

March 2015

Design of a Neck-Support-Incorporated Helmet for Reducing the Risk of Concussion in Ice Hockey

Amanda Lynn Pierce
Worcester Polytechnic Institute

Ashleigh Colleen Collins
Worcester Polytechnic Institute

Kimberly Marie Zielinski
Worcester Polytechnic Institute

Stefano Berti Perez
Worcester Polytechnic Institute

Follow this and additional works at: <https://digitalcommons.wpi.edu/mqp-all>

Repository Citation

Pierce, A. L., Collins, A. C., Zielinski, K. M., & Berti Perez, S. (2015). *Design of a Neck-Support-Incorporated Helmet for Reducing the Risk of Concussion in Ice Hockey*. Retrieved from <https://digitalcommons.wpi.edu/mqp-all/2384>

This Unrestricted is brought to you for free and open access by the Major Qualifying Projects at Digital WPI. It has been accepted for inclusion in Major Qualifying Projects (All Years) by an authorized administrator of Digital WPI. For more information, please contact digitalwpi@wpi.edu.



Design of a Neck-Support-Incorporated Helmet for Reducing the Risk of Concussion in Ice Hockey

A Major Qualifying Project Report
submitted to the Faculty of
WORCESTER POLYTECHNIC INSTITUTE
in partial fulfillment of the requirements for the
Degree of Bachelor of Science
In Mechanical Engineering

Submitted By:
Stefano Berti
Ashleigh Collins
Amanda Pierce
Kimberly Zielinski

In Collaboration With:
Brittany Wasserman

Project Advisor:
Professor Brian Saviolis
Project Number: CS15

3/26/2015

Abstract

The goal of this project was to reduce the likelihood of concussions for ice hockey players by designing a neck support that utilizes shear thickening fluids. The design incorporated a smart fluid of cornstarch and water with ratios of 1:1, 5:3, and 2:1. A testing mechanism was created to simulate a concussion causing impact while measuring x and y accelerations experienced in the head. Recorded accelerations were applied to the Head Impact Power (HIP), Head Injury Criteria (HIC), and Severity Index (SI) parameters, which are commonly used to assess the probability of a head injury. Results were then obtained to compare variations of fluid ratios in the device as well as the current hockey helmet on the market. After analysis, it was found that the 2:1 ratio non-Newtonian fluid best reduced the likelihood of a concussion when comparing the acceleration, HIP, HIC and SI indices.

Acknowledgements

This project would not have been possible without the help and support of several individuals. In this section, we would like to acknowledge the people who majorly contributed to the success of this project. First, we would like to thank our group member Brittany Wasserman who collaborated with us in the beginning of this project. We would also like to thank Peter Hefti, Dr. Adriana Hera, Siamak Ghorbani Faal and Professor Furlong for their expertise, advice and support. Additionally, this project would not have been possible without the guidance and support from our advisor, Professor Brian Savilonis, who was a constant motivator and guide throughout the year.

Table of Contents

Abstract.....	1
Acknowledgements.....	2
Table of Contents.....	3
List of Figures.....	5
List of Tables.....	8
Introduction.....	9
2 Background.....	12
2.1 Defining Concussions.....	12
2.2 Injuries in hockey.....	22
2.3 Head Injury Criterion.....	30
2.4 Head Impact Power.....	31
2.5 Helmet Standards.....	34
2.6 In Play Regulations.....	36
2.7 Current Protective Equipment in Ice Hockey.....	37
2.8 Testing Methods.....	44
2.8.1 Drop Weight Impact Test.....	44
2.8.2 Pendulum Impact Test.....	45
2.8.3 Air Cylinder Impact Test.....	46
2.9 Smart Materials.....	47
3 Methodology.....	50
3.1 Project Goal and Objectives.....	50
3.2 Designing the Neck-Support-Integrated-Helmet.....	53
3.2.1 Options for the Smart Fluids.....	57
3.2.2 Material Options for Oobleck Capsules.....	76
3.2.3 Evaluating the Options for the Neck Support Pattern.....	78
3.2.4 Neck Support Enclosure Material.....	80
3.2.5 Evaluating the Options for Implementation Methods.....	81
3.3 ANSYS Workbench Analysis.....	83
3.3.1 Test Results of the ANSYS Modeling.....	86
4 Final Design.....	93

4.1	Prototyping	93
5	Test Set-Up and Procedure	95
5.1	Developing the Test Rig	95
5.1.1	Structure of the Test Rig	96
5.1.2	Pneumatic Circuit Connecting Air Supply to Air Cylinder	102
5.1.3	LabView Program	102
5.2	Impact Testing Methods	108
5.3	Re-Evaluating the Test Set-Up	108
6	Analysis and Discussion	110
6.1	MathCad Analysis	117
6.2	Final Results	120
6.3	Comparison to No helmet and no neck support	124
6.4	Comparison to Helmet and Empty Neck Support	126
6.5	Discussion	128
7	Conclusion	129
7.1	Recommendations for Future Work	131
8	References	134
9	Appendices	141
9.1	Appendix A: LabVIEW	141
9.2	Appendix B: Calculations	143
9.3	Appendix C: Procedures	203
9.4	Appendix D: Miscellaneous	205

List of Figures

Figure 2-1: Mayo TBI Severity Classification [11].....	14
Figure 2-2: F2220 Specifications for Head forms, Area of Coverage [16]	35
Figure 2-3: Helmet Comparison	38
Figure 2-4: Comparison of Hockey Vs. Football Helmet.....	41
Figure 2-5: Types of Neck Laceration Protectors and Percentage of Players who Wear Each [63]	43
Figure 2-6: Drop Weight Impact Test [65].....	45
Figure 2-7: Pendulum Impact Test	46
Figure 2-8: Air Cylinders.....	47
Figure 3-1: Effect of Oobleck Settling at the Bottom of the Neck Support	58
Figure 3-2: Free Body Diagram of Head During Impact.....	63
Figure 3-3: Graph of Angular Displacement of the Head vs. Time, $F = 476 \text{ N}$	64
Figure 3-4: Graph of Angular Velocity of Head vs. Time, $F = 476 \text{ N}$	65
Figure 3-5: Graph of Acceleration of Head vs. Time, $F = 476 \text{ N}$	65
Figure 3-6: Graph of Angular Displacement of Head vs. Time $F = 4.195 \cdot 10^3 \text{ N}$	67
Figure 3-7: Graph of Angular Velocity of Head vs. Time, $F = 4.195 \cdot 10^3 \text{ N}$	67
Figure 3-8: Graph of Acceleration of Head vs. Time $F = 4.195 \cdot 10^3 \text{ N}$	68
Figure 3-9: Graph of Angular Displacement of Head vs. Time, $F = 3.35 \cdot 10^3 \text{ N}$	69
Figure 3-10: Graph of Angular Velocity of Head vs. Time, $F = 3.35 \cdot 10^3 \text{ N}$	69
Figure 3-11: Graph of Acceleration of Head vs. Time $F = 3.35 \cdot 10^3 \text{ N}$	70
Figure 3-12: HIP Value Corresponding to a Force of $3.35 \cdot 10^3 \text{ N}$	71
Figure 3-13: Graph for Angular Displacement from Scaled-Down Values and Dampening Coefficient = $0 \text{ m}^2 \cdot \text{kg/s}$	72
Figure 3-14: Graph for Angular Velocity from Scaled-Down Values and Dampening Coefficient = $0 \text{ m}^2 \cdot \text{kg/s}$	73

Figure 3-15: Graph for Angular Acceleration from Scaled-Down Values and Dampening Coefficient = $0 \text{ m}^2 \cdot \text{kg/s}$	73
Figure 3-16: Graph and Equation for the HIP Generated from the Scaled-Down Values and Dampening Coefficient = $0 \text{ m}^2 \cdot \text{kg/s}$	74
Figure 3-17: Free Body Diagrams for Horizontally and Vertically Aligned Oobleck Capsules ..	79
Figure 3-18: Dimensioned Sketch of Neck Support Pattern.....	80
Figure 3-19: SolidWorks Head Model.....	84
Figure 3-20: SolidWorks Current Helmet Model	85
Figure 3-21: SolidWorks Head with Additional Neck Support.....	86
Figure 3-22: ANSYS Results of Head Model.....	87
Figure 3-23: ANSYS Results of Current Helmet Model	88
Figure 3-24: ANSYS Results of Neck Support Model.....	89
Figure 3-25: Comparison Graph of ANSYS Output Accelerations.....	91
Figure 3-26: Graph Comparison of Maximum Acceleration in ANSYS	92
Figure 4-1: Sketch of Final Design.....	93
Figure 4-2: The Prototype.....	94
Figure 5-1: Sketch of Test Rig.....	97
Figure 5-2: SolidWorks Reiteration of Test Rig.....	98
Figure 5-3: Finished Test Set-up.....	99
Figure 5-4: Finding Center of Mass.....	101
Figure 5-5: Block Diagram	105
Figure 5-6: Front Panel	107
Figure 6-1 : No Helmet and No Neck Support X-Axis	111
Figure 6-2: No Helmet and No Neck Support Y-Axis	111
Figure 6-3: Helmet with No Neck Support X-Axis	111
Figure 6-4: Helmet with No Neck Support Y-Axis	112

Figure 6-5: Helmet and Empty Neck Support X-Axis.....	112
Figure 6-6: Helmet and Empty Neck Support Y-Axis.....	112
Figure 6-7: Helmet and 1:1 Ratio X-Axis.....	113
Figure 6-8: Helmet and 1:1 Ratio Y-Axis.....	113
Figure 6-9: Helmet and 5:3 Ratio X-Axis.....	114
Figure 6-10: Helmet and 5:3 Ratio Y-Axis.....	114
Figure 6-11: Helmet 2:1 Ratio X-Axis	115
Figure 6-12: Helmet and 2:1 Ratio Y-Axis.....	115
Figure 6-13: Initial Impact – Helmet with Neck Support with 5:3 Ratio X-Axis	116
Figure 6-14: Initial Impact - Helmet with Neck Support with 5:3 Ratio Y-Axis.....	116
Figure 6-15: Online Polynomial Generator	117
Figure 6-16: MathCad Analysis Program.....	119
Figure 6-17: Percent Change in Comparison to No Helmet.....	124
Figure 6-18: Percent Change in Comparison to Helmet and Empty Neck Support	127
Figure 9-1: Block Diagram	142
Figure 9-2: Front Panel	142

List of Tables

Table 2-1: Guidelines of Management in Sports-Related Concussion [13, 16]	15
Table 2-2: Pros and Cons of Concussion Assessment Tools	17
Table 2-3: Pros and Cons of Follow-Up Concussion Assessment [13].....	19
Table 2-4: Impact Mechanisms in Collegiate Ice Hockey [6]	24
Table 2-5: Resultant Peak Linear and Rotational Acceleration of Head Impacts Greater than 20g Sustained by Collegiate Ice Hockey Players for Each Injury Mechanism (95% Confidence Interval)	25
Table 2-6: Percent of Concussions for Each Position.....	26
Table 2-7: Occurrence of Post-Concussion Symptoms	26
Table 2-8: Head Injury Assessment Function Results for Each Player Involved in the Impact [43]	32
Table 2-9: Results from Logistic Regression Analysis	33
Table 2-10: Viscosity and Price of Various Smart Fluids	49
Table 3-1: Options for Each Design Variable.....	52
Table 3-2: Determining Criteria.....	55
Table 3-3: Results from Modifications in the Creation of Oobleck	61
Table 3-4: Determining the Smallest Dampening Coefficient Capable of Reducing Risk of Concussion to below 50%	75
Table 3-5: Determining Method of Implementation to Best Meet Determining Criteria.....	81
Table 3-6: Determining How Far Down the Back the Neck Support Should Extend to Best Meet the Determining Criteria.....	83
Table 3-7: Recorded Accelerations with Respect to Time in ANSYS Modeling.....	89
Table 3-8: Maximum Accelerations of Each Model in ANSYS	91
Table 6-1: Final Results	121
Table 6-2: Averaged Results.....	123
Table 6-3: HIP, HIC, SI Risk Values.....	123

Introduction

An estimated 1.6 to 3.8 million sports-related concussions occur in the United States each year [1]. According to a medical journal review by Thurman and Guerrero, the most severe concussions have caused more than 50,000 deaths and another 70,000-90,000 permanent disabilities in a year [2]. Concussions can be debilitating and present physical, cognitive, emotional, and sleep related symptoms that can last months after the concussion occurred [1]. Permanent cognitive and memory deficits are among the devastating consequences of incurring repeated concussions [3]. All athletes involved in a contact sport are at risk for concussion [4]. The detrimental effects of concussions along with the high incidence of sport-related concussions have become public knowledge and a top concern of anyone involved with a contact sport. For this reason concussions are referred to as "a silent epidemic" [5].

According to a study published by the National Athletic Trainers Association, ice hockey has the highest incidence of concussions for males involved in contact sports [4]. This is due to the aggressive nature of the sport as well as the high speeds, up to 30 mph, ice hockey players are able to reach [6]. The force experienced by the player during an impact is directly related to the sudden change in the player's velocity and acceleration. When ice hockey players get shoved into the boards or into other players, they experience higher forces than most other athletes simply due to their higher initial speeds [6]. As concussions have become one of the top concerns of many people involved with contact sports, rules and regulations regarding hockey protective equipment have become stricter.

Most sports have specific safety equipment that athletes are required to wear to protect them from injury. Many contact sports require that all players wear a helmet that meets regulations set specifically for the intended sport. Unfortunately, the required helmets are mainly

designed to prevent skull fracture and do little to prevent concussions. Many organizations have provided resources for discovering better ways to protect athletes [1]. The research conducted by these organizations has provided knowledge on ways to improve the identification and treatment of sport-related concussions. Resources were also contributed to developing better protective gear that would hopefully reduce the chance of concussion. Despite these efforts, the incidence of sport-related concussions is still alarmingly high and even growing in some demographics [1]. Understanding the biomechanics of a concussion helps explain why wearing a helmet has minimal effect on preventing concussions.

Although diagnosis of a concussion can be difficult, the definition of a concussion was established with consensus during the 4th International Conference on Concussion in Sport [1]. In short, a concussion is a brain injury and is defined as a complex pathophysiological process affecting the brain, induced by biomechanical forces. Along with this definition, common heuristics of the nature of a concussive head injury were also agreed upon as useful guidelines for diagnosis. One of these guidelines explains that a concussion can be caused by a direct impact to the head, or an impact elsewhere on the body that has an impulsive force transmitted to the head [1]. Generally helmets are designed to prevent skull fracture and reduce direct focal external transfers of force, while having minimal, if any, effect on rotational accelerations [7]. Since rotational accelerations are the primary underlying mechanism of concussions, this explains why external padding secured on the head, like a helmet, has minimal effect on preventing concussions [7]. This raises the question, “Is there a better way to protect athletes from concussion than traditional safety gear?”

Recently a study was conducted to discover whether there is a correlation between neck strength and risk of concussion. During this study, athletic trainers working at high schools that

participated in the National High School Sports-Related Injury Surveillance Study measured the neck strength of all students in school-sponsored soccer, basketball, or lacrosse using both a hand-held dynamometer and a hand-held tension scale. These athletes, distributed throughout 25 states, were monitored for concussion by tracking the athletic trainers' weekly submissions of exposure and injury data to the National High School Sports-Related Injury Surveillance Study online data collection tool. After two academic years, it was concluded that for every one pound increase in neck strength, odds of sustaining a concussion decreased by five percent [7]. The moment provided by a strong neck can minimize the effects of an impact by reducing the change in acceleration. A helmet incorporating neck support that simulates and enhances the restoring moment provided by a strong neck would be able to reduce the change in acceleration of the head during an impact. In theory, this type of helmet would decrease the potential for concussion.

2 Background

Before attempting to create a device that will reduce the chance of concussions, one must fully understand what constitutes a concussion as well as the criteria for diagnosing the severity of a concussion. Discovering the mechanisms in which concussions generally occur in hockey will provide essential information for developing protective head gear. In order to develop protective gear that can feasibly be worn by hockey players, it is important to identify the standards and regulations hockey equipment must meet. Exploring the hockey equipment currently available will provide baselines from which improvements can be made. Additionally, materials that could potentially be utilized in the design as well as testing mechanisms that could be used to evaluate the current and modified designs were also researched. This chapter provides the findings of the concussion, hockey, materials, and testing mechanisms research that was conducted.

2.1 Defining Concussions

Some medical experts define a concussion as an immediate loss of consciousness with a period of amnesia after a hit to the head [8, 9]. Other experts define a concussion as brain trauma which may result in cognitive, somatic, emotional and sleep disturbances, which can occur regardless of whether there was loss of consciousness [9]. Experts agree that all concussions can be described as temporary disruptions of brain function due to a direct or indirect impact (i.e. “whiplash”) that results in an abrupt change in the acceleration of the head. Because symptoms of concussions can often be misinterpreted, some concussions go undiagnosed [10].

Even though neurologists and physicians cannot agree upon every post-concussion symptom, there are scales for determining the severity of a concussion. One of the scales commonly used is the post-traumatic amnesia (PTA) scale, which bases the severity of the

traumatic brain injury (TBI) on the duration of the post-traumatic amnesia. The loss of consciousness (LOC) scale bases the severity of the concussion on the duration of the loss of consciousness. Although the predictive validity of these scales is well-established, each may be influenced by factors unrelated or indirectly related to the TBI [11]. Since the vast majority of concussions are not severe and occur without loss of consciousness or post-traumatic amnesia, TBI may be present even if the indicators previously used for the scales are not present. Since there is no brain scan or blood test to definitively diagnose a concussion, symptom-based scales are relied upon. Relying on a single indicator scale could lead to mild concussions going undiagnosed. Because of the shortcomings of single indicator scales, the Mayo clinic developed a classification system that distinguishes the clinical characteristics of the least and the most severe TBIs. The Mayo classification system uses multiple indicators to classify TBIs as: a moderate-severe TBI in which a TBI definitely occurred; a mild TBI in which a TBI probably occurred; or a Symptomatic TBI in which it is possible that a TBI occurred. The details of the Mayo TBI Severity Classification system are shown in Figure 2-1.

TABLE 1. MAYO TBI SEVERITY CLASSIFICATION SYSTEM

- A. Classify as Moderate-Severe (Definite) TBI if one or more of the following criteria apply:
1. Death due to this TBI
 2. Loss of consciousness of 30 minutes or more
 3. Post-traumatic anterograde amnesia of 24 hours or more
 4. Worst Glasgow Coma Scale full score in first 24 hours <13 (unless invalidated upon review, e.g., attributable to intoxication, sedation, systemic shock)
 5. One or more of the following present:
 - Intracerebral hematoma
 - Subdural hematoma
 - Epidural hematoma
 - Cerebral contusion
 - Hemorrhagic contusion
 - Penetrating TBI (dura penetrated)
 - Subarachnoid hemorrhage
 - Brain Stem Injury
- B. If none of Criteria A apply, classify as Mild (Probable) TBI if one or more of the following criteria apply:
1. Loss of consciousness of momentary to less than 30 minutes
 2. Post-traumatic anterograde amnesia of momentary to less than 24 hours
 3. Depressed, basilar or linear skull fracture (dura intact)
- C. If none of Criteria A or B apply, classify as Symptomatic (Possible) TBI if one or more of the following symptoms are present:
- Blurred vision
 - Confusion (mental state changes)
 - Dazed
 - Dizziness
 - Focal neurologic symptoms
 - Headache
 - Nausea
-

Figure 2-1: Mayo TBI Severity Classification [11]

In order to determine the severity or grade of a concussion, neuropsychological testing needs to be done [12]. Recent modifications have been made in the evaluation of concussion severity to better assess the full range of concussion severities. Doctors manage each case individually and determine the presence and severity of a concussion based on multiple tests and scientific evidence [13-15]. The Academy of Sports Medicine and the American Academy of

Neurology developed guidelines in order to diagnose and manage Sport-Related Concussions specifically, as shown in Table 2-1 [16, 17].

Table 2-1: Guidelines of Management in Sports-Related Concussion [13, 16]

MARK	FIRST TIME CONCUSSION	SECOND TIME CONCUSSION
Ranking 1: no loss of consciousness, brief period of confusion, mental symptoms for <15 min	Remove player from sport Examine the player for 5 min If in 15 minutes symptoms are not present, player may return to play	Allow player to play in 1 week timeframe if symptoms have subsided
Ranking 2: no loss of consciousness, brief period of confusion, sporadic mental symptoms for > 15 min	Remove player from sport for rest of day Examine symptoms of player and look for intracranial lesions Allow player to play within a 1 week timeframe	Allow player to play after 2 weeks if symptoms have subsided
Ranking 3: any sort of consciousness lost (place, date, etc.)	Neurological examination in hospital until post-concussive symptoms stabilize Allow player to play in a week if unconsciousness lasted seconds	Do not allow player to play until all symptoms have been cleared and absent for 1 month

	Allow player to play in 2 weeks if unconsciousness lasted 1-6 minutes	
--	---	--

The American Academy of Pediatrics has developed measuring tools that determine sports-related concussion severity and have concluded that a single test cannot suffice for the accurate determination of a concussion’s severity. In the event of potentially severe head trauma, there are seven main assessment tools for diagnosing a concussion. Among the seven concussion assessment tools, four of them are especially relevant to hockey concussion injuries. The pros and cons of these four assessments are shown in Table 2-2.

Table 2-2: Pros and Cons of Concussion Assessment Tools

TOOL	DESCRIPTION	CONS	PROS
GSC (Glasgow Coma Scale):	Used onsite at time of concussion; ranks three levels of response: <i>(Eye opening)</i> Score: 1-5 <i>(Verbal Response)</i> Score: 1-5 <i>(Motor Response)</i> Score: 1-6 <u>Severity of injury classified as:</u> Severe: GCS 3-8 (no lower than 3) Moderate: GCS 9-12 Mild: GCS 13-15[18]	Might create confusion between concussed and non-concussed subjects (history of patient)	Fast (1-2 min); Can determine severity of a severe brain injury
HITS (Head Impact Telemetry System)	The first system to measure impact of players in real time. Used by live sensors which send information to a computer registering it in a 3-D graph of the head. Receptor computer can be located within 150 yards from player. The sensors are able to detect duration, magnitude, direction and	ONLY used in sports with helmets; Correlation of data with symptoms can be misleading	Live monitoring of impact; Detects and record all of the impacts that might cause concussion Good scale measuring system

	<p>location of up to 100 hits.</p> <p>Mainly designed for when a player experiences a hit of 10G's or higher. [19]</p>		
<p>SAC (Standardized Assessment of Concussion)</p>	<p>SAC is an onsite test that measures functions such as:</p> <p><i>Orientation:</i> day, date, month, year, time</p> <p><i>Immediate memory:</i> recall of five words in three separate trials</p> <p><i>Neurologic:</i> Loss of consciousness (occurrence, duration), Strength, Amnesia (either retrograde or anterograde), Sensation, Coordination, Delayed Recall, Maneuvering and Concentration</p> <p>Each is attributed a score out of 30, the higher the score, the more severe concussion [20, 21]</p>	<p>Correlation of data with symptoms can be misleading; Useless if conducted more than 48 hours after time of injury</p> <p>Cannot assess cerebral function</p>	<p>Measures orientation, memory, focus; Intuitive operating system; Short (5-7 min)</p>

SCAT2 (Sport Concussion Assessment Tool)	Mainly focuses on testing cognitive skills affected by concussion. Does not determine concussion degree or athlete's recovery or return to play status. [22]	Long (15-20 min); Requires a professional to conduct; No score or scale; Not very reliable due to weight of symptoms	Testing of cognitive skills affected by concussion
--	---	---	--

With the improved categorization of concussions, doctors are better able to prescribe appropriate rehabilitation regimens. Follow-up assessments during the athlete's rehabilitation must be conducted to accurately determine when a player can safely participate in his or her sport again after sustaining a concussion. There are eight main follow-up assessments given at different intervals to track the patient's recovery [19]. Four of the follow-up assessments also stand out as particularly relevant to hockey concussion injuries. The pros and cons of these assessments are shown in Table 2-3.

Table 2-3: Pros and Cons of Follow-Up Concussion Assessment [13]

TOOL	DESCRIPTION	CONS	PROS
ImPACT (Immediate Post-Concussion Assessment Cognitive Test)	Conducted using software when an athlete no longer has symptoms (24-72 hours post-injury)	Long (20 min); Positive and negative rate can be false; No scale to determine recovery	Able to diagnose multiple areas of neurocognitive function; Correlated

	<p><i>Measures:</i> player symptoms, verbal and visual memory, processing speed, and reaction time</p> <p>Gives a summary of measurements; can determine if player should return to play [23]</p>		MRI tests; No professional needed
<p>DTI or Diffusion MRI (Diffusion tensor imaging)</p>	<p>Provides mapping on how molecules have spread out in biological tissue after a concussion. This mainly sees water molecule diffusion in the brain segment and it is an in-vivo, non-invasive testing mechanism. It can show molecular interaction with other macromolecules, with fibrous tissue, with membranes among others [24]</p>	<p>Cost; Long time to complete; No complete diagnosis</p>	<p>Can determine if white brain matter is affected; Great image; No invasion of any kind</p>

<p>fMRI</p> <p>(Functional magnetic resonance imaging)</p>	<p>Uses MRI technology to measure brain action by indicating changes in blood flow patterns; relies on neuronal activation coupling.</p> <p>It mainly detects and uses blood-oxygen-level dependent (BOLD) to compare results. It specializes in detecting brain activity and interaction with spinal cord due to change in blood flow. It provides high resolution images where notable change on circulation can be shown if area is affected [25]</p>	<p>Cost; Long time to complete; Can affect blood vessel activation</p>	<p>Can detect constant abnormalities in brain function; Often used as clinical validation tool to assess brain functionality; No invasion of any kind</p>
<p>MRS</p> <p>(Magnetic resonance spectroscopy)</p>	<p>Technique to measure metabolic variations of brain strokes, tumors, disorders, Alzheimer's, depressions and concussions affecting the brain functionality. It is used to measure intramyocellular</p>	<p>Cost; Long time to complete; Limitation in diagnosis</p>	<p>Ability to measure brain metabolism; Delivers information on brain function recovery time; No invasion of any kind</p>

	lipid content (IMCL). It uses MRI technology which is able to send signals based on H ⁺ (hydrogen protons) in order to get dimensions of the brain in x, y, z coordinates and determine the concentrations of molecules in certain areas[26]		
--	---	--	--

2.2 Injuries in hockey

Athletes playing contact sports, such as hockey, are at risk for sustaining a concussion. Multiple organizations have done studies to understand the frequency and cause of concussions. Wilcox et al. performed a study on occurrences of concussions in contact sports. The study evaluated eight sports and compiled data on typical injuries. They looked at all concussions, excluding concussions due to whiplash injury, spinal cord injury, facial bone fractures, or soft tissue injuries. This study found that hockey had the greatest incidence of concussions for males, and tae-kwon-do has the greatest incidence rate of concussions for females [6]. According to the 2008-2010 NCAA Men’s and Women’s Ice Hockey Rules and Interpretations, body checking is allowed in men’s ice hockey, but is not allowed in women’s ice hockey. Lack of checking may contribute to tae-kwon-do having the greatest incidence rate of concussions in female sports.

Hockey is different than other contact sports because players move at higher rates of speed on a playing area of solid ice [27]. Hockey players can skate at speeds of up to 30 mph and

can slide at maximum rates of 15 mph. Contacting physical obstacles at such high speeds results in abrupt deceleration causing the player to experience higher impact forces. A study by Denny-Brown and Russell, regarding the acceleration and deceleration of the players' body and specifically their head, determined that in order for a concussion to occur, acceleration and/or deceleration must be present [28].

A study was performed on men's and women's National Collegiate Athletic Association Division I ice hockey teams to analyze the magnitude and frequency of head impacts during games. This study determined the distribution of the mechanisms of impact and concluded that for both men's and women's collegiate ice hockey, the most frequent impact mechanism was contact with another player. The impact mechanism that generated the greatest-magnitude head accelerations was contact with the ice though the frequency of this type of impact was low [6]. The distribution of impact mechanisms is shown in Table 2-4.

Table 2-4: Impact Mechanisms in Collegiate Ice Hockey [6]

Impact Mechanism	Head Impact % of total impacts, (Number of Impacts of that Type)		Head-Impact Frequency per Game By Impact Mechanism	
	Men (n=270)	Women (n=242)	Men	Women
Contact with another player	50.4 % (136)	50 % (121)	0.464	0.208
Contact with ice	7 % (19)	11.2 % (27)	0.104	0.106
Contact with boards/glass	31.1 % (84)	17.3 % (42)	0.349	0.095
Contact with stick	1.9 % (5)	2.9 % (7)	Not Provided, because incidence rate was insignificant	
Contact with goal	0.4 % (1)	0 % (0)		
Contact with puck	0.4 % (1)	0.8 % (2)		
Indirect Contact	4.4 % (12)	15.3 % (37)	0.087	0.1
Celebrating	4.4 % (12)	2.5 % (6)	0.08	0.073

The peak linear and rotational accelerations generated by the impact mechanisms are shown in Table 2-5.

Table 2-5: Resultant Peak Linear and Rotational Acceleration of Head Impacts Greater than 20g Sustained by Collegiate Ice Hockey Players for Each Injury Mechanism (95% Confidence Interval)

Mechanism	Linear Acceleration (g)	Rotational Acceleration (rad/[s.sup.2])
Men		
Contact with another player	28.0 (26.4, 29.7)	2901.8 (2514.5, 3348.7)
Contact with ice	40.1 (31.8, 50.5)	3454.9 (2590.2, 4608.4)
Contact with boards	32.1 (29.7, 34.7)	3350.4 (2995.9, 3746.8)
Indirect contact	31.5 (26.4, 37.8)	2873.8 (1949.8, 4235.7)
Celebrating	25.9 (23.6, 28.4)	2056.3 (1707.9, 2475.7)
Women		
Contact with another player	27.9 (26.3, 29.6)	2323.0 (2031.6, 2656.9)
Contact with ice	35.2 (30.9, 40.0)	2318.9 (1644.2, 3270.4)
Contact with boards	26.8 (25.8, 27.9)	1859.5 (1587.0, 2178.8)
Indirect contact	29.5 (25.6, 34.0)	1861.3 (1387.1, 2497.6)
Celebrating	23.3 (20.1, 27.0)	923.3 (675.2, 1262.5)

Source: Head Impact Mechanisms In Collegiate Ice Hockey[29]

A seven-year study was performed by the Canadian Medical Association Journal (CMAJ) to research and provide statistics regarding concussions in the National Hockey League (NHL). The CMAJ worked with the NHL to determine two major variables in hockey: concussion and time loss. The goals of this study were to determine the rates and trends of concussions as well as the post-concussion signs, symptoms, physical examination findings and time between the injury and return to play. This evaluation was performed between the 1997-1998 season and the 2003-2004 season. Results showed 559 physician-diagnosed concussions throughout the seven seasons with an average of 80 per year. The game rate recorded 5.8 concussions per 100 players per season and overall, an average of 1.8 concussions per 1000 game player-hours. Of these 559 concussions, physician regulated recovery time averaged about six days per concussion. Of the instances, 69% missed ten or less days of unrestricted play and 31% missed more than ten days [30-33]. Statistics regarding positions of players experiencing concussions were highlighted and are displayed in Table 2-6.

Table 2-6: Percent of Concussions for Each Position

POSITION	PLAYERS ON THE ICE AT ONCE	% OF RECORDED CONCUSSIONS
CENTERMEN	1	30.5%
DEFENSEMEN	2	31.4%
WINGERS	2	33.6%
GOALIES	1	4.5%

From the data shown in Table 2-6, centermen, defensemen and wingers recorded approximately the same percent of concussions. By factoring in the amount of players on the ice at one time, researchers found that centermen experienced concussions twice as often as defensemen and wingers.

Detailed data was presented indicating common post-concussion symptoms. The percent occurrence of headaches, dizziness, nausea, neck pain, low energy or fatigue, blurred vision, amnesia, and loss of consciousness were all post-concussion symptoms. The distribution of these statistics is shown in Table 2-7.

Table 2-7: Occurrence of Post-Concussion Symptoms

SYMPTOM	% OCCURRENCE
Headache	71 %
Dizziness	34 %
Nausea	24 %
Neck Pain	23 %

Low energy or fatigue	22 %
Blurred vision	22 %
Amnesia	21 %
Loss of consciousness	18 %

Of the 559 concussions occurring during the seven-year period, 13 % of post-concussion neurologic examinations were abnormal [33].

Many athletes in contact sports experience multiple concussions throughout their participation, which raises additional concerns. Research showed that football players who had endured multiple concussions were at an increased risk and earlier onset of memory impairment, including mild cognitive impairment, and Alzheimer’s dementia. There was also a news release in 2009 about a case of chronic traumatic encephalopathy in a former NHL player. The news release encouraged researchers to study concussions further in order to better protect athletes in potentially harmful situations [33-35].

Le Bihan et al. recently performed a study that evaluated the incidence rates of concussion in junior hockey in comparison to the previously mentioned study of the NHL [35]. Neurosurgical Focus evaluated two teams of junior ice hockey players during one regular season. Junior ice hockey players range in age from approximately 16-21 years old. Overall, this study was not able to observe all 36 regular season games, but the procedure for collecting data used six licensed physicians, and 16 non-physician observers, such as kinesiologists, certified ice hockey coaches, physical therapists, massage therapists, chiropractors and former junior ice hockey players. The overall results of this study were 21 concussions observed in 52 games. This

rate can be quantified as 21.52 concussions per 1000 athlete exposures [35]. This study shows that not only are concussions a problem in the NHL, but they are a problem early on with teenagers in junior ice hockey.

Hutchison et al. held a study from 1998-2000 with players of ages 15 to 20 in Canadian Amateur Hockey leagues to find the rate of concussions occurring in hockey. This study used 272 participants in its first year of study and 283 in the second year of study; of these participants, 115 participated in both year one and year two. Results of this study showed that over this two-year period, 379 concussions were reported. Of the 379 reported, 90% of them occurred during a game, 7.9% occurred during practice, and 2.1% occurred at other times [32]. High rate of concussion is clearly a concern in all levels of ice hockey.

Many experts agree that ice hockey is a dangerous sport and that players are susceptible to concussions during play. Concussions in hockey affect not only the player injured but also the entire team who must play without key players. Since concussions commonly cause detrimental lasting effects, sustaining multiple concussions could cut a player's career short. Preventing concussions will enhance the sport by allowing good players to participate for longer, making team dynamics less erratic.

Monitoring athletes during play has been a topic for discussion in concussion detection. Multiple products are available and patented that will sense if conditions have occurred that could potentially cause a concussion. For instance, a sensor pad was created for use in football helmets. This sensor analyzes impacts that players have encountered and quantifies the data for observers. After the data is quantified, if a predefined threshold is exceeded, a wireless receiver is triggered and indicates that a potentially harmful impact has occurred [36]. This sensor is

currently being used by 19 college football teams and is working its way into youth and high school leagues.

Multiple patents have also been filed on the topic of helmets that incorporate concussion indicators and force detection devices. In 1995, a patent was filed called “Sports helmet capable of sensing linear and rotational forces.” This design was specifically created to detect not only impact on the body, but also to observe both linear and rotational impacts. Accelerometers are present in this design and sense three orthogonally oriented linear forces. When the device senses an impact exceeding the limits previously specified, an electrical signal is sent to a lamp or LED on the sidelines indicating that a potentially harmful impact has occurred [37].

A patent titled “Concussion Indicator” was filed in 2013 to monitor the acceleration in a helmet. The sensor can be applied to either the inner or outer portion of the helmet depending on the athlete’s preference. When the sensor is mounted to the outside of the helmet, indicators can be shown to observers. If the sensor is mounted on the inside of the helmet, the player must remove the helmet before visualizing the indicator. One of the unique qualities of this design is that different indicators signify different degrees of concussions that could have occurred. By visualizing the indicator, observers can identify the intensity of a potential concussion [38].

Research shows that sensors currently used are designed to monitor accelerations and calculate the force experienced by athletes. The sensors indicate whether maximum thresholds have been reached and if there was a chance that a concussion occurred. The main objective of sensors currently on the market is to sense whether or not a concussion has occurred. No research was found on how sensors can be used to prevent concussions from occurring.

2.3 Head Injury Criterion

There are many ways to analyze risk of injuries to the head. One common and versatile method is the Head Injury Criterion (HIC). The HIC is an equation based on the head's acceleration and time over which the acceleration occurs. The result from the equation is an integer that can help determine the likelihood or severity of a head injury. The equation for the HIC is as follows:

$$\text{Equation 1: } HIC = \left(\frac{1}{t_2 - t_1} * \int_{t_1}^{t_2} \hat{a}(t) * dt \right)^{2.5} * (t_2 - t_1)$$

$$\text{Equation 2: } \hat{a} = a/g$$

Where \hat{a} is the unit-less, normalized acceleration of the head with respect to gravity, g (9.8 m/s²), and t is time measured in seconds. HIC is given therefore given as a unit-less number. HIC therefore has units of seconds [39]. Many studies have been completed trying to find at what HIC head injuries will occur. The head injuries of concern are usually surface contusions and concussions [40]. Shear stress concentration and motion of the brain within the skull are known causes of these injuries and directly related to head acceleration with respect to a period of time. This is why the HIC is such a useful tool in quantifying the chance of a head injury and its severity.

An HIC of 200 is commonly considered the threshold at which a concussion may occur [41]. When testing protective equipment (i.e. helmets, seat belts, etc.), HIC values below 200 must be achieved consistently before the design is considered safe to be on the market. However, since each situation and person is different, the HIC does not provide definitive proof of concussion, but rather it provides an indication of the probability that a concussion occurred. There are incidences in which the HIC is under 200 but a head injury did occur, as well as incidences in which the HIC is over 200 without a head injury occurring [41, 42]. An HIC of

around 240 indicates a 50 % probability of concussion and an HIC around 485 corresponds to 95 % probability [43]. The HIC is frequently used as a standard when testing equipment, since it has been shown to fairly accurately predict how well safety equipment will reduce the risk of concussion.

2.4 Head Impact Power

Another method to analyze the risk of injury to the head is with the Head Impact Power (HIP) equation. While the HIC takes into account only the resultant linear acceleration of the head at the center of gravity, the HIP uses both the linear and angular accelerations of the head at the center of gravity [43]. This yields a more accurate prediction than the HIC at the cost of using a more complicated equation. The equation can be seen below:

$$\text{Equation 3: } HIP = m_h a_x(t) \int a_x(t) dt + m_h a_y(t) \int a_y(t) dt + m_h a_z(t) \int a_z(t) dt + I_x \alpha_x(t) \int \alpha_x(t) dt + I_y \alpha_y(t) \int \alpha_y(t) dt + I_z \alpha_z(t) \int \alpha_z(t) dt$$

Where m_h is the mass of the head and I_i are the moments of inertia of the human head about the corresponding axis. The $a_x(t)$, $a_y(t)$, and $a_z(t)$, are the linear acceleration components and $\alpha_x(t)$, $\alpha_y(t)$, and $\alpha_z(t)$ are the angular acceleration components all as functions of time. Since the HIP is a time-dependent function, the maximum value obtained is used as the HIP value [42]. When Newman et. al. developed the HIP; its ability to predict concussion risk was compared to other head injury assessment functions, including *Maximum linear acceleration*, *Maximum linear acceleration with dwell times*, *the Severity Index (SI)*, *the Head Injury Criterion (HIC)*, *and Angular and Linear acceleration GAMBIT equation*. The SI, is the current NOCSAE (National Operating Committee on Standards for Athletic Equipment) standard and incorporates average acceleration with time, with a limiting value of 1200. The equation for SI uses a resultant linear acceleration in the equation $SI = \int_{t_1}^{t_2} a(t)^{2.5} dt$ ([44]). The GAMBIT

(Generalized Acceleration Model for Brain Injury) uses angular and linear acceleration in the

$$\text{equation } G_{\max}(t) = \sqrt{\left(\frac{a_{res}(t)}{250}\right)^2 + \left(\frac{\alpha_{res}(t)}{25000}\right)^2}, \text{ where } a_{res}(t) \text{ and } \alpha_{res}(t) \text{ are the instantaneous}$$

translational and rotational acceleration respectively. Utilizing game video and the associated medical records of twelve NFL head to head impacts, Newman et al. was able to create full-scale laboratory reconstruction of the incidences with helmeted Hybrid III dummies. Each dummy was equipped with nine linear accelerometers placed strategically around the head. For each reconstructed incidence, all six head injury assessment functions were calculated for each player involved in the impact. The results of the calculations as well as whether a MTBI was reported for each case is shown in Table 2-8.

Table 2-8: Head Injury Assessment Function Results for Each Player Involved in the Impact [43]

Case No. 1 = tackler 2 = tackled	Reported MTBI 0=no 1=yes	A_{\max} (m/s ²)	a_{\max} (rad/s ²)	SI	HIC	GAMBIT	HIP (kW)
07-2	0	596	6265	121	93	0.35	6.7
38-2	1	1162	9678	743	554	0.60	23.3
39-2	1	1263	5729	663	521	0.55	19.8
48-2	0	562	5855	157	130	0.32	9.7
57-2	1	758	5786	255	207	0.38	12.1
59-2	0	807	5035	207	138	0.38	8.0
69-2	1	595	4168	181	130	0.25	9.0
71-2	1	1211	5434	655	510	0.52	24.0
77-2	1	788	5128	272	185	0.37	13.2
84-2	1	804	9244	317	225	0.49	17.6
92-2	1	1054	8877	706	508	0.48	21.6
98-2	1	893	7548	366	301	0.46	18.3
07-1	0	489	2832	65	51	0.23	3.4
38-1	0	588	5205	158	127	0.32	6.6
39-1	0	431	4184	61	43	0.18	3.3
48-1	0	310	2817	45	37	0.17	2.6
57-1	0	317	3937	51	37	0.20	4.0
59-1	0	314	1950	32	28	0.14	1.8
69-1	0	371	2593	83	50	0.17	3.6
71-1	1	1005	5555	519	433	0.45	19.3
77-1	0	342	2563	68	53	0.17	4.4
84-1	0	442	3036	98	77	0.22	4.6
92-1	0	586	6070	218	164	0.33	8.3
98-1	0	827	4487	245	187	0.38	10.4

Source: A New Biomechanical Assessment of Mild Traumatic Brain Injury Part 2 – Results and Conclusions [45]

Based on the 24 cases in Table 2-8, univariate logistic regressions were performed for each head injury assessment function. The concussion probability curves that were generated permitted the determination of the specific values of each head injury assessment function that corresponded to significant concussion probabilities. From the probability curve for the HIP, a value of 12.79 kW corresponded to a 50% chance of concussion and an HIP of 20.88 kW corresponded with a 95% chance that a concussion occurred [43]. These values are only preliminary and require additional testing.

Logistic regression analysis revealed which of the head injury assessment functions were most reliable. In regression analysis, the significance (p-value) is often used to determine if an independent variable should be included in the model. According to Newman et al. $p \leq .25$ is used as the threshold for the inclusion of an independent variable; the lower the p-value the higher the significance of an independent variable. Similarly, the -2 Log Likelihood Ratio (-2LLR) indicates whether adding the independent variable to the constant has improved the model. A zero value of the -2LLR indicates an exact fit of the regression model to the data, ergo a smaller value indicates a higher significance. Newman et al. compared the p-value and -2LLR values of each head injury assessment function, shown in Table 2-9, to distinguish the best concussion predictor.

Table 2-9: Results from Logistic Regression Analysis

	A_{max}	α_{max}	SI	HIC ₁₅	GAMBIT	HIP
Significance P-value	0.011	0.029	0.024	0.020	0.013	0.008
-2LLR	18.059	20.676	18.195	19.347	18.031	14.826

Source: A New Biomechanical Assessment of Mild Traumatic Brain Injury Part 2 – Results and Conclusions [45]

The HIP equation proved to be the most significant variable, signifying it is the most reliable predictor of concussion out of the head injury assessment functions utilized in this study. A more recent study by Marjoux et. al. concluded that an HIP of 24 kW and of 30 kW corresponded to 50% and 95% risk of concussion, respectively.

2.5 Helmet Standards

With hockey being a high contact sport, protective equipment and contact rules are a necessity to reduce the number of injuries. The importance of regulated hockey equipment ensures that each issued item of protective equipment offers a baseline of protection. Hockey equipment is regulated by the Hockey Equipment Certification Council (HECC), a non-profit organization. All of USA Hockey, NCAA, and the National Federation of State High School Association (NFHS) must wear gear that is HECC approved [45]. The HECC uses the assessment standards set forth by the American Society for Testing and Materials International (ASTM), which is the standard in America.

The ASTM F1045 standard states proper testing methods as well as the minimum requirements. The standard also defines the proper specifications for head, which are also found in the ASTM F2220 standard. Figure 2-2 shows the minimum helmet coverage requirements for proper fitting based on the circumference of the head and helmet. It is very important that the helmet fits and is tested properly, which is described in the standard.

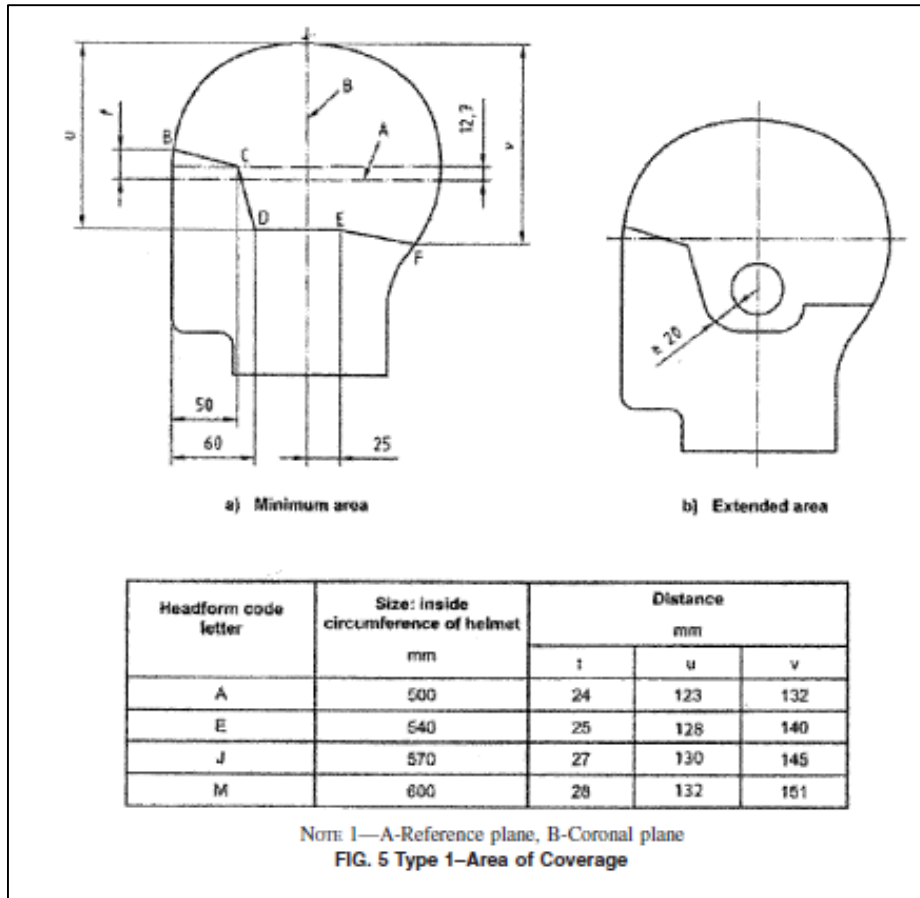


Figure 2-2: F2220 Specifications for Head forms, Area of Coverage [16]

The Testing Methods include impact and drop testing and a shock absorption test. The impact requirement states that the helmet must remain intact, meaning that it must have no visible cracks in the helmet while withstanding impact accelerations up to 300 g's [44]. The chinstrap also needs to up hold standards. It has to have a separation force from the helmet from between 50 and 500 N. Also, while exerting 109 N the chinstrap must not exceed one inch of displacement [46]. Each of these tests must be executed using ambient, hot, and cold temperatures to ensure that the helmet can withstand all forces during game play. After proper certification that the helmet meets all requirements by the ASTM F1045 standard, the HECC will

then place their label of approval on the helmet. This label is not to be altered or taken off , or the equipment certification becomes void [45].

A study by Robert Edward Wall, attempted to answer the question of what standard to use in the National Hockey League (NHL) due to it being an international league. The three standards that were compared were the ASTM, Canadian Standards Association (CSA) and International Organization Standards (ISO). This study showed that not one single standard would shine over the others. In fact, each standard had an area where it performed better than another, making it a difficult comparison. Most importantly, it was concluded that the helmets tested performed relatively the same when based on peak acceleration measurements, but there were differences during multiple impacts. Wall suggests the possibility of combining the standards to create one single standard that can be accepted worldwide [47].

2.6 In Play Regulations

Regulations during play are also set in place to aid in reducing the number of severe injuries. There are many different sets of rules based on age and location. The lower the age, the more regulations developed for play and more equipment requirements. The NHL offers the least amount of regulated protection for its players due to it being played by the most advanced athletes. In the NHL, hitting or checking from behind or contacting a player's head during a hit or check results in penalties or possible ejection from the game. At the NHL level of play, a helmet is the only headgear required [48]. Since the NHL is essentially an international league, it has not adopted one set of standards for its protective headgear; generally ASTM or CSA certified equipment is used.










The collegiate level is regulated by the National Collegiate Athletic Association (NCAA). Players must wear HECC approved helmet and face mask that is securely fastened. The NCAA

also requires the use of a mouth guard. Penalties can arise if a player is checked from behind, charged, boarded, or undergoes contact to the head as mentioned in the NCAA 2014 rulebook. These regulations were put in place to help reduce injury and frequency of concussions.

Despite the implementation of rules and regulations, the occurrence of concussion is still higher than one would hope. Only further implementing rules, regulations and more advanced protective equipment can promote a reduction in the rate and severity of concussions that may arise from playing hockey.

2.7 Current Protective Equipment in Ice Hockey

Modern hockey helmets can be classified by level of protection. There are helmets specifically designed for beginners, for professional players, and for many levels in between [49]. The equipment guide on PureHockey.com, shown in Figure 2-3, classifies the *Reebok 11k* helmet, the *Bauer Re-Akt* Helmet, and the *Bauer IMS 9.0* Helmet as offering “Elite Level Protection”, which is the highest level of protection. Reebok achieved the elite level protection of the 11k helmet by designing it with “a better fit equals more safety” in mind [50]. While most modern hockey helmets offer length-wise adjustment, and some advanced helmets offer length- and width-wise adjustment, the 11k helmet provides the only 360 degree adjustment available [50]. The 11k helmet accomplishes the 360 degree fit by utilizing Reebok’s Microdial II Anchoring system, which wraps the Expanded Polypropylene (EPP) foam, foam commonly used for impact absorption in helmets, around the unique shapes of the player’s head and locks the helmet into place [50]. This system eliminates gaps and pressure points to provide a more protective and comfortable fit. The composite subshell of this helmet makes it Reebok’s lightest fully adjustable helmet.

Cost w/o cage	\$170-\$200	\$145-\$200	~\$140	\$60-\$140	~\$120	~\$150	~\$100	\$90-\$100	\$70-\$130
									
	Bauer Re-Akt	Reebok 11K	Bauer IMS 9.0	Krown 360	Bauer IMS 7.0	CANYON E700	Bauer 7500	Reebok 7K	Bauer 4500
ELITE LEVEL PROTECTION	X	X	X						
EXCELLENT PROTECTION				X	X	X			
MODERATE PROTECTION							X	X	
BASIC PROTECTION									X
ANTI-MICROBIAL	X								
COMPOSITE SHELL		X							
TOOL-FREE ADJUSTMENT	X	X	X	X	X	X	X	X	
COLORS AVAILABLE	X	X	X	X	X	X	X	X	X
CUSTOMIZABLE COLORS AVAILABLE					X				

*The best helmet for you is the one with the most protection, and which fits you the best. There is no helmet that will prevent a concussion.

Figure 2-3: Helmet Comparison

Source: Adapted from Pure Hockey Webpage[51]

The Bauer helmets have many features that contribute to their classification as “Elite protection.” Both Bauer models utilize Vertex foam and Poron XRD liners for impact management, as well as dual-density ear covers with clear protective film to eliminate abrasion [52]. The Vertex foam has the same density as EPP foam but is lighter and provides improved, high- and low- energy impact protection [52]. The Poron XRD foam is made up of urethane molecules that are flexible until placed under high pressure at which time the molecules momentarily stiffen [53]. It has been shown to absorb 90% of the energy of a high-force impact. Poron XRD is also very lightweight and breathable. The Vertex foam is used on areas of the helmet proven to experience less impact, while Poron XRD is placed in the areas where the majority of impacts occur [52]. The Bauer helmets also feature memory foam temple pads that

provide maximum comfort and a snug fit. Bauer products also employ MICROBAN, which offers antimicrobial protection to resist odors and mildew.

The Bauer Re-Akt helmet is marketed as the first hockey helmet to offer protection against all types of hits [54]. Whereas all certified hockey helmets are required to protect against high-energy linear impacts, the Bauer Re-Akt also protects against low-energy linear impacts, and rotational impacts. Rotational impacts have been shown to cause serious head injuries [55]. The Bauer Re-Akt helmet achieves this optimal protection by utilizing Bauer's SUSPEND-TECH liner system. Upon impact the SUSPEND-TECH liner remains with the head, ensuring the placement of pads is maintained, while the shell with its interior liner rotate to absorb and deflect the forces of the impact [54]. This system is advertised as being able to minimize the movement of the head during impacts, which would greatly reduce the likelihood of a concussion [55].

The current padding inside most hockey helmets is an expanded polypropylene and vinyl nitrile. These two paddings have shown to have very similar effects on the risk of injury as concluded in a study on the effects of impact management materials in ice hockey helmets on head injury criteria [4]. All three of the models mentioned above offer tool-free adjustment to make fitting the helmets to the player's head quick and easy [51]. Many experts agree that the proper fitting of the helmet and cage is as important for protection as the helmet's design [51]. Regardless of the impact absorbance technology or stability features incorporated in a helmet, if the helmet does not fit properly, it will not protect a player's head sufficiently [51].

Despite all the features and protective measures, hockey helmets still seem underwhelming compared to the top rated football helmets. When comparing the interior of a hockey helmet to the interior of a football helmet, as seen in Figure 2-4, it is apparent how much more cushioning is available in the football helmet [56]. Considering hockey follows football as

the sport inflicting the majority of concussions, the lack of padding in hockey helmets compared to football helmets is drastic. Perhaps the huge difference in helmet interiors is due to hockey having different conditions and mechanisms in which concussions occur than those in football.

Another possibility could be that football manufacturers have been improving their designs in response to Virginia Tech's five-point STAR (Summation of Tests for the Analysis of Risk) rating system that was first implemented in 2011. Virginia Tech tests football helmets and awards the helmet one to five stars depending on its ability to reduce the risk of head injury and concussion. The head of the biomedical engineering department at Virginia Tech, Dr. Duma, led meetings with scientists and football helmet manufacturers to discuss improving head protection and providing the science behind the methodology of the STAR rating system. The STAR rating system makes consumers aware of which football helmets reduce the risk of concussion the most, motivating the manufacturers to strive for the five-star mark, the highest rating awarded by the Virginia Tech helmet ratings. Each year more of the newly released football helmets are achieving the five-star rating. In the past two years, Virginia Tech has begun lab and rink testing and analysis to develop an analogous STAR rating system for hockey helmets. The hope is that this rating system will have a similar impact on hockey helmets by motivating and informing hockey helmet manufacturers on improving the protective ability of their hockey helmets [56-58].



Figure 2-4: Comparison of Hockey Vs. Football Helmet

Source: NCHL [59]

In addition to helmets, face protection is an important factor in preventing serious injuries considering pucks can travel up to 100 miles per hour. Rules requiring face protection vary from league to league. All face protectors connect to the player's helmet and fall into one of three categories. The most common facial protection for amateur players is the full cage, which consists of metal bars running vertically and horizontally across the player's face [60]. The full cage offers full protective coverage, great ventilation, and the most durability [60]. The cage is very affordable and requires little to no maintenance [60]. However, some players feel that the wire cage is distracting while playing [60].

The second option for facial protection is the full shield, which consists of an impact-resistant plastic covering the eyes and mouth with breathable holes at the bottom of the mask [60]. The full shield offers the same amount of protection as the cage without the distraction of

wires running through the player's line of sight. The downside of full shields is that more maintenance is required than with the cage [60]. Usually, anti-fog solution must be applied to the surface of the shield before each game to limit the amount of fog that occurs during play [60]. Most shields come with an anti-scratch coating that must also be applied to the mask to improve its durability [60]. Even with proper maintenance, typically the full shield still will not last as long as a cage would [60].

The last option is called a visor or a half shield and is for hockey players over the age of 18 years old that are in a league that does not require full facial protection [60]. Half shields are made of high impact-resistant, transparent plastic that covers the top half of the face stopping at the bottom of the nose [61]. The half shield provides the least inhibited vision, with its transparent plastic offering excellent straight ahead and peripheral vision [61]. The half shield does not tend to fog up as much as the full shield but, still experiences some fog issues [60]. The half shield is more flexible than the full shield, making it slightly less durable [60]. This option provides the least protection because it leaves the mouth, jaw, chin, and the bottom of the nose vulnerable to injury [60].

As of now, wearing the helmet face cage or visor is optional for NHL players [62]. The IIHF, Hockey Canada, and USA Hockey require players whom are women or under the age of 18 to wear full face masks [62]. IIHF and Hockey Canada also require at least a visor be worn by players not mandated to use full facial protection, which covers the remaining players that don't fall into the above categories [62]. Many hockey players complain that the face cage/visor impacts their field of vision, which explains why many NHL players choose not to wear them.

Hockey Canada requires and USA Hockey recommends that neck laceration protectors are used for all positional players. This is because, although neck laceration injuries are rare, when a neck laceration does occur it can be very serious and even deadly. There are three main

types of neck protectors available for non-goalie players [63]. The most common is the strap style neck protector, which provides the least amount of coverage [63]. The next style is the “Strap Yoke” which offers a bit more protection than the strap. Both of these types of neck protection are usually made of ballistic nylon or a similar material. The least common neck protector is the Turtleneck; it offers the most coverage and is usually made of 100% Kevlar or Armortex with abrasion resistant properties [63]. Figure 2-5 shows each of the neck laceration protector styles along with the percentage of players who wear each [63]. However, since laboratory testing of neck laceration protectors may not represent actual on-ice mechanisms of injury, their effectiveness is undetermined. A study done by the Mayo Clinic showed that players have experienced lacerations while wearing each type of neck protector available. According to this study, 27% of the neck laceration incidences reported occurred while the player was wearing a neck protector. All the neck protectors currently available are intended for laceration prevention, meaning their purpose is to prevent cuts and scrapes to the area covered. So, the neck protectors do not protect against the impact of a puck or stick to the neck, and do not provide any support against whiplash.

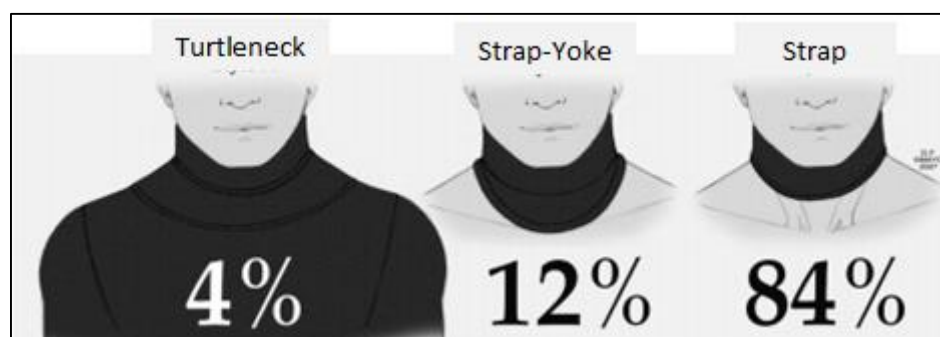


Figure 2-5: Types of Neck Laceration Protectors and Percentage of Players who Wear Each [63]

2.8 Testing Methods

There are numerous ways to test how a helmet protects against impact forces. Three very common impact tests are the drop weight impact test, pendulum impact test and air cylinder impact test. Similar forces can be exerted on the helmet as a result of each testing method but, depending on the desired impact, one test may be better suited than another.

2.8.1 Drop Weight Impact Test

A drop weight impact test involves dropping a weight on the device in order to simulate a desired impact force. Gravity, height of the drop, and the mass of the object being dropped are the factors that change the force of the impact. The impact force from this test is linear and unidirectional. The drop is guided by rails during the free fall stage to assure a straight down impact [64]. The assumption has to be made that the rails are frictionless in order to calculate the impact velocity through conservation of energy. The initial potential energy can be calculated before the drop and that energy will equal the final kinetic energy at the moment of impact.



Figure 2-6: Drop Weight Impact Test [65]

2.8.2 Pendulum Impact Test

A pendulum impact test is similar to a drop weight impact test in that it also uses conservation of energy to determine the impact velocity. Instead of dropping a weight vertically onto the device to be tested, the weight is swung from a set height on a stiff arm as a pendulum. This allows for a horizontal impact on the device to be tested. A horizontal impact may be preferred over a vertical impact due to the rotational accelerations that could result in addition to linear accelerations. Generally, a pendulum impact test is used to break a specimen. Having broken the specimen, the pendulum swings back to a height lower than the starting point. The energy it took to break the specimen can then be calculated [66]. This test can be modified, however, by the use of a catch mechanism in order to just apply an impact force to a device.



Figure 2-7: Pendulum Impact Test

Source: Pendulum Impact [66]

2.8.3 Air Cylinder Impact Test

An air cylinder uses compressed air to deliver a controlled linear force [67]. Most air cylinders have specific forces that can be exerted for different amounts of air pressure. The force that the cylinder can exert also depends on the size of the bore or any attachments to the end of it. Air cylinders are useful for impact testing since, for the same air pressure, the force will always be the same. Since the capabilities of an air cylinder are known at the time of purchase, very few calculations are needed to assure the correct force will be applied to the device being tested. These devices can be used to apply both linear and rotational forces to the device being tested like the pendulum impact device. The main drawback is that this device cannot run on gravity, like the two previously mentioned, and needs to be powered by compressed air.

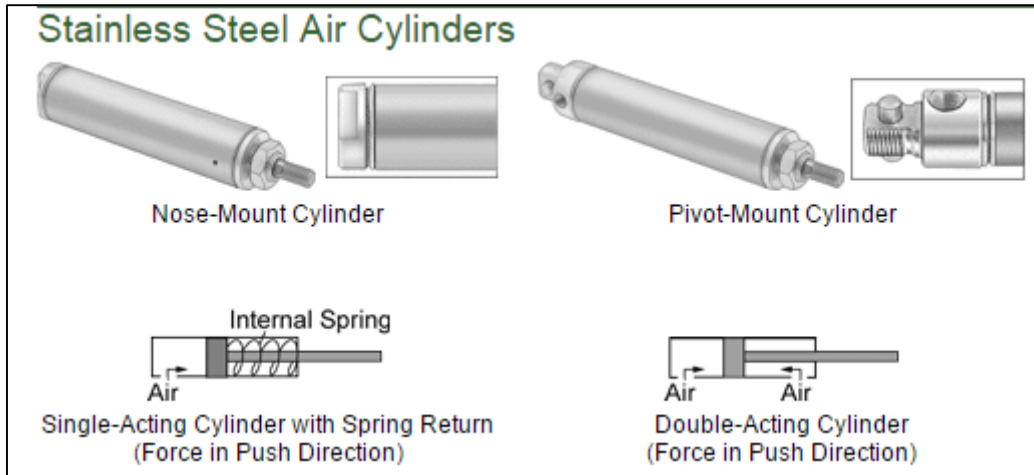


Figure 2-8: Air Cylinders

Source: McMaster Carr [67]

2.9 Smart Materials

Smart fluids are versatile materials with many possible applications in engineering that have properties that respond to different stimuli, such as forces, electrical fields, and magnetic fields. Non-Newtonian fluids have viscosities that change in response to shear rate. As a comparison, “normal,” Newtonian fluids flow continuously under shear. A common example of a non-Newtonian fluid is Oobleck. Oobleck is a suspension of cornstarch in water that has a shear rate dependent viscosity that increases with increasing shear rate. Oobleck can become so viscous in response to a time-dependent force that it transforms into an elastic solid. Once the shear force is removed Oobleck returns to its original, low-viscosity state.

Extensive research was done on different smart fluids in a Major Qualifying Project from 2014 [68]. Specifically, that project group focused on fluids that demonstrated shear thickening, or increasing viscosity when a shear stress is applied. The goal of their project was to use shear thickening fluids in a device to slow down a football player’s head during an impact. Their research led them to focus on Polyethylene Glycol (PEG) and Oobleck as possibilities to use inside of the device they designed. These two smart fluids both demonstrate shear thickening

and other similar physical properties. Because these fluids' viscosities increase depending on shear rate, they were used in the football helmet device to reduce the acceleration of a player's head during a hit. Two other fluids that were mentioned in this MQP report for possible application in the device were electro rheological and magneto rheological fluids.

The properties of Oobleck can be modified by adding glucose or cooking it until it becomes a gel. Adding glucose to the suspension increases the viscosity that can be reached when a force is applied [69]. Cooking the cornstarch and water suspension increases the viscosity of the fluid both before and after a shear stress is applied. The longer it is cooked the greater its viscosity due to evaporation of the water and additional swelling of the cornstarch molecules. There are countless combinations of modifications that can be made to a cornstarch and water suspension allowing for specific, desired traits to be achieved.

Polyethylene Glycol (PEG) is a polymer that has dilatant properties which means its viscosity increases when shearing is present. PEG has the same molecular structure as Polyethylene Oxide (PEO) and Polyoxyethelyne. Yet each of these polymers has different physical properties mainly due to their differing molecular masses. This polymer is labeled as PEG when the molecular mass is less than 20,000 g/mol and PEO when the molecular mass is greater than 20,000 g/mol. POE, however, can refer to the polymer of any molecular mass [2].

Smart fluids are not limited to reacting to shear stresses. Electro rheological (ER) and magneto rheological (MR) fluids are two sophisticated smart fluids that react to electric and magnetic fields respectively. The responses can occur within a few milliseconds but do differ depending on the fluid. ER fluids have a much weaker response than MR fluids and are generally unusable unless enhanced [3]. MR fluids can be used without any additional enhancements due to their stronger effects. MR fluids are also not as easily affected by contamination as ER fluids making them much more useful in many applications [4].

Table 2-10: Viscosity and Price of Various Smart Fluids

Material	Viscosity (η) at 25° C	Price per gram without water
PEG - 400	70 cP	\$0.028
PEO	12-50 cP	\$7.74
Cornstarch Suspension	400-53,000cP*	\$0.0026
Glucose as an additive	N/A	\$0.0011
Polyaniline	Dependent on applied voltage	\$12.36

*The viscosity of the cornstarch and water suspension is a range due to the effects cooking and glucose can have on it. Any value within this range can be obtained.

3 Methodology

With the knowledge acquired from the background research, the project goal and objectives were more fully defined. A plan for achieving the project goals and objectives was devised and followed throughout the design process. This plan involved identifying design variables, generating the variations available for each variable and developing a method for evaluating how well each variation would contribute to achieving the project goals and objectives. The variations were assessed against critical design criteria. Assessing the variations against the design criteria involved research, engineering intuition, dynamic calculations, computational analysis and preliminary performance testing. This section describes the process of defining project objectives, and design development.




3.1 Project Goal and Objectives

With the nearly four million estimated sports-related concussions a year, athletes risk suffering the devastating effects of sustaining a concussion, each time they play the game they love. Ice hockey players are especially at risk due to the higher speeds obtained and the hard ice playing environment. Numerous studies have concluded that there is a high risk of concussion for ice hockey players at all levels of play. The concerns and effects of concussions have lead league officials to seek equipment that better protects players from concussions.

The goal of this project is to reduce the risk of concussion for ice hockey players by incorporating neck support into the current helmet design to provide an additional restoring moment during impact that will reduce the acceleration of the head. The addition of a neck support that simulates and enhances the restoring moment provided by a strong neck should reduce the risk of concussion. This is based on the finding that for every one pound increase in neck strength, as measured by a hand-held dynamometer and tension scale, the odds of

sustaining a concussion decrease by five percent [7]. The ambition of the neck support incorporated helmet is to generate HIP values less than 24 kW when subject to a force typically experienced during a hockey game. Achieving HIP values below 24 kW will result in a less than 50% chance of sustaining a concussion. In order to achieve our goal, we established the variables involved with incorporating the neck support and developed options for each variable. The variables we established along with options for each variable are shown in Table 3-1. To determine which option would be used we devised a list of determining criteria.

Table 3-1: Options for Each Design Variable

Variables	Options
<p>Material</p>	<p>Oobleck</p> <p>-Different concentrations</p> <p>-Cooked vs. uncooked...</p> <p>Borax and PVA</p> <p>MR fluids</p>
<p>Pattern</p>	<p>One solid</p> <p>Vertical strips</p> <p>Horizontal strips</p>
<p>Amount of Overlap with Helmet</p> 	<p>Covering back of head entirely</p> <p>Up to lower back of head</p> <p>Barely overlapping with helmet</p>
<p>How Far it Extends Down the back</p> 	<p>In line with shoulders</p> <p>To mid-shoulder blade</p> <p>To bottom of shoulder blade</p>
<p>Amount of Wrap Around</p> 	<p>Just on back of neck</p> <p>To beneath the ears</p> <p>All the way around</p>
<p>Method of Implementation</p>	<p>Velcro around neck</p>

	Make it adhesive to skin
	Memory forming materials
	Ear-muff mechanism
	Flat spring

In addition to achieving the main goal, the hope is that the modified helmet could be feasibly worn during an ice hockey game without imposing any significant limitations that a typical helmet would not impose. Although it is not the main focus of the project, in order to make implementing the design feasible, we developed the following objectives.

Feasibility Objectives:

1. The players’ range of motion while wearing the modified helmet should not be decreased by more than 4% of their range of motion with the current helmet.
2. The player is able to remove the modified helmet in no more than an extra 5 seconds compared to the removal time of a current hockey helmet.
3. The design shall not incorporate any extrusions that will negatively affect player comfort or safety.

3.2 Designing the Neck-Support-Integrated-Helmet

A process for determining the best option for each of the previously identified variables was created. With these feasibility objectives in mind the first three determining criteria for evaluating the options for each variable were created as shown in the Table 3-2. In addition the main goal and feasibility objectives, cost, availability, and ease of implementation were also determining factors. Table 3-2 shows the complete list of determining criteria that was

established, along with how each option's ability to meet the criteria will be assessed. The questions in the Table 3-2 will be assessed for each option and compared to determine the best option for each variable.

Table 3-2: Determining Criteria

Determining Criteria	Questions to Assess Each Option
Affordable?	How much will it cost to implement?
Available?	<p>Do we have access to the required materials?</p> <p>How easy will it be obtain all the required materials?</p> <p>How much time will it take to obtain all the required materials?</p>
Easy to implement?	<p>Is there a plan for implementing this option?</p> <p>If so, how many steps will it take to get the option implemented?</p>
Reduces HIP?	<p>Does computational analysis predict this option will help reduce the HIP?</p> <p>Do calculations predict this option will help reduce HIP?</p> <p>Does engineering intuition predict this option will help reduce HIP?</p>
Allows Full Range of Motion?	<p>Does this option provide the flexibility necessary to allow full range of motion?</p> <p>How many degrees of freedom are potential affected by this option?</p>
Easy to Use?	<p>Will this option require additional steps to equip the helmet?</p> <p>It so, how many additional steps does this option require?</p>
Is it comfortable and Safe?	<p>Will this option cause parts to be protruding off of helmet? If so, how many?</p> <p>Will this option utilize hard materials that can injure someone upon impact more so than a typical helmet?</p> <p>Will this option lead to sharps corners or parts on the helmet?</p>

Before deciding on the specifics of the helmet modification, a baseline hockey helmet was chosen. It was important that the baseline helmet be commonly used so that the results of testing could be extended to typical hockey situations. In order to ensure that the helmet purchased was a popular one, the choice of helmet was limited to those presented in the equipment guide on PureHockey.com (seen in Figure 2-3). In addition, it was required that the helmet offer good protection before any modifications; thus, any observed improvements can be attributed to the modification and not an unsafe baseline helmet. Ideally, either the Bauer IMS 9.0 or the Reebok 11k would be used since these helmets are classified as elite protection. The Bauer Re-Akt helmet was quickly eliminated from consideration since the SUSPEND-TECH liner could make it infeasible to modify the helmet.

Two helmets were required so that one could remain unmodified to test as a control and the other to modify for comparison to the controlled results. Reusing the control helmet by modifying it after it has been tested could produce inaccurate results, since the integrity of the helmet might diminish from enduring multiple impacts. Based on the need for two helmets and budgetary restraints, two Bauer IMS 7.0 helmets were purchased; this was the helmet that offered the best protection out of the affordable options. Utilizing a cage was determined to be necessary for testing so that the dummy head would not be impacted directly. One of the helmets was purchased with a cage that could be transferred to whichever helmet is being tested at the time.

Once the helmets were purchased, options for each variable were evaluated against the determining criteria. Each variable needs to be determined before building a prototype, since time and budget constraints will only allow for the fabrication of a single prototype.

3.2.1 Options for the Smart Fluids

The first variable that was evaluated was the smart material that would be used for the neck support. The material choice is a critical variable that will have a huge influence on whether the prototype meets the main goal of lowering the HIP. Although, the other neck support variables will contribute, an appropriate choice for the material is crucial for creating a device that will successfully reduce the HIP. There are two main requirements the material of the neck support must meet:

- 1) The material must be able to provide a restoring moment against the force of an impact to reduce the acceleration of the head.
- 2) The material must provide the player with uninhibited use of his or her full range of motion.

At first glance, these requirements seem somewhat contradictory, but a smart fluid that exhibits shear thickening in response to stimuli should be capable of performing both requirements. The materials identified as potential candidates for the neck support were ER fluids, MR fluids, cross-linked polymers, and Oobleck. First, the availability, affordability, and ease of implementation of each option were considered, enabling the elimination of ER and MR fluids from consideration, based on their cost and complicated implementation. Then cross-linked polymers were eliminated since they break when exposed to high shear force. Therefore, the material of the neck support was determined to be Oobleck.

The fact that Oobleck has a low resting-state viscosity and exhibits shear thickening in response to a large shear force rate, makes it a very suitable material for fulfilling both the material requirements. However, the standard two part cornstarch to one part water Oobleck

concentration may make it prone to settling at the bottom of the capsules used to enclose it due to its low resting viscosity. This could impede its ability to meet the first requirement, since the material must remain distributed throughout the vertical length of the neck support in order to provide sufficient restoring moment, as illustrated in the Figure 3-1.

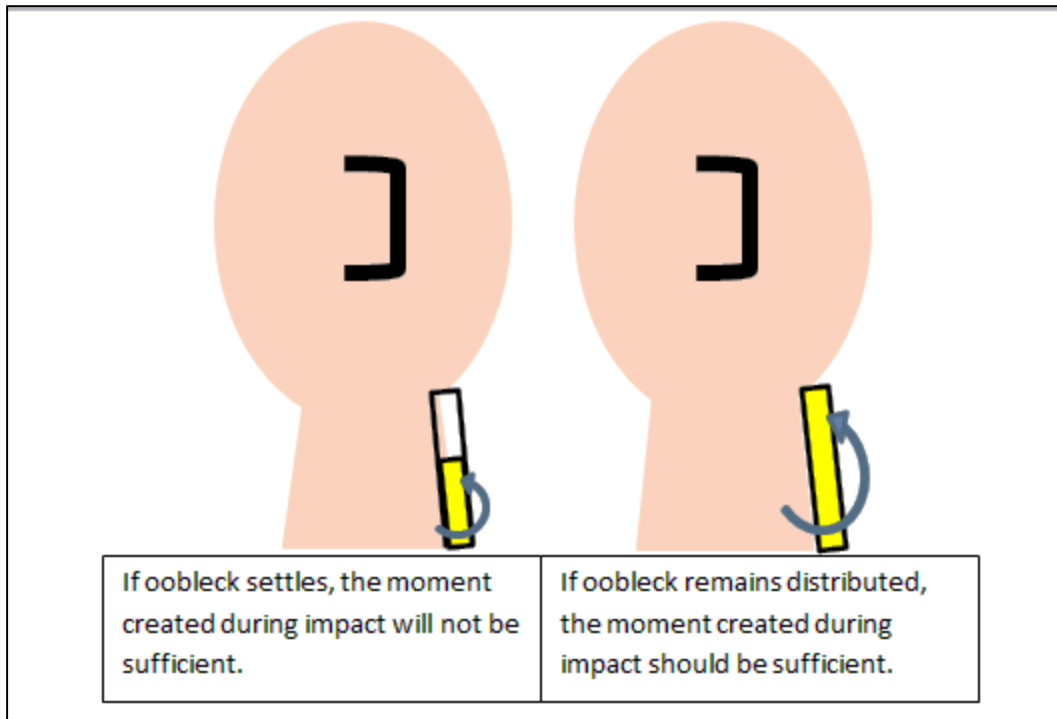


Figure 3-1: Effect of Oobleck Settling at the Bottom of the Neck Support

As discussed in the background section, there are several modifications of the Oobleck creation process that result in variations of Oobleck that display different properties.

Experimentations with these modifications were conducted to determine which would produce Oobleck with properties that best achieve the material requirements. The properties of interest include resting viscosity, and the relationship between viscosity and shear rate.

In order to determine the viscosity properties of the Oobleck produced from each variation experiment, balls of different mass will be dropped through a volume of Oobleck. The time it

takes for the balls to move through the Oobleck will be utilized to obtain the viscosity properties of each. The complete procedure for determining the viscosity of Oobleck is shown in Appendix C.

3.2.1.1 Oobleck Creation Variation Experiments

The Oobleck creation variation experiments include varying concentration, microwaving, boiling, and stove-top cooking of the Oobleck. The first experiment was to compare uncooked Oobleck to Oobleck cooked using a 1000 Watt microwave for differing amounts of time. The microwave seemed to be too aggressive of an option since a difference of ten seconds resulted in a completely gelled over solid. The second experiment involved cooking the Oobleck in plastic bags in hot water. The procedure used for this experiment is shown in Appendix C. Only subtle changes in initial viscosity were observed from this experiment. This method is much more difficult than using a microwave to cook the Oobleck. It is necessary to mix up the Oobleck in the bags periodically while cooking to assure the texture stays consistent. Additionally, the bags need to be kept away from the sides of the pot and up off the bottom by use of a steaming rack to keep the plastic from melting. Increasing the concentration of cornstarch to water was attempted but the shear thickening properties of the Oobleck made mixing difficult. The next experiment involved cooking the Oobleck directly in a pan on the stove top to evaporate the water out of the suspension.

One cup of water was mixed with one cup of cornstarch in a small pan. Once the suspension was uniform, it was cooked over heat three (low-medium) on a gas stove. The mixture was stirred constantly during the cooking process until it started to form a paste and become very thick. Once the mixture no longer had flowing fluid left, it was removed from the

heat and then taken out of the pan to help stop the cooking process. Once cooled, the Oobleck had the texture and viscosity of Play Doh but had lost the desirable shear thickening properties it had when it was a liquid.

This experiment was repeated using one cup of water mixed with one cup of cornstarch and one tablespoon of white sugar, glucose. Glucose has been shown to increase the viscosity of liquid Oobleck. However, once it was cooked and then cooled, this modified Oobleck had no discernable difference between the stove-top cooked Oobleck without glucose.

It is believed that the desired paste-like substance with shear thickening properties was not achieved due to the amount of heat retained in the cooked Oobleck. It took over 30 minutes for the mixture to cool and during that time more of the water had evaporated. This turned the paste, observed at the end of the cooking period, into crumbly dough. This dough was easily manipulated but did not have any of the shear thickening properties necessary to reduce the accelerations of the head during impact. Adding water back to the dough was attempted in order to make a paste however, the shear thickening properties were not recovered. Table 3-3 shows the results from experimenting with various modifications to the Oobleck creation process.

Table 3-3: Results from Modifications in the Creation of Oobleck

Cornstarch to Water Concentration	Modification Method and Duration		Initial Viscosity	Shear Thickening Exhibited*	Comments
2:1	Unmodified				
2:1	Microwave	20 sec			Slightly gelled
2:1		30 sec	Like solid	No	Entirely gelled over
2:1	Plastic bags in boiling water	1 min	Unnoticeable difference from uncooked	Yes	
		5 min	Unnoticeable difference from uncooked	Yes	
		10 min	Unnoticeable difference from uncooked	Yes	
		15 min	Slightly higher than uncooked	Somewhat	
1:1	Stove Top		Like Play-Doh	No	Like Play Doh
1:1:1	Stove Top with 1 tablespoon of glucose		Like Play-Doh	No	Like Play Doh

The desired resting viscosity is one that permits full range of motion but also ensures the Oobleck remains distributed throughout the vertical length of neck. A resting viscosity similar to the viscosity of Play Doh would make the Oobleck capable of staying distributed throughout the vertical length of the neck. The challenge is to create an Oobleck with a resting viscosity similar to that of Play Doh that retains its shear thickening properties.


3.2.1.2 Calculations for Determining Necessary Dampening Coefficient

The shear thickening to force relationship, formally called a constitutive model, of each variation of Oobleck helps distinguish which variation of Oobleck should be used. First, the dampening coefficient necessary for providing a sufficient restoring moment upon impact was calculated. In order to perform the necessary viscosity calculations, a full understanding of how concussions typically occur in hockey had to be obtained and modelled mathematically. Since player-to-player collisions are the most common impact mechanism during ice hockey games, a player skating at top speeds into a stationary player was modelled [6]. The average weight of a professional ice hockey player is 210 pounds force plus 30 pounds force of equipment [70]. This means the average mass of a professional hockey player with equipment is 109 kg. Donaldson et al. studied the accelerations of elite skaters instructed to skate as fast they could, starting from a stand-still [10]. Data were collected after a specified duration, and the average of the elite skaters' accelerations was 4.375 m/s^2 [8]. Considering a worst-case scenario, in which the player hitting into the stationary player transfers the entire force to the impacted player, the obtained values were used in the following equation to determine a typical force experienced by an ice hockey player.

$$\text{Equation 4: } F_{\text{impact}} = m_{\text{player}} * a_{\text{player}}$$

Where, F_{impact} is the force experienced by the player being impacted, m_{player} is the average mass of an equipped professional hockey player, and a_{player} is the average acceleration of an elite skater. This provided a force of 476 N, which would be used to test the helmets.

Using Figure 3-2 below as a free body diagram and rearranging the sum of moments equations provided the following differential equation:

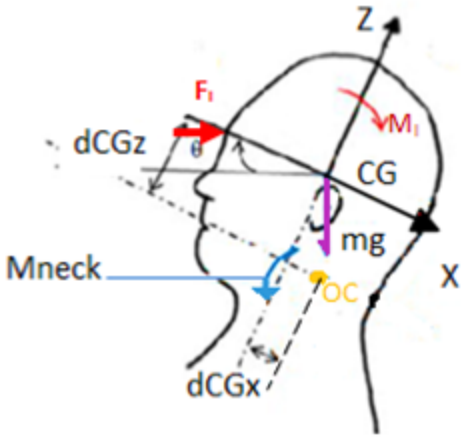

- F_i Impact Force (i.e. Pressure * Area) through Center of Gravity
- M_i Moment from Impact
- OC Occipital Condyle; Point of Rotation
- Mg Gravitational Force (i.e. mass times gravitational constant)
- CG Center of Gravity of the head
- M_{neck} Restoring Moment from neck
- θ Angle of Rotation
- d_{CGz} Distance from Center of Gravity to OC along z-axis
- d_{CGx} Distance from Center of Gravity to OC along x-axis

Figure 3-2: Free Body Diagram of Head During Impact

Equation 5:

$$\frac{d^2}{dt^2} \theta_k + \frac{k_{damp}}{I_y} \frac{d}{dt} \theta_k + \frac{k_{necks}}{I_y} \theta_k = \frac{(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{CGx} + m_{\text{head}} \cdot g \cdot d_{CGz}) \cdot \sin(\Omega_F \cdot t) - (\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{CGz} + m_{\text{head}} \cdot g \cdot d_{CGx}) \cdot \cos(\Omega_F \cdot t)}{I_y}$$

Where, $I_y = 233 \text{ kg} \cdot \text{cm}^2$, and is the moment of inertia about the center of gravity of the human head [28]

$k_{necks} = 50 \frac{\text{N} \cdot \text{m}}{\text{rad}}$, and is the spring constant that has been used to model the response of the human neck during impact [71]

$k_{damp} = 5 \frac{\text{s} \cdot \text{N} \cdot \text{M}}{\text{rad}}$, and is the dampening coefficient that has been used to model the response of the human neck during impact [71]

$d_{CGz} = 55 \text{ mm}$ and $d_{CGx} = 13 \text{ mm}$, and are the distance from the head's center of gravity to the point about which the head rotates (the Occipital Condyle (OC)) along the z- and x- axis respectively [72].

Solving the above differential equation provided the equations for the angular displacement, velocity, and acceleration of the center of gravity of the player's head, shown with corresponding graphs below (the complete calculation can be seen in Appendix B.)

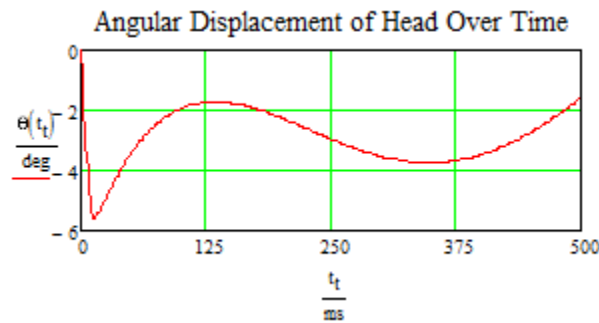


Figure 3-3: Graph of Angular Displacement of the Head vs. Time, $F = 476 \text{ N}$

Equation 6: $\theta(t) = c_1 * e^{r_1 * t} + c_2 * e^{r_2 * t} + A * \sin(\Omega_F * t) + B * \cos(\Omega_F * t),$

Where, $\theta(t)$ is the angular displacement of the center of gravity of the head as a function of time,

t is time in seconds,

Ω_F is the forcing frequency and was estimated using graphs, and

$C_1, C_2, A, B, r_1,$ & r_2 are all constants that were solved for using initial value conditions (the calculations of these constants can be seen in Appendix B.)

Through differentiation the equations for angular velocity and acceleration were determined:

Angular Velocity:

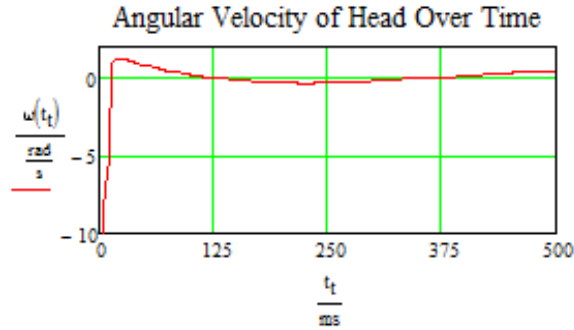


Figure 3-4: Graph of Angular Velocity of Head vs. Time, F = 476 N

Equation 7: $\omega(t) = c_1 * r_1 * e^{r_1 * t} + c_2 * r_2 * e^{r_2 * t} + A * \Omega_F * \cos(\Omega_F * t) - B * \Omega_F * \sin(\Omega_F * t)$

Angular Acceleration:

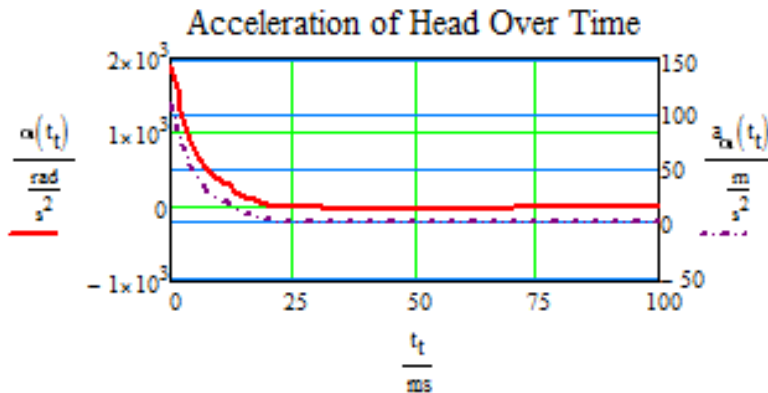


Figure 3-5: Graph of Acceleration of Head vs. Time, F = 476 N

Equation 8: $\alpha(t) = c_1 * r_1^2 * e^{r_1 * t} + c_2 * r_2^2 * e^{r_2 * t} - A * \Omega_F^2 * \sin(\Omega_F * t) - B * \Omega_F^2 * \cos(\Omega_F * t)$

Unfortunately, when this information was entered into the HIP equation, it only produced a value of 1.077 kW, way below the 50% concussion likelihood HIP value of around 24 kW.

Therefore, initial assumptions were reexamined. It was concluded that the low HIP value was probably because the force used in the calculations was determined from a standing start, static view point. A more accurate force was then acquired using the change in momentum equation.

Again, considering a worst-case scenario of two players skating their fastest at 30 mph and hitting head on (causing one to come to a complete stop), provides the initial momentum and the final velocity of one of the players. Rearranging the impulse equals change in momentum formula and plugging in the known variables allowed the impact force to be calculated as seen in the equations below (the complete calculations can be seen in Appendix B).

Equation 9: $Impulse = \Delta momentum$

Equation 10: $Impulse = F * t$ **Equation 11: $\Delta momentum = m_{hp} * (v_i - v_f)$**

Equation 12: $F = \frac{m_{hp} * (v_i - v_f)}{t} = 1.217 * 10^5 N$

Where, F is the impact force

t is the estimated time duration of impact

m_{hp} is the average mass of an equipped hockey player

v_i & v_f are initial and final velocity, respectfully

This force generated an extremely large acceleration and HIP value, indicating that the worst-case scenario that was modelled may have been too extreme.

In an attempt to obtain a more realistic value for the force capable of producing a concussion in a hockey player, background research was consulted for head accelerations that have been obtained from sensors located in helmets of athletes. Provided in the study Newman et al., conducted for developing the HIP were the maximum linear accelerations sensed in the

heads of NFL players who had collided head to head with another player along with whether either player sustained a concussion. Averaging the accelerations of the players who had sustained a concussion generated an acceleration of 953.3 m/s^2 . Using this acceleration and the typical mass of a human head in the force equals mass times acceleration equation provided a force of $4.195 \times 10^3 \text{ N}$ (Complete calculations can be seen in Appendix B).

Utilizing this force to solve for new constants in the angular displacement, velocity and acceleration equations generated the following graphs:

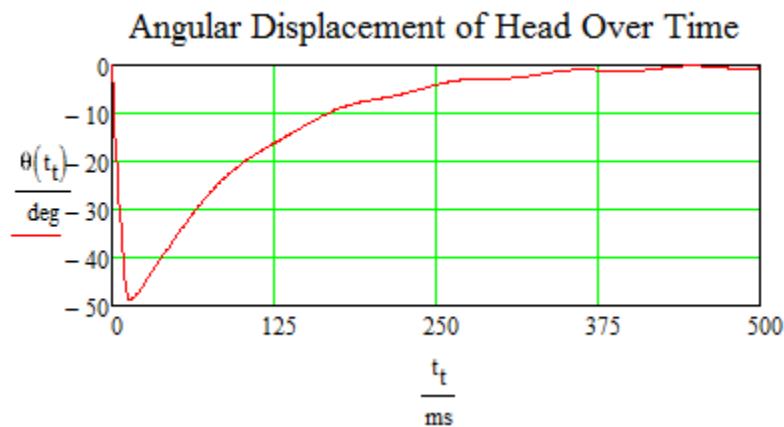


Figure 3-6: Graph of Angular Displacement of Head vs. Time $F = 4.195 \times 10^3 \text{ N}$

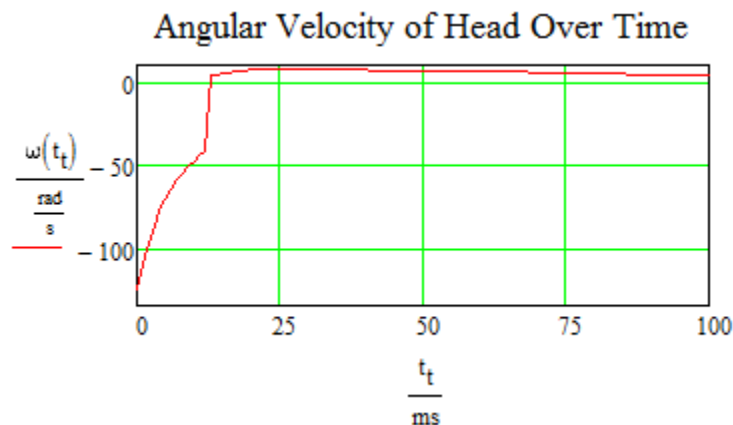


Figure 3-7: Graph of Angular Velocity of Head vs. Time, $F = 4.195 \times 10^3 \text{ N}$

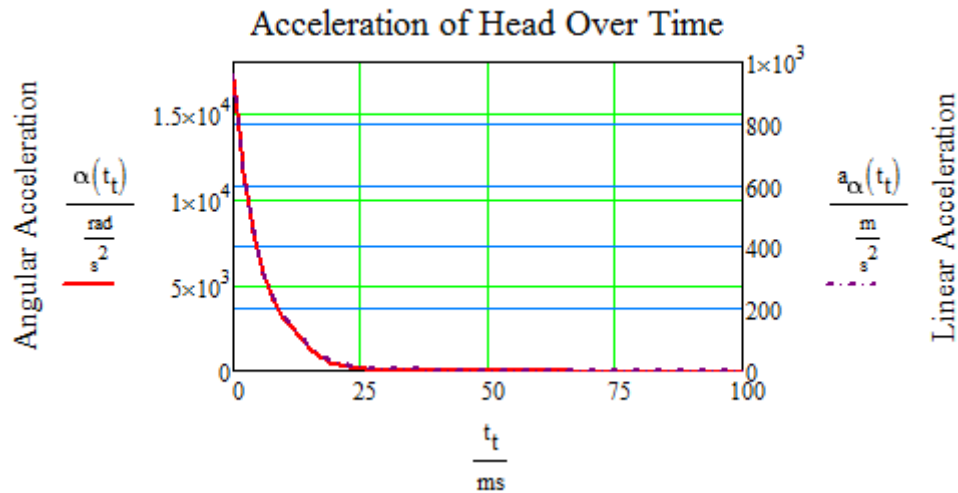


Figure 3-8: Graph of Acceleration of Head vs. Time $F = 4.195 \times 10^3 \text{ N}$

This acceleration generated an HIP of 60 kW which is twice the 30 kW HIP value that corresponds to 95% concussion risk, but is still an obtainable value in certain situations. However, a force that would generate an HIP value that is more typical of an ice hockey player was still desired. Also provided in the study conducted by Newman et al. was the peak acceleration corresponding to a 50% chance of concussion. So this acceleration of 761.5 m/s^2 was multiplied by the mass of the human head to obtain a force of $3.35 \times 10^3 \text{ N}$. Using this force to solve for new constants in the angular displacement, velocity, and acceleration equations generated the following graphs (complete calculations can be seen in Appendix B).

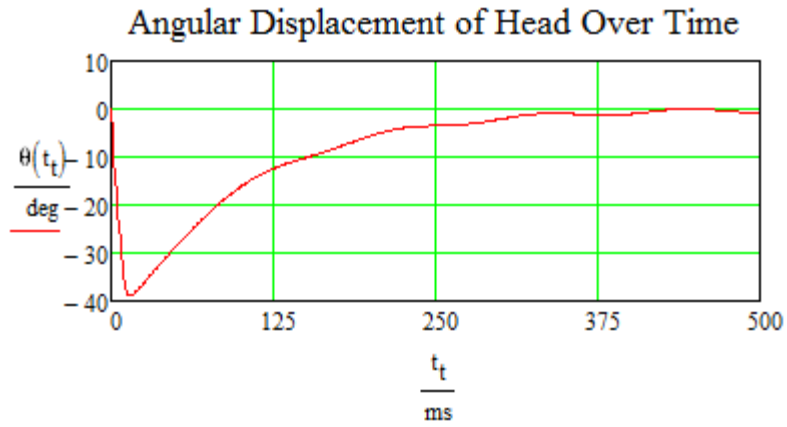


Figure 3-9: Graph of Angular Displacement of Head vs. Time, $F=3.35 \cdot 10^3$ N

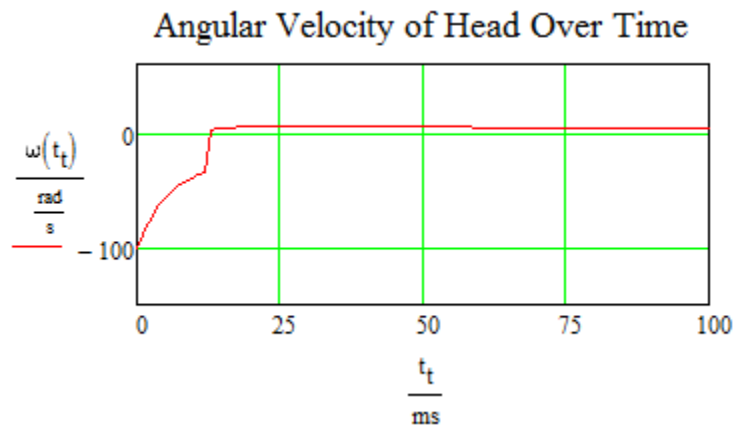


Figure 3-10: Graph of Angular Velocity of Head vs. Time, $F = 3.35 \cdot 10^3$ N

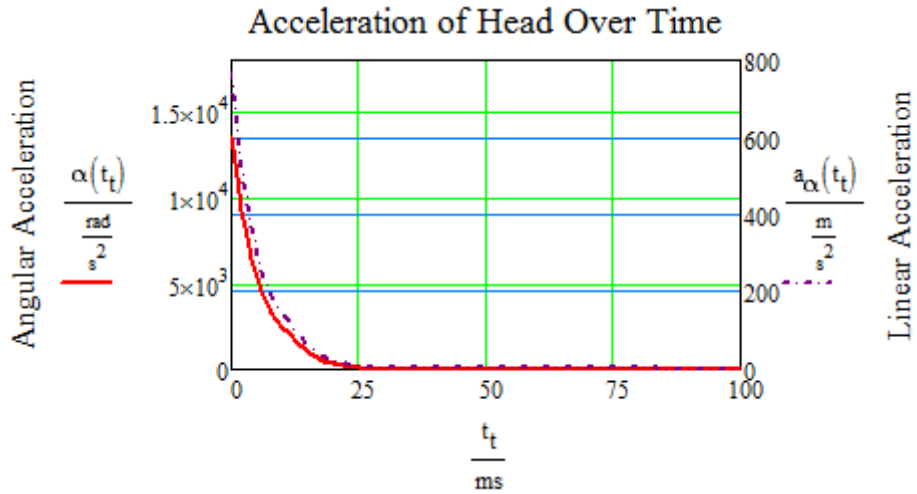


Figure 3-11: Graph of Acceleration of Head vs. Time $F = 3.35 \times 10^3 \text{ N}$

Using the acceleration equation generated by a force of $3.35 \times 10^3 \text{ N}$ produces a reasonable HIP value of about 38 kW, as seen in Figure 3-12, below. This HIP indicates that there is over a 95% concussion risk.

$$\text{HIP}(t_t) := m_{\text{head}} \cdot a_x(t_t) \cdot \int_{0\text{ms}}^{30\text{ms}} a_x(t_t) dt_t + m_{\text{head}} \cdot a_z(t_t) \cdot \int_{0\text{ms}}^{30\text{ms}} a_z(t_t) dt_t + I_y \cdot \alpha(t_t) \cdot \int_{0\text{ms}}^{30\text{ms}} \alpha(t_t) dt_t$$

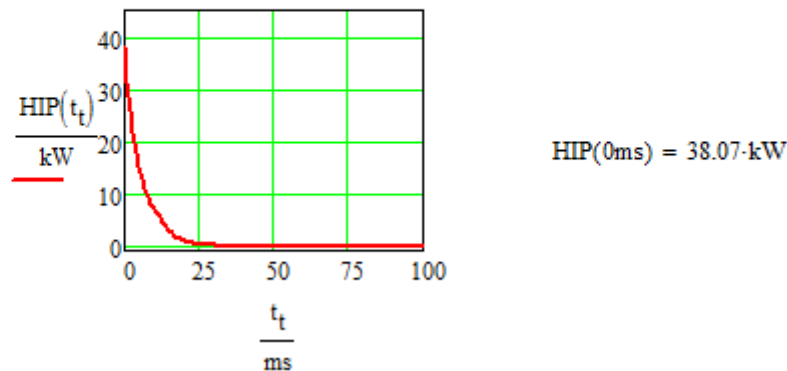


Figure 3-12: HIP Value Corresponding to a Force of $3.35 \cdot 10^3$ N

This force generates a realistic HIP value indicating very high risk of concussion.

However, this force cannot be achieved using the air cylinder already purchased for the test rig.

The exploration of alternative test methods is discussed in Section 3.3.

The solution found from the exploration of alternative test methods was to scale-down the mass of the head and the tension in the neck proportionately to the ratio between the realistic force of $3.35 \cdot 10^3$ N and the small, maximum force the air cylinder is able to deliver. The largest force that could be achieved using the air cylinder was calculated by multiplying the area of the air cylinder bore by 100 psi (the maximum pressure available). The maximum force that can be generated using the air cylinder is 786 N. Dividing the realistic force of $3.35 \cdot 10^3$ N by the maximum force achievable provided a scaling factor of 4.26. To determine the validity of the scaling down test rig solution a mathematical model in which the average mass of a human head, the spring and dampening coefficients used for modelling the human neck and the moment of inertia were divided by the scaling factor. Once equations utilizing the scaled-down values were

created a variable representing the dampening coefficient of the neck support was added (see below).

Equation 13 Scaled-Down Differential Equation Including a Dampening Coefficient of the Neck Support

$$I_y \cdot \frac{d^2}{dt^2} \theta_k + (k_{\text{damp}} + k_{\text{obbleck}}) \cdot \frac{d}{dt} \theta_k + k_{\text{necks}} \cdot \theta_k = \frac{(P \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}) \cdot \sin(\Omega_F \cdot t) - (P \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) \cdot \cos(\Omega_F \cdot t)}{I_y}$$

Where P = 100 psi, and is the maximum available pressure,

Area_{Bore} = 11cm², and is the cross-section area of the air cylinder bore

M_{head}, I_y, k_{damp}, and k_{necks} are the values listed previously divided by the scaling factor

Solving the differential equations with $k_{\text{obbleck}} = 0 \frac{m^2 \cdot kg}{s}$ generated the following angular displacement, velocity, and acceleration graphs.

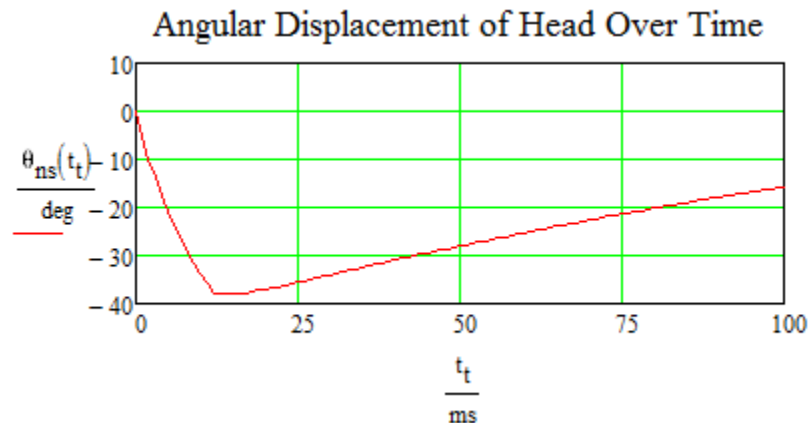


Figure 3-13: Graph for Angular Displacement from Scaled-Down Values and Dampening Coefficient = 0

m²*kg/s

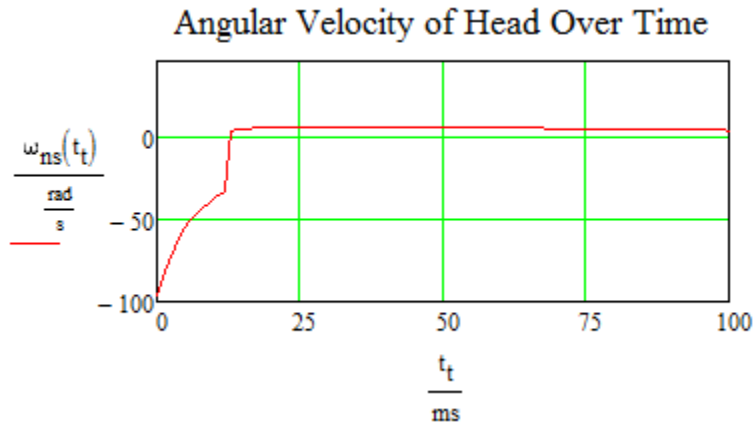


Figure 3-14: Graph for Angular Velocity from Scaled-Down Values and Dampening Coefficient = $0 \text{ m}^2\cdot\text{kg/s}$

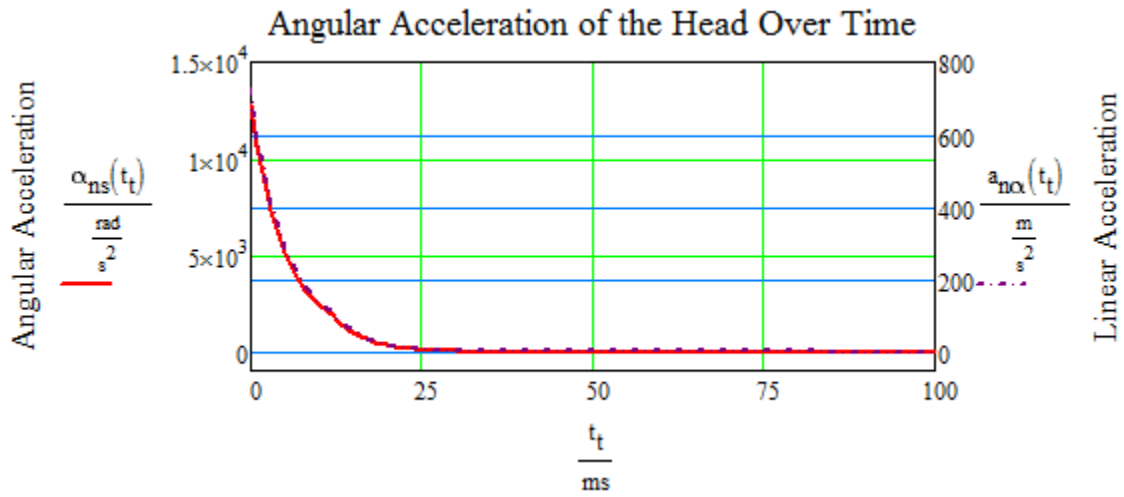


Figure 3-15: Graph for Angular Acceleration from Scaled-Down Values and Dampening Coefficient = $0 \text{ m}^2\cdot\text{kg/s}$

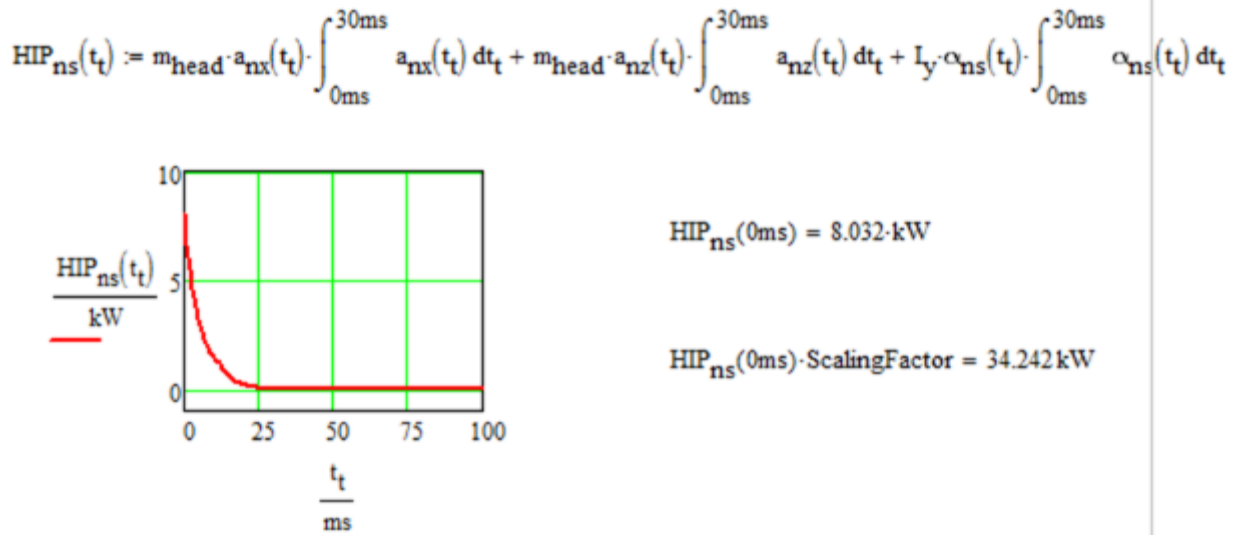


Figure 3-16: Graph and Equation for the HIP Generated from the Scaled-Down Values and Dampening Coefficient = 0 $m^2 \cdot kg/s$

As shown in Figure 3-16, the scaled-down version of the impact generated an HIP value of 8 kW. Multiplying this scaled-down HIP by the scaling factor produces an HIP value of 34 kW very similar to the HIP generated from the mathematical model utilizing the realistic force. This HIP value just slightly exceeds the 30 kW value that corresponds to 95% risk of concussion.

The calculations were done in MathCad so the dampening coefficient could be changed and the equations and HIP value would automatically update (complete calculations can be seen in Appendix B.) First $k_{oobleck} = k_{damp} = 1.173 \cdot \frac{m^2 \cdot kg}{s}$, the scaled-down dampening coefficient of the neck was tried. Multiplying the HIP produced, by the scaling factor, generated an HIP value of 16.305 kW which is below the 24 kW threshold corresponding to 50% risk of concussion. In order to determine the smallest dampening coefficient still capable of producing HIP values below 24 kW, the dampening coefficient was set equal to varying amounts until a dampening coefficient that generated an HIP value just below 24 kW was found. The dampening coefficient necessary for generating an HIP less than 30 kW, corresponding to 95% concussion risk, was also determined. How much the different dampening coefficients were able

to reduce the HIP was quantified by calculating the HIP reduction percentage using the following equation:

$$\%HIP_{Reduction} = \frac{HIP_{no\ neck\ support} - HIP_{neck\ support}}{HIP_{no\ neck\ support}} * 100\%$$

Where, $HIP_{no\ neck\ support} = 34.242\ kW$, and is the HIP generated when dampening

coefficient of neck support equals $0\ \frac{m^2*kg}{s}$

$HIP_{neck\ support}$ is the HIP generated by the dampening coefficient

Table 3-4 lists the values guessed for the dampening coefficients along with the corresponding HIP values that were generated, and the HIP reduction percentage.

Table 3-4: Determining the Smallest Dampening Coefficient Capable of Reducing Risk of Concussion to below 50%

$k_{oobleck}\ (\frac{m^2*kg}{s})$	HIP (kW)	% HIP Reduction from HIP from no neck support
0 (No neck support)	34.242	N/A
$k_{damp} = 1.173$	16.305	52.4 %
1	17.667	47.4 %
.75	20.095	40.2 %
.5	23.302	30.7 %
.45	24.071	28.4 %

.47	23.757	29.3 %
.46	23.913	28.8 %
.25	27.733	17.5 %
.2	28.829	14.2 %
.18	29.293	12.8 %
.15	30.016	10.7 %
.16	29.771	11.4 %

As shown in Table 3-4, in order to reduce the chance of concussion to less than 95% (i.e. less than a 30 kW HIP value), a dampening coefficient of $.16 \frac{m^2 \cdot kg}{s}$ is necessary. In order to generate an HIP below 24 kW, indicating a concussion risk less than 50 %, a 28.8 % HIP reduction is necessary. The dampening coefficient capable of this percentage reduction was found to be $.46 \frac{m^2 \cdot kg}{s}$, as indicated by the green shading above. This means in order to achieve the project goal, the neck support must induce a dampening coefficient of at least $.46 \frac{m^2 \cdot kg}{s}$.

3.2.2 Material Options for Oobleck Capsules

The material and method for encapsulating the Oobleck also had to be determined. The Oobleck has to be enclosed in liquid-tight capsules that will be sewn into a fabric-like material that fits around the neck. The capsule material has to endure impacts without rupturing and be flexible enough so that it does not interfere with the properties of the Oobleck. The material for enclosing the Oobleck was chosen based on durability, resistance to leakage, impact characteristics, availability and price. The first affordable option tested was thick, powder-free nitrile gloves. These gloves are flexible, abrasion resistant, and meant to be a barrier between

skin and the chemicals or biohazards being handled [73]. The gloves provide a leak-proof barrier between the Oobleck and the neck support fabric. To utilize the gloves as Oobleck capsules, the fingers were cut off and filled with Oobleck. The fingers should be short and thin enough so that the Oobleck will not all settle at the bottom but rather remain distributed throughout the length of the finger. These fingers would then be sewn into the fabric of the neck support. A few options for sealing the capsules were tested.

First, a finger from the nitrile glove was filled to capacity using a funnel while still allowing room to be able to tie a knot to seal it. The Oobleck used was roughly 2.25:1 cornstarch concentration. First, the capsule was dropped on the ground. When no signs of cracks or leaks were present, we submitted it to the next test involving a 50th percentile male jumping on it. The capsule appeared to retain its integrity. For the final test, a collegiate softball player threw the Oobleck capsule as hard as possible at a wall. The capsule was thoroughly examined and no leaks or tears were present.

Although a simple knot seemed to secure the Oobleck sufficiently, other sealing options were tested to determine if there was an option that did not create a protrusion (knot) on the capsule. Oobleck was funneled into another finger, filling it almost entirely while leaving just enough of an opening to cover it in super glue. The opening was pushed and held closed until the super glue dried. Then the finger was dropped and Oobleck started leaking out.

So another glove was made the same way but had an additional step of folding the glued seam over and gluing it to itself to reinforce the seal. This finger withstood being dropped on the floor but ruptured when thrown by the collegiate softball player at the wall. It is believed that the integrity of the glove was compromised by the hardening of the glue. The glue seam created

a stiff edge that inhibited the nitrile's flexibility forcing it to rupture when hit hard enough. Therefore, it was decided to just use a knot to seal the capsules.

After review of the integrity of using the nitrile gloves, examination of other materials was then researched. The implementation of a material that is of proper length and width was desirable. Initially the use of a balloon for balloon animals had been analyzed. After testing the strength and integrity of the twisting balloons it was then desirable to find a new source to encapsulate the Oobleck. Through some research for material that resembled the twisting balloons it was then brought to our attention that medical Penrose tubing would provide a stronger and more reliable method of containing the Oobleck. A very similar method of testing the Penrose was then performed and it seemed to withstand all tests that were performed. The Penrose showed to be stronger and have a higher tolerance to the stresses that the neck support would offer.

3.2.3 Evaluating the Options for the Neck Support Pattern

Choosing the right pattern in which the Oobleck is arranged in the neck support is also a very important decision since different patterns may help or hinder the material's ability to achieve the project's goals and objectives. Designing the neck support pattern involves determining the orientation of the Oobleck capsules, how many capsule-filled pockets should be in the neoprene, and how many capsules should be in each pocket. First, the orientation of the Oobleck capsule was considered. Free body diagrams (see Figure 3-17) were created for vertical and horizontal orientation of the capsules. From the free body diagrams, it became apparent that a vertical orientation would be necessary to ensure that the material provides a sufficient restoring moment in response to a force.

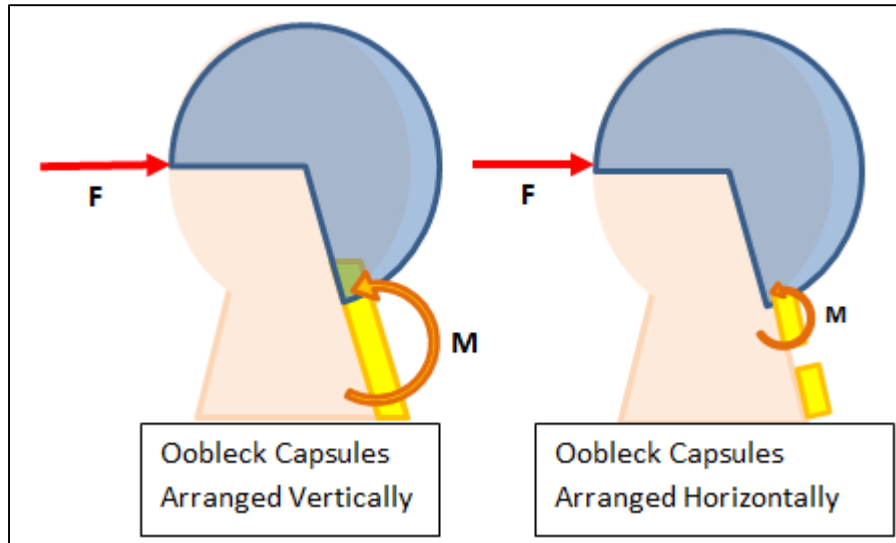


Figure 3-17: Free Body Diagrams for Horizontally and Vertically Aligned Oobleck Capsules

In order to determine how many pockets to use, the decision on how far around the neck the neck support should wrap needed to be made. Wrapping all the way around the neck was eliminated from consideration due to a high potential of reducing the player's range of motion and comfort. Wrapping it around to right beneath each ear was the option chosen since it would provide a restoring moment from more angles than a neck support just covering the back of the neck. Once this decision was made, the corresponding length around the dummy's neck was measured as roughly six inches. After measuring the diameter of the Oobleck capsules, simple division was used to determine that the maximum amount of pockets that could fit was six. Based on the measurements it was decided that two pockets would run along the back of the neck and then two pockets would be on each side of the neck support shown in Figure 3-18. The pockets of the neck support will fasten close using Velcro so that after the initial testing, capsules can be examined for leakage. This will also permit varying the amount of capsules in the pockets

so that additional tests can be performed to discover how many capsules per pocket would be optimal.

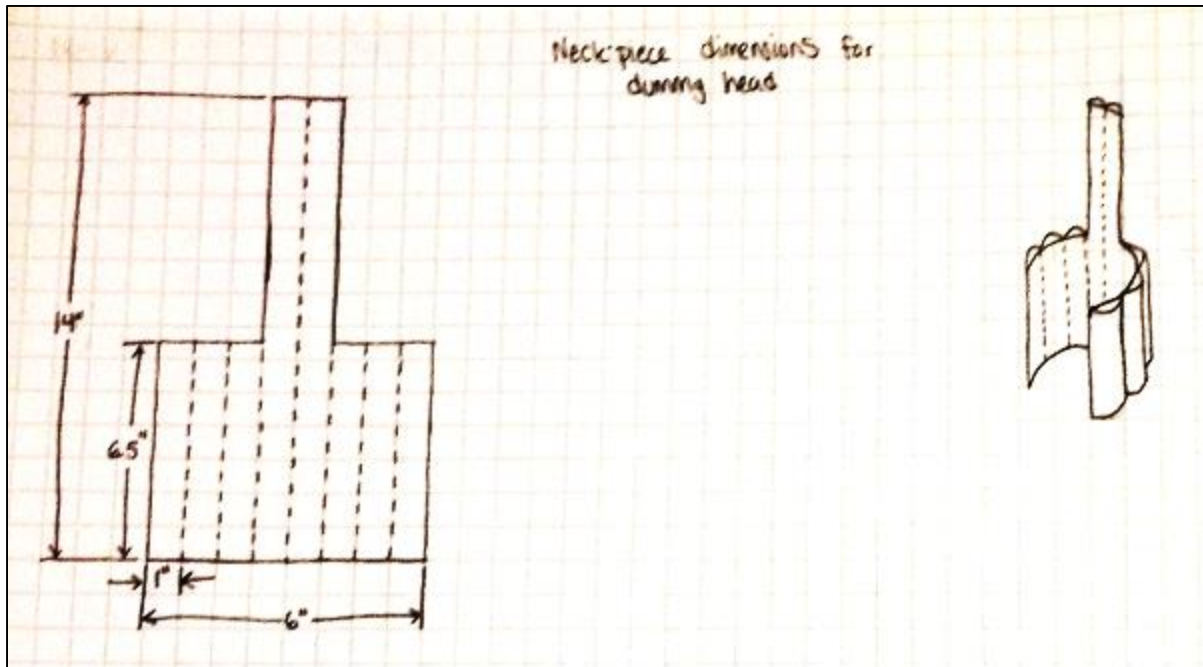


Figure 3-18: Dimensioned Sketch of Neck Support Pattern

3.2.4 Neck Support Enclosure Material

After researching potential materials, neoprene was chosen to fabricate the neck support that will hold the capsules of Oobleck within it. Neoprene is a synthetic rubber used in many applications due to its flexibility, durability, and resistance to breaking down in water [74]. Some of its uses are wet suits, waders, mouse pads, elbow and knee pads, insulated can holders, and orthopedic braces. Neoprene can be purchased as is, with fabric laminated on one side, or with fabric laminated on both sides.

Due to its flexibility, durability, and water resistance, neoprene was chosen for the fabric of the neck support. This material can be sewn using a sewing machine and can be put under tension to help keep the shape of the neck support. Additionally, its water resistance is helpful in case any leakage occurs with fluid holders in the neck support. It will not add a noticeable amount of protection to the player but will be soft, light, and form fitting for comfort and mobility.

3.2.5 Evaluating the Options for Implementation Methods

Determining how to ensure that the neck support form-fits to the neck is a challenge. Ideas were brainstormed and narrowed down to the most feasible ideas. One design idea is to incorporate the mechanism found within flexible ear muffs. This ear muff mechanism would be sewn into the top and bottom of the neck support fabric and then be pushed around the neck. This idea may be accompanied by the use of two torsion springs to ensure the top of the back of the neck support is against the back of the neck beneath the helmet. These methods along with other feasible implementation methods are evaluated in Table 3-5 and Table 3-6.

Table 3-5: Determining Method of Implementation to Best Meet Determining Criteria

Variable: Implementation Method	Options	Adhesion to skin	Memory Forming Materials	Ear muff mechanism	Torsion Spring
Available?	Do we have access to the required materials for this option?	Yes	Potentially	Yes	Yes

	How easy will it be to obtain all the required materials for this option?	Fairly easy once appropriate material is determined	Unknown	Very easy	Very easy
	How much time will it take to obtain all the required materials for this option?	Depending on finding the right material and shipping	Unknown	2-10 business days depending on shipping	2-10 business days depending on shipping
Affordable?	How much will it cost to implement this option?	Unknown	Yes	Less than \$14	Less than \$12
Easy to Implement?	Is there a plan for implementing this option?	Yes	No	Yes	Somewhat
	If so, how many steps will it take to get the option implemented?	At least 2	At least 3	At least 3	At least 4
Easy to Use?	Will this option require additional steps to equip?	Yes	No	Yes	No
	How many extra steps will need to be followed to equip?	1	0	1	0

Comfortable and Safe?	Will this option necessitate the use of dangerous materials or protruding parts?	No	Yes	No	Unknown
------------------------------	--	----	-----	----	---------

*Additional Considerations: Will skin adhesive be reusable? Is there a memory forming material that remains somewhat flexible?

Table 3-6: Determining How Far Down the Back the Neck Support Should Extend to Best Meet the Determining Criteria

Variable: How Far Down Back	Options	In line with shoulders	Down to mid-shoulder blade	Down to bottom of shoulder blade
Easy to Implement?	Is there a plan for implementing this option?	Yes	No	No
	If so, how many steps will it take to get the option implemented?	At least 2	At least 3	At least 3
Easy to Use?	Will it interfere with other padding worn by hockey players?	No	Unknown	Yes

3.3 ANSYS Workbench Analysis

In order to simulate the physical impact test being performed, SolidWorks models were created and imported into ANSYS Workbench. Three separate assemblies were created for testing purposes.

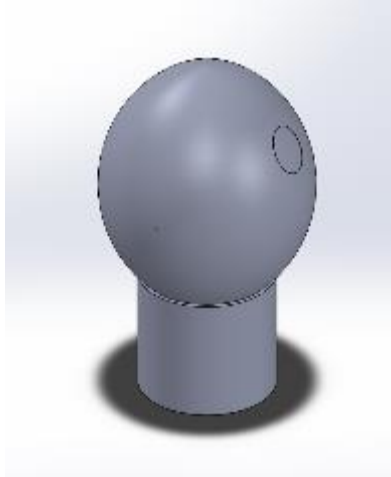


Figure 3-19: SolidWorks Head Model

There is a consistent surface on the front of each model representing the 1.5 inch diameter bore of the air cylinder. There is also a point on the right side of the head depicting a point in which acceleration will be recorded during the dynamic test. The radius of the neck is 2.36 inches and the length of the neck is 4.3 inches, as found in anatomical data. The radius of the head is 3.57 inches and the head height is 9.4 inches. The second assembly uses the current helmet model with a simplified version of a hockey helmet with only 100 degrees of helmet wrapped around the back of the head. Only 100 degrees were used because we were advised that this is a simplified model and is more reasonable to test in ANSYS.

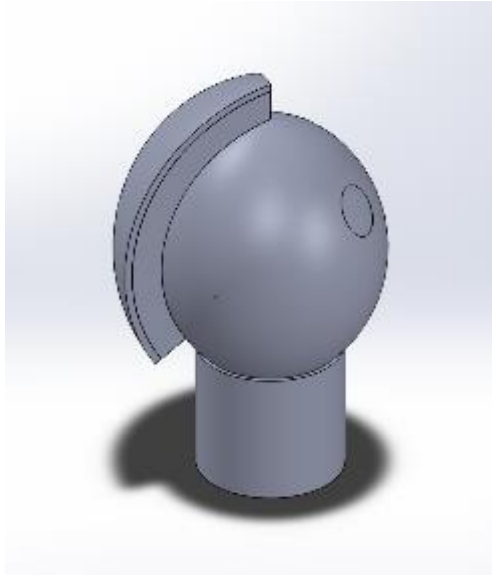


Figure 3-20: SolidWorks Current Helmet Model

A quarter inch of material was used for the outer shell of the helmet and an inch of material for the inner shell was used for the inner padding. The outer padding is represented as polycarbonate in the models, the inner padding is represented as polystyrene, the neck as soft tissue, and the head as polyethylene. The third assembly includes a current helmet with an addition of an inch of material wrapping around the neck. The material wrapped around the neck is represented as polyethylene.

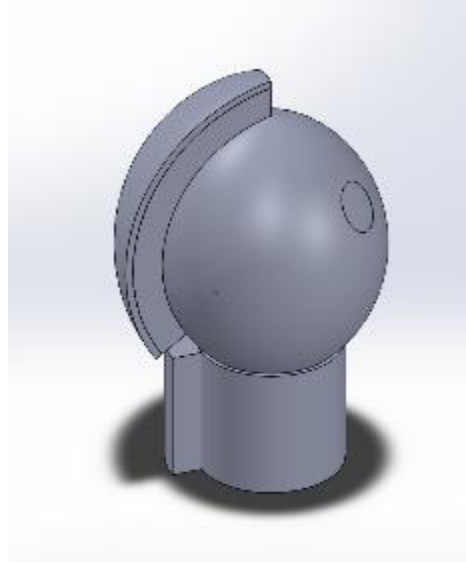


Figure 3-21: SolidWorks Head with Additional Neck Support

The ANSYS models were testing by fixing the base of the neck cylinder and applying a force of 3350 N in the x-direction at the location of the 1.5 inch cutout. The incident occurs over a period of 12 ms and an acceleration is recorded at the point on the right side of the head. The acceleration component type is considered “all” as opposed to a specific coordinate direction.

3.3.1 Test Results of the ANSYS Modeling

The first assembly was solved in ANSYS and recorded the following accelerations:

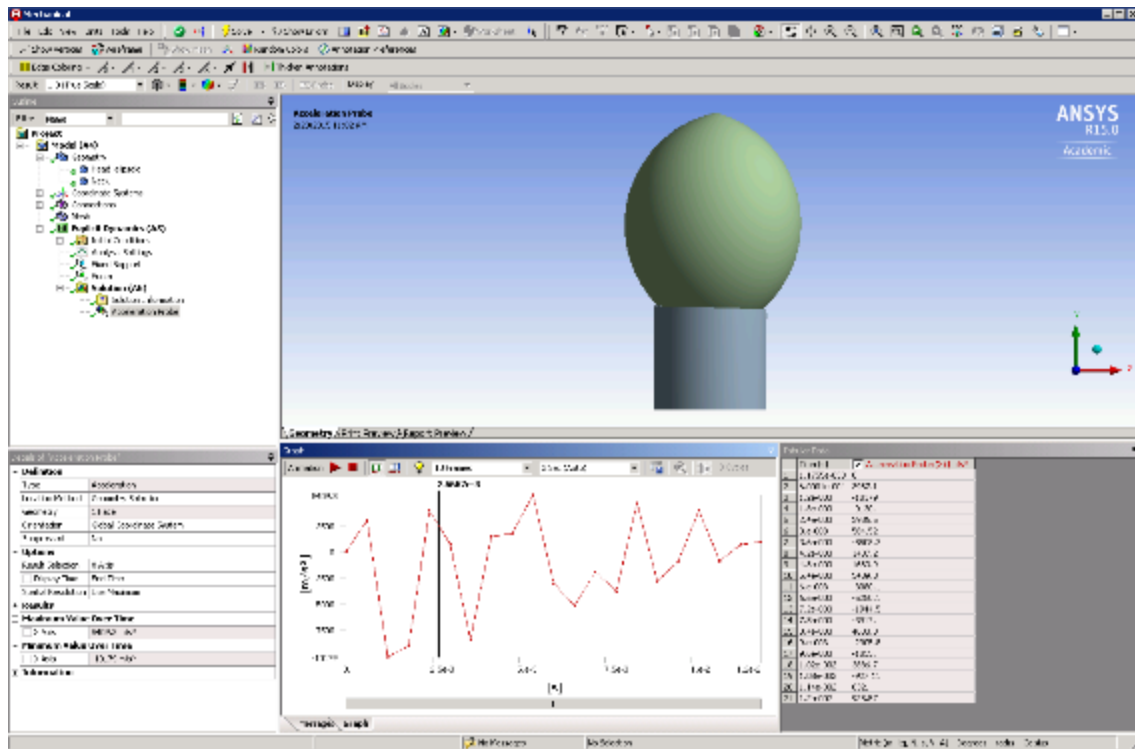


Figure 3-22: ANSYS Results of Head Model

The second assembly was solved as well and gave the following data.

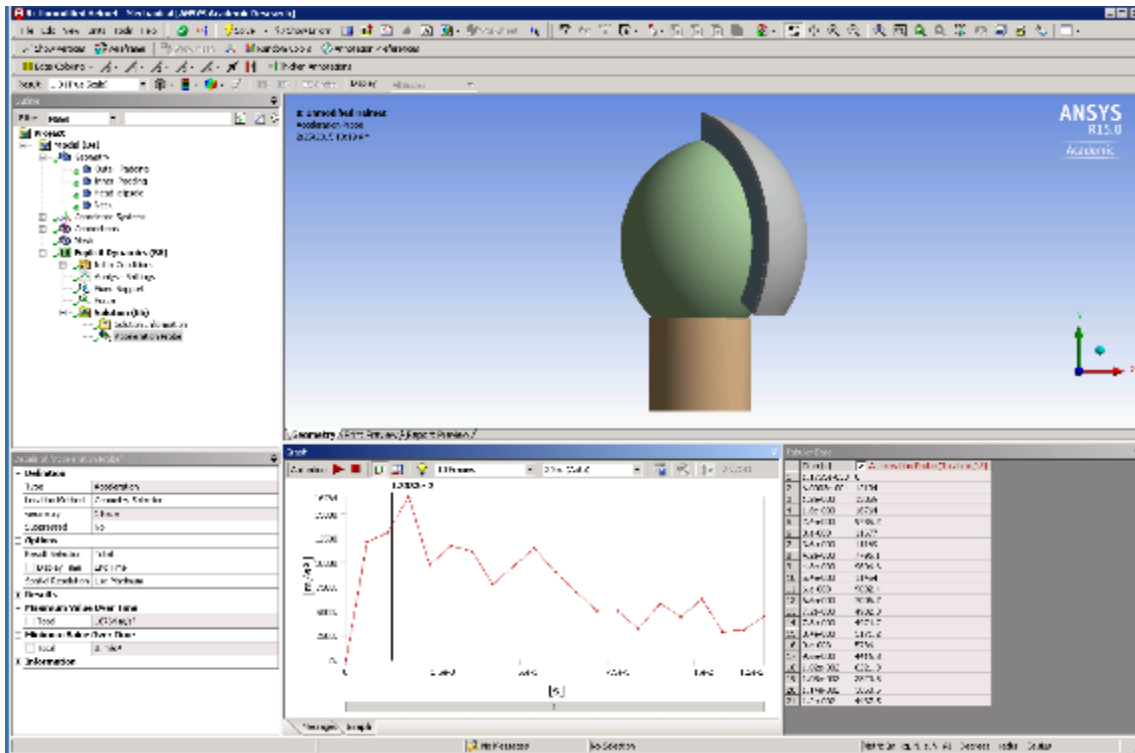


Figure 3-23: ANSYS Results of Current Helmet Model

The third assembly was solved and recorded the following data.

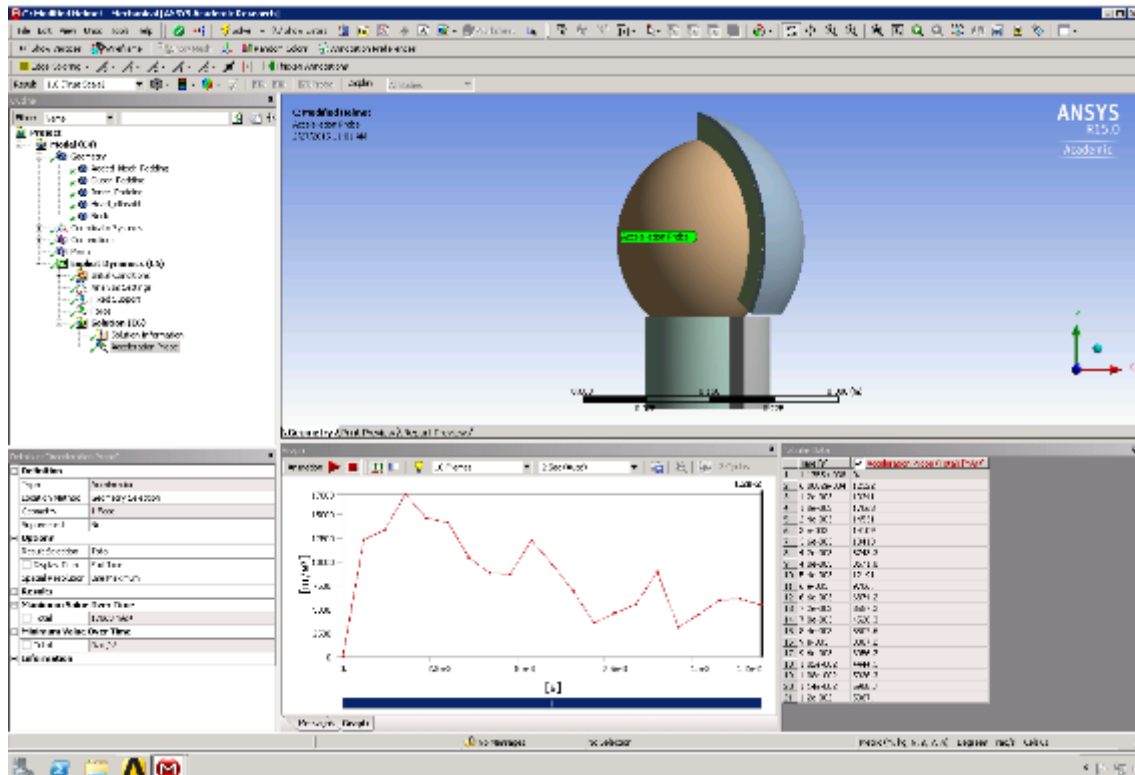


Figure 3-24: ANSYS Results of Neck Support Model

The accelerations in meters per second squared for each model were compiled in relation to time in the following table. The models were then graphed for comparison.

Table 3-7: Recorded Accelerations with Respect to Time in ANSYS Modeling

Time	Helmet	Neck Support	Just head
1.18E-38	0	0	0
6.00E-04	12104	12322	2987.1
1.20E-03	13059	13341	-10179
1.80E-03	16764	17063	-9130
2.40E-03	9785.2	14531	3936.5

3.00E-03	11677	14109	584.52
3.60E-03	11169	10413	-8508.7
4.20E-03	7796.1	8743.3	1437.2
4.80E-03	9606.6	8671.8	1683.9
5.40E-03	11454	12191	5409.3
6.00E-03	9002.4	9706	-3080.1
6.60E-03	7006.7	6874.2	-5250.1
7.20E-03	4982.8	3557.2	-1944.5
7.80E-03	4974.7	4526.3	-3917
8.40E-03	3171.2	5507.6	4603.3
9.00E-03	5786	8887.2	-2905.8
9.60E-03	4416.8	3056.7	-1035
1.02E-02	6221.8	4444.1	3886.7
1.08E-02	2820.5	5926.3	-927.11
1.14E-02	3053.5	5988.7	632
1.20E-02	4437.5	5367	928.57

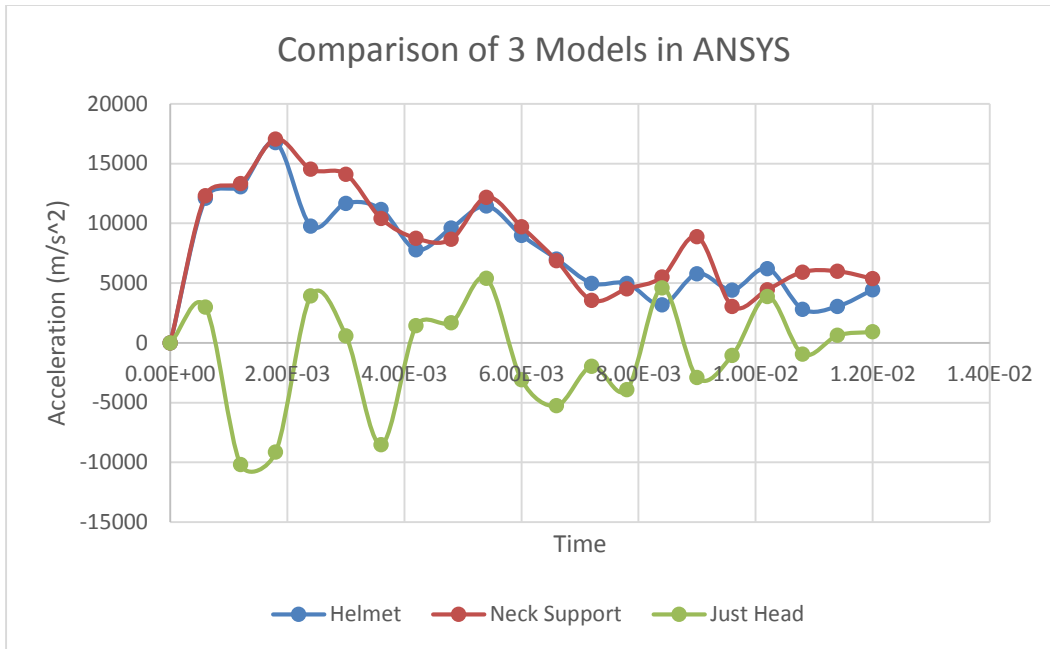


Figure 3-25: Comparison Graph of ANSYS Output Accelerations

Maximum accelerations were also recorded for each model. A table and graph with this information is shown below.

Table 3-8: Maximum Accelerations of Each Model in ANSYS

Model	Maximum acceleration
Just Head	5409.3
Helmet	16764
Neck Support	17063

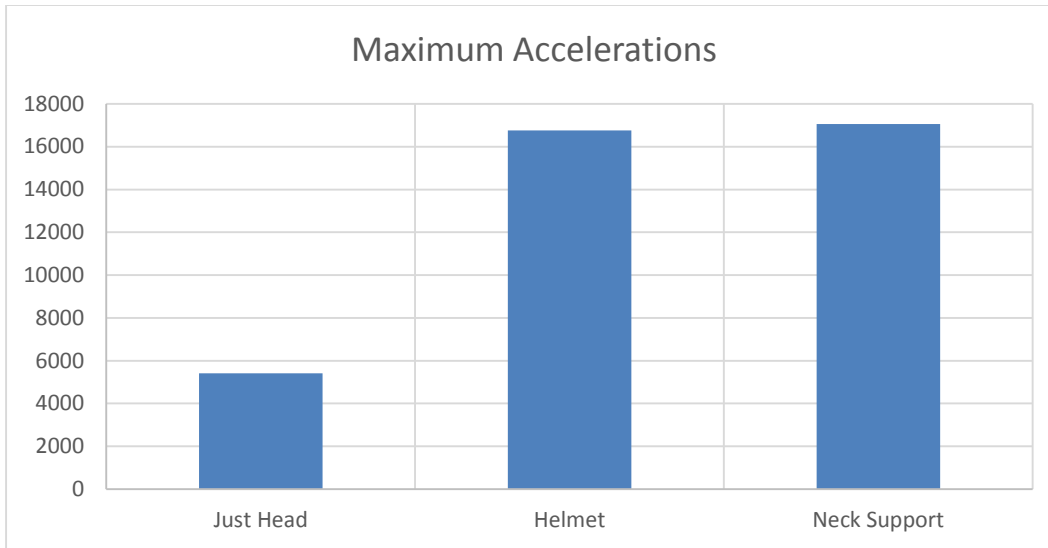


Figure 3-26: Graph Comparison of Maximum Acceleration in ANSYS

From the data received in ANSYS, our models did not show the expected results. The singular head model showed smaller accelerations than the helmet models. Since the goal of hockey helmets currently on the market is to prevent concussions, data showing that an unprotected head will experience lower accelerations and therefore less of a chance of concussions is inaccurate. The neck support model and current helmet recorded very similar values. Because we are adding support to the neck, we expected the recorded accelerations to be dampened by the support. The discrepancies could have been recorded due to over simplification of the neck support model. ANSYS Workbench does not allow the importation of highly complex models, so we were unable to include all details and aspects of our design in the ANSYS models. Because the models required simplification, the results could have been affected and therefore we received discrepancies between our anticipated, calculated, and modeled results.

4 Final Design

The final design was chosen under the criteria from Chapter 3 in this report. The following list highlights all the main components of the final design.

- Pattern: Vertical
- Enclosure: Neoprene
- Smart Fluid: Oobleck
- Smart Fluid Enclosure: Penrose
- Amount of coverage: In line with shoulders and on back of neck.

Implementation of the neoprene, penrose and oobleck are the main components of the device. A CAD model of this design is shown in Figure 4-1, below.



Figure 4-1: Sketch of Final Design

4.1 Prototyping

The process of prototyping was quite straightforward. A schematic was drawn up for dimensioning. The neoprene was then sewn into the desired pattern based on the test set-up dimensioning. It is important that the device sets on the test set-up as intended to accrue accurate results. The Penrose tubing was cut to the proper length and then filled with oobleck. The

'oobleck logs' would then be inserted into the slots on the neoprene sleeve. The neck support is then fastened to the helmet by use of Velcro for testing purposes. Figure 4-2, below, shows the prototype attached to the test mechanism and the helmet.



Figure 4-2: The Prototype

5 Test Set-Up and Procedure

Testing is necessary in order to determine if the project goals and objectives are met. Since the main goal of this project was to reduce the HIP during an impact, an impact test must be conducted. During the impact test the acceleration of the head as a function of time must be obtained in order to calculate the HIP value. Additionally, the testing procedure used on our prototype must also be conducted on an unmodified helmet so that comparisons can be made. Then, even if our goal of reducing the HIP to below 24 kW is not achieved, whether our prototype is an improvement compared to current hockey head gear can still be determined. In addition to evaluating how well the prototype meets the project goal. This chapter describes the set-up and procedure for the impact tests as well as the feasibility objectives assessments.

5.1 Developing the Test Rig

Considering the force of 476 N that was determined from the average mass and acceleration of hockey players used in force equals mass times acceleration, it was determined that an air cylinder impact test would be the best choice for testing the helmets. This test is the most controlled method and requires the least amount of space. A single-acting, spring-return cylinder with a bore diameter of 1.5 inches from McMaster Carr was purchased for the test set-up. The diameter of the bore was used to determine the necessary pressure using the following equation. The pressure had to be less than 100 psi since that is the maximum amount of pressure available in the labs.

Equation 14: $Force = Pressure * Area$

$$\text{Equation 15: } Pressure = \frac{Force}{\frac{\pi * D_{bore}^2}{4}}$$

Where D_{bore}^2 is the squared diameter of the bore of the air cylinder in meters-squared.

With the chosen air cylinder the equation yielded a necessary pressure of around 60 psi which is well below the 100 psi available. Using additional properties of the air cylinder found on the product information section of its website, calculations were done to determine the necessary stroke length based on the duration of time for which the air cylinder should remain in contact with the helmet during the impact test. Based on the calculations, which can be seen in Appendix B, we purchased the four-inch stroke length option for the air cylinder since it would provide additional length than the necessary length to leave room for error.

5.1.1 Structure of the Test Rig

Once the appropriate air cylinder was chosen, a test rig for conducting the helmet impact test was devised. The design of the test rig is essential for accurate testing of the prototype and unmodified helmet. It was important to be able to administer a regulated impact force. The head-form that would wear the helmet was salvaged from a previous MQP and the rest of the rig was designed and created around the head-form and air cylinder. To ensure accuracy and repeatability of the tests, the test mechanism had to keep every component secured to each other in some way. There were a few specifications that were defined that were important for designing the test rig.

- Needs to be rigid; headpiece and impact device must be connected
- Have the ability to rotate the head piece
- Have ability to adjust the height of the impact device
- Must be small and light enough to transport

A pneumatic air cylinder was attached to a rigid metal structure and supplies the amount of force needed to impact the head form. The initial test set-up, shown below, exhibits most of the specifications listed above. The use of a perforated metal allows for the air cylinder to be height adjusted for various impacts. The metal will also allow for a bolt together feature that will offer easy disassembly if need be. The initial design, also allowed the metal structure to be bolted to the head form.

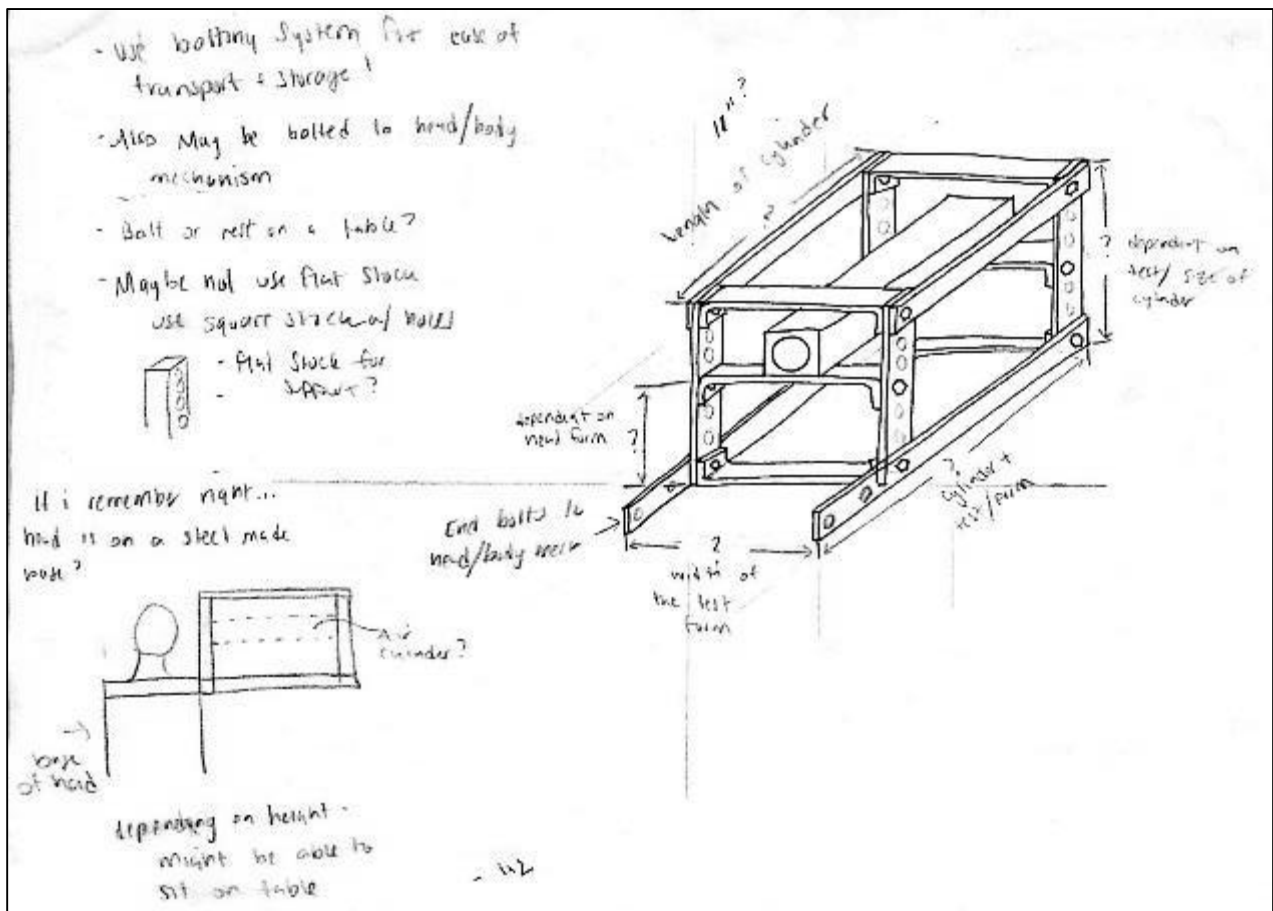


Figure 5-1: Sketch of Test Rig

After performing some research on available parts, it was found that a perforated steel angle frame would be suitable for this application since it offers support from two directions. A reiteration of the design was then modeled in SolidWorks as shown in Figure 5-2.

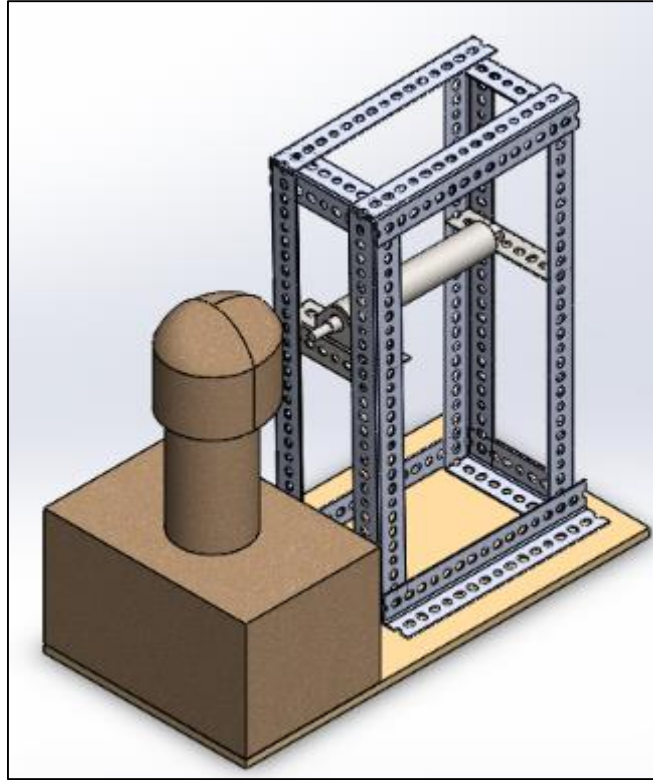


Figure 5-2: SolidWorks Reiteration of Test Rig

The base of this test set-up was a $\frac{1}{4}$ inch thick piece of plywood that provides stability and ensures the base is more rigid than the head-form so that the base remains still while the head-form rotates upon impact. Calculations were executed to ensure that a $\frac{1}{4}$ inch thick piece of plywood would be strong enough to hold and transport the rest of the test set-up without bending too much (see Appendix B.) The metal is held together by nuts and bolts as well as corner braces to ensure that it stays square and rigid. It also is bolted down to the plywood through the use of the perforated angle iron. The air cylinder is bolted to two cross bars that allow for height adjustment for different impacts. Ensuring that the air cylinder is level is essential for administering a straight-on impact. The use of extra washers to prop up the front side of the bracket was needed to level the cylinder.

The dimensions of the metal structure are 12"x 24" x 6". The head stands about 19 inches off the board so the height of 24 inches on the metal structure will cover an impact at the top of the head. The small cross bars on the structure are 6 inches, which makes the structure slightly wider than the cylinder itself. The length of 12 inches was slightly long but the placement allows the vertical (24") pieces to be adjusted to the proper length of the air cylinder. The metal was cut precisely so that the holes align properly. The air cylinder has foot brackets that are 9.5 inches apart, which means the bars holding the cylinder to the structure are that far apart and set into the rectangular structure.

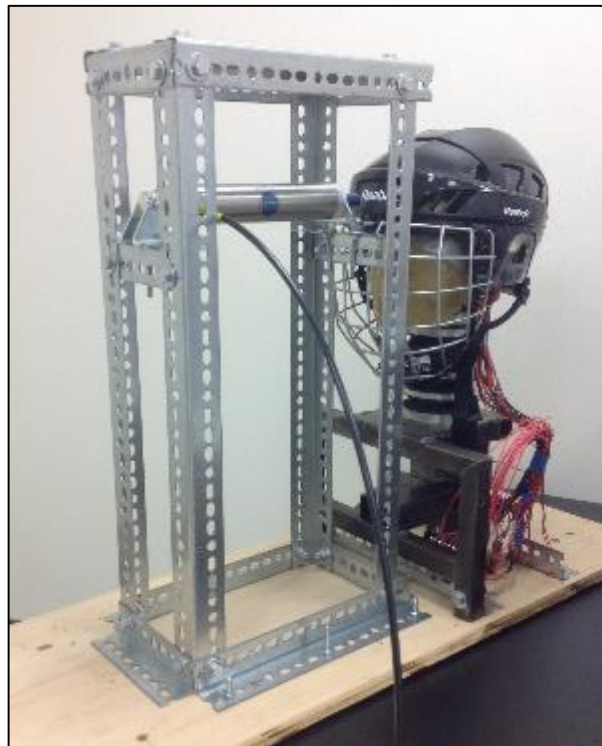


Figure 5-3: Finished Test Set-up

After constructing the metal test structure, the head-form was altered so that it could mount to the piece of plywood. Unnecessary metal on the bottom of the head-form was cut off and leveled so that holes could be drilled to allow the head-form to be bolted to the perforated

angle frame at the required height. This allows for an easy on and off application of the head-form. All the components were placed on the plywood in their appropriate places and the holes were traced and then drilled. Then all the components were bolted together securely.

The head of the dummy was then recreated with the head of a CPR dummy and filled with foam to ensure that the head was a solid object. Bolts were placed inside the head in a manner that was consistent with the current test neck. From here, the center of gravity was found for accelerometer placement.

5.1.1.1 Determining Center of Mass

The new dummy head needed to have a pin-pointed center of mass. Since the head was an irregular shape the center of mass needed to be determined by the use of the hanging string method. The procedure of this process is as follows:

1. Attach a piece of string, which is long enough to hold onto, to any point on the dummy head.
2. Attach a second piece of string that is weighted with a nut tied to the end to the same point as the first string. Make sure it is long enough to span the dummy head.
3. Lift the dummy head by the first string.
4. Draw a straight line where the weighted string falls.
5. Repeat steps 1-4 to get the intersection of two lines. This intersection shows where the center of mass is.
6. Repeat steps 1-5 until you have found an intersection for the center of mass on the side, top, and back of the dummy head.

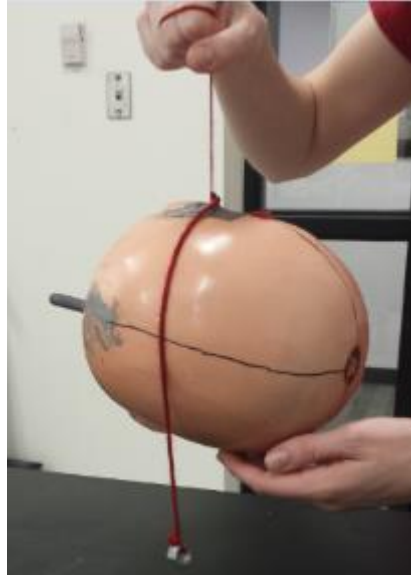


Figure 5-4: Finding Center of Mass

Tape was then placed at each intersection point and drawn on to indicate the correct spot. Once found, holes were drilled in those locations to allow for the accelerometers to fit into to help hold them in place during testing.

5.1.1.2 Accelerometer Placement

Three accelerometers were placed in the dummy head at the predrilled locations. The accelerometers were tangent to the surface of the dummy head and located along the x and y axes of the center of mass. Two accelerometers measured linear acceleration in the x direction and one accelerometer measured linear acceleration in the y direction. One x accelerometer was located on the side of the head and the other was located on the top of the head. The y accelerometer was placed on the back of the head. The x accelerometer on the top of the head and the y accelerometer data were used to calculate the HIP, HIC, and SI values.

5.1.2 Pneumatic Circuit Connecting Air Supply to Air Cylinder

The pneumatic circuit consists of the air supply, the air tank, the air cylinder, hose, and a solenoid switch. The air supply allows for a maximum of 100 psi output. A hose with quick connect fittings connects the air supply to the tank. Attached to the air tank is a pressure gauge that indicates the air pressure being delivered to the cylinder. The air tank also has an output that is controlled by a valve. A quarter inch tube, with male quick connect fittings of 1/4" and a 1/8" NPT, connect the output valve of the air tank to input port on the solenoid switch (each equipped with the corresponding female NPT fittings). Another strip of the quarter inch tubing connects the 1/8" NPT female fitting of the output port on the solenoid switch to the 1/8" NPT female fitting on the input port of the air cylinder. A LabView program was created to monitor the air pressure entering the switch. Once a pressure of 100 psi is detected, the switch will be triggered manually to release the air into the air cylinder. The complete LabView program is shown in Appendix A. Utilizing the switch ensures the release of pressure is instantaneous which reduces the presence of a pressure gradient.

5.1.3 LabView Program

LabVIEW is software developed by National Instruments which allows users to have virtual controls when designing processes for testing, measuring, or controlling applications. It allows users to create and interact with signals or data in the science industry. We needed one LabVIEW VI divided into 2 parts; the first part consists of the design of a VI that controls the activation of the pneumatic system and the second part consists of attaining measurements from the accelerometers located in the dummy.

This is a step by step of the LabVIEW program that will aid us in having an n effective deployment mechanism in order to hit the dummy head by generating the necessary force.

To start, we will have to detail a list of equipment and materials in order to understand the VIs purpose, use and setting. By this, we aim to use this terms in the VI sequence of events in order to have coherence and make scene. This list is found bellow:

Materials needed:

1. DAQ Device
2. Pressure Tank
3. Strain Gauge
4. Air outlet from wall (air pressure Source)
5. Hose
 - a. (from outlet wall to inlet tank)
 - b. (from outlet tank to solenoid valve and from solenoid valve to cylinder)
6. T-connector with two valves
7. Solenoid valve
8. Power Supply
9. Circuit board
10. Resistors
11. Wire
 - a. Banana/gator cables
 - b. Electrical wire
 - c. BNC wire
12. Accelerometers

To start describing the VI for the Test Rig we began by adding in a while loop, with a STOP if true condition. This will allow the VI to run unless the requirements in the inside don't start to function. Two case structures were added in order for the accelerometers to start reading before the deployment of the cylinder. We proceeded to add the first DAQ Assist. This DAQ Assist will be in the first loop of the case structure in order for it to begin reading the accelerometers before the deployment. In this DAQ, we are going to connect terminal ports from AI.1-3. The way to set this up is by adding in the DAQ assist menu, an Acquire Signal Voltage and then selecting the corresponding channels. AI.1 will have the first X direction accelerometer located in the top of the head. AI.2 will have the second accelerometer input, which will be in the X direction as well but at center of gravity on the side of the head. Finally, AI.3 goes to the third accelerometer which will be in the Y direction. In the property menu, we are going to set up the voltage ranges from -5V to 5V in all three channels.

The terminals allow for acquiring data from the accelerometers and transpose it to the gravitational acceleration. In order to do this, we need to convert the voltage reading by dividing it the sensitivity given in the accelerometers which corresponds to 8mV/g times 1000. Each time we test. We have to set the nominal zero value in order for the accelerometers to zero out and have accurate readings. This can be seen bellow in the Figure 5-5.

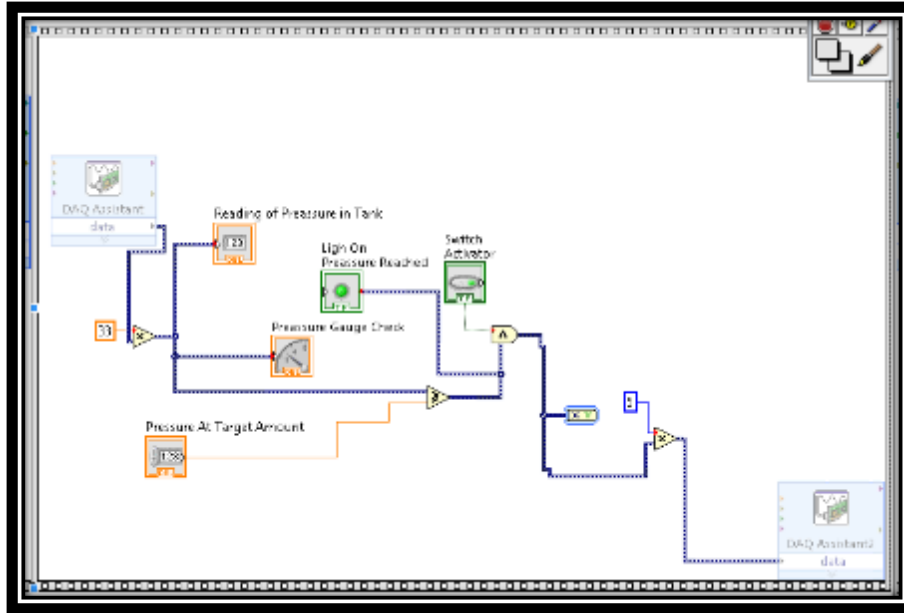


Figure 5-5: Block Diagram

In the final part of this case structure, we are able to see a Write to file function. This function is going to be where the data is going to be written and saved. Every single time we tested, files were created previously and then overwritten. Each different trial had its own file. In order to match our data findings, we included a waveform graph at the end.

For the second part of the case structure we are going to enable another DAQ Assist will have an ANALOG INPUT (AI) signal that is going to be connected into port AI.0 (the first port) in this port we are going to receive voltage change signals from the strain gauge located at the end of the tank to check the pressure. As we want the pressure results to give us results in (PSI) units. We found a Voltage/Pressure ratio which enabled to read this pressure in PSI in the front panel. This ratio was 33, therefore the next step was to include a multiplier in order to read and convert Volts to Pressure. This signal is going to go divided into 3 main terminals.

The First reading will be in DBL format. This will show on the front panel as “Reading Pressure in Tank” in the form of numbers. The second terminal will go to “Pressure Gauge Check” which simply consists of a virtual pressure gauge shown in the frontal panel as a dial.

This will enable us to check the accuracy in three spots, the actual pressure gauge in the tank, the reading in tank, and the virtual pressure gauge. After this is checked, we included a “Pressure at Target Amount” as a minimum benchmark in order to have the sufficient pressure for the necessary force to be deployed. This control allowed us to filter if the pressure was reached at a certain level, it will shoot a signal to a Boolean in the front panel that will lid up to indicate the pressure at target amount was reached. This is going to enable the proper deployment of the cylinder.

We added a “if grater” function in order to activate the switch. Therefore, if the pressure is greater than the minimum pressure we want, this will allow the correct signal to be given for the deployment of the switch. If true, the signal will come out as 1V, therefore we added a voltage multiplier in order to activate the solenoid valve. This will finally send the signal to the last DAQ Assist which will give the trigger to let air pass in and out of the cylinder in order to reach a deployment.

All this can be summarized and organized in the front panel where we were able to control all this mechanisms. This could be better observed in Figure 5-6, below.

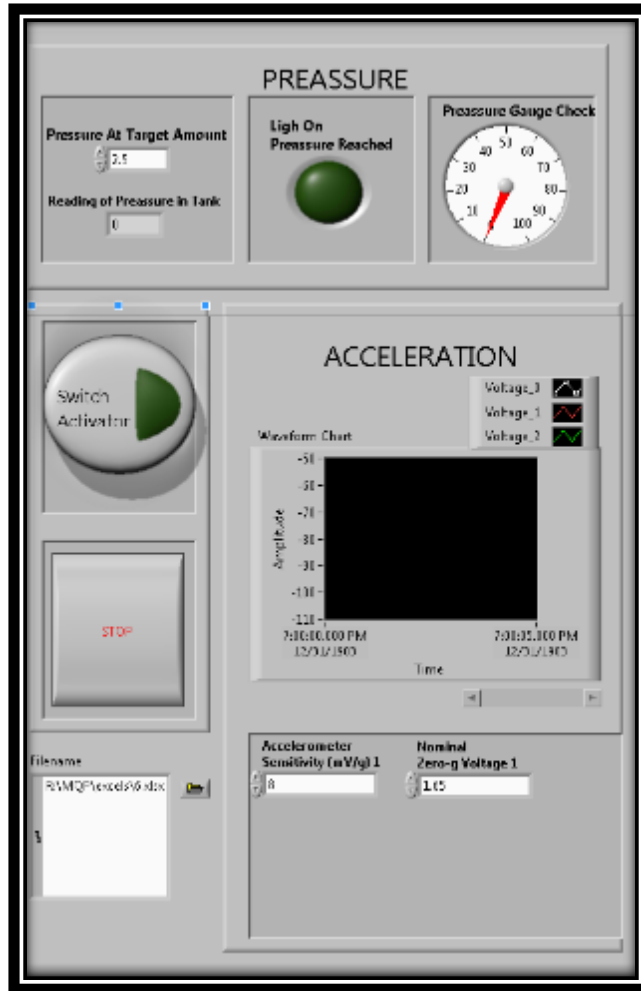


Figure 5-6: Front Panel

5.2 Impact Testing Methods

The helmet will be impacted in one direction but with multiple variables being checked:

1. Helmet with the neck support
 - a. With no oobleck enclosures
 - b. Oobleck with 5:3 ratio
 - c. Oobleck with 2:1 ratio
 - d. Oobleck with 1:1 ratio
2. Helmet without the neck support
3. Without the helmet and the neck support

The location of the tests on the helmet will occur on the front of the helmet located on the Reebok logo. Each test set will be impacted three times at a pressure of 100 psi. Accelerometers in the head will provide the accelerations to a program that will output acceleration as a function of time. This will be used to calculate the HIP value. The complete acceleration acquisition program can be seen in Appendix A. The averages of HIP values at each location of the unmodified helmet will be compared to the averages of the corresponding HIP values of the modified helmet. The comparison of HIP values of our modified helmet to the unmodified helmet will help conclude whether our design is an improvement to the hockey helmets' ability to reduce the risk of concussion.

5.3 Re-Evaluating the Test Set-Up

The 476 N force that the test set-up was designed to generate results in an HIP value that is way too low. This means that the force would not likely result in concussion and may not be enough to trigger the shear thickening response of the Oobleck. However, this was not discovered until after the test rig was built and ready to use. The pressure necessary to produce

the more realistic force of $3.35 * 10^3$ N was calculated using Equation 15: $Pressure = \frac{Force}{\frac{\pi}{4} * D_{bore}^2}$.

This indicated that a pressure of 426 psi was required, which exceeds the available 100 psi.

Calculations were performed to model the scaled-down impact test. The maximum force (i.e. force generated at 100 psi,) that the air cylinder can produce is 786 N. A scaling factor of 4.26 was determined by dividing the realistic force of around $3.35 * 10^3$ N by the 786 N force possible. The mass, spring constant, dampening coefficient, and moment of inertia of the head were all divided by the scaling factor. The angular displacement, velocity, and acceleration equations and graphs generated can be seen in Figure 3-13, Figure 3-14, and Figure 3-15, respectively. The scaled-down model generated an HIP value just above the 30 kW threshold corresponding to 95% risk of concussion, as shown in Figure 3-16.

6 Analysis and Discussion

Data was acquired for six different conditions during testing. Each condition was tested nine times to observe the consistency of the results and to assure there were ample samples of data.

The data was plotted over 50 milliseconds in Microsoft Excel as acceleration vs. time to observe the acceleration curves of each impact.

Listed below are the six different conditions in the order they were tested:

1. Helmet only
2. No helmet and no neck support
3. Helmet and neck support with 2:1 ratio
4. Helmet and neck support with 1:1 ratio
5. Helmet and neck support with 5:3 ratio
6. Helmet and empty neck support

Graphs from each test are shown in Figure 6-1 to Figure 6-12. The graphs are labeled with the test and the position of the accelerometer.

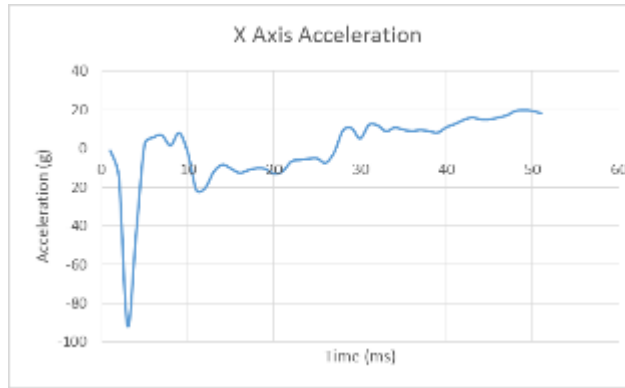


Figure 6-1 : No Helmet and No Neck Support X-Axis

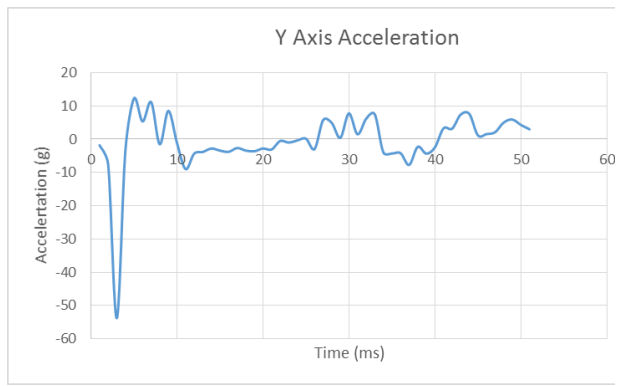


Figure 6-2: No Helmet and No Neck Support Y-Axis

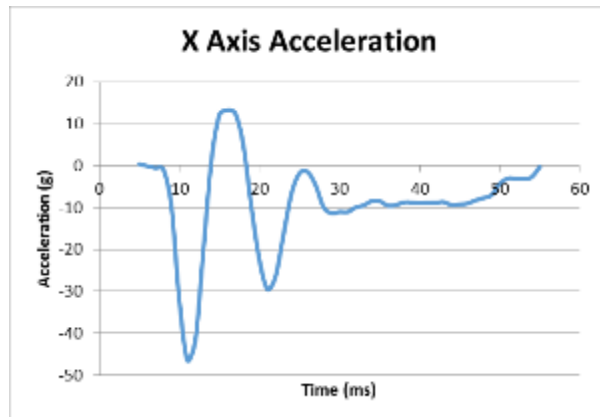


Figure 6-3: Helmet with No Neck Support X-Axis

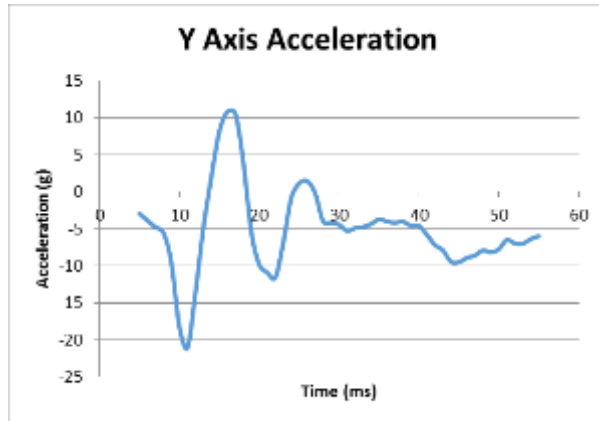


Figure 6-4: Helmet with No Neck Support Y-Axis

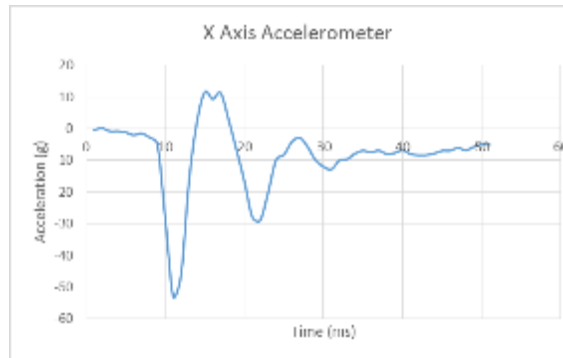


Figure 6-5: Helmet and Empty Neck Support X-Axis

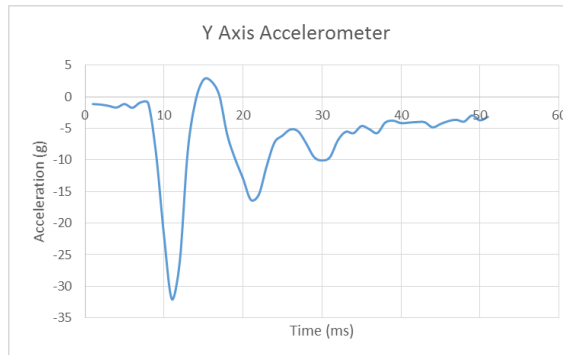


Figure 6-6: Helmet and Empty Neck Support Y-Axis

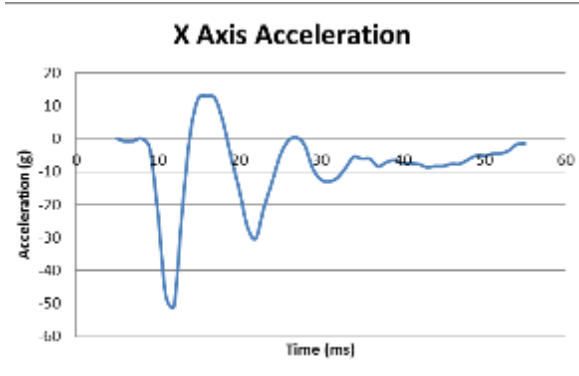


Figure 6-7: Helmet and 1:1 Ratio X-Axis

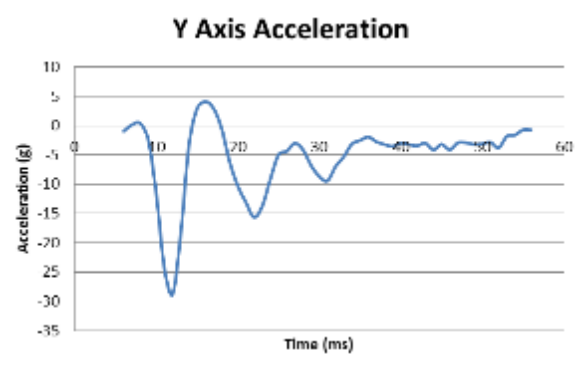


Figure 6-8: Helmet and 1:1 Ratio Y-Axis

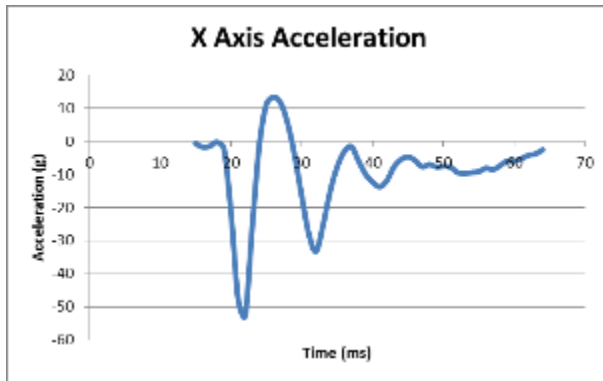


Figure 6-9: Helmet and 5:3 Ratio X-Axis

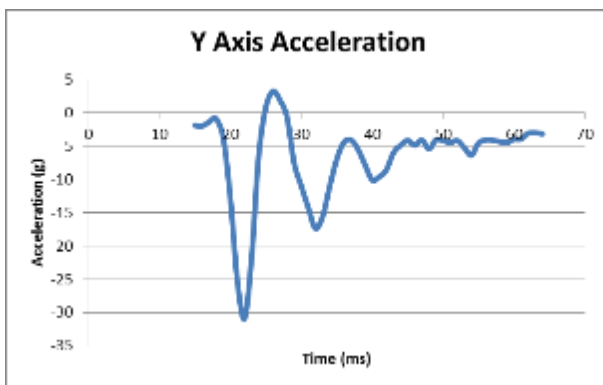


Figure 6-10: Helmet and 5:3 Ratio Y-Axis

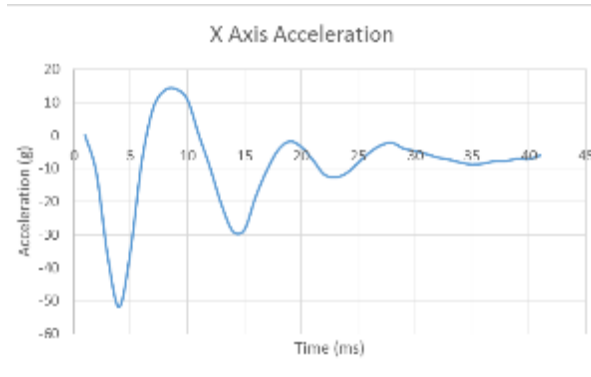


Figure 6-11: Helmet 2:1 Ratio X-Axis

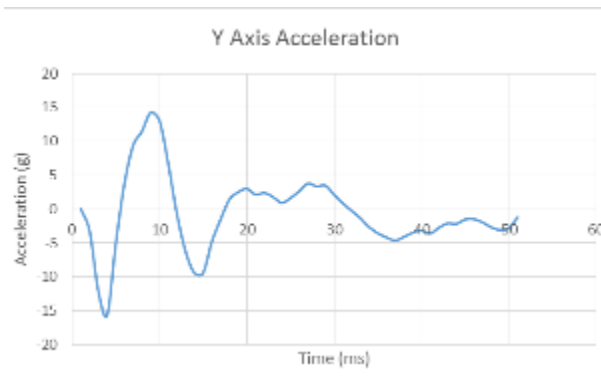


Figure 6-12: Helmet and 2:1 Ratio Y-Axis

Each of these curves show the acceleration of the head from impact to the equilibrium. Acceleration was measured in g's (y axis) while time was measured in milliseconds (x axis) shown in Figure 6-1 to Figure 6-12. From these graphs the initial impact to the head was cropped giving six to seven data points to which an equation was fit. The seven data points isolated the impact of the air cylinder with initial and final values at $y=0$. This recorded the maximum acceleration and up to the maximum rotation of the head. Graphs of the isolated six to seven x and y values are shown below for the helmet and neck support with a 5:3 ratio.

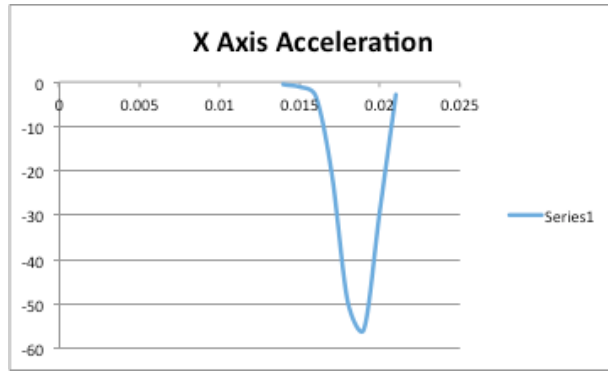


Figure 6-13: Initial Impact – Helmet with Neck Support with 5:3 Ratio X-Axis

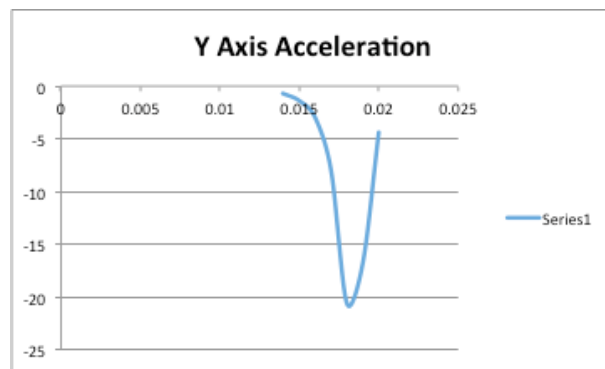


Figure 6-14: Initial Impact - Helmet with Neck Support with 5:3 Ratio Y-Axis

By plotting the values in a reduced curve, a best-fit equation could be extracted. The y values closest to zero were chosen at the start and end of the time frame in order to provide accurate results when integrating the HIP, HIC, and SI equations. An online polynomial generator was used to find 5th order polynomial equations for the data. The polynomial was generated so acceleration was dependent on time and could then be used in the standard injury indices calculations. An example from the online polynomial generator that was used is shown in Figure 6-15.

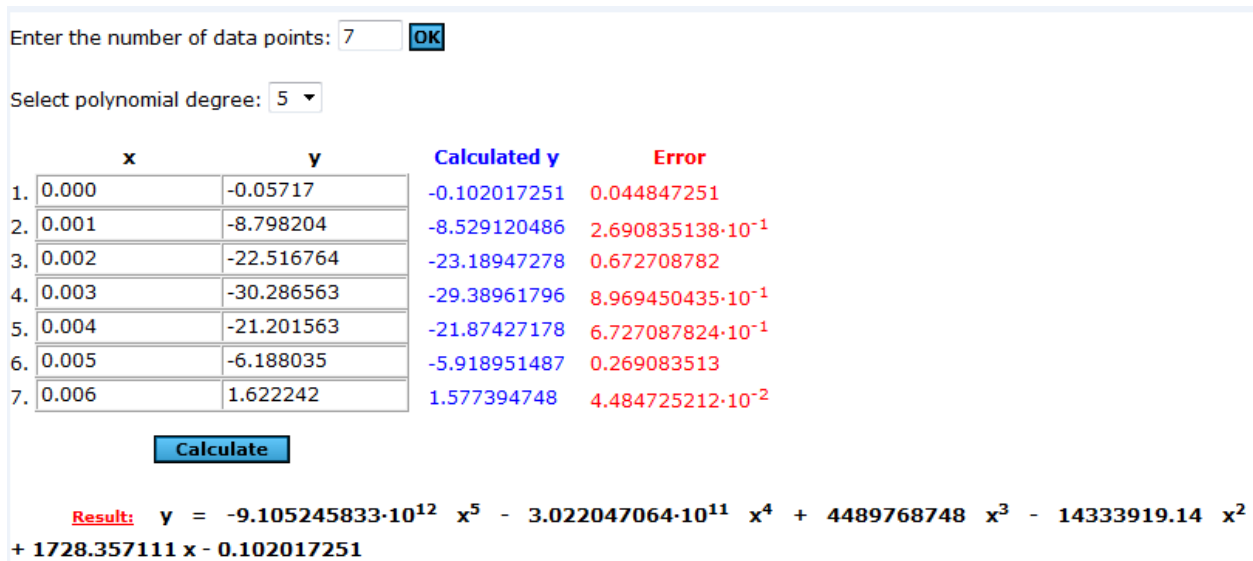


Figure 6-15: Online Polynomial Generator

This online generator related acceleration in g's to time in seconds in order to fit a polynomial equation. As shown in Figure 6-15: Online Polynomial Generator, time and acceleration values were entered into columns to develop equations. Equations were obtained from the data for both the top x-axis accelerometer and back y-axis accelerometer in order to compute the HIP, HIC and SI values.

6.1 MathCad Analysis

A MathCad program was used to evaluate the data once a time dependent equation was fit to each of the acceleration curves. The program gives the results of the HIP in Watts and the HIC and SI as a unit-less numbers. The MathCad program is shown below.

Calculating the HIP from the Testing Results

m = mass of head
 $a_x(t)$ = time dependent function of linear acceleration in the x direction
 $a_y(t)$ = time dependent function of linear acceleration in the y direction
 $a_z(t)$ = time dependent function of linear acceleration in the z direction
 I_x = moment of inertia around the x-axis
 I_y = moment of inertia around the y-axis
 I_z = moment of inertia around the z-axis
 $\alpha_x(t)$ = time dependent function of rotational acceleration around the x-axis
 $\alpha_y(t)$ = time dependent function of rotational acceleration around the y-axis
 $\alpha_z(t)$ = time dependent function of rotational acceleration around the z-axis

$$a_z(t) := 0 \quad m := 0.959 \text{ kg}$$

$$\alpha_z := 0 \quad I_x := 0.016 \text{ kg} \cdot \frac{\text{m}^2}{\text{s}^4}$$

$$I_y := 0.024 \text{ kg} \cdot \frac{\text{m}^2}{\text{s}^4}$$

$$I_z := 0.022 \text{ kg} \cdot \frac{\text{m}^2}{\text{s}^4}$$

$$\text{HIP} := m \cdot a_x(t) \cdot \int_{t_1}^{t_2} a_x(t) dt + m \cdot a_y(t) \cdot \int_{t_1}^{t_2} a_y(t) dt + m \cdot a_z(t) \cdot \int_{t_1}^{t_2} a_z(t) dt + I_x \cdot \alpha_x(t) \cdot \int_{t_1}^{t_2} \alpha_x(t) dt + I_y \cdot \alpha_y(t) \cdot \int_{t_1}^{t_2} \alpha_y(t) dt + I_z \cdot \alpha_z(t) \cdot \int_{t_1}^{t_2} \alpha_z(t) dt$$

The functions for $a_x(t)$ and $a_y(t)$ will vary for each of the test results. These functions will be found using an online polynomial generator to fit the data over the time frame of interest. $\alpha_x(t)$ and $\alpha_y(t)$ are related to $a_x(t)$ and $a_y(t)$ by dividing by the radius of the arc the accelerometer moves in. $R_x = 0.254 \text{ m}$ and $R_y = 0.1615 \text{ m}$.

Calculating the HIC from the Testing Results

$a(t)$ = resultant linear acceleration as a function of time

$$a(t) := \left(\sqrt{a_x(t)^2 + a_y(t)^2} \right)$$

$$\text{HIC} := \left[\left(\frac{1}{t_2 - t_1} \right) \cdot \int_{t_1}^{t_2} a(t) dt \right]^{2.5} \cdot (t_2 - t_1)$$

Calculating the SI from the Testing Results

$$\text{SI} := \int_{t_1}^{t_2} a(t)^{2.5} dt$$

Each test was conducted three times giving us two readings for acceleration in the x direction and one reading for acceleration in the y direction. All of the data is plotted but for the analysis we only need one reading of the acceleration in the x direction. We used the data from the x axis accelerometer on the top of the head and the y axis accelerometer on the back of the head.

Test Example: Frontal Impact with no Helmet and no Neck Support, Test 1-1

HIP

$$a_x(t) := -1.25719475 \cdot 10^{13} t^4 + 1.542862303 \cdot 10^{11} t^3 - 637146057.2 t^2 + 1001823.484 t - 506.0473589$$

$$a_y(t) := -1.033109617 \cdot 10^{13} t^4 + 1.236696452 \cdot 10^{11} t^3 - 499877013.8 t^2 + 780877.1167 t - 396.3390389$$

$$\alpha_x(t) := \frac{a_x(t)}{0.254} \frac{s^2}{m}$$

$$\alpha_y(t) := \frac{a_y(t)}{0.1615} \frac{s^2}{m}$$

$$t_1 := 0.001$$

$$t_2 := 0.005$$

Type in the specific time frame for the data points here.

$$a_x(0.003) = -87.491$$

$$a_y(0.003) = -50.339$$

Use the time value for the max acceleration from the data.

$$HIP := \left(m \cdot a_x(0.003) \cdot \int_{t_1}^{t_2} a_x(t) dt + m \cdot a_y(0.003) \cdot \int_{t_1}^{t_2} a_y(t) dt + I_x \cdot \alpha_x(0.003) \cdot \int_{t_1}^{t_2} \alpha_x(t) dt + I_y \cdot \alpha_y(0.003) \cdot \int_{t_1}^{t_2} \alpha_y(t) dt \right) \cdot 9.81$$

$$HIP = 164.459 \text{ kg}$$

The actual units are Watts. The acceleration equations do not have the units included in them resulting in the answer displaying as kg.

HIC

$$a(t) := \left(\sqrt{a_x(t)^2 + a_y(t)^2} \right)$$

$$HIC := \left[\left(\frac{1}{t_2 - t_1} \right) \int_{t_1}^{t_2} a(t) dt \right]^{2.5} \cdot (t_2 - t_1)$$

$$HIC = 64.764$$

SI

$$SI := \int_{t_1}^{t_2} a(t)^{2.5} dt$$

$$SI = 117.831$$

Figure 6-16: MathCad Analysis Program

6.2 Final Results

Once each scenario was run through the MathCad program, the final results were compiled into **Error! Reference source not found.** The average for all of the results were computed and compiled in **Error! Reference source not found.** The values for HIP, HIC and SI that correlate with a high risk of concussion, as found in outside studies, is shown in Table 6-3.

The percent change in comparison to just the helmet was not calculated and graphed for each of the scenarios. The helmet only test showed inconsistent results in comparison to the no helmet and helmet with empty neck support. Because the empty neck support is made of neoprene, it should not provide a significant effect on output accelerations. The helmet only test had an average HIP of 115 Watts, HIC of 28, SI of 55, x acceleration of -50 g's and y acceleration of -19 g's. The average values for the helmet only are significantly lower than the results for no helmet and helmet with empty neoprene. Further investigation of this outlier is included in 6.5 Discussion.

The accuracy of these results rely upon the precision of the accelerometers, the scale used to weigh the dummy head and the significant figures of the given moments of inertia. The accelerometers measured 1 data point per millisecond and had a sensitivity of 8 mV/g. Therefore, these particular accelerometers were able to measure the acceleration readings at $8 \pm 0.5\text{mV}$. Due to the sensitivity, there was noise during testing making the accelerometer read about $\pm 0.5\text{g}$ for each point. The mass of the head was found using an electronic scale which read out to three decimal places. The given moments of inertia also read out to three decimal places. This means the results are expected to be accurate to a whole number. All of the results are given as whole numbers to account for any inaccuracies.

Table 6-1: Final Results

Test	HIP (W)	HIC	SI	Max Accel. (X)	Max Accel. (Y)
No Helmet or Neck Support					
2.1	164	65	118	-87	-50
2.2	168	63	108	-81	-35
2.3	173	76	133	-89	-55
3.1	184	75	136	-92	-54
3.2	175	73	131	-90	-53
Helmet Only					
1.1	127	20	54	-57	-20
1.2	101	23	46	-51	-17
1.3	102	22	43	-52	-17
2.1	110	25	42	-47	-21
2.2	122	44	92	-42	-22
3.1	122	33	55	-48	-19
3.2	119	26	54	-53	-20
Helmet and Empty Neck Support					
1.1	142	31	61	-54	-29
1.2	147	32	60	-55	-29
1.3	139	29	58	-52	-29
2.1	144	31	61	-54	-30
2.2	144	29	58	-52	-30
2.3	141	30	58	-53	-28
3.1	146	36	58	-53	-31
3.2	149	33	64	-55	-31
3.3	60	14	18	-29	-17

Test	HIP (W)	HIC	SI	Max Accel. (X)	Max Accel. (Y)
1-1 Ratio					
1.1	138	26	55	-51	-29
1.2	137	32	57	-54	-28
1.3	140	29	56	-54	-29
2.1	143	35	57	-56	-28
2.2	143	36	58	-53	-30
2.3	137	29	56	-53	-27
5-3 Ratio					
1.1	132	29	56	-49	-28
1.2	147	34	61	-53	-30
1.3	122	29	56	-42	-29
2.1	139	30	59	-50	-30
2.2	137	30	60	-52	-28
2.3	110	28	60	-41	-20
3.1	141	31	59	-52	-29
3.2	134	30	54	-50	-30
3.3	123	27	51	-48	-28
2-1 Ratio					
1.1	99	25	40	-50	-18
1.3	99	24	40	-51	-19
2.1	106	25	46	-53	-19
2.2	100	24	40	-51	-17
2.3	96	24	40	-50	-16
3.1	102	22	44	-54	-16
3.2	93	23	39	-50	-15
3.3	92	23	38	-50	-14

Table 6-2: Averaged Results

	AVG HIP	STDEV.	AVG HIC	STDEV.	AVG SI	STDEV.	AVG Max A(X)	STDEV.	AVG Max A(Y)	STDEV.
No Helmet or Neck Support	173	7	70	5	125	10	-88	4	-49	7
Helmet Only	115	10	28	8	55	16	-50	4	-19	2
Helmet and Empty Neck Support	135	27	29	6	55	13	-51	8	-28	4
1-1 Ratio	139	3	31	4	56	1	-53	1	-29	1
5-3 Ratio	132	11	30	2	57	3	-48	4	-28	3
2-1 Ratio	98	4	24	1	41	3	-51	1	-17	2

Various sources and experiments give different values associated with risk of concussion. Some sources show HICs as low as 200 causing significant brain injury, while others show that same risk occurring around 1000. This means that there is no concrete number that shows the experiment would have caused a concussion. The numbers are guidelines to assess what the experimental data is showing. A compilation of HIP, HIC, and SI values which a person should not exceed are shown from different sources in

Table 6-3 below.

Table 6-3: HIP, HIC, SI Risk Values

HIP	HIC	SI	Source
20.88 kW	N/A	1200	[43]
N/A	200	N/A	[41]
N/A	1000	1000	[44]
24kW	500	N/A	[42]
N/A	400	N/A	[41]

6.3 Comparison to No helmet and no neck support

In order to compare every test scenario to the no helmet and no neck support test, we calculated averages and computed percent reduction for acceleration HIC, HIP, and SI standard injury criteria. The graph and results can be seen below in Figure 6-17.

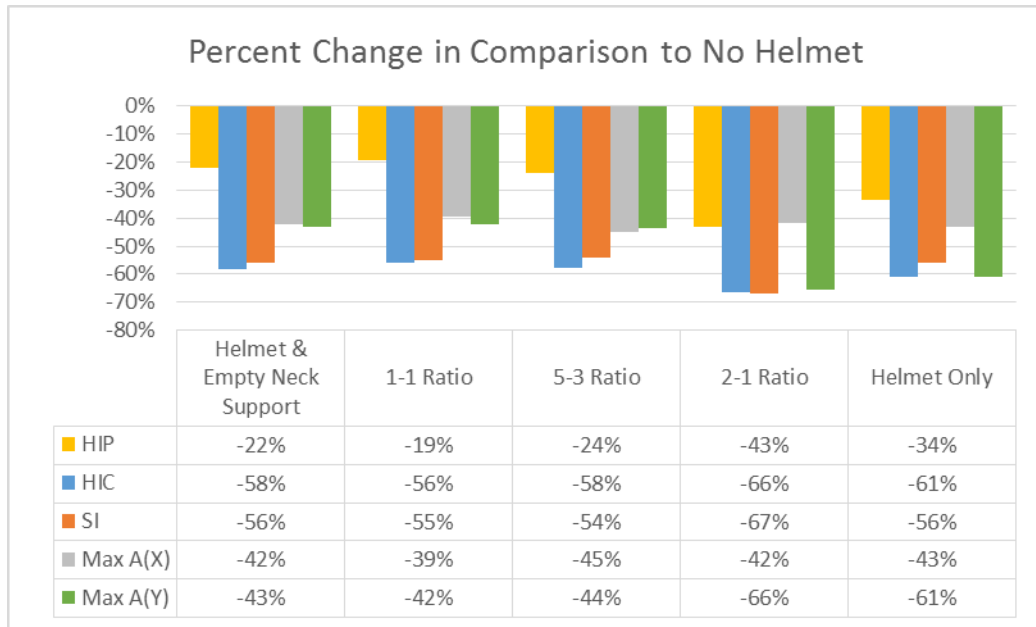


Figure 6-17: Percent Change in Comparison to No Helmet

Initially we compared the no helmet and no neck support vs. the helmet and empty neck support. By incorporating the helmet and empty neck support, we saw a decrease in acceleration of about 42% in the x axis direction and a decrease of 43% in the y axis direction. The calculations obtained from the MathCad file show a decrease of 22% in the HIP index criteria, 58% in the HIC index criteria and 56% in the SI index criteria. Most of these values show a reduction of almost 50% compared to the values obtained on the test for no helmet and no neck support. Our data shows that by incorporating the helmet and empty neck support we were able to meet our goal of decreasing the likelihood of a concussion.

Next, we compared no helmet and no neck support vs. helmet and neck support with 1:1 ratio. By incorporating the helmet and neck support with 1:1 ratio, we can see a decrease in acceleration of about 39% in the x axis direction and a 42% in the y axis direction. The calculations obtained from the MathCad file show a decrease in the HIP index criteria of 19%, in the HIC index criteria of 56% and in the SI index criteria of 55%. All these values showed a reduction, but when adding the shear thickening fluid with a 1:1 ratio, we did not see a decrease from the helmet and empty neck support results. This was due to the fact that the 1:1 ratio suspension did not exhibit the sufficient shear thickening properties. The 1:1 ratio contained too much water in comparison to cornstarch which did not supply enough resistance to the head motion. In all of the 1:1 tests, there was less of a decrease in likelihood of a concussion when compared to the empty neoprene tests.

Third, we compared no helmet and no neck support vs. helmet and neck support with 5:3 ratio. By incorporating helmet and neck support with 5:3 ratio, we saw a decrease in acceleration of about 45% in the x axis direction and a 44% in the y axis direction. Out of all tests analyzed to this point, the 5:3 ratio had the greatest reduction in acceleration in the x axis direction. The reduction in acceleration and the calculations obtained from the MathCad file indicate a decrease in the HIP index criteria of 24%, in the HIC index criteria of 58% and in the SI index criteria of 54%. There was a greater decrease in acceleration in comparison to the 1:1 ratio and just the helmet with empty neck support. While the 5:3 ratio contained more cornstarch than the 1:1 ratio, the fluid did not exhibit ideal shear thickening properties. The 5:3 ratio was not a thick enough fluid to significantly reduce the probability of a concussion. While not the best case scenario, there was improvement from the 1:1 ratio.

Lastly, we compared no helmet and no neck support vs. helmet and neck support with 2:1 ratio. The 2:1 ratio was the thickest fluid we tested. By incorporating the helmet and neck support with 2:1 ratio, we observed a decrease in acceleration of about 42% in the x axis direction and 66% in the y axis direction. The reduction in acceleration in the y axis direction was more than 12% greater than the previous test. There was a decrease in the HIP index criteria of 43%, in the HIC index criteria of 66% and in the SI index criteria of 67%. All of the percent reductions showed a greater decrease in acceleration in comparison to the other four tests. The 2:1 ratio was the most effective when trying to reduce the likelihood of a concussion as shown in Figure 6-17.

6.4 Comparison to Helmet and Empty Neck Support

In order to determine the neck support that best reduced the likelihood of a concussion, we averaged data to calculate the percent reduction for acceleration, HIC, HIP, and SI in comparison to the helmet and empty neck support. A graph and table of the results can be seen below in Figure 6-18.

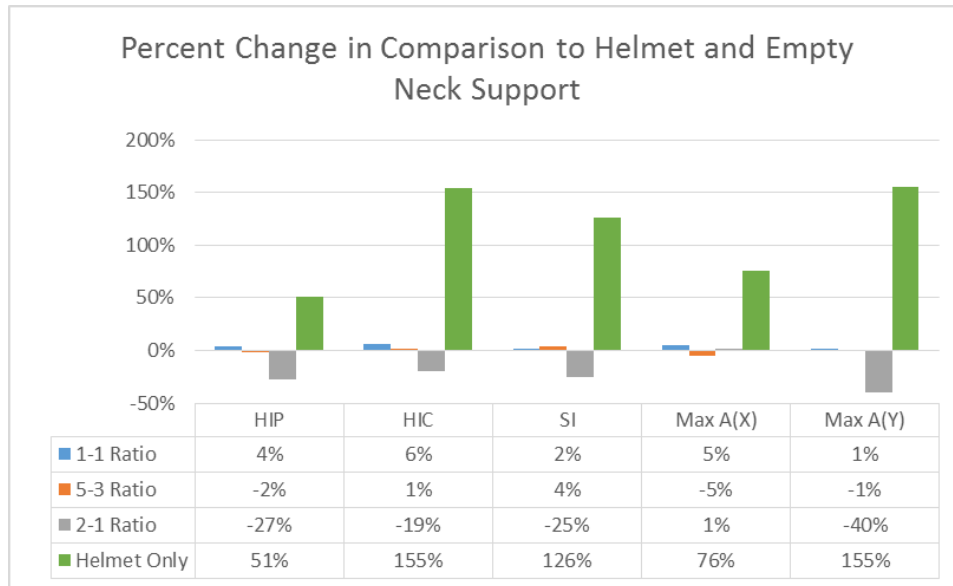


Figure 6-18: Percent Change in Comparison to Helmet and Empty Neck Support

The comparison of the helmet and empty neck support helmet and neck support with 1:1 ratio showed a slight increase in HIP, HIC, SI, and acceleration. The growth of HIP was 4%, HIC was 6% and SI was 2%. The acceleration in the x axis direction increased by 5% while the y axis direction increased by 1%. These increases were not drastic enough to be considered statistically significant. According to the accuracy of this experiment, the results are within the range of deviation.

When comparing the helmet and empty neck support vs. helmet and neck support with a 5:3 ratio, a slightly better result was found than the neck support using a 1:1 ratio. The HIP decreased by 2% while the HIC and SI increased by 1% and 4% respectively. The acceleration in the x axis direction decreased by 5% and 1% in the y axis direction. These results were a positive indication but were still not significant due to the accuracy of the experiment.

Lastly, we compared the helmet and empty neck support vs. helmet and neck support with 2:1 ratio. This ratio exhibited the best performance in reducing the risk of concussion. The

decrease in HIP was 27%, in HIC was 19%, and in SI 25%. While the x axis acceleration increased by 1%, the y axis acceleration decreased by 40%. The x axis acceleration increasing could have been due to a number of factors including accuracy and use of averages in calculating the percent changes.

6.5 Discussion

A discussion section was written in order to elaborate on the final results. Different trends were observed after comparing the following 6 scenarios: no helmet and no neck support, helmet only, helmet and empty neck support, helmet and neck support with 1:1 ratio, helmet and neck support with 5:3 ratio and a helmet and neck support with 2:1 ratio.

Referencing Table 6-2, we observed a decreasing trend of maximum accelerations, HIC values, HIP values, and SI values. The helmet only test did not follow the trend. In comparison to the helmet and empty neck support, we can see an acceleration difference of about 20 g's. The values obtained were significantly lower than all cases except the 2:1 ratio. The 2:1 ratio had the lowest HIP, HIC and SI results. Since the 2:1 ratio was the thickest ratio we tested, we expected these results.

The result of the helmet only test was unexpected for many reasons. One reason was due to the high flexibility and lack of change in stiffness of the neoprene brace. If an extremely rigid material was used, an increase in acceleration may have been observed due to the increased impulse from a shortened duration period. Second, because rubber is an absorbent material, the neck support should have reduced the acceleration by better dispersing forces across the head.

Combining these ideas and looking at the results led us to believe that outside factors may have altered our findings. This could have been because the stiffness of the neck changed after

the first test performed. Even though we controlled the torque of the neck, the rubber spacers in the neck provided additional stiffness that may have changed between tests. We also speculate that the rubber in the neck may have generated heat from friction after repeated hits during testing causing the rubber to soften. During the first test we performed, the no helmet test, the rubber was cold and rigid exhibiting a higher stiffness. As the neck repeatedly bent, heat was generated and the compliance of the material increased. Another contributing factor could have been due to inconsistencies in tightness of the helmet. The helmet could have been looser in the following scenarios, allowing for more movement of the accelerometers. If any of these possibilities occurred, the data set would show inconsistencies.

For the reasons mentioned above, we classified the helmet only data as an outlier. Since this data was inconsistent with the rest, we question the validity of the test and would recommend a future retest of this scenario. Due to the skewed data, we only compared the remaining test results. We compared data using two benchmarks: the results obtained from the no helmet and no neck support and the helmet and empty neck support, to see if the neck brace caused a reduction in acceleration and in chance of concussion.

7 Conclusion

The goal of this project was to reduce the likelihood of concussions for ice hockey players by designing a neck support that utilizes shear thickening fluids. We designed a neck brace in order to incorporate a shear thickening fluid that would reduce acceleration upon abrupt changes in force. We modified the ratios of the shear thickening fluid from 1:1, 5:3, and 2:1 in order to see the most effective response to a concussion simulating impact.

The neck brace was made of neoprene with pockets for the insertion of containers filled with fluid. Two long pockets formed the principal structure of the neck support with attachments to the outer part of the helmet. This extended vertically along the spine past the base of the skull. In the lower portion of the neck support there were three pockets per side. The length wrapped around the neck in a 135 degree rotation extending from each side of the spine.

In order to test the effectiveness of the design, a testing mechanism was created to simulate a concussion causing impact while measuring x and y accelerations experienced in a head model. Recorded accelerations were analyzed using the Head Impact Power (HIP), Head Injury Criteria (HIC), and Severity Index (SI) equations, which are commonly used to assess the probability of an internal head injury. Results were then obtained to compare variations of fluid ratios in the device as well as the current hockey helmet on the market.

Our final conclusion from testing was that the 2:1 ratio was the most effective in reducing the risk of concussion. When compared to the test with no helmet and no neck support, there was a decrease in acceleration of about 42% in the x axis direction and a 66% in the y axis direction. The HIP decreased by 43%, HIC by 66% and SI by 67%. In comparison to the helmet and empty neck support test, there was a decrease in HIP by 27%, HIC by 19%, and SI by 25%. These results are significant and provide proof of concept. The original goal of the project was to obtain a high risk of concussion when testing without a neck support. This was not obtained due to a variety of factors, addressed in future recommendations, however the results are still significant and provide insight for future work.

Developing a device to reduce the likelihood of concussion in hockey is highly desirable. While developing our design concept, our key criteria was to use a non-Newtonian fluid to allow

for normal motion but restrict abrupt motion during collisions. Throughout our design and testing process we utilized three different ratios of fluid to test the reduction of acceleration.

7.1 Recommendations for Future Work

After completing and testing our design concept we contemplated some changes for future work. The overall goal of this project was to show proof of concept in using shear thickening fluids in a neck support to reduce the risk of concussion in ice hockey players. While the results showed a decrease in risk of concussion, there are physical changes and additional testing that could be done in order to obtain improved results. Specifically, a preliminary test should be conducted before each official trial to catch any outliers or cause for concern. During our test procedure, we were not able to simultaneously analyze and compare the data. If we were able to analyze and compare during testing, the helmet only outlier would have been evident. For future work, groups could use the MathCad program during testing to screen for outliers and make necessary corrections.

The testing mechanism of the device is intact and fully functional. A lot of time was spent creating and validating a testing mechanism. This presents the opportunity for a future group to invest their time in researching and experimenting with the use of different non-Newtonian fluids other than oobleck. Oobleck is a cornstarch and water suspension which was simple to make and inexpensive. However, it has grows mold when not refrigerated and the cornstarch will settle and separate from the water if not agitated. This leaves work to be done in finding a more desirable smart fluid.

While the test setup was effective and still is usable, it was unable to create forces that correlate with a high risk of concussion. By using the majority of the existing test rig, a future

team could allocate more of their budget to purchasing a larger cylinder. Our group was restricted by both budget and testing space. The testing space required the use of a less powerful cylinder for safety reasons.

SolidWorks and ANSYS Workbench simulations were conducted in order to theoretically model the results of the experiment. This tool was meant to show if the scenarios would cause a risk of concussion without a neck brace present. The simulations did not record anticipated results and were generally inconclusive. While we were not relying solely on the ANSYS results to determine if we were meeting the criterion for a high risk of concussion, it would have been a valuable cross checking method. Therefore future recommendations are made to explore different options to more accurately model the desired information. ANSYS Workbench was very difficult to use to model an acceleration that varied with time. A different modeling tool may be able to better simulate the dynamics of the scenarios.

In order to utilize the capabilities of ANSYS, the SolidWorks model had to be greatly simplified. Another future recommendation is to create a more advanced SolidWorks model for the neck support to be used with a different modeling tool for increased accuracy. By more precisely representing the neoprene sleeve, shear thickening fluid, and total surface area of the neck support, more accurate results are likely to be recorded.

The neck brace that was made was the first prototype of the device and has many opportunities for improvement. This particular design was not incorporated into the helmet in a cohesive manner. The attachment was to the outside back of the helmet using Velcro. While functional for testing, it is not a feasible design for use in a hockey game. Our group would suggest devising a better implementation system into the helmet, either making it easily detachable or permanently attached while being recessed into the helmet. This would eliminate

the risk of it detaching during game play and would increase contact area between the brace and the user.

Another physical design change suggested is to incorporate springs or other rigid materials into the long back of the neck support to better shape the device and create more opposing moment to the motion of the head. While our results showed proof of concept, they were nowhere near as drastic as we as we were aiming to achieve. The use of different materials in conjuncture with a smart fluid could positively affect the results the neck support have on reducing acceleration.

A portion of the testing that we were not able to achieve was subjective testing range of motion and comfortability. These tests were not possible as the current prototype is designed for specific use on the dummy head and neck. This dummy head and neck system was from a previous MQP project and was not build accurately to the human body. A more anthropometrically designed neck support should be created based off of what shear thickening fluid works the best from the results of testing. Usability is an important factor when creating sports equipment and should be heavily considered.

The concepts developed in this product show potential for future marketability due to a lack of similar devices currently on the market. Having a device that is easily removable is desirable due to the fact that the helmet would not have to be pre-made with the device attached. The implementation of other shear thickening materials could allow for better opposing forces and reduction of the probability of a concussion. By utilizing future recommendations and the testing set up our group has validated, future teams will be able to continue creating designs and apply their entire budget to the production of new product.

8 References

- [1] Weinberger, M., Bradley C., and Briskin, M., Susannah M., 2013, "Sports-Related Concussion," *Clinical Pediatric Emergency Medicine*, pp. 246-253.
- [2] Thurman, D., and Guerrero, J., 1999, "Trends in Hospitalization Associated With Traumatic Brain Injury," *JAMA: The Journal of the American Medical Association*, 282(10), pp. 954-957.
- [3] 2014, "Concussion Overview: Risks, Management, and Current Therapies," *Emergency Medicine Reports*.
- [4] Tommasone, B. A., and Valovich McLeod, T. C., 2006, "Contact Sport Concussion Incidence," *Journal of Athletic training, National Athletic Trainers' Association Inc*, pp. 420-472.
- [5] Kelly, J. P., 1999, "Traumatic Brain Injury and Concussion in Sports," *JAMA*, 282(10), pp. 989-991.
- [6] Wilcox, B. J., Machan, J. T., Beckwith, J. G., Greenwald, R. M., Burmeister, E., and Crisco, J. J., 2014, "Head-Impact Mechanisms in Men's and Women's Collegiate Ice Hockey," *Journal of athletic training*, 49(4), pp. 514-520.
- [7] Collins, C. L., Fletcher, E. N., Fields, S. K., Kluchurosky, L., Rohrkemper, M. K., Comstock, R. D., and Cantu, R. C., 2014, "Neck Strength: A Protective Factor Reducing Risk for Concussion in High School Sports," *J. Primary Prevent*, pp. 309-319.
- [8] Donaldson, L., Asbridge, M., and Cusimano, M. D., 2013, "Bodychecking rules and concussion in elite hockey," *PloS one*, 8(7), p. e69122.
- [9] Purcell, L., Kissick, J., Rizos, J., and Canadian Concussion, C., 2013, "Concussion," *CMAJ : Canadian Medical Association journal = journal de l'Association medicale canadienne*, 185(11), pp. 981-981.
- [10] Marilyn, H. M., 2005, "Concussions," *Pediatrics for Parents*, 21(10), p. 4.

- [11] Malec, J. F., Brown, A. W., Leibson, C. L., Flaada, J. T., Mandrekar, J. N., Diehl, N. N., and Perkins, P. K., 2007, "The Mayo Classification System for Traumatic Brain Injury Severity," *Journal of Neurotrauma*, pp. 1417-1424.
- [12] Ropper, A. H., and Gorson, K. C., 2007, "Concussion," *The New England Journal of Medicine*, 356(2), pp. 166-172.
- [13] Dziemianowicz, M. S., Kirschen, M. P., Pukenas, B. A., Laudano, E., Balcer, L. J., and Galetta, S. L., 2012, "Sports-Related Concussion Testing," *Current Neurology and Neuroscience Reports*, 12(5), pp. 547-559.
- [14] Valentine, V. M., and Logan, K. M., MPH, FAAP, 2012, "Editorials: Cognitive Rest in Concussion Management - American Family Physician," <http://www.aafp.org/afp/2012/0115/p100.html>.
- [15] Khurana, V. G., and Kaye, A. H., 2012, "An overview of concussion in sport," *Journal of clinical neuroscience : official journal of the Neurosurgical Society of Australasia*, 19(1), pp. 1-11.
- [16] Canadian Academy of Sport Medicine Concussion, C., 2000, "Guidelines for assessment and management of sport-related concussion," *Clinical Journal of Sport Medicine*, 10(3), pp. 209-211.
- [17] Kelly, J. P., and Rosenberg, J. H., 1997, "Diagnosis and management of concussion in sports," *Neurology*, 48(3), pp. 575-580.
- [18] 2014, "What Is the Glasgow Coma Scale?," <http://www.brainline.org/content/2010/10/what-is-the-glasgow-coma-scale.html>.
- [19] Duma, S. M., and Rowson, S., 2014, "Re: On the accuracy of the Head Impact Telemetry (HIT) system used in football helmets," *Journal of biomechanics*, 47(6), pp. 1557-1558.
- [20] 2014, "Standardized Assessment of Concussion: A Valuable Tool for Sideline Evaluation."

- [21] Administrator, 2014, "Microsoft Word - SAC.doc."
- [22] 2014, "Sport Concussion Assessment Tool 2 (SCAT2)."
- [23] Administrator, 2014, "Sports-Related Concussion Testing and ImPACT Testing Program."
- [24] Le Bihan, D., Mangin, J. F., Poupon, C., Clark, C. A., Pappata, S., Molko, N., and Chabriat, H., 2001, "Diffusion tensor imaging: concepts and applications," *Journal of magnetic resonance imaging*, 13(4), pp. 534-546.
- [25] 2014, "What Is FMRI? - Center for Functional MRI - UC San Diego,"
<http://fmri.ucsd.edu/Research/whatisfmri.html>.
- [26] Gujar, S. K., Maheshwari, S., Bjorkman-Burtscher, I., and Sundgren, P. C., 2005, "Magnetic resonance spectroscopy," *J Neuroophthalmol*, 25(3), pp. 217-226.
- [27] McIntosh, A. S., McCrory, P., Finch, C. F., and Wolfe, R., 2010, "Head, face and neck injury in youth rugby: incidence and risk factors," *BRITISH JOURNAL OF SPORTS MEDICINE*, 44(3), pp. 188-193.
- [28] McIntosh, A. S., McCrory, P., Finch, C. F., Best, J. P., Chalmers, D. J., and Wolfe, R., 2009, "Does Padded Headgear Prevent Head Injury in Rugby Union Football?," *MEDICINE AND SCIENCE IN SPORTS AND EXERCISE*, 41(2), pp. 306-313.
- [29] Rousseau, P., Post, A., and Hoshizaki, T. B., 2014, "The effects of impact management materials in ice hockey helmets on head injury criteria," University of Ottawa, Ottawa, Ontario, Canada.
- [30] Bradley, C. W., and Susannah, M. B., 2013, "Sports-Related Concussion," *Clinical Pediatric Emergency Medicine*, 14(4), p. 246.
- [31] Anonymous, 2002, "Hockey concussions," *Journal of Physical Education, Recreation & Dance*, 73(4), p. 8.

- [32] Hutchison, M. G., Comper, P., Meeuwisse, W. H., and Echemendia, R. J., 2014, "An observational method to code concussions in the National Hockey League (NHL): the heads-up checklist," *BRITISH JOURNAL OF SPORTS MEDICINE*, 48(2), pp. 125-U133.
- [33] Goodman, D., Gaetz, M., and Meichenbaum, D., 2001, "Concussions in hockey: there is cause for concern," *MEDICINE AND SCIENCE IN SPORTS AND EXERCISE*, 33(12), pp. 2004-2009.
- [34] Hollis, S. J., Stevenson, M. R., McIntosh, A. S., Arthur Shores, E., Collins, M. W., and Taylor, C. B., 2009, "Incidence, Risk, and Protective Factors of Mild Traumatic Brain Injury in a Cohort of Australian Nonprofessional Male Rugby Players," *The American Journal of Sports Medicine*, 37(12), pp. 2328-2333.
- [35] Echlin, P. S., Skopelja, E. N., Tator, C. H., Cusimano, M. D., Cantu, R. C., Taunton, J. E., Upshur, R. E. G., Hall, C. R., Johnson, A. M., and Forwell, L. A., 2010, "A prospective study of physician-observed concussions during junior ice hockey: implications for incidence rates," *NEUROSURGICAL FOCUS*, 29(5).
- [36] Lomberg, J., 2013, "Sensor pad analyzes impacts in football helmets," *Advantage Business Media*, p. 24.
- [37] Rush Iii, G. A., 1901, "Sports helmet capable of sensing linear and rotational forces."
- [38] Pietrantonio, A., 1901, "Concussion indicator."
- [39] Gao, D., and Wampler, C. W., "Head Injury Criterion Assessing the Danger of Robot Impact," *IEEE Robotices and Automation Magazine*.
- [40] Zhang, L., Yang, K. H., and King, A. I., 2004, "A proposed Injury Threshold for Mild Traumatic Brain Injury," *Transactions of the ASME*, 126.

- [41] Funk, J. R., Duma, S. M., Manoogian, S. J., and Rowson, S., 2007, "Biomechanical Risk Estimates for Mild Traumatic Brain Injury," Association for the Advancement of Automotive Medicine, 51, pp. 343-361.
- [42] Marjoux, D., Baumgartner, D., Deck, C., and Willinger, R., 2008, "Head injury prediction capability of the HIC, HIP, SIMon, and ULP criteria," Accident Analysis & Prevention, 40(3), pp. 1135-1148.
- [43] Newman, J., Barr, C., Beusenbergh, M., Fournier, E., Shewchenko, N., Welbourne, E., and Withnall, C., "A New Biomechanical Assessment of Mild Traumatic Brain Injury Part 2-Results and Conclusions", Biokinetics and Associates Ltd., Ottawa, Ontario, Canada.
- [44] Shorten, M. R., and Himmelsbach, J. A., "Sports surfaces and the risk of traumatic brain injury."
- [45] 2014, "The Hockey Equipment Certification Council Inc.," <http://hecc.net/>.
- [46] 2010, "Performance Specification for Ice Hockey Helmets," ASTM International.
- [47] Wall, R. E., 1996, "Comparison of International Certification Standards for Ice Hockey Helmets," Masters of Arts, McGill University, Montreal, Quebec, Canada.
- [48] 2014, "NHL Official Rules," <http://www.nhl.com/ice/page.htm?id=26285>.
- [49] 2010, "Hockey Helmet Reviews."
- [50] Reebok, 2013, "11K Helmet Features," Reebok-CCM Hockey Inc.
- [51] Stevenson, K., "Hockey Helmet Fitting," <http://www.purehockey.com/guidance-info/hockey-helmet-guides>.
- [52] "Bauer RE-AKT Product Description and Reviews,
Bauer IMS 9.0 Product Description and Reviews,"
http://www.totalhockey.com/Product.aspx?itm_id=12170&div_id=2&bn_id=12170-2.

- [53] 2014, "Poron XRD," <http://www.poronxrd.com/howitworks/charts.aspx>.
- [54] 2012, "Bauer Hockey Rolls Out Re-Akt Helmet," Professional Services Close-Up, ProQuest.
- [55] Weber, R., and Reisinger, R. D., 2012, "Helmet Omnidirectional Energy Management Systems."
- [56] 2014, "Hockey Helmets: A Way to Make Them Safer?."
- [57] Varrasi, J., 2014, "Fighting Hockey Concussions with Safer Helmets," Expert Voices OP-ED & Insights.
- [58] 2012, "Adult Football Helmet Evaluation Methodology," VirginiaTech.
- [59] 2014, "In the future, hockey helmets won't be sexy | The Hockey Feed," <http://feed.nhl.com/in-the-future-hockey-helmets-wont-be-sexy/>.
- [60] 2014, "HockeyGiant.com," <http://www.hockeygiant.com/helmets---cages---shields.html>.
- [61] 2014, "Hockey Helmet," TheFreeDictionary.com, Farlex.
- [62] Innes, J., "Helmets: The NHL vs. Everyone Else (part 1)," Puck, that hurts!
- [63] Stuart MD, M. J., Link BA, A. A., Smith RN, P., Aynsley M., Krause PT, D., David A., Sorenson JD, M. C., and Larson MS, D. R., 2009, "Skate Blade Neck Lacerations: A Survey and Case Follow-Up," Department of Orthopedics, Sports Medicine Center, and Division of Biomedical Statistics and Informatics, Mayo Clinic.
- [64] 2014, "Charpy and Izod Pendulum, Drop Weight and Instrumented Impact Tests," http://www.instron.us/wa/applications/test_types/impact/test_types.aspx.
- [65] 2014, "Drop Test," <http://csml9.pme.nthu.edu.tw:8080/csml/Eng-instrument.htm>.
- [66] "Pendulum Impact Tester Plastics," <http://www.directindustry.com/prod/tinius-olsen/pendulum-impact-testers-plastics-29300-508977.html>.

- [67] 2014, "McMaster-Carr Air Cylinders," <http://www.mcmaster.com/#standard-air-cylinders/=u5mfbj>.
- [68] Hanna, T., Hennings, Z., Mensing, M., Perry, E., and Rookey, R., 2014, "Design of a Protective Device for Head and Neck Injuries in Football."
- [69] Hoehn, M. M., and Yahr, M. D., 1998, "Parkinsonism: onset, progression, and mortality," *Neurology*, 50(2), pp. 318-318.
- [70] 2007, "Ice Hockey Injuries," *World of Sports Science*.
- [71] Lee, S.-H., and Terzopoulos, D., "Heads Up! Biomechanical Modeling and Neuromuscular Control of the Neck," University of California, Los Angeles.
- [72] Marshall, S. W., Loomis, D. P., Waller, A. E., Chalmers, D. J., Bird, Y. N., Quarrie, K. L., and Feehan, M., 2005, "Evaluation of protective equipment for prevention of injuries in rugby union," *International journal of epidemiology*, 34(1), pp. 113-118.
- [73] 2014, "Comparison Chart of Glove Materials," <http://www.directglove.com/Articles.asp?ID=133>.
- [74] "Neoprene Sheets, Neoprene Rolls, Neoprene Fabric," <http://www.foamorder.com/neoprene.html>.

9 Appendices

9.1 Appendix A: LabVIEW

To start, we will have to detail a list of equipment and materials in order to understand the VIs purpose, use and setting. By this, we aim to use this terms in the VI sequence of events in order to have coherence and make scene. This list is found bellow:

Materials needed:

- | | |
|---|---------------------------------|
| 13. DAQ Device | 18. T-connector with two valves |
| 14. Pressure Tank | 19. Solenoid valve |
| 15. Strain Gauge | 20. Power Supply |
| 16. Air outlet from wall (air pressure source) | 21. Circuit board |
| 17. Hose | 22. Resistors |
| a. (from outlet wall to inlet tank) | 23. Wire |
| b. (from outlet tank to solenoid valve and from solenoid valve to cylinder) | a. Banana/gator cables |
| | b. Electrical wire |
| | c. BNC wire |
| | 24. Accelerometers |

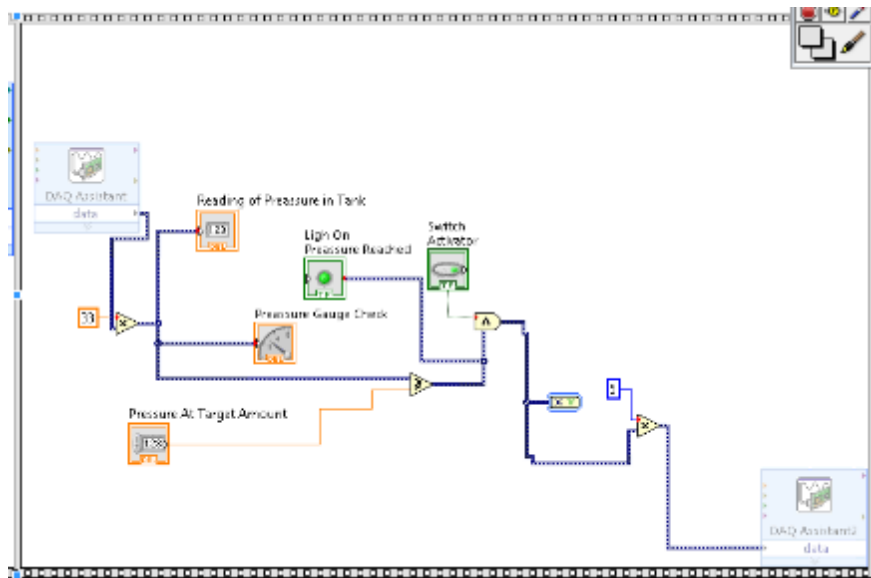


Figure 9-1: Block Diagram

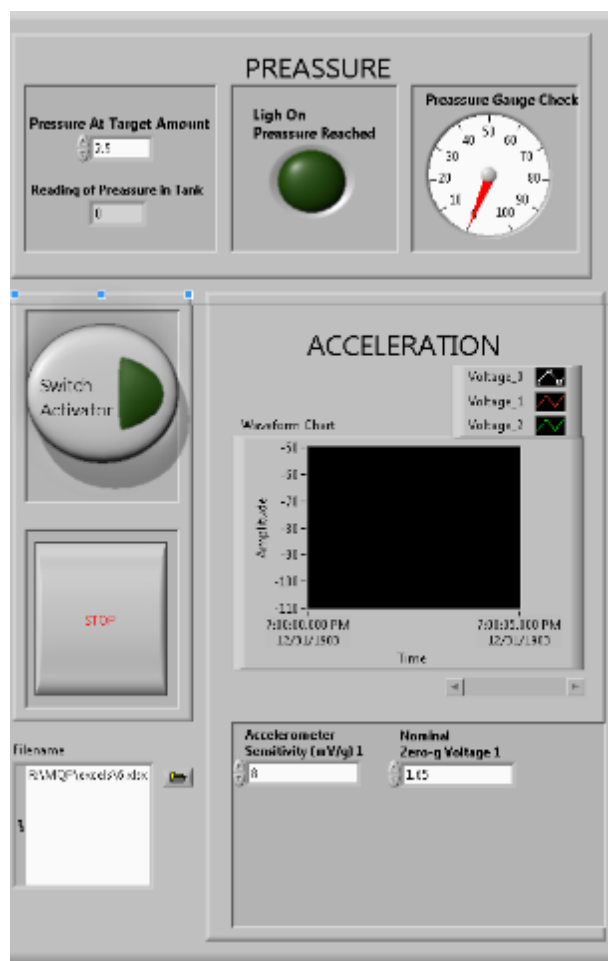


Figure 9-2: Front Panel

9.2 Appendix B: Calculations

9.2-1: Original Calculations

Original Calculations

Average Weight of Professional Hockey Player	$W_p := 210\text{ lbf} = 934.127\text{ N}$	$W_{\text{equipment}} := 30\text{ lbf}$
	$W_{\text{hp}} := W_p + W_{\text{equipment}} = 1.068 \times 10^3\text{ N}$	
Speed of fast skater	$v_{\text{hp}} := 30\text{ mph} = 13.411\frac{\text{m}}{\text{s}}$	Mass $m_{\text{hp}} := \frac{W_{\text{hp}}}{g} = 108.862\text{ kg}$
Average acceleration of an elite hockey player trying to speed up as fast as possible	$A_{\text{hps}} := 4.375\frac{\text{m}}{\text{s}^2}$	
Force from player to stationary player impact	$F_I := m_{\text{hp}} \cdot A_{\text{hps}} = 476.272\text{ N}$	

Determining Necessary Pressure and Stroke Length

$F_I = \text{Pressure} \cdot \text{Area}$		
Volume of rod of Air cylinder w/ 1.5 in bore, 4 in stroke length		
Stroke Length	Diameters	Cross-sect. Area
$L_{\text{rod}} := 4\text{ in}$	$D_{\text{rod}} := .44\text{ in}$	$\text{Area}_{\text{rod}} := \frac{D_{\text{rod}}^2}{4} \cdot \pi = 0.152\text{ in}^2$
	$D_{\text{Bore}} := 1.5\text{ in}$	$\text{Area}_{\text{Bore}} := \frac{\pi}{4} \cdot (D_{\text{Bore}}^2) = 1.767\text{ in}^2$
$\text{Volume}_{\text{rod}} := \text{Area}_{\text{rod}} \cdot L_{\text{rod}} = 0.608\text{ in}^3$		$\text{Pressure} := \frac{F_I}{\text{Area}_{\text{Bore}}} = 60.589\text{ psi}$
Stainless Steel rods Type 304		$\delta_{\text{ss}} := .00803\frac{\text{kg}}{\text{cm}^3} = 8.03 \times 10^3\frac{\text{kg}}{\text{m}^3}$
Mass of Rod		$m_{\text{rod}} := \delta_{\text{ss}} \cdot \text{Volume}_{\text{rod}} = 0.08\text{ kg}$
Approximate mass of air cylinder		$m_{\text{ac}} := \text{Area}_{\text{Bore}} \cdot 11\text{ in} \cdot \delta_{\text{ss}} = 2.558\text{ kg}$
Acceleration of Rod		$a_{\text{rod}} := \frac{F_I}{m_{\text{rod}}} = 5.951 \times 10^3\frac{\text{m}}{\text{s}^2}$

$$761.5 \frac{\text{m}}{\text{s}^2} \cdot m_{\text{head}} = 3.351 \times 10^3 \text{ N} \quad \left| \right.$$

Moments of Inertia from Chalmers, Applied Mechanics, Master's Thesis 2010

$$I_x := 204.117 \text{ kg} \cdot \text{cm}^2 \quad I_y := 232.888 \text{ kg} \cdot \text{cm}^2 \quad I_z := 150.832 \text{ kg} \cdot \text{cm}^2$$

Distance from Occipital Condyle (OC, point about which head rotates) to frankfort line (x-axis in reference frame) frankfort line is imaginary line connecting the upper margin of the auditory meatus (AM, external ear canal) to the lower orbital margin (cavity containing eyeball) Chalmers et al.

$$d_{AMx} := 8 \text{ mm}$$

$$d_{AMz} := 35 \text{ mm}$$

Distance from OC to center of gravity (CG) from Chalmer et al.

$$d_{CGx} := 13 \text{ mm}$$

$$d_{CGz} := 55 \text{ mm}$$

$$d_{CG} := \sqrt{d_{CGx}^2 + d_{CGz}^2} = 56.515 \text{ mm}$$

$$m_{\text{head}} := 4.4 \text{ kg} \quad \text{from Chalmers et al.}$$

Impulse equals Change in momentum equation

	Pressure · Area _{Bore} · t _I	= (m _{hp} + m _{rod}) v _f
Head		Player

Change in Velocity

$$\Delta v_{Ih} := \frac{\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot t_I}{(m_{\text{head}} + m_{\text{rod}})} = 1.276 \frac{\text{m}}{\text{s}}$$

$$\Delta v_{Ip} := \frac{\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot t_I}{(m_{\text{hp}} + m_{\text{rod}})} = 0.052 \frac{\text{m}}{\text{s}}$$

Initial Acceleration

$$a_{hi} := \frac{\text{Pressure} \cdot \text{Area}_{\text{Bore}}}{(m_{\text{head}} + m_{\text{rod}})} = 106.31 \frac{\text{m}}{\text{s}^2}$$

$$a_{rp} := \frac{F_I}{(m_{\text{rod}} + m_{\text{hp}})} = 4.372 \frac{\text{m}}{\text{s}^2}$$

Initial Angular Acceleration

$$\alpha_{hi} := \frac{a_{hi}}{d_{CGz}} = 1.933 \times 10^3 \frac{1}{\text{s}^2}$$

set-up/initial distance between head and air cylinder

$$d_i := 3.75 \text{ in}$$

Time before impact

$$t_{BI} := \left(\frac{2 \cdot d_i}{a_{rod}} \right)^{0.5} = 5.658 \text{ ms}$$

Velocity of rod right before impact

$$v_{rodBI} := a_{rod} \cdot t_{BI} = 33.67 \frac{\text{m}}{\text{s}}$$

Impulse equals change in momentum

$$F_I \cdot t_I = (m_{rod} \cdot v_{rodBI}) - (m_{rod} + m_{head}) \cdot v_{rhc}$$

$$(Pressure \cdot Area_{Bore} - k \cdot \theta) \cdot t_I = (m_{rod} \cdot v_{rodBI}) - (m_{rod} + m_{head}) \cdot v_{rhc}$$

Velocity of rod and head combined

$$v_{rhi} := \frac{(m_{rod} \cdot v_{rodBI})}{(m_{rod} + m_{head})} = 0.601 \frac{\text{m}}{\text{s}}$$

Angular velocity of head after initial impact

$$\omega_{hi} := \frac{-v_{rhi}}{d_{CGz}} = -10.936 \frac{\text{rad}}{\text{s}}$$

$$k_{necks} := 50 \frac{\text{N} \cdot \text{m}}{\text{rad}} \quad \text{from } \text{http://www.cs.ucla.edu/~dt/papers/siggraph06/siggraph06.pdf}$$

$$k_{damp} := .1 \text{ s} \cdot k_{necks} = 5 \text{ s} \cdot \frac{\text{N} \cdot \text{m}}{\text{rad}}$$

Damping Force


Spring Force

$$F_{damp}(\theta) = k_{damp} \cdot \left(\frac{d\theta}{dt} \right)$$

$$F_{spring}(\theta) = k_{necks} \cdot \theta$$

Peak moment of neck from Chalmers et al.

$$M_n := 4.78 \text{ N} \cdot \text{m}$$



$$\theta_k := 0 \text{ deg}, 1 \text{ deg} \dots 95 \text{ deg} \quad t := .000 \text{ sec}, .001 \text{ sec} \dots t_I$$

$$\Sigma F_x = Pressure \cdot Area_{Bore} \cdot \cos(\theta) + m_{head} \cdot g \cdot \cos\left(\frac{\pi}{2} - \theta\right) - F_{sh} = (m_{rod} + m_{head}) \cdot a_{thx}$$

$$\Sigma F_z = Pressure \cdot Area_{Bore} \cdot \sin(\theta) - m_{head} \cdot g \cdot \sin\left(\frac{\pi}{2} - \theta\right) + F_{ax} = (m_{head}) \cdot a_{rhz}$$

$$\Sigma M_{OC} = (Pressure \cdot Area_{Bore} \cdot \sin(\theta)) \cdot d_{CGx} - (Pressure \cdot Area_{Bore} \cdot \cos(\theta)) \cdot d_{CGz} - m_{head} \cdot g \cdot d_{CGx} \cdot \sin\left(\frac{\pi}{2} - \theta\right) + m_{head} \cdot g \cdot d_{CGz} \cdot \cos\left(\frac{\pi}{2} - \theta\right) - k_{damp} \cdot \frac{d\theta_k}{dt} - k_{necks} \cdot \theta = I_y \cdot \alpha_I$$

$$I_y \cdot \frac{d^2\theta_k}{dt^2} + k_{damp} \cdot \frac{d\theta_k}{dt} + k_{necks} \cdot \theta_k = \left[(Pressure \cdot Area_{Bore} \cdot d_{CGx}) + m_{head} \cdot g \cdot d_{CGz} \right] \cdot \sin(\theta_k) - (Pressure \cdot Area_{Bore} \cdot d_{CGz} + m_{head} \cdot g \cdot d_{CGx}) \cdot \cos(\theta_k)$$

$$\frac{d^2\theta_k}{dt^2} + \frac{k_{damp}}{I_y} \cdot \frac{d\theta_k}{dt} + \frac{k_{necks}}{I_y} \cdot \theta_k = \frac{(Pressure \cdot Area_{Bore} \cdot d_{CGx} + m_{head} \cdot g \cdot d_{CGz}) \cdot \sin(\Omega_F \cdot t) - (Pressure \cdot Area_{Bore} \cdot d_{CGz} + m_{head} \cdot g \cdot d_{CGx}) \cdot \cos(\Omega_F \cdot t)}{I_y}$$

Natural Angular Frequency



$$\Omega_n := \sqrt{\frac{k_{\text{necks}}}{I_y}} = 46.335 \frac{1}{s}$$

Finding Forcing angular frequency Ω_F

$$\Omega_F := 30 \frac{\text{rad}}{s} \quad \text{Kept trying different } \Omega_F \text{ until the graph of T.F and T.f looked the same}$$

$$T_F(t) := \left[(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right] \cdot \sin(\Omega_F \cdot t) \dots \\ + \left[(-\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} \right] \cdot \cos(\Omega_F \cdot t)$$

$$T_f(\theta_k) := \left[(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right] \cdot \sin(\theta_k) \dots \\ + \left[(-\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} \right] \cdot \cos(\theta_k)$$

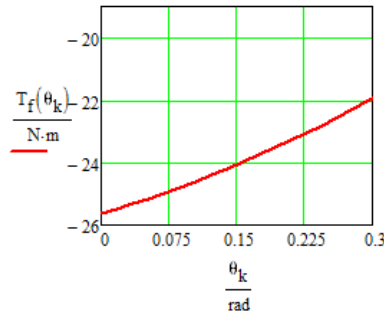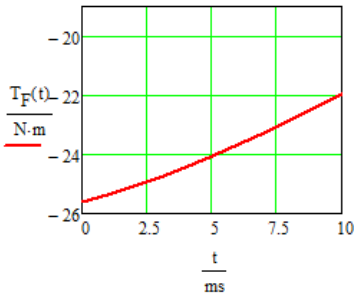

when $T = -21\text{J}$, $\theta_k = .1449 \text{ rad}$, $t = 4.83\text{ms}$
when $T = -20.001\text{J}$, $\theta_k = .2295 \text{ rad}$, $t = 7.65\text{ms}$

$$T_F(4.83\text{ms}) = -24.129\text{J}$$

$$T_f(.1449\text{rad}) = -24.129\text{J}$$

$$T_F(7.65\text{ms}) = -23.014\text{J}$$

$$T_f(.2295\text{rad}) = -23.014\text{J}$$

Complimentary Solution (Left side of equation)

$$I_y \cdot \frac{d^2}{dt^2} \theta_k + k_{\text{damp}} \cdot \frac{d}{dt} \theta_k + k_{\text{necks}} \cdot \theta_k$$

$$\frac{d^2}{dt^2} \theta_k + \frac{k_{\text{damp}}}{I_y} \cdot \frac{d}{dt} \theta_k + \frac{k_{\text{necks}}}{I_y} \cdot \theta_k = 0$$

$$r_1 := \frac{-\frac{k_{\text{damp}}}{I_y} + \sqrt{\left(\frac{k_{\text{damp}}}{I_y}\right)^2 - 4 \cdot \frac{k_{\text{necks}}}{I_y}}}{2} = -10.515 \frac{1}{s}$$

$$r_2 := \frac{-\frac{k_{\text{damp}}}{I_y} - \sqrt{\left(\frac{k_{\text{damp}}}{I_y}\right)^2 - 4 \cdot \frac{k_{\text{necks}}}{I_y}}}{2} = -204.18 \frac{1}{s}$$

$$\theta_I(t) = c_1 \cdot e^{r_1 \cdot t} + c_2 \cdot e^{r_2 \cdot t}$$

Particular Solution (right side of equation)

$$\left[(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right] \cdot \sin(\theta_k) - \left[(-\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} \right] \cdot \cos(\theta_k)$$

Guess

$$A \cdot \sin(\Omega_F \cdot t) + B \cdot \cos(\Omega_F \cdot t)$$

$$\omega_k(t) = A \cdot \Omega_F \cdot \cos(\Omega_F \cdot t) - B \cdot \Omega_F \cdot \sin(\Omega_F \cdot t)$$

$$\alpha_k(t) = -A \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t)$$

$$\frac{d^2}{dt^2} \theta_k + \frac{k_{damp}}{I_y} \cdot \frac{d}{dt} \theta_k + \frac{k_{necks}}{I_y} \cdot \theta_k = -A \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t) + \frac{k_{damp}}{I_y} \cdot (A \cdot \Omega_F \cdot \cos(\Omega_F \cdot t) - B \cdot \Omega_F \cdot \sin(\Omega_F \cdot t)) + \frac{k_{necks}}{I_y} \cdot (A \cdot \sin(\Omega_F \cdot t) + B \cdot \cos(\Omega_F \cdot t))$$

Rearrange

$$\left(-A \cdot \Omega_F^2 - \frac{k_{damp}}{I_y} \cdot B \cdot \Omega_F + \frac{k_{necks}}{I_y} \cdot A \right) \cdot \sin(\Omega_F \cdot t) + \left(-B \cdot \Omega_F^2 + \frac{k_{damp}}{I_y} \cdot A \cdot \Omega_F + \frac{k_{necks}}{I_y} \cdot B \right) \cdot \cos(\Omega_F \cdot t) = \frac{\left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} \dots \right) \cdot \sin(\theta_k) - \left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} \dots \right) \cdot \cos(\theta_k)}{I_y + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}}$$

$$-A \cdot \Omega_F^2 - \frac{k_{damp}}{I_y} \cdot B \cdot \Omega_F + \frac{k_{necks}}{I_y} \cdot A = \frac{\left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} \right) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}}{I_y}$$

$$-B \cdot \Omega_F^2 + \frac{k_{damp}}{I_y} \cdot A \cdot \Omega_F + \frac{k_{necks}}{I_y} \cdot B = \frac{-\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} - m_{\text{head}} \cdot g \cdot d_{\text{CGx}}}{I_y}$$

$$\left(\frac{k_{necks}}{I_y} - \Omega_F^2 \right) \cdot B + \frac{k_{damp}}{I_y} \cdot \Omega_F \cdot A = \frac{-\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} - m_{\text{head}} \cdot g \cdot d_{\text{CGx}}}{I_y}$$

$$\left(\frac{k_{necks}}{I_y} - \Omega_F^2 \right) \cdot A - \frac{k_{damp}}{I_y} \cdot \Omega_F \cdot B = \frac{\left[\left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} \right) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right]}{I_y}$$

$$\left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot A - k_{damp} \cdot \Omega_F \cdot B = \left[\left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} \right) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right]$$

$$B_c = \frac{\left[\left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} \right) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right] - \left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot A}{-\left(k_{damp} \cdot \Omega_F \right)} \quad +$$

$$\left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot \left[\frac{\left[\left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} \right) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right] - \left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot A}{-\left(k_{damp} \cdot \Omega_F \right)} \right] + k_{damp} \cdot \Omega_F \cdot A = -\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} - m_{\text{head}} \cdot g \cdot d_{\text{CGx}}$$

$$\left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot \left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right) - \left(k_{necks} - I_y \cdot \Omega_F^2 \right)^2 \cdot A - \left(k_{damp} \cdot \Omega_F \right)^2 \cdot A = -\left(k_{damp} \cdot \Omega_F \right) \cdot \left(-\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} - m_{\text{head}} \cdot g \cdot d_{\text{CGx}} \right)$$

$$-\left(k_{necks} - I_y \cdot \Omega_F^2 \right)^2 \cdot A - \left(k_{damp} \cdot \Omega_F \right)^2 \cdot A = \left(k_{damp} \cdot \Omega_F \right) \cdot \left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} \right) - \left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot \left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right)$$

$$A_c \cdot \left[-\left(k_{necks} - I_y \cdot \Omega_F^2 \right)^2 - \left(k_{damp} \cdot \Omega_F \right)^2 \right] = \left(k_{damp} \cdot \Omega_F \right) \cdot \left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} \right) - \left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot \left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right)$$

$$A_c := \frac{\left(k_{damp} \cdot \Omega_F \right) \cdot \left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} \right) - \left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot \left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right)}{-\left[\left(k_{necks} - I_y \cdot \Omega_F^2 \right)^2 + \left(k_{damp} \cdot \Omega_F \right)^2 \right]} = -0.161$$

$$B_c := \frac{\left[\left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} \right) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right] - \left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot A_c}{-\left(k_{damp} \cdot \Omega_F \right)} = -0.088$$

Solving for c.1 and c.2 using initial values

Using angular displacement at time 0 equals 0 deg
and angular velocity at time 0 equals initial angular velocity solved for above (ω_{hi})

$$\theta_1(t) = \left(c_1 \cdot e^{r_1 \cdot t} + c_2 \cdot e^{r_2 \cdot t} \right) + \left(A_c \cdot \sin(\Omega_F \cdot t) + B_c \cdot \cos(\Omega_F \cdot t) \right)$$

$$\theta_1(0ms) = (c_1 + c_2) + (B_c \cdot \cos(0)) = 0 \text{deg} \quad c_1 = -(B_c \cdot \cos(0)) - c_2$$

$$\omega_{hi} = -10.936 \frac{1}{s}$$

$$\omega_1(t) = \left(c_1 \cdot r_1 \cdot e^{r_1 \cdot t} + c_2 \cdot r_2 \cdot e^{r_2 \cdot t} \right) + \left(A_c \cdot \Omega_F \cdot \cos(\Omega_F \cdot t) - B_c \cdot \Omega_F \cdot \sin(\Omega_F \cdot t) \right)$$

$$\omega_1(0ms) = (c_1 \cdot r_1 + c_2 \cdot r_2) + (A_c \cdot \Omega_F \cdot \cos(0)) = \omega_{hi}$$

$$[-(B_c \cdot \cos(0)) - c_2] \cdot r_1 + c_2 \cdot r_2 + A_c \cdot \Omega_F \cdot \cos(0) = \omega_{hi}$$

$$-(B_c \cdot r_1 \cdot \cos(0)) - c_2 \cdot r_1 + c_2 \cdot r_2 + A_c \cdot \Omega_F \cdot \cos(0) = \omega_{hi}$$

$$c_2 \cdot (r_2 - r_1) = \omega_{hi} - A_c \cdot \Omega_F \cdot \cos(0) + B_c \cdot r_1 \cdot \cos(0)$$

$$c_{2a} := \frac{(\omega_{hi} - A_c \cdot \Omega_F + B_c \cdot r_1)}{(r_2 - r_1)} = 0.027 \quad c_{1a} := -(B_c \cdot \cos(0)) - c_{2a} = 0.062$$

For better results used initial acceleration instead of velocity

Using initial angular acceleration and initial angular displacement as initial conditions

$$\alpha_a(t) = c_1 \cdot r_1^2 \cdot e^{r_1 \cdot t} + c_2 \cdot r_2^2 \cdot e^{r_2 \cdot t} - A_c \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B_c \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t)$$

$$\alpha_a(0ms) = c_1 \cdot r_1^2 + c_2 \cdot r_2^2 - B_c \cdot \Omega_F^2 = \alpha_{hi}$$

$$[-(B_c \cdot \cos(0)) - c_2] \cdot r_1^2 + c_2 \cdot r_2^2 - B_c \cdot \Omega_F^2 \cdot \cos(0) = \alpha_{hi}$$

$$-r_1^2 \cdot (B_c \cdot \cos(0)) - r_1^2 \cdot c_2 + c_2 \cdot r_2^2 = \alpha_{hi} + B_c \cdot \Omega_F^2$$


$$c_2 := \frac{\alpha_{hi} + B_c \cdot \Omega_F^2 + r_1^2 \cdot (B_c)}{(r_2^2 - r_1^2)} = 0.044$$

$$c_1 := -B_c - c_2 = 0.044$$

Necessary Stroke Length:

Complete Solution

$$\theta_I(t) := \left(c_1 \cdot e^{r_1 \cdot t} + c_2 \cdot e^{r_2 \cdot t} \right) + \left(A_c \cdot \sin(\Omega_F \cdot t) + B_c \cdot \cos(\Omega_F \cdot t) \right)$$

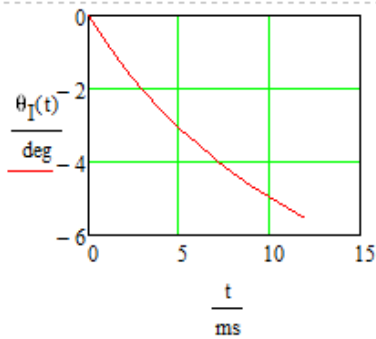


$$\theta_I(0\text{ms}) = 0$$

$$\theta_{EI} := \theta_I(t_I) = -5.551 \cdot \text{deg}$$

Distance cylinder is in contact with head

$$d_{EI} := \sqrt{2 \cdot d_{CG}^2 - 2 \cdot d_{CG}^2 \cdot \cos(\theta_{EI})} = 0.215 \cdot \text{in}$$

$$+ \omega_I(t) := c_1 \cdot r_1 \cdot e^{r_1 \cdot t} + c_2 \cdot r_2 \cdot e^{r_2 \cdot t} + A_c \cdot \Omega_F \cdot \cos(\Omega_F \cdot t) - B_c \cdot \Omega_F \cdot \sin(\Omega_F \cdot t)$$

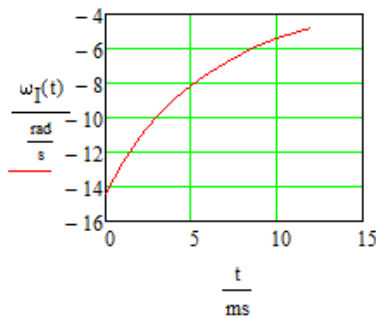


$$\omega_I(0\text{ms}) = -14.354 \frac{1}{s}$$

$$\omega_{EI} := \omega_I(t_I) = -4.783 \frac{\text{rad}}{\text{sec}}$$

$$\omega_{hi} = -10.936 \frac{1}{s}$$

$$\alpha_I(t) := c_1 \cdot r_1^2 \cdot e^{r_1 \cdot t} + c_2 \cdot r_2^2 \cdot e^{r_2 \cdot t} - A_c \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B_c \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t)$$

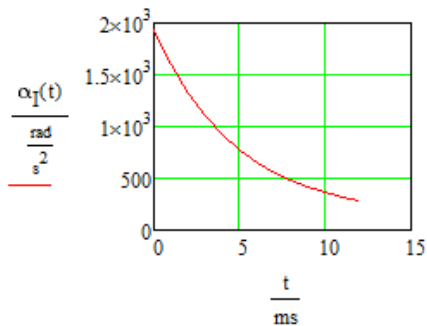

$$\alpha_{EI} := \alpha_I(t_I) = 289.303 \frac{\text{rad}}{s^2}$$

$$\alpha_I(0\text{ms}) = 1.933 \times 10^3 \frac{1}{s^2}$$

$$\alpha_{hi} = 1.933 \times 10^3 \frac{1}{s^2}$$

After Impulse (i.e. after air cylinder is not in contact with head/helmet)

After impulse ie after cylinder stops

Angle traveled through during impulse $\theta_{EI} = -5.551 \text{ deg}$

Velocity $\omega_{EI} = -4.783 \frac{1}{s}$ $v_A := \omega_{EI} d_{CG} = -0.27 \frac{m}{s}$

$t_a := t_I + (t_I + .001s) \dots .50s$ $\theta_{AI} := \theta_{EI}, \theta_{EI} + .25\text{rad} \dots 2\text{rad}$

New Forcing Frequency



$$\Omega_{Fa} := \frac{\theta_{EI}}{t_I} = -8.073 \frac{1}{s} \quad +$$

$$T_{Fa}(t_a) := -m_{\text{head}} \cdot g \cdot d_{CGz} \cdot \sin(\Omega_{Fa} \cdot t_a) + (m_{\text{head}} \cdot g \cdot d_{CGx}) \cdot \cos(\Omega_{Fa} \cdot t_a)$$

$$T_{fa}(\theta_{AI}) := -(m_{\text{head}} \cdot g \cdot d_{CGz}) \cdot \sin(\theta_{AI}) + (m_{\text{head}} \cdot g \cdot d_{CGx}) \cdot \cos(\theta_{AI})$$

$$T_{Fa}(t_I) = 0.788 \text{ J}$$

$$T_{fa}(\theta_{EI}) = 0.788 \text{ J}$$



$$-B_2 \cdot \Omega_{Fa}^2 + \frac{k_{damp}}{I_y} \cdot A_2 \cdot \Omega_{Fa} + \frac{k_{necks}}{I_y} \cdot B_2 = \left(\frac{-m_{head} \cdot g \cdot d_{CGx}}{I_y} \right) \quad +$$

$$-A_2 \cdot I_y \cdot \Omega_F^2 - k_{damp} \cdot B_2 \cdot \Omega_F + k_{necks} \cdot A_2 = m_{head} \cdot g \cdot d_{CGz}$$

$$\left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot A_2 - k_{damp} \cdot \Omega_F \cdot B_2 = m_{head} \cdot g \cdot d_{CGz}$$

$$-B_2 \cdot I_y \cdot \Omega_F^2 + k_{damp} \cdot A_2 \cdot \Omega_F + k_{necks} \cdot B_2 = -m_{head} \cdot g \cdot d_{CGx}$$

$$\left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot B_2 + k_{damp} \cdot \Omega_F \cdot A_2 = -m_{head} \cdot g \cdot d_{CGx}$$

$$B_2 = \frac{-m_{head} \cdot g \cdot d_{CGx} - k_{damp} \cdot \Omega_F \cdot A_2}{\left(k_{necks} - I_y \cdot \Omega_F^2 \right)}$$

$$\left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot A_2 - k_{damp} \cdot \Omega_F \cdot \left(\frac{-m_{head} \cdot g \cdot d_{CGx} - k_{damp} \cdot \Omega_F \cdot A_2}{k_{necks} - I_y \cdot \Omega_F^2} \right) = m_{head} \cdot g \cdot d_{CGz}$$

$$\left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot A_2 + k_{damp} \cdot \Omega_F \cdot m_{head} \cdot g \cdot d_{CGx} + \left(k_{damp} \cdot \Omega_F \right)^2 \cdot A_2 = \left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot \left(m_{head} \cdot g \cdot d_{CGz} \right)$$

$$\left[\left(k_{necks} - I_y \cdot \Omega_F^2 \right) + \left(k_{damp} \cdot \Omega_F \right)^2 \right] \cdot A_2 + k_{damp} \cdot \Omega_F \cdot m_{head} \cdot g \cdot d_{CGx} = \left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot \left(m_{head} \cdot g \cdot d_{CGz} \right)$$

Sum of Moments After Impulse

$$M_{OCa} = \left(m_{head} \cdot g \cdot d_{CGz} \right) \cdot \sin(\theta) - \left(m_{head} \cdot g \cdot d_{CGx} \right) \cdot \cos(\theta) - k_{necks} \cdot \theta - k_{damp} \cdot \frac{d}{dt} \theta = I_y \cdot \left(\frac{d^2}{dt^2} \theta \right)$$

Complimentary Solution

$$\frac{d^2}{dt^2} \theta_a + \frac{k_{damp}}{I_y} \cdot \frac{d}{dt} \theta_a + \frac{k_{necks}}{I_y} \cdot \theta_a = \frac{\left(m_{head} \cdot g \cdot d_{CGz} \right) \cdot \sin(\Omega_{Fa} \cdot t_a) - \left(m_{head} \cdot g \cdot d_{CGx} \right) \cdot \cos(\Omega_{Fa} \cdot t_a)}{I_y}$$

$$\theta_{al}(t_a) = c_3 \cdot e^{r_1(t_a)} + c_4 \cdot e^{r_2(t_a)}$$

Particular Solution

Guess

$$A_2 \cdot \sin(\Omega_{Fa} \cdot t) + B_2 \cdot \cos(\Omega_{Fa} \cdot t)$$

$$\omega_k(t) = A_2 \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} \cdot t) - B_2 \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} \cdot t)$$

$$\alpha_k(t) = -A_2 \cdot \Omega_{Fa}^2 \cdot \sin(\Omega_{Fa} \cdot t) - B_2 \cdot \Omega_{Fa}^2 \cdot \cos(\Omega_{Fa} \cdot t)$$

$$\frac{d^2}{dt^2} \theta_k + \frac{k_{damp}}{I_y} \cdot \frac{d}{dt} \theta_k + \frac{k_{necks}}{I_y} \cdot \theta_k = -A \cdot \Omega_{Fa}^2 \cdot \sin(\Omega_{Fa} \cdot t) - B \cdot \Omega_{Fa}^2 \cdot \cos(\Omega_{Fa} \cdot t) + \frac{k_{damp}}{I_y} \cdot \left(A \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} \cdot t) - B \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} \cdot t) \right) + \frac{k_{necks}}{I_y} \cdot \left(A \cdot \sin(\Omega_{Fa} \cdot t) + B \cdot \cos(\Omega_{Fa} \cdot t) \right)$$

Rearrange

$$\left(-A_2 \cdot \Omega_{Fa}^2 - \frac{k_{damp}}{I_y} \cdot B_2 \cdot \Omega_{Fa} + \frac{k_{necks}}{I_y} \cdot A_2 \right) \cdot \sin(\Omega_{Fa} \cdot t) + \left(-B_2 \cdot \Omega_{Fa}^2 + \frac{k_{damp}}{I_y} \cdot A_2 \cdot \Omega_{Fa} + \frac{k_{necks}}{I_y} \cdot B_2 \right) \cdot \cos(\Omega_{Fa} \cdot t) = \frac{\left(m_{head} \cdot g \cdot d_{CGz} \right) \cdot \sin(\theta_k) - \left(m_{head} \cdot g \cdot d_{CGx} \right) \cdot \cos(\theta_k)}{I_y}$$

$$-A_2 \cdot \Omega_{Fa}^2 - \frac{k_{damp}}{I_y} \cdot B_2 \cdot \Omega_{Fa} + \frac{k_{necks}}{I_y} \cdot A_2 = \left(\frac{m_{head} \cdot g \cdot d_{CGz}}{I_y} \right)$$

$$(k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot A_2 - k_{\text{damp}} \cdot \Omega_F \cdot B_2 = m_{\text{head}} \cdot g \cdot d_{\text{CGz}}$$

$$-B_2 \cdot I_y \cdot \Omega_F^2 + k_{\text{damp}} \cdot A_2 \cdot \Omega_F + k_{\text{necks}} \cdot B_2 = -m_{\text{head}} \cdot g \cdot d_{\text{CGx}}$$

$$(k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot B_2 + k_{\text{damp}} \cdot \Omega_F \cdot A_2 = -m_{\text{head}} \cdot g \cdot d_{\text{CGx}}$$

$$B_2 = \frac{-m_{\text{head}} \cdot g \cdot d_{\text{CGx}} - k_{\text{damp}} \cdot \Omega_F \cdot A_2}{(k_{\text{necks}} - I_y \cdot \Omega_F^2)}$$

$$(k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot A_2 - k_{\text{damp}} \cdot \Omega_F \cdot \left(\frac{-m_{\text{head}} \cdot g \cdot d_{\text{CGx}} - k_{\text{damp}} \cdot \Omega_F \cdot A_2}{k_{\text{necks}} - I_y \cdot \Omega_F^2} \right) = m_{\text{head}} \cdot g \cdot d_{\text{CGz}}$$

$$(k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot A_2 + k_{\text{damp}} \cdot \Omega_F \cdot m_{\text{head}} \cdot g \cdot d_{\text{CGx}} + (k_{\text{damp}} \cdot \Omega_F)^2 \cdot A_2 = (k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot (m_{\text{head}} \cdot g \cdot d_{\text{CGz}})$$

$$\left[(k_{\text{necks}} - I_y \cdot \Omega_F^2)^2 + (k_{\text{damp}} \cdot \Omega_F)^2 \right] \cdot A_2 + k_{\text{damp}} \cdot \Omega_F \cdot m_{\text{head}} \cdot g \cdot d_{\text{CGx}} = (k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot (m_{\text{head}} \cdot g \cdot d_{\text{CGz}})$$

$$A_2 = \frac{(k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot (m_{\text{head}} \cdot g \cdot d_{\text{CGz}}) - k_{\text{damp}} \cdot \Omega_F \cdot m_{\text{head}} \cdot g \cdot d_{\text{CGx}}}{\left[(k_{\text{necks}} - I_y \cdot \Omega_F^2)^2 + (k_{\text{damp}} \cdot \Omega_F)^2 \right]} = 0.035$$

$$B_2 = \frac{-m_{\text{head}} \cdot g \cdot d_{\text{CGx}} - k_{\text{damp}} \cdot \Omega_F \cdot A_2}{k_{\text{necks}} - I_y \cdot \Omega_F^2} = 0.017$$

Solving for c.3 and c.4 using initial conditions

$$\theta_{\text{aI}}(t_a) = c_3 \cdot e^{r_1(t_a)} + c_4 \cdot e^{r_2(t_a)} + A_2 \cdot \sin[\Omega_F(t_a)] + B_2 \cdot \cos[\Omega_F(t_a)]$$

$$\theta_{\text{aI}}(t_I) = c_3 \cdot e^{r_1(t_I)} + c_4 \cdot e^{r_2(t_I)} + A_2 \cdot \sin[\Omega_F(t_I)] + B_2 \cdot \cos[\Omega_F(t_I)] = \theta_{\text{EI}}$$

$$\omega_{\text{aI}}(t_a) = c_3 \cdot r_1 \cdot e^{r_1(t_a)} + c_4 \cdot r_2 \cdot e^{r_2(t_a)} + A_2 \cdot \Omega_F \cdot \cos[\Omega_F(t_a)] - B_2 \cdot \Omega_F \cdot \sin[\Omega_F(t_a)]$$

$$\omega_{\text{aI}}(t_I) = c_3 \cdot r_1 \cdot e^{r_1(t_I)} + c_4 \cdot r_2 \cdot e^{r_2(t_I)} + A_2 \cdot \Omega_F \cdot \cos[\Omega_F(t_I)] - B_2 \cdot \Omega_F \cdot \sin[\Omega_F(t_I)] = \omega_{\text{EI}}$$

$$c_3 = \frac{\theta_{\text{EI}} - A_2 \cdot \sin[\Omega_F(t_I)] - B_2 \cdot \cos[\Omega_F(t_I)] - c_4 \cdot e^{r_2(t_I)}}{e^{r_1(t_I)}}$$

$$c_3 = \frac{\omega_{\text{EI}} - A_2 \cdot \Omega_F \cdot \cos[\Omega_F(t_I)] + B_2 \cdot \Omega_F \cdot \sin[\Omega_F(t_I)] - c_4 \cdot r_2 \cdot e^{r_2(t_I)}}{r_1 \cdot e^{r_1(t_I)}}$$

$$\frac{\omega_{\text{EI}} - A_2 \cdot \Omega_F \cdot \cos[\Omega_F(t_I)] + B_2 \cdot \Omega_F \cdot \sin[\Omega_F(t_I)] - c_4 \cdot r_2 \cdot e^{r_2(t_I)}}{r_1} = \theta_{\text{EI}} - A_2 \cdot \sin[\Omega_F(t_I)] - B_2 \cdot \cos[\Omega_F(t_I)] - c_4 \cdot e^{r_2(t_I)}$$

$$\omega_{\text{EI}} - A_2 \cdot \Omega_F \cdot \cos[\Omega_F(t_I)] + B_2 \cdot \Omega_F \cdot \sin[\Omega_F(t_I)] - c_4 \cdot r_2 \cdot e^{r_2(t_I)} = r_1 \cdot \theta_{\text{EI}} - r_1 \cdot A_2 \cdot \sin[\Omega_F(t_I)] - r_1 \cdot B_2 \cdot \cos[\Omega_F(t_I)] - c_4 \cdot r_1 \cdot e^{r_2(t_I)}$$

$$-c_4 \cdot r_2 \cdot e^{r_2(t_I)} + c_4 \cdot r_1 \cdot e^{r_2(t_I)} = r_1 \cdot \theta_{\text{EI}} - r_1 \cdot A_2 \cdot \sin[\Omega_F(t_I)] - r_1 \cdot B_2 \cdot \cos[\Omega_F(t_I)] - [\omega_{\text{EI}} - A_2 \cdot \Omega_F \cdot \cos[\Omega_F(t_I)] + B_2 \cdot \Omega_F \cdot \sin[\Omega_F(t_I)]]$$

$$\alpha_{\text{al}}(t_1) = r_1^2 \cdot \theta_{\text{EI}} - r_1^2 \cdot A_2 \cdot \sin[\Omega_{\text{Fa}}(t_1)] - r_1^2 \cdot B_2 \cdot \cos[\Omega_{\text{Fa}}(t_1)] - r_1^2 \cdot c_4 \cdot e^{r_2(t_1)} + c_4 \cdot r_2^2 \cdot e^{r_2(t_1)} - A_2 \cdot \Omega_{\text{Fa}}^2 \cdot \sin[\Omega_{\text{Fa}}(t_1)] - B_2 \cdot \Omega_{\text{Fa}}^2 \cdot \cos[\Omega_{\text{Fa}}(t_1)] = \alpha_{\text{EI}}$$


$$-r_1^2 \cdot c_4 \cdot e^{r_2(t_1)} + c_4 \cdot r_2^2 \cdot e^{r_2(t_1)} = \alpha_{\text{EI}} + A_2 \cdot \Omega_{\text{Fa}}^2 \cdot \sin[\Omega_{\text{Fa}}(t_1)] + B_2 \cdot \Omega_{\text{Fa}}^2 \cdot \cos[\Omega_{\text{Fa}}(t_1)] - r_1^2 \cdot \theta_{\text{EI}} + r_1^2 \cdot A_2 \cdot \sin[\Omega_{\text{Fa}}(t_1)] + r_1^2 \cdot B_2 \cdot \cos[\Omega_{\text{Fa}}(t_1)]$$

$$c_4 := \frac{\alpha_{\text{EI}} + A_2 \cdot \Omega_{\text{Fa}}^2 \cdot \sin[\Omega_{\text{Fa}}(t_1)] + B_2 \cdot \Omega_{\text{Fa}}^2 \cdot \cos[\Omega_{\text{Fa}}(t_1)] - r_1^2 \cdot \theta_{\text{EI}} + r_1^2 \cdot A_2 \cdot \sin[\Omega_{\text{Fa}}(t_1)] + r_1^2 \cdot B_2 \cdot \cos[\Omega_{\text{Fa}}(t_1)]}{r_2^2 \cdot e^{r_2(t_1)} - r_1^2 \cdot e^{r_2(t_1)}} = 0.086$$

$$c_3 := \frac{\theta_{\text{EI}} - A_2 \cdot \sin[\Omega_{\text{Fa}}(t_1)] - B_2 \cdot \cos[\Omega_{\text{Fa}}(t_1)] - c_4 \cdot e^{r_2(t_1)}}{e^{r_1(t_1)}} = -0.183$$

Determining at what time head returns to zero

$$\theta_{\text{al}}(t_a) := c_3 \cdot e^{r_1(t_a)} + c_4 \cdot e^{r_2(t_a)} + A_2 \cdot \sin[\Omega_{\text{Fa}}(t_a)] + B_2 \cdot \cos[\Omega_{\text{Fa}}(t_a)]$$

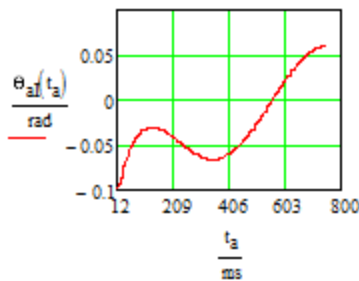

$$\theta_{\text{ral}} := \theta_{\text{al}}(t_1) = -5.551 \text{ deg} \quad \theta_{\text{EI}} = -5.551 \text{ deg}$$

$$\theta_{\text{al}}(502\text{s}) = -1.489 \text{ deg}$$

$$\theta_{\text{al}}(2\text{ms}) = -3.633 \text{ deg}$$


Guess $t_g := 350\text{ms}$

Given

$$\left[c_3 \cdot e^{r_1(t_g)} + c_4 \cdot e^{r_2(t_g)} + A_2 \cdot \sin[\Omega_{\text{Fa}}(t_g)] + B_2 \cdot \cos[\Omega_{\text{Fa}}(t_g)] = 0 \text{ deg} \right]$$

Find(t_g) = 8.727 s


$$\omega_{\text{al}}(t_a) := c_3 \cdot r_1 \cdot e^{r_1(t_a)} + c_4 \cdot r_2 \cdot e^{r_2(t_a)} + A_2 \cdot \Omega_{\text{Fa}} \cdot \cos[\Omega_{\text{Fa}}(t_a)] - B_2 \cdot \Omega_{\text{Fa}} \cdot \sin[\Omega_{\text{Fa}}(t_a)]$$

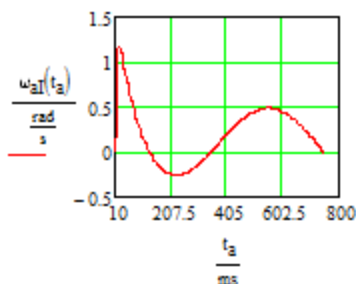

$$\omega_{\text{EI}} = -4.783 \frac{\text{rad}}{\text{sec}}$$

$$\omega_{\text{ral}} := \omega_{\text{al}}(t_1) = 0.018 \frac{1}{\text{s}} \cdot \text{rad}$$

$$\alpha_{al}(t_a) := c_3 \cdot r_1 \cdot 2 \cdot e^{-r_1 \cdot t_a} + c_4 \cdot r_2 \cdot 2 \cdot e^{-r_2 \cdot t_a} - A_2 \cdot \Omega_{FA}^2 \cdot \sin[\Omega_{FA} \cdot (t_a)] - B_2 \cdot \Omega_{FA}^2 \cdot \cos[\Omega_{FA} \cdot (t_a)]$$

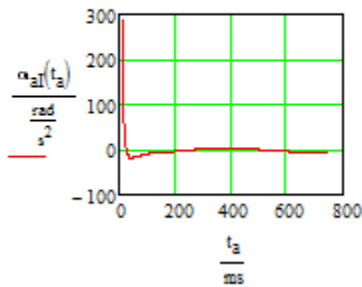

$$\alpha_{EI} = 289.303 \frac{1}{s^2}$$


$$\alpha_{al}(t_1) = 289.303 \frac{1}{s^2}$$

$$\alpha_{constant} := \alpha_{al}(t_1) - \alpha_{EI} = 0 \frac{1}{s^2}$$


Before and After Impulse:

$$t_1 := 0s, .001s \dots 5s$$

$$\theta(t_t) := \begin{cases} c_1 \cdot e^{-r_1 \cdot t_t} + c_2 \cdot e^{-r_2 \cdot t_t} + A_c \cdot \sin(\Omega_F \cdot t_t) + B_c \cdot \cos(\Omega_F \cdot t_t) & \text{if } 0s \leq t_t \leq t_1 \\ c_3 \cdot e^{-r_1 \cdot (t_t)} + c_4 \cdot e^{-r_2 \cdot (t_t)} + A_2 \cdot \sin[\Omega_{FA} \cdot (t_t)] + B_2 \cdot \cos[\Omega_{FA} \cdot (t_t)] & \text{if } t_1 < t_t \leq .5s \end{cases}$$




$$\omega(t_t) := \begin{cases} \left(c_1 \cdot r_1 \cdot e^{-r_1 \cdot t_t} + c_2 \cdot r_2 \cdot e^{-r_2 \cdot t_t} + A_c \cdot \Omega_F \cdot \cos(\Omega_F \cdot t_t) - B_c \cdot \Omega_F \cdot \sin(\Omega_F \cdot t_t) \right) & \text{if } 0s \leq t_t \leq t_1 \\ \left(c_3 \cdot r_1 \cdot e^{-r_1 \cdot t_t} + c_4 \cdot r_2 \cdot e^{-r_2 \cdot t_t} + A_2 \cdot \Omega_{FA} \cdot \cos(\Omega_{FA} \cdot t_t) - B_2 \cdot \Omega_{FA} \cdot \sin(\Omega_{FA} \cdot t_t) \right) & \text{if } t_1 < t_t \leq .5s \end{cases}$$



$$\omega(t_1) = -4.783 \frac{1}{s}$$

$$\alpha(t_t) := \begin{cases} \left(c_1 \cdot r_1^2 \cdot e^{-r_1 \cdot t_t} + c_2 \cdot r_2^2 \cdot e^{-r_2 \cdot t_t} - A_c \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t_t) - B_c \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t_t) \right) & \text{if } 0 \text{ms} \leq t_t \leq t_f \\ \left[c_3 \cdot r_1^2 \cdot e^{-r_1 \cdot (t_t)} + c_4 \cdot r_2^2 \cdot e^{-r_2 \cdot (t_t)} - A_2 \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa} \cdot (t_t)] - B_2 \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa} \cdot (t_t)] \right] & \text{if } t_f < t_t \leq .5\text{s} \end{cases}$$

$$a_{\alpha}(t_t) := \alpha(t_t) \cdot d_{CG} \quad \alpha(0\text{ms}) = 1.933 \times 10^3 \frac{1}{\text{s}^2} \cdot \text{rad}$$

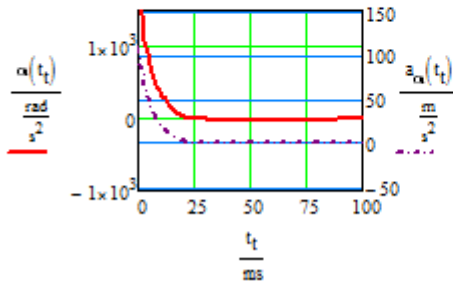

$$a_{\alpha}(0\text{ms}) = 109.239 \frac{\text{m}}{\text{s}^2}$$


$$\frac{\text{Pressure} \cdot \text{Area}_{\text{Bore}}}{m_{\text{rod}} + m_{\text{head}}} = 106.31 \frac{\text{m}}{\text{s}^2}$$

$$\frac{93.021 \frac{\text{m}}{\text{s}^2}}{d_{CGz}} = 1.691 \times 10^3 \frac{1}{\text{s}^2}$$

Calculating HIP

HIP


$$a_x(t_t) := \alpha(t_t) \cdot d_{CGz} \quad a_z(t_t) := \alpha(t_t) \cdot d_{CGx}$$

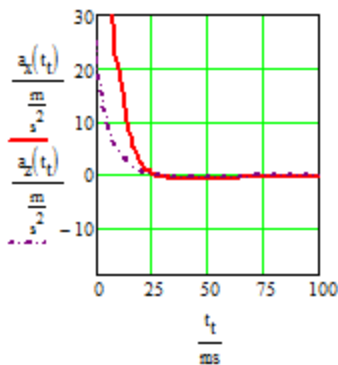

$$a_{x\text{max}} := a_x(0\text{ms}) = 106.31 \frac{\text{m}}{\text{s}^2}$$

$$a_{z\text{max}} := a_z(0\text{ms}) = 25.128 \frac{\text{m}}{\text{s}^2}$$

$$\text{HIP}(t_t) := m_{\text{head}} \cdot a_x(t_t) \cdot \int_{0\text{ms}}^{25\text{ms}} a_x(t_t) dt_t + m_{\text{head}} \cdot a_z(t_t) \cdot \int_{0\text{ms}}^{25\text{ms}} a_z(t_t) dt_t + I_y \cdot \alpha(t_t) \cdot \int_{0\text{ms}}^{25\text{ms}} \alpha(t_t) dt_t$$

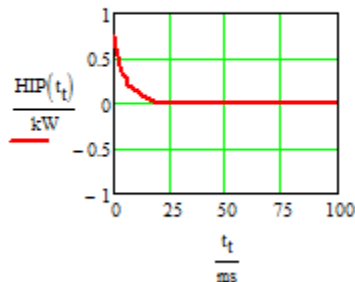

$$\text{HIP}(0\text{ms}) = 0.774 \text{ kW}$$

The HIP was found to be too low from these calculations.

9.2-2: Calculations; Using Impulse Equals Change in Momentum to Find Force

Using Impulse equals change in momentum to calculate force

Average Weight of Professional Hockey Player	$W_p := 210\text{ lbf} = 934.127\text{ N}$	$W_{\text{equipment}} := 30\text{ lbf}$
	$W_{\text{hp}} := W_p + W_{\text{equipment}} = 1.068 \times 10^3\text{ N}$	
Speed of fast skater	$v_{\text{hp}} := 30\text{ mph} = 13.411\frac{\text{m}}{\text{s}}$	Mass $m_{\text{hp}} := \frac{W_{\text{hp}}}{g} = 108.862\text{ kg}$
Average acceleration of an elite hockey player trying to speed up as fast as possible	$A_{\text{hps}} := 4.375\frac{\text{m}}{\text{s}^2}$	
Typical Duration of Impact	$t_I := .012\text{ s}$	}Article stated hockey collision were all under 15ms
Impulse	$\text{Impulse} = F_I \cdot t_I$	Impulse equals change in momentum $m_{\text{hp}} \cdot \Delta v = F_I \cdot t_I$
Change in Momentum	$(m_{1i} \cdot v_{1i} + m_{2i} \cdot v_{2i}) = m_{1f} \cdot v_{1f} + m_{2f} \cdot v_{2f}$	
	$m_{1i} = m_{1f} = m_{2i} = m_{2f} = m_{\text{hp}}$	
	$m_{\text{hp}} \cdot (v_{1i} + v_{2i}) = m_{\text{hp}} \cdot (v_{1f} + v_{2f})$	Energy $E_I := \frac{1}{2} m_{\text{hp}} \cdot v_{\text{hp}}^2 = 9.79 \times 10^3\text{ J}$
Worst Case scenario both players speeding at top speeds directly into eachother, one comes to complete stop:		
	$v_{1i} = -v_{2i} = v_{\text{hp}}$	$v_{1f} := 0\frac{\text{m}}{\text{s}}$
	$F_I := \frac{m_{\text{hp}} \cdot (v_{\text{hp}} - v_{1f})}{t_I} = 1.217 \times 10^5\text{ N}$	+

Complimentary Solution (Left side of equation)

$$I_y \cdot \frac{d^2}{dt^2} \theta_k + k_{\text{damp}} \cdot \frac{d}{dt} \theta_k + k_{\text{necks}} \cdot \theta_k$$

$$\frac{d^2}{dt^2} \theta_k + \frac{k_{\text{damp}}}{I_y} \cdot \frac{d}{dt} \theta_k + \frac{k_{\text{necks}}}{I_y} \cdot \theta_k = 0$$

$$r_1 = \frac{-\frac{k_{\text{damp}}}{I_y} + \sqrt{\left(\frac{k_{\text{damp}}}{I_y}\right)^2 - 4 \cdot \frac{k_{\text{necks}}}{I_y}}}{2} = -10.515 \frac{1}{s}$$

$$r_2 = \frac{-\frac{k_{\text{damp}}}{I_y} - \sqrt{\left(\frac{k_{\text{damp}}}{I_y}\right)^2 - 4 \cdot \frac{k_{\text{necks}}}{I_y}}}{2} = -204.18 \frac{1}{s}$$

$$\theta_1(t) = c_1 \cdot e^{r_1 \cdot t} + c_2 \cdot e^{r_2 \cdot t}$$

Particular Solution (right side of equation)

$$\left[(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right] \cdot \sin(\theta_k) - (\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) \cdot \cos(\theta_k)$$

Guess

$$A \cdot \sin(\Omega_F \cdot t) + B \cdot \cos(\Omega_F \cdot t)$$

$$\omega_k(t) = A \cdot \Omega_F \cdot \cos(\Omega_F \cdot t) - B \cdot \Omega_F \cdot \sin(\Omega_F \cdot t) \quad +$$

$$\alpha_k(t) = -A \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t)$$

$$\frac{d^2}{dt^2} \theta_k + \frac{k_{\text{damp}}}{I_y} \cdot \frac{d}{dt} \theta_k + \frac{k_{\text{necks}}}{I_y} \cdot \theta_k = -A \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t) + \frac{k_{\text{damp}}}{I_y} \cdot (A \cdot \Omega_F \cdot \cos(\Omega_F \cdot t) - B \cdot \Omega_F \cdot \sin(\Omega_F \cdot t)) + \frac{k_{\text{necks}}}{I_y} \cdot (A \cdot \sin(\Omega_F \cdot t) + B \cdot \cos(\Omega_F \cdot t))$$

Rearrange

$$\left(-A \cdot \Omega_F^2 - \frac{k_{\text{damp}}}{I_y} \cdot B \cdot \Omega_F + \frac{k_{\text{necks}}}{I_y} \cdot A \right) \cdot \sin(\Omega_F \cdot t) + \left(-B \cdot \Omega_F^2 + \frac{k_{\text{damp}}}{I_y} \cdot A \cdot \Omega_F + \frac{k_{\text{necks}}}{I_y} \cdot B \right) \cdot \cos(\Omega_F \cdot t) = \frac{\left(F_{\Gamma} \cdot d_{\text{CGx}} \dots \right) \cdot \sin(\theta_k) - \left(F_{\Gamma} \cdot d_{\text{CGz}} \dots \right) \cdot \cos(\theta_k)}{I_y}$$

$$-A \cdot \Omega_F^2 - \frac{k_{damp}}{I_y} \cdot B \cdot \Omega_F + \frac{k_{necks}}{I_y} \cdot A = \left[\frac{(F_I \cdot d_{CGx}) + m_{head} \cdot g \cdot d_{CGz}}{I_y} \right]$$

$$-B \cdot \Omega_F^2 + \frac{k_{damp}}{I_y} \cdot A \cdot \Omega_F + \frac{k_{necks}}{I_y} \cdot B = \frac{-F_I \cdot d_{CGz} - m_{head} \cdot g \cdot d_{CGx}}{I_y}$$

$$\left(\frac{k_{necks}}{I_y} - \Omega_F^2 \right) \cdot B + \frac{k_{damp}}{I_y} \cdot \Omega_F \cdot A = \frac{-F_I \cdot d_{CGz} - m_{head} \cdot g \cdot d_{CGx}}{I_y}$$

$$\left(\frac{k_{necks}}{I_y} - \Omega_F^2 \right) \cdot A - \frac{k_{damp}}{I_y} \cdot \Omega_F \cdot B = \frac{[(F_I \cdot d_{CGx}) + m_{head} \cdot g \cdot d_{CGz}]}{I_y}$$

$$(k_{necks} - I_y \cdot \Omega_F^2) \cdot A - k_{damp} \cdot \Omega_F \cdot B = [(F_I \cdot d_{CGx}) + m_{head} \cdot g \cdot d_{CGz}]$$

$$B_c = \frac{[(F_I \cdot d_{CGx}) + m_{head} \cdot g \cdot d_{CGz}] - (k_{necks} - I_y \cdot \Omega_F^2) \cdot A}{-(k_{damp} \cdot \Omega_F)}$$

$$(k_{necks} - I_y \cdot \Omega_F^2) \cdot \left[\frac{[(F_I \cdot d_{CGx}) + m_{head} \cdot g \cdot d_{CGz}] - (k_{necks} - I_y \cdot \Omega_F^2) \cdot A}{-(k_{damp} \cdot \Omega_F)} \right] + k_{damp} \cdot \Omega_F \cdot A = -F_I \cdot d_{CGz} - m_{head} \cdot g \cdot d_{CGx}$$

$$(k_{necks} - I_y \cdot \Omega_F^2) \cdot (-F_I \cdot d_{CGx} + m_{head} \cdot g \cdot d_{CGz}) - (k_{necks} - I_y \cdot \Omega_F^2)^2 \cdot A - (k_{damp} \cdot \Omega_F)^2 \cdot A = -(k_{damp} \cdot \Omega_F) \cdot (-F_I \cdot d_{CGz} - m_{head} \cdot g \cdot d_{CGx})$$

$$-(k_{necks} - I_y \cdot \Omega_F^2)^2 \cdot A - (k_{damp} \cdot \Omega_F)^2 \cdot A = (k_{damp} \cdot \Omega_F) \cdot (F_I \cdot d_{CGz} + m_{head} \cdot g \cdot d_{CGx}) - (k_{necks} - I_y \cdot \Omega_F^2) \cdot (F_I \cdot d_{CGx} + m_{head} \cdot g \cdot d_{CGz})$$

$$A_c \cdot \left[-(k_{necks} - I_y \cdot \Omega_F^2)^2 - (k_{damp} \cdot \Omega_F)^2 \right] = (k_{damp} \cdot \Omega_F) \cdot (\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{CGz} + m_{head} \cdot g \cdot d_{CGx}) - (k_{necks} - I_y \cdot \Omega_F^2) \cdot (\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{CGx} + m_{head} \cdot g \cdot d_{CGz})$$

$$A_c := \frac{(k_{damp} \cdot \Omega_F) \cdot (F_I \cdot d_{CGz} + m_{head} \cdot g \cdot d_{CGx}) - (k_{necks} - I_y \cdot \Omega_F^2) \cdot (F_I \cdot d_{CGx} + m_{head} \cdot g \cdot d_{CGz})}{-\left[(k_{necks} - I_y \cdot \Omega_F^2)^2 + (k_{damp} \cdot \Omega_F)^2 \right]} = -41.032$$

$$B_c := \frac{[(F_I \cdot d_{CGx}) + m_{head} \cdot g \cdot d_{CGz}] - (k_{necks} - I_y \cdot \Omega_F^2) \cdot A_c}{-(k_{damp} \cdot \Omega_F)} = -18.504$$

Solving for c.1 and c.2 using initial values

$$\theta_I(t) = \left(c_1 \cdot e^{r_1 \cdot t} + c_2 \cdot e^{r_2 \cdot t} \right) + (A_c \cdot \sin(\Omega_F \cdot t) + B_c \cdot \cos(\Omega_F \cdot t))$$

$$\theta_I(0\text{ms}) = (c_1 + c_2) + (B_c \cdot \cos(0)) = 0 \text{deg} \quad c_1 = -(B_c \cdot \cos(0)) - c_2$$

$$\alpha_a(t) = c_1 \cdot r_1^2 \cdot e^{r_1 \cdot t} + c_2 \cdot r_2^2 \cdot e^{r_2 \cdot t} - A_c \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B_c \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t)$$

$$\alpha_a(0ms) = c_1 \cdot r_1^2 + c_2 \cdot r_2^2 - B_c \cdot \Omega_F^2 = \alpha_{hi}$$

$$[-(B_c \cdot \cos(0)) - c_2] \cdot r_1^2 + c_2 \cdot r_2^2 - B_c \cdot \Omega_F^2 \cdot \cos(0) = \alpha_{hi}$$


$$-r_1^2 \cdot (B_c \cdot \cos(0)) - r_1^2 \cdot c_2 + c_2 \cdot r_2^2 = \alpha_{hi} + B_c \cdot \Omega_F^2$$

$$c_2 := \frac{\alpha_{hi} + B_c \cdot \Omega_F^2 + r_1^2 \cdot (B_c)}{(r_2^2 - r_1^2)} = 11.426$$

$$c_1 := -B_c - c_2 = 7.078$$

Complete Solution

$$\theta_I(t) := (c_1 \cdot e^{r_1 \cdot t} + c_2 \cdot e^{r_2 \cdot t}) + (A_c \cdot \sin(\Omega_F \cdot t) + B_c \cdot \cos(\Omega_F \cdot t))$$

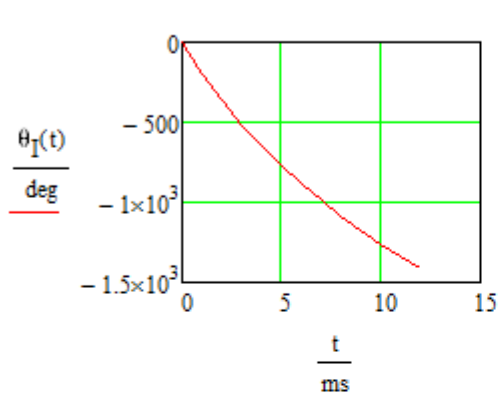


$$\theta_I(0ms) = 0$$

$$\theta_{EI} := \theta_I(t_I) = -1.406 \times 10^3 \cdot \text{deg}$$

Distance cylinder is in contact with head

$$d_{EI} := \sqrt{2 \cdot d_{CG}^2 - 2 \cdot d_{CG}^2 \cdot \cos(\theta_{EI})} = 1.285 \cdot \text{in}$$

$$\omega_I(t) := c_1 \cdot r_1 \cdot e^{r_1 \cdot t} + c_2 \cdot r_2 \cdot e^{r_2 \cdot t} + A_c \cdot \Omega_F \cdot \cos(\Omega_F \cdot t) - B_c \cdot \Omega_F \cdot \sin(\Omega_F \cdot t)$$

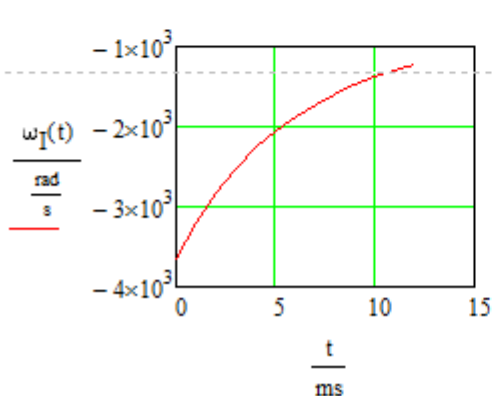


$$\omega_I(0ms) = -3.638 \times 10^3 \frac{1}{s}$$

$$\omega_{EI} := \omega_I(t_I) = -1.223 \times 10^3 \frac{\text{rad}}{\text{sec}}$$

$$\omega_{hi} = -174.792 \frac{1}{s}$$

$$\alpha_I(t) := c_1 \cdot r_1^2 \cdot e^{r_1 \cdot t} + c_2 \cdot r_2^2 \cdot e^{r_2 \cdot t} - A_c \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B_c \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t)$$

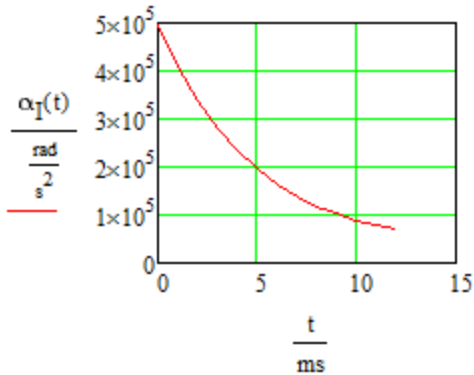

$$\alpha_{EI} := \alpha_I(t_I) = 7.038 \times 10^4 \cdot \frac{\text{rad}}{\text{s}^2}$$

$$\alpha_I(0\text{ms}) = 4.938 \times 10^5 \frac{1}{\text{s}^2}$$

$$\alpha_{hi} = 4.938 \times 10^5 \frac{1}{\text{s}^2}$$

After Cylinder leaves contact with head/helmet

Sum of Moments After Impulse

$$M_{OCa} = (m_{\text{head}} \cdot g \cdot d_{CGz}) \cdot \sin(\theta) - (m_{\text{head}} \cdot g \cdot d_{CGx}) \cdot \cos(\theta) - k_{\text{necks}} \cdot \theta - k_{\text{damp}} \cdot \frac{d}{dt} \theta = I_y \left(\frac{d^2}{dt^2} \theta \right)$$

Complimentary Solution

$$\frac{d^2}{dt^2} \theta_a + \frac{k_{\text{damp}}}{I_y} \cdot \frac{d}{dt} \theta_a + \frac{k_{\text{necks}}}{I_y} \cdot \theta_a = \frac{(m_{\text{head}} \cdot g \cdot d_{CGz}) \cdot \sin(\Omega_{Fa} \cdot t_a) - (m_{\text{head}} \cdot g \cdot d_{CGx}) \cdot \cos(\Omega_{Fa} \cdot t_a)}{I_y}$$

$$\theta_{al}(t_a) = c_3 \cdot e^{r_1(t_a)} + c_4 \cdot e^{r_2(t_a)}$$

Particular Solution

Guess

$$A_2 \cdot \sin(\Omega_{Fa} \cdot t) + B_2 \cdot \cos(\Omega_{Fa} \cdot t)$$

$$\omega_k(t) = A_2 \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} \cdot t) - B_2 \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} \cdot t)$$

$$\alpha_k(t) = -A_2 \cdot \Omega_{Fa}^2 \cdot \sin(\Omega_{Fa} \cdot t) - B_2 \cdot \Omega_{Fa}^2 \cdot \cos(\Omega_{Fa} \cdot t)$$

$$\frac{d^2}{dt^2} \theta_k + \frac{k_{\text{damp}}}{I_y} \cdot \frac{d}{dt} \theta_k + \frac{k_{\text{necks}}}{I_y} \cdot \theta_k = -A \cdot \Omega_{Fa}^2 \cdot \sin(\Omega_{Fa} \cdot t) - B \cdot \Omega_{Fa}^2 \cdot \cos(\Omega_{Fa} \cdot t) + \frac{k_{\text{damp}}}{I_y} \cdot (A \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} \cdot t) - B \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} \cdot t)) + \frac{k_{\text{necks}}}{I_y} \cdot (A \cdot \sin(\Omega_{Fa} \cdot t) + B \cdot \cos(\Omega_{Fa} \cdot t))$$

Rearrange

$$\left(-A_2 \cdot \Omega_{Fa}^2 - \frac{k_{\text{damp}}}{I_y} \cdot B_2 \cdot \Omega_{Fa} + \frac{k_{\text{necks}}}{I_y} \cdot A_2 \right) \cdot \sin(\Omega_{Fa} \cdot t) + \left(-B_2 \cdot \Omega_{Fa}^2 + \frac{k_{\text{damp}}}{I_y} \cdot A_2 \cdot \Omega_{Fa} + \frac{k_{\text{necks}}}{I_y} \cdot B_2 \right) \cdot \cos(\Omega_{Fa} \cdot t) = \frac{(m_{\text{head}} \cdot g \cdot d_{CGz}) \cdot \sin(\theta_k) - (m_{\text{head}} \cdot g \cdot d_{CGx}) \cdot \cos(\theta_k)}{I_y}$$

$$A_2 := \frac{(k_{\text{necks}} - I_y \cdot \Omega_{Fa}^2) \cdot (m_{\text{head}} \cdot g \cdot d_{CGz}) - k_{\text{damp}} \cdot \Omega_{Fa} \cdot m_{\text{head}} \cdot g \cdot d_{CGx}}{\left[(k_{\text{necks}} - I_y \cdot \Omega_{Fa}^2)^2 + (k_{\text{damp}} \cdot \Omega_{Fa})^2 \right]} = -2.35 \times 10^{-5}$$

$$B_2 := \frac{-m_{\text{head}} \cdot g \cdot d_{CGx} - k_{\text{damp}} \cdot \Omega_{Fa} \cdot A_2}{k_{\text{necks}} - I_y \cdot \Omega_{Fa}^2} = 8.227 \times 10^{-6}$$

$$-A_2 \cdot \Omega_{Fa}^2 - \frac{k_{damp}}{I_y} \cdot B_2 \cdot \Omega_{Fa} + \frac{k_{necks}}{I_y} \cdot A_2 = \left(\frac{m_{head} \cdot g \cdot d_{CGz}}{I_y} \right)$$

+

$$-B_2 \cdot \Omega_{Fa}^2 + \frac{k_{damp}}{I_y} \cdot A_2 \cdot \Omega_{Fa} + \frac{k_{necks}}{I_y} \cdot B_2 = \left(\frac{-m_{head} \cdot g \cdot d_{CGx}}{I_y} \right)$$

$$-A_2 \cdot I_y \cdot \Omega_F^2 - k_{damp} \cdot B_2 \cdot \Omega_F + k_{necks} \cdot A_2 = m_{head} \cdot g \cdot d_{CGz}$$

$$\left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot A_2 - k_{damp} \cdot \Omega_F \cdot B_2 = m_{head} \cdot g \cdot d_{CGz}$$

$$-B_2 \cdot I_y \cdot \Omega_F^2 + k_{damp} \cdot A_2 \cdot \Omega_F + k_{necks} \cdot B_2 = -m_{head} \cdot g \cdot d_{CGx}$$

$$\left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot B_2 + k_{damp} \cdot \Omega_F \cdot A_2 = -m_{head} \cdot g \cdot d_{CGx}$$

$$B_2 = \frac{-m_{head} \cdot g \cdot d_{CGx} - k_{damp} \cdot \Omega_{Fa} \cdot A_2}{\left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right)}$$

$$\left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right) \cdot A_2 - k_{damp} \cdot \Omega_{Fa} \cdot \left(\frac{-m_{head} \cdot g \cdot d_{CGx} - k_{damp} \cdot \Omega_{Fa} \cdot A_2}{k_{necks} - I_y \cdot \Omega_{Fa}^2} \right) = m_{head} \cdot g \cdot d_{CGz}$$

$$\left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right)^2 \cdot A_2 + k_{damp} \cdot \Omega_{Fa} \cdot m_{head} \cdot g \cdot d_{CGx} + \left(k_{damp} \cdot \Omega_{Fa} \right)^2 \cdot A_2 = \left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right) \cdot \left(m_{head} \cdot g \cdot d_{CGz} \right)$$

$$\left[\left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right)^2 + \left(k_{damp} \cdot \Omega_{Fa} \right)^2 \right] \cdot A_2 + k_{damp} \cdot \Omega_{Fa} \cdot m_{head} \cdot g \cdot d_{CGx} = \left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right) \cdot \left(m_{head} \cdot g \cdot d_{CGz} \right)$$

$$\theta_{aI}(t_a) = c_3 \cdot e^{r_1(t_a)} + c_4 \cdot e^{r_2(t_a)} + A_2 \cdot \sin[\Omega_F(t_a)] + B_2 \cdot \cos[\Omega_F(t_a)]$$

$$\theta_{aI}(t_I) = c_3 \cdot e^{r_1(t_I)} + c_4 \cdot e^{r_2(t_I)} + A_2 \cdot \sin[\Omega_F(t_I)] + B_2 \cdot \cos[\Omega_F(t_I)] = \theta_{EI}$$

$$\omega_{aI}(t_a) = c_3 \cdot r_1 \cdot e^{r_1(t_a)} + c_4 \cdot r_2 \cdot e^{r_2(t_a)} + A_2 \cdot \Omega_F \cdot \cos[\Omega_F(t_a)] - B_2 \cdot \Omega_F \cdot \sin[\Omega_F(t_a)]$$

$$\omega_{aI}(t_I) = c_3 \cdot r_1 \cdot e^{r_1(t_I)} + c_4 \cdot r_2 \cdot e^{r_2(t_I)} + A_2 \cdot \Omega_F \cdot \cos[\Omega_F(t_I)] - B_2 \cdot \Omega_F \cdot \sin[\Omega_F(t_I)] = \omega_{EI}$$

$$c_3 = \frac{\theta_{EI} - A_2 \cdot \sin[\Omega_{Fa}(t_I)] - B_2 \cdot \cos[\Omega_{Fa}(t_I)] - c_4 \cdot e^{r_2(t_I)}}{e^{r_1(t_I)}}$$

$$c_3 = \frac{\omega_{EI} - A_2 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa}(t_I)] + B_2 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa}(t_I)] - c_4 \cdot r_2 \cdot e^{r_2(t_I)}}{r_1 \cdot e^{r_1(t_I)}}$$

$$\frac{\omega_{EI} - A_2 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa}(t_I)] + B_2 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa}(t_I)] - c_4 \cdot r_2 \cdot e^{r_2(t_I)}}{r_1} = \theta_{EI} - A_2 \cdot \sin[\Omega_{Fa}(t_I)] - B_2 \cdot \cos[\Omega_{Fa}(t_I)] - c_4 \cdot e^{r_2(t_I)}$$

$$\omega_{EI} - A_2 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa}(t_I)] + B_2 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa}(t_I)] - c_4 \cdot r_2 \cdot e^{r_2(t_I)} = r_1 \cdot \theta_{EI} - r_1 \cdot A_2 \cdot \sin[\Omega_{Fa}(t_I)] - r_1 \cdot B_2 \cdot \cos[\Omega_{Fa}(t_I)] - c_4 \cdot r_1 \cdot e^{r_2(t_I)}$$

$$-c_4 \cdot r_2 \cdot e^{r_2(t_I)} + c_4 \cdot r_1 \cdot e^{r_2(t_I)} = r_1 \cdot \theta_{EI} - r_1 \cdot A_2 \cdot \sin[\Omega_{Fa}(t_I)] - r_1 \cdot B_2 \cdot \cos[\Omega_{Fa}(t_I)] - [\omega_{EI} - A_2 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa}(t_I)] + B_2 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa}(t_I)]]$$

$$c_4 \left[r_1 \cdot e^{r_2(t_I)} - r_2 \cdot e^{r_2(t_I)} \right] = r_1 \cdot \theta_{EI} - r_1 \cdot A_2 \cdot \sin[\Omega_{Fa}(t_I)] - r_1 \cdot B_2 \cdot \cos[\Omega_{Fa}(t_I)] - [\omega_{EI} - A_2 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa}(t_I)] + B_2 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa}(t_I)]]$$


$$c_4 = \frac{r_1 \cdot \theta_{EI} - r_1 \cdot A_2 \cdot \sin[\Omega_{Fa}(t_I)] - r_1 \cdot B_2 \cdot \cos[\Omega_{Fa}(t_I)] - [\omega_{EI} - A_2 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa}(t_I)] + B_2 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa}(t_I)]]}{\left[r_1 \cdot e^{r_2(t_I)} - r_2 \cdot e^{r_2(t_I)} \right]} = 88.665$$

$$c_3 = \frac{\omega_{EI} - A_2 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa}(t_I)] + B_2 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa}(t_I)] - c_4 \cdot r_2 \cdot e^{r_2(t_I)}}{r_1 \cdot e^{r_1(t_I)}} = -36.527$$

$$\frac{d^2}{dt^2} \theta_k + \frac{k_{damp}}{I_y} \cdot \frac{d}{dt} \theta_k + \frac{k_{necks}}{I_y} \cdot \theta_k = -A \cdot \Omega_{Fa}^2 \cdot \sin(\Omega_{Fa} t) - B \cdot \Omega_{Fa}^2 \cdot \cos(\Omega_{Fa} t) + \frac{k_{damp}}{I_y} \cdot (A \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} t) - B \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} t)) + \frac{k_{necks}}{I_y} \cdot (A \cdot \sin(\Omega_{Fa} t) + B \cdot \cos(\Omega_{Fa} t))$$

Complete Solution

$$\theta_{aI}(t_a) = c_3 \cdot e^{r_1(t_a)} + c_4 \cdot e^{r_2(t_a)} + A_2 \cdot \sin[\Omega_{Fa}(t_a)] + B_2 \cdot \cos[\Omega_{Fa}(t_a)]$$




$$\theta_{raI} := \theta_{aI}(t_I) = -1.406 \times 10^3 \cdot \text{deg} \quad \theta_{EI} = -1.406 \times 10^3 \cdot \text{deg}$$


$$\theta_{aI}(.502s) = -10.673 \cdot \text{deg}$$

$$\theta_{aI}(17ms) = -1.592 \times 10^3 \cdot \text{deg}$$

$$\omega_{aI}(t_a) := c_3 \cdot r_1 \cdot e^{r_1(t_a)} + c_4 \cdot r_2 \cdot e^{r_2(t_a)} + A_2 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa}(t_a)] - B_2 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa}(t_a)]$$

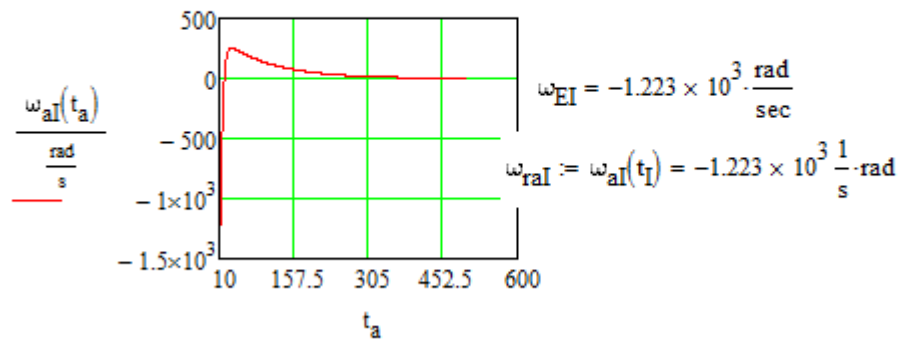


$$\alpha_{aI}(t_a) := c_3 \cdot r_1^2 \cdot e^{r_1(t_a)} + c_4 \cdot r_2^2 \cdot e^{r_2(t_a)} - A_2 \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa}(t_a)] - B_2 \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa}(t_a)]$$

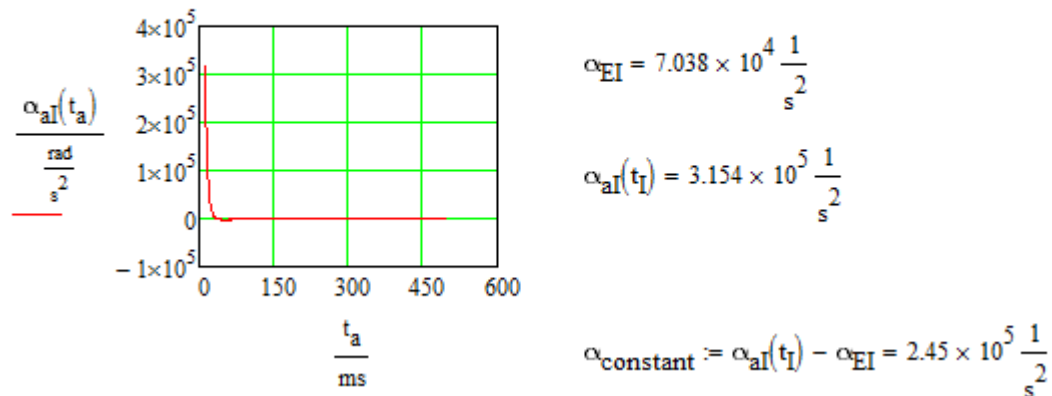


$$t_t := 0s, .001s \dots .5s$$

$$\theta(t_t) := \begin{cases} c_1 \cdot e^{r_1 \cdot t_t} + c_2 \cdot e^{r_2 \cdot t_t} + A_c \cdot \sin(\Omega_F \cdot t_t) + B_c \cdot \cos(\Omega_F \cdot t_t) & \text{if } 0s \leq t_t \leq t_1 \\ c_3 \cdot e^{r_1 \cdot (t_t)} + c_4 \cdot e^{r_2 \cdot (t_t)} + A_2 \cdot \sin[\Omega_{Fa} \cdot (t_t)] + B_2 \cdot \cos[\Omega_{Fa} \cdot (t_t)] & \text{if } t_1 < t_t \leq .5s \end{cases}$$

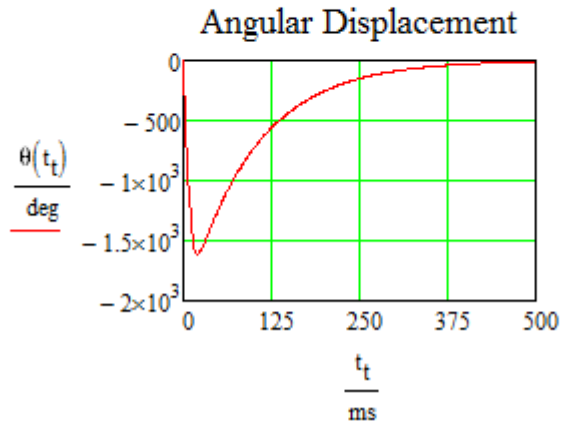

$$\omega(t_t) := \begin{cases} \left(c_1 \cdot r_1 \cdot e^{r_1 \cdot t_t} + c_2 \cdot r_2 \cdot e^{r_2 \cdot t_t} + A_c \cdot \Omega_F \cdot \cos(\Omega_F \cdot t_t) - B_c \cdot \Omega_F \cdot \sin(\Omega_F \cdot t_t) \right) & \text{if } 0s \leq t_t \leq t_1 \\ \left(c_3 \cdot r_1 \cdot e^{r_1 \cdot t_t} + c_4 \cdot r_2 \cdot e^{r_2 \cdot t_t} + A_2 \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} \cdot t_t) - B_2 \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} \cdot t_t) \right) & \text{if } t_1 < t_t \leq .5s \end{cases}$$

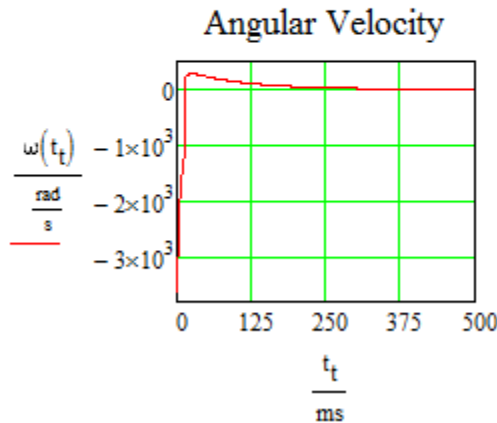

$$\omega(t_1) = -1.223 \times 10^3 \frac{1}{s}$$


$$\omega(0s) = -3.638 \times 10^3 \frac{1}{s}$$

$$+ \alpha(t_t) := \begin{cases} \left(c_1 \cdot r_1^2 \cdot e^{r_1 \cdot t_t} + c_2 \cdot r_2^2 \cdot e^{r_2 \cdot t_t} - A_c \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t_t) - B_c \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t_t) \right) & \text{if } 0 \text{ms} \leq t_t \leq t_I \\ \left[c_3 \cdot r_1^2 \cdot e^{r_1(t_t)} + c_4 \cdot r_2^2 \cdot e^{r_2(t_t)} - A_2 \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa}(t_t)] - B_2 \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa}(t_t)] \right] & \text{if } t_I < t_t \leq .5 \text{s} \end{cases}$$


$$a_{\alpha}(t_t) := \alpha(t_t) \cdot d_{CG}$$

$$\alpha(0 \text{ms}) = 4.938 \times 10^5 \frac{1}{s^2} \cdot \text{rad}$$


$$a_{\alpha}(0 \text{ms}) = 2.791 \times 10^4 \frac{m}{s^2}$$

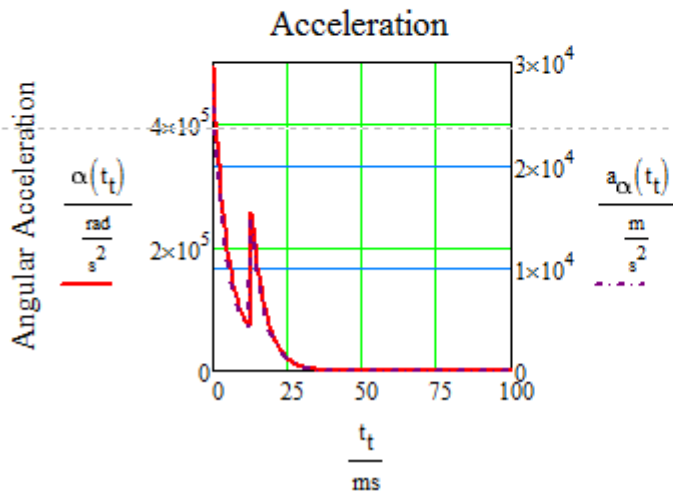

$$\frac{\text{Pressure} \cdot \text{Area}_{\text{Bore}}}{m_{\text{rod}} + m_{\text{head}}} = 2.716 \times 10^4 \frac{m}{s^2}$$

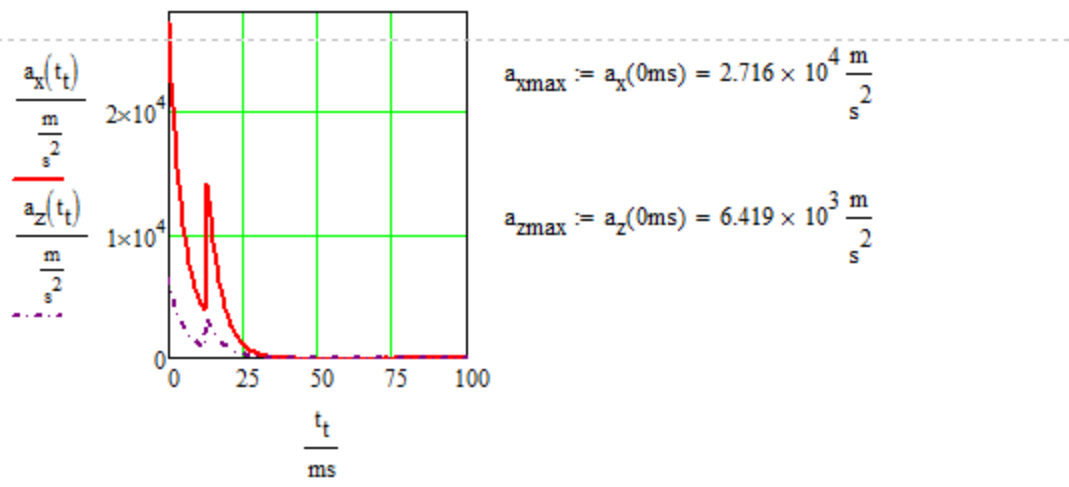

$$\text{HIP}(t_t) := m_{\text{head}} \cdot a_x(t_t) \cdot \int_{0\text{ms}}^{25\text{ms}} a_x(t_t) dt_t + m_{\text{head}} \cdot a_z(t_t) \cdot \int_{0\text{ms}}^{25\text{ms}} a_z(t_t) dt_t + I_y \cdot \alpha(t_t) \cdot \int_{0\text{ms}}^{25\text{ms}} \alpha(t_t) dt_t$$

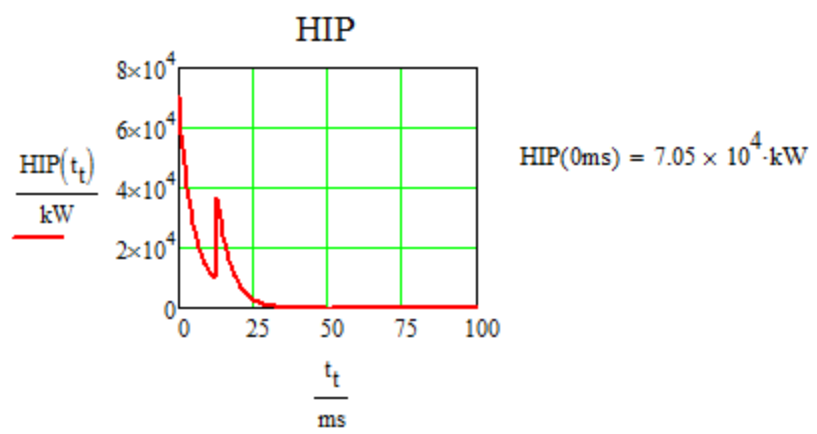

The HIP was found to be too large in these calculations.

9.2-3: Force Calculated from Average Maximum Head-Acceleration of Concussed NFL Players in Newman et al. Study

Average Max Acceleration of Concussed NFL players in Newman et al. study

$$A_{\text{critical}} := \frac{1162 \frac{\text{m}}{\text{s}^2} + 1263 \frac{\text{m}}{\text{s}^2} + 758 \frac{\text{m}}{\text{s}^2} + 595 \frac{\text{m}}{\text{s}^2} + 1211 \frac{\text{m}}{\text{s}^2} + 788 \frac{\text{m}}{\text{s}^2} + 804 \frac{\text{m}}{\text{s}^2} + 1054 \frac{\text{m}}{\text{s}^2} + 893 \frac{\text{m}}{\text{s}^2} + 1005 \frac{\text{m}}{\text{s}^2}}{10} = 953.3 \frac{\text{m}}{\text{s}^2}$$

$$F_{\text{I}} := m_{\text{head}} \cdot A_{\text{critical}} = 4.195 \times 10^3 \text{ N}$$


$$F_{\text{I}} \cdot t_{\text{I}} = m_{\text{hp}} \cdot (v_{\text{hp}} - v_{\text{f}})$$

$$v_{\text{f}} := - \left(\frac{F_{\text{I}} \cdot t_{\text{I}}}{m_{\text{hp}}} - v_{\text{hp}} \right) = 3.779 \frac{\text{m}}{\text{s}}$$


$$E_{\text{I}} := \frac{1}{2} \cdot m_{\text{head}} \cdot v_{\text{f}}^2 = 31.411 \text{ J}$$

$$t_{\text{I}} := 0 \text{ s}, .001 \text{ s} \dots .5 \text{ s}$$

$$\theta(t_t) := \begin{cases} c_1 \cdot e^{r_1 \cdot t_t} + c_2 \cdot e^{r_2 \cdot t_t} + A_c \cdot \sin(\Omega_F \cdot t_t) + B_c \cdot \cos(\Omega_F \cdot t_t) & \text{if } 0 \text{ s} \leq t_t \leq t_{\text{I}} \\ c_3 \cdot e^{r_1 \cdot (t_t)} + c_4 \cdot e^{r_2 \cdot (t_t)} + A_2 \cdot \sin[\Omega_{\text{Fa}} \cdot (t_t)] + B_2 \cdot \cos[\Omega_{\text{Fa}} \cdot (t_t)] & \text{if } t_{\text{I}} < t_t \leq .5 \text{ s} \end{cases}$$

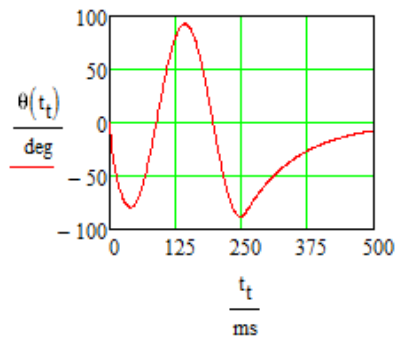


$$\omega(t_t) := \begin{cases} \left(c_1 \cdot r_1 \cdot e^{r_1 \cdot t_t} + c_2 \cdot r_2 \cdot e^{r_2 \cdot t_t} + A_c \cdot \Omega_F \cdot \cos(\Omega_F \cdot t_t) - B_c \cdot \Omega_F \cdot \sin(\Omega_F \cdot t_t) \right) & \text{if } 0s \leq t_t \leq t_1 \\ \left(c_3 \cdot r_1 \cdot e^{r_1 \cdot t_t} + c_2 \cdot r_2 \cdot e^{r_2 \cdot t_t} + A_2 \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} \cdot t_t) - B_2 \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} \cdot t_t) \right) & \text{if } t_1 < t_t \leq .5s \end{cases}$$

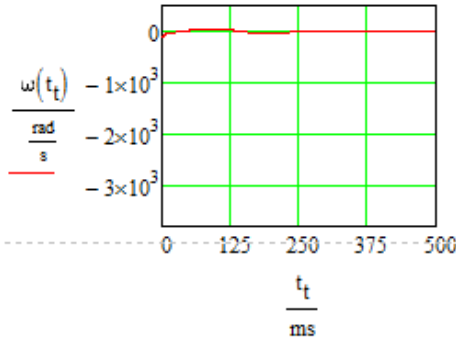

$$\omega(t_1) = 3.471 \frac{1}{s}$$

$$\omega(0s) = -125.541 \frac{1}{s}$$


$$a_x(t_t) := \alpha(t_t) \cdot d_{CGz} \quad a_z(t_t) := \alpha(t_t) \cdot d_{CGx}$$

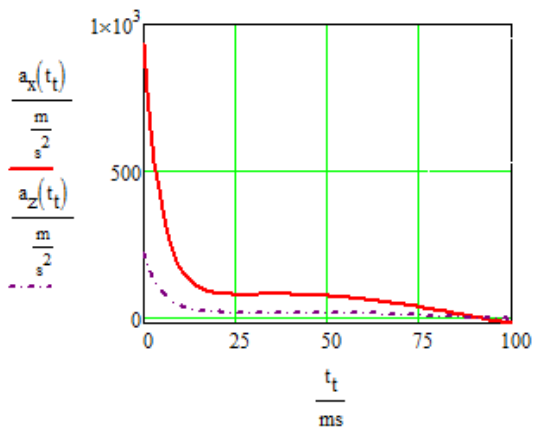

$$a_{x\max} := a_x(0ms) = 936.27 \frac{m}{s^2}$$

$$a_{z\max} := a_z(0ms) = 221.3 \frac{m}{s^2}$$

$$HIP(t_t) := m_{\text{head}} \cdot a_x(t_t) \cdot \int_{0ms}^{85ms} a_x(t_t) dt_t + m_{\text{head}} \cdot a_z(t_t) \cdot \int_{0ms}^{85ms} a_z(t_t) dt_t + I_y \cdot \alpha(t_t) \cdot \int_{0ms}^{85ms} \alpha(t_t) dt_t$$

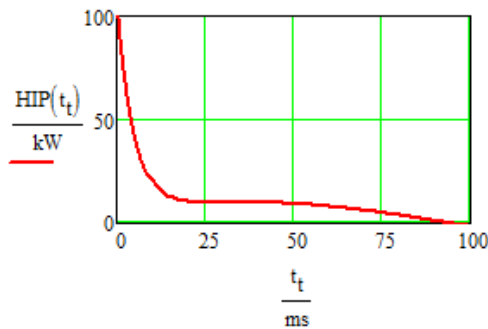


$$HIP(0ms) = 108.445 \text{ kW}$$

$$\alpha(t_t) := \begin{cases} \left(c_1 \cdot r_1^2 \cdot e^{-r_1 \cdot t_t} + c_2 \cdot r_2^2 \cdot e^{-r_2 \cdot t_t} - A_c \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t_t) - B_c \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t_t) \right) & \text{if } 0\text{ms} \leq t_t \leq t_I \\ \left[c_3 \cdot r_1^2 \cdot e^{-r_1(t_t)} + c_4 \cdot r_2^2 \cdot e^{-r_2(t_t)} - A_2 \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa}(t_t)] - B_2 \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa}(t_t)] \right] & \text{if } t_I < t_t \leq .5\text{s} \end{cases}$$

$$a_{\alpha}(t_t) := \alpha(t_t) \cdot d_{CG}$$

$$\alpha(0\text{ms}) = 1.702 \times 10^4 \frac{1}{s^2} \cdot \text{rad}$$

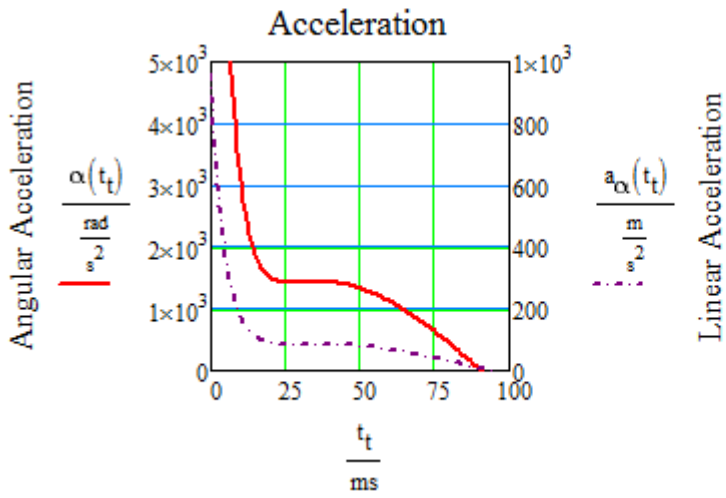

$$a_{\alpha}(0\text{ms}) = 962.068 \frac{m}{s^2}$$

$$\frac{\text{Pressure} \cdot \text{Area}_{\text{Bore}}}{m_{\text{rod}} + m_{\text{head}}} = 936.27 \frac{m}{s^2}$$

HIP value is too high to realistically reflect a hockey collision.

9.2-4: Calculating Force from Maximum Head Acceleration Corresponding to 95% Concussion Risk According to Newman et al.

Finding Force from average mass of head and the maximum head acceleration found to correspond to 95% concussion risk according to Newman et al.

$$A_{\text{critical}} := 761.5 \frac{\text{m}}{\text{s}^2} \quad \text{Amax corresponding to 95\% chance of concussion from Newman et al. Development of HIP}$$

$$F_I := m_{\text{head}} \cdot A_{\text{critical}} = 3.351 \times 10^3 \text{ N}$$


$$F_I \cdot t_I = m_{\text{hp}} \cdot (v_{\text{hp}} - v_f)$$

$$v_f := - \left(\frac{F_I \cdot t_I}{m_{\text{hp}}} - v_{\text{hp}} \right) = 5.717 \frac{\text{m}}{\text{s}}$$

$$E_I := \frac{1}{2} \cdot m_{\text{head}} \cdot v_{\text{hp}}^2 = 395.693 \text{ J}$$


$$t_t := 0\text{s}, .001\text{s}.. 10\text{s}$$

$$\theta(t_t) := \begin{cases} c_1 \cdot e^{r_1 \cdot t_t} + c_2 \cdot e^{r_2 \cdot t_t} + A_c \cdot \sin(\Omega_F \cdot t_t) + B_c \cdot \cos(\Omega_F \cdot t_t) & \text{if } 0\text{s} \leq t_t \leq t_I \\ c_3 \cdot e^{r_1(t_t)} + c_4 \cdot e^{r_2(t_t)} + A_2 \cdot \sin[\Omega_{Fa}(t_t)] + B_2 \cdot \cos[\Omega_{Fa}(t_t)] & \text{if } t_I < t_t \leq .5\text{s} \end{cases}$$

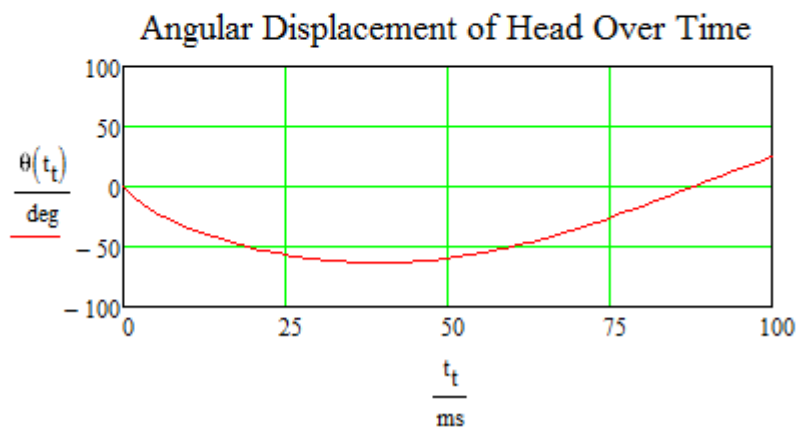

$$\omega(t_t) := \begin{cases} \left(c_1 \cdot r_1 \cdot e^{r_1 \cdot t_t} + c_2 \cdot r_2 \cdot e^{r_2 \cdot t_t} + A_c \cdot \Omega_F \cdot \cos(\Omega_F \cdot t_t) - B_c \cdot \Omega_F \cdot \sin(\Omega_F \cdot t_t) \right) & \text{if } 0s \leq t_t \leq t_I \\ \left(c_3 \cdot r_1 \cdot e^{r_1 \cdot t_t} + c_4 \cdot r_2 \cdot e^{r_2 \cdot t_t} + A_2 \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} \cdot t_t) - B_2 \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} \cdot t_t) \right) & \text{if } t_I < t_t \leq .5s \end{cases}$$

Angular Velocity of Head Over Time

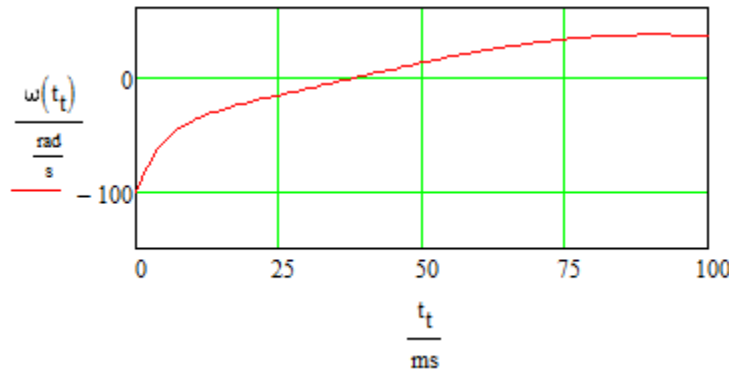

$$\omega(t_I) = 2.859 \frac{1}{s}$$


$$\omega(0s) = -100.306 \frac{1}{s}$$

+

$$\alpha(t_t) := \begin{cases} \left(c_1 \cdot r_1^2 \cdot e^{r_1 \cdot t_t} + c_2 \cdot r_2^2 \cdot e^{r_2 \cdot t_t} - A_c \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t_t) - B_c \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t_t) \right) & \text{if } 0ms \leq t_t \leq t_I \\ \left[c_3 \cdot r_1^2 \cdot e^{r_1 \cdot (t_t)} + c_4 \cdot r_2^2 \cdot e^{r_2 \cdot (t_t)} - A_2 \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa} \cdot (t_t)] - B_2 \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa} \cdot (t_t)] \right] & \text{if } t_I < t_t \leq .5s \end{cases}$$

$$a_{\alpha}(t_t) := \alpha(t_t) \cdot d_{CG} \quad \alpha(0ms) = 1.36 \times 10^4 \frac{1}{s^2} \cdot rad$$


Acceleration of Head Over Time

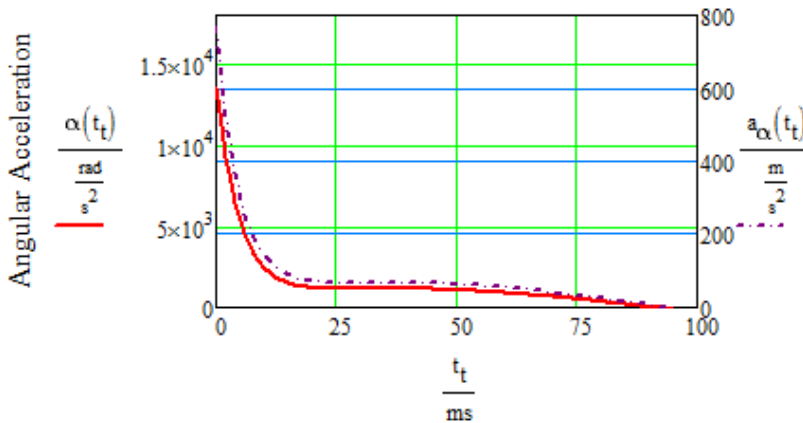

$$a_{\alpha}(0ms) = 768.504 \frac{m}{s^2}$$

$$\frac{\text{Pressure} \cdot \text{Area}_{\text{Bore}}}{m_{\text{rod}} + m_{\text{head}}} = 747.896 \frac{m}{s^2}$$


$$a_x(t_t) := \alpha(t_t) \cdot d_{CGz} \quad a_z(t_t) := \alpha(t_t) \cdot d_{CGx}$$

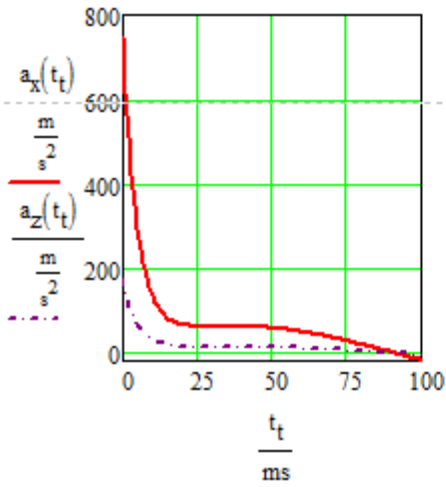

$$a_{x\max} := a_x(0\text{ms}) = 747.896 \frac{\text{m}}{\text{s}^2}$$

$$a_{z\max} := a_z(0\text{ms}) = 176.775 \frac{\text{m}}{\text{s}^2}$$

$$\text{HIP}(t_t) := m_{\text{head}} \cdot a_x(t_t) \cdot \int_{0\text{ms}}^{90\text{ms}} a_x(t_t) dt_t + m_{\text{head}} \cdot a_z(t_t) \cdot \int_{0\text{ms}}^{90\text{ms}} a_z(t_t) dt_t + I_y \cdot \alpha(t_t) \cdot \int_{0\text{ms}}^{90\text{ms}} \alpha(t_t) dt_t$$

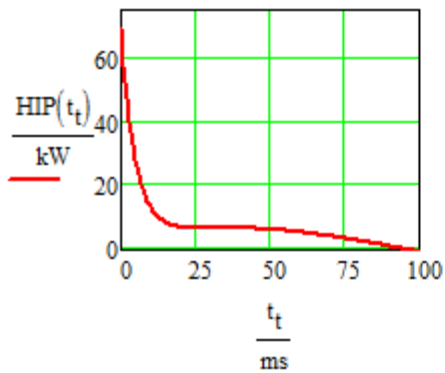

$$\text{HIP}(0\text{ms}) = 69.487 \cdot \text{kW}$$

Calculating necessary pressure

$$F_I = \text{Pressure} \cdot \text{Area}$$

$$F_I = 753.245 \text{ lbf}$$

Volume of rod of Air cylinder w/ 1.5 in bore, 4 in stroke length

$$L_{\text{rod}} := 4 \text{ in}$$

$$D_{\text{rod}} := .44 \text{ in}$$

$$\text{Area}_{\text{rod}} := \frac{D_{\text{rod}}^2}{4} \cdot \pi = 0.152 \cdot \text{in}^2$$

$$D_{\text{Bore}} := 1.5 \text{ in}$$

$$\text{Area}_{\text{Bore}} := \frac{\pi}{4} \cdot (D_{\text{Bore}}^2) = 1.767 \cdot \text{in}^2$$

$$\text{Volume}_{\text{rod}} := \text{Area}_{\text{rod}} \cdot L_{\text{rod}} = 0.608 \cdot \text{in}^3$$

$$\text{Pressure} := \frac{F_I}{\text{Area}_{\text{Bore}}} = 426.249 \text{ psi}$$

} Larger than maximum available

Stainless Steel rods Type 304

$$\delta_{\text{SS}} := .00803 \frac{\text{kg}}{\text{cm}^3} = 8.03 \times 10^3 \frac{\text{kg}}{\text{m}^3}$$

Mass of Rod

$$m_{\text{rod}} := \delta_{\text{SS}} \cdot \text{Volume}_{\text{rod}} = 0.08 \text{ kg}$$

Acceleration of Rod

$$a_{\text{rod}} := \frac{F_I}{m_{\text{rod}}} = 4.186 \times 10^4 \frac{\text{m}}{\text{s}^2}$$

approximate mass of air cylinder

$$m_{\text{ac}} := \text{Area}_{\text{Bore}} \cdot 11 \text{ in} \cdot \delta_{\text{SS}} = 2.558 \text{ kg}$$

$$\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot t_I = (m_{\text{hp}} + m_{\text{rod}}) v_f$$

Considering larger air cylinder

$$F_I = \text{Pressure} \cdot \text{Area}$$

$$F_I = 753.245 \text{ lbf}$$

Volume of rod of Air cylinder w/ 3.5 in bore, 4 in stroke length

$$L_{\text{rod}} := 4 \text{ in}$$

$$D_{\text{rod}} := .44 \text{ in}$$

$$\text{Area}_{\text{rod}} := \frac{D_{\text{rod}}^2}{4} \cdot \pi = 0.152 \cdot \text{in}^2$$

$$D_{\text{Bore}} := 3.5 \text{ in}$$

$$\text{Area}_{\text{Bore}} := \frac{\pi}{4} \cdot (D_{\text{Bore}}^2) = 9.621 \cdot \text{in}^2$$

$$\text{Volume}_{\text{rod}} := \text{Area}_{\text{rod}} \cdot L_{\text{rod}} = 0.608 \cdot \text{in}^3$$

$$\text{Pressure} := \frac{F_I}{\text{Area}_{\text{Bore}}} = 78.291 \cdot \text{psi}$$

Stainless Steel rods Type 304

$$\delta_{\text{ss}} := .00803 \frac{\text{kg}}{\text{cm}^3} = 8.03 \times 10^3 \frac{\text{kg}}{\text{m}^3}$$

Mass of Rod

$$m_{\text{rod}} := \delta_{\text{ss}} \cdot \text{Volume}_{\text{rod}} = 0.08 \text{ kg}$$

Acceleration of Rod

$$a_{\text{rod}} := \frac{F_I}{m_{\text{rod}}} = 4.186 \times 10^4 \frac{\text{m}}{\text{s}^2}$$

approximate mass of air cylinder

$$m_{\text{ac}} := \text{Area}_{\text{Bore}} \cdot 11 \text{ in} \cdot \delta_{\text{ss}} = 13.926 \text{ kg}$$

$$\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot t_I = (m_{\text{hp}} + m_{\text{rod}}) v_f$$

Considering Hammer Test

Considering a hammer impact test

$$L_{\text{hammer}} := 1.5\text{m} \quad L_{\text{hh}} := .051\text{m}$$

$$+L_{\text{hammer}} = 4.921\text{ft} \quad L_{\text{handle}} := L_{\text{hammer}} - L_{\text{hh}} = 1.449\text{m}$$

$$m_{\text{hammer}} := \frac{E_I}{L_{\text{hammer}} \cdot g} = 26.9\text{kg}$$

$$m_{\text{hammer}} \cdot g = 59.303\text{-lbf}$$

Considering a hammer impact test

$$L_{\text{hammer}} := 2.5\text{m} \quad L_{\text{hh}} := .051\text{m}$$

$$+L_{\text{hammer}} = 8.202\text{ft} \quad L_{\text{handle}} := L_{\text{hammer}} - L_{\text{hh}} = 2.449\text{m}$$

$$m_{\text{hammer}} := \frac{E_I}{L_{\text{hammer}} \cdot g} = 16.14\text{kg}$$

$$m_{\text{hammer}} \cdot g = 35.582\text{-lbf}$$

9.2-5: Calculations for Scaled-Down Test Set Up

$$\text{Average Weight of Professional Hockey Player} \quad W_p := 210\text{lbf} = 934.127\text{N} \quad W_{\text{equipment}} := 30\text{lbf}$$

$$W_{\text{hp}} := W_p + W_{\text{equipment}} = 1.068 \times 10^3\text{N}$$

$$\text{Speed of fast skater} \quad v_{\text{hp}} := 30\text{mph} = 13.411 \frac{\text{m}}{\text{s}} \quad \text{Mass} \quad m_{\text{hp}} := \frac{W_{\text{hp}}}{g} = 108.862\text{kg}$$

$$\text{Average acceleration of an elite hockey player trying to speed up as fast as possible} \quad A_{\text{hps}} := 4.375 \frac{\text{m}}{\text{s}^2}$$

$$\text{Force from player to stationary player impact} \quad F_I := m_{\text{hp}} \cdot A_{\text{hps}} = 476.272\text{-N}$$

$$F_I = \text{Pressure} \cdot \text{Area}$$

Volume of rod of Air cylinder w/ 1.5 in bore, 4 in stroke length

Stroke Length Diameters Cross-sect. Area

$$L_{\text{rod}} := 4\text{in} \quad D_{\text{rod}} := .44\text{in} \quad \text{Area}_{\text{rod}} := \frac{D_{\text{rod}}^2}{4} \cdot \pi = 0.152 \cdot \text{in}^2$$

$$D_{\text{Bore}} := 1.5\text{in} \quad \text{Area}_{\text{Bore}} := \frac{\pi}{4} \cdot (D_{\text{Bore}}^2) = 1.767 \cdot \text{in}^2$$

$$\text{Volume}_{\text{rod}} := \text{Area}_{\text{rod}} \cdot L_{\text{rod}} = 0.608 \cdot \text{in}^3$$

$$\text{Pressure} := \frac{F_I}{\text{Area}_{\text{Bore}}} = 60.589 \cdot \text{psi}$$

Stainless Steel rods Type 304

$$\delta_{\text{SS}} := .00803 \frac{\text{kg}}{\text{cm}^3} = 8.03 \times 10^3 \frac{\text{kg}}{\text{m}^3}$$

Mass of Rod

$$m_{\text{rod}} := \delta_{\text{SS}} \cdot \text{Volume}_{\text{rod}} = 0.08 \text{ kg}$$

Approximate mass of air cylinder

$$m_{\text{ac}} := \text{Area}_{\text{Bore}} \cdot 11\text{in} \cdot \delta_{\text{SS}} = 2.558 \text{ kg}$$

Acceleration of Rod

$$a_{\text{rod}} := \frac{F_I}{m_{\text{rod}}} = 5.951 \times 10^3 \frac{\text{m}}{\text{s}^2}$$

Scaling Factor

set-up/initial distance between head and air cylinder

$$d_i := 3.75 \text{ in}$$

Time before impact

$$t_{BI} := \left(\frac{2 \cdot d_i}{a_{rod}} \right)^{.5} = 12.214 \text{ ms}$$

Velocity of rod right before impact

$$v_{rodBI} := a_{rod} \cdot t_{BI} = 15.597 \frac{\text{m}}{\text{s}}$$

Impulse equals change in momentum $F_I \cdot t_I = (m_{rod} \cdot v_{rodBI}) - (m_{rod} + m_{head}) \cdot v_{rhc}$
 $(\text{Pressure} \cdot \text{Area}_{Bore} - k \cdot \theta) \cdot t_I = (m_{rod} \cdot v_{rodBI}) - (m_{rod} + m_{head}) \cdot v_{rhc}$

Velocity of rod and head combined

$$v_{rhi} := \frac{(m_{rod} \cdot v_{rodBI})}{(m_{rod} + m_{head})} = 1.219 \frac{\text{m}}{\text{s}}$$

Angular velocity of head after initial impact

$$\omega_{hi} := \frac{-v_{rhi}}{d_{CGz}} = -22.159 \frac{\text{rad}}{\text{s}}$$

Maximum Force Achievable by this Air Cylinder $\text{Pressure} := 100 \text{ psi}$

$$F_{maxac} := \text{Area}_{Bore} \cdot 100 \text{ psi} = 786.066 \text{ N}$$

Acceleration of Rod

$$a_{arod} := \frac{F_I}{m_{rod}} = 5.951 \times 10^3 \frac{\text{m}}{\text{s}^2}$$

approximate mass of air cylinder

$$m_{ac} := \text{Area}_{Bore} \cdot 11 \text{ in} \cdot \delta_{ss} = 2.558 \text{ kg}$$

$\text{Pressure} \cdot \text{Area}_{Bore} \cdot t_I = (m_{hp} + m_{rod}) v_f$

$$a_{rod} := \frac{a_{arod}}{\text{ScalingFactor}} = 1.277 \times 10^3 \frac{\text{m}}{\text{s}^2}$$

$$\text{ScalingFactor} := \frac{3.663 \cdot 10^3 \text{ N}}{F_{maxac}} = 4.66$$

Moments of Inertia from Chalmers, Applied Mechanics, Master's Thesis 2010

$$I_{fx} := 204.117 \text{ kg} \cdot \text{cm}^2 \quad I_{fy} := 232.888 \text{ kg} \cdot \text{cm}^2 \quad I_{fz} := 150.832 \text{ kg} \cdot \text{cm}^2$$

$$+ \dots \dots \dots I_y := \frac{I_{fy}}{\text{ScalingFactor}} = 49.977 \text{ kg} \cdot \text{cm}^2$$

Distance from Occipital Condyle (OC, point about which head rotates) to frankfort line (x-axis in reference frame) frankfort line is imaginary line connecting the upper margin of the auditory meatus (AM, external ear canal) to the lower orbital margin (cavity containing eyeball) Chalmers et al.

$$d_{AMx} := 8 \text{ mm} \quad d_{AMz} := 35 \text{ mm}$$

Distance from OC to center of gravity (CG) from Chalmer et al.

$$d_{CGx} := 13 \text{ mm} \quad d_{CGz} := 55 \text{ mm}$$

$$d_{CG} := \sqrt{d_{CGx}^2 + d_{CGz}^2} = 56.515 \text{ mm}$$

$m_{\text{ahead}} := 4.4 \text{ kg}$ }from Chalmers et al.

$$m_{\text{head}} := \frac{m_{\text{ahead}}}{\text{ScalingFactor}} = 0.944 \text{ kg}$$

$$\Delta v_{Ih} := \frac{\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot t_I}{(m_{\text{head}} + m_{\text{rod}})} = 9.209 \frac{\text{m}}{\text{s}} \quad \Delta v_{Ip} := \frac{\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot t_I}{(m_{\text{hp}} + m_{\text{rod}})} = 0.087 \frac{\text{m}}{\text{s}}$$

$$k_{fnecks} := 10 \frac{\text{N}\cdot\text{m}}{\text{rad}} \quad \left. \begin{array}{l} \text{from wang et al.} \\ \text{http://ac.els-cdn.com.ezproxy.wpi.edu/S0021929012006896/1-s2.0-S0021929012006896-main.pdf?_tid=98b9ac} \\ \text{do-86ad-11e4-9849-00000aab0f8b&acdnat=1418904267_6b62bd72fb6dd655802ac5760d087ddc} \end{array} \right\}$$

$$k_{fdamp} := .1s \cdot k_{fnecks} = 1s \cdot \frac{\text{N}\cdot\text{m}}{\text{rad}} \quad \left. \begin{array}{l} \text{From chalmers et al.} \end{array} \right\}$$

$$k_{necks} := \frac{k_{fnecks}}{\text{ScalingFactor}} = 2.146 \frac{1}{s} \frac{\text{m}^2 \cdot \text{kg}}{s}$$

$$k_{damp} := \frac{k_{fdamp}}{\text{ScalingFactor}} = 0.215 \frac{\text{m}^2 \cdot \text{kg}}{s}$$

$$\text{critical damping } k_{cd} := 2m \sqrt{m_{\text{head}} \cdot k_{necks}} = 2.847 \frac{\text{N}\cdot\text{m}\cdot\text{s}}{\text{rad}}$$


Damping Force

Spring Force

$$F_{\text{damp}}(\theta) = k_{\text{damp}} \cdot \left(\frac{d}{dt} \theta \right)$$

$$F_{\text{spring}}(\theta) = k_{\text{necks}} \cdot \theta$$

Peak moment of neck from Chalmers et al. $M_n := 4.78 \text{N}\cdot\text{m}$


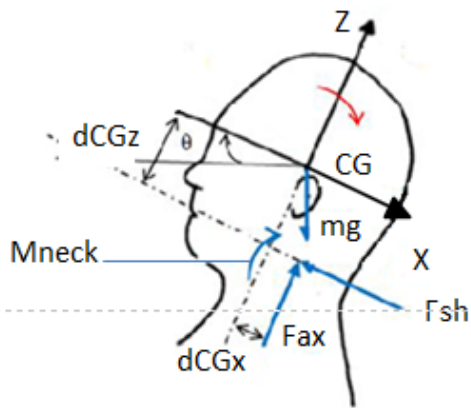


Finding Forcing angular frequency $\Omega.F$

$\Omega_F := 30 \frac{\text{rad}}{\text{s}}$ Kept trying different $\Omega.F$ until the graph of T.F and T.f looked the same

$$T_F(t) := \left[(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right] \cdot \sin(\Omega_F \cdot t) \dots \\ + \left[(-\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} \right] \cdot \cos(\Omega_F \cdot t)$$

$$T_f(\theta_k) := \left[(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right] \cdot \sin(\theta_k) \dots \\ + \left[(-\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} \right] \cdot \cos(\theta_k)$$

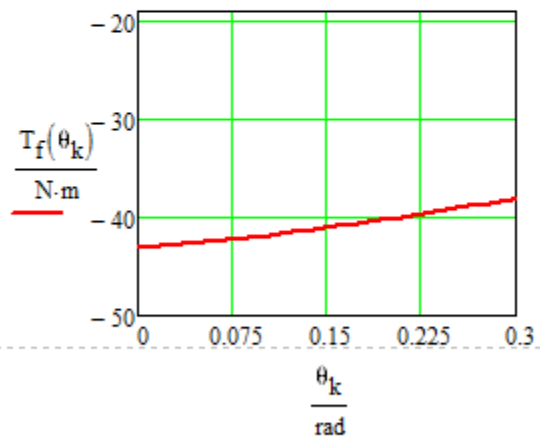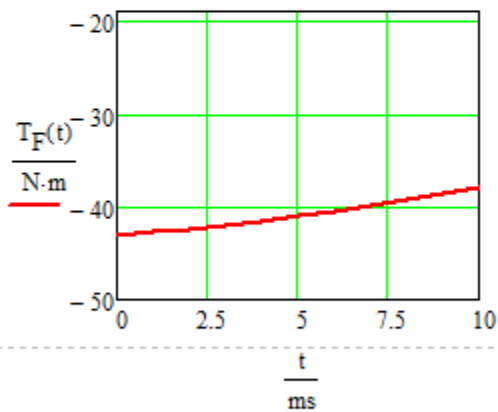

when T = -21J, $\theta.k = .1449 \text{ rad}$, $t = 4.83\text{ms}$
 when T = -20.001J, $\theta.k = .2295\text{rad}$, $t = 7.65\text{ms}$

$$T_F(4.83\text{ms}) = -41.112 \text{ J}$$

$$T_F(7.65\text{ms}) = -39.542 \text{ J}$$

$$T_f(.1449\text{rad}) = -41.112 \text{ J}$$

$$T_f(.2295\text{rad}) = -39.542 \text{ J}$$

Complimentary Solution (Left side of equation)

$$I_y \cdot \frac{d^2}{dt^2} \theta_k + k_{\text{damp}} \cdot \frac{d}{dt} \theta_k + k_{\text{necks}} \cdot \theta_k$$

$$\frac{d^2}{dt^2} \theta_k + \frac{k_{\text{damp}}}{I_y} \cdot \frac{d}{dt} \theta_k + \frac{k_{\text{necks}}}{I_y} \cdot \theta_k = 0$$

$$r_1 := \frac{-\frac{k_{\text{damp}}}{I_y} + \sqrt{\left(\frac{k_{\text{damp}}}{I_y}\right)^2 - 4 \cdot \frac{k_{\text{necks}}}{I_y}}}{2} = -15.853 \frac{1}{s}$$

$$r_2 := \frac{-\frac{k_{\text{damp}}}{I_y} - \sqrt{\left(\frac{k_{\text{damp}}}{I_y}\right)^2 - 4 \cdot \frac{k_{\text{necks}}}{I_y}}}{2} = -27.087 \frac{1}{s}$$

$$\theta_1(t) = c_1 \cdot e^{r_1 \cdot t} + c_2 \cdot e^{r_2 \cdot t}$$

Particular Solution (right side of equation)

$$\left[(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}} \right] \cdot \sin(\theta_k) - \left(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} \right) \cdot \cos(\theta_k)$$

Guess

$$A \cdot \sin(\Omega_F \cdot t) + B \cdot \cos(\Omega_F \cdot t)$$

$$\omega_k(t) = A \cdot \Omega_F \cdot \cos(\Omega_F \cdot t) - B \cdot \Omega_F \cdot \sin(\Omega_F \cdot t)$$

$$\alpha_k(t) = -A \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t)$$

$$\frac{d^2}{dt^2} \theta_k + \frac{k_{\text{damp}}}{I_y} \cdot \frac{d}{dt} \theta_k + \frac{k_{\text{necks}}}{I_y} \cdot \theta_k = -A \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t) + \frac{k_{\text{damp}}}{I_y} \cdot (A \cdot \Omega_F \cdot \cos(\Omega_F \cdot t) - B \cdot \Omega_F \cdot \sin(\Omega_F \cdot t)) + \frac{k_{\text{necks}}}{I_y} \cdot (A \cdot \sin(\Omega_F \cdot t) + B \cdot \cos(\Omega_F \cdot t))$$

Rearrange

$$\left(-A \cdot \Omega_F^2 - \frac{k_{\text{damp}}}{I_y} \cdot B \cdot \Omega_F + \frac{k_{\text{necks}}}{I_y} \cdot A \right) \cdot \sin(\Omega_F \cdot t) + \left(-B \cdot \Omega_F^2 + \frac{k_{\text{damp}}}{I_y} \cdot A \cdot \Omega_F + \frac{k_{\text{necks}}}{I_y} \cdot B \right) \cdot \cos(\Omega_F \cdot t) = \frac{(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} \dots) \cdot \sin(\theta_k) - (\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} \dots + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) \cdot \cos(\theta_k)}{I_y}$$

$$-A \cdot \Omega_F^2 - \frac{k_{\text{damp}}}{I_y} \cdot B \cdot \Omega_F + \frac{k_{\text{necks}}}{I_y} \cdot A = \frac{(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}}{I_y}$$

$$-B \cdot \Omega_F^2 + \frac{k_{\text{damp}}}{I_y} \cdot A \cdot \Omega_F + \frac{k_{\text{necks}}}{I_y} \cdot B = \frac{-\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} - m_{\text{head}} \cdot g \cdot d_{\text{CGx}}}{I_y}$$

$$\left(\frac{k_{\text{necks}}}{I_y} - \Omega_F^2 \right) \cdot B + \frac{k_{\text{damp}}}{I_y} \cdot \Omega_F \cdot A = \frac{-\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} - m_{\text{head}} \cdot g \cdot d_{\text{CGx}}}{I_y}$$

$$\left(\frac{k_{\text{necks}}}{I_y} - \Omega_F^2 \right) \cdot A - \frac{k_{\text{damp}}}{I_y} \cdot \Omega_F \cdot B = \frac{(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}}{I_y}$$

$$\left(k_{\text{necks}} - I_y \cdot \Omega_F^2 \right) \cdot A - k_{\text{damp}} \cdot \Omega_F \cdot B = [(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}]$$

$$B_c = \frac{[(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}] - (k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot A}{-(k_{\text{damp}} \cdot \Omega_F)}$$

$$(k_{\text{necks}} - I_y \cdot \Omega_F^2) \left[\frac{[(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}] - (k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot A}{-(k_{\text{damp}} \cdot \Omega_F)} \right] + k_{\text{damp}} \cdot \Omega_F \cdot A = -\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} - m_{\text{head}} \cdot g \cdot d_{\text{CGx}}$$

$$(k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot (\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}) - (k_{\text{necks}} - I_y \cdot \Omega_F^2)^2 \cdot A - (k_{\text{damp}} \cdot \Omega_F)^2 \cdot A = -(k_{\text{damp}} \cdot \Omega_F) \cdot (-\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} - m_{\text{head}} \cdot g \cdot d_{\text{CGx}})$$

$$-(k_{\text{necks}} - I_y \cdot \Omega_F^2)^2 \cdot A - (k_{\text{damp}} \cdot \Omega_F)^2 \cdot A = (k_{\text{damp}} \cdot \Omega_F) \cdot (\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) - (k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot (\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}})$$

$$A_c \cdot [-(k_{\text{necks}} - I_y \cdot \Omega_F^2)^2 - (k_{\text{damp}} \cdot \Omega_F)^2] = (k_{\text{damp}} \cdot \Omega_F) \cdot (\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) - (k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot (\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}})$$

$$A_c := \frac{(k_{\text{damp}} \cdot \Omega_F) \cdot (\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) - (k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot (\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}})}{-(k_{\text{necks}} - I_y \cdot \Omega_F^2)^2 - (k_{\text{damp}} \cdot \Omega_F)^2} = -6.478$$

$$B_c := \frac{[(\text{Pressure} \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}] - (k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot A_c}{-(k_{\text{damp}} \cdot \Omega_F)} = 0.7$$

Solving for c.1 and c.2 using initial values

$$\theta_I(t) = \left(c_1 \cdot e^{r_1 \cdot t} + c_2 \cdot e^{r_2 \cdot t} \right) + \left(A_c \cdot \sin(\Omega_F \cdot t) + B_c \cdot \cos(\Omega_F \cdot t) \right)$$

$$\theta_I(0\text{ms}) = (c_1 + c_2) + (B_c \cdot \cos(0)) = 0\text{deg} \quad c_1 = -(B_c \cdot \cos(0)) - c_2$$

$$\alpha_a(t) = c_1 \cdot r_1^2 \cdot e^{r_1 \cdot t} + c_2 \cdot r_2^2 \cdot e^{r_2 \cdot t} - A_c \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B_c \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t)$$

$$\alpha_a(0\text{ms}) = c_1 \cdot r_1^2 + c_2 \cdot r_2^2 - B_c \cdot \Omega_F^2 = \alpha_{hi}$$

$$[-(B_c \cdot \cos(0)) - c_2] \cdot r_1^2 + c_2 \cdot r_2^2 - B_c \cdot \Omega_F^2 \cdot \cos(0) = \alpha_{hi}$$

$$-r_1^2 \cdot (B_c \cdot \cos(0)) - r_1^2 \cdot c_2 + c_2 \cdot r_2^2 = \alpha_{hi} + B_c \cdot \Omega_F^2$$

$$c_2 := \frac{\alpha_{hi} + B_c \cdot \Omega_F^2 + r_1^2 \cdot (B_c)}{(r_2^2 - r_1^2)} = 30.598$$

$$c_1 := -B_c - c_2 = -31.299$$

Complete Solution


$$\theta_I(t) := \left(c_1 \cdot e^{r_1 \cdot t} + c_2 \cdot e^{r_2 \cdot t} \right) + (A_c \cdot \sin(\Omega_F \cdot t) + B_c \cdot \cos(\Omega_F \cdot t))$$

$$\theta_I(0\text{ms}) = -1.554 \times 10^{-15}$$


$$\theta_{EI} := \theta_I(t_I) = -309.178 \text{ deg}$$

Distance cylinder is in contact with head

$$d_{EI} := \sqrt{2 \cdot d_{CG}^2 - 2 \cdot d_{CG}^2 \cdot \cos(\theta_{EI})} = 1.91 \text{ in}$$

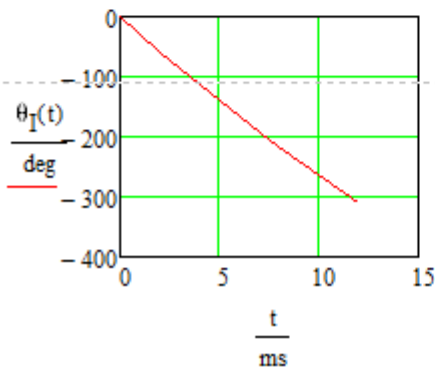

$$\omega_I(t) := c_1 \cdot r_1 \cdot e^{r_1 \cdot t} + c_2 \cdot r_2 \cdot e^{r_2 \cdot t} + A_c \cdot \Omega_F \cdot \cos(\Omega_F \cdot t) - B_c \cdot \Omega_F \cdot \sin(\Omega_F \cdot t)$$

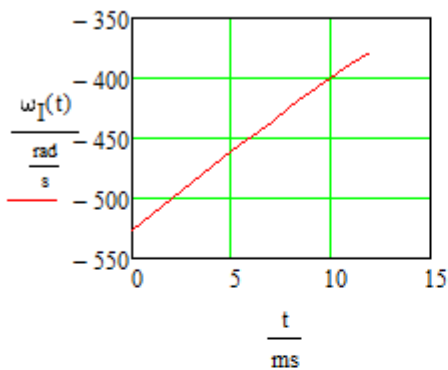


$$\omega_I(0\text{ms}) = -526.989 \frac{1}{\text{s}}$$

$$\omega_{EI} := \omega_I(t_I) = -377.89 \frac{\text{rad}}{\text{sec}}$$

$$\omega_{hi} = -22.159 \frac{1}{\text{s}}$$

$$\alpha_I(t) := c_1 \cdot r_1^2 \cdot e^{r_1 \cdot t} + c_2 \cdot r_2^2 \cdot e^{r_2 \cdot t} - A_c \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B_c \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t)$$

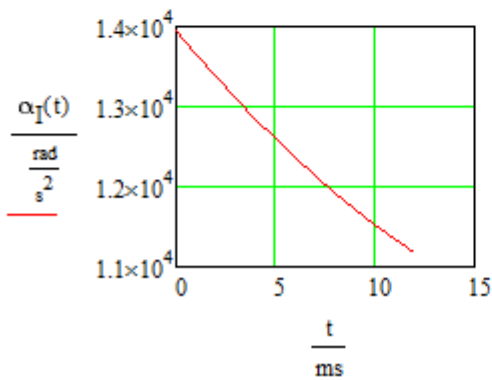

$$\alpha_{EI} := \alpha_I(t_I) = 1.118 \times 10^4 \frac{\text{rad}}{\text{s}^2}$$

$$\alpha_I(0\text{ms}) = 1.395 \times 10^4 \frac{1}{\text{s}^2}$$

$$\alpha_{hi} = 1.395 \times 10^4 \frac{1}{\text{s}^2}$$

After impulse ie after cylinder stops

Angle traveled through during impulse $\theta_{EI} = -309.178 \cdot \text{deg}$

Velocity $\omega_{EI} = -377.89 \frac{1}{s}$ $v_A := \omega_{EI} \cdot d_{CG} = -21.357 \frac{m}{s}$

$t_a := t_I \cdot (t_I + .001s) \dots 1s$ $\theta_{AI} := \theta_{EI} \cdot \theta_{EI} + .25 \text{rad} \dots 2 \text{rad}$

$$\Omega_{Fa} := \frac{\theta_{EI}}{t_I} = -449.682 \frac{1}{s}$$



$$\Omega_{Fha} := \frac{19.161}{s}$$

$$T_{Fa}(t_a) := -m_{\text{head}} \cdot g \cdot d_{CGz} \cdot \sin(\Omega_{Fa} \cdot t_a) + (m_{\text{head}} \cdot g \cdot d_{CGx}) \cdot \cos(\Omega_{Fa} \cdot t_a)$$

$$T_{fa}(\theta_{AI}) := -(m_{\text{head}} \cdot g \cdot d_{CGz}) \cdot \sin(\theta_{AI}) + (m_{\text{head}} \cdot g \cdot d_{CGx}) \cdot \cos(\theta_{AI})$$

$$T_{Fa}(t_I) = -0.319 \text{ J}$$

$$T_{fa}(\theta_{EI}) = -0.319 \text{ J}$$

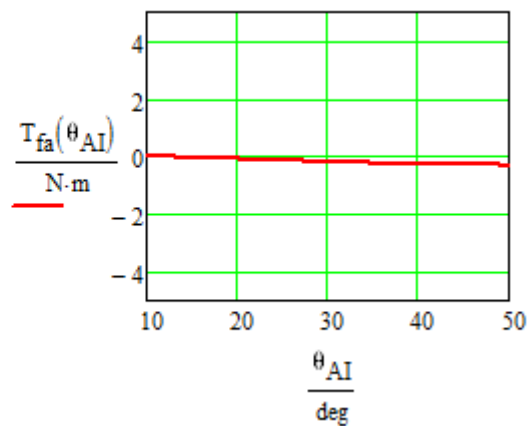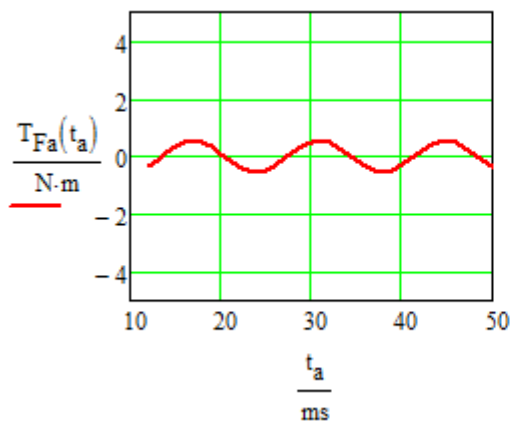

Sum of Moments After Impulse

$$M_{OCa} = (m_{\text{head}} \cdot g \cdot d_{CGz}) \cdot \sin(\theta) - (m_{\text{head}} \cdot g \cdot d_{CGx}) \cdot \cos(\theta) - k_{\text{necks}} \cdot \theta - k_{\text{damp}} \cdot \frac{d}{dt} \theta = I_y \left(\frac{d^2}{dt^2} \theta \right)$$

Complimentary Solution

$$\frac{d^2}{dt^2} \theta_a + \frac{k_{\text{damp}}}{I_y} \cdot \frac{d}{dt} \theta_a + \frac{k_{\text{necks}}}{I_y} \cdot \theta_a = \frac{(m_{\text{head}} \cdot g \cdot d_{CGz}) \cdot \sin(\Omega_{Fa} \cdot t_a) - (m_{\text{head}} \cdot g \cdot d_{CGx}) \cdot \cos(\Omega_{Fa} \cdot t_a)}{I_y}$$

$$\theta_{aI}(t_a) = c_3 \cdot e^{r_1 \cdot (t_a)} + c_4 \cdot e^{r_2 \cdot (t_a)}$$

+

Particular Solution

Guess

$$A_2 \cdot \sin(\Omega_{Fa} \cdot t) + B_2 \cdot \cos(\Omega_{Fa} \cdot t)$$

$$\omega_k(t) = A_2 \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} \cdot t) - B_2 \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} \cdot t)$$

$$\alpha_k(t) = -A_2 \cdot \Omega_{Fa}^2 \cdot \sin(\Omega_{Fa} \cdot t) - B_2 \cdot \Omega_{Fa}^2 \cdot \cos(\Omega_{Fa} \cdot t)$$

$$\frac{d^2}{dt^2} \theta_k + \frac{k_{\text{damp}}}{I_y} \cdot \frac{d}{dt} \theta_k + \frac{k_{\text{necks}}}{I_y} \cdot \theta_k = -A \cdot \Omega_{Fa}^2 \cdot \sin(\Omega_{Fa} \cdot t) - B \cdot \Omega_{Fa}^2 \cdot \cos(\Omega_{Fa} \cdot t) + \frac{k_{\text{damp}}}{I_y} \cdot (A \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} \cdot t) - B \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} \cdot t)) + \frac{k_{\text{necks}}}{I_y} \cdot (A \cdot \sin(\Omega_{Fa} \cdot t) + B \cdot \cos(\Omega_{Fa} \cdot t))$$

Rearrange

$$\left(-A_2 \cdot \Omega_{Fa}^2 - \frac{k_{\text{damp}}}{I_y} \cdot B_2 \cdot \Omega_{Fa} + \frac{k_{\text{necks}}}{I_y} \cdot A_2 \right) \cdot \sin(\Omega_{Fa} \cdot t) + \left(-B_2 \cdot \Omega_{Fa}^2 + \frac{k_{\text{damp}}}{I_y} \cdot A_2 \cdot \Omega_{Fa} + \frac{k_{\text{necks}}}{I_y} \cdot B_2 \right) \cdot \cos(\Omega_{Fa} \cdot t) = \frac{(m_{\text{head}} \cdot g \cdot d_{CGz}) \cdot \sin(\theta_k) - (m_{\text{head}} \cdot g \cdot d_{CGx}) \cdot \cos(\theta_k)}{I_y}$$

$$-A_2 \cdot \Omega_{Fa}^2 - \frac{k_{\text{damp}}}{I_y} \cdot B_2 \cdot \Omega_{Fa} + \frac{k_{\text{necks}}}{I_y} \cdot A_2 = \left(\frac{m_{\text{head}} \cdot g \cdot d_{CGz}}{I_y} \right)$$

$$\begin{aligned}
& -B_2 \cdot \Omega_{Fa}^2 + \frac{k_{damp}}{I_y} \cdot A_2 \cdot \Omega_{Fa} + \frac{k_{necks}}{I_y} \cdot B_2 = \left(\frac{-m_{head} \cdot g \cdot d_{CGx}}{I_y} \right) \\
& -A_2 \cdot I_y \cdot \Omega_F^2 - k_{damp} \cdot B_2 \cdot \Omega_F + k_{necks} \cdot A_2 = m_{head} \cdot g \cdot d_{CGz} \quad + \\
& \left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot A_2 - k_{damp} \cdot \Omega_F \cdot B_2 = m_{head} \cdot g \cdot d_{CGz} \\
& -B_2 \cdot I_y \cdot \Omega_F^2 + k_{damp} \cdot A_2 \cdot \Omega_F + k_{necks} \cdot B_2 = -m_{head} \cdot g \cdot d_{CGx} \\
& \left(k_{necks} - I_y \cdot \Omega_F^2 \right) \cdot B_2 + k_{damp} \cdot \Omega_F \cdot A_2 = -m_{head} \cdot g \cdot d_{CGx} \\
& B_2 = \frac{-m_{head} \cdot g \cdot d_{CGx} - k_{damp} \cdot \Omega_{Fa} \cdot A_2}{\left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right)} \\
& \left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right) \cdot A_2 - k_{damp} \cdot \Omega_{Fa} \cdot \left(\frac{-m_{head} \cdot g \cdot d_{CGx} - k_{damp} \cdot \Omega_{Fa} \cdot A_2}{k_{necks} - I_y \cdot \Omega_{Fa}^2} \right) = m_{head} \cdot g \cdot d_{CGz} \\
& \left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right)^2 \cdot A_2 + k_{damp} \cdot \Omega_{Fa} \cdot m_{head} \cdot g \cdot d_{CGx} + \left(k_{damp} \cdot \Omega_{Fa} \right)^2 \cdot A_2 = \left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right) \cdot \left(m_{head} \cdot g \cdot d_{CGz} \right) \\
& \left[\left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right)^2 + \left(k_{damp} \cdot \Omega_{Fa} \right)^2 \right] \cdot A_2 + k_{damp} \cdot \Omega_{Fa} \cdot m_{head} \cdot g \cdot d_{CGx} = \left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right) \cdot \left(m_{head} \cdot g \cdot d_{CGz} \right)
\end{aligned}$$

$$A_2 := \frac{\left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right) \cdot \left(m_{head} \cdot g \cdot d_{CGz} \right) - k_{damp} \cdot \Omega_{Fa} \cdot m_{head} \cdot g \cdot d_{CGx}}{\left[\left(k_{necks} - I_y \cdot \Omega_{Fa}^2 \right)^2 + \left(k_{damp} \cdot \Omega_{Fa} \right)^2 \right]} = -4.891 \times 10^{-4}$$

$$B_2 := \frac{-m_{head} \cdot g \cdot d_{CGx} - k_{damp} \cdot \Omega_{Fa} \cdot A_2}{k_{necks} - I_y \cdot \Omega_{Fa}^2} = 1.662 \times 10^{-4}$$

$$\theta_{al}(t_a) = c_3 \cdot e^{r_1(t_a)} + c_4 \cdot e^{r_2(t_a)} + A_2 \cdot \sin[\Omega_F(t_a)] + B_2 \cdot \cos[\Omega_F(t_a)]$$

$$\theta_{al}(t_I) = c_3 \cdot e^{r_1(t_I)} + c_4 \cdot e^{r_2(t_I)} + A_2 \cdot \sin[\Omega_F(t_I)] + B_2 \cdot \cos[\Omega_F(t_I)] = \theta_{EI}$$

$$c_3 = \frac{\theta_{EI} - A_2 \cdot \sin[\Omega_{Fa}(t_I)] - B_2 \cdot \cos[\Omega_{Fa}(t_I)] - c_4 \cdot e^{r_2(t_I)}}{e^{r_1(t_I)}}$$


$$\alpha_{al}(t_I) = c_3 \cdot r_1^2 \cdot e^{r_1(t_I)} + c_4 \cdot r_2^2 \cdot e^{r_2(t_I)} - A_2 \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa}(t_I)] - B_2 \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa}(t_I)] = \alpha_I(t_I)$$

$$\begin{aligned} & \left[\omega_{EI} - A_2 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa} \cdot (t_1)] + B_2 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa} \cdot (t_1)] - c_4 \cdot r_2 \cdot e^{r_2 \cdot (t_1)} \right] \cdot r_1 + c_4 \cdot r_2^2 \cdot e^{r_2 \cdot (t_1)} - A_2 \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa} \cdot (t_1)] - B_2 \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa} \cdot (t_1)] = \alpha_1(t_1) \\ & \omega_{EI} \cdot r_1 - A_2 \cdot r_1 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa} \cdot (t_1)] + B_2 \cdot r_1 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa} \cdot (t_1)] - c_4 \cdot r_1 \cdot r_2 \cdot e^{r_2 \cdot (t_1)} + c_4 \cdot r_2^2 \cdot e^{r_2 \cdot (t_1)} - A_2 \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa} \cdot (t_1)] - B_2 \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa} \cdot (t_1)] = \alpha_1(t_1) \\ & c_4 \left[r_2^2 \cdot e^{r_2 \cdot (t_1)} - r_1 \cdot r_2 \cdot e^{r_2 \cdot (t_1)} \right] = \alpha_1(t_1) + A_2 \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa} \cdot (t_1)] + B_2 \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa} \cdot (t_1)] - \omega_{EI} \cdot r_1 + A_2 \cdot r_1 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa} \cdot (t_1)] - B_2 \cdot r_1 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa} \cdot (t_1)] \\ & c_4 := \frac{\alpha_1(t_1) + A_2 \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa} \cdot (t_1)] + B_2 \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa} \cdot (t_1)] - \omega_{EI} \cdot r_1 + A_2 \cdot r_1 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa} \cdot (t_1)] - B_2 \cdot r_1 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa} \cdot (t_1)]}{\left[r_2^2 \cdot e^{r_2 \cdot (t_1)} - r_1 \cdot r_2 \cdot e^{r_2 \cdot (t_1)} \right]} = 23.342 \\ & c_3 := \frac{\theta_{EI} - A_2 \cdot \sin[\Omega_{Fa} \cdot (t_1)] - B_2 \cdot \cos[\Omega_{Fa} \cdot (t_1)] - c_4 \cdot e^{r_2 \cdot (t_1)}}{e^{r_1 \cdot (t_1)}} = -26.925 \end{aligned}$$

$$\frac{d^2}{dt^2} \theta_k + \frac{k_{damp}}{I_y} \frac{d}{dt} \theta_k + \frac{k_{necks}}{I_y} \theta_k = -A \cdot \Omega_{Fa}^2 \cdot \sin(\Omega_{Fa} \cdot t) - B \cdot \Omega_{Fa}^2 \cdot \cos(\Omega_{Fa} \cdot t) + \frac{k_{damp}}{I_y} \cdot (A \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} \cdot t) - B \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} \cdot t)) + \frac{k_{necks}}{I_y} \cdot (A \cdot \sin(\Omega_{Fa} \cdot t) + B \cdot \cos(\Omega_{Fa} \cdot t))$$

Complete Solution

$$\theta_{al}(t_a) = c_3 \cdot e^{r_1 \cdot (t_a)} + c_4 \cdot e^{r_2 \cdot (t_a)} + A_2 \cdot \sin[\Omega_{Fa} \cdot (t_a)] + B_2 \cdot \cos[\Omega_{Fa} \cdot (t_a)]$$



$$\theta_{ral} := \theta_{al}(t_1) = -309.178 \cdot \text{deg} \quad \theta_{EI} = -309.178 \cdot \text{deg}$$

$$\theta_{al}(.502s) = -0.542 \cdot \text{deg}$$

$$\theta_{al}(17ms) = -334.331 \cdot \text{deg}$$


Guess $t_g := 350ms$

Given

$$\left[c_3 \cdot e^{r_1 \cdot (t_g)} + c_4 \cdot e^{r_2 \cdot (t_g)} + A_2 \cdot \sin[\Omega_{Fa} \cdot (t_g)] + B_2 \cdot \cos[\Omega_{Fa} \cdot (t_g)] = 0 \text{deg} \right]$$

Find(t_g) = 0.687 s


$$\omega_{aI}(t_a) := c_3 \cdot r_1 \cdot e^{r_1(t_a)} + c_4 \cdot r_2 \cdot e^{r_2(t_a)} + A_2 \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa}(t_a)] - B_2 \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa}(t_a)]$$

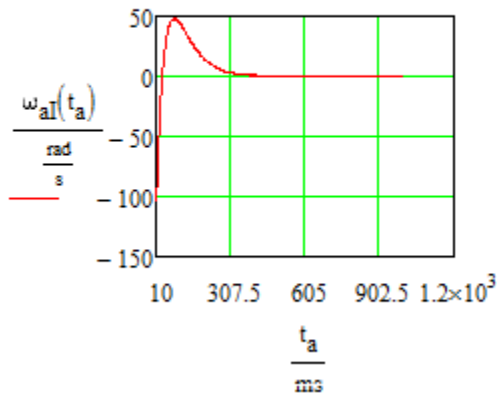

$$\omega_{EI} = -377.89 \cdot \frac{\text{rad}}{\text{sec}}$$

$$\omega_{raI} := \omega_{aI}(t_I) = -103.721 \frac{1}{s} \cdot \text{rad}$$

$$\alpha_{aI}(t_a) := c_3 \cdot r_1^2 \cdot e^{r_1(t_a)} + c_4 \cdot r_2^2 \cdot e^{r_2(t_a)} - A_2 \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa}(t_a)] - B_2 \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa}(t_a)]$$

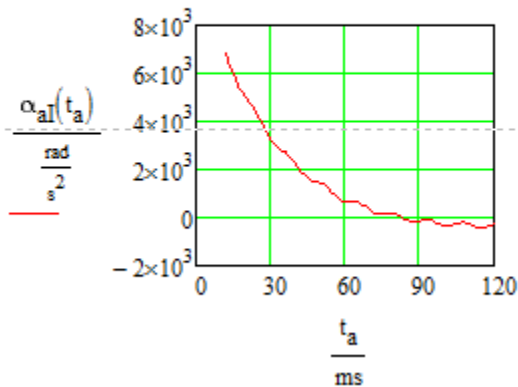


$$\alpha_{EI} = 1.118 \times 10^4 \frac{1}{s^2}$$


$$\alpha_{aI}(t_I) = 6.835 \times 10^3 \frac{1}{s^2}$$

$$t_t := 0s, .001s.. .5s$$

$$\theta(t_t) := \begin{cases} c_1 \cdot e^{r_1 \cdot t_t} + c_2 \cdot e^{r_2 \cdot t_t} + A_c \cdot \sin(\Omega_F \cdot t_t) + B_c \cdot \cos(\Omega_F \cdot t_t) & \text{if } 0s \leq t_t \leq t_1 \\ c_3 \cdot e^{r_1(t_t)} + c_4 \cdot e^{r_2(t_t)} + A_2 \cdot \sin[\Omega_{Fa} \cdot (t_t)] + B_2 \cdot \cos[\Omega_{Fa} \cdot (t_t)] & \text{if } t_1 < t_t \leq .5s \end{cases}$$

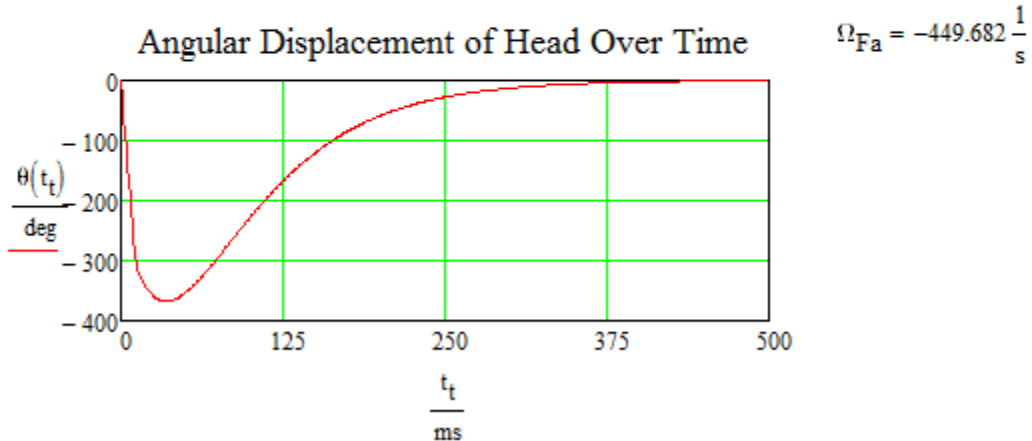


$$\omega(t_t) := \begin{cases} \left(c_1 \cdot r_1 \cdot e^{r_1 \cdot t_t} + c_2 \cdot r_2 \cdot e^{r_2 \cdot t_t} + A_c \cdot \Omega_F \cdot \cos(\Omega_F \cdot t_t) - B_c \cdot \Omega_F \cdot \sin(\Omega_F \cdot t_t) \right) & \text{if } 0s \leq t_t \leq t_1 \\ \left(c_3 \cdot r_1 \cdot e^{r_1(t_t)} + c_4 \cdot r_2 \cdot e^{r_2(t_t)} + A_2 \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} \cdot t_t) - B_2 \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} \cdot t_t) \right) & \text{if } t_1 < t_t \leq .5s \end{cases}$$

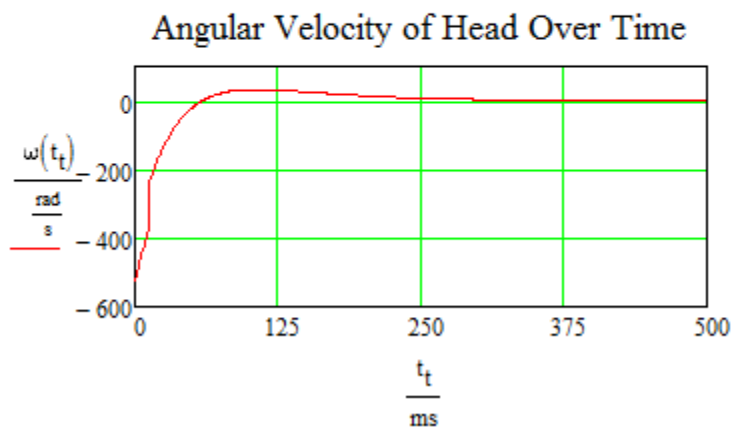


$$\alpha(t_t) := \begin{cases} \left(c_1 \cdot r_1^2 \cdot e^{r_1 \cdot t_t} + c_2 \cdot r_2^2 \cdot e^{r_2 \cdot t_t} - A_c \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t_t) - B_c \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t_t) \right) & \text{if } 0 \text{ms} \leq t_t \leq t_I \\ \left[c_3 \cdot r_1^2 \cdot e^{r_1 \cdot (t_t)} + c_4 \cdot r_2^2 \cdot e^{r_2 \cdot (t_t)} - A_2 \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa} \cdot (t_t)] - B_2 \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa} \cdot (t_t)] \right] & \text{if } t_I < t_t \leq .5\text{s} \end{cases}$$

$$a_{\alpha}(t_t) := \alpha(t_t) \cdot d_{CG}$$

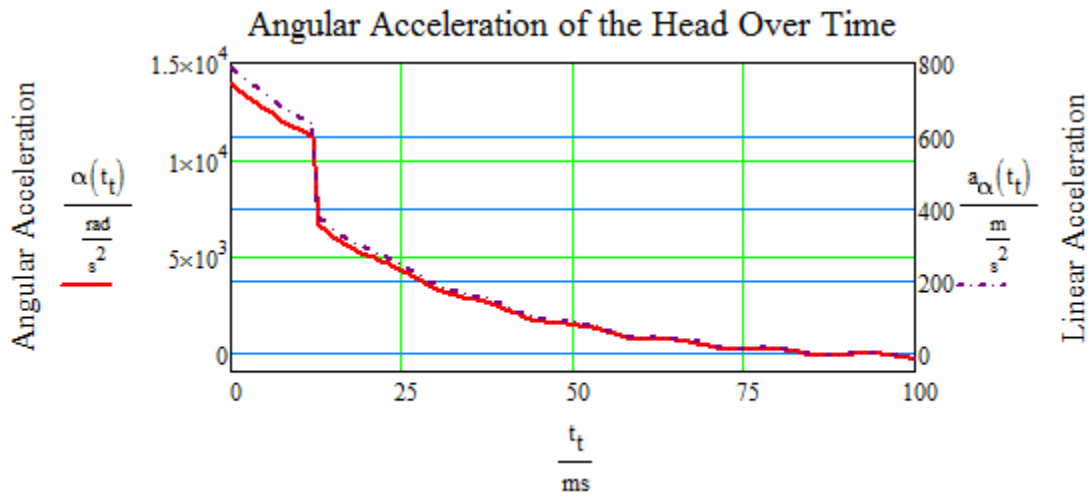


$$a_x(t_t) := \alpha(t_t) \cdot d_{CGz} \quad a_z(t_t) := \alpha(t_t) \cdot d_{CGx}$$

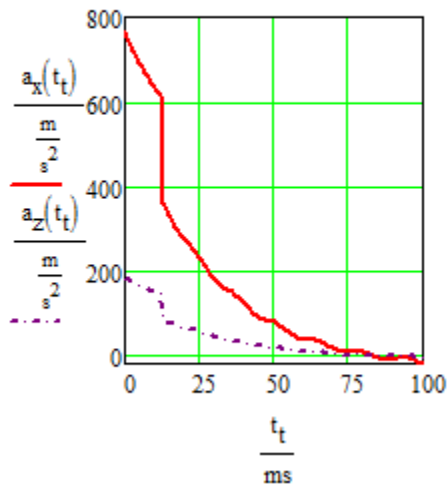

$$a_{x\max} := a_x(0\text{ms}) = 767.45 \frac{\text{m}}{\text{s}^2}$$

$$a_{z\max} := a_z(0\text{ms}) = 181.397 \frac{\text{m}}{\text{s}^2}$$

$$\text{HIP}(t_t) := m_{\text{head}} \cdot a_x(t_t) \cdot \int_{0\text{ms}}^{80\text{ms}} a_x(t_t) dt_t + m_{\text{head}} \cdot a_z(t_t) \cdot \int_{0\text{ms}}^{80\text{ms}} a_z(t_t) dt_t + I_y \cdot \alpha(t_t) \cdot \int_{0\text{ms}}^{80\text{ms}} \alpha(t_t) dt_t$$

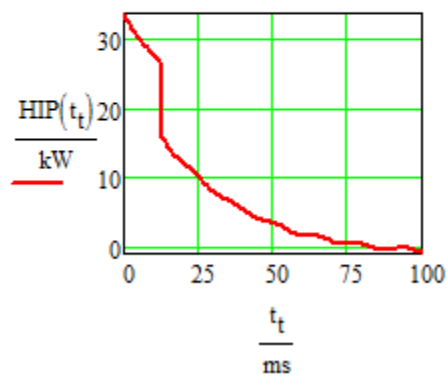

$$\text{HIP}(0\text{ms}) = 33.605 \cdot \text{kW}$$

9.2-6: Calculations for Finding Necessary Damping Coefficient of Neck Support

$$P := 100 \text{ psi} \quad k_{\text{oobleck}} := .15115 \frac{\text{m}^2 \cdot \text{kg}}{\text{s}} \quad k_{\text{damp}} = 0.215 \frac{\text{m}^2 \cdot \text{kg}}{\text{s}}$$

$$I_y \cdot \frac{d^2 \theta_k}{dt^2} + (k_{\text{damp}} + k_{\text{oobleck}}) \cdot \frac{d \theta_k}{dt} + k_{\text{necks}} \cdot \theta_k = \frac{(P \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}) \cdot \sin(\Omega_F t) - (P \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) \cdot \cos(\Omega_F t)}{I_y}$$

Complimentary Solution (Left side of equation)

$$I_y \cdot \frac{d^2 \theta_k}{dt^2} + (k_{\text{damp}} + k_{\text{oobleck}}) \cdot \frac{d \theta_k}{dt} + k_{\text{necks}} \cdot \theta_k$$

$$\frac{d^2 \theta_k}{dt^2} + \frac{(k_{\text{damp}} + k_{\text{oobleck}})}{I_y} \cdot \frac{d \theta_k}{dt} + \frac{k_{\text{necks}}}{I_y} \cdot \theta_k = 0 \quad \text{Area}_{\text{Bore}} = 11.401 \text{ cm}^2$$

$$r_{n1} := \frac{-\frac{(k_{\text{damp}} + k_{\text{oobleck}})}{I_y} + \sqrt{\left(\frac{(k_{\text{damp}} + k_{\text{oobleck}})}{I_y}\right)^2 - 4 \cdot \frac{k_{\text{necks}}}{I_y}}}{2} = -6.433 \frac{1}{\text{s}}$$

$$r_{n2} := \frac{-\frac{(k_{\text{damp}} + k_{\text{oobleck}})}{I_y} - \sqrt{\left(\frac{(k_{\text{damp}} + k_{\text{oobleck}})}{I_y}\right)^2 - 4 \cdot \frac{k_{\text{necks}}}{I_y}}}{2} = -66.75 \frac{1}{\text{s}}$$

$$\theta_{nl}(t) = c_{n1} \cdot e^{r_{n1} \cdot t} + c_{n2} \cdot e^{r_{n2} \cdot t}$$

$$r_1 = -15.853 \frac{1}{\text{s}}$$

$$r_2 = -27.087 \frac{1}{\text{s}}$$

Particular Solution (right side of equation)

$$\frac{(P \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}) \cdot \sin(\Omega_F t) - (P \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) \cdot \cos(\Omega_F t)}{I_y}$$

Guess

$$A \cdot \sin(\Omega_F t) + B \cdot \cos(\Omega_F t)$$

$$\omega_k(t) = A \cdot \Omega_F \cdot \cos(\Omega_F t) - B \cdot \Omega_F \cdot \sin(\Omega_F t)$$

$$\alpha_k(t) = -A \cdot \Omega_F^2 \cdot \sin(\Omega_F t) - B \cdot \Omega_F^2 \cdot \cos(\Omega_F t)$$

$$\frac{d^2 \theta_k}{dt^2} + \frac{(k_{\text{damp}} + k_{\text{oobleck}})}{I_y} \cdot \frac{d \theta_k}{dt} + \frac{k_{\text{necks}}}{I_y} \cdot \theta_k = -A \cdot \Omega_F^2 \cdot \sin(\Omega_F t) - B \cdot \Omega_F^2 \cdot \cos(\Omega_F t) + \frac{(k_{\text{damp}} + k_{\text{oobleck}})}{I_y} \cdot (A \cdot \Omega_F \cdot \cos(\Omega_F t) - B \cdot \Omega_F \cdot \sin(\Omega_F t)) + \frac{k_{\text{necks}}}{I_y} \cdot (A \cdot \sin(\Omega_F t) + B \cdot \cos(\Omega_F t))$$

Rearrange

$$\left[-A \cdot \Omega_F^2 - \frac{(k_{\text{damp}} + k_{\text{oobleck}})}{I_y} \cdot B \cdot \Omega_F + \frac{k_{\text{necks}}}{I_y} \cdot A \right] \cdot \sin(\Omega_F t) + \left[-B \cdot \Omega_F^2 + \frac{(k_{\text{damp}} + k_{\text{oobleck}})}{I_y} \cdot A \cdot \Omega_F + \frac{k_{\text{necks}}}{I_y} \cdot B \right] \cdot \cos(\Omega_F t) = \frac{(P \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}) \cdot \sin(\theta_k) - (P \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) \cdot \cos(\theta_k)}{I_y}$$

$$\left[-A \cdot \Omega_F^2 - \frac{(k_{\text{damp}} + k_{\text{oobleck}})}{I_y} \cdot B \cdot \Omega_F + \frac{k_{\text{necks}}}{I_y} \cdot A \right] = \frac{(P \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}})}{I_y}$$

$$\left[-B \cdot \Omega_F^2 + \frac{(k_{\text{damp}} + k_{\text{oobleck}})}{I_y} \cdot A \cdot \Omega_F + \frac{k_{\text{necks}}}{I_y} \cdot B \right] = \frac{-(P \cdot \text{Area}_{\text{Bore}} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}})}{I_y}$$

$$(k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot B + (k_{\text{damp}} + k_{\text{oobleck}}) \cdot \Omega_F \cdot A = - \left(\begin{array}{l} \text{P} \cdot \text{AreaBore} \cdot d_{\text{CGz}} \dots \\ + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} \end{array} \right)$$

$$(k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot A + (k_{\text{damp}} + k_{\text{oobleck}}) \cdot \Omega_F \cdot B = \left(\begin{array}{l} \text{P} \cdot \text{AreaBore} \cdot d_{\text{CGz}} \dots \\ + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} \end{array} \right)$$

$$A_n = \frac{\text{P} \cdot \text{AreaBore} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} - (k_{\text{damp}} + k_{\text{oobleck}}) \cdot \Omega_F \cdot B_n}{(k_{\text{necks}} - I_y \cdot \Omega_F^2)}$$

$$B_n = \frac{-(\text{P} \cdot \text{AreaBore} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) - (k_{\text{damp}} + k_{\text{oobleck}}) \cdot \Omega_F \cdot A_n}{(k_{\text{necks}} - I_y \cdot \Omega_F^2)}$$

$$B_n = \frac{-(\text{P} \cdot \text{AreaBore} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) - (k_{\text{damp}} + k_{\text{oobleck}}) \cdot \Omega_F \cdot \left[\frac{\text{P} \cdot \text{AreaBore} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}} - (k_{\text{damp}} + k_{\text{oobleck}}) \cdot \Omega_F \cdot B_n}{(k_{\text{necks}} - I_y \cdot \Omega_F^2)} \right]}{(k_{\text{necks}} - I_y \cdot \Omega_F^2)}$$

$$B_n (k_{\text{necks}} - I_y \cdot \Omega_F^2) = -(\text{P} \cdot \text{AreaBore} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) + \frac{-\Omega_F (k_{\text{damp}} + k_{\text{oobleck}}) \cdot \text{P} \cdot \text{AreaBore} \cdot d_{\text{CGz}}}{k_{\text{necks}} - I_y \cdot \Omega_F^2} - \frac{\Omega_F (k_{\text{damp}} + k_{\text{oobleck}}) \cdot m_{\text{head}} \cdot g \cdot d_{\text{CGx}}}{k_{\text{necks}} - I_y \cdot \Omega_F^2} + \frac{[\Omega_F (k_{\text{damp}} + k_{\text{oobleck}})]^2}{(k_{\text{necks}} - I_y \cdot \Omega_F^2)} \cdot B_n$$

$$B_n \left[(k_{\text{necks}} - I_y \cdot \Omega_F^2) - \frac{[\Omega_F (k_{\text{damp}} + k_{\text{oobleck}})]^2}{(k_{\text{necks}} - I_y \cdot \Omega_F^2)} \right] = -(\text{P} \cdot \text{AreaBore} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) + \frac{-\Omega_F (k_{\text{damp}} + k_{\text{oobleck}}) \cdot \text{P} \cdot \text{AreaBore} \cdot d_{\text{CGz}}}{k_{\text{necks}} - I_y \cdot \Omega_F^2} - \frac{\Omega_F (k_{\text{damp}} + k_{\text{oobleck}}) \cdot m_{\text{head}} \cdot g \cdot d_{\text{CGx}}}{k_{\text{necks}} - I_y \cdot \Omega_F^2}$$

$$A_n = \frac{[(k_{\text{damp}} + k_{\text{oobleck}}) \cdot \Omega_F] \cdot (\text{Pressure} \cdot \text{AreaBore} \cdot d_{\text{CGz}} + m_{\text{head}} \cdot g \cdot d_{\text{CGx}}) - (k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot (\text{Pressure} \cdot \text{AreaBore} \cdot d_{\text{CGx}} + m_{\text{head}} \cdot g \cdot d_{\text{CGz}})}{-(k_{\text{necks}} - I_y \cdot \Omega_F^2)^2 + [(k_{\text{damp}} + k_{\text{oobleck}}) \cdot \Omega_F]^2} = -3.978$$

$$B_n = \frac{[(\text{Pressure} \cdot \text{AreaBore} \cdot d_{\text{CGx}}) + m_{\text{head}} \cdot g \cdot d_{\text{CGz}}] - (k_{\text{necks}} - I_y \cdot \Omega_F^2) \cdot A_n}{-[(k_{\text{damp}} + k_{\text{oobleck}}) \cdot \Omega_F]} = -0.125$$

$$\theta_{\text{nl}}(t) = (c_{n1} \cdot e^{r_{n1} \cdot t} + c_{n2} \cdot e^{r_{n2} \cdot t}) + (A_n \cdot \sin(\Omega_F \cdot t) + B_n \cdot \cos(\Omega_F \cdot t))$$

$$\theta_{\text{nl}}(0\text{ms}) = (c_{n1} + c_{n2}) + (B_n \cdot \cos(0)) = 0\text{deg} \quad c_{n1} = -(B_n \cdot \cos(0)) - c_{n2}$$

$$\alpha_{\text{na}}(t) = c_{n1} \cdot r_{n1}^2 \cdot e^{r_{n1} \cdot t} + c_{n2} \cdot r_{n2}^2 \cdot e^{r_{n2} \cdot t} - A_n \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B_n \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t)$$

$$\alpha_a(0\text{ms}) = c_{n1} \cdot r_{n1}^2 + c_{n2} \cdot r_{n2}^2 - B_n \cdot \Omega_F^2 = \alpha_{\text{hi}}$$

$$[-(B_n \cdot \cos(0)) - c_{n2}] \cdot r_{n1}^2 + c_{n2} \cdot r_{n2}^2 - B_n \cdot \Omega_F^2 \cdot \cos(0) = \alpha_{\text{hi}}$$

$$-r_{n1}^2 \cdot (B_n \cdot \cos(0)) - r_{n1}^2 \cdot c_{n2} + c_{n2} \cdot r_{n2}^2 = \alpha_{\text{hi}} + B_n \cdot \Omega_F^2$$

$$c_{n2} := \frac{\alpha_{\text{hi}} + B_n \cdot \Omega_F^2 + r_{n1}^2 \cdot (B_n)}{(r_{n2}^2 - r_{n1}^2)} = 3.134$$

$$c_2 = 30.598$$


+

$$c_1 = -31.299$$

$$c_{n1} := -B_n - c_{n2} = -3.009$$

Complete Solution

$$\theta_{nl}(t) := \left(c_{n1} \cdot e^{r_{n1} \cdot t} + c_{n2} \cdot e^{r_{n2} \cdot t} \right) + \left(A_n \cdot \sin(\Omega_F \cdot t) + B_n \cdot \cos(\Omega_F \cdot t) \right)$$




$$\theta_{nl}(0ms) = 0$$

$$\theta_{nEI} := \theta_{nl}(t_I) = -165.997 \cdot \text{deg}$$

Distance cylinder is in contact with head

$$d_{nEI} := \sqrt{2 \cdot d_{CG}^2 - 2 \cdot d_{CG}^2 \cdot \cos(\theta_{nEI})} = 4.417 \cdot \text{in}$$

$$\omega_{nl}(t) := c_{n1} \cdot r_{n1} \cdot e^{r_{n1} \cdot t} + c_{n2} \cdot r_{n2} \cdot e^{r_{n2} \cdot t} + A_n \cdot \Omega_F \cdot \cos(\Omega_F \cdot t) - B_n \cdot \Omega_F \cdot \sin(\Omega_F \cdot t)$$




$$\omega_{nl}(0ms) = -309.203 \frac{1}{s}$$

$$\omega_{nEI} := \omega_{nl}(t_I) = -186.363 \frac{\text{rad}}{\text{sec}}$$

$$\omega_{hi} = -22.159 \frac{1}{s}$$

$$\alpha_{nl}(t) := c_{n1} \cdot r_{n1}^2 \cdot e^{r_{n1} \cdot t} + c_{n2} \cdot r_{n2}^2 \cdot e^{r_{n2} \cdot t} - A_n \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B_n \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t)$$

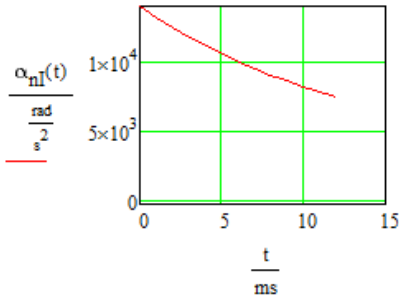

$$\alpha_{nEI} := \alpha_{nl}(t_I) = 7.52 \times 10^3 \frac{\text{rad}}{s^2}$$

$$\alpha_{nl}(0ms) = 1.395 \times 10^4 \frac{1}{s^2}$$

$$\alpha_{hi} = 1.395 \times 10^4 \frac{1}{s^2}$$

+

Sum of Moments After Impulse

$$M_{OCan} = (m_{head} \cdot g \cdot d_{CGz}) \cdot \sin(\theta) - (m_{head} \cdot g \cdot d_{CGx}) \cdot \cos(\theta) - k_{necks} \cdot \theta - (k_{oobleck} + k_{damp}) \cdot \frac{d}{dt} \theta = I_y \cdot \left(\frac{d^2}{dt^2} \theta \right)$$

Complimentary Solution

$$\frac{d^2}{dt^2} \theta_a + \frac{(k_{oobleck} + k_{damp})}{I_y} \cdot \frac{d}{dt} \theta_a + \frac{k_{necks}}{I_y} \cdot \theta_a = \frac{(m_{head} \cdot g \cdot d_{CGz}) \cdot \sin(\Omega_{Fa} \cdot t_a) - (m_{head} \cdot g \cdot d_{CGx}) \cdot \cos(\Omega_{Fa} \cdot t_a)}{I_y}$$

$$\theta_{al}(t_a) = c_{n3} \cdot e^{r_{n1}(t_a)} + c_{n4} \cdot e^{r_{n2}(t_a)}$$

Particular Solution

Guess

$$A_{n2} \cdot \sin(\Omega_{Fa} t) + B_{n2} \cdot \cos(\Omega_{Fa} t)$$

$$\dot{\theta}_k(t) = A_{n2} \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} t) - B_{n2} \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} t)$$

$$\ddot{\theta}_k(t) = -A_{n2} \cdot \Omega_{Fa}^2 \cdot \sin(\Omega_{Fa} t) - B_{n2} \cdot \Omega_{Fa}^2 \cdot \cos(\Omega_{Fa} t)$$

$$\frac{d^2}{dt^2} \theta_k + \frac{(k_{oobleck} + k_{damp})}{I_y} \cdot \frac{d}{dt} \theta_k + \frac{k_{necks}}{I_y} \cdot \theta_k = -A_{n2} \cdot \Omega_{Fa}^2 \cdot \sin(\Omega_{Fa} t) - B_{n2} \cdot \Omega_{Fa}^2 \cdot \cos(\Omega_{Fa} t) + \frac{(k_{oobleck} + k_{damp})}{I_y} \cdot (A_{n2} \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} t) - B_{n2} \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} t)) + \frac{k_{necks}}{I_y} \cdot (A_{n2} \cdot \sin(\Omega_{Fa} t) + B_{n2} \cdot \cos(\Omega_{Fa} t))$$

Rearrange

$$\left[-A_{n2} \cdot \Omega_{Fa}^2 - \frac{(k_{oobleck} + k_{damp})}{I_y} \cdot B_{n2} \cdot \Omega_{Fa} + \frac{k_{necks}}{I_y} \cdot A_{n2} \right] \sin(\Omega_{Fa} t) + \left[-B_{n2} \cdot \Omega_{Fa}^2 + \frac{(k_{oobleck} + k_{damp})}{I_y} \cdot A_{n2} \cdot \Omega_{Fa} + \frac{k_{necks}}{I_y} \cdot B_{n2} \right] \cos(\Omega_{Fa} t) = \frac{(m_{head} \cdot g \cdot d_{CGz}) \sin(\theta_k) - (m_{head} \cdot g \cdot d_{CGx}) \cos(\theta_k)}{I_y}$$

$$-A_{n2} \cdot \Omega_{Fa}^2 - \frac{(k_{oobleck} + k_{damp})}{I_y} \cdot B_{n2} \cdot \Omega_{Fa} + \frac{k_{necks}}{I_y} \cdot A_{n2} = \left(\frac{m_{head} \cdot g \cdot d_{CGz}}{I_y} \right)$$

$$-B_{n2} \cdot \Omega_{Fa}^2 + \frac{(k_{oobleck} + k_{damp})}{I_y} \cdot A_{n2} \cdot \Omega_{Fa} + \frac{k_{necks}}{I_y} \cdot B_{n2} = \left(\frac{-m_{head} \cdot g \cdot d_{CGx}}{I_y} \right)$$

$$-A_{n2} \cdot I_y \cdot \Omega_F^2 - (k_{oobleck} + k_{damp}) \cdot B_{n2} \cdot \Omega_F + k_{necks} \cdot A_{n2} = m_{head} \cdot g \cdot d_{CGz}$$

$$(k_{necks} - I_y \cdot \Omega_F^2) \cdot A_{n2} - (k_{oobleck} + k_{damp}) \cdot \Omega_F \cdot B_{n2} = m_{head} \cdot g \cdot d_{CGz}$$

$$-B_{n2} \cdot I_y \cdot \Omega_F^2 + (k_{oobleck} + k_{damp}) \cdot A_{n2} \cdot \Omega_F + k_{necks} \cdot B_{n2} = -m_{head} \cdot g \cdot d_{CGx}$$

$$(k_{necks} - I_y \cdot \Omega_F^2) \cdot B_{n2} + (k_{oobleck} + k_{damp}) \cdot \Omega_F \cdot A_{n2} = -m_{head} \cdot g \cdot d_{CGx}$$

$$B_{n2} = \frac{-m_{head} \cdot g \cdot d_{CGx} - (k_{oobleck} + k_{damp}) \cdot \Omega_{Fa} \cdot A_{n2}}{(k_{necks} - I_y \cdot \Omega_{Fa}^2)}$$

$$(k_{necks} - I_y \cdot \Omega_{Fa}^2) \cdot A_{n2} - (k_{oobleck} + k_{damp}) \cdot \Omega_{Fa} \cdot \left[\frac{-m_{head} \cdot g \cdot d_{CGx} - (k_{oobleck} + k_{damp}) \cdot \Omega_{Fa} \cdot A_{n2}}{k_{necks} - I_y \cdot \Omega_{Fa}^2} \right] = m_{head} \cdot g \cdot d_{CGz}$$

$$(k_{necks} - I_y \cdot \Omega_{Fa}^2)^2 \cdot A_{n2} + (k_{oobleck} + k_{damp}) \cdot \Omega_{Fa} \cdot m_{head} \cdot g \cdot d_{CGx} + [(k_{oobleck} + k_{damp}) \cdot \Omega_{Fa}]^2 \cdot A_{n2} = (k_{necks} - I_y \cdot \Omega_{Fa}^2) \cdot (m_{head} \cdot g \cdot d_{CGz})$$

$$\left[(k_{necks} - I_y \cdot \Omega_{Fa}^2)^2 + [(k_{oobleck} + k_{damp}) \cdot \Omega_{Fa}]^2 \right] \cdot A_{n2} + (k_{oobleck} + k_{damp}) \cdot \Omega_{Fa} \cdot m_{head} \cdot g \cdot d_{CGx} = (k_{necks} - I_y \cdot \Omega_{Fa}^2) \cdot (m_{head} \cdot g \cdot d_{CGz})$$

$$A_{n2} := \frac{(k_{necks} - I_y \cdot \Omega_{Fa}^2) \cdot (m_{head} \cdot g \cdot d_{CGz}) - (k_{oobleck} + k_{damp}) \cdot \Omega_{Fa} \cdot m_{head} \cdot g \cdot d_{CGx}}{\left[(k_{necks} - I_y \cdot \Omega_{Fa}^2)^2 + [(k_{oobleck} + k_{damp}) \cdot \Omega_{Fa}]^2 \right]} = -4.73 \times 10^{-4}$$

$$A_2 = -4.891 \times 10^{-4}$$

$$B_{n2} := \frac{-m_{head} \cdot g \cdot d_{CGx} - (k_{oobleck} + k_{damp}) \cdot \Omega_{Fa} \cdot A_{n2}}{k_{necks} - I_y \cdot \Omega_{Fa}^2} = 1.965 \times 10^{-4}$$

$$B_2 = 1.662 \times 10^{-4}$$

$$\theta_{nal}(t_a) = c_{n3} \cdot e^{r_{n1}(t_a)} + c_{n4} \cdot e^{r_{n2}(t_a)} + A_{n2} \cdot \sin[\Omega_F(t_a)] + B_{n2} \cdot \cos[\Omega_F(t_a)]$$

$$\theta_{nal}(t_I) = c_{n3} \cdot e^{r_{n1}(t_I)} + c_{n4} \cdot e^{r_{n2}(t_I)} + A_{n2} \cdot \sin[\Omega_F(t_I)] + B_{n2} \cdot \cos[\Omega_F(t_I)] = \theta_{nEI}$$

$$\theta_{\text{nal}}(t_1) = c_{n3} \cdot e^{r_{n1}(t_1)} + c_{n4} \cdot e^{r_{n2}(t_1)} + A_{n2} \cdot \sin[\Omega_F(t_1)] + B_{n2} \cdot \cos[\Omega_F(t_1)] = \theta_{nEI}$$


$$\left[\frac{c_{nEI} + A_{n2} \cdot \Omega_F \cdot \sin[\Omega_F(t_1)] + B_{n2} \cdot \Omega_F \cdot \cos[\Omega_F(t_1)] - c_{n4} \cdot r_{n2}^2 \cdot e^{r_{n2}(t_1)}}{r_{n1}^2} + c_{n4} \cdot e^{r_{n2}(t_1)} + A_{n2} \cdot \sin[\Omega_F(t_1)] + B_{n2} \cdot \cos[\Omega_F(t_1)] = \theta_{nEI} \right]$$

$$\omega_{\text{nal}} := \left[\frac{c_{nEI}(t_1) + A_{n2} \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa}(t_1)] + B_{n2} \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa}(t_1)] - \omega_{nEI} \cdot r_{n1} + A_{n2} \cdot r_{n1} \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa}(t_1)] - B_{n2} \cdot r_{n1} \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa}(t_1)]}{r_{n2}^2 \cdot e^{r_{n2}(t_1)} - r_{n1} \cdot r_{n2} \cdot e^{r_{n2}(t_1)}} \right] = 3.47 \quad \begin{matrix} c_4 = 23.342 \\ c_3 = -26.925 \end{matrix}$$

$$\omega_{\text{nal}} := \frac{\theta_{nEI} - A_{n2} \cdot \sin[\Omega_{Fa}(t_1)] - B_{n2} \cdot \cos[\Omega_{Fa}(t_1)] - c_{n4} \cdot e^{r_{n2}(t_1)}}{e^{r_{n1}(t_1)}} = -4.812$$

Complete Solution

$$\theta_{\text{nal}}(t_a) := c_{n3} \cdot e^{r_{n1}(t_a)} + c_{n4} \cdot e^{r_{n2}(t_a)} + A_{n2} \cdot \sin[\Omega_{Fa}(t_a)] + B_{n2} \cdot \cos[\Omega_{Fa}(t_a)]$$

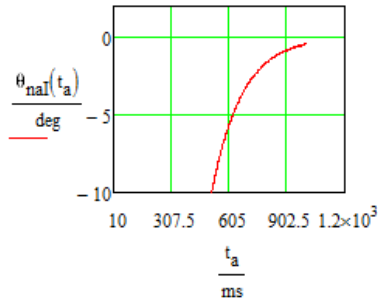


$$\theta_{\text{nal}} := \theta_{\text{nal}}(t_1) = -165.997 \cdot \text{deg} \quad \theta_{nEI} = -165.997 \cdot \text{deg}$$

$$\theta_{\text{nal}}(502\text{s}) = -10.916 \cdot \text{deg}$$

$$\theta_{\text{nal}}(17\text{ms}) = -183.2 \cdot \text{deg}$$

Guess $t_{\text{ng}} := 350\text{ms}$


$$\omega_{\text{nal}}(t_a) := c_{n3} \cdot r_{n1} \cdot e^{r_{n1}(t_a)} + c_{n4} \cdot r_{n2} \cdot e^{r_{n2}(t_a)} + A_{n2} \cdot \Omega_{Fa} \cdot \cos[\Omega_{Fa}(t_a)] - B_{n2} \cdot \Omega_{Fa} \cdot \sin[\Omega_{Fa}(t_a)]$$

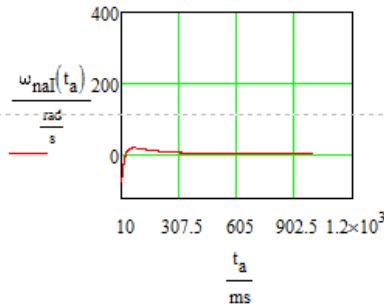

$$\omega_{nEI} = -186.363 \cdot \frac{\text{rad}}{\text{sec}}$$

$$\omega_{\text{nal}} := \omega_{\text{nal}}(t_1) = -75.108 \cdot \frac{\text{rad}}{\text{s}}$$

$$\alpha_{\text{nal}}(t_a) := c_{n3} \cdot r_{n1}^2 \cdot e^{r_{n1} \cdot (t_a)} + c_{n4} \cdot r_{n2}^2 \cdot e^{r_{n2} \cdot (t_a)} - A_{n2} \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa} \cdot (t_a)] - B_{n2} \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa} \cdot (t_a)]$$

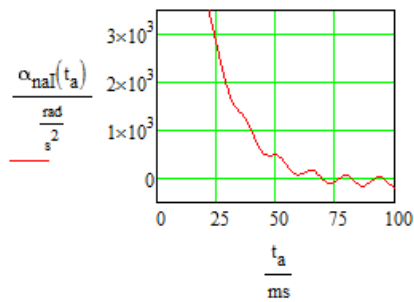

$$\alpha_{nEI} = 7.52 \times 10^3 \frac{1}{s^2}$$


$$\alpha_{\text{nal}}(t_I) = 6.804 \times 10^3 \frac{1}{s^2}$$

$$\alpha_{\text{nconstant}} := \alpha_{\text{nal}}(t_I) - \alpha_{nEI} = -715.681 \frac{1}{s^2}$$

$$t_t := 0s, .001s \dots .5s$$


$$\theta_{\text{ns}}(t_t) := \begin{cases} c_{n1} \cdot e^{r_{n1} \cdot t_t} + c_{n2} \cdot e^{r_{n2} \cdot t_t} + A_n \cdot \sin(\Omega_F \cdot t_t) + B_n \cdot \cos(\Omega_F \cdot t_t) & \text{if } 0s \leq t_t \leq t_I \\ c_{n3} \cdot e^{r_{n1} \cdot (t_t)} + c_{n4} \cdot e^{r_{n2} \cdot (t_t)} + A_{n2} \cdot \sin[\Omega_{Fa} \cdot (t_t)] + B_{n2} \cdot \cos[\Omega_{Fa} \cdot (t_t)] & \text{if } t_I < t_t \leq .5s \end{cases}$$

Angular Displacement of Head Over Time

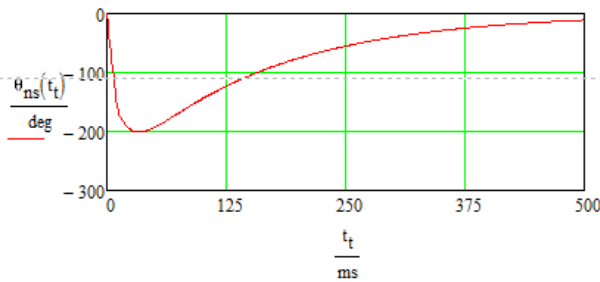

$$\omega_{\text{ns}}(t_t) := \begin{cases} \left(c_{n1} \cdot r_{n1} \cdot e^{r_{n1} \cdot t_t} + c_{n2} \cdot r_{n2} \cdot e^{r_{n2} \cdot t_t} + A_n \cdot \Omega_F \cdot \cos(\Omega_F \cdot t_t) - B_n \cdot \Omega_F \cdot \sin(\Omega_F \cdot t_t) \right) & \text{if } 0s \leq t_t \leq t_I \\ \left(c_{n3} \cdot r_{n1} \cdot e^{r_{n1} \cdot t_t} + c_{n4} \cdot r_{n2} \cdot e^{r_{n2} \cdot t_t} + A_{n2} \cdot \Omega_{Fa} \cdot \cos(\Omega_{Fa} \cdot t_t) - B_{n2} \cdot \Omega_{Fa} \cdot \sin(\Omega_{Fa} \cdot t_t) \right) & \text{if } t_I < t_t \leq .5s \end{cases}$$


Angular Velocity of Head Over Time

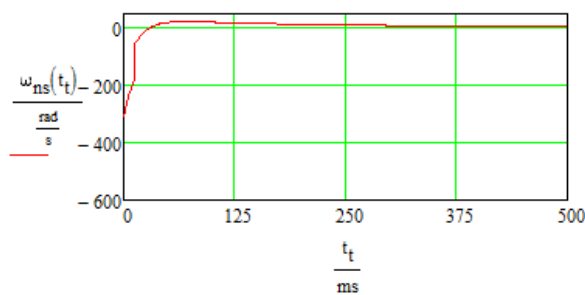


$$\omega(t_I) = -377.89 \frac{1}{s}$$

$$\alpha_{ns}(t) := \begin{cases} \left(c_{n1} \cdot r_{n1}^2 \cdot e^{r_{n1} \cdot t} + c_{n2} \cdot r_{n2}^2 \cdot e^{r_{n2} \cdot t} - A_n \cdot \Omega_F^2 \cdot \sin(\Omega_F \cdot t) - B_n \cdot \Omega_F^2 \cdot \cos(\Omega_F \cdot t) \right) & \text{if } 0ms \leq t \leq t_1 \\ \left[c_{n3} \cdot r_{n1}^2 \cdot e^{r_{n1}(t)} + c_{n4} \cdot r_{n2}^2 \cdot e^{r_{n2}(t)} - A_{n2} \cdot \Omega_{Fa}^2 \cdot \sin[\Omega_{Fa}(t)] - B_{n2} \cdot \Omega_{Fa}^2 \cdot \cos[\Omega_{Fa}(t)] \right] & \text{if } t_1 < t \leq .5s \end{cases}$$

$$a_{n\alpha}(t) := \alpha_{ns}(t) \cdot d_{CG} \quad \alpha_{ns}(0ms) = 1.395 \times 10^4 \frac{1}{s^2} \cdot \text{rad} \quad a_{n\alpha}(0ms) = 788.597 \frac{m}{s^2}$$

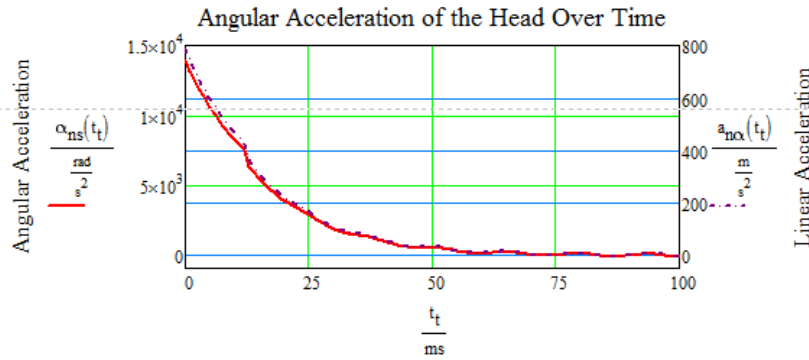


$$a_{nx}(t) := \alpha_{ns}(t) \cdot d_{CGz} \quad a_{nz}(t) := \alpha_{ns}(t) \cdot d_{CGx}$$

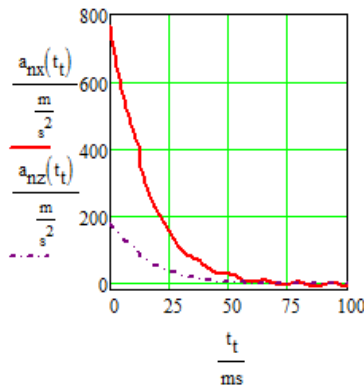

$$a_{nxmax} := a_{nx}(0ms) = 767.45 \frac{m}{s^2}$$

$$a_{nzmax} := a_{nz}(0ms) = 181.397 \frac{m}{s^2}$$

$$HIP_{NS}(t) := m_{head} \cdot a_{nx}(t) \cdot \int_{0ms}^{60ms} a_{nx}(t) dt + m_{head} \cdot a_{nz}(t) \cdot \int_{0ms}^{60ms} a_{nz}(t) dt + I_y \cdot \alpha_{ns}(t) \cdot \int_{0ms}^{60ms} \alpha_{ns}(t) dt$$

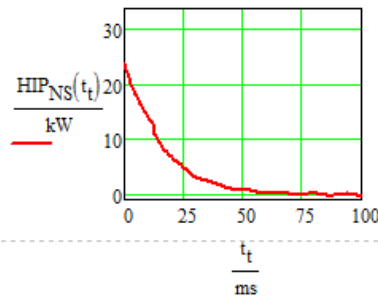

$$HIP_{NS}(0ms) = 23.999 \text{ kW}$$

$$k_{oobleck} = 0.151 \frac{m^2 \cdot kg}{s}$$

$$k_{damp} = 0.215 \frac{m^2 \cdot kg}{s}$$

9.2-7: Calculation for Determining Necessary Thickness of Plywood for the Test Rig Base

How thick of plywood to get?

young's modulus of plywood $E_w := 12.4\text{GPa}$ }from http://www.tecotested.com/techtips/pdf/tt_plywooddesigncapacities

Length of wood board $L_b := 24\text{in}$ width $w_{d_p} := 12\text{in}$ Thickness $Th_p := .25\text{in}$

$$x_b := 0\text{-in, } 1\text{in}.. L_b$$

Volume of wood board $A_{cw} := w_{d_p} \cdot Th_p = 1.935 \times 10^{-3} \text{ m}^2$

Assume weight of air cylinder support structure (& air cylinder) are distributed uniformly

Length from end to start of air cylinder structure $L_a := 13\text{in}$

Density of plywood $\delta_p := 3.47 \frac{\text{kg}}{\text{m}^3}$ }from http://www.tecotested.com/techtips/pdf/tt_plywooddesigncapacities

mass per length of wood base $m_{wb} := A_{cw} \cdot \delta_p = 6.716 \times 10^{-3} \frac{\text{kg}}{\text{m}}$

Weight per length of wood base $W_w := m_{wb} \cdot g = 0.066 \frac{\text{N}}{\text{m}}$

Weight of wood base $W_W := W_w \cdot L_b$

Perforated framing 304 steel

Cross section aread $A_{cF} := [.074\text{in} \cdot (1.5\text{in} + 1.426\text{in})] = 0.217 \cdot \text{in}^2$

Length of frame base $L_F := L_b - L_a = 11\text{-in}$

Amount

total mass 1ft frame $m_{1F} := A_{cF} \cdot \delta_{ss} \cdot 12\text{in} = 0.342\text{kg}$ 4

total mass of 2ft column frame $m_{2F} := A_{cF} \cdot \delta_{ss} \cdot 24\text{in} = 0.684\text{kg}$ 4

total mass 1ft frame $m_{\text{half}F} := A_{cF} \cdot \delta_{ss} \cdot .6\text{in} = 0.017\text{kg}$ 6

total mass of support structure (approx.) $m_F := 4m_{1F} + 4 \cdot m_{2F} + 6 \cdot m_{\text{half}F} = 4.205\text{kg}$

total mass of support structure with air cylinder $m_L := m_F + m_{ac} = 6.763\text{kg}$

weight of support structure with air cylinder $W_L := m_L \cdot g = 14.911\text{-lbf}$

weight of load per inch

$$W_L := \frac{W_L}{L_F} = 1.356 \cdot \frac{\text{lbf}}{\text{in}}$$

Moment of Inertia of wood board

$$I_w := \frac{1}{12} \cdot L_b \cdot Th_p^3 = 0.031 \cdot \text{in}^4$$


Forces from hands while carrying set-up at ends

$$N_2 := \frac{W_w \cdot \frac{L_b^2}{2} + W_L \cdot \left(L_a + \frac{L_F}{2} \right)}{L_b} = 11.498 \cdot \text{lbf}$$


$$N_1 := W_w \cdot L_b + W_L - N_2 = 3.422 \cdot \text{lbf}$$

$$S(x, a) := \text{if}(x \geq a, 1, 0)$$

$$\text{Shear } V(x_b) := N_1 \cdot S(x_b, 0\text{in}) - W_w \cdot S(x_b, 0\text{in}) \cdot (x_b) - W_L \cdot S(x_b, L_a) \cdot (x_b - L_a) + N_2 \cdot S(x_b, L_b)$$

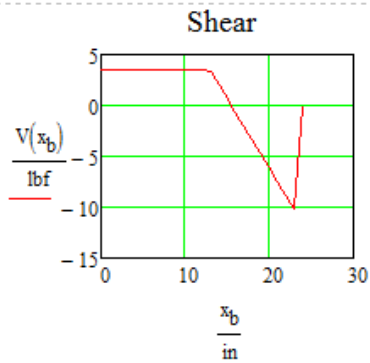

$$M_{\text{bend}}(x_b) := N_1 \cdot S(x_b, 0\text{in}) \cdot x_b - \frac{W_w}{2} \cdot S(x_b, 0\text{in}) \cdot x_b^2 - \frac{W_1}{2} \cdot S(x_b, L_a) \cdot (x_b - L_a)^2 + N_2 \cdot S(x_b, L_b) \cdot (x_b - L_b)$$

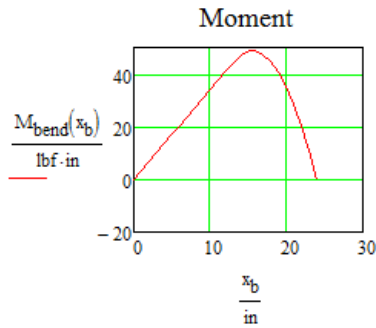

$$\theta_{\text{slope}}(x_b) = \frac{1}{E_w \cdot I_w} \left[\frac{N_1}{2} \cdot S(x_b, 0\text{in}) \cdot x_b^2 - \frac{W_w}{6} \cdot S(x_b, 0\text{in}) \cdot x_b^3 - \frac{W_1}{6} \cdot S(x_b, L_a) \cdot (x_b - L_a)^3 + \frac{N_2}{2} \cdot S(x_b, L_b) \cdot (x_b - L_b)^2 + C_1 \right]$$



$$D(x_b) = \frac{1}{E_w \cdot I_w} \left[\frac{N_1}{6} \cdot S(x_b, 0\text{in}) \cdot x_b^3 - \frac{W_w}{24} \cdot S(x_b, 0\text{in}) \cdot x_b^4 - \frac{W_1}{24} \cdot S(x_b, L_a) \cdot (x_b - L_a)^4 + \frac{N_2}{6} \cdot S(x_b, L_b) \cdot (x_b - L_b)^3 + C_1 \cdot x_b + C_2 \right]$$

$$C_{w1} := \frac{-N_1}{2} \cdot L_b^2 + \frac{W_w}{6} \cdot L_b^3 + \frac{W_1}{6} \cdot (L_b - L_a)^3 = -683.833 \cdot \text{lbf} \cdot \text{in}^2$$

$$C_{w2} := \frac{-N_1}{6} \cdot L_b^3 + \frac{W_w}{24} \cdot L_b^4 + \frac{W_1}{24} \cdot (L_b - L_a)^4 - C_{w1} \cdot L_b = 9.361 \times 10^3 \cdot \text{lbf} \cdot \text{in}^3$$

$$\theta_{\text{slope}}(x_b) := \frac{1}{E_w \cdot I_w} \left[\frac{N_1}{2} \cdot S(x_b, 0\text{in}) \cdot x_b^2 - \frac{W_w}{6} \cdot S(x_b, 0\text{in}) \cdot x_b^3 - \frac{W_1}{6} \cdot S(x_b, L_a) \cdot (x_b - L_a)^3 + \frac{N_2}{2} \cdot S(x_b, L_b) \cdot (x_b - L_b)^2 + C_{w1} \right]$$

$$D(x_b) := \frac{1}{E_w \cdot I_w} \left[\frac{N_1}{6} \cdot S(x_b, 0\text{in}) \cdot x_b^3 - \frac{W_w}{24} \cdot S(x_b, 0\text{in}) \cdot x_b^4 - \frac{W_1}{24} \cdot S(x_b, L_a) \cdot (x_b - L_a)^4 + \frac{N_2}{6} \cdot S(x_b, L_b) \cdot (x_b - L_b)^3 + C_{w1} \cdot x_b + C_{w2} \right]$$

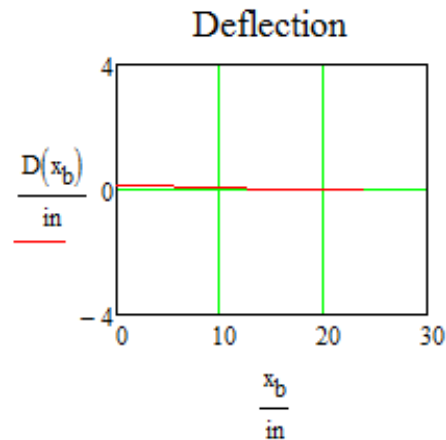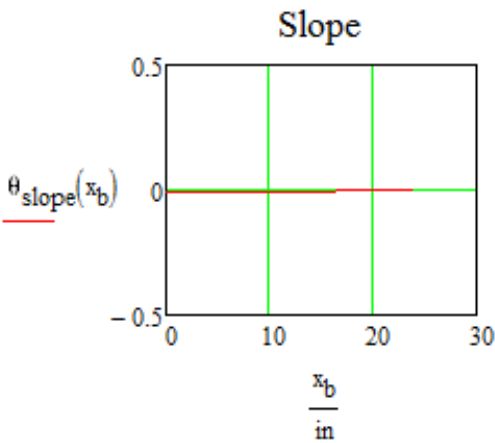

9.3 Appendix C: Procedures

9.3-1: Procedure for Determining Oobleck's Viscosity to Force Relationship

Experimental procedure to find equation relation of viscosity to force for Oobleck:

Materials:

- 2000mL graduated cylinder
- Digital scale
- Micrometer
- Stop watch
- Ruler
- 5 spheres of different masses
- Oobleck sample

Procedure:

- 1) Measure the diameter of the graduated cylinder using the ruler and record the result.
- 2) Find the mass of the empty graduated cylinder using the scale and record the result.
- 3) Measure the diameter of one of the spheres using the micrometer and record the result in a table.
- 4) Find the mass of the same sphere using the scale and record the result in a table.
- 5) Find the density of the sphere using the formula: $\rho = \frac{m}{\frac{3}{16}\pi d^3}$ where m is the mass found in step 4 and d is the diameter found in step 3. Record the result in a table.
- 6) Repeat steps 3-5 for the remaining spheres.
- 7) Take an Oobleck sample and pour it into the graduated cylinder until the 1600mL mark.
- 8) Measure the height the Oobleck fills the graduated cylinder to and record the result. (This only needs to be done once)
- 9) Calculate the volume of the Oobleck using the formula: $V = \frac{1}{4}\pi d^2 h$ where d is the diameter found in step 1 and h is the height found in step 8 and record the result.
- 10) Find the mass of the graduated cylinder with the Oobleck in it using the scale.
- 11) Find the mass of the Oobleck by subtracting the mass of the empty graduated cylinder found in step 2 from the mass found in step 10 and record the result.
- 12) Find the density of the Oobleck by using the following formula: $\rho = \frac{m}{\frac{3}{16}\pi d^2 h}$ where m is the mass found in step 11 and d is the diameter found in step 1. Record your results.
- 13) Use the stopwatch to time how long it takes for the sphere to reach the bottom of the graduated cylinder and record the results in a table.
- 14) Find the viscosity of the Oobleck for each sphere using the following formulas: $F_d = 6\pi\mu Vd$, $F_d = mg - F_b$, and $F_b = \frac{4}{3}\pi r^3 \rho_{\text{fluid}}g$, where F_d is the drag force, μ is the viscosity of the Oobleck, V is the velocity of the sphere, d is the diameter of the sphere, m is the mass of the sphere, g is the acceleration of gravity, F_b is the buoyancy force, r is the radius of the sphere, and ρ_{fluid} is the density of the Oobleck found in step 12. Record your result in a table.
- 15) Repeat steps 13-15 for each sphere in the same sample of Oobleck.
- 16) Repeat steps 7-15 for each sample of Oobleck.
- 17) Once all the viscosities have been found for each sphere in each sample of Oobleck, plot the viscosities vs. weight of the sphere (mg).
- 18) Fit an equation to the curve to find the shear thickening relationship the Oobleck has with force.

9.3-2 : Hot Water Oobleck Cooking Procedure

Oobleck cooking procedure using hot water

1. *Mix one batch 2:1 cornstarch to water in order to have the same concentration*
2. *Divide mixture into zip lock bags*
3. *Fill a large pot with enough water (at the same temperature of that used to make the suspension) to cover the suspension. Use a metal steamer to set the bags on in the pot to make sure none of the plastic touches the side of the pot*
4. *Fill a bowl with cold water and ice*
5. *Turn gas stove on medium (5) and heat water until bubbles are seen sticking to the sides then "stir" the bags*
6. *Reduce heat to low (3) and leave the bags in for 3 minutes*
7. *"stir" and remove 1 bag and place it in the ice water for 2 minutes*
8. *After two minutes "stir" the bags and remove one and place it in the ice water for two minutes*
9. *Repeat steps 7 and 8 for the remaining bags*
10. *Dry off and label bags accordingly after the ice water bath*

**if cooking for longer, "stir" every two minutes*

**The last bag was cooked for 15 minutes to get a more striking difference between the cooked and uncooked oobleck.*

9.4 Appendix D: Miscellaneous

Standardized Assessment of Concussion (SAC)

ORIENTATION Score: ___ / 5

What month is it? 0 1

What is the date? 0 1

What day of the week is it? 0 1

What year is it? 0 1

What time of day is it? (*within 1 hour*) 0 1

IMMEDIATE MEMORY Score: ___ / 15

Form A	Form B	Form C	Form D
Elbow	Candle	Baby	Monkey
Apple	Paper	Monkey	Penny
Carpet	Sugar	Perfume	Blanket
Saddle	Sandwich	Sunset	Lemon
Bubble	Wagon	Iron	Insect

	Trial 1	Trail 2	Trail 3
Word 1	0 <input type="checkbox"/> 1 <input type="checkbox"/>	0 <input type="checkbox"/> 1 <input type="checkbox"/>	0 <input type="checkbox"/> 1 <input type="checkbox"/>
Word 2	0 <input type="checkbox"/> 1 <input type="checkbox"/>	0 <input type="checkbox"/> 1 <input type="checkbox"/>	0 <input type="checkbox"/> 1 <input type="checkbox"/>
Word 3	0 <input type="checkbox"/> 1 <input type="checkbox"/>	0 <input type="checkbox"/> 1 <input type="checkbox"/>	0 <input type="checkbox"/> 1 <input type="checkbox"/>
Word 4	0 <input type="checkbox"/> 1 <input type="checkbox"/>	0 <input type="checkbox"/> 1 <input type="checkbox"/>	0 <input type="checkbox"/> 1 <input type="checkbox"/>
Word 5	0 <input type="checkbox"/> 1 <input type="checkbox"/>	0 <input type="checkbox"/> 1 <input type="checkbox"/>	0 <input type="checkbox"/> 1 <input type="checkbox"/>

NEUROLOGIC SCREENING

Loss of Consciousness: (*occurrence, duration*)

Retrograde Amnesia

Antegrade Amnesia

Strength

Sensation

Coordination

CONCENTRATION: Digits Backwards Score: ___ / 5

Form A

4-9-3	6-2-9	0 <input type="checkbox"/> 1 <input type="checkbox"/>
3-8-1-4	3-2-7-9	0 <input type="checkbox"/> 1 <input type="checkbox"/>
6-2-9-7-1	1-5-2-8-5	0 <input type="checkbox"/> 1 <input type="checkbox"/>
7-1-8-4-6-2	5-3-9-1-4-8	0 <input type="checkbox"/> 1 <input type="checkbox"/>

Form B

5-2-6	4-1-5	0 <input type="checkbox"/> 1 <input type="checkbox"/>
1-7-9-5	4-9-6-8	0 <input type="checkbox"/> 1 <input type="checkbox"/>
4-8-5-2-7	6-1-8-4-3	0 <input type="checkbox"/> 1 <input type="checkbox"/>
8-3-1-9-6-4	7-2-4-8-6-5	0 <input type="checkbox"/> 1 <input type="checkbox"/>

Form C

1-4-2	6-5-8	0 <input type="checkbox"/> 1 <input type="checkbox"/>
1-8-3-1	3-4-8-1	0 <input type="checkbox"/> 1 <input type="checkbox"/>
4-9-1-5-3	6-8-2-5-1	0 <input type="checkbox"/> 1 <input type="checkbox"/>
3-7-6-5-1-9	9-2-6-5-1-4	0 <input type="checkbox"/> 1 <input type="checkbox"/>

Months in Reverse Order

Dec_Nov_Oct_Sept_Aug_Jul_Jun_May_Apr_Mar_Feb_Jan

0 1

DELAYED RECALL Score: ___ / 5

Word 1 0 1

Word 2 0 1

Word 3 0 1

Word 4 0 1

Word 5 0 1

SCORE TOTALS

Orientation = ___ / 5

Immediate Memory = ___ / 15

Concentration = ___ / 5

Delayed Recall = ___ / 5

Overall Score

/ 30

Standard Assessment of Concussion