

MSL Entry, Descent, and Landing Instrumentation: Return on Investment D. Bose¹, T. R. White², M. Schoenenberger³, M. Munk⁴, H. H. Hwang⁵, and H. S. Wright⁶

¹NASA Ames Research Center, Moffet Field, CA, 94035, deepak.bose@nasa.gov

²ERC Inc., Moffet Field, CA, 94035, todd.r.white@nasa.gov

³NASA Langley Research Center, Hampton, VA, 23681, mark.schoenenberger@nasa.gov

⁴NASA Langley Research Center, Hampton, VA, 23681, michelle.m.munk@nasa.gov

⁵NASA Ames Research Center, Moffet Field, CA, 94035, helen.hwang@nasa.gov

⁶NASA Langley Research Center, Hampton, VA, 23681, henry.s.wright@nasa.gov

Introduction: On Aug 5, 2012 the Mars Science Laboratory (MSL) Entry, Descent, and Landing Instrumentation (MEDLI) suite on MSL entry vehicle heat-shield successfully returned surface pressure and in-depth temperature data.^{1,2} The MEDLI data has given scientists and engineers an unprecedented ability to reconstruct entry environment, atmospheric density, and flight trajectory, and flight validation of predictions vehicle aerodynamics and thermal protection system (TPS) performance. This presentation will discuss key findings from MEDLI, some of which are being applied to improve definition of aerothermal environment and TPS sizing margins for existing NASA entry missions. The postflight analysis has shown that a significant thermal protection mass saving upon redesign is possible for an MSL-class vehicle. The success of MEDLI has also demonstrated and qualified robust flight instrumentation technologies at very low risk to the mission. The potential benefits of MEDLI to planetary exploration and sample return missions, as well as to exploration class missions to Mars will be presented.

MEDLI2 Instrumentation Suite

The presentation will also introduce an enhanced MEDLI instrumentation suite (called MEDLI2) that is being developed for Mars-2020 mission with the goals of further reducing TPS mass fraction, and enhanced atmosphere and trajectory reconstruction.

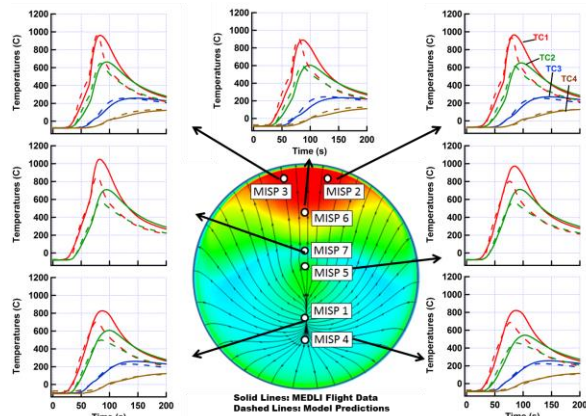


Figure 1. MEDLI temperature data and comparisons with model predictions

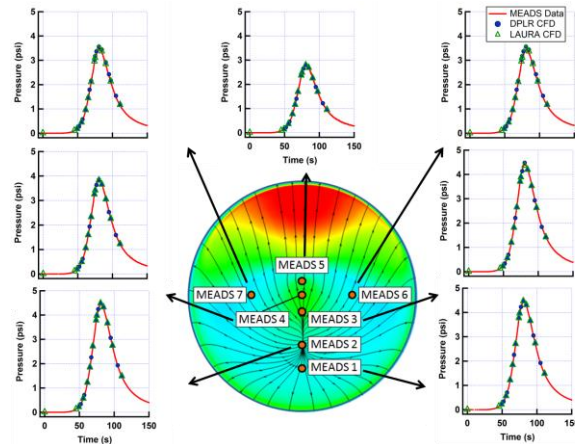


Figure 2. MEDLI pressure data and comparisons with model predictions

Mars-2020 is an MSL build-to-print system that will deploy a surface rover similar to *Curiosity* on Mars. This presentation will describe MEDLI2 objectives, scope, and instrumentation suite being developed. MEDLI2 will expand on the data acquired by MEDLI instrumentation suite. The scope of MEDLI2 will include backshell instrumentation where our aerothermal and pressure environment predictions are highly uncertain. A significant mass savings in the backshell is anticipated with supporting data from MEDLI2. In addition, MEDLI2 will include pressure measurements in the supersonic flight, to better reconstruct flight trajectory and validate aerodynamic predictions. The aerodynamic prediction uncertainty in supersonic flight contributes to an increased landing footprint.

References:

- [1] Bose, D., White, T, Mahzari, M., and Edquist, K., (2013) *AAS 13-311*. [2] Karlgaard, C.D., Kutty, P., Schoenenberger, M, and Schidner, J., *AAS 13-307*.