



# ***Summary of the High Ice Water Content (HIWC) RADAR Flight Campaigns***

Thomas P. Ratvasky<sup>1</sup>, Steven D. Harrah<sup>2</sup>, J. Walter Strapp<sup>3</sup>, Lyle E. Lilie<sup>4</sup>, Fred H. Proctor<sup>2</sup>, Justin K. Strickland<sup>5</sup>, Patricia J. Hunt<sup>5</sup>, Kristopher Bedka<sup>2</sup>, Glenn Diskin<sup>2</sup>, John B. Nowak<sup>2</sup>, T. Paul Bui<sup>6</sup>, Aaron Bansemer<sup>7</sup>, Chris Dumont<sup>8</sup>

<sup>1</sup> NASA Glenn Research Center, <sup>2</sup> NASA Langley Research Center, <sup>3</sup> Met Analytics Inc., <sup>4</sup> Science Engineering Associates, <sup>5</sup> Analytical Mechanics Assoc., <sup>6</sup> NASA Ames Research Center, <sup>7</sup> National Center for Atmospheric Research, <sup>8</sup> FAA William J. Hughes Technical Center


Presented by Thomas Ratvasky

SAE International Conference on Icing of Aircraft, Engines, and Structures  
June 17-21, 2019 - Minneapolis, MN, USA



# Background

- In 2003-05 timeframe, an ARAC Engine Harmonization Working Group (EHWG) reviewed numerous jet-engine powerloss events that occurred near deep convective storms. The effort resulted in a proposed Part 33 Appendix D and a Mixed-Phase/Glaciared Icing Technology Plan to guide future ice crystal icing research.
  - Tasks 1-2 were to improve cloud instruments for HIWC conditions and conduct flight research to characterize HIWC environments
- Mason, et al. (2006), described engine powerloss events and identified some common pilot observations,
  - No significant radar echoes (<30dBz) at flight altitude where engine event occurred
- In 2006, the High Ice Water Content (HIWC) Study was initiated in North America/Australia and developed the HIWC Science Plan<sup>1</sup> to define the aviation and science objectives, including:
  - Investigate use of onboard weather radar to detect HIWC conditions to enable pilots to avoid the HIWC environment

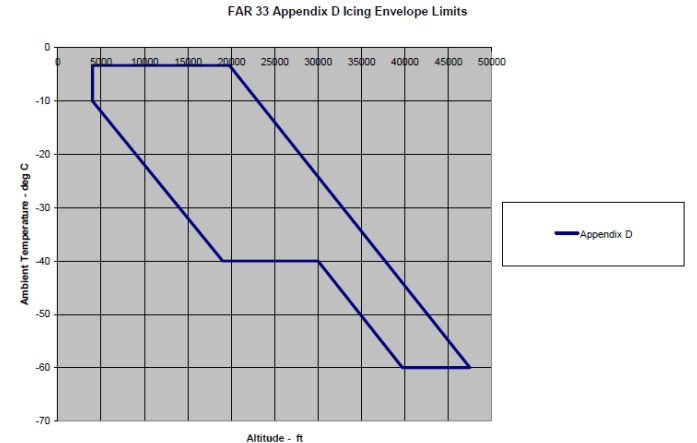

Proposed Appendix D Altitude vs Temp, from Mazzawy et al Appendix D - An Interim Icing Envelope", SAE 2007-01-3311



Locations of Powerloss Events, recreated from Mason et al "The Ice Particle Threat to Engines", AIAA 2006-0206

1 Strapp, et al., "The High Ice Water Content (HIWC) Study of Deep Convective Clouds: Science and Technical Plan," DOT/FAA/TC-14/31

# Background

- In 2014 and 2015, the European-led High Altitude Ice Crystal (HAIC) project and HIWC team collaborated to conduct two HAIC-HIWC flight campaigns to acquire data to characterize the deep convective cloud environment and address other aviation and science objectives
  - 34 research flights of the SAFIRE Falcon 20 equipped with icing probes were conducted from Darwin, Australia (2014) and Cayenne, French Guiana (2015)
    - » The data set from these campaigns was substantial and unique, but:
      - Insufficient amount of data at -50C flight level and
      - No fundamental pilot radar data acquired along with in-situ cloud measurements to develop long-range identification technologies to enable avoidance




# Background

- Post-Darwin, NASA and FAA initiated a collaborative effort to conduct another flight campaign
  - primary objective to quantify pilot weather radar measurements with in-situ measurements of HIWC in deep convective storms.
  - HIWC RADAR I (2015): NASA DC-8, Ft. Lauderdale, FL
  - HIWC RADAR II (2018): NASA DC-8, Ft. Lauderdale, FL/Palmdale, CA/Kona, HI
- Purpose of paper: Summarize how the campaigns were conducted and highlight key results





# HIWC RADAR I (2015) Flight Campaign Overview:


- 3 week campaign, 80 flt-hrs based from Ft Lauderdale, FL, Aug 10-31, 2015
- Utilized NASA DC-8 Airborne Science Laboratory
  - Excellent platform for HIWC research:
    - » Flight performance: Range (5,400 Nm), Ceiling (41,000 ft), Endurance (12 hr)
    - » Instrumentation sites on wing pylons and fuselage
- Operating Area: Caribbean and Gulf of Mexico
  - Climatological analyses supported August timeframe
  - Areas defined to facilitate discussions with ATC and country clearances

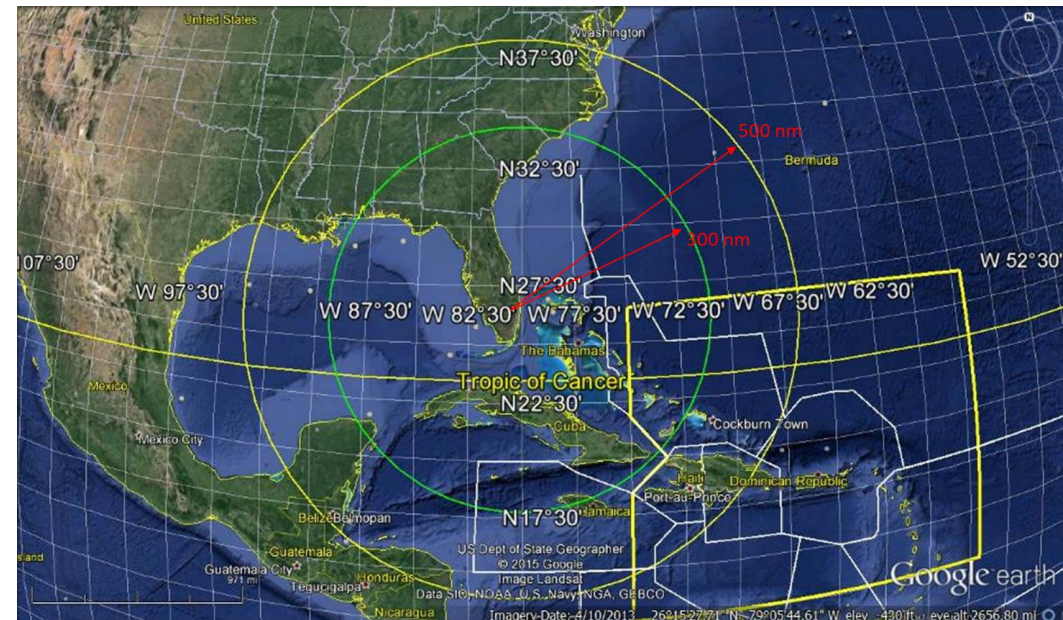

# HIWC RADAR I Instrumentation:

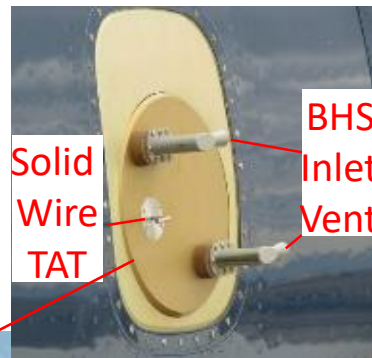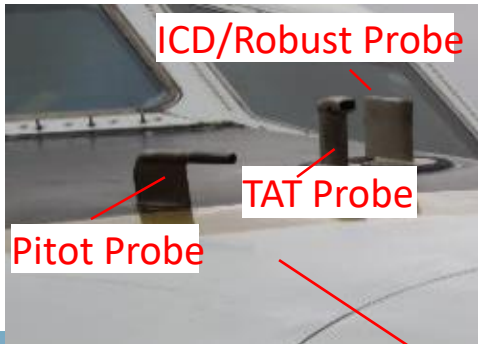

- Radar I&Q / Reflectivity
  - Honeywell RDR-4000
- Water Content
  - IKP2 (freestream)
  - SEA Robust/ICD (fuselage)
- Particle Spectra
  - DMT CDP2 (2-50 um)
  - SPEC 2D-S (10-1280 um)
  - DMT PIP (100-6400 um)
- Additional fuselage mounted instruments for background humidity, temperature, water content
- DC-8 systems: pitot-static for airspeed/altitude, TAT, GPS, etc.

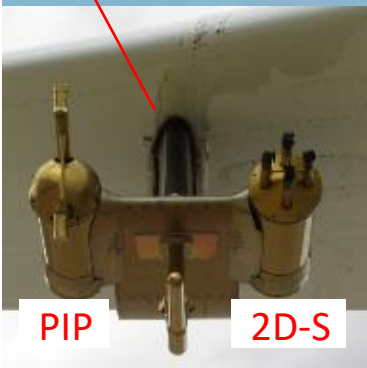

ARIM200





Modified  
Honeywell  
RDR-4000



# HIWC RADAR I Sampling Strategies & Concept of Operations


- Sampling Strategies: (consistent with HIWC Science Plan)
  - Oceanic MCSs (diam >100 Nm) with cloud top reaching tropopause; Tropical Storms highly desired
  - Level transects at altitudes associated with -50C, -40C, -30C, -10C ± 5C
- Concept of operations
  - Climatology indicated peak convection in late morning
  - Anticipated life cycles: MCSs ~3 hours; TS ~days
  - Daily morning Wx briefings – identify region of interest, initial way point
  - After takeoff, ground guidance team provide way points, altitude for initial run.
  - Subsequent runs defined during flight. Parallel, offset tracks; or repeat tracks at different altitude

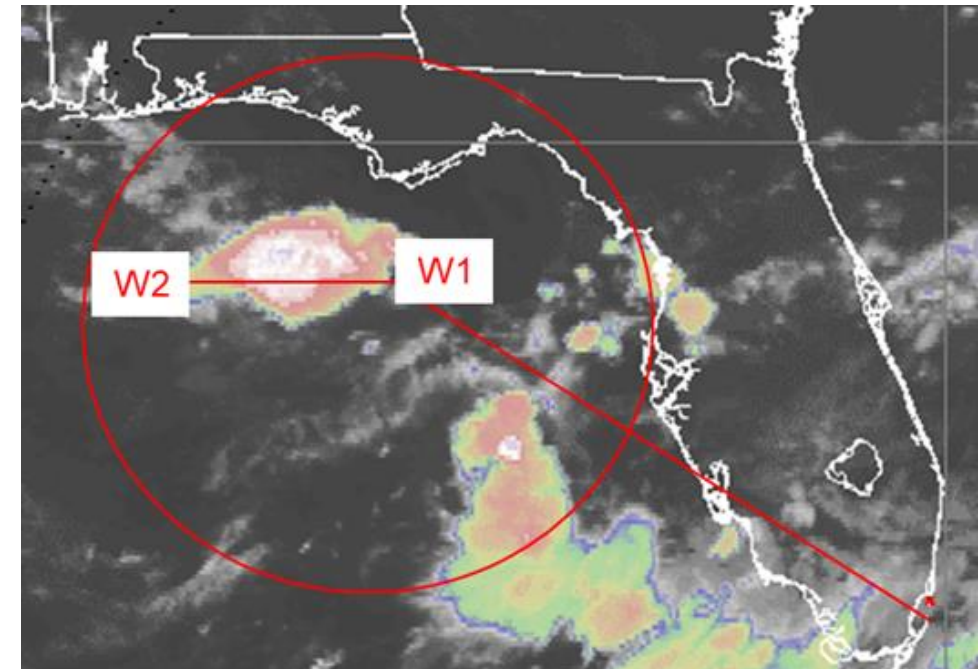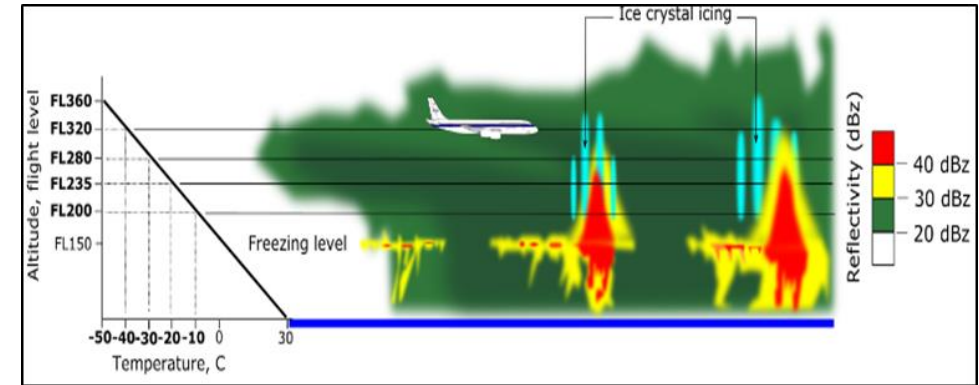






# HIWC RADAR I Flight Campaign Outcomes:


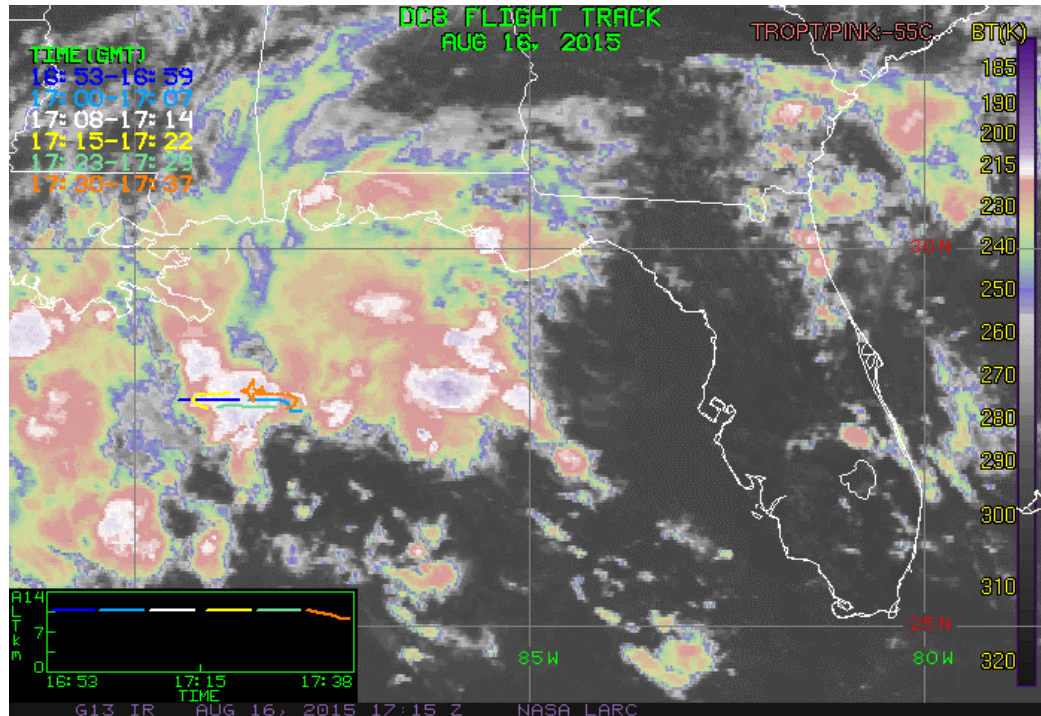


- Offshore MCS (Flight 4) example:
  - Flight tracks of 4 parallel runs with 5 Nm offset
  - TWC variations across parallel runs are consistent
    - » IWC generally peaks about 2 g/m<sup>3</sup>
    - » Cloud extent for IWC>0.1 about 40 Nm

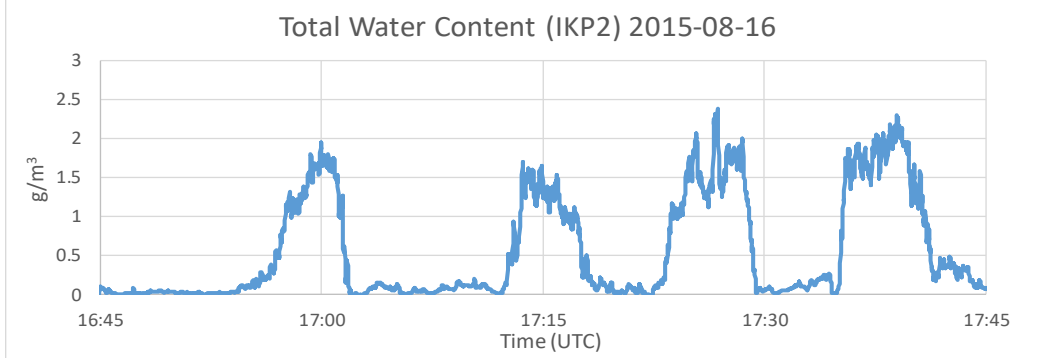

Alt=34Kft, Ts=-41C

# HIWC RADAR I Flight Campaign Outcomes:

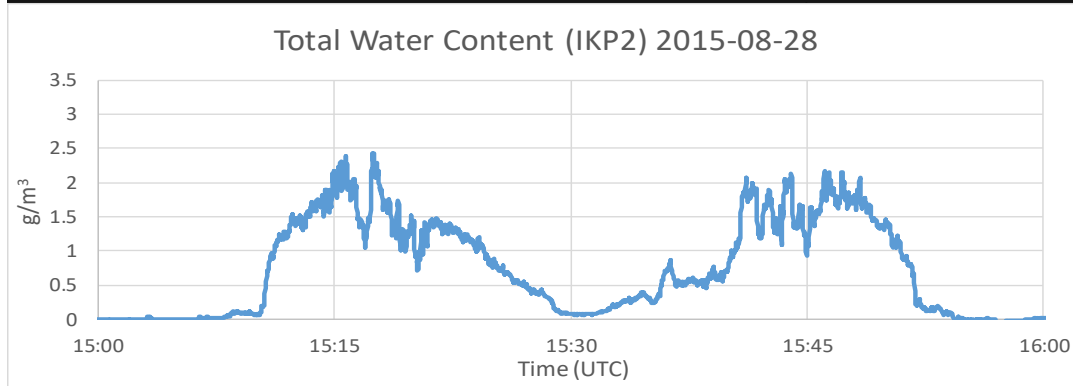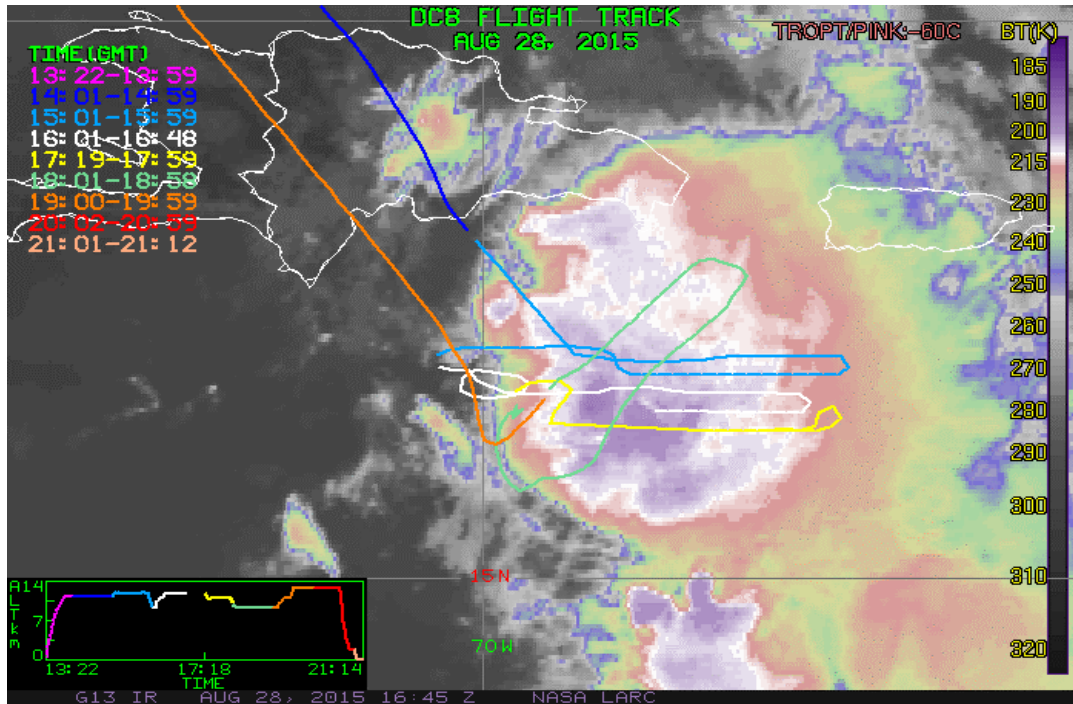


Alt=37Kft, Ts=-48C

- Tropical Storm (Flight 10) example:
  - Flight tracks of 2 parallel runs (cyan color) with 10 Nm offset
  - TWC variations across parallel runs are consistent
    - » IWC generally peaks about 2 g/m<sup>3</sup>
    - » Cloud extent for IWC>0.1 about 130 Nm
- General comparison of TS to MCS
  - TS provide deeper (colder) and longer data runs
  - TS are have longer life-cycle, predictable path and overall easier for flight planning


# HIWC RADAR I Flight Campaign Outcomes: Pitot Probe Anomalies



- Pitot probe icing has occurred in-service events during HIWC encounters
- During HIWC RADAR I, pitot probe icing occurred in 6 of ten flights.
- Airspeed anomalies were sometime abrupt (120 m/s drop) and other times subtle.
- Flight crew followed pre-planned mission rules and procedures when airspeed anomalies occurred
- Airspeed corrections were developed post flight and applied to SAT, TWC, PSD/MSD calculations

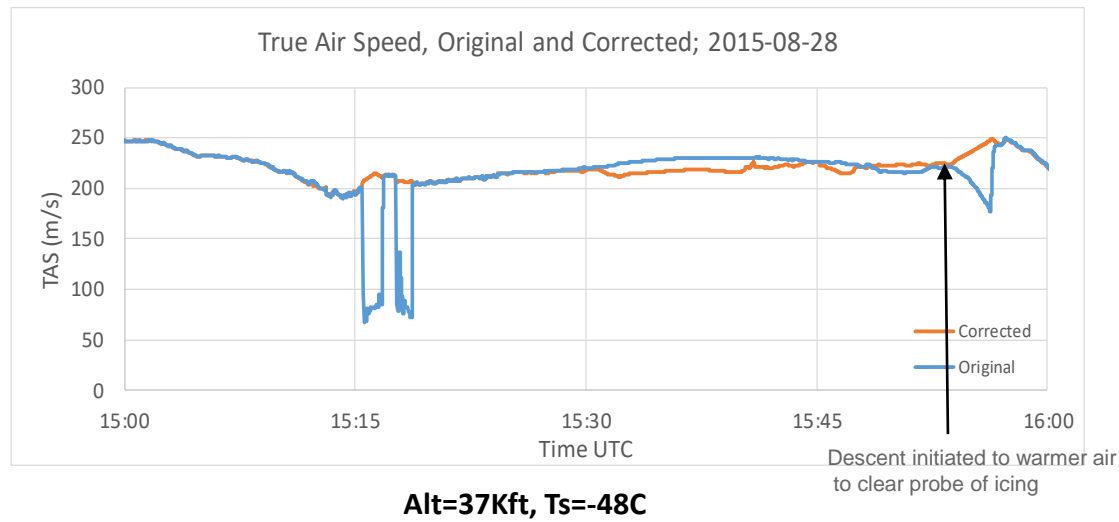

# HIWC RADAR I Flight Campaign Outcomes: TAT Probe Anomalies

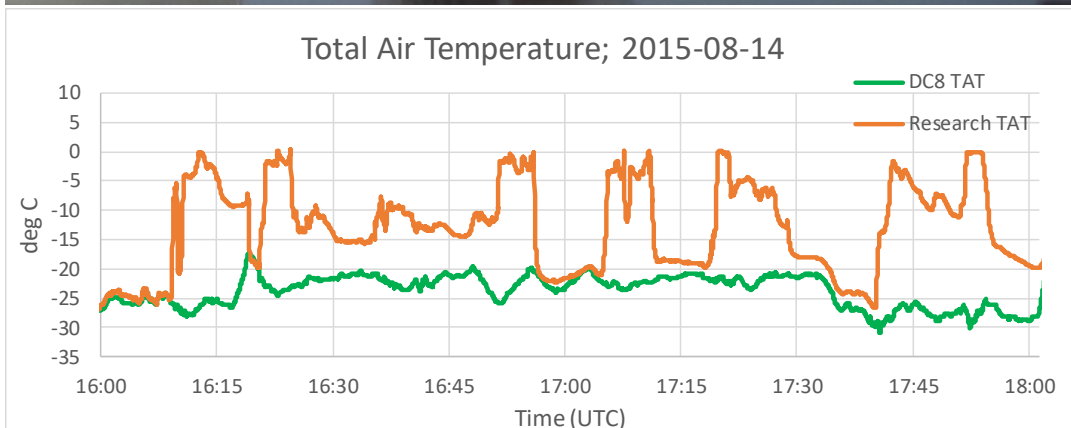


**Alt=37-34Kft, Ts=-49 to -42C**

- TAT probe icing has occurred in-service events during HIWC encounters
- During HIWC RADAR, a TAT probe with in-service events was mounted on the nose near SEA TWC probe. TAT anomalies occurred under when IWC and SAT thresholds were reached.
- TAT anomalies were abrupt. After initial event, recoveries were sometimes incomplete.
- TAT probe location important factor. Other similar TAT probe designs on DC-8 had no TAT anomalies

# HIWC RADAR I Flight Campaign Key Findings:

- Correlation of radar reflectivity to IWC <sup>1</sup>
  - Conclude reflectivity alone insufficient for IWC detection
- Augmented TWC and PSD/MSD at -50C data set (68%) for Part 33 Appendix D assessment <sup>2</sup>
- Confirmed common observations from in-service events and previous campaigns
  - High IWC in low radar reflectivity
  - Pitot and TAT probe anomalies
  - Water streaming on windscreen in high IWC
  - Linkage of research data to in-service events

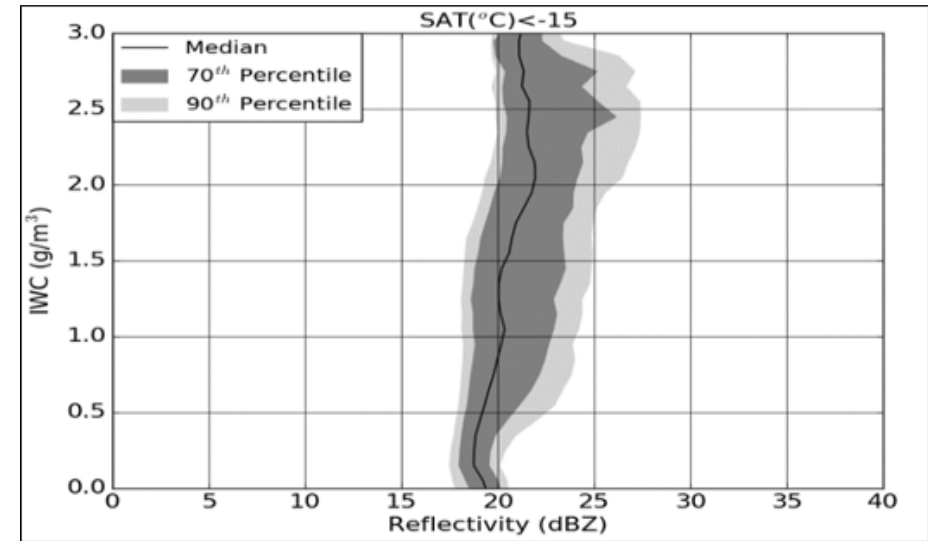



- Lessons Learned
  - Tropical storms were good targets for HIWC research flights
  - DC-8 performance excellent; no issues with engine operation in HIWC
  - Need for instrumentation improvements for airspeed, background humidity, winds

<sup>1</sup> Harrah, et al., this conference


<sup>2</sup> Strapp, et al., this conference

# HIWC RADAR II (2018) Flight Campaign Overview:

- As a result of insufficient correlation of RRF to IWC, NASA Langley radar researchers identified other promising radar-based candidates for long-range HIWC detection
  - Dual-polarimetric radar (Wolde, et al.)
  - Swerling (new process relating RRF Index of Dispersion to IWC (Harrah, et al.)
  
- Second flight campaign to evaluate the new methods
  - 3 week campaign, 50 flt-hrs based from Ft Lauderdale, FL, July 30-Aug19, 2018
  - Utilized NASA DC-8 Airborne Science Laboratory
  - Operating Area: Caribbean and Gulf of Mexico
  - Same sampling strategy, but add -20C flight level
  - Dual-pol not tested due to hardware delivery issue

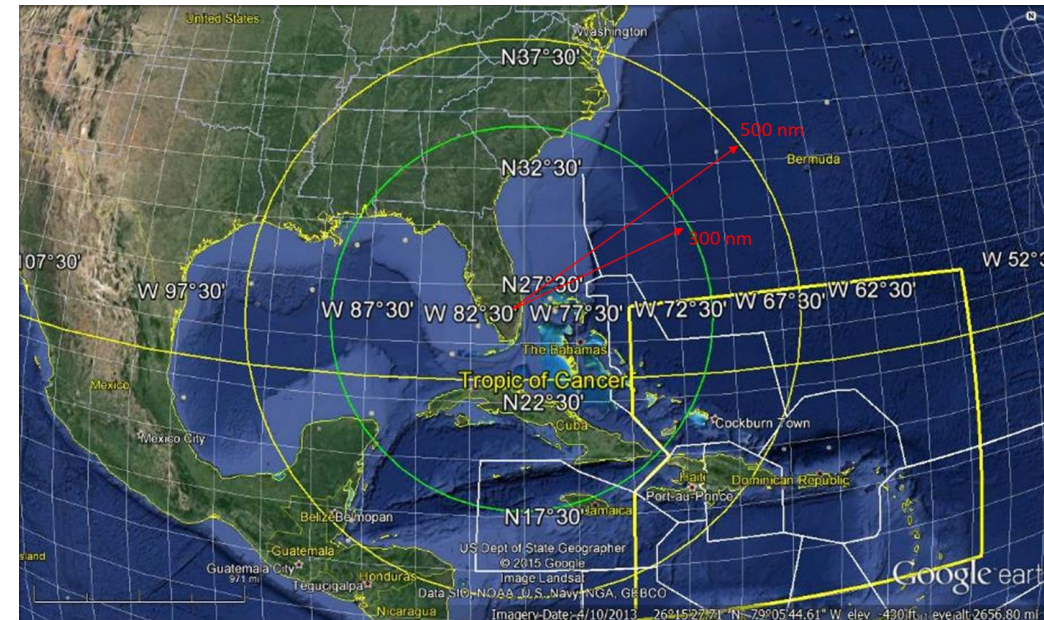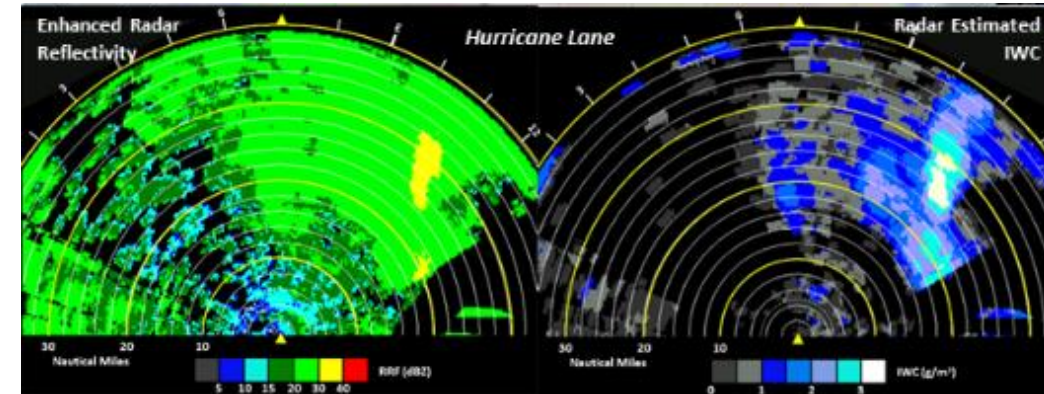



# HIWC RADAR II Instrumentation:

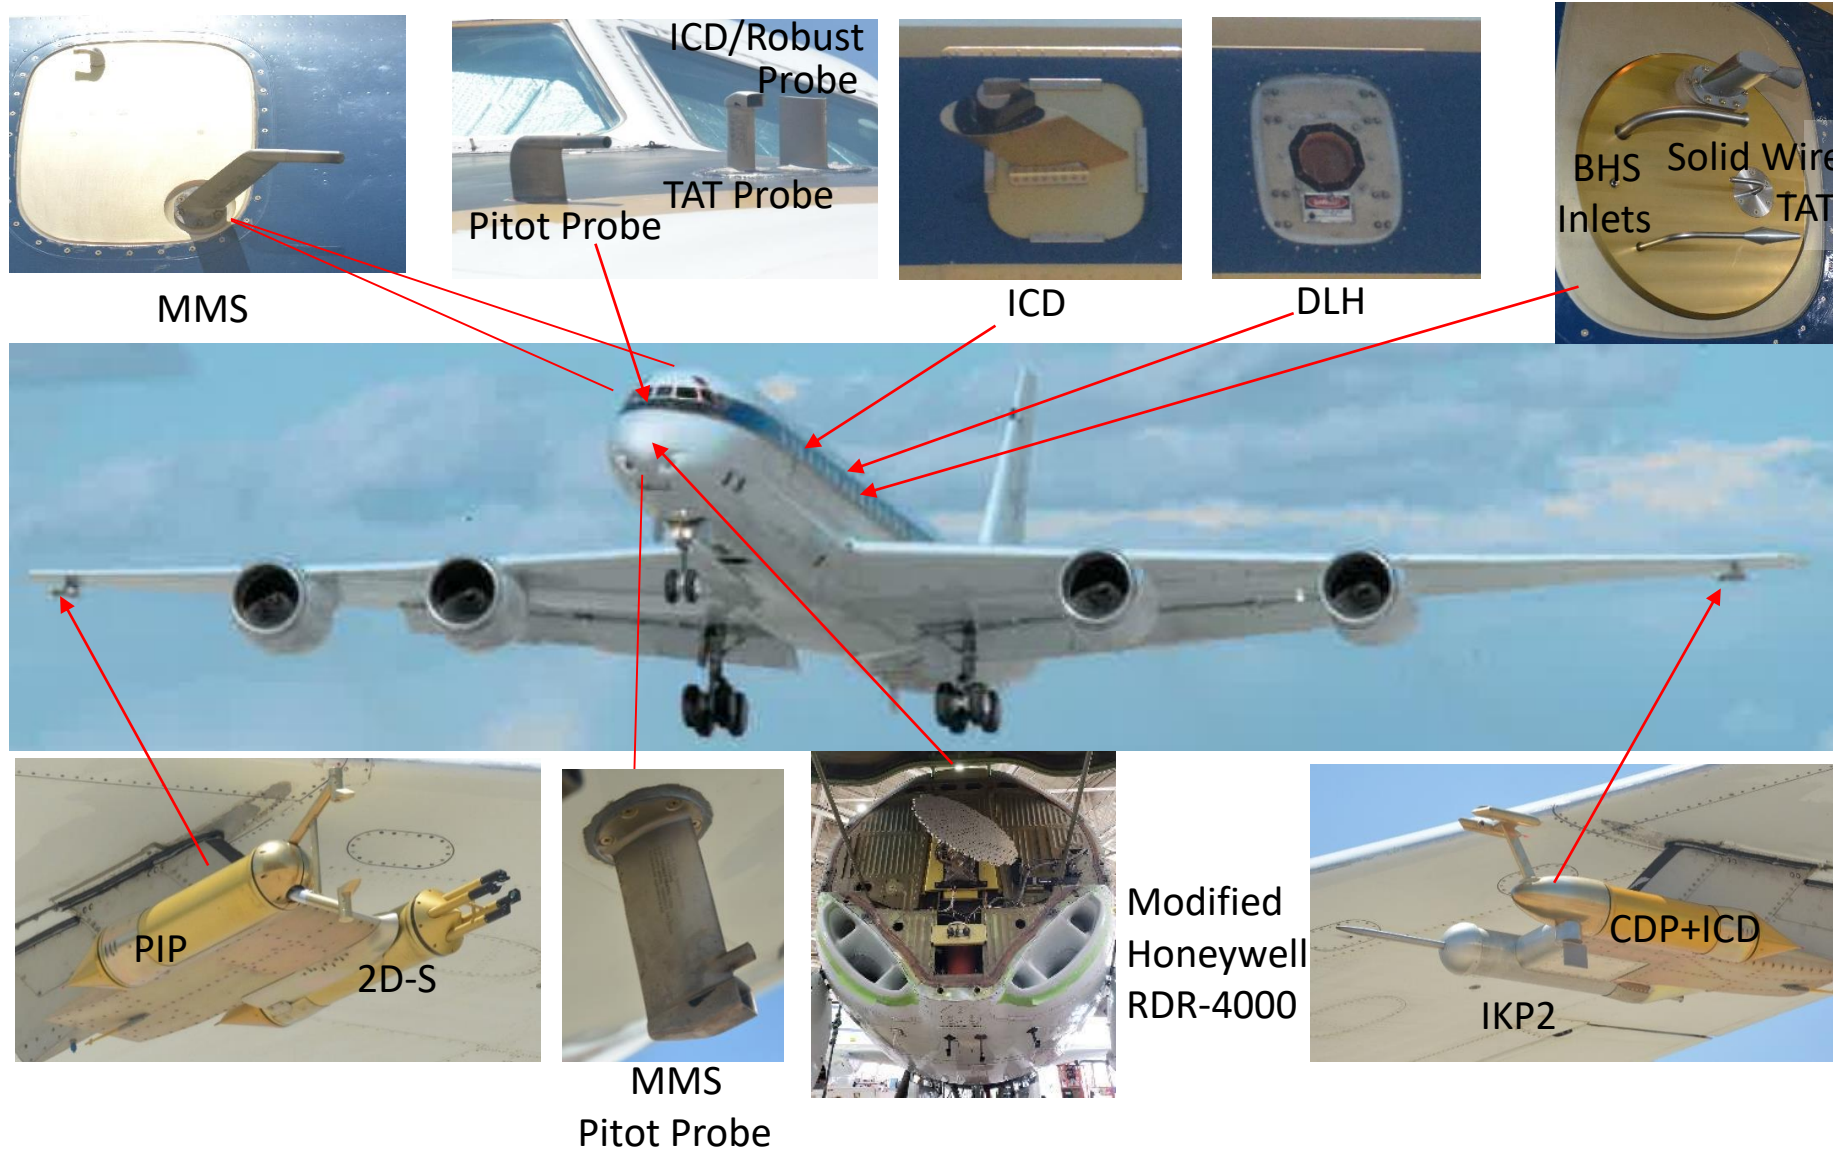

- Same instrumentation suite as 2015 plus:
- Auxiliary research pitot-static for airspeed/altitude
- Meteorological Measurement System (MMS) for winds and gusts
- Diode Laser Hygrometer (DLH) for background humidity
- Improved inlets for background humidity system
- N<sub>2</sub> purge for particle probes
- Hotwire TWC on wing canister and on window mount
- Collins Aerospace Optical Ice Detector (OID)<sup>3</sup>

# HIWC RADAR II Flight Campaign Outcomes: 7 Research Flights


- Initial flights from Ft. Lauderdale, FL into Offshore MCS in Gulf of Mexico
  - Smaller scale storms
  - 2 flights in 8 days
  - Dry air/dust off Africa and cooler ocean temps in Caribbean suppressing deep convection
    - » Forecasts indicated much the same for duration
  - Meanwhile, multiple MCS and tropical storms/hurricanes developing in eastern Pacific
- Decision Time
  - During post flight debrief (Aug-06), team discussed option to re-deploy back to AFRC and sample storms in Pacific
  - By end of meeting, decided to return to AFRC
  - Ferry flight back on Aug-08

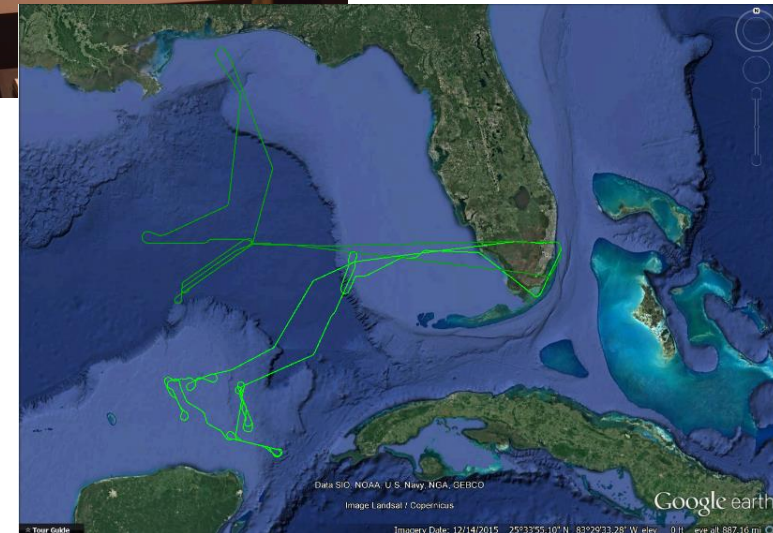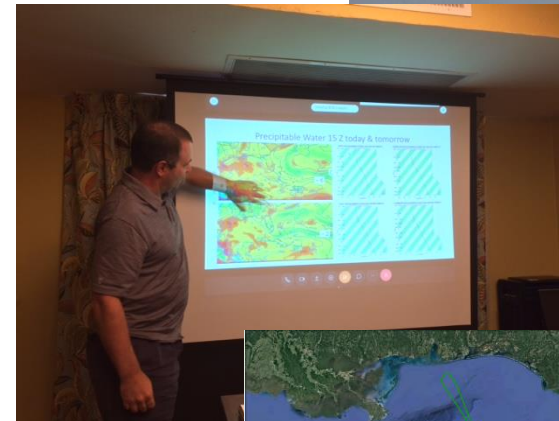



# HIWC RADAR II Flight Campaign Outcomes: 7 Research Flights

- After unplanned engine swap, 5 flights were made over the eastern Pacific
  - Aug-15: Tropical Storm Lane
  - Aug-16: Tropical Storm Lane
  - Aug-18: Hurricane Lane – Cat 4
  - Aug-19: Hurricane Lane – Cat 3
  - Aug-20: Hurricane Lane – Cat 4
- Long transit flights (> 3 hr) from Palmdale; rebase from Kona, Hawaii for last 3 flights
- Large scale deep convection (~300 Nm diameter)

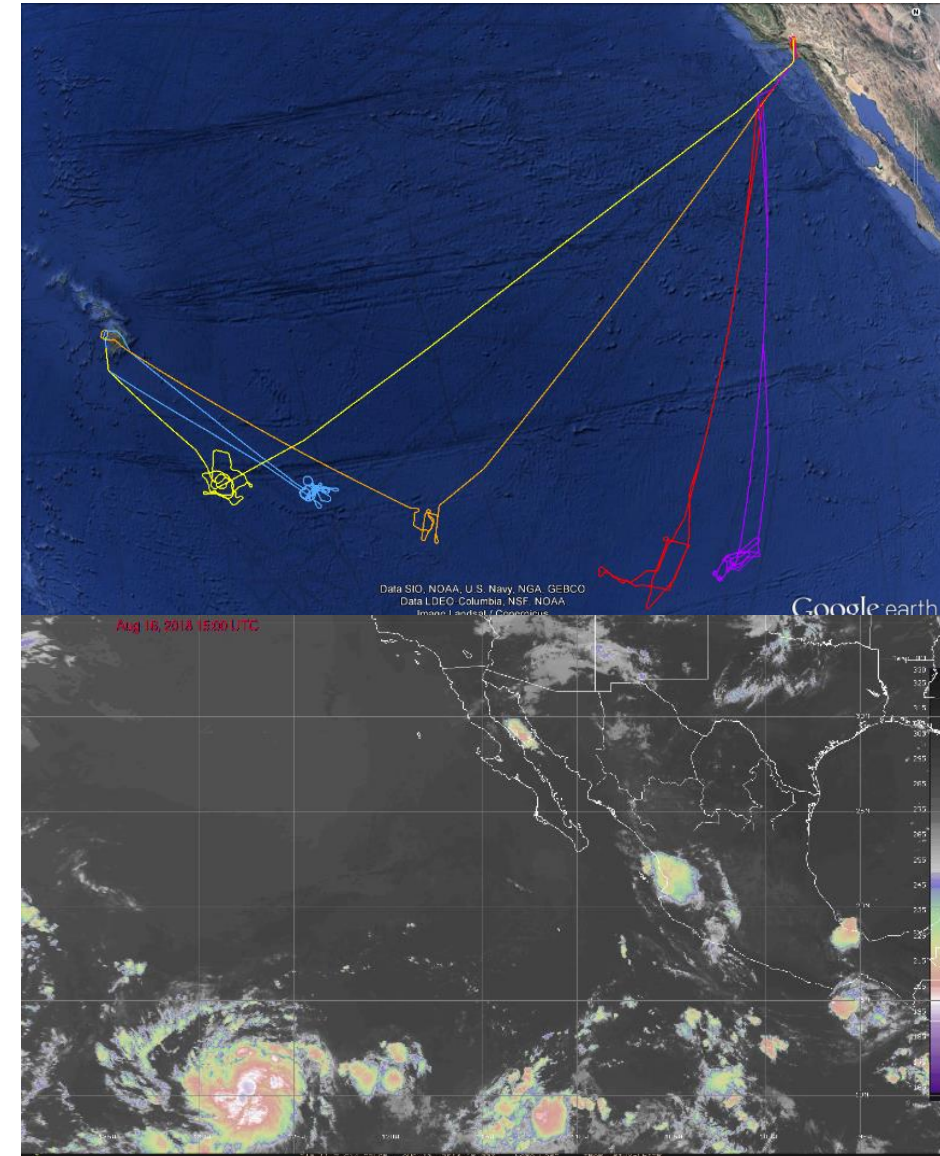



# HIWC RADAR II Flight Campaign Outcomes: TS Lane Example

## Satellite Products

- Strategic planning
  - » deep, cold cloud areas where high IWC anticipated
  - » Areas of overshooting tops
- Tactical planning
  - » As storm at left was ebbing, HIWC zones were shrinking
  - » Near end of flight, pilots flew to intercept “string of pearls” visible in feeder bands and based on Swerling R-IWC

IR Brightness Temperature [°C]

NASA LaRC HIWC Probability

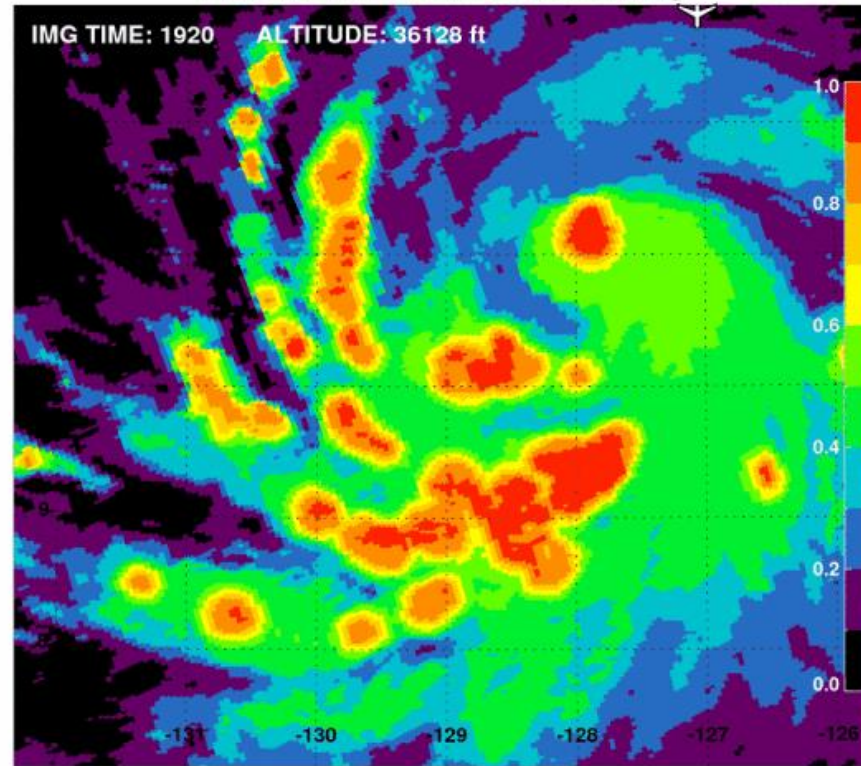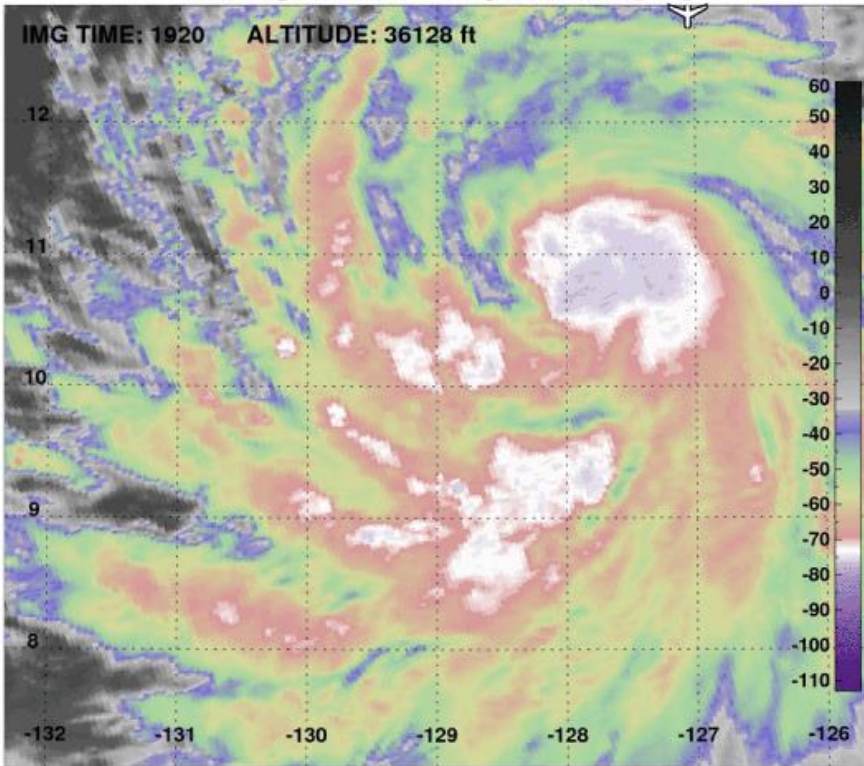


~400 Nm

[http://clouds.larc.nasa.gov/prod/OT/GOES16\\_DC8overlay\\_IR-HIWC\\_16AUG2018.gif](http://clouds.larc.nasa.gov/prod/OT/GOES16_DC8overlay_IR-HIWC_16AUG2018.gif)


# HIWC RADAR II Flight Campaign Outcomes: TS Lane Example

- Swerling R-IWC: real-time, onboard guidance
  - IWC thresholds, 0.5 g/m<sup>3</sup> steps
  - ~ 50 Nm range, initial detection of small region with IWC ~ 2.5-3 g/m<sup>3</sup>
    - » Radar team notified crew and monitored
  - ~30 Nm range, the region of IWC ~ 2.5-3 g/m<sup>3</sup> increased about 5 Nm wide
    - » Radar team requested left turn to intercept
  - When DC-8 passed through the radar-identified region, the IKP recorded IWC 1.5-2.2 g/m<sup>3</sup> with peak of 3.6 g/m<sup>3</sup>
    - » R-IWC generally lower, but within 1 g/m<sup>3</sup> of IKP
- These encounters increased confidence in Swerling R-IWC product and was used to guide flight tracks in remaining flights

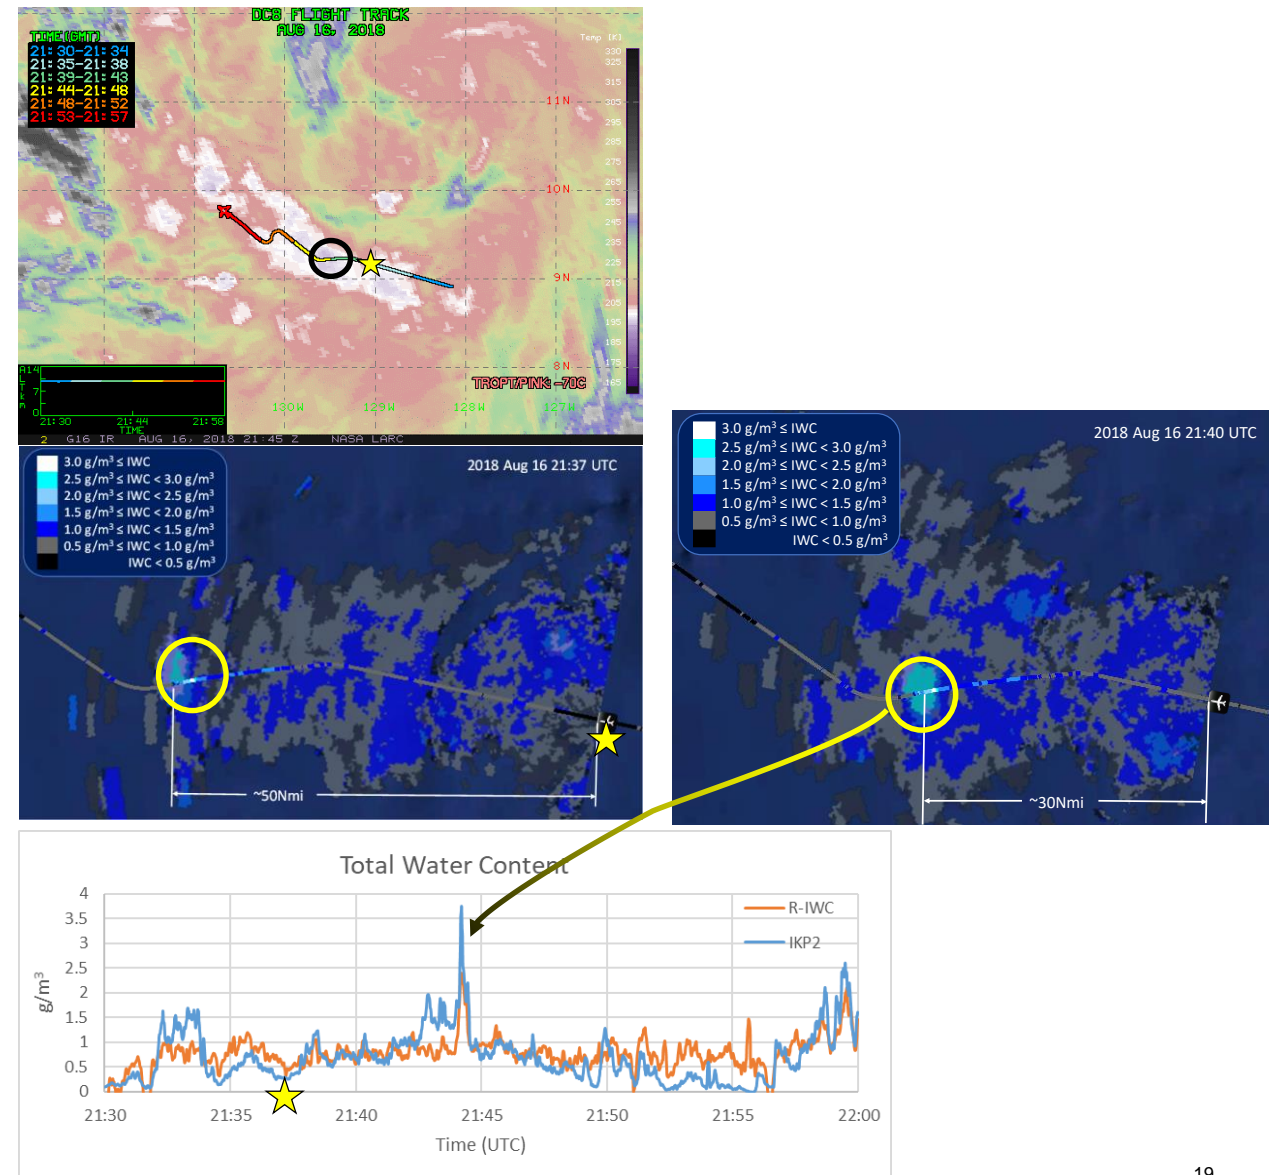

# HIWC RADAR II Flight Campaign Key Findings/Contributions:

- Swerling concept can identify HIWC conditions in low RRF about 60 Nm ahead of the aircraft<sup>1</sup>
- Data can be compared to HIWC characterization data from previous flights
- Satellite diagnostic products from NASA Langley were very useful for strategic and tactical guidance<sup>4</sup>

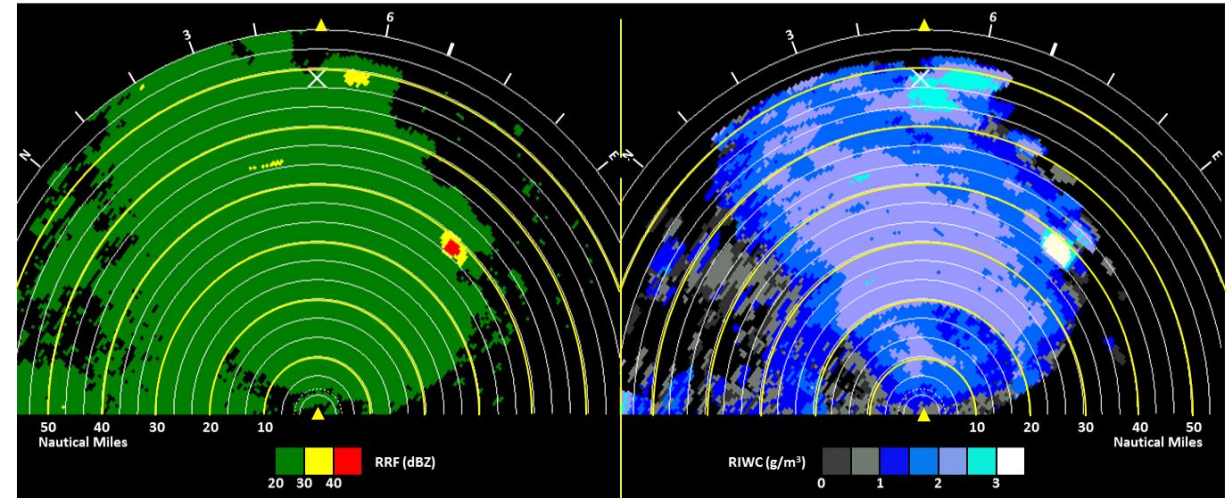

- Lessons Learned
  - Diode Laser Hygrometer solved a prior problem of measuring background humidity in HIWC conditions on the DC-8
  - DC-8 pitot anomalies occurred, but MMS provided accurate and reliable true airspeed
  - DC-8 performance capabilities were critical for this campaign

<sup>1</sup> Harrah, et al., this conference

<sup>4</sup> Bedka, et al., this conference

# HIWC RADAR Flight Campaign Summary:

- Two flight campaigns (2015 and 2018) using NASA DC-8 successfully flew in deep convective storms to acquire high IWC data with pilot weather radar and in-situ instruments
  - Demonstrated radar-based technique to identify HIWC conditions at 60 Nm ahead of airplane
  - Acquired data at -50C altitude for Appendix D characterization
  - Provided validation data for HIWC diagnostic products
- Future Work:
  - Continued evaluation of Swerling technique and other data from the flight campaigns
  - Working groups in RTCA and ARAC

