

Occupant Injury Severity using a Heteroscedastic Ordered Logit Model: Distinguishing the Effects of Vehicle Weight and Type

By

Xiaokun Wang

Graduate Student Researcher
The University of Texas at Austin
6.9 E. Cockrell Jr. Hall, Austin, TX 78712-1076
wangxk@mail.utexas.edu

Kara M. Kockelman

Clare Boothe Luce Associate Professor of Civil Engineering
The University of Texas at Austin
6.9 E. Cockrell Jr. Hall, Austin, TX 78712-1076
kkockelm@mail.utexas.edu
Phone: 512-471-0210
FAX: 512-475-8744
(Corresponding Author)

The following paper is a pre-print and the final publication can be found in
Transportation Research Record No. 1908: 195-204, 2005.
Presented at the 2005 Annual Meeting of the Transportation Research Board

ABSTRACT

This paper uses a heteroscedastic ordered logit model to study the effects of various vehicle, environmental, roadway and occupant characteristics on the severity of injuries sustained by vehicle occupants, conditional on the crash occurrence. As expected, the models find that heavier vehicles increase both a vehicle's crashworthiness and its aggressiveness towards others. The models also find that if all passenger vehicles were to become 1000 lbs heavier, crash injury outcomes would not change dramatically. However, if all passenger cars were to become light duty trucks (i.e., minivans, pickups and sport utility vehicles) of the same weight, incapacitating injuries and the fatalities are predicted to rise by 26 and 64 percent, respectively. Beyond weight and vehicle type, many other factors were controlled for all well. For example, older occupants and female occupants are more likely to experience injury and death, particularly when navigating curved roadway sections with higher speed limits.

KEY WORDS

Crash modeling, Injury severity, Heteroscedastic ordered logit, Vehicle weight, Light-duty trucks

INTRODUCTION

Since 1997, the number of injuries caused by motor vehicle crashes has declined each year in the United States. However, during the same period, the number of fatalities has increased. In 2003, a total of 43,220 deaths were reported on United States highways, the highest since 1990 [1]. Some researchers [2] attribute this change in injury severity to the revocation of the national speed limit in 1996. Others suggest that the rise in recent years of SUVs and pickups, which are

heavier than passenger cars, may be the source of the increased fatalities, as cited by *The New York Times* [3]. Of course, most automotive manufactures hold the view (at least publicly) that heavier vehicles are safer [3]. And this opinion is supported by several studies [4,5,6].

In order to untangle the contributions of vehicle type and vehicle weight, this paper examines crash consequences conditioned on crash occurrence (i.e., it examines crashworthiness and aggressiveness, rather than crash frequency), while controlling for a variety of variables, including speed limits, weather, roadway design and vehicle and occupant characteristics. Using data from the National Automotive Sampling System's Crashworthiness Data System (NASS CDS), both a standard and a heteroscedastic ordered logit model are calibrated.

This paper begins with a review of related research. Then, the structure of the heteroscedastic ordered logit model is described and an equation for calculating the marginal effects of variables that appear in both the severity and variance equations is given. The data are then described, along with regression results and a comparison of the standard and heteroscedastic models.

PREVIOUS RESEARCH

Motivated by different purposes and relying on different data sets, researchers have applied a variety of methods to analyze the influential factors in crash severity. Some [7,8] experimentally tested vehicles and their restraint systems, which is a costly process and one that allows for relatively few variations in control variables. Most studies rely on some type of statistical analysis of police-reported crash data. Some of these approaches are rather unsophisticated, correlating just a few variables at a time. For example, Huelke and Compton [9] simply compared the number of unrestrained occupants with the number of belted occupants on each injury level to illustrate the effect of seatbelt use. Shinohara et al. [10] used a Chi-square test to compare injury severities between belted and unbelted occupants, compact cars and medium-sized cars, and drivers and passengers.

More sophisticated approaches utilize multivariate analyses and discrete-response models for level of injury severity. The logistic model is a very popular choice. For example, Krull et al. [11] used a logistic model to study how driver condition, vehicle type, roadway geometrics, AADT, speed limit and rollover involvement affect the probability of fatal and incapacitating injuries. Bedard et al. [5] used it to analyze how driver, crash, and vehicle characteristics contribute to driver fatalities. Toy and Hammitt [12] modeled the risk of serious injury and death as a function of vehicle type, driver's age, gender, restraint use and the configuration of the crash in two-vehicle crashes. As an extension to this approach, Dissanayake et al. [13] employed the sequential binary logit (SBL) model to find how crash and injury severity are influenced in passenger car-fixed roadside object crashes.

Though multinomial logit (MNL) and probit (MNP) models do not recognize order in injury levels (such as fatal crashes being worse than PDO crashes) and do require far more coefficient estimates when variables are not generic (i.e., when variables do not vary by outcome type, as is the case with design, weather, vehicle and occupant characteristics), they do avoid certain restrictions posed by standard ordered models. They allow variables to have opposing effects regardless of injury order; for example, air bars may cause more injuries but fewer fatalities [14]. Thus, MNL and MNP models may still have a place in crash severity analysis. For example, Ulfarsson and Mannering [15] used an MNL to study the effect of gender on injury severity across different vehicle types. Yet the most frequently used model for such analyses is an ordered logit (OL) or ordered probit (OP) model. Of these two models, the OL tends to converge more quickly [16] while the OP has a simpler statistical form and is much more common in past

studies. For example, Khattak [17,18] has used OP models to analyze the effect of adverse weather conditions, vehicle and information technology, and driver age on injury severity. Renski et al. [2] used it to study the effect of speed limits. Kockelman and Kweon [19] controlled for a wide variety of factors in order to deduce the effect of vehicle type. Their later work [20] combined crash exposure, frequency and severity models for a rather comprehensive risk analysis of various driver and vehicle types. Abdel-Aty [21] calibrated different OP models for injury severity, along roadway sections, at signalized intersections, and at toll plazas. Khattak and Rocha [22] focused on SUVs.

Extensions to the OP and OL model specifications include the ordered mixed logit model (OML), the heteroskedastic ordered probit (HOP) model and the heteroskedastic ordered logit (HOL) model. Several crash-severity investigations have relied on these. The OML model allows for random coefficients across observational units, while the HOP and HOL models allow the error term's variance to vary. Srinivasan's [23] OML model accommodated variable, random, and correlated injury severity thresholds. He used Chi-square tests to show that the OML model was statistically superior to the OL model. O'Donnell and Connor's [24] work is most closely related to the models examined here. They applied HOP and HOL models to discern how injury severity is affected by occupant age, seating position, use of a seat belt, blood alcohol level, vehicle speed, type, and make and collision type. The variance in their error terms was parameterized to be a function of occupant age, vehicle speed, vehicle year and time of accident. They found that higher speeds and occupant age result in higher injury severity, along with head-on crashes, travel in light-duty truck, vehicle age, being female, having a blood alcohol level over 0.08 percent and not wearing a seatbelts. Among all these factors, they estimated seat position to have the most significant effect, with the driver's position being safest, a result that is inconsistent with most other research [9,25]. Their models' variance terms were minimized for 30-year-old occupants and crash times of 1:00 pm, and increased with travel speed.

Previous research involving vehicle type is extensive; in comparison, research distinguishing vehicle weight from vehicle type is limited. Evans and Wasielewski [26] studied the effect of vehicle weight on serious and fatal driver injury rates in head-on crashes. Though control variables were limited (e.g., vehicle type was not included) and the model structure unsophisticated, this early research was influential in later studies. Bedard et al. [5] aimed to use vehicle weight (though not vehicle type) as a control variable but ended up relying on wheelbase instead (since wheelbase is highly correlated with weight and gave them more precise results). Farmer et al. [4] did control for vehicle type and weight as well as the collision partner's type and weight. However, their model estimated only the probability of a severe or fatal injury outcome, using a binary logistic regression model. Toy and Hammitt [12] used the ratio of the vehicle curb weights as an explanatory variable in their two-vehicle crash model. Thus, they assumed that only the ratio of weights, rather than their absolute values, is what contributes to injury severity.

This work controls for the most valuable variables used in O'Donnell and Connor [24], along with vehicle weights, both for the primary vehicle and any collision partner. It also calibrates distinct models for single- and two-vehicle crashes, since these are distinctive crash types. It should be noted that multi-vehicle crashes are first divided into several two-vehicle crashes where the collision partner is defined as the first vehicle to crash into the observed vehicle. The following section describes the model specifications.

MODEL STRUCTURE

After considering the strengths and limitations of the various models used in previous research, this paper uses the HOL model to study a variety of factors that influence injury severity. The general form of the HOL model can be explained via equations (1) through (8).

Let y denote the occupant's observed injury severity level, y^* the latent (unobserved) injury severity measure, and $\mu_j (j=1,2,3)$ the thresholds for injury severity, such that the following hold:

$$y = 0 \text{ (no injury)} \quad \text{if } y^* \leq 0$$

$$y = 1 \text{ (no visible injury, only pain reported)} \quad \text{if } 0 < y^* \leq \mu_1$$

$$y = 2 \text{ (non-incapacitating injury)} \quad \text{if } \mu_1 < y^* \leq \mu_2$$

$$y = 3 \text{ (incapacitating injury)} \quad \text{if } \mu_2 < y^* \leq \mu_3$$

$$y = 4 \text{ (death)} \quad \text{if } y^* > \mu_3$$

The latent injury severity measure y^* is obtained using a linear equation:

$$y^* = x' \beta + \varepsilon \tag{1}$$

where x is the set of factors explaining y^* , with associated parameters β , and the error term ε indicates the effect of all unobserved factors on y^* . If one defines $\mu_{-1} = -\infty$, $\mu_0 = 0$ and $\mu_j = +\infty$, then the probability of injury severity j for the i^{th} observation can be written as the following [16]:

$$P(y = j) = P(\mu_{j-1} < y^* \leq \mu_j) = F\left(\frac{\mu_j - x_i \beta}{\sigma_i}\right) - F\left(\frac{\mu_{j-1} - x_i \beta}{\sigma_i}\right) \tag{2}$$

where $F(\square)$ is the logistic distribution's CDF and σ_i^2 is the variance of the random contribution of unobserved factors in the i^{th} observation, parameterized so as ensure its positivity, by using an exponential function. In other words,

$$F(x) = (1 + \exp(-x))^{-1} \tag{3}$$

$$\sigma_i^2 = (\exp(Z_i \gamma))^2 \tag{4}$$

where Z_i is the set of variables explaining the error term variance of the i^{th} observation, and γ is the associated parameter set. It can be seen here that an OL model, which assumes homoscedasticity, restricts γ to equal zero. For the model used in this work, the variance is parameterized as a function of speed limit (similar to O'Donnell and Connor's [24] use of travel speed), vehicle type, and vehicle curb weight. The use of speed limit in the variance specification is based on O'Donnell and Connor's [24] use of travel speed (a variable that is missing in most crash observations used here), and vehicle type and weight are used because a great many unobserved vehicle features are connoted by these (including variables like stiffness and structure). (The effects of occupant gender and age also were tested in the variance specification, but then excluded because they were not statistically significant.) Coefficients can be estimated using the method of maximum likelihood. For HOL, the likelihood function is [16]:

$$L = \prod_{j=1}^J \prod_{i=1}^n \left(F \left(\frac{\mu_j - x_i \beta}{\sigma_i} \right) - F \left(\frac{\mu_{j-1} - x_i \beta}{\sigma_i} \right) \right)^{w_{ij}} \quad (5)$$

Here w_{ij} is the weight or expansion factor for the i^{th} observation (i.e., occupant) experiencing injury severity level j . (Sample unit expansion factors are provided in the NASS CDS data set, recognizing that certain crashes are relatively underreported.)

As Greene [27] indicates, in an ordered probit (or logit) model, the sign of any parameter β_i can only clearly determine the marginal effect of variable x_i on the extreme probabilities (in this case, the probability of no injury and the probability of a fatal injury). The marginal effects on all other probabilities are ambiguous, since a shift in the distribution can cause the probability of intermediate response types to fall or rise, depending on the positioning of the average response. For an HOL model, this issue is complicated when the variable of interest affects not only the latent injury severity but also the variance. In an HOL model, the marginal effect of such a variable x_i across the sample, for the “average observational case”, can be written as follows:

$$\frac{\partial P(y = j)}{\partial x_i} = \left(f \left(\frac{\mu_j - \bar{x} \beta}{\bar{\sigma}} \right) - f \left(\frac{\mu_{j-1} - \bar{x} \beta}{\bar{\sigma}} \right) \right) \cdot \frac{\beta_i}{\bar{\sigma}} \cdot (\gamma_i \bar{x}_i - 1) - \left(\mu_j f \left(\frac{\mu_j - \bar{x} \beta}{\bar{\sigma}} \right) - \mu_{j-1} f \left(\frac{\mu_{j-1} - \bar{x} \beta}{\bar{\sigma}} \right) \right) \cdot \frac{\gamma_i}{\bar{\sigma}} \quad (6)$$

where x_i is the variable of interest, \bar{x}_i is its weighted average across observational units; $\bar{\sigma}$ is the (weighted) mean variance across observations; \bar{x} is the vector of (weighted) average values; β_i is the i^{th} variable’s coefficient for explaining y^* ; and γ_i is that same variable’s coefficient for explaining variance σ^2 , and $f(\square)$ is the probability density function for the logistic distribution:

$$f(x) = \frac{\exp(-x)}{(1 + \exp(-x))^2} \quad (7)$$

As equation (6) suggests, the i^{th} variable’s marginal effect is related not only to its own, primary coefficient, but also to its average value and the value of its variance-specifying coefficient. Therefore, even the marginal effect on the extreme probabilities cannot be inferred from simply the signs of the estimated primary parameters. Equation (6) must be used when determining the marginal effects of vehicle type, since these were used to specify the variance relation. If the variable of interest, x_i , only explains the injury severity measure, y^* , and not the variance, then its marginal effect simplifies to equation (8). In this case, similar conclusions about those variables’ marginal effects can be drawn as in the standard, homoscedastic OL model.

$$\frac{\partial P(y = j)}{\partial x_i} = - \left(f \left(\frac{\mu_j - \bar{x} \beta}{\bar{\sigma}} \right) - f \left(\frac{\mu_{j-1} - \bar{x} \beta}{\bar{\sigma}} \right) \right) \cdot \frac{\beta_i}{\bar{\sigma}} \quad (8)$$

The effects of binary variables on probabilities can best be obtained by comparing probabilities where the variable equals 1 and where it equals 0 (i.e., the base variable is used) with all other variables held at their average values (except in the case of other binary variables that share the same category with the variable under evaluation; of course, these are held at 0). For convenience, the effects of binary variables are also called marginal effects in this paper.

It can be seen from the above analysis that HOL models allow the distribution of unobserved factors to differ, providing more flexibility and realism than an OL model. As an example,

SUVs' stiffness may help protect occupants, but their added roll-over potential can counter this effect, resulting in more outcome uncertainty. Such vehicle types then would be expected to exhibit higher variability in their latent injury severity measures, a feature permitted by HOL specifications. Thanks to this feature, HOL models allow extreme probabilities to be similarly affected (i.e., in the same direction) when variable values change.

DATA DESCRIPTION

The data set used in this paper comes from the National Automotive Sampling System's Crashworthiness Data System (NASS CDS) for the years 1998 through 2001. The NASS CDS collects crash data at 24 sites (also called primary sample units, or PSUs) in 17 states in the U.S. All crashes selected are police reported, involving property damage and/or personal injury and at least one towed passenger car or light truck or van. Data are sampled in a stratified fashion, first among PSUs, then among police jurisdictions, and lastly among reported crashes, and together they represent just 0.05 percent of all police-reported crashes in the U.S, less than most other national collected data set. Each observation in the sample data is given a population expansion factor called a Ratio Inflation Factor (RIF), which is the inverse of the probability of selecting that crash from crashes nationwide. This value is used as the observational weight in the likelihood function's (Eq. (5)) maximization.

It is important to note that CDS data are not totally unbiased. More severe crashes are more likely to be reported and thus entered into the CDS. Weights are estimated in order to try and account for these selection biases, but some statistical uncertainty remains. Moreover, different PSUs have different criteria for reporting their crash data (such as a minimum crash cost or severity). This causes some geographic heterogeneity in the data [19]. Nonetheless, among all available data sets, the NASS CDS is the most appropriate one for this study because of its detailed information and comparatively unbiased sample. Farmer et al. [4] and Toy and Hammitt [12] also used the NASS CDS. Other, larger sample data sets either lack vehicle weight information (such as the National Automotive Sampling System's Crashworthiness Data System's General Estimates System (NASS GES) and Highway Safety Information System (HSIS)), or focus on a particular crashes (such as FARS). These datasets may be preferable when the effect of vehicle weight is not concerned. For example, White [28] and Kockelman and Kweon [19] used NASS GES in their studies; Bedard et al. [5], Gayer [29] and Kahane [6] used FARS.

Information on vehicles and occupants were merged in order to produce an occupant-based dataset. There are 18,609 occupant observations for two-vehicle crashes and 7,628 for one-vehicle crashes containing all required variables. These represent 53.6 percent and 77.8 percent of the NASS CDS sample data for such crash occupants, respectively. The dependent variable, injury severity, is missing in 6,036 occupant observations, accounting for a large percentage of the invalid observations. Other variables missing in significant numbers include occupant age and gender, seat belt usage, curb weight, seat type, and weight of collision partner.

Less severe injuries and passenger cars as collision partners are slightly underrepresented in the data analyzed here. Bucket seat types are over-represented, in both models. Furthermore, because the NASS CDS does not provide curb weights for the medium and heavy-duty trucks, these are assumed to weigh 25,000 lbs here. Any overall bias in this assumption is expected to be largely picked up by the indicator variable used for medium and heavy trucks in the model's specification.

ANALYSIS OF RESULTS

It is necessary to compare the OL and HOL model results and select the preferred model, before focusing on specific results for each of the explanatory variables used.

Comparison of the OL and HOL Model Results

Explanatory variables for injury severity include vehicle, weather, roadway and occupant information. Variance is explained by vehicle type, vehicle curb weight and speed limit. Variable statistics are presented in Table 1. As noted, the models are estimated using the method of maximum likelihood, in LIMDEP. The results for both OL and HOL models are shown in Table 2. The existence of heteroscedasticity in one- and two-vehicle crashes are tested using Likelihood Ratio (LR) tests, as follows [27]:

$$LR_{one-vehicle} = -2(\ln L_{restricted} - \ln L_{unrestricted}) = -2(-8530.5 - (-8505.4)) = 50.3 > \chi_5^2 = 20.52 \quad (9)$$

$$LR_{two-vehicle} = -2(\ln L_{restricted} - \ln L_{unrestricted}) = -2(-20265.8 - (-20099.3)) = 333.0 > \chi_{10}^2 = 29.59 \quad (10)$$

So for both type of crashes, the null hypotheses $\gamma = 0$ are rejected at a 0.001 significance level, suggesting that heteroscedasticity exists in both crash types. Thus, the more flexible HOL specification is statistically preferred to the OL model.

As shown in Table 2, all explanatory variables (in both one-vehicle and two-vehicle crashes) result in similar OL and HOL estimates. But the HOL models also produce several statistically significant coefficients characterizing variance of the model's error term. These suggest that variance varies with vehicle weight, speed limit and vehicle type. Those traveling in pickups on roads with higher speed limit experience greater variation in their injuries than others. This added uncertainty in injury outcomes may be due to greater diversity in truck designs and more potential for extreme crashes at higher speeds.

Table 3 further shows the difference of marginal effects in OL and HOL, using two-vehicle collision partner vehicle type as an example. (The primary vehicle type is held at its mean value, which means the figures presented in the table indicate an average effect of the given collision partner vehicle type.) For the OL model, as expected, the marginal effect on the probability of no injury has the same sign as the coefficient on the right hand side of Table 2, while the probability of fatality has the opposite sign. In this model, all injury severity levels other than no injury experience the same direction of change as the probability of fatality. The OL model results suggest that SUVs, minivans and pickups are more aggressive than cars of the same weight, everything else constant. The HOL model depicts things a little differently. Pickups are still shown to be more aggressive than cars. SUVs are also more aggressive, though the fatality probability decreases slightly. Minivans, which are built on car frames, are no more aggressive than cars. (While they increase the probability of overall injury for occupants in their collision partners, the probabilities of incapacitating and fatal injuries are both lower.) This suggests that pickups and SUVs, which have raised bodies and often have a rigid frame, are more aggressively designed than cars and minivans, as pointed out by Newstead et al. [30] and Kahne [6], Gabler and Hollowell [31]. Thus, recognition of heteroscedasticity due to collision partner's vehicle type has illuminated an interesting distinction that would not be visible in the less flexible OL model.

Effects of Vehicle Weight and Type

In addition to the effects of the collision partner vehicle type described above (since OL and HOL results differ on this point), the effects of (primary) vehicle type and weight and of

collision partner weight (in the case of two-vehicle crashes) are of great interest. Figure 1 provides charts showing the changes of injury severity probability (given that a crash has occurred) with respect to these variables. In one-vehicle crashes, occupants in heavier vehicles are estimated to sustain more severe injuries, but the effect of weight in one-vehicle crashes is less dramatic than that in two-vehicle crashes. In two-vehicle crashes, increasing vehicle weight is found to reduce all injury probabilities for occupants (also see [4]) – while raising those for occupants of collision partners. Considering both the crashworthiness and aggressiveness effects of vehicle weight in both crash types (where 30 percent of crashes involve just one-vehicle) and holding all other variables at their average values, a weight increase of 1000 lbs of all U.S. vehicles (Different from the study by Kahane [6], this vehicle weight increase occurs on all types of vehicles – and on both primary and counterpart vehicles based on the fleet and crash-type proportions witnessed in the NASS CDS data set.) can be estimated. The models predict that the overall probability of injury or death will *fall* by 3 percent. In it, Non-incapacitating and incapacitating injury probabilities are predicted to fall by 1 and 5 percent, respectively, while the probability of death is predicted to rise by 19 percent. Thus, the overall effect of increasing light-duty vehicle weights (by 33%) is almost negligible.

In one-vehicle crashes, minivans and pickups are estimated here to be less crashworthy, everything else constant (including weight). In contrast, SUVs are found to decrease the probability of occupant injury, while increasing the probability of fatality. Similarly, Kockelman and Kweon [19] found that pickups and SUVs are less safe than passenger cars in single-vehicle crashes. White [28] found that occupants involved in single vehicle crashes are more likely to be killed or seriously injured if they are driving a light truck rather than a car. Ulfarsson and Mannering [15] also found that in single-vehicle accidents, pickup, SUV and minivan drivers tend to sustain more severe injuries than passenger car drivers. In two-vehicle crashes, all light-duty trucks (i.e., minivans, pickups and SUVs) are predicted to result in more severe injuries for their occupants, i.e., less crashworthy – after controlling for vehicle weight. At first glance this conclusion may appear to be at odds with work by Krull et al. [11], Kockelman and Kweon [19] and Abdel-Aty [21]; however, such research has not controlled for both vehicle weight and type simultaneously (nor for variables like seat type).

If all passenger cars were to become light duty trucks (based on each vehicle type's own, average weight and the crash-type proportions witnessed in the NASS CDS data set), the overall probability of sustaining some kind of injury (even those that are not visible) following a crash is predicted to increase by 3 percent. Among these, the incapacitating injury is expected to rise by 25 percent and fatalities by a startling 79 percent. The results suggest that *lighter* vehicles reduce, rather than increase, the probability of death. Of course, it is difficult to believe that lighter vehicles are indeed safer if the only variable that changes is weight. In reality, vehicle weight is probably correlated with design variables not controlled for here (such as bumper design and vehicle interior padding). Thus, the results may simply be implying that vehicle design is more important than weight. This implication is consistent with manufacturer Honda's stated position, though Honda is a notable dissenter in the automotive industry [3]. It also suggests that policymakers should not be so concerned about fatality rates as a result of more stringent fuel economy legislation; they should be concerned about vehicle design. This conclusion is consistent with that by Greene and Keller [32].

In addition, it should be noticed that vehicle weight and type are often correlated with driver characteristics, such as travel speed choice and other aggressive behaviors. So a vehicle's crashworthiness and aggressiveness, as estimated here, also may reflect driver attributes.

Moreover, some vehicles may be less likely to be crash-involved, thanks to better brakes or other design attributes; so overall risk may differ from risk conditioned on having been crash-involved. (Kweon and Kockelman [20] present crash rate and risk estimates by vehicle and driver type.) Finally, the variable of vehicle age was controlled for in initial models and found to be statistically insignificant; so its results are not presented here.

Seating and Seat Belts

Vehicle equipment is important in protecting crash victims. The model results suggest that bench-type seats with separate cushions (NHTSA [33] provides seat type details) are the least safe, in both one-vehicle and two vehicle crashes. This may be because they are more likely to collapse in crashes. Benches with folding backs, however, are estimated to be most protective, perhaps because they are neither as stiff as integral seats nor as fragile as seats with separate cushions, as suggested by Prasad et al. [34] and Burnett et al. [8]. As expected, seat belts play a key role in protecting occupants. In two-vehicle crashes, with lap and shoulder belts working together, the probability of being injured decreases by 36.3 percent while that of being killed decreases by 47.3 percent, when compared with not wearing a seat belt. The effect of wearing a lap-only or shoulder-only belt is estimated to be statistically equivalent to a lap-and-shoulder belt. The effect of seat belts is more pronounced in one-vehicle crashes. Wearing lap and shoulder belts is estimated to decrease the probability of being injured by a striking 90.2 percent and the probability of being killed by 71.9 percent. (Lap-only or shoulder-only belts are estimated to decrease the probability of being injured by 65.7 percent and the probability of being killed by 60 percent, which is still striking.) The general effect of seat belt for all crash types shows that lap-and-shoulder belts are better than lap-only or shoulder-only belts, especially in preventing slight injuries. This result is consistent with Huelke et al.'s [35] and others' results.

Roadway Design and Environmental Factors

Roadway features, including speed limits, geometric characteristics and traffic safety measures, affect injury severity by influencing the manner of the crash (such as speed and collision type). Environmental factors, such as weather and lighting, also can play important roles.

As expected, the results indicate that in two-vehicle crashes, roads with higher speed limits have a higher proportion of fatal crashes. This change is clearer at higher speed limits. When the speed limit changes from 35 mi/h to 45 mi/h, the probability of being injured increases by 0.03 (or 4.7 percent) and the fatality probability increases by 0.001 (or 86.6 percent). When the speed limit changes from 65 mi/h to 75 mi/h, the probability changes are 0.09 (or 19.7 percent) and 0.01 (or 110.1 percent). It is interesting to find that in one-vehicle crashes, the probability of being injured is the highest when the speed limit is 60 mi/h. Over this speed limit, the probability of getting injured decreases. But the fatality probability keeps increasing with the speed limit. However, the effect of the speed limit is not as significant as that in a two-vehicle crash. When the speed limit increases from 65 mi/h to 75 mi/h, the probability of being killed increases by only 0.0007 (or 6.1 percent). Zhang et al. [36], Krull et al. [11] and Khattak et al. [18] all found in their works that higher speed limits are associated with more severe injuries. This work shows results consistent with theirs. However, the speed limits are correlated with a host of design factors that permit higher speed limits, such as wider lanes and shoulders, and less horizontal and vertical curvature. These better design features counteract the speed limit effect, especially for one-vehicle crashes, biasing its coefficient toward zero. Speed limits also may be associated with

certain use variables, such as AADT per lane and heavy-duty truck use. Thus, it is very difficult to estimate the true effect of speed limits, everything else constant, without controlling for all such variables.

Adverse weather is estimated to be safer for occupants. In two-vehicle crashes, bad weather decreases the probability of being injured by 0.09 (16.4 percent) and the probability of being killed by 0.0007 (or 32.5 percent). In one-vehicle crashes, its effect is more significant. This can be attributed to the more cautious driver behavior during bad weather, including lower speeds. This conclusion is consistent with that of Khattak et al. [17]. However, Zhang et al. [36] found that snowy weather increases severity, and Dissanayake and Lu [13] did not find weather to be statistically significant. Lack of light shows different effects in the two types of crashes. It decreases the severity in one-vehicle crashes, consistent with the work by Krull et al. [11], but increases the injury severity in two-vehicle crashes. In general, the lack of light results in a higher injury severity. This is consistent with results of Khattak et al. [18] and Abdel-Aty [21].

Ideally, one would control for degree of curve, as well as vertical grade, but these variables are not provided in the NASS CDS data set. Nevertheless, related variables are included and controlled for here. For example, the presence of horizontal curvature increases injury severity risk. This is as expected, and consistent with work by Dissanayake and Lu [13] and Abdel-Aty [21]. Evidently, a leftward curve is more dangerous than a rightward curve, in terms of any resulting injuries. Compared to a straight road section, a leftward curve increases the fatality probability by 56.7 percent and a rightward curve increases the fatality probability by 39.2 percent. One-vehicle crashes show similar results. While prior studies do not differentiate between uphill and downhill grades, Dissanayake and Lu [13] find that grades are associated with more severe injuries. Here, after distinguishing uphill/downhill and one-vehicle/two-vehicle crashes, it is found that grade plays different roles in different circumstances. In two-vehicle crashes, downhill grades are associated with more severe injury, increasing the injury probability by 13.3 percent and fatality probability by 37.3 percent. While uphill grades result in less severe injury, their effect is only half that of downhill grades. In one-vehicle crashes, however, the results suggest that uphill and downhill grades have no practically significant effects.

Roadway dividers and medians are estimated to decrease injury severity in two-vehicle crashes. Manufactured barriers are estimated to be the most effective, decreasing the probability of fatality by 0.001, or 53.7 percent. Use of vegetation, water, embankments, or ravines is not significantly better (in a practical sense) than no-division. In one-vehicle crashes (which are largely run-off-road crashes), only manufactured barriers are estimated to decrease injury severity, and then only slightly. Other dividers and one-way roads are both estimated to increase injury severity, perhaps by offering little or no assistance to drivers who lose control of their vehicles.

Occupant Characteristics

As occupant age increases, so does injury severity. However, the effect of age is not as important as might be expected. In two vehicle crashes, 10 years' increase in age results in about a 2 percent increase in injury probability and 6 percent increase in fatality probability. In one-vehicle crashes, the effect of age is a little stronger, but is also limited to only about 8 percent and 16 percent, respectively. This may be because older people often compensate for their fragility and slower reaction times by more cautious driving [13]. Women are more likely to sustain severe injuries than men. In two-vehicle crashes, a female's probability of being injured is 0.08 (12.4 percent) higher than a male's, and her fatality probability is 37.5 percent higher. In a

one-vehicle crash, the effect is more dramatic. The gender effect is about twice that in a two-vehicle crash. Nearly all previous works [4,36,13,5,17,19,15] find that females and/or older occupants are more prone to injury. Thus, this paper's results are consistent with their findings. It should be noted, however, that control variables can proxy for unobserved variables, such as driver risk-aversion. For example, minivan drivers may differ from pickup drivers in multiple, immeasurable ways that affect outcome severity; these effects are statistically ascribed to the vehicle type variables, biasing their values. In the case of minivans, it may make them appear safer than they truly are, all things constant, if the drivers and their occupants take extra precautions.

In one-vehicle crashes, the driver's seat seems to be the most dangerous place to sit, even though alert drivers should have a strong self-preservation instinct. The right seat in the front row and "other positions" (in the back of a pickup, for example), are estimated to be a little safer than the driver's position, but the differences are not statistically significant. In two-vehicle crashes, because of side and rear impact crashes, the right seat in the front row and "other positions" are slightly more dangerous than the driver's position. In both types of crashes, the second row is much safer than the front row. The probability of being killed while seated in the second row is about 40 percent lower than while seated in the first row. When considering all crash types, the driver's position is generally the most dangerous place in a crash, consistent with Huelke and Compton's [9] results.

CONCLUSIONS

This study of crash severity applies a relatively novel methodology, the heteroscedastic ordered logit, while controlling for a variety of relevant design, speed, vehicle, occupant, and environmental variables. It empirically distinguishes a vehicle's type from its weight for injuries endured not just by its own occupants but also for those endured by occupants of crash partners. Related studies, by Kockelman and Kweon [19] and Abdel-Aty [21], did not control for vehicle weight.

The results suggest that both the revocation of the national maximum speed limit in 1995 and the boom in sales of light duty trucks may have contributed to the higher injury severity in recent years. In particular, SUVs and pickups are estimated to be more aggressive but no more crashworthy than cars, once vehicle weights are controlled for. Notably, overall increases in the weight of the vehicle fleet are not found to significantly impact crash severity. This is an important point, since legislators, auto manufacturers and others often resist efforts to increase fuel economy on the assumption that crash severities will increase. Of course, injury severity also is influenced by a variety of other factors, including roadway design, environmental factors and occupant characteristics. The many quantitative results provided here should be useful for auto manufacturers, highway engineers, policy makers and travelers in providing, and experiencing, safer travel.

ACKNOWLEDGEMENTS AND DISCLAIMER

The authors are grateful to Hampton C. Gabler, Zheng Li and Jianming Ma for providing useful suggestions regarding data sets and analytical methods, and to Annette Perrone and Liberty Lidz for editorial assistance. The authors are also grateful to anonymous reviewers and to Wenzel Tom for their suggestions and comments on this paper.

The National Cooperative Highway Research Program (NCHRP) sponsored this research (under contract number 17-23), but the opinions expressed here do not necessarily reflect the

policy of NCHRP. The results of this work are preliminary and have not yet been approved by the NCHRP 17-23 project panel for publication as an NCHRP report.

REFERENCES

1. National Highway Traffic Safety Administration (NHTSA). *DOT Releases Preliminary Estimates Of 2003 Highway Fatalities*.
<http://www.nhtsa.dot.gov/nhtsa/announce/press/pressdisplay.cfm?year=2004&filename=FFARSrIs404.html>. Accessed July 1, 2004.
2. Renski, H., Khattak, A. J. and Council, F. M. Effect of speed limit increases on crash injury severity: Analysis of single-vehicle crashes on North Carolina Interstate highways. *Transportation Research Record* No. 1665, 1999, pp.100-108.
3. Hakim, D. *Average U.S. Car Is Tipping Scales at 4,000 Pounds*. New York Times May 05, 2004.
4. Farmer, C. M., Braver, E. R. and Mitter, E. L. Two-vehicle side impact crashes: The relationship of vehicle and crash characteristics to injury severity. *Accident Analysis and Prevention* 29(3), 1997, pp.399-406.
5. Bedard, M., Guyatt, G. H., Stones, M. J. and Hirdes, J. P. The independent contribution of driver, crash, and vehicle characteristics to driver fatalities. *Accident Analysis and Prevention* 34(6), 2002, pp.717-727.
6. Kahane, C. J. *Vehicle Weight, Fatality Risk and Crash Compatibility of Model Year 1991-99 Passenger Cars and Light Trucks*.
<http://www.nhtsa.dot.gov/cars/rules/regrev/evaluate/pdf/809662.pdf>. Accessed July 1, 2004.
7. Viano, D. C. and Arepally, S. Assessing the safety performance of occupant restraint systems. *Society of Automotive Engineers Transactions* 99 (6), 1990, pp.1913-1939.
8. Burnett, R., Carter, J., Roberts, V. and Myers, B. The influence of seatback characteristics on cervical injury risk in severe rear impacts. *Accident Analysis and Prevention* 36 (4), 2004, pp. 591-601.
9. Huelke, D. F. and Compton, C. P. Effects of seat belts on injury severity of front and rear seat occupants in the same frontal crash. *Accident Analysis and Prevention* 27(6), 1995, pp.835-838.
10. Shinohara, K., Okazaki, J., Sakuma, H., Kumada, Y. and Matsumoto, A. A clinical survey of motor vehicle crashes: What most influences the severity of patient's injuries? *JSAE Review* 24(3), 2003, pp.357-358.
11. Krull, K.A., Khattak, A.J. and Council, F.M. Injury effects of rollovers and events sequence in single-vehicle crashes. *Transportation Research Record* No. 1717, 2000, pp.46-54.
12. Toy, E. L., Hammitt, J. K. Safety impacts of SUVs, vans, and pickup trucks in two-vehicle crashes. *Risk Analysis* 23(4), 2003, pp.641-650.
13. Dissanayake, S. and Lu, J. J. Factors influential in making an injury severity difference to older drivers involved in fixed object-passenger car crashes. *Accident Analysis and Prevention* 34(5), 2002, pp.609-618.
14. Washington, S., Karlaftis, M. and Mannering, F. *Statistical and econometric methods for transportation data analysis*. Chapman & Hall/CRC, Boca Raton, FL, 2003.

15. Ulfarsson, G.F. and Mannering, F.L. Differences in male and female injury severities in sport-utility vehicle, minivan, pickup and passenger car accidents. *Accident Analysis and Prevention* 36(2), 2004, pp.135-147.
16. Alvarez, R.M. and Brehm, J. *Hard Choices, Easy Answers: Values, Information, and American Public Opinion*. Princeton University Press, Princeton, New Jersey, 2002.
17. Khattak, A. J., Kantor, P. and Council, F. M. Role of adverse weather in key crash types on limited-access roadways. *Transportation Research Record* No. 1621, 1998, pp.10-19.
18. Khattak, A. J., Pawlovich, M. D., Souleyrette, R. R. and Hallmark, S. L. Factors related to more severe older driver traffic crash injuries. *Journal of Transportation Engineering* 128(3), 2002, pp.243-249.
19. Kockelman, K. M. and Kweon, Y. J. Driver injury severity: An application of ordered probit models. *Accident Analysis and Prevention* 34(3), 2002, pp.313-321.
20. Kweon, Y.J. and Kockelman, K. M. Overall injury risk to different drivers: Combining exposure, frequency, and severity models. *Accident Analysis and Prevention* 35(4), 2003, pp.441-450.
21. Abdel-Aty, M. A. Analysis of driver injury severity levels at multiple locations using ordered probit models. *Journal of Safety Research* 34(5), 2003, pp.597-603.
22. Khattak, A. J. and Rocha, M. Are SUVs ‘Supremely Unsafe Vehicles? Analysis of rollovers and injuries with sport utility vehicles. *Transportation Research Record* No, 1840, 2003, pp.167-177.
23. Srinivasan, K. K. Injury severity analysis with variable and correlated thresholds: Ordered mixed logit formulation. *Transportation Research Record* No. 1784, 2002, pp.132-142.
24. O'Donnell, C.J. and Connor, D.H. Predicting the severity of motor vehicle accident injuries using models of ordered multiple choice. *Accident Analysis and Prevention* 28(6), 1996, pp.739-753.
25. Smith, K.M. and Cummings, P. Passenger seating position and the risk of passenger death or injury in traffic crashes. *Accident Analysis and Prevention* 36 (2), 2004, pp.257-260.
26. Evans, L and Wasielewski, P. Serious or fatal driver injury rate versus car mass in head-on crashes between cars of similar mass. *Accident Analysis and Prevention* 19(2), 1987, pp.119-131.
27. Greene, W. H. *Econometric Analysis, Fifth Edition*. Prentice Hall, New Jersey, 2002.
28. White, M. J. The “Arms Race” on American Roads: The Effect of SUV’s and Pickup Trucks on Traffic Safety. <http://econ.ucsd.edu/~miwhite/SUVS-finalversion.pdf>. Accessed March 1, 2005.
29. Gayer, T. The Fatality Risks of Sport-Utility Vehicles, Vans, and Pickups. <http://repositories.cdlib.org/iber/econ/E01-297>. Accessed March 1, 2005.
30. Newstead S., Cameron, M., Watson, L. and Delaney, A. *Vehicle crashworthiness and aggressivity ratings and crashworthiness by year of vehicle manufacture*. <http://www.general.monash.edu.au/muarc/rptsum/muarc196.pdf>. Accessed July 1, 2004.
31. Gabler, H. C. and Hollowell, W. T. Aggressivity of light trucks and vans in traffic crashes. *SAE Special Publications No.1333, Airbag Technology*, 1998, pp.125-133.
32. Greene, D.L. and Keller. M. Dissent on Safety Issues: Fuel Economy and Highway Safety. *Effectiveness and Impact of Corporate Average Fuel Economy (CAFE) Standards*. National Academies Press, Washington, D.C, 2002.

33. National Highway Traffic Safety Administration (NHTSA). *National Automotive Sampling System Crashworthiness Data System 2000 Coding and Editing Manual*. <http://www-nrd.nhtsa.dot.gov/departments/nrd-30/nca/TextVer/AvailInf.html>. Accessed July 1, 2004.
34. Prasad, P., Kim, A., Weerappuli, D.P.V., Roberts, V. and Schneider, D. Relationships between passenger car seat back strength and occupant injury severity in rear end collisions: Field and laboratory studies. *Stapp Car Crash Conference Proceedings* No.P-315, 1997, pp.417-449.
35. Huelke, D. F., Mackay, G. M. and Morris, A. Intraabdominal injuries associated with lap-shoulder belt usage. *SAE Special Publications No. 947, Frontal Impact Protection: Seat Belts and Air Bags*, 1993, pp.39-47.
36. Zhang, J., Lindsay, J., Clarke, K., Robbins, G. and Mao, Y. Factors affecting the severity of motor vehicle traffic crashes involving elderly drivers in Ontario. *Accident Analysis and Prevention* 32 (1), 2000, pp.117-125.

LIST OF TABLES

TABLE 1 Variable Definitions and Statistics

TABLE 2 Results of Ordered Logit and Heteroscedastic Ordered Logit Models

TABLE 3 Marginal Effects of Collision Partner's Vehicle Type

LIST OF FIGURES

FIGURE 1 Probabilities of Injury by Vehicle Type and Weight

TABLE 1 Variable Definitions and Statistics

Variable	Variable Description	One-vehicle Crash		Two-vehicle Crash	
		Mean	Std. Dev.	Mean	Std. Dev.
#CURBWGT	Curb weight of the vehicle, in lbs	3,170	720.9	3,047	726.3
CAR	1 if the vehicle is a passenger car; 0 otherwise	Base variable for vehicle type			
#MINIVAN	1 if the vehicle is a minivan; 0 otherwise	0.039	0.193	0.087	0.283
#SUV	1 if the vehicle is an SUV; 0 otherwise	0.214	0.410	0.082	0.274
#PICKUP	1 if the vehicle is a pickup; 0 otherwise	0.127	0.333	0.093	0.291
*PTNRVEHWGT	Curb weight of the collision partner, in lbs			4,302	4,690
PTNRCAR	1 if the collision partner is a car; 0 otherwise	Base variable for partner vehicle type			
*PTNRMINIVAN	1 if the collision partner is a minivan; 0 otherwise			0.084	0.277
*PTNRSUV	1 if the collision partner is an SUV; 0 otherwise			0.116	0.321
*PTNRPICKUP	1 if the collision partner is a pickup; 0 otherwise			0.170	0.376
*PTNRMDTHDT	1 if the collision partner is a medium or heavy-duty truck; 0 otherwise			0.047	0.212
BUCKET	1 if the seat is a integral bucket; 0 otherwise	Base variable for seat type			
FOLDINGBUCKET	1 if the seat is a bucket with folding back; 0 otherwise	0.263	0.440	0.253	0.434
BENCHSEAT	1 if the seat of the occupant is a integral bench; 0 otherwise	0.072	0.258	0.077	0.267
SEPBENCH	1 if the seat is a bench with separate cushion; 0 otherwise	0.098	0.297	0.105	0.306
FOLDINGBENCH	1 if the seat is a bench with folding cushion; 0 otherwise	0.165	0.371	0.126	0.332
OTHERSEAT	1 if the seat is pedestal or box mounted; 0 otherwise	0.029	0.169	0.045	0.207
NOBELT	1 if the occupant does not use any belt; 0 otherwise	Base variable for seat belt usage			
LAPSHOU	1 if the occupant uses lap and shoulder belt; 0 otherwise	0.550	0.497	0.546	0.498
OTHEBELT	1 if the occupant uses shoulder only or lap only belt; 0 otherwise	0.204	0.403	0.316	0.465
GOODWEATHER	1 if the weather is good; 0 otherwise	Base variable for weather			
BADWEATHER	1 if the weather is adverse, including snowy, rainy, foggy and smoky; 0 otherwise	0.215	0.411	0.190	0.392
LIGHT	1 if the light condition is daylight; 0 otherwise	Base variable for light condition			
DARK	1 if the light condition is dark or dawn; 0 otherwise	0.543	0.498	0.263	0.440
#SPDLIMIT	Speed limit of the site (unit: mph)	44.6	14.4	40.5	10.3
SPDLIMITSQD	Square of the speed limit of the site (unit: mph ²)	2,194	1,364	1,749	888.9
NODIVISION	1 if the roadway is two-way yet not divided; 0 otherwise	Base variable for road division			
NONPOSITIVEDIV	1 if the roadway is divided by vegetation, water, trees, embankments, ravine ; 0 otherwise	0.144	0.351	0.220	0.414
POSITIVEDIV	1 if the roadway is divided by manufactured barriers; 0 otherwise	0.125	0.331	0.090	0.287
ONEWAY	1 if the roadway is a one-way road; 0 otherwise	0.070	0.254	0.050	0.219
STRAIGHT	1 if the roadway is straight; 0 otherwise	Base variable for horizontal curve			
CURVRIGHT	1 if the roadway curves right; 0 otherwise	0.161	0.367	0.060	0.238
CURVLEFT	1 if the roadway curves left; 0 otherwise	0.266	0.442	0.053	0.224
LEVEL	1 if the roadway is level; 0 otherwise	Base variable for grade			
UPHILL	1 if the roadway is uphill; 0 otherwise	0.152	0.359	0.173	0.378
DOWNHILL	1 if the roadway is downhill; 0 otherwise	0.303	0.460	0.143	0.350
AGE	Occupant age (unit: year)	27.9	16.0	32.0	19.0
MALE	1 if male; 0 otherwise	Base variable for gender			
FEMALE	1 if female; 0 otherwise	0.384	0.486	0.513	0.500
FRONTLEFT	1 if seated in the driver seat (front left); 0 otherwise	Base variable for seat position			
FRONTRIGHT	1 if seated in the front passenger seat (front right); 0 otherwise	0.208	0.406	0.202	0.401
SECONDLEFT	1 if seated in the second row, left seat; 0 otherwise	0.076	0.264	0.081	0.273
SECONDRIGHT	1 if seated in the second row, middle or right seat; 0 otherwise	0.066	0.249	0.048	0.214
OTHERPOSITION	1 if seated in position other than the above and front left; 0 otherwise (including the third row and outside the pickups)	0.008	0.091	0.011	0.103

* This variable is also used in the heteroscedasticity specification for two-vehicle crashes.

This variable is also used in the heteroscedasticity specifications for two-vehicle and one-vehicle crashes.

TABLE 2 Results of Ordered Logit and Heteroscedastic Ordered Logit Models

Variable	One-vehicle Crashes				Two-vehicle Crashes			
	HOL		OL		HOL		OL	
	Coef.	t-stat.	Coef.	t-stat.	Coef.	t-stat.	Coef.	t-stat.
Latent injury severity measure								
Constant	-2.046	-59.614	2.000	-63.340	2.519	55.737	0.786	35.129
CURBWGT	1.94E-04	32.252	1.21E-04	22.221	-6.93E-04	-98.055	-2.64E-04	-94.360
MINIVAN	-0.075	-0.939	0.195	3.469	0.495	30.737	0.243	37.886
SUV	-0.380	-51.719	-0.216	-33.173	0.532	40.957	0.256	39.280
PICKUP	0.295	18.818	0.437	33.059	0.059	3.550	0.087	12.330
PTNRVEHWGT	---	---	---	---	2.48E-04	52.123	7.47E-05	49.906
PTNRSUV	---	---	---	---	0.596	64.880	0.311	64.635
PTNRMINIVAN	---	---	---	---	0.395	36.478	0.177	29.483
PTNRPICKUP	---	---	---	---	0.214	25.773	0.270	74.633
PTNRMDTHDT	---	---	---	---	-5.539	-51.866	-1.411	-41.653
FOLDINGBUCKET	0.111	18.202	0.081	14.477	-0.128	-19.161	-0.071	-20.609
BENCHSEAT	-0.570	-48.939	-0.499	-46.746	0.105	4.983	0.047	4.932
SEPBENCH	0.370	29.069	0.367	31.345	0.786	60.730	0.387	61.881
FOLDINGBENCH	-0.416	-31.939	-0.309	-26.858	-0.115	-6.671	-0.082	-10.167
OTHERSEAT	-0.362	-4.170	-0.345	-5.579	-0.041	-1.706	-0.026	-2.398
LAPSHOU	-1.422	-228.349	-1.285	-233.341	-1.298	-153.502	-0.663	-153.988
OTHEBELT	-1.026	-143.930	-0.909	-141.373	-1.526	-172.436	-0.742	-164.853
BADWEATHER	-0.949	-97.003	-0.877	-100.323	-0.795	-116.375	-0.384	-116.469
DARK	-0.125	-25.523	-0.078	-17.472	0.475	65.583	0.232	64.447
SPDLIMIT	0.062	57.742	0.065	64.518	-0.099	-52.035	-0.038	-38.873
SPDLIMITSQD	-5.11E-04	-42.371	-5.12E-04	-46.578	1.46E-03	63.909	6.49E-04	58.161
NONPOSITIVEDIV	0.610	53.738	0.547	53.346	-0.170	-24.687	-0.099	-28.106
POSITIVEDIV	-0.056	-4.939	-0.084	-8.386	-1.378	-105.902	-0.696	-115.116
ONEWAY	0.341	24.982	0.235	19.542	-0.346	-18.810	-0.228	-26.204
CURVRIGHT	0.323	31.568	0.252	27.606	0.669	48.656	0.362	58.832
CURVLEFT	0.564	69.939	0.500	70.199	0.909	76.342	0.460	86.546
UPHILL	0.071	8.176	0.047	5.828	-0.322	-41.688	-0.148	-41.358
DOWNHILL	-0.169	-20.230	-0.149	-19.668	0.642	64.723	0.353	73.510
AGE	1.66E-02	77.145	1.53E-02	80.867	1.13E-02	57.163	5.79E-03	61.760
FEMALE	0.681	150.887	0.623	151.267	0.645	117.495	0.316	113.742
FRONTRIGHT	-0.143	-40.959	-0.151	-47.495	0.086	14.527	0.030	9.775
SECONDLEFT	-0.682	-53.686	-0.670	-58.016	-0.998	-48.286	-0.467	-49.399
SECONDRIGHT	-0.630	-50.511	-0.658	-58.010	-1.042	-35.158	-0.513	-40.396
OTHERPOSITION	-0.078	-0.540	-0.131	-1.255	-0.252	-7.539	-0.025	-1.602
Variance								
CURBWGT	-3.59E-05	-2.368	---	---	7.18E-05	5.561	---	---
MINIVAN	0.303	3.814	---	---	-0.006	-0.154	---	---
SUV	0.141	3.152	---	---	-0.040	-0.988	---	---
PICKUP	0.307	5.832	---	---	0.104	2.491	---	---
SPDLIMIT	3.06 E-03	3.266	---	---	8.61E-03	9.681	---	---
PTNRVEHWGT	---	---	---	---	3.07E-05	2.862	---	---
PTNRSUV	---	---	---	---	-0.100	-3.134	---	---
PTNRMINIVAN	---	---	---	---	-0.186	-5.089	---	---
PTNRPICKUP	---	---	---	---	0.214	6.800	---	---
PTNRMDTHDT	---	---	---	---	-0.262	-1.085	---	---

TABLE 2 Results of Ordered Logit and Heteroscedastic Ordered Logit Models (Cont'd)

Variable	One-vehicle Crashes				Two-vehicle Crashes			
	HOL		OL		HOL		OL	
	Coef.	t-stat.	Coef.	t-stat.	Coef.	t-stat.	Coef.	t-stat.
Threshold								
μ_0	0.000	–	0.000	–	0.000	–	0.000	–
μ_1	0.713	24.422	0.642	34.920	2.257	31.208	1.118	70.526
μ_2	2.133	29.339	1.911	54.523	4.228	32.331	2.070	82.932
μ_3	5.264	26.744	4.639	41.769	11.764	26.891	5.410	44.628
Number of observations	7,628				18,609			
LRI	0.237		0.235		0.257		0.251	

TABLE 3 Marginal Effects of Collision Partner's Vehicle Type

Model Type	Vehicle Type	Marginal Effect (Change of Probabilities Versus Cars)				
		No Injury	Possible Injury	Non-incapacitating Injury	Incapacitating Injury	Fatal Injury
HOL	Minivan	-0.0439	0.0519	0.0097	-0.0162	-0.0014
	SUV	-0.0734	0.0435	0.0238	0.0068	-0.0006
	Pickup	-0.0343	-0.0279	0.0093	0.0473	0.0056
	HDT&MDT	0.4110	-0.2168	-0.1097	-0.0822	-0.0023
OL	Minivan	-0.0434	0.0153	0.0141	0.0135	0.0006
	SUV	-0.0767	0.0253	0.0252	0.0251	0.0011
	Pickup	-0.0664	0.0224	0.0217	0.0214	0.0010
	HDT&MDT	0.2646	-0.1324	-0.0727	-0.0572	-0.0023

Note: Probabilities are calculated while evaluating all other variables at their average values.

Chart (a). Injury Likelihood in One-vehicle Crashes by Type and Weight

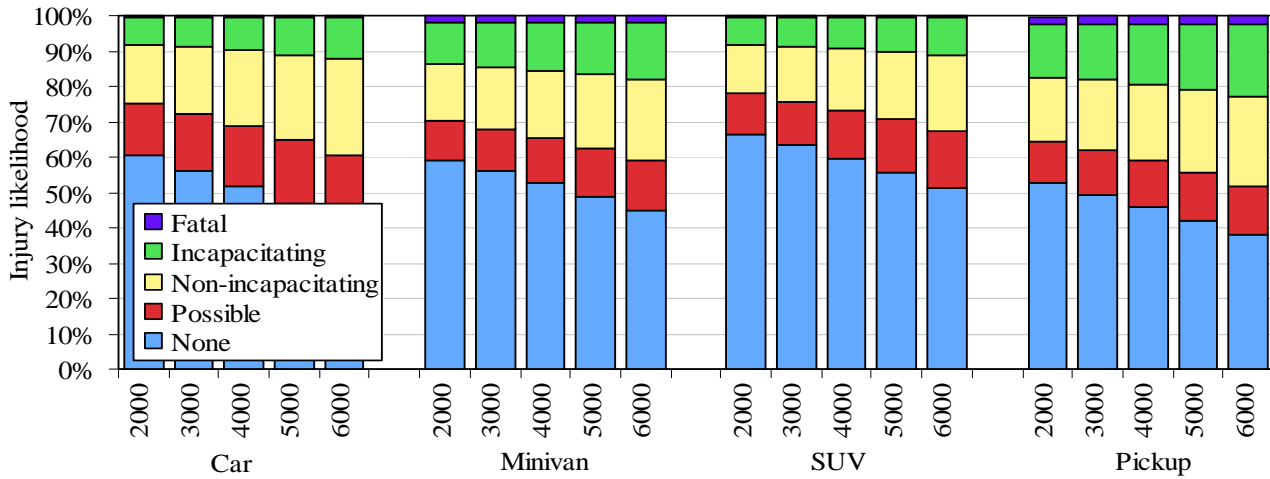


Chart (b). Injury Likelihood in Two-vehicle Crashes by Type and Weight of Primary Vehicle

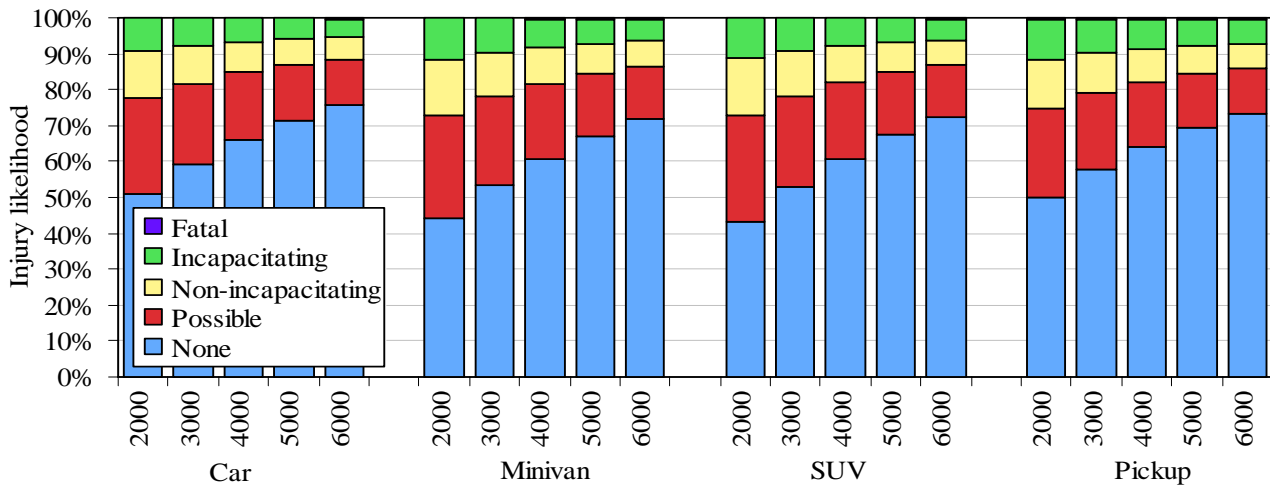


Chart (c). Injury Likelihood in Two-vehicle Crashes by Type and Weight of Collision Partner Vehicle

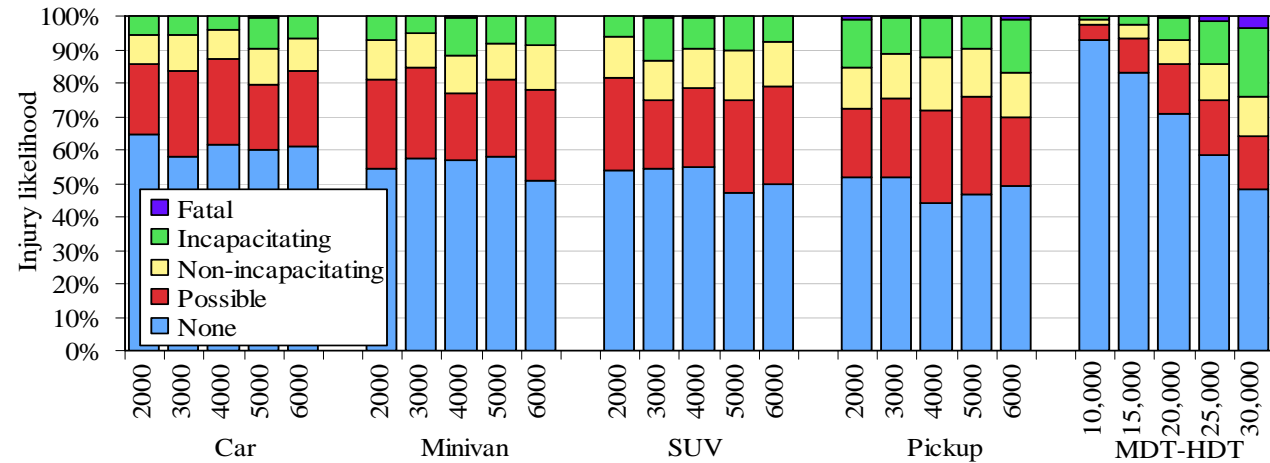
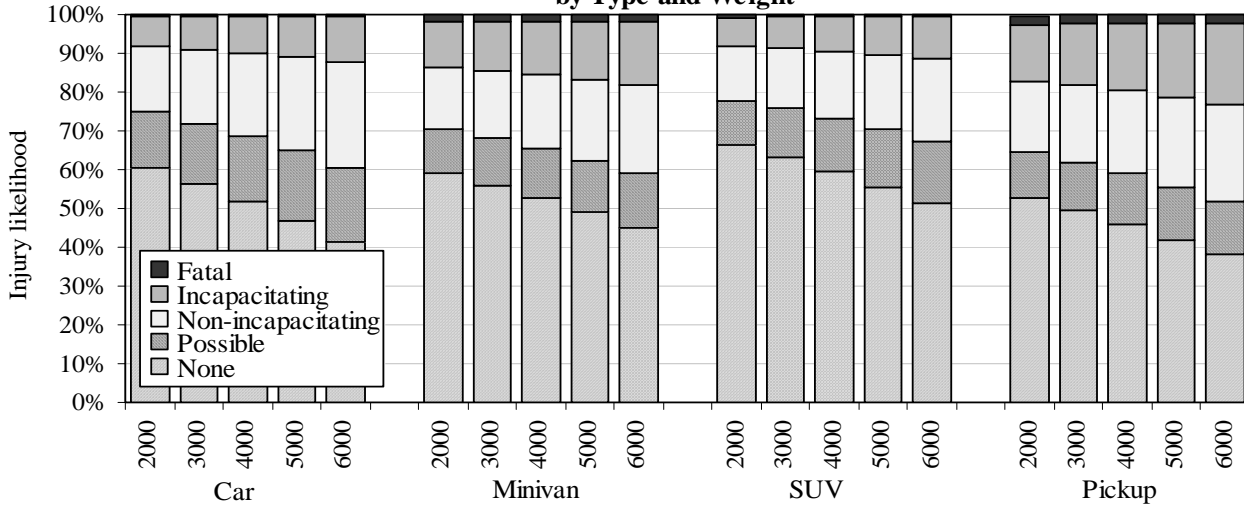
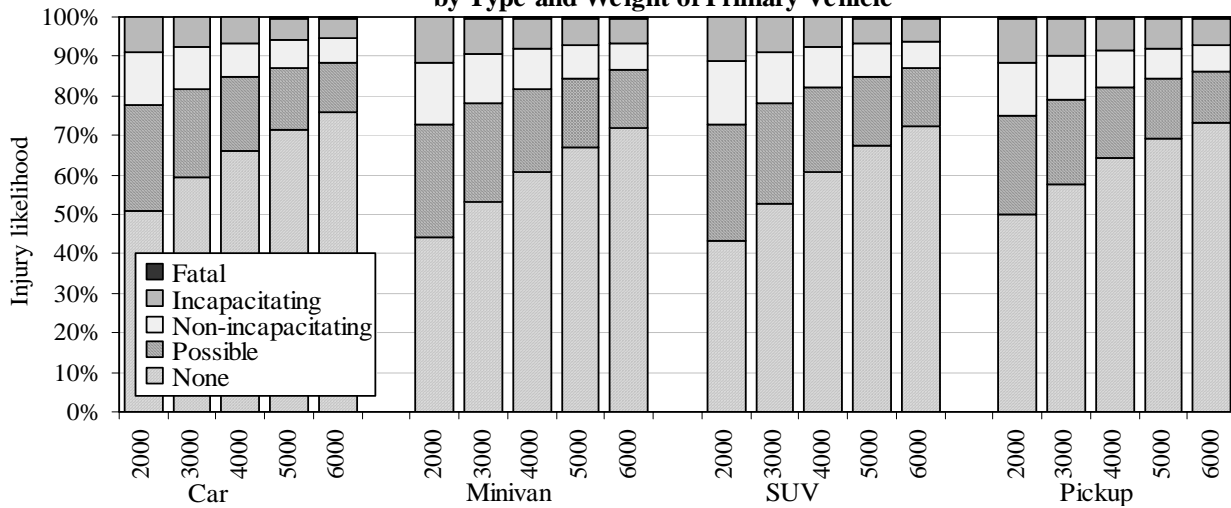


FIGURE 1 Probabilities of Injury by Vehicle Type and Weight.

**Chart (a). Injury Likelihood in One-vehicle Crashes
by Type and Weight**



**Chart (b). Injury Likelihood in Two-vehicle Crashes
by Type and Weight of Primary Vehicle**



**Chart (c). Injury Likelihood in Two-vehicle Crashes
by Type and Weight of Collision Partner Vehicle**

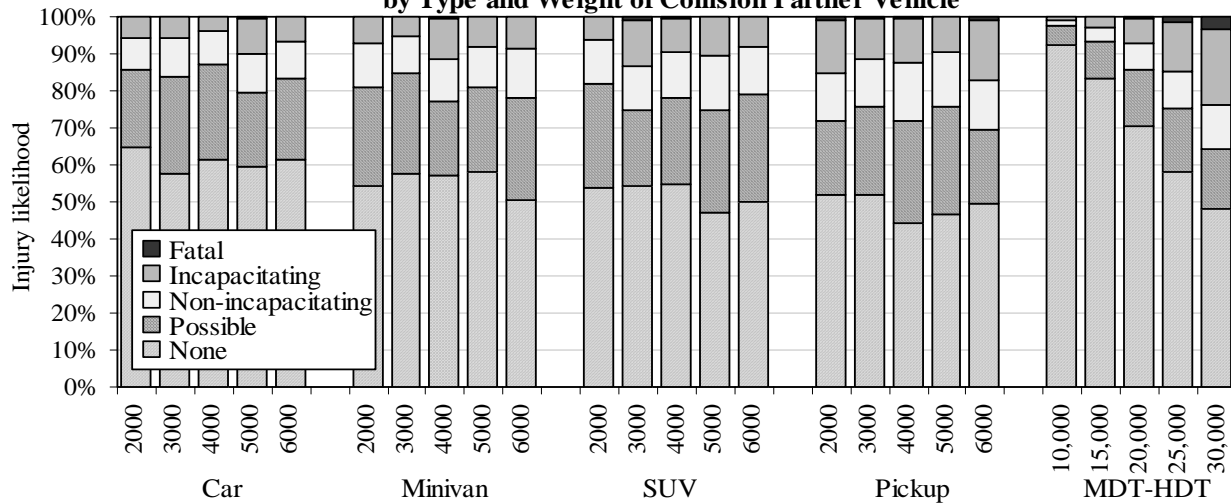


FIGURE 1 Probabilities of Injury by Vehicle Type and Weight.