

## Optimization of machining processes using pattern search algorithm

Miloš Madić\* and Miroslav Radovanović

*Faculty of Mechanical Engineering in Niš, University of Niš, A. Medvedeva 14, 18000 Niš, Serbia*

### CHRONICLE

#### *Article history:*

Received October 2 2013  
Received in revised format  
November 7 2013  
Accepted January 10 2014  
Available online  
January 14 2014

#### *Keywords:*

*Machining  
Optimization  
Pattern search algorithm*

### ABSTRACT

Optimization of machining processes not only increases machining efficiency and economics, but also the end product quality. In recent years, among the traditional optimization methods, stochastic direct search optimization methods such as meta-heuristic algorithms are being increasingly applied for solving machining optimization problems. Their ability to deal with complex, multi-dimensional and ill-behaved optimization problems made them the preferred optimization tool by most researchers and practitioners. This paper introduces the use of pattern search (PS) algorithm, as a deterministic direct search optimization method, for solving machining optimization problems. To analyze the applicability and performance of the PS algorithm, six case studies of machining optimization problems, both single and multi-objective, were considered. The PS algorithm was employed to determine optimal combinations of machining parameters for different machining processes such as abrasive waterjet machining, turning, turn-milling, drilling, electrical discharge machining and wire electrical discharge machining. In each case study the optimization solutions obtained by the PS algorithm were compared with the optimization solutions that had been determined by past researchers using meta-heuristic algorithms. Analysis of obtained optimization results indicates that the PS algorithm is very applicable for solving machining optimization problems showing good competitive potential against stochastic direct search methods such as meta-heuristic algorithms. Specific features and merits of the PS algorithm were also discussed.

© 2014 Growing Science Ltd. All rights reserved

## 1. Introduction

Importance for saving costs, maintaining competitiveness in a fierce market and ever-growing demand for high quality machined products, necessitates optimization of machining processes. Machining processes are highly complex, dynamic processes characterized by a number of machining parameters, i.e. input variables and different performance measures (responses), i.e. outputs (Kovačević et al., 2013). The main goal of optimization of machining processes is to determine the optimal values of machining parameters so as to achieve an enhanced machining performance with high dimensional accuracy (Samanta & Chakraborty, 2011). Traditionally, determination of optimal values of machining parameters comprises of mathematical modeling of a machining performance measures and optimization using an optimization method.

\* Corresponding author. Tel: +381 18500687 Fax: +381 18 588244  
E-mail: [madic@masfak.ni.ac.rs](mailto:madic@masfak.ni.ac.rs) (M. Madić)

Wide spectrum of optimization methods and algorithms has been proposed for solving machining optimization problems (Dixit & Dixit, 2008; Mukherjee & Ray, 2006; Zhang et al., 2006). Some of these include analytical, classical optimization and artificial intelligence methods. In an early work, Gilbert (1950) presented an analytical approach for the selection of optimal cutting speed in a single pass turning process. Armarego and Brown (1969) reported the application of differential calculus for solving unconstrained machining optimization problem. Bhattacharya et al. (1970) applied Lagrange's method for optimization of unit cost in turning process, subject to the constraints of surface roughness and cutting power. Many references presented the application of linear, non-linear, geometric and dynamic programming methods.

Linear programming was used in the early stage of optimization of machining process (Ermer & Patel, 1974). Later on, Tan and Creese (1995) used a sequential method based on linear programming for optimization of multi-pass turning operation. An approach based on the use of integer linear programming was presented by Gupta et al. (1995) for optimization of machining cost. Linear programming methods are fast and reliable (Al-Sumait et al., 2007), but both objective function and constraint equation(s) are linear functions. As machining optimization problems are mostly complex and non-linear in nature, linear programming methods do not provide an adequate answer, or may not be appropriate for many such problems. Multi-modal objective functions and consideration of multiple non-linear objective functions justify the use of non-linear programming methods (Mukherjee and Ray, 2006). Geometric programming was earlier used for solving different machining optimization problems. Ermer (1971), Petropoulos (1973) and Lambert and Walvekar (1978) applied geometric programming for solving constrained machining economics optimization problems. Sönmez et al. (1999) used geometric and dynamic programming for optimization of multi-pass slab milling and face milling for maximum production rate. The geometric programming method could not become popular for two reasons. First, the constraints and objective functions must be expressible in the form of a polynomial and second, as the number of constraints increase, the degree of difficulty in solving a geometric programming problem increases (Dixit & Dixit, 2008).

Dynamic programming has been applied for solving sequential and multi-stage optimization problems (Shin & Joo, 1992; Hayers & Davis, 1979; Sekhon, 1982) and goal programming was earlier used to solve multi-objective non-linear machining optimization problems (Sundaram, 1978; Philipson & Ravindran, 1978; El-Gizawy & El-Sayed, 2002). The aforementioned mathematical programming optimization methods are mostly gradient-based, and they possess many limitations in the application for solving machining optimization problems including: (i) inability to deal with integer/discrete input variables (Zhang et al., 2006), (ii) inclined to obtain a local optimal solution (Yildiz, 2009; Rao & Pawar, 2010; Debroy & Chakraborty, 2013) (iii) a judicious choice of an initial starting point in the input space is required (Zhang et al., 2006; Debroy & Chakraborty, 2013), (iv) slow convergence, (v) lack of robustness (Rao & Pawar, 2010) and (vi) inability to handle the overall machining process complexities due to large number of inter-dependent input variables and their stochastic relationships (Markos et al., 1998).

In the past decade, the new trend in the optimization of the machining processes has been based on the use of meta-heuristic algorithms (Zain et al., 2011; Yusup et al., 2013; Bhushan et al., 2012; Savas & Ozay, 2008; Kilickap et al., 2011; Maji & Pratihari, 2011; Rao & Pawar, 2009; Rao & Pawar, 2010; Rao, 2011; Rao & Kalyankar, 2013; Goswami & Chakraborty, 2014). It has been widely reported that these algorithms have the possibility to deal with discontinuous, non-differentiable, and multi-dimensional machining process models. Furthermore, they do not require the derivative information of the objective function and constraints for the search, rather, they "intelligently" search the optimization space by combining different rules so as to imitate natural phenomena. Lately, the need to tackle more and more complex machining optimization problems and reach a global optimal solution, led to the introduction of hybrid methods which combine constructive properties of several methods, both classical and meta-heuristic algorithms. Yildiz (2009) demonstrated the superiority of the proposed

hybrid method by combining immune algorithm with a hill climbing local search algorithm for solving multi-pass turning operation. Also, hybridization of simulated annealing and Hooke-Jeeves algorithm (Chen & Tsai, 1996), genetic algorithm and simulated annealing (Wang et al., 2004), Taguchi's method and genetic algorithm (Yildiz & Ozturk, 2006), etc., proved the effectiveness and efficiency of combined approach for solving machining optimization problems.

Although the popularity of the meta-heuristic algorithms is ever increasing, they are plagued by their own limitations including (Kovačević et al., 2013; Yildiz, 2009): (i) the optimality of the determined solution is impossible to prove, (ii) algorithm parameters settings have a strong influence on the final optimization solution, (iii) there is no universal rule for setting the algorithm parameters and (iv) even expert knowledge in meta-heuristics, systematical selection of the algorithm parameters, as well as understanding of the optimization problem being solved, do not guarantee the optimality of the obtained solution, (v) premature convergence to a local minimum and poor exploitation abilities.

Apart from meta-heuristic algorithms, the potential for solving machining optimization problems also have other optimization methods that are conceptually simpler. In recent years, direct search methods have received renewed interest due to new mathematical analysis, their suitability for parallel and distributed computing, and their utility in addressing optimization problems that involve complex computer simulations (Lewis & Torczon, 2011). Direct search methods as one of the earliest numerical optimization methods, formally proposed in the late 1950s and early 1960s, have remained popular with users due to their (Macklem, 2006; Lewis et al., 2000; Lewis & Torczon, 2011): (i) ease of implementation and formulation requiring setting of only few parameters, (ii) flexibility, reliability and practical success in solving a wide range of non-continual, non-differentiable and multimodal optimization problems, (iii) features unique to direct search methods often avoid the pitfalls that can plague more sophisticated approaches, (iv) robustness in locating at least local optimal solutions. Historically direct search methods can be classified into pattern search (PS) methods, simplex methods, and methods with adaptive sets of search directions (Lewis et al., 2000). The development and results of Torczon's multidirectional search (Torczon, 1989), generalized pattern search (Torczon, 1997), generating set search (Kolda et al., 2003) and mesh adaptive direct search (Audet and Dennis, 2006) renewed interest in the application of direct search methods for solving nonlinear optimization problems. Direct search methods neither compute nor approximate derivatives, instead, they work directly with values of the objective function to drive the search for an optimal point (Lewis & Torczon, 2011). They generate search points according to a pattern, around the current point, and accept points, which improve the objective function. Many of the direct search methods are based on surprisingly sound heuristics that fairly recent analysis demonstrates guarantee global convergence behavior analogous to the results known for globalized quasi-Newton techniques (Lewis et al., 2000).

The main objective of this paper is to introduce the use of PS algorithm to the subject of machining optimization, which to the best of the authors' knowledge, has not been previously applied in this field. This paper aims at investigating applicability and performance of conceptually simple PS algorithm for solving single and multi-objective machining optimization problems. The machining optimization application examples considered are taken from scientific resource bases, such as Springer, Elsevier, and Sage. The paper is organized as follows. After introduction, the brief description of the PS algorithm is given in the second section. In the third section, six case studies of machining optimization problems were considered. In each case study optimization solutions obtained by previous researchers using meta-heuristic algorithms and optimization solutions obtained using the PS algorithm were compared and discussed. Findings and observations are summarized in the last section.

## 2. Pattern search algorithm

The PS algorithm is characterized by a series of exploratory moves that consider the behavior of the objective function at a pattern of points, all of which lie on a rational lattice (Lewis et al., 2000). The algorithm computes a sequence of points that may or may not approach an optimal point.

The PS algorithm uses a set of vectors  $\{v_i\}$ , called a pattern, to determine which points to search at each iteration. The pattern is defined by the number of independent variables of the objective function,  $N$ , and the positive basis set. Two commonly used ones are the maximal basis, with  $2N$  vectors ( $v_1=[1 \ 0 \ 0]$ ,  $v_2=[0 \ 1 \ 0]$ ,  $v_3=[0 \ 0 \ 1]$ ,  $v_4=[-1 \ 0 \ 0]$ ,  $v_5=[0 \ -1 \ 0]$ ,  $v_6=[0 \ 0 \ -1]$ ), and the minimal basis, with  $N+1$  vectors ( $v_1=[1 \ 0 \ 0]$ ,  $v_2=[0 \ 1 \ 0]$ ,  $v_3=[0 \ 0 \ 1]$ ,  $v_4=[-1 \ -1 \ -1]$ ).

At each iteration, the PS algorithm searches a set of points, called a mesh, around the current point (the point computed at the previous step of the algorithm) for a point that improves the objective function value. The mesh is formed by (MathWorks, 2012):

1. Generating a set of vectors  $\{d_i\}$  by multiplying each pattern vector  $v_i$  by a scalar  $\Delta_m$ , called the mesh size.
2. Adding the current point to the  $\{d_i\}$ .

The pattern vector that produces a mesh point is called its direction. After generation of mesh the PS algorithm polls the points in the current mesh by computing their objective function values. If the PS algorithm finds a point in the mesh that improves the objective function value, the new point becomes the current point in the next iteration. In this case the mesh size  $\Delta_m$  is multiplied by 2 (expansion factor). Otherwise, the poll is called unsuccessful, the current point remains in the next iteration and the mesh size  $\Delta_m$  is multiplied by 0.5 (contraction factor). The PS algorithm stops when any of the following conditions occurs (MathWorks, 2012):

- The mesh size is less than mesh tolerance.
- Maximal number of iterations is reached.
- Total number of objective function evaluations is reached.
- Time limit is reached.
- The distance between the point found in two consecutive iterations and the mesh size are both less than a set tolerance.
- The change in the objective function in two consecutive iterations and the mesh size are both less than function tolerance.

It should be noted that the implementation of the PS algorithm in the Matlab programming environment allows for customization of the PS algorithm by defining polling, searching, and other functions. For a detailed description of the PS algorithm, its variants and other direct search algorithms refer to Lewis et al., (2000), Torczon, (1989, 1997), Kolda et al. (2003) and Audet and Dennis, (2006).

### 3. Case studies

To investigate the applicability of the PS algorithm for solving machining optimization problems, six research papers dealing with machining optimization were considered. In order to facilitate validation and comparison of obtained optimization solutions this paper considered only mathematical models developed using polynomial equations. For the purpose of optimization, the related m.files for the considered mathematical models were developed in Matlab. In an initial attempt this study was not focused on the analysis of the effects of main control parameters of the PS algorithm on the quality of optimization solutions obtained and convergence speed. Therefore in all case studies considered the PS algorithm was implemented with the following values of main control parameters.

Poll	Mesh
poll method: maximal basis $2N$	initial size: 1
complete poll: off	expansion factor: 2
polling order: consecutive	contraction factor: 0.5

Prior to the application, the PS algorithm takes at least two input arguments, namely the definition of the mathematical model i.e. objective function and a start point – initial solution. For each case study the optimization was attempted starting from three different initial solutions that are: all machining parameter values set on low level (–1) – “PS solution 1”, all machining parameter values set on centre level (0) – “PS solution 2” and all machining parameter values set on high level (+1) – “PS solution 3”. All computations were run on Intel Core2Duo T5800 with 4 GB RAM.

### 3.1. Single objective machining optimization examples

#### 3.1.1. Abrasive waterjet machining

Çaydaş and Haşçalık (2008) investigated the abrasive waterjet machining process through the application of artificial neural networks and regression analysis. Using the obtained experimental data the authors developed mathematical models to predict surface roughness ( $R_a$ ) using machining parameters of traverse speed ( $V$ ), waterjet pressure ( $P$ ), standoff distance ( $h$ ), abrasive grit size ( $d$ ) and abrasive flow rate ( $m$ ). The final mathematical model for the prediction of  $R_a$  was obtained as:

$$\begin{aligned} R_a = & -5.07976 + 0.08169 \cdot V + 0.07912 \cdot P - 0.34221 \cdot h - 0.08661 \cdot d \\ & - 0.34866 \cdot m - 0.00031 \cdot V^2 - 0.00012 \cdot P^2 + 0.10575 \cdot h^2 \\ & + 0.00041 \cdot d^2 + 0.07590 \cdot m^2 - 0.00008 \cdot V \cdot m - 0.00009 \cdot P \cdot m \\ & + 0.03089 \cdot h \cdot m + 0.00513 \cdot d \cdot m \end{aligned} \quad (1)$$

The range of machining parameter values used in experimental process was selected to present the constraints of the optimization problem as given in Eq. (2).

$$\begin{aligned} 50 & \leq V \leq 150 \text{ (mm/min)} \\ 125 & \leq P \leq 250 \text{ (MPa)} \\ 1 & \leq h \leq 4 \text{ (mm)} \\ 60 & \leq d \leq 120 \text{ (}\mu\text{m)} \\ 0.5 & \leq m \leq 3.5 \text{ (g/s)} \end{aligned} \quad (2)$$

Considering the constraints given in Eq. (2), the PS algorithm was used to optimize Eq. (1). The obtained optimization solutions and optimization solutions obtained by past researches using meta-heuristic algorithms (Zain et al., 2011; Yusup et al., 2013) are given in Table 1.


**Table 1**

Comparison of optimization solutions for abrasive waterjet machining process

Approach	V (mm/min)	P (MPa)	h (mm)	d ( $\mu$ m)	m (g/s)	Minimal $R_a$	Computational time (s)	Number of iterations
GA Zain et al. (2011)	50.024	125.018	1.636	94.73	0.525	1.5549		
SA Zain et al. (2011)	50.003	125.029	1.486	107.737	0.5	1.5355		
ABC Yusup et al. (2013)	50	125	1.55	102.521	0.5	1.5223		
PS solution 1	50	125	1.545	102.494	0.5	1.5223	1.16	66
PS solution 2	50	125	1.545	102.494	0.5	1.5223	1.53	88
PS solution 3	50	125	1.545	102.494	0.5	1.5223	1.78	104

It can be observed from Table 1 that the PS algorithm gives better results than the genetic algorithm (GA) and simulated annealing (SA) obtained previously by (Zain et al., 2011). The optimization results are comparable with the results of ABC algorithm as previously reported by Yusup et al. (2013). The optimization results indicate that PS algorithm, starting from three different initial points, successfully avoided the local minimum entrapment problem. However, it should be noted that in this case study the initial point had great impact on the convergence speed of the PS algorithm (Fig. 1). As can be observed only 66 iterations were needed to find the optimal solution when starting the optimization from lower bound [50 125 1 60 0.5] as initial point, whereas 104 iterations were needed when starting

the optimization from upper bound [150 250 4 120 3.5] as initial point. Considering that the surface roughness mathematical model was complex having five independent variables as well interaction and quadratic terms, the computational time less than 2s indicate that the application of PS algorithm represents an efficient alternative for solving machining optimization problems.

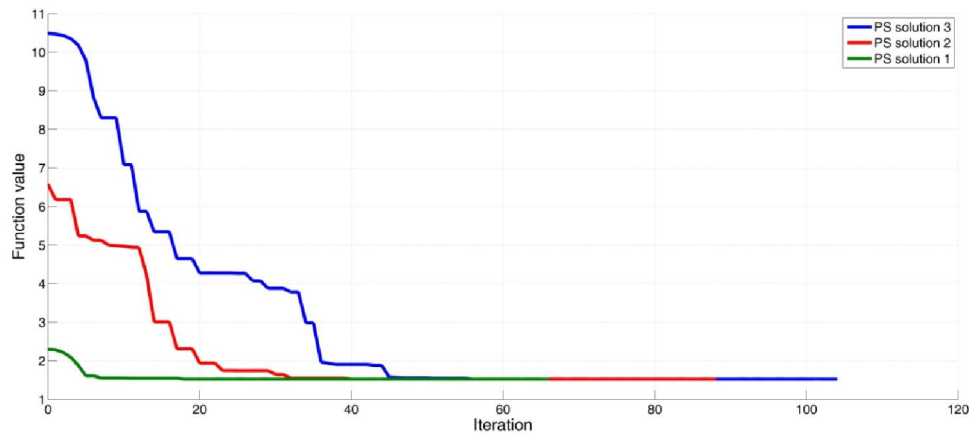

**Fig. 1.** Convergence of the PS algorithm

### 3.1.2. Turning process

In an attempt to optimize turning parameters so as to minimize surface roughness, Bhushan et al. (2012) presented an integrated approach consisting of regression analysis and GA. On the basis of the experimental results, Bhushan et al. (2012) developed the following mathematical model for the prediction of surface roughness:

$$R_a = 0.72412 + 0.00324 \cdot A - 0.19694 \cdot B + 4.19915 \cdot C - 0.18753 \cdot D - 0.0000174 \cdot A^2 - 3.42419 \cdot C^2 + 3.33125 \cdot B \cdot C - 0.56484 \cdot C \cdot D \quad (3)$$

where A = cutting speed, B = feed rate, C = depth of cut and D = nose radius.

The range of machining parameter values used in experimental process was selected to present the constraints of the optimization problem as given in Eq. (4).

$$\begin{aligned} 90 &\leq A \leq 210 \text{ (m/min)} \\ 0.15 &\leq B \leq 0.25 \text{ (mm/rev)} \\ 0.2 &\leq C \leq 0.6 \text{ (mm)} \\ 0.4 &\leq D \leq 1.2 \text{ (mm)} \end{aligned} \quad (4)$$

The optimization solution of the afore-mentioned optimization problem using the PS algorithm and optimization solution obtained Bhushan et al. (2012) are given in Table 2.

**Table 2**  
Comparison of optimization solutions for turning process

Approach	Cutting speed (m/min)	Feed rate (mm/rev)	Depth of cut (mm)	Nose radius (mm)	Minimal $R_a$	Computational time (s)	Number of iterations
GA Bhushan et al. (2012)	207.055	0.151	0.201	1.199	1.06509 <sup>a</sup>		
PS	PS solution 1	90	0.15	0.2	1.28744	1.14	40
	PS solution 2	210	0.15	0.2	1.04984	1.41	82
	PS solution 3	210	0.15	0.2	1.04984	1.18	56

<sup>a</sup> Corrected value

Unlike the previous study, although the objective function was simpler containing fewer independent variables, local solution entrapment was observed. However, comparison of optimization results from

Table 2 indicate that the PS algorithm yielded better results than the GA obtained previously by Bhushan et al. (2012).

### 3.1.3. Turn-milling machining process

Savas and Ozay (2008) investigated tangential turn-milling machining process. The study was aimed at determination of optimum machining parameter values at which surface roughness is minimal by using GA. According to the experiment data obtained the following mathematical model for surface roughness was obtained:

$$R_a = (0.000008 \cdot N^2 - 0.0082 \cdot N + 2.8734) \cdot (0.00003 \cdot n^2 - 0.0135 \cdot n + 1.9924) \cdot (0.0171 \cdot f + 0.4677) \cdot (0.2525 \cdot a + 0.4087) \cdot 5.3 \quad (5)$$

where  $N$  = workpiece speed,  $n$  = tool speed,  $f$  = feed rate and  $a$  = depth of cut.

The constraints for the machining parameters used in optimization are given in Eq. (6).

$$\begin{aligned} 300 &\leq N \leq 700 \text{ (rev/min)} \\ 150 &\leq n \leq 300 \text{ (rev/min)} \\ 3 &\leq f \leq 20 \text{ (mm/min)} \\ 0.1 &\leq D \leq 1 \text{ (mm)} \end{aligned} \quad (6)$$

The optimization solution of the afore-mentioned optimization problem using the PS algorithm and optimization solution obtained by Savas and Ozay (2008) are given in Table 3.

**Table 3**

Comparison of optimization solutions for turn-milling machining process

Approach	Workpiece speed (rev/min)	Tool speed (rev/min)	Feed rate (mm/min)	Depth of cut (mm)	Minimal $R_a$	Computational time (s)	Number of iterations
GA Savas and Ozay (2008)	511.9	224.9	3.2	0.1	0.439437*		
PS solution 1	512.5	225	3	0.1	0.436558	1.24	62
PS solution 2	512.5	225	3	0.1	0.436558	1.28	66
PS solution 3	512.5	225	3	0.1	0.436558	1.51	78

\* Corrected value

Analysis of obtained optimization results given in Table 3 indicates again the efficiency of the PS algorithm in determining optimization solution which is better than the one obtained by the GA.

### 3.1.4. Drilling process

Kilickap et al. (2011) presented a GA based methodology for optimization of drilling parameters considering surface roughness as objective function in drilling of AISI 1045. Mathematical prediction model of the surface roughness was obtained as

$$R_a = 4.115 - 0.82767 \cdot x_1 + 8.225 \cdot x_2 + 0.135 \cdot x_3 + 0.0538 \cdot x_1^2, \quad (7)$$

where  $x_1$  = cutting speed,  $x_2$  = feed rate,  $x_3$  = cutting environment.

The constraints for the machining parameters used in optimization are given in Eq. (8).

$$\begin{aligned} 5 &\leq x_1 \leq 15 \text{ (m/min)} \\ 0.1 &\leq x_2 \leq 0.3 \text{ (mm/rev)} \\ 1 &\leq x_3 \leq 3 \end{aligned} \quad (8)$$

The optimization solution of the afore-mentioned optimization problem using the PS algorithm and optimization solution obtained Kilickap et al. (2011) are given in Table 4.

**Table 4**

Comparison of optimization solutions for drilling process

Approach	Cutting speed (m/min)	Feed rate (mm/rev)	Cutting environment	Minimal $R_a$	Computational time (s)	Number of iterations
GA Kilickap et al. (2011)	7.62	0.1	1	1.89		
PS	PS solution 1	7.692	0.1	1	1.88924	1.04
	PS solution 2	7.692	0.1	1	1.88924	1.13
	PS solution 3	7.692	0.1	1	1.88924	1.21

Optimization solutions obtained by the PS algorithm are comparable with the optimization solutions obtained by using the GA. It can be also observed that convergence to the optimal point of the PS algorithm was not affected by the selection of initial point.

### 3.2. Multi-objective machining optimization examples

In multi-objective optimization of the machining processes, instead of treating two objective functions (responses) separately, both are to be simultaneously optimized.

#### 3.2.1. Electrical discharge machining process

Maji and Pratihaar (2011) modeled input-output relationships of an electrical discharge machining process based on the experimental data (collected according to a central composite design) using regression analysis. Three machining parameters, such as peak current ( $I_p$ ), pulse-on-time ( $T_{on}$ ) and pulse-duty-factor ( $t$ ), and two process responses, namely, material removal rate (MRR) and surface roughness (SR) were considered in the study. Both MRR and SR were expressed separately, as given in Eq. (9) and Eq. (10), respectively:

$$\begin{aligned}
 MRR = & -0.112931 + 0.0170470 \cdot I_p + 0.000222059 \cdot T_{on} + 0.0190297 \cdot t - 7.23331 \cdot 10^{-5} \cdot I_p^2 \\
 & - 2.43026 \cdot 10^{-7} \cdot T_{on}^2 - 3.03374 \cdot 10^{-4} \cdot t^2 + 1.58294 \cdot 10^{-5} \cdot I_p \cdot T_{on} \\
 & + 0.00148333 \cdot I_p \cdot t - 3.96310 \cdot 10^{-5} \cdot T_{on} \cdot t
 \end{aligned} \quad (9)$$

$$\begin{aligned}
 SR = & 1.76966 + 0.882071 \cdot I_p + 0.00686577 \cdot T_{on} - 0.447132 \cdot t - 0.0373631 \cdot I_p^2 \\
 & - 9.89173 \cdot 10^{-6} \cdot T_{on}^2 + 0.0221831 \cdot t^2 + 0.000517857 \cdot I_p \cdot T_{on} \\
 & + 0.0109375 \cdot I_p \cdot t - 2.76786 \cdot 10^{-4} \cdot T_{on} \cdot t
 \end{aligned} \quad (10)$$

Maji and Pratihaar (2011) formulated the multi-objective problem considering both MRR and SR as given bellow:

$$\text{Maximize } Y = MRR + 1/SR$$

$$\text{subject to: } 6 \leq I_p \leq 18 \text{ (A),}$$

$$50 \leq I_{on} \leq 750 \text{ (}\mu\text{s)},$$

$$4 \leq t \leq 12.$$

(11)

The obtained optimization solution obtained using the PS algorithm and the solution obtained by Maji and Pratihaar (2011) by using the binary coded GA are compared in Table 5.

**Table 5**

Comparison of optimization solutions for electrical discharge machining process

Approach	Peak current, $I_p$ (A)	Pulse-on-time, $T_{on}$ ( $\mu$ s)	Pulse-duty- factor, $t$	Y	MRR (g/min)	SR ( $\mu$ m)	Computational time (s)	Num. of iterations
GA Maji & Pratihaar, 2011	17	138	11	0.745349	0.608957	7.331776		
PS	PS solution 1	18	50	12	0.833964	0.676512	6.351134	0.85
	PS solution 2	18	50	12	0.833964	0.676512	6.351134	0.9
	PS solution 3	18	50	12	0.833964	0.676512	6.351134	0.98



The obtained optimization results indicate that the PS algorithm can be efficiently used for solving multi-objective machining optimization problems formulated based on classic weighted sum method. Fast computational time and avoidance of local optima entrapments confirm the validity on the use of the PS algorithm. From Table 5, it is obvious that the optimal solution obtained by the PS algorithm actually represents the boundary points of the machining parameter values in the covered experimental hyperspace.

### 3.2.2. Wire electrical discharge machining process

Rao and Pawar (2009) investigated the wire electrical discharge machining (WEDM) process. The authors developed mathematical models for correlating different machining parameters and cutting speed ( $V_m$ ) and surface roughness ( $R_a$ ). The developed mathematical models by for  $V_m$  and  $R_a$  are given by Eqs. (12) and (13), respectively, whereas Eq. (14) gives the surface roughness constraint.

$$V_m = 1.555 + 0.1095 \cdot x_1 - 0.187 \cdot x_2 + 0.0929 \cdot x_3 + 0.1279 \cdot x_4 + 0.0393 \cdot x_1 \cdot x_2 - 0.0793 \cdot x_1 \cdot x_3 - 0.01188 \cdot x_1 \cdot x_4 - 0.01688 \cdot x_2 \cdot x_3 - 0.0493 \cdot x_2 \cdot x_4 - 0.0606 \cdot x_3 \cdot x_4 - 0.03219 \cdot x_1^2 + 0.02031 \cdot x_2^2 - 0.0909 \cdot x_3^2 - 0.06094 \cdot x_4^2 \quad (12)$$

$$R_a = 3.6 + 0.2979 \cdot x_1 - 0.2979 \cdot x_2 - 0.1479 \cdot x_3 - 0.03542 \cdot x_4 + 0.021875 \cdot x_1 \cdot x_2 - 0.2031 \cdot x_1 \cdot x_3 + 0.04062 \cdot x_1 \cdot x_4 + 0.01562 \cdot x_2 \cdot x_3 - 0.1531 \cdot x_2 \cdot x_4 - 0.1031 \cdot x_3 \cdot x_4 - 0.3182 \cdot x_1^2 - 0.3807 \cdot x_2^2 - 0.4057 \cdot x_3^2 - 0.2682 \cdot x_4^2 \quad (13)$$

$$R_{per} - R_a \geq 0 \quad (14)$$

where  $x_1$  = pulse-on time,  $x_2$  = pulse-off time,  $x_3$  = peak current,  $x_4$  = servo feed setting and  $R_{per}$  is the permissible value of surface roughness.

The upper and lower bound values for the machining parameters used by Rao and Pawar (2009) are as given as: pulse-on time ( $\mu s$ ) = 4 – 8; pulse-off time ( $\mu s$ ) = 10 – 30; peak current (A) = 90 – 140; servo feed setting = 30 – 50. In order to determine optimal machining parameter values such that permissible surface value of  $R_{per} = 2 \mu m$  is obtained and cutting speed is maximized at the same time, different meta-heuristic algorithms were previously applied (Rao & Pawar, 2009; Rao, 2011; Rao & Kalyankar, 2013) (Table 6). For solving nonlinear constraint problems, as in this case study, the PS algorithm uses augmented Lagrangian approach, in which the bounds and linear constraints are handled separately from nonlinear constraints. A subproblem is formulated by combining the objective function and nonlinear constraint function using the Lagrangian and the penalty parameters. A sequence of such optimization problems are approximately minimized using the PS algorithm such that the linear constraints and bounds are satisfied (MathWorks, 2012). The optimization solutions obtained using the PS algorithm are given in Table 6.

**Table 6**  
Comparison of optimization solutions for wire electrical discharge machining process

Approach	Pulse on time ( $\mu s$ )	Pulse off time ( $\mu s$ )	Peak current (A)	Servo feed	$V_m$ (mm/min)	$R_{per}$ ( $\mu m$ )	Comp. time (s)	Num. of iterations
ABC Rao and Pawar (2009)	8	30	132.57	50	1.420907*	1.998325		
PSO Rao (2011)	4	23.23	140	50	1.420498	1.998649		
MHS Rao (2011)	8	29.66	134.15	50	1.414212*	1.972583		
SA Rao (2011)	8	29.66	134.15	50	1.414212	1.972583		
SFL Rao (2011)	7.972	29.8	133.375	50	1.417831*	1.994749		
TLBO Rao & Kalyankar, 2013	4	22.937	140	50	<b>1.4287</b>	2.018925		
PS solution 1	-	-	-	-	no feasible solution found		-	-
PS solution 2	8	30	132.825	49.84	1.4205	2.00	7.46	4
PS solution 3	8	30	140	44.79	1.3997	2.00	1.05	5

\* Corrected values

When solving nonlinear constrained optimization problems, as in this case study, the selection of starting point resulted in three different optimization solutions. Namely, no feasible solution was found

when starting the optimization from lower bound [4 10 90 30] as the initial point. PS optimization led to the maximum  $V_m$  of 1.3997 mm/min (local maximum) when starting the optimization from upper bound [8 30 140 50] as the initial point. However, the best obtained solution by the PS algorithm was obtained when starting the optimization from [6 20 115 40] as the initial point. It is interesting to note that this solution was found only in four iterations, requiring however, computational time of about 8 s. When comparing the optimization solution obtained by the PS algorithm with the solutions of other meta-heuristic algorithms it can be observed that the PS algorithm solution is comparable to the solution obtained by the particle swarm optimization (PSO) algorithm, and better than solutions obtained by SA, shuffled frog leaping (SFL) algorithm and modified harmony search (MHS) algorithm, all reported by Rao (2011). As can be seen from Table 6, the best optimization solution was obtained by the artificial bee colony (ABC) algorithm (Rao and Pawar, 2009).

#### 4. Conclusions

This paper has introduced a new approach based on the PS algorithm for solving machining optimization problems. The PS algorithm has been used to solve both the single- and multi-objective optimization problems which had been solved by the past researchers using meta-heuristic algorithms. The conclusions of this research are summarized in the following points:

- Convergence of the PS algorithm, i.e. the number of required iterations and computational time greatly depends on the selection of the initial solution. The effectiveness of the PS algorithm appears to rely on how close the initial point is to the optimal point.
- Unlike meta-heuristic algorithms, the PS algorithm consistently produces the same solutions when the optimization is started from the same initial point.
- In the case of solving single-objective optimization problems, the optimization solutions obtained by the PS algorithm are better or at least comparable with the optimization solutions obtained by using meta-heuristic algorithms such as GA, SA and ABC algorithm.
- The PS algorithm can be efficiently used for solving multi-objective machining optimization problems formulated on the basis of the classic weighted sum method.
- Although the PS algorithm has yielded comparable or better optimization solutions than the optimization solutions obtained by several meta-heuristic algorithms such as PSO, SA, SFL and MHS, when solving nonlinear constrained machining optimization problems, the PS algorithm has faced convergence problems. The comparative analysis of optimization results has indicated that the priority in this case should be given to the ABC algorithm, which has powerful mathematical tools to guide the exploration of optimization space.

In conclusion, it has been found that the PS algorithm is an efficient optimization method and its overall performance has shown that it is well suited for solving machining optimization problems. Considering that the previous researchers have adjusted the main parameters of GA and ABC algorithm (Yusup et al., 2013; Bhushan et al., 2012; Kilickap et al., 2011; Maji & Pratihari, 2011), while in this paper the PS optimization solutions have been obtained without any adjustments of the main PS algorithm parameters such as mesh size, expansion and contraction factor values, one can conclude that deterministic direct search methods, such as the PS algorithm, have good competitive potential in solving machining optimization problems against stochastic direct search methods such as meta-heuristic algorithms. The main scope of future work will be the analysis of the PS algorithm parameters and selection of initial solutions by the use of Taguchi's experimental design technique and the application with comparative analysis of other direct search methods for solving machining optimization problems. Attempts will also be made to investigate the efficiency of a combined optimization approach by integrating deterministic and stochastic direct search methods.

## Acknowledgments

This work was carried out within the project TR 35034, financially supported by the Ministry of Science and Technological Development of the Republic of Serbia.

## References

- Al-Sumait, J.S., Al-Othman, A.K., & Sykulski, J.K. (2007). Application of pattern search method to power system valve-point economic load dispatch. *Electrical Power and Energy Systems*, 29, 720–730.
- Armarego, E.J.A., & Brown, R.H. (1969). *The machining of metals*. Englewood Cliffs, NJ: Prentice Hall.
- Audet, C., & Dennis, J.E. (2006). Mesh adaptive direct search algorithms for constrained optimization. *SIAM Journal on Optimization*, 17, 188–217.
- Bhattacharya, A., Faria-Gonzalez, R., & Inyong, H. (1970). Regression analysis for predicting surface finish and its application in the determination of optimum machining conditions. *Journal of Engineering for Industry*, 92, 711–714.
- Bhushan, R.K., Kumar, S., & Das, S. (2012). GA approach for optimization of surface roughness parameters in machining of Al Alloy SiC particle composite. *Journal of Materials Engineering and Performance*, 21, 1676–1686.
- Çaydaş, U., & Haşcalik, A. (2008). A study on surface roughness in abrasive waterjet machining process using artificial neural networks and regression analysis method. *Journal of Materials Processing Technology*, 202, 574–582.
- Chen, M.C., & Tsai, D.M. (1996). A simulated annealing approach for optimization of multi-pass turning operations. *International Journal of Production Research*, 34, 2803–2825.
- Debroy, A., & Chakraborty, S. (2013). Non-conventional optimization techniques in optimizing non-traditional machining processes: a review. *Management Science Letters*, 3, 23–38.
- Dixit, P.M., & Dixit, U.S. (2008). *Modeling of metal forming and machining processes: by finite element and soft computing methods*. Springer.
- El-Gizawy, A.S., & El-Sayed, J.J. (2002). A multiple objective based strategy for process design of machining operations. *International Journal of Computer Integrated Manufacturing*, 15, 353–360.
- Ermer, D.S. (1971). Optimization of constrained machining economics problem by geometric programming. *Journal of Engineering for Industry*, 93, 1067–1072.
- Ermer, D.S., & Patel, D.C. (1974). Maximization of the production rate with constraints by linear programming and sensitivity analysis. *Proceedings NAMRC*, pp. 436–449.
- Gilbert, W.W. (1950). Economics of machining. In: *Machining Theory and Practice*. American Society of Metals, pp. 465–485.
- Goswami, D., & Chakraborty, S. (2014). Differential search algorithm-based parametric optimization of electrochemical micromachining processes. *International Journal of Industrial Engineering Computations*, 5, 1–14.
- Gupta, R., Batra, J.L., & Lal, G.K. (1995). Determination of optimal subdivision of depth of cut in multi-pass turning with constraints. *International Journal of Production Research*, 33, 2555–2565.
- Hayers, G.M., & Davis, R.P. (1979). A discrete variable approach to machine parameter optimization. *AIIE Transactions*, 11, 155–159.
- Kilickap, E., Huseyinoglu, M., & Yardimeden, A. (2011). Optimization of drilling parameters on surface roughness in drilling of AISI 1045 using response surface methodology and genetic algorithm. *International Journal of Advanced Manufacturing Technology*, 52, 79–88.
- Kolda, T.G., Lewis, R.M., & Torczon, V. (2003). Optimization by direct search: new perspectives on some classical and modern methods. *SIAM Review*, 45, 385–482.
- Kovačević, M., Madić, M., & Radovanović, M. (2013). Software prototype for validation of machining optimization solutions obtained with meta-heuristic algorithms. *Expert Systems with Applications*, 40, 6985–6996.
- Lambert, P.K., & Walvekar, A.G. (1978). Optimization of multi-pass machining operations. *International Journal of Production Research*, 16, 247–259.
- Lewis, R.M., Torczon, V., & Trosset, M.W. (2000). Direct search methods: then and now. *Journal of Computational and Applied Mathematics*, 124, 191–207.
- Lewis, R.M., & Torczon, V. (2011). *Direct search methods*, in Wiley Encyclopedia of Operations Research and Management Science.

- Maji, K., & Pratihari, D. K. (2011). Modeling of electrical discharge machining process using conventional regression analysis and genetic algorithms. *Journal of Materials Engineering and Performance*, 20, 1121–1127.
- Macklem, M. (2006). Low-dimensional curvature methods in derivative-free optimization on shared computing networks. PhD Thesis, Dalhousie University.
- Markos, S., Viharos, Zs.J., & Monostori, L. (1998). Quality-oriented, comprehensive modelling of machining processes. Sixth ISMQC IMEKO symposium on metrology for quality control in production, pp. 67–74.
- MathWorks Inc. Global Optimization Toolbox User's Guide, 2012. Natick, MA: MathWorks, Inc.
- Mukherjee, I., & Ray, P. K. (2006). A review of optimization techniques in metal cutting processes. *Computers and Industrial Engineering*, 50, 15–34.
- Petropoulos, P.G. (1973). Optimal selection of machining rate variables by geometric programming. *International Journal of Production Research*, 11, 305–314.
- Philipson, R.H., & Ravindran, A. (1978). Application of goal programming to machinability data optimization. *Journal of Mechanical Design*, 100, 286–291.
- Rao, R.V., & Pawar, P.J. (2009). Modelling and optimization of process parameters of wire electrical discharge machining. *Proceedings of the Institution of Mechanical Engineers, Journal of Engineering Manufacture* 223, 1431–1440.
- Rao, R.V., & Pawar, P.J. (2010). Parameter optimization of a multi-pass milling process using non-traditional optimization algorithms. *Applied Soft Computing*, 10, 445–456.
- Rao, R.V. (2011). *Advanced modeling and optimization of manufacturing processes: international research and development*. London: Springer-Verlag.
- Rao, R.V., & Kalyankar, V.D. (2013). Parameter optimization of modern machining processes using teaching–learning-based optimization algorithm. *Engineering Applications of Artificial Intelligence*, 26, 524–531.
- Samanta, S., & Chakraborty, S. (2011). Parametric optimization of some non-traditional machining processes using artificial bee colony algorithm. *Engineering Applications of Artificial Intelligence*, 24, 946–957.
- Savas, V., & Ozay, C. (2008). The optimization of the surface roughness in the process of tangential turn-milling using genetic algorithm. *International Journal of Advanced Manufacturing Technology*, 37, 335–340.
- Sekhon, G.S. (1982). Application of dynamic programming to multi-stage batch machining. *Computer-Aided Design*, 14, 157–159.
- Shin, Y.C., & Joo, Y.S. (1992). Optimization of machining condition with practical constraints. *International Journal of Production Research*, 30, 2907–2919.
- Sönmez, A.I., Baykasoglu, A., Dereli, T., & Filiz, I.H. (1999). Dynamic optimization of multipass milling operation via geometric programming. *International Journal of Machine Tools and Manufacture*, 39, 297–320.
- Sundaram, R.M. (1978). An application of goal programming technique in metal cutting. *International Journal of Production Research*, 16, 375–382.
- Tan, F.P., & Creese, R.C. (1995). A generalized multi-pass machining model for machining parameter selection in turning. *International Journal of Production Research*, 33, 1467–1487.
- Torczon, V. (1989). *Multi-directional search: a direct search algorithm for parallel machines*. PhD thesis, Rice University.
- Torczon, V. (1997). On the convergence of pattern search algorithms. *SIAM Journal on Optimization*, 7, 1–25.
- Wang, Z.G., Wong, Y.S., & Rahman, M. (2004). Optimisation of multi-pass milling using genetic algorithm and genetic simulated annealing. *International Journal Advanced Manufacturing Technology*, 24, 727–732.
- Yildiz, A.R. (2009). An effective hybrid immune-hill climbing optimization approach for solving design and manufacturing optimization problems in industry. *Journal of Materials Processing Technology*, 209, 2773–2780.
- Yildiz, A.R., & Ozturk, F. (2006). Hybrid enhanced genetic algorithm to select optimal machining parameters in turning operation. *Proceedings of the Institution of Mechanical Engineers Part B Journal of Engineering Manufacture*, 220, 2041–2053.
- Yusup, N., Sarkheyli, A., Zain, A.M., Hashim, S.Z.M., & Ithnin, N. (2013). Estimation of optimal machining control parameters using artificial bee colony. *Journal of Intelligent Manufacturing*, DOI 10.1007/s10845-013-0753-y.
- Zain, A.M., Haron, H., & Sharif, S. (2011). Genetic algorithm and simulated annealing to estimate optimal process parameters of the abrasive waterjet machining. *Engineering with Computers*, 27, 251–259.
- Zhang, J.Y., Liang, S.Y., Yao, J., Chen, J.M., & Huang, J.L. (2006). Evolutionary optimization of machining processes. *Journal of Intelligent Manufacturing*, 17, 203–215.