

HYDROMAGNETIC FLOW AND HEAT TRANSFER ADJACENT TO A STRETCHING VERTICAL SHEET IN A MICROPOLAR FLUID

by

Nor Azizah YACOB^a, Anuar ISHAK^{b*}, and Ioan POP^c

^a Faculty of Computer and Mathematical Sciences, Universiti Teknologi MARA Pahang, Pahang, Malaysia

^b School of Mathematical Sciences, Faculty of Science and Technology, Universiti Kebangsaan, Malaysia, UKM Bangi, Selangor, Malaysia

^c Department of Mathematics, Babes-Bolyai University, Cluj-Napoca, Romania

Original scientific paper

DOI: 10.2298/TSCI100308198Y

An analysis is carried out for the steady 2-D mixed convection flow adjacent to a stretching vertical sheet immersed in an incompressible electrically conducting micropolar fluid. The stretching velocity and the surface temperature are assumed to vary linearly with the distance from the leading edge. The governing partial differential equations are transformed into a system of ordinary differential equations, which is then solved numerically using a finite difference scheme known as the Keller box method. The effects of magnetic and material parameters on the flow and heat transfer characteristics are discussed. It is found that the magnetic field reduces both the skin friction coefficient and the heat transfer rate at the surface for any given K and λ . Conversely, both of them increase as the material parameter increases for fixed values of M and λ .

Key words: *heat transfer, magnetohydrodynamics, micropolar fluid, stretching sheet*

Introduction

Sakiadis [1, 2] was the first to investigate the boundary layer flow past a moving solid surface of a viscous fluid with a constant velocity. Later, the numerical results of Sakiadis were confirmed by Tsou *et al.* [3] analytically and experimentally. Since then many researchers have considered various physical effects of this problem in Newtonian fluid [4-10]. In recent years, the flow and heat transfer over a stretching sheet immersed in a Newtonian fluid in the presence of magnetic field has received great attention because of its important applications in metallurgical industry which involves the cooling of continuous strips and filaments drawn through a quiescent fluid [11-19]. However, many industrial processes involve non-Newtonian fluid such as paints, lubricants, blood, polymers, colloidal fluids, and suspension fluids which cannot be described by traditional Newtonian fluid. Therefore, to investigate those fluids, the researchers applied the theory of micropolar fluid that was first formulated by Eringen [20, 21]. This theory is capable to describe those fluids by taking into account the effect arising from local structure and micro-motions of the fluid elements. Since the publication of Eringen's micropolar fluid theory, many authors [22-31] have investigated various flow and heat transfer problems. Extensive reviews of the theory and applications can be found in the review articles by Ariman *et al.* [32, 33] and the recent books by Lukaszewicz [34] and Eringen [35]. Rahman and Sattar [36] ana-

* Corresponding author; e-mail: anuar_mi@ukm.my

lyzed the magnetohydrodynamics (MHD) convective flow of a micropolar fluid past a continuously moving vertical porous plate in the presence of heat generation/absorption. Eldabe and Ouaf [37] studied the heat and mass transfer past a stretching horizontal surface immersed in an electrically conducting fluid which are solved numerically using Chebyshev finite difference method. Chen [38] considered the problem of MHD flow and heat transfer of an electrically conducting of a non-Newtonian power-law fluid past a stretching sheet in the presence of a transverse magnetic field. Recently, Ishak *et al.* [39] studied the steady 2-D MHD stagnation point flow towards a stretching sheet with variable surface temperature. Motivated by the above-mentioned investigations, the present paper considers the problem of hydromagnetic flow and heat transfer past a stretching vertical sheet immersed in an incompressible micropolar fluid.

Problem formulation

Consider a steady, 2-D mixed convection flow adjacent to a stretching vertical sheet immersed in an incompressible electrically conducting micropolar fluid of temperature T_∞ . The stretching velocity $U_w(x)$ and the surface temperature $T_w(x)$ are assumed to vary linearly with the distance x from the leading edge, *i. e.* $U_w(x) = ax$ and $T_w(x) = T_\infty + bx$, where a and b are constants with $a > 0$ and $b \geq 0$. A uniform magnetic field of strength B is assumed to be applied in the positive y -direction normal to the stretching sheet. The magnetic Re is assumed to be small, and thus the induced magnetic field is negligible. The boundary layer equations are:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (1)$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = \left(\frac{\mu + \kappa}{\rho} \right) \frac{\partial^2 u}{\partial y^2} + \frac{\kappa}{\rho} \frac{\partial N}{\partial y} - \frac{\sigma B^2}{\rho} u + g\beta(T - T_\infty) \quad (2)$$

$$\rho j \left(u \frac{\partial N}{\partial x} + v \frac{\partial N}{\partial y} \right) = \gamma \frac{\partial^2 N}{\partial y^2} - \kappa \left(2N \frac{\partial u}{\partial y} \right) \quad (3)$$

$$u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \alpha \frac{\partial^2 T}{\partial y^2} \quad (4)$$

subject to the boundary conditions

$$u = U_w(x), \quad v = 0, \quad N = -m \frac{\partial u}{\partial y}, \quad T = T_w(x) \quad \text{at } y = 0, \\ u \rightarrow 0, \quad N \rightarrow 0, \quad T \rightarrow T_\infty \quad \text{as } y \rightarrow \infty \quad (5)$$

where u and v are the velocity components along the x - and y -axes, respectively. Further, $\mu, \kappa, \rho, \gamma, \alpha, \beta, T, j, N$, and g are the dynamic viscosity, vortex viscosity (or the microrotation viscosity), fluid density, spin gradient viscosity, thermal diffusivity, thermal expansion coefficient, fluid temperature in the boundary layer, microinertia density, microrotation vector, and acceleration due to gravity, respectively. It should be noted that m is the boundary parameter with $0 \leq m \leq 1$ [40]. Further, we follow the work of many recent authors by assuming that $\gamma = (\mu + \kappa/2)j = \mu(1 + K/2)j$ where $j = \nu/a$ [40]. This assumption is invoked to allow the field of equations predicts the correct behavior in the limiting case when the microstructure effects become negligible and the total spin N reduces to the angular velocity [41].

The continuity eq. (1) is satisfied by introducing a stream function ψ such that $u = \partial\psi/\partial y$ and $v = -\partial\psi/\partial x$. The momentum, angular momentum and energy equations can be trans-

formed into the corresponding non-linear ordinary differential equations by the following transformations:

$$\eta = \sqrt{\frac{a}{\nu}} y, \quad f(\eta) = \frac{\psi}{\sqrt{\nu a x}}, \quad h(\eta) = \frac{N}{a \sqrt{\frac{a}{\nu}} x}, \quad \theta(\eta) = \frac{T - T_\infty}{T_w - T_\infty} \quad (6)$$

The transformed non-linear ordinary differential equations are:

$$(1 + K)f''' + ff'' - f'^2 + Kh' - Mf' + \lambda\theta = 0 \quad (7)$$

$$\left(1 + \frac{K}{2}\right)h'' + fh' - f'h - K(2h + f'') = 0 \quad (8)$$

$$\frac{1}{\text{Pr}}\theta'' + f\theta' - f'\theta = 0 \quad (9)$$

subject to the boundary conditions eq. (5) which become:

$$f(0) = 0, \quad f'(0) = 1, \quad h(0) = -mf''(0), \quad \theta(0) = 1, \quad f'(\eta) \rightarrow 0, \quad h(\eta) \rightarrow 0, \quad \theta(\eta) \rightarrow 0 \quad \text{as } \eta \rightarrow \infty \quad (10)$$

In the above equations, primes denote differentiation with respect to η , $K = \kappa/\mu$ is the material parameter, $\nu = \mu/\rho$ – the kinematic viscosity, and $\text{Pr} = \nu/\alpha$.

The physical quantities of interest are the skin friction coefficient C_f and the local Nusselt number (Nu_x), which are defined as:

$$C_f = \frac{2\tau_w}{\rho U_w^2}, \quad \text{Nu}_x = \frac{xq_w}{k(T_w - T_\infty)} \quad (11)$$

where the wall shear stress τ_w and the wall heat flux q_w are given by:

$$\tau_w = \left[(\mu + \kappa) \frac{\partial u}{\partial y} + \kappa N \right]_{y=0}, \quad q_w = -k \left(\frac{\partial T}{\partial y} \right)_{y=0} \quad (12)$$

with k being the thermal conductivity. Using the similarity variables, eq. (6), we obtain:

$$\frac{1}{2} C_f \sqrt{\text{Re}_x} = [1 + (1 - m)K] f''(0)$$

$$\frac{\text{Nu}_x}{\sqrt{\text{Re}_x}} = -\theta'(0) \quad (13)$$

We notice that when $K = 0$ (viscous fluid) and $\lambda = 0$ (forced convection flow), eq. (7) has an exact solution:

$$f(\eta) = \frac{1}{\sqrt{1 + M}} (1 - e^{-\sqrt{1 + M}\eta}) \quad (14)$$

while the solution for the energy eq. (9) is given by:

$$\theta(\eta) = e^{-\frac{\text{Pr}}{\sqrt{1 + M}}\eta} \frac{F(\zeta - 1, \zeta + 1, -\zeta e^{\sqrt{1 + M}\eta})}{F(\zeta - 1, \zeta + 1, -\zeta)} \quad (15)$$

where $\zeta = \text{Pr}/(1 + M)$, and $F(a, b, z)$ denotes the confluent hypergeometric function [42], with:

$$F(a, b, z) = 1 + \sum_{n=1}^{\infty} \frac{a_n}{b_n} \frac{z^n}{n!}, \quad a_n = a(a + 1)(a + 2) \dots (a + n - 1), \quad b_n = b(b + 1)(b + 2) \dots (b + n - 1)$$

Further, from eqs. (14) and (15), the skin friction coefficient $f''(0)$ and the Nusselt number $-\theta'(0)$ can be shown by:

$$f''(0) = -\sqrt{1+M}$$

$$-\theta'(0) = \frac{\text{Pr}}{\sqrt{1+M}} \left[1 - \frac{\zeta-1}{\zeta+1} \frac{F(\zeta, \zeta+2, -\zeta)}{F(\zeta-1, \zeta+1, -\zeta)} \right] \quad (16)$$

Results and discussion

The non-linear ordinary differential eqs. (7-9) subject to the boundary conditions (10) have been solved numerically using an implicit finite-difference scheme known as the Keller-box method as described in the book by Cebeci and Bradshaw [43], for several values of K , M , m , and λ , while the Pr is fixed to unity. Table 1 shows the values of $-\theta'(0)$ which show a favorable agreement with previously reported data available in the literature.

Table 1. Values of $-\theta'(0)$ for different values of K , M and m when $\text{Pr} = 1$ and $\lambda = 0$

K	M	m	Grubka and Bobba [6]	Ali [8]	Eq. (16)	Present work
0	0		1.0000	0.9959655	1.0000000000	1.0000
	1		–	–	0.8921467957	0.8921
1	0	0	–	–	–	1.0745
		0.5	–	–	–	1.0484
		1	–	–	–	1.0029
	1	0	–	–	–	0.9975
		0.5	–	–	–	0.9860
		1	–	–	–	0.8873

Figure 1 presents the variation of the skin friction coefficient $f''(0)$ with λ , while the respective heat transfer rate at the surface $-\theta'(0)$ is depicted in fig. 2. Figures 1 and 2 show that the values of $f''(0)$ and $-\theta'(0)$ increase with λ but decrease with increasing values of M . It is observed that the values of $f''(0)$ are negative for small values of λ , which means that the sheet exerts a drag force on the fluid. For larger values of λ , $f''(0)$ becomes positive due to stronger buoyancy force, and for this case, the formation of the boundary layer not depend solely on the stretching sheet. On the other hand, the values of $-\theta'(0)$ are always positive, *i. e.* the heat is trans-

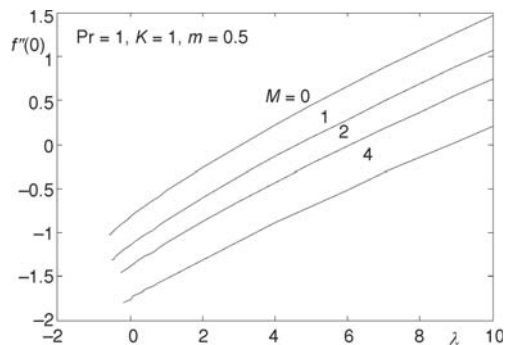


Figure 1. Variation of $f''(0)$ with λ for different values of M when $\text{Pr} = 1$, $K = 1$, and $m = 0.5$

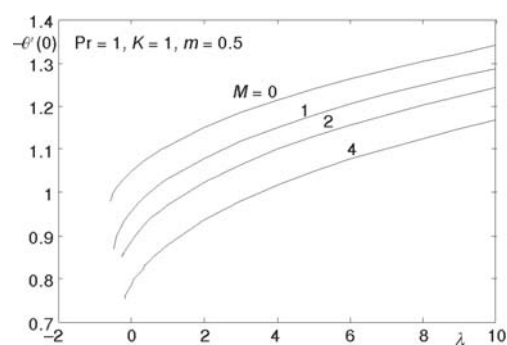


Figure 2. Variation of $-\theta'(0)$ with λ for different values of M when $\text{Pr} = 1$, $K = 1$, and $m = 0.5$

ferred from the hot sheet to the cold fluid. Figure 3 shows the variation of the skin friction coefficient $f''(0)$ with M for different values of K when $\lambda = 1$, while the heat transfer rate at the surface $-\theta'(0)$ is depicted in fig. 4. For a particular value of K , the values of $f''(0)$ and $-\theta'(0)$ decrease with an increase in M . This observation is in agreement with the results presented in figs. 1 and 2. Moreover, the effect of the material parameter K is found to increase the values of $f''(0)$ and $-\theta'(0)$.

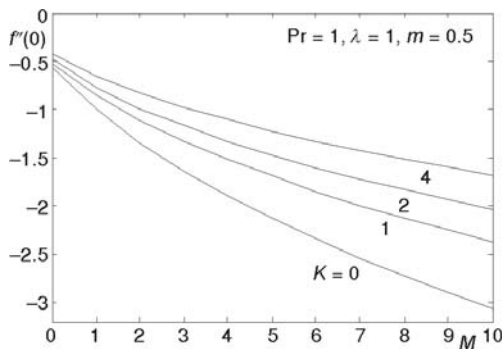


Figure 3. Variation of $f''(0)$ with M for different values of K when $Pr = 1$, $\lambda = 1$, and $m = 0.5$

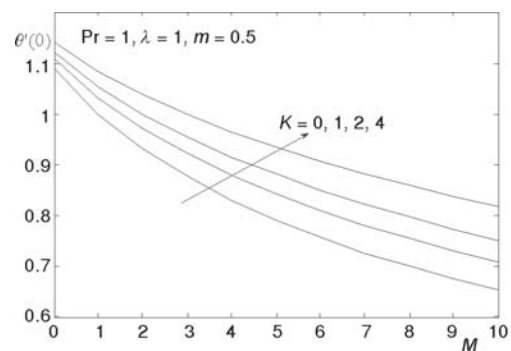


Figure 4. Variation of $-\theta'(0)$ with M for different values of K when $Pr = 1$, $\lambda = 1$, and $m = 0.5$

The influences of the magnetic parameter M on the velocity and temperature profiles are depicted in figs. 5 and 6, respectively. It can be seen that increasing M is to reduce the velocity distribution in the boundary layer which results in thinning of the boundary layer thickness, and hence induces an increase in the absolute value of the velocity gradient at the surface. The reverse trend is observed for temperature distribution as depicted in fig. 6, where the absolute value of the temperature gradient at the surface decreases with M . Thus, heat transfer rate at the surface decreases with an increase in M . The opposite behaviors are observed for the effect of K as shown in figs. 7 and 8. The sample of microrotation profiles for various values of m , while the other parameters are fixed to unity is presented in fig. 9. As expected, the microrotation effect at the surface $h(0)$ is more dominant for larger values of the boundary parameter m . The velocity, temperature, and microrotation profiles presented in figs. 5-9 show that the far field boundary

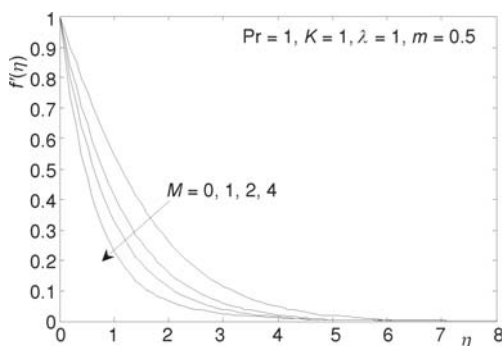


Figure 5. Velocity profiles $f'(\eta)$ for different values of M when $Pr = 1$, $K = 1$, $\lambda = 1$, and $m = 0.5$

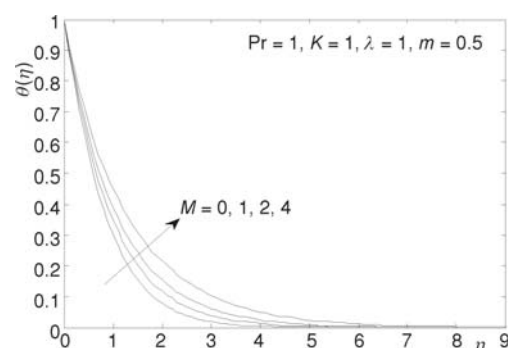


Figure 6. Temperature profiles $\theta(\eta)$ for different values of M when $Pr = 1$, $K = 1$, $\lambda = 1$, and $m = 0.5$

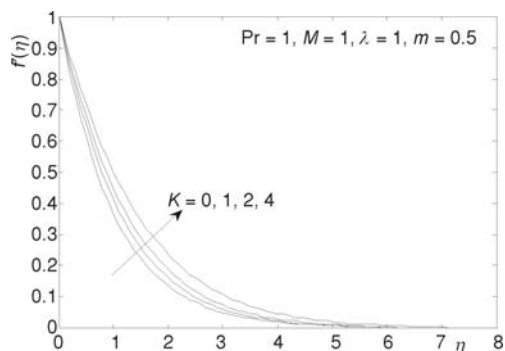


Figure 7. Velocity profiles $f'(\eta)$ for different values of K when $Pr = 1, M = 1, \lambda = 1,$ and $m = 0.5$

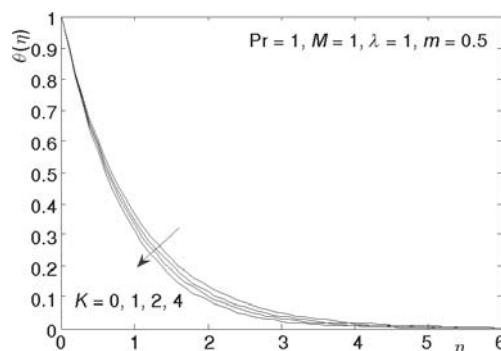


Figure 8. Temperature profiles $\theta(\eta)$ for different values of K when $Pr = 1, M = 1, \lambda = 1,$ and $m = 0.5$

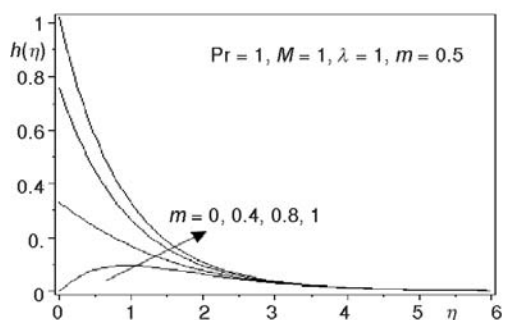


Figure 9. Microrotation profiles $h(\eta)$ for different values of m when $Pr = 1, K = 1, M = 1,$ and $\lambda = 1$

conditions are satisfied asymptotically, which support the validity of the numerical results presented in tab. 1 as well as figs. 1-4.

Conclusions

We have theoretically studied the problem of steady 2-D mixed convection flow adjacent to a stretching vertical sheet immersed in an incompressible micropolar fluid. The governing partial differential equations are transformed, using similarity transformation, to a system of non-linear ordinary differential equations, before being solved numerically by the Keller-box method. The effects of the governing parameters on the skin friction coefficient and the heat transfer rate at the surface are discussed. It is found that the skin friction coefficient and the heat transfer rate at the surface decrease in the presence of a magnetic field. Conversely, both of them increase as the material parameter increases.

Acknowledgment

The financial supports received from the Ministry of Higher Education, Malaysia (Project Code: FRGS/1/2012/SG04/UKM/01/1) and the Universiti Kebangsaan Malaysia (Project Code: DIP-2012-31) are gratefully acknowledged.

Nomenclature

a, b – constant
 B – uniform magnetic field, [T]
 C_f – skin friction coefficient
 F – confluent hypergeometric function
 f – dimensionless stream function
 h – dimensionless microrotation
 Gr_x – local Grashof number
 g – acceleration to gravity, [ms^{-1}]
 j – microinertia density, [m^2]
 K – material parameter

k – thermal conductivity, [$Wm^{-1}K^{-1}$]
 M – magnetic parameter
 m – boundary parameter
 N – dimensionless angular velocity
 Nu_x – local Nusselt number
 Pr – Prandtl number
 q_w – wall heat flux, [Wm^{-2}]
 Re_x – local Reynolds number
 T – fluid temperature, [K]
 $T_w(x)$ – temperature of the stretching sheet, [K]

T_∞	– ambient temperature, [K]	θ	– dimensionless parameter
$U_w(x)$	– velocity of the stretching sheet	κ	– vortex viscosity, [$\text{kgm}^{-1}\text{s}^{-1}$]
u, v	– velocity components along the x- and y-directions, respectively	λ	– buoyancy or mixed convection parameter
x, y	– Cartesian co-ordinates along the surface and normal to it, respectively	μ	– dynamic viscosity, [$\text{kgm}^{-1}\text{s}^{-1}$]
z	– variable	ν	– kinematic viscosity, [m^2s^{-1}]
Greek symbols		ρ	– fluid density, [kgm^{-3}]
α	– thermal diffusivity, [m^2s^{-1}]	σ	– electrical conductivity, [Sm^{-1}]
β	– thermal expansion coefficient, [K^{-1}]	τ_w	– shear stress
γ	– spin-gradient viscosity, [kgms^{-1}]	ψ	– stream function
ζ	– constant	Subscripts	
η	– similarity variable	w	– condition at the stretching sheet
		∞	– condition at infinity

References

- [1] Sakiadis, B. C., Boundary-Layer Behavior on Continuous Solid Surfaces: I. Boundary-Layer Equations for Two-Dimensional and Axisymmetric Flow, *AIChE J.*, 7 (1961), 1, pp. 26-28
- [2] Sakiadis, B. C., Boundary-Layer Behavior on Continuous Solid Surfaces: II. Boundary-Layer Equations on a Continuous Flat Surface, *AIChE J.*, 7 (1961), 1, pp. 221-225
- [3] Tsou, F. K., *et al.*, Flow and Heat Transfer in the Boundary Layer on a Continuous Moving Surface, *International Journal of Heat and Mass Transfer*, 10 (1967), 2, pp. 219-235
- [4] Crane, L. J., Flow Past a Stretching Plate, *ZAMP*, 21 (1970), 4, pp. 645-647
- [5] Dutta, B. K., *et al.*, Temperature Field in Flow over a Stretching Sheet with Uniform Heat Flux, *International Communications Heat and Mass Transfer*, 12 (1985), 1, pp. 89-94
- [6] Grubka, L. J., Bobba, K. M., Heat Transfer Characteristics of a Continuous Stretching Surface with Variable Temperature, *ASME Journal of Heat Transfer*, 107 (1985), 1, pp. 248-250
- [7] Chen, C. K., Char, M. I., Heat Transfer of a Continuous Stretching Surface with Suction and Blowing, *Journal of Mathematical Analysis and Applications*, 135 (1988), 2, pp. 568-580
- [8] Ali, M. E., On Thermal Boundary Layer on a Power Law Stretched Surface with Suction or Injection, *International Journal of Heat and Fluid Flow*, 16 (1995), 4, pp. 280-290
- [9] Elbashbeshy, E. M. A., Heat Transfer over a Stretching Surface with Variable Surface Heat Flux, *Journal of Physics D: Applied Physics*, 31 (1998), 16, pp. 1951-1954
- [10] Ishak, A., *et al.*, Unsteady Mixed Convection Boundary Layer Flow Due to a Stretching Vertical Surface, *The Arabian Journal for Science and Engineering*, 31 (2006), 2B, pp. 165-182
- [11] Vajravelu, K., Hadjinicolaou, A., Convective Heat Transfer in an Electrically Conducting Fluid at a Stretching Surface with Uniform Free Stream, *International Journal of Engineering Science*, 35 (1997), 12-13, pp. 1237-1244
- [12] Chiam, T. C., Hydromagnetic Flow over a Surface Stretching with a Power-Law Velocity, *International Journal of Engineering Science*, 33 (1995), 3, pp. 429-435
- [13] Pop, I., Na, T. Y., A Note on MHD Flow Over a Stretching Permeable Surface, *Mechanics Research Communications*, 25 (1998), 3, pp. 263-269
- [14] Chamkha, A. J., Hydromagnetic Three-Dimensional Free Convection on a Vertical Stretching Surface with Heat Generation or Absorption, *International Journal of Heat and Fluid Flow*, 20 (1999), 1, pp. 84-92
- [15] Chandran, P., *et al.*, Hydromagnetic Flow and Heat Transfer Past a Continuously Moving Porous Boundary, *International Communications Heat and Mass Transfer*, 23 (1996), 6, pp. 889-898
- [16] Mukhopadhyay, S., *et al.*, Study of MHD Boundary Layer Flow over a Heated Stretching Sheet with Variable Viscosity, *International Journal of Heat and Mass Transfer*, 48 (2005), 21-22, pp. 4460-4466
- [17] Ishak, A., *et al.*, MHD Boundary-Layer Flow Due to a Moving Extensible Surface, *Journal of Engineering Mathematics*, 62 (2008), 1, pp. 23-33
- [18] Chen, C. H., Magneto-Hydrodynamic Mixed Convection of a Power-Law Fluid Past a Stretching Surface in the Presence of Thermal Radiation and Internal Heat Generation/Absorption, *International Journal of Non-Linear Mechanics*, 44 (2009), 6, pp. 596-603

- [19] Subhas Abel, M., et al., Effects of Thermal Buoyancy and Variable Thermal Conductivity on the MHD Flow and Heat Transfer in a Power-Law Fluid Past a Vertical Stretching Sheet in the Presence of a Non-Uniform Heat Source, *International Journal of Non-Linear Mechanics*, 44 (2009), 1, pp. 1-12
- [20] Eringen, A. C., Theory of Micropolar Fluids, *Journal of Mathematics and Mechanics*, 16 (1966), 1, pp. 1-18
- [21] Eringen, A. C., Theory of Thermomicropolar Fluids, *Journal of Mathematical Analysis and Applications*, 38 (1972), 2, pp. 480-496
- [22] Ishak, A., et al., Boundary-Layer Flow of a Micropolar Fluid on a Continuous Moving or Fixed Surface, *Canadian Journal of Physics*, 84 (2006), 5, pp. 399-410
- [23] Ishak, A., et al., MHD Boundary-Layer Flow of a Micropolar Fluid Past a Wedge with Variable Wall Temperature, *Acta Mechanica*, 196 (2008), 1-2, pp. 75-86
- [24] Ishak, A., Thermal Boundary Layer Flow Over a Stretching Sheet in a Micropolar Fluid with Radiation Effect, *Meccanica*, 45 (2010), 3, pp. 367-373
- [25] Ishak, A., et al., Stagnation Flow of a Micropolar Fluid Towards a Vertical Permeable Surface, *International Communications in Heat and Mass Transfer*, 35 (2008), 3, pp. 276-281
- [26] Ishak, A., et al., Moving Wedge and Flat Plate in a Micropolar Fluid, *International Journal of Engineering Science*, 44 (2006), 18, pp. 1225-1236
- [27] Yacob, N. A., et al., Melting Heat Transfer in Boundary Layer Stagnation-Point Flow Towards a Stretching/Shrinking Sheet in a Micropolar Fluid, *Computers & Fluids*, 47 (2011), 1, pp. 16-21
- [28] Rahman, M. M., et al., Thermo-Micropolar Fluid Flow Along a Vertical Permeable Plate with Uniform Surface Heat Flux in the Presence of Heat Generation, *Thermal Science*, 13 (2009), 1, pp. 23-36
- [29] Rahman, M. M., et al., Heat Transfer in Micropolar Fluid Along a Non-Linear Stretching Sheet with Temperature Dependent Viscosity and Variable Surface Temperature, *International Journal of Thermophysics*, 30 (2009), 5, pp. 1649-1670
- [30] Rahman, M. M., Al-Lawatia, M., Effects of Higher Order Chemical Reaction on Micropolar Fluid Flow on a Power Law Permeable Stretched Sheet with Variable Concentration in a Porous Medium, *The Canadian Journal of Chemical Engineering*, 88 (2010), 1, pp. 23-32
- [31] Lok, Y. Y., et al., Steady Two-Dimensional Periodic Motion of a Micropolar Fluid Near an Infinite Array of Moving Walls, *Journal of Applied Mathematics and Mechanics (ZAMM)*, 89 (2009), 7, pp. 570-586
- [32] Ariman, T., et al., Microcontinuum Fluid Mechanics – A Review, *International Journal of Engineering Science*, 11 (1973), 8, pp. 905-930
- [33] Ariman, T., et al., Application of Microcontinuum Fluid Mechanics, *International Journal of Engineering Science*, 12 (1974), 4, pp. 273-293
- [34] Lukaszewicz, G., *Micropolar Fluids: Theory and Application*, Birkhauser, Basel, Switzerland, 1999
- [35] Eringen, A. C., *Microcontinuum Field Theories. II: Fluent Media*, Springer, New York, USA, 2001
- [36] Rahman, M. M., Sattar, M. A., MHD Convective Flow of a Micropolar Fluid Past a Continuously Moving Vertical Porous Plate in the Presence of Heat Generation/Absorption, *ASME Journal of Heat Transfer*, 128 (2006), 2, pp. 142-152
- [37] Eldabe, N. T., Ouaf, M. E. M., Chebyshev Finite Difference Method for Heat and Mass Transfer in a Hydromagnetic Flow of a Micropolar Fluid Past a Stretching Surface with Ohmic Heating and Viscous Dissipation, *Applied Mathematics and Computation*, 177 (2006), 2, pp. 561-571
- [38] Chen, C. H., Effects of Magnetic Field and Suction/Injection on Convective Heat Transfer of Non-Newtonian Power-Law Fluids Past a Power-Law Stretched Sheet with Surface Heat Flux, *International Journal of Thermal Sciences*, 47 (2008), 7, pp. 954-961
- [39] Ishak, A., et al., MHD Stagnation Point Flow Towards a Stretching Sheet, *Physica A*, 388 (2009), 17, pp. 3377-3383
- [40] Nazar, R., et al., Stagnation Point Flow of a Micropolar Fluid Towards a Stretching Sheet, *International Journal of Non-Linear Mechanics*, 39 (2004), pp. 1227-1235
- [41] Ahmadi, G., Self-Similar Solution of Incompressible Micropolar Boundary Layer Flow over a Semi-Infinite Plate, *International Journal of Engineering Science*, 14 (1976), 7, pp. 639-646
- [42] Abramowitz, M., Stegun, I. A., *Handbook of Mathematical Functions*, Dover, New York, USA, 1965
- [43] Cebeci, T., Bradshaw, P., *Physical and Computational Aspects of Convective Heat Transfer*, Springer, New York, USA, 1988