



MODULAR DAMAGE DETECTION FOR EXPANDABLE STRUCTURES

Mark E. Lewis⁽¹⁾

Dr. Tracy L. Gibson⁽²⁾, Dr. Pedro J. Medelius⁽³⁾

⁽¹⁾NASA Kennedy Space Center, Email:

Mark.E.Lewis@nasa.gov

⁽²⁾ Southeastern Universities Research Association, LASSO-008 , KSC, Email: Tracy.L.Gibson@nasa.gov

⁽³⁾ASRC Federal Space and Defense, Email:

Pedro.Medelius@asrcfederal.com

Agenda

- Background
- Sensor System Design
- Sensory Panel
- Embedded Software
- Graphical User Interface
- Testing and Demonstration
- Summary
- Questions & Answers

Background

- Micrometeoroids (MM) & Orbital Debris (OD) are serious threats to International Space Station (ISS) & extraterrestrial habitats
 - NASA classes MM & OD as primary threats to commercial crew vehicles
 - See article at <https://www.nasaspaceflight.com/2016/08/nasa-mmod-primary-threat-crew-vehicles/>
 - In July 2014, radiator damage was observed after review of downlinked camera inspection imagery
 - See article at <http://www.nasaspaceflight.com/2014/07/iss-managers-evaluating-mmod-radiator/>
- NASA has identified structural health monitoring and damage detection technologies as critical needs in multiple technology roadmaps

Background


- NASA Kennedy Space Center (KSC) has been developing damage detection technologies for years
 - U.S. Patent 9,233,765 & 9,635,302,B2
- KSC has successfully tested and demonstrated damage detection technologies
 - In 2011, demonstrated single panel system for Habitat Demonstration Unit (HDU) field demonstration at Desert Research and Technology Studies (D-RATS)
 - In 2012, integrated and demonstrated damage detection system with multiple sensory panels in crew display avionics for HDU
 - In 2013, demonstrated remote testing capability of three panel system using a secure network (between KSC & JSC)

Sensor System Design

- Modular Damage Detection System (MDDS) is an intelligent damage detection “skin” that could be embedded into or added to structures
 - Technology based on sensing electrical integrity of parallel conductive traces
 - When an impact occurs, traces are broken
 - Several sensing layers can be implemented, where alternate layers are arranged orthogonally with respect to adjacent layers
 - Design is tailorable for interior and/or exterior applications
 - Sensing panel material, size, and trace spacing can be customized per application
 - Provides lightweight in-situ health monitoring capability for spacecraft or expandable, deployable structures
- MDDS consists of three main subsystems
 - Sensory Panel(s)
 - Embedded software for situational awareness and damage detection
 - Mobile device with graphical user interface (GUI) to operate the system

Sensor System Design


- MDDS architecture is flexible and expandable, supporting one or many Sensory Panels organized two-dimensionally in grid pattern
 - Sensory Panels are identical in hardware & software which greatly enhances modularity
 - They are interchangeable and operate independently, scanning for damage periodically and waiting to be connected to a Bluetooth-enabled device
 - GUI on the mobile device allows users to configure, command, and monitor the Sensory Panels in the system

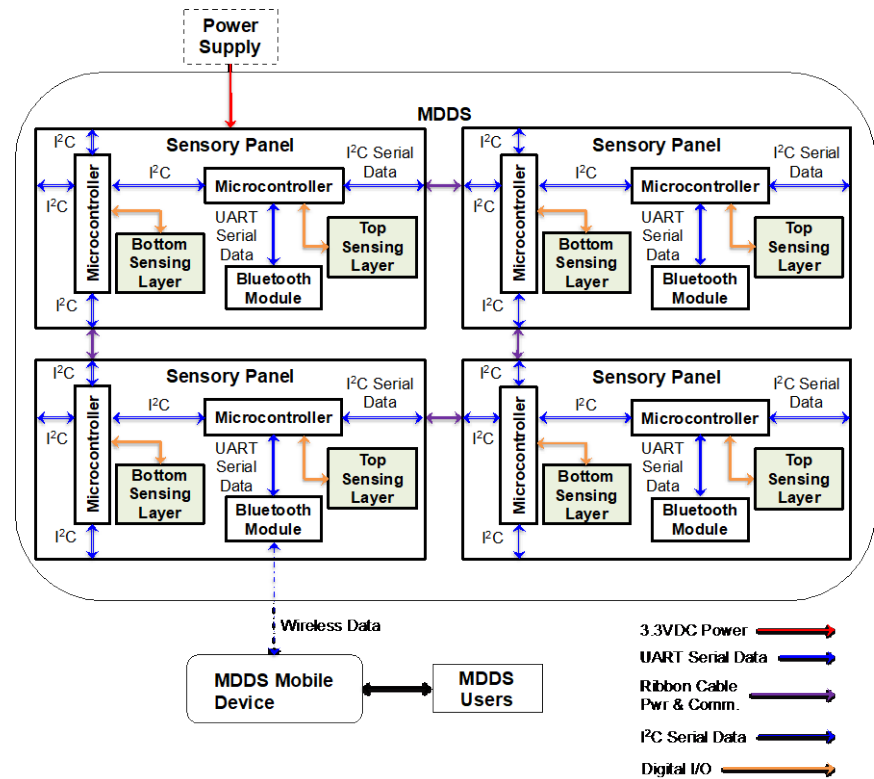

Notional MDDS Architecture Block Diagram with Four Sensory Panels

Sensory Panel


- Sensory Panels consist of two 32-bit microcontrollers with embedded software, two Sensing Layers, and Bluetooth low-energy (BLE) module for wireless communication
 - Two serial peripheral interfaces (UART & I²C) for communication
 - Each Sensing Layer has 96 parallel conductive traces with trace-to-trace spacing of approximately 50 mils
 - Sensing Layers are oriented orthogonally creating a two-dimensional grid pattern
 - Sensory Panel overall dimensions are 9.5 x 9.5 x 0.062 in. (W x L x D)
 - Sensing Layers are 7.67 x 7.67 in.
 - Low power consumption – typically less than 500mW / panel

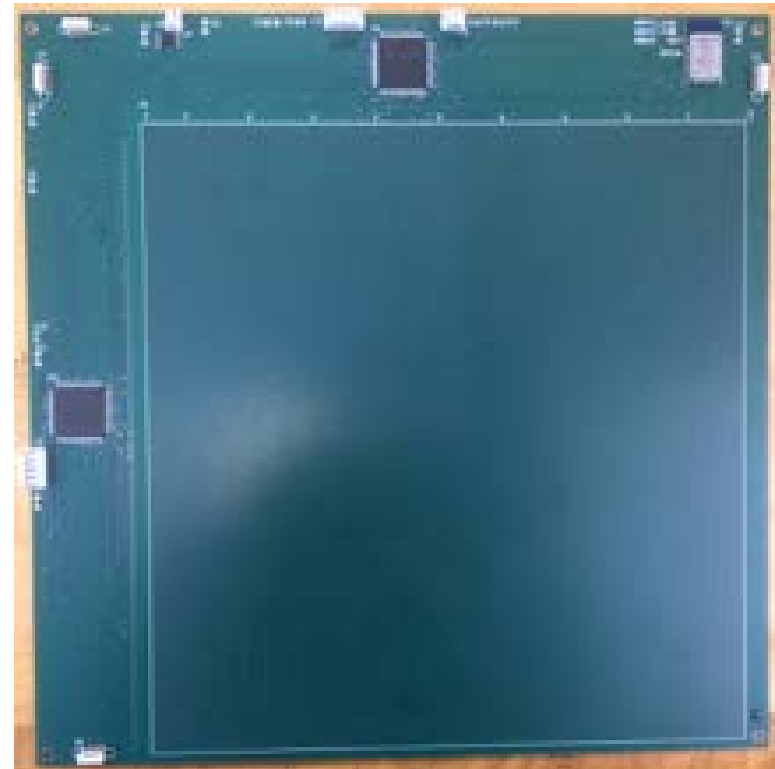

MDDS Sensory Panel

Embedded Software

- Embedded software is stored in non-volatile memory of microcontrollers
 - Initializes and configures the serial peripheral interfaces and the BLE module
 - Processes and responds to commands sent from the mobile device and reports Sensory Panel health information upon request
 - Executes algorithms to:
 - Determine potential Master Panels (MPs) and set the MP upon connection with GUI
 - Generate active panel map
 - Monitor the health status of all active panels

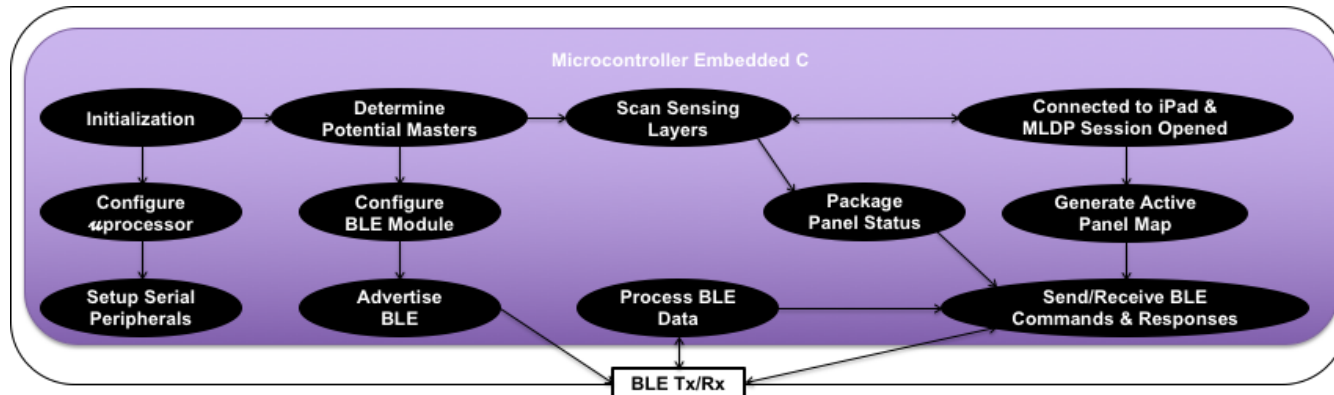

Sensory Panel Embedded Software Logical and Structural Overview

Embedded Software


- Each panel checks presence of an active panel to its left and/or below it using I²C serial interfaces to determine potential Master Panels (MPs)
 - If no active panels are present to left or below, it assigns panel as potential MP and configures BLE module
 - Since configuration of MDDS is arbitrary, one or more potential MPs could be present
- User selects a MP arbitrarily using the GUI
 - Once assigned, all other panels become normal, active panels
- Newly-assigned MP starts a progressive scan using active panel mapping algorithm to determine spatial relationship to the other active panels
 - Communicates with adjacent panels to determine its closest neighboring panels
 - Requests each of its adjacent neighbors to report status of their respective neighbors until no new panels are found
 - Maintains a record of the configuration and path to access any active panel

Embedded Software


- Each Sensory Panel continuously monitors its health
 - Damage detection algorithm evaluates health status by injecting test pulses periodically on the sensing traces to determine the electrical integrity
 - If traces are broken, algorithm calculates actual location of any faults
 - Relative time stamp is associated with each damage event to establish proper order of events
 - Helps organize and identify the location of damage if subsequent damages occur at a later time on the same panel
- GUI periodically requests health status from MP of all active panels
 - MP gathers, coordinates, and packages damage information and sends it wirelessly to the GUI
 - Damage location is reported in rectangular boundaries (bottom left-hand to upper right-hand corners)
 - When damage is detected on top Sensing Layer ONLY, exact damage location is undermined
 - Reports the corresponding location in the x-axis only

MDDS GUI

- MDDS application (app) designed for 3rd generation iPad Pro with iOS 12
 - Written in Swift 4.2 using Xcode 10
 - GUI allows users to configure, command, control, monitor, and display health status of active Sensory Panels in the system
 - Receives telemetry wirelessly from MP using Bluetooth technology

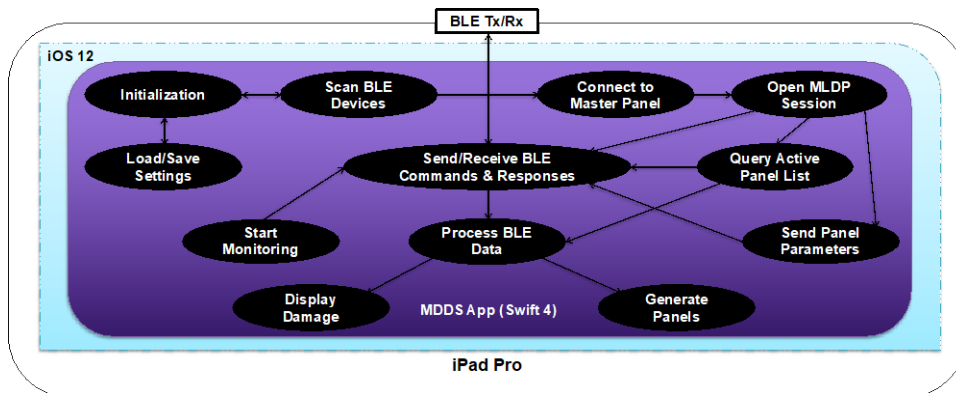


MDDS App Software Logical and Structural Overview

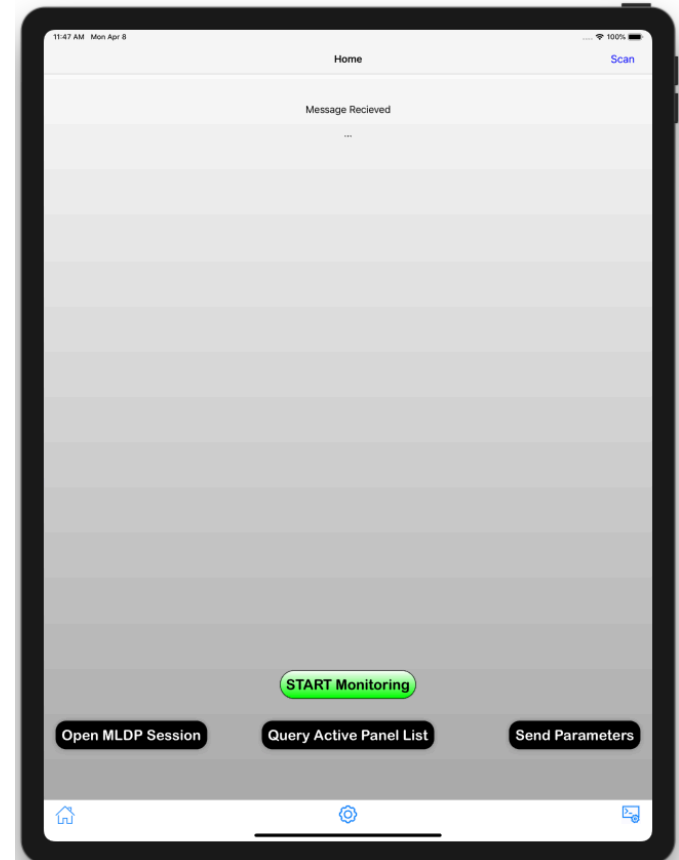

MDDS Application Home Page

Testing & Demonstration

- Simulated test data was created to evaluate MDDS App performance
 - Data set consisted of five Sensory Panels laid out in an inverted-T pattern
- Upon power-up, Sensory Panels performed their initialization and determined whether they're a potential MP
- User scans for BLE advertisements and selects potential MP
 - Upon connection, MP is assigned
- User configures Sensory Panel settings and opens BLE private communication service to send and receive information wirelessly

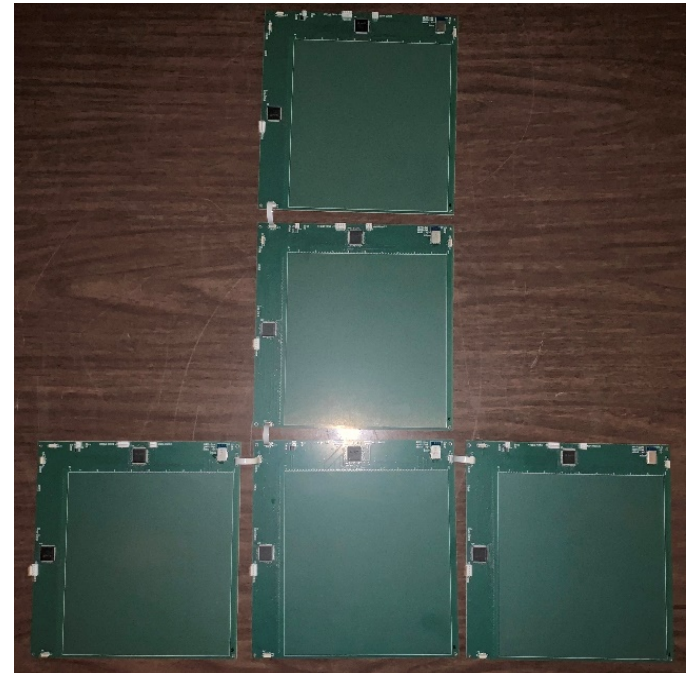

Sensory Panels Layout for Simulated Testing

Testing & Demonstration


- Using the GUI, user requests query of active panels from MP and begins monitoring the system
- Two of the five Sensory Panels simulated health status contain damage information for display
 - Sensory Panels' graphics with red backgrounds and borders indicate panels with damage
 - Green-filled panels indicate Sensory Panels without damage
- Panel IDs increment from bottom left to top right
- Detailed Sensory Panel health information is displayed by clicking on the panel graphic



GUI Displaying Active Sensory Panels & Their Health Status

Testing & Demonstration

- Panel 2,3 GUI shows four simulated damage areas:
 - Three rectangular/square in red
 - Damage resulting in broken conductive traces on both top and bottom Sensing Layers
 - One top-only damage in yellow
 - X-only coordinate provided; no y-coordinate can be assigned
- Damage details are displayed in tabular format
 - Damage ID number is assigned
 - Bottom left-hand corner and top right-hand corner x- and y-coordinates are shown
 - Damage width, height, and calculated area are displayed

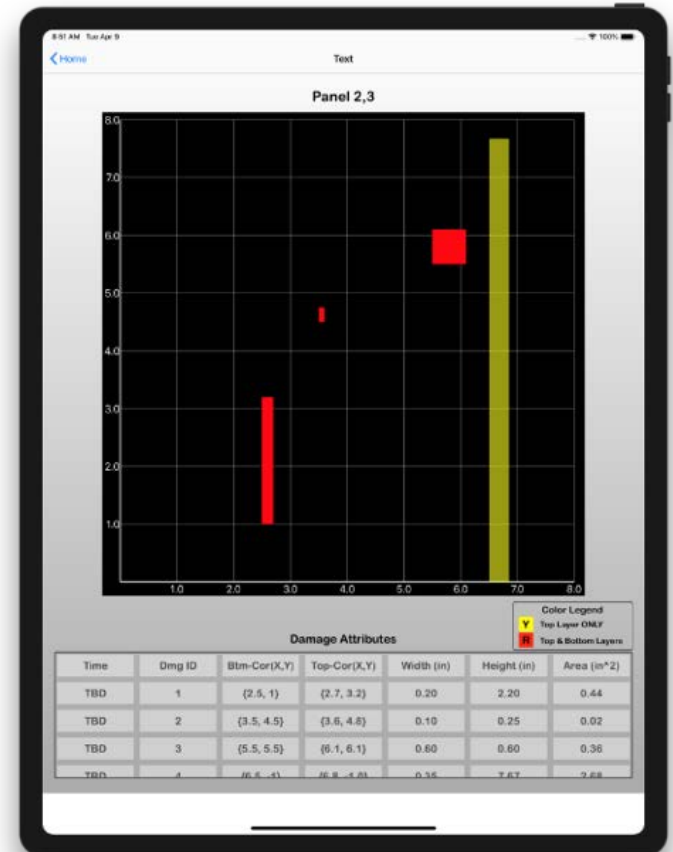

Detailed Damage Information for Panel 2,3

Summary

- NASA KSC has been developing and successfully demonstrating damage detection technologies for years
- MDDS provides an attractive option for applications where in-situ health monitoring for space debris impacts is needed
 - Design is tailorable for interior and/or exterior applications
 - Architecture is flexible and expandable, supporting one or many Sensory Panels
 - Algorithms provide for situational awareness, self-configuration, and damage detection and localization
 - Supports wireless communication using Bluetooth technology
 - Sensory Panels are modular and interchangeable
 - Same hardware and software
 - Low power consumption – typically less than 500mW / panel
 - MDDS App provides users a simple and attractive method to interact with the system

Questions

