



THE  
UNIVERSITY OF  
STRATHCLYDE  
IN GLASGOW

# THE 21<sup>st</sup> INTERNATIONAL CONFERENCE ON AUTOMATION AND COMPUTING

*Automation, Computing and Manufacturing  
for New Economic Growth*



## ***Special Session on Industry 4.0***

Organised and chaired by:

*Professor Yun Li, University of Glasgow*

*Professor Hongnian Yu, Bournemouth University*

### Invited Talk -----Towards Industry 4.0

**Paulino Rocher**

*Manufacturing Technology Centre, UK*

## ***Special Session on Industry 4.0***

Organised and chaired by:

*Professor Yun Li, University of Glasgow*

*Professor Hongnian Yu, Bournemouth University*

### Forum Discussion: Design Knowledge Capture, Optimisation & Automation to Advance Industry 4.0

**Discussion facilitated by Joo Hock Ang**

*Sembcorp Marine, Singapore*

# The Factory of the Future Production System Research

Milan Gregor<sup>1</sup>, Jozef Herčko<sup>2</sup>, Patrik Grznár<sup>3</sup>

CEIT, a.s., Slovakia<sup>1</sup>, Department of Industrial Engineering, University of Žilina<sup>2,3</sup>  
Žilina, Slovakia

milan.gregor@ceitgroup.eu<sup>1</sup>, jozef.hercko@fstroj.uniza.sk<sup>2</sup>, patrik.grznar@fstroj.uniza.sk<sup>3</sup>

**Abstract**—This paper is dealing with a new research and development platform for the development of Factory of the Future Production System, referred to as ZIMS (Žilina Intelligent Manufacturing System). ZIMS is a new, open and collaborative environment, supporting creativity, inventing new solutions and their practical implementation in the form of new innovative products. ZIMS is based on holonic based, what brings many opportunities to develop new intelligent solutions for industry.

*Factory of the Future; Žilina Intelligent Manufacturing System; Digital Factory*

## I. INTRODUCTION

The globalized economy is strongly influenced not only by economic cycles but also a rapid change in customer behavior, which result in turbulences. Business community should continually find new ways to respond to these incentives. One of the effective solutions is the use of reconfigurable manufacturing systems.

In the world runs intensive research into Factory of the Future Production System. The EU has launched extensive research programs dedicated to Factory of the Future and Intelligent Manufacturing Systems (IMS), Smart Manufacturing. The goal of all these efforts is to develop a new production system using advanced technology, which will enable to satisfy demanding customer requirements in the future.

Authors of the paper describe a new research and development platform for the development of Factory of the Future Production System, referred to as ZIMS (Žilina Intelligent Manufacturing System).

## II. ŽILINA INTELLIGENT MANUFACTURING SYSTEM

### A. ZIMS – New Research and Development Platform

Response to the latest trends in the area of Factory of the Future Production System is the emergence of new research platform – ZIMS. This research platform was created in cooperation of CEIT, a. s., Slovakia (Central European Institut of Technology) spin off the University of Žilina, Technical University of Košice, technological and industrial partners. ZIMS responds to trends with the digital transformation of Industry – or Industry 4.0 Europe [1].

ZIMS uses the most advanced technologies for the design, optimization and operation of Factory of the Future (FoF), especially in the area of: Digital Factory and Digital Engineering, Virtual Engineering, Reverse Engineering, digitization (3D laser scanning), Rapid Prototyping, virtual testing, computer simulation and emulation, etc.

The layout of workplaces in ZIMS (Fig. 1) is represented an area of more than 1000 m<sup>2</sup> (Fig. 2). As shown in Figure 1, the layout of workplaces in ZIMS was carried out on the basis of the logic of development of innovation. It starts with the idea and its presentation in Virtual Reality, Rapid Prototyping and product testing, design of production processes, configuration of the production system using Digital Factory Technologies It finishes with the practical realization of the product in the production system.



Figure 1. Layout of workplaces in ZIMS.

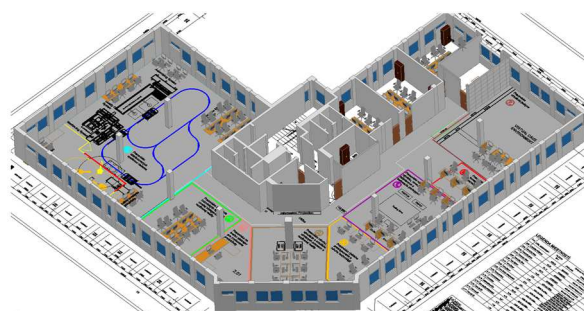


Figure 2. Concept of CPS in ZIMS.

ZIMS is a new, open and collaborative environment, supporting creativity, inventing new solutions and their practical implementation in the form of new innovative products.

This environment fully supports experimentation with new, unknown issue and search of non-traditional approaches to solving existing problems. ZIMS also serves as an incubator latest technology.

### B. ZIMS – Cyber-Physical System

ZIMS, as a system is built in three different worlds: the real, the virtual and the digital (Fig. 3), where their interface is created a Cyber-Physical System (CPS) ensuring a direct integration of virtual, digital and real world [2].

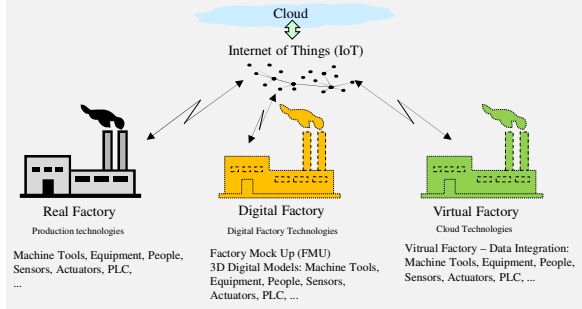


Figure 3. Concept of CPS in ZIMS.

Smart Factory – is built as an agile system that is able to adapt rapidly to changing customer requirements. Intelligent features, automation, and robotics, reconfiguration, automatic control, simulation and emulation technologies are used to create rapid change.

Virtual Factory – virtualization technology and data integration are used to represent the dynamics of real enterprise. Virtual Factory represents cyber feature of real enterprise and virtual representation of all its elements. It uses data from sensors, actuators, video and audio information, biometric data, etc. In real time creates a virtual image of functioning of enterprise.

Digital Factory – digitalization and digital technologies are used to integration of all activities within product life cycle and production systems. Digitizing, modeling, simulation and emulation are used to understanding of comprehensive manufacturing processes and creation of new knowledge, which is used for optimization of real production systems. In contrast to virtual factory, digital factory do not use real data, but use data for example from simulation.

### C. ZIMS - Holonic Concept

ZIMS represents a pilot project of Intelligent Manufacturing Systems, which is composed of workplaces that communicate with each other through Holon [3]. Holons form comprehensive holarchy.

The strength of holonic organization, or holarchy, is that it enables the construction of very complex system that are nonetheless efficient in the use of resource, highly resilient to disturbance and adaptable to changes in the environment in which they exist [4].

The proposed Holonic concept of manufacturing system is used for control and monitoring of individual activities multi-agent system (MAS). The functioning of holonic systems are based on the use of autonomous ability of agent. The agents are considered to be autonomous

entities of system. Their interactions can be either cooperative or selfish within the defined level of action. Agents receive tasks from higher level of holarchy, but their solutions are carried out autonomously. Intelligent agent is a natural or computing system that is able to perceive their environment and on the basis of the monitoring carried out actions, which fulfilling the global objectives of the system.

Multi-agent systems (MAS) can be considered an elementary part of distributed artificial intelligence, which forms the conceptual framework for modeling of comprehensive systems. MAS is defined as a loosely bound network consisting of researchers of generated tasks. MAS platform represents distribution, autonomy, interaction (i. e. communication), coordination and organization of individual agents.

### D. Knowledge environment - learning from the process

Fig. 4 represents the principle of building a knowledge environment that will encourage learning systems of active processes [2]. This approach is validated in research area of technology for the industrial production of large optical single crystals.

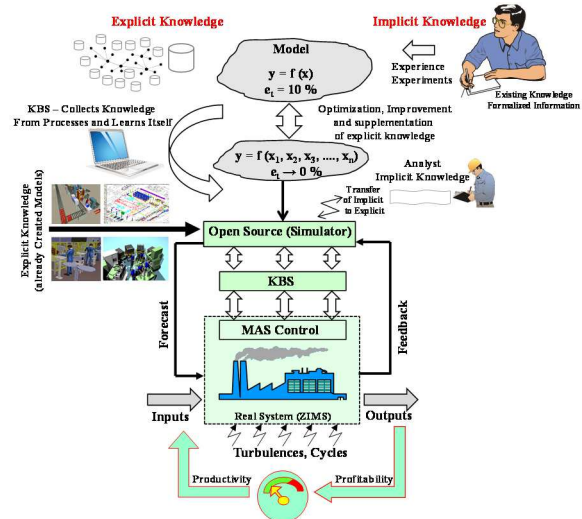


Figure 4. System of learning from the process.

Physical production system in ZIMS is controlled using a multi-agent system (MAS). When experimentation and development management for large-scale production of optical single crystals are used logic control system developed in ZIMS. It is based on a system of learning processes and uses meta-modeling approach. The control system communicates directly with the knowledge system. Knowledge-based systems used for decision support computer simulation (simulator). The simulator performs a set of simulation experiments. From the statistical data are obtained using multiple nonlinear regression analysis generated the desired meta-models. The resulting meta-models are used for making predictions about the future behavior of the controlled system (prediction) and these prediction amenities for Aproximativ production management. Aproximativ (gross) production management, represented by a set of metamodels is cyclically refined, using feedback (data) of real processes and new use of simulation. This creates a closed system of learning process, and its base is built and own knowledge



system. It is integrating the explicit knowledge (for example, models created in the past, the knowledge gained in the past, new explicit theoretical knowledge) and formalized implicit knowledge (conceptual system designers, analysts existing system).

### III. INTELLIGENT, MODULAR PRODUCTION CONCEPT

Intelligent Modular Production is one of the workplaces that is built in ZIMS and represents a pilot project for intelligent, modular production solutions.

Intelligent Modular Production is research and experimental workplace, where are developed five subsystems:

- The Intelligent Modular System of Quality Control (InMoSys QC).
- The Intelligent Modular Assembly System (InMoSys AS).
- The Intelligent Modular Automated Guided Vehicle System (InMoSys AGV).
- The Intelligent Modular Robotic Machining System - InMoSys RMS-3.
- The Intelligent Modular Storage System (InMoSys ST) [5].

The principle of Intelligent Modular Production activities can be described simplistically on the basis of the logic of processing of a product.

It starts with the inputs from the input/output storage system InMoSys ST, from which the material is conveyed to the workplace InMoSys RMS-3. There is machined into the desired shape (volume, shape, texture, size, etc.). The processed part is transported by the InMoSys AGV to the quality control workplace InMoSys QC, wherein the control operations are carried out (precision, dimension, size, etc.).

High-quality parts are further transported by InMoSys AGV to assembly workplace InMoSys AS, which are shared with other parts already assembled into the final product. The final products are transported to the input-output storage system InMoSys ST.

### IV. SYSTEM INNOVATION OF INTERNAL LOGISTICS

#### A. The Logistics Towing Units

Reconfigurable manufacturing systems are proposed (of several authors) as a solution to unpredictable fluctuations in market demand and market turbulence [6], [7], [8], [9], [10].

An example of an innovative development using the latest Internet of Things technologies is an autonomous logistics system developed in the framework of research ZIMS [11]. This system uses the logistics towing units Aurora, from the company CEIT (Fig. 5).



Figure 5. The logistics towing units of program Aurora.

These autonomous towing units were developed in the base of the requirements of the automotive industry, in cooperation with Volkswagen, Slovakia. The resulting solution is the Modular Reconfigurable Logistics System.

The following Fig. 6 shows the application of this logistics solution in the automotive industry. As is shown, the system uses automatic identification of towing units position, custom navigation, monitoring and control system, which is integrated to the Production Planning System.



Figure 6. The logistics concept of CEIT.

The following Fig. 7 shows the deployment of current system AURORA in the automotive industry.

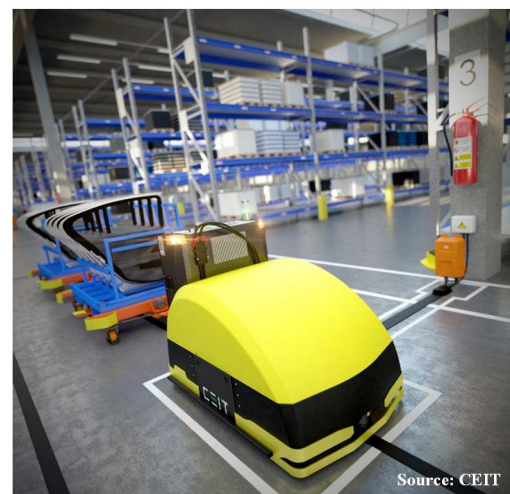


Figure 7. The logistics concept of CEIT.

The development of autonomous mobile robotic control system is implemented in its own development platform Ella® that uses virtual reality and digital models of individual elements of the proposed system. Dynamic verification of the functioning of the system in operating conditions is implemented through computer simulation and emulation (Fig. 8) in the environment of Ella SIM system [12].

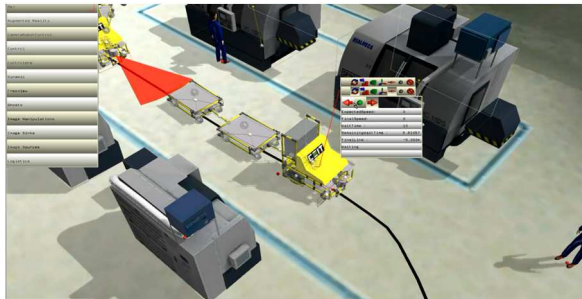


Figure 8. Simulation/emulation environment of Ella SIM system.

The preparation for implementation (Fig. 9) is performed off-line, in the environment of Ella VUP, in the system of virtual commissioning [13]. This approach allows in advance, supported by simulations to undertake predictive studies and optimization [14].

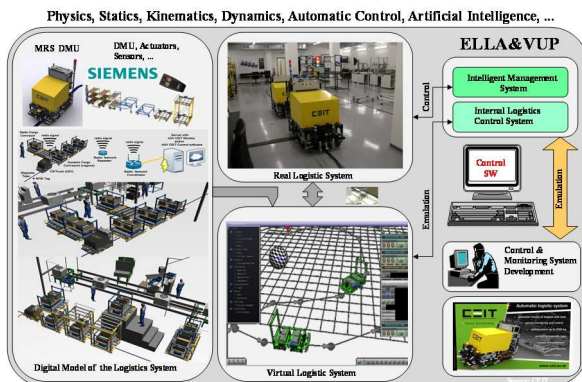


Figure 9. The virtual commissioning Ella VUP.

Digital Factory Technologies enabled the development of the company's own decision-making approach for analyzing potential for developing innovations (Fig. 10). The first step, it is evaluated the innovative concept and technological feasibility of the innovation (it finds out if: Does the innovation work?). In the second step, it is tested the significance of innovation, it is determined the market potential and market interest in innovation (to find out if: Does a customer buy this product?).

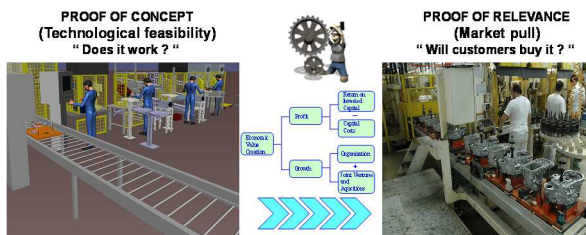


Figure 10. Decision-making on innovation.

One way to facilitate the design of the production system in virtual reality and simulation is to use our own software solution (Fig. 11), referred to as Virtual Design of Manufacturing Systems (VDMS). The trade name of VDMS is CEIT Table [15].



Figure 11. CEIT Table.

CEIT Table represents an integrated solution for support intuitive, team-oriented design of production and logistics systems.

It supports the productivity growth of the design process; it also fully supports the elimination of inefficient decisions in the process of preparation of innovation projects.

The customers have the opportunity to try out the activities of their Factory of the Future Production in the environment of virtual reality and augmented reality (CAVE - Computer Aided Virtual Environment). It was labeled as Adaptive Haptic Virtual Collaborative Development Environment (HVADE) (Fig. 12).


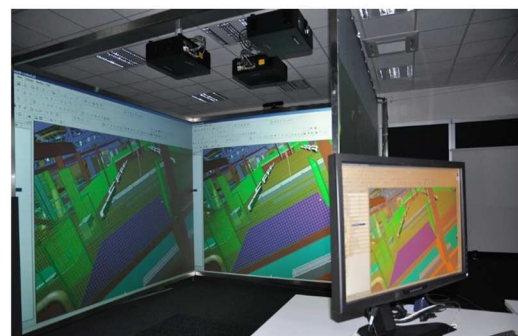


Figure 12. CAVE.

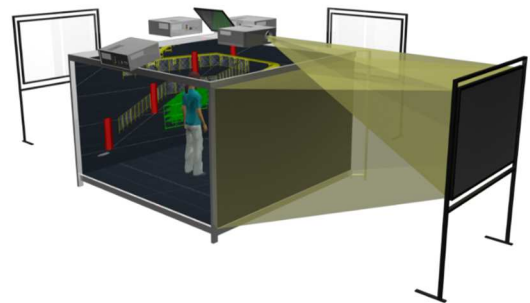

There are also technologies for haptic, special virtual reality headset for 3D dynamic effects (Oculus Rift), or the latest experimental technology for brainwave reading device (EPOC) (Fig. 13).



Figure 13. Oculus Rift and EPOC.

The latest development is oriented to the wider use of Digital Factory Technologies and advanced information and communication technologies [16]. All devices in developing logistics system will automatically monitor through sensors. Their current status (operation, failure, downtime, etc.) will be available to any other element of the production system.

In the development is the solution, in which each product will be carried (as one of the attributes) all the information, which will be required for processing in the base of the current status of the production system.

Intelligent pallets in developing manufacturing system will be equipped with its own processor and will be capable of optimizing of processing of their contents in production. Mobile robots will be fully autonomous and the order for transport will directly receive from the processed products or pallets.

Operation of all elements of the system will be constantly monitored and on the basis of this operation will be carried out predictions of potential fault conditions or interruption of system operation and will be immediately implemented some countermeasures.

An innovative approach to planning, evaluation of audits, deadlines and workshops in order to obtain outputs interactively, with room on-line display of the selected group of workplaces (Fig. 14).

There is possible to control not only the planned date, outputs of the analysis in tables and graphs but also to watch video recording or other desired plan activities.

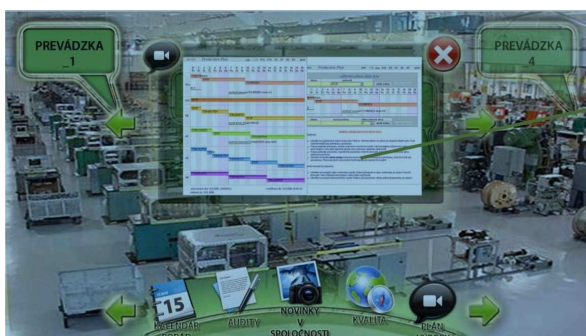


Figure 14. Innovative planning board.

Comprehensive simulation models whose input will be sensors of service consumption (energy, materials, etc.) will enable the optimization in real time.

The whole logistics system will be linked via the Internet of Things to cloud solutions so that all system information will be stored online and will be accessible in the cloud.

Operational interventions will be done after connecting to the internet from an arbitrary point in the world.

The enterprise will not need already undertaking its own IT solutions, servers and data repositories on first use of this solution, but will use Direct Memory Access Databases, which allow enormous acceleration of IT communications in industry.

Using the Data Centric Computing Deep Computing Architecture will run all important calculations at the point of data collection, which will further accelerate real-time communication. [16].

This research is funded by CEIT; spin off the University of Zilina and the Technical University of Košice.

Interface of controlled enterprises with social networks, households, public buildings, transport systems and vehicles is created a new environment – cyberspace.

This cyberspace can no longer function without artificial intelligence. For a description of such comprehensive systems will require special descriptive language. This language was developed in SRN – Unified Service Description Language (USDL).

## V. CONCLUSION

Nature is as a comprehensive, self-organized, holonic system. A human is also made up of small, autonomous units - Holon, which create together larger self-organized, comprehensive units and this units form a comprehensive holonic system – a human.

Nature creates biological systems and enables their further development through evolution, towards the highest form of organized mass - Intelligent Systems.

Biological systems represent the most effective and efficient production systems that humanity knows. These systems serve scientists as role models in creating "artificial" mechanisms that imitate nature, for the production of new products.

Learning from Nature has become one of the most important resources for further development of humanity.

Biological systems represent the most effective and efficient production systems that humanity knows. These systems serve scientists as role models in creating "artificial" mechanisms that imitate nature, for the production of new products.

The Advanced Factory of the Future Production Systems may come increasingly closer to optimized biological systems by evolution and will use the latest scientific breakthroughs in artificial intelligence, nanotechnology and information and communication technology (ICT).

Nowadays, research teams are developing the Advanced Factory of the Future Production Systems in Zilina.



## ACKNOWLEDGEMENT

This paper is the part of research supported by project VEGA 1/1146/12.

## REFERENCES

- [1] T. Bauernhansl, M. ten Hompel, and B. Vogel-Heuser, (Hrsg.), "Industrie 4.0 in Produktion, Automatisierung und Logistik, Anwendung, Technologien, Migration," Wiesbaden: Springer Fachmedien, 2014, ISBN 978-3-658-04681-1, p. 634.
- [2] M. Gregor and Š. Medvecký, "CEIT 2030. CEIT - Technologické trendy do roku 2030," Žilina: CEIT, 2015, CEIT-Š002-03-2015, p. 103.
- [3] P. Marčan, "Holonický koncept inteligentných systémov," Produktivita a inovácie, Vol. 14, No. 6, 2013, ISSN 1339-2271, pp. 44-48.
- [4] V. Botti, and A. Giret, "Anemone: A multi-agent methodology for holonic manufacturing systems," London: Springer-Verlag, ISBN 978-1-84800-309-5, 2008, p. 214.
- [5] J. Rofár, "ZIMS – Žilinský inteligentný výrobný systém," Produktivita a inovácie, Vol. 14, No. 2, 2013, ISSN 1339-2271, pp.17-21.
- [6] A.I. Dashenko, "Reconfigurable Manufacturing Systems and Transformable," 2006.
- [7] E. Westkämper, and E. Zahn, "Wandlungsfähige Produktionsunternehmen. Das Stuttgarter Unternehmensmodell," Berlin: Springer Verlag, ISBN 978-3-540-21889-0, 2009. pp. 321.
- [8] Y. Koren, "The Global Manufacturing Revolution," New Jersey: John Wiley & Sons, 2010, ISBN 978-0-470-58377-7, pp. 399.
- [9] K. Mubarak, "The issues for the implementation of reconfigurable Manufacturing systems in small and medium Manufacturing enterprises," In ARIKA, ISSN 1978-1105, Vol. 4, No. 1, pp. 82-88.
- [10] M. Gregor, and M. Haluška, "Rekonfigurabilita holonického výrobného systému s podporou agentného prístupu," Produktivita a inovácie, Vol. 14, No. 6, 2013, ISSN 1339-2271, pp. 35-38.
- [11] M. Gregor, "ZIMS – Žilina Intelligent Manufacturing System. Nová iniciatíva Žilinskej univerzity a CEIT," Study CEIT-Š001-09-2011, 2011.
- [12] L. Ďurica, "Simulačné, emulačné a vizualizačné procesy v inteligentných výrobných systémoch," Žilina: Žilinská univerzita, 2015, p. 10.
- [13] M. Gregor, T. Michulek, and J. Rofár, "Virtuálne uvedenie do prevádzky – Virtual Commissioning," Produktivita a inovácie. Vol. 14, No. 4, 2013, ISSN 1339-2271, pp. 38-40.
- [14] Liu, Z., Suchold, N. and Diedrich, Ch., "Virtual Commissioning of Automated Systems," In INTECH: proceedings, Kongoli: CC, 2012, ISBN 978-953-51-0685-2, pp. 131-148.
- [15] M. Gregor, Š. Medvecký, and B. Mičieta, "Žilina Intelligent Manufacturing System (ZIMS)," Žilina: CEIT. Study CEIT-Š001-05-2010, 2010, pp. 50.
- [16] M. Gregor, and M. Gregor, "Ľudský mozog ako počítač," ProIN, No. 16, Vol. 1, 2015, ISSN 1339-2271, pp. 32-40.

# Industry 4.0 with Cyber-Physical Integration: A Design and Manufacture Perspective

Alfredo Alan Flores Saldivar<sup>1</sup>, Yun Li<sup>1</sup>, Wei-neng Chen<sup>2</sup>, Zhi-hui Zhan<sup>2</sup>, Jun Zhang<sup>2</sup>, Leo Yi Chen<sup>3</sup>

<sup>1</sup> School of Engineering, University of Glasgow, Oakfield Avenue, Glasgow G12 8LT, U.K.

(Email: a.flores-saldivar.1@research.gla.ac.uk; Yun.Li@glasgow.ac.uk)

<sup>2</sup> School of Advanced Computing, Sun Yat-sen University, Guangzhou, China

<sup>3</sup> School of Engineering and Build Environment, Glasgow Caledonian University, Glasgow, U.K.

**Abstract**— Foreseeing changes in the way companies manufacture products and provide services, future trends are emerging in design and manufacture. Together with growing internet applications and technologies connected through the cloud, a new Industrial Revolution, named “Industry 4.0”, aims to integrate cyber-virtual and cyber-physical systems to aid smart manufacturing, as presented in this paper. Connecting information and physical machinery, this new paradigm relies on how effective and fast connectivity are achieved for Industry 4.0. A new generation of wireless connection, 5G, will help and accelerate this trend. Following analysis of the present cyber-physical integration for the 4<sup>th</sup> Industrial Revolution, this paper also investigates future methodologies and trends in smart manufacturing, design and innovation.

**Keywords**- Cyber-physical integration; cyber-physical systems; Industry 4.0; smart manufacturing; networked autonomous production; CAD; CAutoD

## I. INTRODUCTION

Design and manufacture are currently moving to a new paradigm, targeting innovation, lower costs, better responses to customer needs, optimal solutions, intelligent systems, and alternatives towards on-demand production. The concept that highlights this significant evolution is “Industry 4.0” (I4), dubbed the “4th Industrial Revolution” [1], with associated concepts of networked embedded systems, cyber-physical systems (CPS), smart factory, Internet of Things (IoT), Internet of Services (IoS) and “Internet+”, to name but a few. All these trends have in common the integration of several features in the same place as a response to challenges of computerized decision making and big data that are proliferated by the internet and cloud computing (CC).

To gauge the development and trends, this paper aims to analyze cyber-physical integration for design and manufacture, and to present a timely survey on Industry 4.0. Section 2 set the scene of Industrial Revolutions (IRs), with cyber-physical systems detailed in Section III. Necessary information and communication technologies (ICT) are analyzed in Section IV. Conclusions are drawn and future agendas are discussed in Section V.

## II. INDUSTRY 4.0 – AN EVOLUTIONARY REVOLUTION

### A. What Industry 4.0 Is

Ever since the beginning of industrialization, technological advances have led to socio-economic paradigm shifts which are

today termed “industrial revolutions”, i.e., mechanization with steam power for the 1st IR → electrical energy for mass production in the 2nd IR → automated production with electronics and control in the 3rd IR. Today, with advances in digitalisation and the internet, “smart manufacturing” and “smart factories” are becoming a reality, where the manufacturing value chain in the physical world can be integrated with its virtual copy in the cyberspace through CSP and IoT, and then be seamlessly integrated with IoS. Tempted by these future expectations, the term “Industrie 4.0” or “Industry 4.0” was coined *a priori* by the German government promoting their “High-Tech Strategy 2020 Action Plan” in 2013 for a planned “4th industrial revolution” [2]-[4].

The terminologies “Smart Industry” and I4 describe the same technological evolution from the microprocessor embedded manufacturing systems to the emerging CPS, smartly linking (i) demand to (ii) manufacture, (iii) supply, and (iv) services by the internet. Via decentralising intelligence, object networking and independent process management interact with the virtual and real worlds, heralding a crucial new aspect of future industrial production process that integrates the above four processes. In short, I4 represents a paradigm shift from “centralised” to “decentralised” production, a reversal of the logic of production process thus far. The design principles of I4 components are shown in Table 1 [4].

**Table 1 Design Principles of I4 Components**

Design	CPS	IoT	IoS	Smart Factory
Interoperability	X	X	X	X
Virtualisation	X	-	-	X
Decentralisation	X	-	-	X
Real-Time Capability	-	-	-	X
Service Orientation	-	-	X	-
Modularity	-	-	X	-

### B. Importance of the Strategised Industry Revolution

The first three industrial revolutions came about as a result of centralization for production. Now, businesses will establish global networks that incorporate their machinery, warehousing systems and production facilities in the shape of a cyber-physical system, comprising “smart machines”, storage systems and production facilities capable of autonomously exchanging information, triggering actions and controlling each other independently.

A. A. Flores Saldivar is grateful to CONACYT for a Mexican Government scholarship. Y. Li and W.-N. Chen are grateful to the Royal Society and National Science Foundation of China for the support via a Newton Fund.

These form a “smart factory” that allows individual customer requirements to be met, whilst efficiency obtained in automated production is maintained. This means that even one-off items can be manufactured profitably. In Industry 4.0, dynamic business and engineering processes enable last-minute changes to production and offer the ability also to respond flexibly to disruptions and failures. End-to-end transparency is provided over the manufacturing process, also facilitating optimized design and decision-making. Further, Industry 4.0 will result in new ways of creating value and novel business models. In particular, it will provide start-ups and small businesses with the opportunity to develop and provide downstream services. To both developed and developing economies, I4 will reduce factory-floor requirements and help progress of humanity.

### III. CYBER-PHYSICAL INTEGRATION

A CPS collaborates computational entities which are in intensive connections with their surrounding physical world and on-going processes, providing and using, at the same time, data-accessing and data-processing services available on the internet [5]. A cyber-physical production system relies on the newest and foreseeable further developments of computer science, ICT, and manufacturing science. Concepts like autonomous cars, robotic surgery, intelligent buildings, and implanted medical devices are just some of practical examples that have already emerged in Research and Developments (R&D) [6].

#### A. Design of a Cyber-Physical System

Cyber space and virtual systems represented by ICT are now getting integrated with physical control and production systems. This integration is enabling compression of development cycles by reuse of existing methodologies, methods, models, tools and techniques, encapsulated in integrated and customized models and components that can be rapidly used in an innovative or creative design. The unique challenges in CPS integration emerge from the heterogeneity of components and interactions. This heterogeneity drives the need for modelling and analyzing cross-domain interactions among physical and computational and networking domains, which demands deep understanding of the effects of heterogeneous abstraction layers in the design flow [7].

Figure 1 illustrates a well-funded approach to cyber-physical integration to meet design principles, mainly proposed in [8]. It highlights that analysis is a key issue in current CPS developments, integrating various objects, design methods and tools, aspect-oriented development methods and tools, multi-domain physical modelling methods and tools, and formal methods that address different aspects of the development process of CPS. Systems specification, modelling and design method integration involve many aspects of integration at different levels, including:

- Integration of the physical world dimension, communication dimension and computation dimension;
- Integrated object-oriented methodology, multi-domain methodology, aspect-oriented methodology and formal techniques;
- Integration of different design views;

- Integration of the methods used to specify and implement systems requirements;
- Integration of tools that support these methods;
- Integration of physical components and cyber components;
- Integration of different representations;
- Integration of the multiple specification fragments produced by applying these methods and tools; and
- Integration between informal specification methods and formal specification methods.

Model, Methodology and Tool Integration are detailed in the following sections. These aspects help investigate future directions and trends in Industry 4.0.

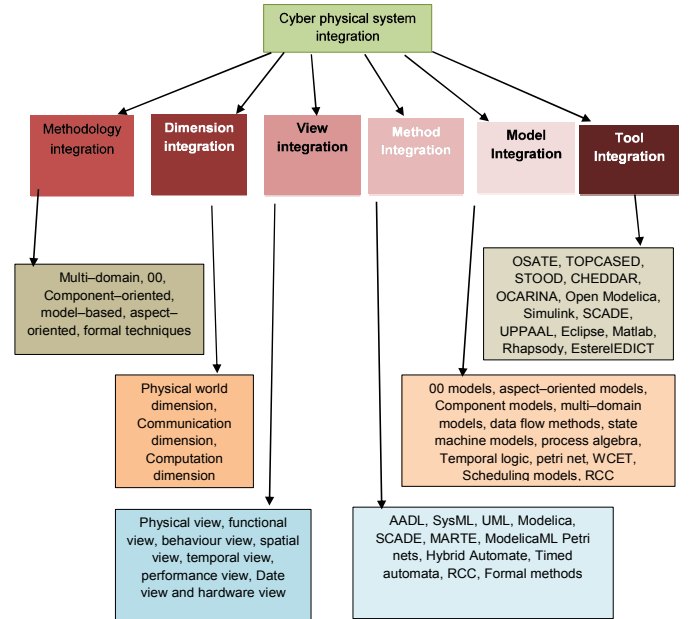


Figure 1. Integrated Approach to develop CPS.

#### B. Model Integration for Manufacturing-Aware Design Flow

As discussed, it is important to develop methodologies that integrate models, techniques, and tools that can be used in a design customized within its models and components. Components and models in a CPS are heterogeneous, spanning multiple disciplines (physical – thermal, mechanical, electrical, fluid,... and cyber – software, computing, cloud...). These require multiple models to represent the physical aspects, requirements, architectures, behaviours, spatial-temporal constraints, and interfaces, at multiple levels of abstractions [8].

Model and component-based design have been recognized as key technologies for radically changing productivity with CPS. Model-based design uses formal and sufficiently complete models, processes, their environments, and their interactions. The goal of a model-based design is “correct-by-construction”, where properties of the synthesized models of the designed system predict the properties of the implemented or manufactured system with sufficient accuracy [9]. As a result, an integrated tool suite called OpenMETA has been developed to provide a manufacturing-aware design flow, which covers both cyber and physical design aspects. A new integration

model for the OpenMETA suite was proposed in [9], as shown in Figure 2. Basically, the design flow is implemented as a multi-model composition/synthesis process that incrementally shapes and refines the design space using formal, manipulated models. It includes analysis and testing steps to validate and verify requirements and to guide the design process to achieve least complexity, and therefore the least risky and least expensive solutions. For example, the Adaptive Vehicle Make (AVM) [10] project, funded by the Defense Advanced Research Project Agency (DARPA), has constructed a fully integrated model and component-based design flow for the make process of a complex CPS.

- 3) Design Space Models (DSM) that define structural and architectural variabilities;
- 4) Test Bench Models (TBM) representing environment inputs, composed system models connected to a range of testing and verification tools for key performance parameters; and
- 5) Parametric Exploration Models (PEM) for specifying regions in the design space to be used for optimization and models for complex analysis flows producing results such as Probabilistic Certification of Correctness (PCC).

The first emphasis is placed on the development of a model integration language, so as to address heterogeneity to cover all relevant views of multi-physics and cyber domains and to achieve compositionality. Heterogeneity of the multi-physics, multi-abstraction and multi-fidelity design space, and the need for rapidly evolving/updating design flows require the use of a rich set of modelling languages usually influenced/determined by existing and emerging model-based design, verification and simulation technologies and tools. Consequently, the language suite and the related infrastructure cannot be static; it will continuously evolve. Then the second development is methodology integration in this framework [9]

### C. Method Integration

To integrate modelling languages for CPS environments, mathematical models in this sense can bring together abstractions that are imported from individual languages and required for modelling cross-domain interactions. Proposed in [9], a language called CyPhyML is constructed as a lightweight, evolvable, composable integration language that is frequently updated and morphed. While these DSMLs may be individually quite complex (e.g., Modelica, Simulink, SystemC, etc...) CyPhyML is relatively simple and easily evolvable. This “semantic interface” between CyPhyML and the domain specific modeling languages (DSML) shown in Figure 3 is formally defined, evolved as needed, and verified for essential properties (such as well-formedness and consistency) using the methods and tools of formal meta-modelling. By design, CyPhyML is moving in the opposite direction to unified system design languages, such as SysML or AADL. Its goal is specificity as opposed to generality, and heavy weight standardization is replaced by layered language architecture and specification of explicit semantics.

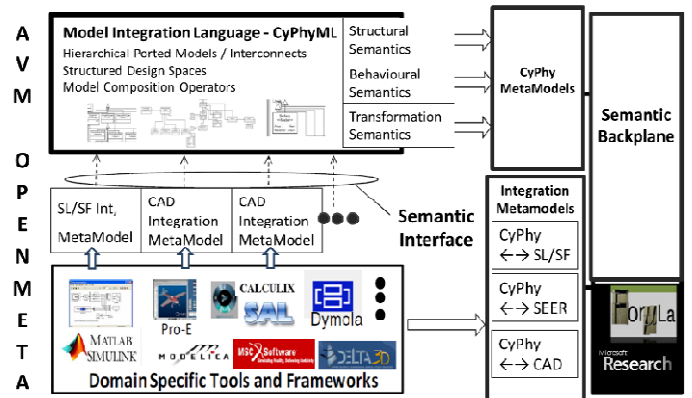


Figure 3. Method Integration Framework.

Figure 2. Model Integration: OpenMETA framework.

The main procedures of this design flow sketch the following phases:

- 1) Currently combinatorial or future intelligent design space exploration and architecture evaluation;
- 2) Behavioural design space exploration by progressively deepening from qualitative discrete behaviours to precisely formulated relational abstractions and to quantitative multi-physics, lumped parameter hybrid dynamic models using both deterministic and probabilistic approaches;
- 3) Geometric/structural design space exploration coupled with physics-based nonlinear finite element analysis of thermal, mechanical and mobility properties; and
- 4) Cyber design space exploration (both hardware and software) integrated with system dynamics.

As highlighted in Figure 2, these elements reflect the drive train challenge for the AVM development, emphasizing the 3D/CAD tools and finite element analysis for verifying blast protection and hydrodynamic requirements remaining on the basic structure of the integration architecture. In synthesis, the modelling functions of the OpenMETA design flow are built on the following model types [9]:

- 1) AVM Component Models (ACM) with standard, composable interfaces;
- 2) Design Models (DM) that describe component architectures and related constraints;



integration. The key is to define the structural and behavioural semantics of the CyPhy model integration language using formal meta-modelling, a tool support formal framework for updating the CyPhy metamodels and verifying its overall consistency and completeness as the modeling languages evolving. In this case, the meta-modelling tool FORMULA from Microsoft Research can be used. This tool is sufficient for defining mathematically modelling domains, transformations across domains, as well as constraints over domains and transformations, since they are algebraic data types (ADTs) and constraint logic programming (CLP) based semantics.

In Figure 2, it is observed as part of the Model Integration that a large suite of modelling languages and tools for multi-physics, multi-abstraction and multi-fidelity modelling are included; OpenModelica, Dymola, Bond Graphs, Simulink/Stateflow, STEP, ESMOL and many others software that are useful for analysis. At the end CyPhyML model integration language provides the integration across this heterogeneous modelling space and the FORMULA - based Semantic Backplane provides the semantic integration for all OpenMETA composition tools [10] The next step in this case, will be to outline Tool Integration according to Development 3, in which execution integration is also provided as a whole platform.

#### D. Tool Integration

Using the same approaching to [9-11], in which the Tool Integration Framework of the OpenMETA incorporates a network of model transformations that include models for individual tools and integrate model-based design flows, model-transformations are used for the following roles:

- 1) **Packaging:** Models are translated into a different syntactic form without changing their semantics. Taking the development, AVM Component Models and AVM Design Models are translated into standard Design Data Packages (Figure 2, .ACM and .ADM files) for consumption by a variety of design analysis, manufacturability analysis and repository tools.
- 2) **Composition:** Model- and component-based technologies are based on composing different design artefacts (such as DAE-s for representing lumped parameter dynamics as Modelica equations, input models for verification tools, CAD models of component assemblies, design space models, and many others) from appropriate models of components and component architectures.
- 3) **Virtual prototyping:** Several test and verification methods (such as Probabilistic Certificate of Correctness – PCC) require test benches that embed a virtual prototype of the designed system executing a mission scenario in some environment (as defined in the requirement documents). It is found that distributed, multi-model simulation platforms are the most scalable solution for these tests. The author selected the High Level Architecture (HLA) as the distributed simulation platform and integrated FMI Co-Simulation components with HLA.
- 4) **Analysis flow:** Parametric explorations of designs (PET), such as analyzing effects of structural parameters (e.g. length of vehicle) on vehicle performance, or deriving PCC for performance properties frequently require complex analysis flows

that include a number of intermediate stages. Automating design space explorations require that Python files controlling the execution of these flows on the Multidisciplinary Design Analysis and Optimization (OpenMDAO6) platform (that are currently use in OpenMETA) are auto-generated from the test bench and parametric exploration models (Figure 2).

It is highlighted through this development, that both multi-physical and computation modelling present advantages choosing the specification of composition, i.e. for physical interactions; power flow oriented modelling (Modelica, Simscape or Bond Graph modelling languages) requires spending time typing for expressing and enforcing connectivity constraints achieving safe modelling of multi-physics interactions.

The OpenMeta model and tool integration technology needs and infrastructure for creating and executing complex analysis flows. Based on “software-as-a-service” aspect of this development, it allows end users (individuals, research groups, and large companies) to repositories, analytic services and design tools to lower the costs, and excluding the high costs of acquiring and maintaining desktop engineering tools. In Figure 4 is presented the platform for executing the part of tool integration, according to [9].

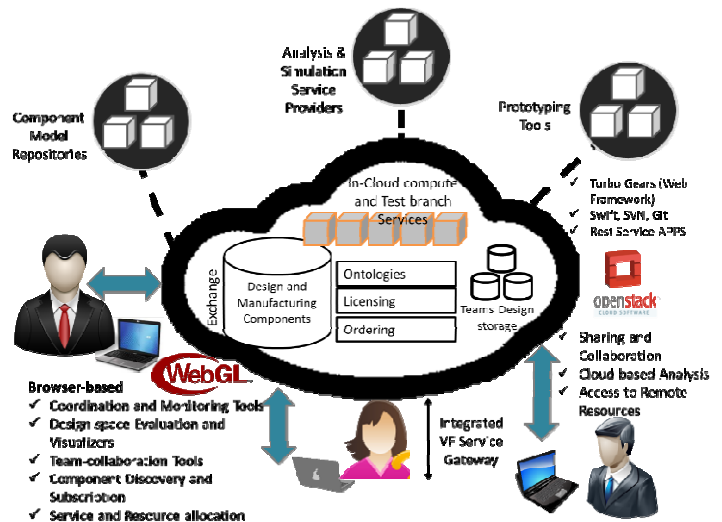


Figure 1. Tool Integration Framework.

The key fundamentals addressed in this platform are:

- 1) Resource elasticity and service staging, to address scalability and system wide optimization.
- 2) Managing the evolution of data, data presentations and their use by service and service integration over time.

With these fundamentals, it is clear that another matter need to be addressed for this platform, as shown in Figure 4. The evolution of data is key to better results and performance of this development.

#### IV. ICT INFRASTRUCTURE FOR INDUSTRY 4.0

##### A. Decentralized Computing

One of the main barriers to Industry 4.0 is decentralized systems, as described in [12], for allocating hardware and software resources to individual workstation or desired

location, which have been designed and operated with limited knowledge of the complete system. However, decentralized computing is now a trend in business environments. As there is no central decision maker, the information flow stays mostly local. Viewed as part of the control system, decentralization forms a self-organizing emergent system, with self-adaption, self-management, and self-diagnosis, keys in autonomic computing as well as Industry 4.0. This allows control of more complex systems, although global optimal performance cannot be guaranteed as firmly as with global controllers [12].

For implementing Smart Manufacturing schemes, ICT known as unified communications and integration of telecommunications, computers, necessary software, storage, and all those interfaces that allow users within the systems to access, store, transmit and manipulate information, must be addressed as well. As the number of users increases and the cloud computing grows in scale, decentralised cloud solution can play an importance role of infrastructure [13]. Decentralised intelligence can keep information and communication between the system components. By simulation and virtual design, manufacturing can be improved using optimization and control tools to set system scenarios. However, distributed optimization, owing to explosion in size and complexity of modern datasets, comprises the importance of solving problems and analysis.

Networked production leading to what Industry 4.0 is aiming to achieve, constantly collects Big Data sets, those data sets possess characteristics of being extremely large, high-dimensional and data stored or collected in a distributed manner. All those characteristics can also be noted as part of the machine learning process. As a result, it has become of central importance to develop algorithms that are both rich enough to capture the complexity of modern data, and scalable enough to process huge datasets in a parallelized or fully decentralized fashion [14].

### B. Cloud Computing

Through resources virtualization, cloud computing provides infrastructure, platform and software as services. “Cloud computing is a model for enabling ubiquitous, convenient, on demand network access to a shared pool of configurable computing resources (e.g. networks, servers, storage, applications, and services) that can be rapidly provisioned and released with minimal management effort or service provider interaction” [6]. This cloud model is composed of five essential characteristics, three service models, and four deployment models for optimal scheduling of resources [15].

For an I4 environment, private clouds, where data are restricted to the usage of a company, are imperative as a service linking between the private networks and the public ones, with a well-funded policy of data sharing and data accessing. The linkage between cloud computing and automation systems is strong. Nowadays, developments on both sides are getting involved, so as to achieve higher efficiency with less effort. With cloud computing, CPS are being optimized to reach manufacturing by the press of one button [16]. The gathering of knowledge and perspectives with the proposal of architecture for Global Information are showed in Figure 5.

Facing this paradigm, the integration of CPS, IoT, IoS and CC leads to a transformation, more than a revolution. Those subjects already mentioned before comprise the trend and need to implement Industry 4.0, which gives the way of reorganizing the modes of production using existing tools and placing

reliance on networks. With the mergence between the Internet and factories, Industry 4.0 is characterized by the constant communication and linkage among production, supply chain, tools and workstations via the Internet and virtual networks.

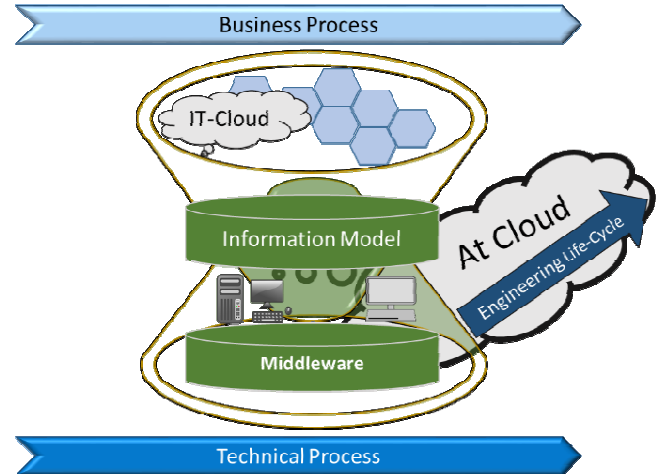


Figure 2. Architecture for Global Information with use of Cloud Computing.

### C. Model-Based Integration

Considering Integration as part of the whole-system automation, it comes another topic of interest: “embedded-automation systems”, those which refer to control systems encompassing both domains (control-dominated and data-dominated) and which can be designed using one unified approach. This approach was proposed in [17], where the control-dominated parts deal with asynchronous inputs from an external environment, while the data-dominated parts process these events by calling appropriate functions.

While trying to reduce IT costs, improve efficiency of sharing processes and enhance scalability inside companies’ data and applications integration, there are certain levels of integrations known as: presentation level integration, business process integration (Service Oriented Architecture), data integration and communications-level integration. Depending on a company’s particular needs, communication can be either synchronous, asynchronous or a combination of both. In synchronous communication, a sender application sends a request to a receiver application and must wait for a reply before it can continue with its processing. Then, in asynchronous communication, a sender application sends a message to a receiver application and continues its processing before receiving a response. Asynchronous communication allows the loose coupling of applications, eliminating the need for connection management. This results in an applications integration solution that is more flexible, agile, and scalable - essential attributes denoting what Industry 4.0 seeks for. For designing an integration solution, asynchronous communication offers a number of advantages over synchronous communication, especially when it comes to services in a Service Oriented Architecture. In synchronous communication patterns, timeouts are more common when an application has to wait for responses from several other applications. This means that the availability of services increases since individual processes are not blocked out as frequently due to waiting on other sub-processes to complete [17].

At present, a model-based integration approach is in its infancy and requires significant future research efforts. Many researchers agree that modelling from the CPS is a sizeable obstacle for companies that handle big data and obtain any profitable analysis for prediction. It has been suggested to tackle uncertainties within the data analysis. Tool integration and support from model-based systems and rapid construction of domain-specific tool chains are also suggested from present research [16].

#### D. Virtual Prototyping with Computer-Automated Design

Utilizing Evolutionary Computation, CAutoD accelerates and optimizes the tedious process of trial-and-error by reversing a design problem into a simulation problem, then automating such digital prototyping by intelligent search via biological-inspired machine learning [18]. Experimental research in order to validate scientific results of the theoretical work is also what researchers suggest. Validation and implementation of this approaches help with a fast rhythm of acquiring knowledge and developments. What is trending now will not be the same in a few more years' time. When launching projects like smart manufacturing and Industry 4.0, companies should stay one step ahead and put efforts on innovative resources for advanced results.

### V. DISCUSSION AND CONCLUSION

As stated so far, there exist challenges and future directions when tackling the subject of Industry 4.0, as argued in [3]. These include general reluctance to change by stakeholders, threat of redundancy of corporate IT departments and a lack of adequate skill-sets to expedite the march towards the 4th Industrial Revolution.

Many other trends have developed for Smart Manufacturing, not only in Germany with Industry 4.0, but also in the United States such as the Smart Manufacturing Leadership Coalition (SMLC). What SMLC presents is the infusion of intelligence that transforms the way industries conceptualize, design and operate the manufacturing enterprise [19]. Both perspectives agree on what challenges have to overcome in order to achieve what they pursue, such as analysis of big data-information, interoperability and scalability, among others.

So far, smart manufacturing approaches, analysis, virtualization and the new tendencies like the Industry 4.0 and big data studies have been studied. Summarizing the related work and developments leads to focus on the aspects facing Industry 4.0, such as methodologies that integrate collaborative systems. In this case, researchers suggest that a well-funded methodology that integrates CPS, cloud computing, virtual designs and real-time analysis is key to achieving innovation and a high productivity, because the system at the end becomes self-aware and self-predictive among other properties that are suitable for future research.

#### REFERENCES

- [1] Lee, J., H.-A. Kao and S. Yang (2014). "Service Innovation and Smart Analytics for Industry 4.0 and Big Data Environment." *Procedia CIRP* 16(0): 3-8.)
- [2] Lasi, H., P. Fettke, H.-G. Kemper, T. Feld and M. Hoffmann (2014). "Industry 4.0." *Business & Information Systems Engineering* 6(2): 239-242.
- [3] Kagermann, H., W. Wahlster and J. Helbig (2013). "Recommendations for implementing the strategic initiative INDUSTRIE 4.0." ACATECH NATIONAL ACADEMY OF SCIENCE AND ENGINEERING(3).R. Nicole, "Title of paper with only first word capitalized," J. Name Stand. Abbrev., in press.
- [4] MacDougall, W. (2014). "INDUSTRIE 4.0 SMART MANUFACTURING FOR THE FUTURE." *MECHANICAL & ELECTRONIC TECHNOLOGIES, GERMANY TRADE & INVEST*(4): 40.
- [5] Monostori, L. (2014). "Cyber-physical Production Systems: Roots, Expectations and R&D Challenges." *Procedia CIRP* 17(5): 9-13.
- [6] Technology, N. I. o. S. a. (2013). "Strategic R&D Oportunities for 21st Century Cyber-Physical Systems." *Foundations for Innovation in Cyber-Physical Systems Workshop*(6): 32.
- [7] Sztipanovits, J., X. Koutsoukos, G. Karsai, N. Kottenstette, P. Antsaklis, V. Gupta, B. Goodwine, J. Baras and W. Shige (2012). "Toward a Science of Cyber&#x2013Physical System Integration." *Proceedings of the IEEE* 100(7): 29-44.
- [8] Lichen, L. (2015). *Model Integration and Model Transformation Approach for Multi-Paradigm Cyber Physical System Development*. Progress in Systems Engineering, H. Selvaraj, D. Zydek and G. Chmaj, Springer International Publishing. 330: 629-635.
- [9] Sztipanovits, J., T. Bapty, S. Neema, L. Howard and E. Jackson (2014). *OpenMETA: A Model- and Component-Based Design Tool Chain for Cyber-Physical Systems*. From Programs to Systems. The Systems perspective in Computing, S. Bensalem, Y. Lakhneck and A. Legay, Springer Berlin Heidelberg. 8415: 235-248.
- [10] Lattmann, Z., A. Nagel, J. Scott, K. Smyth, C. vanBuskirk, J. Porter, S. Neema, T. Bapty, J. Sztipanovits, J. Ceisel and D. Mavris (2012). *Towards Automated Evaluation of Vehicle Dynamics in System-Level Designs*. ASME 2012 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference. A. S. M. ENGINEERS: 1131-1141.
- [11] Eremenko, P. (2011). *Philosophical Underpinnings of Adaptive Vehicle Make*. DARPA-BAA-12-15. Appendix 1 (December 5, 2011), Arlington, VA.
- [12] De Wolf, T. and T. Holvoet (2003). *Towards autonomic computing: agent-based modelling, dynamical systems analysis, and decentralised control*. Industrial Informatics, 2003. INDIN 2003. Proceedings. IEEE International Conference on.
- [13] Jun, C., W. Xing, Z. Shilin, Z. Wu and N. Yanping (2012). *A Decentralized Approach for Implementing Identity Management in Cloud Computing*. Cloud and Green Computing (CGC), 2012 Second International Conference on.
- [14] Boyd, S., N. Parikh, E. Chu, B. Peleato and J. Eckstein (2010). "Distributed Optimization and Statistical Learning via the Alternating Direction Method of Multipliers." *Foundations and Trends® in Machine Learning* 3(13): 1-122.
- [15] Andreadis, G., G. Fourtounis and K.-D. Bouzakis (2015). "Collaborative design in the era of cloud computing." *Advances in Engineering Software* 81(11): 66-72.
- [16] Givehchi, O., H. Trsek and J. Jasperneite (2013). *Cloud computing for industrial automation systems- A comprehensive overview*. Emerging Technologies & Factory Automation (ETFA), 2013 IEEE 18th Conference on.
- [17] Yoong, L., P. Roop, Z. Bhatti and M. Y. Kuo (2015). *Introduction to Synchronous Programming Using Esterel. Model-Driven Design Using IEC 61499*, Springer International Publishing: 35-64.
- [18] Bukata, B. B. and L. Yun (2011). *Reviewing DSTATCOM for smart distribution grid applications in solving power quality problems*. Automation and Computing (ICAC), 2011 17th International Conference on.
- [19] Swink, D. (2014). *Smart Manufacturing Leadership Coalition (SMLC)*. OSI-SOFT, SAN LEANDRO, CA.

## ***Special Session on Industry 4.0***

Organised and chaired by:

*Professor Yun Li, University of Glasgow*

*Professor Hongnian Yu, Bournemouth University*

### Invited Talk ----- Supercomputing for Industry 4.0

**Richard Martin**

*ARCHIE-WeSt High-Performance Computing Centre, UK*