

Challenges on computational models for ship design and navigation: Ongoing projects at CIMNE MARINE

Julio García-Espinosa





- Some completed projects
- On-going projects
 - Fibreship
 - Nice-Ship
 - STM Validation






CIMNE MARINE SOME COMPLETED PROJECTS




CIMNE MARINE: SOME COMPLETED PROJECTS

Evaluating performance of the air cushion and seals of a SES T-Craft in waves (M-SES). 2009-2012. ONR Global.






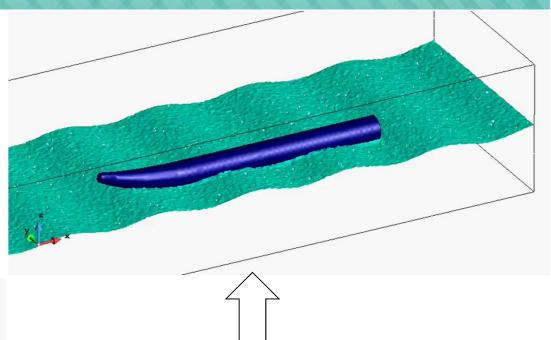


Advanced numerical simulation and performance evaluation of wave adaptive modular vessels in spray generating conditions (WAM-V). 2012-2014. ONR Global.

CIMNE MARINE: SOME COMPLETED PROJECTS

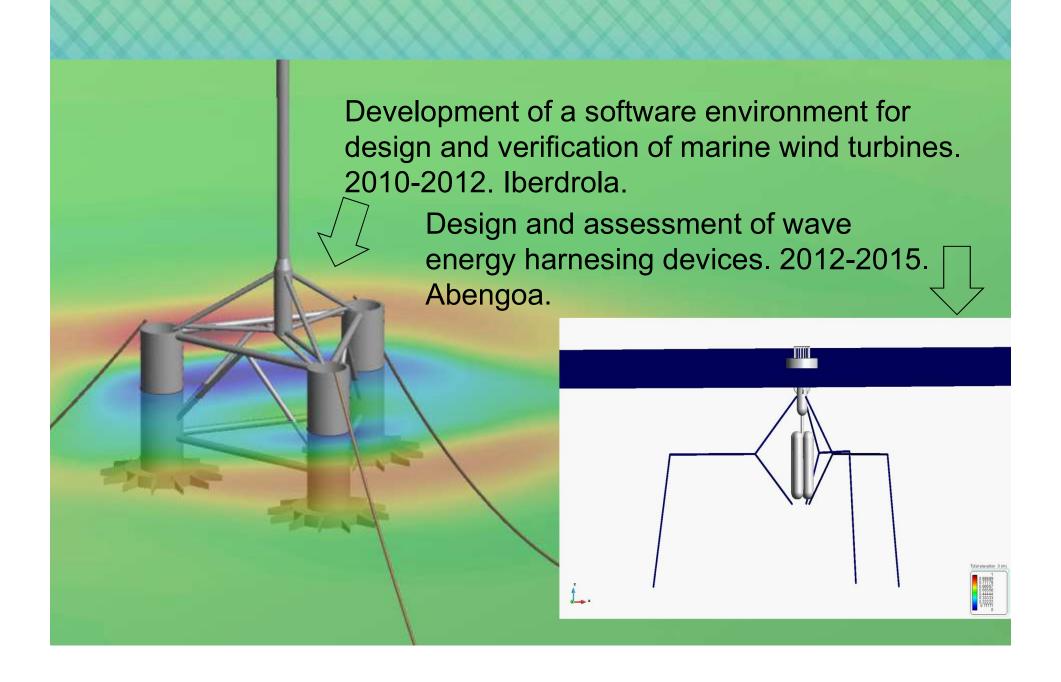

CIMNE MARINE: SOME COMPLETED PROJECTS

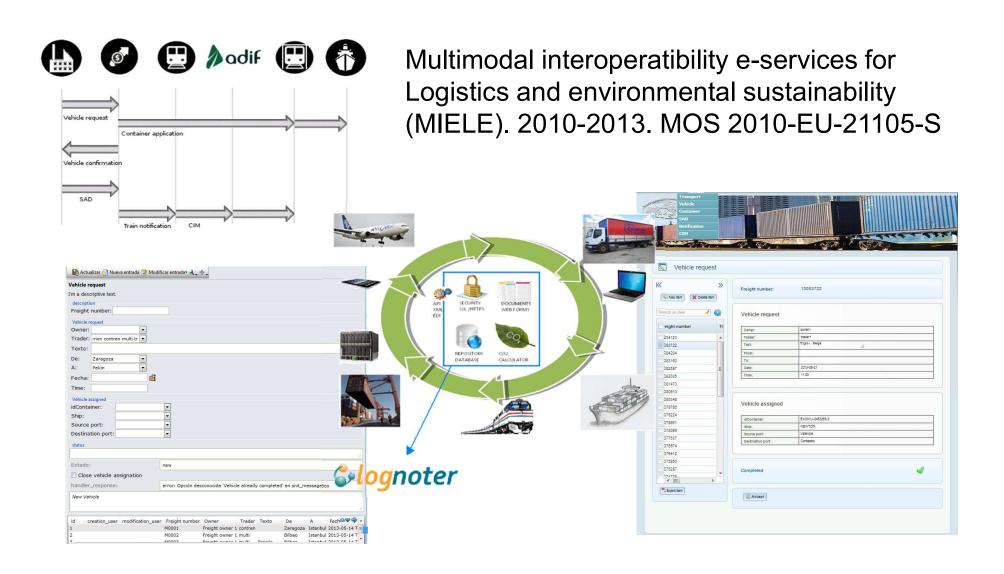




CIMNE MARINE ON-GOING PROJECTS NICE-SHIP



CIMNE MARINE: NICE-SHIP PROJECT

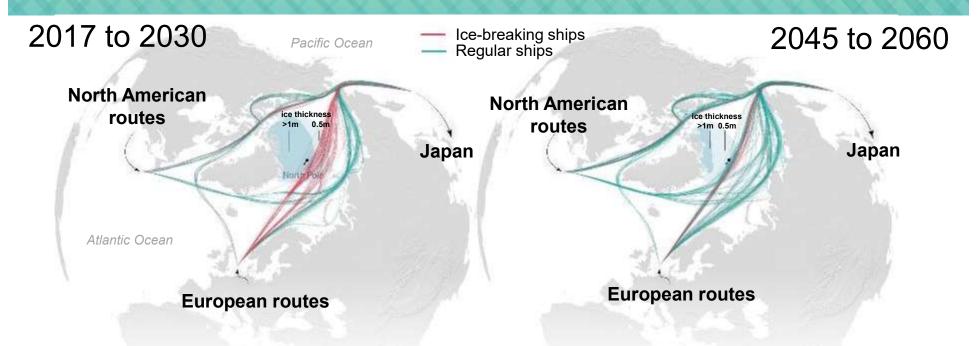

- Until now, exploitation of the vast stores resources in the far north has largely been confined to the land. But current retreating of sea ice is enabling an expansion northwards of commercial fisheries and, in time, it will facilitate the exploitation of the mineral and hydrocarbon resources in the Arctic Circle.
- De-icing of the existing ice masses in the far north region allows Arctic trade routes to remain open for longer periods of time. Sailing by northern routes could reduce by 20-30% the journey times and with similar savings in fuel consumption and greenhouse gas emissions.
- While nobody disputes today that the exploitation of those opportunities must be properly managed in order to preserve the delicate Arctic environment, it is undeniable that reality of today is that commercial activity and economic development in the Arctic is increasing rapidly.

CIMNE MARINE: NICE-SHIP PROJECT

- The potential development of the Arctic and Antarctic regions evidence the need for new procedures for estimating the forces that ice exerts on ice-breakers, polar ships and marine structures, and in general, the need for having advanced computational tools able to help naval architects to design the new generation of vessels to operate in polar regions.
- The NICE-SHIP (2016 2019) project aims to developing a new generation of computational methods, based on the integration of innovative semi-Lagrangian particle-based and discrete element models for the analysis of the operation of a vessel in an iced sea.



Scenario 1: Icebreaking performance in level ice





Scenario 2: Navigation of ships in brash ice (and broken ice)


CIMNE MARINE: NICE-SHIP PROJECT MODELLING ICE MECHANICS

Discrete Element Method


- Material represented by a collection of spherical (ellipsoidal) particles (not micro, usually cms).
- Rigid particles, soft contacts.
- Adequate contact laws yield desired macroscopic material behaviour (local contact problem).
- Contact surfaces (for forces integration) based on weighted Voronoi diagram.
- Contact interaction takes into account friction, cohesion, and the possibility of breakage of cohesive bonds.
- Dynamics based on standard equations of motion.

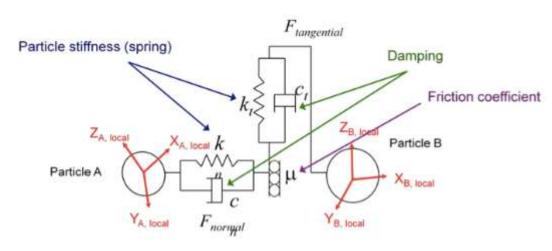

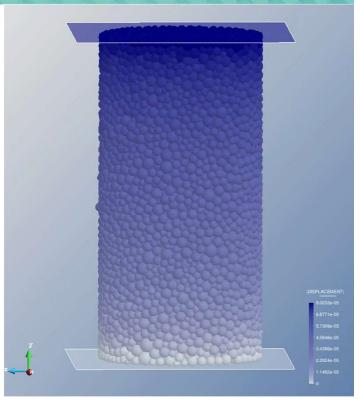

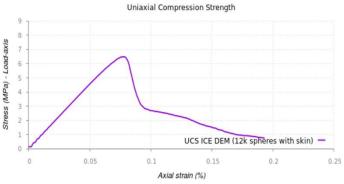

CIMNE MARINE: NICE-SHIP PROJECT SCENARIO 1 (PRELIMINARY TESTS)

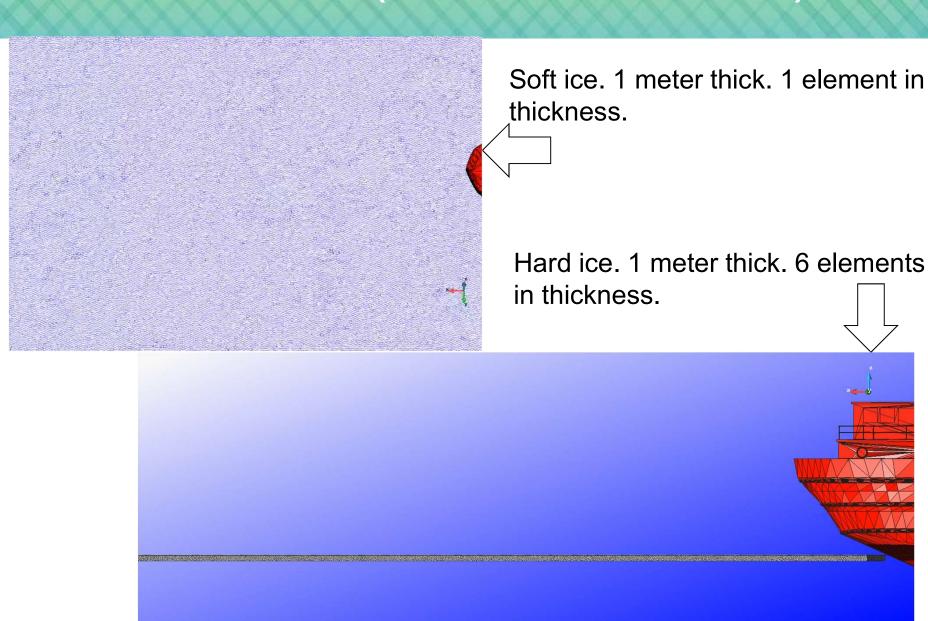

CIMNE MARINE: NICE-SHIP PROJECT SEMILAGRANGIAN MODEL FOR INCOMPRESSIBLE NAVIER-STOKES

Lagrangian governing equations: $d_t U_{\lambda} = A_{\lambda}$ $d_t X_{\lambda} = U_{\lambda}$

$$d_t U_{\lambda} = A_{\lambda} \quad d_t X_{\lambda} = U_{\lambda}$$

Integration along trajectory:

$$\frac{U_{\lambda}(X_{\lambda}^{n+1}) - U_{\lambda}(X_{\lambda}^{n})}{\Delta t} = A_{\lambda}(X_{\lambda}^{n+1})$$


Lagrangian splitting:
$$\begin{cases} \frac{U_{\lambda}^{*}\left(X_{\lambda}^{n+1}\right) - U_{\lambda}(X_{\lambda}^{n})}{\Delta t} = 0 \rightarrow U_{\lambda}^{*}\left(X_{\lambda}^{n+1}\right) = U_{\lambda}(X_{\lambda}^{n}) \\ \frac{U_{\lambda}\left(X_{\lambda}^{n+1}\right) - U_{\lambda}^{*}\left(X_{\lambda}^{n+1}\right)}{\Delta t} = A_{\lambda}\left(X_{\lambda}^{n+1}\right) \end{cases}$$

Projection onto background FE mesh:

$$\frac{\Pi\left(U_{\lambda}(X_{\lambda}^{n+1})\right) - \Pi\left(U_{\lambda}^{*}\left(X_{\lambda}^{n+1}\right)\right)}{\Delta t} = \Pi\left(A^{n+1}(X_{\lambda}^{n+1})\right)$$
$$u^{n+1} = \Pi\left(U_{\lambda}(X_{\lambda}^{n+1})\right)$$

Lagrangian → Eulerian

$$\frac{u^{n+1} - u^*}{\Delta t} = a^{n+1} = -\frac{1}{\rho} \nabla P^{n+1} + \nu \Delta u^{n+1}$$

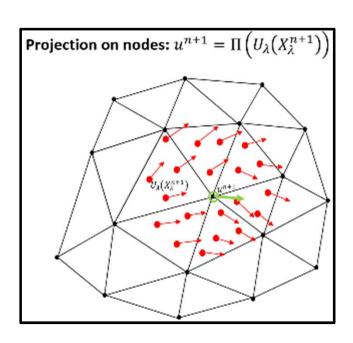


CIMNE MARINE: NICE-SHIP PROJECT A SEMI-LAGRANGIAN METHOD FOR SOLID TRANSPORT IN FLUIDS

$$\mathbf{F}_e = \int_{\Gamma} (p \cdot \mathbf{n}) d\Gamma + \int_{\Gamma} (\mathbf{n} \cdot \mathbf{\tau}) d\Gamma$$

Step 2. Once the translation and rotation of the ice block is evaluated, the interface of the solid mesh with the fluid mesh can be calculated.

Step 3. Then, the FE space can be enriched, by creating new DOFs on each of the interface elements for the pressure field (the original shape functions are split in two independent functions across the interface) and then statically condensing the new unknowns.

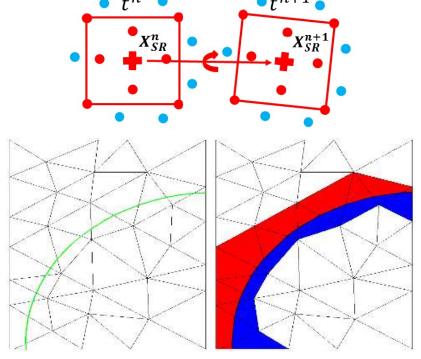



(left) Ice block interface over the mesh, (right) resulting enriched finite elements at the interface of the ice block


CIMNE MARINE: NICE-SHIP PROJECT A SEMI-LAGRANGIAN METHOD FOR SOLID TRANSPORT IN FLUIDS

Proofs of concept

- 2D flow around a circular cylinder.
- Transport of two solid blocks within an uniform flow.

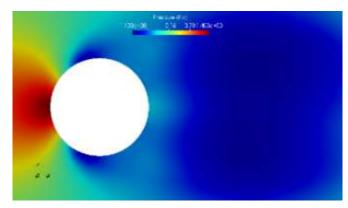

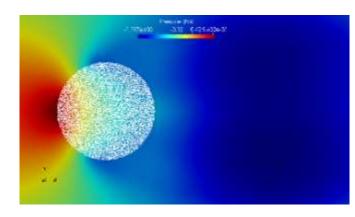

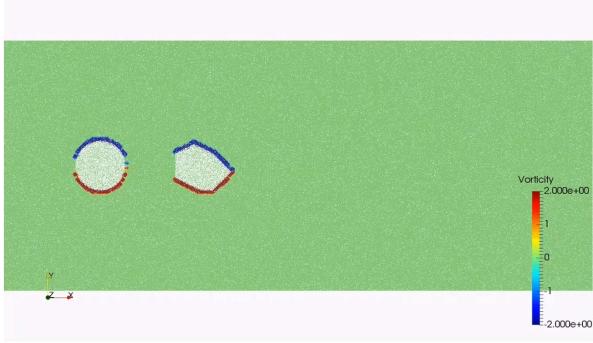

CIMNE MARINE: NICE-SHIP PROJECT SCENARIO 2 (PRELIMINARY TESTS)

Patrol ship in ice covered waters (brash ice)


Patrol ship

Length: 75.5 m / 79.8 m

Draft: 4.0 m

Beam: 12.6 m / 13.2 mDisplacement: 1813 t

Velocity: 8kn

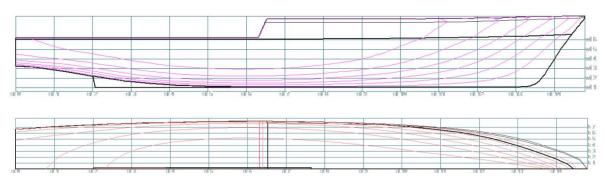


Ice covered waters

- Brash ice channel of 25 m wide
- Ice blocks of average size
 0.5 m
- 300 x 25 ice blocks

CIMNE MARINE: NICE-SHIP PROJECT SCENARIO 2 (PRELIMINARY TESTS)

Patrol ship in ice covered waters (brash ice)

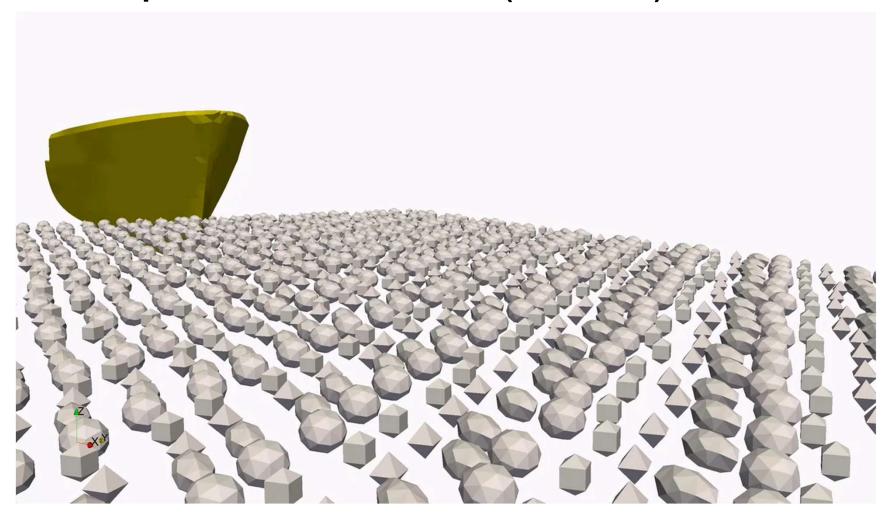




CIMNE MARINE ON-GOING PROJECTS STM VALIDATION






STM past, present and future

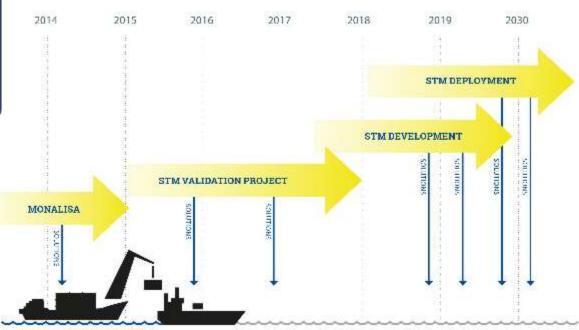

- STM validation project is the second step in a long-term project aimed at developing and deployment of a Sea Traffic Management system connects and updates the maritime world in real time.
- STM-services allow personnel on-board and on shore to make decisions based on real-time information. These services enable more just-in-time arrivals, right steaming, reduced administrative burden and decreased risk related to human factors.
- Example of services are route optimization services, ship to ship route exchange, enhanced monitoring or port call synchronization.



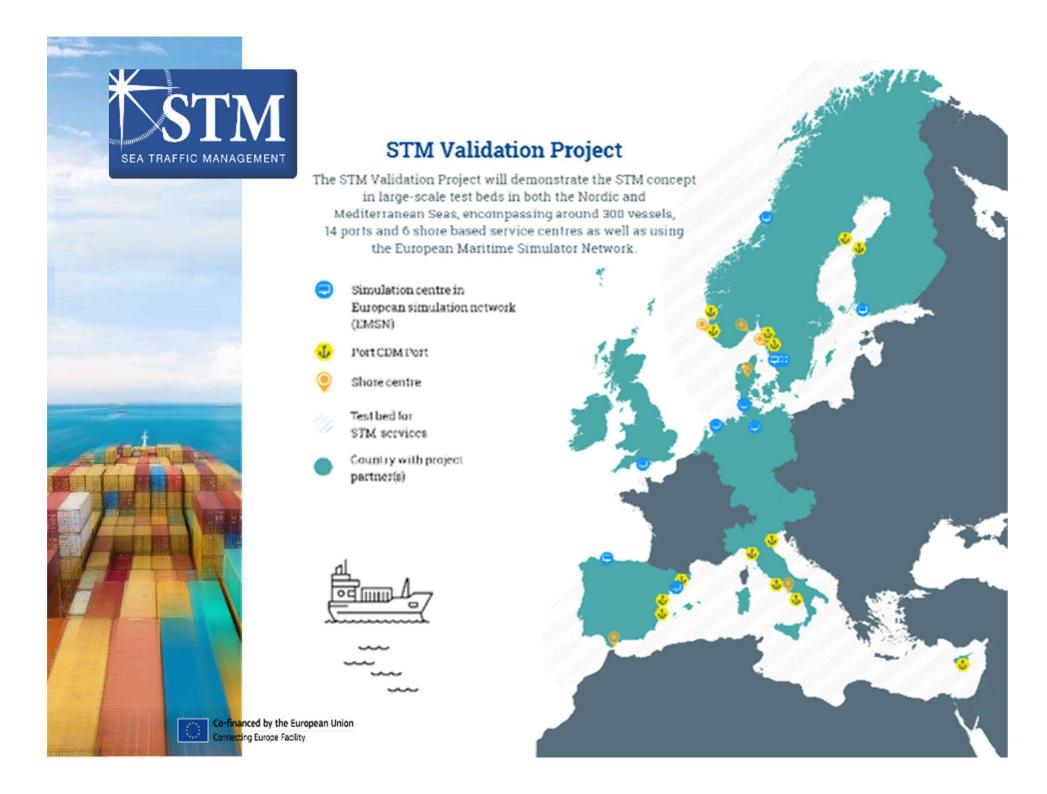





STM Validation Project

























Co-financed by the European Union Connecting Europe Facility



Port Collaborative Decision Making (PortCDM)

CIMNE has developed different analysis solutions for the PortCDM service. Tasks:

- To develop a solution for analysis of the data collected in PortCDM systems in order to validate the concept.
- The PortCDM concept has been translated into key performance indicator (KPIs) to enable PortCDM to be measured.
- The quantitative data collected on the systems currently deployed at ports has been used to calculate the KPIs.






onnecting Europe Facility

Route Optimization Service (ROS)


CIMNE has developed the ROS. It evaluates the best route considering: weather forecast/surface currents (speed reduction and IMO safety guidelines), fuel consumption, traffic congestion (statistical prediction), no-go areas (protected, draft restrictions, ...), conflicts with other ships routes etc.

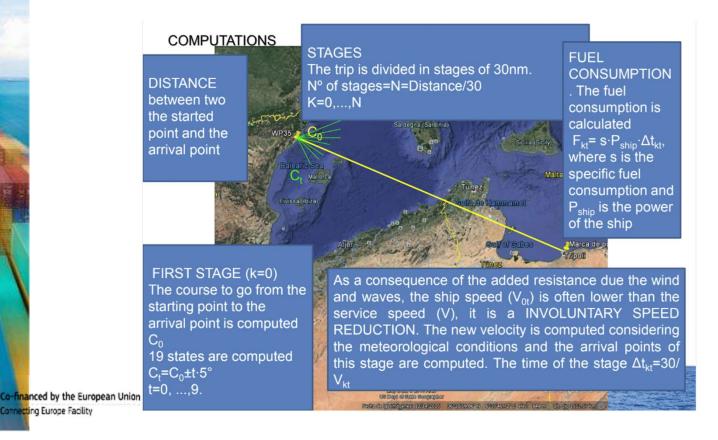



Sea System Wide Information Management (SeaSWIM)

- SeaSWIM is a set of open industry standards and best practices, providing an environment where different services can interoperate over organizational boundaries.
- CIMNE has worked in the implementation of the SeaSWIM Connector (SSC); an interface to reach STM and its connected actors and services.
- SSC take in account the communication flow between the core services of the SeaSWIM (identity registry and identity provider, service registry) and the rest of application services deployed in the infrastructure.
- SSC functionalities help the use of safe communication channels and authentication standards implementing the general requirements of the STM infrastructure.

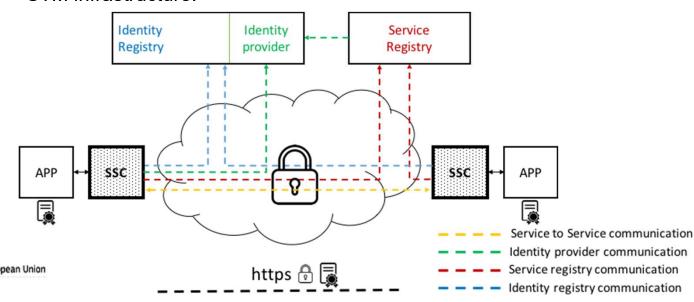



CIMNE MARINE ON-GOING PROJECTS FIBRESHIP









The main objective of the FIBRESHIP project (2017-2020) is to enable the building of the complete hull and superstructure of large-length seagoing and inland ships in FRP materials. In order to achieve this objective, the project will audit innovative FRP materials, elaborate new design and production guidelines, generate efficient inspection methodologies and develop new analysis tools.





30%

Fuel Reduction (10-15%)

Lower Greenhouse gas emissions

Better Stability/Safety

Increase cargo capacity (12%)

Underwater Noise Reduction

Reduced maintenance & life cycle costs (30%)

Immune to corrosion

Continuous Structural Health Monitoring (safety)

Aesthetic improvements

Recycling rate (up to 75%)







Project development will focus in three vessel categories that have been targeted as the most promising for the final project market orientation

CATEGORY I Light Commercial Vessels



Representative Container Vessel

COMPASS

- RoRo vessel
- Car Carrier
- Multi-purpose
- Freezer Vessel
- •I NG
- Wood Transportation

CATEGORY II Passengers transportation & Leisure



Representative **ROPAX**

- Ferries
- Passenger vessel
- Megayacht
- •.....


CATEGORY III Special Services



Representative Fishing Research Vessel

- ·Fishing vessel
- Seismic Vessel
- Supply vessel
- Rescue vessel


RINA






Tri.









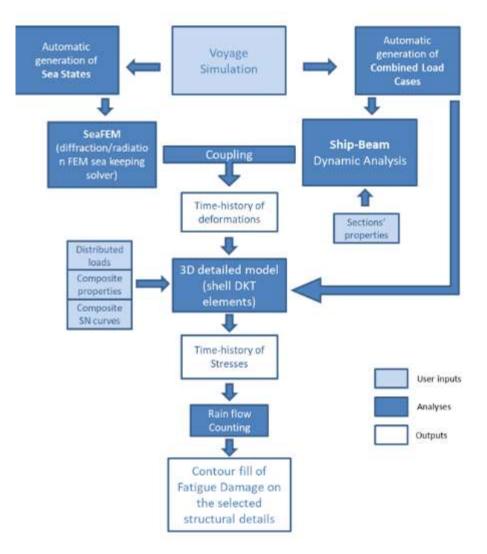



Development of a coupled Seakeeping-FEA analysis tool (structural health monitoring)


- Hull girder model: Simple 3D dynamic beam coupled with FEM seakeeping solver. It allows to analyse quickly long time series of the coupled problem.
- 3D detailed model: Complete 3D FEM model (fatigue) uses the information obtained from the hull girder model to generate boundary conditions for the local detailed analysis of the ship structure. Fatigue model evaluates damage by obtaining the quasi-static stiffness at discrete cycle intervals.
- IFEM model: Structural Health monitoring + Topology-based optimization tool.





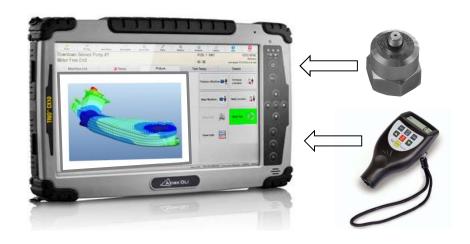

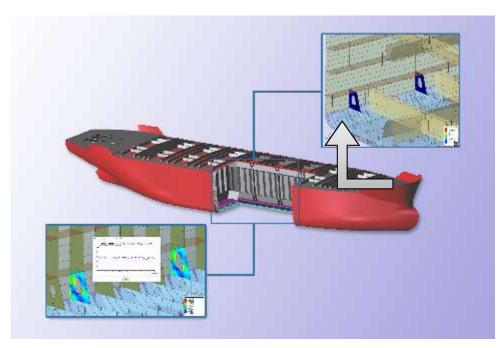


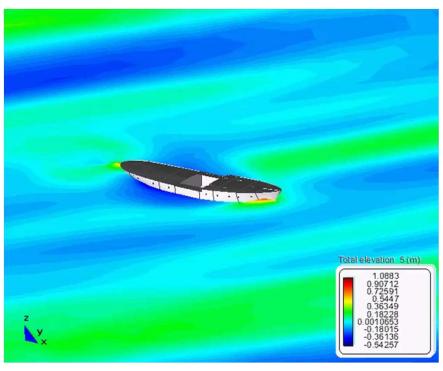

IFEM model: Structural Health monitoring + Topology-based optimization tool: Find the damage patern that macthes the vibration modes (local and global) monitored in different selected areas of the ship.





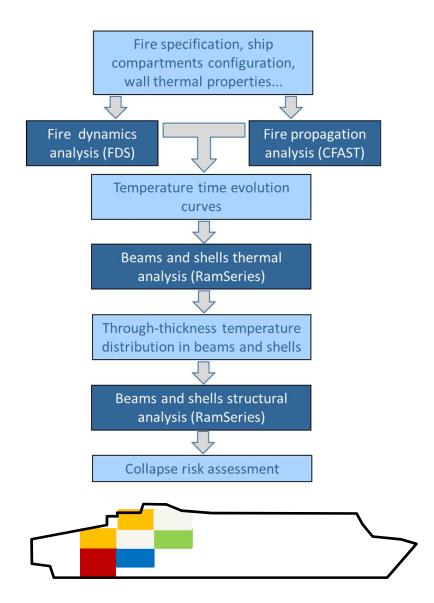


Development of thermo-mechanical behaviour analysis and collapse assessment tools for laminated composite structures

Fire dynamics analysis. Local analysis of a fire scenario will be modelled using a CFD model thus providing detailed information on fire development and local structure degradation (coupling with FEM model + pyrolysis model)

Fire propagation analysis. Fire propagation scenarios (involving a number of compartments) will be modelled with a zone fire model to simulate the fire propagation and evaluate the global collapse of the structure (coupling with FEM model + pyrolysis model)






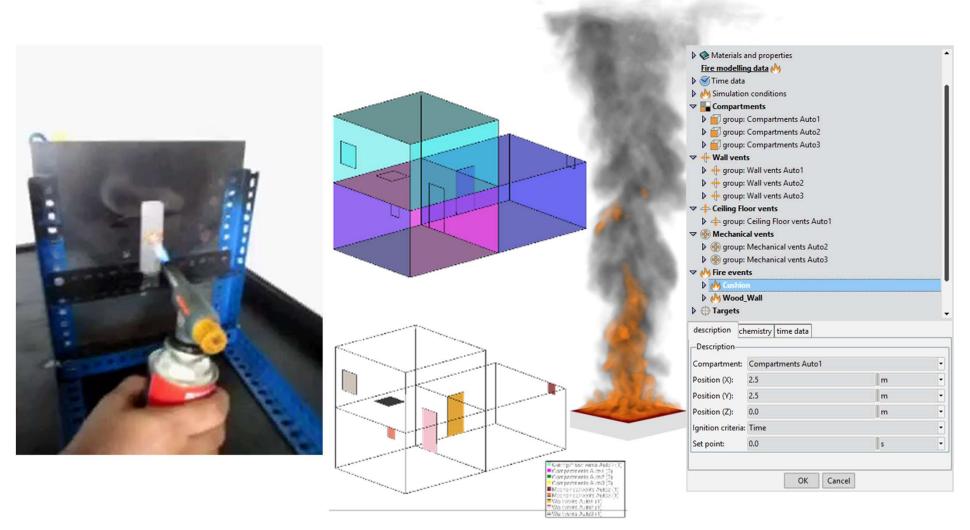

Left: preliminary test on intumescent coatings. **Right**: development of the fire dynamics simulation and collapse analysis tool





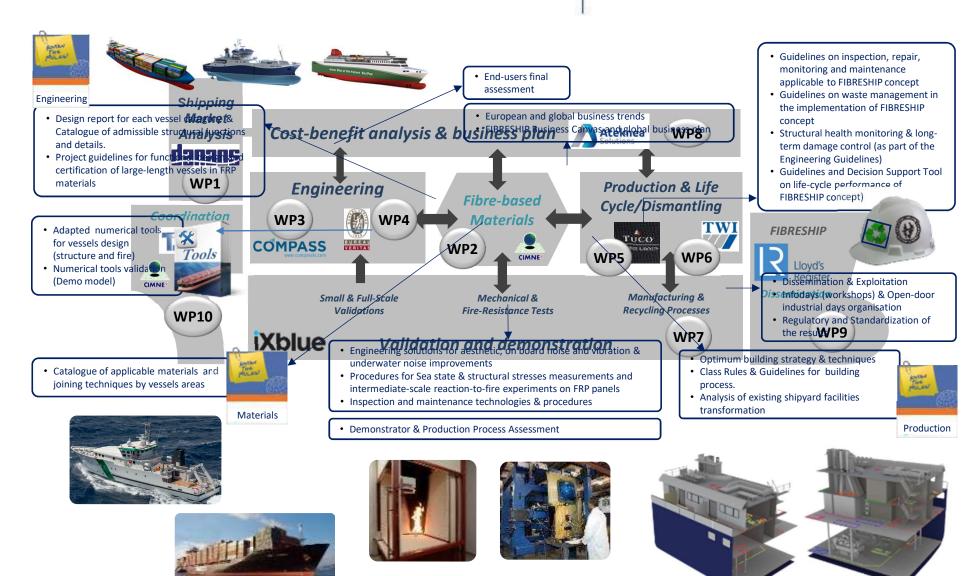

THIS PRESENTATION IS AVAILABLE AT



https://www.scipedia.com/public/García-Espinosa_2017e



THANK YOU
FOR YOUR ATTENTION