

Mapping inequality in accessibility: a global assessment of travel time to cities in 2015

*Weiss, D.J.¹, Nelson, A.², Gibson, H.S.¹, Temperley, W.³, Peedell, S.³, Lieber, A.⁴, Hancher, M.⁴, Poyart, E.⁴, Belchior, S.⁵, Fullman, N.⁶, Mappin, B.⁷, Dalrymple, U.¹, Rozier, J.¹, Lucas, T.C.D.¹, Howes, R.E.¹, Tusting, L.S.¹, Kang, S.Y.¹, Cameron, E.¹, Bisanzio, D.¹, Battle, K.E.¹, Bhatt, S.⁸, Gething, P.W.¹

* *corresponding author*

¹ *Malaria Atlas Project, Big Data Institute, Nuffield Department of Medicine, University of Oxford, Roosevelt Drive, Oxford, OX3 7FY, UK*

² *Department of Natural Resources. ITC - Faculty of Geo-Information Science and Earth Observation of the University of Twente, PO Box 217, AE Enschede 7500, The Netherlands*

³ *European Commission, Joint Research Centre, Unit D.6 Knowledge for Sustainable Development and Food Security, Via Fermi 2749, Ispra 21027, VA, Italy*

⁴ *Google Inc., 1600 Amphitheatre Parkway, Mountain View, CA, 94043, USA*

⁵ *Vizzuality, Office D Dales Brewery, Gwydir Street, Cambridge CB1 2LJ, UK*

⁶ *Institute for Health Metrics and Evaluation, University of Washington, 2301 5th Ave., Suite 600, Seattle, WA 98121, USA*

⁷ *Centre for Biodiversity and Conservation Science, School of Biological Sciences, University of Queensland, St. Lucia, Qld 4072, Australia*

⁸ *Department of Infectious Disease Epidemiology, Imperial College London, London W2 1PG, UK*

The economic and manmade resources that sustain human wellbeing are not distributed evenly across the world, but are instead heavily concentrated in cities. Poor access to opportunities and services offered by urban centers (a function of distance, transport infrastructure, and the spatial distribution of cities) is a major barrier to improved livelihoods and overall development. Advancing accessibility worldwide underpins the equity agenda of “leaving no one behind” established by the United Nations’ Sustainable Development Goals (SDGs)¹, bringing a renewed international focus on accurately measuring accessibility and using this metric to inform development policy design and implementation. The only previous attempt to reliably map accessibility worldwide occurred nearly a decade ago², which predated the baseline for the SDGs and excluded the recent expansion in infrastructure networks, particularly within lower-resource settings. In parallel, new data sources provided by Open Street Map and Google now capture transportation networks with unprecedented detail and precision. By integrating ten global-scale surfaces that characterize factors affecting human movement rates and

13,840 high-density urban centers within an established geospatial-modeling framework we develop and validate a map that quantifies travel time to cities for 2015 at a spatial resolution of approximately 1x1 kilometer. Our results highlight disparities in accessibility relative to wealth as 50.9% of individuals living in low-income settings (concentrated in sub-Saharan Africa) reside within an hour of a city compared to 90.7% of individuals in high-income settings. By further triangulating this map against socioeconomic datasets, we demonstrate how access to urban centers stratifies the economic, educational, and health status of humanity.

An axiom for the twenty-first century is that the world is becoming increasingly connected. While this is certainly true for electronic forms of communication, physical links between locations, and thus the time it takes to move between them, remain constrained by available infrastructure as well as physical and political impediments to travel. Eliminating disparities in accessibility is central to the United Nations' Sustainable Development Goals (SDGs)¹, which explicitly call for improved or universal access to key services, including education programs, health services, and banking and financial institutions. Cities are the epicenters of such activities³⁻⁶, and how easily people can reach urban areas directly affects whether crucial services can be obtained.

What constitutes "accessibility" is widely debated and precise definitions of this metric can be arbitrary. In this study, we operationalize accessibility in terms of travel time required to reach the nearest urban center, defined as a contiguous area with 1,500 or more inhabitants per square kilometer or a majority of built-up land cover coincident with a population center of at least 50,000 inhabitants⁷. We define accessibility using

travel time as it is readily interpretable, can be feasibly generated at global scales, and is known to be a predictive metric in research domains including conservation⁸, food security⁶, trade,⁹ and population health^{10,11}. Furthermore, travel time better captures the opportunity cost of travel than Euclidean or network distance, and ultimately reflects the information humans use to inform transport decisions. The outcome of this research is a map that provides an actionable dataset supportive of many research and policy needs. To demonstrate the map's utility for global and local decision-making, we provide exploratory analyses examining relationships between accessibility and national-level income as well as household-cluster-level economic prosperity, educational attainment, and healthcare utilization.

Our study responds to a heightened need for fine-grained quantification of accessibility worldwide. The only previous assessment of global accessibility² was for the year 2000 and tremendous advances in data quality and availability have since occurred. By anchoring our global accessibility map to 2015 (i.e., the year of formal SDG adoption), we provide a baseline from which to track infrastructural improvements and urban expansion throughout the SDGs' duration on the basis that accessibility is a precondition for many development targets. While our results are useful in a variety of contexts, their potential impact centers around a more unifying aim: catalyzing action to narrow gaps in opportunity by improving accessibility for remote populations and/or reducing disparities between populations with differing degrees of connectivity to cities.

To quantify travel time required to reach the nearest city via surface transport (air travel is not considered) we applied a similar methodology to that used in producing the foremost existing global accessibility map² to updated and expanded input datasets for

2015. These inputs consisted of gridded surfaces that quantify the geographic positions and salient attributes of roads, railways, rivers, water bodies, land cover types, topographic conditions (slope angle and elevation), and national borders. Roads are the primary driver of accessibility globally and also represent the most substantial advance from the previous accessibility mapping effort. Our roads dataset was created by merging Open Street Map (OSM) data with a distance-to-roads product derived from the Google roads database; these datasets were extracted in November 2016 and March 2016, respectively. The resulting roads dataset represents the first-ever, global-scale synthesis of these two data sources, and the unparalleled data quality of this dataset led to a 4.8-fold increase in road pixels relative to the dataset used for the previous accessibility map². While roads built since 2000 contributed to this heightened data volume, the primary driver of this increase was the inclusion of minor roads (e.g., unpaved rural roads and exurban residential streets). The OSM database also provided the information necessary for assigning country- and road-type-specific speed data to road pixels. The Google roads data provided information critical for maintaining connectivity in areas where OSM coverage was sparse and/or fragmented due to its piecemeal data collection approach. All input datasets were combined to create a global “friction surface” at a resolution of approximately 1x1 kilometer at the equator (i.e., 30 arc-second resolution), effectively enumerating the generalized rates at which humans can move through each pixel of the world’s surface.

The geographic dataset representing cities was the Global Human Settlement grid of high-density land cover (GHS-HDC)⁷. This dataset consisted of 13,840 urban areas, an increase of 62.6% from the city points dataset used for the circa 2000 map². We applied a

least-cost-path algorithm¹² to the friction surface and the center points of pixels defined as urban areas within the GHS-HDC, which ultimately produced a global accessibility map enumerating travel time to the closest city for each pixel between 60° south and 85° north latitude (figure 1). We generated the friction surface and most of the accessibility map using the Google Earth Engine platform¹³, and by freely distributing our data and code our design supports the construction of bespoke accessibility maps targeted at specific policy or programmatic priorities and interests (e.g., travel time to healthcare facilities, schools, employment centers, or markets). As with any global mapping effort, however, this study is subject to limitations that we detail within the methods section.

Our accessibility map illustrates broad patterns of accessibility globally, capturing both the asymmetric distribution of cities and vast inequalities in infrastructural development. Highly accessible areas include those with abundant transportation infrastructure and/or many spatially disaggregated cities, suggesting that accessibility to cities can be increased via improvements in infrastructure as well as polycentric urban development. Further exploration of accessibility relative to gridded population datasets¹⁴⁻¹⁷ shows that 80.7% of people (5.88 billion individuals) reside within 60 minutes of cities, but accessibility is not equally distributed across the development spectrum. This disparity is evident when comparing accessibility for populations subdivided by World Bank classifications for income group and geographic region¹⁸ (figure 2), as 90.7% of people in high-income countries (concentrated in Europe and North America) live within one hour of a city compared to 50.9% of people in low-income countries (concentrated in sub-Saharan Africa). The relationship between national wealth and population accessibility is more ambiguous for upper- and lower-middle

income countries due to the high population and large number of spatially diffuse urban centers found in northern India. This finding exemplifies differences in accessibility that can readily be discerned from our map because it was produced using a globally consistent (and thus comparable) methodology. While global summaries are informative, the accessibility map also supports fine-grained summarization and analysis (extended figures 1-3, supplementary information). Our map also provides a means for more nuanced characterizations of accessibility within rural populations than those based upon commonly-used datasets such as binary classifications of urban vs. rural land cover¹⁹ or national estimates of urban population percentages²⁰ (extended figure 4). As such our map can be used to highlight major development gaps between predominantly urban and rural populations and/or provide a means of enumerating accessibility within rural populations along a continuum.

To analyze subnational relationships between accessibility and socioeconomic, educational, and health measures we utilized data collected by the Demographic and Health Surveys (DHS) program between 2000 and 2015. Our DHS database consisted of 66,768 household clusters, from 122 unique surveys spanning 52 countries, which were aggregated from nearly 1.77 million surveyed households. While DHS surveys primarily cover low- to middle-income countries (LMICs), and thus do not fully represent all socioeconomic contexts, our results illustrate reciprocal relationships between accessibility and key metrics of human wellbeing in many geographic, political, and economic settings. We found a clear association between higher household wealth and greater accessibility to population centers (figure 3a). Similar patterns emerged for measures of educational attainment (figure 3b) and treatment of fever among children

under five (figure 3c). While exceptions occurred (e.g., there were wealthy household clusters far from cities and vice-versa), and the selected metrics were strongly collinear, the association between accessibility to cities and indicators of human wellbeing in LMICs was unequivocal.

The 2015 global accessibility map provides an unprecedented level of detail while also characterizing spatial heterogeneity in accessibility at a range of spatial scales. Our map is likely to serve as a critical input for future geospatial modeling endeavors, including those that highlight positive aspects of low accessibility, such as the protective effect remoteness provides to wilderness areas^{21,22}, or reinforce the need for strategic road building that avoids unnecessary environmental damage^{23,24}. We illustrate such utility through a cursory case study relating accessibility with forest loss between 2000 and 2015 (extended figures 1-3) based upon the Global Forest Change dataset²⁵. This exemplar shows the potential of our map for contributing to natural science research, conservation efforts, and formulation of environmental policy.

While results from our exploratory analyses do not causally link accessibility with metrics of development (e.g., they cannot be used to determine whether places are more affluent due to greater accessibility or vice-versa), they nevertheless illustrate the relationship between travel time and socioeconomic outcomes encompassed within the SDGs. Many view reducing inequalities in accessibility to the services, institutions, and economic opportunities offered by cities as a vital pathway to sustainable development and improved livelihoods for all populations. Our analysis supports this perspective and future studies should track and evaluate the multifaceted effects that result from improved accessibility.

Data availability statement

The accessibility map is available for visualization and/or download at <http://roadlessforest.eu/map.html> and http://www.map.ox.ac.uk/accessibility_to_cities/.

Acknowledgements

Juan Carlos Alonso, Gerardo Pacheco, Edward Brett, Alicia Arenzana, and Benjamin A. Laken developed <http://roadlessforest.eu/map.html>, and Daniel Pfeffer and Kate Twohig formatted figures and references. Funding was provided by a Google Earth Engine Research Award entitled “Developing and validating an online accessibility mapping tool powered by Google Earth Engine” and the "Roadless Forest" project - "Making efficient use of EU climate finance: Using roads as an early performance indicator for REDD+ projects" (European Parliament / EC Directorate General for Climate Action).

Author contributions

Research concept and design: D.J.W., A.N., S.P., and P.W.G. Drafted the manuscript: D.J.W. Prepared and/or supplied data: D.J.W., A.N., H.G., W.T., A.L., B.M., and U.D. Conducted the analyses: D.J.W. Implemented algorithms: M.H and E.P. Project coordination: D.J.W. and A.L. Supported the analyses and interpretations: A.N., H.G., N.F., T.C.D.L., R.E.H., K.E.B., and S.Bh. Produced visualizations: J.R. and S.Be. All authors discussed the results and revised the final manuscript.

Author Information

Reprints and permissions information is available at www.nature.com/reprints. The authors declare that there are no competing financial interests. Correspondence and requests for materials should be addressed to D.J.W. (daniel.weiss@bdi.ox.ac.uk).

References

- 1 United Nations. Transforming our world: the 2030 Agenda for Sustainable Development. *United Nations Department of Economic and Social Affairs*: New York. (2015).
- 2 Nelson, A. Travel time to major cities: A global map of accessibility. *Global Environment Monitoring Unit – Joint Research Centre of the European Commission*: Ispra Italy. <http://forobs.jrc.ec.europa.eu/products/gam/> (2008).
- 3 Young, A. Inequality, the urban-rural gap and migration. *Q. J. Econ.* **128**, 1727-1785 (2013).
- 4 Fotso, J.-C. Urban–rural differentials in child malnutrition: trends and socioeconomic correlates in sub-Saharan Africa. *Health Place* **13**, 205-223 (2007).
- 5 Bloom, D. E., Canning, D. & Fink, G. Urbanization and the Wealth of Nations. *Science* **319**, 772-775(2008).
- 6 Frelat, R. et al. Drivers of household food availability in sub-Saharan Africa based on big data from small farms. *Proc. Natl. Acad. Sci.* **113**, 458-463(2016).
- 7 Pesaresi, M. & Freire, S. GHS Settlement grid following the REGIO model 2014 in application to GHSL Landsat and CIESIN GPW v4-multitemporal (1975-1990-2000-2015) data sets. *European Commission, Joint Research Centre*. http://data.europa.eu/89h/jrc-ghsl-ghs_smod_pop_globe_r2016a (2016).
- 8 Nelson, A. & Chomitz, K. M. Effectiveness of strict vs. multiple use protected areas in reducing tropical forest fires: a global analysis using matching methods. *PLoS ONE* **6**, e22722 (2011).
- 9 Schmitz, C. et al. Trading more food: Implications for land use, greenhouse gas emissions, and the food system. *Glob. Environ. Change* **22**, 189-209(2012).
- 10 Gilbert, M. et al. Predicting the risk of avian influenza A H7N9 infection in live-poultry markets across Asia. *Nat. Commun.* **5** (2014).
- 11 Bhatt, S. et al. The effect of malaria control on Plasmodium falciparum in Africa between 2000 and 2015. *Nature* **526**, 207-211 (2015).
- 12 Dijkstra, E. W. A note on two problems in connexion with graphs. *Numerische mathematik* **1**, 269-271 (1959).

- 13 Gorelick, N. *et al.* Google Earth Engine: Planetary-scale geospatial analysis for everyone. *Remote Sens. Environ.*, doi:<http://dx.doi.org/10.1016/j.rse.2017.06.031> (2017).
- 14 Gaughan, A. E., Stevens, F. R., Linard, C., Jia, P. & Tatem, A. J. High resolution population distribution maps for Southeast Asia in 2010 and 2015. *PLoS ONE* **8**, e55882 (2013).
- 15 Linard, C., Gilbert, M., Snow, R. W., Noor, A. M. & Tatem, A. J. Population distribution, settlement patterns and accessibility across Africa in 2010. *PLoS ONE* **7**, e31743 (2012).
- 16 Sorichetta, A. *et al.* High-resolution gridded population datasets for Latin America and the Caribbean in 2010, 2015, and 2020. *Scientific Data* **2**, 150045 (2015).
- 17 Center for International Earth Science Information Network (CIESIN) & Centro Internacional de Agricultura Tropical (CIAT). Gridded Population of the World, Version 3 (GPWv3): Population Density Grids. NASA Socioeconomic Data and Applications Center (SEDAC) <http://dx.doi.org/10.7927/H4ST7MRB> (2005).
- 18 World Bank. GDP (current US\$). <http://data.worldbank.org/indicator/NY.GDP.MKTP.CD> (2016).
- 19 Center for International Earth Science Information Network - CIESIN - Columbia University, CUNY Institute for Demographic Research - CIDR, International Food Policy Research Institute - IFPRI, The World Bank & Centro Internacional de Agricultura Tropical - CIAT. Global rural-urban mapping project, version 1 (GRUMPv1): settlement points revision 01. NASA Socioeconomic Data and Applications Center (SEDAC) <https://doi.org/10.7927/H4BC3WG1> (2016).
- 20 United Nations. World urbanization prospects: the 2014 revision, highlights. *United Nations Department of Economic and Social Affairs: New York.* (2014).
- 21 Allan, J. R. *et al.* Recent increases in human pressure and forest loss threaten many Natural World Heritage Sites. *Biol. Conserv.* **206**, 47-55 (2017).
- 22 Ibisch, P. L. *et al.* A global map of roadless areas and their conservation status. *Science* **354**, 1423-1427 (2016).
- 23 Laurance, W. F. *et al.* A global strategy for road building. *Nature* **513**, 229-232 (2014).
- 24 Laurance, W. F. & Arrea, I. B. Roads to riches or ruin? *Science* **358**, 442-444, doi:10.1126/science.aao0312 (2017).
- 25 Hansen, M. C. *et al.* High-resolution global maps of 21st-century forest cover change. *Science* **342**, 850-853 (2013). Data available on-line from: <http://earthenginepartners.appspot.com/science-2013-global-forest>.

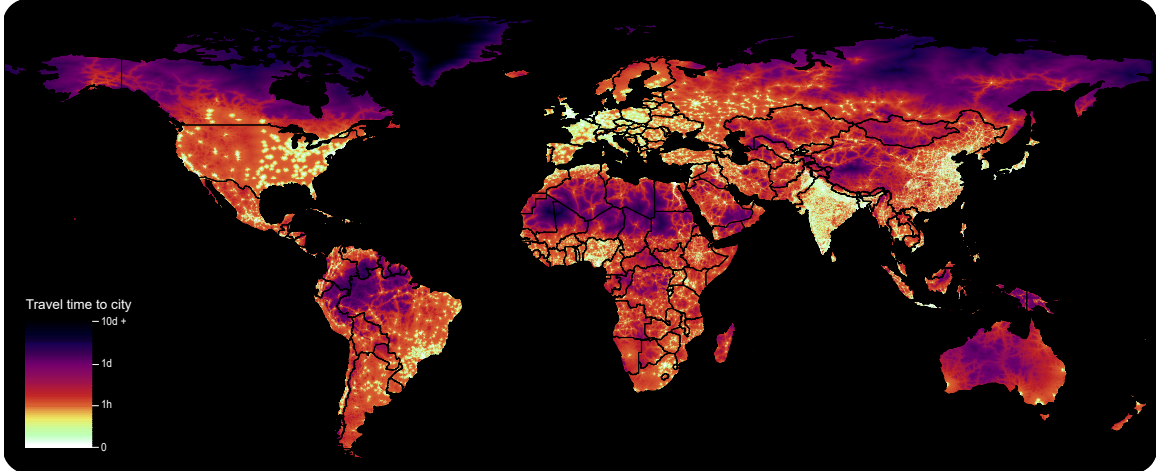


Figure 1: Global map of travel time to cities for 2015. The accessibility map has a spatial resolution of approximately 1x1 kilometer, spans 60° south to 85° north latitude, and enumerates travel time to the city with the shortest associated journey.

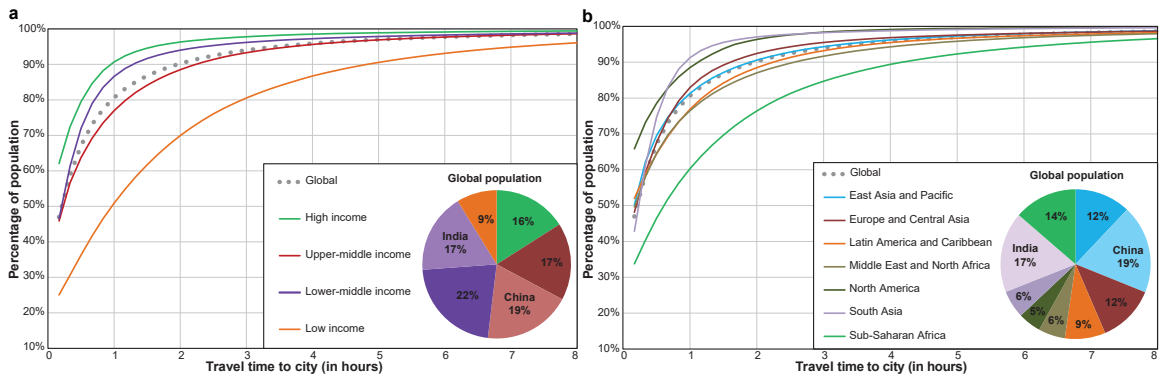


Figure 2: Global disparities in accessibility. Travel time of global populations grouped by World Bank (a) income categories and (b) regions. Graphed lines depict population aggregated in ten-minute increments and then divided by the total population of each group. The inset charts show the percentage of the global population within each group.

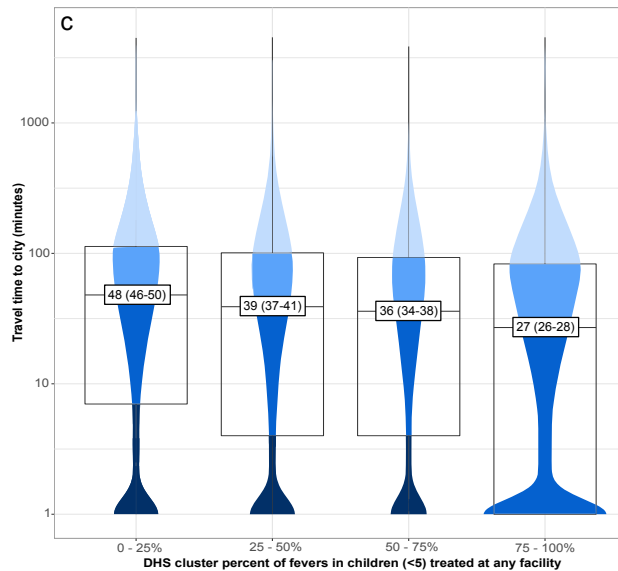
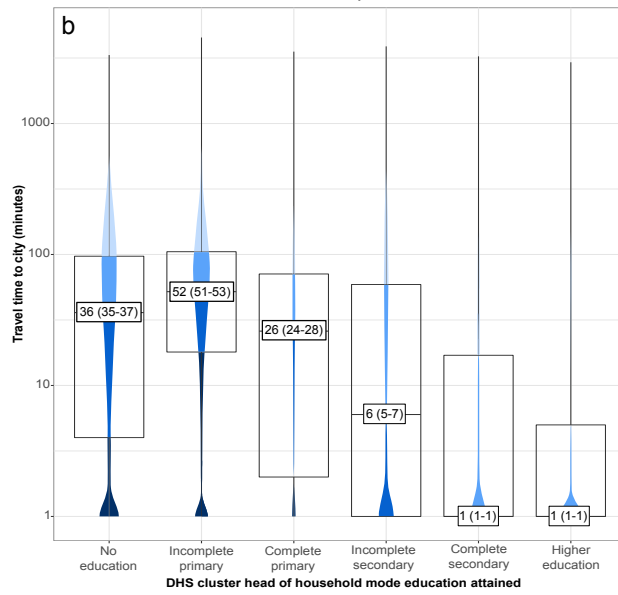
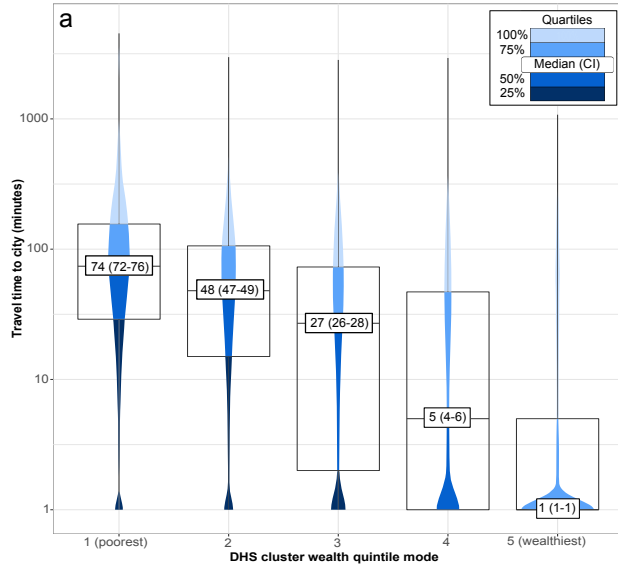


Figure 3: Relating accessibility with human wellbeing. Log-scale violin plots show travel times (plus one minute) for household clusters for metrics of (a) wealth (n=47,761), (b) educational attainment (n=59,686), and (c) healthcare utilization (n=39,014). The overlaid boxplot hinges and color-coding indicate the data quartiles, whiskers extend to the range of the data, violin shapes depict the data distributions, and median and confidence intervals (CI) are displayed at the boxplot centers.

Methods

To model the time required for individuals to reach their most accessible city we first quantified the speed at which humans move through the landscape. For this we built upon previous work that integrated a number of infrastructural, political, and environmental datasets within a GIS-based model². The principle underlying this work was that all areas on Earth, represented here as pixels within a 2-D grid, had a cost (i.e., time) associated with moving through them that we quantified as a movement speed within a cost or “friction” surface. We then applied a least-cost-path algorithm¹² to the friction surface in relation to a set of high-density urban points. The algorithm calculated pixel-level travel times for the optimal path between each pixel and its nearest (i.e., shortest journey time) city. From this work we ultimately produced two products: (a) an accessibility map showing travel time to urban centers, as cities are proxies for access to many goods and services that affect human wellbeing; and (b) a friction surface that underpins the accessibility map and enables the creation of custom accessibility maps from other point datasets of interest.

Accessibility mapping methodology

The datasets we used to construct the friction surface characterize the spatial locations and properties of roads, railroads, rivers, bodies of water, topographic conditions (elevation and slope angle), land cover, and national borders. The datasets were converted into aligning grids with a 30 arc-second resolution, with the pixel values representing speeds of movement. The layers were then combined following the approach defined within an earlier accessibility mapping project² such that the fastest mode of transport took precedence. The lone exception to this logic was national borders, for which a crossing-time penalty was superimposed with priority over all other layers. The borders dataset was created from a UN global administrative units layer (GAUL) such that each border segment had a unique numerical identifier. This approach supports setting border-specific crossing times via a lookup table, however usable data do not presently exist for universally defining this parameter. As such, we used a static, one-hour crossing-time penalty for all borders other than those within the Schengen and the UK-Ireland common security zones. Note that for readability the travel speeds for other input layers are provided in km/h, but the actual units within the friction surface raster are minutes required to travel one meter.

With the exception of the rivers input, each of the datasets we used in this project and the methods we used to pre-process the data have improved considerably relative to those of the circa 2000 accessibility map that was produced in 2008². Two roads datasets were combined for this research. The first road input layer consisted of vector data extracted from the Open Street Map (OSM) database, which was created by a user community dedicated to producing open-source, geocoded datasets of infrastructural

resources. The OSM dataset was converted into a grid matching the geographic resolution and extent of the eventual friction surface. In cases where vector features of more than one road type were present within a single pixel, the road type with the highest associated travel speed took precedence. This rasterization procedure resulted in an integer grid where pixel values corresponded to a single road type that was subsequently linked to a speed via a lookup table, which we also derived from the OSM database. The lookup table contains the country-specific mean travel speeds associated with each available road type, as derived from attributes linked to individual roads by the OSM user community. We utilized this lookup table approach rather than direct assignment of road speeds because such speed-of-travel information was infrequently assigned to road vectors within the OSM database. This limitation also necessitated the creation of a global default lookup table, which we created using mean values for each road type from all countries. We applied values from the default table in cases where a country had no speed limit records for one or more road types found within it.

The second, equally important source of road data was the Google distance to roads surface. This Google dataset was also global in extent, though China and the Korean Peninsula were omitted due to data distribution limitations. To combine the two roads datasets the Google distance to roads raster was first restricted to include only pixels with values of 500 meters or less, thereby approximating the 1x1 km rasterization of the OSM road vectors. Unlike the OSM data the resulting Google roads raster lacked road type information. As such the OSM road type designation took precedence if both layers contained road information for a single pixel. Where only Google road data were available the pixels were given the default integer value corresponding to the generic

“road” class from OSM. When creating the friction surface, all pixels from the combined roads raster were assigned the road travel speeds from the OSM-based lookup tables. For the lookup procedure we also utilized a grid of administrative units to determine each pixel’s country association.

The railroad input layer was also created from the rasterized OSM surface. Unlike the OSM roads data, however, the railroads were not differentiated by type within OSM and thus consisted of a single class with a uniform movement speed. The railroad speed used in this project was 24.3 km/h, which was the mean value assigned to railroad vectors extracted from the OSM database.

Three datasets were used to account for travel time by water within the friction surface. River travel time was added via a global set of navigable rivers rasterized from the CIA World Data Bank II vector rivers dataset²⁶, which was the only holdover input variable from the circa 2000 accessibility mapping endeavor². Other options available for characterizing major rivers were explored, most notably the HydroSHEDS²⁷ river network and Vector Map Level 0 (VMAP0)²⁸ datasets, but we ultimately concluded that reusing the original data was warranted as neither of the alternatives was discernibly superior given their associated limitations and lack of detail on which rivers were navigable. For inland water bodies we utilized a newly created global surface water occurrence dataset²⁹, which we first aggregated from its native 30-meter resolution to create a layer that enumerated the fraction of each pixel’s area that was covered by water at the resolution of the friction surface. In this procedure, all 30-meter pixels within the resulting fractional surface water dataset that were classified as water at least 80% of the time were considered permanent water, as 80% was the lowest occurrence value we

observed within ocean pixels when screening the data. The resulting fractional surface water layer was then converted into a binary surface whereby only pixels that were completely covered by permanent water were codified as a body of water amenable to be crossed via boat. The final dataset relating to water was a land-sea mask, which was used to identify ocean pixels. The movement speeds assigned to the water types within the friction surface were 10 km/h for rivers and lakes and 19 km/h for oceans. The value for rivers was based on inland travel speeds reported in the UK, Ireland, and Australia³⁰. The ocean value was the average speed gleaned from over 142 million observations of oceangoing passenger ships collected from the Automatic Identification System (AIS) and the Voluntary Observing Ship (VOS) program³⁰.

For all pixels not covered by any of the water, road, or railroad datasets, we derived a baseline speed of movement overland (i.e., on-foot) using the MODIS MCD12Q1 land cover product³¹ whereby we assigned each land cover type a travel speed from a lookup table. The lookup table was created by summarizing results from an online survey designed to crowd-source estimates of how long it takes individuals to traverse each cover type. The survey consisted of representative photos and global maps of each land cover type. Respondents were asked to estimate the amount of time it would take them to travel one kilometer (or one mile) on foot through each land cover type. The survey received 407 complete responses and, after standardizing the distance units, the median values for the fifteen land cover classes within the survey (in units of km/h) were as follows: Evergreen Needleleaf Forest = 3.24, Evergreen Broadleaf Forest = 1.62, Deciduous Needleleaf Forest = 3.24, Deciduous Broadleaf Forest = 4.00, Mixed Forest = 3.24, Closed Shrublands = 3.00, Open Shrublands = 4.20, Woody Savannas = 4.86,

Savannas = 4.86, Grasslands = 4.86, Permanent Wetlands = 2.00, Croplands = 2.50, Cropland/Natural Vegetation = 3.24, Snow and Ice = 1.62, and Barren or Sparsely Vegetated = 3.00. The two land cover classes we excluded from the survey were (a) urban and built-up, which was given a speed of 5 km/h, but this value is virtually never needed due to the higher speed (and thus precedence) of the roads datasets that dominate urban landscapes at 1x1 kilometer resolution, and (b) open water, which was given a speed of 1 km/h. The speed for the open water pixels was assigned using the rationale that if these pixels were not considered inland water within the water bodies layer (and would thus have received the inland water speed associated with boat travel) they were likely more akin to permanent wetland pixels that had a very high subpixel fraction of water to circumnavigate on foot. As such, all pixels that were classified as open water in the land cover layer but not as permanent water in the water bodies layer were given a speed half as fast as the crowd-sourced median speed for permanent wetlands of 2 km/h.

The land cover-dependent travel speeds were then adjusted to take into account the effect of topographic properties. Topographic datasets used in this analysis were produced from the Global Multi-resolution Terrain Elevation Dataset 2010 (GMTED2010), a derivative of the Shuttle Radar Topography Mission data produced by USGS³². The adjustment we applied to elevation accounts for decreasing atmospheric density (and thus available oxygen) with altitude, which closely parallels the drop in maximal oxygen consumption (i.e., VO₂ max, a measure of optimum heart and lung function) and thus decreased the predicted travel speed as a function of altitude³³. Equation 1, based on the standard atmosphere calculation, shows the adjustment factor we associated with elevation (in meters). We treated slope angle (in degrees) similarly, as

steep terrain slows humans' ability to traverse it on foot. For the slope adjustment we utilized Tobler's Hiking Function³⁴ as shown in Equations 2 and 3, with Tobler's speed capped at a maximum speed of five km/h and then divided by five to convert it into a fraction of maximum travel speed. The elevation and slope adjustment factors were subsequently multiplied by the land cover-dependent travel speeds, thus lowering the speed of travel on foot and increasing the time required to traverse each associated pixel within the friction surface.

$$\text{EQ1: Elevation adjustment factor} = 1.016e^{(-0.0001072 * \text{elevation})}$$

$$\text{EQ2: Tobler's walking speed} = 6e^{(-3.5[(\text{TAN}(0.01745 * \text{slope angle}) + 0.05)])}$$

$$\text{EQ3: Slope adjustment factor} = \text{Tobler's walking speed} / 5.0$$

The final input for the accessibility map was the dataset of urban land cover, which was created using a layer from the Global Human Settlement (GHS) project⁷. This dataset was produced using a combination of satellite imagery and census data to map the spatial distribution of urban areas across the globe. To be consistent with data used in past accessibility mapping research² we selected the "high-density centers" variant of the GHS dataset, which is defined as "contiguous cells with a density of at least 1,500 inhabitants per km² or a density of built-up greater than 50% and a minimum of 50k inhabitants". The dataset contained a total of 13,840 unique urban areas and, unlike the circa 2000 accessibility map in which cities were represented as single geographic points, cities extracted from the GHS consisted of a cluster of pixels, thus effectively representing urban areas as polygons. The switch from single-point to multiple-pixel representations of cities was operationalized by extracting each urban pixel's center

coordinates and then applying the least-cost-path algorithm to only points on edges of urban areas. Over 400,000 high-density urban points were processed in this manner, not including points from the urban interiors, which were ignored to reduce redundant processing and later masked to have travel times of zero in the resulting accessibility map.

The friction surface was created entirely within Google Earth Engine, which was also used to create the majority of the accessibility surface. In contrast to the process used to create the friction surface, deriving the accessibility map was very computationally intensive and required a more complex processing chain. Within Earth Engine accessibility surfaces were generated using the cumulativeCost function³⁵, a least-cost-path function that was an experimental tool implemented specifically for this project but is now freely available within Earth Engine. By harnessing the computational power of the Google cloud-computing system the cumulativeCost function shortened the production time of the global accessibility surface from several months (when relying on local computing resources alone) to approximately two weeks. Despite reducing the production time substantially, the cumulativeCost function was still an evolving tool that was not yet capable of producing the global accessibility map in a single run or reliably producing output for latitudes above 60° if the friction surface was in geographic coordinates (i.e., units of degrees latitude and longitude). As such, we created the global accessibility map by mosaicking a set of 31 tiles, 24 of which encapsulated the most computationally demanding areas and were generated within Earth Engine, and seven of which we created outside Earth Engine. The limitations of the least-cost-path function within Earth Engine at high latitudes were due to the nature of processing raster data

stored in geographic coordinates because distances at high latitudes span far more degrees of longitude (and thus more pixels) than comparable distances at low latitudes. In order to parallelize computations efficiently the Earth Engine cumulativeCost function required specification of a maximum search distance from the source points (i.e. high-density urban land cover pixel centers), which we set to 1500km for most of the globe but reduced to 1000 km in areas from 50° to 55° latitude due to the afore-mentioned processing limitations at high latitudes. For latitudes above 50° we calculated accessibility tiles using the gDistance package in R³⁶, thus ensuring an overlapping area of five-degrees latitude and providing data with which to compare the output maps from the differing sources (pixel values in these areas proved to be virtually identical). We also calculated accessibility times locally for very remote islands at lower latitudes that were beyond the 1500km search distance threshold from their closest cities. Lastly, the cumulativeCost function in Earth Engine could not account for wrapping at +/- 180° longitude, so we created an alternative version of the friction surface centered at this longitude and reprocessed approximately one fifth of the globe outside of Earth Engine to ensure that any pixels that had their closest cities on the opposite side of this “edge” were ascribed accurate travel times. We then mosaicked all of the tiles together by selecting the minimum travel times for all pixels that fell within overlapping portions of multiple tiles. The result of this mosaicking operation is the global accessibility map shown in Figure 1.

Model validation

The approach we adopted for validating the accessibility map was to compare the

travel times extracted derived using least-cost-path calculations based on the friction surface with corresponding estimates derived using the driving directions application within Google Maps (i.e., comparison to travel time estimates derived using a network distance algorithm). The data source we used for validation consisted of settlement points from the Global Rural-Urban Mapping Project (GRUMP)¹⁹. Point pairs linking small settlements (i.e., those with populations under 50,000 inhabitants) with their nearest city (i.e., settlements with populations over 50,000 inhabitants) were processed using the friction surface approach to produce travel times akin to those within the accessibility map. After receiving special permission to automate the process of querying the Google driving directions application programming interface (API), we acquired validation travel times for each of the point pairs. A total of 53,091 validation point-pairs were available after removing all coordinate pairs the API could not match. This approach limited the validation to places that fell along road networks, which precluded an assessment of the map's accuracy in the most remote areas on Earth. However, the applied validation approach does thoroughly validate the map with respect to human populations as (a) most of the world's people live in close proximity to a road of some variety, and (b) named points along road networks that we tested were indicative, from an accessibility perspective, of other points near roads at unnamed locations.

The validation results were encouraging, with an R^2 of 0.66 and a mean absolute error (i.e., the average difference between the travel times regardless of sign) of 20.7 minutes. The distribution of the differences between the travel times also matched our expectations as 86.5% of the point pairs had lower travel time estimates from the friction surface approach compared to the values derived from the Google API. We attributed this

unequal distribution to the presence of roads within the OSM dataset that were not present within the Google data and were thus unknown to the Google API when it calculated travel time via the Google road network. Another factor that helped explain the preponderance of lower travel times to cities derived using the friction surface was that it incorporated other forms of travel (e.g., by water). This factor was particularly important for explaining point pairs with very large travel time disparities. Additional reasons why the friction surface approach tended to produce lower travel times relative to the Google API include (a) the abstraction of vector roads within raster space, which effectively shortened some roads by reducing their sinuosity; (b) the speed limit look-up table which assigned speeds to roads that may be unrealistically high (e.g., if road conditions are poor); and (c) the friction surface approach assumed constant and optimal travel speeds, unlike the Google API that incorporated temporally varying delays related to traffic density (e.g., rush-hour delays).

The geographic distribution of the 13.5% of point pairs where the travel times estimated via the Google API were shorter than the corresponding times from the friction surface approach was heavily concentrated in China. This is noteworthy as the Google roads dataset we utilized to create the friction surface lacked road data for China. As such, this finding suggests that there were roads in China that the Google API utilized to estimate travel times that were unaccounted for within the friction surface (i.e., not present within OSM). Because both the under- and over-estimates were partially attributable to incomplete road network data from either OSM or Google, using a combination of these road data sources to produce the accessibility map represents a major strength of this research.

Description of map limitations

Virtually all research projects that generate modeled data at global scales rely upon assumptions, generalizations, and the use of best-available (even if suboptimal) datasets. An important example of this for our work is that the time it takes an individual to move through the landscape is mediated by far more factors than just infrastructure or landscape properties. Wealth, in particular, is a likely determinant of whether someone travels on foot rather than taking a vehicle and thus substantially affects accessibility on the level of the individual. As such, users are cautioned from assuming our travel time estimates are universally applicable. It should also be noted, however, that because the accessibility mapping system was developed within Earth Engine, alternative variants of the accessibility map (e.g., a walking only travel time map) can readily be created.

Another caveat relates to transport via rail and water, and specifically how the least-cost-path algorithm is able to freely transition from these networks to roads or vice-versa when, in reality, switching modes of transport typically requires a station or port. In our friction surface this reality is not reflected and thus the least-cost-path algorithm will occasionally utilize water and rail pixels unrealistically. Railroads are also problematic because there is insufficient data within OSM to differentiate railroads by type and thus all railroads are assigned a relatively slow speed. As such, high-speed train travel is effectively absent from our map, although that point is largely moot when mapping accessibility to the nearest city as high-speed trains typically link large cities together (i.e., to utilize such a network an individual is likely already within a city of 50,000 or more people) and are therefore similar to air travel within this context.

Including slope angle as an input layer also presents challenges because the level of detail inherent to topographic datasets depends on the spatial resolution of the elevation data used to generate such metrics. For example, data at a 1x1 kilometer resolution can only reflect the slope angle at that resolution, likely missing large changes in topographic relief (and thus slope angle) at finer resolutions. A related caveat is the isotropic handling of slope angle such that it will always slow down movement regardless of whether the least-cost-path is oriented uphill or downhill. The net result of these caveats is that the friction and accessibility surfaces are less reliable for off-road areas, and particularly in mountainous regions. It should also be noted that erroneous data within the global topographic dataset resulted in unrealistically high travel time estimates for a small cluster of pixels (i.e., less than 50) in western Colombia.

Another known limitation of the accessibility map is that it ignores geopolitical conflicts, such as those currently occurring in Syria, where degraded infrastructure and other impediments to movement will greatly impact travel times. The relative ease with which a new friction surface can be generated using our methodology, however, would allow us to create new a friction surface and accessibility map that took degraded infrastructure into account and thus identifies areas affected by the reduced access to resources. Likewise, national borders are particularly challenging to incorporate into the accessibility map because many borders are contested and/or unrecognized by the UN (e.g., the border between Northern Cyprus and Cyprus) and thus not accounted for within the friction surface. A related challenge is borders that are effectively impermeable barriers to travel for most people (e.g., the border between North and South Korea). As previously stated, there are simply no reliable data that quantify how long it takes to cross

most land borders, much less the contested ones, and thus we applied a universal value that reflects the fact that most borders slow movement, particularly at road crossings, while avoiding any baseless assumptions. These factors highlight the need for better global data on border permeability and crossing times, particularly in light of ongoing policy changes related to transnational migrant flows.

Seasonal changes also present a major challenge when characterizing accessibility, particularly when they pertain to areas periodically inundated by water or covered by deep snow in which movement may be precluded for portions of the year and/or people may change their mode of transport (and thus their movement speed). Likewise, rare events such as floods and earthquakes can sever transportation links like roads and bridges, thereby dramatically changing spatial accessibility patterns. Because the accessibility map was produced largely in Earth Engine, such modifications to transportation networks can be addressed by rapidly remaking the friction surface to reflect the changed reality on the ground. There are several crowd-sourced examples demonstrating how quickly such information can be collected and made available for analysis (e.g., https://www.hotosm.org/mapping_in_activations). A more common issue of temporal variability in accessibility pertains to public forms of transportation, which typically operate on schedules that produce delays in travel time as individuals wait for buses, trains, or ferries. Similarly, traffic congestion will slow travel times both predictably (e.g., at rush hour or due to construction) and unpredictably (e.g., due to traffic accidents). As such, our accessibility should not be viewed as applicable at every moment, but rather a general estimate of accessibility during nominal traveling hours and in the absence of adverse conditions.

Exploratory analysis methodology – wealth, education, and healthcare utilization

The variables selected from the Demographic and Health Survey (DHS) Program database for exploratory analysis consisted of household cluster measures for the mode wealth index for heads of household, the mode educational attainment for heads of household, and the percentage of children receiving treatment for a fever (i.e., healthcare utilization). The wealth and education variables were aggregated directly from questions asked within the surveys and, due to the categorical nature of these metrics, we selected the mode head of household values for analysis. The healthcare utilization metric, in contrast, was aggregated from individual-level data to provide cluster-level counts for both the numerator and denominator of the fever-treated fractions. For fever treatment this constitutes, respectively, the number of children (under five years of age) in each household cluster who received treatment for their fever divided by the total number of children within that household cluster who had a fever in the past two weeks. Summaries of the DHS metrics relative to accessibility were depicted using violin plots (figure 3), which show the distribution and number of household clusters via the violin shape and area, respectively. To show the full data range these metrics were plotted using a logarithmic scale, which necessitated adding one minute to each survey cluster to plot those with travel times of zero. The added minute is reflected in Figure 3, including the reported median and confidence interval values, the latter of which (derived following equation 4³⁷) are quite narrow as a result of the large sample sizes.

$$\text{EQ4: } \textit{Confidence intervals} = \textit{median} \pm 1.58(\textit{interquartile range} / n^{0.5})$$

Exploratory analysis methodology – forest loss

Despite potential beneficial aspects of short travel times to cities for humans, higher accessibility has an associated environmental cost due to the relative ease with which humans can extract natural resources in places closer to population centers. This relationship is observable when comparing a global dataset of changes in forest density from 2000 to 2015²⁵ with travel time to cities. The initial step in this analysis was to aggregate the data for (a) forest coverage in 2000 and (b) forest loss from 2000 to 2015 from their native 30-meter resolutions to match the 30-arc second resolution of the accessibility surface. This process resulted in two grids quantifying the fraction of each pixel that (a) contained forest in 2000 and (b) experienced forest loss by 2015. By multiplying these layers by a grid of area per pixel (to convert the results to km²), binning (in ten minute increments) the pixels in both resulting layers according to their intersection with the accessibility map, and then dividing (a) the binned totals for area forest that experienced loss by (b) the binned totals for area of forest in 2000, we obtained the summarized proportion of the original forest that experienced any level of loss for each travel time interval. The summarized results were then subdivided by country. Brazil and Indonesia were selected to illustrate the relationship between accessibility and forest loss using a combination of visual juxtaposition (extended figures 1-2) and a comparison of summarizations of the national population, land area, and forest loss relative to accessibility (extended figure 3). Our results indicate that forest loss tends to peak between 1 and 5 hours from cities, or just beyond the relatively stable forest matrix associated with urban and suburban landscapes. This suggests that very close

proximity to urban areas has a protective effect for forests, but a more nuanced assessment is that such areas were likely to have been heavily exploited prior to the year 2000 (i.e., they had little readily harvestable forest remaining in 2000) and thus do not show major forest losses since the turn of the century. Geographic differences in both the magnitude and shape of the curves, however, reflect the importance of local context when interpreting results. Subnational patterns of forest loss also follow predictable patterns in both Brazil and Indonesia, with the least accessible forests showing the least amount of density loss.


Code availability statement

The core code used to create the accessibility map is available for download from the Malaria Atlas Project website (http://www.map.ox.ac.uk/accessibility_to_cities/).

Additional references


- 26 Central Intelligence Agency, Office of Geographic and Cartographic Research. World Data Bank II: North America, South America, Europe, Africa, Asia. *Inter-university Consortium for Political and Social Research (ICPSR)* <https://doi.org/10.3886/ICPSR08376.v1> (2000).
- 27 Lehner, B., Verdin, K. & Jarvis, A. New global hydrography derived from spaceborne elevation data. *Eos* **89**, 93-94 (2008).
- 28 National Imagery and Mapping Agency (NIMA). Vector Map Level 0 (VMAP0). *mapAbility* http://www.mapability.com/info/vmap0_download.html (1997).
- 29 Pekel, J.-F., Cottam, A., Gorelick, N. & Belward, A. S. High-resolution mapping of global surface water and its long-term changes. *Nature* **540**, 418-422 (2016).
- 30 Walbridge, S. *Assessing ship movements using volunteered geographic information*, Dissertation, University of California, Santa Barbara, California (2013).
- 31 Friedl, M. A. *et al.* MODIS Collection 5 global land cover: Algorithm refinements and characterization of new datasets. *Remote Sens. Environ.* **114**, 168-182 (2010).

- 32 Danielson, J. J. & Gesch, D. B. Global multi-resolution terrain elevation data 2010 (GMTED2010). *US Geological Survey*
<https://explorer.earthengine.google.com/#detail/USGS%2FGMTED2010> (2011).
- 33 Wehrlin, J. P. & Hallén, J. Linear decrease in V02 Max and performance with increasing altitude in endurance athletes. *Eur J Appl Physiol* **96**, 404-412 (2005).
- 34 Tobler, W. Three Presentations on Geographical Analysis and Modeling: Non-Isotropic Geographic Modeling; Speculations on the Geometry of Geography; and Global Spatial Analysis. Technical Report 93-1. *National Center for Geographic Information and Analysis* (1993).
- 35 Google Earth Engine Developers. Cumulative Cost Mapping.
https://developers.google.com/earth-engine/image_cumulative_cost (2017).
- 36 van Etten, J. R Package gdistance: Distances and Routes on Geographical Grids. *J. Stat. Softw.* **76**, 1-21, doi:10.18637/jss.v076.i13 (2017).
- 37 Chambers, J. M., Cleveland, W.S., Kleiner, B. & Tukey P.A. *Graphical methods for data analysis*. Wadsworth International Group; Duxbury Press; Belmont, California. (1983).

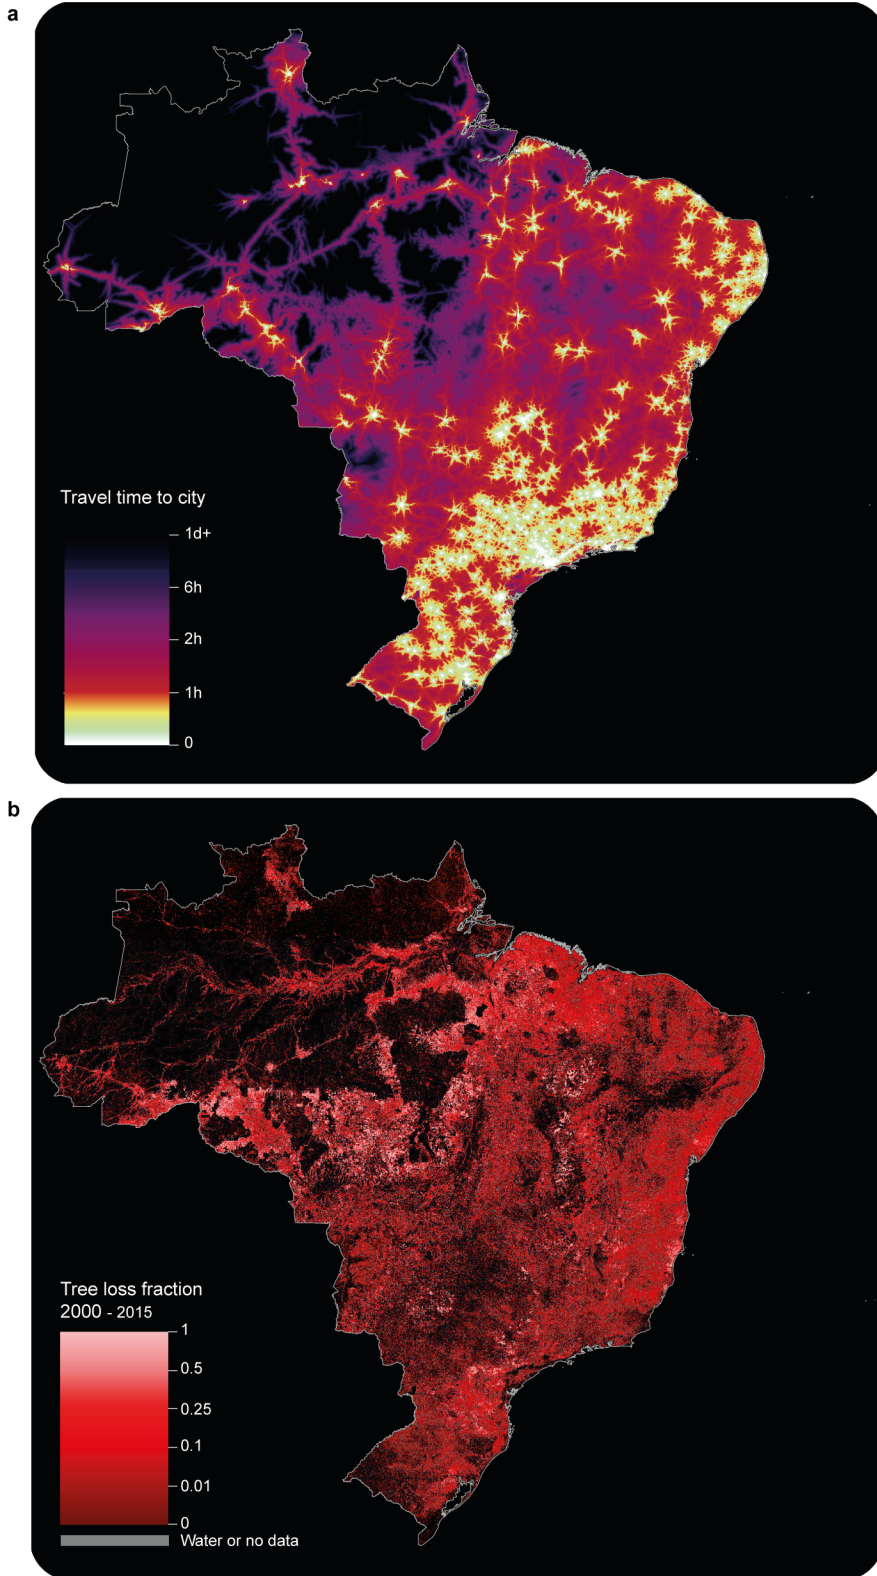


Extended Figure 1: Accessibility and forest loss in Brazil. Maps of (a) travel time to urban centers and (b) forest loss from 2000 to 2015. Forest loss is defined as the

fraction of land area identified as forest in 2000 that experienced any loss in forest density (i.e., not necessarily total removal) by 2015.

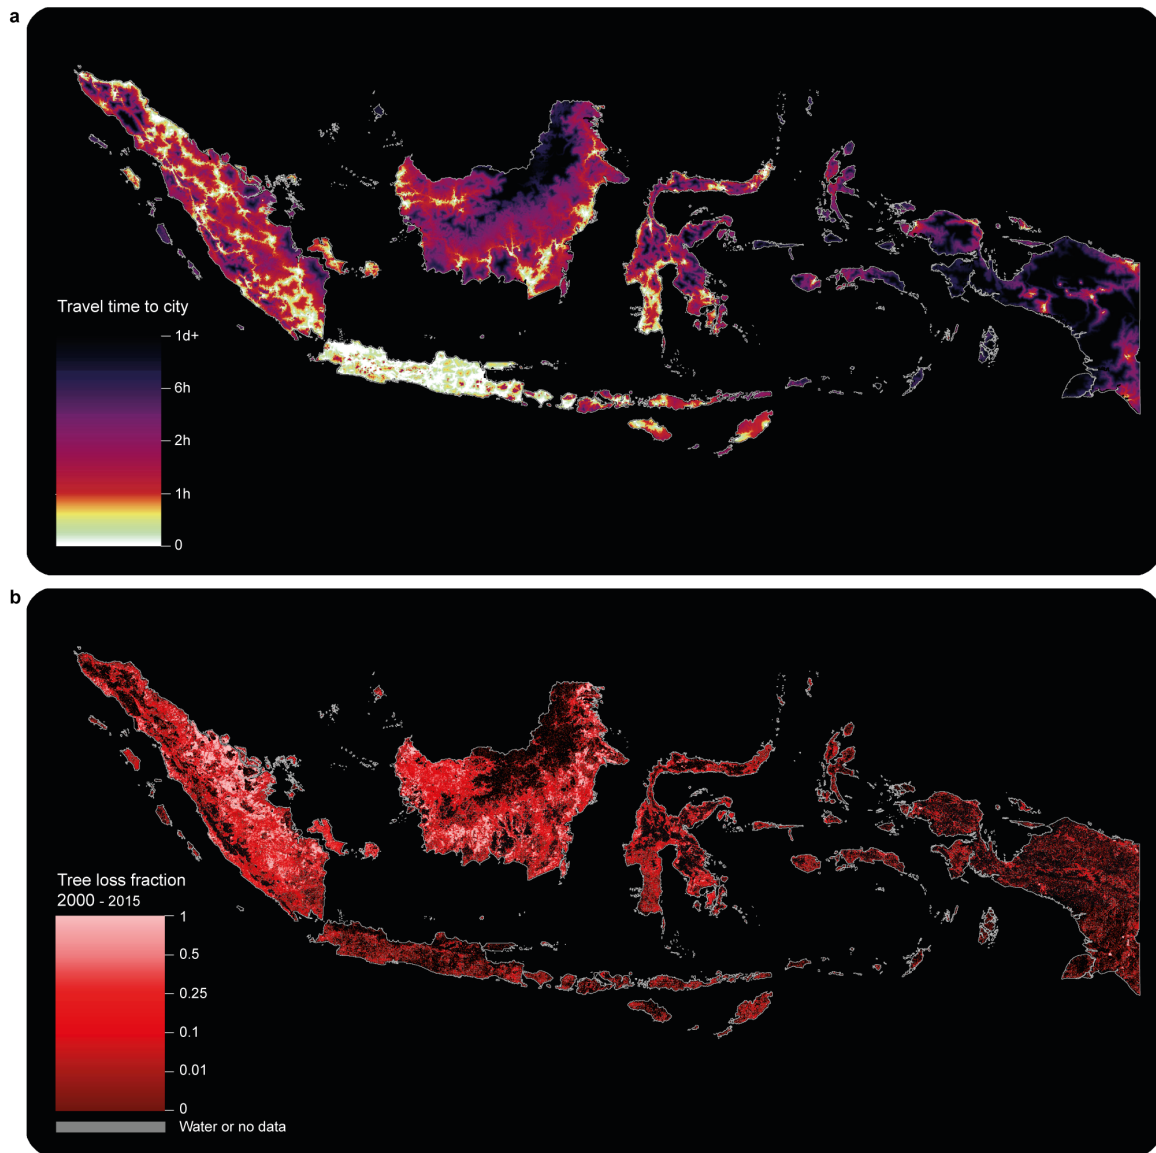


Extended Figure 2: Accessibility and forest loss in Indonesia. Maps of (a) travel time to urban centers and (b) forest loss from 2000 to 2015. Forest loss is defined as the fraction of land area identified as forest in 2000 that experienced any loss in forest density (i.e., not necessarily total removal) by 2015.

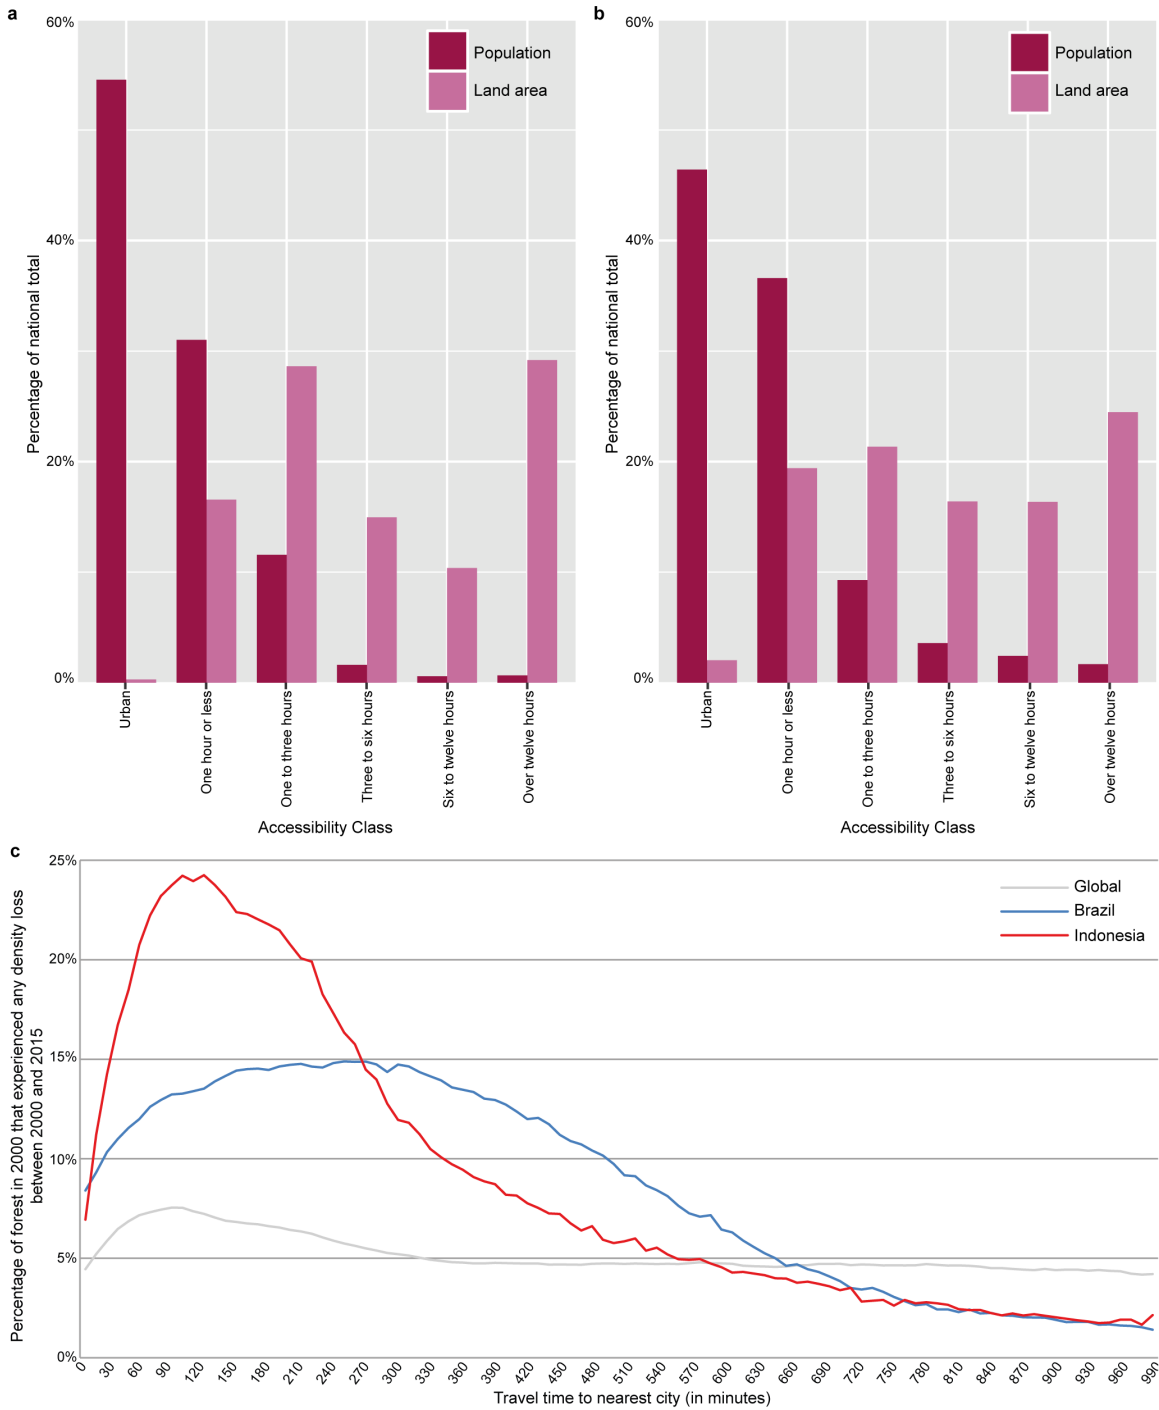

Extended Figure 3: Forest loss relative to accessibility. Bar charts for (a) Brazil and (b) Indonesia summarizing the distribution of the population and land area by accessibility category. Graphed lines (c) show the percentage of area that

experienced any loss in forest density since 2000 for each country and the global average.

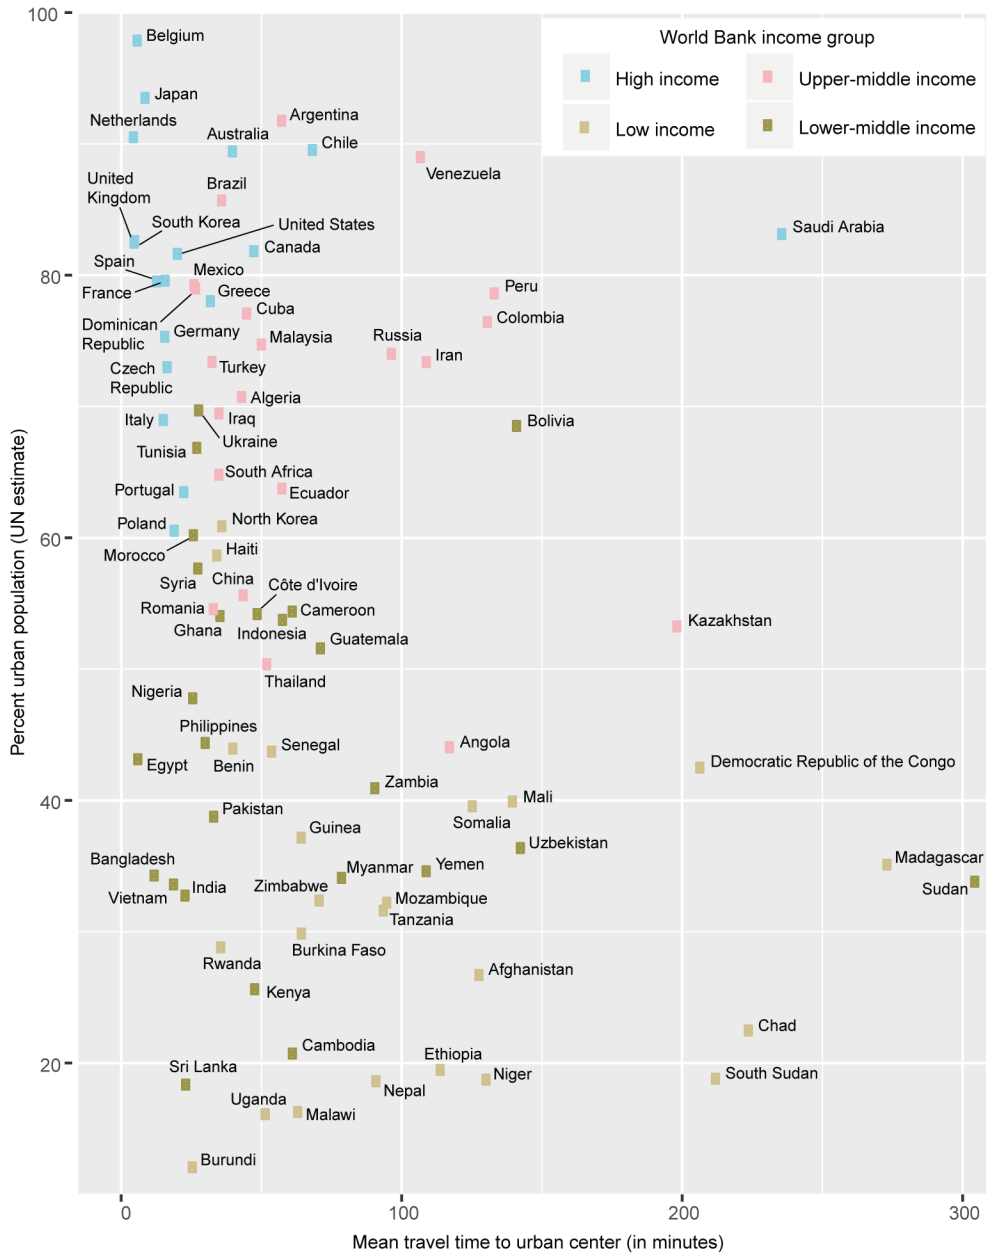

Extended Figure 4: Travel time relative to percent urban population. Mean national accessibility for countries with populations over ten million relative to the percentage of urban population as estimated by the UN, color-coded by World Bank income category.