YUCOMAT 2008 - September 08-12 2008 Hercea Novi Montenearo

View metadata, citation and similar papers at core.ac.uk

brought to you by DCORE

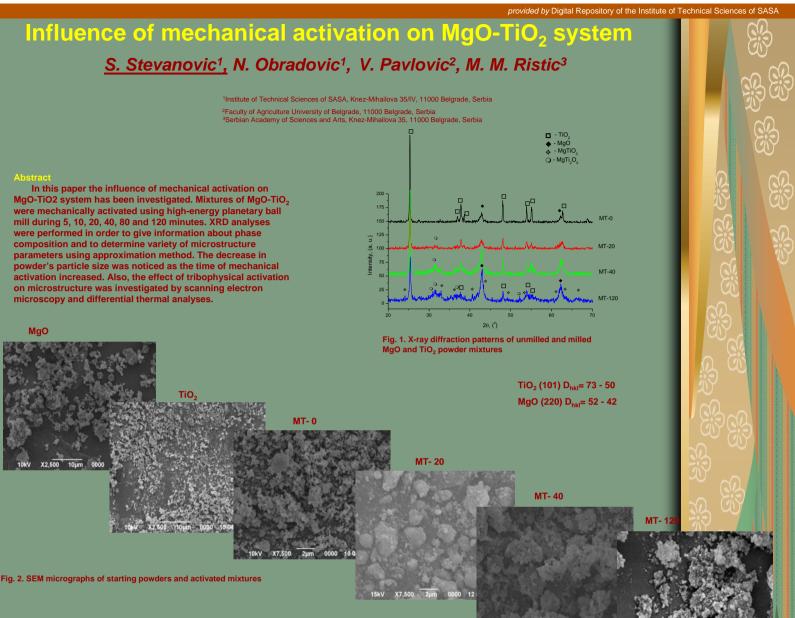


Table 5 Characteristic temperatures obtained by DTA analyses

Sample	T ₁ (°C)	$Q_{1}\left(J/g\right)$	T ₂ (°C)	$Q_2\left(J/g\right)$	T ₃ (°C)	$Q_{3}\left(kJ/g ight)$
MT-0	388.86	15.13	448.37	25.33	1020.14	2.51
MT-20	370.47	10.45	-	-	980.50	0.54
MT-40	265.95	3.48	-	-	1011.46	1.06
MT-120	-	-	-	-	1010.85	1.03

Conclusion

In this paper the influence of mechanical activation on MgO-TiO2 system was studied. Scanning electron micrographs indicate a difference between the starting and activated powders morphology confirming the changes taking place during the mechanical activation. Based on these results, the first significant appearance of the magnesium titanate phases along with the starting phases were found to occur after 40 minutes of mechanical treatment.

10kV X7,500 2µm 0000 10 04 SEI

Also, it has been found that mechanical activation leads to particle size reduction, the increase of dislocation density and lattice strain. It is well known that the appearance and the increase of defects within the observed material leads to a better diffusion, shifts the onset of reaction to lower temperatures and accelerates the solid-state reaction, wich is in a great accordance with data obtained using thermal analyses.