



**Calhoun: The NPS Institutional Archive**

---

Theses and Dissertations

Thesis Collection

---

1968-03

**Intensity distribution in the oscillating turbulent  
boundary layer on a flat plate.**

Jacobs, Gerald Keith

Monterey, California. Naval Postgraduate School

---

<http://hdl.handle.net/10945/12363>



Calhoun is a project of the Dudley Knox Library at NPS, furthering the precepts and goals of open government and government transparency. All information contained herein has been approved for release by the NPS Public Affairs Officer.

**Dudley Knox Library / Naval Postgraduate School  
411 Dyer Road / 1 University Circle  
Monterey, California USA 93943**

<http://www.nps.edu/library>

NPS ARCHIVE

1968

JACOBS, G.

INTENSITY DISTRIBUTION IN THE OSCILLATING  
TURBULENT BOUNDARY LAYER ON A FLAT PLATE

GERALD KEITH JACOBS







INTENSITY DISTRIBUTION IN THE OSCILLATING  
TURBULENT BOUNDARY LAYER ON A FLAT PLATE

by

Gerald Keith Jacobs  
Ensign, United States Navy  
B.S., Naval Academy, 1967

Submitted in partial fulfillment of the  
requirements for the degree of

MASTER OF SCIENCE IN AERONAUTICAL ENGINEERING

from the

NAVAL POSTGRADUATE SCHOOL  
March 1968

NPS ARCHIVE Thesis J235 C.1  
1968  
JACOBS, G.

ABSTRACT

The effect of oscillating flow on the turbulent intensity distribution in the turbulent boundary layer on a flat plate was investigated experimentally.

A wind tunnel incorporating a set of rotating shutter blades downstream of the test section was used to create oscillating flow with amplitude variations from 6 to 110 per cent of mean velocity and frequencies ranging from 5 to 80 cycles per second at a local Reynolds number of  $1.5 \times 10^6$ . A vertical traverse of the turbulent boundary layer was conducted with a hot wire anemometer, and the mean velocity profile and the turbulent intensity distribution were recorded.

Results indicate that there is no radical effect on the turbulent intensity distribution in the boundary layer due to frequency or amplitude changes in the oscillating freestream flow.

## TABLE OF CONTENTS

| Section                                 | Page |
|-----------------------------------------|------|
| 1. Introduction                         | 11   |
| 2. Experimental Equipment and Procedure | 13   |
| 2.1 The Wind Tunnel                     | 13   |
| 2.1.1 General Description               | 13   |
| 2.1.2 The Rotating Shutter Valve        | 13   |
| 2.1.3 The Test Section                  | 16   |
| 2.2 The Model                           | 16   |
| 2.3 Instrumentation                     | 20   |
| 2.4 Procedure                           | 20   |
| 3. Experimental Results and Discussion  | 30   |
| 4. Conclusions                          | 39   |
| Bibliography                            | 40   |
| Appendix                                | 41   |



LIST OF TABLES

| Table                                 | Page |
|---------------------------------------|------|
| I. Transition Data                    | 27   |
| II. Experimental Operating Conditions | 29   |
| III. Experimental Results             | 42   |



## LIST OF ILLUSTRATIONS

| Figure                                                                                                                                        | Page |
|-----------------------------------------------------------------------------------------------------------------------------------------------|------|
| 1. Inlet and Test Sections                                                                                                                    | 14   |
| 2. Rotating Shutter Valve                                                                                                                     | 15   |
| 3. Tunnel Test Section                                                                                                                        | 17   |
| 4. Flat Plate Model                                                                                                                           | 18   |
| 5. Traverse Mechanism                                                                                                                         | 19   |
| 6. Hot Wire Anemometer                                                                                                                        | 21   |
| 7. Instrumentation and Control Equipment                                                                                                      | 22   |
| 8. Schematic Diagram of Instrumentation                                                                                                       | 23   |
| 9. Pressure Distribution                                                                                                                      | 24   |
| 10. Longitudinal Test Probe                                                                                                                   | 25   |
| 11. Distribution of Turbulent Intensities<br>$N_a = 0.07$ $R_x = 1.5 \times 10^6$                                                             | 31   |
| 12. Distribution of Turbulent Intensities<br>$N_a = 0.18$ $R_x = 1.5 \times 10^6$                                                             | 32   |
| 13. Distribution of Turbulent Intensities<br>$N_a = 0.77$ $R_x = 1.5 \times 10^6$                                                             | 33   |
| 14. Comparison of Turbulent Intensity<br>Distributions. Various Fluctuation<br>Amplitudes and Steady Flow Results.<br>$R_x = 1.5 \times 10^6$ | 34   |
| 15. Oscilloscope Traces of Turbulent Intensity<br>in the Freestream (Upper Beam) and in the<br>Boundary Layer (Lower Beam). 2" Blades         | 36   |
| 16. Oscilloscope Traces of Turbulent Intensity<br>in the Freestream (Upper Beam) and in the<br>Boundary Layer (Lower Beam). 3" Blades         | 37   |
| 17. Oscilloscope Traces of Turbulent Intensity<br>in the Freestream (Upper Beam) and in the<br>Boundary Layer (Lower Beam). 5" Blades         | 38   |



LIST OF SYMBOLS

| Symbol          | Definition                                                            | Units                |
|-----------------|-----------------------------------------------------------------------|----------------------|
| f               | Frequency of Freestream Velocity Fluctuations                         | cps                  |
| $\delta$        | Boundary Layer Thickness                                              | inches               |
| y               | Vertical Displacement from Surface                                    | inches               |
| $\nu$           | Kinematic Viscosity                                                   | ft <sup>2</sup> /sec |
| x               | Length Coordinate                                                     | feet                 |
| p               | Mean Static Pressure                                                  | cm H <sub>2</sub> O  |
| p <sub>0</sub>  | Mean Static Pressure at Test Point                                    | cm H <sub>2</sub> O  |
| q               | Reference Dynamic Pressure                                            | cm H <sub>2</sub> O  |
| $\bar{u}$       | Local Mean Velocity                                                   | ft/sec               |
| U <sub>fs</sub> | Mean Freestream Velocity                                              | ft/sec               |
| $\Delta U$      | Velocity Fluctuation Amplitude                                        | ft/sec               |
| R <sub>x</sub>  | Local Reynolds Number = $\frac{U_{fs} x}{\nu}$                        |                      |
| I               | Turbulent Intensity (local)                                           |                      |
| I <sub>fs</sub> | Freestream Turbulent Intensity                                        |                      |
| N <sub>f</sub>  | Normalized Frequency Parameter = $\frac{f \nu}{U_{fs}^2}$             |                      |
| N <sub>i</sub>  | Normalized Turbulent Intensity = $\frac{I}{I_{fs}}$                   |                      |
| N <sub>a</sub>  | Normalized Velocity Fluctuation Amplitude = $\frac{\Delta U}{U_{fs}}$ |                      |

## ACKNOWLEDGEMENT

The author wishes to express his gratitude to Dr. James A. Miller, Associate Professor, Department of Aeronautics, for his guidance and support during the present work.

Grateful recognition is also due LT R. A. Despard, USN, Doctorate Program, for his advice and suggestions.

The author also wishes to express special appreciation to Messrs. Theodore B. Dunton, Robert A. Besel, and the entire laboratory staff, Department of Aeronautics, for their constant cooperation and aid in this work.

## 1. Introduction

Although the unsteady turbulent boundary layer is a common phenomenon, very little work has been done to better the understanding of this complex problem. The steady turbulent boundary layer is a non-linear mechanism, and when this situation is further complicated by a time-dependent mean freestream velocity, a full analytical solution is a formidable task.

Karlsson (ref. 1) investigated the nonsteady turbulent boundary layer by separating the velocity fluctuations into periodic and random components. By averaging the oscillations over a complete period and substituting the results into the equations of motion, he obtained equations similar to the steady turbulent boundary layer equations with an extra fluctuating term. He predicted and experimentally verified that the oscillations had little effect on the mean velocity profile in the turbulent boundary layer.

Klebanoff (ref. 2) has recorded the distribution of turbulent intensity in the turbulent boundary layer on a flat plate immersed in a steady flow of very low freestream turbulence. A similar study has also been conducted by Reichardt (ref. 9).

Morrissey (ref. 5) has investigated the effects of large amplitude flow oscillations on the heat transfer rates from a flat plate. His results indicate no measurable influence on local heat transfer rates from the superposition of large amplitude fluctuations on the turbulent boundary layer. These results would suggest that the eddy diffusivity and thus the turbulent intensity distribution should exhibit similar behavior.

The objective of the present work is to investigate experimentally the effect of an oscillating mean stream on the turbulent intensity distribution in the fully established turbulent boundary layer.

## 2. Experimental Equipment and Procedure

### 2.1 The Wind Tunnel

#### 2.1.1 General Description

The oscillating flow wind tunnel in the Aeronautics Department Laboratories of the Naval Postgraduate School was used for this investigation. This is an open circuit tunnel with a test section 24 inches square and 223 inches long. The tunnel is of metal and Lucite construction. The inlet section shown in Figure 1 has a contraction ratio of 16:1, which, coupled with three high solidity screens, results in very low freestream turbulent intensities. Measured steady free-stream turbulence levels in the test section varied from 0.25 to 0.37 per cent of the freestream velocity.

The wind tunnel is driven by two 100 horsepower Joy Axivane fans with adjustable blades. Located in front of each fan is a set of variable inlet vanes which serve as controls for the velocity in the test section. To reduce velocity the vanes pre-swirl the air in the direction of fan rotation, reducing the fan work input. The pitch of the fan blades was set to produce velocities of 88 to 250 feet per second. The mean test section velocity was measured with a pitot-static tube and an inclined draft gauge.

#### 2.1.2 The Rotating Shutter Valve

A shutter valve was used to superimpose an oscillating sinusoidal component onto the mean freestream velocity. It consists of four rotating blades driven by a variable speed motor. Figure 2 shows the shutter valve with 5-inch blades installed. The motor speed and pulley ratio selection determine the frequency of oscillation, and the blade width (and to some extent the frequency) determine the

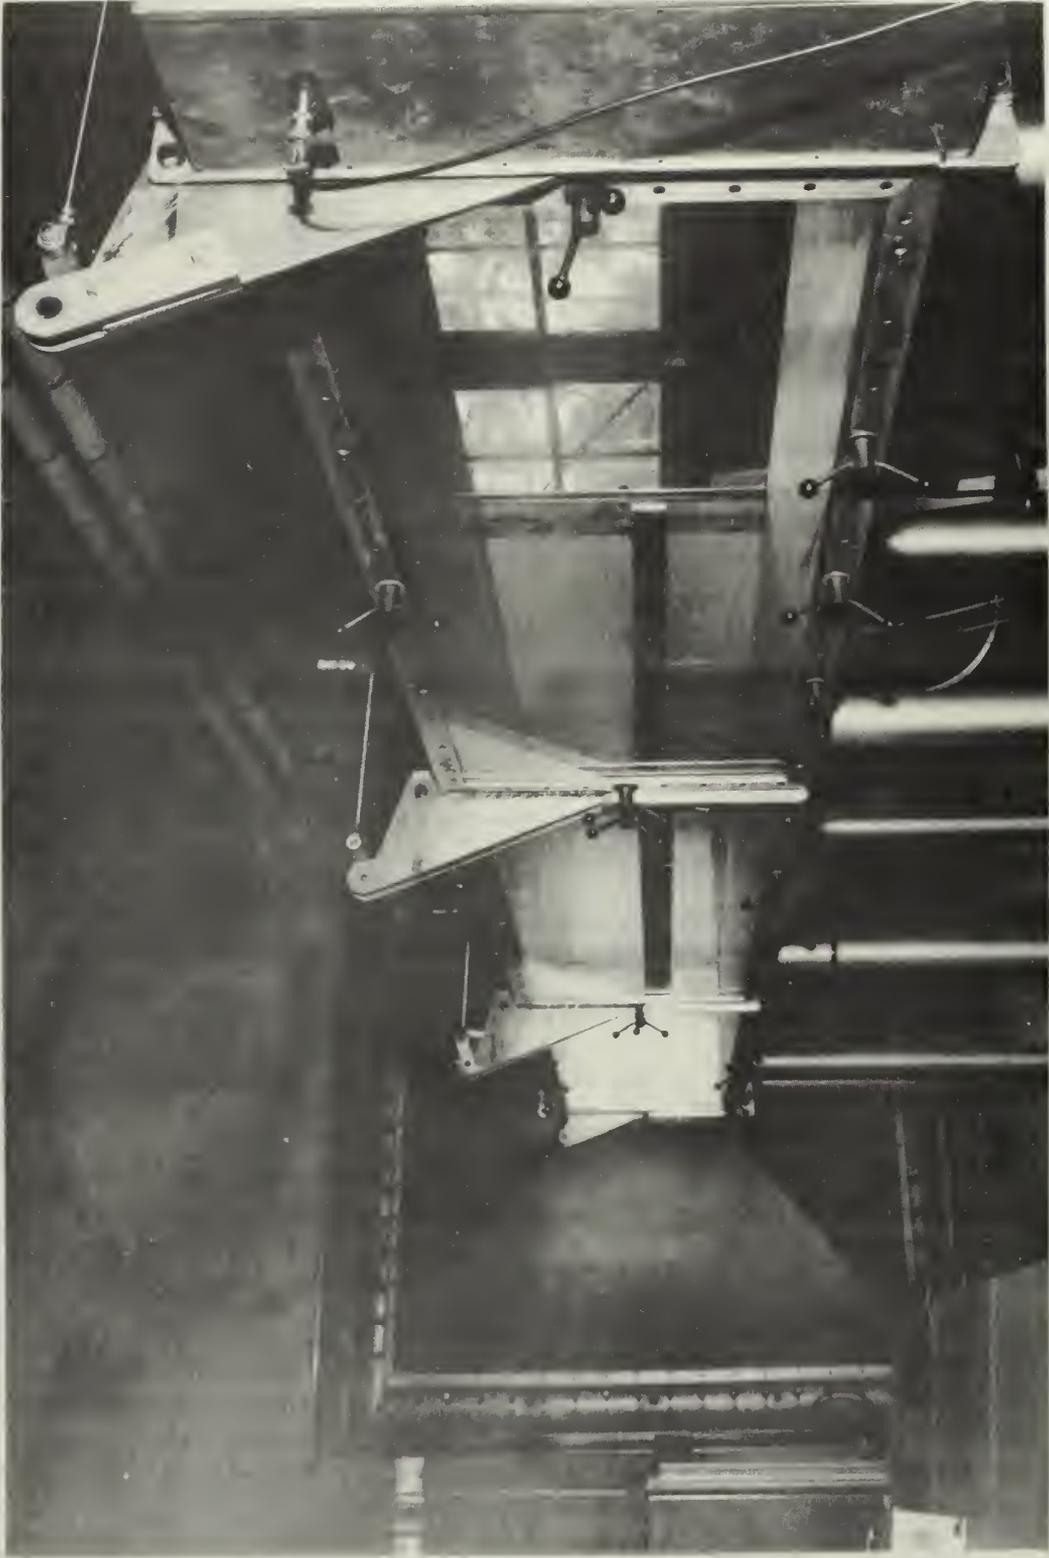
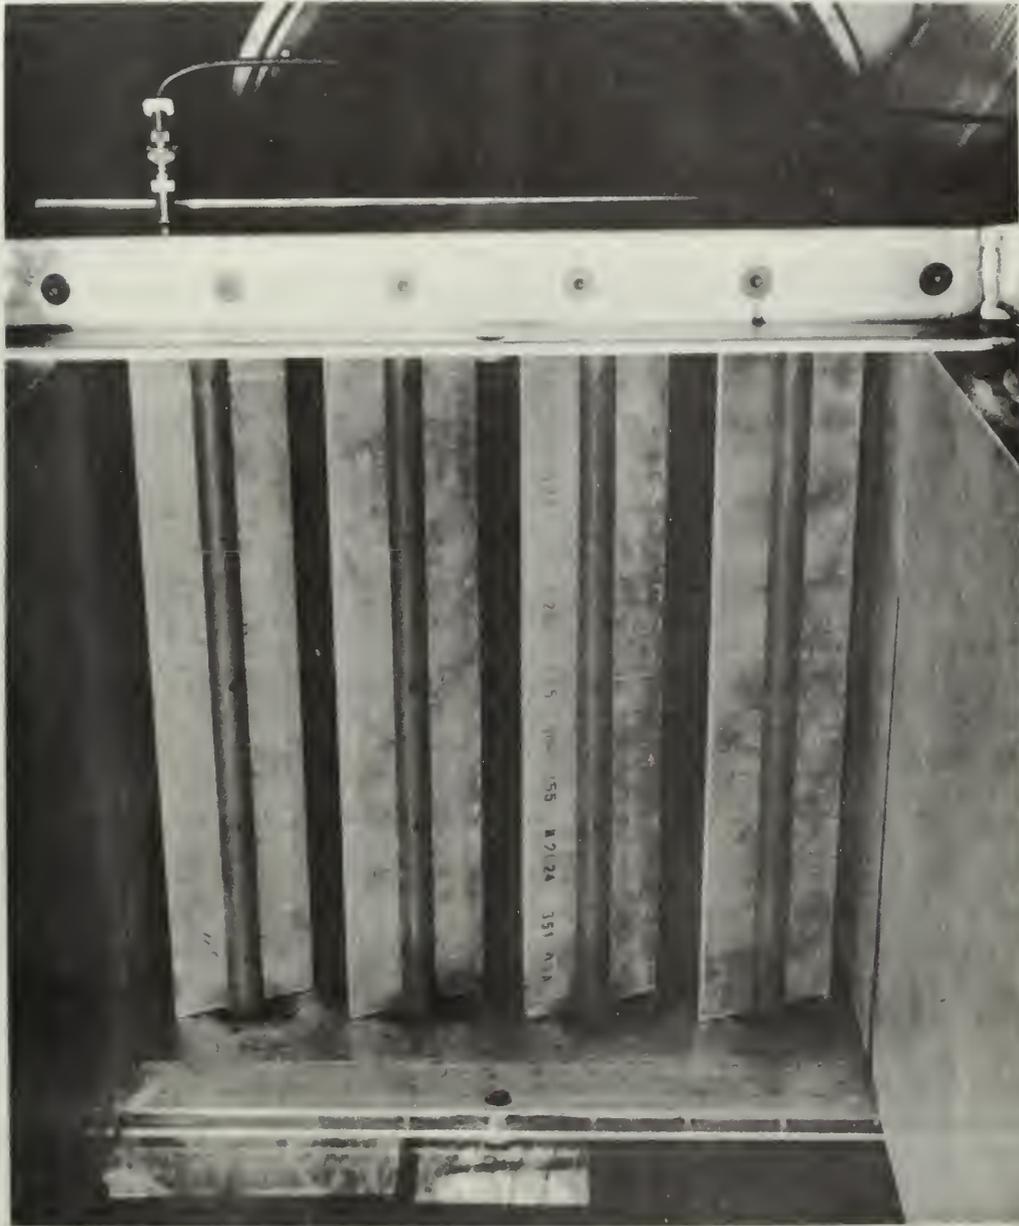


FIGURE I  
INLET AND TEST SECTIONS



**FIGURE 2**  
**ROTATING SHUTTER VALVE**

amplitude. For the present work a range of frequencies from 5 to 80 cycles per second and amplitudes from 6 to 110 per cent of the freestream velocity was produced by employing three blade widths and two pulley ratios.

### 2.1.3 The Test Section

The test section is constructed of 2-inch thick aluminum plates on top and bottom and 2-inch thick stress-relieved Lucite on the sides. One back panel of Lucite has been replaced with wood for convenience in mounting the model and instrumentation. Figure 3 is a photograph of the test section with the side panels raised.

## 2.2 The Model

The flat plate model was constructed of a slab of phenolic material 24 inches wide, 55 inches long and 5/8 inch thick. It was provided with a rounded leading edge in order to avoid leading edge separation. A 5-inch tapered spoiler which could be adjusted from outside the tunnel was used to trim the pressure gradient. The model and spoiler are shown in Figure 4. The traversing mechanism was attached to the underside of the plate, and the probe was extended up through the plate and bent forward and down to the upper surface at a point 27 inches aft of the leading edge. The traversing mechanism was designed to be mounted on the model rather than on the tunnel test section in order to avoid vibration problems produced by the oscillating stream. The traverse mechanism, shown in Figure 5, provided a resolution of 0.001 inch in displacement, measured with a dial indicator.

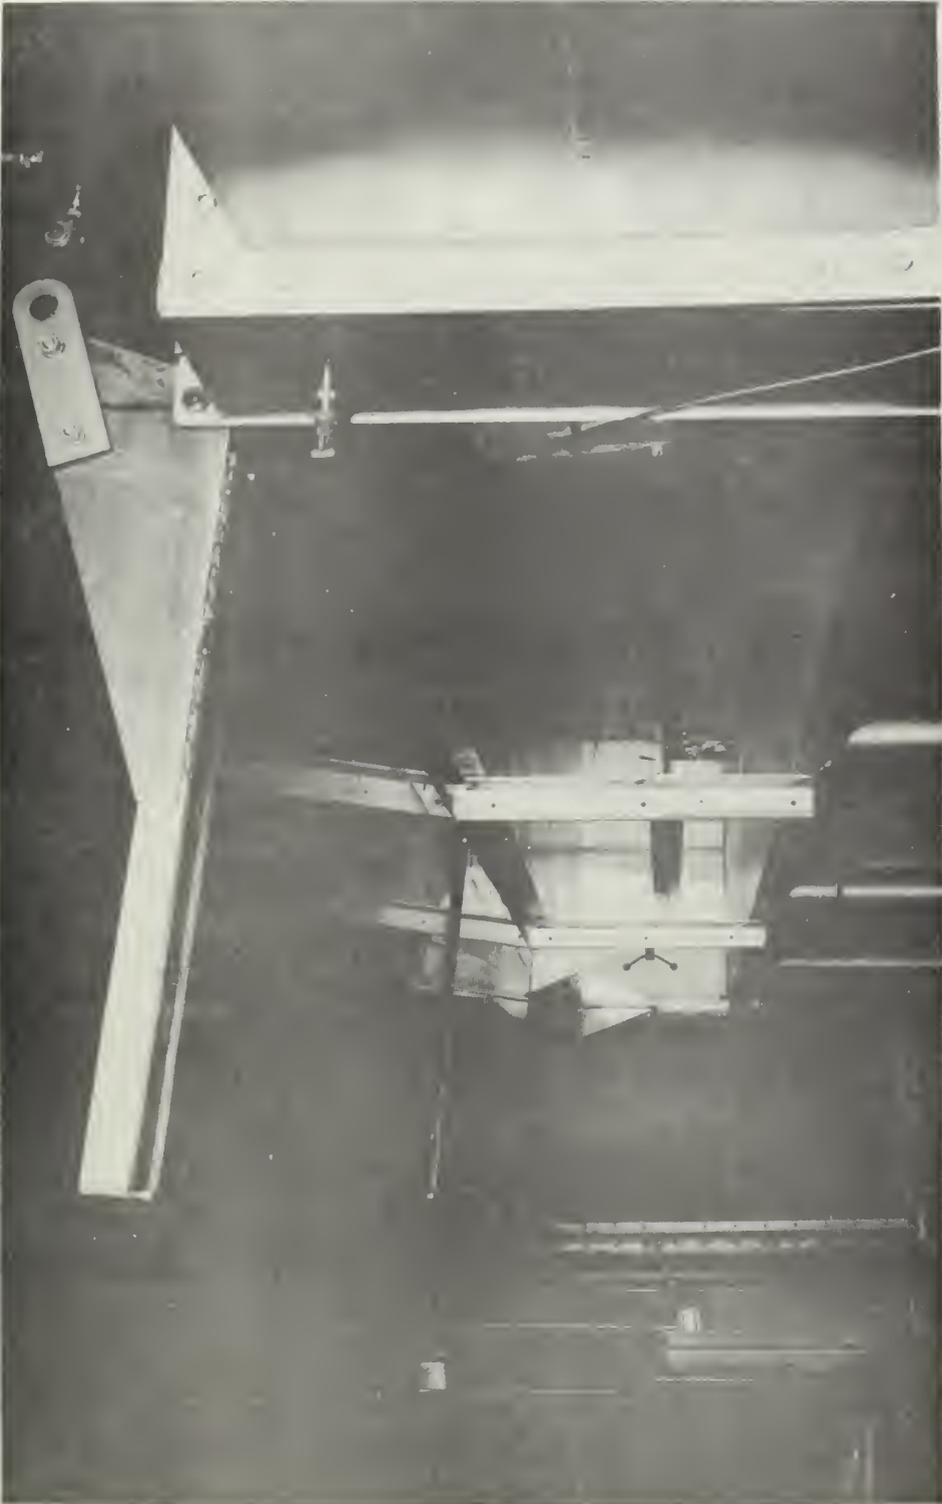
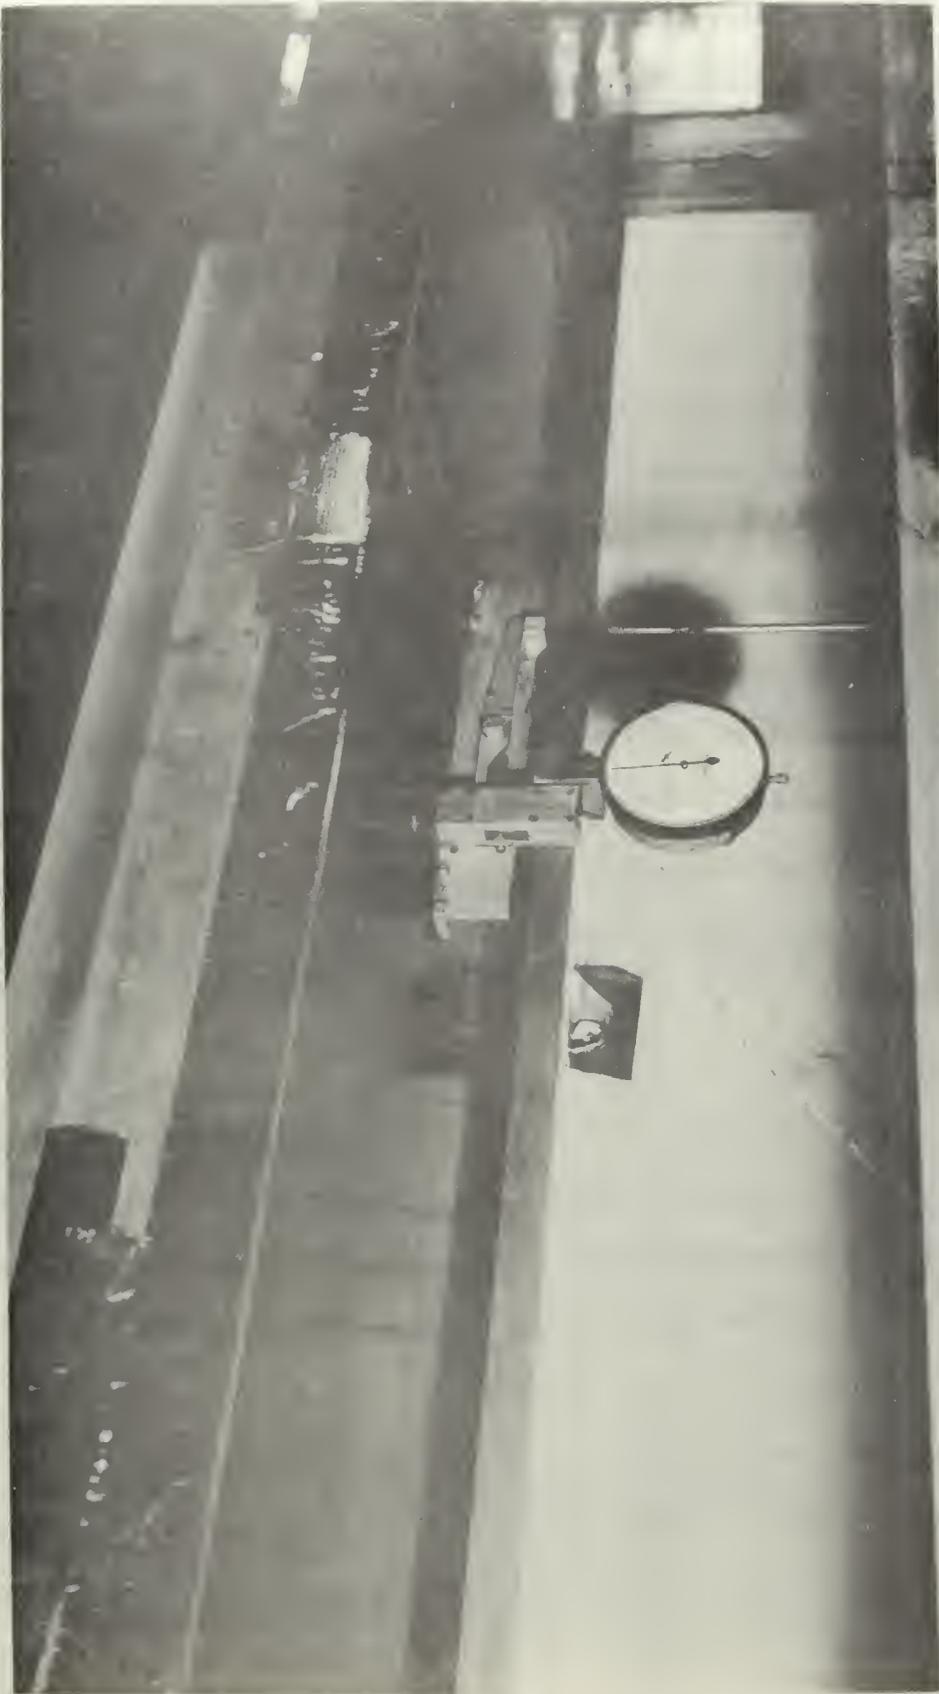


FIGURE 3  
TUNNEL TEST SECTION



**FIGURE 4**  
**FLAT PLATE MODEL**



**FIGURE 5**  
**TRAVERSE MECHANISM**

### 2.3 Instrumentation

A transistorized, ten channel, constant temperature hot wire anemometer was employed in this work (Security Associates Model 1000). This equipment is shown in Figure 6. The hot wire consisted of a 0.00015 inch diameter and 0.080 inch long tungsten filament. The hot wire circuit contains a built-in analog computer which produces an output which is linear in velocity. Since the circuitry is D.C. coupled, the total instantaneous velocity is available at the output. Calibration of the apparatus was performed similar to the method used by Murphy (ref. 6). The turbulent intensity was measured with a Ballentine True RMS Voltmeter. An oscilloscope trace of the velocity wave form was recorded photographically.

The frequency of oscillation was determined by a magnetic pickup mounted outboard of the upper shutter valve blade shaft. The output pulse frequency was read on a Berkeley decade counter. The instrumentation system is shown pictorially in Figure 7 and schematically in Figure 8.

### 2.4 Procedure

After the plate was installed in the test section and adjusted to zero incidence, a static pressure survey was made to ensure the existence of a zero pressure gradient. Results of the pressure survey are shown in Figure 9. Next, conditions necessary for a fully established turbulent boundary layer were determined. A hot wire probe with tips bent down close to the surface well into the boundary was used to traverse the plate in a longitudinal direction. This device, shown in Figure 10, provided an indication of the transition point and the turbulent intensity along the plate at a constant vertical displacement of about 0.020 inch.

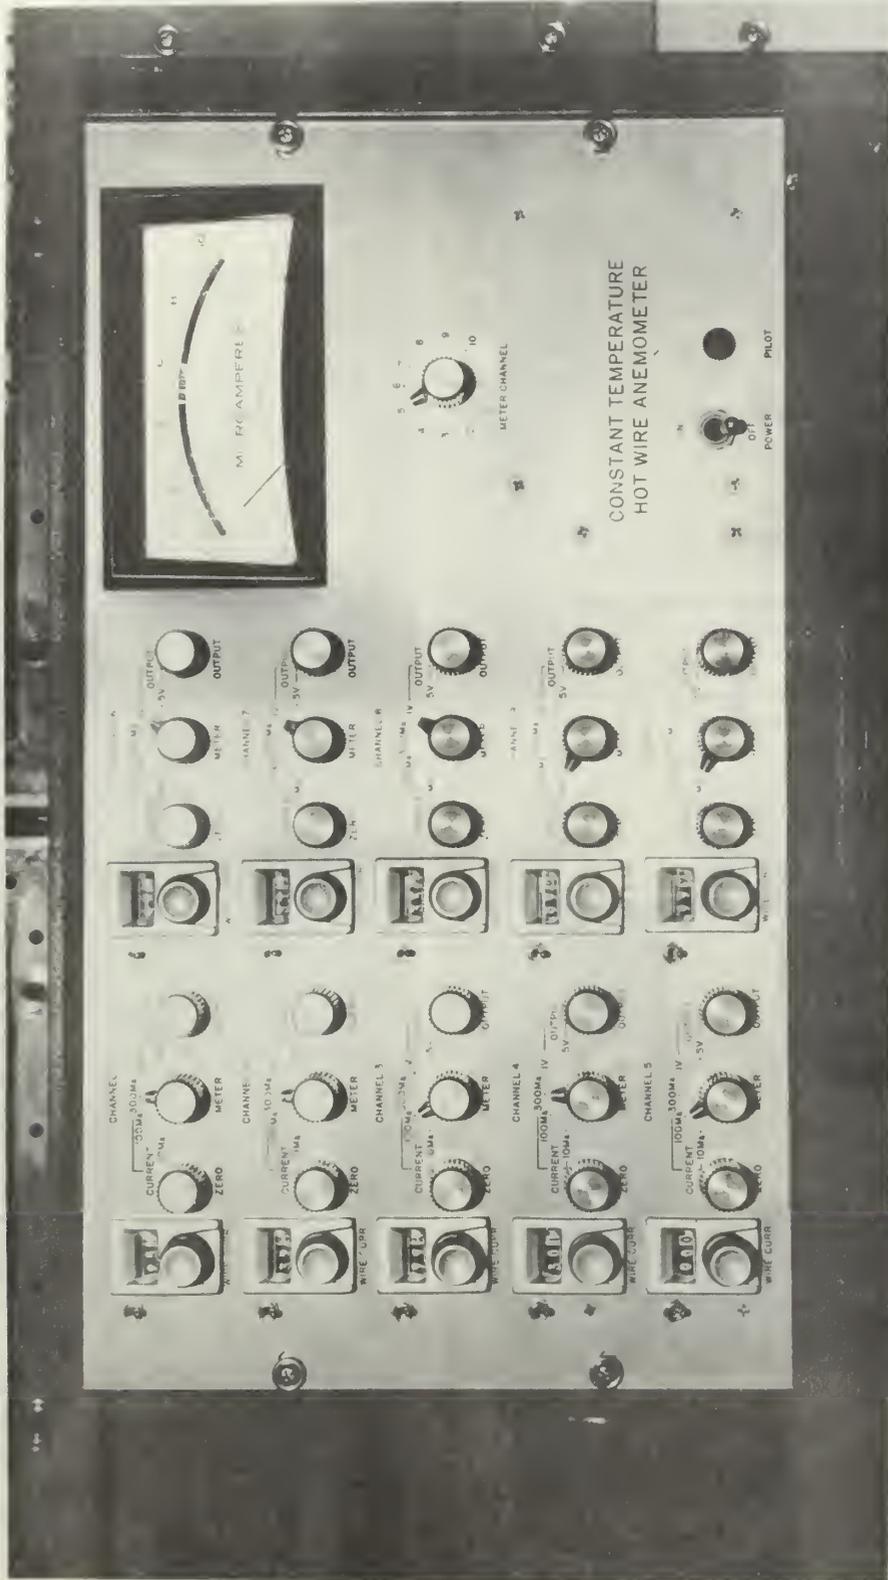


FIGURE 6  
HOT WIRE ANEMOMETER

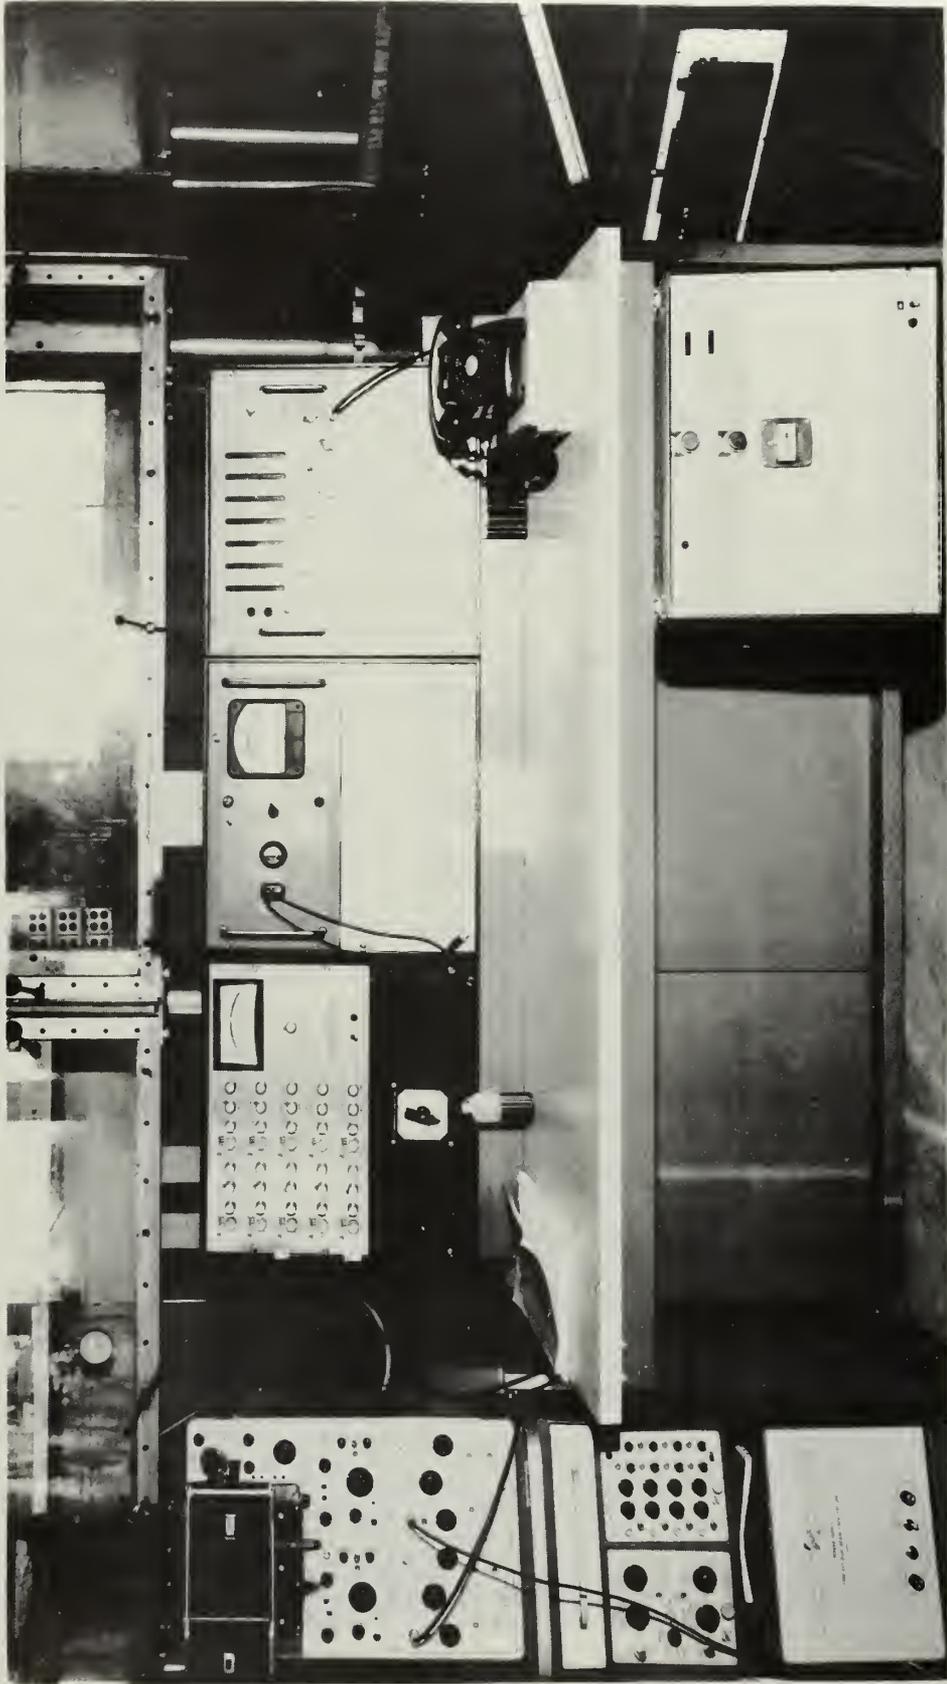


FIGURE 7  
INSTRUMENTATION AND CONTROL EQUIPMENT

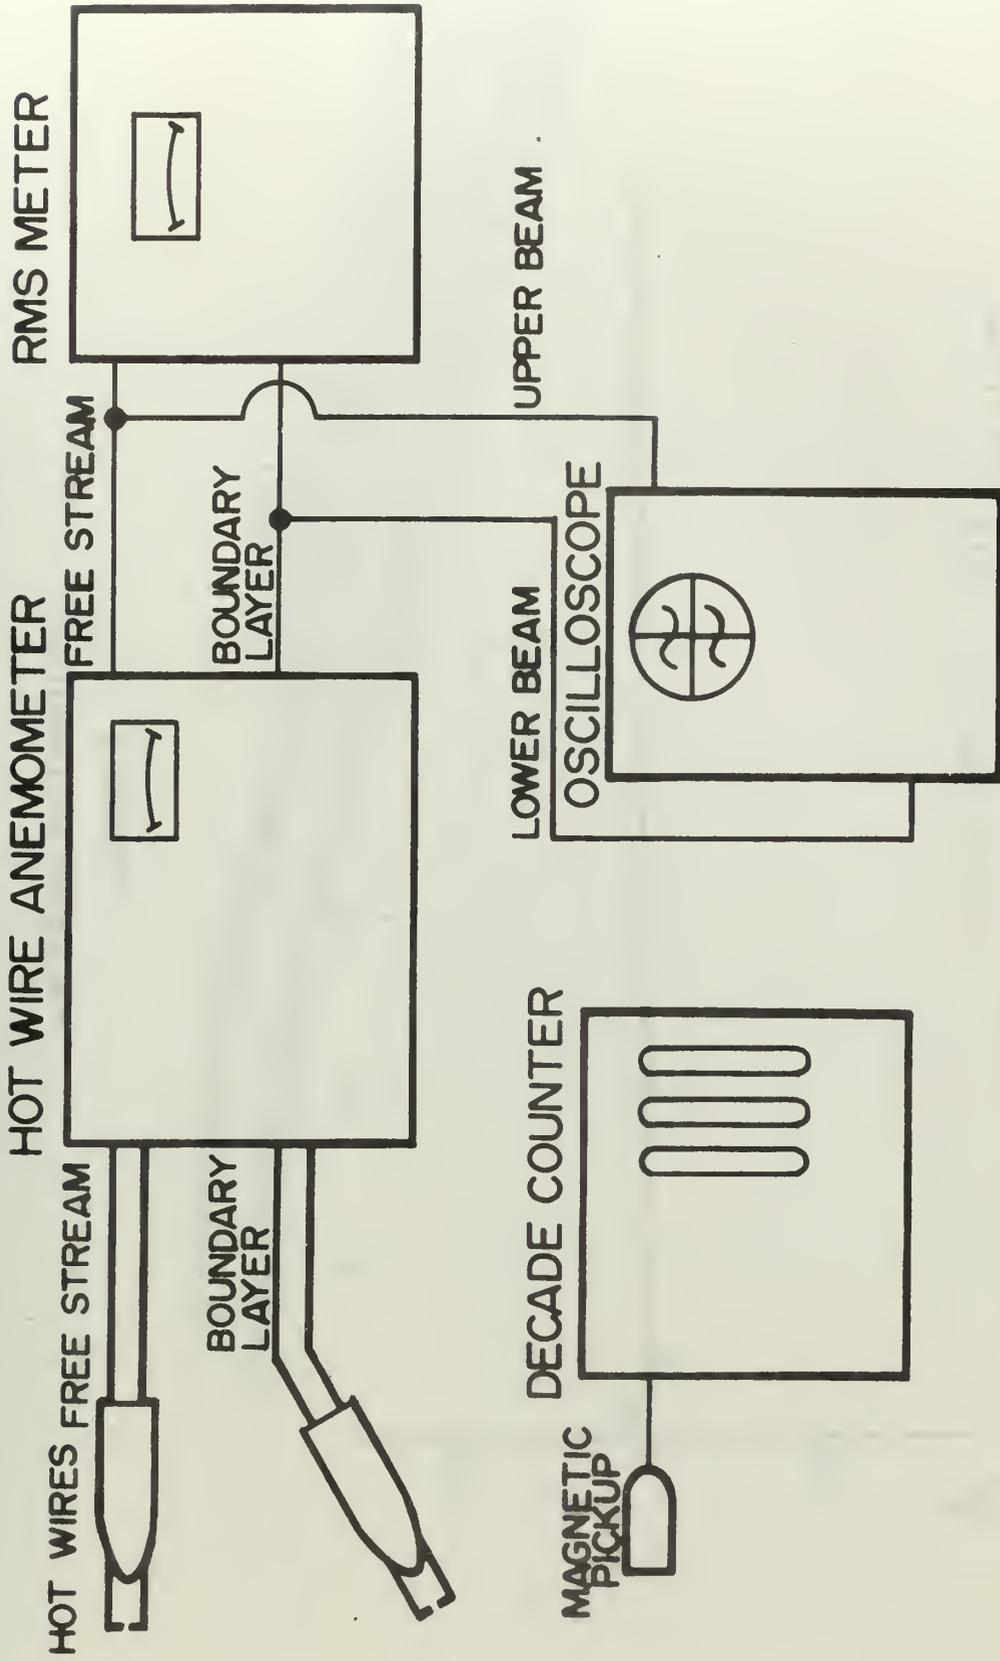
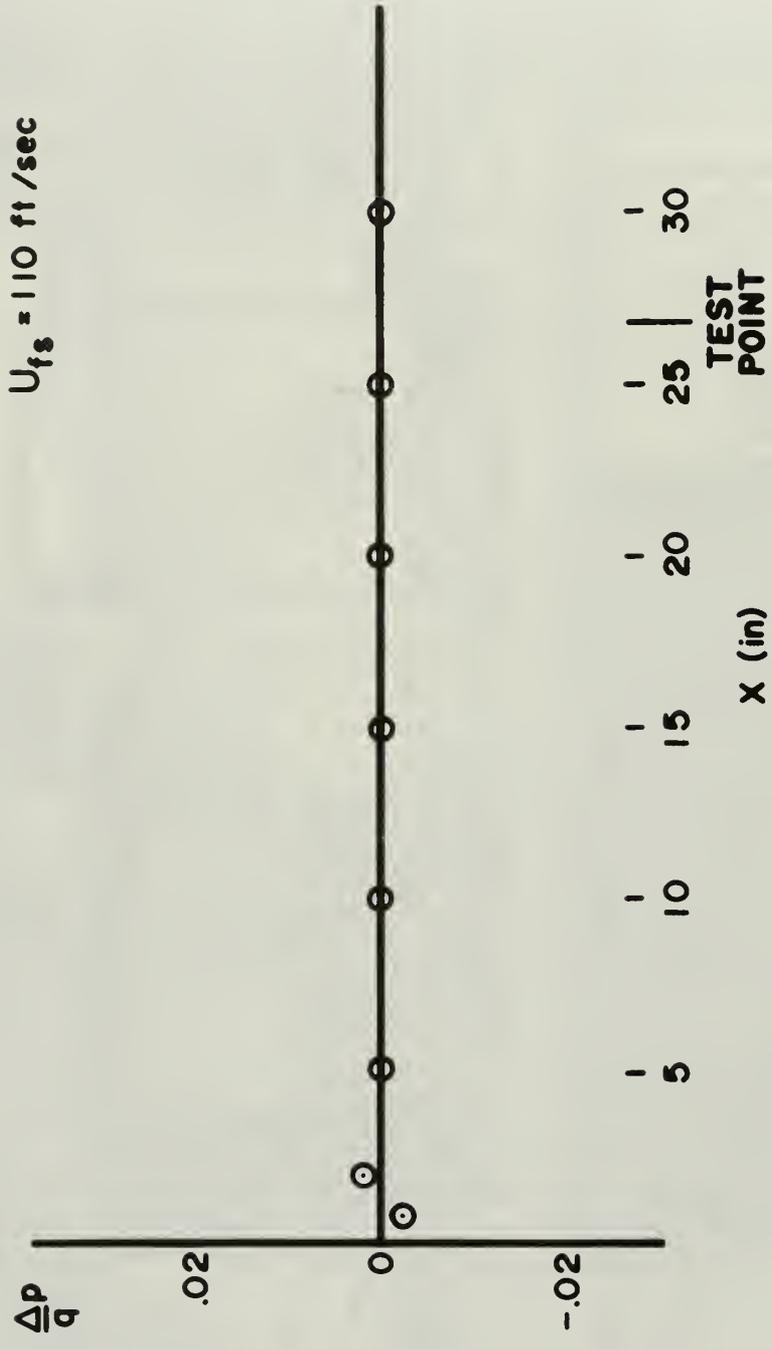


FIGURE 8  
SCHEMATIC DIAGRAM OF INSTRUMENTATION



**FIGURE 9**  
**PRESSURE DISTRIBUTION**



FIGURE 10  
LONGITUDINAL TEST PROBE.

A test section velocity of 110 feet per second was found to cause transition 17 inches from the leading edge and lead to a fully established turbulent boundary layer at the test point, 27 inches from the leading edge ( $R_x = 1.5 \times 10^6$ ). The results of this preliminary investigation are summarized in Table I.

For each experimental run the boundary layer thickness was determined, and a vertical traverse of the boundary layer was then conducted, during which the mean velocity and the turbulent intensity were recorded.

TABLE I  
TRANSITION DATA

| $U_{fs}$ | x (in) | $R_x \times 10^{-6}$ | Regime                       |
|----------|--------|----------------------|------------------------------|
| 100      | 10     | 0.529                | Laminar                      |
|          | 12     | .635                 | Laminar                      |
|          | 16     | .846                 | Laminar                      |
|          | 18     | .970                 | Near Transition              |
|          | 19     | 1.020                | Transition                   |
| 105      | 13     | .725                 | Laminar                      |
|          | 15     | .837                 | Laminar                      |
|          | 18     | 1.000                | Transition                   |
|          | 20     | 1.120                | Turbulent                    |
| 110      | 15     | .875                 | Laminar                      |
|          | 16     | .935                 | Laminar                      |
|          | 17     | 1.000                | Transition                   |
|          | 18     | 1.050                | Turbulent                    |
|          | 27     | 1.576                | Turbulent<br>(Test Position) |

Photographs of the oscilloscope traces were taken at various positions during the vertical traverse of the boundary layer. Oscillation frequencies of 5, 10, 20, 40, and 80 cycles per second were investigated for each of three sets of blade widths (2-inch, 3-inch, and 5-inch) corresponding to fluctuation amplitudes of 6 to 110 per cent of the mean freestream velocity. A summary of the experimental operating conditions and normalized frequency and amplitude parameters is presented in Table II.

TABLE II  
EXPERIMENTAL OPERATING CONDITIONS

| Mean Velocity: 110 ft/sec |                  |                 | Local Reynolds Number: $1.57 \times 10^6$ |       |                                              |
|---------------------------|------------------|-----------------|-------------------------------------------|-------|----------------------------------------------|
| Run                       | Blade Width (in) | Frequency (cps) | $N_f \times 10^8$                         | $N_a$ | Freestream Turbulent Intensity (% $U_{fs}$ ) |
| 1                         | 2                | 5               | 6.5                                       | 0.07  | 2.0                                          |
| 2                         | 2                | 10              | 13.0                                      | .08   | 2.0                                          |
| 3                         | 2                | 20              | 26.0                                      | .07   | 2.1                                          |
| 4                         | 2                | 40              | 52.0                                      | .06   | 2.0                                          |
| 5                         | 2                | 80              | 104.0                                     | .06   | 1.5                                          |
| 6                         | 3                | 80              | 104.0                                     | .16   | 4.5                                          |
| 7                         | 3                | 40              | 52.0                                      | .16   | 6.7                                          |
| 8                         | 3                | 20              | 26.0                                      | .24   | 6.3                                          |
| 9                         | 3                | 10              | 13.0                                      | .16   | 4.6                                          |
| 10                        | 3                | 5               | 6.5                                       | .20   | 5.5                                          |
| 11                        | 5                | 5               | 6.5                                       | 1.10  | 25.0                                         |
| 12                        | 5                | 10              | 13.0                                      | .95   | 21.0                                         |
| 13                        | 5                | 20              | 26.0                                      | .60   | 20.5                                         |
| 14                        | 5                | 40              | 52.0                                      | .60   | 18.8                                         |
| 15                        | 5                | 80              | 104.0                                     | 0.60  | 19.8                                         |

### 3. Experimental Results and Discussion

The experimental results are presented in Table III (Appendix). Figures 11, 12, and 13 summarize the effect of frequency on the turbulent intensity distribution in the oscillating turbulent boundary layer for each of the three amplitude ranges investigated. Also included in these graphs are typical velocity profiles for each of the amplitude ratios. The results are presented as the ratio of local intensity to freestream intensity ( $N_1$ ) because the freestream magnitude is clearly a determining factor on the intensity magnitude in the boundary layer. This normalized turbulent intensity appears relatively independent of frequency for each amplitude range.

Curves for the mean intensity distributions for each of the amplitudes are compared with the steady flow results of Klebanoff (ref. 2) and Reichardt (ref. 9) in Figure 14. A check of steady flow results was in close agreement with those of Klebanoff. Although there is a slight trend toward decreasing turbulent intensity with increasing oscillation amplitude, the general shape of the curve is clearly preserved. In each case the pronounced maximum is in close proximity to the wall. Moreover, there are no radical differences between the distribution results measured in oscillating flows and those measured in steady flow. One would assume such differences small when comparing flows with freestream turbulence intensity levels ranging from 0.20 to 25.0 per cent. Moreover, the data indicate that relative intensity is essentially unaltered very close to the surface, which is the primary region of importance in determining heat transfer rates. With some degree of certainty it may be concluded that frequency

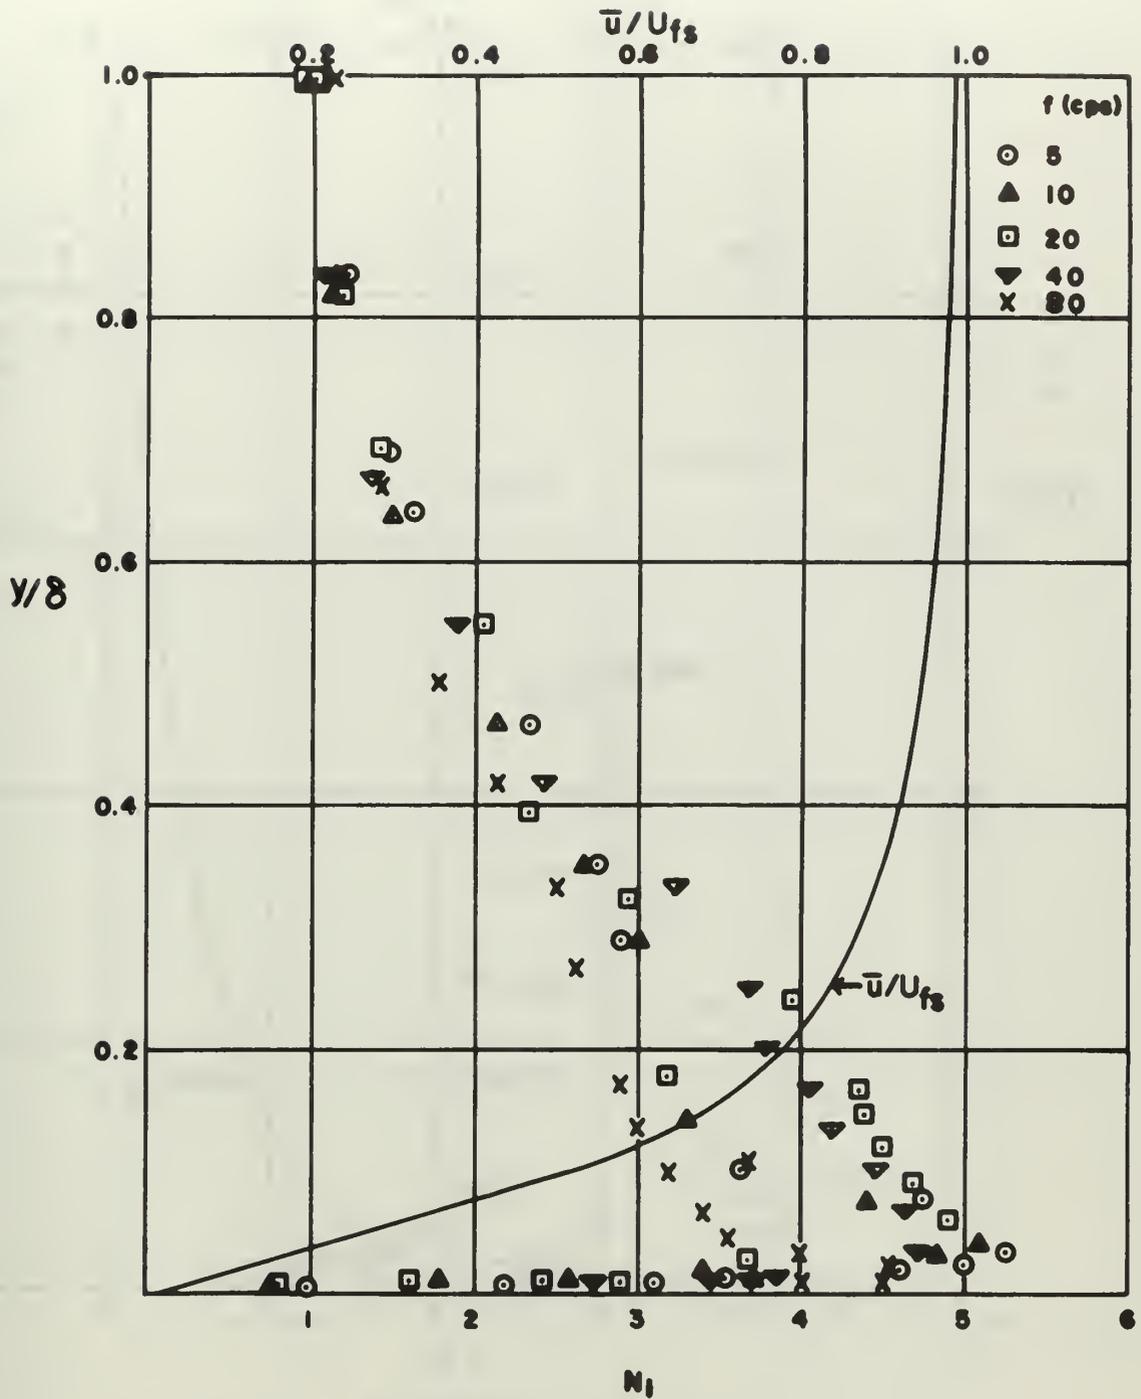


FIGURE II  
 DISTRIBUTION OF TURBULENT INTENSITIES  
 $N_0 = .07$        $R_x = 1.5 \times 10^6$

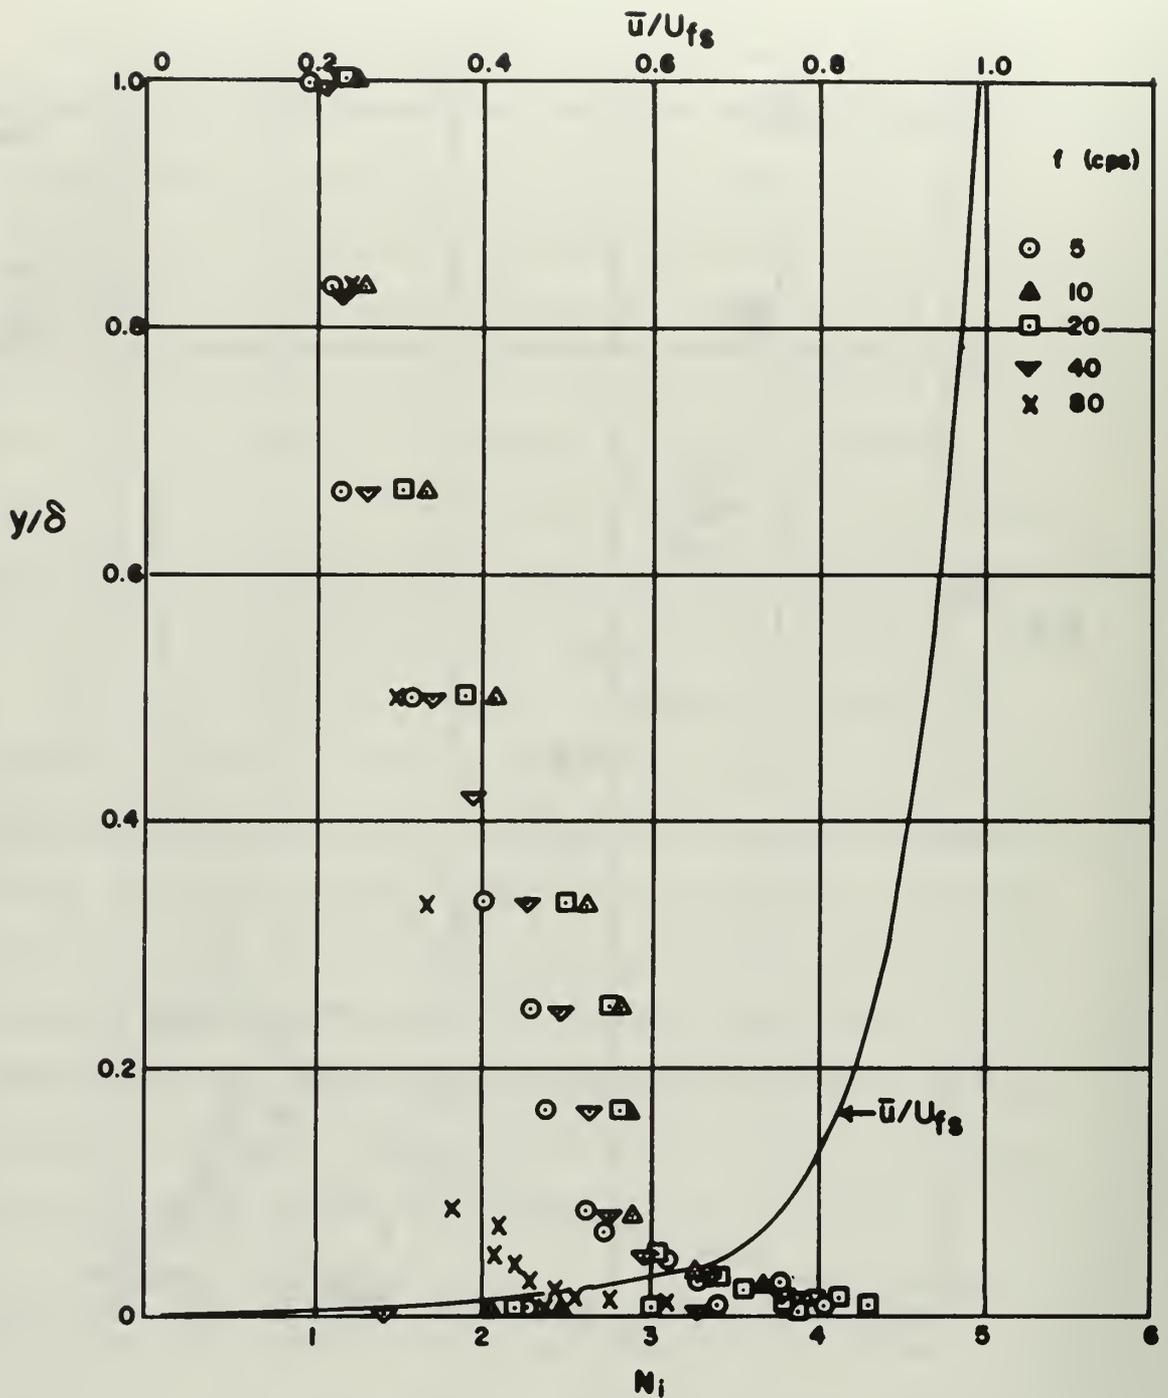


FIGURE 12  
 DISTRIBUTION OF TURBULENT INTENSITIES.  
 $N_e = .18$        $R_x = 1.5 \times 10^6$

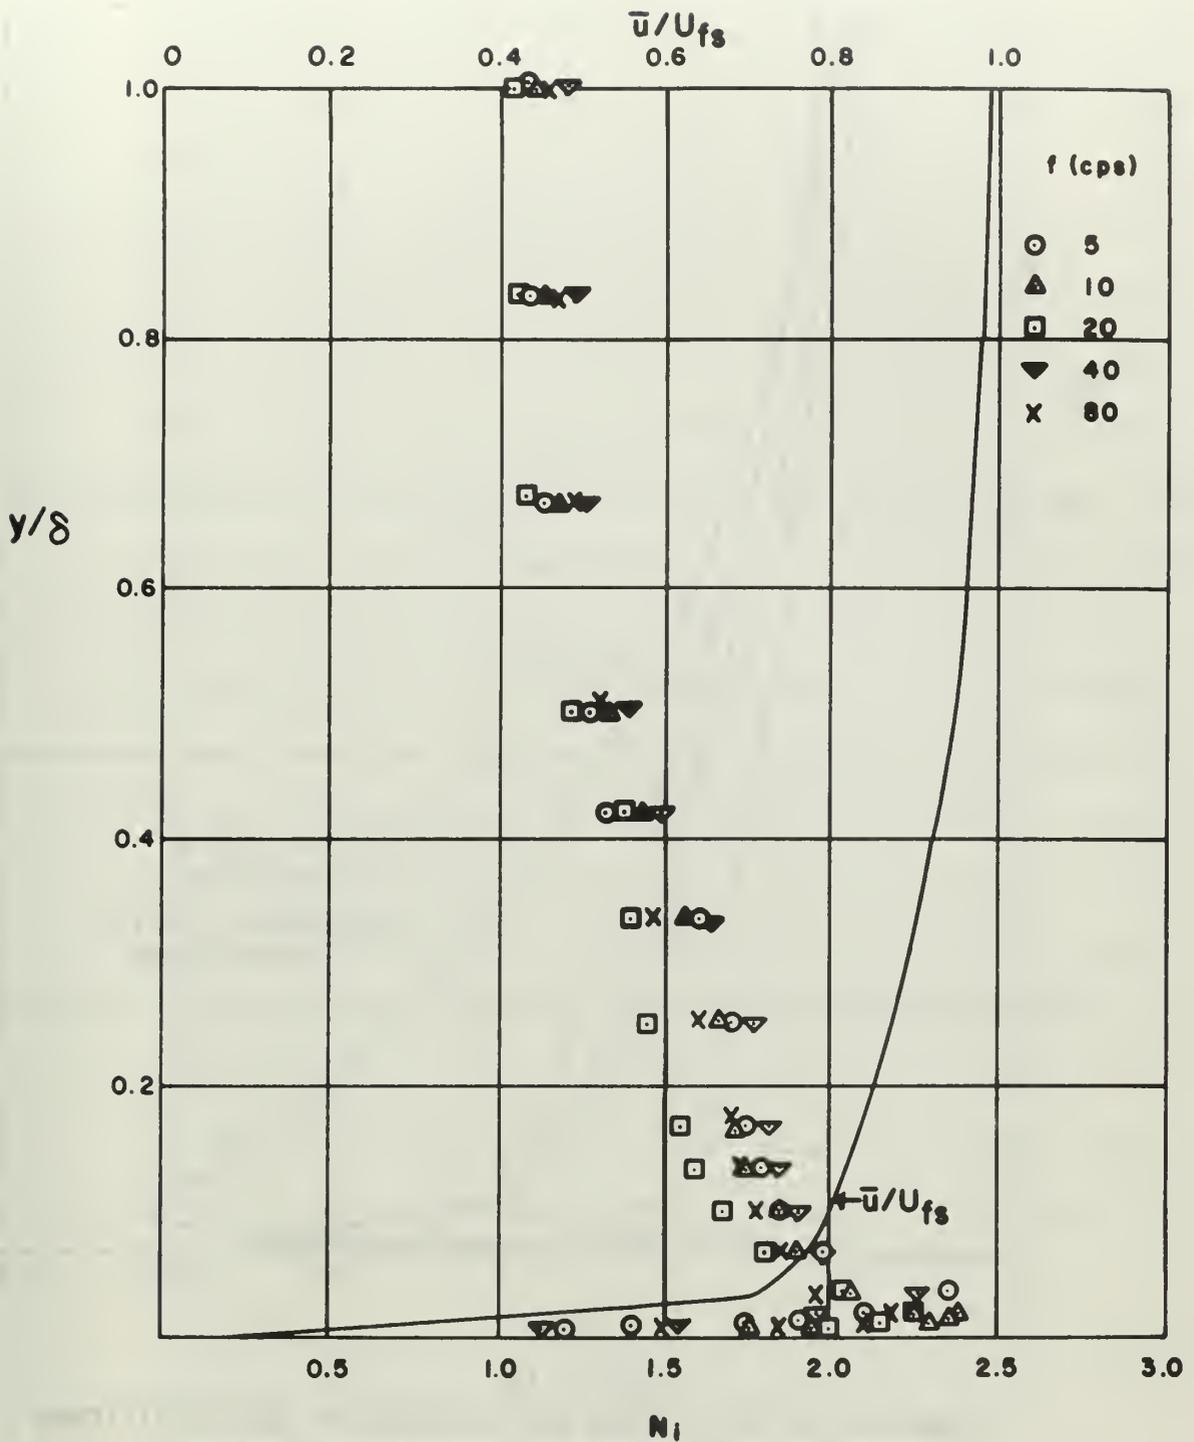


FIGURE 13  
 DISTRIBUTION OF TURBULENT INTENSITIES.  
 $N_0 = .77$        $R_x = 1.5 \times 10^6$

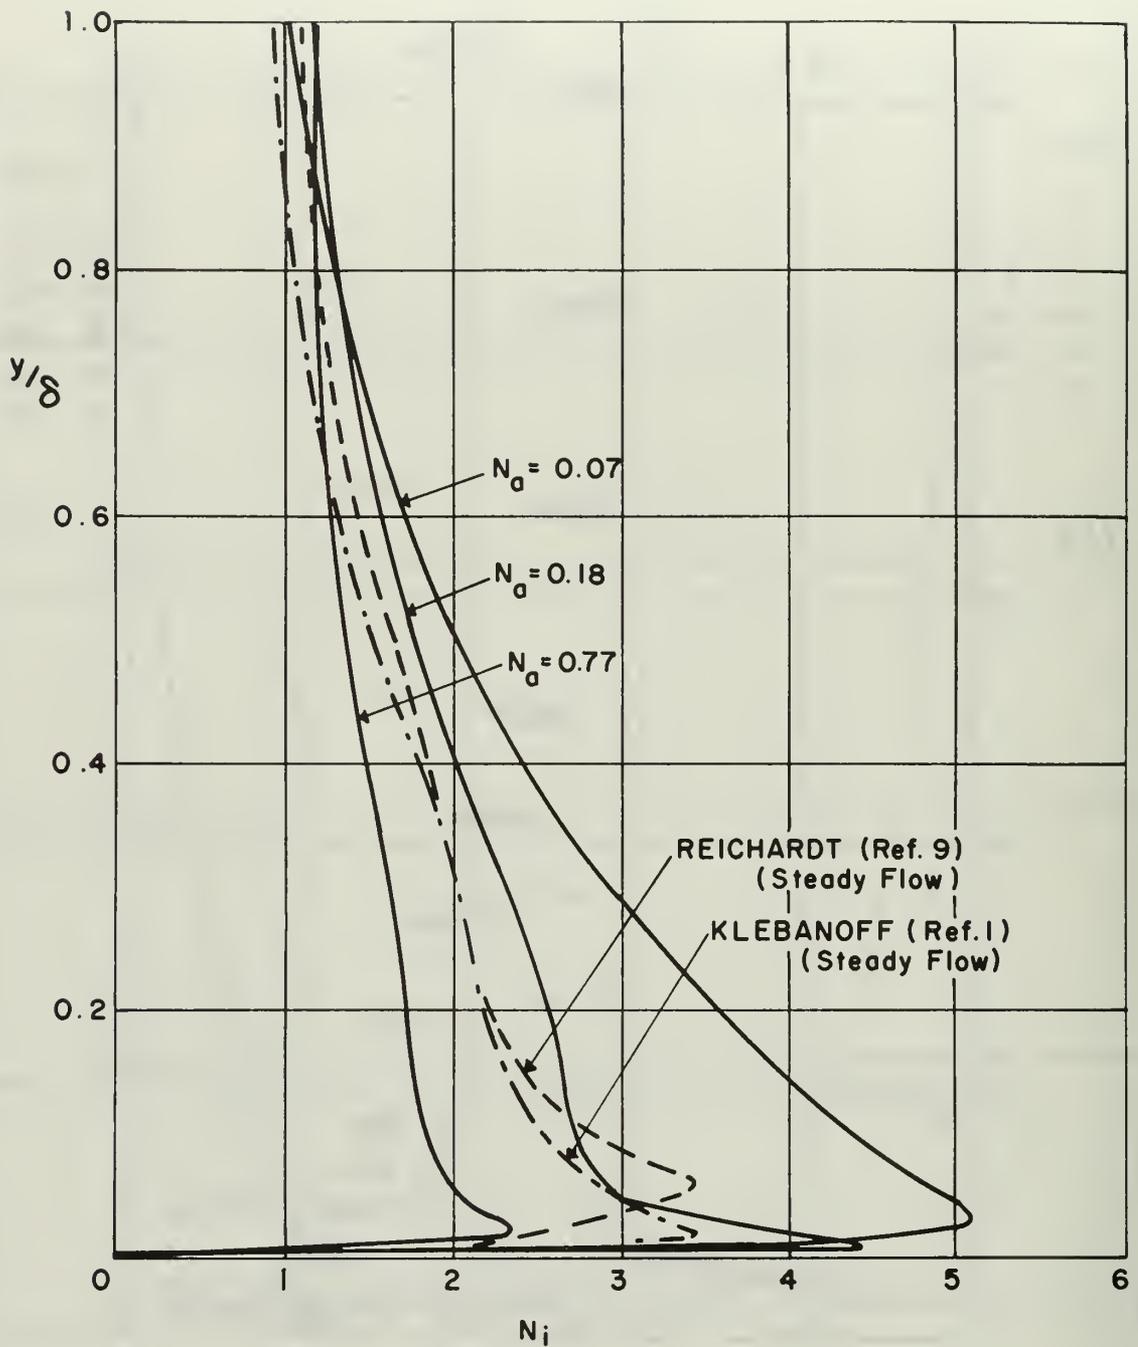


FIGURE 14  
 COMPARISON OF TURBULENT INTENSITY DISTRIBUTIONS  
 VARIOUS FLUCTUATION AMPLITUDES AND  
 STEADY FLOW RESULTS

$R_x = 1.5 \times 10^6$

and amplitude produce very little alteration in the turbulent intensity distribution in the turbulent boundary layer.

Figures 15, 16, and 17 are the oscilloscope trace photographs taken at four locations ( $y/\delta = 1.0, 0.5, 0.02, \text{ and } 0.005$ ) in the boundary layer for each of the vertical traverses. An interesting phenomenon was observed in the boundary layer at low frequencies (for example, Figure 15 for  $f = 5.0$  cps). The effect of these weak oscillations is to produce layers in the turbulent boundary layer in which turbulent bursts are seen. This is indicative of a late transition regime, that is, not a fully established turbulent boundary layer. This conclusion is born out by the measured velocity profile (Figure 11) as well as the data reported by Miller and Fejer (ref. 4).

Moreover, the hot wire traces are similar to those reported in the late transition regime by Miller and Fejer. This conclusion would also tend to explain part of the differences in results in Figure 14. The increased intensity observed for  $N_a = 0.07$  might be attributed to a late transition regime rather than a fully turbulent regime.

Further work in this area might consider the effects on turbulent intensity profiles of a new velocity parameter involving the friction velocity. This approach might lead to stronger conclusions concerning the effects of freestream oscillations on turbulent intensity distribution.

The RMS value of velocity measured in this work was a superposition of residual turbulence on the lower frequency oscillations. A more accurate method of obtaining true turbulence might be pursued in a later project.

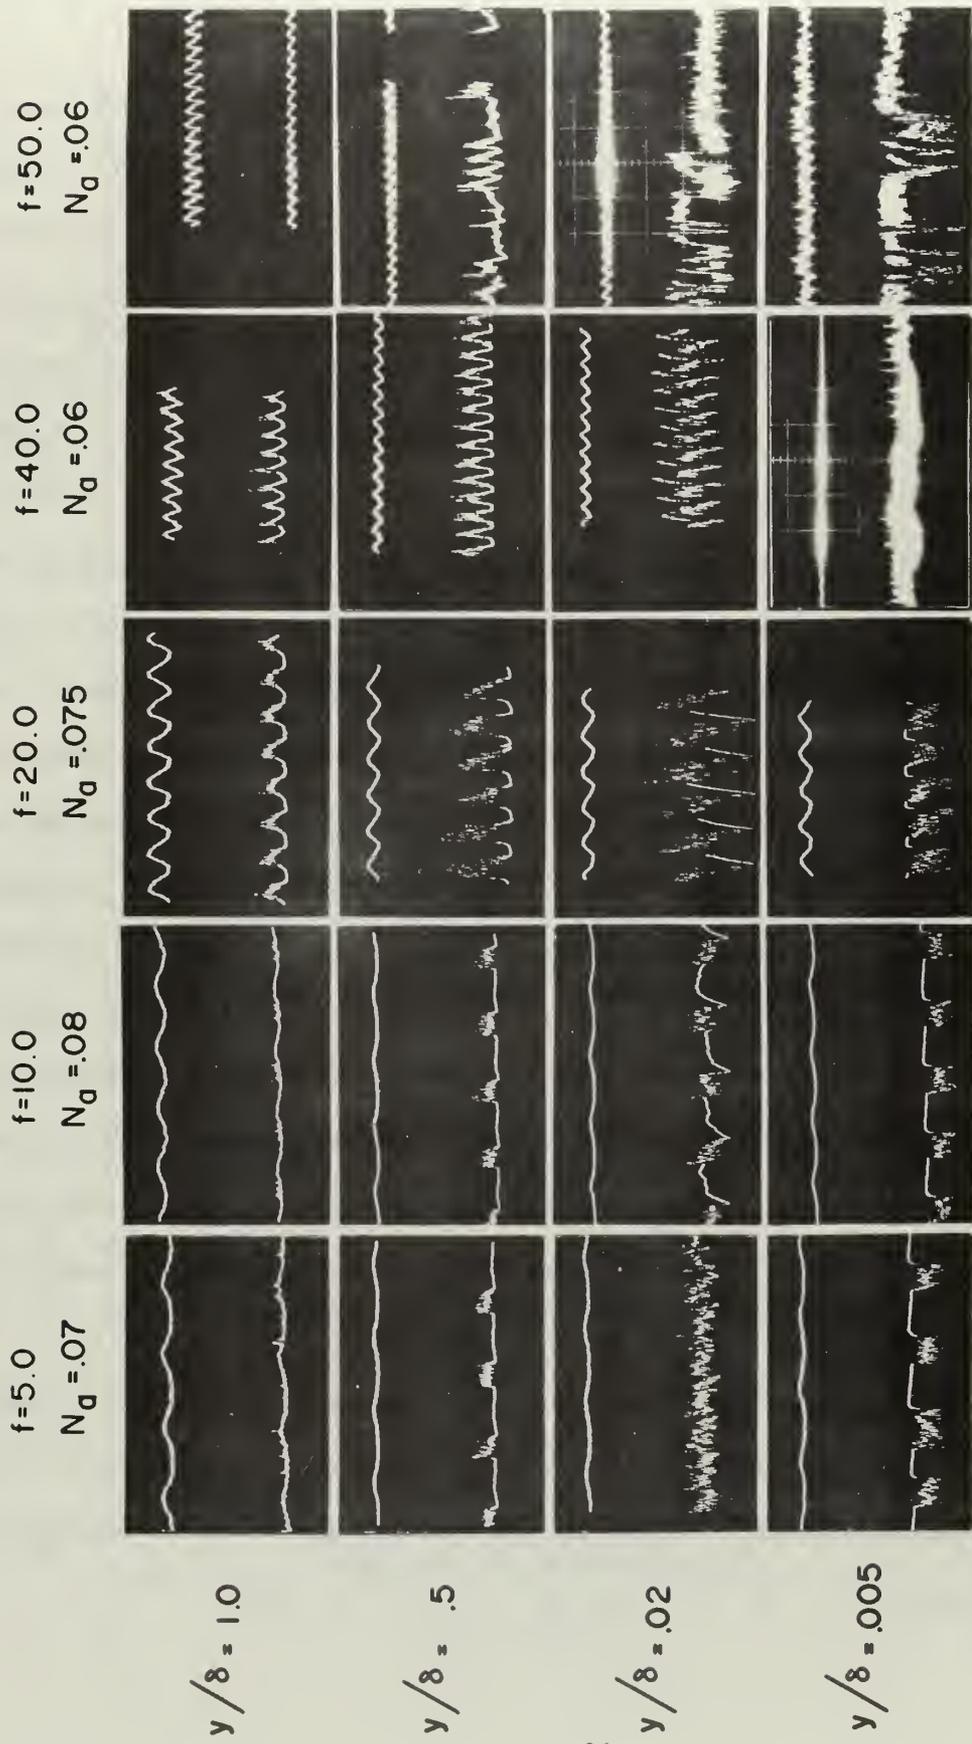


FIGURE 15  
 OSCILLOSCOPE TRACES OF TURBULENT INTENSITY IN THE FREESTREAM  
 (UPPER BEAM) AND IN THE BOUNDARY LAYER (LOWER BEAM). 2" BLADES

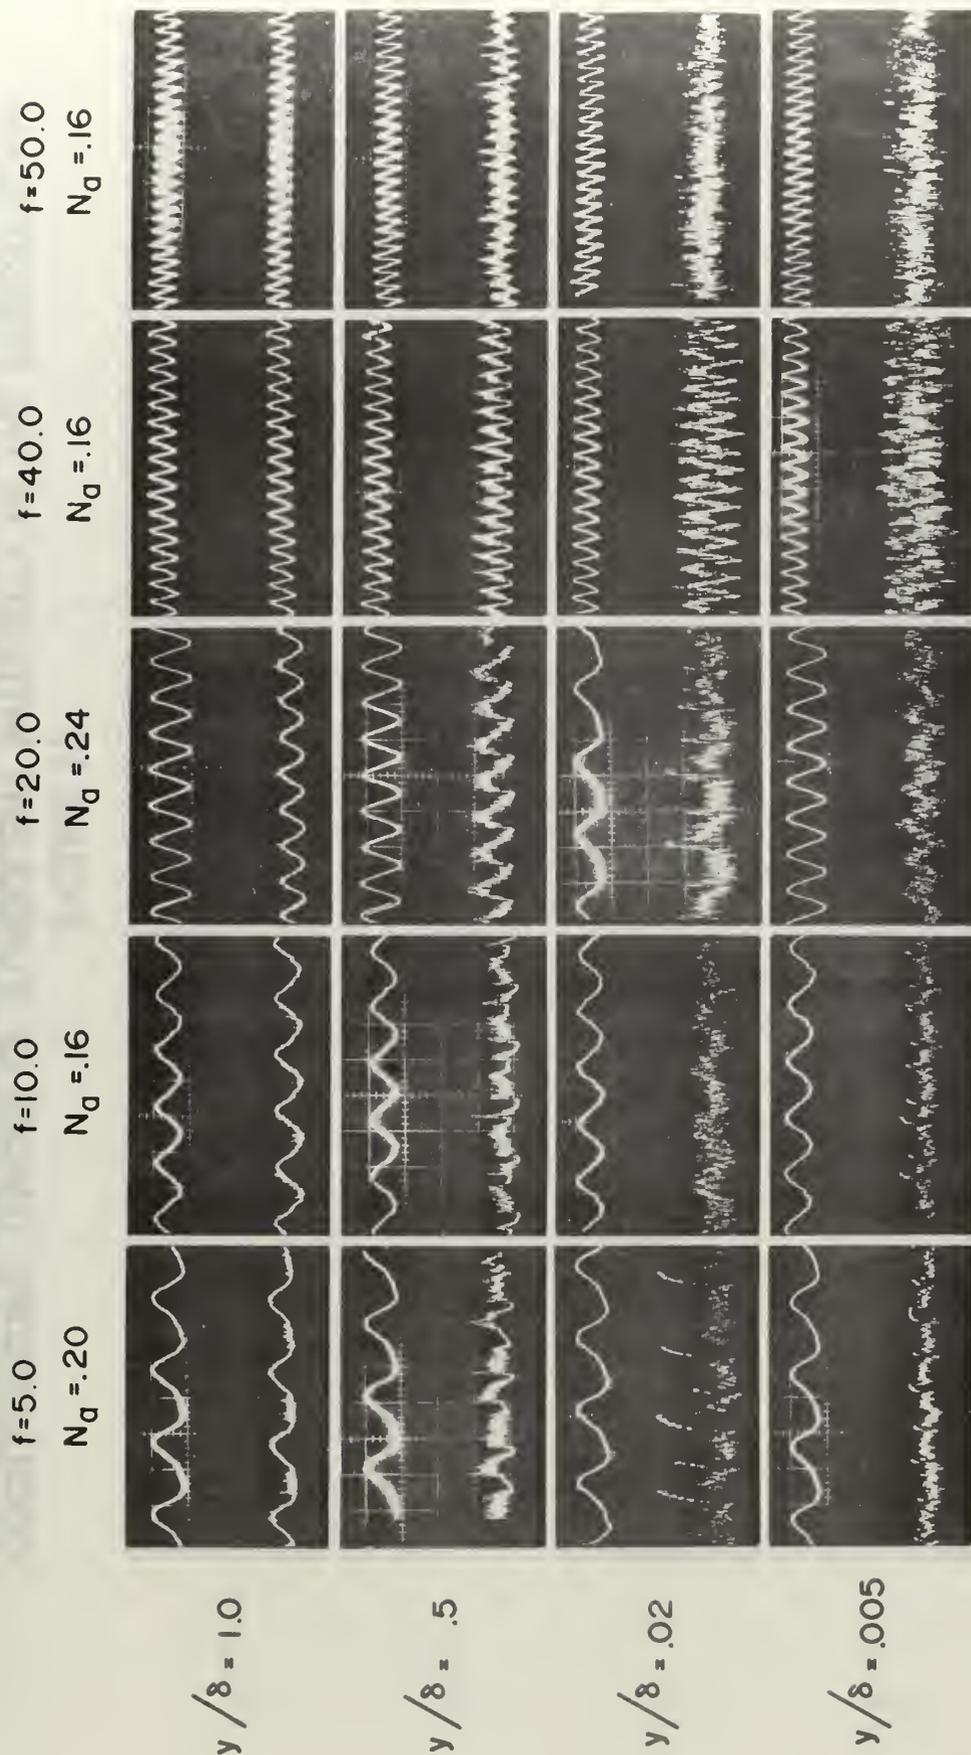


FIGURE 16  
 OSCILLOSCOPE TRACES OF TURBULENT INTENSITY IN THE FREESTREAM  
 (UPPER BEAM) AND IN THE BOUNDARY LAYER (LOWER BEAM). 3" BLADES

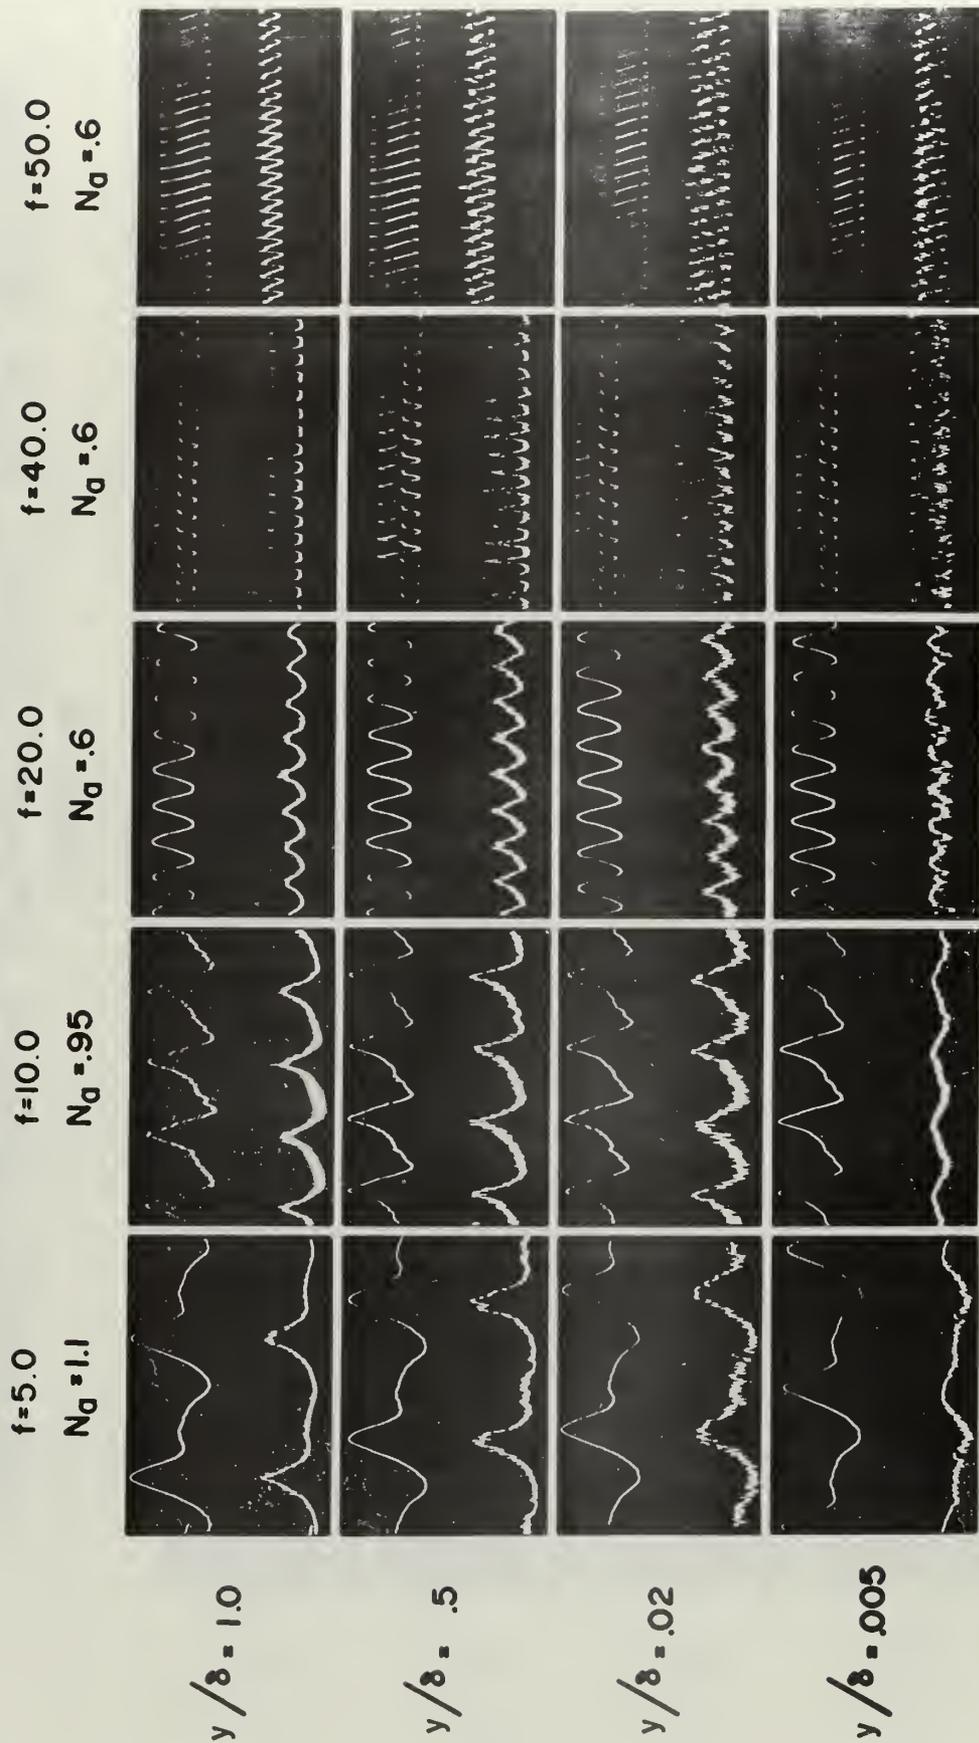


FIGURE 17

OSCILLOSCOPE TRACES OF TURBULENT INTENSITY IN THE FREESTREAM (UPPER BEAM) AND IN THE BOUNDARY LAYER (LOWER BEAM). 5" BLADES

#### 4. Conclusions

The results of this investigation lead to the conclusion that, for the ranges of frequency and amplitude studied, the superposition of a fluctuating velocity component onto the mean flow does not substantially alter the turbulent intensity distribution in the turbulent boundary layer on a flat plate at zero incidence. This is in good agreement with the heat transfer measurements of Morrissey (ref. 5), who found only a 3 to 5 per cent increase in local Nusselt numbers in such flows.

One concludes that the relatively unchanged turbulent intensity profiles are indicative of relatively unchanged eddy diffusivity distributions, confirming the analysis of Karlsson (ref. 1), who found that the mean properties of the turbulent boundary layer were unaltered by the imposition of freestream oscillations.

## BIBLIOGRAPHY

1. Karlsson, S. K. F., "An unsteady turbulent boundary layer." Johns Hopkins University, Ph. D. Thesis, 1958.
2. Klebanoff, P. S., "Characteristics of turbulence in a boundary layer with zero pressure gradient." N. A. C. A. Report No. 1247, 1955.
3. Miller, J. A., "Transition in oscillating Blasius flow." Illinois Institute of Technology, Ph. D. Thesis, 1963.
4. Miller, J. A. and Frejer, A. A., "Transition phenomena in oscillating boundary layer flows." Journal of Fluid Mechanics, 18 (1964), pp. 438-448.
5. Morrissey, J. E., "The effect of large amplitude flow oscillations on turbulent forced convection heat transfer from a flat plate." Naval Postgraduate School, Master's Thesis, 1967.
6. Murphy, J. C., "The effects of nonsteady flow on the pressure distribution about a circular cylinder." Naval Postgraduate School, Engineer's Thesis, 1966.
7. Nickerson, R. J., "The effect of freestream oscillations on the laminar boundary layers on a flat plate." Massachusetts Institute of Technology, Ph. D. Thesis, 1957.
8. Obremski, H. J., "Transition phenomena in nonsteady boundary layer flows." Illinois Institute of Technology, Ph. D. Thesis, 1966.
9. Reichardt, H., "Messungen turbulenter Schwankungen." Naturwissenschaften, 404 (1938), pp. 217-225.
10. Schraub, F. A. and Kline, S. J., "A study of the structure of the turbulent boundary layer with and without longitudinal pressure gradients." Report No. MD-12, NSF Grant, 1965.
11. Schlichting, H., Boundary Layer Theory, Fourth Edition, Pergamon Press, 1955.

APPENDIX

TABLE III  
EXPERIMENTAL RESULTS

| Run Number 1 | $N_a = 0.07$     | $f = 5.0 \text{ cps}$ | $I_{fs} = 2.0\%$ |
|--------------|------------------|-----------------------|------------------|
| $y/\zeta$    | $\bar{u}/U_{fs}$ | I                     | $N_i$            |
| 1.0          | 0.99             | 0.020                 | 1.00             |
| .821         | .985             | .024                  | 1.20             |
| .643         | .975             | .032                  | 1.60             |
| .554         | .945             | .036                  | 1.80             |
| .464         | .930             | .047                  | 2.35             |
| .349         | .925             | .055                  | 2.75             |
| .286         | .895             | .058                  | 2.90             |
| .178         | .795             | .065                  | 3.25             |
| .143         | .695             | .065                  | 3.27             |
| .107         | .570             | .074                  | 3.70             |
| .074         | .390             | .095                  | 4.75             |
| .037         | .205             | .105                  | 5.25             |
| .025         | .160             | .100                  | 5.00             |
| .021         | .140             | .093                  | 4.65             |
| .018         | .110             | .071                  | 3.55             |
| .014         | .095             | .063                  | 3.17             |
| .011         | .061             | .045                  | 2.23             |
| .007         | .025             | .019                  | 0.97             |
| 0.004        | 0.005            | 0.001                 | 0.05             |

TABLE III (continued)

| Run Number 2 | $N_a = 0.08$     | $f = 10.0$ cps | $I_{fs} = 2.0\%$ |
|--------------|------------------|----------------|------------------|
| $y/\delta$   | $\bar{u}/U_{fs}$ | I              | $N_i$            |
| 1.0          | 0.990            | 0.020          | 1.00             |
| .820         | .980             | .023           | 1.15             |
| .640         | .963             | .030           | 1.50             |
| .464         | .940             | .043           | 2.15             |
| .349         | .920             | .054           | 2.70             |
| .286         | .882             | .060           | 3.00             |
| .178         | .780             | .064           | 3.17             |
| .143         | .680             | .066           | 3.30             |
| .110         | .560             | .073           | 3.65             |
| .070         | .400             | .088           | 4.38             |
| .036         | .210             | .103           | 5.12             |
| .032         | .195             | .096           | 4.78             |
| .029         | .170             | .093           | 4.63             |
| .025         | .150             | .075           | 3.75             |
| .021         | .125             | .072           | 3.60             |
| .018         | .105             | .069           | 3.45             |
| .014         | .078             | .052           | 2.60             |
| .011         | .050             | .036           | 1.80             |
| .007         | .024             | .017           | 0.85             |
| 0.004        | 0.005            | 0.002          | 0.10             |

TABLE III (continued)

| Nun Number 3 | $N_a = 0.075$    | $f = 20.0 \text{ cps}$ | $I_{fs} = 2.15\%$ |
|--------------|------------------|------------------------|-------------------|
| $y/\delta$   | $\bar{u}/U_{fs}$ | I                      | $N_a$             |
| 1.0          | 0.99             | 0.022                  | 1.00              |
| .820         | .980             | .026                   | 1.20              |
| .695         | .975             | .031                   | 1.45              |
| .545         | .942             | .044                   | 2.05              |
| .395         | .905             | .051                   | 2.37              |
| .318         | .865             | .063                   | 2.95              |
| .242         | .830             | .085                   | 3.95              |
| .166         | .765             | .093                   | 4.35              |
| .151         | .750             | .095                   | 4.40              |
| .121         | .710             | .097                   | 4.50              |
| .091         | .625             | .101                   | 4.70              |
| .061         | .520             | .106                   | 4.92              |
| .031         | .345             | .080                   | 3.70              |
| .015         | .340             | .063                   | 2.92              |
| .012         | .150             | .053                   | 2.45              |
| .009         | .120             | .034                   | 1.60              |
| .006         | .030             | .017                   | 0.80              |
| 0.003        | 0.005            | 0.003                  | 0.11              |

TABLE III (continued)

| Run Number 4 | $N_a = 0.006$    | $f = 40.0$ cps | $I_{fs} = 2.0\%$ |
|--------------|------------------|----------------|------------------|
| $y/\delta$   | $\bar{u}/U_{fs}$ | I              | $N_i$            |
| 1.0          | 0.99             | 0.021          | 1.05             |
| .833         | .985             | .023           | 1.15             |
| .667         | .980             | .028           | 1.40             |
| .500         | .970             | .039           | 1.95             |
| .416         | .955             | .049           | 2.45             |
| .332         | .940             | .065           | 3.25             |
| .250         | .925             | .074           | 3.70             |
| .200         | .895             | .076           | 3.80             |
| .167         | .865             | .081           | 4.05             |
| .133         | .815             | .084           | 4.20             |
| .100         | .740             | .089           | 4.45             |
| .067         | .640             | .093           | 4.65             |
| .033         | .545             | .095           | 4.75             |
| .017         | .465             | .078           | 3.90             |
| .013         | .375             | .075           | 3.75             |
| .010         | .330             | .070           | 3.50             |
| .007         | .305             | .065           | 3.25             |
| 0.003        | 0.280            | 0.055          | 2.75             |

TABLE III (continued)

| Run Number 5 | $N_a = 0.06$     | $f = 80.0 \text{ cps}$ | $I_{fs} = 1.5\%$ |
|--------------|------------------|------------------------|------------------|
| $y/\delta$   | $\bar{u}/U_{fs}$ | I                      | $N_i$            |
| 1.0          | 0.990            | 0.017                  | 1.13             |
| .833         | .990             | .018                   | 1.20             |
| .667         | .985             | .021                   | 1.40             |
| .500         | .980             | .027                   | 1.82             |
| .416         | .965             | .032                   | 2.15             |
| .332         | .950             | .037                   | 2.50             |
| .250         | .940             | .040                   | 2.65             |
| .167         | .925             | .044                   | 2.90             |
| .133         | .885             | .045                   | 3.00             |
| .100         | .830             | .048                   | 3.20             |
| .067         | .790             | .051                   | 3.40             |
| .050         | .710             | .053                   | 3.55             |
| .033         | .590             | .060                   | 4.00             |
| .017         | .405             | .069                   | 4.55             |
| .013         | .400             | .068                   | 4.50             |
| .010         | .380             | .064                   | 4.25             |
| 0.005        | 0.300            | 0.060                  | 4.00             |

TABLE III (continued)

| Run Number 6 | $N_a = 0.16$     | $f = 80.0 \text{ cps}$ | $I_{fs} = 5.45\%$ |
|--------------|------------------|------------------------|-------------------|
| $y/\delta$   | $\bar{u}/U_{fs}$ | I                      | $N_i$             |
| 1.0          | 0.990            | 0.060                  | 1.10              |
| .833         | .960             | .064                   | 1.20              |
| .667         | .935             | .080                   | 1.47              |
| .500         | .920             | .084                   | 1.54              |
| .333         | .905             | .092                   | 1.68              |
| .083         | .875             | .100                   | 1.83              |
| .067         | .825             | .114                   | 2.10              |
| .050         | .780             | .115                   | 2.12              |
| .040         | .750             | .120                   | 2.20              |
| .030         | .740             | .124                   | 2.24              |
| .025         | .680             | .134                   | 2.46              |
| .015         | .645             | .140                   | 2.56              |
| .012         | .600             | .150                   | 2.76              |
| .009         | .510             | .162                   | 2.96              |
| .005         | .400             | .168                   | 3.08              |
| .003         | .290             | .180                   | 3.30              |
| 0.002        | 0.130            | 0.130                  | 2.38              |

TABLE III (continued)

| Run Number 7 | $N_a = 0.16$     | $f = 40.0 \text{ cps}$ | $I_{fs} = 6.7\%$ |
|--------------|------------------|------------------------|------------------|
| $y/\xi$      | $\bar{u}/U_{fs}$ | I                      | $N_i$            |
| 1.0          | 0.990            | 0.070                  | 1.04             |
| .833         | .985             | .078                   | 1.16             |
| .667         | .975             | .088                   | 1.32             |
| .500         | .940             | .104                   | 1.70             |
| .416         | .925             | .132                   | 1.96             |
| .333         | .900             | .152                   | 2.28             |
| .250         | .880             | .166                   | 2.48             |
| .167         | .840             | .176                   | 2.64             |
| .083         | .825             | .186                   | 2.76             |
| .050         | .765             | .200                   | 3.00             |
| .033         | .735             | .226                   | 3.36             |
| .017         | .690             | .252                   | 3.76             |
| .013         | .665             | .258                   | 3.86             |
| .010         | .620             | .268                   | 4.00             |
| .007         | .550             | .274                   | 4.04             |
| .005         | .375             | .222                   | 3.32             |
| .003         | .295             | .134                   | 2.00             |
| 0.001        | 0.205            | 0.095                  | 1.41             |

TABLE III (continued)

| Run Number 8 | $N_a = 0.24$     | $f = 20.0 \text{ cps}$ | $I_{fs} = 6.3\%$ |
|--------------|------------------|------------------------|------------------|
| $y/\delta$   | $\bar{u}/U_{fs}$ | I                      | $N_i$            |
| 1.0          | 0.990            | 0.073                  | 1.16             |
| .833         | .980             | .081                   | 1.28             |
| .667         | .960             | .096                   | 1.52             |
| .500         | .950             | .120                   | 1.90             |
| .333         | .925             | .159                   | 2.52             |
| .250         | .895             | .174                   | 2.76             |
| .167         | .875             | .176                   | 2.80             |
| .083         | .830             | .180                   | 2.78             |
| .050         | .780             | .192                   | 3.04             |
| .033         | .740             | .201                   | 3.34             |
| .027         | .700             | .216                   | 3.44             |
| .020         | .670             | .226                   | 3.60             |
| .017         | .615             | .230                   | 3.66             |
| .013         | .570             | .240                   | 3.80             |
| .010         | .490             | .254                   | 3.92             |
| .007         | .425             | .252                   | 3.90             |
| .005         | .325             | .189                   | 3.00             |
| 0.003        | 0.210            | 0.139                  | 2.20             |

TABLE III (continued)

| Run Number 9 | $N_a = 0.16$     | $f = 10.0$ cps | $I_{fs} = 4.6\%$ |
|--------------|------------------|----------------|------------------|
| $y/\delta$   | $\bar{u}/U_{fs}$ | I              | $N_i$            |
| 1.0          | 0.990            | 0.056          | 1.22             |
| .833         | .975             | .060           | 1.30             |
| .667         | .960             | .076           | 1.65             |
| .500         | .930             | .096           | 2.08             |
| .333         | .900             | .122           | 2.64             |
| .250         | .880             | .127           | 2.76             |
| .167         | .835             | .131           | 2.84             |
| .083         | .770             | .132           | 2.88             |
| .050         | .725             | .134           | 2.92             |
| .033         | .675             | .141           | 3.06             |
| .027         | .630             | .150           | 3.26             |
| .020         | .580             | .168           | 3.66             |
| .017         | .540             | .188           | 4.08             |
| .013         | .490             | .200           | 4.36             |
| .010         | .410             | .180           | 3.90             |
| .007         | .325             | .132           | 2.86             |
| .005         | .230             | .110           | 2.40             |
| 0.003        | 0.210            | 0.104          | 2.06             |

TABLE III (continued)

| Run Number 10 | $N_a = 0.20$     | $f = 5.0$ cps | $I_{fs} = 5.5\%$ |
|---------------|------------------|---------------|------------------|
| $y/\delta$    | $\bar{u}/U_{fs}$ | I             | $N_i$            |
| 1.0           | 0.990            | 0.055         | 1.00             |
| .833          | .985             | .060          | 1.09             |
| .667          | .975             | .064          | 1.16             |
| .500          | .950             | .088          | 1.60             |
| .333          | .920             | .110          | 2.00             |
| .250          | .880             | .128          | 2.32             |
| .167          | .845             | .130          | 2.36             |
| .083          | .760             | .144          | 2.62             |
| .067          | .725             | .150          | 2.72             |
| .050          | .667             | .172          | 3.12             |
| .033          | .625             | .190          | 3.44             |
| .027          | .580             | .200          | 3.64             |
| .020          | .550             | .212          | 3.86             |
| .013          | .470             | .204          | 3.76             |
| .007          | .300             | .190          | 3.44             |
| 0.003         | 0.175            | 0.126         | 2.28             |

TABLE III (continued)

| Run Number 11 | $N_a = 1.10$     | $f = 5.0$ cps | $I_{fs} = 25.0\%$ |
|---------------|------------------|---------------|-------------------|
| $y/\delta$    | $\bar{u}/U_{fs}$ | I             | $N_i$             |
| 1.0           | 0.990            | 0.270         | 1.08              |
| .833          | .980             | .275          | 1.10              |
| .667          | .970             | .290          | 1.15              |
| .500          | .945             | .320          | 1.29              |
| .416          | .915             | .340          | 1.37              |
| .333          | .890             | .410          | 1.61              |
| .250          | .780             | .425          | 1.70              |
| .167          | .750             | .435          | 1.74              |
| .133          | .675             | .450          | 1.79              |
| .100          | .630             | .462          | 1.85              |
| .067          | .550             | .491          | 1.97              |
| .033          | .485             | .590          | 2.36              |
| .017          | .405             | .530          | 2.11              |
| .013          | .310             | .470          | 1.92              |
| .010          | .225             | .438          | 1.75              |
| .007          | .150             | .350          | 1.41              |
| 0.003         | 0.100            | 0.305         | 1.22              |

TABLE III (continued)

| Run Number 12 | $N_a = 0.95$     | $f = 10.0$ cps | $I_{fs} = 24.0\%$ |
|---------------|------------------|----------------|-------------------|
| $y/\delta$    | $\bar{u}/U_{fs}$ | I              | $N_i$             |
| 1.0           | 0.990            | 0.270          | 1.12              |
| .833          | .990             | .272           | 1.13              |
| .667          | .980             | .285           | 1.18              |
| .500          | .965             | .310           | 1.30              |
| .416          | .950             | .340           | 1.42              |
| .333          | .905             | .375           | 1.57              |
| .250          | .870             | .400           | 1.67              |
| .167          | .830             | .410           | 1.71              |
| .133          | .800             | .420           | 1.75              |
| .100          | .720             | .430           | 1.80              |
| .067          | .615             | .455           | 1.90              |
| .033          | .560             | .500           | 2.07              |
| .017          | .470             | .540           | 2.25              |
| .013          | .410             | .571           | 2.38              |
| .010          | .300             | .570           | 2.37              |
| .007          | .270             | .550           | 2.28              |
| 0.003         | 0.200            | 0.420          | 1.75              |

TABLE III (continued)

| Run Number 13 | $N_a = 0.60$     | $f = 20.0 \text{ cps}$ | $I_{fs} = 20.5\%$ |
|---------------|------------------|------------------------|-------------------|
| $y/\delta$    | $\bar{u}/U_{fs}$ | I                      | $N_i$             |
| 1.0           | 0.990            | 0.214                  | 1.04              |
| .833          | .985             | .218                   | 1.06              |
| .667          | .970             | .225                   | 1.10              |
| .500          | .940             | .255                   | 1.25              |
| .416          | .920             | .280                   | 1.38              |
| .333          | .865             | .290                   | 1.42              |
| .250          | .805             | .300                   | 1.46              |
| .167          | .780             | .320                   | 1.55              |
| .133          | .730             | .328                   | 1.60              |
| .100          | .680             | .345                   | 1.68              |
| .068          | .620             | .370                   | 1.81              |
| .033          | .580             | .420                   | 2.05              |
| .017          | .420             | .460                   | 2.25              |
| .013          | .330             | .440                   | 2.15              |
| .010          | .250             | .410                   | 2.00              |
| .007          | .190             | .400                   | 1.95              |
| 0.003         | 0.110            | 0.360                  | 1.75              |

TABLE III (continued)

| Run Number 14 | $N_a = 0.60$     | $f = 40.0$ cps | $I_{fs} = 18.8\%$ |
|---------------|------------------|----------------|-------------------|
| $y/\delta$    | $\bar{u}/U_{fs}$ | I              | $N_i$             |
| 1.0           | 0.990            | 0.225          | 1.20              |
| .833          | .985             | .228           | 1.21              |
| .667          | .980             | .235           | 1.25              |
| .500          | .960             | .260           | 1.38              |
| .416          | .915             | .278           | 1.47              |
| .333          | .875             | .305           | 1.63              |
| .250          | .810             | .330           | 1.76              |
| .167          | .770             | .340           | 1.81              |
| .133          | .760             | .345           | 1.83              |
| .100          | .700             | .355           | 1.88              |
| .067          | .630             | .370           | 1.97              |
| .033          | .600             | .425           | 2.26              |
| .017          | .540             | .355           | 1.90              |
| .013          | .480             | .330           | 1.75              |
| .010          | .400             | .290           | 1.55              |
| .007          | .320             | .265           | 1.40              |
| 0.003         | 0.200            | 0.216          | 1.15              |

TABLE III (continued)

| Run Number 15 | $N_a = 0.60$     | $f = 80 \text{ cps}$ | $I_{fs} = 19.8\%$ |
|---------------|------------------|----------------------|-------------------|
| $y/\delta$    | $\bar{u}/U_{fs}$ | I                    | $N_i$             |
| 1.0           | 0.990            | 0.230                | 1.16              |
| .833          | .985             | .235                 | 1.18              |
| .667          | .970             | .245                 | 1.23              |
| .500          | .950             | .260                 | 1.31              |
| .416          | .925             | .275                 | 1.38              |
| .333          | .880             | .295                 | 1.48              |
| .250          | .810             | .320                 | 1.62              |
| .167          | .760             | .340                 | 1.71              |
| .133          | .745             | .345                 | 1.74              |
| .100          | .650             | .350                 | 1.77              |
| .067          | .615             | .362                 | 1.83              |
| .033          | .490             | .395                 | 1.99              |
| .017          | .440             | .430                 | 2.17              |
| .013          | .420             | .415                 | 2.10              |
| .010          | .385             | .365                 | 1.85              |
| .007          | .320             | .347                 | 1.75              |
| 0.003         | 0.215            | 0.297                | 1.50              |

INITIAL DISTRIBUTION LIST

|                                                                                                                   | No. Copies |
|-------------------------------------------------------------------------------------------------------------------|------------|
| 1. Defense Documentation Center<br>Cameron Station<br>Alexandria, Virginia 22314                                  | 20         |
| 2. Library<br>Naval Postgraduate School<br>Monterey, California 93940                                             | 2          |
| 3. Commander, Naval Air Systems Command<br>Navy Department<br>Washington, D. C. 20360                             | 1          |
| 4. Professor J. A. Miller<br>Department of Aeronautics<br>Naval Postgraduate School<br>Monterey, California 93940 | 20         |
| 5. Chairman, Department of Aeronautics<br>Naval Postgraduate School<br>Monterey, California 93940                 | 1          |
| 6. Professor A. E. Fuhs<br>Department of Aeronautics<br>Naval Postgraduate School<br>Monterey, California 93940   | 1          |
| 7. ENS Gerald Keith Jacobs, USN<br>403 First Street, N. E.<br>Oelwein, Iowa 50662                                 | 3          |
| 8. Naval Ship Systems Command<br>Department of the Navy<br>Washington, D. C. 20360                                | 1          |



## Security Classification

## DOCUMENT CONTROL DATA - R&amp;D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |                                                                                      |                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------|-----------------------|
| 1. ORIGINATING ACTIVITY (Corporate author)<br>Naval Postgraduate School<br>Monterey, California 93940                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  | 2a. REPORT SECURITY CLASSIFICATION<br>Unclassified                                   |                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  | 2b. GROUP                                                                            |                       |
| 3. REPORT TITLE<br>Intensity Distribution in the Oscillating Turbulent Boundary Layer on a Flat Plate                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |                                                                                      |                       |
| 4. DESCRIPTIVE NOTES (Type of report and inclusive dates)<br>Master of Science Thesis, March 1968                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |                                                                                      |                       |
| 5. AUTHOR(S) (Last name, first name, initial)<br><br>Jacobs, Gerald K.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |                                                                                      |                       |
| 6. REPORT DATE<br>March 1968                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  | 7a. TOTAL NO. OF PAGES<br>56                                                         | 7b. NO. OF REFS<br>11 |
| 8a. CONTRACT OR GRANT NO.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  | 9a. ORIGINATOR'S REPORT NUMBER(S)                                                    |                       |
| b. PROJECT NO.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |                                                                                      |                       |
| c.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  | 9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)          |                       |
| d.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |                                                                                      |                       |
| 10. AVAILABILITY/LIMITATION NOTICES<br><del>This document is subject to special export controls and each transmission for foreign dissemination or foreign circulation is made only with prior approval of the Naval Postgraduate School.</del>                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |                                                                                      |                       |
| 11. SUPPLEMENTARY NOTES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  | 12. SPONSORING MILITARY ACTIVITY<br>Naval Ships Systems Command<br>Washington, D. C. |                       |
| 13. ABSTRACT<br><br>The effect of oscillating flow on the turbulent intensity distribution in the turbulent boundary layer on a flat plate was investigated experimentally.<br><br>A wind tunnel incorporating a set of rotating shutter blades downstream of the test section was used to create oscillating flow with amplitude variations from 6 to 110 per cent of mean velocity and frequencies ranging from 5 to 80 cycles per second at a local Reynolds number of $1.5 \times 10^6$ . A vertical traverse of the turbulent boundary layer was conducted with a hot wire anemometer, and the mean velocity profile and the turbulent intensity distribution were recorded. |  |                                                                                      |                       |

14

KEY WORDS

LINK A

LINK B

LINK C

ROLE

WT

ROLE

WT

ROLE

WT

Turbulence  
Boundary Layer  
Turbulent Intensity Distribution  
Unsteady Flow  
Oscillating Flow  
Experimental  
Flat Plate









~~\_\_\_\_\_~~

thesJ235

DUDLEY KNOX LIBRARY



3 2768 00414741 3

DUDLEY KNOX LIBRARY