



Title	A novel discrete network design problem formulation and its global optimization solution algorithm
Author(s)	Wang, DZW; Liu, H; Szeto, WY
Citation	Transportation Research Part E: Logistics and Transportation Review, 2015, v. 79, p. 213-230
Issued Date	2015
URL	http://hdl.handle.net/10722/215234
Rights	This work is licensed under a Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License.

1 **A novel discrete network design problem formulation and its global optimization solution**
2 **algorithm**

3

4 **David Z.W. Wang***, Haoxiang Liu

5 School of Civil and Environmental Engineering, Nanyang Technological University, 50 Nanyang Avenue,
6 639798, Singapore

7 **W. Y. Szeto**

8 Department of Civil Engineering, The University of Hong Kong, Pok Fu Lam, Hong Kong

9

10 **ABSTRACT**

11

12 Conventional discrete transportation network design problem deals with the optimal decision on
13 new link addition, assuming the capacity of each candidate link addition is predetermined and
14 fixed. In this paper, we address a novel yet general discrete network design problem formulation
15 that aims to determine the optimal new link addition and their optimal capacities simultaneously,
16 which answers the questions on whether a new link should be added or not, and if added, what
17 should be the optimal link capacity. A global optimization method employing linearization, outer
18 approximation and range reduction techniques is developed to solve the formulated model.

19 Key words: Network design problem, User equilibrium, Mixed-integer linear programming, Global
20 optimization, Range reduction

21

22 **1. Introduction**

23 The discrete network design problem (DNDP) involves the optimal decision on addition of new
24 links or roadway segments to an existing transportation network, subject to a limited investment
25 budget. Traditionally, given a group of candidate links with fixed capacities, the DNDP is
26 formulated as 0-1 decision problem aiming to determine the optimal road construction plan. The
27 objective of DNDP is to optimize transportation network performance while considering the
28 drivers' routing behavior, for example, following deterministic user equilibrium (DUE) (Sheffi,
29 1985). The DNDP is typically formulated as a bi-level program with the upper-level minimizing
30 the total travel time cost and the lower-level describing the equilibrium flow pattern.

31 The DNDP has been widely investigated in previous research works, and it is widely recognized
32 as one of the most difficult frontiers in transportation study due to its computational difficulties
33 in solving the mixed-integer nonlinear nonconvex, bi-level program formulation. Yang and Bell
34 (1998) reviewed a number of models and solution algorithms for network design problem (NDP)
35 based on bi-level programming. Magnanti and Wong (1984) presented a unifying framework for
36 deriving a bunch of algorithms for DNDP and reviewed some computational experience in
37 solving NDP. LeBlanc (1975) proposed a branch-and-bound (B&B) algorithm for solving the
38 upper-level problem of DNDP. Poorzahedy and Turnquist (1982) adopted a well-behaved

1 function to substitute the original total user cost objective function and formulated a single-level
2 model. A B&B based heuristic algorithm was also given in their research. By applying the
3 concept of support function to express the relationship between improvement flows and new
4 addition links, Gao et al. (2005) transformed the bi-level programming of DNDP into a general
5 nonlinear problem and thus traditional constrained optimization algorithms can be used. Solanki
6 et al. (1998) decomposed the DNDP into a sequence of sub-problems and presented a quasi-
7 optimization heuristic algorithm. Furthermore, heuristic/meta-heuristic approaches were studied
8 to solve DNDP, including ant system/cooperating agents algorithm (Poorzahedy and
9 Abulghasemi, 2005), genetic algorithms (Drezner and Wesolowsky, 2003; Kim and Kim, 2006)
10 and so on. Some methods of hybrid meta-heuristic were also designed and compared among each
11 other (Poorzahedy and Rouhani, 2007). More recently, global optimal algorithms for NDP have
12 generated interest amongst researchers. Wang and Lo (2010) employed single-level mixed-
13 integer linear programming (MILP) to approximating continuous network design problem
14 (CNDP), which dealt with continuous expansion of existing links. The nonlinearity of travel time
15 function was removed by applying a convex-combination based piecewise linear approximation.
16 Luathep et al. (2011) further extended this method to solve mixed network design problem
17 (MNDP), which is a combination of CNDP and DNDP. The DUE condition was depicted by a
18 variational inequality (VI) problem and a cutting constraint based algorithm was proposed to
19 seek the optimal solution. Farvaresh and Sepehri (2011) developed a single-level mixed-integer
20 linear programming by transforming the lower-level DUE constraints into the equivalent Karush-
21 Kuhn-Tucker (KKT) condition. Li et al. (2012) presented a global optimal approach for CNDP
22 based on the concept of gap function and penalty. Wang et al. (2013) developed a NDP model
23 with discrete multiple capacity levels to address the problem of adding an optimal number of
24 lanes to existing candidate links. Furthermore, Fontaine and Minner (2014) proposed a solution
25 method based on bender decomposition to solve linearized discrete network design problem. A
26 global optimal method is designed by making use of the relationship between user equilibrium
27 traffic assignment and system optimal principle. Szeto et al. (2014) address a sustainable road
28 network design problem with land use transportation interaction over time. Liu and Wang (2015)
29 proposed a global optimization solution approach for CNDP with stochastic user equilibrium
30 travel flow pattern.

31 In previous studies, the discrete network design problems (DNDP) assume pre-determined road
32 capacity for candidate link addition, while only addressing the issue that whether or not a new
33 link will be constructed. However, it is more interesting to answer the question that whether or
34 not a new link should be added, and simultaneously, if added, what is the optimal link capacity.
35 In this paper, we exploit a DNDP problem with consideration of link capacity optimization,
36 which aims to optimize the network performance via determining which links should be added
37 from a set of candidate links and what capacities the new links to be constructed should have.
38 The decision variables for a candidate link simultaneously include both discrete (binary)
39 variables, which indicates whether the candidate link will be added or not, and continuous
40 variables, i.e. the link capacity variables (the scenario with only discrete capacity levels is also
41 considered in this paper). The DUE condition is used to describe the equilibrium traffic flow.
42 Taking the advantage of variational inequality formulation in representing the DUE condition,
43 this study firstly formulates a mathematical program with equilibrium constraints. Then, a global
44 optimization method is proposed to solve the problem. As the transport network design problem
45 is naturally formulated as an inherently nonlinear and non-convex problem, the advantage and
46 benefit of finding the globally optimal solution is obvious, to ensure that the network design plan

1 is exactly the “best plan” to achieve the targeted goal. Indeed, no previous studies have ever
2 developed global optimization solution method for solving the transport network design problem
3 presented in this paper, and this study could contribute in filling in this research gap in the
4 literature. Noting that the nonlinearity of the problem stems from the bilinear terms and
5 nonlinear travel time functions in the programming, this study applies two different techniques to
6 deal with them. For the bilinear functions, we apply a Reformulation-linearization technique
7 (Sherali and Adams, 1994, 1998) to transform them into a set of equivalent linear constraints;
8 meanwhile, for the multi-variable travel time functions, we firstly take logarithm of them and
9 then derive its mixed-integer linear relaxation through an outer-approximation technique. By
10 doing so, a mixed-integer linear program (MILP) relaxation model is obtained, whose solution
11 provides a tight lower bound of the original model solution. Then, a range reduction technique is
12 applied to update and improve the lower bound until the gap between the lower bound and upper
13 bound fulfills certain stopping criteria. The solution algorithm is proved to converge to the global
14 optimal solution of the original problem.

15 This study considers a novel, yet more general NDP problem, which is sought to provide
16 transportation network planners more indicative information not only on new candidate link
17 additions, but also on optimal capacity of the new links, which are otherwise assumed to be
18 given in previous DNDP studies. The developed model is more general formulation, which may
19 include other conventional network design problems as particular cases. For example, when the
20 capacity for each new link addition is given, this model will reduce to traditional DNDP in the
21 literature; when the discrete variables on new link addition plan is predetermined, this problem is
22 indeed a classical continuous network design problem (CNDP). Assuming road capacities to be
23 continuous, the solutions of CNDP provide a “first-best” road capacity expansion plan. In
24 practice, the CNDP modeling and solution algorithm is more useful when signalization or ramp
25 metering is considered (Yang and Bell, 1998). Besides, in this study, it is also demonstrated that
26 the model formulation can be used to solve the case of DNDP assuming discrete link capacity
27 (discrete number of lanes) for new link additions. For the model formulation, which is still
28 intrinsically nonlinear and nonconvex, a global optimization algorithm is developed to solve the
29 model to its exact global optimal solution. Specifically, the original model formulation is firstly
30 relaxed into a mixed integer linear programming problem, whose solution provides the lower
31 bound of the original problem. Then, the lower bound is updated and improved until the global
32 optimization solution is obtained. In constructing the linear programming relaxation,
33 reformulation and linearization technique and mixed-integer outer-approximation approach are
34 adopted. In summary, this paper contributes to the literature in the following aspects: firstly, it
35 provides a novel yet general network design problem formulation to address both the discrete
36 link addition design and continuous road capacity design, which is not studied in previous
37 researches (to our best knowledge). Secondly, a global optimization solution algorithm
38 employing various linearization techniques is developed. Different from the global optimization
39 algorithm used in previous studies (Wang and Lo, 2010 and Luathep et al. 2011), the solution
40 method developed in this study is proved to be able to solve the real global optimum of the
41 original problem, rather than that for only the linearized approximation of the original problem.
42 In addition, the proposed model and solution algorithm could be tailored and adapted to address
43 DNDP with special considerations. For example, the model is shown to be able to solve the
44 network design problem with traffic assignment considering explicit capacity constraints, as well
45 as the DNDP with assumption of discrete capacity levels in design process.

1 The remainder of this paper is organized as follows. Section 2 presents the original model
 2 formulation and the relaxed mixed-integer linear model reformulation. Section 3 proposes the
 3 global optimal algorithm. Section 4 discusses several practical considerations. Section 5 reports
 4 numerical examples. The final section summarizes the paper.

5 2. Model Formulation

6 The following notation is used for the formulation.

Sets and parameters

A_1	Set of existing links in the network
A_2	Set of candidate links in the network
A	Set of all links in the network, $A = A_1 \cup A_2$
W	Set of origin-destination (OD) pairs
d^w	Fixed demand between a specified OD pair $w \in W$, $\mathbf{d}^w = [d^w]$ is the vector form demand between the specified OD pair w with a length of N (number of node), wherein the element equals to d^w at the origin node, $-d^w$ at the destination node and 0 otherwise.
Δ	Node-link incidence matrix with a size of $N \times A$, $\Delta = [\delta_a^n]$, where $\delta_a^n = 1$ if node n lies at the entrance of link $a \in A$, $\delta_a^n = -1$ if node n lies at the exit of link a , and $\delta_a^n = 0$ otherwise.
\underline{y}_a	Lower bound of link capacity for candidate link $a \in A_2$
\bar{y}_a	Upper bound of link capacity for candidate link $a \in A_2$
B	Total available budget
M	A large enough positive number
Y_a	Link capacity for existing link $a \in A_1$

Decision variables

x_a	Continuous link flow variable, $\mathbf{x} = [x_a]$, $a \in A$
y_a	Continuous link capacity variable for candidate link, $\mathbf{y} = [y_a]$, $a \in A_2$
u_a	Binary decision variable, $\mathbf{u} = [u_a]$, $a \in A_2$. It indicates whether a candidate link is added or not for $a \in A_2$: link a is added to the network if $u_a = 1$ and otherwise if $u_a = 0$. For existing link $a \in A_1$, u_a (as is defined to represent γ_a in subsection 2.2.1) indicates whether traffic flows on this link is zero or not: no traffic if $u_a = 0$ and $u_a = 1$ otherwise.
v_a^w	Continuous disaggregate link flow between OD pair $w \in W$, $\mathbf{v}^w = [v_a^w]$, $a \in A$
t_a	Link travel time function, $a \in A$
g_a	Investment function for candidate link $a \in A_2$

1 The proposed DNDP model aims to provide the transportation network planner simultaneously
2 optimal decisions on both new link additions (binary variables) and new link capacities
3 (continuous variables). It is assumed that the route choice behavior of network users follows the
4 Wardrop's first principle (Wardrop, 1952). In order to minimize the total network travel time
5 costs subject to a given budget, this problem can be represented as following:

6 [OP: Original Problem]

$$7 \quad \min_{x,y,u} Z_{\text{OP}} = \sum_{a \in A_1} x_a t_a(x_a) + \sum_{a \in A_2} x_a t_a(x_a, y_a, u_a) \quad (1)$$

8 Subject to:

$$9 \quad \underline{y}_a \leq y_a \leq \bar{y}_a, \quad \forall a \in A_2 \quad (2)$$

$$10 \quad \sum_{a \in A_2} g_a(y_a, u_a) = \sum_{a \in A_2} \alpha u_a y_a + \beta u_a \leq B \quad (3)$$

$$11 \quad x_a \leq u_a M, \quad \forall a \in A_2 \quad (4)$$

$$12 \quad u_a \in \{0,1\}, \quad \forall a \in A_2 \quad (5)$$

$$13 \quad \mathbf{x} = \mathbf{x}^*(\mathbf{y}, \mathbf{u}) \quad (6)$$

$$14 \quad t_a(x_a) = T_a \left(1 + R_a \left(\frac{x_a}{Y_a} \right)^4 \right), \quad \forall a \in A_1 \quad (7)$$

$$15 \quad t_a(x_a, y_a, u_a) = T_a \left(1 + R_a \left(\frac{x_a}{y_a} \right)^4 \right) + (1 - u_a)M, \quad \forall a \in A_2 \quad (8)$$

16 The objective function of this formulation in Eq. (1) is the total travel time cost from both
17 existing links and candidate links. Constraint (2) expresses the restriction of candidate road
18 capacity. Budgetary constraint (3) entails that the total construction cost is less than the
19 maximum allowable expenditure for network improvement. In constraint (3), the second term
20 βu_a indicates the fixed cost of new road, that is, the fixed cost β is needed once the link is
21 planned to be constructed ($u_a = 1$); a bilinear term i.e., $\alpha u_a y_a$ is used to describe the
22 construction cost: if a candidate link is to be added, i.e., $u_a = 1$, the construction cost is assumed
23 to be a linear function with respect to the link capacity; otherwise, if it is not to be added, i.e.,
24 $u_a = 0$, the construction cost will be zero. Constraints (4) and (5) ensure that there is no flow on a
25 link if the link is not constructed, i.e., if $u_a = 0$, then $x_a = 0$. Constraint (6) enforces the flow
26 pattern with Deterministic User Equilibrium (DUE), where $\mathbf{x}^*(\mathbf{y}, \mathbf{u})$ is the vector of DUE flows
27 for given vector of link capacities \mathbf{y} and vector of binary decision variables \mathbf{u} . Constraints (7)
28 and (8) use the typical BPR function to define the link travel time. In (7), the travel times for

1 existing links only depend on the travel flows x_a as the link capacities Y_a are given. In constraint
2 (8), for candidate link additions, when a candidate link is planned to be constructed, i.e. $u_a = 1$,
3 the additional term $(1 - u_a)M$ equals to zero and thus link travel time is described by traditional
4 BPR travel time function; meanwhile, when a link is not to be constructed, i.e., $u_a = 0$, the link
5 travel time will be subject to a big enough constant M . The positive and big enough value of
6 travel time for unconstructed link (when $u_a = 0$) as imposed in constraint (8) is to ascertain that
7 no traveler will use this link if it is not even constructed when deterministic user equilibrium
8 principle is applied to capture travelers' routing choice behavior; however, it will not affect the
9 objective function, as constraints (3) and (4) ensure zero traffic flow on unconstructed link and
10 therefore the term $x_a t_a(x_a, y_a, u_a)$ is still equal to zero.

11 It should be noted that, in this model formulation, each candidate link is associated with two
12 decision variables, u_a and y_a , which combine to describe the link addition plan, whether the link
13 will be constructed or not, and what should be the new link capacity if constructed. If the link
14 capacity y_a is predetermined, this model will reduce to a conventional DNDP; on the other hand,
15 if the link additions u_a are given, this model is indeed a classical CNDP. The obvious
16 nonlinearity property of the model formulation comes from two parts: the bilinear term $u_a y_a$ in
17 constraint (3) and BPR travel time function in constraints (7) and (8). In designing global
18 optimization solution method for this model, different techniques are applied to deal with the two
19 types of nonlinear terms.

20 2.1. Variational inequality function of traffic assignment problem

21 As is mentioned in the last section, in this paper, the traffic flow is assumed to be in a pattern of
22 deterministic user equilibrium, i.e., Eq (6), which follows the Wardrop's first principle. Here, the
23 DUE condition is represented by a Variational Inequality (VI) problem (Dafermos, 1980; Smith,
24 1979). The advantages of VI formulation have been widely recognized: this formulation is only
25 related to link flows, thus avoiding the complicated path enumeration process; more importantly,
26 it can be conveniently used to represent network equilibrium with asymmetric and non-separable
27 travel cost function, i.e., considering interaction between traffic on different roads (Dafermos,
28 1980). For a given fixed network investment plan (\mathbf{y}, \mathbf{u}) , the VI problem is to find the optimal
29 solution $\mathbf{x}^* \in \Psi$ which satisfies the following constraints

$$30 \quad \sum_{a \in A_1} t_a(x_a^*) \cdot (x_a^* - x_a) + \sum_{a \in A_2} t_a(x_a^*, y_a, u_a) \cdot (x_a^* - x_a) \leq 0, \quad \forall x_a \in \Psi, \quad (9)$$

$$31 \quad \Psi = \left\{ \mathbf{x} \mid x_a = \sum_{w \in W} v_a^w, \Delta \cdot \mathbf{v}^w = \mathbf{d}^w, v_a^w \geq 0, \forall a \in A, w \in W \right\}, \quad (10)$$

32 where Ψ is a feasible set of traffic flow on the network.

1 Since all the constraints in Ψ are linear, Ψ is actually a bounded polytope. Let C be the
 2 indexes set of corner-points of the polytope and thus it is induced that any point $\mathbf{x} \in \Psi$ can be
 3 represented by a convex combination of some corner-points that belong to C , that is,

$$4 \quad \mathbf{x} = \sum_{c \in C} \lambda_c \mathbf{x}^c, \quad (11)$$

$$5 \quad \sum_{c \in C} \lambda_c = 1, \quad 0 \leq \lambda_c \leq 1, \quad \forall c \in C, \quad (12)$$

6 where λ_c is the weighted factor of the c th corner-point \mathbf{x}^c of the polytope Ψ . According to this
 7 characteristic of the feasible region, the following proposition can be easily derived.

8 **Proposition 1** For a given network investment plan (\mathbf{y}, \mathbf{u}) , $\mathbf{x}^* \in \Psi$ is the optimal solution of the
 9 VI problem (9)-(10) if and only if \mathbf{x}^* satisfies the following problem

$$10 \quad \sum_{a \in A_1} t_a(x_a^*) \cdot (x_a^* - x_a^c) + \sum_{a \in A_2} t_a(x_a^*, y_a, u_a) \cdot (x_a^* - x_a^c) \leq 0, \quad \forall c \in C \quad (13)$$

11 Proof. Refer to Luathep et al. (2011).

12 In conclusion, Eq. (14) can be formulated to stand for the VI problem of the DUE condition.

$$13 \quad \sum_{a \in A_1} t_a(x_a^*) \cdot (x_a^* - x_a^c) + \sum_{a \in A_2} [t_a(x_a^*, y_a) + (1 - u_a)M] \cdot (x_a^* - x_a^c) \leq 0, \quad \forall c \in C \quad (14)$$

14 where $x_a^* \in \Psi$. \square

15 2.2. Reformulation of multivariate polynomial function

16 In this section, we deal with two types of nonlinear terms, i.e., the multivariate link travel time
 17 functions and the bilinear functions. The link travel time functions will be reformulated into
 18 logarithmic functions, which are univariate and globally concave. Thus, less effort is needed in
 19 the process of linearization and relaxation as compared to the multivariate travel time functions
 20 as shown in (8). For bilinear functions, the Reformulation-Linearization Technique (RLT) will
 21 be applied to transform bilinear functions into equivalent linear constraints.

22 In the original problem (OP) model, there are two polynomial functions on the list of
 23 reformulation, that is, the link travel cost function and the total travel cost function.

24 2.2.1. Link travel time function

25 In this paper, the link travel cost function follows the typical Bureau of Public Roads (BPR)
 26 equation, which is

$$27 \quad t_a(x_a, y_a) = T_a \left(1 + R_a \left(\frac{x_a}{y_a} \right)^4 \right), \quad \forall a \in A \quad (15)$$

1 where T_a is free flow travel cost; both T_a and R_a are given BPR parameters. It should be noted
 2 that for existing link $a \in A_1$, x_a is the only variable in the function, whereas for candidate link
 3 $a \in A_2$, both x_a and y_a are decision variables.

4 Let a new variable h_a to represent the monomial $(x_a)^4 / (y_a)^4$ as in (15) we have:

$$5 \quad h_a = \left(\frac{x_a}{y_a} \right)^4, \quad \forall a \in A \quad (16)$$

6 Since $x_a \geq 0, \forall a \in A$, we cannot take logarithm on both sides of Eq. (16). To solve this issue,
 7 two additional nonzero continuous variables \tilde{x}_a ($0 < \tilde{x}_a \leq M, \forall a \in A$) and
 8 \tilde{h}_a ($0 < \tilde{h}_a \leq M, \forall a \in A$), and a binary variable γ_a ($\gamma_a \in \{0,1\}, \forall a \in A$) are introduced for each
 9 link $a \in A$. Let

$$10 \quad x_a = \gamma_a \tilde{x}_a, \quad \forall a \in A \quad (17)$$

$$11 \quad \tilde{h}_a = \left(\frac{\tilde{x}_a}{y_a} \right)^4, \quad \forall a \in A \quad (18)$$

12 Thus, by substituting Eq. (17) into Eq. (16), the following Eq. (19) can be induced:

$$13 \quad h_a = \gamma_a \tilde{h}_a, \quad \forall a \in A \quad (19)$$

14 The binary variable $\gamma_a, a \in A$ is introduced to describe whether link a will be used or not. One
 15 can prove that, in the solutions of the OP, $\gamma_a = u_a, a \in A_2$.

16 **Proposition 2.** Adding constraints $u_a^* = \gamma_a^*, a \in A_2$ into OP will not change the optimal solution
 17 of the OP.

18 Proof. If $u_a^* = 0$, which means link a is not constructed, $\gamma_a^* = x_a^* = 0$ is immediately true due to
 19 the constraint (4).

20 If $u_a^* = 1$ and $\gamma_a^* = 1$, which means, in the optimal solution of OP, if a candidate link is
 21 constructed, it must be used or $\gamma_a^* = 1$.

22 If in the optimal solution of OP $(x_a^*, y_a^*, u_a^*, \gamma_a^*, h_a^*)$, $u_a^* = 1, \gamma_a^* = 0$ for some links, one can always
 23 find another optimal solution with the same objective value by only letting $u_a^* = 0$, which will
 24 not change the resultant traffic flow pattern x_a^* and the budget constraint will not be violated. In
 25 other words, if $u_a^* = 1, \gamma_a^* = 0$ are true in your optimal investment plan, which means a new link
 26 addition is completely not used in the network, we can just decide not to construct this new link.

1 This new investment plan will remain optimal, which will not change the resultant equilibrium
 2 traffic pattern and thus the objective value of total network travel time; however, reduce the
 3 construction cost, making the budget constraint still fulfilled. That is to say, even in optimal
 4 solutions, $u_a^* = 1, \gamma_a^* = 0$, we can obtain an equivalent optimal solution (i.e., with the same
 5 objective value) by just letting $u_a^* = 0, \gamma_a^* = 0$. \square

6 Therefore, $\gamma_a, a \in A_2$ is actually the binary investment decision variable $u_a, a \in A_2$ for candidate
 7 new links. For an existing road $a \in A_1$, γ_a only indicates whether traffic flow on this link is zero
 8 or not. To simplify the denotation, we also use the binary variable $u_a (\forall a \in A_1)$ to represent γ_a
 9 of existing links, which results in:

$$10 \quad x_a = u_a \tilde{x}_a, \quad \forall a \in A \quad (20)$$

$$11 \quad h_a = u_a \tilde{h}_a, \quad \forall a \in A \quad (21)$$

12 Taking logarithm on both sides of Eq. (18), we have:

$$13 \quad \ln \tilde{h}_a = 4 \ln \tilde{x}_a - 4 \ln y_a, \quad \forall a \in A \quad (22)$$

14 So far, the monomial in the BPR function is transformed into Eq. (22), wherein the nonlinearity
 15 is only contained in the logarithmic functions. That is, other than these logarithmic functions, Eq.
 16 (22) is in fact in linear form. Let $L_{ha} = \ln(\tilde{h}_a)$, $L_{xa} = \ln(\tilde{x}_a)$ and $L_{ya} = \ln(y_a)$, we have

$$17 \quad L_{ha} = 4L_{xa} - 4L_{ya}, \quad \forall a \in A \quad (23)$$

18 The link travel cost function can be replaced by:

$$19 \quad t_a(x_a, y_a) = T_a + T_a R_a h_a, \quad \forall a \in A \quad (24)$$

20 The benefits of doing this transformation are apparent: a general nonlinear nonconvex travel time
 21 function is now rewritten into several *globally concave single-variable* logarithmic functions,
 22 which will greatly facilitate the model relaxation in the next section.

23 2.2.2. Total system travel cost function

24 The total system travel cost also makes use of the BPR equation, the formation of which is quite
 25 similar to the link travel time function.

$$26 \quad \sum_{a \in A} x_a \cdot t_a(x_a, y_a) = \sum_{a \in A} T_a x_a + \sum_{a \in A} T_a R_a \frac{(x_a)^5}{(y_a)^4} \quad (25)$$

27 Following the same technique introduced in the last subsection, the new variable p_a is used to
 28 replace the monomial part in Eq. (25):

$$1 \quad p_a = \frac{(x_a)^5}{(y_a)^4}, \quad \forall a \in A \quad (26)$$

2 As is done above, substituting Eq. (20) into Eq. (26) and introducing a new continuous variable
 3 \tilde{p}_a ($0 < \tilde{p}_a \leq M, \forall a \in A$) leads to:

$$4 \quad \tilde{p}_a = \frac{(\tilde{x}_a)^5}{(y_a)^4}, \quad \forall a \in A \quad (27)$$

$$5 \quad p_a = u_a \tilde{p}_a, \quad \forall a \in A \quad (28)$$

6 Taking logarithm on both sides of Eq. (27) leads to:

$$7 \quad \ln(\tilde{p}_a) = 5\ln(\tilde{x}_a) - 4\ln(y_a), \quad \forall a \in A \quad (29)$$

8 Similarly, by letting L_{pa} to stand for $\ln(\tilde{p}_a)$, Eq. (29) is rewritten as

$$9 \quad L_{pa} = 5L_{\tilde{x}_a} - 4L_{y_a}, \quad \forall a \in A \quad (30)$$

10 Thus, the total system travel cost can be replaced by:

$$11 \quad \sum_{a \in A} x_a \cdot t_a(x_a, y_a) = \sum_{a \in A} T_a x_a + \sum_{a \in A} T_a R_a p_a \quad (31)$$

12 In this case, the objective function can be represented by Eq. (31) because it is exactly the total
 13 system travel time.

14 As for the VI constraints, by plugging Eq. (31) into Eq. (14), we have:

$$15 \quad \sum_{a \in A} T_a x_a^* + \sum_{a \in A} T_a R_a p_a + \sum_{a \in A_2} (x_a^* - u_a x_a^*) M - \sum_{a \in A} t_a x_a^c - \sum_{a \in A_2} (1 - u_a) M \cdot x_a^c \leq 0, \quad \forall c \in C \quad (32)$$

16 In Eq. (32), there is one nonlinear term, i.e., $(x_a^* - u_a x_a^*)$. From the proposition 2, we have that
 17 the link flow x_a must be positive if a candidate link is planned to be constructed, i.e. $u_a = 1$,
 18 whereas apparently there will be no traffic flows on a link if $u_a = 0$. In conclusion, for each
 19 candidate link $a \in A_2$, the nonlinear term $(x_a^* - u_a x_a^*)$ is always equal to zero. Then Eq. (32) can
 20 be simplified into a linear constraint:

$$21 \quad \sum_{a \in A} T_a x_a^* + \sum_{a \in A} T_a R_a p_a - \sum_{a \in A} t_a x_a^c - \sum_{a \in A_2} (1 - u_a) M \cdot x_a^c \leq 0, \quad \forall c \in C \quad (33)$$

22 It should be noted that, this nonlinear term was relaxed into linear constraints in Luatkep et al.
 23 (2011), which is indeed deviated from the original constraints.

24 2.3. Linear transformation of bilinear function using RLT technique

1 In the model formulation, bilinear terms are also involved. In this subsection, we will apply a
 2 linearization technique to convert the bilinear terms into equivalent linear constraints, as
 3 suggested by Sherali and Adams (1994).

4 For illustration purpose, this linearization technique is stated as below by taking Eq. (20)
 5 $x_a = u_a \tilde{x}_a, \forall a \in A$ as an example. It is supposed that $\underline{x}_a \leq \tilde{x}_a \leq \bar{x}_a$, where \underline{x}_a and \bar{x}_a are
 6 respectively a sufficiently small positive number and a sufficiently large upper bound of flow x_a .
 7 Then, the equivalent linear transformation for each link can be expressed as:

8 [Linear transformation of bilinear terms]

$$9 \quad \begin{cases} x_a - u_a \underline{x}_a \geq 0 \\ x_a - u_a \bar{x}_a \leq 0 \\ x_a - \tilde{x}_a + \underline{x}_a - u_a \underline{x}_a \leq 0 \\ x_a - \tilde{x}_a + \bar{x}_a - u_a \bar{x}_a \geq 0 \end{cases}, \quad \forall a \in A \quad (34)$$

10 Eq. (20) can be directly rewritten as "if-and-only-if" conditions, which are represented as:

$$11 \quad \begin{cases} x_a = 0 \Leftrightarrow u_a = 0 \\ x_a = \tilde{x}_a \Leftrightarrow u_a = 1 \end{cases}, \quad \forall a \in A \quad (35)$$

12 Therefore, by separately substituting two possible values of u_a into Eq. (34), we have:

$$13 \quad u_a = 0 \Leftrightarrow \begin{cases} x_a \geq 0 \\ x_a \leq 0 \\ x_a - \tilde{x}_a + \underline{x}_a \leq 0 \\ x_a - \tilde{x}_a + \bar{x}_a \geq 0 \end{cases} \Leftrightarrow \begin{cases} x_a = 0 \\ \underline{x}_a \leq \tilde{x}_a \leq \bar{x}_a \end{cases} \quad (36)$$

$$14 \quad u_a = 1 \Leftrightarrow \begin{cases} x_a - \underline{x}_a \geq 0 \\ x_a - \bar{x}_a \leq 0 \\ x_a - \tilde{x}_a \leq 0 \\ x_a - \tilde{x}_a \geq 0 \end{cases} \Leftrightarrow \begin{cases} x_a = \tilde{x}_a \\ \underline{x}_a \leq x_a \leq \bar{x}_a \end{cases} \quad (37)$$

15 The above result shows that Eq. (34) is identical to the "if-and-only-if" condition in Eq. (35).
 16 Thus, equivalence between Eq. (34) and Eq. (20) is also verified. We can use this linear
 17 transformation to replace the bilinear functions in the DNDP model with equivalent linear
 18 constraints.

19 Similarly, given domains of \tilde{h}_a and \tilde{p}_a as defined by $\underline{h}_a \leq \tilde{h}_a \leq \bar{h}_a$ and $\underline{p}_a \leq \tilde{p}_a \leq \bar{p}_a$, it is
 20 convenient to implement the RLT technique to obtain the equivalent linearization of Eq. (21) and
 21 Eq. (28).

1 It should be noted that the construction cost function $g_a(u_a, y_a)$ also involves a bilinear term in
 2 constraint (3).

3 Considering that the upper bound and lower bound of y_a are already given in the road capacity
 4 restriction in Eq. (2), the RLT method can be directly applied to linearize $u_a y_a$. Let k_a to
 5 represent the bilinear term $u_a y_a$, we have:

$$6 \quad g_a(u_a, y_a) = \alpha k_a + \beta u_a, \quad \forall a \in A_2 \quad (38)$$

7 For simplicity of illustration, let D be a set of variables $D = \{\tilde{x}_a, \tilde{h}_a, \tilde{p}_a, \forall a \in A; y_a, \forall a \in A_2\}$; for
 8 any variable $d \in D$, \underline{d} and \bar{d} are the lower and upper bounds respectively, and \hat{d} stands for a
 9 bilinear term $u_a d$. In summary, the reformulated DNDP problem can be expressed as follows:

10 [MINLP: Mixed-integer Non-Linear Problem]

$$11 \quad \min_{\mathbf{x}, \mathbf{y}, \mathbf{u}} Z_{MNL P} = \sum_{a \in A} T_a x_a + \sum_{a \in A} T_a R_a p_a \quad (39)$$

12

13 Subject to:

$$14 \quad \underline{y}_a \leq y_a \leq \bar{y}_a, \quad \forall a \in A_2 \quad (40)$$

$$15 \quad \sum_{a \in A_2} \alpha k_a + \beta u_a \leq B \quad (41)$$

$$16 \quad x_a \leq u_a M, \quad \forall a \in A \quad (42)$$

$$17 \quad \sum_{a \in A} T_a x_a + \sum_{a \in A} T_a R_a p_a - \sum_{a \in A} t_a x_a^c - \sum_{a \in A_2} (1 - u_a) M \cdot x_a^c \leq 0, \quad \forall c \in C \quad (43)$$

$$18 \quad t_a = T_a + T_a R_a h_a, \quad \forall a \in A \quad (44)$$

$$19 \quad L_{ha} = 4L_{xa} - 4L_{ya}, \quad \forall a \in A \quad (45)$$

$$20 \quad L_{ha} = \ln(\tilde{h}_a), \quad \forall a \in A \quad (46)$$

$$21 \quad L_{xa} = \ln(\tilde{x}_a), \quad \forall a \in A \quad (47)$$

$$22 \quad L_{ya} = \ln(y_a), \quad \forall a \in A \quad (48)$$

$$23 \quad L_{pa} = 5L_{xa} - 4L_{ya}, \quad \forall a \in A \quad (49)$$

$$1 \quad L_{pa} = \ln(\tilde{p}_a), \quad \forall a \in A \quad (50)$$

$$2 \quad \left. \begin{aligned} & \hat{d} - u_a \underline{d} \geq 0 \\ & \hat{d} - u_a \bar{d} \leq 0 \\ & \hat{d} - d + \underline{d} - u_a \underline{d} \leq 0 \\ & \hat{d} - d + \bar{d} - u_a \bar{d} \geq 0 \\ & d \in D = \{\tilde{x}_a, \tilde{h}_a, \tilde{p}_a, \forall a \in A; y_a, \forall a \in A_2\} \end{aligned} \right\} \quad (51)$$

$$3 \quad u_a \in \{0,1\}, \quad \forall a \in A \quad (52)$$

$$4 \quad \Psi = \left\{ \mathbf{x} \mid x_a = \sum_{w \in W} v_a^w, \Delta \cdot \mathbf{v}^w = \mathbf{d}^w, v_a^w \geq 0, \forall a \in A, w \in W \right\} \quad (53)$$

5 Where \mathbf{x}, \mathbf{y} and \mathbf{u} are vectors of decision variables x_a, y_a and u_a respectively.


6 **3. Solution algorithm**

7 3.1. Model relaxation

8 3.1.1. Relaxation of general logarithmic function

9 One can find that the nonlinearity of the above shown MINLP only lies in the four logarithmic
10 functions: $\ln(\tilde{x}_a), \ln(y_a), \ln(\tilde{h}_a)$ and $\ln(\tilde{p}_a)$. In this subsection, a linear relaxation (LR) model
11 for a general logarithmic function is introduced. This model is constructed by using a sequence
12 of outer tangent lines and piecewise linear interpolations. Without loss of generality and for
13 convenience of explanation, the nonlinear function $L_{xa} = \ln(\tilde{x}_a)$ is taken as an instance to
14 illustrate the linear relaxation process of a logarithmic function.

15 Suppose the feasible region of \tilde{x}_a is a bounded interval $[\underline{x}_a, \bar{x}_a]$. The interval is divided into
16 $N-1$ small segments by selecting $N-2$ breakpoints between the two endpoints \underline{x}_a and \bar{x}_a .
17 The series of breakpoints and two endpoints are denoted by $x_a^n, \forall n \in 1, 2, \dots, N$. It should be
18 noted that there is no need to partition the interval into equal segments. As shown in Fig. 1, the
19 linear relaxation of the concave logarithmic function $\ln(\tilde{x}_a)$ is set to be the region below all
20 tangent lines on each breakpoint and endpoint, and above all chord lines between each pair of
21 consecutive points. In Fig. 1, only two breakpoints are used for demonstration.

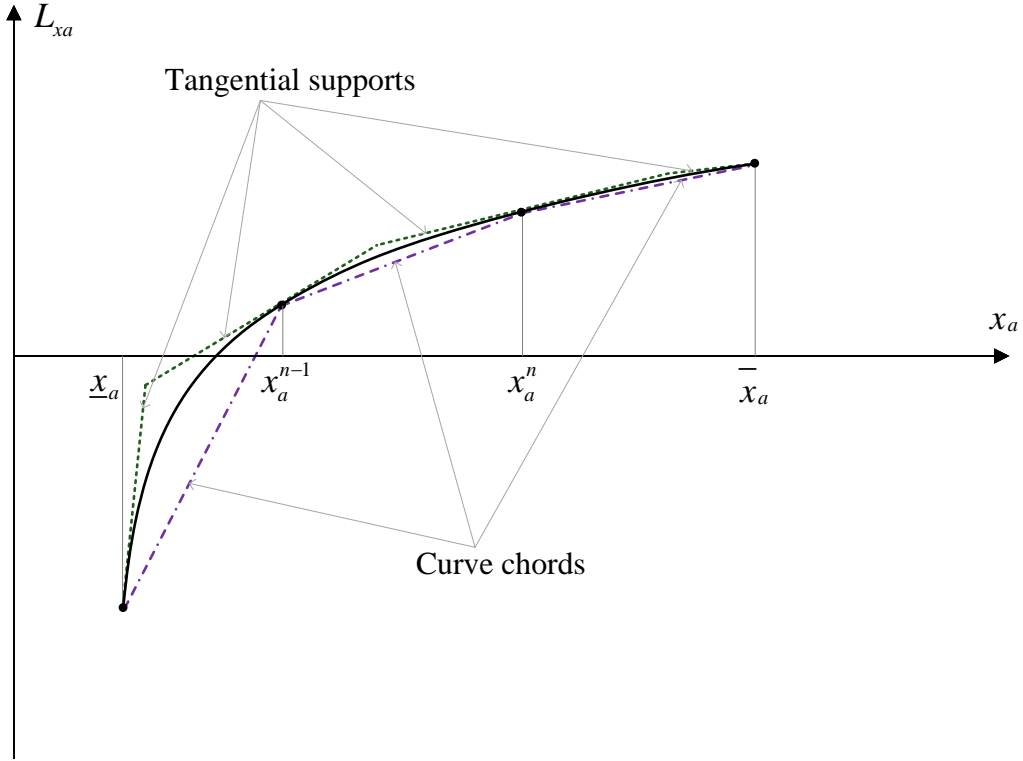

1

2

Fig. 1 A linear relaxation for logarithmic function with two breakpoints

3 The linear relaxation of $\ln(\tilde{x}_a)$ with breakpoints $\underline{x}_a = x_a^1 \leq \dots \leq x_a^n \leq \dots \leq x_a^N = \bar{x}_a$ including two
 4 endpoints can be specified as follows:

5 [LR: Linear Relaxation]

6
$$L_{xa} \leq \ln(x_a^n) - 1 + \frac{x_a}{x_a^n}, \quad \forall x_a^n = \underline{x}_a + \frac{\bar{x}_a - \underline{x}_a}{N-1} \cdot (n-1), \quad n = 1, 2, \dots, N \quad (54)$$

7
$$\sum_{n=1}^N \theta_{xa}^n x_a^n = x_a \quad (55)$$

8
$$\sum_{n=1}^N \theta_{xa}^n \ln(x_a^n) \leq L_{xa} \quad (56)$$

9
$$\sum_{n=1}^N \theta_{xa}^n = 1 \quad (57)$$

10
$$\theta_{xa}^n \geq 0, \quad n = 1, 2, \dots, N \quad (58)$$

11
$$\theta_{xa}^n \leq \lambda_{xa}^{n-1} + \lambda_{xa}^n, \quad n = 2, 3, \dots, N-1, \quad \theta_{xa}^1 \leq \lambda_{xa}^1, \quad \theta_{xa}^N \leq \lambda_{xa}^{N-1} \quad (59)$$

$$\sum_{n=1}^{N-1} \lambda_{xa}^n = 1 \quad (60)$$

$$\lambda_{xa}^n \in \{0,1\}, \quad n = 1, 2, \dots, N-1 \quad (61)$$

The upper bound of $\ln(\tilde{x}_a)$ is given in Eq. (54), the right-hand side of which denotes all the tangent lines on each point, whereas the lower bound is provided by Eqs. (55)-(61), which represents all the piecewise linear interpolations between each pair of consecutive points.

To formulate the piecewise linear function, N continuous variables θ_{xa}^n , $n = 1, 2, \dots, N$ and $N-1$ binary variables λ_{xa}^n , $n = 1, 2, \dots, N-1$ are introduced. As shown in Fig. 1, the binary variable λ_{xa}^n indicates whether an interval is active or not, that is: x_a falls in this interval $[x_a^n, x_a^{n+1}]$ if $\lambda_{xa}^n = 1$ and $x_a \notin [x_a^n, x_a^{n+1}]$ if $\lambda_{xa}^n = 0$. The continuous variables θ_{xa}^n , $n = 1, 2, \dots, N$ are the coefficients associated with each breakpoint and measure the location of x_a between the two endpoints of the active interval: specifically, $\theta_{xa}^n = (x_a - x_a^n) / (x_a^{n+1} - x_a^n)$ and $\theta_{xa}^{n+1} = (x_a^{n+1} - x_a) / (x_a^{n+1} - x_a^n)$ if $[x_a^n, x_a^{n+1}]$ is an active interval, whereas the other coefficients of breakpoints are all equal to 0.

Generally, for the case where x_a falls within the active interval $[x_a^n, x_a^{n+1}]$, Eq. (60) guarantees that only λ_{xa}^n is equal to 1 and all the other λ_{xa}^m , $m = 1, \dots, n-1, n+1, \dots, N-1$ are equal to 0. According to Eqs. (57)-(59), it implies that $\theta_{xa}^n + \theta_{xa}^{n+1} = 1$, $\theta_{xa}^n \geq 0$, $\theta_{xa}^{n+1} \geq 0$ and $\theta_{xa}^m = 0$, $\forall m = 1, \dots, n-1, n+2, \dots, N$. Hence, x_a can be represented by a convex combination from Eq. (55), i.e. $x_a = \theta_{xa}^n x_a^n + \theta_{xa}^{n+1} x_a^{n+1}$, and the lower bound of $\ln(\tilde{x}_a)$ can be evaluated from Eq. (56), i.e. $\theta_{xa}^n \ln(x_a^n) + \theta_{xa}^{n+1} \ln(x_a^{n+1}) \leq L_{xa}$. Combined with Eq. (54), the feasible region $\theta_{xa}^n \ln(x_a^n) + \theta_{xa}^{n+1} \ln(x_a^{n+1}) \leq L_{xa} \leq \ln(x_a^n) - 1 + x_a / x_a^n$ is obtained to serve as relaxation of $\ln(\tilde{x}_a)$.

In the above linear relaxation model, the nonlinear function $\ln(\tilde{x}_a)$ is replaced by a set of mixed-integer linear constraints, which serves as its outer approximation. Following the same method, each logarithmic function in the MINLP model can be substituted by a LR programming.

3.1.2. Relaxation of the DUE condition

The DUE condition in the MINLP model is formulated as a VI problem related with a set of all corner-points of the traffic flow feasible region Ψ . However, the number of VI constraints is extremely large due to the huge number of corner-points, which will notably influence the computation efficiency in solving the MINLP model. Fortunately, because some of the VI constraints are not binding at the optimal solution, a subset of corner-points can be used to define relaxed VI constraints. It is proved that in some conditions a solution to a relaxed VI problem is also the solution to the original VI problem, i.e. the equilibrium traffic flow (Luatthep et al., 2011).

1 Let C_s be a subset of the traffic flow feasible region, i.e. $C_s \subseteq C$, the relaxed VI constraints can
 2 be expressed as follows:

$$3 \quad \sum_{a \in A} T_a x_a + \sum_{a \in A} T_a R_a p_a - \sum_{a \in A} t_a x_a^c - \sum_{a \in A_2} (1 - u_a) M \cdot x_a^c \leq 0, \quad \forall c \in C_s, \quad C_s \subseteq C \quad (62)$$

4 wherein $x_a \in \Psi$. Thus, given a reduced set of corner-points C_s , the relaxed MINLP problem can
 5 be formulated as:

6 [R-MINLP: Relaxed MINLP]

$$7 \quad \min_{x, y, u} Z_{R-MINLP} = \sum_{a \in A} T_a x_a + \sum_{a \in A} T_a R_a p_a \quad (63)$$

8 Subject to the same constraints (40)-(42), (44)-(53), and the relaxed VI constraints (62).

9 The set C_s can be updated iteratively by searching for new corner-points via a linear
 10 programming (LP-min). A stopping criteria needs to be satisfied in the iterative process, in which
 11 situation it infers that the solution of the relaxed problem R-MINLP also meets the original VI
 12 constraints, i.e. it is also the solution of MINLP (see Appendix).

13 Finally, by further relaxing general logarithmic function in the R-MINLP problem, a relaxed
 14 MILP model (denoted as R-MILP) is formulated, which is a linear relaxation of the original
 15 problem. Without loss of generality, we let Q stand for the set of variables, whose logarithmic
 16 functions need linear relaxation. Thus, for arbitrary variable $q \in Q$, \underline{q} and \bar{q} are the lower and
 17 upper bounds respectively; L_q denotes the logarithmic function $\ln(q)$, for example, L_q actually
 18 represents L_{y_a} if $q = y_a$. In conclusion, the R-MILP can be expressed as follows:

19 [R-MILP: Relaxed MILP]

$$20 \quad \min_{x, y, u, t} Z_{R-MILP} = \sum_{a \in A} T_a x_a + \sum_{a \in A} T_a R_a p_a \quad (64)$$

21 Subject to:

$$22 \quad \underline{y}_a \leq y_a \leq \bar{y}_a, \quad \forall a \in A_2 \quad (65)$$

$$23 \quad \sum_{a \in A_2} \alpha k_a + \beta u_a \leq B \quad (66)$$

$$24 \quad x_a \leq u_a M, \quad \forall a \in A \quad (67)$$

$$25 \quad \sum_{a \in A} T_a x_a + \sum_{a \in A} T_a R_a p_a - \sum_{a \in A} t_a x_a^c - \sum_{a \in A_2} (1 - u_a) M \cdot x_a^c \leq 0, \quad \forall c \in C_s, \quad C_s \subseteq C \quad (68)$$

$$26 \quad t_a = T_a + T_a R_a h_a, \quad \forall a \in A \quad (69)$$

$$1 \quad L_{ha} = 4L_{xa} - 4L_{ya}, \quad \forall a \in A \quad (70)$$

$$2 \quad L_{pa} = 5L_{xa} - 4L_{ya}, \quad \forall a \in A \quad (71)$$

$$3 \quad \left. \begin{aligned} & \hat{d} - u_a \underline{d} \geq 0 \\ & \hat{d} - u_a \bar{d} \leq 0 \\ & \hat{d} - d + \underline{d} - u_a \underline{d} \leq 0 \\ & \hat{d} - d + \bar{d} - u_a \bar{d} \geq 0 \\ & d \in D = \{\tilde{x}_a, \tilde{h}_a, \tilde{p}_a, \forall a \in A; y_a, \forall a \in A_2\} \end{aligned} \right\} \quad (72)$$

$$4 \quad u_a \in \{0,1\}, \quad \forall a \in A \quad (73)$$

$$5 \quad \Psi = \left\{ \mathbf{x} \mid x_a = \sum_{w \in W} v_a^w, \Delta \cdot \mathbf{v}^w = \mathbf{d}^w, v_a^w \geq 0, \forall a \in A, w \in W \right\} \quad (74)$$

$$6 \quad \left. \begin{aligned} & L_q \leq \ln(q^n) - 1 + \frac{q}{q^n}, \quad \forall q^n = \underline{q} + \frac{\bar{q} - \underline{q}}{N-1} \cdot (n-1), \quad n = 1, 2, \dots, N \\ & \sum_{n=1}^N \theta_q^n q^n = q \\ & \sum_{n=1}^N \theta_q^n \ln(q^n) \leq L_q \\ & \sum_{n=1}^N \theta_q^n = 1 \\ & \theta_q^n \geq 0, \quad n = 1, 2, \dots, N \\ & \theta_q^n \leq \lambda_q^{n-1} + \lambda_q^n, \quad n = 2, 3, \dots, N-1, \quad \theta_q^1 \leq \lambda_q^1, \quad \theta_q^N \leq \lambda_q^{N-1} \\ & \sum_{n=1}^{N-1} \lambda_q^n = 1 \\ & \lambda_q^n \in \{0,1\}, \quad n = 1, 2, \dots, N-1 \end{aligned} \right\} \quad (75)$$

$$7 \quad q \in Q = \{\tilde{x}_a, \tilde{h}_a, \tilde{p}_a, \forall a \in A; y_a, \forall a \in A_2\} \quad (76)$$

8 3.2. Global optimization algorithm

9 In this section, a global optimization algorithm is proposed to solve the problem based on the
10 linear relaxation model R-MILP and a range reduction technique.

11 3.2.1. Range reduction technique

1 In the R-MILP model, a number of breakpoints are introduced to relax the logarithmic function
2 into a mixed-integer linear programming. In principle, the relaxation model R-MILP will be
3 much tighter if a larger number of breakpoints are adopted. However, introducing large amount
4 of binary variables with these breakpoints will increase the computational load significantly.
5 Therefore, a range reduction technique is applied, which cuts and reduces the feasible region
6 while ensuring the global optimum not excluded. In this way, with only a few breakpoints to
7 relax the feasible region, the obtained R-MILP model is tighter, and thus by solving which a
8 better lower bound can also be achieved. The range reduction technique is indeed implemented
9 through a series of optimization problems (denoted by RRT problems). Specifically, for an
10 arbitrary variable $x \in X_{\text{var}}$, where X_{var} is the set of variables in the R-MILP model, the RRT
11 problem contains two parts: updating the lower bound of x by solving the RRT-L problem and
12 calculating the new upper bound of x through the RRT-U problem. The RRT problems can be
13 stated as follows:

14 [RRT-L: Range Reduction Technique for updating Lower bound]

$$15 \quad \underline{x}^{\text{new}} = \text{Min } x \quad (77)$$

16 subject to:

$$17 \quad \underline{x}^{\text{old}} \leq x \leq \bar{x}^{\text{old}}, \quad \forall x \in X_{\text{var}} \quad (78)$$

$$18 \quad Z_{R\text{-MILP}} \leq \bar{Z}_{\text{MINLP}} \quad (79)$$

19 All the other constraints in the R-MILP model except bound constraints. (80)

20 [RRT-U: Range Reduction Technique for updating Upper bound]

$$21 \quad \bar{x}^{\text{new}} = \text{Max } x \quad (81)$$

22 subject to:

$$23 \quad \underline{x}^{\text{old}} \leq x \leq \bar{x}^{\text{old}}, \quad \forall x \in X_{\text{var}} \quad (82)$$

$$24 \quad Z_{R\text{-MILP}} \leq \bar{Z}_{\text{MINLP}} \quad (83)$$

25 All the other constraints in the R-MILP model except bound constraints. (84)


26 where $\underline{x}^{\text{old}}$ and \bar{x}^{old} are respectively the current lower and upper bounds for variable $x \in X_{\text{var}}$
27 before update, \bar{Z}_{MINLP} is a known upper bound of the global optimal objective function value of
28 the original MINLP model. \bar{Z}_{MINLP} can be obtained from the objective value of the MINLP
29 problem by feeding a feasible road construction plan into the VI problem and then solving it.
30 Otherwise, one can also utilize a traditional local optimal algorithm to calculate a better upper
31 bound value for \bar{Z}_{MINLP} . It is worth noted that the set of variables that need bounds update should
32 be carefully selected, because calculating new bounds also influences the algorithm efficiency.

1 Considering this, for large size network, reducing range for only a part of variables in X_{var} is
 2 recommended. What's more, in order to save computational time, it is recommended to always
 3 use the latest feasible range to calculate new bounds.

4 *3.2.2. Global optimization solution algorithm*

5 Based on the above analysis, we develop a global optimization solution algorithm for the model
 6 formulation. Basically, the R-MILP is solved to obtain the lower bound of the problem, which is
 7 updated and improved by applying range reduction technique, until the gap between lower bound
 8 and upper bound fulfils certain requirement.

9 To explain the solution algorithm more clearly, we show the framework of this solution approach
 10 in Fig. 2. Roughly, there are three modules contained in the algorithm. Firstly, an initialization
 11 module prepares a group of input parameters for the initial formulation of R-MILP problem.
 12 Secondly, R-MILP problem is recurrently updated and solved in each iteration to obtain a lower
 13 bound of the problem and then, an upper bound of the problem is calculated by making use of
 14 the road construction plan in current solution. A range reduction technique is introduced in the
 15 iterative process to reduce the feasible region while guarantee the global optimal solution
 16 remaining in the new range. Thirdly, the subset of corner-points is updated, which can make sure
 17 that the solution meets the DUE condition. Finally, the algorithm will terminate at the global
 18 optimal solution.

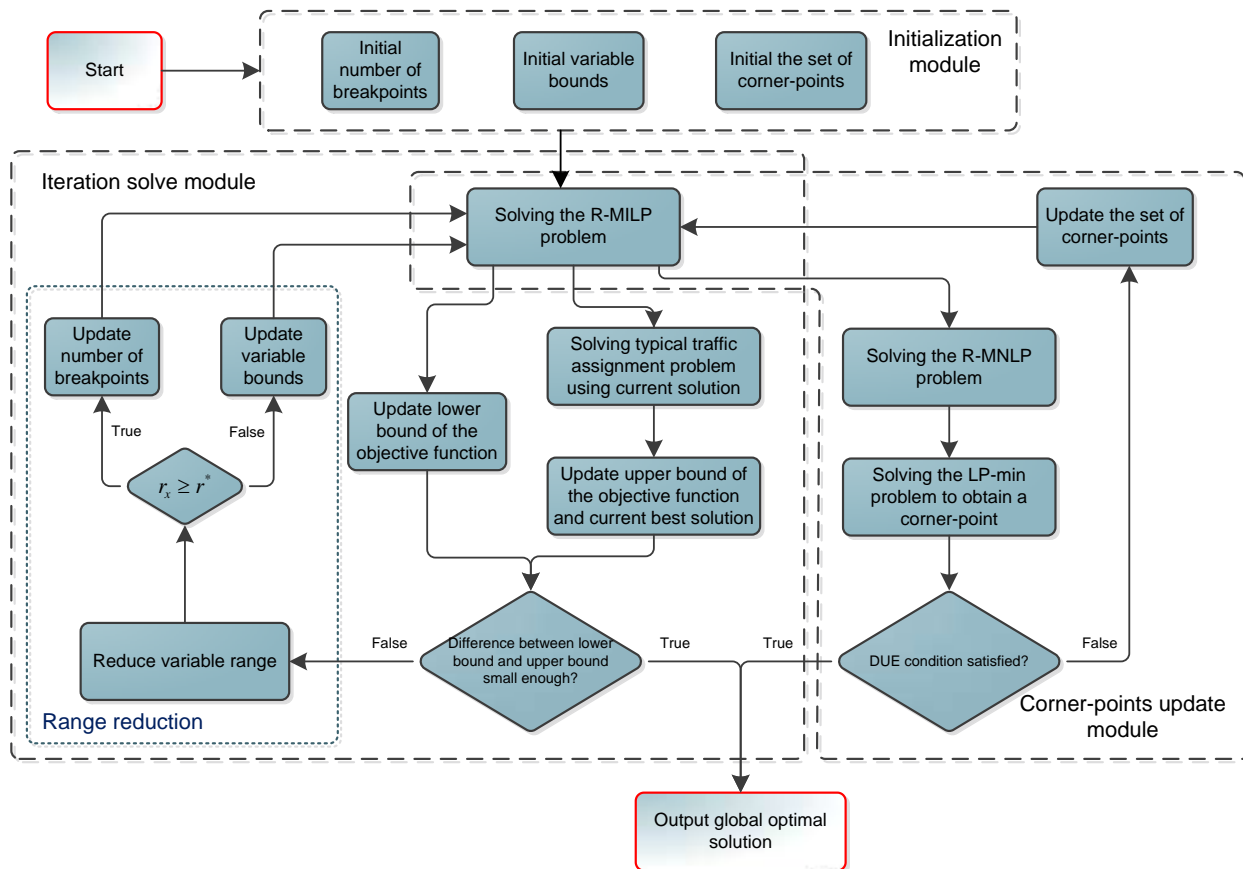

19

20

Fig. 2 Framework of algorithm

1 In summary, the steps of the presented global optimization algorithm can be stated below:

2 Step 1. Initialization. Use a small integer n as the initial number of break points for each
3 logarithmic curve. Here, n is set to 4. Let the initial bound of y_a be its original domain. For \tilde{x}_a ,
4 \tilde{h}_a , and \tilde{p}_a , set a small enough positive numbers as their original lower bounds, and a big
5 enough positive number as their initial upper bounds. Find some corner-points to initialize the set
6 $\{\mathbf{x}^c \mid c \in C_s\}$ to facilitate the formulation of the R-MILP model. Let the iteration number $i = 1$.

7 Step 2. Solve the relaxed model. Formulate the R-MILP problem with the incumbent range of
8 variables and the current subset of corner-points. Solve the R-MILP problem to its global
9 optimum $\zeta^i = \{\mathbf{x}^\zeta, \mathbf{y}^\zeta, \mathbf{u}^\zeta, \mathbf{h}^\zeta, \mathbf{p}^\zeta, \mathbf{t}^\zeta\}$ by any commercial solver or traditional MILP algorithms.
10 The corresponding objective function value is denoted by $Z_{R-MILP,i}^*$.

11 Step3. Update the subset of corner-points. Using ζ^i as the beginning point, solve the R-MINLP
12 problem with fixed construction plan \mathbf{u}^ζ to obtain a local optimal solution
13 $\sigma^i = \{\mathbf{x}^\sigma, \mathbf{y}^\sigma, \mathbf{u}^\sigma, \mathbf{h}^\sigma, \mathbf{p}^\sigma, \mathbf{t}^\sigma\}$ ($\mathbf{u}^\sigma = \mathbf{u}^\zeta$) nearby through conventional MINLP methods. Note that the
14 R-MINLP problem only has one group of integer variable \mathbf{u} . Once \mathbf{u} is fixed, the R-MINLP
15 problem is reduced to an NLP problem. Formulate the LP-min problem (refer to Appendix) with
16 σ^i and solve it to obtain \mathbf{x}^{r*} . Check whether the condition
17 $\sum_{a \in A} T_a x_a^\sigma + \sum_{a \in A} T_a R_a P_a^\sigma - \sum_{a \in A} t_a^\sigma x_a^{r*} - \sum_{a \in A_2} (1 - u_a^\sigma) M \cdot x_a^{r*} \leq \varepsilon$ is true or not. Do nothing if this condition
18 is true or add \mathbf{x}^{r*} to the subset of corner points for the next iteration otherwise.

19 Step 4. Update the objective function bounds and check convergence. Substitute \mathbf{y}^σ and \mathbf{u}^σ into
20 the VI problem and solve it to obtain a feasible objective function value $Z_{R-MILP,i}^*$ of the MINLP
21 problem. The upper bound of the objective function value is then updated via
22 $\bar{Z}_i = \min\{\bar{Z}_{i-1}, Z_{MINLP,i}^*\}$, whereas the lower bound is updated via $\underline{Z}_i = \max\{\underline{Z}_{i-1}, Z_{R-MILP,i}^*\}$. The
23 approximated global optimal road construction plan is improved to \mathbf{y}_i^* and \mathbf{u}_i^* , which is the
24 local solution of the R-MINLP problem corresponding to incumbent \bar{Z}_i . Calculate the relative
25 difference between the upper bound and lower bound $|\bar{Z}_i - \underline{Z}_i| / \underline{Z}_i$.

26 Step 5. Reduce feasible range of variables. Calculate new bounds for each variable $x \in X_{\text{var}}$ by
27 employing the range reduction technique. Renew bounds of variable if its new bounds are tighter
28 than old ones.

29 Step 6. Renew set of breakpoints for each logarithmic curve. Calculate reserved range rate over
30 the previous variable range via $r_x = (\bar{x}^{\text{new}} - \underline{x}^{\text{new}}) / (\bar{x}^{\text{old}} - \underline{x}^{\text{old}})$, $x \in X_{\text{var}}$. If all $r_x \geq r^*$ ($0 < r^* < 1$),
31 where r^* is a given rate, increase the number of break points $n = n + \hat{n}$ (\hat{n} is a given positive
32 integer) for the selected χ variables with the largest interval. For better problem approximation,

1 local solutions from the last i iterations can also be included in the set of breakpoints if the
 2 distance between a local solution point and the nearest existing breakpoint is larger than a given
 3 gap. Update the iteration number $i = i + 1$, go to step 2.

4 Step 7. Iteration terminates. Stop the iteration if $\left| \bar{Z}_i - \underline{Z}_i \right| / \underline{Z}_i < \tau$ and the condition

$$5 \sum_{a \in A} T_a x_a^\sigma + \sum_{a \in A} T_a R_a p_a^\sigma - \sum_{a \in A} t_a^\sigma x_a'^* - \sum_{a \in A_2} (1 - u_a^\sigma) M \cdot x_a'^* \leq \varepsilon$$

6 and \mathbf{u}_i^* .

7 In Step 1, the initial corner-point can be found by solving the VI problem in Eq. (14) with the
 8 original network. To improve the computational efficiency, more corner-points that may be
 9 binding at the optimal solution can be calculated by repeating the iteration in Step 2 and 3: first
 10 solve the R-MILP problem and obtain an optimal construction plan \mathbf{u}^ζ , then solve the R-MINLP
 11 problem with this construction plan \mathbf{u}^ζ as input, search for new corner-point via LP-min and add
 12 it to $\{\mathbf{x}^c \mid c \in C_s\}$.

13 In the following proposition, we prove the convergence of the proposed global optimal algorithm.

14 **Proposition 3** The proposed algorithm converge to the global optimal solution of the MINLP
 15 problem and also the OP problem when the iteration number $i \rightarrow \infty$.

16 Proof. Denote the exact global optimal solution of the MINLP problem by $\hat{\mathbf{y}}$ and $\hat{\mathbf{u}}$ and let \hat{Z}
 17 be the corresponding objective function value. Because the linear relaxation problem R-MILP
 18 always underestimates the MINLP problem, it holds that the objective function value $Z_{R-MILP,i}^*$
 19 from R-MILP is no larger than \hat{Z} . On the other side, feasible value of the MINLP problem
 20 $Z_{MINLP,i}^*$ always overestimates \hat{Z} . Considering $\underline{Z}_i = \max\{\underline{Z}_{i-1}, Z_{R-MILP,i}^*\}$, $\bar{Z}_i = \min\{\bar{Z}_{i-1}, Z_{MINLP,i}^*\}$

21 and the current best solution $\{\mathbf{x}_i^*, \mathbf{y}_i^*, \mathbf{u}_i^*, \mathbf{h}_i^*, \mathbf{p}_i^*, \mathbf{t}_i^*\}$, we have $\underline{Z}_i \leq \hat{Z} \leq Z_{MINLP,i}^*(\mathbf{y}_i^*, \mathbf{u}_i^*) = \bar{Z}_i$. When
 22 the iteration number $i \rightarrow \infty$, the implementation of Proposition 2 and Proposition 3 in Step 3
 23 guarantees that the final solution satisfies the inequality

$$24 \sum_{a \in A} T_a x_{a,i}^* + \sum_{a \in A} T_a R_a p_{a,i}^* - \sum_{a \in A} t_{a,i}^* x_{a,i}'^* - \sum_{a \in A_2} (1 - u_{a,i}^*) M \cdot x_{a,i}'^* \leq \varepsilon$$

25 given gap tolerance and $x_{a,i}'^*$ is from the solution of the LP-min problem. What's more, the
 26 combination of range reduction technique in Step 5 and renewing set of breakpoints in Step 6 can
 27 always updates the bounds \underline{Z}_i and \bar{Z}_i for \hat{Z} . Therefore, we will have $\lim_{m \rightarrow \infty} \underline{Z}_i = \hat{Z}$ and

$$28 \lim_{m \rightarrow \infty} \bar{Z}_i = \lim_{m \rightarrow \infty} Z_{MINLP,i}^*(\mathbf{y}_i^*, \mathbf{u}_i^*) = \hat{Z}$$

29 This proves that the proposed global optimal method converge
 30 to the exact global optimal solution of the MINLP model. Since the MINLP model is equivalent
 to the OP, the algorithmic convergence to the real global optimum of the OP is also proved. \square

31 Remark: It should be noted that the gap cannot be guaranteed to completely vanish in finite
 32 number of iterations. However, in practice, usually an accuracy requirement will be given. Thus,
 33 the global optimal solution can be efficiently obtained, up to the specific accuracy requirement.

1 4. Practical considerations

2 The proposed model formulation and solution algorithm can also be tailored and extended to
3 address other practical considerations in discrete transportation network design problems.
4 Hereby, two specific scenarios are illustrated.

5 4.1. Link capacitated traffic assignment problem (CTAP)

6 Though the traditional DUE model is realistic in distributing traffic in a non-saturated network,
7 the model results in a congested network are far from real observation. Due to the application of
8 link cost function, specifically BPR function, the model may leads to a solution containing over-
9 saturated links, where the traffic flows even exceed their capacities. Considering this, the link
10 capacitated traffic assignment is formulated by including the capacity constraints on link flows in
11 the traditional DUE model to improve the performance of traffic assignment in an over-saturated
12 network. The constraints are shown as follows:

$$13 \begin{aligned} x_a &\leq y_a, & \forall a \in A_1 \\ x_a &\leq u_a y_a, & \forall a \in A_2 \end{aligned} \quad (85)$$

14 With these capacity constraints, some solution methods are specially proposed for CTAP (Nie et
15 al., 2004). However, the global optimization solution algorithm developed in this study can be
16 immediately applied to solve the DNDP problem even if the capacity constraints are added to the
17 original model. Because we already have $k_a = u_a y_a$, $\forall a \in A_2$, constraints (85) can be rewritten as
18 linear constraints (86) and added to the MINLP and R-MILP model:

$$19 \begin{aligned} x_a &\leq y_a, & \forall a \in A_1 \\ x_a &\leq k_a, & \forall a \in A_2 \end{aligned} \quad (86)$$

20 Since adding these new linear inequality constraints bring no change to the mathematical
21 property of this problem, the proposed algorithm can still be used and it guarantees the global
22 optimal solution.

23 4.2. Discrete levels of link capacity

24 In practice, capacity of candidate new road is usually evaluated in discrete number of lanes,
25 which means feasible regions of link capacity variables y_a are discrete, rather than continuous
26 variables. In the above problem formulation, we assume continuous link capacity variables.
27 However, one can find that both the model and the proposed global optimal algorithm can be
28 easily extended to solve the problem with assumption of discrete link capacity.

29 Suppose link capacity y_a is a discrete variable now and the set $\{1, 2, \dots, m\}$ represents the feasible
30 number of lanes that contained in a candidate link. Thus domain of y_a can be depicted by

$$31 y_a \in \{y_a^1, y_a^2, \dots, y_a^m\}, \quad \forall a \in A_2 \quad (87)$$

1 Based on this assumption, for MINLP and R-MINLP, we introduce a series of binary variables
 2 $\gamma_a^r, r \in \{1, 2, \dots, m\}, a \in A_2$ to indicate whether link capacity y_a is equal to y_a^r or not, i.e. $y_a = y_a^r$
 3 if $\gamma_a^r = 1$ and $y_a \neq y_a^r$ vice versa. In summary, the bounds constraints of y_a in Eq. (40) can be
 4 substituted by the following Eq. (88):

$$\left. \begin{aligned}
 & y_a = \sum_{r=1}^m \gamma_a^r y_a^r \\
 & \sum_{r=1}^m \gamma_a^r = 1 \\
 & \gamma_a^r \in \{0, 1\}, \quad \forall r \in \{1, 2, \dots, m\} \\
 & \forall a \in A_2
 \end{aligned} \right\} \quad (88)$$

6 Like analysis before, the second and the third constraints in Eq. (88) guarantee there is only one
 7 one γ_a^r can equal to 1 and all the other γ_a^r are forced equal to 0. Thus, from the first constraint,
 8 we have $y_a = y_a^r$, only when the associated γ_a^r equals to 1.

9 For the R-MILP model, the LR model cannot be applied immediately in this case because y_a is
 10 no longer a continuous variable. Hereby, we remove Eq. (65) and discard y_a from the set Q in
 11 Eq. (76). The linear relaxation method for the discrete function $\ln(y_a), a \in A_2$ is amended as
 12 below:

$$13 \quad \sum_{r=1}^m \lambda_{ya}^r y_a^r = y_a, \quad y_a^r \in \{y_a^1, y_a^2, \dots, y_a^m\} \quad (89)$$

$$14 \quad \sum_{n=1}^m \lambda_{ya}^r \ln(y_a^r) = L_{ya} \quad (90)$$

$$15 \quad \sum_{r=1}^m \lambda_{xa}^r = 1 \quad (91)$$


$$16 \quad \lambda_{ya}^r \in \{0, 1\}, \quad r = 1, 2, \dots, m \quad (92)$$

17 where only a series of binary variables λ_{ya}^r are introduced and all the equations are linear. As
 18 compared with LR, this model has mainly two differences. First, the weighted factor variables
 19 are not needed to approximate the function value between two adjacent feasible points. Second,
 20 this model is not a relaxation approximation but provides an exact value of the logarithmic
 21 function $\ln(y_a)$.

22 It is worth noted that, despite the model modification catering for the case with discrete link
 23 capacity variables, the essential model properties are not changed, that is, the reformulated R-
 24 MILP model remains a mixed-integer linear relaxation of the amended MINLP problem.

1 Therefore, the proposed global optimal algorithm can still be utilized to solve the problem with
 2 discrete levels of link capacity.

3 **5. Numerical examples**

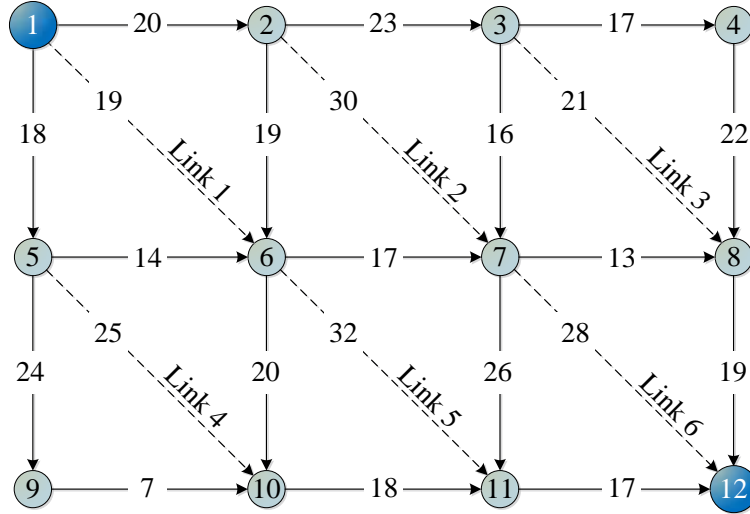

4
 5 Fig. 3. The 12-node test network.

6 In this section, to evaluate the model validity and to illustrate the performance of the solution
 7 algorithm, a 12-node network, as was used in Gao et al. (2005), is employed as numerical
 8 examples. The test network is shown in Fig. 3. It consists of twelve nodes, six candidate links
 9 and one O-D pair. Existing links are represented by solid lines and six candidate links by dashed
 10 lines. The numbers labeled on these links indicate their free flow travel time T_a . The total traffic
 11 demand from node 1 to node 12 is supposed to be 20 units. For existing links,
 12 $t_a(x_a) = T_a + 0.008x_a^4$ is adopted as the travel time function; while for candidate links, the travel
 13 time function is assumed to be $t_a(x_a, y_a) = T_a \left(1 + R_a (x_a / y_a)^4 \right)$, where $R_a = 0.15$ and
 14 $y_a \in [4, 6]$. The construction cost function $g_a(y_a, u_a) = \alpha u_a y_a + \beta u_a$ is used in the tests. The
 15 value of parameter α and β are appropriately set to make the construction cost function value
 16 consistent with that in previous studies and given in Table 1. Set ε in the VI constraints equals
 17 to 5×10^{-5} . The iteration process terminates if gap between the obtained lower and upper bounds
 18 of objective function value is less than 5×10^{-5} . The gap tolerance rate is set according to the
 19 specific requirement of practical problems. By applying the solution algorithm presented in this
 20 study, the global optimization solution of the original problem could be obtained, up to specific
 21 accuracy requirement.

22 All of our tests are run on a personal computer with Intel(R) Xeon(R) CPU E5-2609 0 @
 23 2.40GHz 2.40GHz (two processors), 32GB RAM and Windows 7 Professional operating system
 24 (64-bit). The YALMIP-R20130405 (Löfberg, 2004) together with MATLAB R2012a is used to
 25 model all the numerical tests. The commercial optimization solver CPLEX optimization studio
 26 12.3 (IBM ILOG, 2009) is adopted to globally solve all MILP problems, whereas the free solver
 27 IPOPT is applied to solve all the nonlinear problems.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38

Table 1

Value of parameters in construction cost function.

Candidate link	1	2	3	4	5	6
α	1.4200	1.0000	1.9600	2.1200	2.7500	3.0800
β	0.8308	2.1300	2.2691	2.1356	1.3896	3.2568

5.1. Example 1: comparison between DCNDP and a two-step method.

In this example, results of the proposed model solution are compared with those of a two-step sequential DNDP and CNDP modeling approach. In this two-step sequential method, the traditional DNDP problem with given predetermined road capacities for candidate links is solved first, as was done in Gao et al. (2005) and Luatthep et al. (2011). The solution of this DNDP, i.e., the road construction plan, is then applied as the input of the transportation network structure and topology, and a CNDP problem is solved to obtain the optimal road capacity expansion, as was done in Wang and Lo (2010). Table 3 lists the optimal link construction plans with different budgets, wherein results labeled as *'Integrated method (this study)'* are solved by the presented global optimization algorithm in this study. Solutions labeled as *'Two-step method'* are solved from the two-step sequential method. Since the DNDP model needs fixed link capacity and thus fixed link construction cost, in order to have a fair comparison with the integrated method, the parameters shown in Table 2 are adopted in the two-step method. All the other parameters are the same with those used in the integrated method. In columns of *'Capacity'* in Table 3, 1 indicates the corresponding candidate link should be built and 0 otherwise. We calculate objective function value twice in the two-step method: the first time after link addition in step 1 and the second after link expansion in step 2. Both of them are reported in Table 3 and the latter is the final objective function value of the two-step method. In principle, our model can simultaneously provide solution of both candidate links to be constructed and optimal capacities of new links and the solution is global optimal, whereas the sequential two-step method can only optimize one type of variable in each step while assuming the other one is fixed thus the solution is local optimal. Table 3 shows the computational results: the proposed model generally provides better network design plans. The network performance of construction plan from the proposed model is enhanced by up to 9.99% ($=\frac{2460.0762-2214.4123}{2460.0762}$) than that of the two-step method. We also notice that the results from the two methods may be the same, for example, in the cases with given budget of 10, 20 and 60. In summary, the computational results are consistent with the theoretical analysis, that is, the solution of the proposed model in this study may provide a network design plan that is better than simply applying the sequential two-step method, if not the same. One interesting finding that can be observed from Table 3 is that the result with budget 50 is even worse than the result with budget 40 when using the two-step method, which is still because this method can only solve local optimal, and its solution is highly affected by the selection of predetermined road capacities for link additions and cannot guarantee the best network construction plan. This result, from another point of view, justifies the necessity of our integrated model.

1 On the other side, the proposed solution algorithm for the DCNDP model is globally optimal.
 2 The updating process of each iteration with different budgets is shown in Table 4. For each
 3 iteration, it presents the evolving upper and lower bounds of objective function value, gap
 4 between the two bounds ($\text{Gap} = [\text{Upper bound} - \text{Lower bound}] / \text{Upper bound}$) and solution of
 5 relaxed MILP. From this table, one can find that the solution algorithm converges very fast and
 6 the global optimal solution can be obtained in a small number of iteration. The computational
 7 time for the three cases is 21.7 min, 8.1 min and 34.3 min respectively. In practice, the
 8 computational time and the number of iteration may be improved by using different initial set of
 9 corner-points, choosing different range reduction variable in set X_{var} , rescaling the feasible
 10 region of variable and other techniques that can improve the efficiency of MILP. Here, we only
 11 set $X_{\text{var}} = \{x_a, h_a, \forall a \in A; y_a, \forall a \in A_2\}$ and rescale the feasible region of $x_a, \forall a \in A$ and
 12 $y_a, \forall a \in A_2$. It should be noted that the number of iteration needed seems not to be related to the
 13 value of budget with our method. However, in Gao et al. (2005), the budget value affects the
 14 required number of iteration significantly, and larger number of iterations is needed with their
 15 solution method.

16

17 Table 2

18 Parameters adopted in two-step method.

DNDP parameters							CNDP parameters
Candidate link	1	2	3	4	5	6	Construction cost
Link capacity	4	4	4	4	4	4	$g_a(y_a) = \alpha(y_a - 4)$
Construction cost	6.5108	6.1300	10.1091	10.6156	12.3896	15.5768	

19

20 Table 3

21 Optimal link construction results for the 12-node network.

Budget	Two-step method				Integrated method (this study)			Network performance enhancement
	Step1: DNDP		Step2: CNDP		New links	Capacity	Objective value	
	New links	Objective value	Capacity	Objective value				
10	1 0 0 0 0 0	4117.6890	(6)	3959.2197	1 0 0 0 0 0	(6)	3959.2197	0.00%
20	1 0 0 0 1 0	3875.4668	(4.7744, 4)	3795.5799	1 0 0 0 1 0	(4.7744, 4)	3795.5799	0.00%
30	1 1 0 0 0 1	2678.0491	(4.8844, 4, 4.1710)	2584.8569	1 0 0 0 0 1	(6, 5.6469)	2488.8950	3.71%
40	1 1 1 0 0 1	2549.8698	(4.7736, 4, 4, 4.1866)	2459.8584	1 1 0 0 0 1	(6, 6, 6)	2315.5778	5.87%
50	1 1 1 1 0 1	2523.1283	(4.6963, 4, 4, 4, 4.0224)	2460.0762	1 1 0 0 1 1	(6, 4, 4.1428, 6)	2214.4123	9.99%
60	1 1 1 0 1 1	2406.3574	(6, 4.2837, 4, 4, 6)	2123.1311	1 1 1 0 1 1	(6, 4.2837, 4, 4, 6)	2123.1311	0.00%
70	1 1 1 1 1 1	2383.1818	(6, 4, 4, 4, 4, 5.8922)	2108.9950	1 1 1 0 1 1	(6, 6, 5.4203, 6, 6)	2104.3019	0.22%

22

23

24

1 Table 4
 2 Progression of iteration results with different budgets.

Budget	Lower bound	Upper bound	Gap	New links	Capacity
20		5500.9609			
	1563.4780	3932.9888	60.2471%	1 0 0 1 0 0	(6.0000, 4.0159)
	3029.1426	3850.0410	21.3218%	1 0 1 0 0 0	(5.8428, 4.3895)
	3437.4043	3799.5409	9.5311%	1 0 0 0 1 0	(4.7171, 4.0296)
	3609.2963	3795.5799	4.9079%	1 0 0 0 1 0	(4.7744, 4.0000)
	3795.5444	3795.5799	0.0009%	1 0 0 0 1 0	(4.7744, 4.0000)
	Result:	3795.5799	Iteration number:	5	Computational time: 21.7 min
40		5500.9609			
	1561.2002	2315.5778	32.5784%	1 1 0 0 0 1	(6.0000, 6.0000, 6.0000)
	1644.3193	2315.5778	28.9888%	1 1 0 0 0 1	(6.0000, 6.0000, 6.0000)
	2122.6644	2315.5778	8.3311%	1 1 0 0 0 1	(6.0000, 6.0000, 6.0000)
	2245.6877	2315.5778	3.0183%	1 1 0 0 0 1	(6.0000, 6.0000, 6.0000)
	2315.5159	2315.5778	0.0027%	1 1 0 0 0 1	(6.0000, 6.0000, 6.0000)
	Result:	2315.5778	Iteration number:	5	Computational time: 8.1 min
60		5500.9609			
	1561.1886	2182.7586	28.4764%	1 1 0 0 1 1	(6.0000, 6.0000, 4.0776, 6.0000)
	1643.1247	2182.7586	24.7226%	1 1 0 0 1 1	(6.0000, 6.0000, 4.0776, 6.0000)
	2027.3339	2170.4235	6.5927%	1 1 0 0 1 1	(6.0000, 6.0000, 6.0000, 6.0000)
	2075.4905	2170.4235	4.3739%	1 1 0 0 1 1	(6.0000, 6.0000, 6.0000, 6.0000)
	2121.4478	2123.1311	0.0793%	1 1 1 0 1 1	(6.0000, 4.2837, 4.0000, 4.0000, 6.0000)
	2123.1269	2123.1311	0.0002%	1 1 1 0 1 1	(6.0000, 4.2837, 4.0000, 4.0000, 6.0000)
	Result:	2123.1311	Iteration number:	6	Computational time: 34.3 min

3

4 5.2. Example 2: DCNDP with discrete levels of capacity improvements

5 We also test the DCNDP model with discrete levels of capacity improvements. The test network
 6 is identical, i.e., the 12-node network shown in Fig. 3. It is assumed that $y_a \in \{4,5,6\}, \forall a \in A$
 7 and all the other value of parameters are the same as those used in example 1. The results of this
 8 test with different budgets are exhibited in Table 5. One can find the optimal objective value is
 9 no better than the results of DCNDP as shown in Table 3 with continuous capacity enhancement
 10 for new link additions, which can be easily interpreted by the more stringent constraint of
 11 discrete link capacity.

12

1 Table 5

2 Optimal solutions of DCNDP model with discrete levels of capacity improvements.

Budget	New links	Capacities	Objective value from MILP	Exact objective value	Gap	Iteration
10	1 0 0 0 0 0	(6)	3959.1757	3959.2197	0.00111%	5
20	1 0 1 0 0 0	(6, 4)	3865.9238	3866.0809	0.00406%	7
30	1 0 0 0 0 1	(5, 6)	2526.6700	2526.6708	0.00003%	5
40	1 1 0 0 0 1	(6, 6, 6)	2315.5769	2315.5778	0.00004%	5
50	1 1 0 0 1 1	(6, 4, 4, 6)	2216.0031	2216.0344	0.00141%	5
60	1 1 1 0 1 1	(6, 4, 4, 4, 6)	2125.1241	2125.1245	0.00002%	5
70	1 1 1 0 1 1	(6, 6, 5, 6, 6)	2104.5681	2104.5692	0.00005%	6

3

4 **6. Conclusion**

5 In this study, we develop a novel and general discrete network design model formulation and its
6 global optimal solution algorithm to determine the optimal link addition and link capacity
7 construction plan in transportation networks. The model relaxes the assumption that the link
8 capacity for candidate link addition is predetermined and given and treats it as a simultaneous
9 decision variable, which provides a more general transport network design model. Besides, the
10 global optimization solution algorithm is developed based on RLT technique, outer-
11 approximation approach and range reduction technique. Numerical tests are implemented to
12 demonstrate the performance of the proposed model and the solution quality of the algorithm.
13 However, we have to admit that, at current stage, most global optimal solution algorithms are not
14 as efficient as local optimal solution methods, and therefore unattractive especially for practical
15 use. However, it also should be noted that only this type of solution algorithm can guarantee true
16 global optimal solution of the developed model, thus deserves more attention in the future study.

17

18 **Acknowledgements**

19 This study is sponsored by the Singapore Ministry of Education AcRF Tier 1 Grant RG117/14,
20 M401030000. The helpful and constructive comments of the anonymous referees are gratefully
21 acknowledged.

22

1 **Appendix**

2 Suppose $F = (x_a, t_a, u_a, p_a)$ is the solution to the relaxed VI problem Eq. (62), thus F also
 3 meets the original VI constraints Eq. (43), i.e., for arbitrary link flows $x'_a \in \Psi$, the following
 4 inequation (A.1) is satisfied.

$$5 \quad \sum_{a \in A} T_a x_a + \sum_{a \in A} T_a R_a p_a - \sum_{a \in A} t_a x'_a - \sum_{a \in A_2} (1 - u_a) M \cdot x'_a \leq 0. \quad (\text{A.1})$$

6 In order to judge whether F is the solution to the original VI problem and find new corner-
 7 points, Luathep et al. (2011) proposed a optimization-based method, which is briefly stated here.

8 Significantly, constraint (A.1) equals to following inequation:

$$9 \quad \max_{x'_a \in \Psi} \left(\sum_{a \in A} T_a x_a + \sum_{a \in A} T_a R_a p_a - \sum_{a \in A} t_a x'_a - \sum_{a \in A_2} (1 - u_a) M \cdot x'_a \right) \leq 0. \quad (\text{A.2})$$

10 Since F is known, the first two terms of the left-hand side equation can be treated as constants.
 11 Thus, we have,

$$12 \quad \min_{x'_a \in \Psi} \left(\sum_{a \in A} t_a x'_a + \sum_{a \in A_2} (1 - u_a) M \cdot x'_a \right) \geq 0. \quad (\text{A.3})$$

13 That is, if the minimum value of the multinomial is larger than 0, F is the solution to the
 14 original VI. Hence, an unconstrained linear programming is proposed to find the minimum value
 15 of the multinomial, which is expressed as:

16 [LP-min]

$$17 \quad \min_{x'_a \in \Psi} Z_{LP-\min} = \sum_{a \in A} t_a x'_a + \sum_{a \in A_2} (1 - u_a) M \cdot x'_a. \quad (\text{A.4})$$

18 One can easily solve this LP-min problem to its optimum x'_a^* by any traditional algorithm, which
 19 is also its global optimal solution considering the global optimality characteristic of linear
 20 programming. Therefore, the condition (A.1) is satisfied for all feasible link flows $x'_a \in \Psi$, that

21 is, F is also the solution to the original VI, if
 22 $\sum_{a \in A} T_a x_a + \sum_{a \in A} T_a R_a p_a - \sum_{a \in A} t_a x'_a - \sum_{a \in A_2} (1 - u_a) M \cdot x'_a \leq 0$. Obviously, otherwise if

23 $\sum_{a \in A} T_a x_a + \sum_{a \in A} T_a R_a p_a - \sum_{a \in A} t_a x'_a - \sum_{a \in A_2} (1 - u_a) M \cdot x'_a > 0$, F is infeasible for the original VI

24 constraints. In this case, x'_a^* can be added to the set of corner-points because the solution of the
 25 linear programming is always a corner-point of the feasible region Ψ .

26

27

1 **References:**

- 2 Dafermos, S., 1980. Traffic equilibrium and variational inequalities. *Transportation Science* 14 (1), 42-54.
- 3 Drezner, Z., Wesolowsky, G.O., 2003. Network design: Selection and design of links and facility location. *Transportation Research Part A* 37 (3), 241-256.
- 4 Farvaresh, H., Sepehri, M.M., 2011. A single-level mixed integer linear formulation for a bi-level discrete
- 5 network design problem. *Transportation Research Part E* 47 (5), 623-640.
- 6 Fontaine, P., Minner, S., 2014. Benders decomposition for discrete–continuous linear bilevel problems
- 7 with application to traffic network design. *Transportation Research Part B* 70, 163-172.
- 8 Gao, Z., Wu, J., Sun, H., 2005. Solution algorithm for the bi-level discrete network design problem.
- 9 *Transportation Research Part B* 39 (6), 479-495.
- 10 IBM ILOG, 2009. User's manual for cplex, New York.
- 11 Kim, B.J., Kim, W., 2006. An equilibrium network design model with a social cost function for
- 12 multimodal networks. *The Annals of Regional Science* 40 (3), 473-491.
- 13 Leblanc, L.J., 1975. An algorithm for the discrete network design problem. *Transportation Science* 9 (3),
- 14 183-199.
- 15 Li, C., Yang, H., Zhu, D., Meng, Q., 2012. A global optimization method for continuous network design
- 16 problems. *Transportation Research Part B* 46 (9), 1144-1158.
- 17 Liu, H., Wang, D.Z.W., 2015. Global optimization method for network design problem with stochastic
- 18 user equilibrium. *Transportation Research Part B* 72, 20-39.
- 19 Löfberg, J., 2004. Yalmip : A toolbox for modeling and optimization in matlab, Proceedings of the 2004
- 20 IEEE International Symposium on Computer Aided Control Systems Design, Taipei, Taiwan, pp. 284-
- 21 289.
- 22 Luathep, P., Sumalee, A., Lam, W.H.K., Li, Z.-C., Lo, H.K., 2011. Global optimization method for mixed
- 23 transportation network design problem: A mixed-integer linear programming approach. *Transportation*
- 24 *Research Part B* 45 (5), 808-827.
- 25 Magnanti, T.L., Wong, R.T., 1984. Network design and transportation planning: Models and algorithms.
- 26 *Transportation Science* 18 (1), 1-55.
- 27 Meng, Q., Yang, H., Bell, M.G.H., 2001. An equivalent continuously differentiable model and a locally
- 28 convergent algorithm for the continuous network design problem. *Transportation Research Part B* 35 (1),
- 29 83-105.
- 30 Nie, Y., Zhang, H., Lee, D.-H., 2004. Models and algorithms for the traffic assignment problem with link
- 31 capacity constraints. *Transportation Research Part B* 38 (4), 285-312.
- 32 Poorzahedy, H., Abulghasemi, F., 2005. Application of ant system to network design problem.
- 33 *Transportation* 32 (3), 251-273.
- 34 Poorzahedy, H., Rouhani, O.M., 2007. Hybrid meta-heuristic algorithms for solving network design
- 35 problem. *European Journal of Operational Research* 182 (2), 578-596.
- 36 Poorzahedy, H., Turnquist, M.A., 1982. Approximate algorithms for the discrete network design problem.
- 37 *Transportation Research Part B* 16 (1), 45-55.
- 38 Sheffi, Y., 1985. *Urban transportation networks: Equilibrium analysis with mathematical programming*
- 39 *methods*. Prentice-Hall, Englewood Cliffs, NJ.
- 40 Sherali, H.D., Adams, W.P., 1994. A hierarchy of relaxations and convex hull characterizations for
- 41 mixed-integer zero—one programming problems. *Discrete Applied Mathematics* 52 (1), 83-106.
- 42 Sherali, H.D., Adams, W.P., 1998. A reformulation-linearization technique for solving discrete and
- 43 continuous nonconvex problems. Springer.
- 44 Smith, M.J., 1979. The existence, uniqueness and stability of traffic equilibria. *Transportation Research*
- 45 *Part B* 13 (4), 295-304.
- 46 Solanki, R.S., Gorti, J.K., Southworth, F., 1998. Using decomposition in large-scale highway network
- 47 design with a quasi-optimization heuristic. *Transportation Research Part B* 32 (2), 127-140.

1 Szeto W. Y., Jiang Y., Wang, D. Z. W., Sumalee, A. 2014. A Sustainable Road Network Design Problem
2 with Land Use Transportation Interaction over Time. *Network and Spatial Economics*. In Press. DOI:
3 10.1007/s11067-013-9191-9.
4 Wang, D.Z.W., Lo, H.K., 2010. Global optimum of the linearized network design problem with
5 equilibrium flows. *Transportation Research Part B* 44 (4), 482-492.
6 Wang, S., Meng, Q., Yang, H., 2013. Global optimization methods for the discrete network design
7 problem. *Transportation Research Part B* 50 , 42-60.
8 Wardrop, J.G., 1952. Some theoretical aspects of road traffic research, *Proceedings of the Institution of*
9 *Civil Engineers*, pp. Part II, Vol. 1, 325-378.
10 Yang, H., Bell, M.G.H., 1998. Models and algorithms for road network design: A review and some new
11 developments. *Transport Reviews* 18 (3), 257-278.

12