

Improved interpretation of T_2 distributions from NMR relaxation measurements for a better prediction of low permeabilities

***J. Arnold¹, H. Pape¹, R. Pechnig¹, C. Clauser¹,
S. Anferova², E. Talnishnikh² and B. Blümich²***

***¹Applied Geophysics and
Geothermal Energy, E.ON
Energy Research Center***

***²Institute of Technical and
Macromolecular Chemistry***



Outline


- Motivation
- NMR relaxation mechanisms
- NMR Instrumentation
- New model theory
- Permeability results
- Conclusions

Motivation




- Permeability prediction from measured NMR decay times (T_2)
- Mobile NMR core-scanner for rapid well-site analysis



NMR Relaxation - T_1

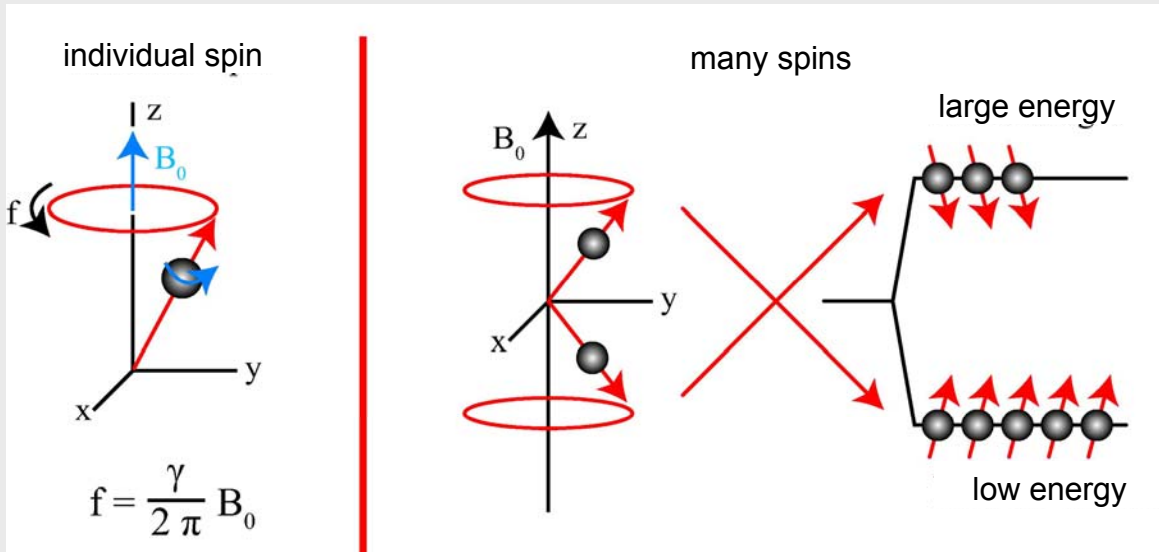

T_1 relaxation time: alignment of proton spins in external field \rightarrow porosity

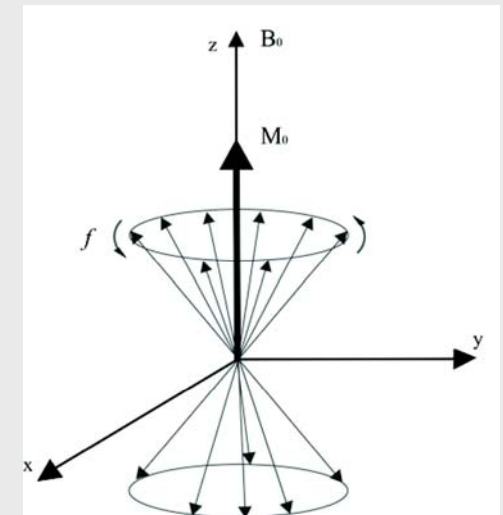


NMR Relaxation – T_2

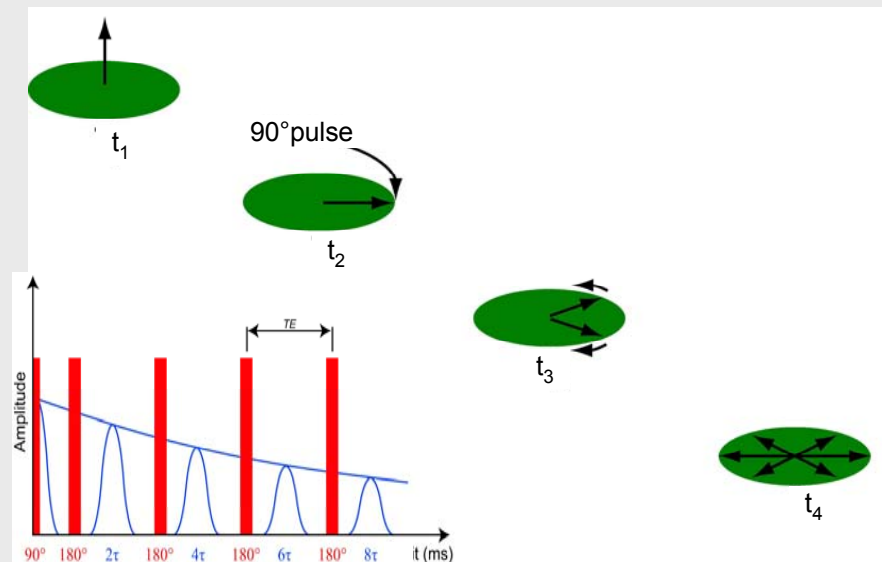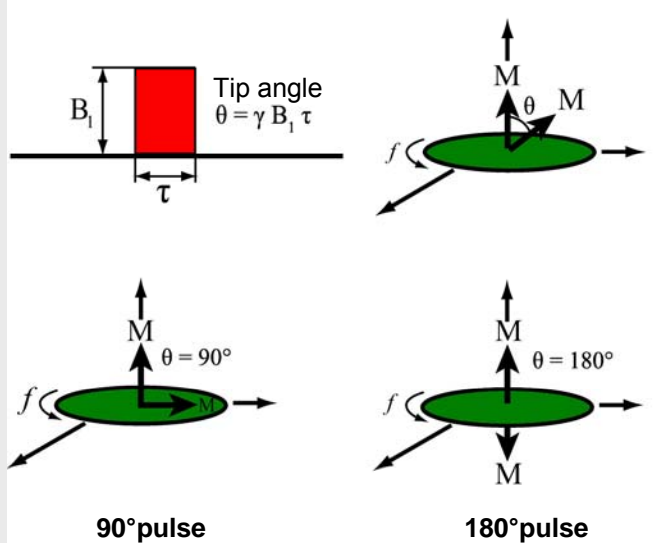


T_2 relaxation time: repeated tipping of spins by external radio-frequency field B_1 followed by decay of transverse magnetization

- T_2 decay curve;
- pore size distribution;
- permeability

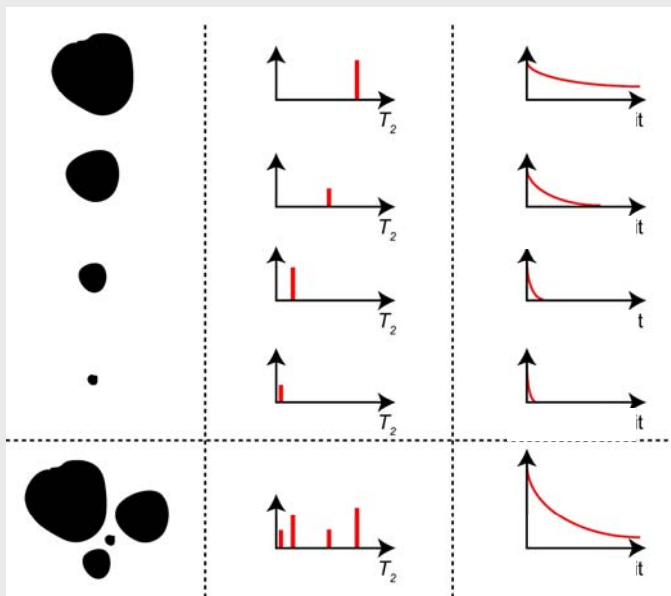

Halbach core-scanner

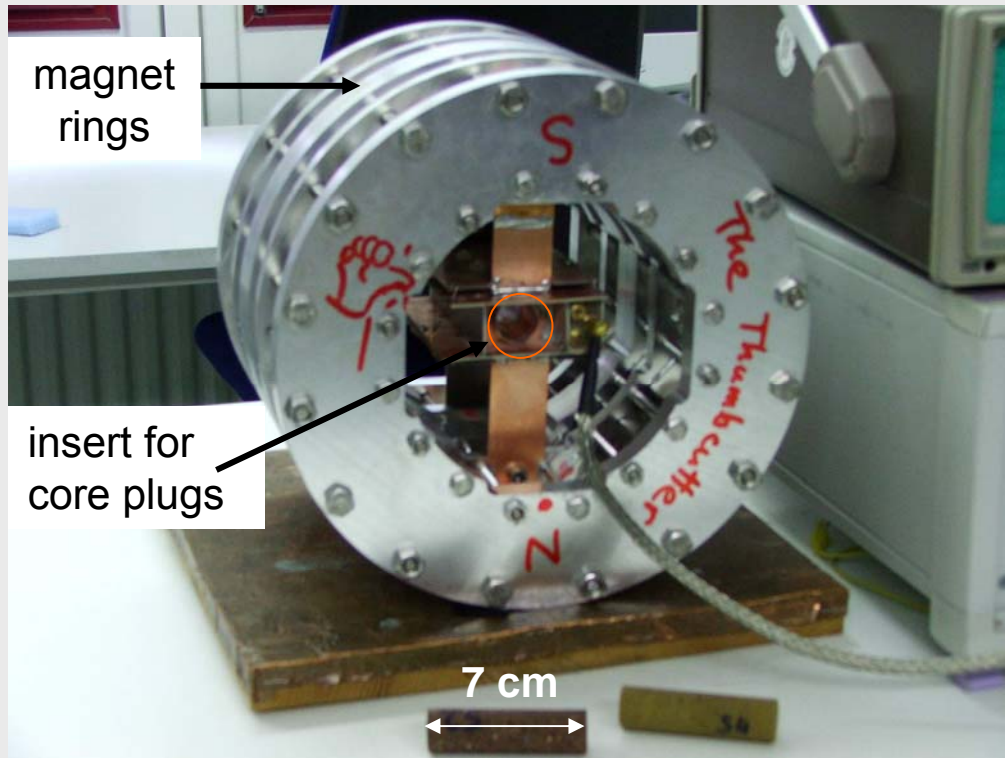

- Weight: 8 kg
- B_0 : 0.3 T
- G: 0.3 T/m
- Frequency: 13 MHz


Anferova, S., Anferov, V., Arnold, J., Talnishnikh, E., Voda, M. A., Kupferschläger, K., Blümmler, P., Clauser, C., Blümich, B., 2007. Improved Halbach Sensor for NMR Scanning of Drill Cores, *Magnetic Resonance Imaging*, 25, 474–480.

NMR Relaxation Rates

$$\frac{1}{T_{1\text{ apparent}}} = \frac{1}{T_{1\text{ free fluid}}} + \frac{1}{T_{1\text{ surface}}}$$

$$\frac{1}{T_{2\text{ apparent}}} = \frac{1}{T_{2\text{ free fluid}}} + \frac{1}{T_{2\text{ surface}}} + \frac{1}{T_{2\text{ diffusion}}}$$


Surface Relaxivity

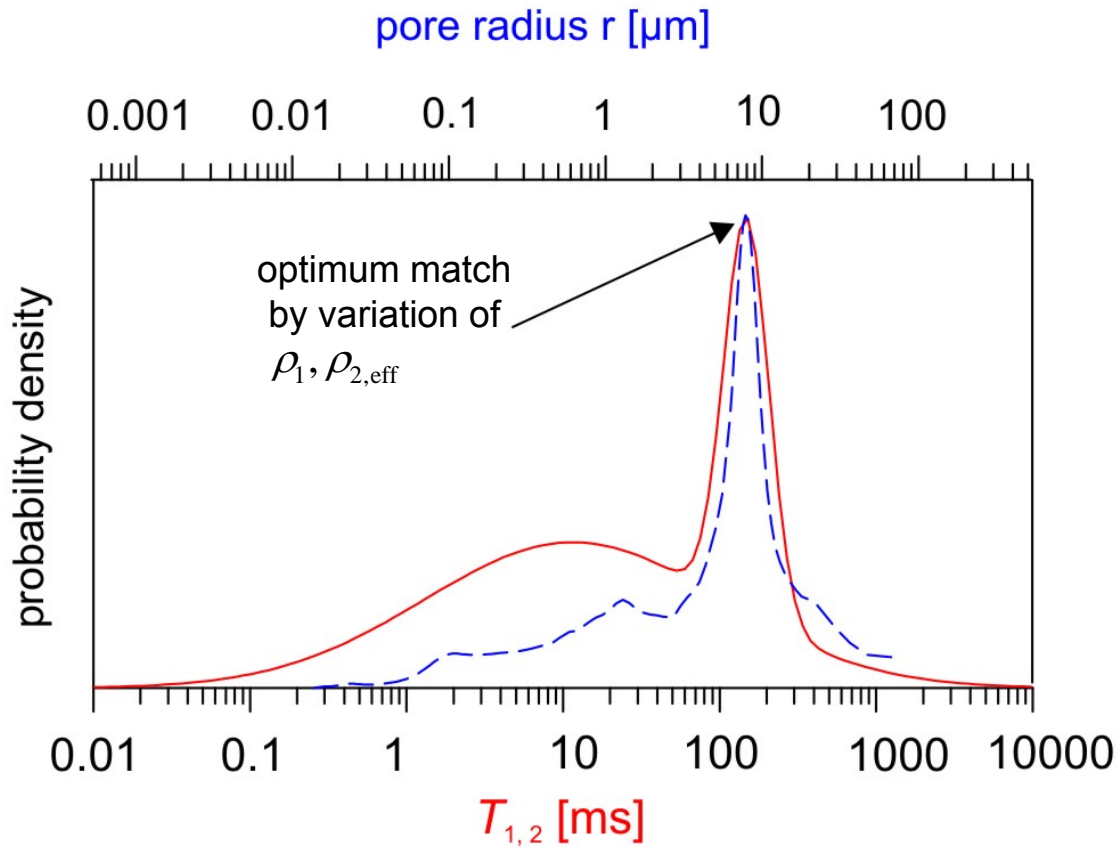

$$\frac{1}{T_{1,2}} = \frac{3\rho_{1,2\text{eff}}}{r}$$

ρ : surface relaxivity [$\mu\text{m/s}$]

Standard equation for permeability

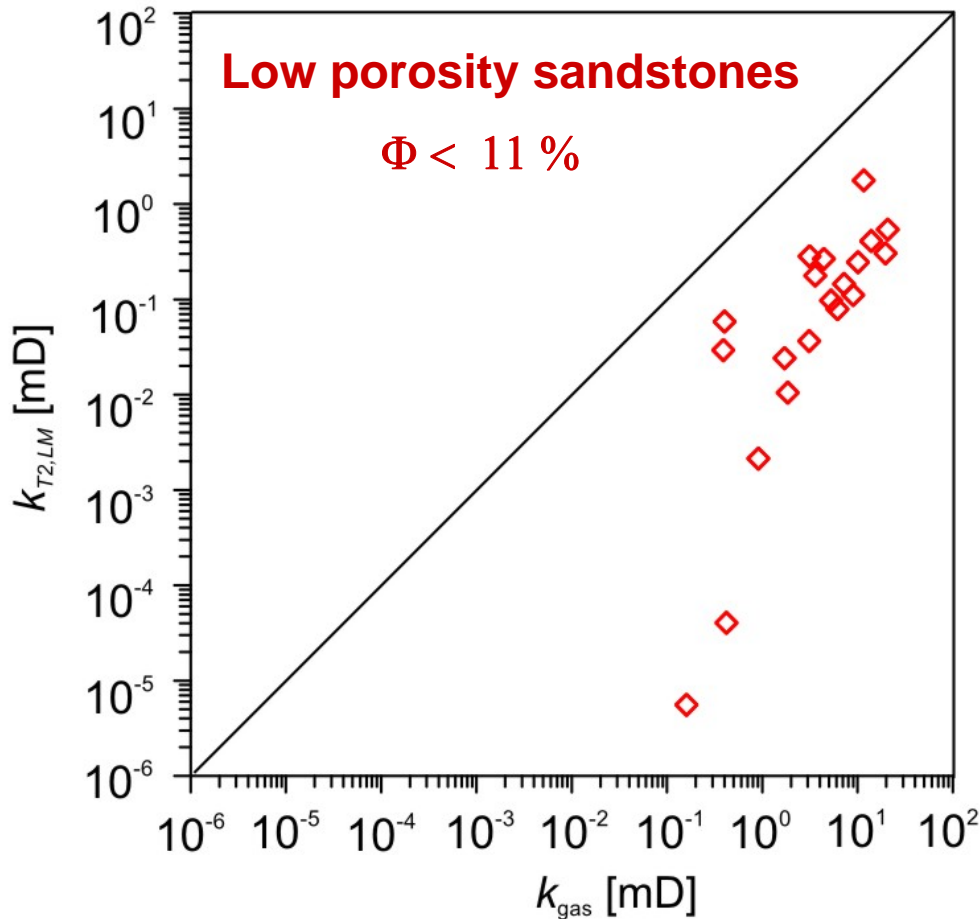

[2] Kenyon et al., 1988.

$$k_{T_{2,LM}} = a T_{2,LM}^2 \Phi^4$$


$$a = 4 \text{ mD/ms}^2$$

k : permeability [md]

$T_{2,LM}$: logarithmic mean of T_2 [ms]

Φ : porosity [-]


2D T1-T2 correlation map

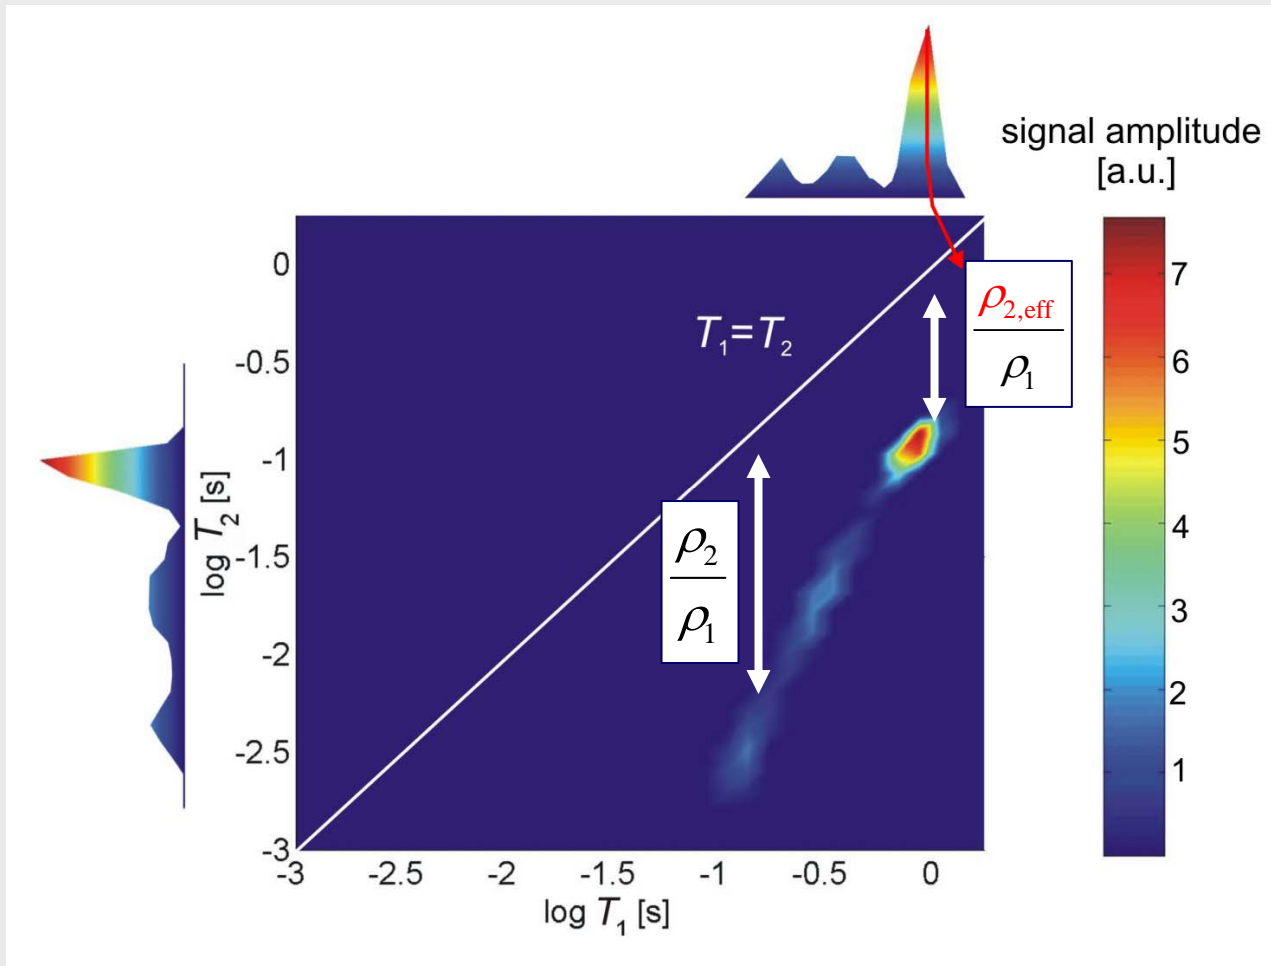

Sandstone sample

AC15: $\Phi = 9\%$


New Model Theory

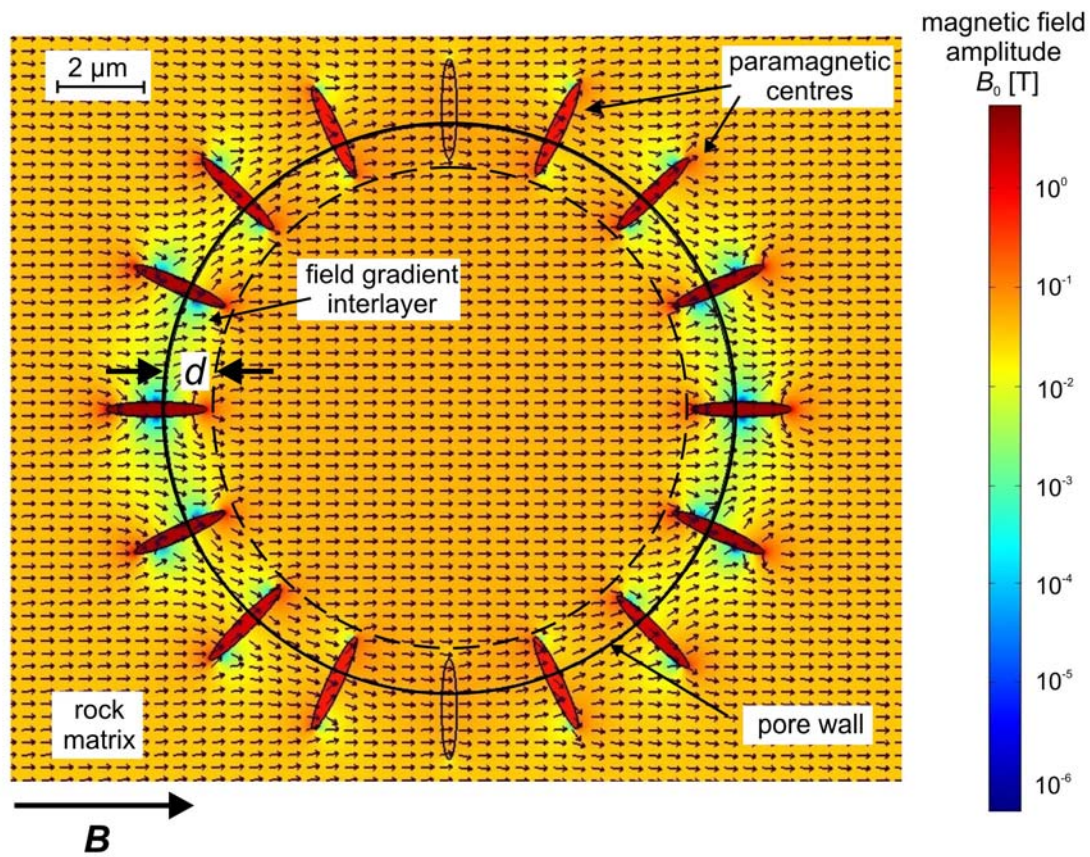

$$\frac{1}{T_{2,\text{ifg}}} = \frac{3\rho_{2,\text{ifg}}}{r-d}$$

$$\frac{1}{T_{2,\text{apparent}}} = \frac{1}{T_{2,\text{free fluid}}} + \frac{1}{T_{2,\text{surface}}} + \frac{1}{T_{2,\text{diffusion}}}$$


Correction of T2 distribution

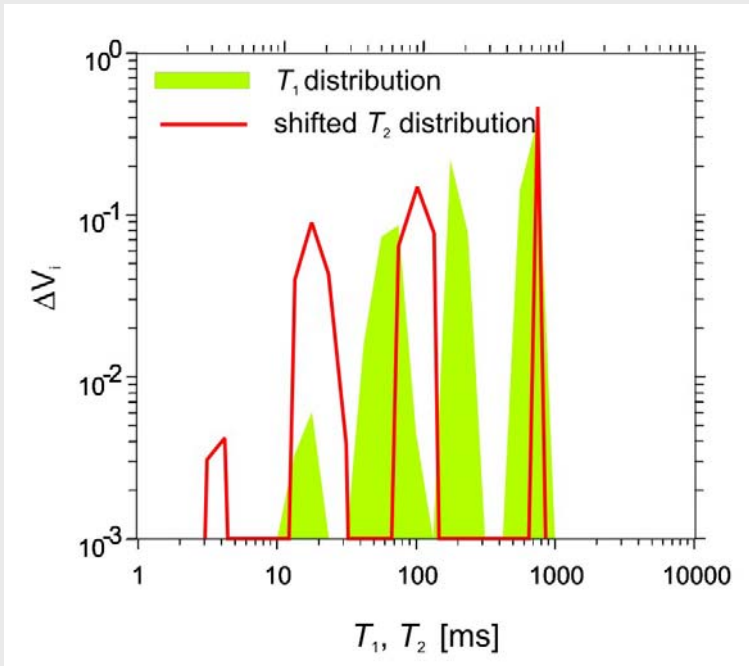

Correction
of T_2



based on:

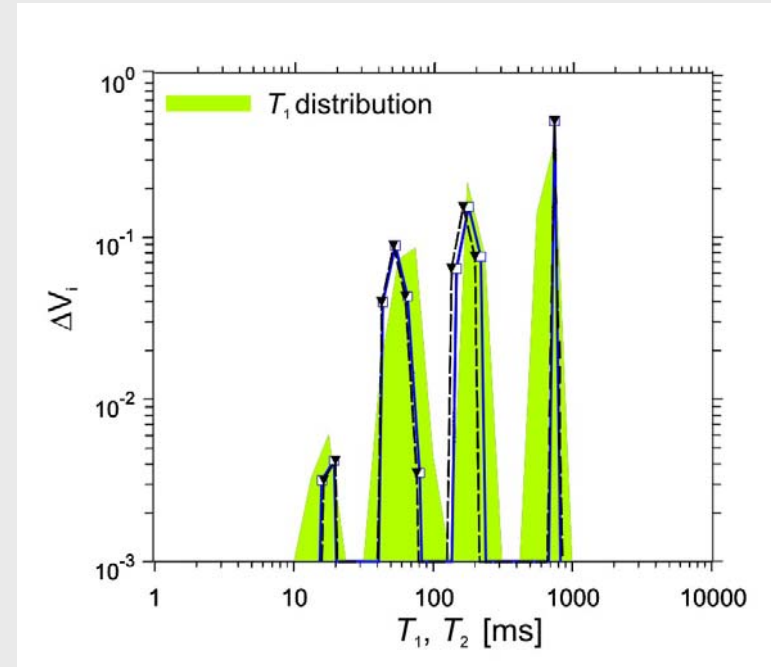

model theory:


$$\rho_2 = \rho_1 + \frac{\rho_{2,\text{ifg}}}{\left(1 - \frac{d}{r}\right)}$$



empirical equation:

$$r_{\text{corr}} = r_{\rho_{2,\text{eff}}} \left(\frac{9.53}{r_{\rho_{2,\text{eff}}}} \right)^{0.3}$$

Permeability results

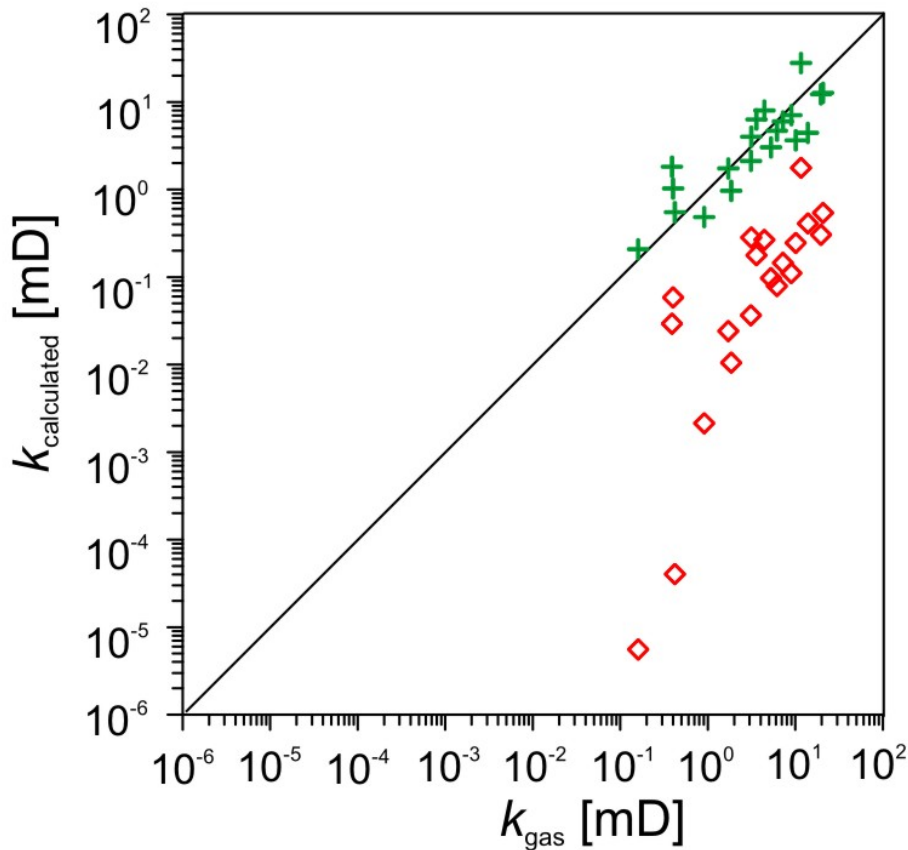

Kozeny-Carman equation

using $r_{\text{corr}}(T_{2,\text{LM}})$:

$$k = \left(\frac{1}{8} \right) \frac{\Phi}{T} r_{\text{corr}}^2(T_{2,\text{LM}})$$

T : tortuosity

Standard $T_{2,\text{LM}}$ equation:

$$k = a T_{2,\text{LM}}^2 \Phi^4$$

Conclusions

- ✓ Mobile tool for use on drilling platforms
- ✓ Standard permeability calculation scheme for high porosity rocks
- ✓ Improved permeability prediction for low porosity rocks taking into account increasing diffusion effects
- ! Individual calibration required for each formation

Acknowledgments

to the German Science Foundation (DFG)
for operating grants
BL 231/26-1/2 to B. Blümich and
CL 121/16-1/2 to C. Clauser
within the DFG ODP/ICDP priority program.