



Ritchie, M., Fioranelli, F., Griffiths, H., and Torvik, B. (2016) Monostatic and Bistatic Radar Measurements of Birds and Micro-drone. In: 2016 IEEE Radar Conference (RadarConf), Philadelphia PA, USA, 2-6 May 2016, pp. 1-5.

There may be differences between this version and the published version. You are advised to consult the publisher's version if you wish to cite from it.

<http://eprints.gla.ac.uk/120148/>

Deposited on: 14 June 2016

Enlighten – Research publications by members of the University of Glasgow
<http://eprints.gla.ac.uk>

Monostatic and Bistatic Radar Measurements of Birds and Micro-Drone

Matthew Ritchie, Francesco Fioranelli, Hugh Griffiths

Department of Electronic and Electrical Engineering
University College London
London, UK
Email: m.ritchie@ucl.ac.uk

Børge Torvik

Norwegian Defence Research Establishment (FFI)
Instituttveien 20, 2027 KJELLER,
Norway

Abstract — This paper analyses the experimental results from recent monostatic and bistatic radar measurements of multiple birds as well as a quadcopter micro-drone. The radar system deployed for these measurements was the UCL developed NetRAD system. The aim of this work is to evaluate the key differences observed by a radar system between different birds and a micro-drone. In order to do simultaneous monostatic and cross polarized data was measured along with coherent bistatic measurements. The results obtained show comparable signature within the time domain and a marked difference in the Doppler domain, from the various birds in comparison to the micro-drone.

Keywords— *Bistatic radar; Radar; Birds; Micro-drone; Doppler signatures; classification.*

I. INTRODUCTION

Recently the number of micro-drones available to the general public has significantly increased due to the low price and ease of use. These platforms can be used for private leisure and filming, as well as for applications such as disaster response, search and rescue, and agricultural and environmental monitoring. However, there are potential misuses that can involve micro-drones, such as personal privacy violation, illegal filming of restricted areas, collision hazard with people, other UAVs, and larger aircraft, and even transport of illegal substances or explosive/toxic materials. The detection, tracking, and classification of small UAVs using radar systems is a challenging task, as these platforms have small radar cross section (RCS) and fly at lower altitude and speed in comparison with conventional larger aircraft [1].

There is limited published research available on radar detection and classification of micro-drones. Previous work in [2] and [3] investigated the changes in RCS of a micro-drone and its blades through numerical simulations and experiments in a controlled environment. An important challenge to address for effective radar detection of micro-drones is the possibility of discriminating them from birds to avoid significant false alarm rates. After developing a radar sensor sensitive enough for micro-drone detection the challenge of bird related false targets could potentially reduce the systems effectiveness significantly. In [4] features extracted at tracking levels were proposed for this purpose, whereas in [5-7] features extracted from the micro-Doppler signatures were investigated using experimental data from a monostatic X-band radar.

This paper presents the preliminary analysis of signatures of three different species of birds and of a micro-drone (DJI Phantom Vision 2+ quadcopter), all collected using the same multistatic radar in the same deployment configuration. Significant insight into the RCS and micro-Doppler signatures of these birds and of the micro-drone can be achieved from these data, providing useful information to develop effective detection and classification methods. These experimental data include simultaneous monostatic and bistatic co-polarized data, as well as simultaneous cross-polarized monostatic data collected by two co-located radar nodes.

The rest of this paper is organized as follows. Section II describes the experimental setup and the radar system. Section III presents the data analysis with examples of range-time-intensity (RTI) plots and micro-Doppler signatures for 3 different species of birds and for a micro-drone. Section IV finally concludes the paper and discusses the future analysis that will be included in the full paper.

II. RADAR AND MEASUREMENT GEOMETRY

The radar system used for these measurements was the NetRAD system that has been developed at University College London (UCL) over the past 10 years [8]. NetRAD is an S-Band (2.4 GHz) coherent pulsed multistatic radar, with three separate but identical nodes [9]. The system was configured to use a peak power of 0.2 W, pulse length of 0.6 μ s and a PRF of 5 kHz as these were empirically found to provide the best results for this type of measurement. The measurement methodology was to record 300,000 pulses of data over a period of 60 seconds in order to capture a number of movements per recording.

The geometry that was used was a straight baseline deployment of two of the radar nodes with an additional receive only node at the monostatic site. The baseline between the monostatic and bistatic node was limited to approximately 28 m due to the geometry of the site that was being used. In this configuration it was possible to measure simultaneous HH and HV polarized data at the monostatic site (Node 1 and Node 2), and bistatic HH (Node 3). The antennas used for the measurements were a H polarized transmit antenna with a $10^\circ \times 10^\circ$ beamwidth and gain of 24 dBi at the monostatic node, and $20^\circ \times 20^\circ$ beamwidth receive antennas at both the co-located monostatic H pol and V pol receive nodes as well as the bistatic H pol receive node. The location of the site was in

the South East of England in a flat field area that was approximately 100 m by 80 m in size, the deployment geometry used is shown in Fig. 1.

The aim of the measurements was to observe the birds flying between two waypoints that were either individual bird trainers standing still, or a wooden perch for the bird to land/take-off from. These waypoints are labelled on Fig. 1 which shows the pairs A-B, C-D and E-F. The majority of experiments measured the birds in flight between waypoints A-B, in flight paths both towards and away from the monostatic radar line of sight.

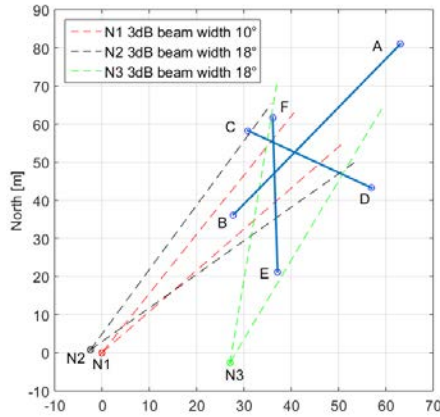


Fig. 1. Experimental setup and birds flight paths

As the birds flew from waypoint to waypoint the aspect angle with respect to each radar node changed and quantifying the effect of this on the recorded RCS and micro-Doppler signatures is of interest and will be evaluated further in the full paper submission. Estimations for the orientation of the birds with respect to each node for each flight path are shown in Fig. 1 are presented in Fig. 2. This shows that significant variation in aspect angles were recorded during the different waypoint experiments allowing for quantitative comparisons of how the relative RCS and micro-Doppler signatures alter with angle.

During the measurements three different birds and one drone were observed, these were a Hooded Vulture, Eurasian Eagle Owl and Barn Owl, images of the birds are shown within Fig. 3 (a) to (c). The animals were part of a falconry center based in the South East of England, they have been trained to fly to a handler when called and therefore more suitable to use for measurements than wild birds which require an element of luck and patience to be able to record in a controlled way over different geometries. These animals are clearly very different in their size, shape, weight, feather types and even the way that they fly. The largest of the birds was the Hooded Vulture which weighed approximately 1.8 kg compared to Barn Owl which was the smallest at only 280 g. These physical characteristics will clearly produce very different RCS and micro-Doppler contributions from the different species. For comparison with the birds a quadcopter micro-drone was also flown over the same waypoints. The drone used was a DJI Phantom Vision 2 which is approximately 0.35 x 0.35 x 0.19 m in size and weighs 1.2 kg. This is a widely used commercially available drone that is comparable to a large bird in size and

weight, hence representing a challenging target to classify for an operational radar when presented with many other bird targets in the scene.

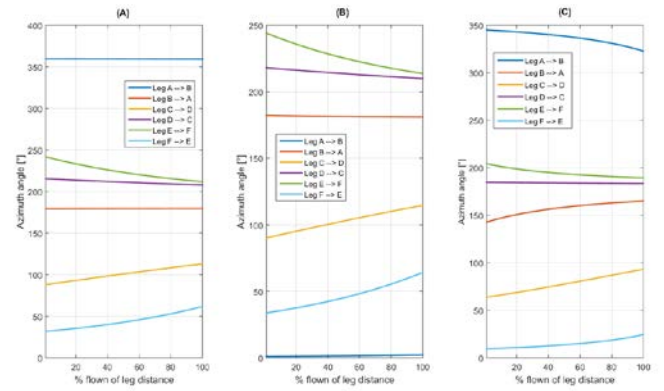


Fig. 2. Actual aspect angle of birds in flight dependent on flight path with respect to the radar nodes (a) Node 1 (b) Node 2 (c) Node 3

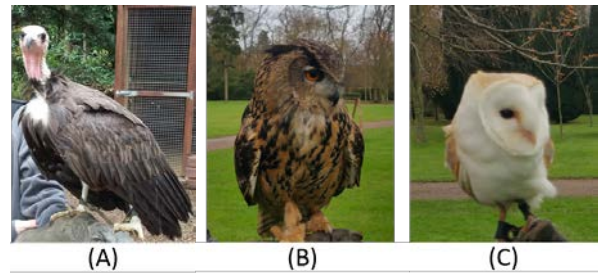


Fig. 3. Photo of (A) Hooded Vulture (B) Eurasian Eagle Owl (C) Barn Owl

III. DATA ANALYSIS

The analysis of the data produced was completed in both the time domain and the Doppler domain to compare the relative amplitudes of the signatures returned from the birds and drone. The Range Time Intensity (RTI) results shown are the match filtered values after normalizing to a peak of 0 dB within each measurement. Prior to plotting the data, a high pass filter was applied in the Doppler domain with a cut off at 20 Hz in order to remove the static clutter component from the signals. The range bins of interest were selected and displayed for each case. The micro-Doppler analysis applied a Short Time Fourier Transform (STFT) to the range bins that the birds were present within. This STFT used a hamming window of length 0.3 seconds, an overlap of 95% between windows and a padding of a factor of 4 in the Doppler domain relative to the window length. The micro-Doppler signatures have also been normalized to a peak of 0dB within each measurement.

The RTI profiles of the Hooded Vulture from monostatic and bistatic HH pol are shown in Fig. 4 (a) and (b) respectively. The cross polarized data is not shown here as the target signature was too weak to be visible, this was seen in all RTI plots of all targets. For each RTI plot a subsection of the full 60 second recording is displayed, when the target was actually in motion. During this time the Vulture was moving from waypoint A to waypoint B. The moving target can be clearly seen within both monostatic and bistatic RTI plots, with

more background clutter present in the bistatic result. It was found that the target signature within cross polarized radar node data was significantly reduced, which was to be expected. Doppler processing was required to highlight the targets in the cross polarized results. The micro-Doppler signatures from all radar nodes of the Hooded Vulture are shown in Fig. 5. The bird is more visible in the Doppler domain as the majority of background clutter is now separated from the moving target. The results from the bistatic and cross polarized monostatic nodes show horizontal lines, these are the result of unwanted Doppler images. Further filtering of this data will be applied for the full paper submission in order to enhance just the bird signatures. The micro-Doppler signatures in the co and cross polarized monostatic data show a pattern of motion on top of the bulk velocity, it is believed that this was produced by the flapping of the wings. This is because the additional components appear at the beginning and end of the flight where the majority of the wing flapping occurred, compared to the gliding motion mid-flight. In general, during each of the flights the birds were very close to the ground and depending of species only flapped their wings for a fraction of the full flight time. This may be different from the typical open air flight style of these birds and this should be considered when drawing conclusions from this observed data.

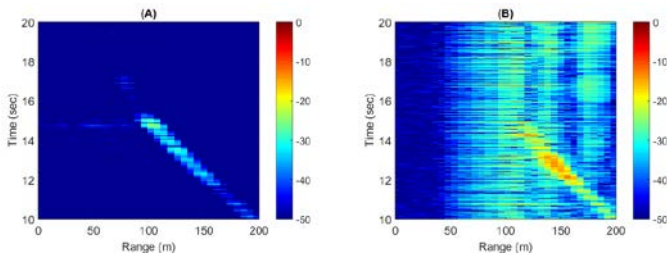


Fig. 4. RTI of Hooded Vulture moving from A to B (A) Monostatic HH (B) Bistatic HH

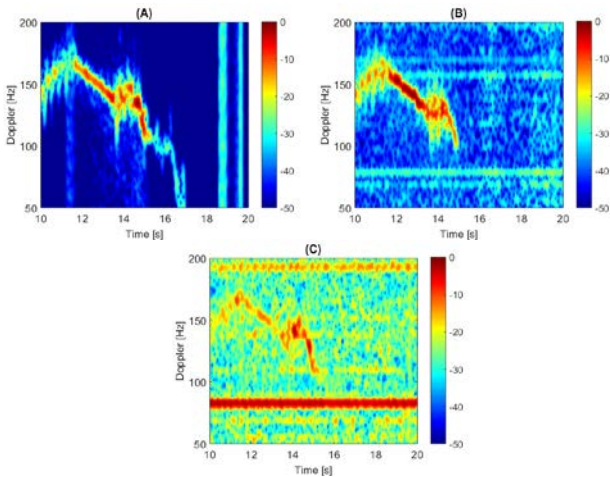


Fig. 5. RTI of Hooded Vulture moving from A to B (A) Monostatic HH (B) Bistatic HH (C) Monostatic HV

The RTI profiles of the Eurasian Eagle Owl from monostatic and bistatic HH pol are shown in Fig. 6 (a) and (b) respectively. The large bird was also visible in the range

domain, although the SNR was reduced in comparison the Vulture in the bistatic channel. The bird's signature is shown to reduce from approximately 140 m to 80 m during the flight, taking less than 4 seconds. Micro-Doppler analysis of the Eurasian Eagle Owl is shown in Fig. 7 for all three nodes. The target has a significant SNR, similar to the Vulture, but moves at a slower velocity. The additional micro-Doppler wing flapping components are not as visible for this species.

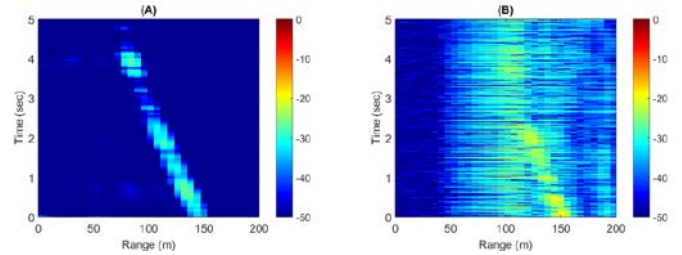


Fig. 6. RTI of Eurasian Eagle Owl moving from A to B (A) Monostatic HH (B) Bistatic HH

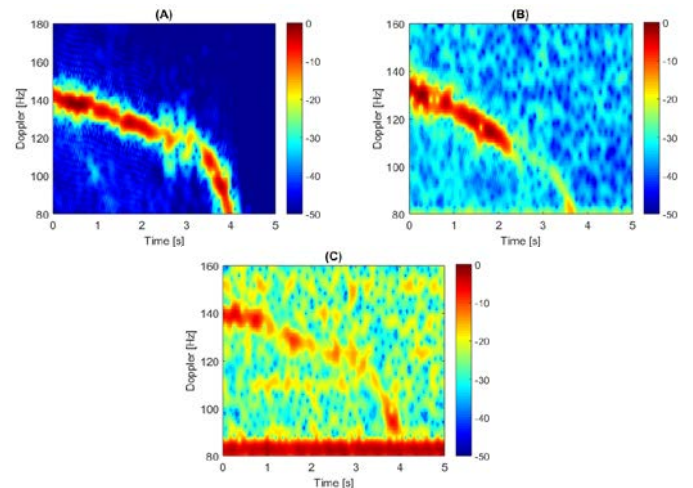


Fig. 7. Micro-Doppler signature of Eurasian Eagle Owl moving from A to B (A) Monostatic HH (B) Bistatic HH (C) Monostatic HV

The RTI data from the barn owl has not been included as the signature in the time domain was very weak in comparison to the background clutter, hence reducing the usefulness of the direct RTI information. Only after the micro-Doppler processing was applied was it possible to clearly observe the returned signatures from the bird, shown in Fig. 8. The monostatic H pol signature in Fig. 8(a) shows a great deal of modulation on top of the bulk velocity component. The flight style of this smaller species included a high wing beat frequency and this has translated directly to the features observed in Doppler. The clear difference in wing beat frequency from Fig. 5(a) to Fig. 8(a) could potentially be used as a classifier feature for the type of bird. The barn owl was also found to change velocity at a fast rate than the larger birds, which is likely linked to its more agile flight pattern.

The measurement of the bird signatures is now compared to the results from the DJI Phantom drone. This drone was flown over the same waypoints as the birds and the resulting data was processing in the same manner in order to directly compare the

data. The RTI of the drone can be seen in Fig. 9. The quadcopter was also found to be clearly visible in the RTI plot for both the monostatic and bistatic radar nodes. Some interference was observed in the monostatic node, which was likely to be caused by unwanted WiFi signals, further filtering of the data will aim to remove this in the final paper.

The micro-Doppler signatures from the monostatic HH pol, HV cross pol and bistatic HH pol are shown in Fig. 10 (a), (b) and (c) respectively. This plot has an expanded Doppler range due to the additional components observed at frequencies greater than 200 Hz. These are clearly seen in the monostatic H pol data and are thought to be caused by the rotor blades motion. This Doppler signature is clearly very different from that generated by the birds and could easily be used to differentiate between animal or rotor blade powered target. It was noted that the peak returns from the drone rotor blades were approximately 8 dB lower than the main body reflections.

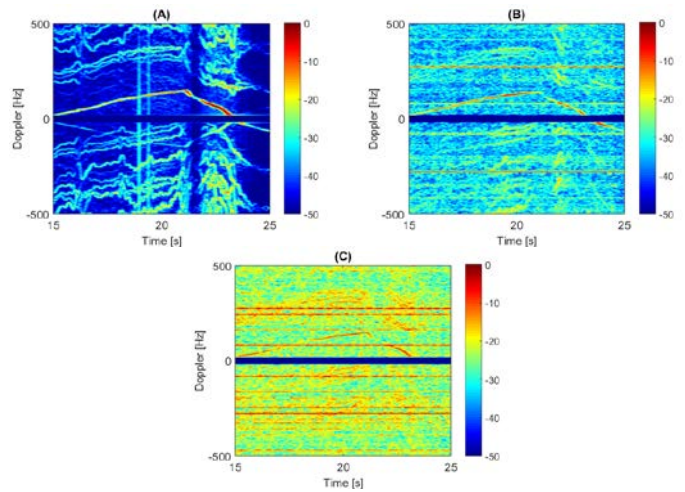


Fig. 10. Micro-Doppler signatures of DJI Phantom quadcopter drone moving from A to B (A) Monostatic HH (B) Monostatic HV (C) Bistatic HH

IV. CONCLUSIONS

In conclusion the radar signatures in both range and Doppler domain of co/cross polarized monostatic as well as co-polarized bistatic data have been shown for 3 different birds as well as a quadcopter drone. It was found that the micro-drone signature was comparable in RCS to the other birds, larger than the barn owl but smaller than the eagle owl and vulture. Further quantification of this in the monostatic co and cross polarized results as well as the bistatic result will be included in the final paper. On the other hand the micro-Doppler signatures were found to be significantly different between the drone platform and the birds. However, many small drones come with plastic rotors, virtually invisible to radar at some distance [2]. One potential way ahead to distinguish between the two classes would be to positively identify birds as birds. Bird wings are shown to have significant RCS compared to the bird body at certain aspect angles [10], and both micro-Doppler signatures and amplitude modulations [11] may contribute to the classification process. In the lower frequency bands, polarimetry is believed to give valuable information about birds and small drones. Future work will include analysis of polarimetric variables for differentiation between the classes.

ACKNOWLEDGMENT

The authors would like to thank the Hawking Centre, Doddington for providing the birds. This work has been funded by the IET A F Harvey Prize awarded to Prof. Hugh Griffiths in 2013.

REFERENCES

- [1] R. I. A. Harmanny, J. J. M. de Wit, and G. P. Cabic, 'Radar micro-Doppler feature extraction using the spectrogram and the cepstrogram', *2014 11th European Radar Conference (EuRAD)*, pp. 165-168, October 2014, Rome, Italy.
- [2] M. Ritchie, F. Fioranelli, H. Griffiths, and B. Torvik, 'Micro-drone RCS Analysis', Presented at the *2015 IEEE Radar Conference*, October 2015, Johannesburg, South Africa.

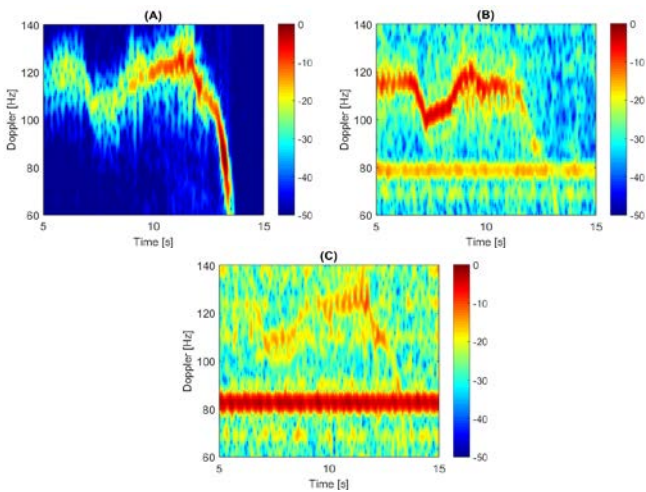


Fig. 8. Micro-Doppler signature of Barn Owl moving from A to B (A) Monostatic HH (B) Bistatic HH (C) Monostatic HV

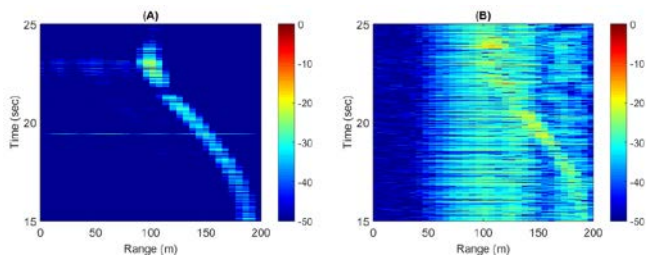


Fig. 9. RTI signatures of DJI Phantom quadcopter drone moving from A to B (A) Monostatic HH (B) Monostatic HV (C) Bistatic HH

- [3] [A. Schroeder, M. Renker, U. Aulenbacher, A. Murk, U. Boeniger, R. Oechslin, and P. Wellig, 'Numerical and experimental radar cross section analysis of the quadcopter DJI Phantom 2', Presented at the 2015 IEEE Radar Conference, October 2015, Johannesburg, South Africa.](#)
- [4] [N. Mohajerin, J. Histon, R. Dizaji, and S. L. Waslander, 'Feature extraction and radar track classification for detecting UAVs in civilian airspace', 2014 IEEE Radar Conference, pp. 0674-0679, Cincinnati.](#)
- [5] [J. J. M. De Wit, R. Harmanny, and P. Molchanov, 'Radar Micro-Doppler Feature Extraction Using the Singular Value Decomposition', 2014 International Radar Conference, October 2014, Lille, France.](#)
- [6] [J. J. M. de Wit, R. I. Harmanny, and G. Premel-Cabic, 'Micro-Doppler analysis of small UAVs', 2012 9th European Radar Conference \(EuRAD\), pp. 210-213, November 2012, Amsterdam.](#)
- [7] [P. Molchanov, K. Egiazarian, J. Astola, R. I. Harmanny, and J. J. M. de Wit, 'Classification of small UAVs and birds by micro-Doppler signatures', 2013 10th European Radar Conference \(EuRAD\), pp. 172-175, October 2013, Nuremberg, Germany.](#)
- [8] [T. E. Derham, S. Doughty, K. Woodbridge, and C. J. Baker, 'Design and evaluation of a low-cost multistatic netted radar system', IET Radar, Sonar & Navigation, vol. 1, pp. 362-368, 2007.](#)
- [9] [F. Fioranelli, M. Ritchie, and H. Griffiths, 'Multistatic Human Micro-Doppler Classification of Armed/Unarmed Personnel' IET Radar, Sonar & Navigation, vol. 9, pp. 857-865, 2015.](#)
- [10] [Torvik, B.; Olsen, K.E.; Griffiths, H.D., "X-band measurements of radar signatures of large sea birds," in Radar Conference \(Radar\), 2014 International , vol., no., pp.1-6, 13-17 Oct. 2014](#)
- [11] [Torvik, B.; Knapkog, A.; Lie-Svendsen, O.; Olsen, K.E.; Griffiths, H.D., "Amplitude modulation on echoes from large birds," in European Radar Conference \(EuRAD\), 2014 11th , vol., no., pp.177-180, 8-10 Oct. 2014](#)