

AAS 15-381

## GENERATION OF SIMULATED TRACKING DATA FOR LADEE OPERATIONAL READINESS TESTING

James Woodburn\*, Lisa PolICASTRI† and Brandon Owens‡

Operational Readiness Tests were an important part of the pre-launch preparation for the LADEE mission. The generation of simulated tracking data to stress the Flight Dynamics System and the Flight Dynamics Team was important for satisfying the testing goal of demonstrating that the software and the team were ready to fly the operational mission. The simulated tracking was generated in a manner to incorporate the effects of errors in the baseline dynamical model, errors in maneuver execution and phenomenology associated with various tracking system based components. The ability of the mission team to overcome these challenges in a realistic flight dynamics scenario indicated that the team and flight dynamics system were ready to fly the LADEE mission.

### INTRODUCTION

The Lunar Atmosphere and Dust Environment (LADEE) mission<sup>1,2,3</sup> was a lunar science and technology demonstration mission that launched in September of 2013 and operated for approximately 7 months. Operational Readiness Tests (ORTs) were an important part of the pre-launch preparation for the LADEE mission<sup>4,5</sup>. The goal of the ORTs was to demonstrate that the Mission Operations System--including the operations team--was prepared to conduct the planned mission. These tests were designed to support an evaluation of the level of preparedness of the operations system and team under normal and stressing conditions through the introduction of anomalies into a simulation of the nominal mission plan. Results of the ORTs were scrutinized at the Operations Readiness Review and passage of the ORTs was a requirement for the verification of launch readiness.

During operations on a live mission, the true trajectory of the spacecraft is never known. Yet trajectory information is required to schedule science observations, ground contacts, etc. In order to provide an estimate of the trajectory for such purposes, an orbit determination process is performed using observations of the spacecraft to yield an updated estimate of where the spacecraft was during the times when measurements were taken and provide predictions of the spacecraft position at future times. This relationship between the unknown truth and a determined estimate was emulated during the LADEE ORTs in order to ensure that LADEE's orbit determination process<sup>6</sup> could handle the types of errors and uncertainty that were expected during the mission and create suitable products for other processes, such as the maneuver planning process<sup>7</sup>. Simulated


---

\* Chief Orbital Scientist, Analytical Graphics, Inc., 220 Valley Creek Blvd., Exton, PA, 19341-2380.

† LADEE Orbit Determination Lead, Applied Defense Solutions, 10440 Little Patuxent Pkway #600, Columbia, MD, 21044

‡ LADEE Deputy Mission Operations Manager, SGT, Inc., NASA Ames Research Center, Moffett Field, CA, 94035


tracking data was constructed based on a series of simulated trajectory segments that were deviated from the nominal mission trajectory through injection, maneuver, and dynamical model errors. The truth trajectory was not known to the Flight Dynamics Team during the test period. The Flight Dynamics Team used the simulated measurements to generate estimates of LADEE's trajectory. The desired dual realizations of the spacecraft trajectory were therefore available for use during the ORTs: the simulated truth trajectory which was used in the generation of all simulated sensor outputs and the trajectory estimate produced by the Flight Dynamics Team which was used for mission planning purposes. The flow of information through the various teams and functions involved in the LADEE ORTs and mission operations is depicted in Figure 1.

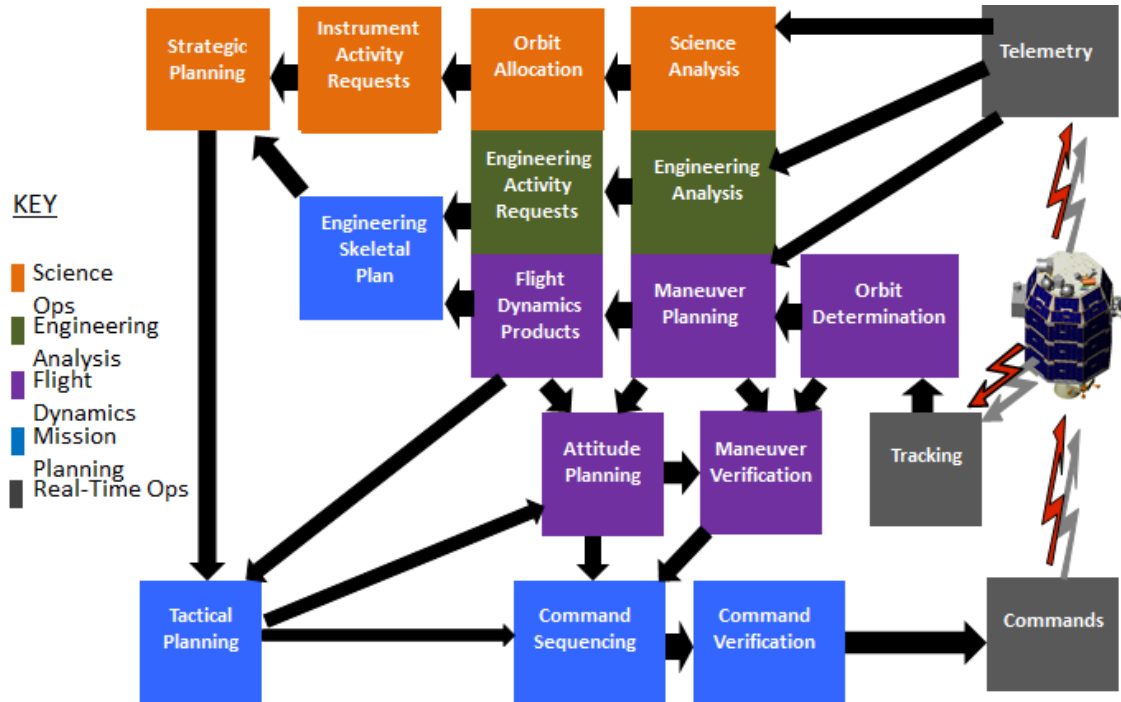


**Figure 1. Representative ORT data flow diagram.**

The LADEE mission trajectory<sup>8</sup> can be viewed as a concatenated set of trajectory segments beginning with the near Earth initial acquisition period, transitioning to the lunar transfer phase through cis-lunar space, entering a commissioning orbit at the Moon via a Lunar Orbit Insertion (LOI) maneuver, and finally descending into the lunar science orbit. LADEE was to be the first mission to launch on the all-solids five stage Minotaur V. To accommodate the launch dispersions, a phasing loop strategy, as shown in Figure 2, was chosen where two to three apogee-raising maneuvers were planned in order for LADEE to arrive at the Moon on the same day, regardless of the launch achieved. The progression of the trajectory from capture into lunar orbit to the final science orbit also followed a series of maneuvers that gradually decreased the altitude above the lunar surface as depicted in Figure 3. The red segments of the trajectory in Figure 3 denote where the Moon blocks view of LADEE from any DSN station and the purple cone depicts the viewing geometry from the Earth for the LOI maneuver. Table 1 provides a subset of the overall maneuver plan for the LADEE mission. It is noteworthy that the maneuver plan contained a number of maneuvers which nominally had either zero or a very small effect on the LADEE trajectory. Such maneuvers are put in place to correct for unexpected deviations, such as those generated by the anomalies inserted into the ORTs, that exist between the trajectory estimate and

the planned trajectory. In the case where a nominal or near nominal trajectory has been maintained leading up to the planned time for such a maneuver, the operations team often decides to waive (not perform) the maneuver.

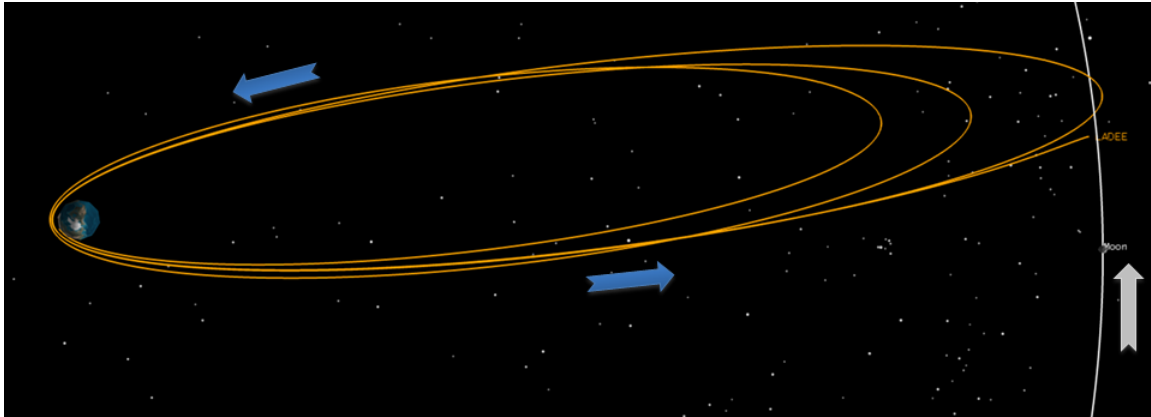

**Figure 2. Phasing Loop Trajectory, Earth-Inertial Frame**

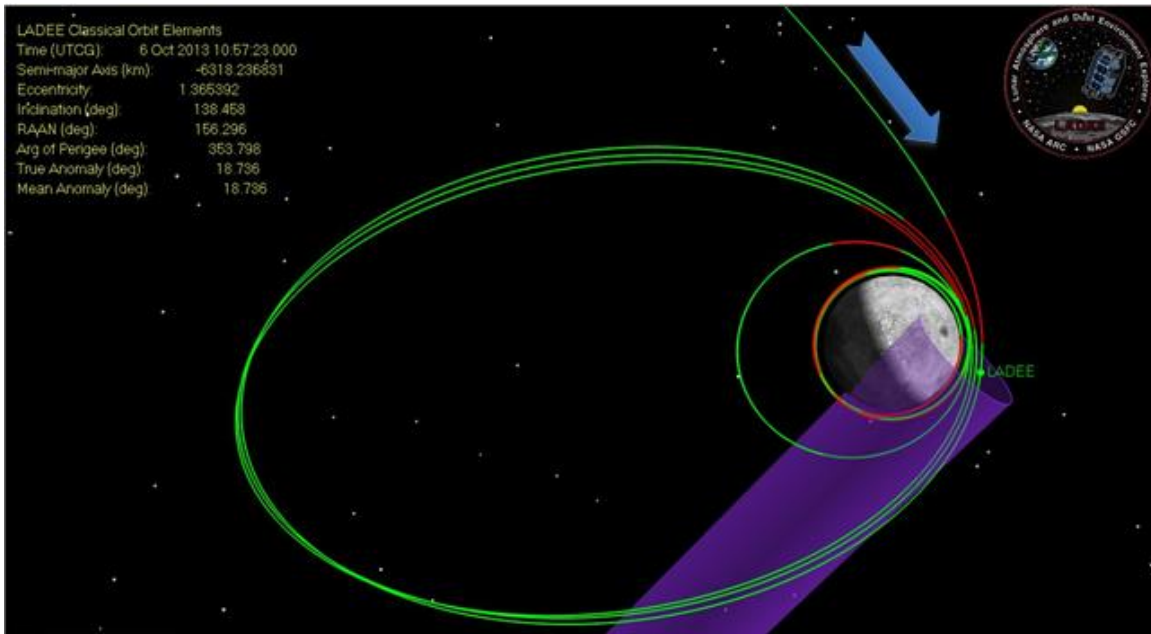

**Figure 3. Trajectory During Lunar Orbit Insertion Maneuvers, and Orbit Lowering Maneuvers, Moon-Inertial Frame**

The ORTs were designed to exercise operational personnel, software, and procedures across selected portions of the complete mission timeline. The original ORT campaign design contained five test periods which were later reduced to four test periods due to scheduling constraints. Each ORT test period focused on evaluating the system and team performance across a significant event in the LADEE mission timeline. In this paper, we describe the design of the trajectory perturbations and tracking data anomalies for the LADEE ORTs. The software used to generate the simulated tracking data did not directly support the modification of all settings needed to generate the desired anomalies during each ORT data simulation time period in a single run. We outline the procedure that was developed for stopping and restarting the simulations in a manner that maintained continuity of the spacecraft trajectory and related stochastic model parameters while

allowing for the desired modifications to measurement noise and biases to be injected. Finally, we discuss the effectiveness of the tests in familiarizing the team with potential anomaly scenarios and in identifying improvements to planned operational procedures.

**Table 1. Example of LADEE Maneuver Plan Used for Planning ORTs**

	Mnvr	Maneuver Name	Thruster Used	Pressure Mode	Baseline Min Expected DV (m/s)	Baseline Max Expected DV (m/s)	
Mission Phase							
Phasing Loop	AM1	Apogee Maneuver 1	OCS or RCS	Pressure R	0.00	7.00	
	PM1	Perigee Maneuver 1	OCS or RCS	Pressure R	3.57	34.95	
	AM2	Apogee Maneuver 2	OCS or RCS	Pressure R	0.00	0.00	
	PM2	Perigee Maneuver 2	OCS or RCS	Pressure R	2.11	26.95	
	OPM	Out-of-Plane Maneuver	OCS or RCS	Pressure R	0.00	1.63	
	PM3	Perigee Maneuver 3	OCS or RCS	Pressure R	0.26	19.90	
	TCM1	Trajectory Correction Maneuver 1	RCS	Pressure R	0.00	0.00	
	TCM2	Trajectory Correction Maneuver 2	RCS	Pressure R	0.00	0.00	
	TCM3	Trajectory Correction Maneuver 3	RCS	Pressure R	0.00	0.00	
	LOA	LOI1	Lunar Orbit Insertion 1	OCS	Pressure R	302.74	318.32
		LAM1	Lunar Apogee Maneuver 1	RCS	Pressure R	0.00	0.00
		LOI2	Lunar Orbit Insertion 2	OCS	Pressure R	295.94	296.01
		LOI3	Lunar Orbit Insertion 3	OCS	Pressure R	237.94	238.25
Commissioning	OLM1	Orbit Lowering Maneuver 1	RCS	Pressure R	-	-	
	OLM2	Orbit Lowering Maneuver 2	OCS	Pressure R	40.00	40.00	
	OLM3	Orbit Lowering Maneuver 3	OCS	Pressure R	31.88	31.88	
	OLM4	Orbit Lowering Maneuver 4	RCS	Pressure R	6.84	6.84	
Science	OMM01	Orbit Maintenance Maneuver 1	RCS	Blowdown	2.76	2.76	
	OMM02	Orbit Maintenance Maneuver 2	RCS	Blowdown	5.00	5.00	
	OMM03	Orbit Maintenance Maneuver 3	RCS	Blowdown	4.90	4.90	
	OMM04	Orbit Maintenance Maneuver 4	RCS	Blowdown	3.38	3.38	
	OMM05	Orbit Maintenance Maneuver 5	RCS	Blowdown	4.50	4.50	
	OMM06	Orbit Maintenance Maneuver 6	RCS	Blowdown	6.79	6.79	
	OMM07	Orbit Maintenance Maneuver 7	RCS	Blowdown	4.71	4.71	
	OMM08	Orbit Maintenance Maneuver 8	RCS	Blowdown	6.00	6.00	
	OMM09	Orbit Maintenance Maneuver 9	RCS	Blowdown	4.94	4.94	
	OMM10	Orbit Maintenance Maneuver 10	RCS	Blowdown	7.39	7.39	
	OMM11	Orbit Maintenance Maneuver 11	RCS	Blowdown	4.76	4.76	
	OMM12	Orbit Maintenance Maneuver 12	RCS	Blowdown	3.27	3.27	

## ORT DESIGN OVERVIEW

The ORTs were designed to exercise the Mission Operations System over critical events in the mission timeline. While it would have been desirable, in one sense, to use a continuous trajectory covering the entire mission as the basis for all of the ORTs, the use of mostly independent trajectory segments for each of the ORT time periods was less complex and provided more flexibility in the design of the tests for individual mission phases. The choice to use a test specific trajectory baseline for the ORTs facilitated changing the list of challenges inserted into each ORT period at any time up to the start of the ORT without imposing the requirement that data for all ORT periods be regenerated. It also reduced the burden related to the planning of ground contact periods which could be designed based on an a priori set of pre-generated trajectories since orbital perturbations injected into a particular ORT did not accumulate into large enough trajectory differences during the ORT time period to invalidate the planned contact periods. Finally, the additional flexibility of this approach allowed the ORTs to be performed in non-chronological order, thus providing the opportunity to test key activities (e.g., fault management reconfiguration<sup>9</sup> for the lunar orbit insertion, science phase activities, etc.) earlier in the ORT campaign and to adapt to the overall project schedule as necessary. **Error! Reference source not found.** presents an overview of the four ORT test periods. The times listed in **Error! Reference source not found.** represent times in the LADEE mission timeline, not the wall clock times when the tests were performed. The actual order in which the tests were performed is also provided.

**Table 2. High Level ORT Descriptions.**

ORT	Order	Start/Stop	Trajectory Events	Event Perturbation
1	3	2013-09-06T21:00 2013-09-09T00:00	Launch 2013-09-07T03:31	Off-nominal trajectory consistent within expected launch dispersion
2	4	2013-09-29T15:00 2013-10-03T00:00	Perigee Maneuver 3 2013-10-01T16:30	Start with degraded orbit. Maneuver execution ~3% cold with small pointing error.
3	1	2013-10-06T03:00 2013-10-09T00:00	Lunar Orbit Insertion 1 2013-10-06T12:00	Maneuver execution ~7% hot with small pointing error
5	2	2013-12-23T14:00 2013-12-28T01:00	Orbit Maint. Maneuver 6 2013-10-28T01:00	Maneuver execution ~2% cold with small pointing error

## TRAJECTORY SIMULATION

Truth trajectories were simulated for each ORT. Each truth trajectory was based on the selection of a particular trajectory from a set of feasible trajectories provided by the Trajectory Design Team. Each feasible trajectory was constructed as an independently targeted trajectory starting from an orbit insertion state that was consistent with the expected dispersion about the nominal orbit insertion state. In the case of ORT-1, which covered the launch portion of the LADEE mission timeline, the truth trajectory contained the orbit insertion state and exactly followed the selected feasible trajectory for the duration of the test period. For the remaining ORTs, truth trajectories were generated as variants of the provided feasible trajectories where part of each truth trajectory preceded the test time period. Inside the test period, truth trajectories were allowed to diverge from the feasible reference trajectory via the inclusion of errors in the ORT initial state and incorporated the effects of perturbations to the dynamical model and maneuvers. The simulated truth trajectories were generated using AGI's Orbit Determination Tool Kit (ODTK)<sup>10</sup>. In addition to serving as the basis for the generation of simulated tracking data, these truth trajectories are used in the simulation of ancillary ORT products (attitude, s/c events, etc.).

### Initial condition errors

Initial condition errors represent deviations from the selected feasible trajectory at the beginning of the ORT test period. Initial condition errors were generated by starting the ODTK tracking data simulation prior to the beginning of the test period, when possible, and allowing the Flight Dynamics Team to process imperfect observations over the time period between the start of tracking data generation and the beginning of the ORT test period. The tracking data generated prior to the start of the ORT followed the planned station contact schedule so as to provide an orbit estimate with accuracy that would be expected during the mission at the start of the ORT test period. For ORT-3 and ORT-5, the simulated truth trajectory exactly followed the selected feasible trajectory during times prior to the test period. For ORT-2, an unexpected RCS thruster firing was included in the pre-test period trajectory simulation for the purpose of degrading the orbit determination solution at the start of the test period. ORT-1 was a special case where the initial condition errors were incorporated via the selection of a non-nominal, yet feasible trajectory at initial orbit insertion.

### Dynamical model errors

The dynamical model required for the LADEE mission consisted primarily of Earth and Moon gravity plus solar pressure. Acceleration errors in the baseline dynamical model were injected through the addition of an exponentially correlated stochastic sequence to the solar pressure coef-

ficient. The stochastic accelerations in the solar pressure model were along the sun line with a root variance of approximately 13% of the nominal solar pressure acceleration and a half-life of 2 days. Accelerations due to spacecraft thrusting are considered separately for the purpose of this analysis.

### **Maneuver errors**

Nominal acceleration profiles for orbital maneuvers in each ORT test period were provided by the Maneuver Planning Team. The maneuver acceleration profiles consisted of a time series of accelerations and fuel use due only to the thrust force on the spacecraft. Deterministic errors in maneuver magnitude were generated by importing the acceleration profile into EXCEL™ and scaling the accelerations by a predetermined value. For example, to simulate a maneuver that executed 7% hot, all accelerations were multiplied by a factor of 1.07. Maneuver errors also included a small random deviation in the direction of thrust with root variance of a fraction of a degree (varied by maneuver). The simulated maneuver errors were unique and independent for each maneuver.

## **MEASUREMENT SIMULATION**

Simulated measurements were generated based on a station contact schedule provided by the Mission Planning Team. The contact periods were initially determined based on a nominal mission trajectory provided by the Trajectory Design Team. Outside of the period just after launch, the contact periods were mostly unaffected by deviations from the nominal trajectory due to the large distance between the spacecraft and the Earth. Measurement types, accuracy and the time between observations were set to be as expected during the mission based on the capabilities and normal operational procedures of the tracking systems. LADEE tracking was performed by the NEN, USN, and DSN tracking systems. Reported observations were constructed as the modeled value of the measurements corrupted by white noise and time correlated measurement bias, transponder delay, and troposphere modeling errors. Observation accuracy (as measured by the white noise variance) was determined for each (tracking station – observation type) pairing by processing data from prior missions. These pass-specific increases in measurement noise were not communicated to the Flight Dynamics Team.

### **Measurement white noise**

During nominal tracking passes, observations were corrupted with Gaussian white noise with variance that depended upon the tracking station and observation type. In addition, a number of anomalous passes were simulated where the tracking data quality was degraded due to an increase in the variance of the white noise for specific measurement types.

### **Measurement bias errors**

Nominal measurement biases were set to zero but were allowed to vary during the simulation according to exponentially correlated stochastic sequences. A separate stochastic sequence was used for each (tracking station – observation type) combination where the amplitude and half-life of each stochastic sequence was chosen to be consistent with results from prior processing of real mission data. During several anomalous passes, step functions were added to selected measurement biases to render the observations useless.

### **Measurement reporting**

Measurements were reported on a pass by pass basis with a unique file containing the measurements from each pass. File naming conventions varied between DSN and non-DSN stations.

## LADEE TRACKING RESOURCES

The LADEE mission was tracked by a combination of NEN, USN, and DSN tracking stations. The set of stations used for the generation of simulated tracking data during the ORTs is given in Table 3. The set of stations used for the LADEE ORTs was augmented by the addition of the USN/Western Australia station AUWA01 during the actual mission. Not all measurement types associated with a station were generated for each tracking pass supported by that station.

**Table 3: LADEE Tracking Stations Used in ORTs**

Station	Obs Types	Obs Spacing	Sim Accuracy
DSN 27	TCP	10 sec	0.003 cycles
	Sequential Range	60 sec	0.5 m
DSN 24	TCP	10 sec	0.003 cycles
	Sequential Range	60 sec	0.5 m
DSN 34	TCP	10 sec	0.003 cycles
	Sequential Range	60 sec	0.5 m
DSN 45	TCP	10 sec	0.005 cycles
	Sequential Range	60 sec	0.5 m
DSN 54	TCP	10 sec	0.003 cycles
	Sequential Range	60 sec	0.5 m
DSN 65	TCP	10 sec	0.003 cycles
	Sequential Range	60 sec	0.005 m
USN/HBK	Azimuth	5 sec	0.03 deg
	Elevation	5 sec	0.02 deg
	Doppler	5sec	75 cm/s
NEN/AGO	X	5 sec	6 arcsec
	Y	5 sec	6 arcsec
	Range	5 sec	5 m
	Doppler	5 sec	7.5 cm/s
NEN/WS-1	Azimuth	5 sec	0.03 deg
	Elevation	5 sec	0.02 deg
	Range	5 sec	0.1 m
	Doppler	5 sec	0.15c m/s

## USE OF ODTK

Simulated tracking measurements were generated using ODTK, the same software that was used for operational orbit determination during the mission. ODTK provides the capability to generate simulated observations based either on the satisfaction of visibility constraints or following a predetermined schedule as was required during the ORTs to emulate the quantity of tracking data that would be available during the actual mission. There were, however, two requirements for the generation of simulated tracking data that ODTK did not support directly: saving tracking data from each pass to a different file and generating multiple observables from a single tracking station at different rates over a pass.

We were able to leverage two existing ODTK capabilities to generate the tracking data in the desired manner: the option to specify a pre-generated ephemeris as the trajectory reference and the ability to pause and restart simulation runs. To achieve all of the data simulation goals, the ODTK simulator was run multiple times for each ORT. The first run was used to generate the



truth trajectory for the ORT and covered the entire ORT time frame, including the pre-ORT period during which tracking data was generated to allow for initialization of the orbit estimate, without need for pausing and restarting. The purpose of this run was to generate a spacecraft trajectory that could be used as the basis for tracking data generation on all subsequent runs. All perturbations to the spacecraft dynamical model and maneuver errors were incorporated into this run and the use of the custom tracking schedule was disabled. Tracking data generated during the computation of the truth trajectory was discarded as it did not follow the prescribed tracking schedule. For the subsequent runs, which were configured to follow the prescribed tracking schedule, the spacecraft object in ODTK was reconfigured to follow the truth trajectory generated in the first run. This procedure ensured that consistent trajectory information was used for the generation of all tracking data. The number of runs required for tracking data generation for each ORT depended upon the existence of simultaneous tracking from multiple ground stations and the need to generate different observables at unique data rates as described below. Any particular run could also be paused and restarted to allow for the injection of tracking data anomalies into the simulation.

The ODTK capabilities to use restart records, pre-generated ephemerides and a customized tracking schedule were key in the generation of simulated tracking data. Contact schedules from the mission planning team were read by the scripts driving the ODTK simulation runs and used to populate the ODTK custom tracking schedule.

### **Generation of data at different rates**

DSN tracking data is typically recorded at two data sample rates where sequential ranging is reported at a lower sample rate than Total Count Phase (TCP). For the LADEE ORTs, TCP measurements were generated every 10 seconds while sequential range measurements were generated every 60 seconds. ODTK does not currently support the generation of data with observation rates dependent upon observation type from a single ground station. To work around this limitation, the ODTK tracking data simulator was run twice for each DSN pass: The first run was performed at the step size required for the generation of TCP and the second run at the step size for sequential ranging. The use of a pre-generated ephemeris for LADEE during the simulation of observations during two runs was critical to ensuring that observations generated from independent simulation runs were consistent.

### **Pass specific data files and generation of overlapping tracking data**

Simulated tracking data for each ORT was made available as a set of files where each file contained data from a single pass as collected from a single station. This delivery method was chosen to emulate the delivery of real tracking data and to conform to the design of the Ames Flight Dynamics System. In the absence of simultaneous tracking from multiple stations, the pass specific files were simply generated by pausing the simulation after each tracking pass and renaming the output tracking data file before resuming the simulation from a restart record that ensured continuity of all stochastic parameters in the simulation. When simultaneous tracking was present, the simulator was run multiple times in the same manner, once for each ground station, to allow the separation of the tracking data into unique files. An exception to this rule was allowed for the LADEE ORTs to permit the delivery of DSN sequential ranging in a separate file from the DSN TCP measurements to accommodate the use of different data rates.

### **Increase in measurement noise**

Each LADEE tracking station was assigned statistical parameters describing the accuracy of realized observations based on historical performance. The purely random component of observed measurement errors was characterized as measurement white noise, which is fully de-



scribed by only a root variance. In the simulation of measurements in ODTK, such noise is not represented in the state structure of the simulation; it is merely added on to the modeled measurement based on a random draw. Unexpected increases in the measurement white noise on specific passes were added during the simulation of tracking data during the ORTs to model situations where a ground station may not have placed into the correct configuration prior to a pass. This was accommodated during the simulation by simply increasing the measurement white noise setting while the simulation was paused prior to the affected tracking pass. The prior setting was then restored during the pause in the simulation prior to the next pass.

### **Step functions in measurement biases and transponder delay**

Another type of anomaly that is sometimes seen in tracking data is a sudden change in measurement bias. This type of anomaly can result from improper ground station configuration, improper spacecraft configuration or hardware modifications at the ground station. In the ODTK simulations, measurement biases were represented as the sum of a constant bias and an exponentially correlated, zero mean, stochastic sequence. The random component of the bias was an element of the state space. Step changes in the constant component of the bias were inserted during pauses in the simulation prior to and after passes where the anomalous behavior was desired for purposes of the ORTs. The ODTK simulator provides an interface to the list of the current values of the stochastic variables involved in the simulation that allows for their values or the defining parameters for the stochastic sequence to be reset during a pause in the simulation. User provided changes are then picked up and incorporated into the simulation when the simulation is restarted. In this manner, step functions can be added to identified parameters while stochastic sequences that have not been altered maintain continuity across the pause and restart of the simulation.

No a priori transponder delay was provided for use in the generation of the simulated tracking data. The transponder delay affects two-way ranging measurements in a manner that makes the observed range larger than would be expected based purely on geometry. All ranging data for ORT-1 and ORT-2 were generated using a large nearly constant transponder delay. Tracking data for the other ORTs was generated with a zero nominal transponder delay. All ORTs modeled the transponder delay as the sum of a constant and an exponentially correlated, zero mean, stochastic sequence, similar to how measurement biases were handled. ORT-5 included a step function in the transponder bias which was generated following the same process as the step functions in measurement biases.

### **Troposphere mis-modeling**

Errors in the effects of troposphere were introduced in several tracking passes during ORT-5. Unlike measurement biases, troposphere uncertainty was not accounted for in state space. Instead, an effective offset in the local atmospheric conditions was used to alter the computed tropospheric refraction. These offsets were introduced prior to the simulation of data across the affected during a pause in the simulation and were removed during the pause in the simulation prior to the next track.

## **SPECIFIC DESCRIPTIONS OF ORTS**

Each ORT covered a significant event in the LADEE mission timeline. The ORTs were numbered—and are listed below—in chronological order with respect to the mission timeline. However, as noted above, the ORTs were not executed in chronological order. Anomalies related to the trajectory and tracking data were incorporated into each ORT to challenge and provide practice for the Flight Dynamics Team and to test the robustness of the Ames Flight Dynamics System.

ORT-1 and ORT-2 were subject to the additional constraint that they use the same reference trajectory so that ORT-1 tracking data could be used in ORT-2. Trajectory selection was important since the focal point of ORT-2 was the PM-3 maneuver. In the absence of a large enough deviation from the nominal trajectory, the PM-3 maneuver could be waived (as it was during the actual execution of the mission) which would circumvent the purpose of ORT-2. For this reason, the highest C3 energy trajectory from a set of trajectories provided by the Trajectory Design Team was selected.

### ORT-1: Launch, Activation, and Checkout

The ORT-1 test time period covered launch and early operations. The maximum C3 energy trajectory selected for ORT-1 was used as provided, no additional perturbations were modeled, to ensure continuity of the trajectory at the start of ORT-2. A description of the tracking data anomalies for ORT-1 is provided in Table 4. Trajectory generation and orbit determination for ORT-1 was performed using the Earth as the primary central body.

**Table 4. Tracking data anomalies for ORT-1.**

Station	Start/Stop	Description
All	N/A N/A	The nominal transponder delay on the spacecraft was set to 1873 ns and allowed to slowly vary in a small range about the nominal value using a short term delay root variance of 5 ns and correlation half-life of 20 days.
HBK	2013-09-07T03:56:16 2013-09-07T18:11:37	Azimuth and Elevation angles are degraded: Short term bias root variance raised from 1 to 2 deg, correlation half-life reduced from 2 to ½ days, measurement white noise root variance increased by 0.05 deg.
DSS34	2013-09-07T04:30:00 2013-09-07T09:23:31	Sequential ranging degraded: Measurement white noise root variance increased from 0.5 to 30 meters.
DSS27	2013-09-07T18:13:17 2013-09-08T00:45:00	Sequential ranging degraded: Constant range bias increased by 1.8 Km.
DSS34	2013-09-08T00:35:00 2013-09-08T10:10:00	Total Count Phase (Doppler) degraded: Measurement white noise increased from 0.003 to 0.30 cycles.

### ORT-2: Phasing Loop Maneuver

The ORT-2 test time period covered the third perigee maneuver, PM-3, during the phasing loop period of the mission. The baseline trajectory for ORT-2 was selected as the highest C3 energy trajectory maintaining continuity with ORT-1. Integration of the ORT-2 truth trajectory in ODTK began 5 hours prior to the start of the test period. The trajectory was allowed to deviate at integration start point from the selected baseline trajectory due to differences in solar pressure modeling, the inclusion of an unexpected Reaction Control System (RCS) thruster firing—partly inspired by a mass ejection anomaly on a prior mission<sup>11</sup>—and off-nominal performance of the PM-3 burn. Details of the acceleration anomalies included in the ORT-2 truth trajectory are described in further detail in Tables 5 and 6. Trajectory generation and orbit determination for ORT-2 was performed using the Earth as the primary central body.

**Table 5. Trajectory anomalies for ORT-2.**

Source	Start/Stop	Description
RCS	2013-09-29T10:13:11 2013-09-29T10:13:13	Errant Reaction Control System (RCS) thruster firing: 2 second pulse of a 22N thruster canted 45 degrees off the Z axis of the spacecraft. Prior to ORT test period.
Cp	N/A N/A	Solar pressure variation: The solar pressure coefficient was allowed to vary during the simulation based on the generation of a random stochastic sequence. The nominal one sigma value for the time dependent variation was set to 13% of the nominal value and the time correlation half-life was 2 days.
PM-3	2013-10-01T20:54:19 2013-10-01T20:54:51	PM-3 Perturbation: The nominal PM-3 burn as provided by the trajectory team was biased to be 3.1415% cold with a small random component of magnitude (1 sigma = 0.5%) and a small random directional error (1 sigma = 0.5 degrees).

**Table 6. Errant RCS Thruster Firing (ICRF Coordinates).**

Epoch	29-Sep-2013 10:13:11
Delta V <sub>x</sub>	-0.0767348 m/s
Delta V <sub>y</sub>	-0.0622362 m/s
Delta V <sub>z</sub>	-0.0650268 m/s

The tracking data anomalies added for ORT-2 are listed in Table 7. This ORT was executed last and provided the opportunity to leverage the experience gained by the Flight Dynamics Team during the earlier exercises to overcome a more dense set of challenges. Some of the anomalies included for this ORT such as large jumps in measurement biases were meant to render tracking data from a particular pass useless.

### **ORT-3: Lunar Orbit Acquisition**

The ORT-3 test time period covered the first of two Lunar Orbit Insertion (LOI) maneuvers, LOI-1. The baseline trajectory for ORT-3 was selected as the nominal launch trajectory in order to allow for the use of the nominal station contact schedule and nominal LOI-1 plan. The LOI-1 uplink time is located prior to the start of the ORT-3 test period. Integration of the ORT-3 truth trajectory in ODTK began 5 days prior to the start of the test period as LADEE was approaching the Moon. The ORT-3 truth trajectory was allowed to deviate at this point from the selected baseline trajectory due to differences in solar pressure modeling and off-nominal performance of the LOI-1 burn. Details of the acceleration anomalies included in the ORT-3 truth trajectory are described in further detail in Table 8. Tracking data anomalies for ORT-3 are shown in Table 9. Trajectory generation and orbit determination for ORT-3 was performed using the Moon as the primary central body.

**Table 7. Tracking data anomalies for ORT-2**

Station	Start/Stop	Description
All	N/A N/A	The nominal transponder delay on the spacecraft was set to 1873 ns and allowed to slowly vary in a small range about the nominal value using a short term delay root variance of 5 ns and correlation half-life of 20 days.
WS-1	2013-09-15T11:54:31 2013-09-15T16:34:06	Ranging degraded: Constant range bias increased from 0.0 to 34.567 Km.
DSS 27	2013-09-16T17:24:51 2013-09-17T01:14:58	Total Count Phase (Doppler) degraded: Measurement white noise root variance increased from 0.003 to 0.222 cycles.
DSS 34	2013-09-17T23:35:00 2013-09-18T03:45:00	Sequential Range degraded: Constant range bias increased from 0.0 to 40 m.
DSS 34	2013-09-26T07:45:00 2013-09-26T08:45:00	Total Count Phase (Doppler) degraded: Measurement white noise root variance increased from 0.003 to 0.01111 cycles, bias of 0.012 cycles added. Sequential Range degraded: Bias sigma increased from 1.5 m to 22 m.
DSS 34	2013-09-27T07:45:00 2013-09-27T08:45:00	Total Count Phase (Doppler) degraded: Measurement white noise root variance increased from 0.003 to 0.077 cycles.
DSS 54	2013-09-29T12:40:00 2013-09-29T18:40:00	Sequential Range degraded: Measurement white noise root variance increased from 1.5 m to 13.7 m.
DSS 65	2013-09-30T10:05:00 2013-09-30T19:20:00	Total Count Phase (Doppler) degraded: Measurement white noise root variance increased from 0.003 to 0.0888 cycles.
DSS 45	2013-10-01T01:30:00 2013-10-01T09:40:00	Sequential Range degraded: Measurement white noise root variance increased from 0.5 m to 9.4 m.
DSS 34	2013-10-01T21:15:00 2013-10-02T07:45:00	Sequential Range degraded: Constant range bias increased from 0.0 to 717 m.

The Lunar Apogee Maneuver 1 (LAM-1) was part of the mission timeline after LOI to be used to correct for off-nominal performance of the LOI-1 maneuver and place LADEE in the correct orbit to perform the LOI-2 maneuver. Following a near-nominal LOI-1 maneuver, the LAM-1 maneuver could be waived (which was the case during the actual mission). During the ORT-3 test, the simulated LOI-1 maneuver was biased to be 7% hot. The overburn lowered the aposelene and reduced the amount of periselene decay (due to Earth gravity perturbations) which was needed to lower LADEE's periselene to the altitude required for the LOI-2 maneuver. This 7% maneuver over-performance was detected by the Flight Dynamics Team through examination of the orbit determination results. The post LOI-1 trajectory was then examined by the trajectory design team and the need for the LAM-1 maneuver was determined. LAM-1 was subsequently planned, executed, and reconstructed during the ORT, followed by the planning of the LOI-2 maneuver. The orbit determination team determined LAM-1 to be about 1% cold with a small directional error.

**Table 8. Trajectory anomalies for ORT-3.**

Source	Start/Stop	Description
Cp	N/A N/A	Solar pressure variation: The solar pressure coefficient was allowed to vary during the simulation based on the generation of a random stochastic sequence. The nominal one sigma value for the time dependent variation was set to 13% of the nominal value and the time correlation half-life was 2 days.
LOI-1	2013-10-06T11:48:21 2013-10-06T11:52:45	LOI-1 Perturbation: The nominal LOI-1 burn was biased to be 7% hot with a small random directional error (1 sigma = 0.25 degrees).
LAM-1	2013-10-08T11:50:20 2013-10-08T11:50:55	LAM-1 Perturbation: A LAM maneuver opportunity was utilized based on orbit determination results following the LOI-1 maneuver. The planned LAM-1 burn was biased to be 1.5% cold with very small directional error of 0.055 degrees.

**Table 9. Tracking data anomalies for ORT-3.**

Station	Start/Stop	Description
DSS 54	2013-10-06T09:04:49 2013-10-06T11:16:05	Total Count Phase (Doppler) degraded: Measurement white noise root variance increased from 0.003 to 0.07 cycles. Sequential ranging degraded: Measurement white noise root variance increased from 1.5 to 18 meters.
DSS 54	2013-10-07T10:07:59 2013-10-07T11:11:48	Sequential ranging degraded: Constant range bias increased from 0.0 to 1.8 Km.
DSS65	2013-10-08T11:38:16 2013-10-08T19:05:00	Sequential ranging degraded: Measurement white noise root variance increased from 0.005 to 30 meters.

**ORT-5: Science Phase Activities**

The ORT-5 test time period covered the sixth in a series of Orbit Maintenance Maneuvers (OMM) that were performed after LADEE entered its lunar science orbit. The baseline trajectory for ORT-5 was selected as the nominal launch trajectory in order to allow for the use of the nominal station contact schedule and nominal OMM-6 plan. The OMM-6 uplink time was placed prior to the start of the ORT-5 test period. Tracking data generation began 11 days prior to the start of the ORT test period. The ORT-6 truth trajectory followed the nominal trajectory up to the ORT start time at which point numerical integration of the remainder of the ORT-5 truth trajectory began. The ORT-5 truth trajectory was allowed to deviate at this point from the selected baseline trajectory due to differences in solar pressure modeling and off-nominal performance of the OMM-6 burn. Details of the acceleration anomalies included in the ORT-5 truth trajectory are described in further detail in Table 10. Tracking data anomalies for ORT-5 are shown in Table 11. Trajectory generation and orbit determination for ORT-5 was performed using the Moon as the primary central body.

**Table 10. Trajectory anomalies for ORT-5.**

Source	Start/Stop	Description
Cp	N/A N/A	Solar pressure variation: The solar pressure coefficient was allowed to vary during the simulation based on the generation of a random stochastic sequence. The nominal one sigma value for the time dependent variation was set to 13% of the nominal value and the time correlation half-life was 2 days.
OMM-6	2013-12-27T04:06:59 2013-12-27T04:07:32	OMM-6 Perturbation: The nominal OMM-6 burn was biased to be 2% cold with a small random directional error (1 sigma = 0.25 degrees).

**Table 11. Tracking data anomalies for ORT-5.**

Station	Start/Stop	Description
DSS 65	2013-12-24T04:10:38 2013-12-24T05:10:38	Total Count Phase (Doppler) degraded: Measurement white noise root variance increased from 0.003 to 0.015 cycles.
DSS 65	2013-12-24T06:08:58 2013-12-24T07:08:58	Total Count Phase (Doppler) degraded: Measurement white noise root variance increased from 0.003 to 0.015 cycles.
DSS45	2013-12-24T17:52:30 2013-12-24T18:22:30	Total Count Phase (Doppler) degraded: Surface refractivity in the troposphere model decreased by 13%.
DSS45	2013-12-24T23:37:30 2013-12-25T00:07:30	Total Count Phase (Doppler) degraded: Surface refractivity in the troposphere model decreased by 13%.
DSS 65	2013-12-25T03:19:58 2013-12-25T04:19:58	Total Count Phase (Doppler) degraded: Measurement white noise root variance increased from 0.003 to 0.02 cycles.
DSS 65	2013-12-25T05:15:00 2013-12-25T06:15:00	Total Count Phase (Doppler) degraded: Measurement white noise root variance increased from 0.003 to 0.02 cycles.
DSS45	2013-12-26T19:45:30 2013-12-26T20:15:30	Total Count Phase (Doppler) degraded: Surface refractivity in the troposphere model decreased by 10%.
DSS45	2013-12-26T23:36:30 2013-12-27T00:06:30	Total Count Phase (Doppler) degraded: Surface refractivity in the troposphere model decreased by 10%.
DSS54	2013-12-27T05:22:43 2013-12-27T06:22:43	Sequential Range degraded: Constant transponder bias increased from zero to 187 ns.
DSS65	2013-12-28T04:45:21 2013-12-28T05:45:21	Total Count Phase (Doppler) degraded: Measurement white noise root variance increased from 0.003 to 0.007 cycles.
DSS65	2013-12-28T06:42:16 2013-12-28T07:42:16	Total Count Phase (Doppler) degraded: Measurement white noise root variance increased from 0.003 to 0.007 cycles.

## FLIGHT DYNAMICS TEAM PERFORMANCE

The entire Flight Dynamics Team, and specifically the Orbit Determination team members who processed the simulated tracking data, gained useful and relevant experience through the

ORTs. The tracking simulations with anomalies allowed the team to exercise the flight dynamics processes and tools in a true operational sense. The team needed to use the Ames Flight Dynamics System to process the tracking data, compare the data received was as expected, perform tracking system calibration, perform maneuver reconstruction, and then report their finding and output to the Mission Operations Management Team through operational-like meetings and via an anomaly tracking system.

As a result of the ORTs, the Flight Dynamics Team made several improvements to the Flight Dynamics System and operational documentation for improved Flight Operations. Updates were made to the Flight Dynamics System procedures, which consist of software workflows and scripts. The team uncovered areas in the workflow scripts that needed to be streamlined, such as creating more useful and quick-turnaround graphical outputs for decision-making. Errors in scripts, detected during the examination of realistic data outputs, were corrected and tested for use in Flight Operations. Additionally, because of the ORTs' flight-like processing environment, the Flight Dynamics Team made updates to their team logging interface, the "Virtual Whiteboard". These improvements provided clarification in communications indicating which data products were completed and validated for use, both between team members on the same shift, and for shift handovers. Furthermore, the Flight Dynamics Team was able to update their Handbook after the ORTs, adding information where it was lacking and clarifying previously confusing content based on their experience using the Handbook in the flight-like environment.


As described in the ORT sections, each ORT was designed to present specific orbit determination challenges. Several of the reported anomalies are described below from ORT-1. The anomaly reports are presented here as documented during the execution of the ORTs with only minor editing for format and typographical corrections.

#### **[LADOPS-531] Constant Transponder Range Bias is now trending in OD plots**

The OD Filter tuning process has uncovered a Transponder Range Bias. The constant bias is 550 meters, +/- 120 meters, 3-sigma. This constant bias is now consistently working as part of our solution throughout the beginning of the mission. We will continue to monitor this, and will adjust (lower) the sigma on this if possible, or adjust the Constant Bias if we see that it is trending away from 550 meters.

Attached is the Transponder range bias graph, Figure 4, in terms of nano seconds. The "zero" line on the Y axis is the Constant Bias. The Constant Bias (zero line on Y axis) is 1834.6 nanoseconds, or 550 meters. The blue line is the estimated bias off of that constant bias throughout the timeline. An estimate of the transponder bias is updated whenever the filter has accepted range tracking data.




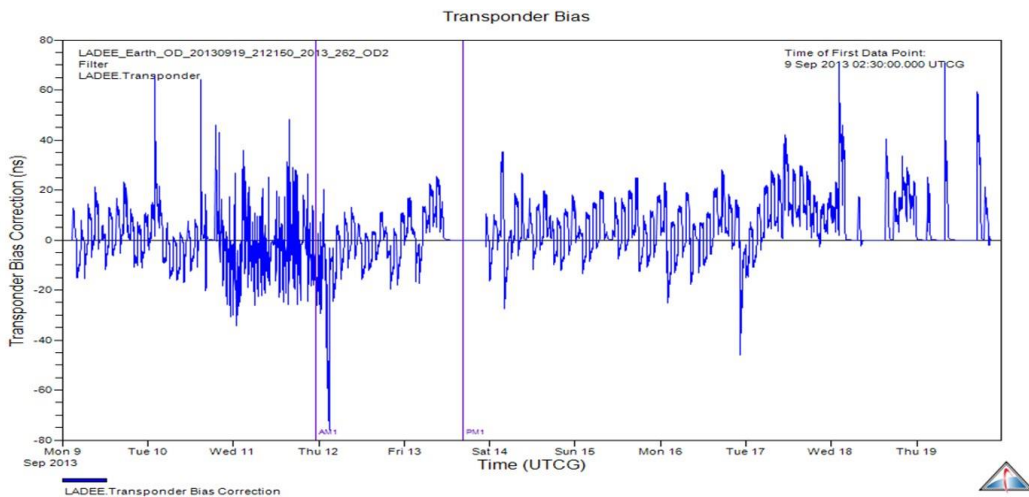

**Figure 4. Initial Detection of LADEE Transponder Bias.**

**[LADOPS-530] HBK elevation measurements seemed outside of normal bounds for short period of time**

On Sept 7 08:06 through 08:14 the elevation measurements from the HBK antenna are being rejected from the OD Filter. We have not correlated this time to any other events that would indicate a required change in our modeling. Just wanted to note this. The priority of going back and looking into this is low, since it is less than 10 minutes of data. But we wanted to note it. A graph, Figure 5, of the few minutes of the HBK data is attached, for reference, to accompany the description of this anomaly report.

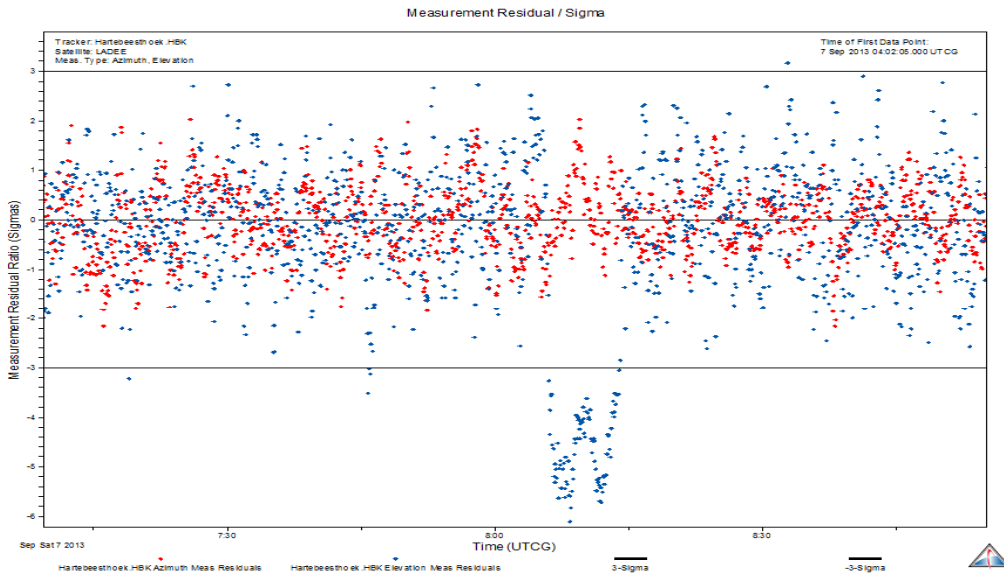

**Figure 5. Detection of Degraded Angle Measurements.**

### [LADOPS-529] DSS27 Sequential Range Bias

All of the sequential range data from the DSS27 Sep 7 @18:13:16 to Sep 8 @ 00:44:56 contact is being rejected from the OD solution. It is showing a constant bias of about 1.7 km, and which ranges from about 20 to 30-sigma during that portion of the solution. We are choosing not to set a constant bias on this antenna at this time (which would force the Filter to include this data). We are allowing the rejection to occur, and instead report this as an anomaly.

Attached is a residual ratios graph, Figure 6. This version of the graph is plotting all of the residuals from all stations, for all measurement types, using the current (as of Sep 8, 08:28 UTC) statistics settings including the transponder bias settings. The wavy brown line that is way above where all of the other colors are mashed up is the DSS27 range residuals that the filter is rejecting. The second contact we had on DSS-27 did not have the range bias. The range data was accepted without any problems during the second contact with DSS-27.

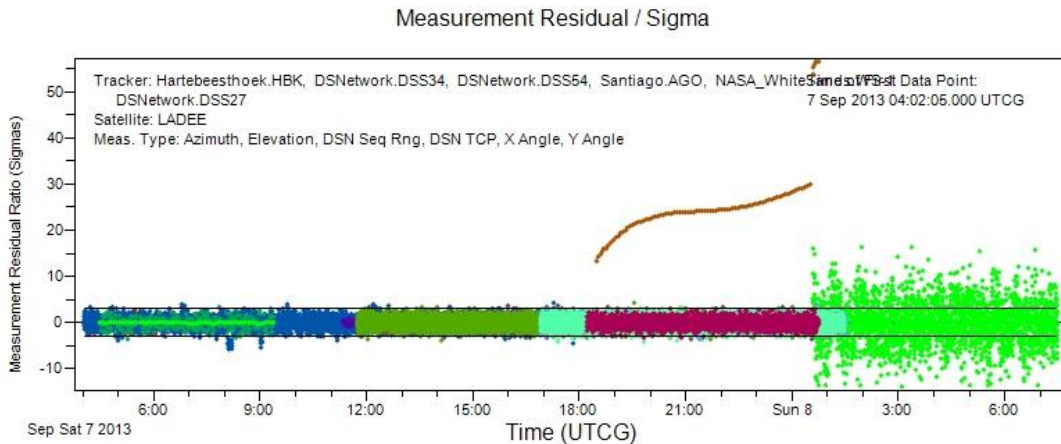



Figure 6. Detection of Anomalous Range Bias.

### [LADOPS-533] Noisy Doppler on DSS34 Sep 8 00:35-10:10

Reported noisy TCP (Doppler) data from the DSS34 antenna from the second contact we had with that antenna. This behavior was not observed in the measurements during the first DSS34 contact on Sep 7th. Attached is a plot of all of the Doppler (TCP) measurements, Figure 7, received from all of the DSN antennas thus far. The last contact was on DSS34 and there is much noisier Doppler during this contact. One question to ask the DSN is to find out if the station performed their antenna calibration prior to this pass, like they were scheduled to do. If not, it is possible that something could be off that would make this occur.

### Maneuver reconstruction

The Flight Dynamics Team was also able to successfully reconstruct the maneuver performances from the orbit determination estimates during the ORTs. Below are two examples from Maneuver Assessment Meeting presentations during the ORTs. Table 12 shows the results from ORT-2's PM3 maneuver assessment. Table 13 describes the results from ORT-3's LOI-1 maneuver. The orbit determination and maneuver planning team members were able to exercise a flight-like maneuver reconstruction process, and then the results presented in the flight-like meeting. This whole experience enabled the team members to practice working through the challenges and results on a flight-like timeline, and practice communicating those results within the mission operations team.

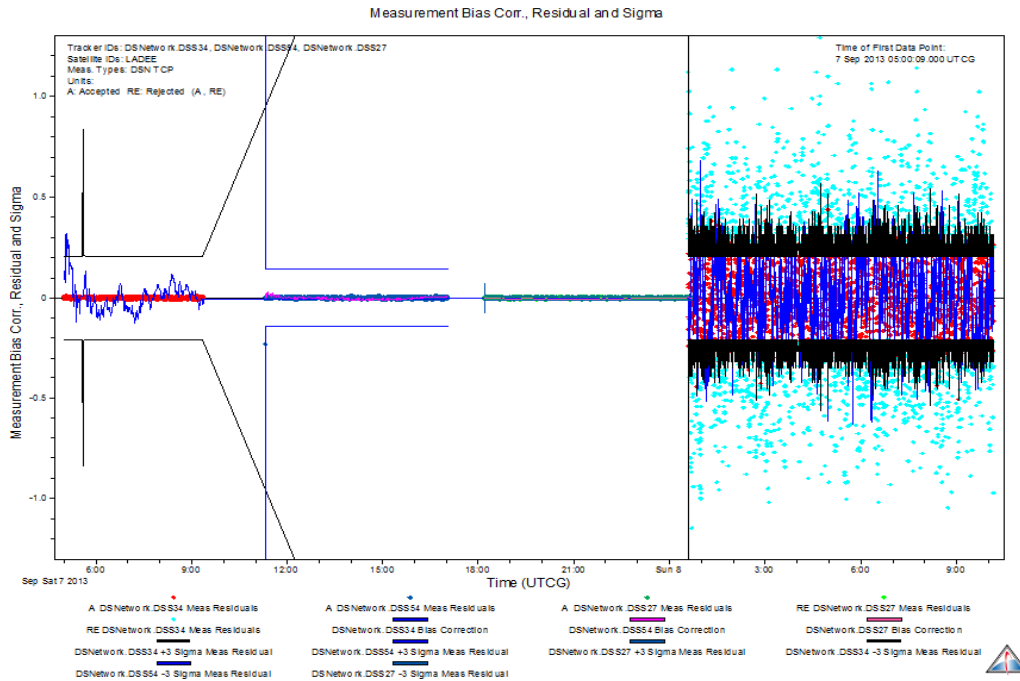

**Figure 7. Detection of Degraded TCP Performance.**

**Table 12. ORT-2 Maneuver Assessment from OD Results at PM-3 Plus 7 Hours.**

Key Parameters	Expected Value	Recovery From Tracking Data
Main Burn Start Time	01 Oct 2013 20:54:39.000	
Main Burn Duration	10.944 sec	
Main Burn DV (m/s)	17.0 m/s	16.5 m/s
Performance Error	Nominal Burn (0%)	3.1% Cold
Pointing Error	0 deg	0.4 deg pointing error
Duty Cycle	92% Off-Pulse 10% On-Pulse	
Post-Maneuver Propellant Mass	130.1 kg (TAO Estimate) 130.1 kg (Prop Estimate)	

**Table 13. ORT-3 Maneuver Assessment from OD Results at LOI-1 Plus 12 Hours.**

Key Parameters	Expected Value	Recovery
Maneuver	LOI1	LOI1
Main Burn Start Time	06 Oct 2013 11:48:42.000	06 Oct 2013 11:48:43.011480 (first telemetry point)
Main Burn Duration	243.014 s	243.014 s <i>From Telemetry</i>
Main Burn DV (m/s)	332.75 m/s	356 m/s
Propulsion Performance		<b>7% Hot – tracking data</b> 13% Hot – telemetry TSF = 1.07
Pointing Error	0 deg	1.5-1.8 deg pointing error
LAM1 Needed		Yes, 14.5 m/s <i>To lower periselene Alt by ~330 km</i>
LOI2		Adjusted for LAM1 burn ~10 Oct 2013 11:47:25
Post-Maneuver Orbit Details (at apse following LOI1)	Period = 24.0 hrs Perigee altitude = 450 km Apogee altitude = 15598 km	Period = 19 hrs Periapsis altitude = 642 km Apoapsis altitude = 12806 km

## CONCLUSION

The generation and use of simulated spacecraft trajectories and corresponding tracking data allowed for the use of consistent true and estimated spacecraft positional information across all groups involved in the LADEE Operational Readiness Tests. Anomalies introduced into maneuver execution, environmental effects, and tracking system phenomenology provided stressing challenges for the Flight Dynamics Team to overcome in a simulated real-time environment using the soon to be operational Flight Dynamics System. The ability of the flight dynamics, mission planning, spacecraft engineering, real-time operations, and mission operations management teams to overcome these challenges and deliver accurate flight dynamics products provided reasonable assurance that the team and flight dynamics system were ready to fly the LADEE mission.

## ACKNOWLEDGEMENTS

The authors would like to thank all of the members of the LADEE mission operations and science operations teams. We also thank Jens Ramrath for his assistance in the development of the ODTK data simulation scripts.

The LADEE mission and a portion of this work was performed at the NASA Ames Research Center, under the Lunar Quest Program, and sponsored by the NASA Science Mission Directorate Division of Planetary Science.

## REFERENCES

- <sup>1</sup> Hine, B. P., Spremo, S., Turner, M., and Caffrey, R., “The Lunar Atmosphere and Dust Environment Explorer Mission,” *Proceedings of the 2010 IEEE Aerospace Conference*, Big Sky, MT, Mar. 6 – 13, 2010.
- <sup>2</sup> D’Ortenzio, M. V., Bresina, J. L., Crocker, A. R., Elphic, R. C., Galal, K. F., Hunt, D. R., Owens, B. D., Hawkins, A. M., Plice, L., and Policastro, L. A., “Operating LADEE: Mission Architecture, Challenges, Anomalies, and Successes,” *Proceedings of the 2015 IEEE Aerospace Conference*, Big Sky, MT, Mar. 7 – 14, 2015 (in press).
- <sup>3</sup> Robinson, B. S., Boroson, D. M., Burianek, D. A., Murphy, D. V., Khatri, F. I., Burnside, J. W., Kinsky, J. E., Biswas, A., Sodnik, Z., and Cornwell, D. M., “The NASA Lunar Laser Communication Demonstration—Successful High-Rate Laser Communications To and From the Moon,” *Proceedings of the 2014 AIAA SpaceOps Conference*, Pasadena, CA, May 5 – 9, 2014.
- <sup>4</sup> Owens, B. D., and Crocker, A. R., “SimSup’s Loop: A Control Theory Approach to Spacecraft Operator Training,” *Proceedings of the 2015 IEEE Aerospace Conference*, Big Sky, MT, Mar. 7 – 14, 2015 (in press).
- <sup>5</sup> Benz, N. A., Viazzo, D., and Gundy-Burlet, K., “Multi-Purpose Spacecraft Simulator for the LADEE Mission,” *Proceedings of the 2015 IEEE Aerospace Conference*, Big Sky, MT, Mar. 7 – 14, 2015 (in press).
- <sup>6</sup> Policastro, L. A., Carrico, J. P., Kam, A., Nickel, C. A., Lebois, R. L., and Sherman, R., “Orbit Determination and Acquisition for LADEE and LLCD Mission Operations,” *Proceedings of the 25<sup>th</sup> AAS/AIAA Space Flight Mechanics Meeting*, Williamsburg, VA, Jan. 11 – 15, 2015.
- <sup>7</sup> Hawkins, A. M., Kam, A., and Carrico, J. P., “LADEE Maneuver Planning and Performance,” *Proceedings of the 25<sup>th</sup> AAS/AIAA Space Flight Mechanics Meeting*, Williamsburg, VA, Jan. 11 – 15, 2015.
- <sup>8</sup> Kam, A., Plice, L., Galal, K. F., Hawkins, A. M., Policastro, L. A., Loucks, M. E., Carrico, J. P., Nickel, C. A., Lebois, R. L., and Sherman, R., “LADEE Flight Dynamics: Overview of Mission Design and Operations,” *Proceedings of the 25<sup>th</sup> AAS/AIAA Space Flight Mechanics Meeting*, Williamsburg, VA, Jan. 11 – 15, 2015.
- <sup>9</sup> Cannon, H. N., Bajwa, A., Berg, P. P., and Crocker, A. R., “LADEE Preparations for Contingency Operations for the Lunar Orbit Insertion Maneuver,” *Proceedings of the 2015 IEEE Aerospace Conference*, Big Sky, MT, Mar. 7 – 14, 2015 (in press).
- <sup>10</sup> Vallado, D.A., Hujsak, R., Johnson, T., Seago, J., Woodburn, J., “Orbit Determination Using ODTK Version 6”, European Space Astronomy Centre, Madrid, Spain, May 2010.
- <sup>11</sup> Owens, B. D., Cosgrove, D. P., Marchese, J. E., Bonnell, J. W., Pankow, D. H., Frey, S., and Bester, M. G., “Mass Ejection Anomaly in Lissajous Orbit: Response and Implications for the ARTEMIS Mission,” *Proceedings of the 22<sup>nd</sup> AAS/AIAA Space Flight Mechanics Meeting*, Charleston, SC, Jan. 29 – Feb. 2, 2012.