

Characterization of Corrosion Inhibitor Containing Microparticles for Environmentally Friendly Smart Coatings

Benjamin Pearman, PhD

John F. Kennedy Space Center: Corrosion Technology Laboratory


Corrosion: Everyone's Problem

Metals corrode in presence of oxygen, water & salt

Cost: ~3% of World GDP \equiv \$2.2 trillion per year

KSC: Most corrosive environment in the world

- Adjacent to Atlantic ocean (salt, humidity)
- Sunshine & heat
- Acidic rocket fumes

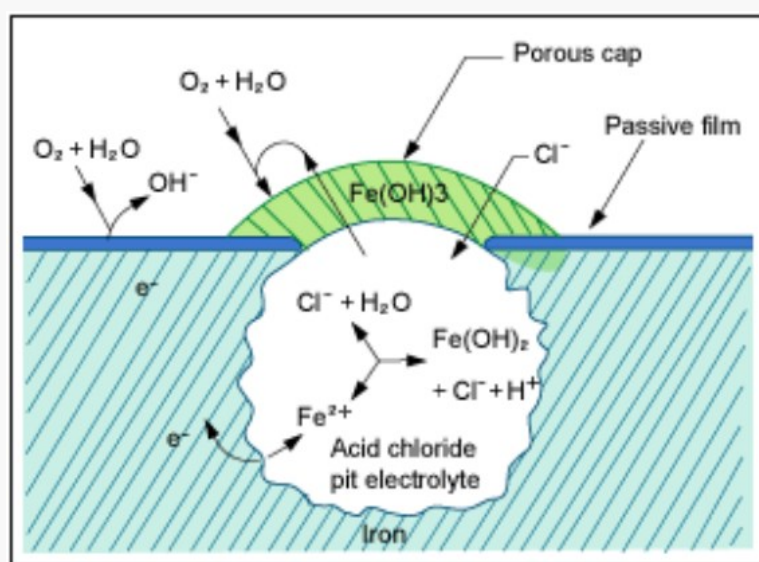

KSC Mission

Sustainable development of a multi-user spaceport for government, military and commercial customers

→ Environmentally friendly corrosion protection system


KSC Corrosion Technology Lab: Problem & Approach

Problem

Direct replacement of current inhibitors with environmentally friendly alternatives not possible due to coating compatibility and inhibitor solubility issues

Approach

- Encapsulate inhibitors into coating compatible microcontainers with
- Autonomous, corrosion triggered release
- Characterize release properties and corrosion test performance

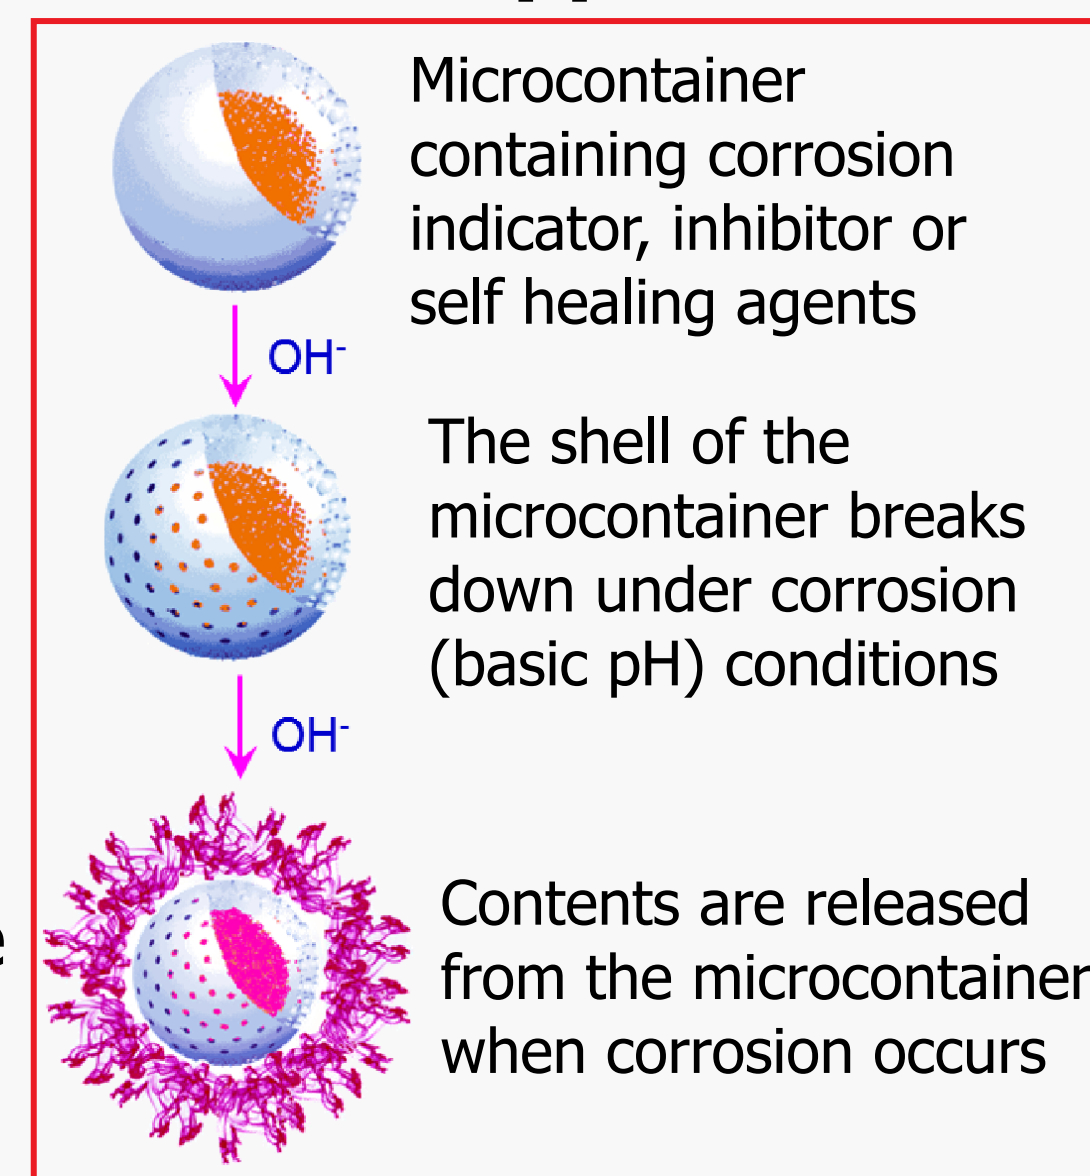


Encapsulation

Encapsulation of:

- Organic & inorganic inhibitors into
- Organic & inorganic microparticles

Resulting free-flowing powders enable:

- Simple and safe handling
- Incorporation into existing coatings systems

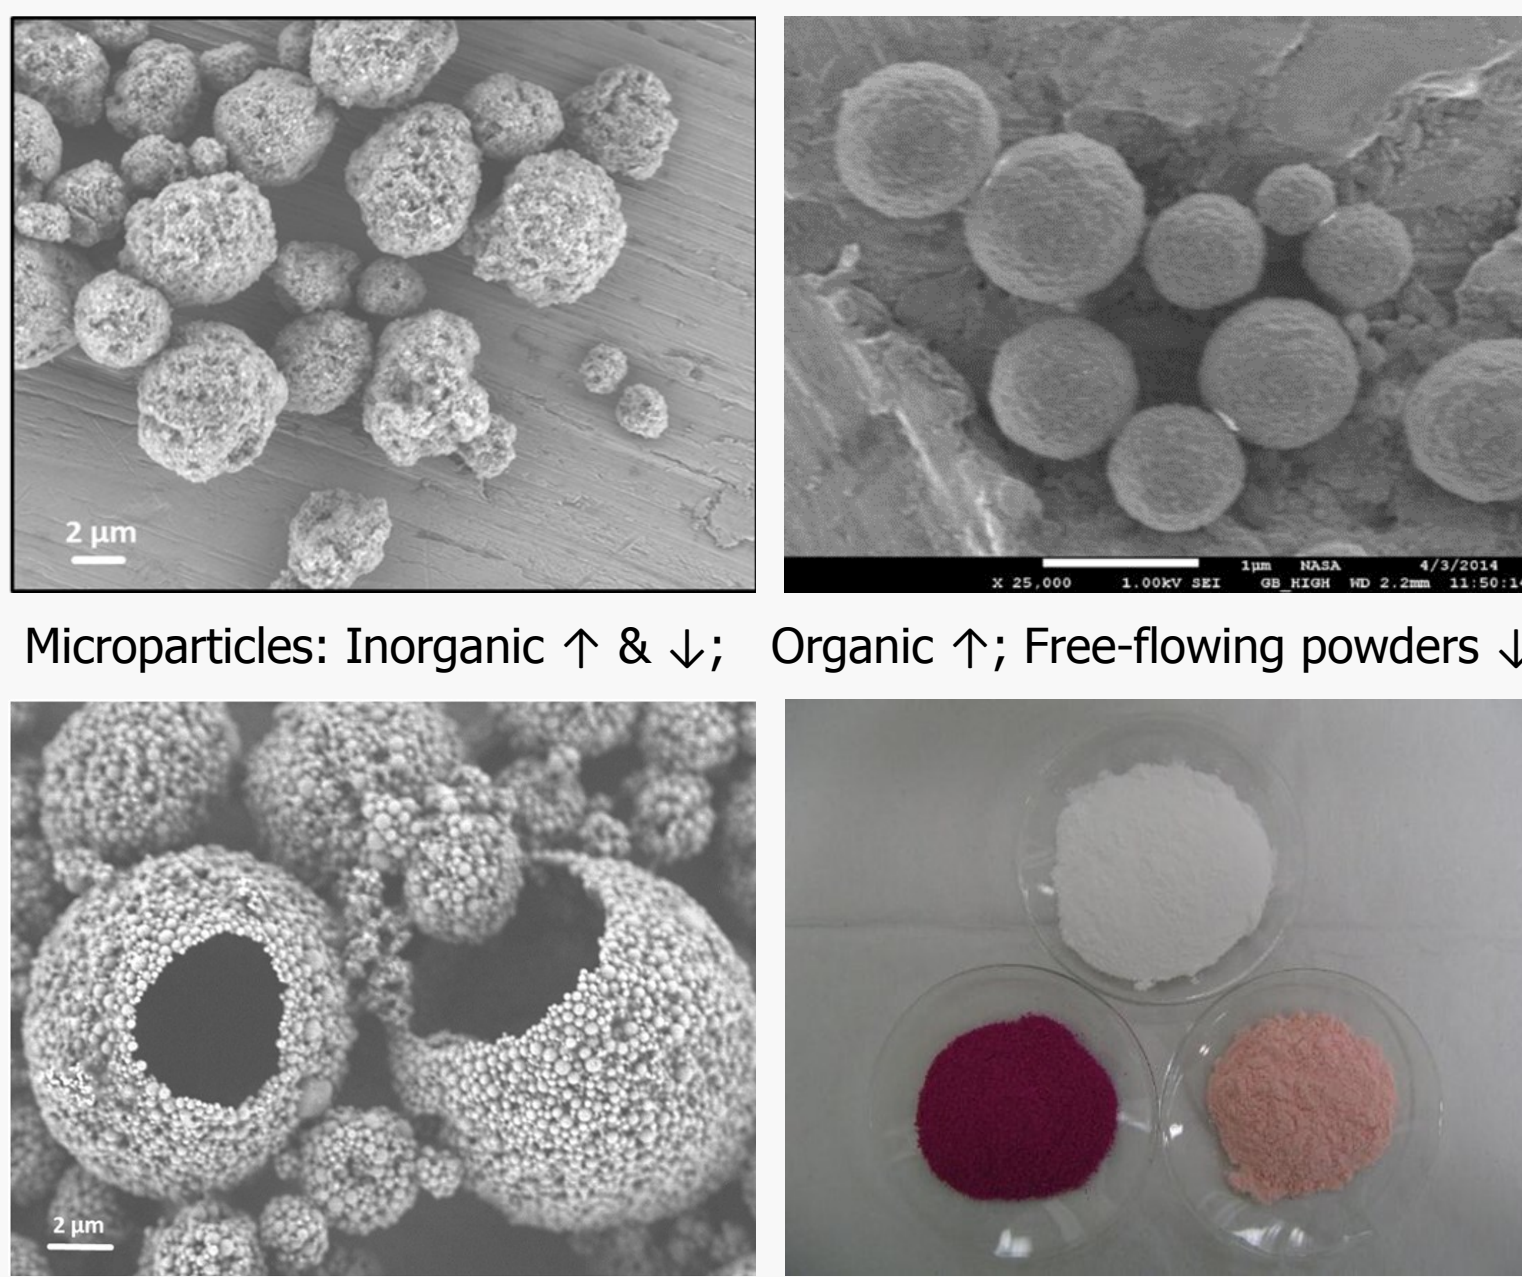


Inhibitor Release

Organic Particles

- Low initial release
- Long consistent release (up to 18 weeks)

Inorganic Particles

- High initial release
- Absorption properties


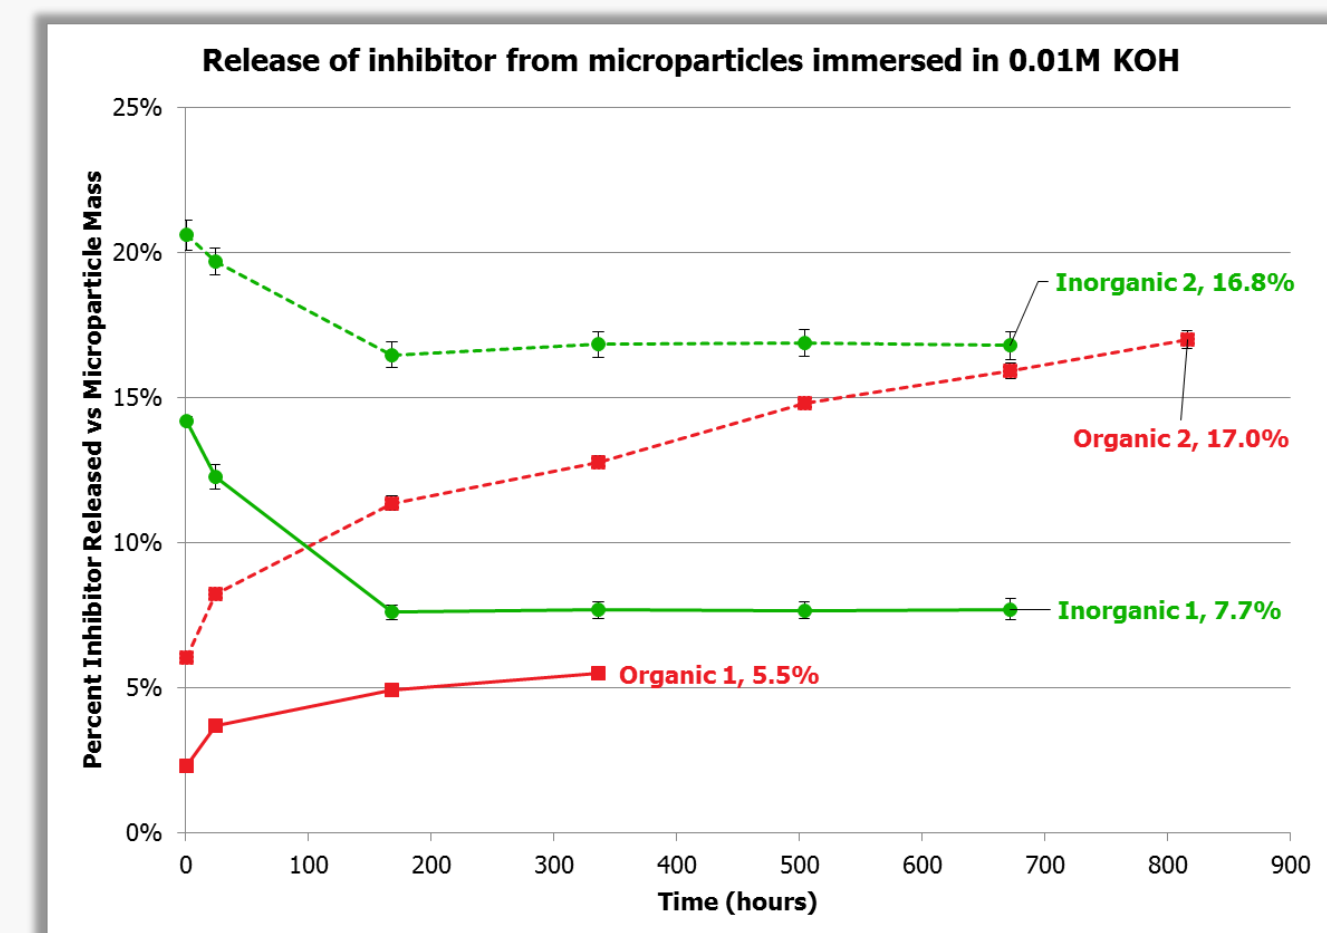


- Tunable release properties for short- and long-term corrosion protection
- Analysis of particle payload & release properties guide formula changes
- Improved formula: Doubling of inhibitor content and release amounts

Corrosion Testing: Polarization



Inhibitors or particles in solutions result in:

- Increases in corrosion potential
- Shifts in anodic & cathodic curves
- Inhibitors significantly reduce corrosion
- Microparticles show same inhibition: just as effective

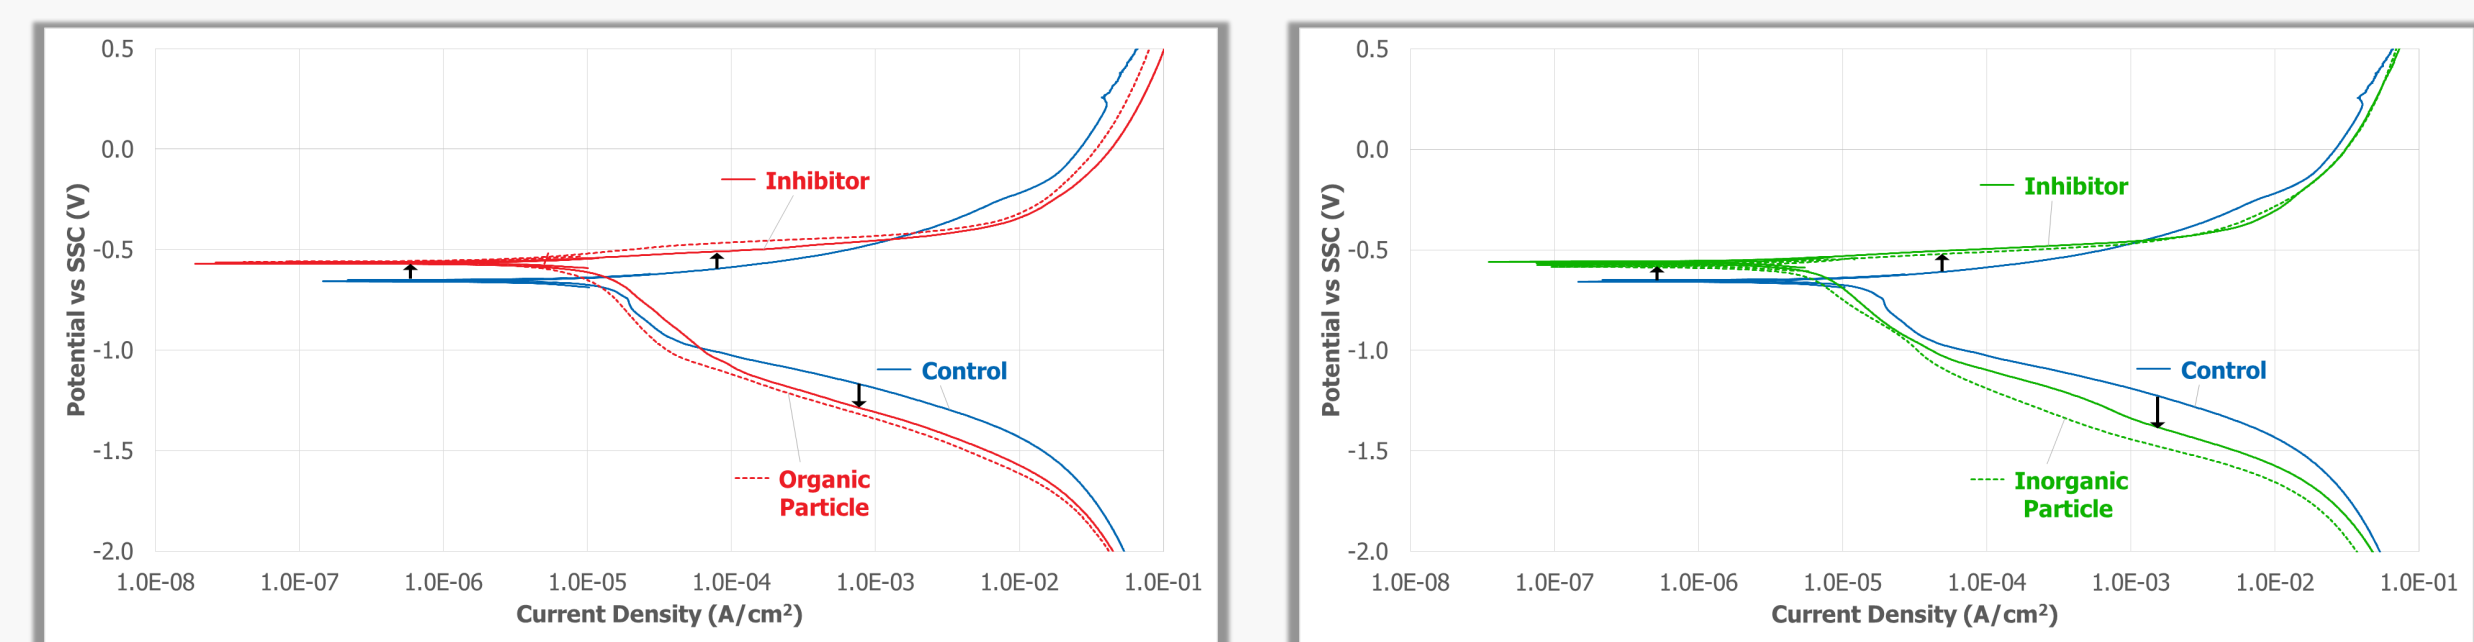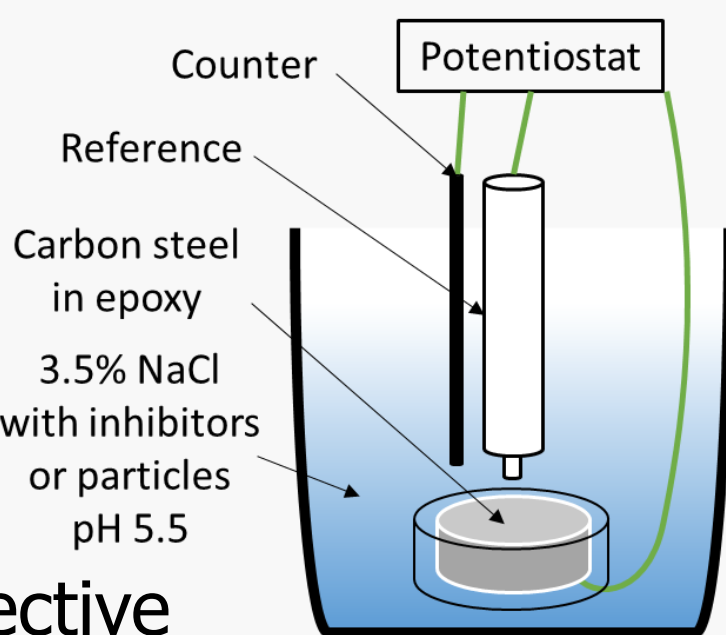

Corrosion Testing: Mass Loss

- Inhibitors: same/worse corrosion rate than control
- Particles: reduce corrosion rate over 4 weeks
- Outperform pure inhibitors
- Targeted delivery of inhibitor to corrosion sites
- Improved corrosion protection

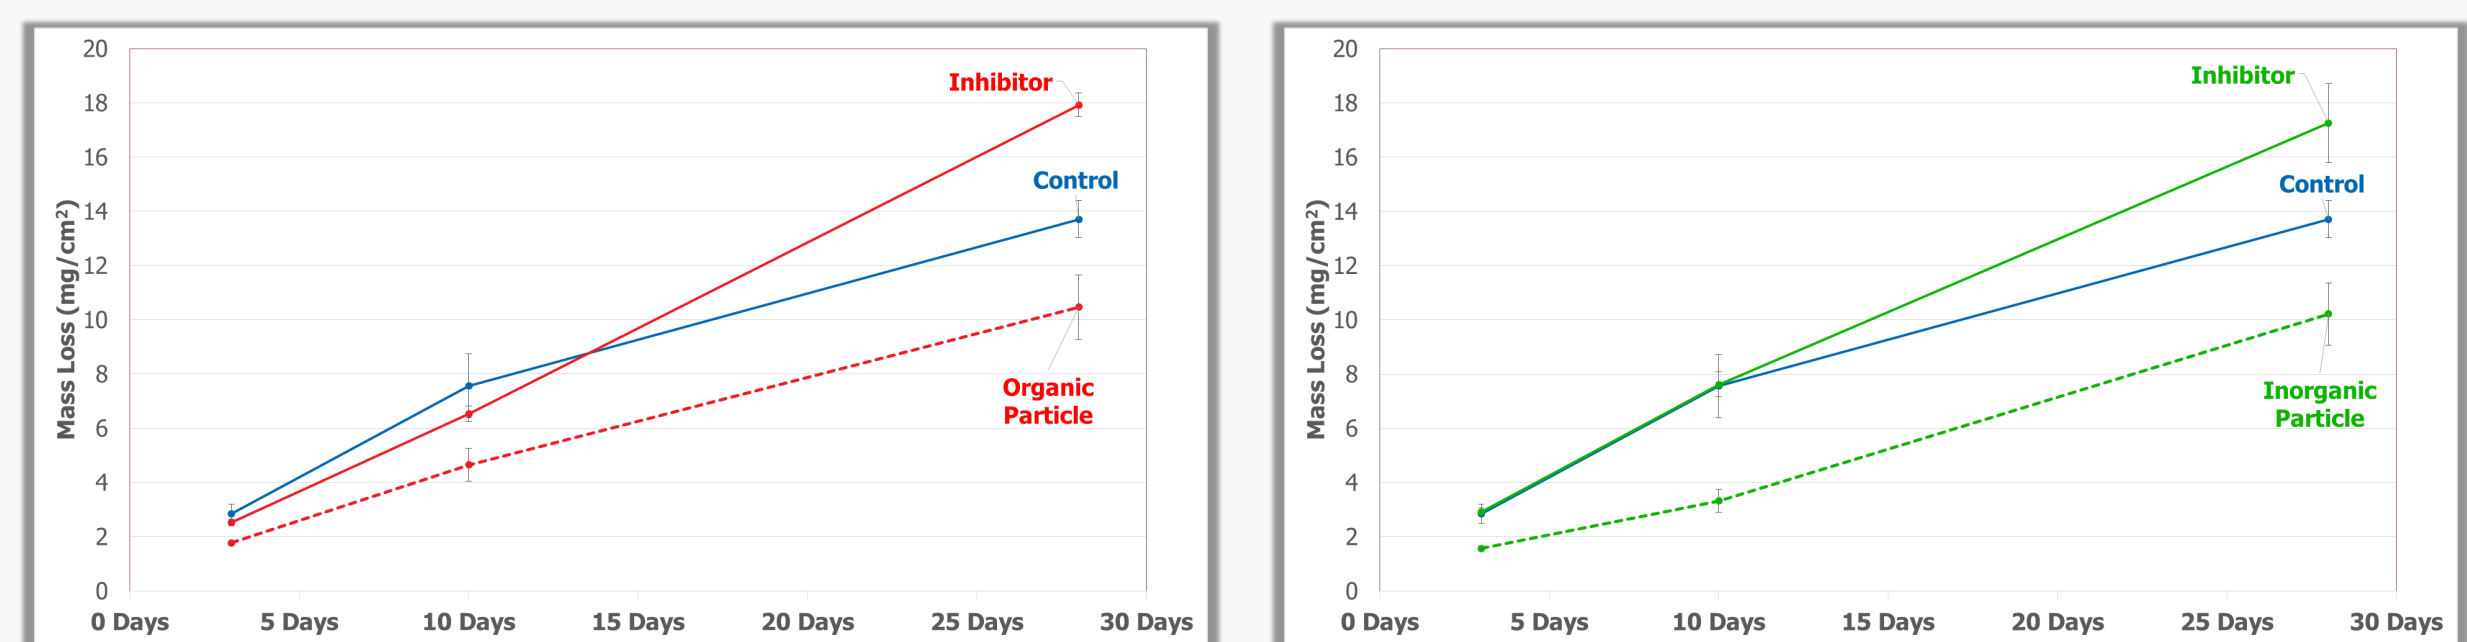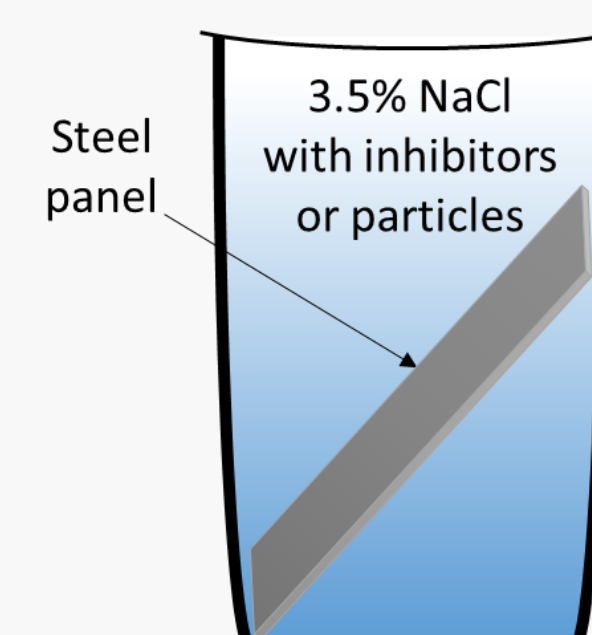

Conclusion

- Encapsulation of organic & inorganic corrosion inhibitors into organic & inorganic delivery systems
- Corrosion triggered release observed
- Tunable release properties for short- and long-term protection
- Study of release properties leads to higher payloads and release amounts
- Corrosion inhibition of microparticles meets or exceeds that of pure inhibitors
- Coating compatible microparticles provide superior corrosion protection

Future Work

- Assess release property efficacy in coating systems and for other metals
- Determine corrosion inhibition efficiency of other promising inhibitors and microparticles
- Test suitability of inhibitors and delivery systems for other metals (e.g. Aluminum)
- Study coating compatibility issues
- Characterize using other corrosion tests, e.g. salt spray & atmospheric exposure
- Shelf-life determination
- Adaptation to other NASA applications

Carbon Steel; Waterborne Acrylic Coating; Salt Spray; 790 hours

