



Evaluation of Mixed-Phase Microphysics Within Winter Storms using Field Data and In Situ Observations

¹Brian A. Colle, ¹Ruyi Yu, ²Andrew L. Molthan, and ³Stephen Nesbitt
¹School of Marine and Atmospheric Sciences, Stony Brook University / SUNY, Stony Brook, NY
²NASA Marshall Space Flight Center / Earth Science Office, Huntsville, Alabama
³Department of Atmospheric Sciences, University of Illinois

Introduction

- It is hypothesized that microphysical predictions have greater uncertainties/errors when there are complex interactions that result from mixed-phased processes like riming.
- Use Global Precipitation Measurement (GPM) Mission ground validation studies in Ontario, Canada to verify and improve parameterizations.

Motivating Questions

- How well do the various Weather Research and Forecasting (WRF) microphysical schemes predict snowband intensity and microphysics?
- What is the benefit of using a more sophisticated double moment ice/snow scheme as well as more advanced riming schemes?

Field Case Study – 18 February 2012

- Figure 1 shows the 9, 3, and 1-km WRF domains, and the case study location (red dot and inset).
- On 18 February 2012 there was a weak cyclone near Lake Huron and a weak warm front approaching from the southwest.
- Surface radar estimate and WRF underestimated precipitation during this event (Fig. 2).

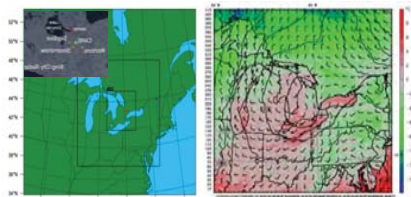


Figure 1. (left) WRF model domains and the GCPEX field location site (red dot). (right) 11-h WRF forecast (at 1100 UTC 18 February 2012) showing SLP (every 2 hPa), surface temperature (shaded) and surface winds (full barb = 10 kts).

- The observed snowband was associated with an enhanced area of reflectivity (25-35 dBZ) extending up to 3 km.
- The Goddard scheme most realistically predicted the structure of the narrow snowband (Thompson too weak).
- There were convective cells aloft that were predicted in the Goddard and Stony Brook (SBU-YLin) schemes.
- There was little cloud water (LWC) observed and simulated on the north (cold) side of the precipitation band (Fig 5).

Observed Versus WRF Radar Analysis

- WRF initial and boundary conditions from the 13-km RUC at 0000 UTC 18 February. Physics include: YSU PBL, GD CP scheme on 9-km only, and RRTM for LW, Dudhia scheme for SW Radiation.
- At 1100 UTC 18 February there was a warm frontal snowband observed near the field study site.
- Most of the 1-km WRF microphysical members realistically simulated this snowband, except the Thompson run was too weak.

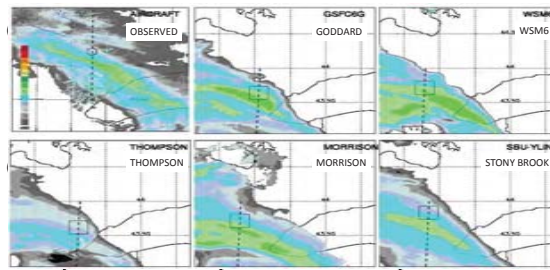


Figure 3. Observed radar (0.5 deg) vs 1-km WRF (surface) reflectivity (shaded) at 1100 UTC 18 Feb 2012. North-south cross section locations (dashed) are band relative in order to compare radar and model.

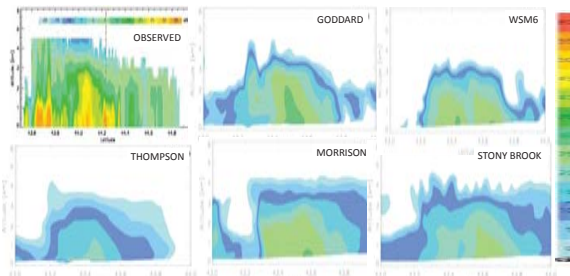


Figure 4. Observed versus 1-km WRF-simulated radar reflectivity at 1100 UTC 18 Feb 2012 for the cross section locations shown in Fig. 2.

- WRF microphysical predictions were averaged within the boxes in Fig. 3, which is location of aircraft spiral.
- At 1100 UTC (north side of band), all WRF schemes realistically predicted the ice water content profiles. The Thompson tended to underpredict, and Goddard/SBU-YLin overpredict.

18 Feb 2012: Microphysics




Figure 5. Mean 1-km WRF profile of exponential PSD slope parameter and liquid water content for the boxes in Fig. 3 in (a) light and (b) heavy riming cases.

- Morrison best predicted the snowband structure, but had difficulty with the temperature dependent slope intercept. The Thompson and SBU and WSM) had a much closer intercept to the aircraft spiral.

Microphysical Comparison

- Reflectivity and Doppler velocity were compared to microwave rain radar (MRR) and surface rain gauge (from stereomicroscope) at the GCPEX field site (New York City) for nine snow events. WRFv3.5 was nested down to 1-km grid spacing using GFDL




Figure 6. Mean snow, cloud water, graupel, and rain profiles during the (a) light and (b) heavy riming cases for (c) THOM2, and (d) SBU-YLIN schemes.

Winter Storms

Stony Brook University



Verification

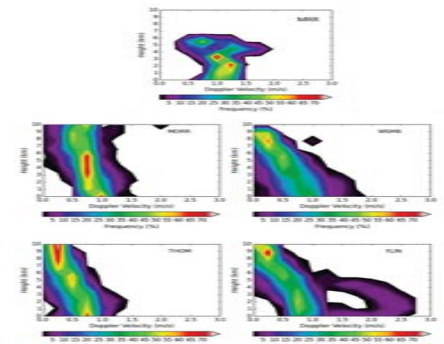



Figure 7. CFADs of Doppler velocity ($m s^{-1}$) for light riming periods given in Table 3. (a) from the MRR, (b) from OKX, (c) from the MORR scheme, (d) from the WSM6 scheme, (e), from the THOM2 scheme, and (f) from the SBU-YLin scheme.

ater content, snow slope intercept, and liquid water content to aircraft spiral.

distribution (slope), but had difficulty with the temperature dependent slope intercept. The Thompson and SBU and WSM) had a much closer intercept to the aircraft spiral.

Long Island, NY

m four WRF BMPs (MORR, WSM6, THOM2, and SBU-YLin) were compared to microwave rain radar (MRR) and surface rain gauge (from stereomicroscope) at the GCPEX field site (New York City) for nine snow events. WRFv3.5 was nested down to 1-km grid spacing using GFDL

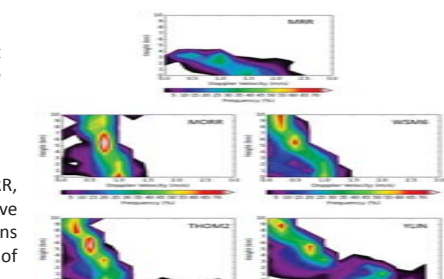


Figure 8. Same as Fig. 7 except heavy riming cases.

ditions.

* All schemes underpredict fallspeeds for light riming, and this problem increases for heavy riming (except SBU-YLin scheme (Figs. 6-8).

Summary and Conclusions

- The snowband structure is sensitive to the microphysical parameterization used in WRF.
- The Goddard and SBU-YLin most realistically predicted the band structure, but overpredicted snow content.
- The double moment Morrison scheme best produced the slope of the snow distribution, but it underpredicted the intercept.
- Fallspeeds and mixing ratios suggest that many BMPs underpredict cloud water and riming in winter storms.

Acknowledgements

We acknowledge support from NASA PMM Grant: NNX13AF88G, Dr. Brian Colle, Principal Investigator.

View metadata, citation and similar papers at core.ac.uk

provided by NASA Technical Reports Server

brought to you by CORE