



Needs-Driven (Rationalistic) Autonomy

Kalmanje KrishnaKumar
Lead, Autonomous Systems & Robotics

August, 8 2014
2014 Intelligent Systems Workshop

Provided by NASA Technical Reports Server

CORE

Aeronautics and Space Administration

Metadata, citation and similar papers at core.ac.uk







National Aeronautics and
Space Administration



Overview

- **Autonomy Context**
- **Autonomy Scenarios**
- **Autonomy Challenges**

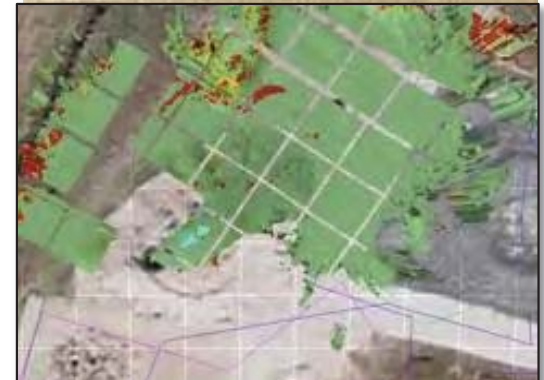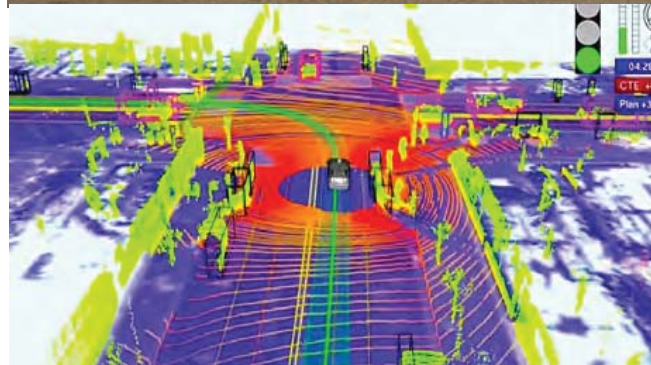





National Aeronautics and Space Administration



Overview

- **Autonomy Context**
- **Autonomy Scenarios**
- **Autonomy Challenges**

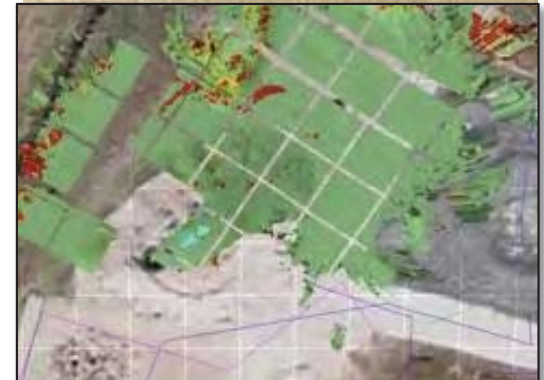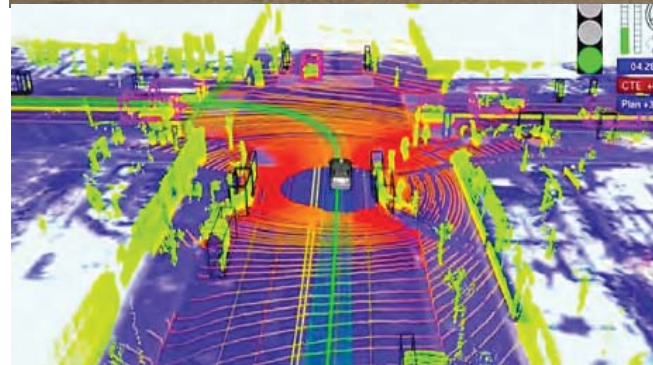


Definitions

Autonomy:

1. The state of existing or **acting separately from others** (Webster's)
2. Able to independently choose how to act in order to achieve goals (perhaps provided by another entity)
3. Autonomy is a **relative** term: from **who?** for **what?** and **when?**
4. Both **humans** and **systems** can function autonomously

Rationalistic Autonomy:

Systems and sub-systems “acting independently” to meet the “needs” of the mission.



Exploration destinations

(one-way travel times)



Future missions will be longer, more complex, & require new technology



Robotics and Mobility



Deep Space Habitation



Advanced Spacesuits



Advanced Space Comm



Advanced Propulsion



Resource Utilization



Human-Robot Systems

Human Missions

International Space Station (ISS)

6 to 35 flight controllers in the Mission Control Center (MCC)

300K commands/year from ground

Planned loss of comm for periods of tens of minutes (nominally)

Only a fraction of data generated by ISS can be sent to ground

Hundreds of tools and **millions of lines** of code needed on ground for ops

Astronauts cannot revise plans without help from ground control

Changes in vehicle drive changes in needed operations software and software function



Robotic Missions

Mars rovers

- **20 to 40 min round-trip comm delay** between Earth and Mars
- Rovers capable of **automatic command sequence** execution with some (limited) on-board autonomy
- Mission control handles tactical operations
- Science Operations Working Group (SOWG) performs **tactical** and **strategic** mission planning
- Tactical planning cadence = 1 to few *sol*s at a time
- Many independent software tools used to perform planning, sequencing, and execution



Technology Roadmaps

Autonomy is cross-cutting ...

TA04: Robotics and Autonomous Systems

TA05: Communication and Navigation Systems

TA06: Human Health, Life Support and Habitation Systems

TA07: Human Exploration Destination Systems

TA08: Science Instruments Observatories and Sensor Systems

TA09: Entry Descent and Landing

TA11: Modeling and Simulation

TA12: Materials Structures Mechanical Systems and Manufacturing

TA13: Ground and Launch Systems

TA15: Aeronautics





National Aeronautics and
Space Administration



Aeronautics vs Space: Similarities

Aeronautics

- Ground systems automation
- Pilot decision aids
- Single Pilot Operations
- UAV autonomy
- Risk of upgrades to ongoing missions

Space

- Ground systems automation
- Astronaut decision aids
- Smaller crews to Mars
- Spacecraft / Robot autonomy
- Risks to upgrading continuously operating aircraft infrastructure



Aeronautics vs Space: Differences

Aeronautics

- Large fleet size
- High system diversity
- Low communication latency
- ~100% communication coverage
- High operating hours => fewer defects
- High value from modest gains (amortized over large fleet)
- Highly regulated
- Risk to crew, passengers, ground

Space

- Small fleet size
- Low system diversity
- High communication latency
- Lower communication coverage (~90% for ISS, may be lower for Mars)
- Lower operating time => more defects (due to fleet size)
- Less value amortized from modest gains (due to fleet size)
- Few/No regulations
- Risk to crew, passengers (limited ground risk during launch)





National Aeronautics and Space Administration



Overview

- Autonomy Context
- **Autonomy Scenarios**
- Autonomy Challenges

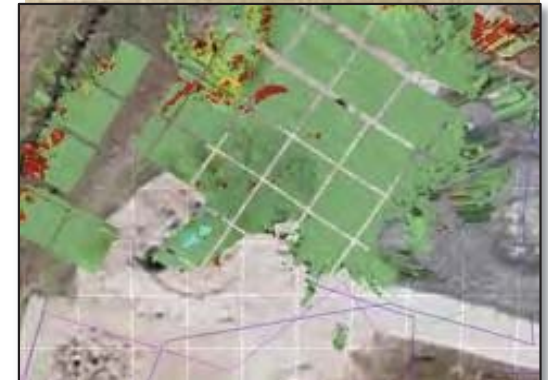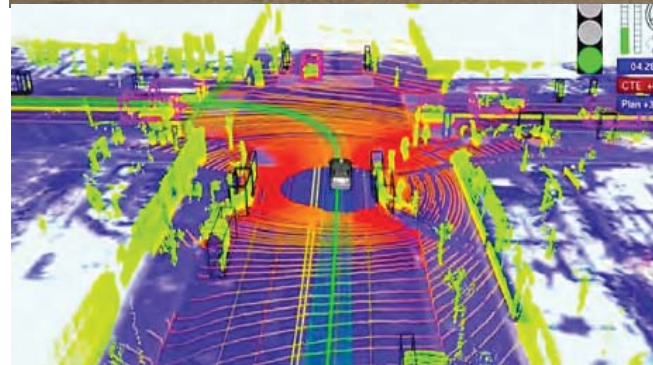




National Aeronautics and Space Administration




Autonomy Scenario #1


Human

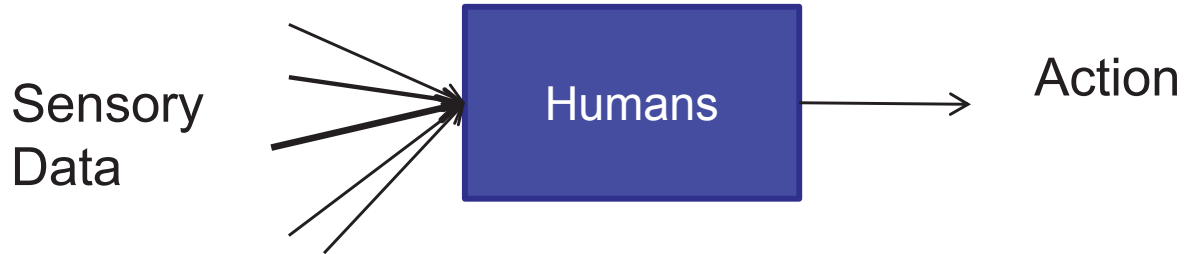

Autonomy

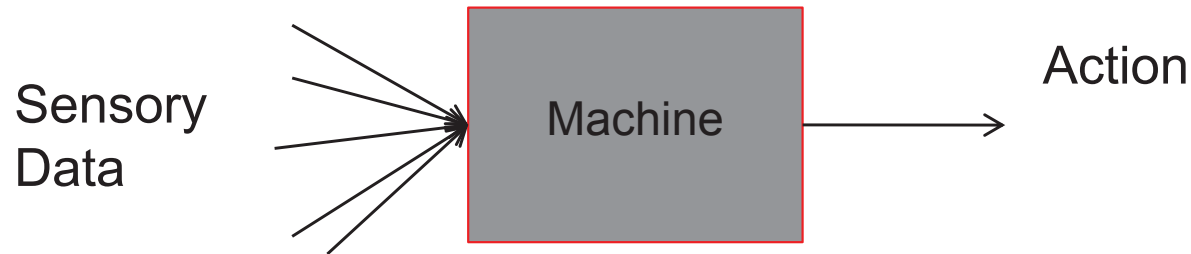

Variable
Autonomy

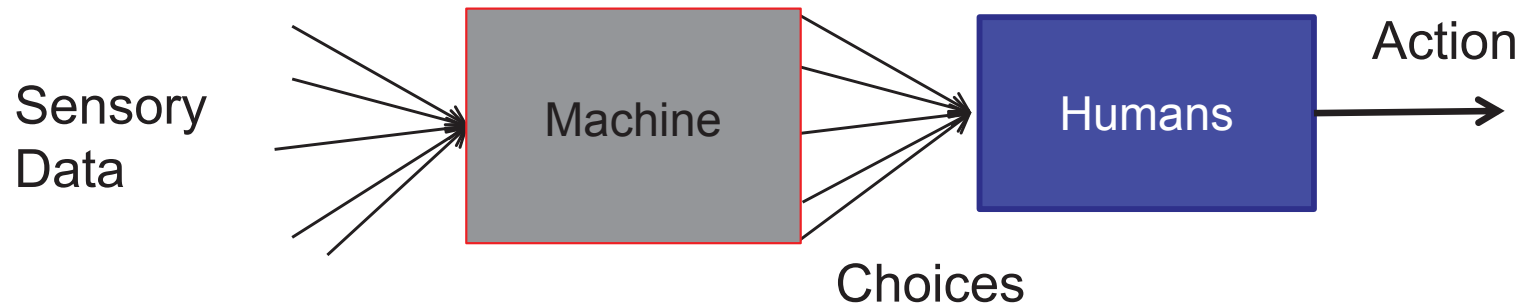

Real-Time (Interactive) Optimization



Emergency Landing Planner

Objective: Assist pilots in finding suitable emergency landing sites when hazards are encountered or anticipated.

Approach: The ELP tool determines the lowest risk paths to runways within a 150 mile radius considering a large number of factors.

Ref 1. Meuleau, N., Neukom, C., Plaunt, C., Smith, D., & Smith, T. (2011, June). The emergency landing planner experiment. In *ICAPS-11 Scheduling and Planning Applications Workshop*.

Ref 2. Meuleau, N., Plaunt, C., Smith, D. E., & Smith, T. B. (2009, September). An Emergency Landing Planner for Damaged Aircraft. In *IAAI*.

ACFS Flight Simulation Study:

5 pilot teams (UPS, UA)


2 days each

training + 16 runs

Overwhelmingly positive pilot feedback:



“... your software program alleviates the uncertainty about finding a suitable landing site and also reduces workload so the Crew can concentrate on ‘flying’ the aircraft.”

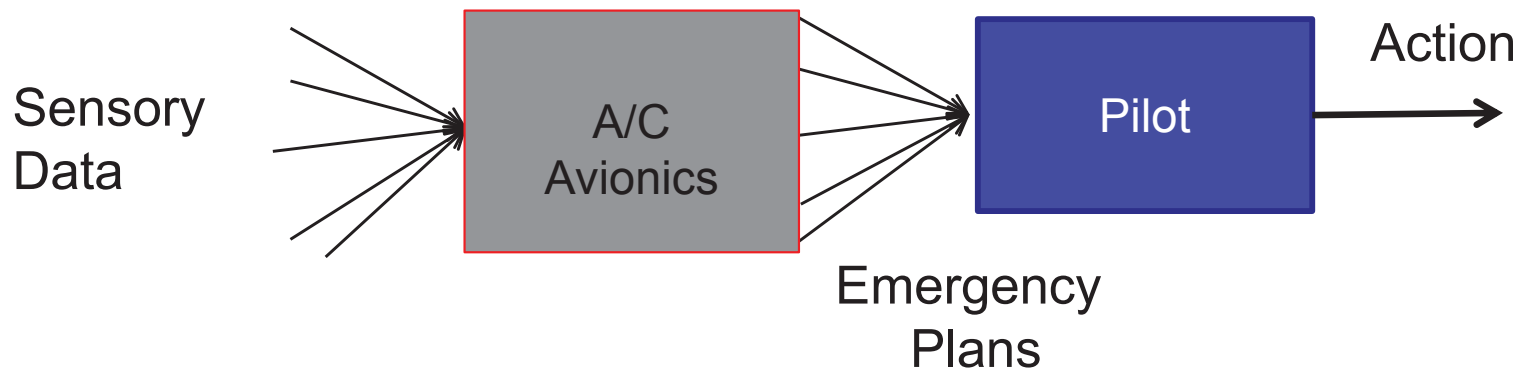




National Aeronautics and
Space Administration



Autonomous Cueing – VMS Pilot Test

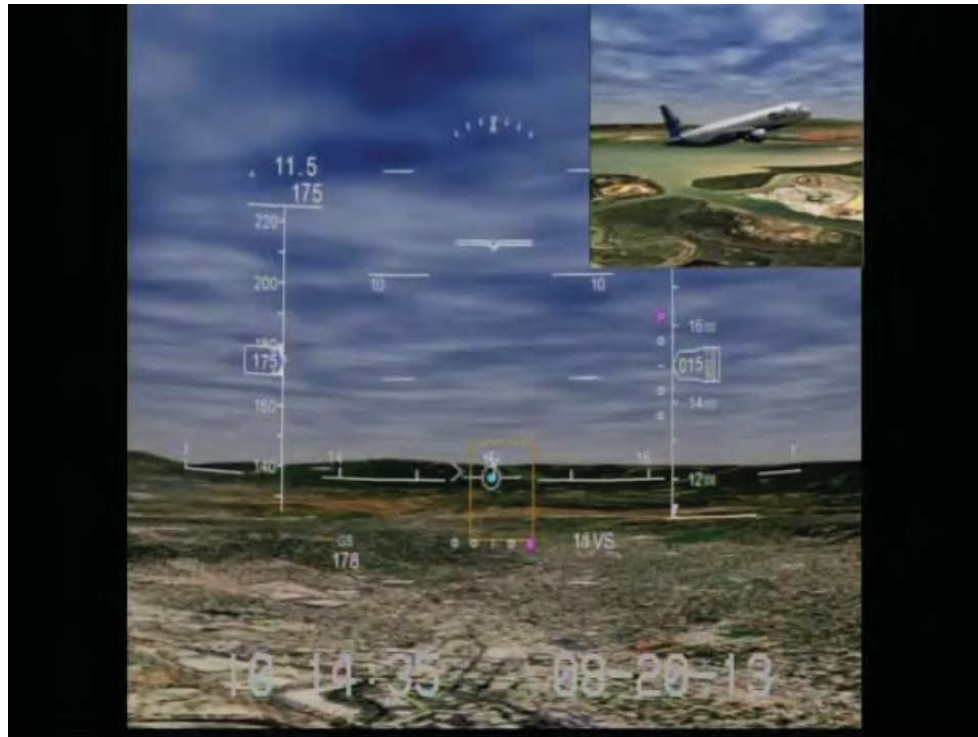

PILOT COMMENTS

“Once I was accustomed to the box it helped significantly”

“Excellent tool to know the parameters ...”


“The bounding box significantly reduces the training curve...”

Ref 1: Krishnakumar, Kalmanje, et al. "Piloting on the Edge: Approaches to Real-Time Margin Estimation and Flight Control." *Proceedings of the AIAA Guidance, Navigation and Control Conference, Minneapolis, MN. 2011.*

Ref 2: : Krishnakumar, Kalmanje, et al. "Initial Evaluations of LoC Prediction Algorithms using the NASA Vertical Motion Simulator", AIAA 2014-0265.




Autonomy Scenario # 2


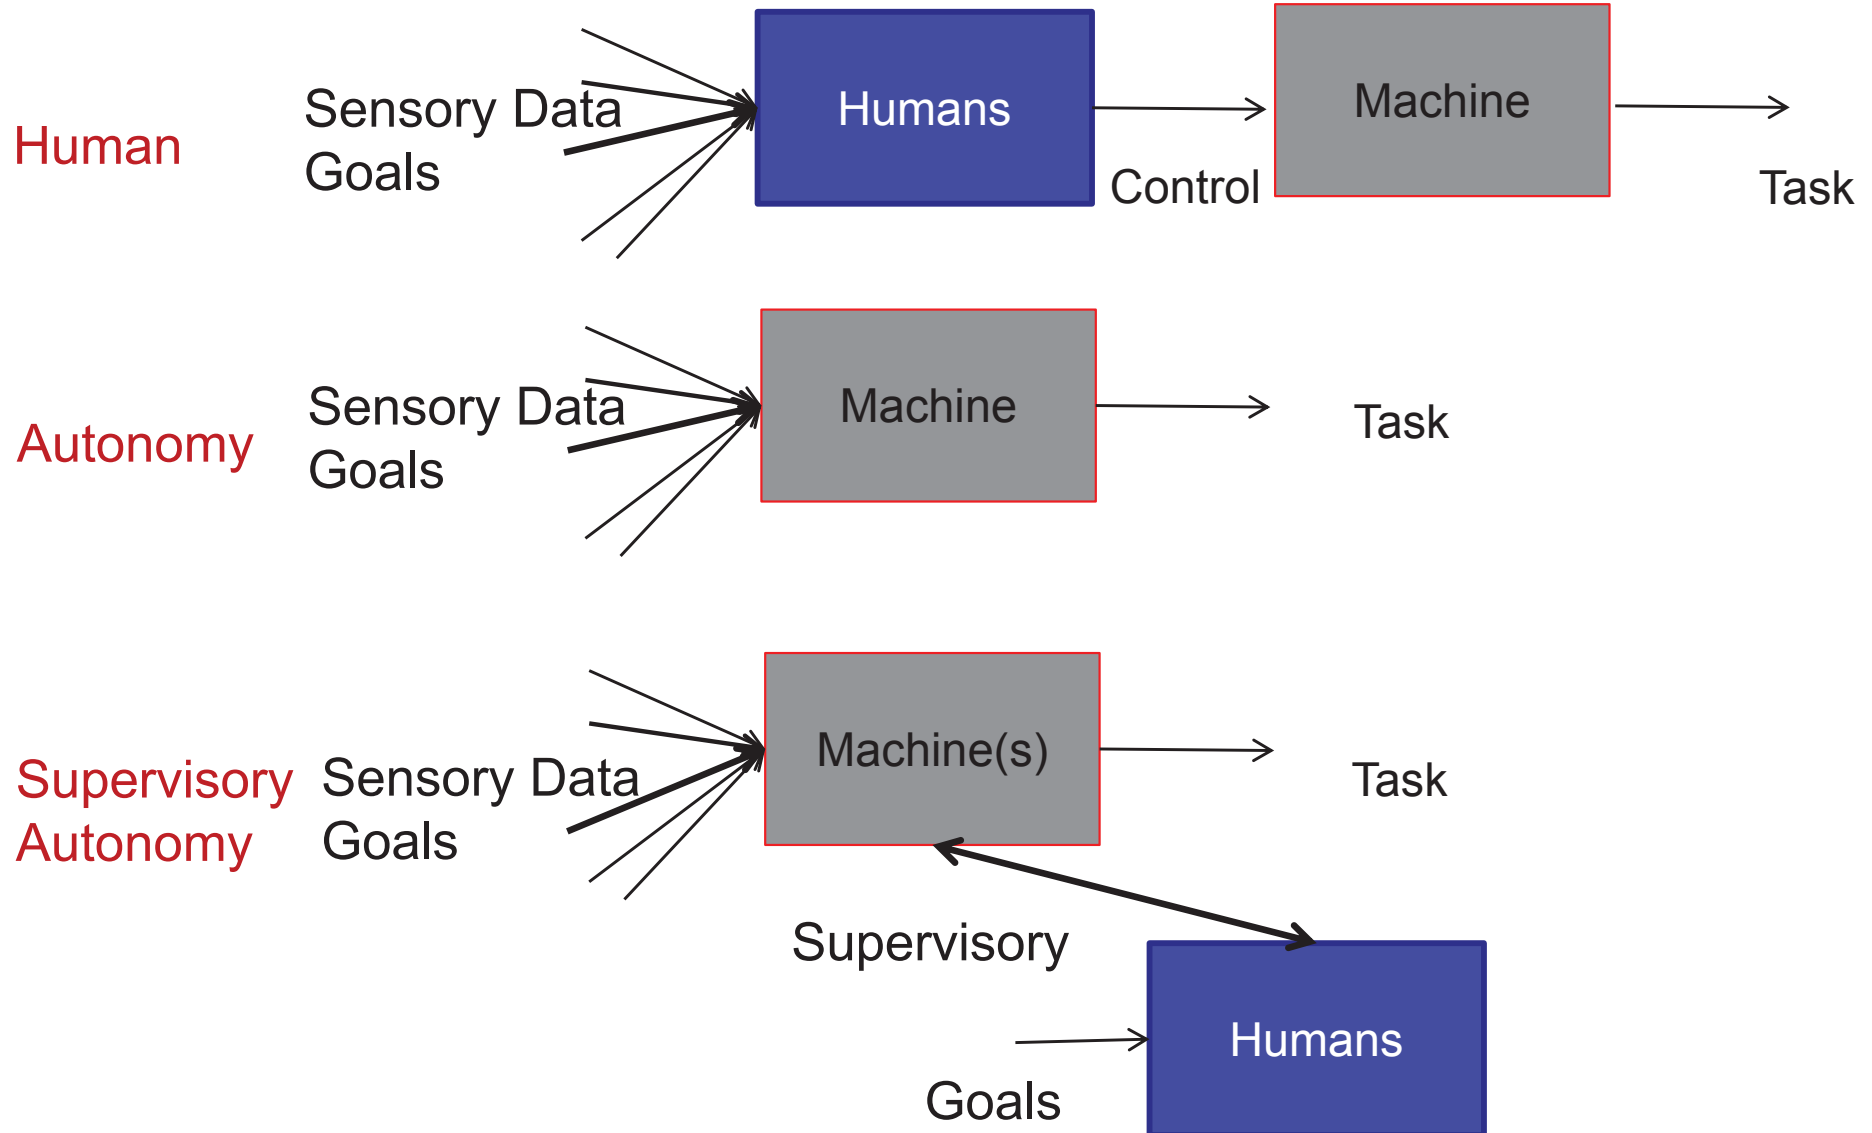




Smart SPHERES Project

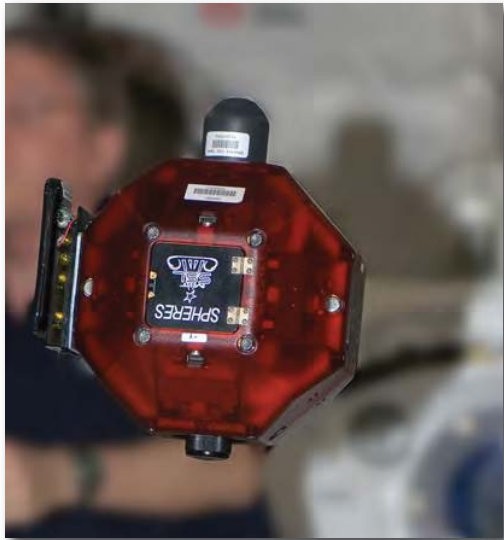

- Free-flying robot (6 axis, cold-gas propulsion)
- Ground control and crew centric operations
- Perform remotely operated mobile sensor tasks
- Demonstrate autonomous operations onboard ISS

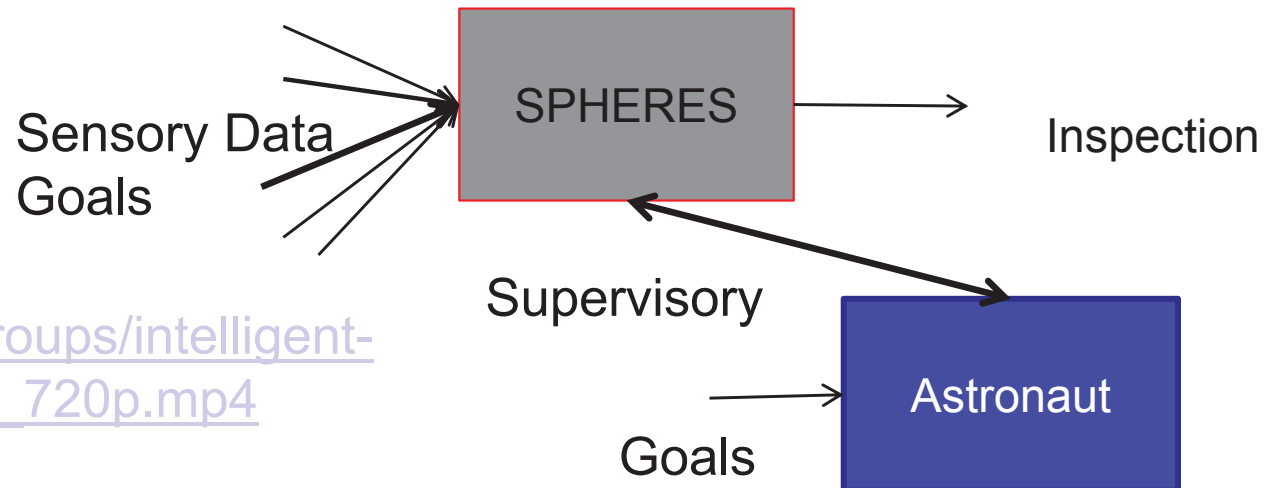
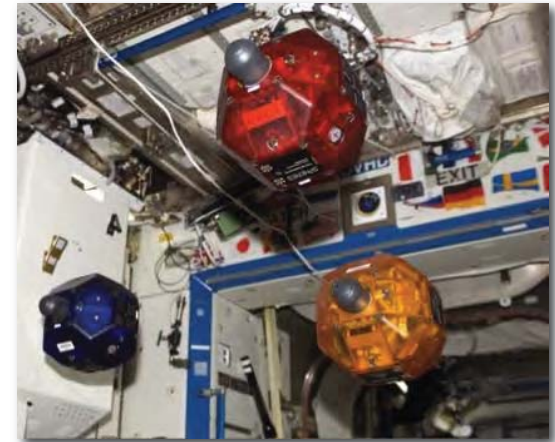




Surface Telerobotics Project



- Mobile robot on surface (Moon, asteroid, Mars)
- Crew centric operations from inside flight vehicle
- Perform surface activities before/support/after crew
- Operated by ISS Crew

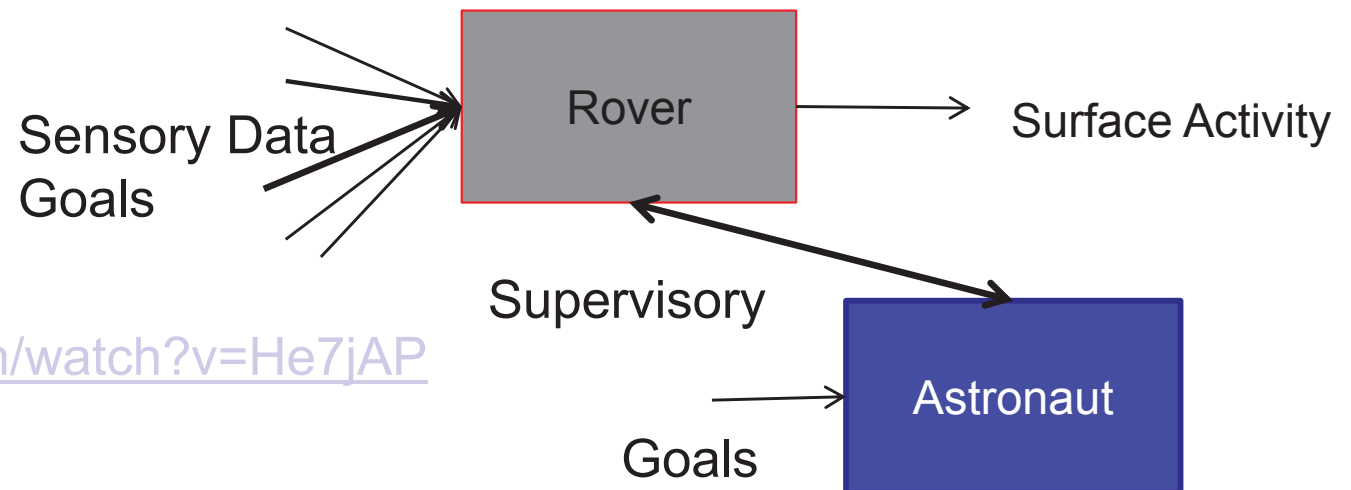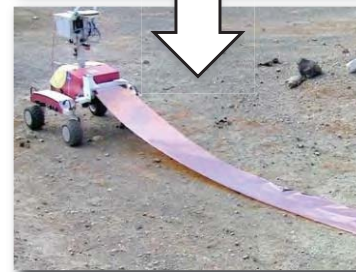

https://www.youtube.com/watch?v=He7jAP_bco8




National Aeronautics and
Space Administration



Autonomy Considerations


Autonomy is needed ...

- When the cadence of decision making exceeds **communication constraints** (delays, bandwidth, and communication windows)
- When **time-critical decisions** (control, health, life-support, etc) must be made on-board the system, vehicle, etc.
- When decisions can be better made using **rich on-board data** compared to limited downlinked data (e.g., adaptive science)
- When local decisions **improve robustness** and **reduces** complexity of system architecture
- When autonomous decision making can **reduce system cost** or **improve performance**
- When **variability in training, proficiency**, etc. associated with manual control is unacceptable

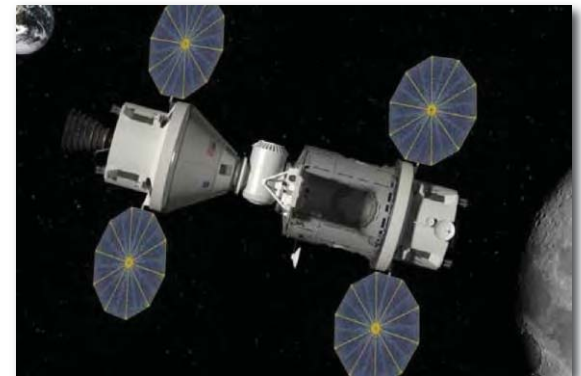



Autonomy Scenario # 3

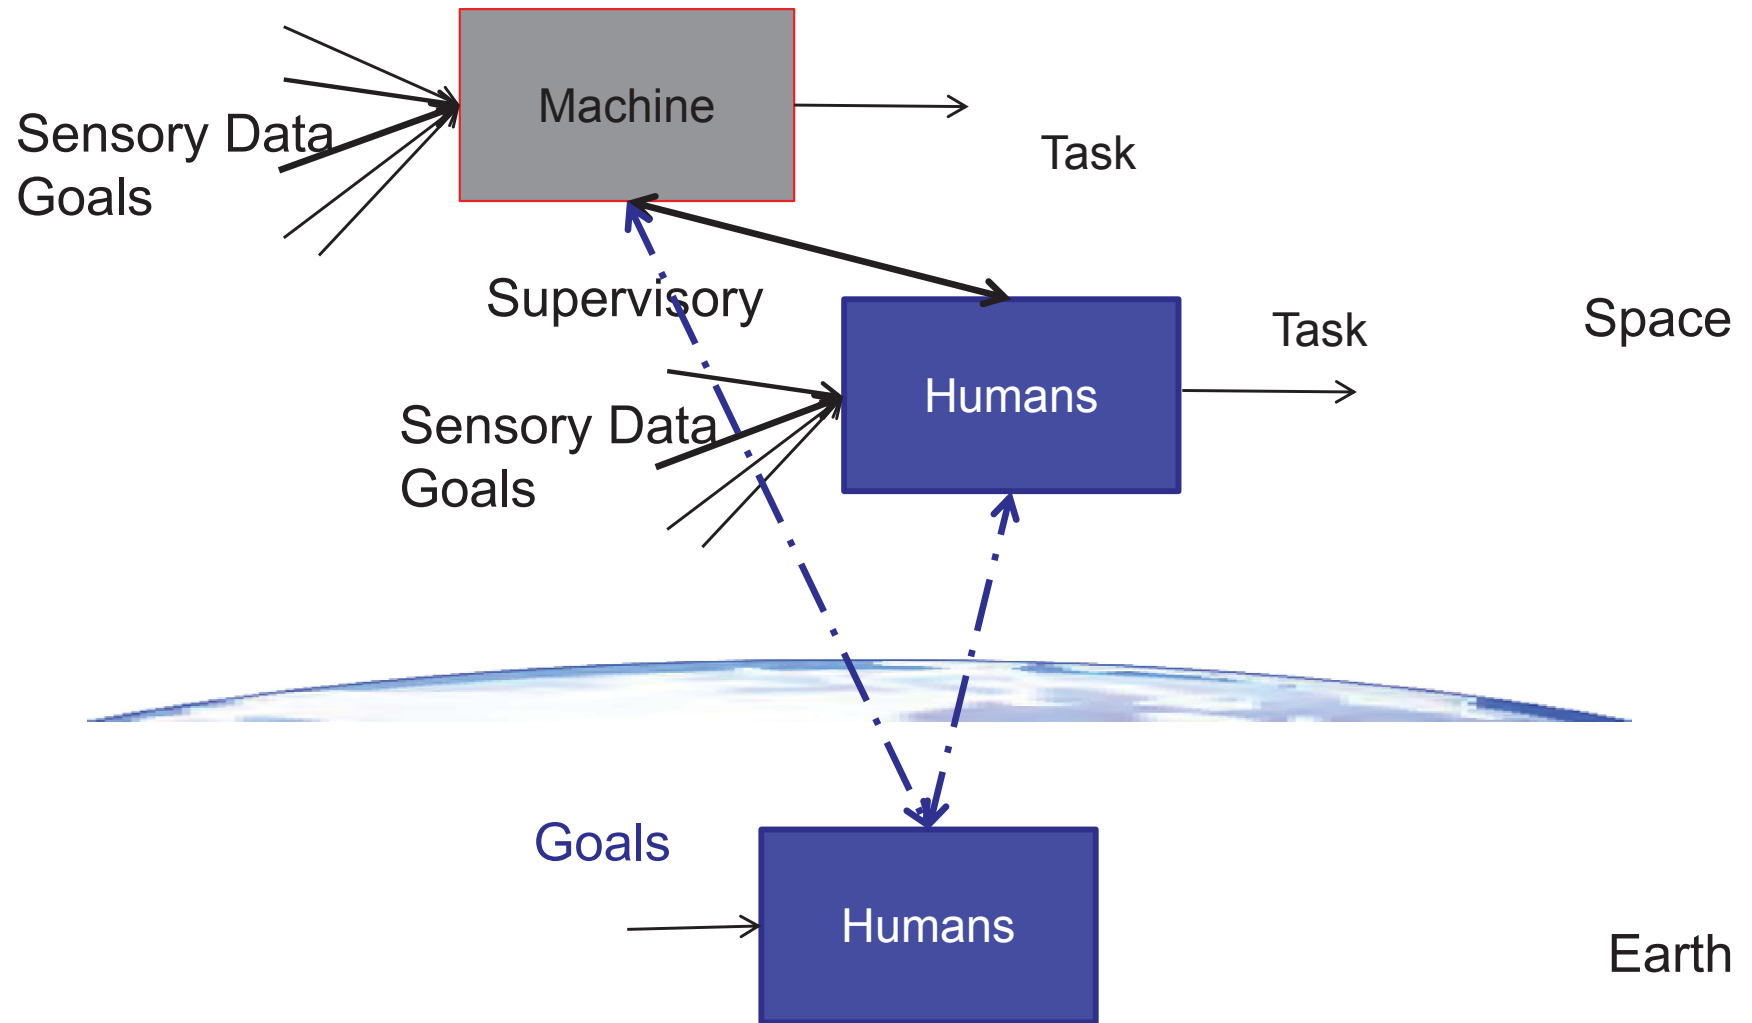




National Aeronautics and Space Administration



Autonomous Mission Operations

How will NASA *operate* a crewed mission with a *long communication delay* between the spacecraft and Earth?

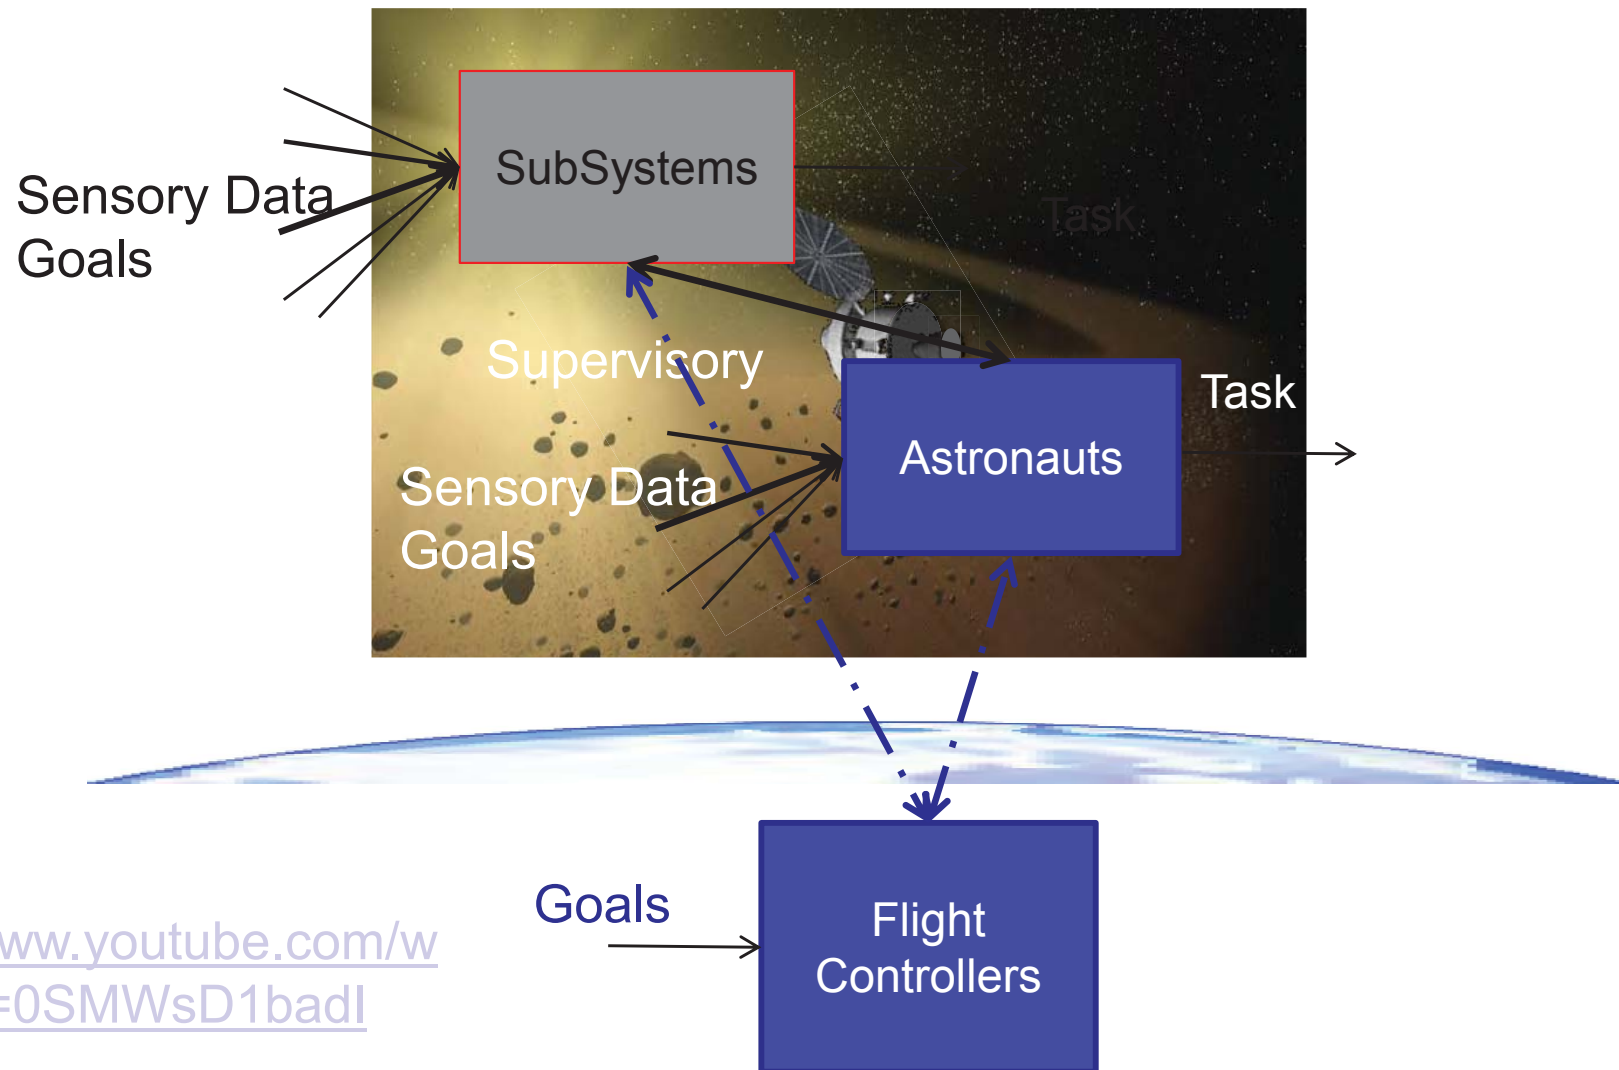

<http://www.youtube.com/watch?v=0SMWsD1badI>



National Aeronautics and
Space Administration




Autonomous Mission Operations

How will NASA *operate* a crewed mission with a *long communication delay* between the spacecraft and Earth?


How should the vehicle functions be distributed between the flight crew and onboard system automation?

When during the mission should responsibility shift from flight control team to crew or from crew to vehicle, and what should the process of shifting responsibility be as the mission progresses?

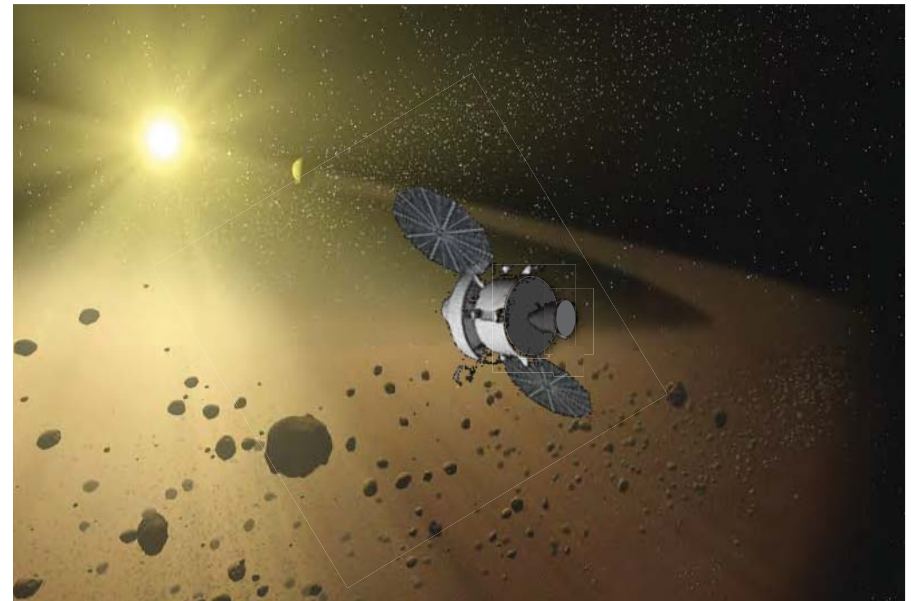



Autonomy Scenario # N

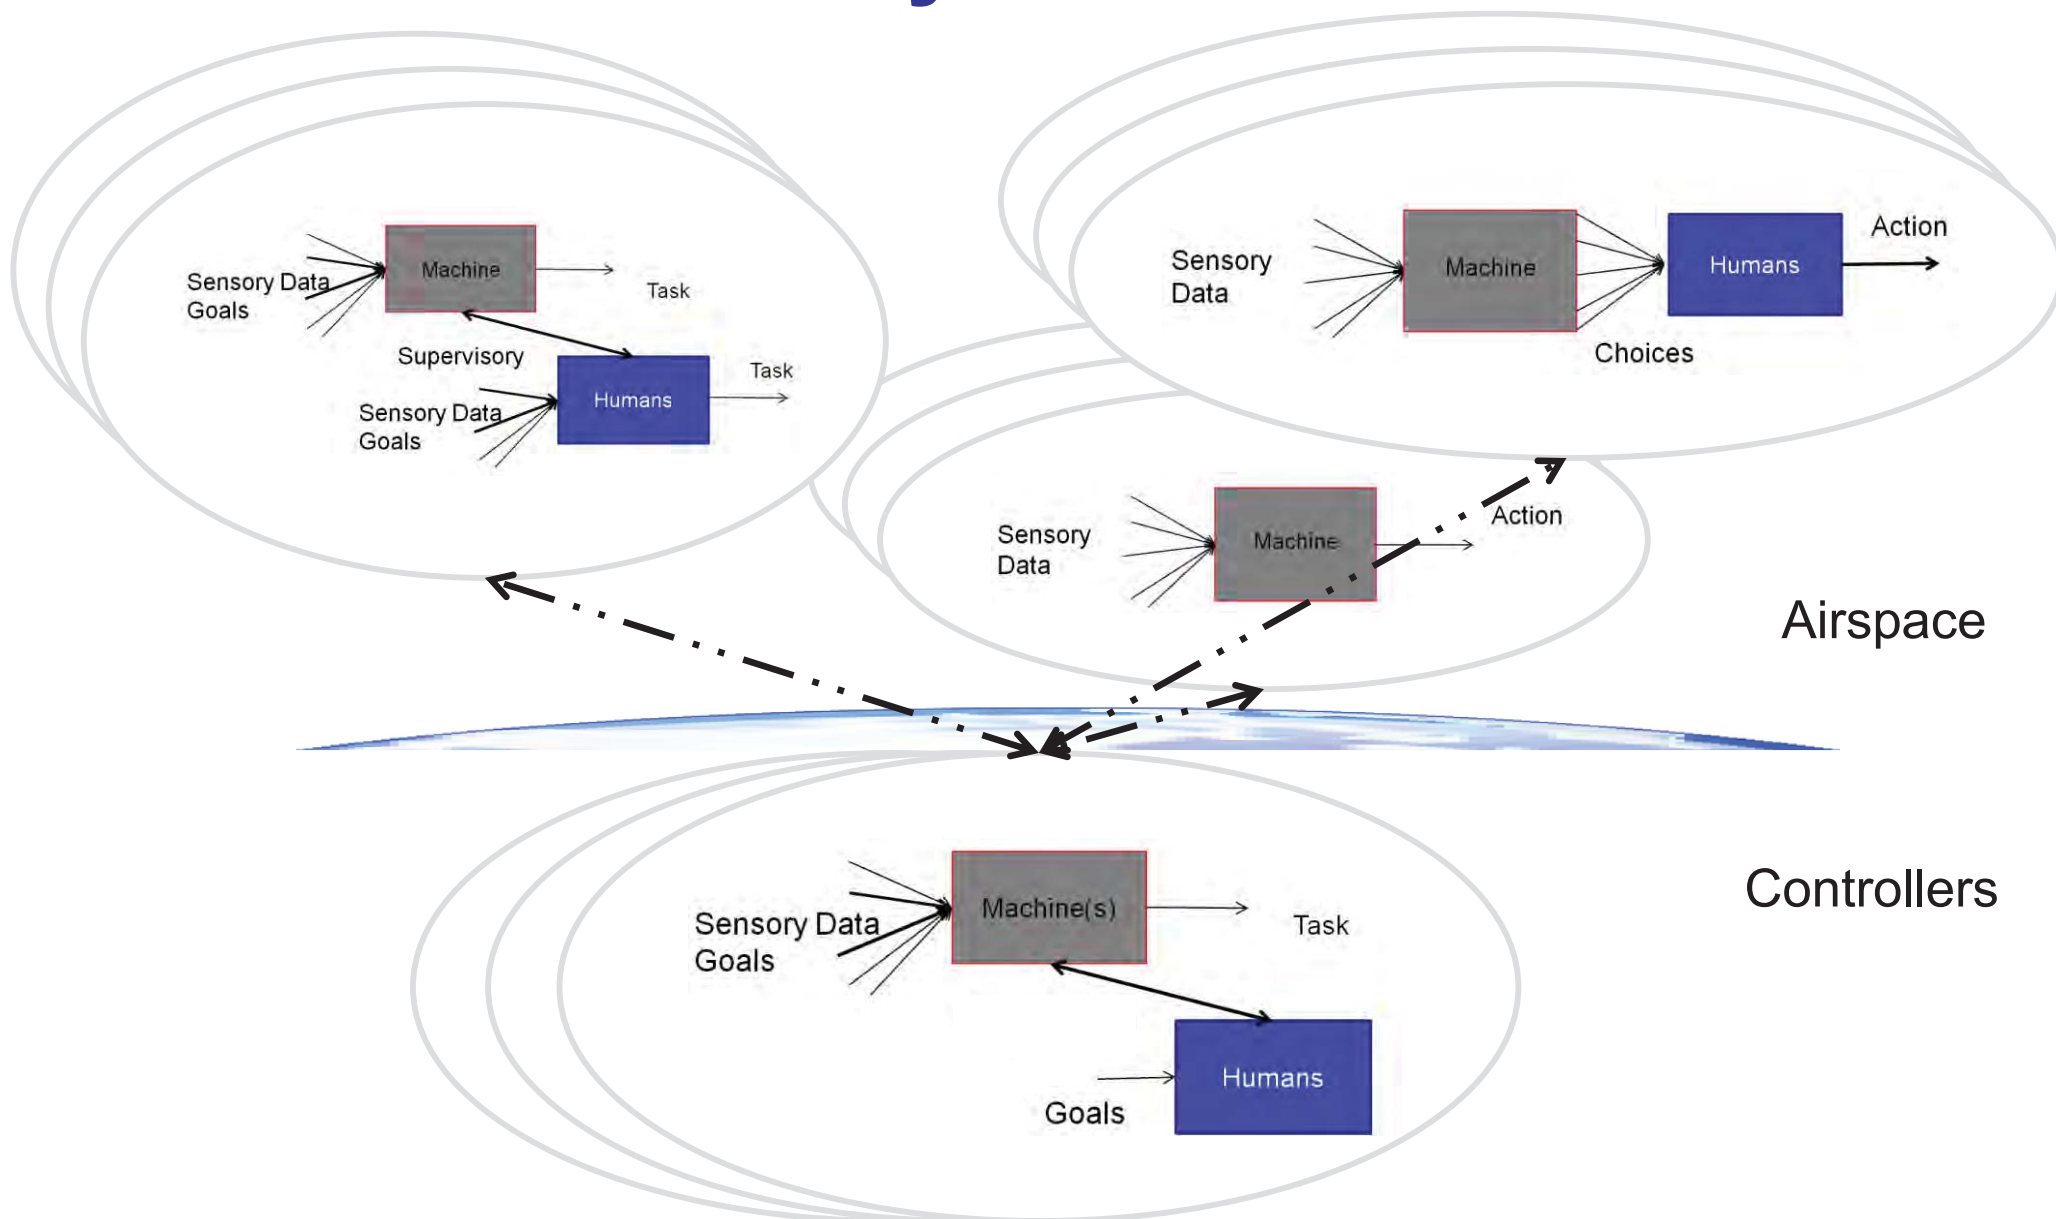





National Aeronautics and Space Administration



Overview

- **Autonomy Context**
- **Autonomy Scenarios**
- **Autonomy Challenges**

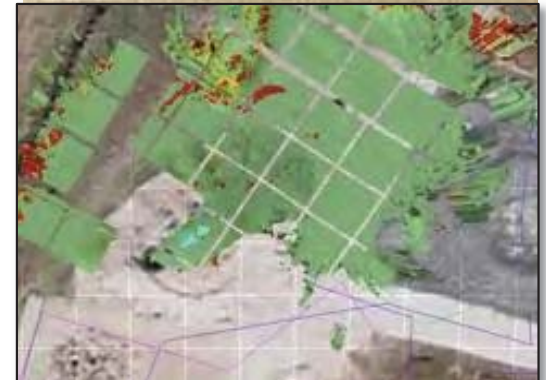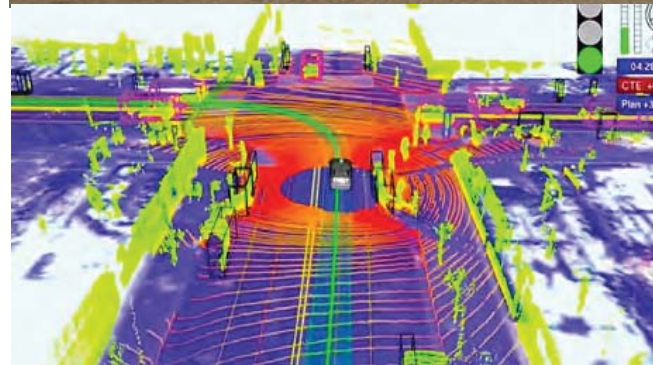



National Aeronautics and
Space Administration




Autonomy Challenges

- **Autonomy Technology Challenges**
- **Boundaries of Autonomous Systems**



Technology Challenges

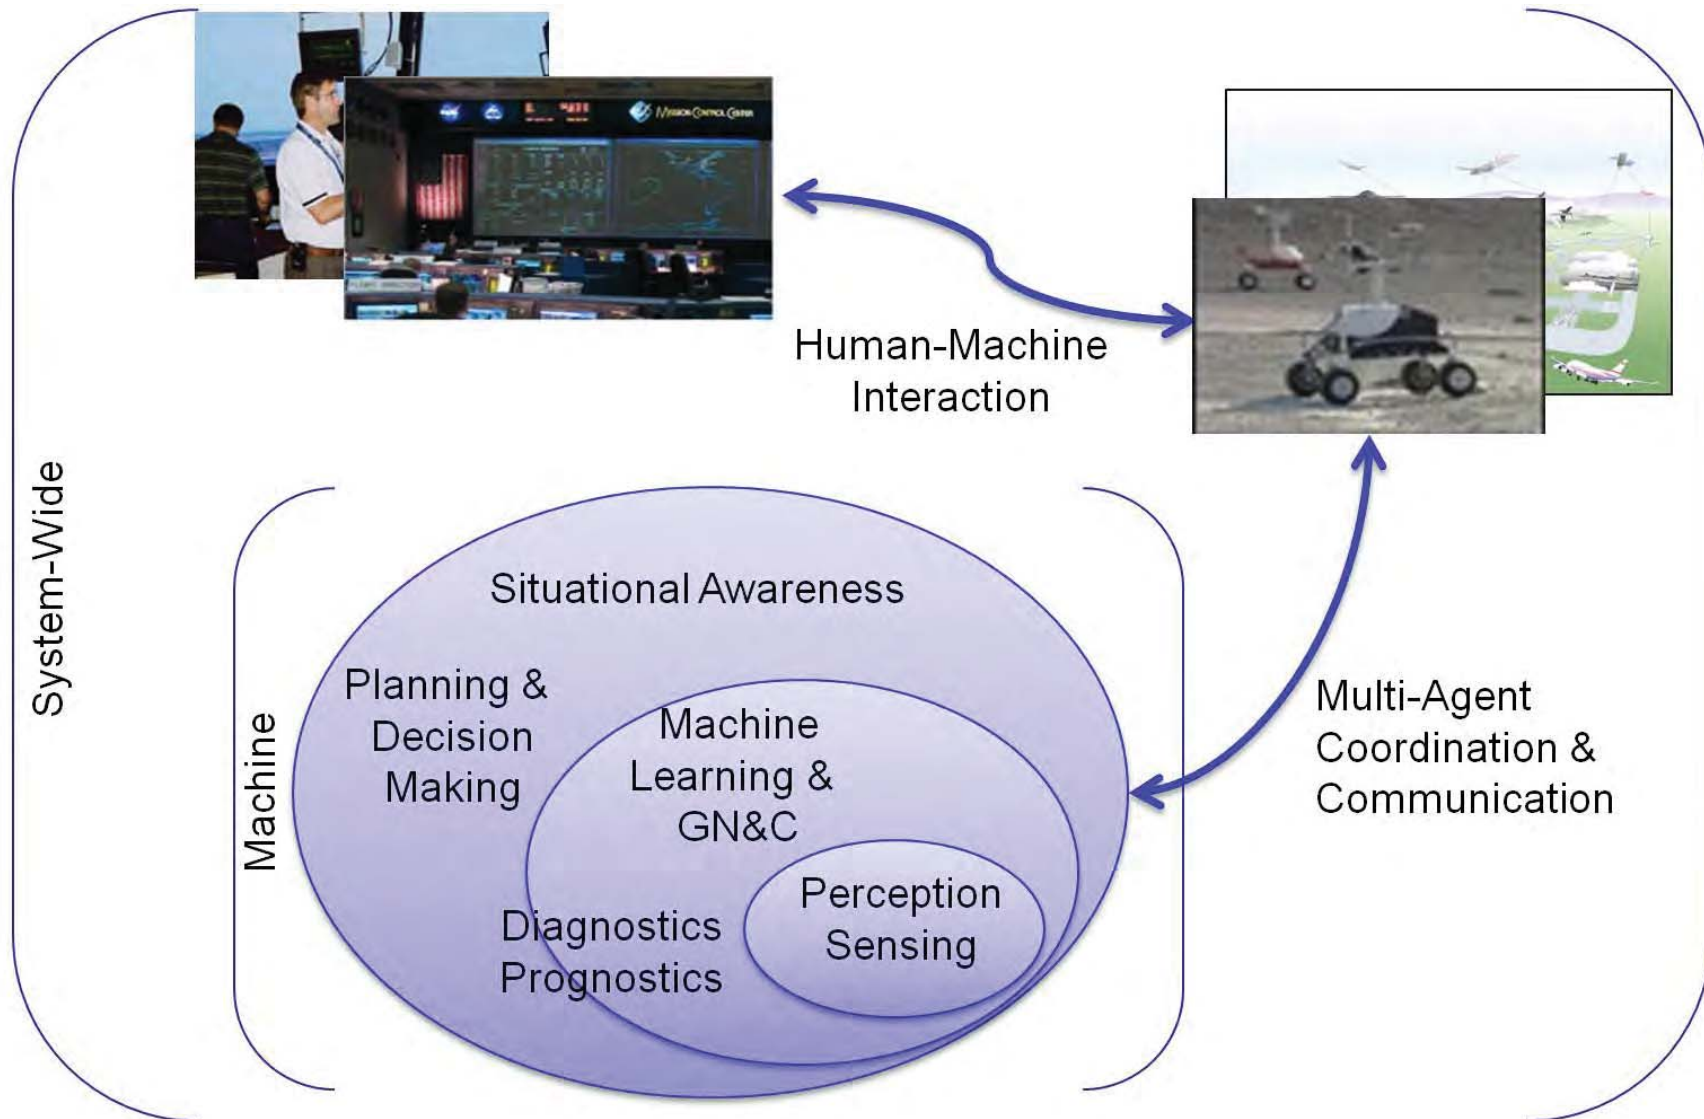

Cross-Cutting Challenges: Model- Based Software, Autonomy Processors, Assurance, V&V



National Aeronautics and
Space Administration



Boundaries of Autonomous Systems

➤ Human Boundaries

- Monitoring
 - **Transparency, situational awareness**
- Responsibility
 - **Transferring roles and responsibilities to and from Autonomous Systems**
- Teaming & Interacting
 - **Number, frequency of interaction, etc**

➤ Machine Boundaries

- Operational Envelope & Communication Limits
 - **Safe Mode concept**
- Algorithm Complexity
 - **Optimality Vs Sufficability**
- CPU and Memory Limits
 - **Balanced use of computational resources**



National Aeronautics and
Space Administration



Every Problem is Unique: “Rationalistic Autonomy” is what is needed.

Mission control / operations

What aspects should be allocated to **ground control**?

What aspects should be allocated to the **on-board system**?

Ground control / operations

What tasks should be **manually performed**?

What tasks should be **autonomously performed**?

On-board system (crew, spacecraft, robot, aircraft)

What tasks should be performed by **crew**? (if there is crew...)

What tasks should be performed by **on-board system automation**?

Transition of Authority

When should control shift from ground control to the system?

When should control shift from crew to vehicle?

How should control shift as a function of time delay, mission phase, operational context, etc.?