



American Institute of Engineers Symposium on 3D Printing and Additive Manufacturing for Defense and Government • October 21-22, 2014

NASA Perspective and Initiatives in Additive Manufacturing

R. G. Clinton, Jr. Deputy Manager, Science & Technology Office Marshall Space Flight Center



- NASA Headquarters Structure and Sponsorship
- Aeronautics Applications
- "FOR Space" Additive Manufacturing
- "IN Space" Additive Manufacturing
 - National Research Council Committee on Space-Based Additive Manufacturing (COSBAM) Report Synopsis
 - Initiatives
- Cross-Cutting Activities
- Summary








- Ames Research Center Jessica Koehne
- Glenn Research Center Michael Meyer, Bob Carter
- Goddard Space Flight Center Peter Hughes, Aprille Ericsson
- Jet Propulsion Laboratory Kendra Short
- Johnson Space Center Michael Waid
- Kennedy Space Center Jack Fox
- Langley Research Center Karen Taminger
- Marshall Space Flight Center Frank Ledbetter, Kristin Morgan, Niki Werkheiser, Janet Salverson
- National Research Council COSBAM Dwayne Day, Betsy Cantwell
- **University of Southern California Berok Khoshnevis**





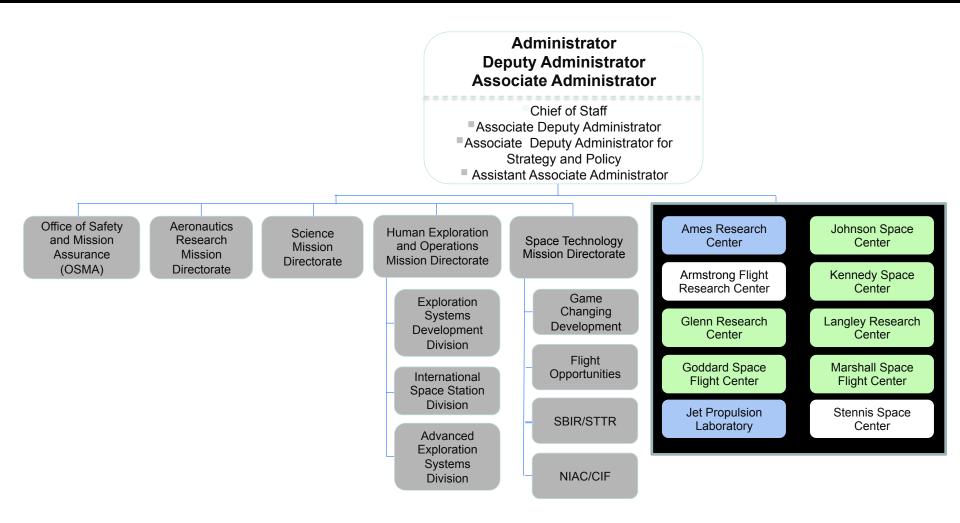













- Engineered materials coupled with tailored structural design enable reduced weight and improved performance for future aircraft fuselage and wing structures
- Multi-objective optimization:
 - Structural load path
 - Acoustic transmission
 - Durability and damage tolerance
 - Minimum weight
 - Materials functionally graded to satisfy local design constraints
- Additive manufacturing using new alloys enables unitized structure with functionally graded, curved stiffeners
- Weight reduction by combined tailoring structural design and designer materials



Design optimization tools integrate curvilinear stiffener and functionally graded elements into structural design

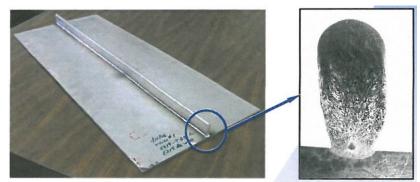

High toughness alloy at stiffener base for damage tolerance, transitioning to metal matrix composite for increased stiffness and acoustic damping






- Objective: Conduct the first comprehensive evaluation of emerging materials and manufacturing technologies that will enable fully non-metallic gas turbine engines.
- Assess the feasibility of using additive manufacturing technologies to fabricate gas turbine engine components from polymer and Ceramic matrix composites.
 - Fabricate prototype components and test in engine operating conditions
- Conduct engine system studies to estimate the benefits of a fully non-metallic gas turbine engine design in terms of reduced emissions, fuel burn and cost
- Focusing on high temperature and fiber reinforced polymer composites fabricated using FDM, and fundamental development of high temperature ceramics / CMC's using binder jet process


A Fully Non-Metallic Gas Turbine Engine Enabled by Additive Manufacturing




Polymer Vane Configuration in Cascade wind tunnel Rig



Digital Image CorrelationMeasurements





Finite Element Analysis

Binder jet process was adapted for SiC fabrication






"FOR Space" Additive Manufacturing

FOR Space: Spacecraft Electronics, Sensors and Coatings – Goddard Science & Technology Office **Space Flight Center**

Aerosol jet printing of various circuit building blocks: crossovers, resistors, capacitors, chip attachments, EMI shielding.

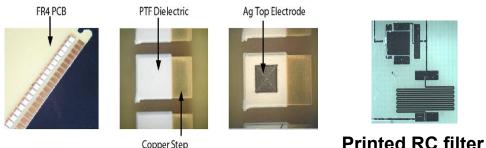

Copper Step


Multi-layer deposition, Polyimide dielectric and Aq deposited onto Cu pads to make a simple capacitor

- Nanosensors printed directly on a daughter board for chemical detection
- Super-black nanotechnology coating: Enable Spacecraft instruments to be more sensitive without enlarging their size. Demonstrated growth of a uniform layer of carbon nanotubes through the use of Atomic Layer Deposition.

Printed Nanosensor

Graphene

- Nanowires
- Functional groups for selectivity
- Metal cluster for selectivity
- Printed Circuit Board
- Contact pad
- Metal lead

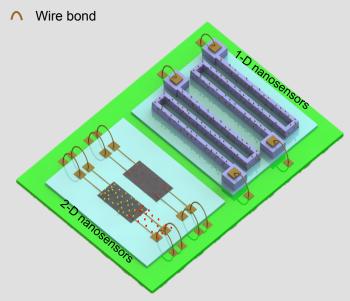



FOR Space: Spacecraft Instruments and Components – Goddard Space Flight Center



- GSFC's first Additive Manufacturing (AM) part for instrument prototype/possible flight use (FY12) -Titanium tube - in a tube – in a tube for cryo thermal switch for ASTRO-H
- First to fly AM component in space (FY13) battery case on suborbital sounding rocket mission
- Miniaturizing telescopes: Utilize new Direct Metal Laser Sintering (DMLS) to produce <u>dimensionally</u> <u>stable</u> integrated instrument structures at lower cost
- Unitary core-and-face-sheet optical bench material
 - Features tailored alloy composition to achieve desired coefficient of thermal expansion
- Efficient radiation shielding through Direct Metal Laser Sintering:
 - Develop a method for mitigating risk due to total ionizing dose (TID) using direct metal laser sintering (DMLS) and the commerciallyavailable Monte-Carlo particle transport code, NOVICE to enable otherwise difficult to fabricate component-level shielding



Optical bench core


material sample



Battery Case

CubeSat-class 50-mm (2") imaging camera/instrument mirrors and integrated optical-mechanical structures- manufacturing with 3D-printed parts


0.3m Telescope via DMLS







- GRC and Aerojet Rocketdyne tested an additively manufactured injector in 2013 under the Manufacturing Innovation Project (MIP)
- MSFC successfully tested two complex injectors printed with additive manufacturing August 2014
- GRC, LaRC, and MSFC Team building on success of MIP program to develop and hot fire test additively manufactured thrust chamber assembly
 - Copper combustion chamber and nozzle produced via Selective Laser Melting (SLM)
 - Grade from copper to nickel for structural jacket and manifolds via EBF³
- RL10 Additive Manufacturing Study (RAMS) task order between GRC and Aerojet-Rocketdyne sponsored by USAF.
 - Related activity Generate materials characterization database on additively manufactured (AM) Ti-6AI-4V to facilitate the design and implementation of an AM gimbal cone for the RL10 rocket engine.
- GRC, AFRL, MSFC Additive Manufacturing of Hybrid Turbomachinery Disk:

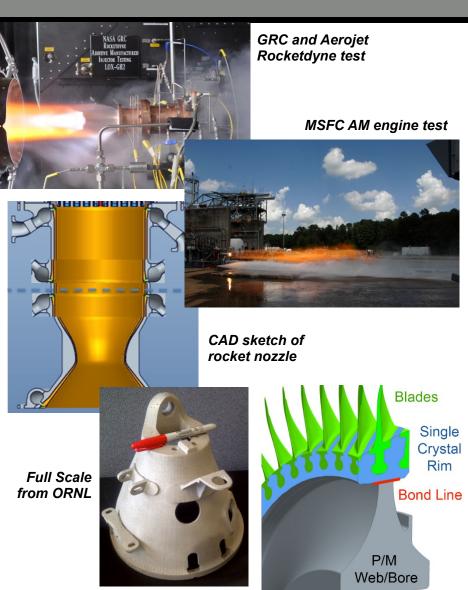

Hybrid Disk Concept





- Powder Bed Fusion (PBF) technologies enable rapid manufacturing of complex, high-value propulsion components.
- Flexibility inherent in the AM technologies increases design freedom; enables complex geometries. Designers can explore lightweight structures; integrate functionality; customize parts to specific applications and environments.
- Goal: reduce part count, welds, machining operations \rightarrow reduce \$ and time





J-2X Gas Generator Duct Pogo Z-Baffle Turbopump Inducer





SLM Design

17

26

~57

RS-25 Flex Joint

Part	Cost Savings	Time Savings	RS-25 Flex Joint	Heritage Design
J-2X Gas Generator Duct	70%	50%	Part Count	45
Pogo Z-Baffle	64%	75%	# Welds	70+
Turbopump Inducer	50%	80%	Machining Operations	~147



FOR Space Applications: Environmental Control and Life Support Systems and ISS Tools



• AM techniques can create extremely fine internal geometries that are difficult to achieve with subtractive manufacturing methods.



ISS Urine Processor Assembly Air Filter/ Scrubbers



- ISS Tool Design for Manufacturability and Processing
- Structural Integrity
 Verification
 - Material Properties
 - Non-destructive Evaluation
 - Structural Analysis and Testing






"IN Space" Additive Manufacturing





- Air Force Space Command and the Air Force Research Laboratory Space Vehicles Directorate and the NASA Science and Technology Mission Directorate, requested the US National Research Council (NRC) to
 - Evaluate the feasibility of the concept of space-based additive manufacturing of space hardware
 - Identify the science and technology gaps
 - Assess the implications of a space-based additive manufacturing capability
 - Report delivered in July
 - Printed in September

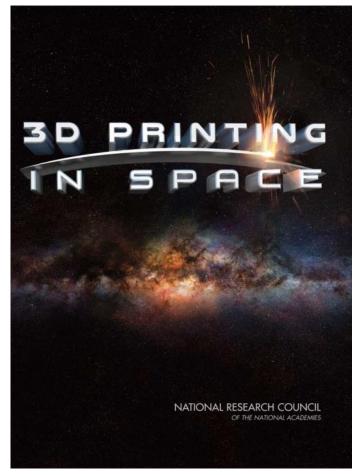

NRC Report: http://www.nap.edu/ download.php?record_id=18871






- Analysis. Agencies need to do <u>systems and cost benefit analyses</u> (CBA) related to the value of AM in space. The analyses should not focus just on how AM could replace traditional manufacturing but how it can enable <u>entirely new structures</u> and functionalities that were not possible before. A specific area where a CBA would be helpful is in the manufacture of smaller satellites on the ISS.
- **Investment**. Targeted investment is needed in areas such as <u>standardization and</u> <u>certification</u>, and <u>infrastructure</u>. The investment should be strategic, and use workshops and other information-sharing forums to develop roadmaps with short and long-term targets.
- **Platforms**. Given the short life of the <u>ISS</u>, agencies should leverage it to the extent feasible to test AM and AM parts.
- **Cooperation, coordination and collaboration**. Instead of stove-piped parallel development in multiple institutional settings, it is critical that there be cooperation, coordination and collaboration within and across agencies, sectors, and nations. It would be useful to develop working groups, conferences and leverage existing efforts such as the *America Makes*.
- Education and training. Agencies need to <u>develop capabilities</u> related to relevant fields such as material science and others that would be important for the development of the field of AM.



NASA IN Space Manufacturing Technology Development Vision



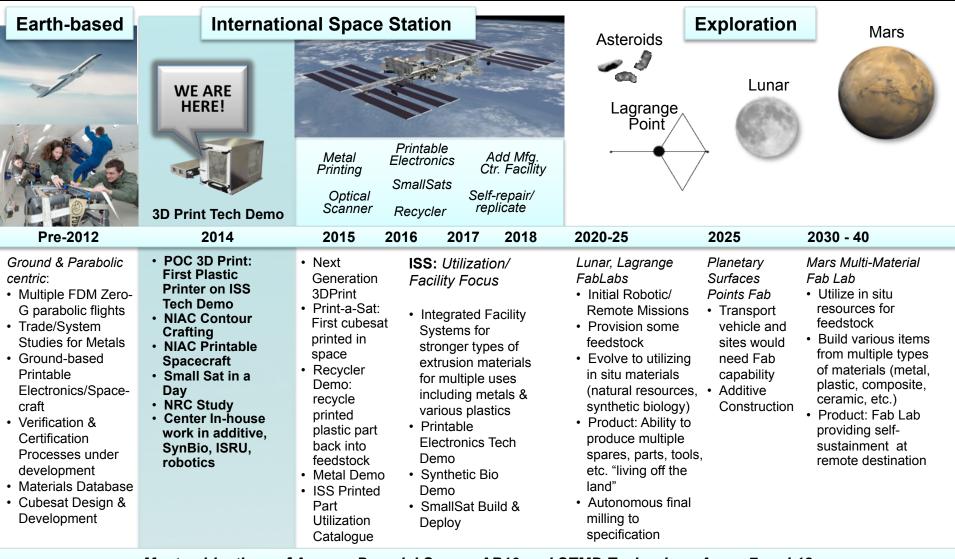

Meets objectives of Agency Decadal Survey AP10 and STMD Technology Areas 7 and 12

ISS Technology Demonstrations are Key in 'Bridging' Technology Development to Full Implementation of this Critical Exploration Technology.



IN Space Manufacturing: ISS Tech Demo – 3D Print





Microgravity Research




3D Print Ground Testing

Potential Mission Accessories



The 3D Print project will deliver the first 3D printer on the ISS and will investigate the effects of consistent microgravity on melt deposition additive manufacturing by printing parts in space.




- Melt deposition modeling: 1) nozzle ejecting molten plastic,
- 2) deposited material (modeled part),
- 3) controlled movable table

3D Print Specifications			
Dimensions	33 cm x 30 cm x 36 cm		
Print Volume	6 cm x 12 cm x 6 cm		
Mass	20 kg (w/out packing material or		
	spares)		
Est. Accuracy	95 %		
Resolution	.35 mm		
Maximum Power	176W (draw from MSG)		
Software	MIS SliceR		
Traverse	Linear Guide Rail		
Feedstock	ABS Plastic		



3D Print in Micro-G Science Glovebox (MSG)







• 3D Printing in Zero-G Continuation:

- MSFC analyses of Flight Parts compared to ground samples, publish results
- Utilization Catalogue Development
 - MSFC/JSC working with ISS IVA Tools and Operations Support Offices to define, first AM Parts for In-space Utilization
- ISS Scanner/In-space Verification & Validation
 - Made in Space, Inc.: provides CoTS Scanner for ISS Flight
- In-space Materials Characterization Database
 - MSFC Foundation for In-space utilization, analyses, testing, & verification
- Recycler Tech Demo
 - Two Phase I SBIRs awarded which will be completed early FY15.





Original Part Printed

Recycle printed part back into Feedstock Filament









Printable Electronics


 ARC/MSFC/JPL: Develop in-space manufacturing capabilities to produce functional electronic and photonic component on demand.

In-space Additive Repair

 JSC/MSFC: working with JSC and MMOD Office to develop and test process for ground-based repair of MMOD simulated damaged panels for future in-space capability.




Close-up of simulated MMOD Damage to External ISS Panel



Scanning the Damaged Panel

Additive Construction

 Co-led by KSC & MSFC: Joint project with Engineer Research and Development Center – Construction Engineering Research Laboratory, U. S. Army Corp of Engineers.

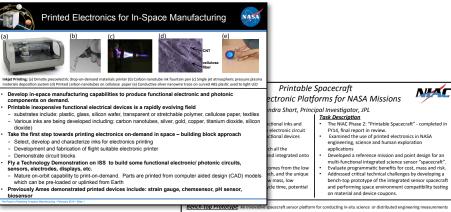










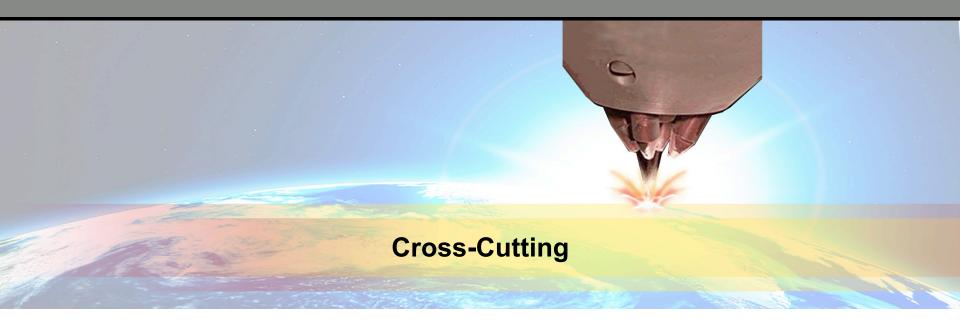






Technical Objectives

Build the standard level of information on AM powder bed fusion processes that is required for qualification of any new critical process used for aerospace applications

Expand and extend the manufacturing base for aerospace hardware through standardization and qualification of critical AM processes. Better understanding of controlling process parameters and process failure modes will be achieved through completion of this study. Opportunities for industry participation are available in each of the tasks below.

- 1. Build Interactions / Effects ARC/LaRC/MSFC **Objective:** Understand how basic AM build factors influence part properties.
- 2. Powder Influence / Effects GRC **Objective:** Understand how basic powder feedstock characteristics influence a part's physical, mechanical, and surface properties.
- 3. Thermal Processing / Effects LaRC/MSFC **Objective:** a) Understand how standard wrought thermal processes influence *AM mechanical properties, and b) explore the potential cost and benefit of AM-specific thermal processing.*
- 4. Surface Improvement / Effects MSFC **Objective:** Understand how as-built and improved AM surface texture influence part performance and fatigue life.
- 5. Applied Materials Characterization GRC/LaRC/MSFC **Objective:** Enable use of AM parts in severe aerospace environments.
- 6. Qualification of AM Critical Components MSFC *Objective:* Develop an Agency-wide accepted practice for the qualification of AM processes for aerospace hardware.

Related Task: Process Modeling – GRC,MSFC Objective: Use precipitation modeling to predict location specific microstructure in as-fabricated and post-processed 718, which has been fabricated with selective laser sintering







- Activity Title: Foundational NDE Methodology for Certification of Additive Manufacturing (AM) Parts and Materials
- Purpose: Develop certification methodologies designed to ensure the production of safe and reliable AM parts for spaceflight applications. Emphasis will be placed on metals and AM processes used in fabrication of propulsion system components.
- **Justification:** AM is a rapidly emerging technology and there is a recognized lag in AM process and part validation and certification methodologies. NDE has been identified as one key technology to close this gap.
- **Summary:** The OSMA state of the art AM report will be used to define highest priority needs/gaps for NDE of AM parts. Resources will be used to down select and optimize NDE techniques that will then be combined with NDE modeling for a cost-effective methodology for verifying part quality. A workshop will be held mid year to assess progress and further define needs.





- NASA, including each Mission Directorate, is investing in, experimenting with, and/or utilizing AM across a broad spectrum of applications and projects.
- Centers have created and are continuing to create partnerships with industry, other Government Agencies, other Centers, and Universities.
- In-house additive manufacturing capability enables rapid iteration of the entire design, development and testing process, increasing innovation and reducing risk and cost to projects.
- For deep space exploration, AM offers significant reduction to logistics costs and risk by providing ability to create on demand.
- There are challenges: Overwhelming message from recent JANNAF AM for Propulsion Applications TIM was "certification."
- NASA will continue to work with our partners to address this and other challenges to advance the state of the art in AM and incorporate these capabilities into an array of applications from aerospace to science missions to deep space exploration.