

# Development of Compact, Modular Lunar Heat Flow Probes

S. Nagihara  
 Department of Geosciences, Texas Tech University, Lubbock, TX 79409  
 K. Zacny and M. Hedlund  
 Honeybee Robotics, Pasadena, CA 91103  
 P. T. Taylor  
 NASA Goddard Space Flight Center, Greenbelt, MD 20711

## Narrative

Geothermal heat flow measurements are a high priority for the future lunar geophysical network missions recommended by the latest Decadal Survey (1) and previously the International Lunar Network (2). Be-

## CORE

Provided by NASA Technical Reports Server

avoid the effect of potentially long-term changes of the surface thermal environment (3, 4). The recently developed pneumatic excavation system (5) can largely meet the low-power, low-mass, and the depth requirements. The system utilizes a stem which winds out of a pneumatically driven reel and pushes its conical tip into the regolith. Simultaneously, gas jets, emitted from the cone tip, loosen and blow away the soil.

The thermal sensors consist of resistance temperature detectors (RTDs) embedded on the stem and an *in-situ* thermal conductivity probe attached to the cone tip. The thermal conductivity probe consists of a short 'needle' (2.4-mm diam. and 15- to 20-mm length) that contains a platinum RTD wrapped in a coil of heater wire. During a deployment, when the penetrating cone reaches a desired depth, it stops blowing gas, and the stem pushes the needle into the yet-to-be excavated, undisturbed bottom soil. Then, it begins heating and monitors the temperature. Thermal conductivity of the soil can be determined from the rate of temperature increase with time. When the measurement is complete, the system resumes excavation until it reaches the next targeted depth.

## Excavation Test: 1 m into JSC-1A lunar simulant in near vacuum

The latest prototype of the heat flow probe has been tested successfully in excavating one meter




[Metadata, citation and similar papers at core.ac.uk](#)




of Nitrogen gas pressurized at 400 kPa, while weight on bit (WOB) was kept under 30 N most of the time.




3-m excavation test in preparation

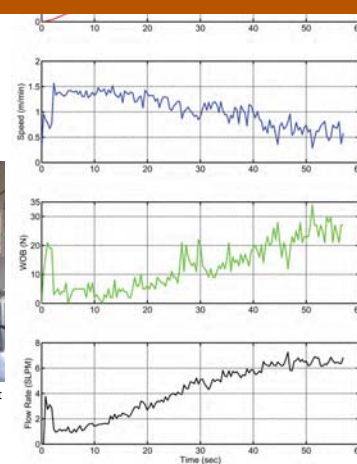

## The Pneumatic Heat Flow System

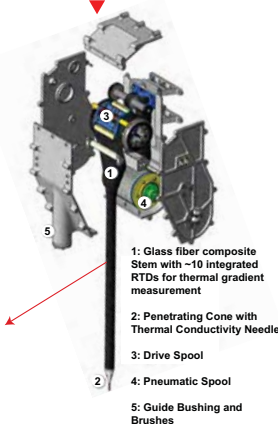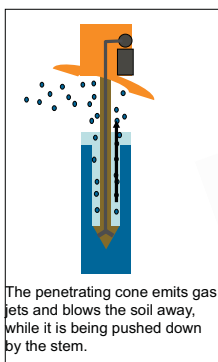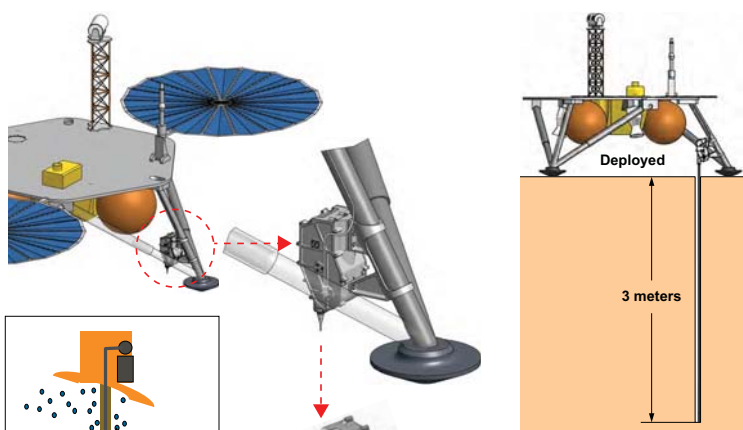


Fully assembled prototype, stowed.



- 1: Glass fiber composite Stem with ~10 integrated RTDs for thermal gradient measurement
- 2: Penetrating Cone with Thermal Conductivity Needle
- 3: Drive Spool
- 4: Pneumatic Spool
- 5: Guide Bushing and Brushes


## In-situ Thermal Conductivity Probe

A prototype of the thermal conductivity system has been fabricated and tested with the lunar simulant JSC-1A in a vacuum chamber. Side-by-side measurements of the current system and a commercial thermal conductivity probe (*Decagon TR-1*) were carried out at chamber pressures ranging from 0.0014 to 744 Torr. The simulant was compacted before the measurements. At pressures lower than 0.1 Torr, thermal conductivity of JSC-1A is nearly constant at 0.005 W/mK [6].

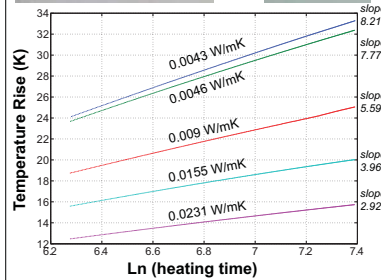

References Cited: [1] National Research Council (2011) pub# 13117. [2] Cohen et al. (2009) ILN Final Report. [3] Wiecek et al. (2006), LPSC XXXVII, 1682. [4] Saito et al. (2006), Bull. Japanese Soc. Planet. Sc. 16, 158-164. [5] Zacny et al. (2011) LEAG 2028. [6] Nagihara et al., in press, Planetary & Space Sci.

## Probe Stem Fully Extended

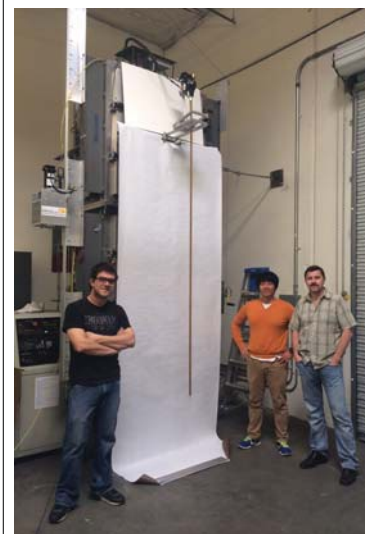

The work presented here is supported by the Planetary Instrument Definition and Development Program of NASA-SMD.