

NASA/TM-2014-218266



# Maneuver Acoustic Flight Test of the Bell 430 Helicopter Data Report

*Michael E. Watts and Eric Greenwood  
Langley Research Center, Hampton, Virginia*

*Charles D. Smith  
Analytical Mechanics Associates, Inc., Hampton, Virginia*

*Royce Snider  
Bell Helicopter Textron, Inc., Fort Worth, Texas*

*David A. Conner  
U.S. Army Research, Development and Engineering Command  
Aviation and Missile Research, Development and Engineering Center  
Aeroflightdynamics Directorate, Langley Research Center, Hampton, Virginia*

## NASA STI Program . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA scientific and technical information (STI) program plays a key part in helping NASA maintain this important role.

The NASA STI program operates under the auspices of the Agency Chief Information Officer. It collects, organizes, provides for archiving, and disseminates NASA's STI. The NASA STI program provides access to the NASA Aeronautics and Space Database and its public interface, the NASA Technical Report Server, thus providing one of the largest collections of aeronautical and space science STI in the world. Results are published in both non-NASA channels and by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA Programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers, but having less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or co-sponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services also include organizing and publishing research results, distributing specialized research announcements and feeds, providing information desk and personal search support, and enabling data exchange services.

For more information about the NASA STI program, see the following:

- Access the NASA STI program home page at <http://www.sti.nasa.gov>
- E-mail your question to [help@sti.nasa.gov](mailto:help@sti.nasa.gov)
- Fax your question to the NASA STI Information Desk at 443-757-5803
- Phone the NASA STI Information Desk at 443-757-5802
- Write to:  
STI Information Desk  
NASA Center for AeroSpace Information  
7115 Standard Drive  
Hanover, MD 21076-1320

NASA/TM-2014-218266



# Maneuver Acoustic Flight Test of the Bell 430 Helicopter Data Report

*Michael E. Watts and Eric Greenwood  
Langley Research Center, Hampton, Virginia*

*Charles D. Smith  
Analytical Mechanics Associates, Inc., Hampton, Virginia*

*Royce Snider  
Bell Helicopter Textron, Inc., Fort Worth, Texas*

*David A. Conner  
U.S. Army Research, Development and Engineering Command  
Aviation and Missile Research, Development and Engineering Center  
Aeroflightdynamics Directorate, Langley Research Center, Hampton, Virginia*

National Aeronautics and  
Space Administration

Langley Research Center  
Hampton, Virginia 23681-2199

May 2014

## **Acknowledgments**

The test could not have been accomplished without a team of dedicated individuals. The onsite test team consisted of three NASA (Michael Watts, Eric Greenwood and Benny Cheung), two U.S. Army (David Conner and Ben Sim), ten Bell (Royce Snider, John Brieger, Joel Baden, Rick Gorton, Jay Latham, Pete Trevino, Huy K Nguyen, Luther Simmons, Terry Dalehite and Britt Jolley), three AMA (Keith Scudder, Mike Walke and Charles Smith), two U.S. Air Force (Todd Dulle and Jeremy Brown), one University of Maryland (Rick Sickenberger), and two University of Mississippi personnel (Xiaoi Di and Rommel Stribling). Numerous NASA, Bell, University of Maryland, U.S. Army and Air Force personnel also provided support before, during and after the test. The authors would like to thank their tireless effort, professionalism and dedication in making this test happen.

The use of trademarks or names of manufacturers in this report is for accurate reporting and does not constitute an official endorsement, either expressed or implied, of such products or manufacturers by the National Aeronautics and Space Administration.

Available from:

NASA Center for AeroSpace Information  
7115 Standard Drive  
Hanover, MD 21076-1320  
443-757-5802

# Abstract

A cooperative flight test by NASA, Bell Helicopter and the U.S. Army to characterize the steady state acoustics and measure the maneuver noise of a Bell Helicopter 430 aircraft was accomplished. The test occurred during June/July 2011 at Eglin Air Force Base, Florida. This test gathered a total of 410 test points over 10 test days and compiled an extensive database of dynamic maneuver measurements. Three microphone arrays with up to 31 microphones in each were used to acquire acoustic data. Aircraft data included Differential Global Positioning System, aircraft state and rotor state information. This paper provides an overview of the test and documents the data acquired.

# Contents

<b>1</b>	<b>Introduction</b>	<b>18</b>
<b>2</b>	<b>Technical Approach</b>	<b>19</b>
<b>3</b>	<b>Test Aircraft</b>	<b>19</b>
<b>4</b>	<b>Aircraft Measurements</b>	<b>20</b>
4.1	Aircraft Position . . . . .	20
4.2	Control Positions . . . . .	20
4.3	Aircraft State . . . . .	21
4.4	Tip Path Plane Orientation Measurement . . . . .	21
<b>5</b>	<b>Bell Aircraft Data Files</b>	<b>22</b>
<b>6</b>	<b>Microphone Instrumentation</b>	<b>22</b>
6.1	Source Noise Microphone Layout . . . . .	23
6.2	Maneuvering Noise Microphone Layout . . . . .	24
6.3	Terminal Area Noise Microphone Layout . . . . .	24
<b>7</b>	<b>Weather Instrumentation</b>	<b>24</b>
<b>8</b>	<b>Flight Conditions Flown</b>	<b>25</b>
8.1	Level Flight Source Noise Mapping . . . . .	25
8.2	Steady Descent Source Noise Mapping . . . . .	26
8.2.1	Steady Turn Source Noise Mapping . . . . .	27
8.3	Maneuvers . . . . .	28
8.3.1	Collective Pull-Up or Push-Over . . . . .	29
8.3.2	Cyclic Pitch-Up . . . . .	30
8.3.3	Cyclic Roll . . . . .	30
8.3.4	Quick Stop/Start . . . . .	30
8.3.5	Roll Angle Changes During Climbing Flight . . . . .	31
8.3.6	Roll Angle Changes During Accelerating Flight . . . . .	31

8.4	Terminal Area Approaches . . . . .	31
<b>9</b>	<b>Electronic Data</b>	<b>33</b>
9.1	Microphone Location File . . . . .	33
9.2	Acoustic Pressure Time History Data . . . . .	34
9.3	Test Reference Data . . . . .	34
9.4	Aircraft Data . . . . .	34
9.5	Aircraft Tracking Data . . . . .	35
9.6	Individual Semi-spheres . . . . .	35
9.7	Averaged Semi-spheres . . . . .	35
9.8	Weather Data . . . . .	35
9.8.1	NASA Profiling Weather Balloon . . . . .	35
9.8.2	NASA Stationary Weather Sensors . . . . .	36
9.8.3	Ole Miss Stationary Weather Balloon . . . . .	36
9.9	Test Cards . . . . .	36
<b>10</b>	<b>Concluding Remarks</b>	<b>37</b>
<b>A</b>	<b>Empirical Noise Radiation Model</b>	<b>39</b>

## List of Tables

1	Bell Model 430 Specifications . . . . .	40
2	Aircraft Locations . . . . .	40
3	Data Availability . . . . .	41
4	Source Array . . . . .	42
5	Primary Test Site Locations . . . . .	44
6	Maneuver Array . . . . .	45
7	Terminal Area Array . . . . .	47
8	Weather Instrumentation Availability . . . . .	49
9	Source Level Flight Test Points . . . . .	50
10	Steady Descent Flight Test Points . . . . .	50
11	Flight 1273 Test Card, 6/17/2011, Source Array . . . . .	51
12	Flight 1274 Test Card, 6/18/2011, Source Array . . . . .	53
13	Flight 1275 Test Card, 6/19/2011, Source Array . . . . .	55
14	Steady Turn Flight Test Points . . . . .	57
15	Flight 1277 Test Card, 6/22/2011, Source Array . . . . .	58
16	Flight 1278 Test Card, 6/24/2011, Maneuver Array . . . . .	59
17	Flight 1280 Test Card, 6/25/2011, Maneuver Array . . . . .	60
18	Flight 1282 Test Card, 6/26/2011, Maneuver Array . . . . .	64
19	Flight 1285 Test Card, 6/28/2011, Maneuver Array . . . . .	66
20	Flight 1287 Test Card, 6/30/2011, Maneuver Array . . . . .	69
21	Collective Flight Test Points . . . . .	72
22	Cyclic Pitch-Up Flight Test Points . . . . .	72
23	Cyclic Roll Flight Test Points . . . . .	73
24	Quick Start, Quick Stop Flight Test Points . . . . .	73

25	Roll Angle Change During Climbing Flight Test Points . .	73
26	Roll Angle Change During Accelerating/Decelerating Flight Test Points . . . . .	73
27	Flight 1288 Test Card, 7/1/2011, Terminal Area Array . .	74
28	Reference File Variable Names . . . . .	76
29	Pressure Time History File Contents . . . . .	77
30	Low Frequency Aircraft Data File Variables . . . . .	78
31	High Frequency Aircraft Data File Variables . . . . .	79
32	Azimuth Aircraft Data File Variables . . . . .	80
33	Hemisphere File Contents . . . . .	80

## List of Figures

1	Rotorcraft acoustics issues. . . . .	81
2	Bell 430 helicopter. . . . .	81
3	Testing area overview. . . . .	82
4	MicroADAS installation in aircraft. . . . .	83
5	Flight course deviation indicator. . . . .	84
6	Differential Global Positioning System (DGPS) ground station setup. . . . .	85
7	TPP cameras mounted on pylon. . . . .	85
8	TPP reflective tape mounted on rotor tip. . . . .	86
9	Quick-look aircraft position. . . . .	87
10	Quick-look aircraft control positions. . . . .	88
11	Quick-look aircraft state parameters. . . . .	89
12	Quick-look aircraft control attitudes. . . . .	90
13	Quick-look aircraft attitude rates. . . . .	91
14	Wireless Acoustic Measurement System. . . . .	92
15	Source noise microphone array. . . . .	93
16	Source noise microphone array. . . . .	94
17	Maneuver microphone array. . . . .	95
18	Maneuver microphone array. . . . .	96
19	Maneuver microphone array projection onto semi-sphere. . . . .	97
20	Lambert conformal conic projection of an acoustic radia- tion semi-sphere. . . . .	98
21	Terminal area microphone array. . . . .	99
22	Terminal area microphone array. . . . .	100
23	Weather instrumentation locations. . . . .	101
24	Level flight, 80 KIAS housekeeping runs. . . . .	102
25	Semi-spheres for low speed level flight, Overall Sound Pressure Level (OASPL). . . . .	103
26	Semi-spheres for mid speed level flight, OASPL. . . . .	104
27	Semi-spheres for high speed level flight, OASPL. . . . .	105
28	Semi-spheres for low speed level flight, Blade Vortex Inter- action Sound Pressure Level (BVISPL). . . . .	106

29	Semi-spheres for mid speed level flight, BVISPL. . . . .	107
30	Semi-spheres for high speed level flight, BVISPL. . . . .	108
31	Source noise descent cases flown. . . . .	109
32	Descent hemi-sphere Be430103, 75.6 KTAS, -3.1° . . . . .	110
33	Descent hemi-sphere Be430104, 78.9 KTAS, -2.7° . . . . .	111
34	Descent hemi-sphere Be430105, 51.0 KTAS, -2.5° . . . . .	112
35	Descent hemi-sphere Be430106, 50.0 KTAS, -3.4° . . . . .	113
36	Descent hemi-sphere Be430108, 73.0 KTAS, -5.0° . . . . .	114
37	Descent hemi-sphere Be430109, 66.6 KTAS, -5.3° . . . . .	115
38	Descent hemi-sphere Be430110, 40.1 KTAS, -4.7° . . . . .	116
39	Descent hemi-sphere Be430112, 42.1 KTAS, -5.5° . . . . .	117
40	Descent hemi-sphere Be430113, 48.8 KTAS, -5.3° . . . . .	118
41	Descent hemi-sphere Be430114, 53.2 KTAS, -4.9° . . . . .	119
42	Descent hemi-sphere Be430115, 59.2 KTAS, -4.9° . . . . .	120
43	Descent hemi-sphere Be430116, 81.0 KTAS, -5.5° . . . . .	121
44	Descent hemi-sphere Be430145, 56.4 KTAS, -11.2° . . . . .	122
45	Descent hemi-sphere Be430146, 53.7 KTAS, -11.4° . . . . .	123
46	Descent hemi-sphere Be430147, 55.2 KTAS, -11.8° . . . . .	124
47	Descent hemi-sphere Be430148, 77.9 KTAS, -11.8° . . . . .	125
48	Descent hemi-sphere Be430149, 79.9 KTAS, -10.9° . . . . .	126
49	Descent hemi-sphere Be430150, 59.6 KTAS, -9.1° . . . . .	127
50	Descent hemi-sphere Be430151, 71.6 KTAS, -8.4° . . . . .	128
51	Descent hemi-sphere Be430152, 58.5 KTAS, -9.7° . . . . .	129
52	Descent hemi-sphere Be430153, 80.9 KTAS, -10.0° . . . . .	130
53	Descent hemi-sphere Be430154, 88.6 KTAS, -9.4° . . . . .	131
54	Descent hemi-sphere Be430155, 82.3 KTAS, -10.2° . . . . .	132
55	Descent hemi-sphere Be430156, 57.2 KTAS, -8.3° . . . . .	133
56	Descent hemi-sphere Be430157, 56.3 KTAS, -6.8° . . . . .	134
57	Descent hemi-sphere Be430158, 55.7 KTAS, -6.9° . . . . .	135
58	Descent hemi-sphere Be430159, 81.1 KTAS, -6.6° . . . . .	136
59	Descent hemi-sphere Be430177, 82.2 KTAS, -6.4° . . . . .	137
60	Descent hemi-sphere Be430178, 82.1 KTAS, -6.9° . . . . .	138
61	Descent hemi-sphere Be430182, 61.4 KTAS, -8.1° . . . . .	139
62	Descent hemi-sphere Be430183, 55.2 KTAS, -8.4° . . . . .	140
63	Descent hemi-sphere Be430184, 81.3 KTAS, -8.5° . . . . .	141
64	Descent hemi-sphere Be430185, 82.2 KTAS, -9.0° . . . . .	142
65	Descent hemi-sphere Be430187, 87.1 KTAS, -7.5° . . . . .	143
66	Descent hemi-sphere Be430188, 85.7 KTAS, -5.9° . . . . .	144
67	Descent hemi-sphere Be430189, 92.1 KTAS, -5.8° . . . . .	145
68	Descent hemi-sphere Be430190, 94.4 KTAS, -6.2° . . . . .	146
69	Descent hemi-sphere Be430191, 63.3 KTAS, -5.8° . . . . .	147
70	Descent hemi-sphere Be430192, 68.9 KTAS, -11.2° . . . . .	148
71	Descent hemi-sphere Be430193, 72.2 KTAS, -11.6° . . . . .	149
72	Descent hemi-sphere Be430194, 93.6 KTAS, -11.5° . . . . .	150
73	Descent hemi-sphere Be430195, 45.4 KTAS, -9.2° . . . . .	151
74	Descent hemi-sphere Be430196, 72.9 KTAS, -7.6° . . . . .	152



75	Descent hemi-sphere Be430197, 78.0 KTAS, -8.1° . . . . .	153
76	Descent hemi-sphere Be430198, 89.4 KTAS, -8.6° . . . . .	154
77	Descent hemi-sphere Be430199, 80.4 KTAS, -5.0° . . . . .	155
78	Descent hemi-sphere Be430200, 78.3 KTAS, -5.9° . . . . .	156
79	Descent hemi-sphere Be430201, 68.9 KTAS, -6.7° . . . . .	157
80	Descent hemi-sphere Be430202, 91.2 KTAS, -7.1° . . . . .	158
81	Source noise descent matrix maximum BVISPL. . . . .	159
82	Flight path angle sweep at 80 knots true airspeed. . . . .	160
83	True airspeed sweep at -6° flight path angle. . . . .	161
84	Steady turn procedure sketch. . . . .	162
85	Steady turn flight paths (radius is to scale). . . . .	163
86	Steady 80 knots, 30° right turn microphone projection. .	164
87	Steady turn OASPL semi-spheres. . . . .	165
88	Steady turn BVISPL semi-spheres. . . . .	166
89	Cyclic pitch up from 80 knot, 6° descent housekeeping points. . . . .	167
90	Maneuver condition L1, 80 KIAS, level, run number 278301	168
91	Maneuver condition L1, 80 KIAS, level, run number 280341	169
92	Maneuver condition L1,80 KIAS, level, run number 280405	170
93	Maneuver condition L1, 80 KIAS, level, run number 282411	171
94	Maneuver condition L1, 80 KIAS, level, run number 282440	172
95	Maneuver condition L1, 80 KIAS, level, run number 282451	173
96	Maneuver condition L1, 80 KIAS, level, run number 285461	174
97	Maneuver condition L1, 80 KIAS, level, run number 285516	175
98	Maneuver condition L1, 80 KIAS, level, run number 287521	176
99	Maneuver condition L1, 80 KIAS, level, run number 287574	177
100	Maneuver condition A4, 60 KIAS, -3° , run number 285497	178
101	Maneuver condition A5, 60 KIAS, -4.5° , run number 280398	179
102	Maneuver condition A6, 60 KIAS, -6° , run number 282446	180
103	Maneuver condition A8, 60 KIAS, -9° , run number 282444	181
104	Maneuver condition A10, 60 KIAS, -12° , run number 282441	182
105	Maneuver condition A10, 60 KIAS, -12° , run number 282442	183
106	Maneuver condition A10, 60 KIAS, -12° , run number 285494	184
107	Maneuver condition A10, 60 KIAS, -12° , run number 285495	185
108	Maneuver condition A12, 70 KIAS, -4.5° , run number 280399 . . . . .	186
109	Maneuver condition A16, 70 KIAS, -10.5° , run number 280402 . . . . .	187
110	Maneuver condition A16, 70 KIAS, -10.5° , run number 280403 . . . . .	188
111	Maneuver condition A16, 70 KIAS, -10.5° , run number 280404 . . . . .	189
112	Maneuver condition A18, 80 KIAS, -3° , run number 282449	190
113	Maneuver condition A18, 80 KIAS, -3° , run number 285498	191
114	Maneuver condition A19, 80 KIAS, -4.5° , run number 280400 . . . . .	192

115	Maneuver condition A22, 80 KIAS, $-9^\circ$ , run number 282445193	
116	Maneuver condition A24, 80 KIAS, $-12^\circ$ , run number 282443194	
117	Maneuver condition A24, 80 KIAS, $-12^\circ$ , run number 285496195	
118	Maneuver condition A26, 90 KIAS, $-4.5^\circ$ run number 280401196	
119	Maneuver condition C1, 60 KIAS, slow collective pull-up, run number 282435 . . . . .	197
120	Maneuver condition C1, 60 KIAS, slow collective pull-up, run number 282436 . . . . .	198
121	Maneuver condition C3, 60 KIAS, fast collective pull-up, run number 282437 . . . . .	199
122	Maneuver condition C3, 60 KIAS, fast collective pull-up, run number 282438 . . . . .	200
123	Maneuver condition C4, 80 KIAS, slow collective pull-up, run number 280390 . . . . .	201
124	Maneuver condition C4, 80 KIAS, slow collective pull-up, run number 280391 . . . . .	202
125	Maneuver condition C4, 80 KIAS, slow collective pull-up, run number 282434 . . . . .	203
126	Maneuver condition C6, 80 KIAS, fast collective pull-up, run number 280392 . . . . .	204
127	Maneuver condition C6, 80 KIAS, fast collective pull-up, run number 280393 . . . . .	205
128	Maneuver condition C6, 80 KIAS, fast collective pull-up, run number 280394 . . . . .	206
129	Maneuver condition C6, 80 KIAS, fast collective pull-up, run number 280395 . . . . .	207
130	Maneuver condition C6, 80 KIAS, fast collective pull-up, run number 280396 . . . . .	208
131	Maneuver condition C6, 80 KIAS, fast collective pull-up, run number 282433 . . . . .	209
132	Maneuver condition C10, 80 KIAS, slow collective push- over, run number 282426 . . . . .	210
133	Maneuver condition C10, 80 KIAS, slow collective push- over, run number 282427 . . . . .	211
134	Maneuver condition C10, 80 KIAS, slow collective push- over, run number 282428 . . . . .	212
135	Maneuver condition C10, 80 KIAS, slow collective push- over, run number 287535 . . . . .	213
136	Maneuver condition C10, 80 KIAS, slow collective push- over, run number 287536 . . . . .	214
137	Maneuver condition C12, 80 KIAS, fast collective push- over, run number 282429 . . . . .	215
138	Maneuver condition C12, 80 KIAS, slow collective push- over, run number 282430 . . . . .	216
139	Maneuver condition C12, 80 KIAS, slow collective push- over, run number 282431 . . . . .	217

140	Maneuver condition C12, 80 KIAS, slow collective push-over, run number 282432 . . . . .	218
141	Maneuver condition C12, 80 KIAS, slow collective push-over, run number 287537 . . . . .	219
142	Maneuver condition C12, 80 KIAS, slow collective push-over, run number 287538 . . . . .	220
143	Maneuver condition C12, 80 KIAS, slow collective push-over, run number 287539 . . . . .	221
144	Maneuver condition D1, 60 KIAS, level, slow cyclic pitch up, run number 282439 . . . . .	222
145	Maneuver condition D3, 60 KIAS, level, fast cyclic pitch up, run number 280363 . . . . .	223
146	Maneuver condition D3, 60 KIAS, level, fast cyclic pitch up, run number 280364 . . . . .	224
147	Maneuver condition D3, 60 KIAS, level, fast cyclic pitch up, run number 280365 . . . . .	225
148	Maneuver condition D3, 60 KIAS, level, fast cyclic pitch up, run number 280366 . . . . .	226
149	Maneuver condition D3, 60 KIAS, level, fast cyclic pitch up, run number 280367 . . . . .	227
150	Maneuver condition D3, 60 KIAS, level, fast cyclic pitch up, run number 287531 . . . . .	228
151	Maneuver condition D4, 80 KIAS, level, slow cyclic pitch up, run number 280356 . . . . .	229
152	Maneuver condition D4, 80 KIAS, level, slow cyclic pitch up, run number 280357 . . . . .	230
153	Maneuver condition D4, 80 KIAS, level, slow cyclic pitch up, run number 280358 . . . . .	231
154	Maneuver condition D5, 80 KIAS, level, medium cyclic pitch up, run number 285475 . . . . .	232
155	Maneuver condition D5, 80 KIAS, level, medium cyclic pitch up, run number 285476 . . . . .	233
156	Maneuver condition D6, 80 KIAS, level, fast cyclic pitch up, run number 280359 . . . . .	234
157	Maneuver condition D6, 80 KIAS, level, fast cyclic pitch up, run number 280360 . . . . .	235
158	Maneuver condition D6, 80 KIAS, level, fast cyclic pitch up, run number 280361 . . . . .	236
159	Maneuver condition D6, 80 KIAS, level, fast cyclic pitch up, run number 280362 . . . . .	237
160	Maneuver condition D6, 80 KIAS, level, fast cyclic pitch up, run number 287530 . . . . .	238
161	Maneuver condition D7, 60 KIAS, $-6^\circ$ , slow cyclic pitch up, run number 280350 . . . . .	239
162	Maneuver condition D7, 60 KIAS, $-6^\circ$ , slow cyclic pitch up, run number 280351 . . . . .	240

163	Maneuver condition D9, 60 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 280352 . . . . .	241
164	Maneuver condition D9, 60 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 280353 . . . . .	242
165	Maneuver condition D9, 60 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 280354 . . . . .	243
166	Maneuver condition D9, 60 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 280355 . . . . .	244
167	Maneuver condition D9, 60 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 287533 . . . . .	245
168	Maneuver condition D10, 80 KIAS, $-6^\circ$ , slow cyclic pitch up, run number 278303 . . . . .	246
169	Maneuver condition D10, 80 KIAS, $-6^\circ$ , slow cyclic pitch up, run number 278304 . . . . .	247
170	Maneuver condition D10, 80 KIAS, $-6^\circ$ , slow cyclic pitch up, run number 278305 . . . . .	248
171	Maneuver condition D10, 80 KIAS, $-6^\circ$ , slow cyclic pitch up, run number 278306 . . . . .	249
172	Maneuver condition D10, 80 KIAS, $-6^\circ$ , slow cyclic pitch up, run number 278330 . . . . .	250
173	Maneuver condition D10, 80 KIAS, $-6^\circ$ , slow cyclic pitch up, run number 278331 . . . . .	251
174	Maneuver condition D10, 80 KIAS, $-6^\circ$ , slow cyclic pitch up, run number 282413 . . . . .	252
175	Maneuver condition D10, 80 KIAS, $-6^\circ$ , slow cyclic pitch up, run number 282414 . . . . .	253
176	Maneuver condition D10, 80 KIAS, $-6^\circ$ , slow cyclic pitch up, run number 282415 . . . . .	254
177	Maneuver condition D11, 80 KIAS, $-6^\circ$ , medium cyclic pitch up, run number 285478 . . . . .	255
178	Maneuver condition D12, 80 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 278302 . . . . .	256
179	Maneuver condition D12, 80 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 278307 . . . . .	257
180	Maneuver condition D12, 80 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 278308 . . . . .	258
181	Maneuver condition D12, 80 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 278309 . . . . .	259
182	Maneuver condition D12, 80 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 278310 . . . . .	260
183	Maneuver condition D12, 80 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 280342 . . . . .	261
184	Maneuver condition D12, 80 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 280406 . . . . .	262
185	Maneuver condition D12, 80 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 282412 . . . . .	263

186	Maneuver condition D12, 80 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 282450 . . . . .	264
187	Maneuver condition D12, 80 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 285462 . . . . .	265
188	Maneuver condition D12, 80 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 285517 . . . . .	266
189	Maneuver condition D12, 80 KIAS, $-6^\circ$ , fast cyclic pitch up, run number 287575 . . . . .	267
190	Maneuver condition D19, 80 KIAS, $-9^\circ$ , slow cyclic pitch up, run number 285490 . . . . .	268
191	Maneuver condition D19, 80 KIAS, $-9^\circ$ , slow cyclic pitch up, run number 285491 . . . . .	269
192	Maneuver condition D21, 80 KIAS, $-9^\circ$ , fast cyclic pitch up, run number 285492 . . . . .	270
193	Maneuver condition D21, 80 KIAS, $-9^\circ$ , fast cyclic pitch up, run number 285493 . . . . .	271
194	Maneuver condition D22, 100 KIAS, level, medium cyclic pitch up, run number 287526 . . . . .	272
195	Maneuver condition D22, 100 KIAS, level, medium cyclic pitch up, run number 287527 . . . . .	273
196	Maneuver condition D22, 100 KIAS, level, medium cyclic pitch up, run number 287528 . . . . .	274
197	Maneuver condition D23, 100 KIAS, level, fast cyclic pitch up, run number 287529 . . . . .	275
198	Maneuver condition R3, 60 KIAS, level, fast cyclic roll left, run number 285465 . . . . .	276
199	Maneuver condition R3, 60 KIAS, level, fast cyclic roll left, run number 285466 . . . . .	277
200	Maneuver condition R4, 80 KIAS, level, slow cyclic roll left, run number 280373 . . . . .	278
201	Maneuver condition R4, 80 KIAS, level, slow cyclic roll left, run number 280374 . . . . .	279
202	Maneuver condition R4, 80 KIAS, level, slow cyclic roll left, run number 280375 . . . . .	280
203	Maneuver condition R4, 80 KIAS, level, slow cyclic roll left, run number 280376 . . . . .	281
204	Maneuver condition R4, 80 KIAS, level, slow cyclic roll left, run number 280377 . . . . .	282
205	Maneuver condition R5, 80 KIAS, level, medium cyclic roll left, run number 285473 . . . . .	283
206	Maneuver condition R5, 80 KIAS, level, medium cyclic roll left, run number 285474 . . . . .	284
207	Maneuver condition R6, 80 KIAS, level, fast cyclic roll left, run number 280368 . . . . .	285
208	Maneuver condition R6, 80 KIAS, level, fast cyclic roll left, run number 280369 . . . . .	286

209	Maneuver condition R6, 80 KIAS, level, fast cyclic roll left, run number 280371 . . . . .	287
210	Maneuver condition R6, 80 KIAS, level, fast cyclic roll left, run number 280372 . . . . .	288
211	Maneuver condition R6, 80 KIAS, level, fast cyclic roll left, run number 285471 . . . . .	289
212	Maneuver condition R6, 80 KIAS, level, fast cyclic roll left, run number 285472 . . . . .	290
213	Maneuver condition R9, 60 KIAS, $-6^\circ$ , fast cyclic roll left, run number 285488 . . . . .	291
214	Maneuver condition R9, 60 KIAS, $-6^\circ$ , fast cyclic roll left, run number 285489 . . . . .	292
215	Maneuver condition R10, 80 KIAS, $-6^\circ$ , slow cyclic roll left, run number 278316 . . . . .	293
216	Maneuver condition R10, 80 KIAS, $-6^\circ$ , slow cyclic roll left, run number 278317 . . . . .	294
217	Maneuver condition R10, 80 KIAS, $-6^\circ$ , slow cyclic roll left, run number 278318 . . . . .	295
218	Maneuver condition R10, 80 KIAS, $-6^\circ$ , slow cyclic roll left, run number 278319 . . . . .	296
219	Maneuver condition R10, 80 KIAS, $-6^\circ$ , slow cyclic roll left, run number 278320 . . . . .	297
220	Maneuver condition R10, 80 KIAS, $-6^\circ$ , slow cyclic roll left, run number 278321 . . . . .	298
221	Maneuver condition R10, 80 KIAS, $-6^\circ$ , slow cyclic roll left, run number 278322 . . . . .	299
222	Maneuver condition R10, 80 KIAS, $-6^\circ$ , slow cyclic roll left, run number 282418 . . . . .	300
223	Maneuver condition R10, 80 KIAS, $-6^\circ$ , slow cyclic roll left, run number 282419 . . . . .	301
224	Maneuver condition R10, 80 KIAS, $-6^\circ$ , slow cyclic roll left, run number 282420 . . . . .	302
225	Maneuver condition R10, 80 KIAS, $-6^\circ$ , slow cyclic roll left, run number 282421 . . . . .	303
226	Maneuver condition R11, 80 KIAS, $-6^\circ$ , medium cyclic roll left, run number 285481 . . . . .	304
227	Maneuver condition R11, 80 KIAS, $-6^\circ$ , medium cyclic roll left, run number 285482 . . . . .	305
228	Maneuver condition R12, 80 KIAS, $-6^\circ$ , fast cyclic roll left, run number 278311 . . . . .	306
229	Maneuver condition R12, 80 KIAS, $-6^\circ$ , fast cyclic roll left, run number 278312 . . . . .	307
230	Maneuver condition R12, 80 KIAS, $-6^\circ$ , fast cyclic roll left, run number 278313 . . . . .	308
231	Maneuver condition R12, 80 KIAS, $-6^\circ$ , fast cyclic roll left, run number 278314 . . . . .	309

232	Maneuver condition R12, 80 KIAS, $-6^\circ$ , fast cyclic roll left, run number 278315 . . . . .	310
233	Maneuver condition R12, 80 KIAS, $-6^\circ$ , fast cyclic roll left, run number 282416 . . . . .	311
234	Maneuver condition R12, 80 KIAS, $-6^\circ$ , fast cyclic roll left, run number 282417 . . . . .	312
235	Maneuver condition R12, 80 KIAS, $-6^\circ$ , fast cyclic roll left, run number 285479 . . . . .	313
236	Maneuver condition R12, 80 KIAS, $-6^\circ$ , fast cyclic roll left, run number 285480 . . . . .	314
237	Maneuver condition R15, 60 KIAS, level, fast cyclic roll right, run number 280386 . . . . .	315
238	Maneuver condition R15, 60 KIAS, level, fast cyclic roll right, run number 280387 . . . . .	316
239	Maneuver condition R15, 60 KIAS, level, fast cyclic roll right, run number 280388 . . . . .	317
240	Maneuver condition R15, 60 KIAS, level, fast cyclic roll right, run number 280389 . . . . .	318
241	Maneuver condition R15, 60 KIAS, level, fast cyclic roll right, run number 285463 . . . . .	319
242	Maneuver condition R15, 60 KIAS, level, fast cyclic roll right, run number 285464 . . . . .	320
243	Maneuver condition R16, 80 KIAS, level, slow cyclic roll right, run number 280382 . . . . .	321
244	Maneuver condition R16, 80 KIAS, level, slow cyclic roll right, run number 280383 . . . . .	322
245	Maneuver condition R16, 80 KIAS, level, slow cyclic roll right, run number 280384 . . . . .	323
246	Maneuver condition R16, 80 KIAS, level, slow cyclic roll right, run number 280385 . . . . .	324
247	Maneuver condition R17, 80 KIAS, level, medium cyclic roll right, run number 285469 . . . . .	325
248	Maneuver condition R17, 80 KIAS, level, medium cyclic roll right, run number 285470 . . . . .	326
249	Maneuver condition R18, 80 KIAS, level, fast cyclic roll right, run number 280378 . . . . .	327
250	Maneuver condition R18, 80 KIAS, level, fast cyclic roll right, run number 280379 . . . . .	328
251	Maneuver condition R18, 80 KIAS, level, fast cyclic roll right, run number 280380 . . . . .	329
252	Maneuver condition R18, 80 KIAS, level, fast cyclic roll right, run number 280381 . . . . .	330
253	Maneuver condition R18, 80 KIAS, level, fast cyclic roll right, run number 285467 . . . . .	331
254	Maneuver condition R18, 80 KIAS, level, fast cyclic roll right, run number 285468 . . . . .	332

255	Maneuver condition R21, 60 KIAS, $-6^\circ$ , fast cyclic roll right, run number 280346 . . . . .	333
256	Maneuver condition R21, 60 KIAS, $-6^\circ$ , fast cyclic roll right, run number 280347 . . . . .	334
257	Maneuver condition R21, 60 KIAS, $-6^\circ$ , fast cyclic roll right, run number 280348 . . . . .	335
258	Maneuver condition R21, 60 KIAS, $-6^\circ$ , fast cyclic roll right, run number 280349 . . . . .	336
259	Maneuver condition R21, 60 KIAS, $-6^\circ$ , fast cyclic roll right, run number 287532 . . . . .	337
260	Maneuver condition R21, 60 KIAS, $-6^\circ$ , fast cyclic roll right, run number 287534 . . . . .	338
261	Maneuver condition R22, 80 KIAS, $-6^\circ$ , slow cyclic roll right, run number 278327 . . . . .	339
262	Maneuver condition R22, 80 KIAS, $-6^\circ$ , slow cyclic roll right, run number 278328 . . . . .	340
263	Maneuver condition R22, 80 KIAS, $-6^\circ$ , slow cyclic roll right, run number 278329 . . . . .	341
264	Maneuver condition R22, 80 KIAS, $-6^\circ$ , slow cyclic roll right, run number 280343 . . . . .	342
265	Maneuver condition R22, 80 KIAS, $-6^\circ$ , slow cyclic roll right, run number 280344 . . . . .	343
266	Maneuver condition R22, 80 KIAS, $-6^\circ$ , slow cyclic roll right, run number 280345 . . . . .	344
267	Maneuver condition R23, 80 KIAS, $-6^\circ$ , medium cyclic roll right, run number 285486 . . . . .	345
268	Maneuver condition R23, 80 KIAS, $-6^\circ$ , medium cyclic roll right, run number 285487 . . . . .	346
269	Maneuver condition R24, 80 KIAS, $-6^\circ$ , fast cyclic roll right, run number 278323 . . . . .	347
270	Maneuver condition R24, 80 KIAS, $-6^\circ$ , fast cyclic roll right, run number 278324 . . . . .	348
271	Maneuver condition R24, 80 KIAS, $-6^\circ$ , fast cyclic roll right, run number 278325 . . . . .	349
272	Maneuver condition R24, 80 KIAS, $-6^\circ$ , fast cyclic roll right, run number 278326 . . . . .	350
273	Maneuver condition R24, 80 KIAS, $-6^\circ$ , fast cyclic roll right, run number 282422 . . . . .	351
274	Maneuver condition R24, 80 KIAS, $-6^\circ$ , fast cyclic roll right, run number 282423 . . . . .	352
275	Maneuver condition R24, 80 KIAS, $-6^\circ$ , fast cyclic roll right, run number 282424 . . . . .	353
276	Maneuver condition R24, 80 KIAS, $-6^\circ$ , fast cyclic roll right, run number 282425 . . . . .	354
277	Maneuver condition R24, 80 KIAS, $-6^\circ$ , fast cyclic roll right, run number 285483 . . . . .	355



278	Maneuver condition R24, 80 KIAS, $-6^\circ$ , fast cyclic roll right, run number 285484 . . . . .	356
279	Maneuver condition R24, 80 KIAS, $-6^\circ$ , fast cyclic roll right, run number 285485 . . . . .	357
280	Maneuver condition R25, 100 KIAS, level, fast cyclic roll right, run number 287524 . . . . .	358
281	Maneuver condition R25, 100 KIAS, level, fast cyclic roll right, run number 287525 . . . . .	359
282	Maneuver condition R26, 100 KIAS, level, medium cyclic roll right, run number 287522 . . . . .	360
283	Maneuver condition R26, 100 KIAS, level, medium cyclic roll right, run number 287523 . . . . .	361
284	Maneuver condition M2, 80 to 100 KIAS, medium quick start, run number 285499 . . . . .	362
285	Maneuver condition M2, 80 to 100 KIAS, medium quick start, run number 285500 . . . . .	363
286	Maneuver condition M2, 80 to 100 KIAS, medium quick start, run number 287545 . . . . .	364
287	Maneuver condition M3, 80 to 100 KIAS, fast quick start, run number 285501 . . . . .	365
288	Maneuver condition M3, 80 to 100 KIAS, fast quick start, run number 285502 . . . . .	366
289	Maneuver condition M3, 80 to 100 KIAS, fast quick start, run number 285503 . . . . .	367
290	Maneuver condition M3, 80 to 100 KIAS, fast quick start, run number 287546 . . . . .	368
291	Maneuver condition M3, 80 to 60 KIAS, fast quick start, run number 287547 . . . . .	369
292	Maneuver condition M4, 80 to 60 KIAS, slow quick stop, run number 285504 . . . . .	370
293	Maneuver condition M5, 80 to 60 KIAS, medium quick stop, run number 287540 . . . . .	371
294	Maneuver condition M5, 80 to 60 KIAS, medium quick stop, run number 287541 . . . . .	372
295	Maneuver condition M5, 80 to 60 KIAS, medium quick stop, run number 287542 . . . . .	373
296	Maneuver condition M5, 80 to 60 KIAS, medium quick stop, run number 285505 . . . . .	374
297	Maneuver condition M6, 80 to 60 KIAS, fast quick stop, run number 285506 . . . . .	375
298	Maneuver condition M6, 80 to 60 KIAS, fast quick stop, run number 285507 . . . . .	376
299	Maneuver condition M6, 80 to 60 KIAS, fast quick stop, run number 287543 . . . . .	377
300	Maneuver condition M6, 80 to 60 KIAS, fast quick stop, run number 287544 . . . . .	378

301	Maneuver condition Z6, 80 KIAS, 0° to 6° , roll left, run number 287550 . . . . .	379
302	Maneuver condition Z6, 80 KIAS, 0° to 6° , roll left, run number 287551 . . . . .	380
303	Maneuver condition Z9, 80 KIAS, 0° to 9° , roll left, run number 287555 . . . . .	381
304	Maneuver condition Z9, 80 KIAS, 0° to 9° , roll left, run number 287556 . . . . .	382
305	Maneuver condition Z15, 80 KIAS, 0° to 6° , roll right, run number 285513 . . . . .	383
306	Maneuver condition Z15, 80 KIAS, 0° to 6° , roll right, run number 285514 . . . . .	384
307	Maneuver condition Z15, 80 KIAS, 0° to 6° , roll right, run number 285515 . . . . .	385
308	Maneuver condition Z15, 80 KIAS, 0° to 6° , roll right, run number 287548 . . . . .	386
309	Maneuver condition Z15, 80 KIAS, 0° to 6° , roll right, run number 287549 . . . . .	387
310	Maneuver condition Z18, 80 KIAS, 0° to 9° , roll right, run number 287552 . . . . .	388
311	Maneuver condition Z18, 80 KIAS, 0° to 9° , roll right, run number 287553 . . . . .	389
312	Maneuver condition Z18, 80 KIAS, 0° to 9° , roll right, run number 287554 . . . . .	390
313	Maneuver condition Y3, 60 to 80 KIAS at 1 kt/s, level cyclic roll left, run number 287568 . . . . .	391
314	Maneuver condition Y3, 60 to 80 KIAS at 1 kt/s, level cyclic roll left, run number 287569 . . . . .	392
315	Maneuver condition Y6, 60 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 285508 . . . . .	393
316	Maneuver condition Y6, 60 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 285509 . . . . .	394
317	Maneuver condition Y6, 60 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 285510 . . . . .	395
318	Maneuver condition Y6, 60 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 287571 . . . . .	396
319	Maneuver condition Y6, 60 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 287573 . . . . .	397
320	Maneuver condition Y12, 100 to 80 KIAS at 1 kt/s, level cyclic roll left, run number 287560 . . . . .	398
321	Maneuver condition Y12, 100 to 80 KIAS at 1 kt/s, level cyclic roll left, run number 287561 . . . . .	399
322	Maneuver condition Y15, 100 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 287564 . . . . .	400
323	Maneuver condition Y15, 100 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 287565 . . . . .	401

324	Maneuver condition Y21, 60 to 80 KIAS at 1 kt/s, level cyclic roll right, run number 287566 . . . . .	402
325	Maneuver condition Y21, 60 to 80 KIAS at 1 kt/s, level cyclic roll right, run number 287567 . . . . .	403
326	Maneuver condition Y24, 60 to 80 KIAS at 2 kt/s, level cyclic roll right, run number 285511 . . . . .	404
327	Maneuver condition Y24, 60 to 80 KIAS at 2 kt/s, level cyclic roll right, run number 285512 . . . . .	405
328	Maneuver condition Y24, 60 to 80 KIAS at 2 kt/s, level cyclic roll right, run number 287570 . . . . .	406
329	Maneuver condition Y24, 60 to 80 KIAS at 2 kt/s, level cyclic roll right, run number 287572 . . . . .	407
330	Maneuver condition Y30, 100 to 80 KIAS at 1 kt/s, level cyclic roll right, run number 287557 . . . . .	408
331	Maneuver condition Y30, 100 to 80 KIAS at 1 kt/s, level cyclic roll right, run number 287558 . . . . .	409
332	Maneuver condition Y30, 100 to 80 KIAS at 1 kt/s, level cyclic roll right, run number 287559 . . . . .	410
333	Maneuver condition Y33, 100 to 80 KIAS at 2 kt/s, level cyclic roll right, run number 287562 . . . . .	411
334	Maneuver condition Y33, 100 to 80 KIAS at 2 kt/s, level cyclic roll right, run number 287563 . . . . .	412
335	Terminal area condition T1, 60 KIAS constant speed, $-6^\circ$ , run number 288621 . . . . .	413
336	Terminal area condition T1, 60 KIAS constant speed, $-6^\circ$ , run number 288623 . . . . .	414
337	Terminal area condition T2, 60 KIAS constant speed, $-9^\circ$ , run number 288610 . . . . .	415
338	Terminal area condition T2, 60 KIAS constant speed, $-9^\circ$ , run number 288611 . . . . .	416
339	Terminal area condition T2, 60 KIAS constant speed, $-9^\circ$ , run number 288639 . . . . .	417
340	Terminal area condition T3, 100 KIAS decelerating, $-6^\circ$ , run number 288624 . . . . .	418
341	Terminal area condition T3, 100 KIAS decelerating, $-6^\circ$ , run number 288625 . . . . .	419
342	Terminal area condition T4, 100 KIAS decelerating, $-9^\circ$ , run number 288612 . . . . .	420
343	Terminal area condition T4, 100 KIAS decelerating, $-9^\circ$ , run number 288613 . . . . .	421
344	Terminal area condition T5, 100 KIAS decelerating, $-12^\circ$ , run number 288614 . . . . .	422
345	Terminal area condition T5, 100 KIAS decelerating, $-12^\circ$ , run number 288615. Quietest approach profile flown. . . .	423
346	Terminal area condition T6, segmented 100 - 40 KIAS, $-6^\circ$ , 40 - 0 KIAS, $-12^\circ$ , run number 288616 . . . . .	424

347	Terminal area condition T6, segmented 100 - 40 KIAS, -6° , 40 - 0 KIAS, -12° , run number 288617 . . . . .	425
348	Terminal area condition T7, segmented 100 - 90 KIAS, 3° , 90 - 0 KIAS, -9.5° , run number 288618 . . . . .	426
349	Terminal area condition T7, segmented 100 - 90 KIAS, 3° , 90 - 0 KIAS, -9.5° , run number 288619 . . . . .	427
350	Terminal area condition T7, segmented 100 - 90 KIAS, 3° , 90 - 0 KIAS, -9.5° , run number 288620 . . . . .	428
351	Terminal area condition T8, segmented 100 - 95 KIAS, -3° , 95 - 0 KIAS, -7.5° , run number 288626 . . . . .	429
352	Terminal area condition T8, segmented 100 - 95 KIAS, -3° , 95 - 0 KIAS, -7.5° , run number 288627 . . . . .	430
353	Terminal area condition T9, segmented 100 - 110 KIAS, -9° , 110 - 90 KIAS, -7.5° , 90 - 0 KIAS, -4° , run number 288629 . . . . .	431
354	Terminal area condition T9, segmented 100 - 110 KIAS, -9° , 110 - 90 KIAS, -7.5° , 90 - 0 KIAS, -4° , run number 288630 . . . . .	432
355	Terminal area condition T9A, segmented 100 - 110 KIAS, -9° , 110 - 90 KIAS, -7.5° , 90 - 0 KIAS, -4° , run number 288631 . . . . .	433
356	Terminal area condition T9A, segmented 100 - 110 KIAS, -9° , 110 - 90 KIAS, -7.5° , 90 - 0 KIAS, -4° , run number 288632 . . . . .	434
357	Terminal area condition T10A, U shaped, 100 KIAS, -9° , run number 288638 . . . . .	435
358	Terminal area condition T11, pilot discretion, run number 288633 . . . . .	436
359	Terminal area condition T11, pilot discretion, run number 288634 . . . . .	437
360	Terminal area condition T11A, pilot discretion, run number 288635 . . . . .	438
361	Terminal area condition L1, 80 KIAS, level, run number 288601 . . . . .	439
362	Terminal area condition L1, 80 KIAS, level, run number 288602 . . . . .	440
363	Terminal area condition L6, 100 KIAS, level, run number 288603 . . . . .	441
364	Terminal area condition L8, 120 KIAS, level, run number 288604 . . . . .	442
365	Terminal area condition L8, 120 KIAS, level, run number 288605 . . . . .	443
366	Terminal area condition L10, 140 KIAS, level, run number 288606 . . . . .	444
367	Terminal area condition L10, 140 KIAS, level, run number 288607 . . . . .	445

368	Electronic data file structure. . . . .	446
369	Flight 280, profile number 16. . . . .	447

## Acronyms

- AGL** Above Ground Level
- AGLMIP** Above Ground Level at the Maneuver Initiation Point
- ART** Acoustic Re-propagation Technique
- ASCII** American Standard Code for Information Interchange
- BVI** Blade Vortex Interaction
- BVISPL** Blade Vortex Interaction Sound Pressure Level
- CAFTA** Computer Aided Flight Test Analysis
- CTR** Civil Tilt Rotor
- CTRDAC** Civil Tiltrotor Development Advisory Committee
- dB** decibels
- DGPS** Differential Global Positioning System
- FFT** Fast Fourier Transform
- GPS** Global Positioning System
- INU** Inertial Navigation Unit
- KIAS** Knots Indicated Airspeed
- LaRC** Langley Research Center
- MIP** Maneuver Initiation Point
- NetCDF** Network Common Data Form
- OASPL** Overall Sound Pressure Level
- PDU** Pilot Display Unit
- RH** Relative Humidity
- RNM** Rotorcraft Noise Model
- SEL** Sound Exposure Level
- SPL** Sound Pressure Level
- TALP** Terminal Area Landing Point

**TPP** Tip-Path-Plane

**UTC** Coordinated Universal Time

**UTM** Universal Transverse Mercator

**V/ESTOL** Vertical/Extremely Short Take Off and Landing

**WAMS** Wireless Acoustic Measurement System

## 1 Introduction

Airport congestion and flight delays continue to increase as passenger demand continues to grow. Vertical lift aircraft can have a significant impact on reducing airport congestion and flight delays. In 1995, the Civil Tiltrotor Development Advisory Committee (CTRDAC) Final Report to Congress [1] found that Civil Tilt Rotors (CTRs) could produce significant societal benefits, reducing airport congestion, creating jobs, and having a positive impact on the balance of trade. A study in 2001 [2] showed that 26% of commercial operations from the 64 major airports had a trip length of less than 500 miles and could be offloaded from conventional aircraft with Runway Independent Aircraft. This resulted in a reduction of the projected 2017 average delay time from 86.5 minutes to 18.3 minutes, thus showing Vertical/Extremely Short Take Off and Landing (V/ESTOL) aircraft can have a significant impact on commercial operations. An even more recent study [3] focused on the three major regions of Atlanta, Las Vegas and the Northeast Corridor and found that a fleet of 90 to 120 passenger CTRs would reduce the average delays in 2025 from 60 minutes to less than a minute.

Several barriers need to be overcome before the public will accept rotorcraft for commercial scheduled operations. One of the barriers is the acoustic impact of these operations on the community in and around the terminal area. Rotorcraft noise heard on the ground is governed by three physical processes, as shown in Figure 1.

Sound from the rotorcraft is generated via several physical mechanisms across a range of frequencies and directions depending on the flight condition. This noise is propagated through the atmosphere to the receiver. The propagated noise is affected by the atmospheric conditions and the terrain. Finally, the receiver perceives the signal in a way that is dependent on individual human characteristics.

Research flight testing, such as that reported in [4, 5], has been performed by NASA and other agencies to gather data used to validate acoustic codes such as the Rotorcraft Noise Model (RNM) [4] that are designed to predict the noise footprint on the ground. However, these codes currently use steady linear segments for their flight paths. Previous testing has shown an acoustic impact when the helicopter turns [6–8] or maneuvers aggressively [9] but these data sets were either limited in

scope or were acquired in less than ideal weather conditions. A detailed set of maneuvering helicopter acoustic measurements is needed to better understand and incorporate these unsteady flight effects into ground footprint prediction codes.

## 2 Technical Approach

The NASA Langley Research Center (LaRC), Bell Helicopter Textron and the U.S. Army Aeroflightdynamics Directorate conducted a joint flight test to investigate the steady and maneuvering acoustics of a Bell 430 helicopter, shown in Figure 2. This Maneuver Acoustic Flight Test was performed at Eglin Air Force Base, Test Area B-75, in June/July 2011. The primary purpose for this flight test was to obtain a benchmark database of detailed acoustic source noise characteristics for a maneuvering helicopter. This database is intended to be used to predict ground noise footprints due to vehicle operations, to develop low noise operations, and for the development and validation of acoustic prediction methods. Figure 3 shows the B-75 test range with the control area, reference locations and weather balloon systems indicated. The blue lines indicate the two different flight paths used.

## 3 Test Aircraft

The acoustic test was conducted using a Bell Model 430, Serial Number 49001, equipped with retractable wheel landing gear (Figure 2), owned and operated by Bell Helicopter Textron per an experimental airworthiness certificate for research and development. The Bell Model 430 is an intermediate sized 10-place twin-turbine-engine helicopter incorporating a four-bladed main rotor and two-bladed tail rotor configuration. The engines are Allison 250-C40B turboshaft with Full Authority Digital Engine Control. The main transmission is rated at 870 shaft horsepower for single engine operation (30 second rating) and 1311 shaft horsepower for twin engine operation. Maximum gross weight is 9300 pounds (4218 kilograms). Bell Model 430 specifications are shown in Table 1 and key locations on the aircraft are shown in Table 2 in units of inches. The helicopter was externally configured as a standard Model 430 with the following exceptions: a flight test airspeed boom installed with angle of attack and angle of side slip vanes, NASA provided Tip-Path-Plane (TPP) data acquisition cameras mounted on the top of the left and right stub-wings, and small blade tracking tabs installed on the tips of the main rotor blades. The TPP measurement system was removed for the last day of testing.

## 4 Aircraft Measurements

The aircraft was fitted with a customized version of the Micro Airborne Data Acquisition System ( $\mu$ ADAS, Figure 4), including a Pilot Display Unit (PDU). The data acquisition unit of the NASA TPP system was mounted to the Bell Helicopter instrumentation pallet inside the cabin. A calibration that measured the relationship between the main rotor blades geometric pitch angles and the control system positions (aircraft rigging) was performed and documented prior to testing. Several instrumentation cards were damaged during an under-voltage event that occurred during test preparation after the aircraft arrived at Eglin Air Force Base. As a result of this and other issues, not all instruments were available during the entire test. A decision was made to perform each type of testing with the minimum instrumentation required for that test phase. This decision allowed the flight test to continue and instrumentation was added as it was recovered. This reduced the programmatic risk and allowed all phases of testing to be performed. Table 3 lists the availability of the aircraft instrumentation for each flight. This table also lists the accuracy of the instrumentation.

### 4.1 Aircraft Position

Accurate vehicle position data are essential to not only the generation of high-quality source noise semi-spheres but also for accurate maneuver acoustics modeling. A Bell Helicopter DGPS system was used for flight path guidance as well as an accurate measure of aircraft position. This system consisted of both aircraft and ground based components. Aircraft mounted components of the DGPS included a Global Positioning System (GPS) antenna, recorder, wireless modem and modem antenna. Additional aircraft components included instrumentation to process the DGPS base station correction signal, flight guidance processing and a pilot course deviation indicator (Figure 5). The ground station consisted of a precision GPS antenna located at a pre-surveyed location, a recorder and a wireless modem transmitter to broadcast the GPS correction signal to the aircraft (Figure 6). The desired guidance course was selected via the PDU and precision flight guidance cues were provided back to the pilot in real-time during flight test via the course deviation indicator.

### 4.2 Control Positions

The aircraft was instrumented with collective and cyclic position measurement instrumentation. Collective and cyclic were recorded as a percent of full deflection of the controls. A static rigging calibration was performed to relate these percentage measurements to the movement of the swashplate and thus to static blade pitch angle.



### 4.3 Aircraft State

An on-board aircraft attitude and rate gyro was used to provide pitch, roll and yaw attitudes and rates as a function of time. Analysis of the aircraft's system attitude data indicated an intermittent and unpredictable "drift" in attitude signal. In an effort to obtain reliable aircraft attitude data, an Inertial Navigation Unit (INU) unit provided by the Army was installed during the maneuver portion of the testing. This unit recorded reliable pitch, roll and yaw attitudes and rates as a function of time. It should be noted that both the aircraft's and Army's INU systems provided consistent rate data, only the aircraft's attitude data exhibited a drift. In spite of this intermittent problem, the aircraft's system attitude data is useful in some cases, for example, when the INU data is unavailable to indicate abrupt changes in pitch, roll, and yaw attitude caused by pilot control inputs.

An instrumentation boom was installed for the test that measured angle-of-attack, sideslip as well as static and dynamic pressure. Aircraft true airspeed was derived from the measured pressures and the outside air temperature from the NASA weather balloon system described below. Torque and fuel remaining were noted on the flight card by the flight test engineer during each data acquisition run.

### 4.4 Tip Path Plane Orientation Measurement

The measurement of the main rotor TPP angle-of-attack is desirable to accurately estimate the mean inflow through the rotor system and serves as an experimental check of predictions for steady and quasi-steady flight. A TPP measurement system that accurately measures the location of the rotor tips at four locations around the aircraft was used during portions of this flight test. This system was developed for NASA by University of Maryland and uses lasers and cameras mounted on the aircraft as shown in Figure 7 [10]. These lasers are reflected off of retroreflective tape mounted on the rotor tips (Figure 8). The reflections are captured by the cameras at four azimuth locations. The system was installed and operated on the aircraft by a Bell/University of Maryland team. A pulse was recorded by the data acquisition system when the red (reference) blade passed over the tail of the aircraft (at the azimuth angle  $\psi = 0^\circ$ ). This pulse is used by the TPP measurement system for azimuthal alignment as well for deriving the rotor RPM. TPP data was recorded during two flights during the Maneuver Phase of the test. However, a maximum deviation of  $0.2^\circ$  was seen in the movement of the TPP with respect to the fuselage so the data is not presented in this report. This minimal movement is due to the stiff design of this particular rotor system. The data is not contained as part of the electronic data package but is available upon request.

## 5 Bell Aircraft Data Files

Following each test flight, the aircraft data were downloaded and processed using a mobile Bell Helicopter Computer Aided Flight Test Analysis (CAFTA) system. This enabled the test team to assess and validate aircraft state parameter and flight profiles performed during the same day of testing, prior to test planning for the next day. Examples of these "Quick-look" aircraft data plots used for same-day data evaluation are shown in Figures 9 to 13 for a dynamic maneuver from  $6^\circ$  descending flight.

Final processed and calibrated aircraft data results were provided in the following format for each flight condition performed:

1. Two CAFTA output files with aircraft position and state parameter data sampled at 125 Hz,
2. One post-processed "Track-file" with all aircraft position and state parameter data in the CAFTA output files, down-sampled to the DGPS sample rate of 5 Hz and synchronized with Coordinated Universal Time (UTC)-time, and
3. One additional CAFTA output file with rotor azimuth reference sampled at 2000 Hz per rotor revolution.

## 6 Microphone Instrumentation

The acoustic data were acquired using NASA's Mobile Acoustic Facility. This facility consists of two trailers, one is used to control the flight test and the other to maintain the 36 Wireless Acoustic Measurement Systems (WAMSs) used to record the acoustic signals. Each WAMS consists of a ground board, microphone, GPS receiver and antenna. UTC time obtained from the GPS was used to synchronize all microphone, aircraft and weather information together. The WAMS setup used for this test consisted of a 1/2 inch Falcon (B&K 4189) microphone inverted with the diaphragm 1/4 inch over a 15 inch round ground board, shown in Figure 14. Notice that the microphones are offset from the center of the ground board to minimize the edge effects. The acoustic signals were acquired at 25,000 samples per second at 16 bit resolution. Up to 31 of these systems were deployed in three different configurations depending on the flight conditions being tested that day.

A recent upgrade to the WAMS system had the unforeseen consequence of introducing an intermittent delay of precisely one second to the recorded acoustic data. A procedure was developed to identify these delays and correctly synchronize the measured acoustic data. Using a previously developed time-domain de-Dopplerization technique [11], the acoustic pressure time histories for all recorded signals during each run were transformed from time of observation to time of emission. A window

of the transformed data was then selected for each run corresponding to a time range when the helicopter was located 3000 to 6000 feet before arriving at the microphone array. Examining the data in this way ensures that the measured signal primarily reflects the thickness noise radiated by the main and tail rotors. A cross correlation of these windows was computed for all possible channel pair combinations in the array. The cross correlations were then used to uniquely identify the channels which were offset by the intermittent one second. This analysis is possible because the main rotor and tail rotor blade passing frequencies are non-integer multiples of each other, such that the period between phase alignment of the main and tail rotor thickness signals is much greater than one second. The corrections calculated by this method were applied to the raw microphone time histories. The Sound Pressure Level (SPL) for the band pass filtered (20-100 Hz) corrected time histories were then calculated and plotted. These corrected time history plots were examined for correctness and adjustments were made to the data where applicable. Note that all data distributed has these offset corrections applied with the exception of the terminal area approaches.

## 6.1 Source Noise Microphone Layout

Straight line level flight and steady descents were measured using a linear array consisting of 21 microphone locations in a 3,429 foot line perpendicular to the flight path. The spacing was set such that there was a microphone approximately every  $11.5^\circ$  from directly below the aircraft to near in-plane of the rotor for a flyover height of 150 feet above the center microphone. Three locations (directly below and the +/- 200 foot microphone locations) had three microphone configurations; inverted over a ground board, the diaphragm flush mounted in a ground board and a microphone on a four foot tripod. These three locations will provide data that will be used to compare the effects of different microphone mounting configurations. The result was 27 microphones being deployed for this configuration. The source noise array is shown in Figures 15 and 16. Table 4 lists the microphone locations. This table contains the latitude, longitude and geoid height in meters from the GPS survey. Coordinate systems were established with the center at the microphone 11 position which is also the nominal aircraft crossing location (This microphone 11 position is referred to as the reference location for all coordinate systems in this report). The first coordinate system is a Universal Transverse Mercator (UTM) type coordinate system where UTM X is True East and UTM Y is True North. These UTM coordinates were then rotated by 123.6 Degrees in the counter clockwise direction to generate the local coordinate system where positive X is along the primary flight path, positive Y to the left of the flight path and Z is positive up. This array was also used for the steady turns portion of the test. Additionally, Table 5 lists the GPS locations and cartesian coordinates of the non-microphone

key locations.

## 6.2 Maneuvering Noise Microphone Layout

Based on preliminary predictions of where the high levels of noise during maneuvers would be expected when the aircraft was directly over the Maneuver Initiation Point (MIP) at 150 foot altitude, a 31 microphone array was designed to capture Blade Vortex Interaction (BVI) noise and near in-plane noise directivity. Figures 17 and 18 show the microphone array and Table 6 lists the microphone locations, referenced to microphone 34 (which is the same location as microphone 11 in the source noise measurement array). The flight path is shown in blue. The coordinate system for this table is the same as that for the source noise measurement layout. Figure 19 shows the projection of the microphones on a Lambert projection of the semi-sphere to illustrate the directivity pattern to be captured when the aircraft is directly over the MIP. The Lambert projection allows a minimally distorted picture of the external noise radiation pattern. The process of projecting the hemispherical surface as a 2D image using the Lambert projection is shown in Figure 20. The center of the plot, marked with an elevation angle of  $-90^\circ$  represents the underside of the semi-sphere. The edges with a  $0^\circ$  elevation represent noise radiated in the horizon plane. Azimuth angles start at  $0^\circ$  behind the helicopter, and progress counter-clockwise with the direction of the Bell 430 rotor rotation such that the right hand side of the plot represents the advancing side of the semi-sphere.

## 6.3 Terminal Area Noise Microphone Layout

A microphone array was designed to capture noise with the aircraft flying various approach flight profiles into a terminal area. This array consisted of microphones placed primarily in a rectangular grid which spanned 3,000 feet (laterally) by 6,400 feet (in the flight direction) and resulted in an array of 27 microphones. Figures 21 and 22 show the resultant array and Table 7 lists the microphone locations relative to microphone 98 location (which is the same location as microphones 11 and 34 in the previous layouts). The coordinate system for this table is the same as for the source and maneuver arrays. This coordinate system resulted in the primary flight direction being in the negative Y direction.

## 7 Weather Instrumentation

An extensive set of weather measurements were made throughout the test. A tethered weather balloon system was located near the control area 4750 feet from the reference microphone. This balloon was continuously traversed (1) from 0 to 300 feet Above Ground Level (AGL) during the source, steady turn, and maneuvering flight test phases and (2) from 0

to 1,000 feet AGL during the terminal area approach testing. Another tethered balloon was placed 4,750 feet from the reference microphone and was stationary at a height of 300 feet. This stationary balloon had up to five weather sondes at constant altitudes during much of the test. Up to four weather sondes were also placed around the test area. Two of these sondes were mounted on 8 foot high poles, one was mounted on a 25 foot high pole and one was mounted on a 30 foot high pole. All weather sondes recorded wind speed and direction, temperature, pressure and relative humidity. Weather sondes determine the altitude based on static pressure. However, the static pressure can change as a function of time due to things such as clouds transitioning over the sensor. To take into account the changes in ambient pressure and accurately record the altitude of the profiling balloon, the pressure altitude value was reset when the balloon was on the ground for each profile. However, the static balloon only set the pressure altitude to reference the ground at the beginning of the day. Thus to get an accurate altitude reading it must be compared to the ground static pressure at any given time. The locations of the weather instrumentation are indicated on Figure 23. Not all weather instrumentation was available during all testing. Some weather sondes acquired data even during non test days to acquire historical weather information. Table 8 shows the availability of weather instrumentation during the test. All available weather data is included in the electronic data package.

## 8 Flight Conditions Flown

### 8.1 Level Flight Source Noise Mapping

Steady flight condition data were acquired for level flight and constant descent rate for various flight speeds. Data from these “speed sweeps” are used to generate semi-spheres for the steady flight segments and are used by codes such as RNM for prediction of noise on the ground (“ground footprints”). Most of the level flight conditions were flown with the gear retracted and all descents were flown with the gear extended for safety of flight reasons. Three days of source noise mapping flights were flown. Table 9 lists the nominal level flight conditions, the condition reference code and the number of test points available for that condition in the format “L1 - 11”, where L1 is the condition code and 11 is the number of verified test points acquired and contained in the distributed data set. All test condition tables provided use this format. Note that there can be several test points for the same flight condition as each condition was repeated several times.

Often in flight testing, a “housekeeping” flight condition is flown at certain intervals during the test to give an indication of the repeatability of the data. For this portion of the testing, a level flight housekeeping condition was flown at a flight speed of 80 knots. OASPL values for the

reference microphone as a function of distance along the flight track are shown in Figure 24 for seven housekeeping runs flown during the three days of source noise mapping. These repeated runs show a 3 dB scatter when the aircraft was at a location 850 feet before arriving at the center microphone. This level of scatter is considered normal for this type of testing.

Sound semi-spheres were created using the Acoustic Re-propagation Technique (ART) methodology contained within RNM. ART captures the noise spectra from all microphones at specific time intervals (typically every 0.5 seconds) along the flight profile and relates these spectra to the aircraft position, thus providing noise levels as a function of noise emission angle. These measured noise levels are then de-propagated to a semi-sphere of a specified semi-sphere radius, centered at the aircraft GPS receiver. The semi-sphere radius used here is 100 feet. Atmospheric and speed effects are accounted for during this de-propagation process. For more details, the de-propagation process is described more fully in [4]. Figures 25, 26 and 27 present Lambert projections of the OASPL semi-spheres as a function of true airspeed during level flight. The circles in these figures represent data points acquired. The acoustic pressures were averaged over more than one data run as indicated by the brackets where appropriate to represent one true airspeed for the semi-spheres. The general trend of increasing noise levels as a function of true airspeed is as expected. However, at the low airspeeds there is a slight decrease in OASPL on the retreating side with increasing airspeed until approximately 105 knots.

## 8.2 Steady Descent Source Noise Mapping

Steady descents were performed to investigate the BVI noise as a function of airspeed and descent angle. Table 10 lists the constant descent flight conditions flown, the condition reference code, and the number of points for that condition. BVISPL is the integrated sound pressure level over the 5th thru 50th blade passage frequencies (116 to 1,160 Hz) which are the frequencies of interest for investigating BVI. The level flight semi-spheres for the BVISPL are shown in Figures 28, 29 and 30 to compare the level flight with the descent conditions. Figure 31 shows the actual descent angle as a function of true airspeed for each point along with that data run's number. The scatter seen in this plot is attributed to the pilot flying indicated airspeed by using the aircraft internal instrumentation and a visual system for flight path guidance. As indicated in Table 3, the indicated airspeed instrument for the source portion of the testing was not functional. Because of this, the true airspeed was derived from combining the GPS derived groundspeed with the wind direction and wind velocity as measured by the NASA weather balloon. Figures 32 thru 80 show the OASPL and the BVISPL hemispheres for each of the descent points shown in Figure 31 in run number order. To better visualize the BVISPL

trends, Figure 81 was generated and shows the descent angle as a function of true airspeed with the points color coded with the maximum BVISPL level seen in each of the BVISPL hemispheres presented in Figures 32 thru 80. This figure shows the expected trend of increasing BVI noise with increase in descent rate and true airspeed.

No groupings around the nominal points are evident so to facilitate examining trends in airspeed and descent angle, an empirical model of the helicopter's external noise radiation characteristics was generated. A four-dimensional modified Shepard's method (described in Appendix A) was used to create a model that represents the external noise radiation of the helicopter as a function of flight path angle, true airspeed, and radiation direction (azimuth and elevation) from the set of acoustic hemispheres created by the source noise characterization of the Bell 430 helicopter. The result is a model of the helicopter's external noise radiation which varies smoothly with variation in flight condition and directivity angle. By constructing a single model incorporating variations in both flight condition and directivity, more accurate noise estimates may be produced at conditions and directions which have not been directly measured. For instance, during source noise characterization of steep descent conditions over a linear array of microphones it is particularly difficult to acquire data near the plane of the horizon. The modified Shepard's method interpolation combines both noise data measured near the plane of the horizon during shallower descents with out-of-plane noise data from steeper descent conditions to provide an estimate of the in-plane noise radiation during steeper descent conditions. This model was used to generate Figure 82 and shows the semi-spheres for a flight path angle sweep at 80 knots true airspeed. Figure 83 was also generated using this model and shows the semi-spheres for a speed sweep at a flight path angle of 6 degrees.

Tables 11 thru 13 contain the test cards as recorded in the control trailer during the Level Flight and Steady Source Noise portion of the test for the data included in the electronic data distribution package.

### **8.2.1 Steady Turn Source Noise Mapping**

Steady level flight constant bank angle turns were flown over the linear source ground array. The helicopter approached parallel to the array, but offset laterally from the array line by the distance of the radius of the turn being flown. The turn was then initiated such that it was stabilized by the time a heading  $45^\circ$  from the initial flight direction was obtained with the goal of crossing over the reference microphone. The pilot then maintained the designated angle of bank (either  $15^\circ$  or  $30^\circ$ ) while simultaneously maintaining a constant airspeed of 60 or 80 KIAS at 200 foot AGL throughout the steady portion of the turn. The steady turn was held for at least 90 degrees of heading change with the aircraft exiting the turn parallel to the microphone array. This procedure for

a right hand turn is shown in sketch form in Figure 84. Both left and right hand turns were flown with one test day devoted to acquiring this steady turn data. The left and right turn flight paths are shown in Figure 85. Table 14 lists the conditions flown, the condition reference code and the number of points collected for that condition. Steady turns were flown with gear down for safety of flight reasons. The projection of the microphone position at one-half second intervals is shown in a semi-sphere for a  $30^\circ$ , 80 knot right steady turn is shown in Figure 86 and shows good coverage for generating semi-spheres. It should be noted that  $0^\circ$  elevation on these semi-spheres is in the horizontal plane and not rotated with the helicopter. This example was a typical projection for the steady turn testing. Figure 87 shows the OASPL and Figure 88 the BVISPL semi-spheres for the steady turns performed during this test.

Table 15 contains the test cards as recorded in the control trailer during the Steady Turns portion of the test.

### 8.3 Maneuvers

A primary focus of this test was the acoustic characterization of maneuvers and five days of testing were devoted to these flight conditions. The dynamic maneuvers were flown with the gear down for safety of flight and using slow, medium, and fast pilot control (stick) deflection rates. Nominally the fast rate was about four times that of the slow rate. The medium rate was defined as one between the slow and fast rates. The helicopter initially established a steady flight condition along a straight line trajectory which was perpendicular to the primary linear array and passed over the MIP which was 1,500 feet before the reference microphone ( $X = -1,500$  feet). This stabilized pre-maneuver flight condition was nominally established 500 feet before reaching the MIP ( $X = -2,000$  feet). The pilot initiated the maneuver from this steady state flight condition just before reaching the MIP. The maneuver test plan focused on isolated pilot control inputs such as cyclic pitch, cyclic roll, and collective pull/push. More complex coordinated maneuvers were also acquired. Maneuver conditions were prioritized such that “Priority One” cases acquired at least four points and “Priority Two” cases acquired at least two points for each condition. An 80 knot level flight (L1) and 80 knot, fast cyclic pitch up at  $6^\circ$  descent (D12, see Section 8.3.2 below for a more detailed description) were chosen as housekeeping cases and were flown at the beginning and end of each flight. Figure 89 shows the OASPL, elevation over the reference microphone and longitudinal cyclic control inputs versus horizontal distance from reference microphone for seven cyclic pitch up housekeeping points to demonstrate the consistency of the control inputs by the pilot and that the spread of acoustic data was within 4 dB OASPL.

Data for each of the maneuver points acquired are presented in the following sections. The 80 knot level flight housekeeping conditions are



shown in Figures 90 to 99. The constant speed descent cases flown over the maneuver microphone measurement array are shown in Figures 100 to 118. The acoustic pressure time histories were corrected for ground board installation effects and then de-Dopplerized in the time domain. Six contour plots for microphones 40 thru 60 are shown on the left of the figures. The flight path is indicated with a blue line with the aircraft moving from left to right. Each contour subplot shows a BVISPL noise footprint generated at 6 times of emission where the aircraft location is denoted by a symbol on the flight path. The average of three 4,096 point Fast Fourier Transforms (FFTs) (using a Hanning window) centered around each of these locations were averaged. Also shown on the right of each figure are the flight track projected to the XY coordinate plane, the altitude, the cyclic and collective control positions, the roll and pitch attitudes, and the indicated and true airspeeds. For longitudinal cyclic 0% is with the stick aft. For lateral cyclic 0% is to the stick to the left. For collective, 0% is with the collective stick down. Roll right and pitch up are the positive rotational directions. Plotting scales were kept consistent for all the figures with the exception of the altitude subfigure with the text \*Scale Shifted\* appearing when it is not the standard scale. All figures in the Maneuvers section are of the same format.

Tables 16 thru 20 contain the test cards as recorded in the control trailer during the maneuver noise portion of the test for the data included in the electronic data distribution package.

### 8.3.1 Collective Pull-Up or Push-Over

A dynamic maneuver involving the collective control was performed to measure the effect of a transient maneuver which used just a collective control input. This maneuver starting from a level flight condition where the rotor wake is expected to be near the rotor plane. The pilot initiated a constant rate ramp of the collective pull or push at the start of this maneuver, allowing flight path angle and airspeed to change freely. Only slow and fast maneuvers were executed based on emerging noise data indicating that the medium speed collective control inputs would yield little or no useful information. The maneuver was performed with cyclic control inputs primarily held fixed. The maneuver was initiated from level flight at 150 feet Above Ground Level at the Maneuver Initiation Point (AGLMIP) for positive collective inputs and 250 feet AGLMIP for negative collective inputs.

Table 21 lists the conditions flown, the condition reference code and the number of points collected for that condition. The points acquired are shown in Figures 119 to 143

### 8.3.2 Cyclic Pitch-Up

Cyclic pitch-up maneuvers were performed to measure the effect of a transient longitudinal cyclic control input, starting from a level flight condition or a descending flight condition ( $6^\circ$  and  $9^\circ$  descent angles were used) where the rotor wake is expected to be near the rotor disk plane. At initiation of the maneuver, the pilot entered a constant rate ramp input of aft longitudinal cyclic, allowing flight path angle and airspeed to change freely. Slow, medium, and fast cyclic control input maneuvers were executed. All other controls were specified to be held fixed throughout the cyclic pitch-up maneuver. These maneuvers were initiated at 150 feet AGLMIP for cyclic inputs initiated from level flight and 250 feet AGLMIP for maneuvers initiated from a descent.

Table 22 lists the conditions flown, the condition reference code and the number of points collected for that condition. The points acquired are shown in Figures 144 to 197

### 8.3.3 Cyclic Roll

Maneuvers were performed to measure the effect of just using a transient lateral cyclic control input to cause an aircraft roll. These cyclic rolls were started from a level flight condition as well as a  $6^\circ$  descending flight condition where the rotor wake is expected to be near the rotor. At the initiation of the maneuver, the pilot entered a constant rate ramp input of lateral cyclic, allowing bank angle, flight path angle, and airspeed to change freely. Slow, medium and fast control rate maneuvers were executed by applying a lateral cyclic ramp input at a rate defined as from trimmed position towards the left or right. All other controls were specified to be held fixed throughout the maneuver. Cyclic roll maneuvers were performed from stabilized conditions of level flight and  $6^\circ$  descent for 60, 80 and 100 knot indicated airspeeds. Level flight maneuvers were initiated at 150 feet AGLMIP for both left and right rolls. Descending maneuvers were initiated at 250 feet AGLMIP for both left and right rolls.

Table 23 lists the conditions flown, the condition reference code and the number of points collected for that condition. The points acquired are shown in Figures 198 to 283

### 8.3.4 Quick Stop/Start

The quick stop/start maneuvers were flown to investigate the effect of the transition from steady constant airspeed flight to accelerating or decelerating flight. The onset of accelerating or decelerating flight changes the configuration of the rotor wake and has an effect on the radiated noise, especially during the transition to decelerating flight where the wake is expected to move closer to the rotor disk. These maneuvers were initiated from a steady flight condition of 80 KIAS in level flight

at 150 feet AGLMIP. The pilot began the acceleration or deceleration at 200 feet before the MIP using 2, 4 and 6 knots per second changes in airspeed along the flight path towards the target airspeed of 60 or 100 KIAS. Collective was controlled so that altitude was maintained during the maneuver.

Table 24 lists the conditions flown, the condition reference code and the number of points collected for that condition. The points acquired are shown in Figures 284 to 300.

### **8.3.5 Roll Angle Changes During Climbing Flight**

This maneuver is similar to the single control input cyclic descending roll maneuver, except that it is performed while the aircraft is climbing instead of descending. However, in order to initiate the roll maneuver at the desired altitude over the microphone array, the climb can only be entered just prior to the MIP. To perform this maneuver the helicopter started from steady level flight at 80 KIAS with an altitude of 150 feet AGLMIP. At 750 feet before the MIP, (2,250 feet from reference microphone) the pilot began a 6° or 9° climb at constant airspeed. At the MIP the pilot performed a cyclic roll. The roll rate was the same roll rate as the fast rate from the cyclic roll maneuvers and executed by applying a lateral cyclic ramp input from trimmed position to left or right.

Table 25 lists the conditions flown, the condition reference code and the number of points collected for that condition. The points acquired are shown in Figures 301 to 312.

### **8.3.6 Roll Angle Changes During Accelerating Flight**

The rotor wake geometry is different in accelerating/decelerating flight than in steady level flight and provides a different initial condition for transient maneuvers. The purpose of these maneuvers is to assess the acoustic effect of decelerations or accelerations prior to entry into a turn. The maneuver was initiated from a steady flight condition of either 60 or 100 KIAS in level flight at 150 feet AGLMIP. The pilot then began to accelerate or decelerate at a rate of 4 knots per second while maintaining 150 feet AGLMIP. This acceleration or deceleration was initiated at a point such that the airspeed was approximately 80 KIAS at the MIP. Once the MIP was reached, the pilot performed a cyclic roll (left or right) while continuing to accelerate or decelerate.

Table 26 lists the conditions flown, the condition reference code and the number of points collected for that condition. The points acquired are shown in Figures 313 to 334.

## **8.4 Terminal Area Approaches**

Terminal area approach data were acquired for use in verification of ground footprint predictions. A number of different approach and level

flight profiles were flown. These profiles ranged from a constant speed profile with a single descent angle to decelerating and turning approaches. All approaches were flown with gear down for safety of flight, were started at 1,000 feet AGL over the Terminal Area Landing Point (TALP) and terminated at the TALP shown in Figure 21.

Table 27 contains the test card as recorded in the control trailer during the terminal area approach portion of the test for the data included in the electronic data distribution package and the approaches are described below:

1. Single descent angle, constant speed approaches were flown at 60 knots at descending flight path angles of  $6^\circ$  (T1 - 2) and  $9^\circ$  (T2 - 3). The airspeed was held constant during the descent until it became necessary for the pilot to terminate the approach at the TALP. These approaches are shown in Figures 335 thru 339.
2. Single descent angle, decelerating approaches were flown starting at an airspeed of 100 knots and decelerating to approximately 20 knots at the TALP while holding  $6^\circ$  (T3 - 2),  $9^\circ$  (T4 - 2) or  $12^\circ$  (T5 - 2) descending flight path angles. These approaches are shown in Figures 340 thru 345.
3. Complex approaches that included multiple descent angles, multiple airspeed combinations, U-shaped and spiraling descents were flown (T6 - 2, T7 - 3, T8 - 2, T9 - 4 and T10 - 1). Flying these complex pre-defined approaches proved to be problematic and beyond the capability of the guidance system but twelve attempts were made to fly the five complex approach profiles by the pilot using ground markers as guidance. These test points provide valuable information even though the actual profile flown varies from the defined profile because the aircraft information was recorded and can thus be used to predict the footprint for the actual profile flown and compared to the measured footprint. These approaches are shown in Figures 346 thru 357.
4. Three test points were taken where the pilot was asked to fly the quietest profile that he considered possible, based on his extensive piloting experience (T11 - 3). These approaches are shown in Figures 358 thru 360.
5. Several level flights were flown in the same manner and flight direction as in the source noise measurement portion of the test to acquire aircraft data for these conditions that was not available during that phase of testing due to instrumentation issues as described in Table 3. These points (L1 - 2, L6 - 1, L8 - 2 and L10 - 2) are shown in Figures 361 thru 367.

The measured Sound Exposure Level (SEL) contour for the A-weighted noise radiation during a standard 60 knot 6° approach is shown in Figure 335 and the contour for a 100 knot, 12° decelerating approach is shown in Figure 345. The higher speed, 12° , decelerating approach shows a significant decrease in SEL from the standard 6° approach and is the quietest approach profile flown during this test. This correlates with the observation made during the source noise measurements that the peak BVI descent rate is near 9° . This result is consistent with previous findings [12–14] which show that during approach, deceleration at an angle steeper than the peak BVI condition can reduce noise.

## 9 Electronic Data

Data described in this paper are open and available electronically upon request from Michael Watts, Aeroacoustics Branch (D314), Mail Stop 461, NASA Langley Research Center, 23681, Michael.e.watts@nasa.gov. The data are provided in standard American Standard Code for Information Interchange (ASCII) text and/or Network Common Data Form (NetCDF) formats, depending on data type. NetCDF is a “self-describing”, packed binary format which is platform independent. Drivers for a multitude of platforms are available at no cost at <http://www.unidata.ucar.edu/software/netcdf/>. The file structure for the electronic data is shown in Figure 368. Descriptions of the contents of each file type, including file naming convention and file format, are contained in the following subsections.

### 9.1 Microphone Location File

The microphone GPS locations are contained in the comma delimited text file `M430MicFullList.csv`. This file has a row for each microphone which contains the microphone number, latitude and longitude in decimal degrees, orthometric height in meters and an installation type keyword. The installation types are (1) `invgb7` for inverted 7 mm over a ground board, (2) `elevtd` for elevated 4 feet on a tripod, (3) `gdbdf1` for flush mounted in a ground board with the diaphragm pointed up and (4) `empty` for no microphone of this number. The commercial software package MATLAB® function `micConvert` is included and used to read this file and generate the microphone locations in a UTM Cartesian coordinate system centered at an input reference location with +X in the easterly direction and +Y in the northerly direction. The function `coordrotate` can then be used to rotate that UTM coordinate system to point the +X in the desired direction, in this case to 326.4° true. The primary installation type used in the data analysis for this paper is the `invgb7` type and has a constant installation correction of 6 dB for 0 to 10,000 Hz due to the ground plane.

## 9.2 Acoustic Pressure Time History Data

Acoustic pressure time history data, in units of Pascals, are in the NetCDF binary files contained in the `M430_pascals_v3` directory. This data is corrected for time offset issues but uncorrected for installation effects. There is one file per microphone per data run with the file name being the `<6 Digit NASA Run Number>_<2 Digit Microphone Number>_pascal_v3.nc`. For example, file `273100_08_pascal_v3.nc` is the file containing the acoustic pressure time history data in Pascals for NASA run number 272100, microphone number 8. Table 29 describes the variables contained in the acoustic pressure time history files. The included function `netCDFimport` is used to import the netCDF data into MATLAB<sup>®</sup>.

The acoustic pressure data has been corrected for an acquisition time alignment problem as mentioned in a previous section. The text file `all_time_offsets_v3.txt` contains the corrections applied to the baseline data to create the data marked with the `v3` in the filename. This file contains one section for each data point acquired which contains a row that lists the applicable microphone number and another row that lists the offset applied for those microphones. A 0 offset is no correction, 1 is add 1 second to the start time, and a 9 is to not include the microphone in the data set.

## 9.3 Test Reference Data

Information about each test point is contained in the comma delimited text file `M430FullRefList.csv` and Table 28 describes the values contained within the file. The function in file `loadM430RefInfo.m` loads these variables into MATLAB<sup>®</sup> in a data structure that contains the values for the specified run number. The entire table can be read into MATLAB<sup>®</sup> using the function `csvimport`.

## 9.4 Aircraft Data

Low frequency, high frequency and rotor azimuth data recorded on the aircraft is contained in three comma delimited text files for each run number. The low frequency data was sampled at a rate of 5 Hz and is contained in a file with the naming convention of `<6 Digit NASA Run Number>_lfacdata.csv`. The file has two rows of header and then a row for each time step. The high frequency file name is structured the same way except that it has `_hfacdata` and the rotor azimuth data has `_azacdata`. These data files are contained within the directory `M430aircraftData`. Tables 30, 31 and 32 describe the variables contained within the files. The function `loadM430ACData` is included in the distribution which loads the aircraft data into a MATLAB<sup>®</sup> data structure.

## 9.5 Aircraft Tracking Data

Tracking data records the position of the GPS antenna in space as a function of time at a 5 Hz sample rate. The files are contained in the directory `NASAGPS` with one comma delimited file for each run number with the file name being the `<6 Digit NASA Run Number>.GPS`. Each file contains 5 columns that are UTC local time, seconds from midnight, latitude, longitude and orthometric height in feet. The World Geodetic System 1984 (WGS84) ellipsoid is used for all tracking calculations in this report. The GPS receiver and the longitude, butline and waterline locations on the aircraft (in inches) are located in Table 2. Three MATLAB<sup>®</sup> functions are included in the distribution. The `M430trackNASAGPS` function reads in the tracking file and uses `gps_to_utm` to calculate the aircraft track in UTM coordinates in relation to a reference location. It then uses the `coordrotate` to rotate the UTM coordinates by a specified rotation as discussed previously.

## 9.6 Individual Semi-spheres

One-third Octave sound semi-spheres were generated for each of the steady state level and descent test points acquired during the source phase of the test. These files are included in the data distribution and are contained in a folder called `M430_individual_hemispheres_v3`. Each files name is of the format `Be430<last 3 digits of the run number>.nc`. For example, `Be430100.nc` is the file for run 273100. Table 33 describes the variables contained in these NetCDF files.

## 9.7 Averaged Semi-spheres

One-third octave band, level flight sound semi-spheres were averaged based on true airspeed as described in 8.1. These averaged semi-sphere files are included in the data distribution and are contained in a folder called `M430_averaged_hemispheres_v3`. Each file's name is of the format `Be430<3 digit condition number>.nc` where the condition numbers run from 721 to 733 and indicate increasing airspeed as shown on Figures 25 thru 27 and Figures 28 thru 30.

## 9.8 Weather Data

The weather data is contained in three sub-folders in the folder `Weather`.

### 9.8.1 NASA Profiling Weather Balloon

The profiling weather balloon raw data is stored in comma delimited text files within the `NASA_weather_balloon` folder. The naming convention is `EglinSonde<date in mmddyy format>.csv`. Each file contains Secs, hr, min, sec, altitude (ft), temperature (° F), relative humidity

(%), pressure (kPa), cup wind speed (kts), wind direction (mag), wind direction (true), dynamic WS (kts), ground temperature (° F), density (kg/m<sup>3</sup>). This raw data file is divided into individual profiles as designated in the MATLAB<sup>®</sup> script `M430wprofiles`. This script calls the MATLAB<sup>®</sup> functions `readRawBalloonWeather`, `loadballoonprofiles` and `weatherfitsmooth` to load the raw balloon data, separate the profiles and then curve fit the data. The results of these actions are data structures in MATLAB<sup>®</sup> that are described in the comments of the `fltwpDescription.m` file. Results of this separation and curve fitting are graphically displayed in folders within the `NASA_weather_balloon` directory. One example is shown in Figure 369.

### 9.8.2 NASA Stationary Weather Sensors

NASA ground weather station data is stored in files within the `NASA_weather_stations` folder. The naming convention is `SW<date in mmddyy format>_<sensor number>.txt`. The pertinent parameters in each file are time, date, temperature(° F), humidity (%Relative Humidity (RH)), pressure (kPa), wind speed (kts), wind direction (mag), wind direction (true), and dew point (° F). The MATLAB<sup>®</sup> script `readNASAWeatherStation` reads these weather weather files for the days where testing occurred and loads the data into the data structure described in the file `nwsFormat.m`.

### 9.8.3 Ole Miss Stationary Weather Balloon

The Ole Miss weather balloon data is stored in files within the `Ole_Miss_weather` folder. The naming convention is `OM<date in mmddyy format>_<sensor number>.txt`. The pertinent parameters in each file are time, pressure (hPa), temp(K), humidity (%RH), alt (meters), wind speed (meters per second) and wind direction (mag). The MATLAB<sup>®</sup> script `readOleMissBalloon` reads these weather weather files for the days where testing occurred and loads the data into the data structure described in the file `omwFormat.m`.

## 9.9 Test Cards

The directory `Test_Cards` contains two subdirectories. The `NASA_Cards` subdirectory contains Microsoft Excel formatted files containing the test cards as written in the control trailer during the testing for all data points acquired. The `Pilot_Cards` subdirectory contains scans of the notes (in pdf format) taken by the flight test engineer onboard the aircraft during testing.



## 10 Concluding Remarks

A cooperative flight test between NASA, Bell Helicopter, and the U.S. Army to characterize the acoustics of, and to measure maneuver noise on, a Bell Helicopter 430 aircraft was accomplished during June/July 2011 at Eglin Air Force Base in Florida. This test gathered a total of 410 test points over 10 test days and included extensive measurements with the aircraft performing dynamic maneuvers. Three microphone configurations with up to 31 microphones in each configuration were used and specifically targeted to the acoustic data type being measured. Aircraft data were acquired, including DGPS, aircraft state and rotor state information. This data set contains a complete acoustic representation of the Bell 430 aircraft for inclusion in the RNM database. The data shown demonstrates that maneuvers lead to significant increases in noise. The terminal area measurements include a variety of flight paths ranging from simple to complex and provide valuable information for the validation of ground footprint prediction tools. This extensive data set is publicly available upon request.

## References

1. "CTRDAC-1995-REPORT, civil tiltrotor development advisory committee report to congress in accordance with PL102-581," December 1995.
2. J. Johnson, V. Stouffer, D. Long, and J. Gribko, "Evaluation of the national throughput benefits of the civil tilt rotor," NASA, NASA CR 2001-211055, September 2001.
3. W. W. Chung and et.al., "Modeling high-speed civil tiltrotor transports in the next generation airspace," NASA, NASA CR 2011-215960, January 2011.
4. D. A. Conner, C. L. Burley, and C. D. Smith, "Flight acoustic testing and data acquisition for the rotorcraft noise model (RNM)," in *American Helicopter Society 62nd Annual Forum*, May 2006.
5. M. E. Watts, D. A. Conner, and C. D. Smith, "Joint Eglin acoustic week III data report," NASA/TM-2010-216206, March 2010.
6. E. Greenwood, F. H. Schmitz, G. Gopalan, and B. W.-C. Sim, "Helicopter external noise radiation in turning flight: Theory and experiment," in *American Helicopter Society 63rd Annual Forum*, May 2007.
7. H. Ishi, H. Gomi, and Y. Okuno, "Helicopter flight tests for BVI noise measured using an onboard external microphone," in *AIAA*

*Flight Mechanics Conference and Exhibit, San Francisco, CA, August 2005.*

8. P. Spiegel, H. Buchholz, and M. Pott-Pollenske, “Highly instrumented BO105 and EC135-FHS aeroacoustic flight tests including maneuver flights,” in *American Helicopter Society 61st Annual Forum*, May 2005.
9. R. D. Sickenberger, G. Gopalan, and F. H. Schmitz, “Helicopter near-horizon harmonic noise radiation due to cyclic pitch transient control,” in *American Helicopter Society 67th Annual Forum*, May 2011.
10. R. D. Sickenberger and F. H. Schmitz, “Longitudinal tip-path-plane measurement using an optics-based system,” in *American Helicopter Society 63rd Annual Forum*, Virginia Beach, VA, May 2007.
11. E. Greenwood and F. H. Schmitz, “Separation of main and tail rotor noise ground-based acoustic measurements using time-domain de-dopplerization,” in *35th European Rotorcraft Forum*, September 2009.
12. N. Lappos, J. Arnold, P. Erway, and E. McConkey, “The development of a decelerating helicopter instrument landing system using differential GPS,” in *American Helicopter Society 56th Annual National Forum*, Virginia Beach, VA, May 2000.
13. F. H. Schmitz, G. Gopalan, and B. W.-C. Sim, “Flight-path management/control methodology to reduce helicopter blade-vortex interaction noise,” *Journal of Aircraft*, vol. 39, no. 2, pp. 193–205, 2002.
14. F. H. Schmitz, E. Greenwood, R. D. Sickenberger, G. Gopalan, B. W.-C. S. amd David Conner, and E. M. III, “Measurement and characterization of helicopter noise in steady-state and maneuvering flight,” in *American Helicopter Society 63rd Annual Forum*, Virginia Beach, VA, May 2007.

## Appendix A

### Empirical Noise Radiation Model

A modified Shepard's method is described by Equation A1 and was used to construct a model from the noise levels stored in the set of measured hemispheres.

$$u(\mathbf{x}) = \sum_{i=0}^N \frac{w_i(\mathbf{x})u_i}{\sum_{j=0}^N w_j(\mathbf{x})} \quad (\text{A1})$$

where  $\mathbf{x}$  is the four-dimensional vector describing the interpolant,  $u(\mathbf{x})$  the estimated noise level,  $N$  the number of measured data points,  $u_i$  the measured noise levels, and  $w_i$  the weights associated with each data point. In the standard Shepard's method these weights are the square of the inverse of the distance,  $d$ , between the interpolant and the data points:

$$w_i(\mathbf{x}) = \frac{1}{d(\mathbf{x}, \mathbf{x}_i)^2} \quad (\text{A2})$$

The modified Shepard's method used to construct the model includes a nearby subset of the local data to estimate the noise levels at each interpolant. This is described by using the modified weights given in Equation A3. For modeling the external noise radiation, the data were scaled such that the radius,  $R$ , included radiation directions within  $180^\circ$ , flight path angles within  $3^\circ$ , and true airspeeds within 10 knots of the interpolants.

$$w_k(\mathbf{x}) = \left( \frac{R - d(\mathbf{x}, \mathbf{x}_k)}{Rd(\mathbf{x}, \mathbf{x}_k)} \right)^2 \quad (\text{A3})$$

## Tables

Table 1: Bell Model 430 Specifications

Main Rotor Diameter	42 ft
Num. Main Rotor Blades	4
MR RPM, BPF	348.6 RPM, 23.2 Hz
Tail Rotor Diameter	6 ft 10.6 in
Num. Tail Rotor Blades	2
TR RPM, BPF	1880.7 RPM, 62.7 Hz
Power Plant	2- Allison 250-C40B - 783 HP ea.
Empty Weight	5,305 lb
Max Take Off GW	9,300 lb
Max Speed	143 knots

Table 2: Aircraft Locations

Position	Longitudinal, in	Butt Line, in	Water Line, in
GPS Antenna	159.5	0	93
Hub	252.5	0	142
Pilot Eye	152	16	73
IMU	216	-0.5	44
Tail Rotor	543.5	-22.5	99
Nominal CG	249.8	-0.17	70

Table 3: Data Availability

Test Phase	Source			Turns	Dynamic Maneuvers					Term Area	Accuracy
Date	6/17/11	6/18/11	6/19/11	6/22/11	6/24/11	6/25/11	6/26/11	6/28/11	6/30/11	7/1/11	
Flight Number	1273	1274	1275	1277	1278	1280	1282	1285	1287	1288	
Ind AS				x	x	x	x	x	x	x	±2 kts
AC Heading				x	x	x	x	x	x	x	±0.5°
AC AOA	x		x	x	x	x	x	x	x	x	±0.5°
AC Sideslip	x		x	x	x	x	x	x	x	x	±0.5°
AC Pitch Rate				x	x	x	x	x	x	x	±0.5° /s
AC Roll Rate				x	x	x	x	x	x	x	±0.5° /s
AC Yaw Rate				x	x	x	x	x	x	x	±0.5° /s
AC Vert Acc	x	x	x	x	x	x	x	x	x	x	±0.01 g
Long Cyclic				x	x	x	x	x	x	x	±2% range
Lat Cyclic				x	x	x	x	x	x	x	±2% range
Collective				x	x	x	x	x	x	x	±2% range
INU Pitch						x (1)	x	x	x		±0.2°
INU Roll						x (1)	x	x	x		±0.2°
INU Heading						x (1)	x	x	x		±0.5°
INU Pitch Rate						x (1)	x	x	x		±0.2° /s
INU Roll Rate						x (1)	x	x	x		±0.2° /s
INU Yaw Rate						x (1)	x	x	x		±0.2° /s
INU Long Acc						x (1)	x	x	x		±0.01 g
INU Lat Acc						x (1)	x	x	x		±0.01 g
INU Vert Acc						x (1)	x	x	x		±0.01 g
Rotor Speed		x	x	x		x (3)	x	x	x	x	±0.5 RPM
DGPS	x	x	x	x	x	x	x	x	x	x	±5 ft
TPP								x (2)	x (2)		±0.1°

- (1) INU data available for acoustic runs 341 to 345 for this flight  
(2) TPP data available for acoustic runs 461 to 493 and 521 to 551  
(3) Rotor Speed not available for 280369 - 280401

Table 4: Source Array

Mic Number	Latitude	Longitude	Geoid Height Feet	UTM X Feet	UTM Y Feet	X Feet	Y Feet	Z Feet	Angle Deg
1	30.57110870	-86.78589432	179.2	-1428.3	-948.6	-0.1	1714.6	13.7	5.0
2	30.57170890	-86.78484675	180.5	-1098.6	-730.3	-0.6	1319.2	15.0	6.5
3	30.57242381	-86.78360749	181.7	-708.5	-470.2	0.2	850.4	16.2	10.0
4	30.57313456	-86.78236678	168.4	-318.1	-211.7	-0.4	382.1	2.9	21.4
5	30.57335828	-86.78196859	166.1	-192.7	-130.4	-2.0	232.7	0.6	32.8
6	30.57340936	-86.78188108	165.9	-165.2	-111.8	-1.7	199.5	0.5	36.9
7	30.57347578	-86.78176599	165.4	-129.0	-87.6	-1.6	155.9	-0.1	43.9
8	30.57355352	-86.78164207	165.7	-90.0	-59.4	0.3	107.8	0.2	54.3
9	30.57361506	-86.78151867	165.9	-51.1	-37.0	-2.5	63.1	0.4	67.2
10	30.57366749	-86.78143342	165.7	-24.3	-17.9	-1.5	30.2	0.2	78.6
11 (ref)	30.57371670	-86.78135616	165.5	0.0	0.0	0.0	0.0	0.0	-90.0
12	30.57375520	-86.78127846	165.4	24.5	14.0	-1.9	-28.1	-0.1	-79.4
13	30.57380798	-86.78118616	165.7	53.5	33.2	-1.9	-62.9	0.2	-67.2
14	30.57386812	-86.78108272	165.9	86.1	55.1	-1.7	-102.2	0.4	-55.7
15	30.57394608	-86.78094570	165.8	129.2	83.4	-2.0	-153.8	0.3	-44.3
16	30.57401445	-86.78082641	165.6	166.7	108.3	-2.0	-198.8	0.1	-37.0
17	30.57406597	-86.78073256	165.5	196.3	127.0	-2.7	-233.8	0.0	-32.7
18	30.57428658	-86.78034417	164.4	318.5	207.3	-3.5	-380.0	-1.1	-21.5
19	30.57500530	-86.77910116	159.0	709.7	468.7	-2.2	-850.5	-6.5	-10.0
20	30.57576255	-86.77778083	153.7	1125.2	744.1	-2.6	-1349.0	-11.8	-6.3

*Continued on next page*

Table 4: *continued*

Mic Number	Latitude	Longitude	Geoid Height Feet	UTM X Feet	UTM Y Feet	X Feet	Y Feet	Z Feet	Angle Deg
21	30.57631968	-86.77681516	153.7	1429.1	946.8	-1.9	-1714.3	-11.8	-5.0
22 (1)	30.57340936	-86.78188108	165.9	-165.2	-111.8	-1.7	199.5	0.5	36.9
23 (1)	30.57371670	-86.78135616	165.5	0.0	0.0	0.0	0.0	0.0	-90.0
24 (1)	30.57401445	-86.78082641	165.6	166.7	108.3	-2.0	-198.8	0.1	-37.0
25 (2)	30.57340936	-86.78188108	165.9	-165.2	-111.8	-1.7	199.5	0.5	36.9
26 (2)	30.57371670	-86.78135616	165.5	0.0	0.0	0.0	0.0	0.0	-90.0
27 (2)	30.57401445	-86.78082641	165.6	166.7	108.3	-2.0	-198.8	0.1	-37.0

1) Microphone mounted flush in ground board

2) Microphone mounted on 4' tripod

Table 5: Primary Test Site Locations

Mic Number	Latitude	Longitude	Geoid Height Feet	UTM X Feet	UTM Y Feet	X Feet	Y Feet	Z Feet
Command	30.55920632	-86.77469684	159.5	2096.1	-5277.6	-5556.1	1173.4	-6.0
NASA Balloon	30.55965011	-86.77488155	149.1	2038.8	-5116.2	-5389.4	1132.6	-16.4
Ole Miss Balloon	30.58719478	-86.77866867	173.4	8456.8	4902.2	3615.9	-3416.4	7.9
Helo Fueling Point	30.57612933	-86.78524273	188.2	-1223.1	877.5	1407.7	533.5	22.7
NASA WS 2	30.56561074	-86.79283572	186.2	-3613.1	-2948.1	-457.1	4640.8	20.7
NASA WS 3	30.57042378	-86.7785311	150.8	889.1	-1197.7	-1489.6	-78.1	-14.7
NASA WS 4	30.57725482	-86.77331893	158.4	889.1	-1197.7	-1489.6	-78.1	-14.7
Ref Mic	30.57371670	-86.78135616	165.5	0.0	0.0	0.0	0.0	0.0
MIP	30.57027433	-86.77872111	150.9	829.3	-1252.0	-1501.7	1.8	-14.6
TALP	30.57670613	-86.76845112	161.7	4061.3	1087.5	-1340.7	-3984.9	-3.8



Table 6: Maneuver Array

Mic Number	Latitude	Longitude	Geoid Height Feet	UTM X Feet	UTM Y Feet	X Feet	Y Feet	Z Feet
30	30.57596749	-86.78132113	196.1	11.0	818.7	675.9	-462.1	30.6
31	30.57242381	-86.78360749	181.7	-708.5	-470.2	0.2	850.4	16.2
32	30.57313456	-86.78236678	168.4	-318.1	-211.7	-0.4	382.1	2.9
33	30.57355352	-86.78164207	165.7	-90.0	-59.4	0.3	107.8	0.2
34 (ref)	30.57371670	-86.78135616	165.5	0.0	0.0	0.0	0.0	0.0
35	30.57386812	-86.78108272	165.9	86.1	55.1	-1.7	-102.2	0.4
36	30.57428658	-86.78034417	164.4	318.5	207.3	-3.5	-380.0	-1.1
37	30.57500530	-86.77910116	159.0	709.7	468.7	-2.2	-850.5	-6.5
38	30.57576255	-86.77778083	153.7	1125.2	744.1	-2.6	-1349.0	-11.8
39	30.57698436	-86.77565139	157.5	1795.3	1188.6	-3.1	-2153.1	-8.0
40	30.57155716	-86.77970384	156.6	520.0	-785.5	-942.0	1.3	-8.9
41	30.57129968	-86.78004863	155.1	411.5	-879.1	-960.0	143.5	-10.4
42	30.57181080	-86.77884551	151.2	790.2	-693.2	-1014.6	-274.8	-14.3
43	30.57170669	-86.77806828	148.1	1034.8	-731.1	-1181.5	-457.6	-17.4
44	30.57111041	-86.77906344	151.4	721.6	-948.0	-1188.9	-76.7	-14.1
45	30.57087364	-86.77917684	152.2	685.9	-1034.1	-1240.9	0.7	-13.3
46	30.57075619	-86.77933187	152.4	637.1	-1076.8	-1249.5	64.9	-13.1
47	30.57116577	-86.77855599	148.4	881.3	-927.8	-1260.4	-220.9	-17.1
48	30.57100087	-86.77875519	150.2	818.6	-987.8	-1275.7	-135.5	-15.3
49	30.57061904	-86.77898857	151.5	745.2	-1126.7	-1350.8	2.5	-14.0

*Continued on next page*

Table 6: *continued*

Mic Number	Latitude	Longitude	Geoid Height Feet	UTM X Feet	UTM Y Feet	X Feet	Y Feet	Z Feet
50	30.57029347	-86.77954704	151.6	569.4	-1245.1	-1352.2	214.5	-13.9
51	30.57095752	-86.77839517	148.6	931.9	-1003.6	-1351.5	-221.2	-16.9
52	30.57070376	-86.77872690	151.0	827.5	-1095.9	-1370.7	-83.1	-14.5
53	30.57047580	-86.77887094	151.2	782.2	-1178.8	-1414.7	0.5	-14.3
54	30.57068009	-86.77852443	150.4	891.2	-1104.5	-1413.1	-131.4	-15.1
55	30.57074055	-86.77805043	148.6	1040.4	-1082.5	-1477.3	-267.9	-16.9
56	30.57027433	-86.77872111	151.0	829.3	-1252.1	-1501.8	1.8	-14.5
57	30.56983347	-86.77936940	152.4	625.3	-1412.4	-1522.5	260.4	-13.1
58	30.57004126	-86.77877620	151.4	812.0	-1336.8	-1562.8	63.1	-14.0
59	30.57004441	-86.77863330	151.3	857.0	-1335.7	-1586.8	25.0	-14.2
60	30.57023452	-86.77788985	151.2	1091.0	-1266.5	-1658.6	-208.2	-14.3
MIP	30.57027433	-86.77872111	150.9	829.3	-1252.0	-1501.7	1.8	-14.6

Table 7: Terminal Area Array

Mic Number	Latitude	Longitude	Geoid Height Feet	UTM X Feet	UTM Y Feet	X Feet	Y Feet	Z Feet
30	30.57596749	-86.78132113	196.1	11.0	818.7	675.9	-462.1	30.6
70	30.56907604	-86.78497050	150.5	-1137.6	-1687.9	-776.8	1881.4	-15.0
71	30.56866129	-86.78864962	183.6	-2295.5	-1838.7	-261.8	2929.4	18.1
72	30.57031013	-86.78579551	168.7	-1397.2	-1239.0	-259.2	1849.4	3.2
73	30.57184176	-86.78297063	166.6	-508.1	-682.0	-287.0	800.5	1.1
74	30.57345922	-86.78017751	156.8	370.9	-93.6	-283.2	-257.2	-8.7
75	30.57498317	-86.77726758	153.7	1286.7	460.7	-328.1	-1326.8	-11.8
76	30.57656070	-86.77441894	165.0	2183.2	1034.5	-346.0	-2391.0	-0.5
77	30.56478501	-86.78978185	180.9	-2652.0	-3248.5	-1239.1	4006.3	15.4
78	30.56636239	-86.78696742	176.4	-1766.1	-2674.9	-1251.3	2951.0	11.0
79	30.56792475	-86.78425997	155.5	-913.9	-2106.6	-1249.3	1926.8	-10.0
80	30.56955622	-86.78124086	153.4	36.3	-1513.3	-1280.7	806.9	-12.1
81	30.57110422	-86.77838536	147.8	935.0	-950.2	-1308.8	-253.2	-17.7
82	30.57268267	-86.77555974	153.6	1824.3	-376.1	-1322.5	-1311.7	-11.8
83	30.57431565	-86.77271214	161.4	2720.4	218.0	-1323.4	-2386.8	-4.1
84	30.56244362	-86.78802297	178.5	-2098.4	-4100.2	-2254.8	4016.3	13.1
85	30.56394259	-86.78518121	158.0	-1203.9	-3555.0	-2295.5	2969.6	-7.5
86	30.56562396	-86.78226434	145.1	-285.8	-2943.5	-2293.9	1866.5	-20.3
87	30.56723679	-86.77955099	149.2	568.2	-2356.9	-2277.7	830.5	-16.3
88	30.56879386	-86.77671554	156.1	1460.6	-1790.5	-2299.6	-226.2	-9.4

*Continued on next page*

Table 7: *continued*

Mic Number	Latitude	Longitude	Geoid Height Feet	UTM X Feet	UTM Y Feet	X Feet	Y Feet	Z Feet
89	30.57051563	-86.77384063	155.2	2365.4	-1164.2	-2278.4	-1326.4	-10.3
90	30.57204661	-86.77095128	158.1	3274.7	-607.3	-2317.5	-2392.0	-7.4
91	30.56682131	-86.78324044	149.0	-593.1	-2508.0	-1761.2	1881.5	-16.5
92	30.56176285	-86.78344280	142.0	-656.8	-4347.9	-3258.6	2952.4	-23.5
93	30.56329667	-86.78054118	146.5	256.5	-3790.0	-3299.1	1882.9	-19.0
94	30.56492667	-86.77767446	154.4	1158.8	-3197.1	-3304.4	803.3	-11.1
95	30.56654073	-86.77486860	151.1	2041.9	-2610.0	-3303.8	-257.2	-14.4
96 (1)	30.57110422	-86.77838536	151.6	935.0	-950.2	-1308.8	-253.2	-13.9
97 (1)	30.56993126	-86.77751901	150.6	1207.7	-1376.8	-1815.0	-244.4	-14.9
98 (ref)	30.57371670	-86.78135616	165.5	0.0	0.0	0.0	0.0	0.0
TALP	30.57670613	-86.76845112	161.7	4061.3	1087.5	-1340.7	-3984.9	-3.8

1) Microphone mounted on 4' tripod

Table 8: Weather Instrumentation Availability

Date	Flight	Ground Station				NASA Balloon	Ole Miss Balloon
		1	2	3	4		
6/8/11		x					
6/9/11		x					
6/10/11		x					
6/11/11		x					
6/12/11		x					
6/13/11		x	x	x	x		
6/14/11		x	x	x	x		
6/15/11		x	x	x	x		
6/16/11		x	x	x	x		
6/17/11	1273	x	x	x	x	x	
6/18/11	1274	x	x	x	x	x	100, 150, 200, 250
6/19/11	1275	x	x	x	x	x	9, 100, 200, 300
6/20/11		x	x	x	x		
6/21/11		x	x	x	x		
6/22/11	1277	x	x	x	x	x	200
6/23/11		x	x	x	x		
6/24/11	1278	x	x	x	x	x	250
6/25/11	1280	x	x	x	x	x	9, 75, 150, 250, 350
6/26/11	1282	x	x	x	x	x	9, 75, 150, 250, 350
6/27/11		x	x	x	x		
6/28/11	1285	x	x	x	x	x	9, 75,150, 250, 350
6/29/11		x		x	x		
6/30/11	1287	x	x	x	x	x	
7/1/11	1288	x	x	x	x		

Table 9: Source Level Flight Test Points

KIAS	Gear Up	Gear Down
50	L2 - 1	
60	L3 - 5	
70	L4 - 2	
80	L1 - 11	L11 - 2
90	L5 - 1	
100	L6 - 2	
110	L7 - 1	L12 - 2
120	L8 - 3	
130	L9 - 4	

Table 10: Steady Descent Flight Test Points

Angle	Airspeed, KIAS				
	50	60	70	80	90
-3°		A4 - 2		A18 - 2	
-6°	A2 - 2	A6 - 4	A13 - 2	A20 - 4	A27 - 2
-7.5°		A7 - 2	A14 - 1	A21 - 4	A28 - 1
-9°	A3 - 1	A8 - 3	A15 - 2	A22 - 2	A29 - 1
-10.5°		A9 - 2		A23 - 3	
-12°		A10 - 3	A17 - 2	A24 - 2	A31 - 1

Table 11: Flight 1273 Test Card, 6/17/2011, Source Array

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Ground Temp	Wind Speed	Wind Heading	Comments
901	6:21:05	6:22:07	AMB	NA	NA	NA	75.1	0.0	175	Helo entered field during ambient
100	6:30:38	6:31:41	L1	80	200	0.0	74.8	0.0	175	Housekeeping
103	6:42:52	6:43:51	A18	80	200	-3.0	75.7	0.0	175	30 ft low
104	6:46:37	6:47:36	A18	80	200	-3.0	76.1	0.0	175	Good - 5 kts slow, 215 AGL cross
105	6:50:48	6:52:05	A4	60	200	-3.0	76.5	0.0	175	Below GS - 180 AGL (left cross wind)
106	6:55:19	6:56:36	A4	60	200	-3.0	77.0	0.0	175	Good course, low
108	7:04:01	7:05:00	A13	70	200	-6.0	77.5	1.0	175	Cross high, Wind 5.6@213
109	7:07:56	7:09:00	A13	70	200	-6.0	78.0	0.0	175	2500 AGL cross, Wind 8.5@221@250 AGL
110	7:12:39	7:14:08	A2	50	200	-6.0	78.0	1.7	175	Left crab? 270 AGL cross
112	7:21:10	7:22:48	A2	50	200	-6.0	79.2	1.2	215	200 AGL cross
113	7:25:19	7:26:42	A6	60	200	-6.0	78.9	6.4	209	slight right drift - 210 AGL
114	7:29:10	7:30:28	A6	60	200	-6.0	79.7	4.2	186	
115	7:33:07	7:34:17	A6	60	200	-6.0	79.6	4.9	213	230-240 AGL
116	7:37:54	7:38:52	A20	80	200	-6.0	79.8	3.7	210	220 AGL low fuel
-	-	-	-	-	-	-	-	-	-	Refuel, Balloon profile to 1000 AGL
117	8:39:38	8:40:52	L1	80	200	0.0	83.5	6.6	204	+/- 2 kts
118	8:43:27	8:45:22	L2	50	200	0.0	80.6	5.9	206	+/- 3 kts
119	8:47:57	8:49:34	L3	60	200	0.0	80.9	4.6	214	170 AGL cross +/-1.5 kts
120	8:52:19	8:54:12	L3	60	200	0.0	82.3	3.4	220	5 kts slow
121	8:56:38	8:58:19	L3	60	200	0.0	82.6	4.2	204	
122	9:00:57	9:02:26	L4	70	200	0.0	83.0	2.9	253	stab at 1,500', 155 AGL , 6kts off
123	9:04:55	9:06:22	L4	70	200	0.0	83.1	3.7	221	155 AGL 70-65 kts
124	9:08:48	9:10:00	L1	80	200	0.0	82.8	4.2	231	190 AGL
125	9:12:25	9:13:39	L1	80	200	0.0	82.2	4.4	184	190 AGL
126	9:16:00	9:17:04	L5	90	200	0.0	81.8	5.6	201	190 AGL

Continued on next page

Table 11: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Ground Temp	Wind Speed	Wind Heading	Comments
127	9:19:18	9:20:19	L6	100	200	0.0	81.8	-	192	+/-1 kts, 190 AGL, A/S Boom reading low
128	9:23:59	9:24:55	L7	110	200	0.0	83.4	6.5	245	+/-1 kts 115, 94 on boom
129	9:26:58	9:27:50	L8	120	200	0.0	83.0	2.7	213	+/-1 kts, 94 on boom
130	9:29:53	9:30:43	L9	130	200	0.0	83.3	6.8	240	+/-1 kts, 96 kts on boom
131	9:33:14	9:34:28	L1	80	200	0.0	83.3	6.1	256	180 AGL
902	9:41:18	9:42:18	AMB	NA	NA	NA	81.7	8.8	241	A/C +3 nm out at start



Table 12: Flight 1274 Test Card, 6/18/2011, Source Array

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Ground Temp	Wind Speed	Wind Heading	Comments
901	5:21:49	5:22:51	AMB	0	0	0.0	72.9	1.2	145	none
902	5:26:15	5:27:16	AMB	0	0	0.0	73.0	1.0	145	Increased Gains
141	6:07:43	6:08:58	L1	80	200	0.0	73.2	2.0	145	none
145	6:22:44	6:24:00	A10	60	200	-12.0	73.2	1.2	145	Poor
146	6:26:40	6:27:54	A10	60	200	-12.0	73.2	1.0	145	Good glideslope
147	6:30:52	6:32:04	A10	60	200	-12.0	73.4	0.7	145	800 AGL to 50 AGL, good glideslope
148	6:34:39	6:35:35	A24	80	200	-12.0	73.6	1.2	145	under GS, collective full down - Olemiss up
149	6:38:09	6:39:07	A24	80	200	-12.0	74.0	1.2	145	
150	6:41:47	6:42:55	A9	60	200	-10.5	74.1	0.5	145	100 AGL above path, GS good
151	6:45:32	6:46:28	A9	60	200	-10.5	74.3	0.7	145	Poor, 150 AGL above, 10 kts high
152	6:49:09	6:50:23	A9	60	200	-10.5	74.5	1.7	145	Good!
153	6:52:56	6:53:55	A23	80	200	-10.5	74.7	2.0	146	8% torque
154	6:56:20	6:57:14	A23	80	200	-10.5	74.9	0.2	146	fast and high
155	6:59:44	7:00:44	A23	80	200	-10.5	75.2	1.2	146	little slow, but good glidepath and slope
156	7:03:37	7:04:48	A8	60	200	-9.0	75.6	1.2	158	profile 4/5 mislabel?
157	7:07:24	7:08:42	A7	60	200	-7.5	75.6	0.7	158	30 AGL high
158	7:11:01	7:12:24	A7	60	200	-7.5	76.3	0.0	158	+/- 1 kts, GS good
159	7:14:36	7:15:37	A21	80	200	-7.5	76.8	0.5	158	30 AGL high, end for fuel
-	-	-	-	-	-	-	-	-	-	Refuel, Balloon profile to 1000 AGL
160	7:59:52	8:01:05	L1	80	200	0.0	73.7	6.6	222	none
161	8:04:11	8:05:48	L3	60	200	0.0	80.1	4.2	191	good a/s and altitude, but 10% Q variation
162	8:08:32	8:10:13	L3	60	200	0.0	80.6	6.6	201	4 kts decay
163	8:12:50	8:14:03	L11	80	200	0.0	80.0	3.4	192	gear down, '+/- 1 kts A/S, 10 AGL
164	8:16:45	8:17:58	L11	80	200	0.0	80.0	6.1	177	gear down
165	8:20:29	8:21:30	L12	110	200	0.0	80.4	6.4	183	gear down (100 kts actual)

*Continued on next page*

Table 12: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Ground Temp	Wind Speed	Wind Heading	Comments
166	8:23:49	8:24:47	L12	110	200	0.0	80.7	4.2	207	gear down (100 kts actual)
167	8:27:06	8:28:06	L6	100	200	0.0	81.2	4.4	184	good a/s, glideslope
168	8:30:48	8:32:00	L1	80	200	0.0	82.1	4.2	184	good
169	8:34:22	8:35:17	L8	120	200	0.0	81.1	5.1	227	left of center
170	8:37:49	8:38:37	L9	130	200	0.0	81.2	9.3	196	good (134 KIAS)
171	8:41:14	8:42:01	L9	130	200	0.0	80.6	8.8	201	133-134 KIAS
172	8:44:27	8:45:19	L13	131	200	0.0	81.5	5.6	202	130-133 KIAS
177	9:00:24	9:01:22	A21	80	200	-7.5	81.8	5.4	199	260 AGL
178	9:03:41	9:04:37	A21	80	200	-7.5	81.8	9.5	203	240 AGL
179	9:07:37	9:08:53	L1	80	200	0.0	82.0	10.8	173	
903	9:16:55	9:18:06	AMB	0	0	0.0	82.1	3.7	196	gain: -107
904	9:19:50	9:20:52	AMB	0	0	0.0	81.9	4.6	185	gain: -113

Table 13: Flight 1275 Test Card, 6/19/2011, Source Array

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Ground Temp	Wind Speed	Wind Heading	Comments
901	5:23:34	5:24:32	AMB	0	0	0.0	75.8	0.2	253	ambient
181	5:54:39	5:55:29	L9	130	200	0.0	75.9	2.0	247	Stabilized glideslope at 1500'
182	5:58:29	5:59:43	A8	60	200	-9.0	76.0	0.7	247	Stabilized glideslope at 1500'
183	6:02:09	6:04:09	A8	60	200	-9.0	75.2	1.7	194	none
184	6:07:23	6:08:16	A22	80	200	-9.0	75.5	1.5	184	none
185	6:11:00	6:11:57	A22	80	200	-9.0	76.1	3.4	212	good, 180 AGL cross, getting gusty
187	6:18:39	6:19:47	A21	80	200	-7.5	75.5	1.2	278	good glideslope, 81 KIAS
188	6:22:30	6:23:24	A20	80	200	-6.0	76.0	0.2	278	81 KIAS +/-1, good course
189	6:26:09	6:27:12	A27	90	200	-6.0	76.0	1.5	253	late data stop, 92 KIAS
190	6:29:42	6:30:33	A27	90	200	-6.0	76.1	1.0	253	lots of collective motion
191	6:33:39	6:34:52	A32	60	390	-6.0	76.5	2.4	252	180 AGL cross, good glideslope, 58 KIAS
192	6:38:35	6:39:36	A17	70	200	-12.0	76.6	0.2	253	good slope, 70-61 KIAS
193	6:42:40	6:43:42	A17	70	200	-12	76.9	0.0	253	good slope, 70-71 KIAS
194	6:46:35	6:47:29	A31	90	200	-12.0	76.9	1.7	253	none
195	6:50:46	6:52:33	A3	50	200	-9.0	77.2	1.2	252	good slope, 42-47 kts
196	6:55:23	6:56:31	A15	70	200	-9.0	77.4	1.5	252	100 ft high
197	6:59:07	7:00:14	A15	70	200	-9.0	77.3	2.4	252	280 AGL high, 5 KIAS increase near end
198	7:02:37	7:03:37	A29	90	200	-9.0	77.7	2.0	252	none
199	7:06:42	7:07:38	A20	80	200	-6.0	77.9	2.0	252	roll cyclic inputs, midcourse corrections
200	7:10:26	7:11:25	A20	80	200	-6.0	78.2	0.5	228	81-81 KIAS, good
201	7:14:26	7:15:31	A14	70	200	-7.5	78.2	0.7	228	70-71 KIAS, 220 AGL cross
202	7:18:06	7:19:05	A28	90	200	-7.5	78.2	2.9	237	KIAS 92-93, 230 AGL cross
203	7:21:17	7:22:35	L1	80	200	0.0	78.2	2.0	231	housekeeping - good course
-	7:23:17	-	-	-	-	-	-	-	-	Refuel
204	8:13:14	8:14:34	L1	80	200	0.0	80.9	6.1	265	housekeeping - gusty at altitude - 82-77 KIAS

*Continued on next page*

Table 13: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Ground Temp	Wind Speed	Wind Heading	Comments
205	8:20:40	8:22:26	B1	60	65	Max	80.4	7.8	253	climb - KIAS +/- 2 kts 55-65 KIAS 60-65 KIAS
206	8:29:41	8:31:13	B1	60	65	Max	80.6	6.6	264	
207	8:33:55	8:35:32	B1	60	65	Max	81.0	5.6	262	
208	8:38:08	8:39:29	B2	80	65	Max	81.2	8.1	279	KIAS +/- 2 kts Ambient
209	8:42:02	8:43:20	B2	80	65	Max	81.0	9.5	264	
902	9:53:48	9:54:50	AMB	0	0	0.0	83.4	9.5	251	

Table 14: Steady Turn Flight Test Points

KIAS	Direction	Bank Angle	
		15°	30°
60	Left	S1 - 2	S2 - 3
	Right	S5 - 2	S6 - 4
80	Left	S3 - 1	S4 - 2
	Right	S7 - 2	S8 - 3

Table 15: Flight 1277 Test Card, 6/22/2011, Source Array

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Turn Dir	Bank Angle	Ground Temp	Wind Speed	Wind Heading	Comments
901	5:01:28	5:02:30	AMB	0	0.0	0	71.0	1.0	44	ambient
241	5:52:43	5:54:01	S5	60	Right	15	71.1	0.0	44	12 deg bank crossing 200 ft south
242	5:57:02	5:58:33	S5	60	Right	15	71.1	0.0	44	200ft off center, Wind 2.5@187@200 AGL
243	6:00:39	6:01:47	S6	60	Right	30	71.3	0.0	44	20-25 deg bank, increased speed 10kts, climb
244	6:03:17	6:04:28	S6	60	Right	30	71.2	0.2	44	12 KIAS increase
245	6:06:05	6:07:08	S6	60	Right	30	71.0	2.2	62	6 KIAS increase, bank angle good
246	6:09:02	6:10:02	S6	60	Right	30	71.1	2.4	62	bank 26-30
247	6:12:20	6:13:30	S7	80	Right	15	71.0	0.7	76	KIAS '+/- 1 kts, +/- 2 deg bank
248	6:15:20	6:16:30	S7	80	Right	15	71.0	0.2	77	Good!
249	6:18:10	6:19:09	S8	80	Right	30	70.9	0.5	77	Bank shallow by 2 deg
250	6:20:42	6:21:33	S8	80	Right	30	71.0	0.0	77	25-30 deg Bank, +5 KIAS
251	6:23:23	6:24:09	S8	80	Right	30	71.2	0.0	77	Wind 5@146@200 AGL
252	6:26:38	6:27:51	S1	60	Left	15	71.1	1.2	77	Bank 12-15
253	6:30:01	6:31:08	S1	60	Left	15	71.5	0.0	77	100 ft off center
254	6:33:07	6:34:05	S2	60	Left	30	71.8	0.0	77	bad
255	6:35:46	6:36:47	S2	60	Left	30	72.0	0.0	83	+/- 1 kts, 2 deg bank, 150 ft off
256	6:38:24	6:39:22	S2	60	Left	30	71.9	0.5	83	Wind 4.5@154@200 AGL, good
257	6:41:32	6:42:42	S3	80	Left	15	72.0	0.7	84	300 ft past center
258	6:44:55	6:46:06	S3	80	Left	15	71.6	1.2	109	good - 150 ft off center
259	6:48:10	6:49:06	S4	80	Left	30	72.0	0.5	109	good
260	6:51:17	6:52:15	S4	80	Left	30	71.8	1.5	105	bank 2 deg low, 50 off center

Table 16: Flight 1278 Test Card, 6/24/2011, Maneuver Array

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
901	4:10:46	4:11:46	AMB	NA	NA	NA	NA	NA				ambient
902	5:02:40	5:03:41	AMB	NA	NA	NA	NA	NA	73.9	0.0	142	ambient
301	5:52:02	5:53:09	L1	80	200	0.0	NA	NA	73.8	2.0	43	housekeeping
302	5:56:01	5:56:55	D10	80	250	-6.0	Pitch Up	Slow	73.7	2.2	39	Wind 2@249@250 AGL, med rate actual
303	5:59:37	6:00:27	D10	80	250	-6.0	Pitch Up	Slow	73.4	2.2	15	good
304	6:02:46	6:03:41	D10	80	250	-6.0	Pitch Up	Slow	73.4	1.2	15	82 KIAS
305	6:05:54	6:06:49	D10	80	250	-6.0	Pitch Up	Slow	73.2	2.9	358	good
306	6:08:58	6:09:52	D10	80	250	-6.0	Pitch Up	Slow	73.1	2.9	2	temp inv 3 deg/300 ft
307	6:12:23	6:13:14	D12	80	250	-6.0	Pitch Up	Fast	73.1	2.4	6	240 AGL
308	6:15:21	6:16:11	D12	80	250	-6.0	Pitch Up	Fast	73.4	2.2	8	none
309	6:18:18	6:19:13	D12	80	250	-6.0	Pitch Up	Fast	73.4	1.5	15	245 AGL
310	6:21:23	6:22:18	D12	80	250	-6.0	Pitch Up	Fast	73.4	0.7	15	270 AGL
311	6:24:35	6:25:26	R12	80	250	-6.0	Roll Left	Fast	73.4	0.0	15	control rate fast
312	6:27:20	6:28:12	R12	80	250	-6.0	Roll Left	Fast	73.4	0.2	15	good rate
313	6:30:09	6:30:57	R12	80	250	-6.0	Roll Left	Fast	73.5	0.2	15	270 AGL
314	6:32:55	6:33:46	R12	80	250	-6.0	Roll Left	Fast	73.5	0.0	15	good, 280 AGL
315	6:35:40	6:36:30	R12	80	250	-6.0	Roll Left	Fast	73.8	0.0	15	250 AGL
316	6:38:17	6:39:06	R10	80	250	-6.0	Roll Left	Slow	73.9	0.0	15	control rates high
317	6:40:53	6:41:43	R10	80	250	-6.0	Roll Left	Slow	73.8	1.5	23	control rates high
318	6:43:37	6:44:29	R10	80	250	-6.0	Roll Left	Slow	73.4	1.0	110	+1 KIAS, control rate good
319	6:46:28	6:47:19	R10	80	250	-6.0	Roll Left	Slow	73.5	0.2	110	good, 81-82 KIAS, little fast controls
320	6:49:15	6:50:01	R10	80	250	-6.0	Roll Left	Slow	73.6	0.0	110	control rates medium

*Continued on next page*

Table 16: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
321	6:52:02	6:52:48	R10	80	250	-6.0	Roll Left	Slow	73.5	1.0	110	245 AGL, better rates
322	6:54:52	6:55:38	R10	80	250	-6.0	Roll Left	Slow	73.7	0.0	110	250 AGL, +1 KIAS
323	6:57:47	6:58:36	R24	80	250	-6.0	Roll Right	Fast	74.0	0.7	110	control rate fast
324	7:00:39	7:01:28	R24	80	250	-6.0	Roll Right	Fast	74.0	0.0	110	low alt
325	7:03:12	7:04:02	R24	80	250	-6.0	Roll Right	Fast	74.1	0.0	111	Wind 1.6@266@260 AGL
326	7:05:41	7:06:33	R24	80	250	-6.0	Roll Right	Fast	74.3	0.0	111	good
327	7:08:11	7:09:00	R22	80	250	-6.0	Roll Right	Slow	74.5	0.0	111	light on fuel
328	7:10:43	7:11:30	R22	80	250	-6.0	Roll Right	Slow	74.7	0.0	111	medium rate
329	7:13:05	7:13:56	R22	80	250	-6.0	Roll Right	Slow	74.7	0.0	111	Wind 1.6@290@260 AGL, 230 AGL good rate
NA	NA	NA	D10	80	250	-6.0	Pitch Up	Slow	75.1	0.0	111	No data call
330	7:18:42	7:19:44	D10	80	250	-6.0	Pitch Up	Slow	75.2	0.0	111	good rate, 260 AGL
331	7:21:21	7:22:18	D10	80	250	-6.0	Pitch Up	Slow	75.4	0.0	111	good rate, 260 AGL

Table 17: Flight 1280 Test Card, 6/25/2011, Maneuver Array

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
901	4:51:41	4:52:42	AMB	NA	NA	NA	NA	NA	68.1	2.7	346	ambient
341	5:56:23	5:57:37	L1	80	200	0.0	NA	NA	68.0	1.5	82	Wind 5.7@75@200 AGL
342	6:01:51	6:02:41	D12	80	250	-6.0	Pitch Up	Fast	67.9	2.2	81	man start moved 150m back, 300 AGL
343	6:04:58	6:05:48	R22	80	250	-6.0	Roll Right	Slow	67.8	2.2	73	290 AGL, medium rate

*Continued on next page*



Table 17: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
344	6:07:42	6:08:28	R22	80	250	-6.0	Roll Right	Slow	67.8	2.2	61	none
345	6:10:16	6:11:12	R22	80	250	-6.0	Roll Right	Slow	67.8	2.2	61	-1 KIAS, good rate
346	6:13:14	6:14:15	R21	60	250	-6.0	Roll Right	Fast	67.9	0.2	61	310 AGL, no Mic 40
347	6:16:11	6:17:11	R21	60	250	-6.0	Roll Right	Fast	68.1	1.5	61	315 AGL, little fast control rate
348	6:19:13	6:20:16	R21	60	250	-6.0	Roll Right	Fast	68.2	2.2	61	260 AGL
349	6:22:20	6:23:21	R21	60	250	-6.0	Roll Right	Fast	68.4	2.9	60	good rate, above path
350	6:25:35	6:26:38	D7	60	250	-6.0	Pitch Up	Slow	68.5	3.2	57	good rates
351	6:28:48	6:29:54	D7	60	250	-6.0	Pitch Up	Slow	68.8	2.2	59	good rates, on course, 1-2 KIAS slow
352	6:32:14	6:33:13	D9	60	250	-6.0	Pitch Up	Fast	69.1	2.0	61	good rates, on condition
353	6:35:30	6:36:40	D9	60	250	-6.0	Pitch Up	Fast	69.5	1.0	68	none
354	6:39:07	6:40:15	D9	60	250	-6.0	Pitch Up	Fast	69.7	1.5	68	+/- 1 KIAS, rates slow
355	6:42:21	6:43:29	D9	60	250	-6.0	Pitch Up	Fast	70.2	1.5	67	good rates, good course
356	6:45:44	6:46:21	D4	80	150	0.0	Pitch Up	Slow	70.3	1.7	67	120 AGL over MIP, good rate and course
357	6:48:17	6:49:08	D4	80	150	0.0	Pitch Up	Slow	70.7	1.0	67	rate a little faster, but still slow
358	6:50:54	6:51:45	D4	80	150	0.0	Pitch Up	Slow	71.1	1.5	67	good, slow input (4-4.5 s)
359	6:53:35	6:54:21	D6	80	150	0.0	Pitch Up	Fast	71.3	1.5	67	on condition
360	6:56:11	6:57:00	D6	80	150	0.0	Pitch Up	Fast	71.3	1.2	70	rate slightly slow
361	6:58:49	6:59:44	D6	80	150	0.0	Pitch Up	Fast	71.2	2.4	82	quick control rate
362	7:01:26	7:02:16	D6	80	150	0.0	Pitch Up	Fast	71.5	2.2	81	-1 KIAS, good rate/course
363	7:04:20	7:05:16	D3	60	150	0.0	Pitch Up	Fast	71.5	1.0	81	collective increase about 2 sec in to hold NR

*Continued on next page*

Table 17: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
364	7:07:13	7:08:15	D3	60	150	0.0	Pitch Up	Fast	71.8	1.2	81	none
365	7:10:15	7:11:19	D3	60	150	0.0	Pitch Up	Fast	72.0	3.4	68	medium control rate
366	7:13:15	7:14:23	D3	60	150	0.0	Pitch Up	Fast	72.1	3.4	68	slightly high – good
367	7:16:21	7:17:27	D3	60	150	0.0	Pitch Up	Fast	76.9	2.7	77	Wind 5.6@74@200 AGL, stick bumped
368	7:20:06	7:20:51	R6	80	150	0.0	Roll Left	Fast	73.0	4.2	53	good
-	-	-	-	-	-	-	-	-	-	-	-	Refuel
369	8:02:34	8:03:22	R6	80	150	0.0	Roll Left	Fast	77.1	2.0	41	Wind 4.3@78@200 AGL, +1 KIAS
371	8:07:32	8:08:24	R6	80	150	0.0	Roll Left	Fast	77.6	2.9	36	good
372	8:10:04	8:10:50	R6	80	150	0.0	Roll Left	Fast	77.8	3.2	23	120 AGL
373	8:12:35	8:13:27	R4	80	150	0.0	Roll Left	Slow	77.5	2.2	15	good
374	8:15:09	8:15:57	R4	80	150	0.0	Roll Left	Slow	78.4	0.0	12	good rate, good course
375	8:17:45	8:18:34	R4	80	150	0.0	Roll Left	Slow	78.6	0.7	30	rate a little fast (medium)
376	8:20:21	8:21:13	R4	80	150	0.0	Roll Left	Slow	79.0	1.5	41	no mic 44
377	8:23:00	8:23:48	R4	80	150	0.0	Roll Left	Slow	78.7	1.2	18	good
378	8:25:49	8:26:34	R18	80	150	0.0	Roll Right	Fast	79.1	2.2	18	good
379	8:28:14	8:28:59	R18	80	150	0.0	Roll Right	Fast	79.0	1.0	18	good
380	8:30:39	8:31:27	R18	80	150	0.0	Roll Right	Fast	79.5	1.5	18	good
381	8:33:06	8:33:52	R18	80	150	0.0	Roll Right	Fast	79.4	2.2	29	-1 KIAS
382	8:35:36	8:36:22	R16	80	150	0.0	Roll Right	Slow	79.7	2.7	69	good
383	8:38:01	8:38:54	R16	80	150	0.0	Roll Right	Slow	80.0	2.2	43	none
384	8:40:28	8:41:18	R16	80	150	0.0	Roll Right	Slow	79.8	0.0	342	-1 KIAS, little fast rate
385	8:42:58	8:43:49	R16	80	150	0.0	Roll Right	Slow	79.8	1.5	326	none
386	8:45:25	8:46:26	R15	60	150	0.0	Roll Right	Fast	79.8	1.7	322	-1 KIAS, medium rate

*Continued on next page*

Table 17: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
387	8:48:12	8:49:15	R15	60	150	0.0	Roll Right	Fast	80.9	4.2	21	50 AGL low, -2 KIAS
388	8:50:59	8:52:01	R15	60	150	0.0	Roll Right	Fast	80.3	2.2	10	1-2 KIAS slow, o.w. good
389	8:53:32	8:54:53	R15	60	150	0.0	Roll Right	Fast	79.9	2.2	351	good
390	8:56:24	8:57:12	C4	80	150	0.0	Pull Up	Slow	80.3	3.7	350	input late (100 m)
391	8:59:05	8:59:58	C4	80	150	0.0	Pull Up	Slow	80.7	1.5	358	good
392	9:02:01	9:02:52	C6	80	150	0.0	Pull Up	Fast	81.2	2.2	6	good, 1 sec to 10% rate
393	9:04:40	9:05:35	C6	80	150	0.0	Pull Up	Fast	81.6	0.0	30	late input (50 m)
394	9:07:21	9:08:12	C6	80	150	0.0	Pull Up	Fast	82.0	2.2	37	good 1 sec to 12%
395	9:10:07	9:10:57	C6	80	150	0.0	Pull Up	Fast	82.1	2.2	22	still late
396	9:12:50	9:13:14	C6	80	150	0.0	Pull Up	Fast	81.5	2.2	348	good
398	9:19:24	9:20:30	A5	60	200	-4.5	NA	NA	82.1	2.2	345	+/- 2 KIAS, +/- 30 ft
399	9:22:44	9:23:48	A12	70	200	-4.5	NA	NA	81.8	1.0	335	+1/-3 KIAS
400	9:25:57	9:26:52	A19	80	200	-4.5	NA	NA	82.2	0.0	335	+1/-2 KIAS
401	9:28:49	9:29:46	A26	90	200	-4.5	NA	NA	82.8	2.9	329	bumpy
402	9:31:57	9:32:57	A16	70	200	-10.5	NA	NA	83.0	2.7	298	bumpy
403	9:35:42	9:36:37	A16	70	200	-10.5	NA	NA	82.5	2.0	317	-4 KIAS, above glide slope
404	9:39:03	9:40:09	A16	70	200	-10.5	NA	NA	83.2	2.2	339	large control inputs
405	9:42:28	9:43:46	L1	80	200	0.0	NA	NA	83.3	5.4	243	+/- 200 FPM sink rate
406	9:46:23	9:47:13	D12	80	250	-6.0	Pitch Up	Fast	82.7	3.9	292	none
902	10:26:14	10:27:15	AMB	0	0	0.0	0.0	0	82.9	6.6	211	ambient

Table 18: Flight 1282 Test Card, 6/26/2011, Maneuver Array

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
901	5:21:05	5:22:06	AMB	NA	NA	NA	NA	NA	72.0	1.0	136	ambient
411	5:56:17	5:57:35	L1	80	200	0.0	NA	NA	72.6	1.7	136	housekeeping
412	6:00:08	6:01:01	D12	80	250	-6.0	Pitch Up	Fast	73.1	1.7	136	man housekeeping, rate a bit fast
413	6:03:20	6:04:14	D10	80	250	-6.0	Pitch Up	Slow	73.1	2.0	135	Wind 4.5@318@200 AGL, medium rate actual
414	6:06:20	6:07:15	D10	80	250	-6.0	Pitch Up	Slow	72.9	2.0	134	good
415	6:09:26	6:10:19	D10	80	250	-6.0	Pitch Up	Slow	73.7	2.0	133	rate - 4 sec (slow)
416	6:12:41	6:13:31	R12	80	250	-6.0	Roll Left	Fast	73.8	2.0	133	good rate/airspeed, glideslope 1.5 deg
417	6:15:33	6:16:23	R12	80	250	-6.0	Roll Left	Fast	73.8	1.5	133	good
418	6:18:21	6:19:10	R10	80	250	-6.0	Roll Left	Slow	73.7	1.2	133	fast rate actual
419	6:21:00	6:21:57	R10	80	250	-6.0	Roll Left	Slow	73.8	1.0	133	good, Wind 4.3@325@240
420	6:23:37	6:24:30	R10	80	250	-6.0	Roll Left	Slow	73.8	0.7	133	bumpy input
421	6:26:20	6:27:11	R10	80	250	-6.0	Roll Left	Slow	74.0	0.7	133	good
422	6:29:06	6:29:59	R24	80	250	-6.0	Roll Right	Fast	73.9	0.0	133	unsmooth input, Wind 5.8@314@240 AGL
423	6:31:46	6:32:34	R24	80	250	-6.0	Roll Right	Fast	74.0	0.0	133	rate medium actual
424	6:34:21	6:35:11	R24	80	250	-6.0	Roll Right	Fast	74.0	0.2	133	good, +/- 1 KIAS
425	6:36:50	6:37:43	R24	80	250	-6.0	Roll Right	Fast	74.1	0.5	133	+/- 1 KIAS
426	6:39:30	6:40:19	C10	80	250	0.0	Push Over	Slow	74.4	0.0	133	rate medium actual
427	6:42:10	6:43:02	C10	80	250	0.0	Push Over	Slow	74.4	0.2	133	X = MIP- 25m
428	6:45:00	6:45:48	C10	80	250	0.0	Push Over	Slow	74.3	0.0	133	3-4 sec rate actual
429	6:47:52	6:48:20	C12	80	250	0.0	Push Over	Fast	74.1	0.0	133	very fast rate
430	6:50:40	6:51:31	C12	80	250	0.0	Push Over	Fast	74.2	0.2	133	good

Continued on next page

Table 18: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
431	6:53:54	6:54:37	C12	80	250	0.0	Push Over	Fast	74.7	1.5	93	Noticed 150 AGL for all C push overs (C10, C12) good fast actual, fixed cyclic, no real airspeed change roll response without cyclic correction glideslope low 160 AGL, little roll response medium rate actual good good Refuel
432	6:56:25	6:56:25	C12	80	250	0.0	Push Over	Fast	74.6	1.2	93	
433	6:59:26	7:00:17	C4	80	150	0.0	Pull Up	Slow	75.5	0.0	93	
434	7:02:10	7:03:01	C4	80	150	0.0	Pull Up	Slow	75.6	0.2	93	
435	7:05:04	7:06:09	C1	60	150	0.0	Pull Up	Slow	75.6	0.7	93	
436	7:08:05	7:09:11	C1	60	150	0.0	Pull Up	Slow	75.9	1.0	93	
437	7:11:08	7:12:13	C3	60	150	0.0	Pull Up	Fast	75.9	2.0	62	
438	7:14:17	7:15:20	C3	60	150	0.0	Pull Up	Fast	76.0	1.7	22	
439	7:17:23	7:18:36	D1	60	150	0.0	Pitch Up	Slow	75.8	2.0	8	
-	-	-	-	-	-	-	-	-	-	-	-	
440	8:21:10	8:22:28	L1	80	200	0.0	0.0	0	80.7	5.1	333	housekeeping, +3/-2 KIAS
441	8:25:06	8:26:26	A10	60	200	-12.0	NA	NA	80.9	7.6	312	unsteady
442	8:28:48	8:30:18	A10	60	200	-12.0	NA	NA	81.1	6.1	313	unsteady
443	8:32:35	8:33:39	A24	80	200	-12.0	NA	NA	80.9	2.7	291	unsteady
444	8:36:05	8:37:25	A8	60	200	-9.0	NA	NA	81.0	3.2	307	better quality
445	8:39:46	8:40:45	A22	80	200	-9.0	NA	NA	81.6	5.1	342	better, Wind 7.2@310@300 AGL
446	8:43:17	8:44:38	A6	60	200	-6.0	NA	NA	82.0	7.1	319	glideslope unsteady
449	8:54:18	8:55:16	A18	80	200	-3.0	NA	NA	81.4	6.1	311	unsteady glideslope
450	8:57:44	8:58:35	D12	80	250	-6.0	Pitch Up	Fast	81.2	7.3	335	housekeeping, good, Wind 8.1@327@260 AGL
451	9:00:47	9:02:08	L1	80	200	0.0	NA	NA	81.9	7.8	345	housekeeping, unsteady alt

Table 19: Flight 1285 Test Card, 6/28/2011, Maneuver Array

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
901	5:02:09	5:03:10	AMB	0	0	0.0	0.0	0	74.4	0.0	322	ambient
461	5:45:10	5:46:23	L1	80	150	0.0	0.0	0	73.8	0.0	323	camera crew near ref mic position
462	5:51:01	5:52:55	D12	80	250	-6.0	Pitch Up	Fast	73.6	0.0	323	+1 KIAS, GS high
463	5:54:29	5:56:24	R15	60	150	0.0	Roll Right	Fast	73.7	0.0	323	1.5 sec rate
464	5:57:32	5:59:22	R15	60	150	0.0	Roll Right	Fast	73.4	0.0	323	+/-1 KIAS, 140 AGL
465	6:00:31	6:02:20	R3	60	150	0.0	Roll Left	Fast	73.5	0.0	323	1 sec rate, +/- 10 AGL
466	6:03:17	6:05:15	R3	60	150	0.0	Roll Left	Fast	73.7	0.0	323	good
467	6:06:21	6:07:56	R18	80	150	0.0	Roll Right	Fast	73.7	0.0	323	good
468	6:08:56	6:10:36	R18	80	150	0.0	Roll Right	Fast	73.9	0.0	323	good
469	6:11:48	6:13:49	R17	80	150	0.0	Roll Right	Med	74.0	0.0	324	good
470	6:14:35	6:16:05	R17	80	150	0.0	Roll Right	Med	74.2	0.0	324	good
471	6:17:06	6:18:43	R6	80	150	0.0	Roll Left	Fast	74.5	0.0	324	135 AGL, +/-1 KIAS, 1 sec rate, good
472	6:19:35	6:21:16	R6	80	150	0.0	Roll Left	Fast	74.6	0.0	324	good, Wind 3.5@ 294@160 AGL +/-1 KIAS, rate slow, 2-3 sec
473	6:22:06	6:23:47	R5	80	150	0.0	Roll Left	Med	74.5	0.0	324	
474	6:24:49	6:26:26	R5	80	150	0.0	Roll Left	Med	74.8	0.0	324	good
475	6:27:22	6:29:05	D5	80	150	0.0	Pitch Up	Med	75.0	0.0	324	good
476	6:30:22	6:32:07	D5	80	150	0.0	Pitch Up	Med	75.2	0.0	324	good
477	6:33:21	6:35:08	D11	80	250	-6.0	Pitch Up	Med	74.7	0.0	324	good
478	6:36:26	6:38:10	D11	80	250	-6.0	Pitch Up	Med	74.8	0.0	324	good
479	6:39:20	6:41:14	R12	80	250	-6.0	Roll Left	Fast	75.5	0.0	324	good
480	6:42:10	6:44:07	R12	80	250	-6.0	Roll Left	Fast	75.6	0.0	325	good, 79 KIAS
481	6:45:00	6:46:54	R11	80	250	-6.0	Roll Left	Med	75.7	0.0	325	good

Continued on next page

Table 19: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
482	6:47:41	6:49:31	R11	80	250	-6.0	Roll Left	Med	75.9	0.0	327	good
483	6:50:36	6:52:31	R24	80	250	-6.0	Roll Right	Fast	76.3	0.0	327	good, 1-1.5 sec rate
484	6:53:31	6:55:19	R24	80	250	-6.0	Roll Right	Fast	76.5	0.2	327	slow rate (2 sec)
485	6:56:29	6:58:00	R24	80	250	-6.0	Roll Right	Fast	76.8	0.0	328	good
486	6:58:58	7:00:53	R23	80	250	-6.0	Roll Right	Med	77.1	0.0	328	good
487	7:01:48	7:03:33	R23	80	250	-6.0	Roll Right	Med	76.9	0.0	328	good
488	7:04:40	7:06:41	R9	60	250	-6.0	Roll Left	Fast	77.8	0.0	328	good
489	7:07:34	7:09:49	R9	60	250	-6.0	Roll Left	Fast	78.0	0.0	328	57 KIAS
490	7:12:02	7:14:03	D19	80	250	-9.0	Pitch Up	Slow	78.3	0.0	328	good
491	7:15:15	7:17:02	D19	80	250	-9.0	Pitch Up	Slow	78.5	0.0	328	good
492	7:18:54	7:20:37	D21	80	250	-9.0	Pitch Up	Fast	78.4	0.0	328	good
493	7:21:52	7:23:40	D21	80	250	-9.0	Pitch Up	Fast	78.2	0.0	328	good
-	-	-	-	-	-	-	-	-	-	-	-	Refuel
494	8:02:10	8:05:04	A10	60	200	-12.0	0.0	0	80.5	4.6	279	slope/lateral corrections
495	8:06:32	8:08:54	A10	60	200	-12.0	0.0	0	80.7	4.4	328	high (230 AGL cross)
496	8:10:31	8:12:29	A24	80	200	-12.0	0.0	0	81.0	4.4	299	+3 KIAS, 260 AGL
497	8:13:51	8:16:23	A4	60	200	-3.0	0.0	0	81.5	5.6	313	+/- 2 KIAS, 175 AGL, Wind 7@303@200 AGL
498	8:18:10	8:20:07	A18	80	200	-3.0	0.0	0	81.4	5.4	290	good
499	8:21:32	8:23:21	M2	80	200	0.0	Accel	Med	81.1	5.1	307	2 kts/s actual
500	8:24:55	8:26:35	M2	80	200	0.0	Accel	Med	81.7	3.7	340	2.5 kts/s actual
501	8:28:01	8:29:45	M3	80	200	0.0	Accel	Fast	81.7	4.9	321	accel unsure? Initiate at
502	8:31:56	8:33:41	M3	80	200	0.0	Accel	Fast	81.9	5.9	290	2000 ft for future accel 4 kts/s actual, 5 sec to get collective w/o overtorque

*Continued on next page*

Table 19: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
503	8:35:05	8:36:58	M3	80	200	0.0	Accel	Fast	82.3	4.2	296	2 kts/s actual
504	8:38:17	8:40:05	M4	80	200	0.0	Decel	Slow	81.4	9.3	315	overdrive some mics, Mic 51 did not record, good cond
505	8:41:23	8:43:19	M5	80	200	0.0	Decel	Med	81.6	7.8	333	good, decel 3-3.5 kts/s
506	8:44:37	8:46:17	M6	80	200	0.0	Decel	Fast	81.6	7.3	301	good, 5 kts/s (approaching overspeed)
507	8:47:49	8:49:59	M6	80	200	0.0	Decel	Fast	82.0	5.6	313	good, 5 kts/s, 33,34,35 overdriven
508	8:51:34	8:53:20	Y6	60-80	200	0.0	Left/Accel	Fast	82.3	9.0	279	wrong maneuver
509	8:55:28	8:57:20	Y6	60-80	200	0.0	Left/Accel	Fast	82.3	7.6	313	accel 500-700m prior to roll initiation
510	8:58:47	9:00:31	Y6	60-80	200	0.0	Left/Accel	Fast	82.4	5.9	289	good! 2 kts/s accel, good timing on roll
511	9:01:36	9:03:28	Y24	60-80	200	0.0	Right/Accel	Fast	82.3	9.8	307	roll 100m too soon
512	9:04:20	9:06:17	Y24	60-80	200	0.0	Right/Accel	Fast	82.3	7.3	307	good, input at MIP
513	9:07:20	9:09:31	Z15	80	200	6.0	Right	Fast	81.9	7.3	313	climb start 300m before MIP
514	9:11:05	9:12:42	Z15	80	200	6.0	Right	Fast	82.2	8.3	281	good
515	9:13:48	9:15:21	Z15	80	200	6.0	Right	Fast	82.7	6.4	297	good
516	9:16:15	9:18:17	L1	80	150	0.0	0.0	0	83.4	6.8	304	housekeeping
517	9:20:02	9:21:55	D12	80	250	-6.0	Pitch Up	Fast	83.2	2.7	317	housekeeping



Table 20: Flight 1287 Test Card, 6/30/2011, Maneuver Array

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
901	5:24:51	5:25:51	AMB	NA	NA	NA	NA	NA	70.7	0.2	356	ambient
521	5:45:00	5:47:03	L1	80	200	0.0	NA	NA	70.7	0.0	355	housekeeping
522	5:52:13	5:53:42	R17	80	150	0.0	Roll Right	Med	70.6	1.0	355	good
523	5:54:40	5:56:04	R17	80	150	0.0	Roll Right	Med	70.5	1.5	355	good, Wind 6.4@14@160 AGL
524	5:56:57	5:58:24	R18	80	150	0.0	Roll Right	Fast	70.6	1.2	355	good
525	5:59:20	6:00:47	R18	80	150	0.0	Roll Right	Fast	70.6	0.5	355	good, Wind 7.8@19@160 AGL
526	6:01:44	6:03:03	D5	80	150	0.0	Pitch Up	Med	70.6	1.2	355	+1KIAS, good
527	6:04:01	6:05:29	D5	80	150	0.0	Pitch Up	Med	70.5	0.5	355	fast rate, other a/c
528	6:06:28	6:08:02	D5	80	150	0.0	Pitch Up	Med	70.5	1.5	355	other aircraft in area, good
529	6:08:52	6:10:22	D6	80	150	0.0	Pitch Up	Fast	70.4	1.7	356	good
530	6:11:19	6:13:03	D6	80	150	0.0	Pitch Up	Fast	70.4	1.7	356	good
531	6:14:13	6:16:15	D3	60	150	0.0	Pitch Up	Fast	70.3	1.7	356	-1 KIAS, 105 AGL
532	6:17:24	6:19:38	R21	60	250	-6.0	Roll Right	Fast	70.4	2.0	352	slope unstable, strong wind grad (4@100 ft)
533	6:20:33	6:22:41	R21	60	250	-6.0	Roll Right	Fast	70.5	2.0	343	pitch up instead of roll
534	6:23:52	6:26:01	R21	60	250	-6.0	Roll Right	Fast	70.7	1.5	344	good
535	6:27:02	6:28:36	C10	80	250	0.0	Push Over	Slow	71.0	1.0	351	33,34,35 overdriven, fast rate
536	6:29:38	6:31:19	C10	80	250	0.0	Push Over	Slow	71.0	1.0	351	good
537	6:32:36	6:34:19	C12	80	250	0.0	Push Over	Fast	71.2	2.2	348	good
538	6:35:26	6:37:00	C12	80	250	0.0	Push Over	Fast	71.3	0.7	348	190 AGL, good
539	6:38:10	6:39:50	C12	80	250	0.0	Push Over	Fast	71.5	1.5	349	good, Wind 7.2@11@160 AGL
540	6:41:07	6:42:35	M5	80	150	0.0	Decel	Med	71.8	0.7	349	100m too early
541	6:43:31	6:45:11	M5	80	150	0.0	Decel	Med	71.8	1.7	349	rate unsure

Continued on next page

Table 20: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
542	6:46:22	6:47:57	M5	80	150	0.0	Decel	Med	71.8	1.7	349	rate a bit slower
543	6:49:17	6:50:49	M6	80	150	0.0	Decel	Fast	72.2	2.4	346	good
544	6:52:13	6:54:04	M6	80	150	0.0	Decel	Fast	72.7	1.5	337	good
545	6:55:46	6:57:23	M2	80	150	0.0	Accel	Med	72.7	2.2	343	1 kts/s
546	6:58:41	7:00:20	M3	80	150	0.0	Accel	Fast	73.0	2.4	333	2-3 kts/s
547	7:01:33	7:03:12	M3	80	150	0.0	Accel	Fast	73.0	2.4	332	2-3 kts/s
548	7:04:30	7:05:59	Z15	80	150	6.0	Roll Right	Fast	73.3	2.7	332	+/-1 KIAS, good track, shallow climb
549	7:06:51	7:08:26	Z15	80	150	6.0	Roll Right	Fast	73.6	3.9	358	+/-1 KIAS, good
550	7:09:45	7:11:29	Z6	80	150	6.0	Roll Left	Fast	73.6	3.2	340	late input
551	7:12:43	7:14:02	Z6	80	150	6.0	Roll Left	Fast	73.8	3.4	350	good, +/-1 KIAS, fast rate
-	-	-	-	-	-	-	-	-	-	-	-	Refuel
552	7:51:47	7:53:31	Z18	80	150	9.0	Roll Right	Fast	76.6	4.9	350	+/- 1 KIAS, bumped collective on climb
553	7:54:47	7:56:23	Z18	80	150	9.0	Roll Right	Fast	77.0	5.6	351	roll a bit early
554	7:57:36	7:59:32	Z18	80	150	9.0	Roll Right	Fast	77.1	4.4	353	
555	8:01:01	8:02:37	Z9	80	150	9.0	Roll Left	Fast	77.4	6.9	6	+1 KIAS
556	8:03:53	8:05:31	Z9	80	150	9.0	Roll Left	Fast	77.7	5.6	13	good (F15 over B70 @ 16000 AGL)
557	8:07:49	8:09:43	Y30	80	150	0.0	Decel/Right	Slow/Fast	77.9	3.4	345	75 KIAS at MIP, slow roll rate
558	8:11:18	8:12:55	Y30	80	150	0.0	Decel/Right	Slow/Fast	78.1	5.6	1	mic 49 overdriven
559	8:14:15	8:15:44	Y30	80	150	0.0	Decel/Right	Slow/Fast	78.5	5.4	5	83 KIAS at MIP
560	8:17:03	8:18:38	Y12	80	150	0.0	Decel/Left	Slow/Fast	78.8	5.6	13	80 KIAS at MIP

*Continued on next page*

Table 20: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Flight Path Angle	Direct	Rate	Ground Temp	Wind Speed	Wind Heading	Comments
561	8:19:48	8:21:45	Y12	80	150	0.0	Decel/Left	Slow/Fast	78.7	5.9	358	good
562	8:22:33	8:24:03	Y33	80	150	0.0	Decel/Right	Med/Fast	79.2	5.1	355	good
563	8:25:22	8:26:54	Y33	80	150	0.0	Decel/Right	Med/Fast	79.8	4.2	22	good
564	8:28:07	8:29:39	Y15	80	150	0.0	Decel/Left	Med/Fast	79.3	5.6	355	overdrove 41
565	8:30:45	8:32:11	Y15	80	150	0.0	Decel/Left	Med/Fast	79.4	6.4	2	good
566	8:33:31	8:35:44	Y21	80	150	0.0	Accel/Right	Slow/Fast	79.5	6.6	354	not much accel
567	8:36:35	8:38:32	Y21	80	150	0.0	Accel/Right	Slow/Fast	79.6	6.4	8	still slow accel
568	8:39:53	8:41:38	Y3	80	150	0.0	Accel/Left	Slow/Fast	80.0	5.1	360	slow accel
569	8:42:47	8:44:36	Y3	80	150	0.0	Accel/Left	Slow/Fast	80.1	6.4	2	still slow
570	8:48:34	8:50:38	Y24	80	150	0.0	Accel/Right	Med/Fast	80.4	4.4	0	good
571	8:51:43	8:53:32	Y24	80	150	0.0	Accel/Right	Med/Fast	81.6	5.9	18	Left roll actual
572	8:54:39	8:56:28	Y24	80	150	0.0	Accel/Right	Med/Fast	81.4	9.0	8	better accel
573	8:57:44	8:59:35	Y6	80	150	0.0	Accel/Left	Med/Fast	81.1	8.6	5	good
574	9:00:52	9:03:04	L1	80	150	0.0	NA	NA	81.1	9.5	10	+/- 2 KIAS
575	9:05:11	9:07:16	D12	80	150	-6.0	Pitch Up	Fast	81.5	6.1	4	good

Table 21: Collective Flight Test Points

KIAS	Input	Rate	
		Slow	Fast
60	PU	C1 - 2	C3 - 2
80	PU	C4 - 3	C6 - 6
	PO	C10 - 5	C12 - 7

PU - Collective Pull

PO - Collective Drop

Table 22: Cyclic Pitch-Up Flight Test Points

KIAS	Angle	Rate		
		Slow	Medium	Fast
60	0°	D1 - 1		D3 - 6
	-6°	D7 - 2		D9 - 5
80	0°	D4 - 3	D5 - 2	D6 - 5
	-6°	D10 - 9	D11 - 2	D12 - 12
	-9°	D19 - 2		D21 - 2
100	0°		D22 - 3	D23 - 1

Table 23: Cyclic Roll Flight Test Points

KIAS	Angle	Input	Rate		
			Slow	Medium	Fast
60	0°	Left			R3 - 2
		Right			R15 - 6
	6°	Left			R9 - 2
		Right			R21 - 6
80	0°	Left	R4 - 5	R5 - 2	R6 - 7
		Right	R16 - 4	R17 - 2	R18 - 6
	6°	Left	R10 - 11	R11 - 2	R12 - 9
		Right	R22 - 6	R23 - 2	R24 - 11
100	0°	Right		R26 - 2	R25 - 2

Table 24: Quick Start, Quick Stop Flight Test Points

KIAS	Rate		
	Slow	Medium	Fast
80 to 100		M2 - 3	M3 - 5
80 to 60	M4 - 1	M5 - 4	M6 - 4

Table 25: Roll Angle Change During Climbing Flight Test Points

KIAS	Angle	Direction	
		Left	Right
80	0° to 6°	Z6 - 2	Z15 - 5
	0° to 9°	Z9 - 2	Z18 - 3

Table 26: Roll Angle Change During Accelerating/Decelerating Flight Test Points

KIAS	KIAS kt/s	Cyclic Input	
		Left	Right
60 to 80	1	Y3 - 2	Y21 - 2
	2	Y6 - 5	Y24 - 4
100 to 80	-1	Y12 - 2	Y30 - 3
	-2	Y15 - 2	Y33 - 2

Table 27: Flight 1288 Test Card, 7/1/2011, Terminal Area Array

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Ground Temp	Wind Speed	Wind Heading	Comments
901	5:25:46	5:27:17	AMB	NA	NA	71.9	0.0	343	ambient
601	5:44:18	5:46:25	L1	80	150	71.4	1.0	343	housekeeping - stablized by X = -5000
602	5:50:41	5:52:54	L1	80	150	71.2	1.7	343	good
603	5:42:22	5:56:16	L6	100	150	71.1	2.4	343	good, -1 KIAS
604	5:57:37	5:59:15	L8	120	150	71.2	2.7	353	altitude unsteady until X = -1500
605	6:00:48	6:02:23	L8	120	150	71.2	2.9	353	117-118 KCAS
606	6:03:49	6:05:22	L10	140	150	71.0	2.9	355	A/S 138-140 KIAS
607	6:07:01	6:08:27	L10	140	150	71.0	2.2	3	A/S 139 KIAS, 131 KCAS
610	6:20:03	6:23:13	T2	NA	NA	71.2	0.5	3	overshoot TALP by 200 ft
611	6:25:06	6:28:26	T2	NA	NA	71.2	0.5	3	
612	6:33:46	6:35:53	T4	NA	NA	71.9	2.0	3	slightly left of course, 20-50 ft above GS
613	6:38:08	6:40:22	T4	NA	NA	72.2	1.7	3	may only slow to 20 KIAS at TALP
614	6:42:51	6:44:49	T5	NA	NA	73.2	1.2	3	approach auto
615	6:47:40	6:49:49	T5	NA	NA	73.2	1.7	3	near auto - good, wobbly course
616	6:53:11	6:55:29	T6	NA	NA	73.5	0.7	3	little low on approach, bit fast
617	6:57:52	7:00:31	T6	NA	NA	73.9	0.5	3	better
618	7:04:03	7:07:04	T7	NA	NA	74.5	1.7	13	40 ft above glideslop
619	7:10:20	7:13:29	T7	NA	NA	74.9	2.0	21	not on course
620	7:16:27	7:19:26	T7	NA	NA	75.0	3.2	11	good glideslope, constant accel
-	-	-	-	-	-	-	-	-	Refuel
621	8:19:46	8:22:44	T1	NA	NA	80.0	3.4	25	slightly under glideslope
623	8:26:53	8:30:24	T1	NA	NA	79.9	5.6	4	above glidepath, lateral deflections
624	8:33:04	8:35:35	T3	NA	NA	80.6	3.7	1	bit of course wander
625	8:38:44	8:41:30	T3	NA	NA	82.6	4.6	26	much better course

*Continued on next page*

Table 27: *continued*

NASA Run Num	Data On Time	Data Off Time	Cond Counter	KIAS	Cross Alt	Ground Temp	Wind Speed	Wind Heading	Comments
626	8:44:11	8:46:55	T8	NA	NA	82.4	4.4	33	good
627	8:49:22	8:52:12	T8	NA	NA	82.9	6.4	28	slowed to 95 kts early, then held on first segment
629	8:59:59	9:01:53	T9	NA	NA	84.2	4.4	29	terminated - below glidepath
630	9:04:35	9:06:59	T9	NA	NA	84.2	7.1	47	visual marker does not seem aligned with guidance
631	9:09:56	9:12:03	T9A	NA	NA	83.9	7.6	35	did not intercept flightpath at desired point
632	9:14:58	9:16:30	T9A	NA	NA	85.0	9.5	34	terminated - initial at 1,300 ft
633	9:19:19	9:22:11	T11	NA	NA	85.0	8.1	22	level 100-60 KIAS, steep descent 55 - 0
634	9:24:54	9:27:23	T11	NA	NA	86.1	4.6	19	
635	9:30:04	9:33:10	T11A	NA	NA	86.3	7.8	28	turning during approach, decelerating descending left turn
638	9:43:02	9:45:31	T10A	NA	NA	86.6	5.4	10	unguided - little fast and shallow, but closer to T10
639	9:48:34	9:50:53	T2	NA	NA	87.0	3.9	29	100 KIAS actual

Table 28: Reference File Variable Names

Column Number	Variable	Description	Units
1	test	Daily test number	
2	nasa	NASA run number	
3	bell	Bell run number	
4	utc_h_start	UTC start time hours	hours
5	utc_m_start	UTC start time minutes	minutes
6	utc_s_start	UTC start time seconds	secs
7	utc_secs_from_mid	UTC seconds from midnight	secs
8	utc_local_secs_from_mid	Local time seconds from midnight	secs
9	duration	Run length	secs
10	trfile	Bell CAFTA system file name	
11	ref_location	Reference mic description for guidance	
12	ref_mic_loc	Reference mic number for guidance	
13	ref_lat	Reference point latitude for guidance	
14	ref_lon	Reference point longitude for guidance	
15	ref_elips_ft	Reference point elipsoid height for guidance	ft
16	ref_hgt_ft	Reference point hgtm height for guidance	ft
17	test_cond	Planned test condition code	
18	overhead_time	Reference overhead time	secs
19	test_plan_ctr	Test condition counter	
20	description	Test condition description	
21	avg_grd_spd	Average ground speed	kts
22	profile_number	Bell guidance profile number	
23	true_heading	Commanded true heading	deg
24	gross_weight	Aircraft gross weight	pounds
25	target_ias	Commanded indicated airspeed	kts
26	asp_tol	Airspeed tolerance	kts
27	rtr_torque	Rotor torque	percent
28	fuel_rem	Fuel remaining	pounds
29	long_cg	Longitudinal center of gravity	in
30	fpa	Commanded flight path angle	deg
31	direction	Maneuver direction	
32	rate	Maneuver rate	
33	control_temp_F	Temperature at control van	deg F
34	control_ws_kts	Wind speed at control van	kts
35	control_wd	Wind direction at control van	deg
36	daily_weather_profile	Weather profile in structure flt*wp	
37	fwpinfo_profile_num	Weather profile number in fwpinfo	
38	comments	Comments from test cards	



Table 29: Pressure Time History File Contents

Variable Name	Description	Units
pressure	Acoustic pressure as measured	pascals
X	Mic X location in rotated coordinate frame	feet
Y	Mic Y location in rotated coordinate frame	feet
Z	Mic Z location in rotated coordinate frame	feet
overhead_time	Time that aircraft is closest to ref location	seconds
UTM_X	Mic X location in UTM coordinate frame	feet
UTM_Y	Mic Y location in UTM coordinate frame	feet
global.test	Test description	
global.location	Test location	
global.date	Date of test	
global.run_number	Run number	
global.noise_source	Aircraft type	
global.mic_number	Microphone number	
global.X	Mic X location in rotated coordinate frame	feet
global.Y	Mic Y location in rotated coordinate frame	feet
global.Z	Mic Z location in rotated coordinate frame	feet
global.sample_rate	Samples per second of pressure data	
global.start_time	Local seconds from midnight of first sample	secs
global.overhead_time	Time that aircraft is closest to ref location	seconds
global.number_samples	Number of data samples	
global.UTM_X	Mic X location in UTM coordinate frame	feet
global.UTM_Y	Mic Y location in UTM coordinate frame	feet

Table 30: Low Frequency Aircraft Data File Variables

Column Number	Variable Name	Description	Units	Source
1	timelf	UTC local seconds from midnight	secs	
2	Xlf	x coord along 326.3° flight track	ft	GPS
3	Ylf	y coord perp. to 326.3° flight track	ft	GPS
4	Zlf	elevation over microphone 11	ft	GPS
5	UTM_Xlf	x UTM coordinate + is East	ft	GPS
6	UTM_Ylf	y UTM coordinate + is North	ft	GPS
7	latlf	aircraft latitude		GPS
8	lonlf	aircraft longitude		GPS
9	geoidlf	GPS geoid height	m	GPS
10	iaslf	Indicated Airspeed	kts	VF0006
11	iasnewlf	calculated IAS	kts	
12	casnewlf	calibrated airspeed	kts	
13	gsktftlf	ground speed	kts	GPS
14	tasnewlf	TAS using tempF and statpres	kts	
15	psidlf	Boom PSID	PSI	00VF06
16	statpreslf	Boom Static Pressure	PSI	PZ0002
17	totpreslf	Boom Total Pressure	PSI	PZ0003
18	tempFlf	° F from NASA weather balloon	F	NASA WB
19	aoalf	AC Angle of Attack	deg	00QP02
20	sideslipf	Sideslip	deg	00QQ02
21	pitchratelf	AC Pitch Rate	deg/s	87RP01;
22	rollratelf	AC Roll Rate	deg/s	87RR01
23	yawratelf	AC Yaw Rate	deg/s	87RQ01
24	truehdnglf	true heading	deg	GPS
25	vertacclf	AC Vertical Acceleration	G	00GV01
26	longcyclf	Longitudinal Cyclic	%	10DF04
27	latcyclf	Lateral Cyclic	%	10DL01
28	collf	Collective	%	10DF07
29	inupitchlf	INU Pitch Attitude	deg	00QP61
30	inurollf	INU Roll Attitude	deg	00QR61
31	inuheadinglf	INU True Heading	deg	00DZ61
32	inupitchratelf	INU Pitch Rate	deg/s	00RP61
33	inurollratelf	INU Roll Rate	deg/s	00RR61
34	inuyawratelf	INU Yaw Rate	deg/s	00RQ61
35	inulongacclf	INU Longitudinal Acceleration	G	00GF10
36	inulataclf	INU Lateral Acceleration	G	00GL10
37	inuvataclf	INU Vertical Acceleration	G	00GV10
38	rtrspeedlf	Rotor Speed	RPM	RM3004

Table 31: High Frequency Aircraft Data File Variables

Column Number	Variable Name	Description	Units	Source
1	timelf	UTC local seconds from midnight	secs	
2	Xlf	x coord along 326.3° flight track	ft	GPS
3	Ylf	y coord perp. to 326.3° flight track	ft	GPS
4	Zlf	elevation over microphone 11	ft	GPS
5	UTM_Xlf	x UTM coordinate + is East	ft	GPS
6	UTM_Ylf	y UTM coordinate + is North	ft	GPS
7	latlf	aircraft latitude		GPS
8	lonlf	aircraft longitude		GPS
9	geoidlf	GPS geoid height	m	GPS
10	iaslf	Indicated Airspeed	kts	VF0006
11	iasnewlf	calculated IAS	kts	
12	casnewlf	calibrated airspeed	kts	
13	gskftlfl	ground speed	kts	GPS
14	tasnewlf	TAS using tempF and statpres	kts	
15	psidlf	Boom PSID	PSI	00VF06
16	statpreslf	Boom Static Pressure	PSI	PZ0002
17	totpreslf	Boom Total Pressure	PSI	PZ0003
18	tempFlf	° F from NASA weather balloon	F	NASA WB
19	aoalf	AC Angle of Attack	deg	00QP02
20	sidesliplf	Sideslip	deg	00QQ02
21	pitchratelf	AC Pitch Rate	deg/s	87RP01;
22	rollratelf	AC Roll Rate	deg/s	87RR01
23	yawratelf	AC Yaw Rate	deg/s	87RQ01
24	truehdnglf	true heading	deg	GPS
25	vertaccclf	AC Vertical Acceleration	G	00GV01
26	longcyclf	Longitudinal Cyclic	%	10DF04
27	latcyclf	Lateral Cyclic	%	10DL01
28	collf	Collective	%	10DF07
29	inupitchlf	INU Pitch Attitude	deg	00QP61
30	inurolllf	INU Roll Attitude	deg	00QR61
31	inuheadinglf	INU True Heading	deg	00DZ61
32	inupitchratelf	INU Pitch Rate	deg/s	00RP61
33	inurollratelf	INU Roll Rate	deg/s	00RR61
34	inuyawratelf	INU Yaw Rate	deg/s	00RQ61
35	inulongaccclf	INU Longitudinal Acceleration	G	00GF10
36	inulataccclf	INU Lateral Acceleration	G	00GL10
37	inuvertaccclf	INU Vertical Acceleration	G	00GV10
38	rtrspeedlf	Rotor Speed	RPM	RM3004
39	redaz	azimuth angle for red blade	deg	
40	redtheta75	theta at .75 radius	deg	
41	orangeaz	azimuth angle for orange blade	deg	
42	orangetheta75	theta at .75 radius	deg	
43	blueaz	azimuth angle for blue blade	deg	
44	bluetheta75	theta at .75 radius	deg	
45	greenaz	azimuth angle for green blade	deg	
46	greentheta75	theta at .75 radius	deg	

Table 32: Azimuth Aircraft Data File Variables

Column Number	Variable Name	Description	Units
1	azsecs	UTC local seconds from midnight	sec
2	oneP	once per rev pulse 1 = red blade over tail	
3	onePaz	azimuth angle for red blade	deg

Table 33: Hemisphere File Contents

Variable Name	Description	Units
BB	Broadband data switch	
NB	Narrow-Band data switch	
PT	Pure-Tone data switch	
DOPPLER_SHIFT_REMOVED	0 = False and 1 = True	
EMPTY_WEIGHT	(not used for this test)	
FUEL_WEIGHT	(not used for this test)	
LOAD_WEIGHT	(not used for this test)	
RADIUS	Radius of Sound Sphere	ft
FLIGHT_PATH_ANGLE	Target flight path angle	deg
PYLON_ANGLE	(not used for this test)	
SPEED	True airspeed	kts
MASTTILT	(not used for this test)	
XYZ	(not used for this test)	
PHI	Spherical angle $\phi^\circ$	deg
THETA	Spherical angle theta	deg
FREQUENCY	Center frequencies	Hz
AMPLITUDE	Sound pressure level	dB
GROSS_WEIGHT	Aircraft gross weight	lbs
TARGET_SPEED	Commanded IAS	kts
TARGET_ANGLE	Commanded flight path angle	deg
OAT	Crossing altitude temperature	$^\circ$ F
CROSS_ALT	Crossing altitude at reference	ft
STAT_PRESS	Crossing altitude static pressure	psi
WIND_SPEED	Crossing altitude wind speed	kts
WIND_DIR	Crossing altitude wind direction	deg
GROUND_SPEED	Average ground speed	kts
INDICATED_SPEED	Average IAS over processed data	kts
START_X	Processing starting X	ft
STOP_X	Processing ending X	ft
global.title	Hemisphere description	

## Figures

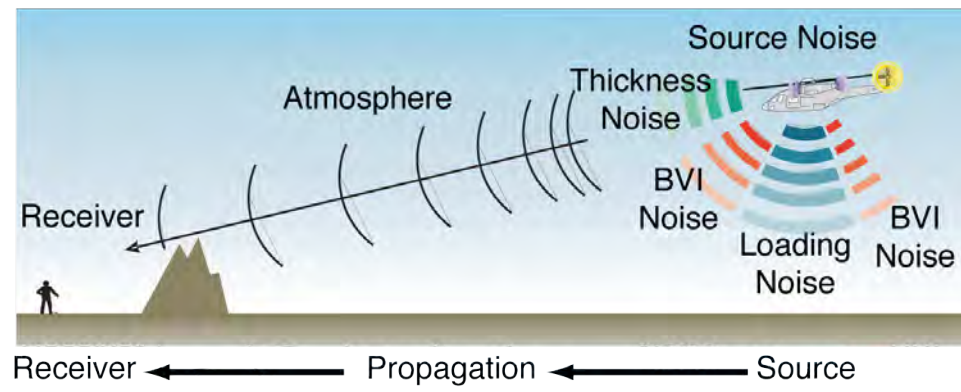


Figure 1: Rotorcraft acoustics issues.



Figure 2: Bell 430 helicopter.

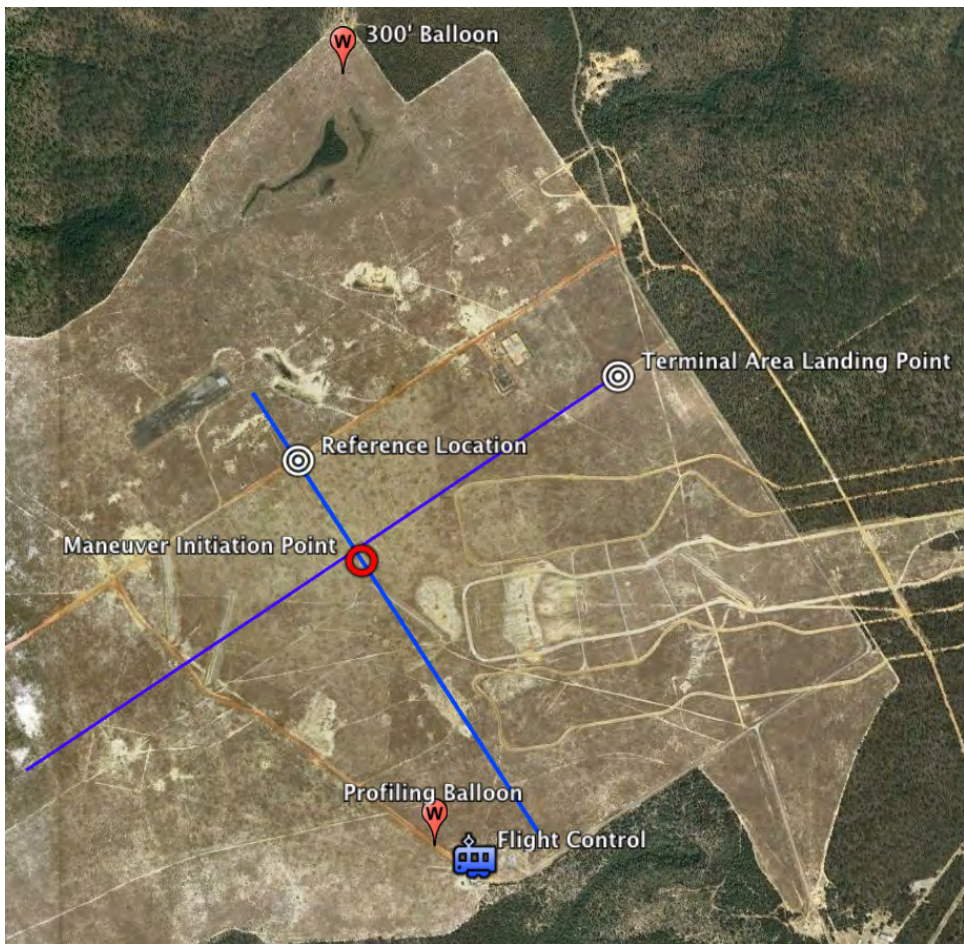


Figure 3: Testing area overview.



Figure 4: MicroADAS installation in aircraft.



Figure 5: Flight course deviation indicator.





Figure 6: DGPS ground station setup.

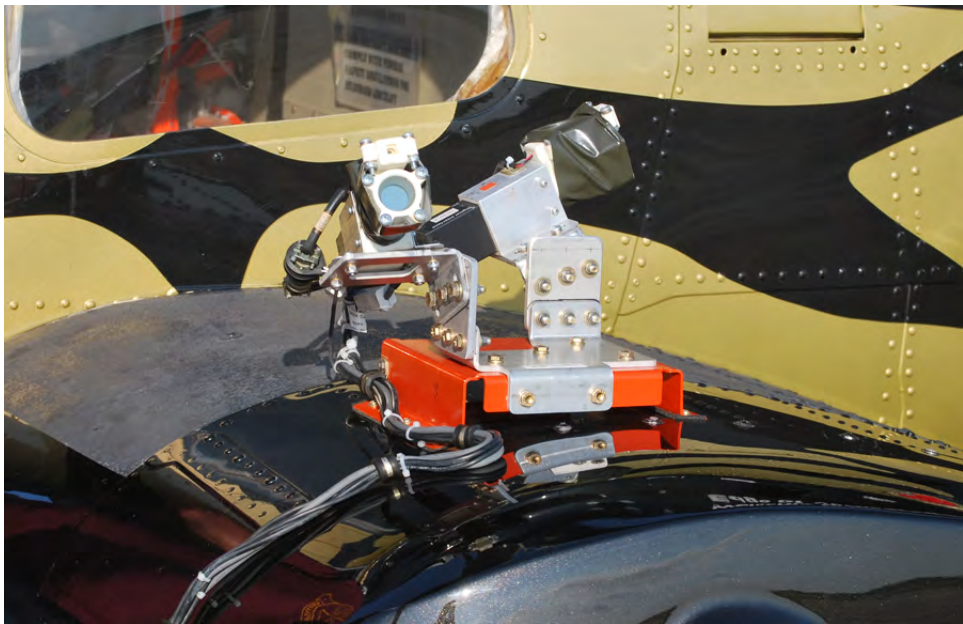


Figure 7: TPP cameras mounted on pylon.



Figure 8: TPP reflective tape mounted on rotor tip.

### Aircraft Position Quick-Look

**Aircraft: 430 S/N 49001**

Gross Weight: 8242#

Acoustics Record: 575; CAFTA Record 1287:83

Reference Airspeed: 80 knots

Flight Profile: 21; Dynamic Maneuver from 6 Deg Descending Flight

Rotor Torque: 34%

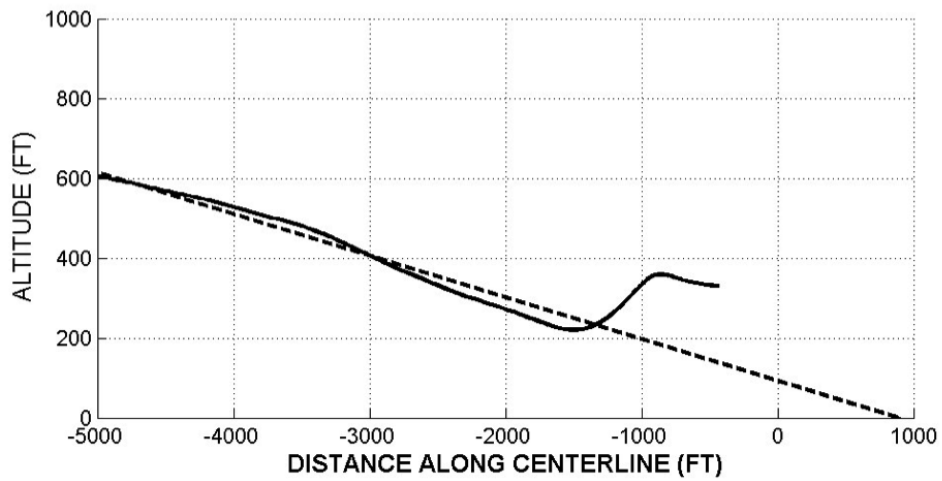
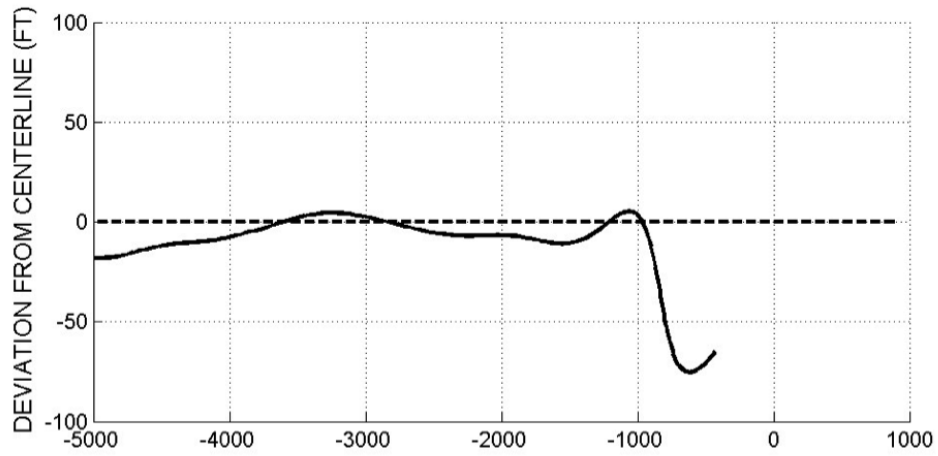


Figure 9: Quick-look aircraft position.

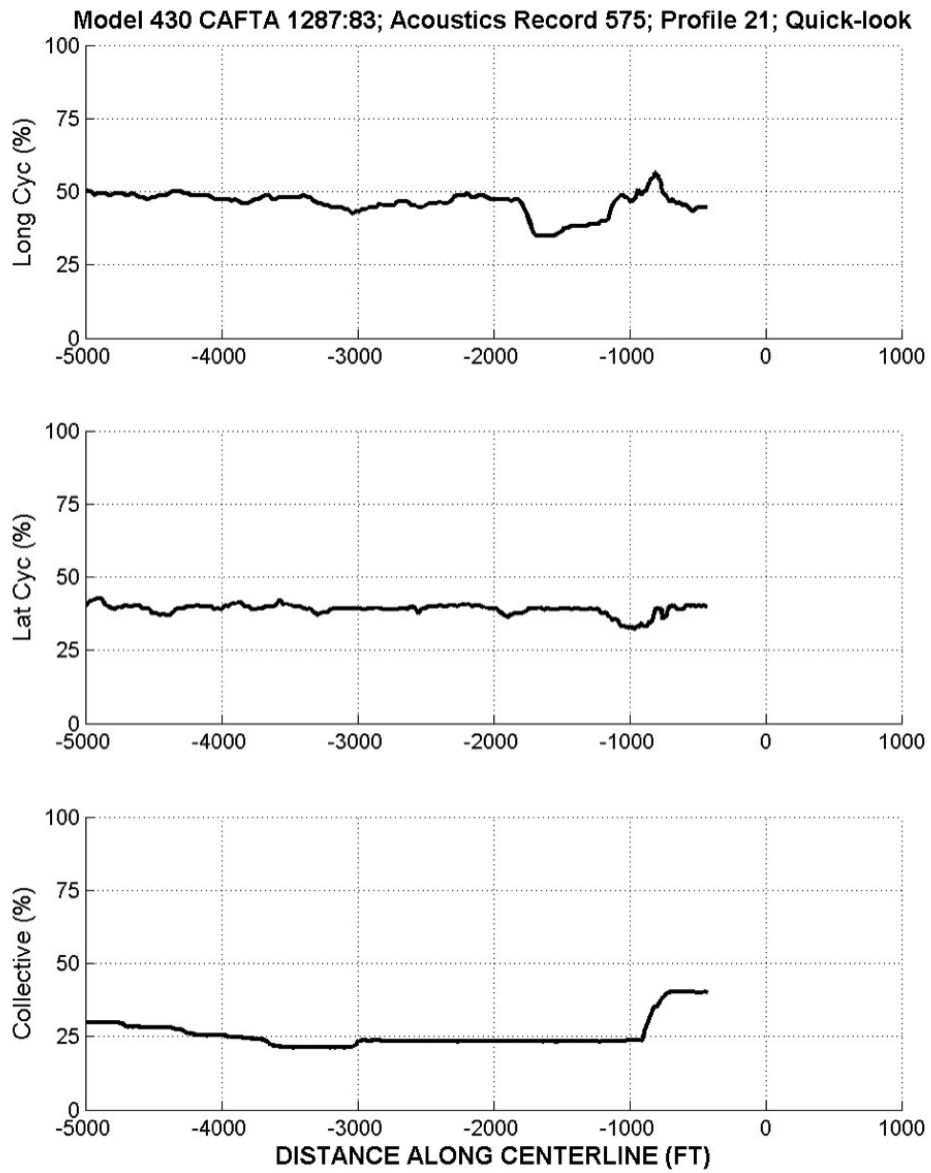


Figure 10: Quick-look aircraft control positions.

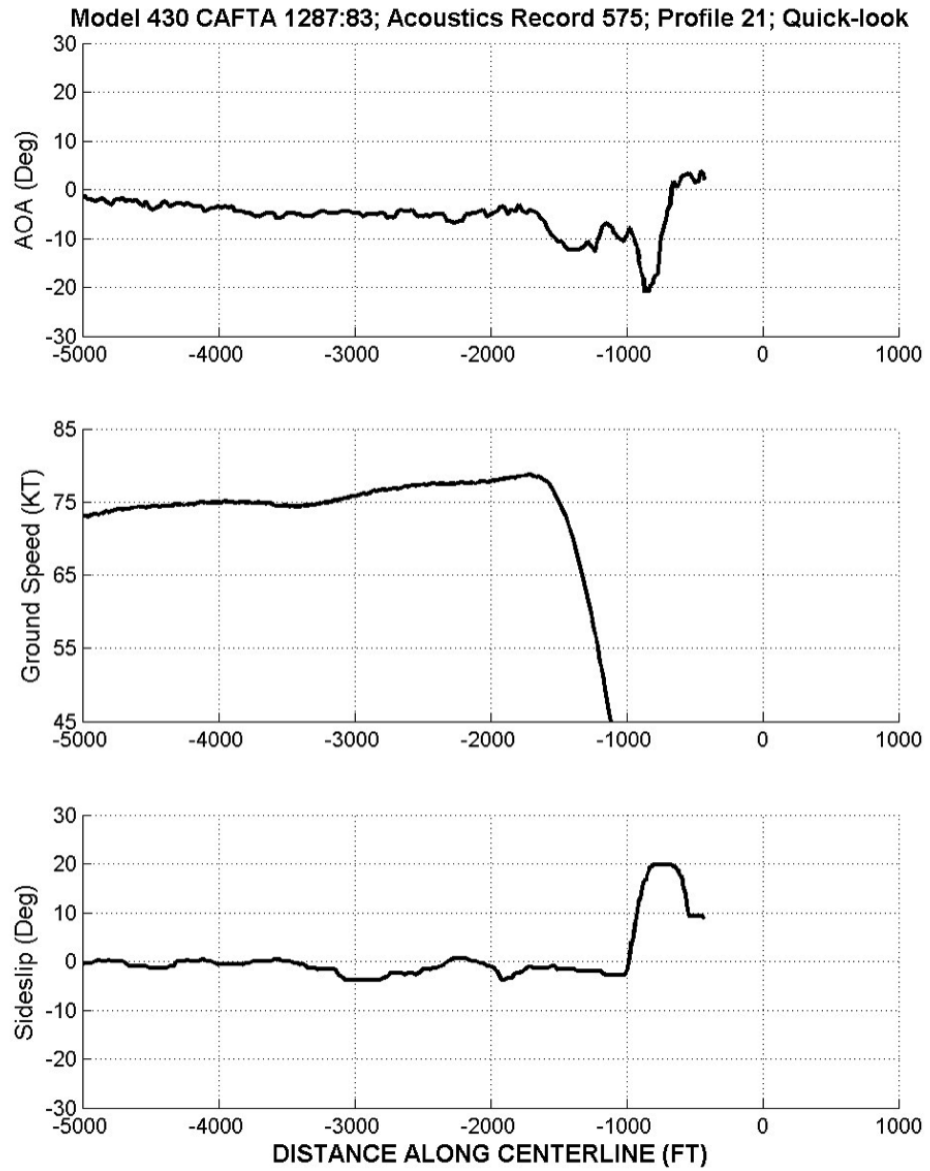


Figure 11: Quick-look aircraft state parameters.

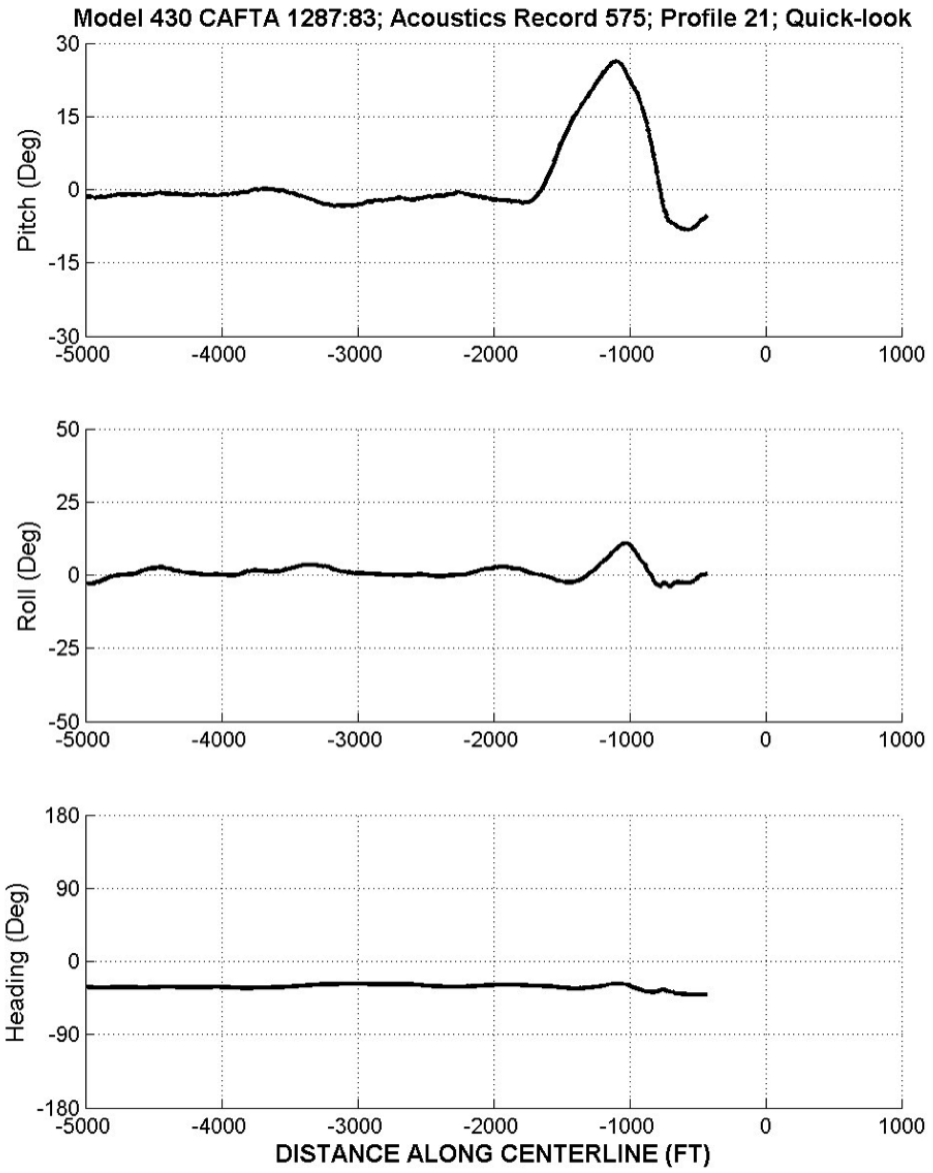


Figure 12: Quick-look aircraft control attitudes.

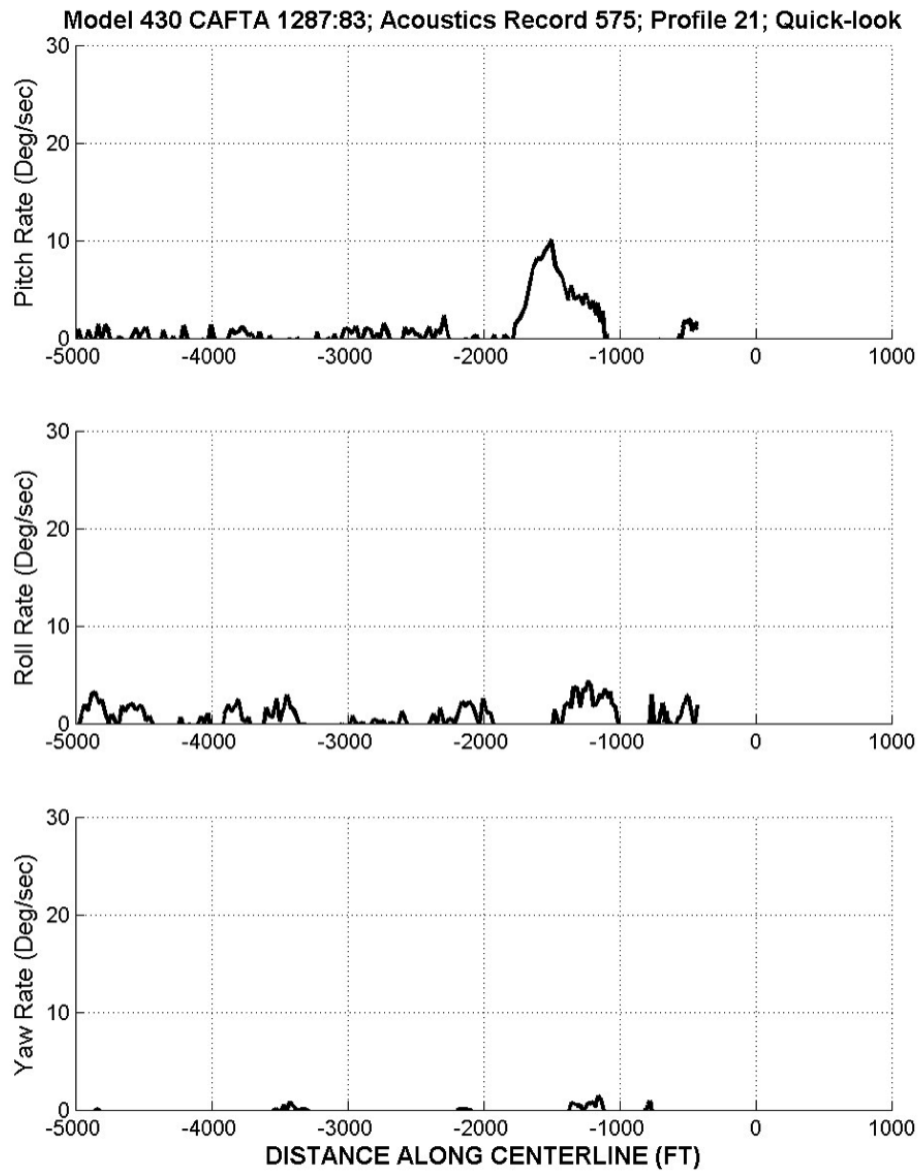


Figure 13: Quick-look aircraft attitude rates.



Figure 14: Wireless Acoustic Measurement System.





Figure 15: Source noise microphone array.

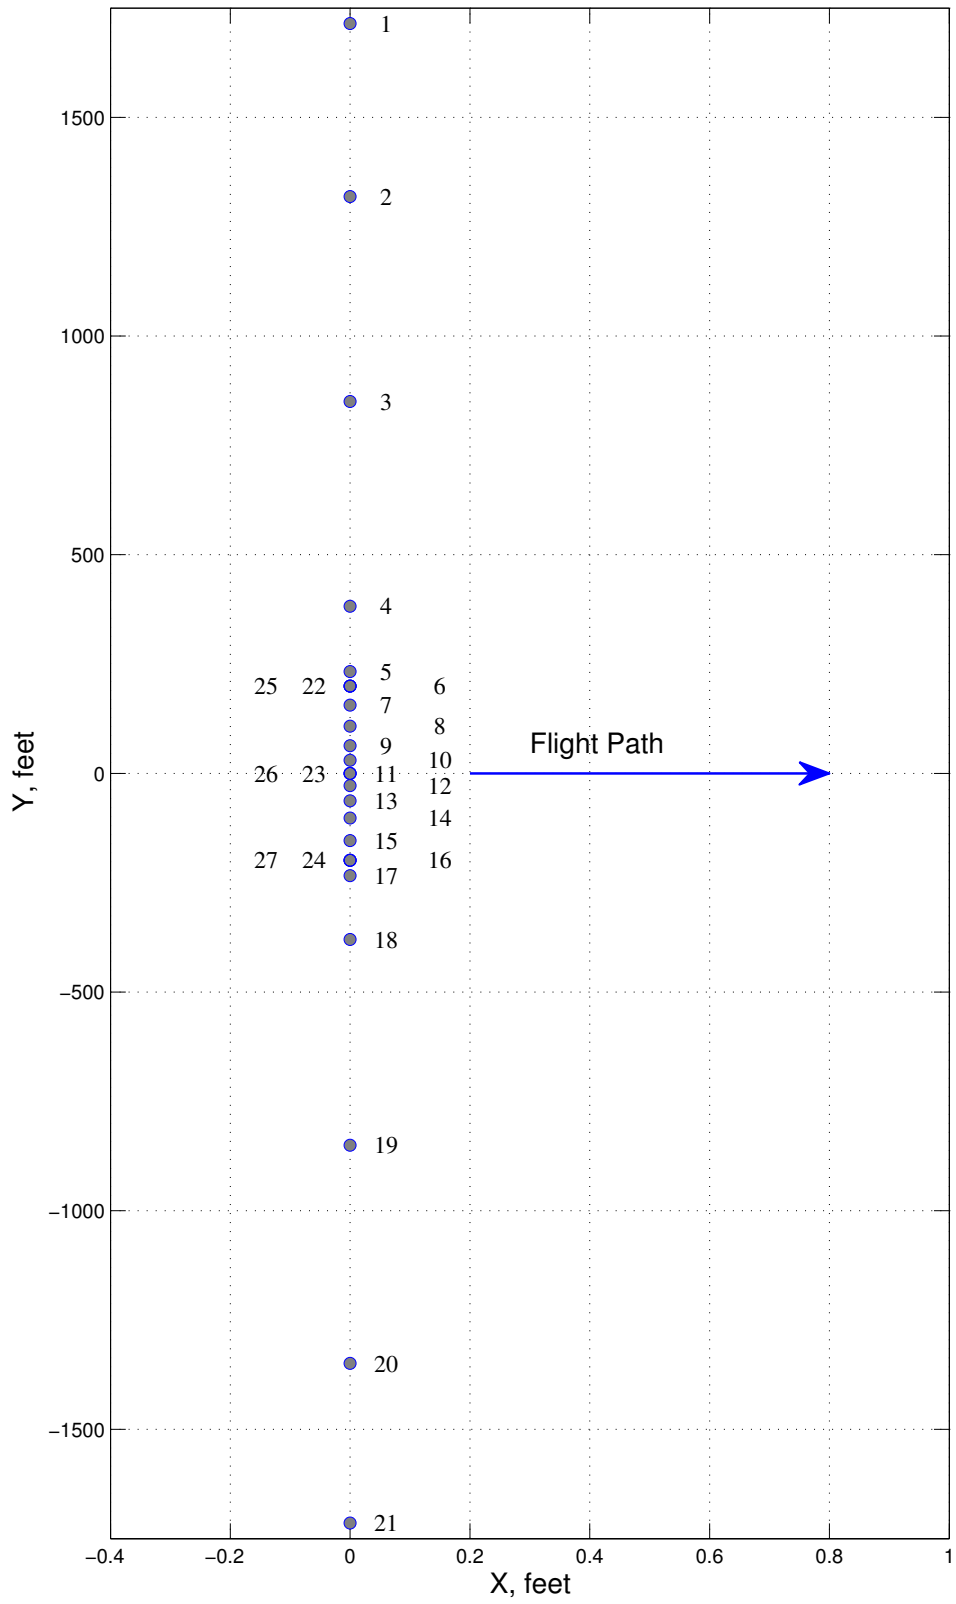


Figure 16: Source noise microphone array.

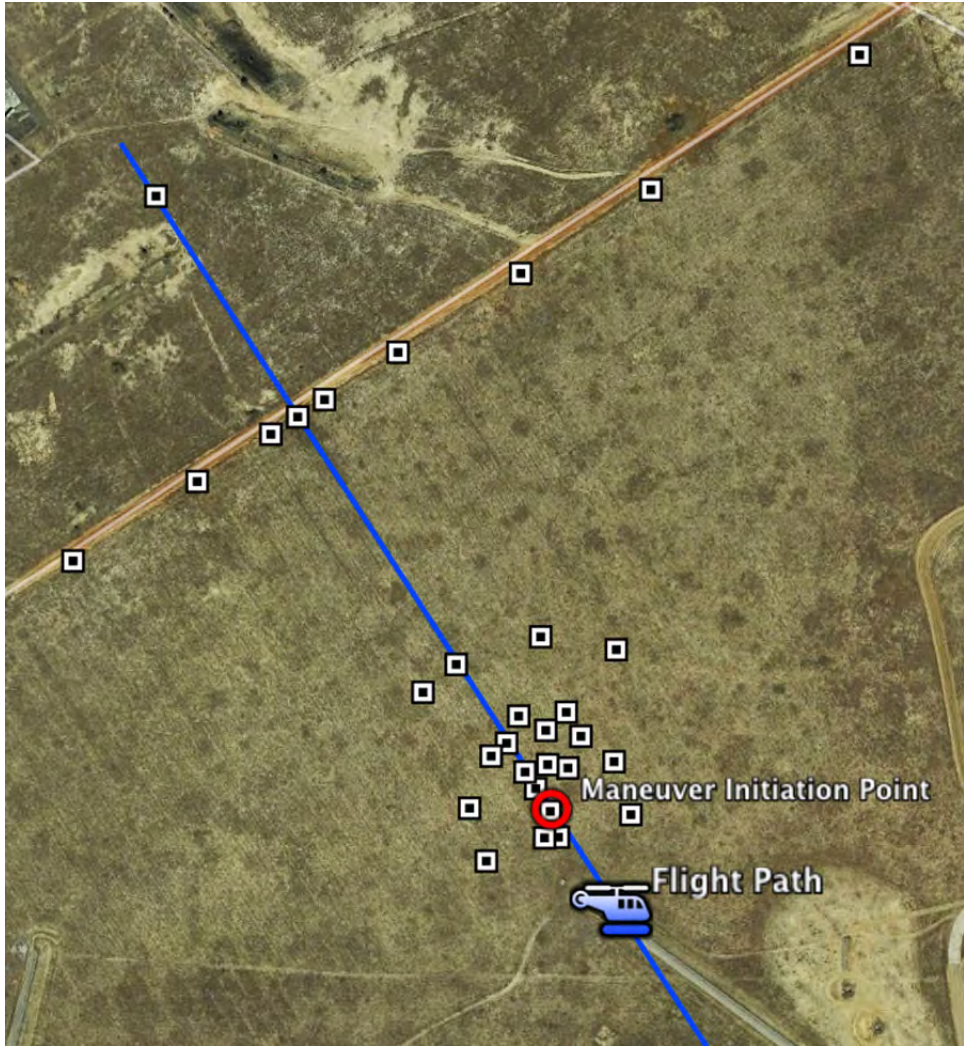


Figure 17: Maneuver microphone array.

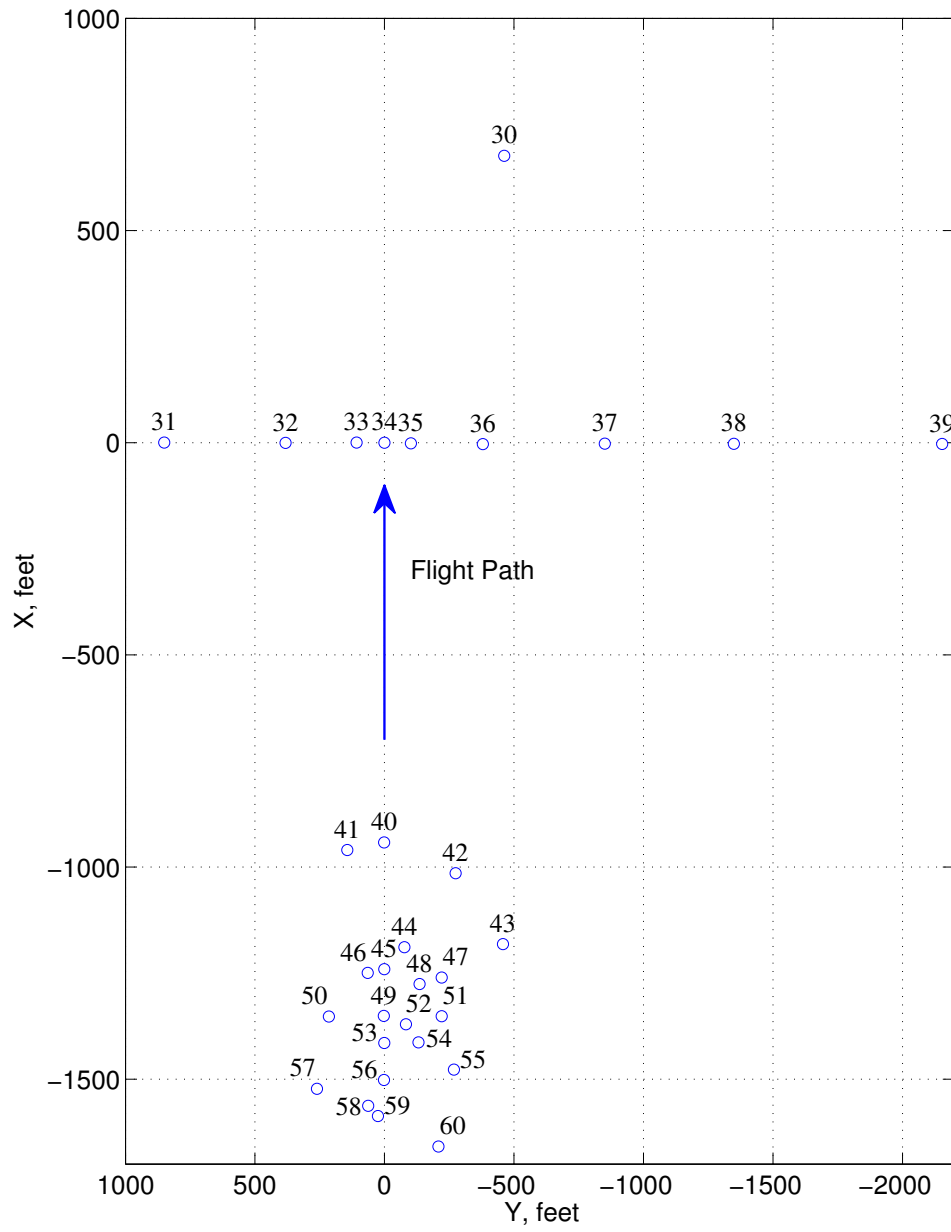


Figure 18: Maneuver microphone array.

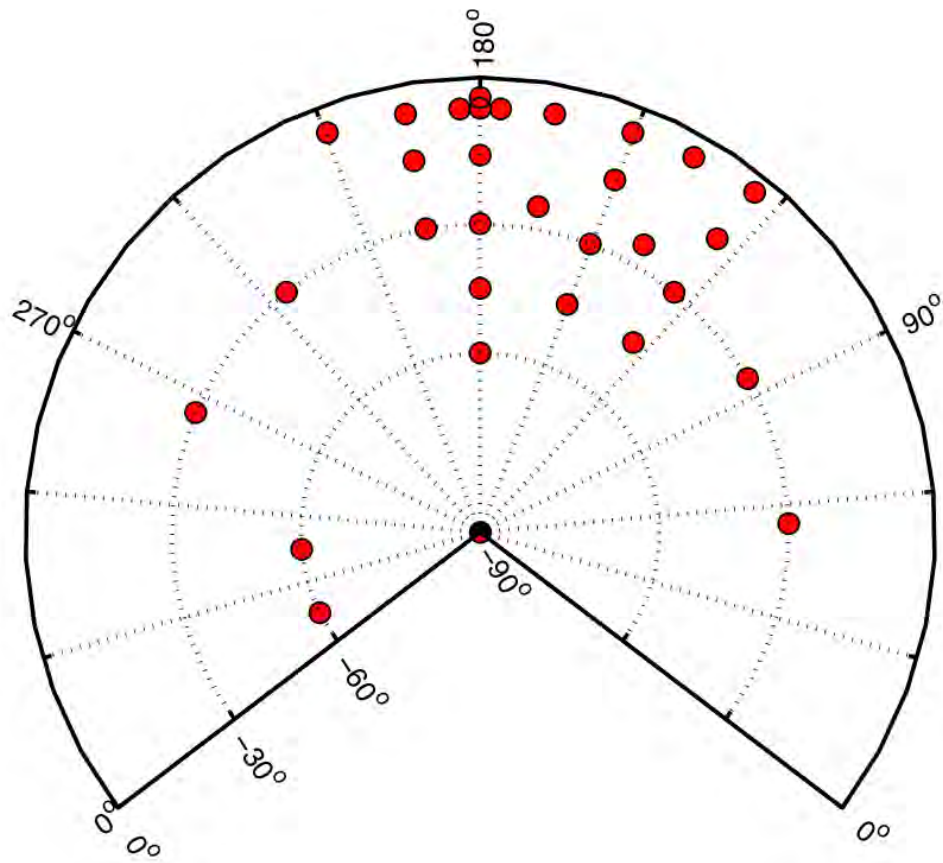


Figure 19: Maneuver microphone array projection onto semi-sphere.

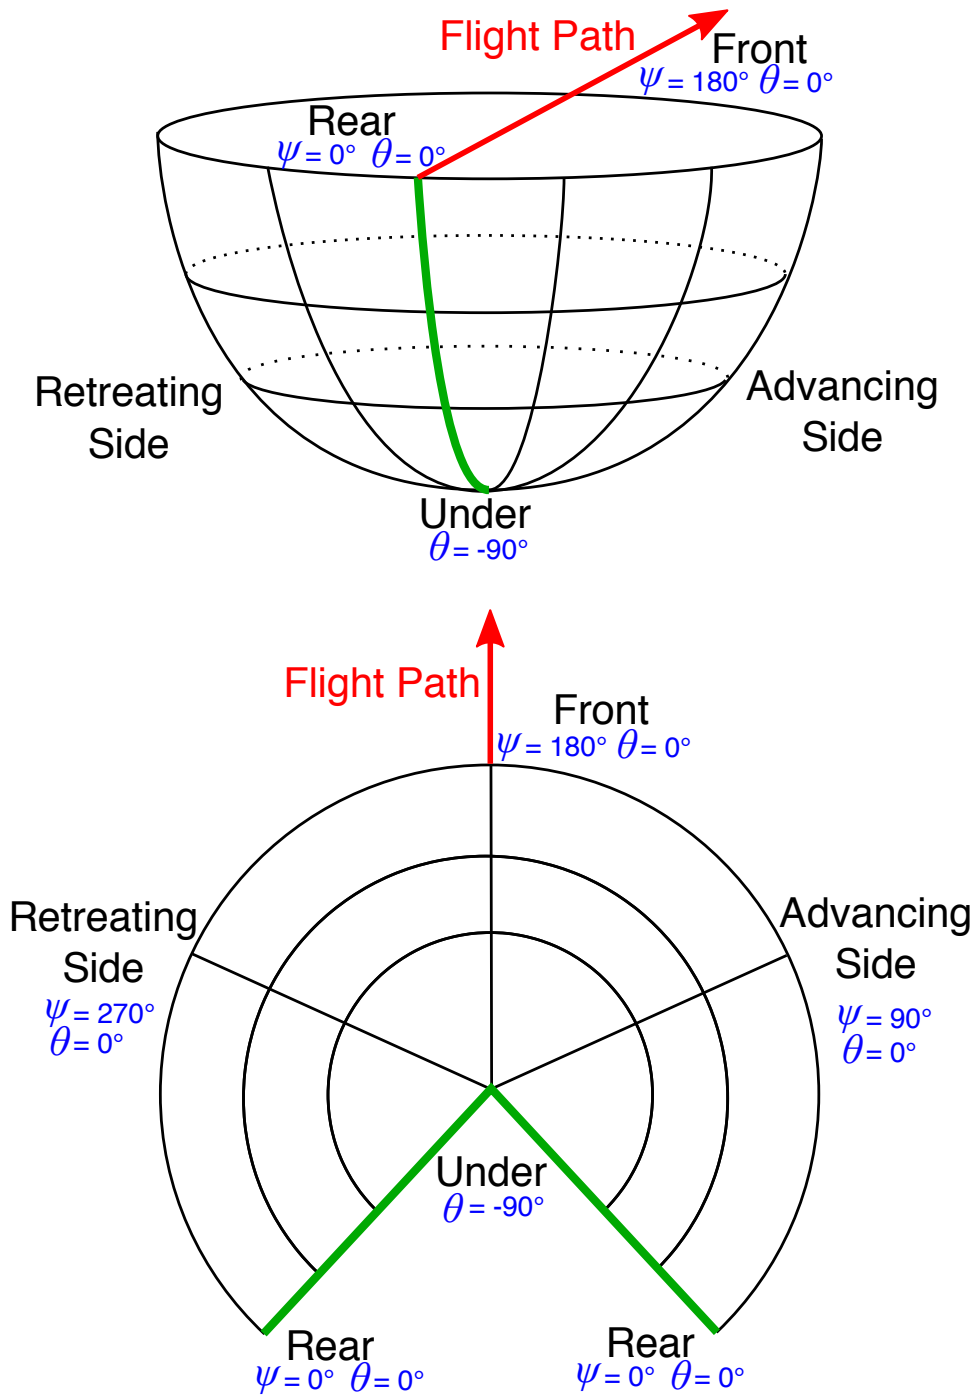


Figure 20: Lambert conformal conic projection of an acoustic radiation semi-sphere.



Figure 21: Terminal area microphone array.

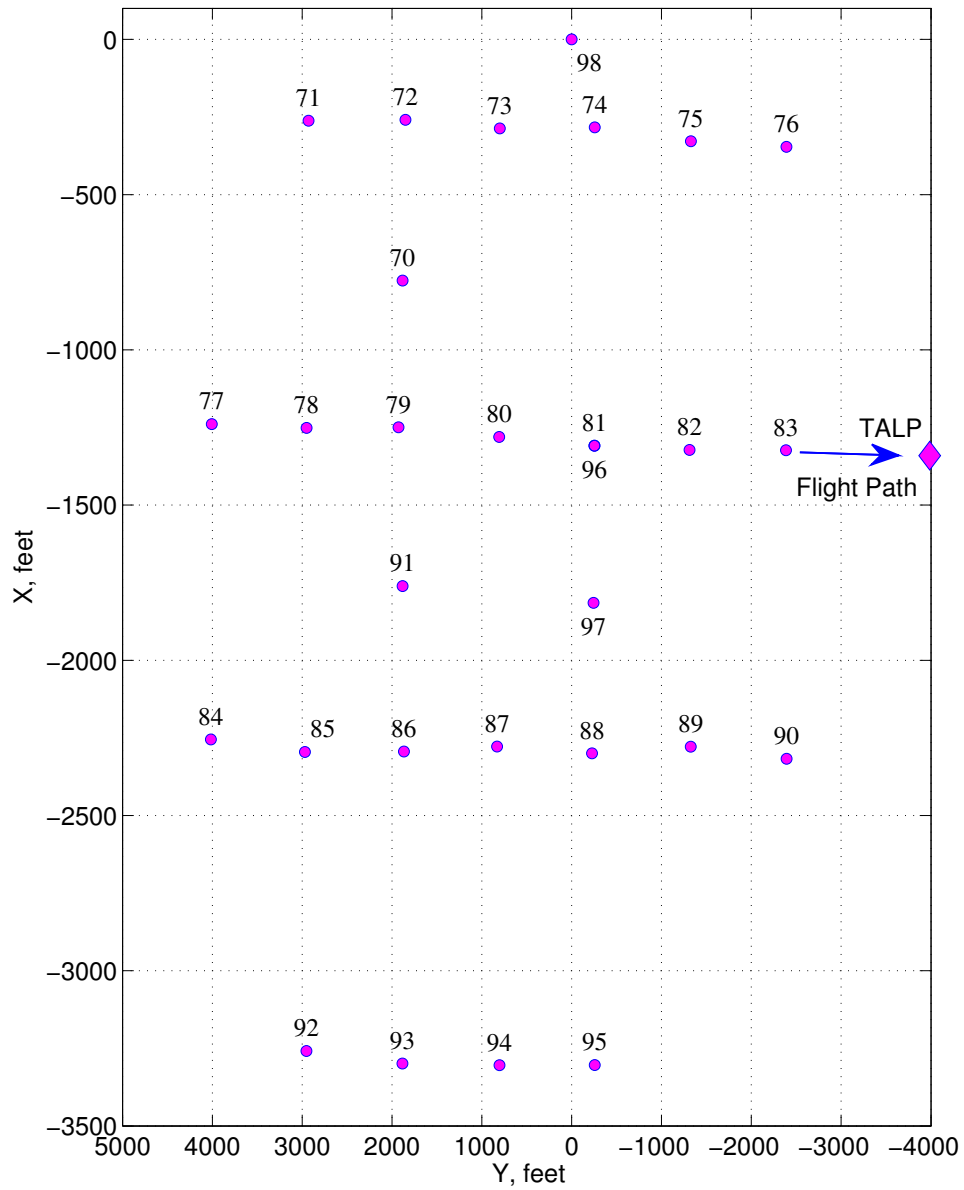


Figure 22: Terminal area microphone array.



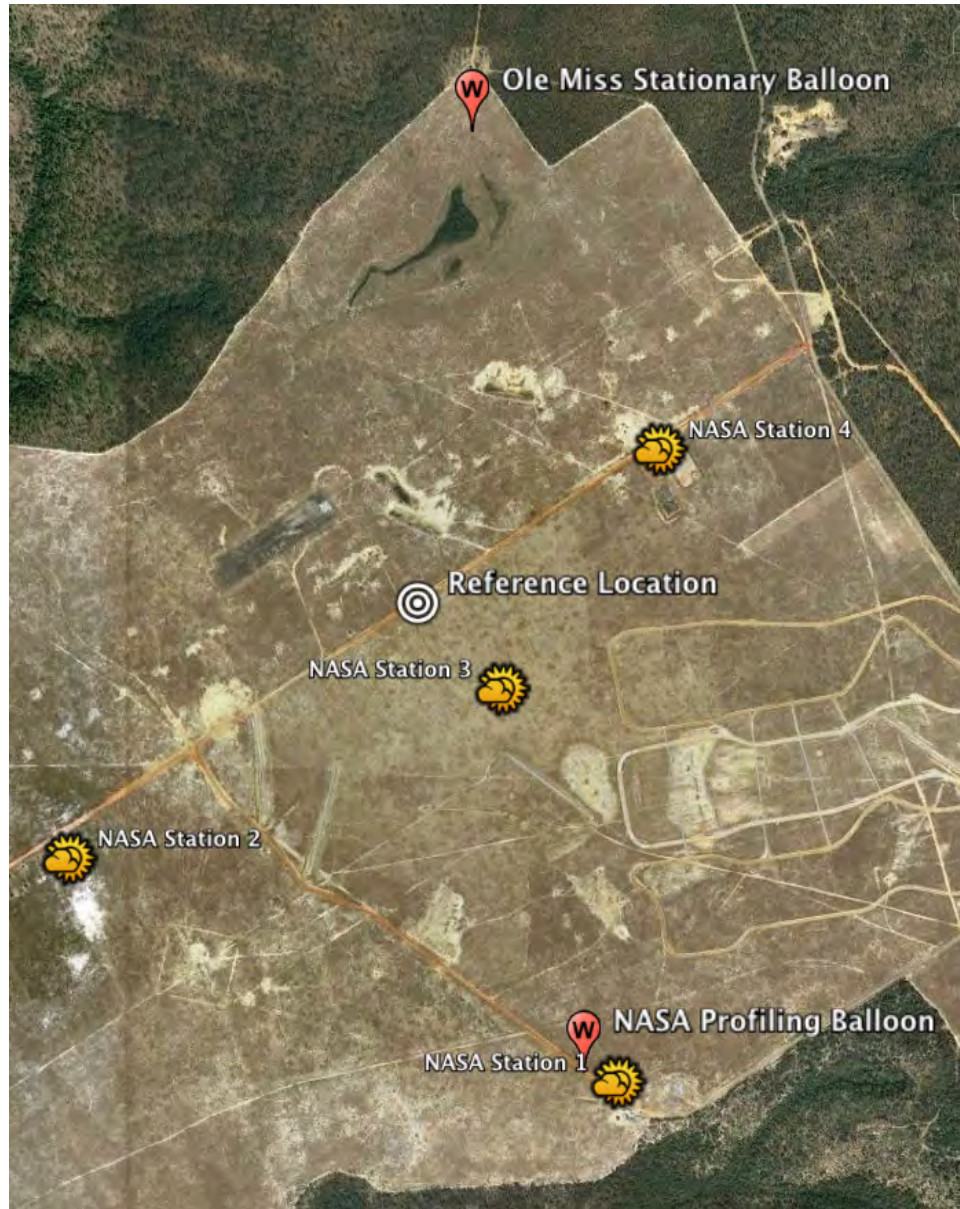


Figure 23: Weather instrumentation locations.

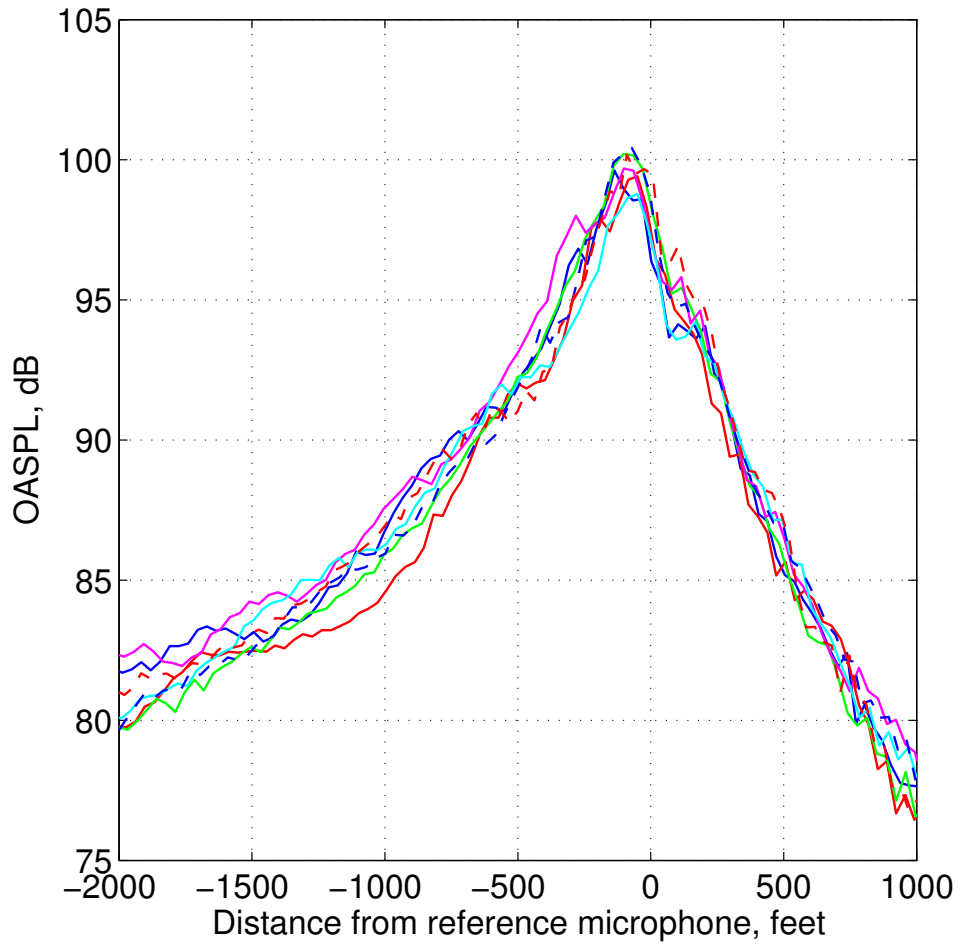


Figure 24: Level flight, 80 KIAS housekeeping runs.

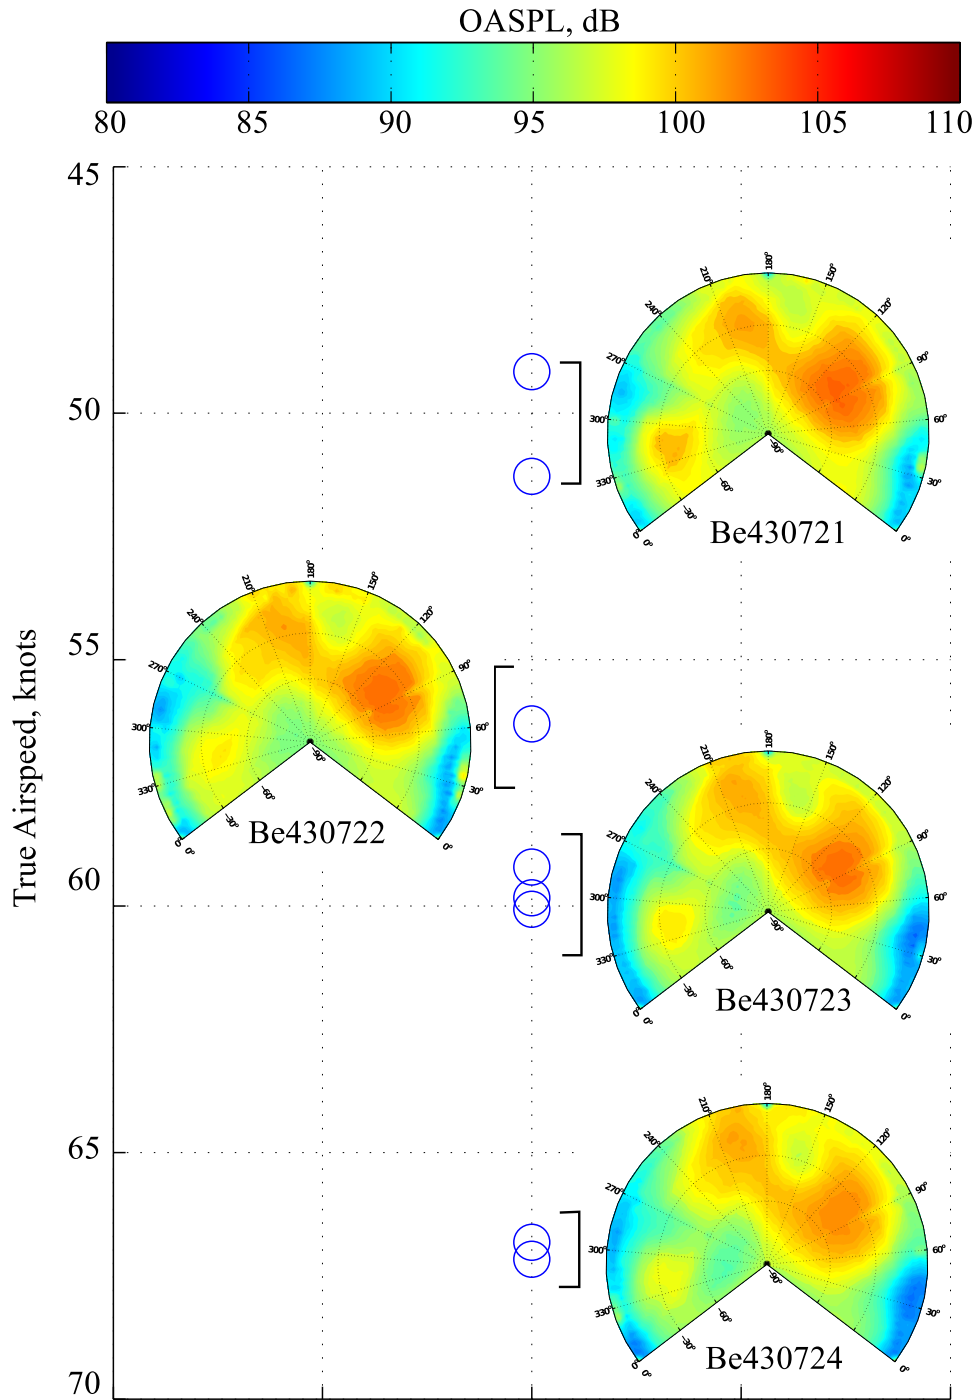


Figure 25: Semi-spheres for low speed level flight, OASPL.

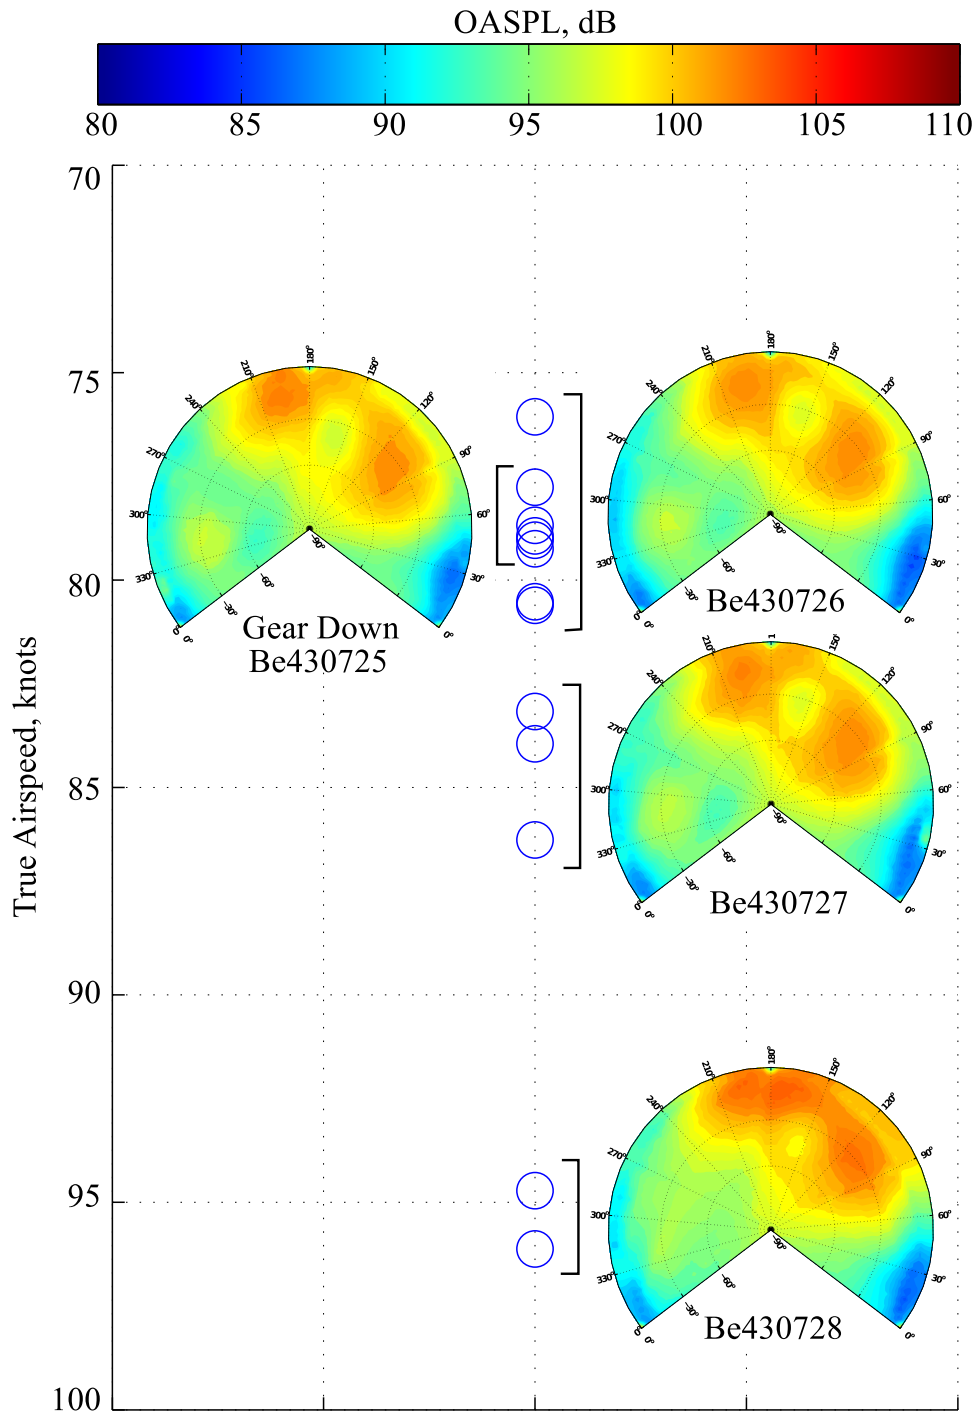


Figure 26: Semi-spheres for mid speed level flight, OASPL.

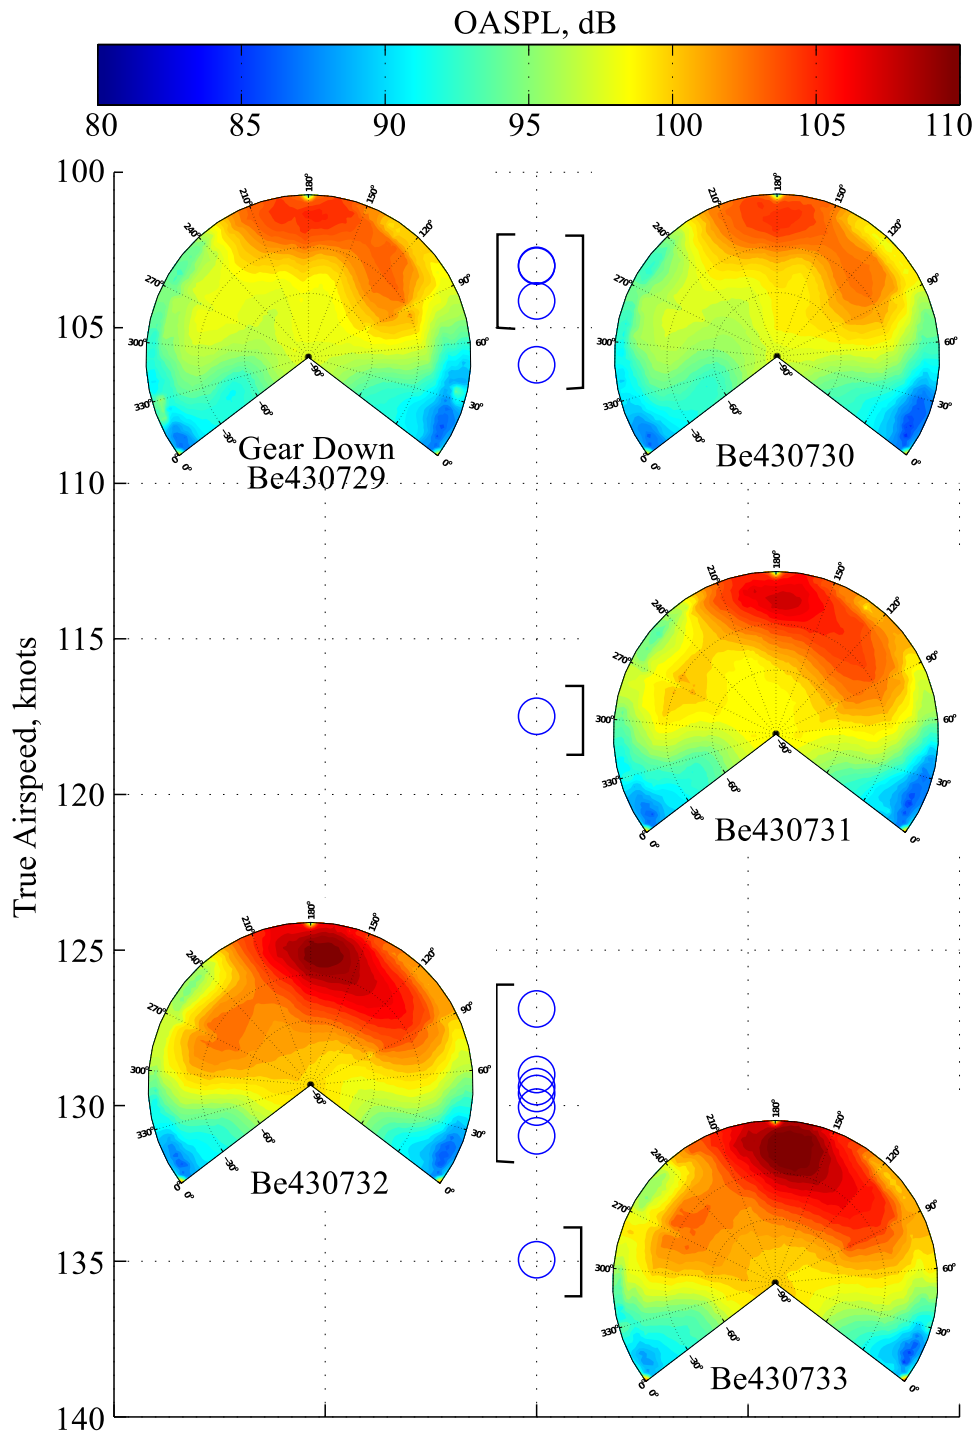


Figure 27: Semi-spheres for high speed level flight, OASPL.

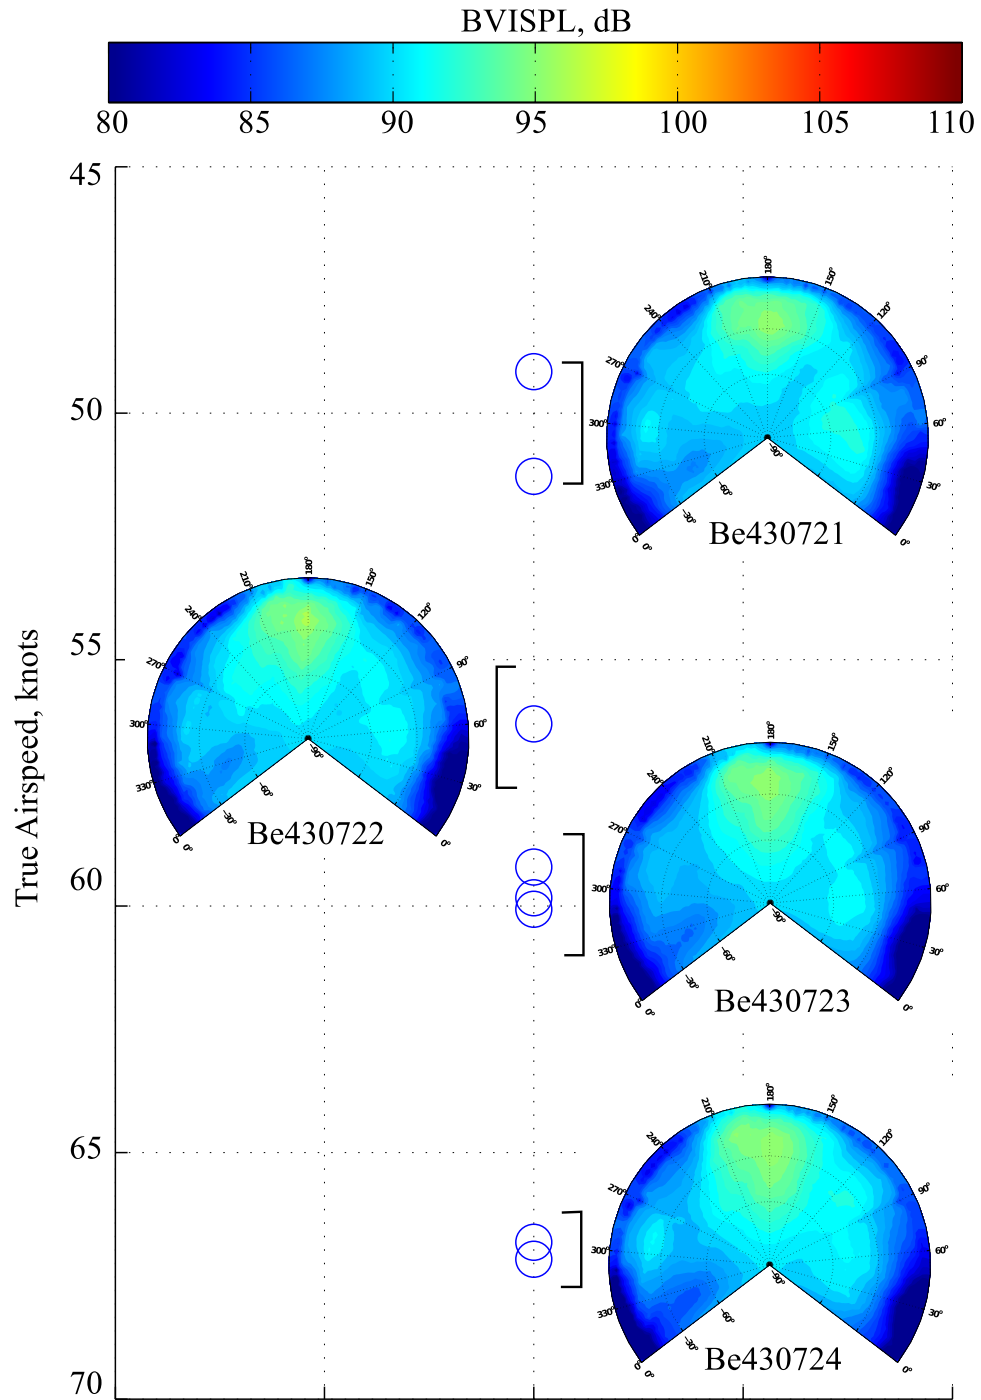


Figure 28: Semi-spheres for low speed level flight, BVISPL.

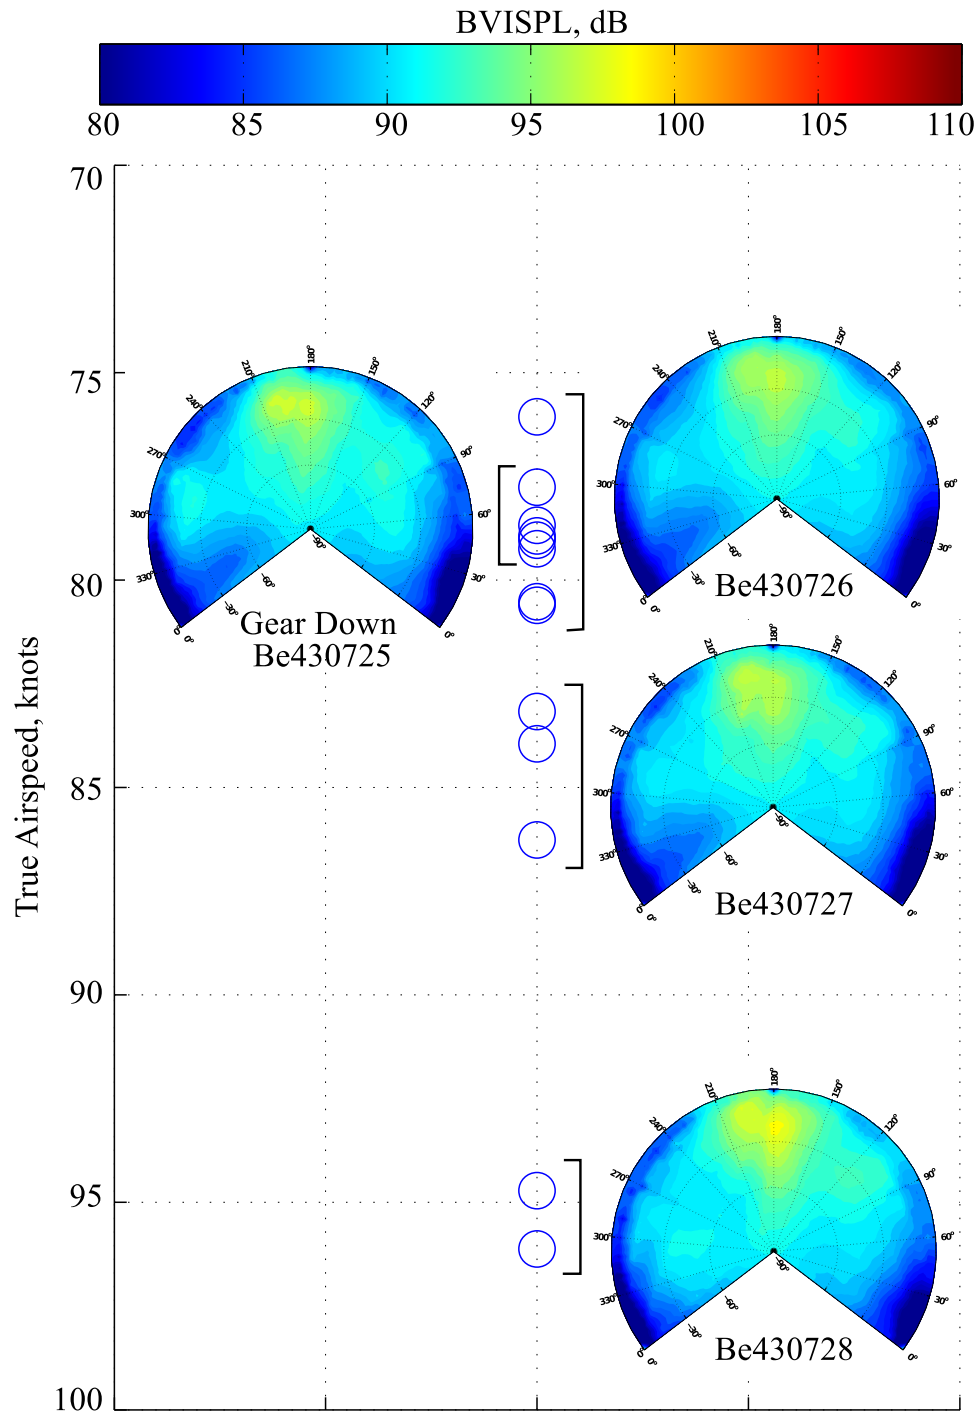


Figure 29: Semi-spheres for mid speed level flight, BVISPL.

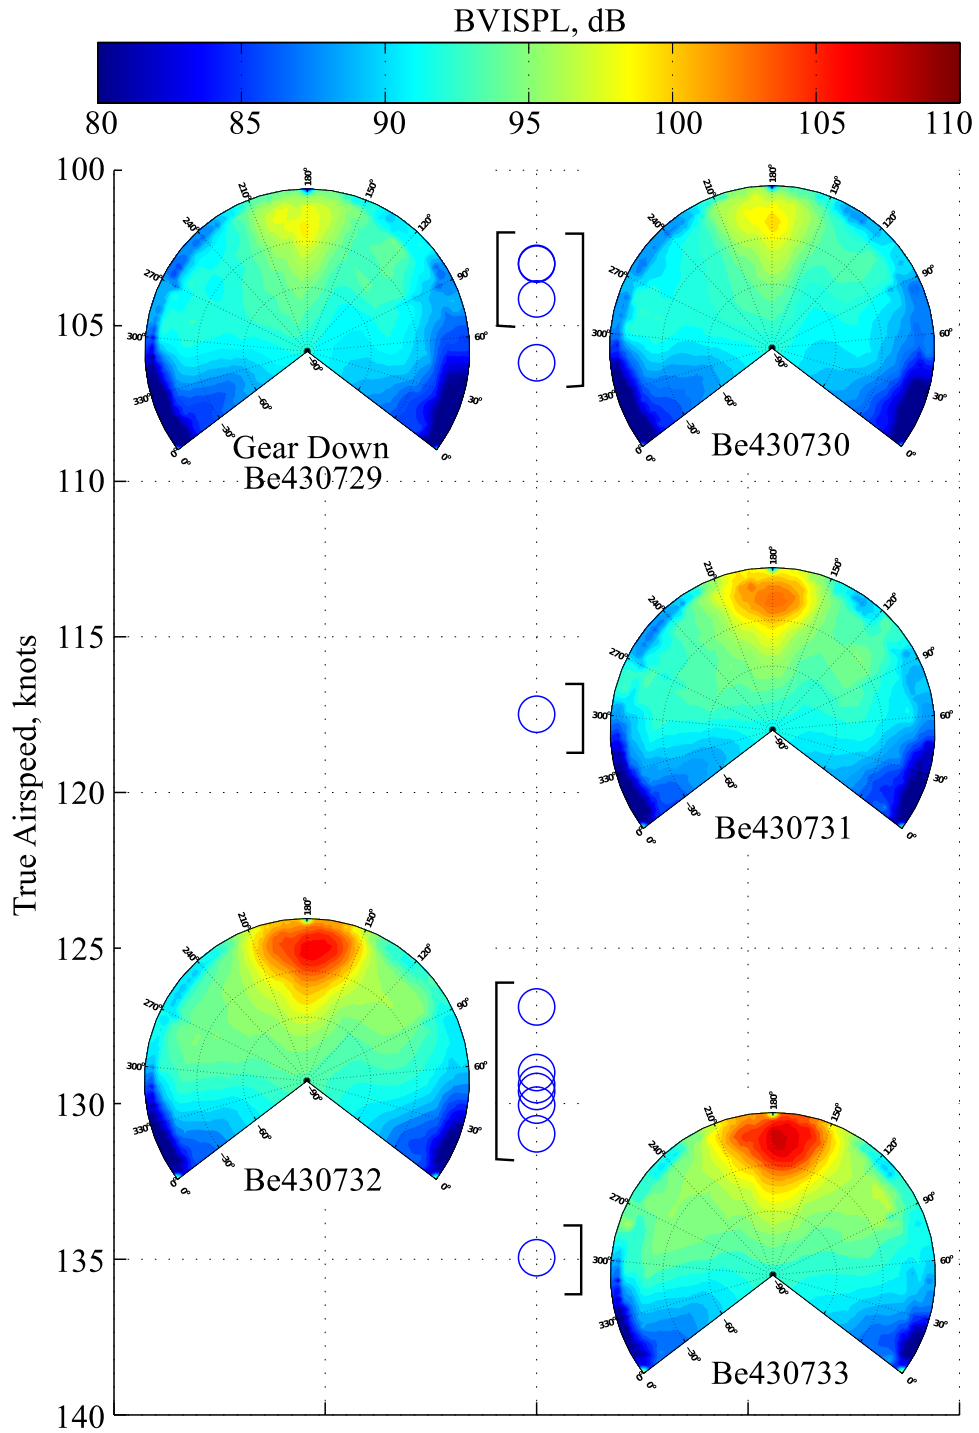


Figure 30: Semi-spheres for high speed level flight, BVISPL.





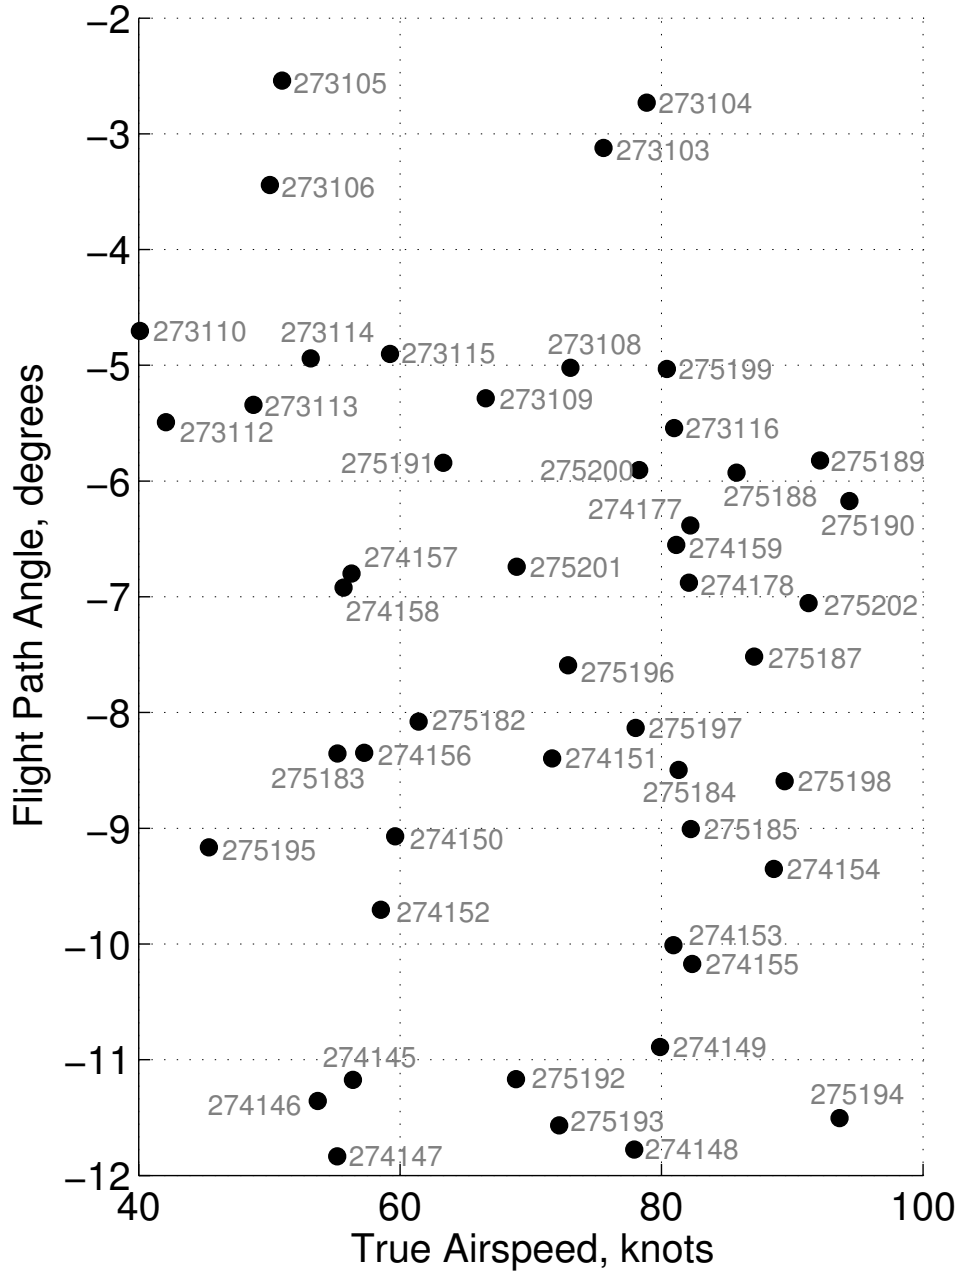


Figure 31: Source noise descent cases flown.

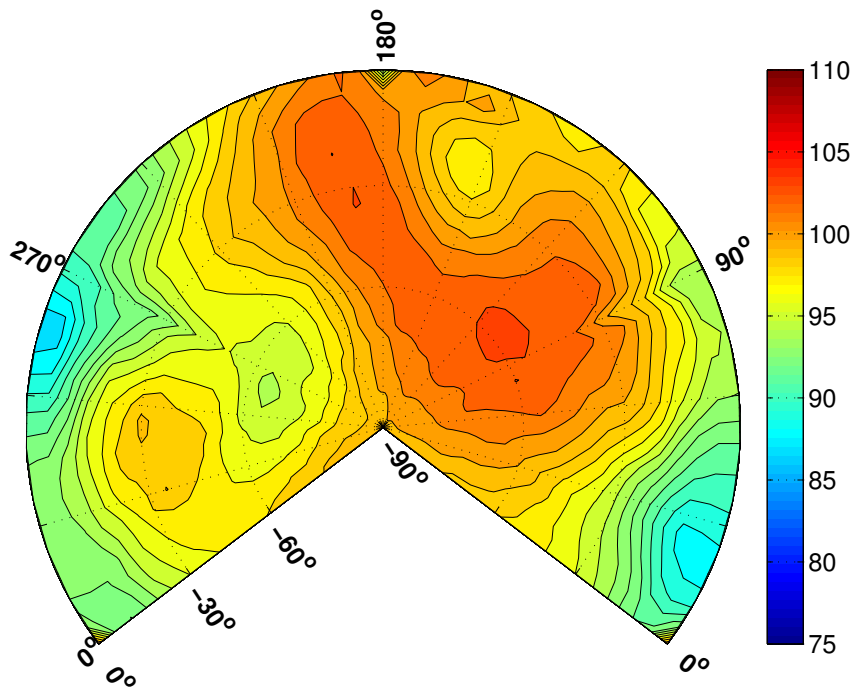


(a) OASPL, dB

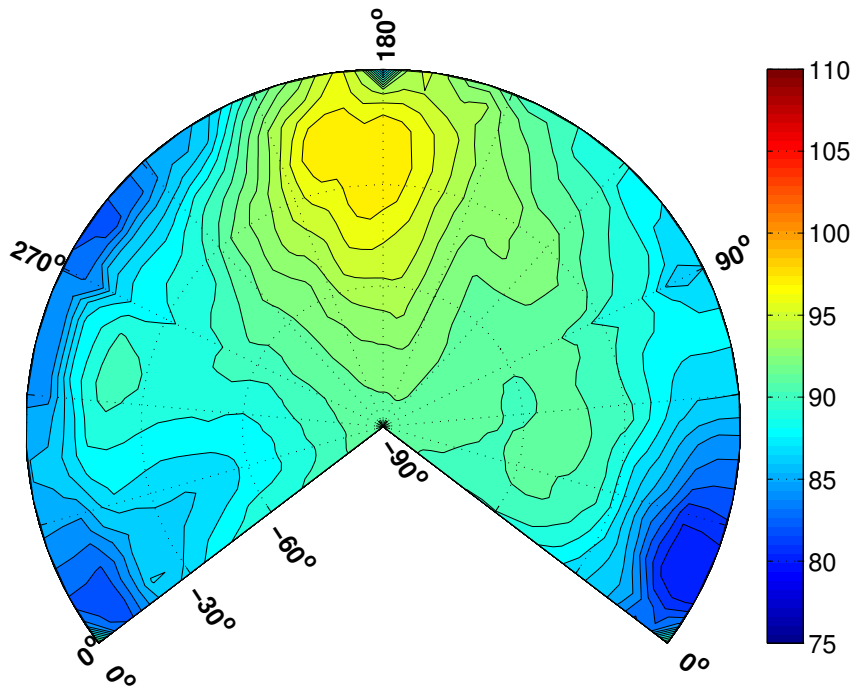


(b) BVISPL, dB

Figure 32: Descent hemi-sphere Be430103, 75.6 KTAS,  $-3.1^\circ$

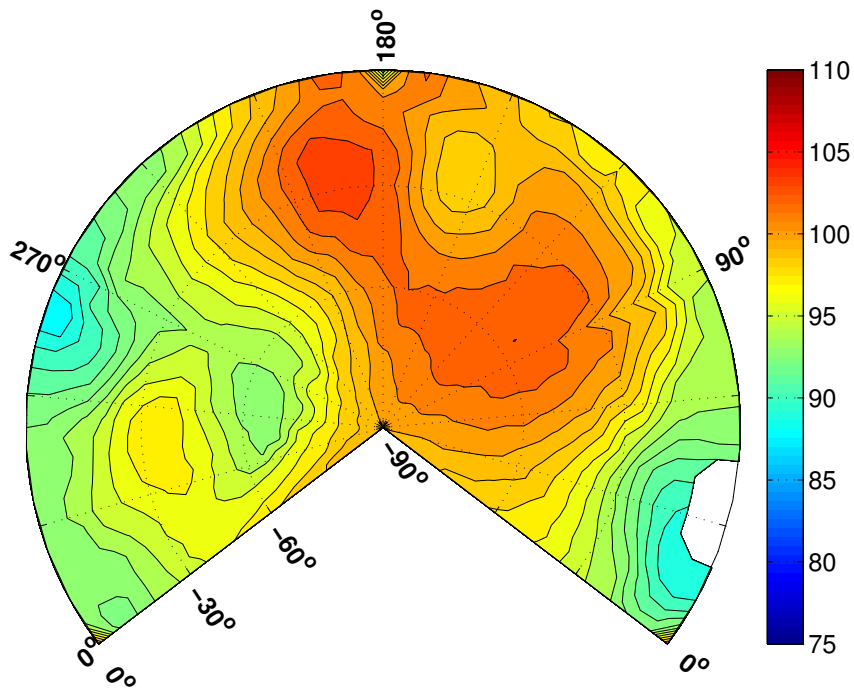


(a) OASPL, dB

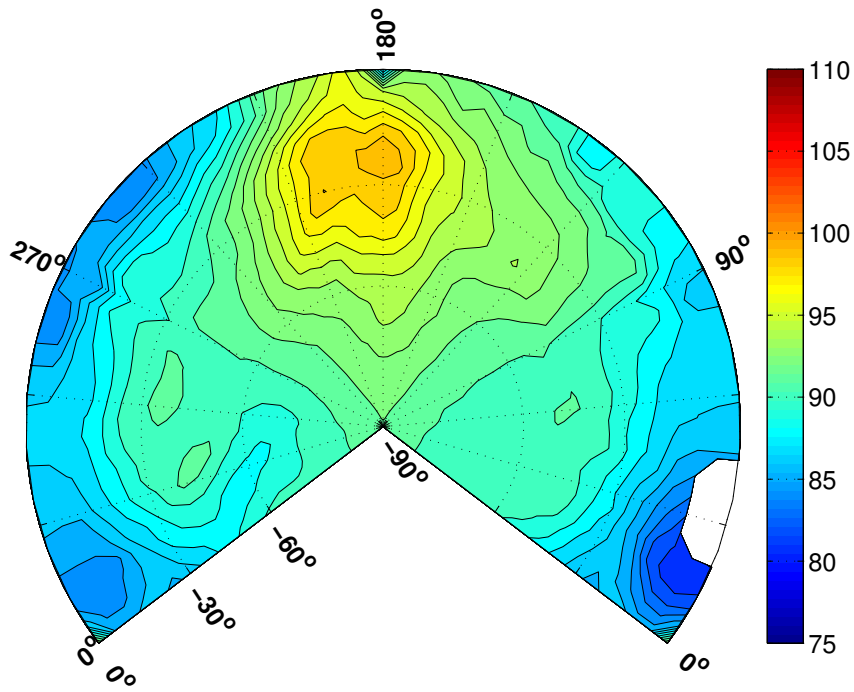


(b) BVISPL, dB

Figure 33: Descent hemi-sphere Be430104, 78.9 KTAS,  $-2.7^\circ$

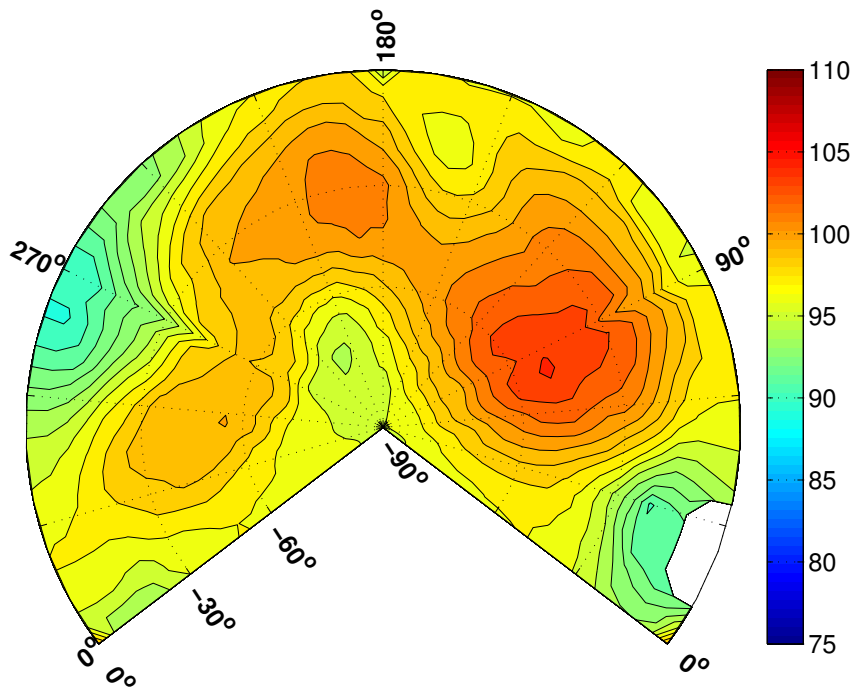


(a) OASPL, dB

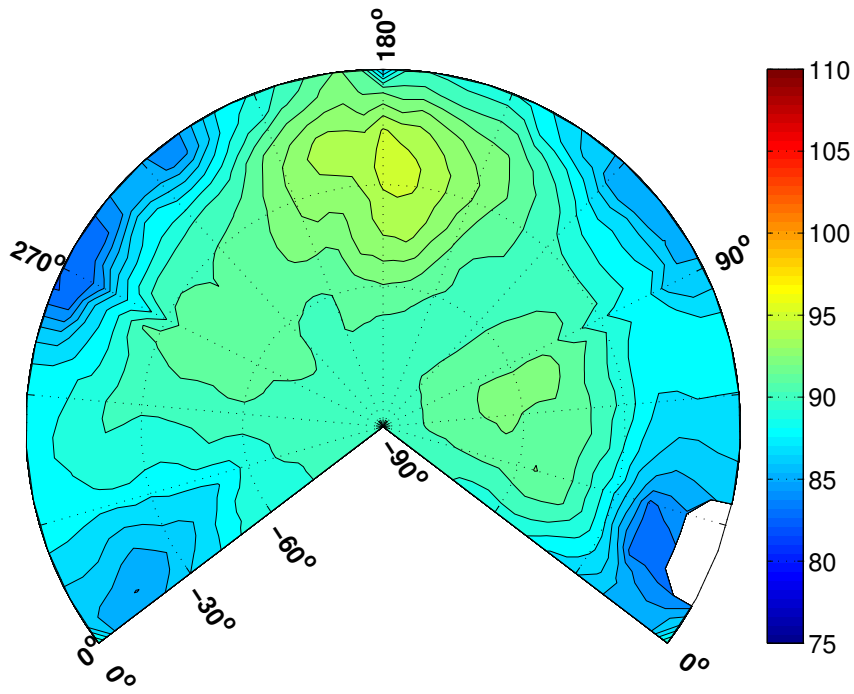


(b) BVISPL, dB

Figure 34: Descent hemisphere Be430105, 51.0 KTAS,  $-2.5^\circ$

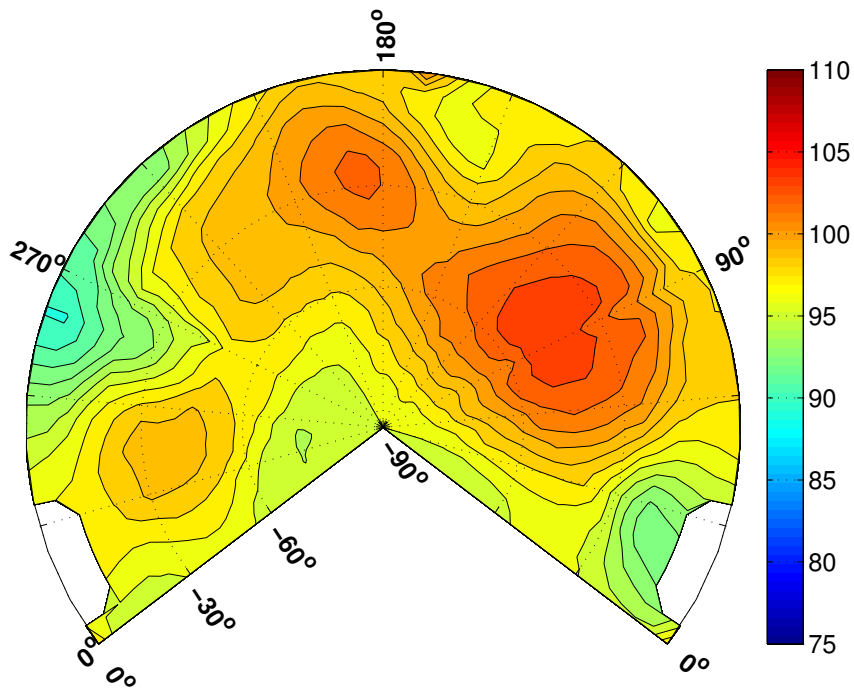


(a) OASPL, dB

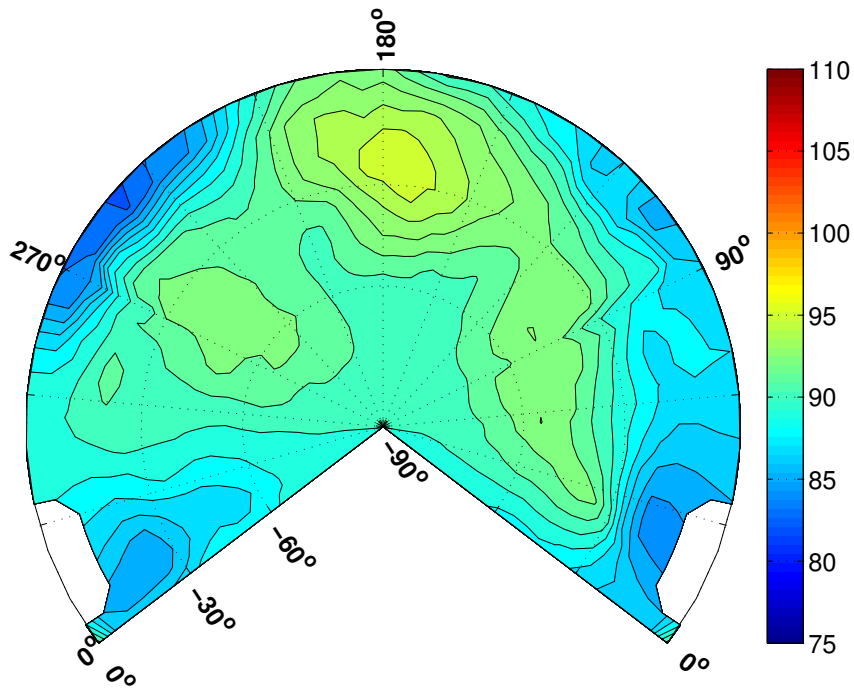


(b) BVISPL, dB

Figure 35: Descent hemisphere Be430106, 50.0 KTAS,  $-3.4^\circ$

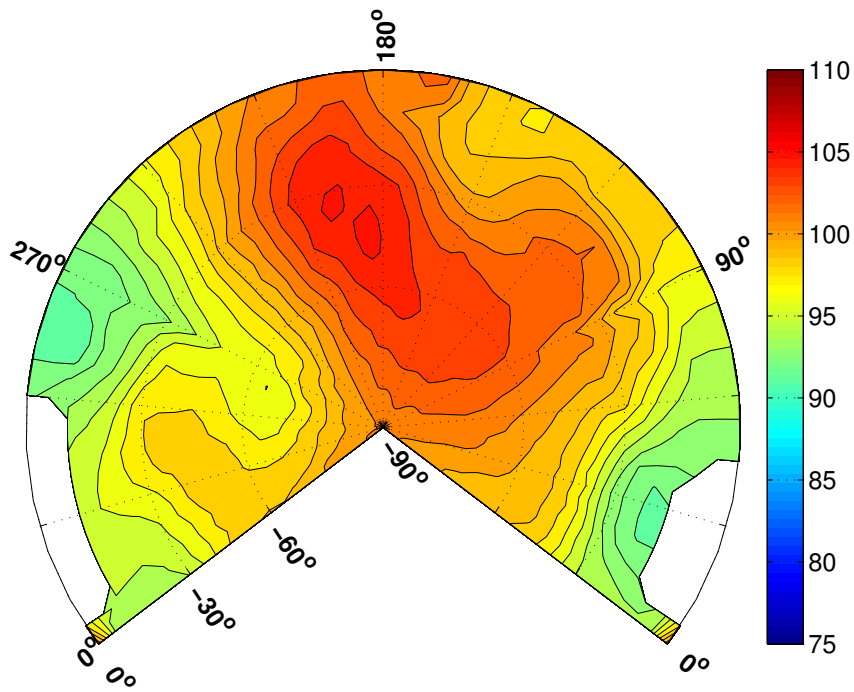


(a) OASPL, dB

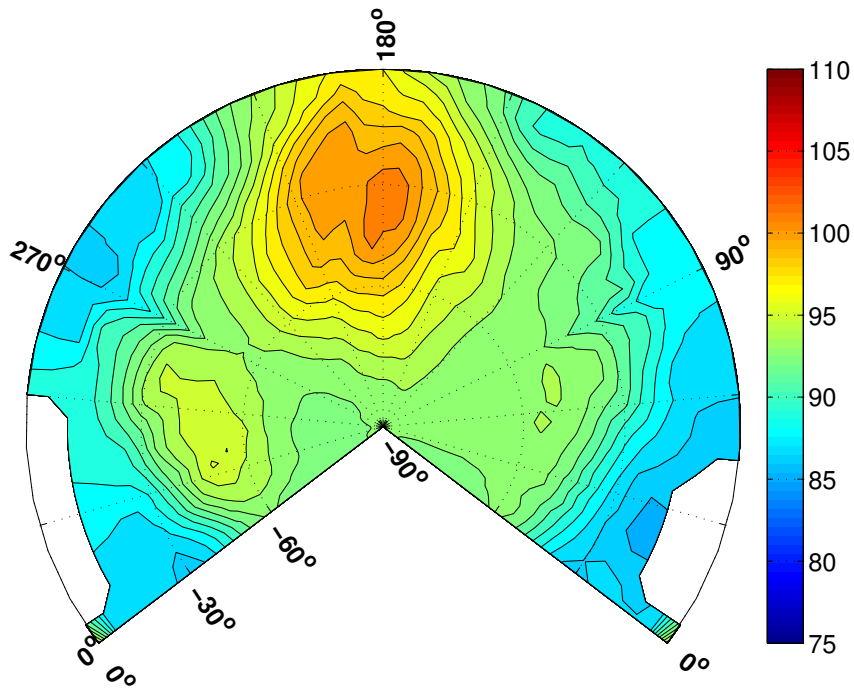


(b) BVISPL, dB

Figure 36: Descent hemisphere Be430108, 73.0 KTAS,  $-5.0^\circ$

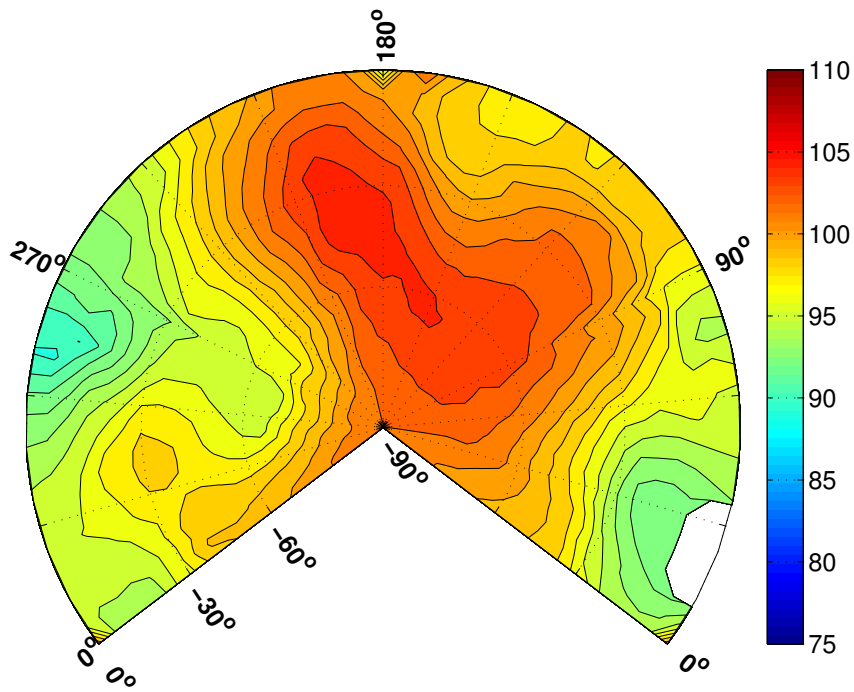


(a) OASPL, dB

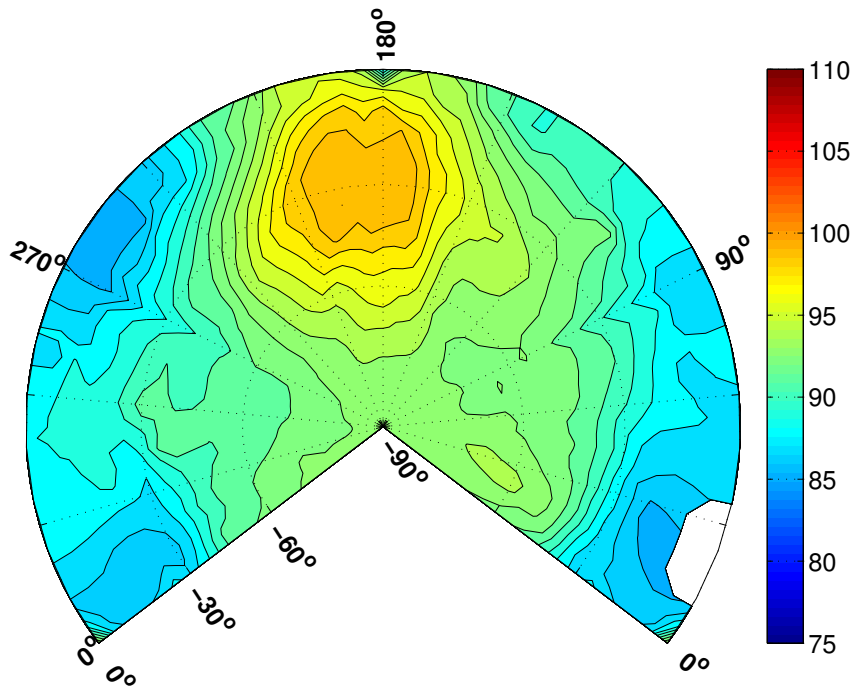


(b) BVISPL, dB

Figure 37: Descent hemisphere Be430109, 66.6 KTAS,  $-5.3^\circ$

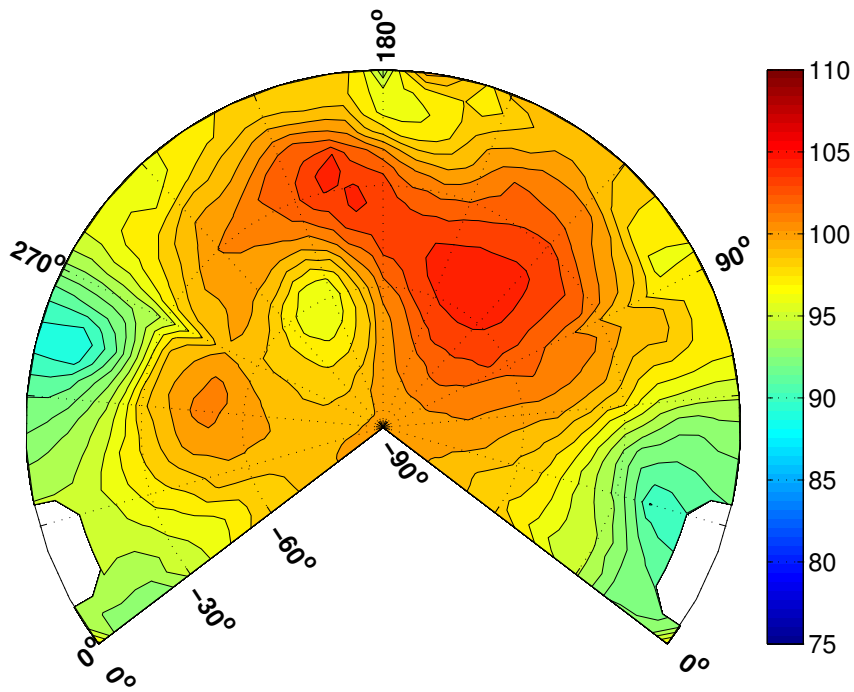


(a) OASPL, dB

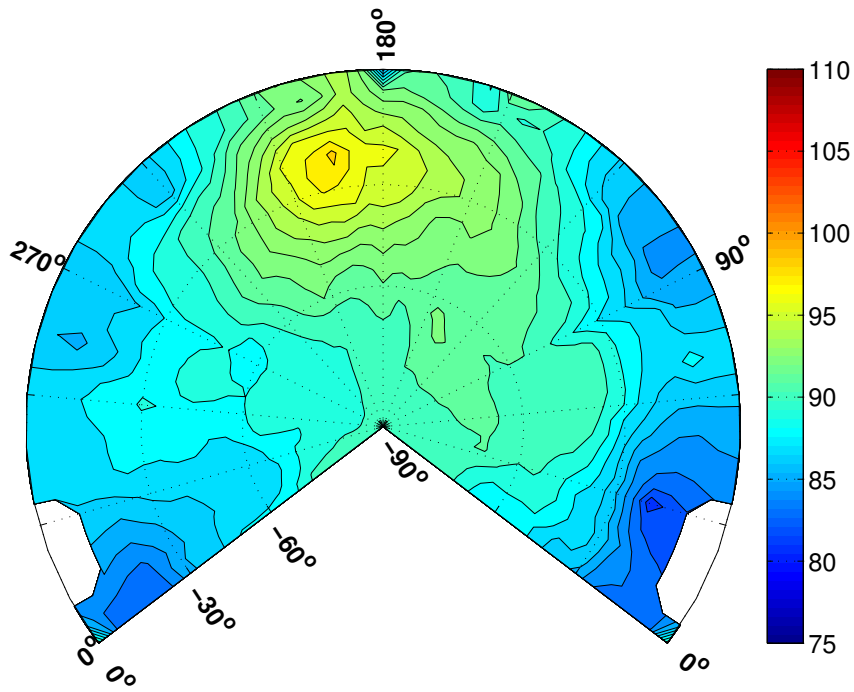


(b) BVISPL, dB

Figure 38: Descent hemisphere Be430110, 40.1 KTAS,  $-4.7^\circ$



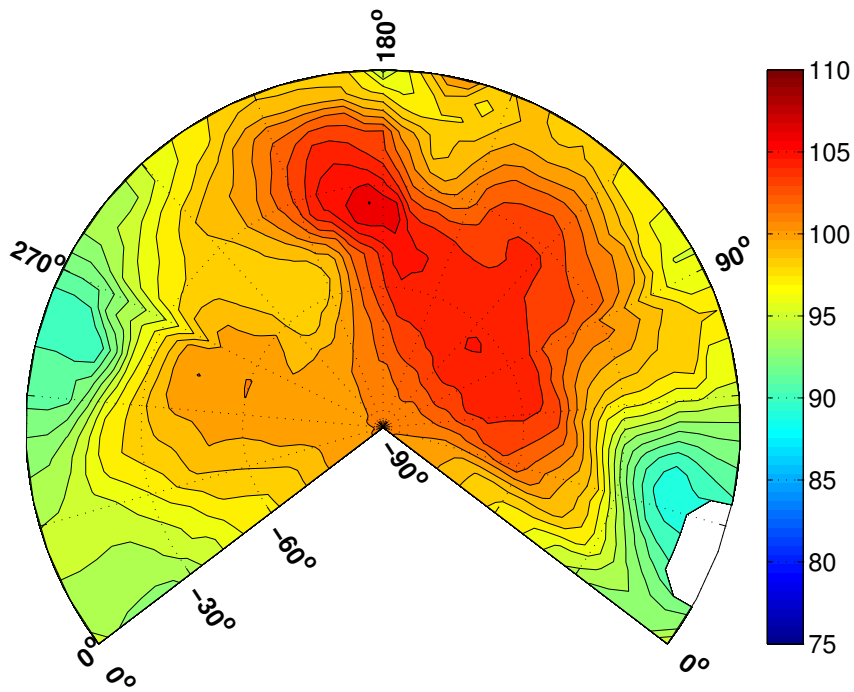


(a) OASPL, dB

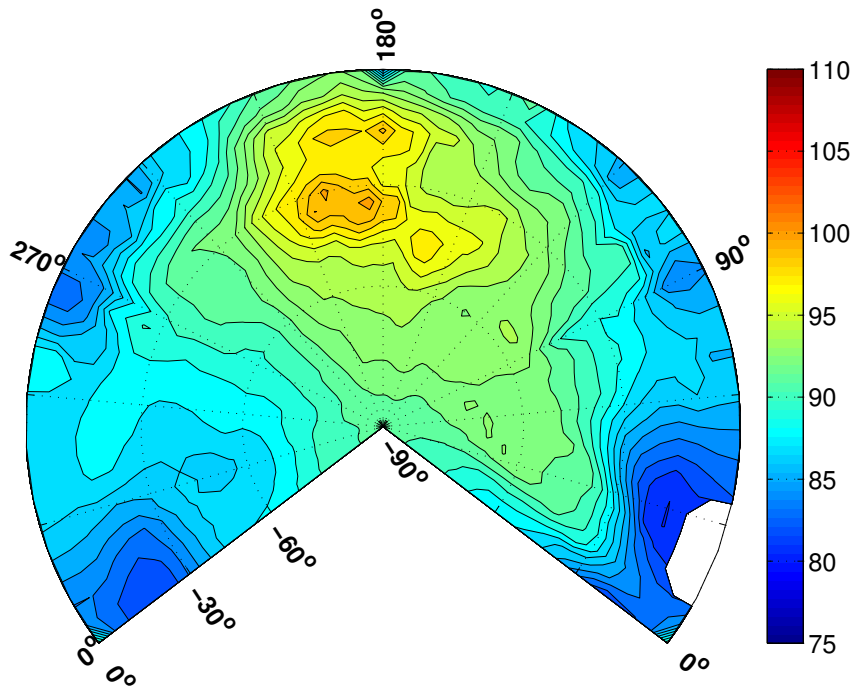


(b) BVISPL, dB

Figure 39: Descent hemisphere Be430112, 42.1 KTAS,  $-5.5^\circ$

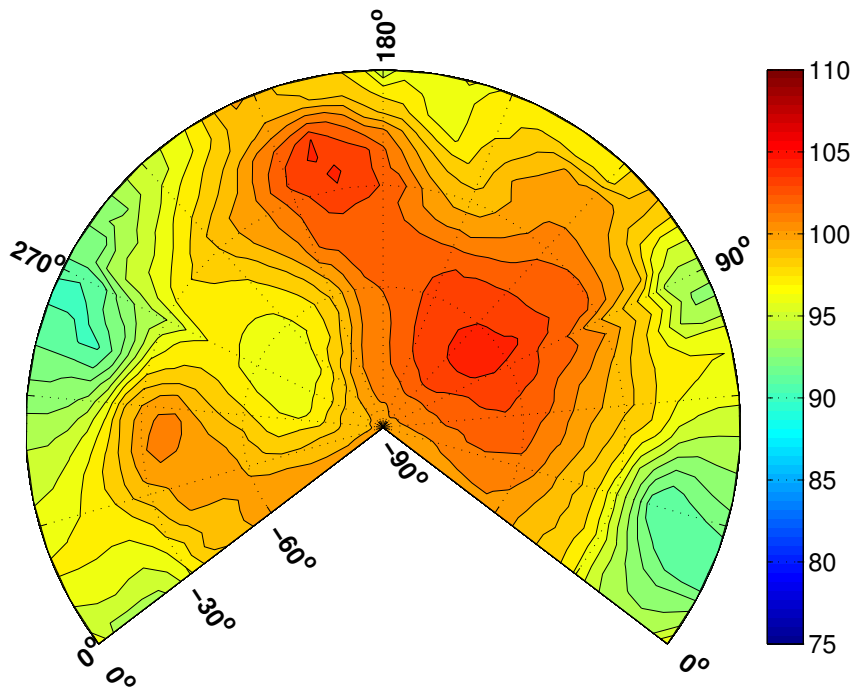


(a) OASPL, dB

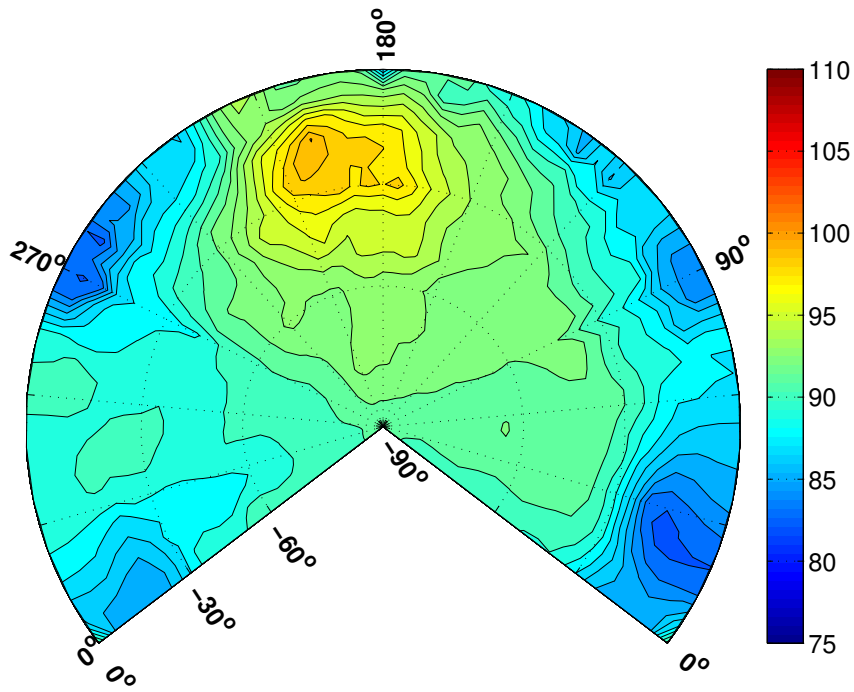


(b) BVISPL, dB

Figure 40: Descent hemi-sphere Be430113, 48.8 KTAS,  $-5.3^\circ$

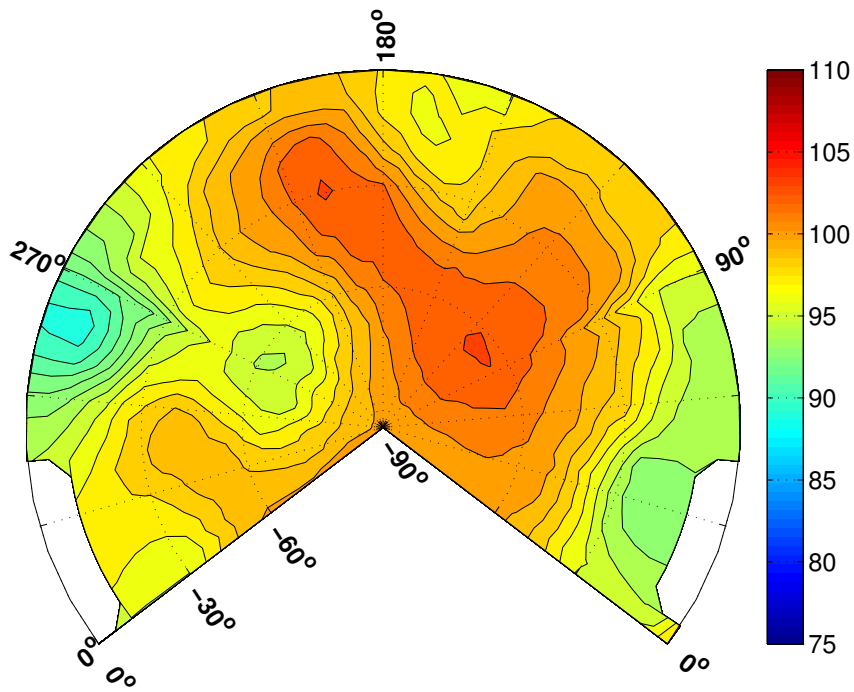


(a) OASPL, dB

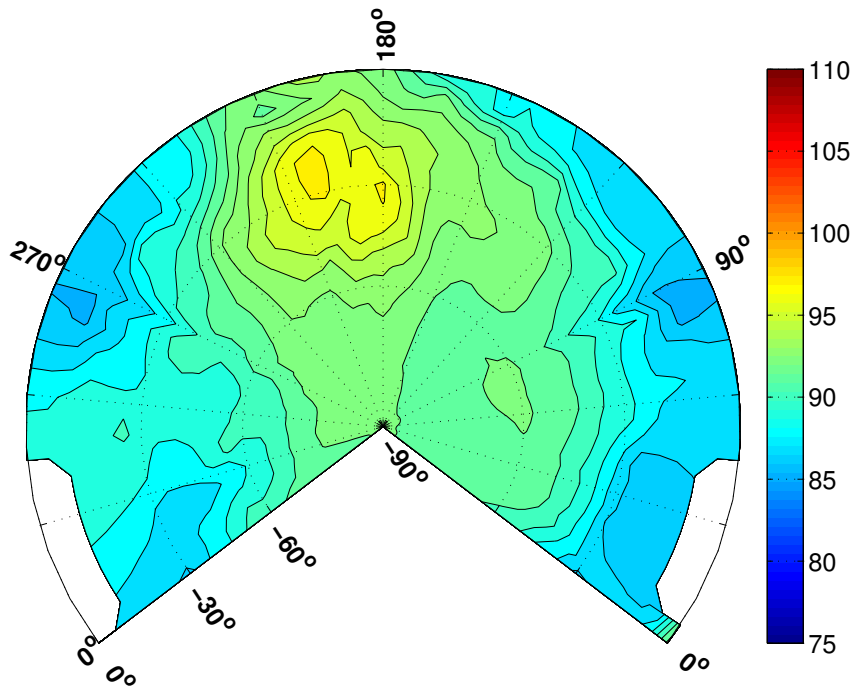


(b) BVISPL, dB

Figure 41: Descent hemi-sphere Be430114, 53.2 KTAS,  $-4.9^\circ$

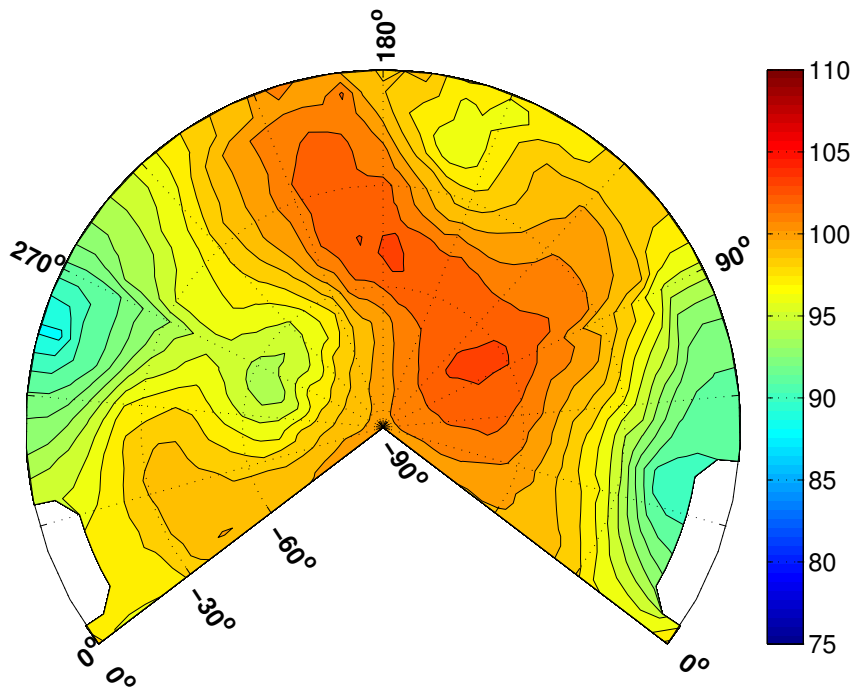


(a) OASPL, dB

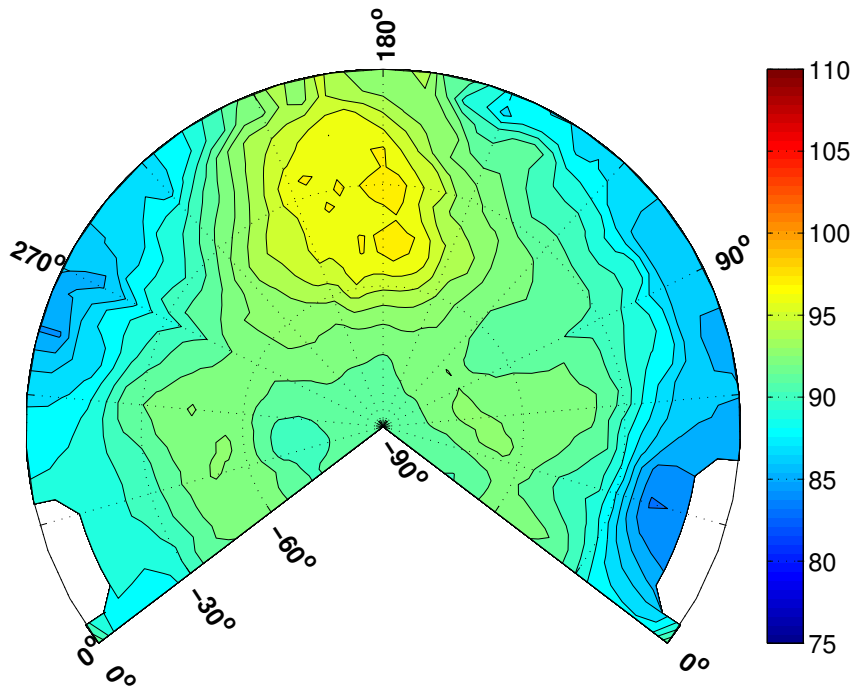


(b) BVISPL, dB

Figure 42: Descent hemisphere Be430115, 59.2 KTAS,  $-4.9^\circ$

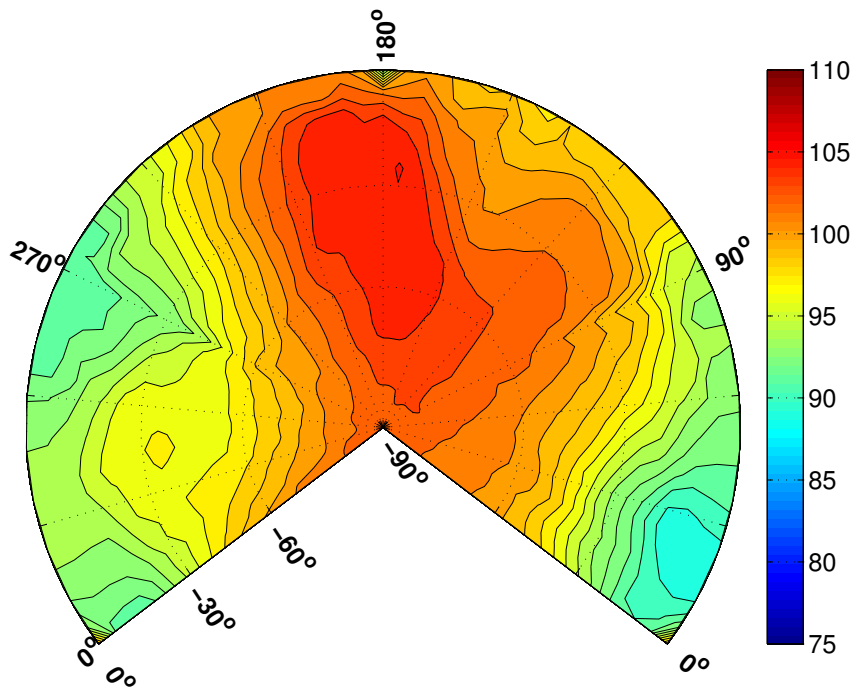


(a) OASPL, dB

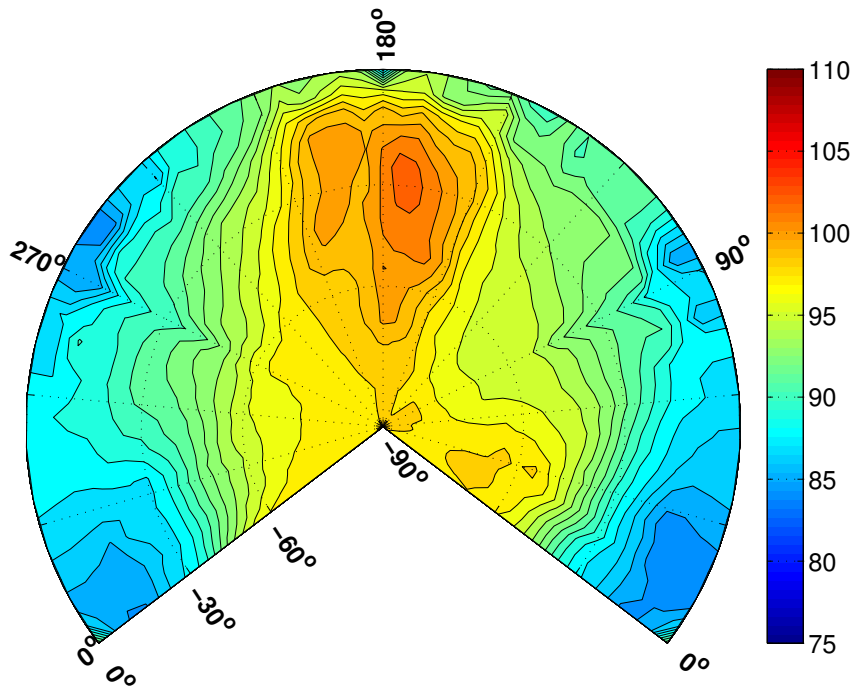


(b) BVISPL, dB

Figure 43: Descent hemisphere Be430116, 81.0 KTAS,  $-5.5^\circ$

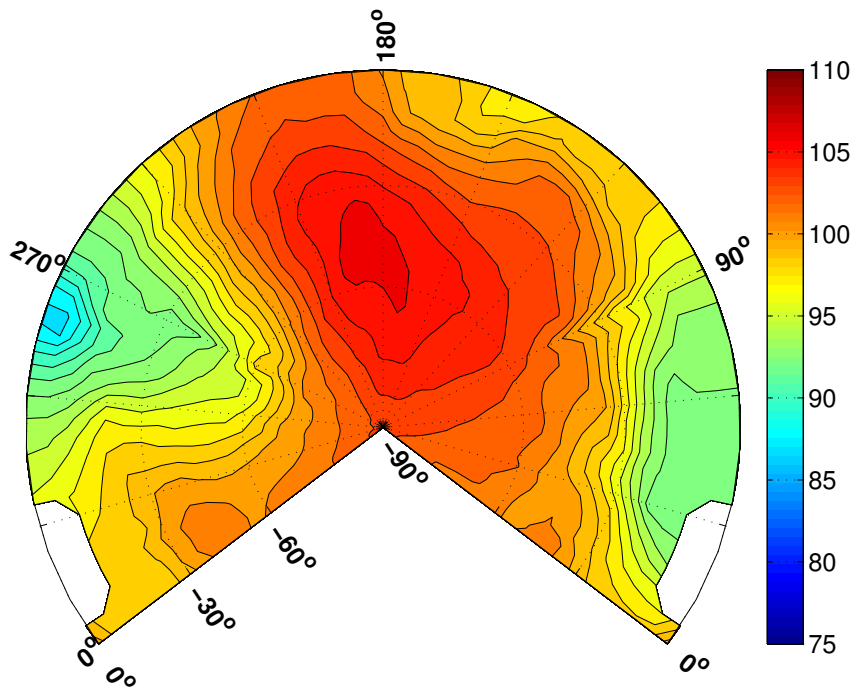


(a) OASPL, dB

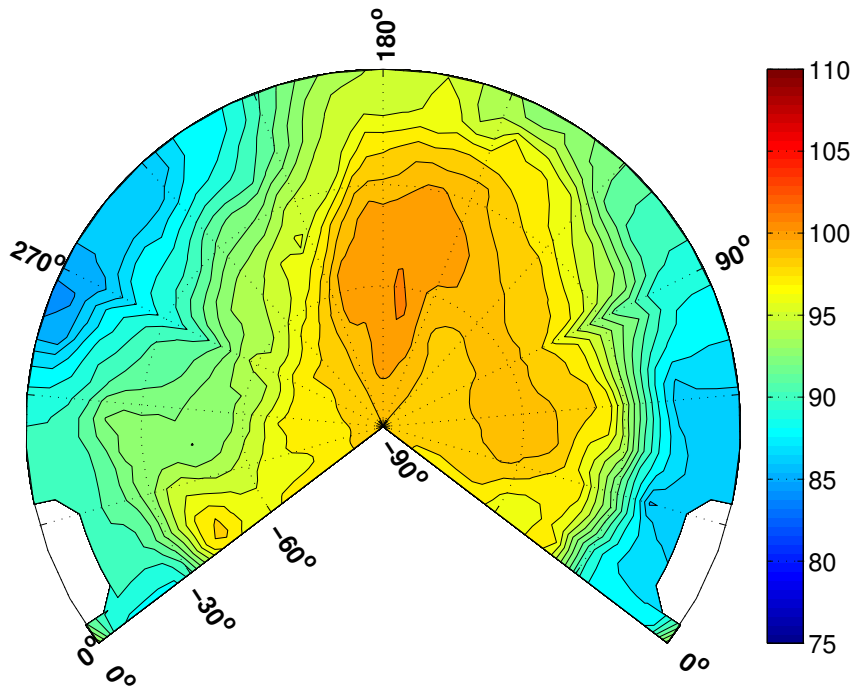


(b) BVISPL, dB

Figure 44: Descent hemisphere Be430145, 56.4 KTAS,  $-11.2^\circ$

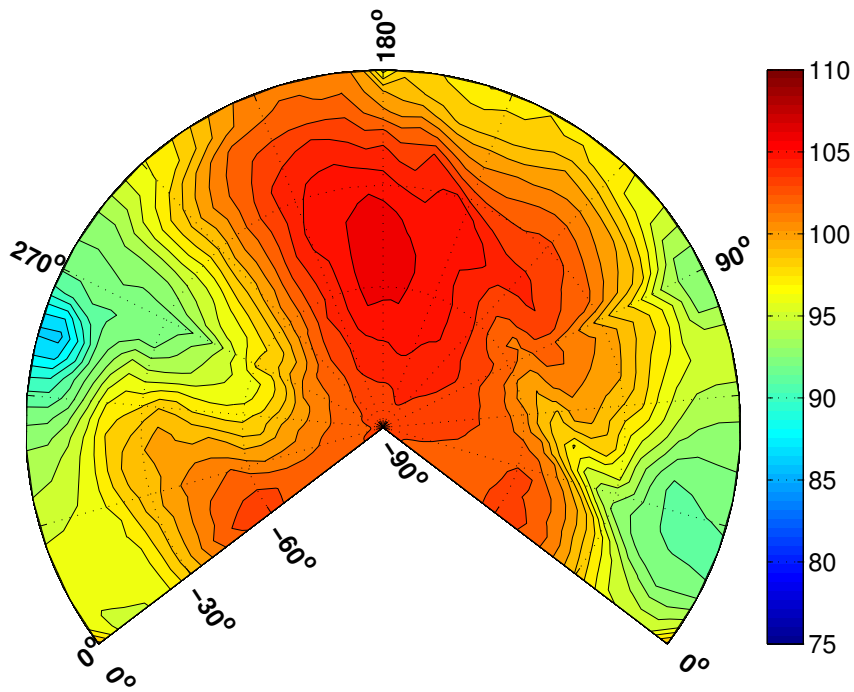


(a) OASPL, dB

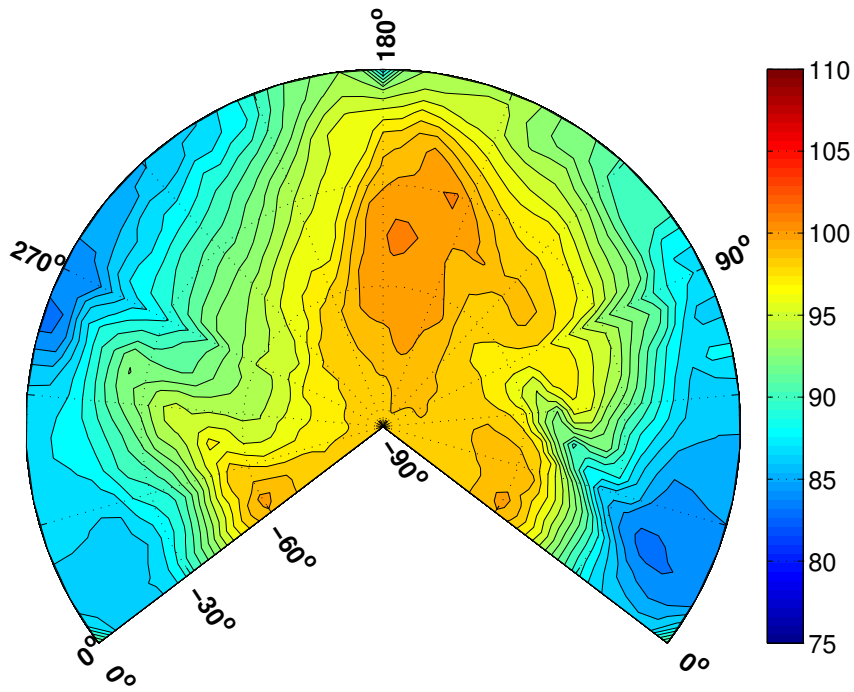


(b) BVISPL, dB

Figure 45: Descent hemisphere Be430146, 53.7 KTAS,  $-11.4^\circ$

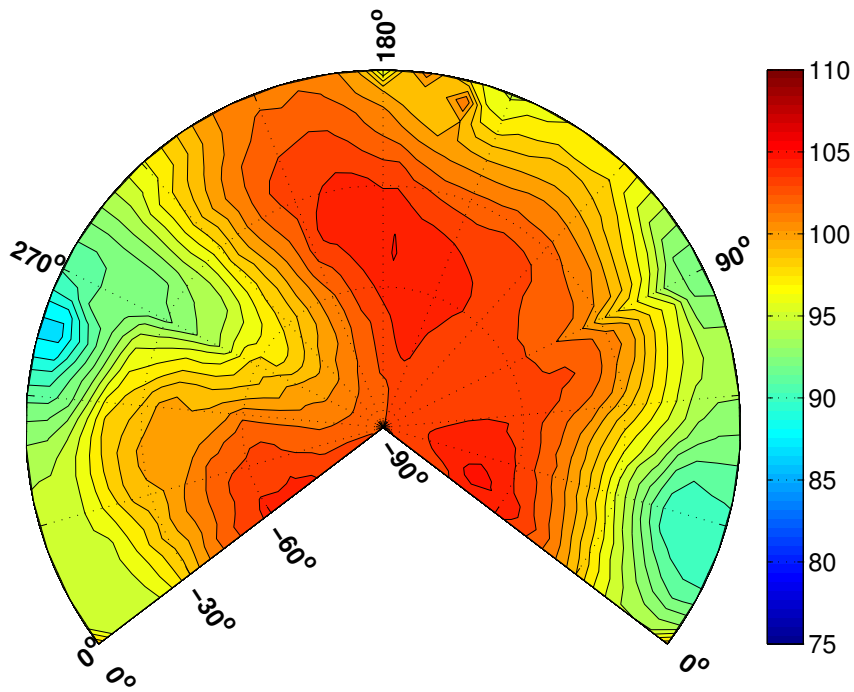


(a) OASPL, dB

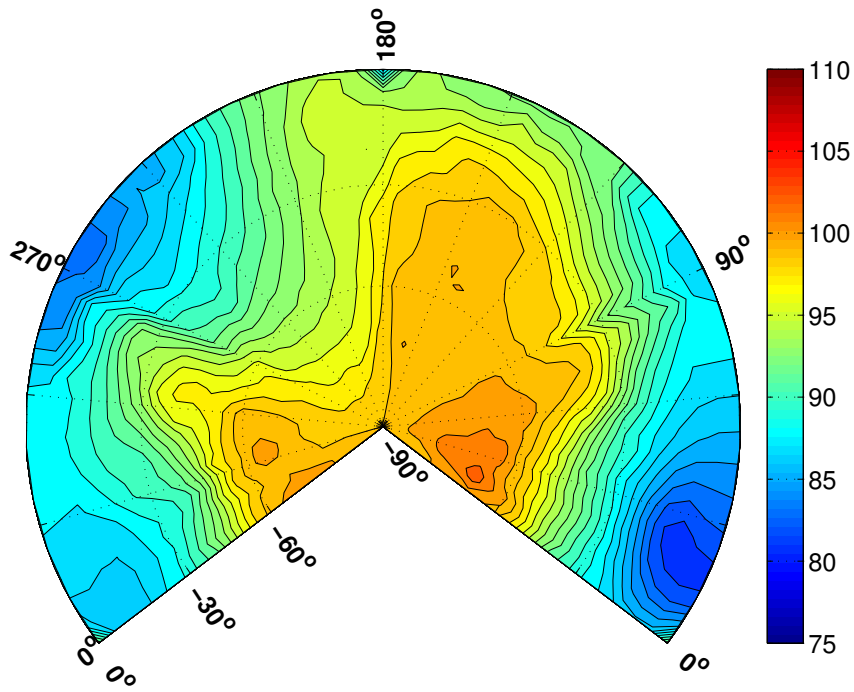


(b) BVISPL, dB

Figure 46: Descent hemi-sphere Be430147, 55.2 KTAS,  $-11.8^\circ$



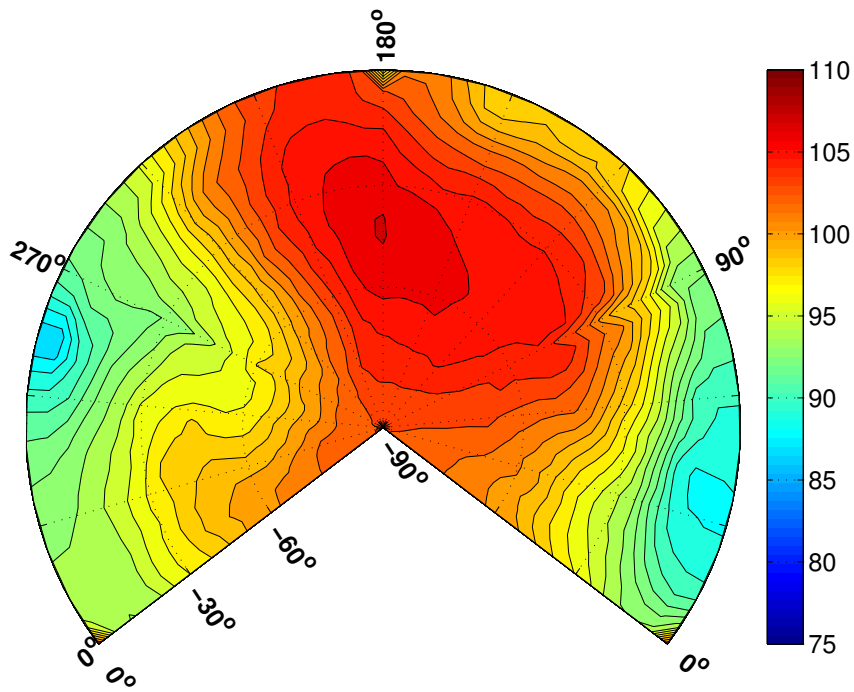


(a) OASPL, dB

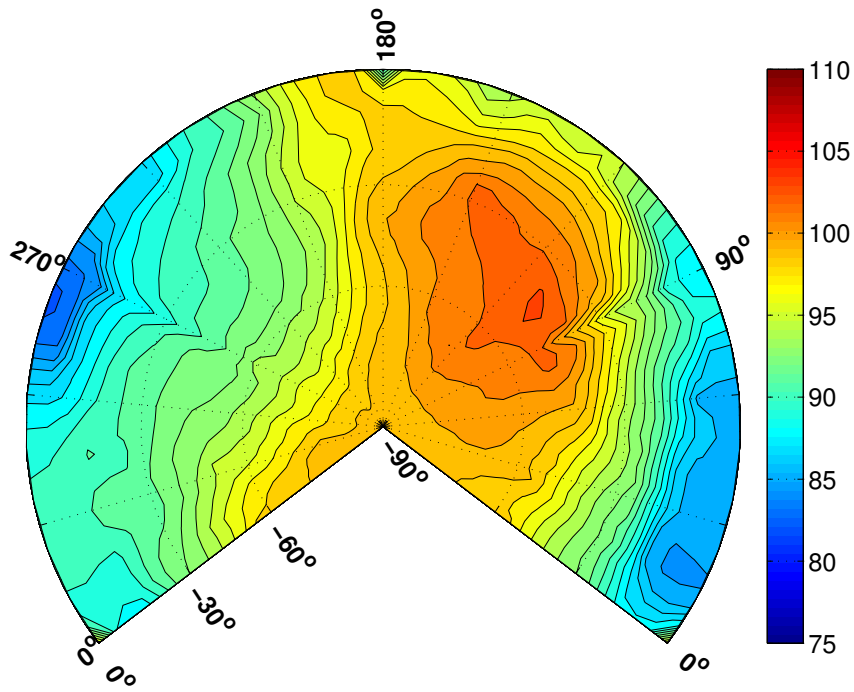


(b) BVISPL, dB

Figure 47: Descent hemisphere Be430148, 77.9 KTAS,  $-11.8^\circ$

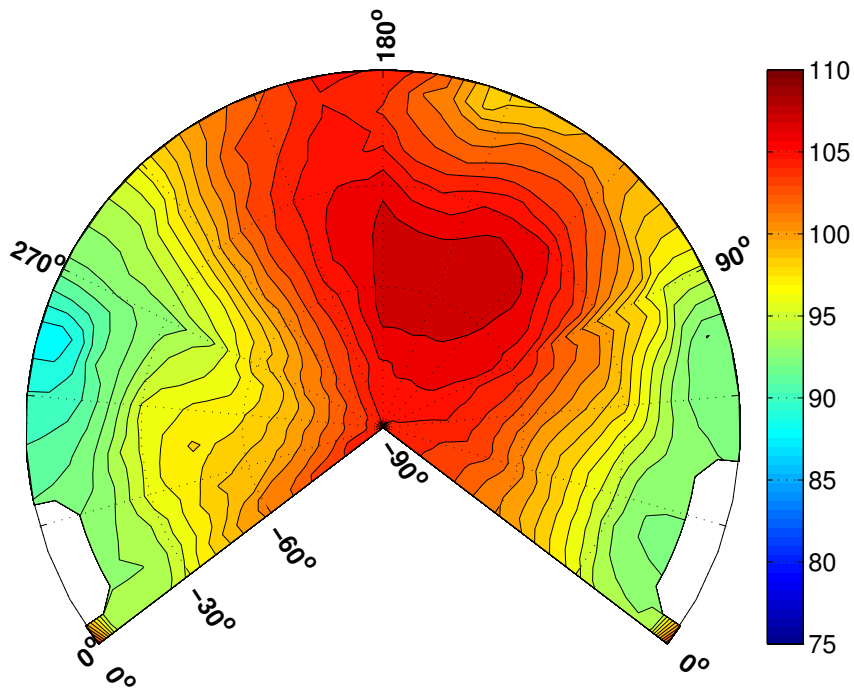


(a) OASPL, dB

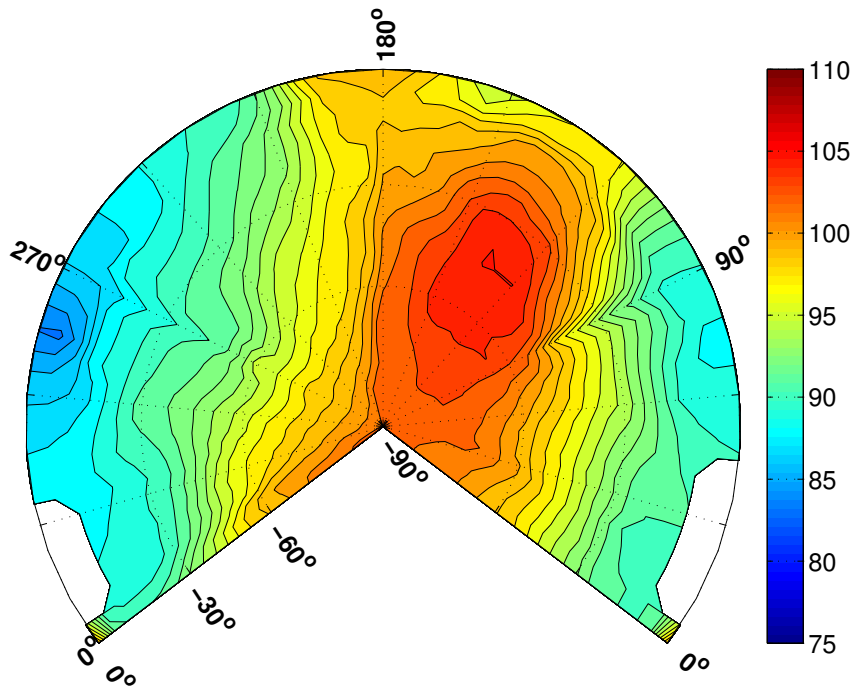


(b) BVISPL, dB

Figure 48: Descent hemi-sphere Be430149, 79.9 KTAS,  $-10.9^\circ$

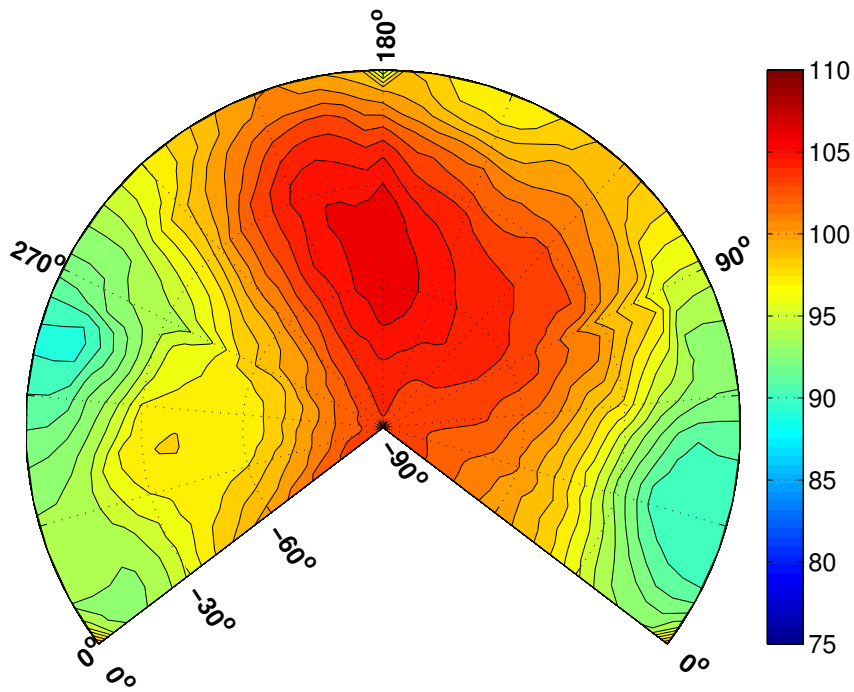


(a) OASPL, dB

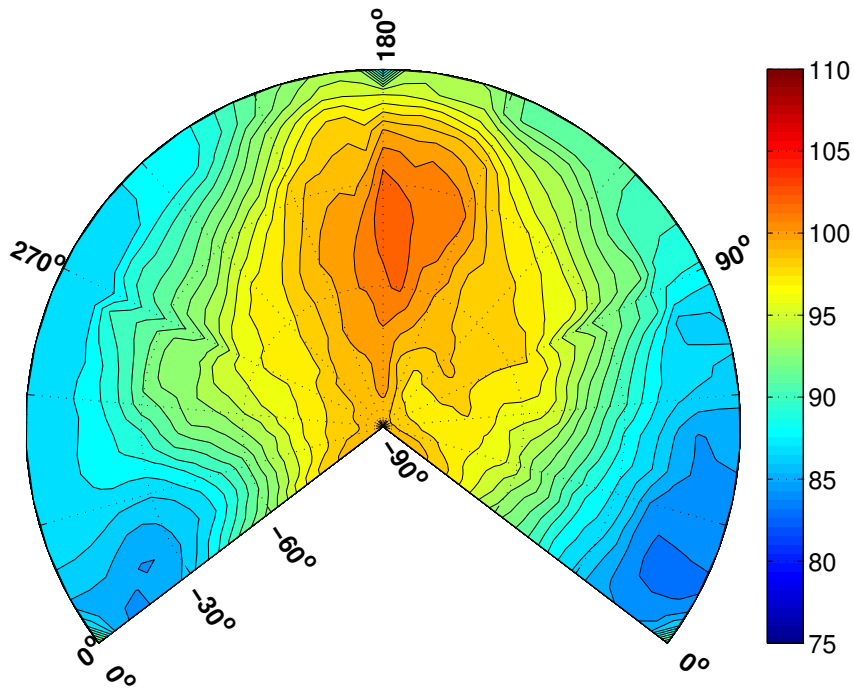


(b) BVISPL, dB

Figure 49: Descent hemi-sphere Be430150, 59.6 KTAS,  $-9.1^\circ$

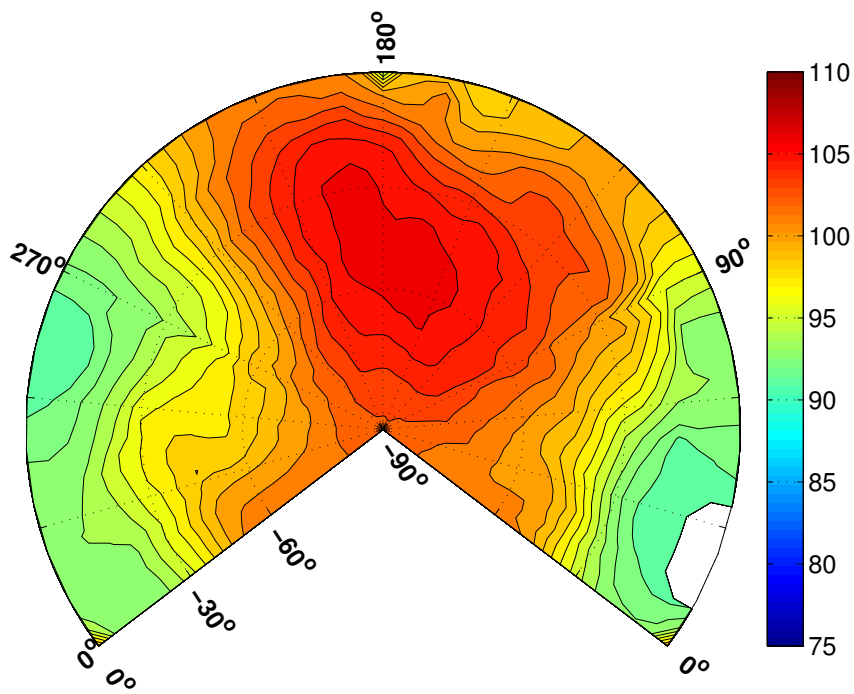


(a) OASPL, dB

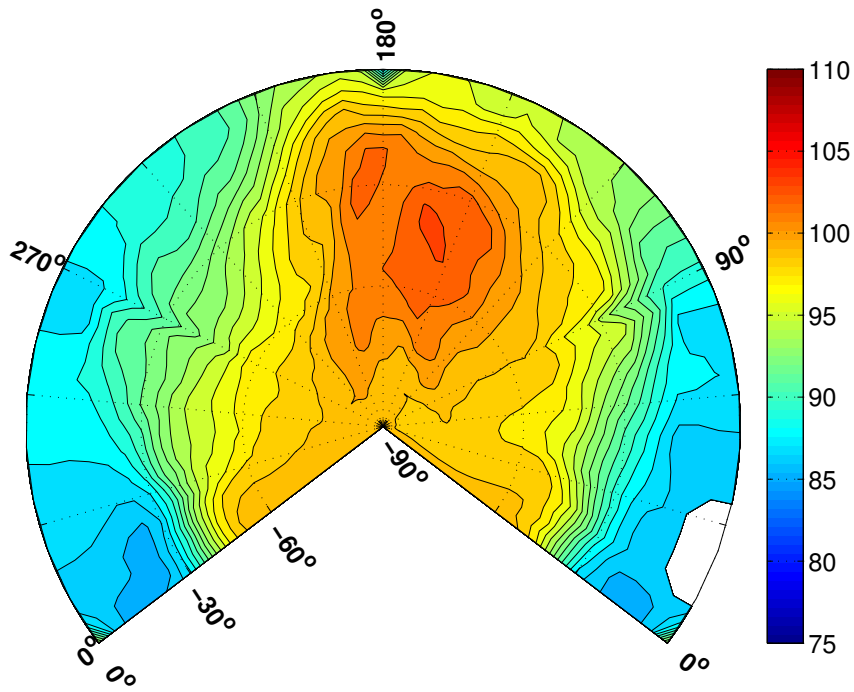


(b) BVISPL, dB

Figure 50: Descent hemisphere Be430151, 71.6 KTAS,  $-8.4^\circ$

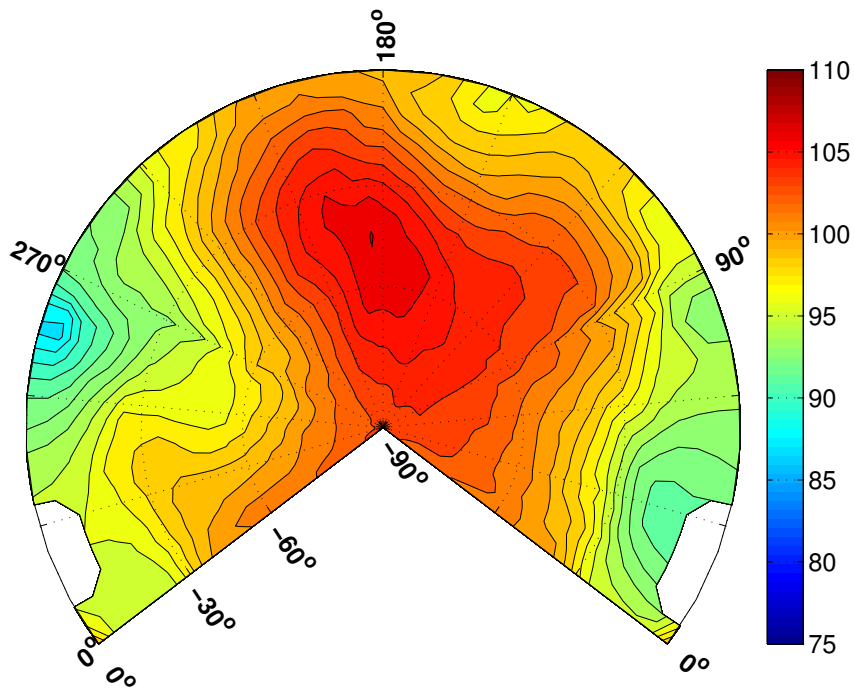


(a) OASPL, dB

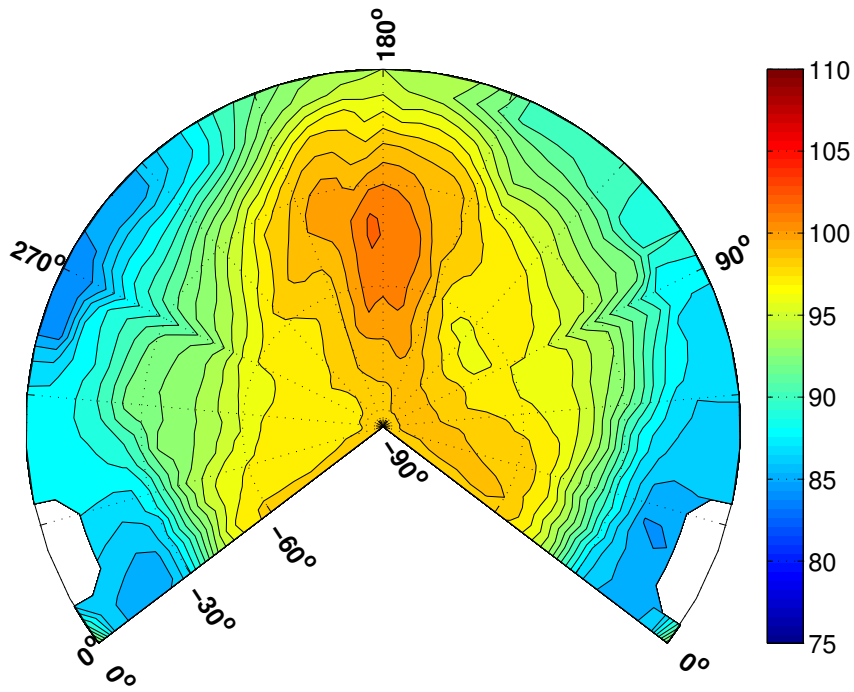


(b) BVISPL, dB

Figure 51: Descent hemi-sphere Be430152, 58.5 KTAS,  $-9.7^\circ$

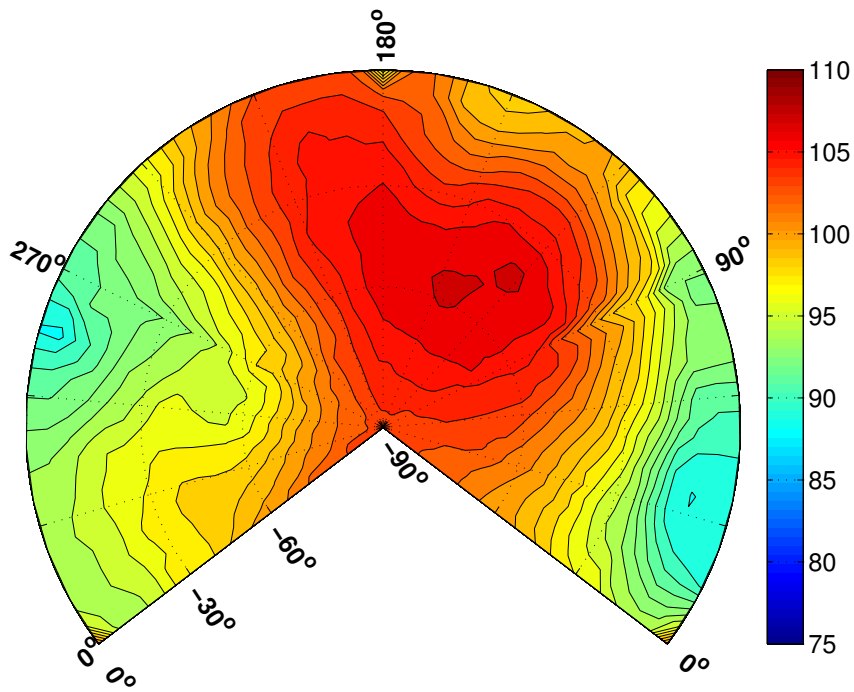


(a) OASPL, dB

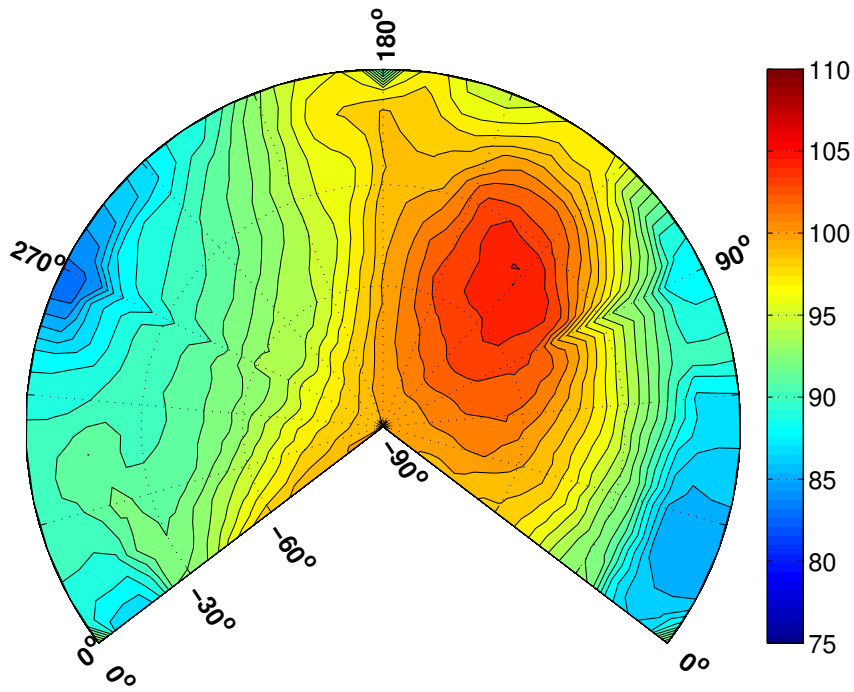


(b) BVISPL, dB

Figure 52: Descent hemisphere Be430153, 80.9 KTAS,  $-10.0^\circ$

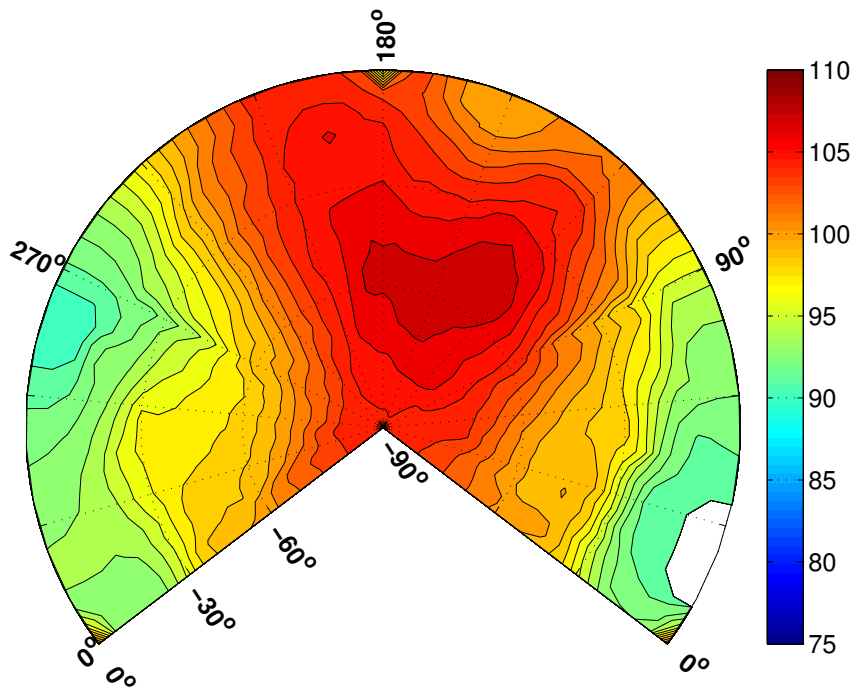


(a) OASPL, dB

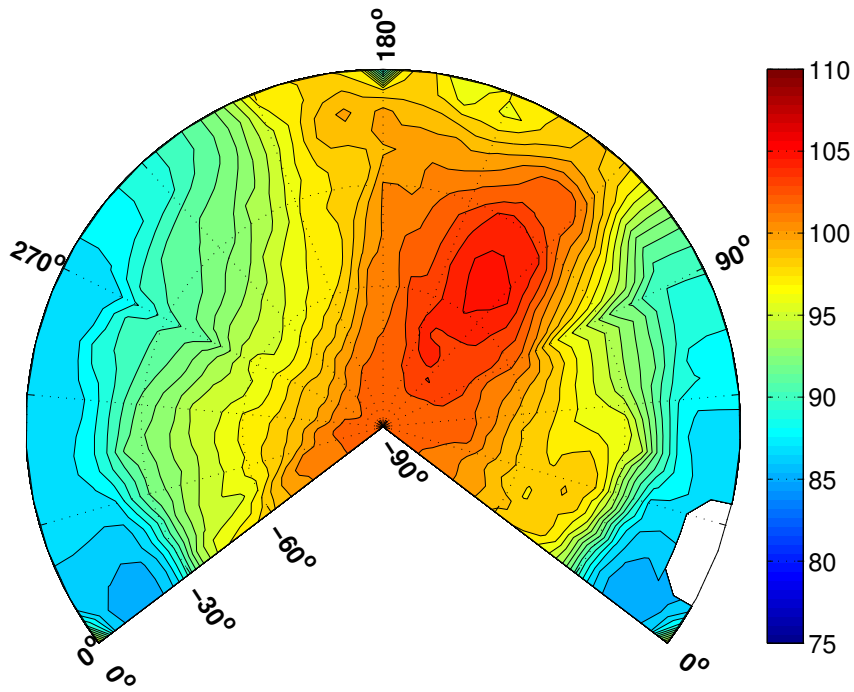


(b) BVISPL, dB

Figure 53: Descent hemisphere Be430154, 88.6 KTAS,  $-9.4^\circ$

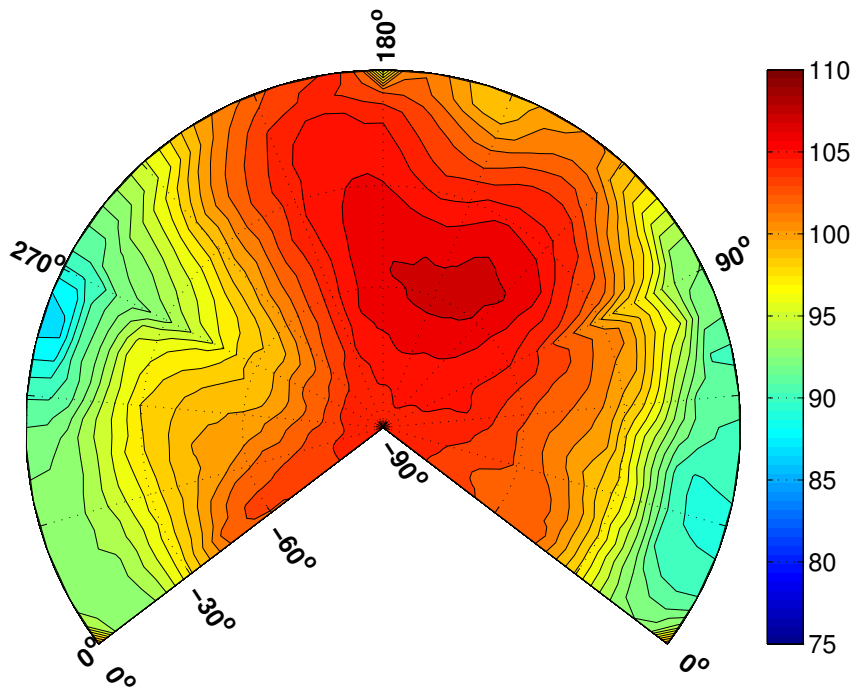


(a) OASPL, dB

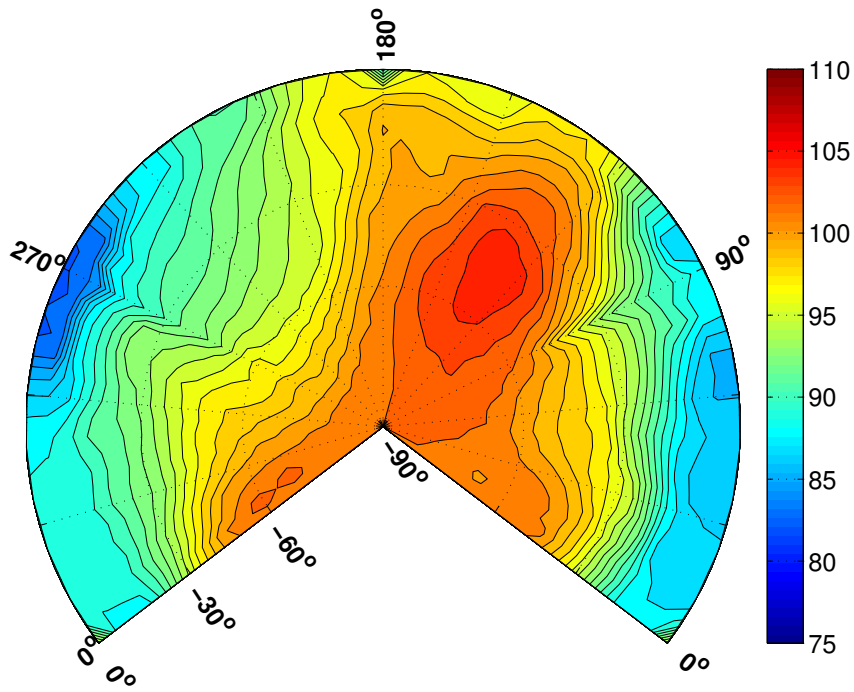


(b) BVISPL, dB

Figure 54: Descent hemisphere Be430155, 82.3 KTAS,  $-10.2^\circ$



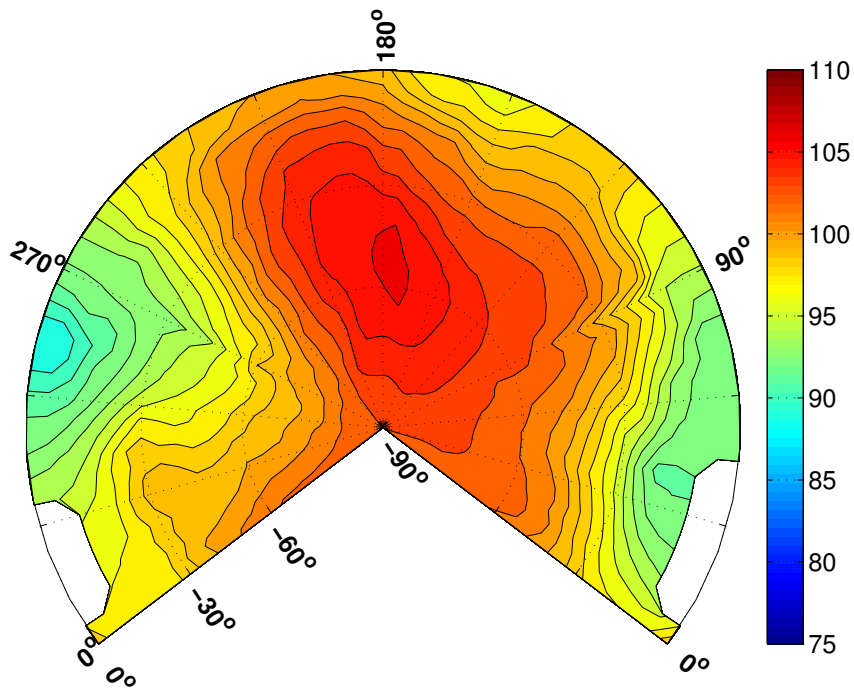


(a) OASPL, dB

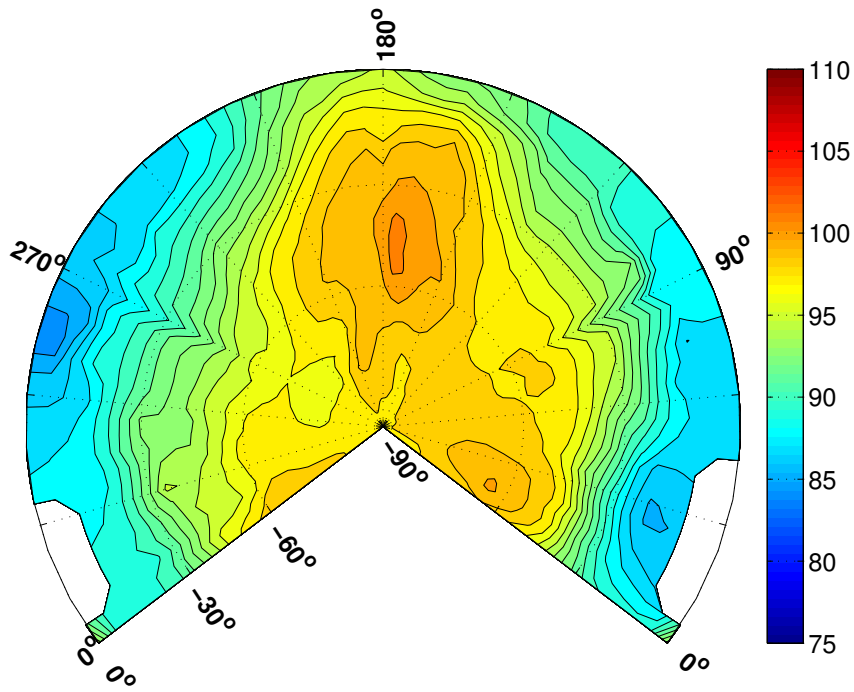


(b) BVISPL, dB

Figure 55: Descent hemi-sphere Be430156, 57.2 KTAS,  $-8.3^\circ$

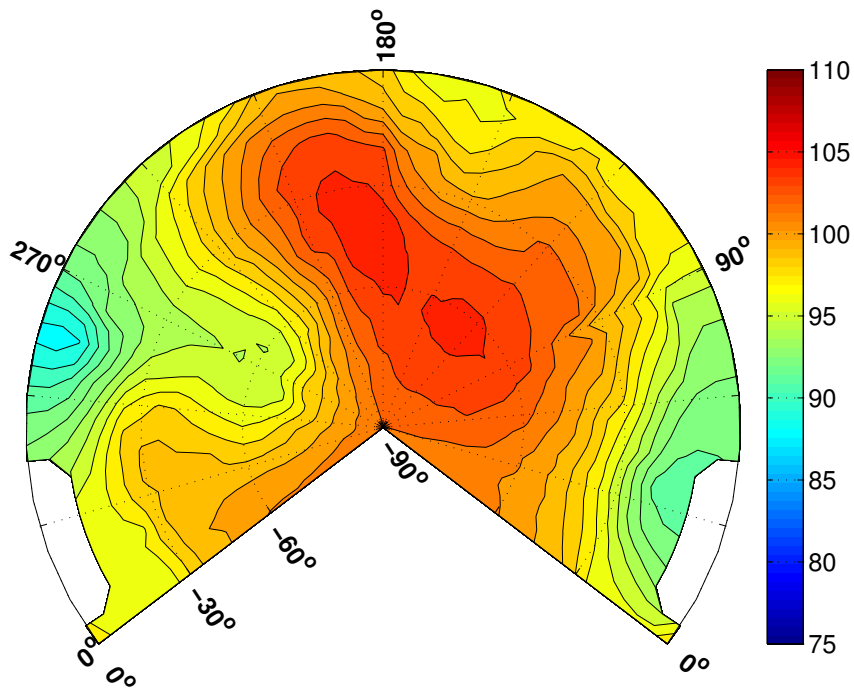


(a) OASPL, dB

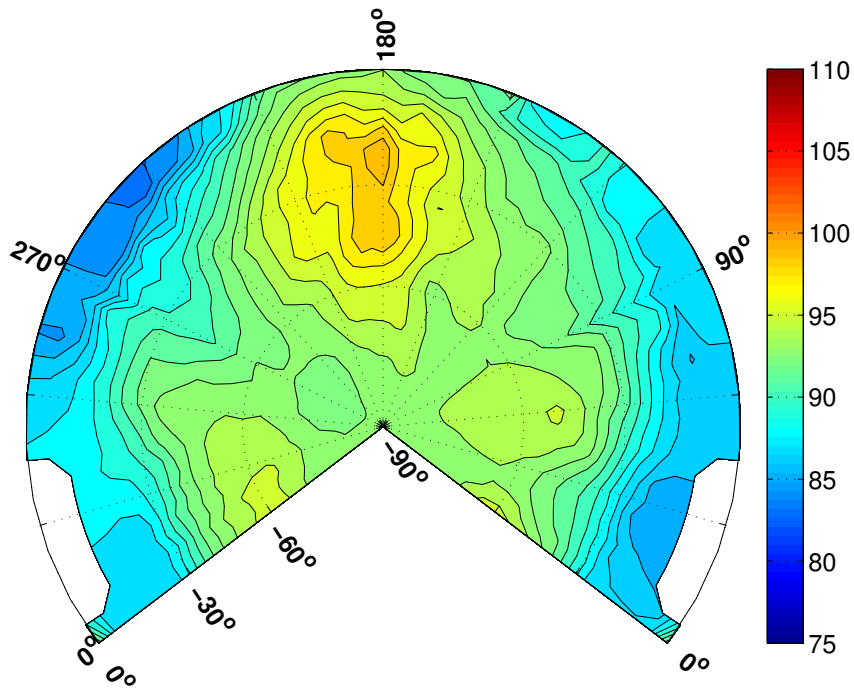


(b) BVISPL, dB

Figure 56: Descent hemi-sphere Be430157, 56.3 KTAS,  $-6.8^\circ$

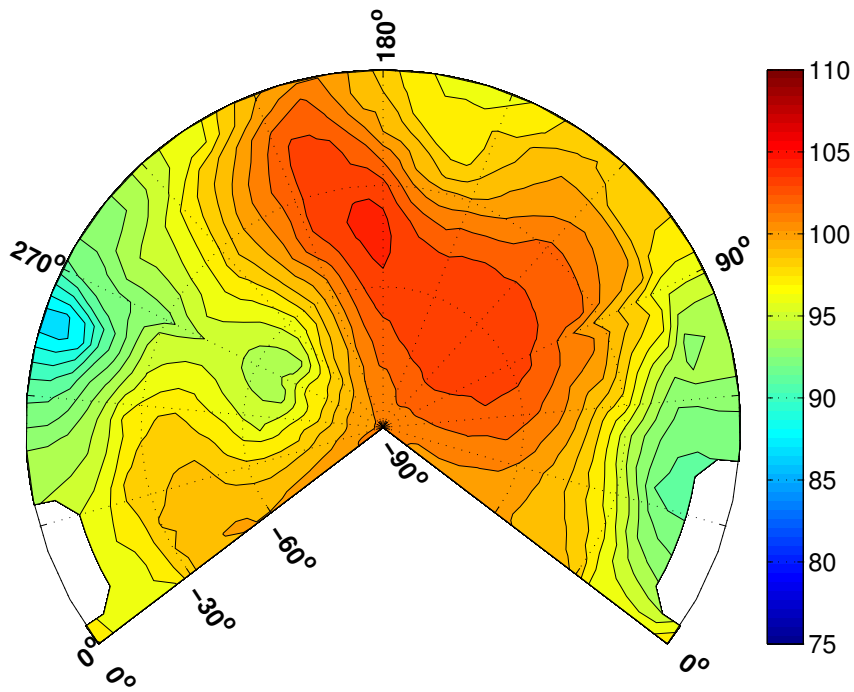


(a) OASPL, dB

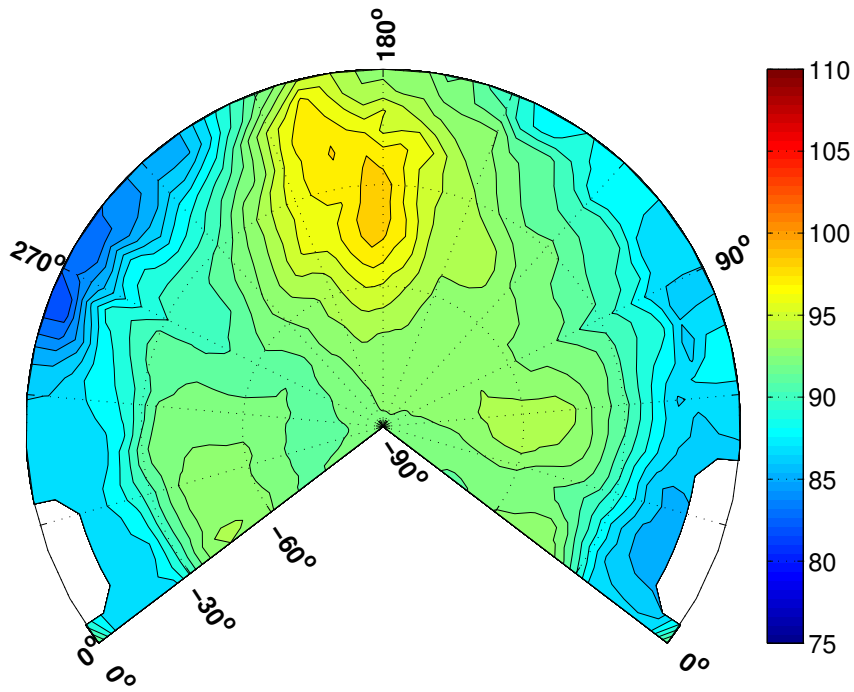


(b) BVISPL, dB

Figure 57: Descent hemisphere Be430158, 55.7 KTAS,  $-6.9^\circ$

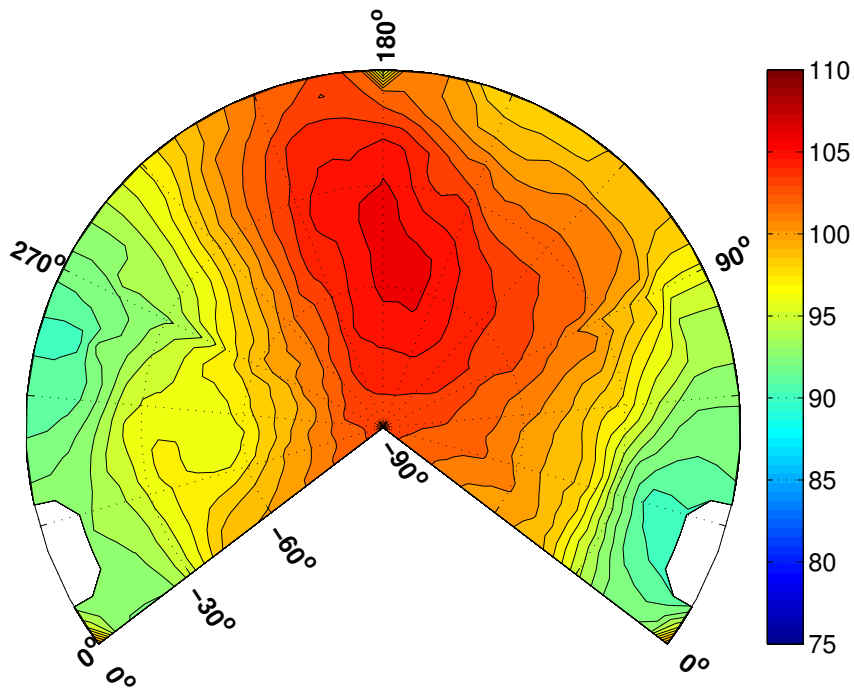


(a) OASPL, dB

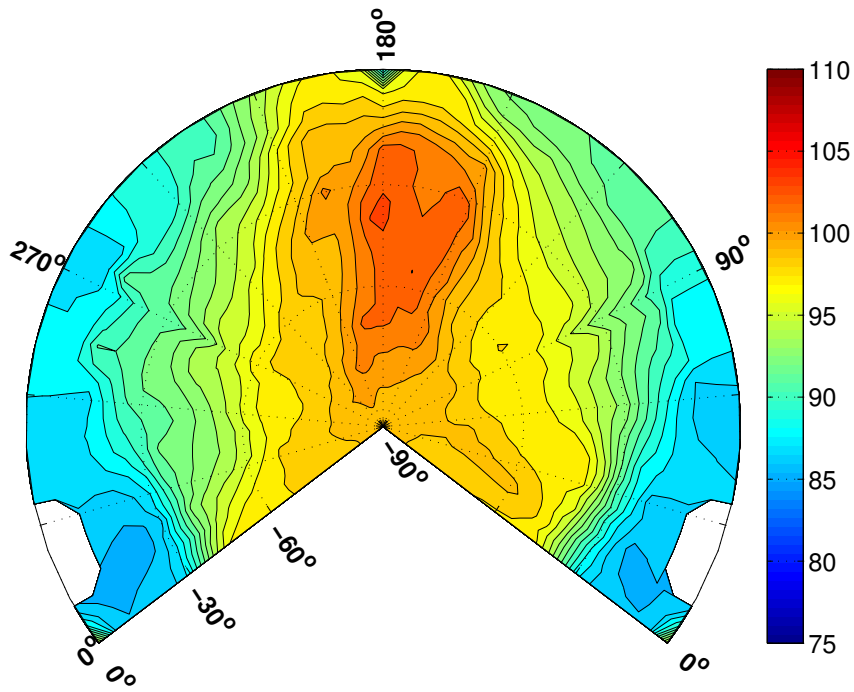


(b) BVISPL, dB

Figure 58: Descent hemi-sphere Be430159, 81.1 KTAS,  $-6.6^\circ$

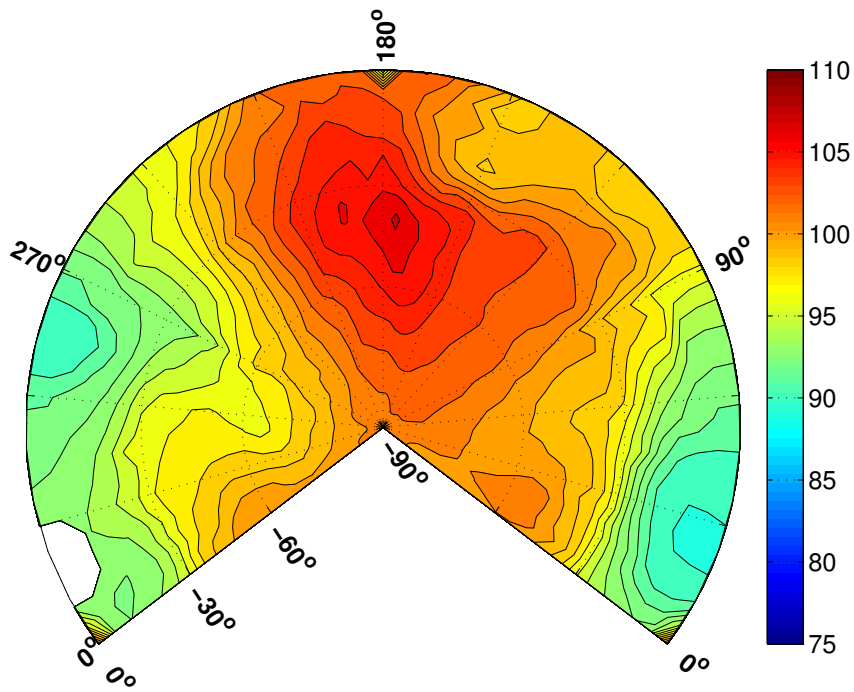


(a) OASPL, dB

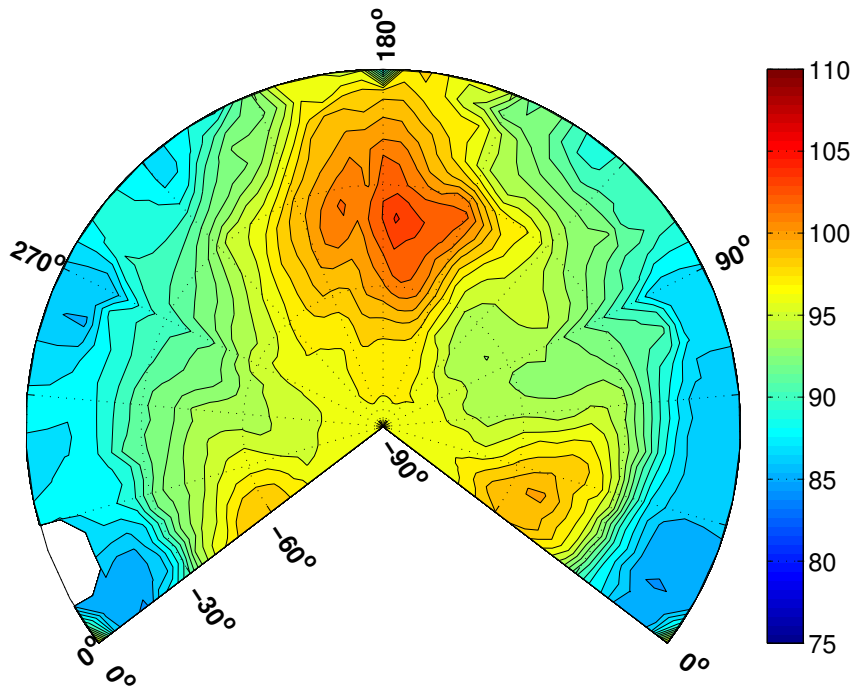


(b) BVISPL, dB

Figure 59: Descent hemisphere Be430177, 82.2 KTAS,  $-6.4^\circ$

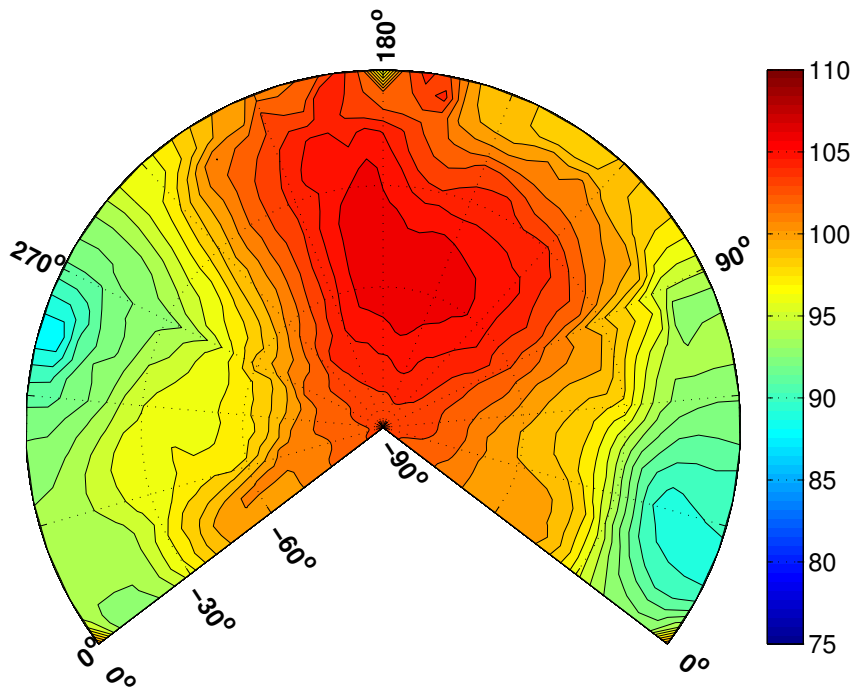


(a) OASPL, dB

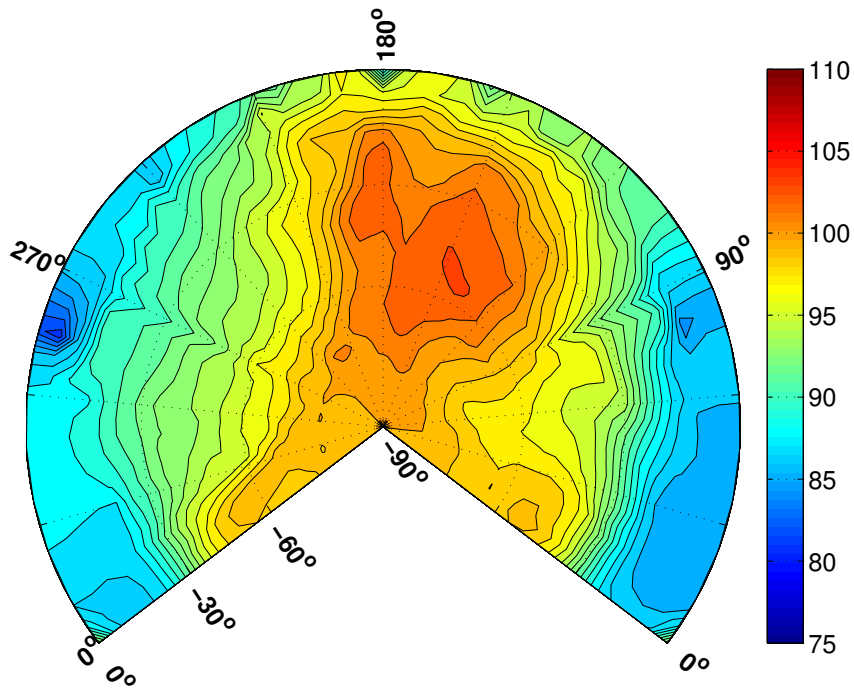


(b) BVISPL, dB

Figure 60: Descent hemi-sphere Be430178, 82.1 KTAS,  $-6.9^\circ$

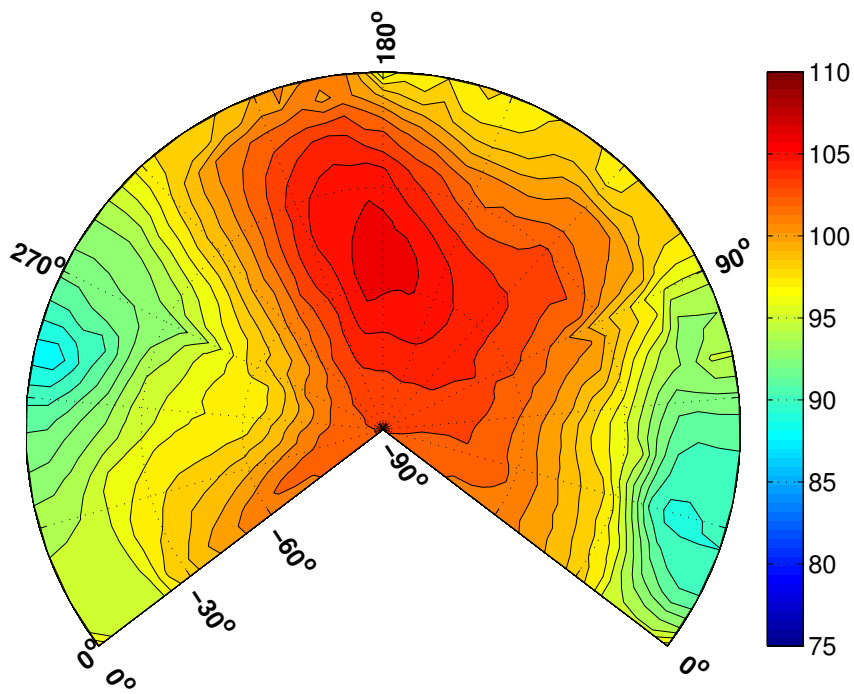


(a) OASPL, dB

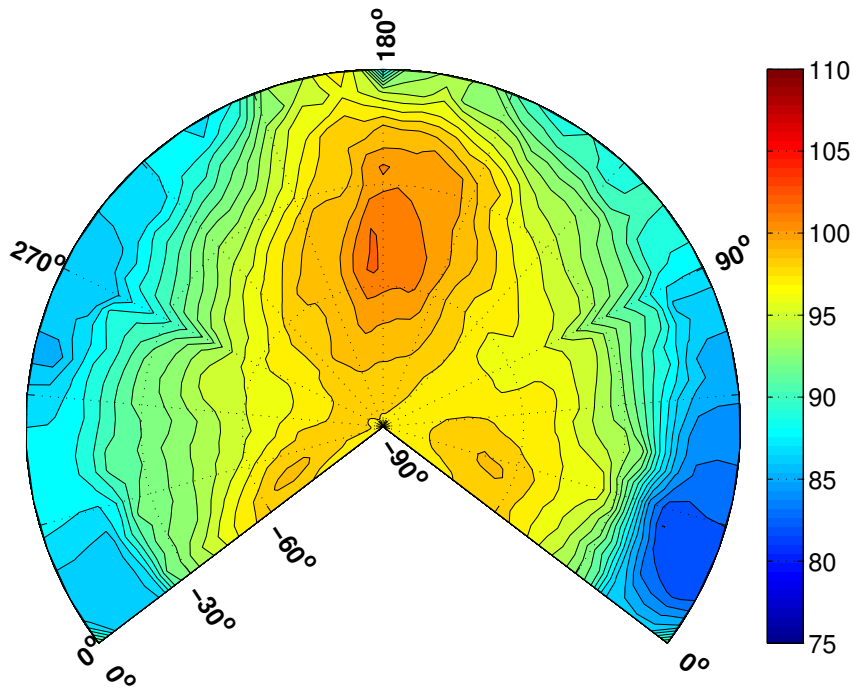


(b) BVISPL, dB

Figure 61: Descent hemi-sphere Be430182, 61.4 KTAS,  $-8.1^\circ$

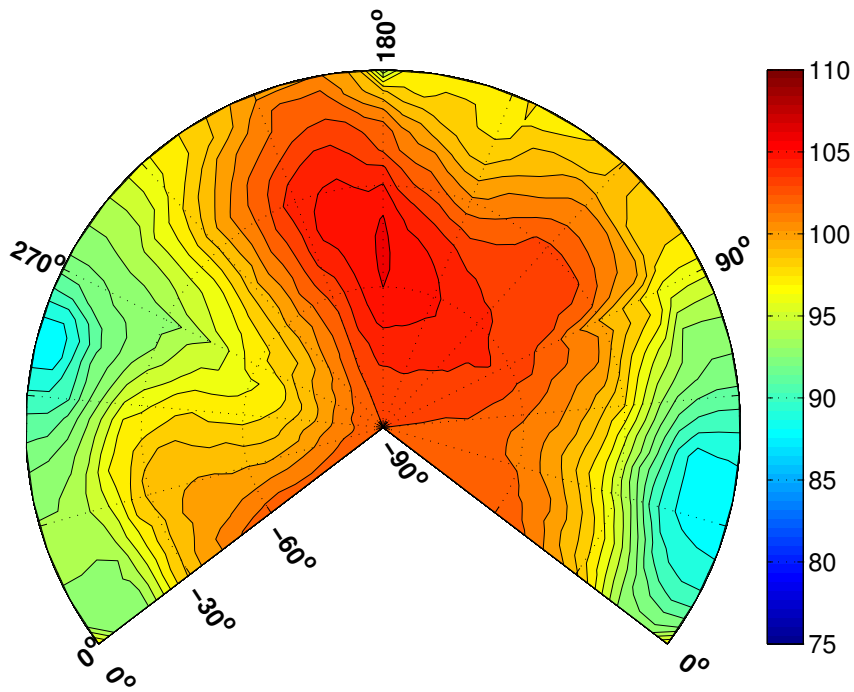


(a) OASPL, dB

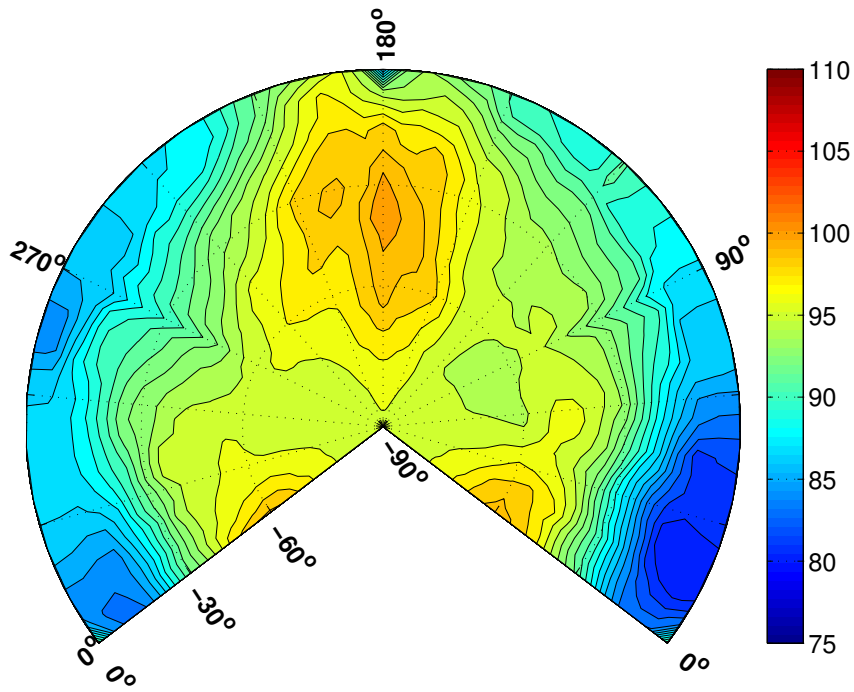


(b) BVISPL, dB

Figure 62: Descent hemi-sphere Be430183, 55.2 KTAS,  $-8.4^\circ$



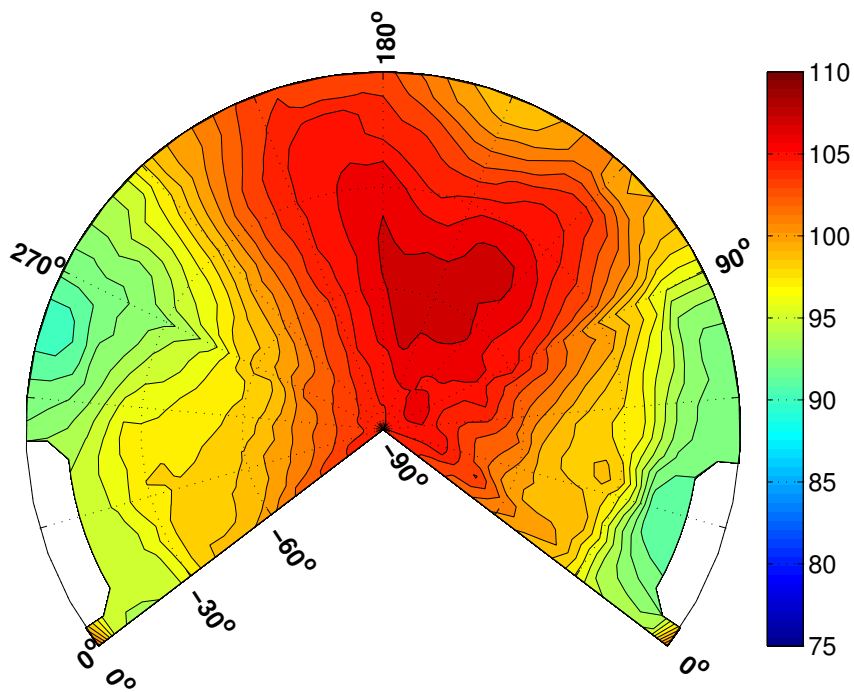


(a) OASPL, dB

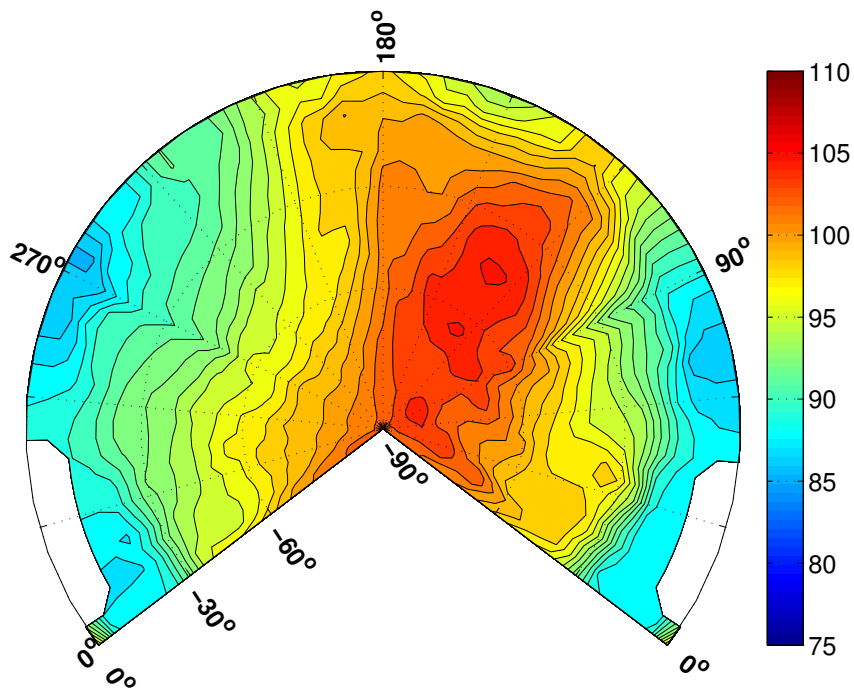


(b) BVISPL, dB

Figure 63: Descent hemi-sphere Be430184, 81.3 KTAS,  $-8.5^\circ$

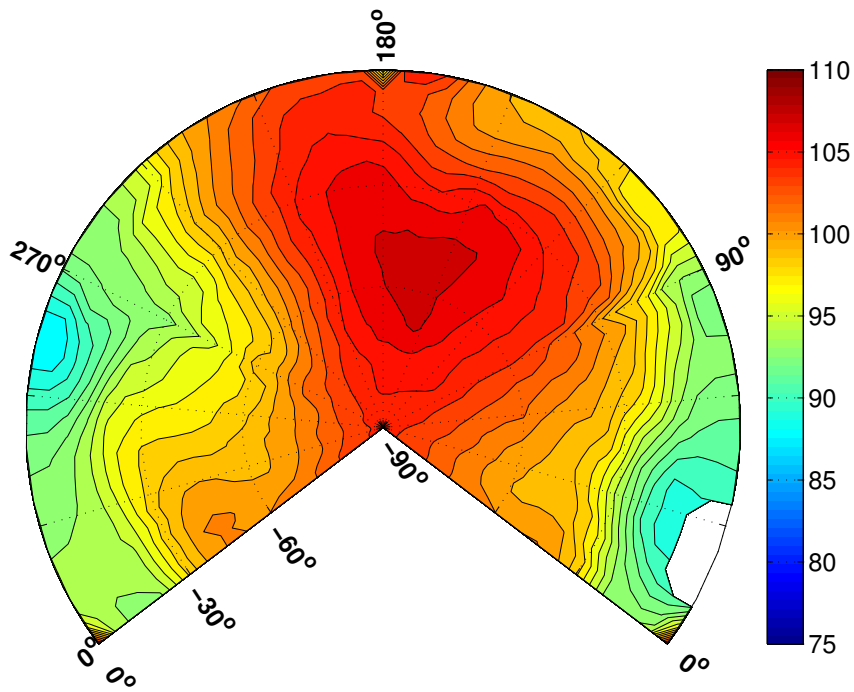


(a) OASPL, dB

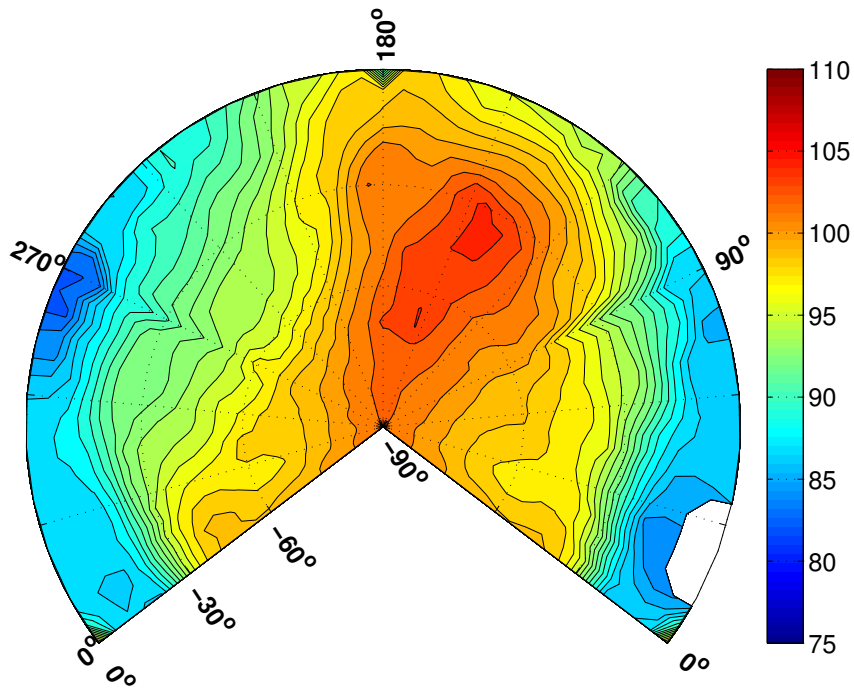


(b) BVISPL, dB

Figure 64: Descent hemisphere Be430185, 82.2 KTAS,  $-9.0^\circ$

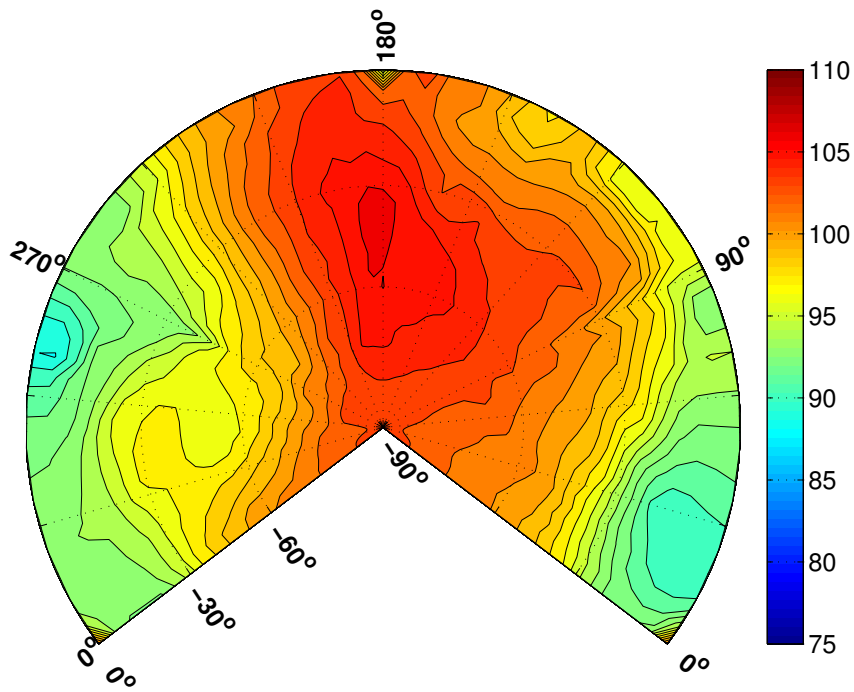


(a) OASPL, dB

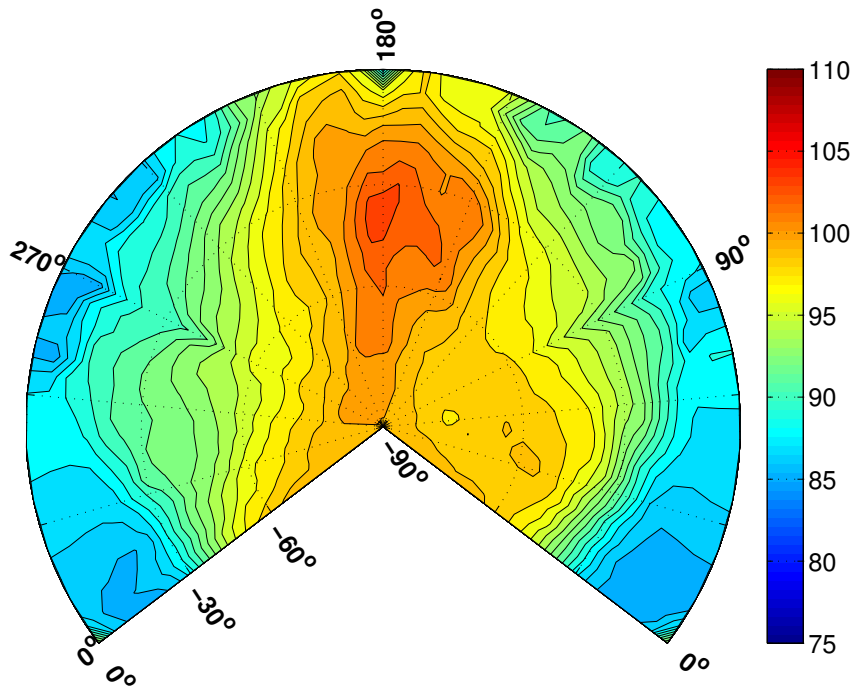


(b) BVISPL, dB

Figure 65: Descent hemisphere Be430187, 87.1 KTAS,  $-7.5^\circ$

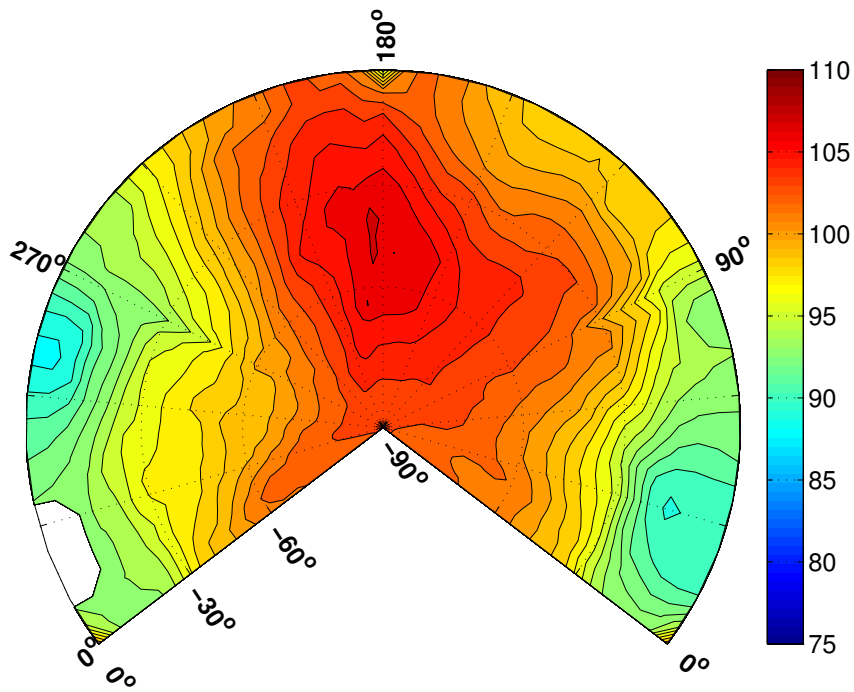


(a) OASPL, dB

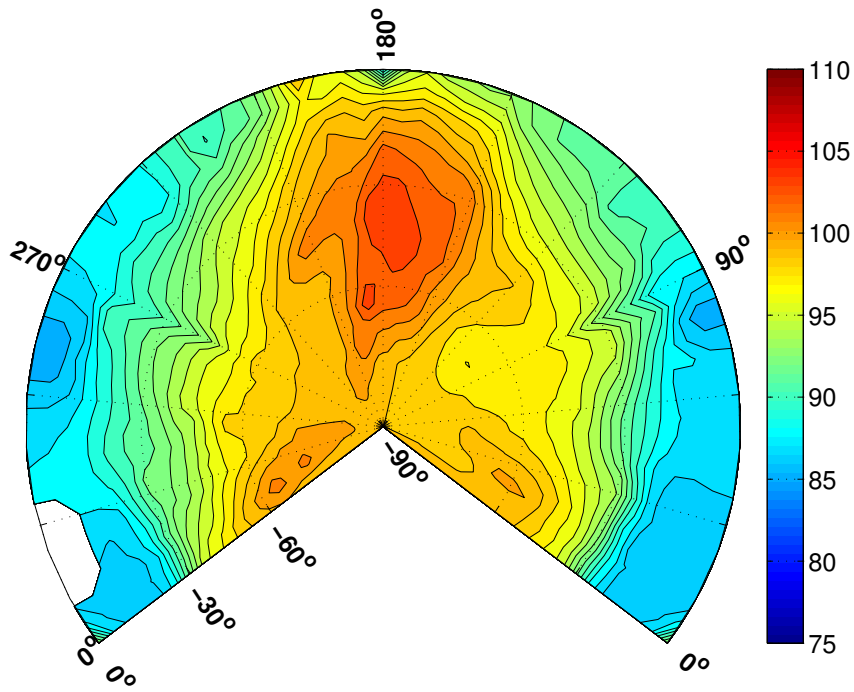


(b) BVISPL, dB

Figure 66: Descent hemi-sphere Be430188, 85.7 KTAS,  $-5.9^\circ$

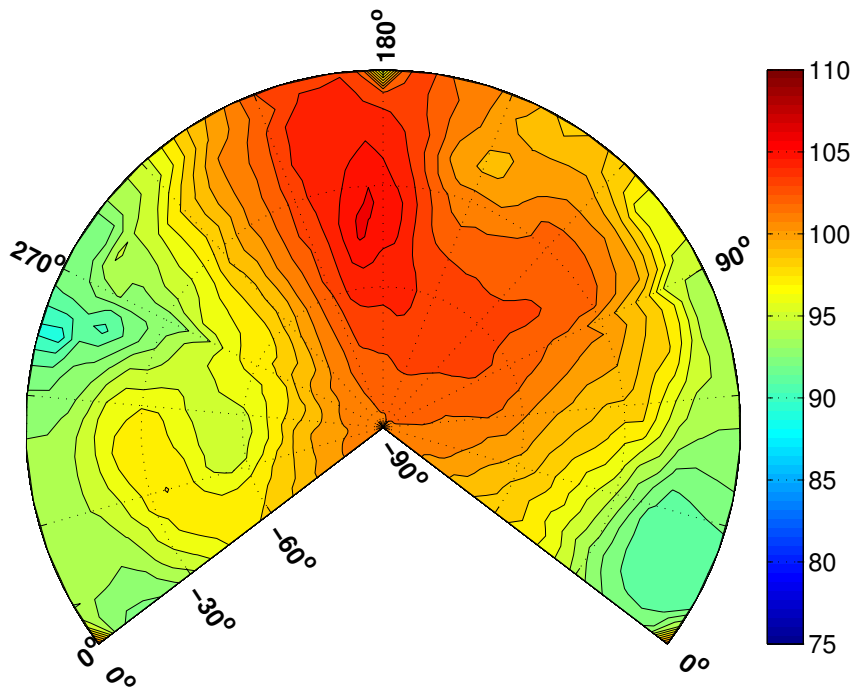


(a) OASPL, dB

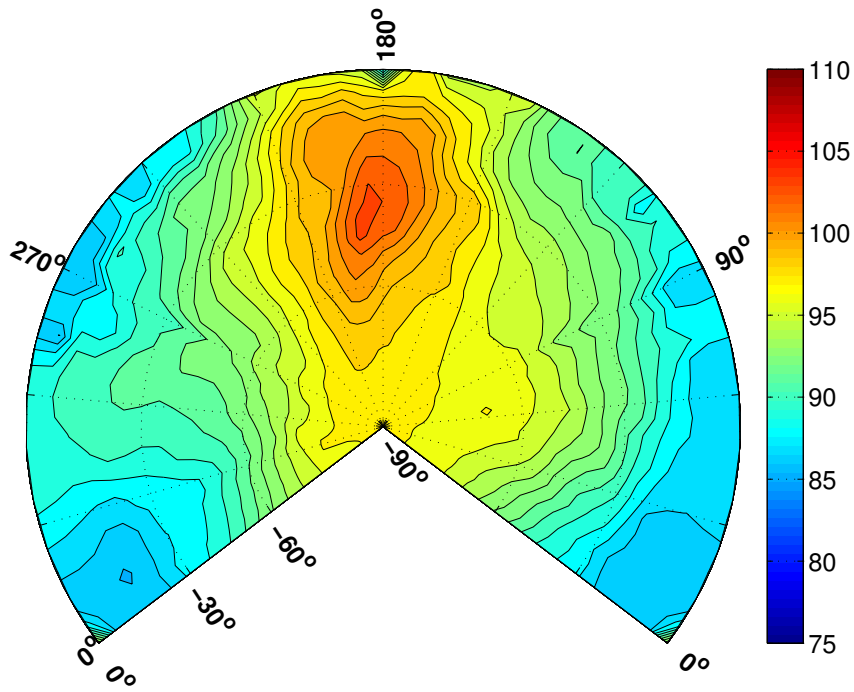


(b) BVISPL, dB

Figure 67: Descent hemisphere Be430189, 92.1 KTAS,  $-5.8^\circ$

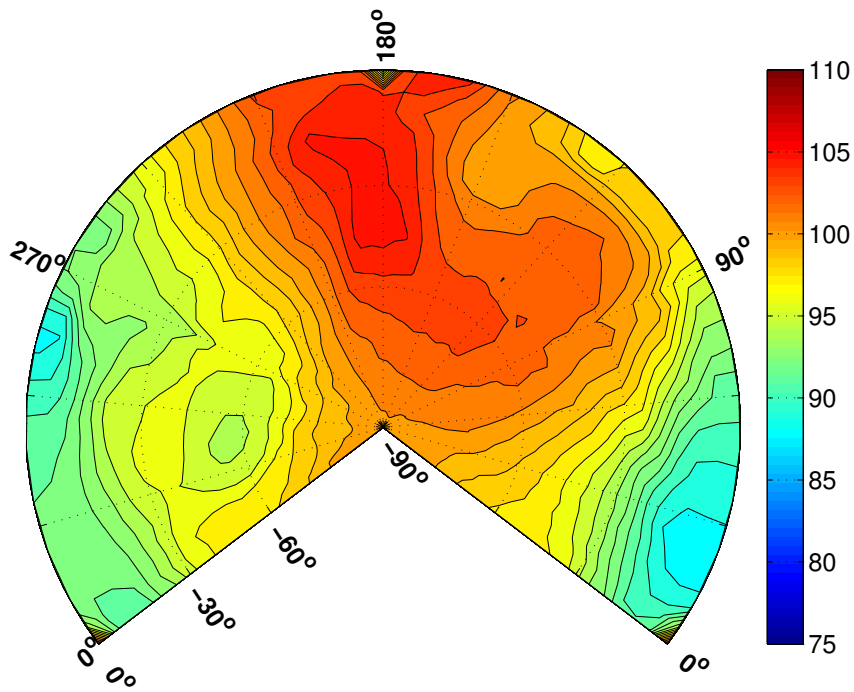


(a) OASPL, dB

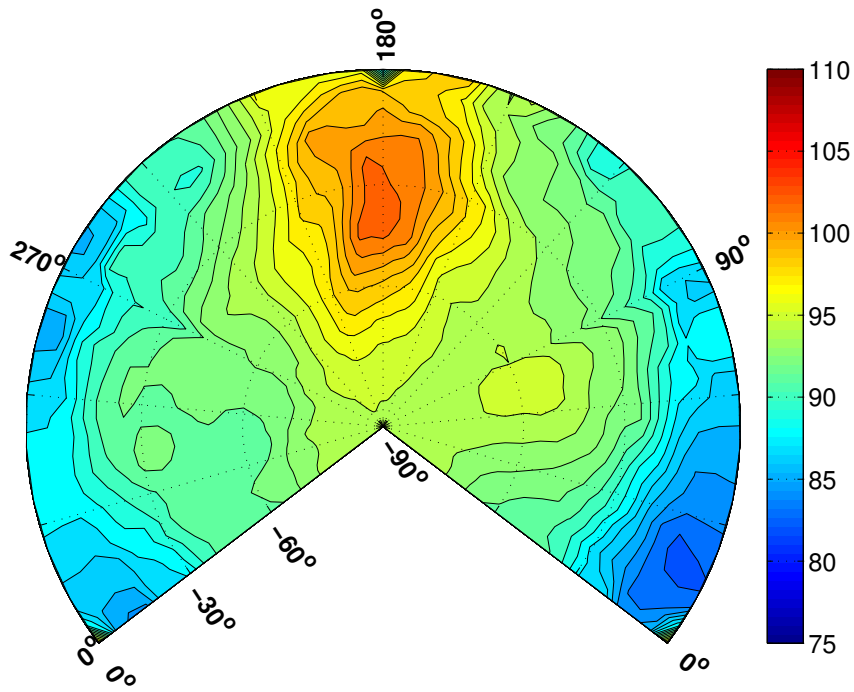


(b) BVISPL, dB

Figure 68: Descent hemisphere Be430190, 94.4 KTAS,  $-6.2^\circ$

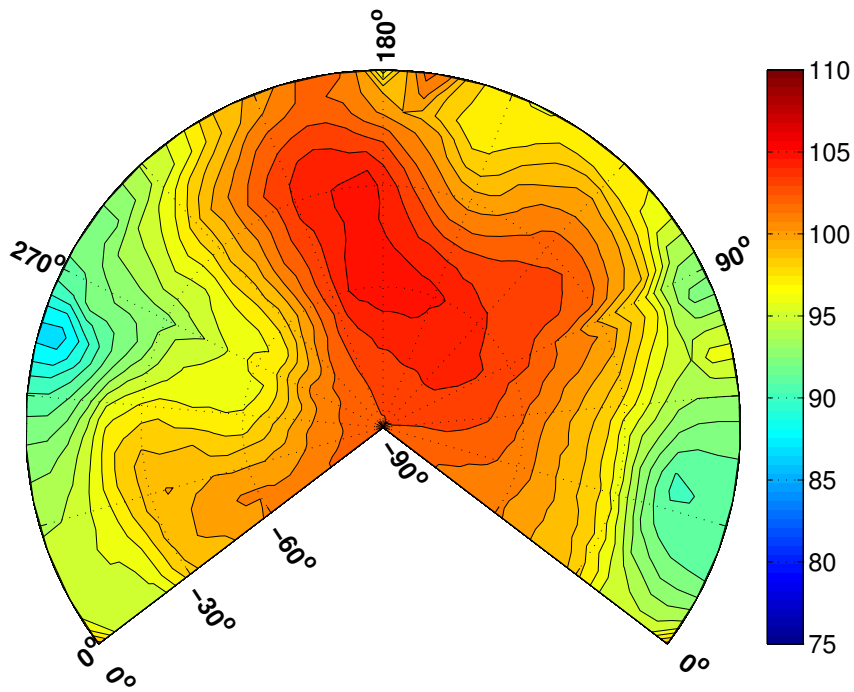


(a) OASPL, dB

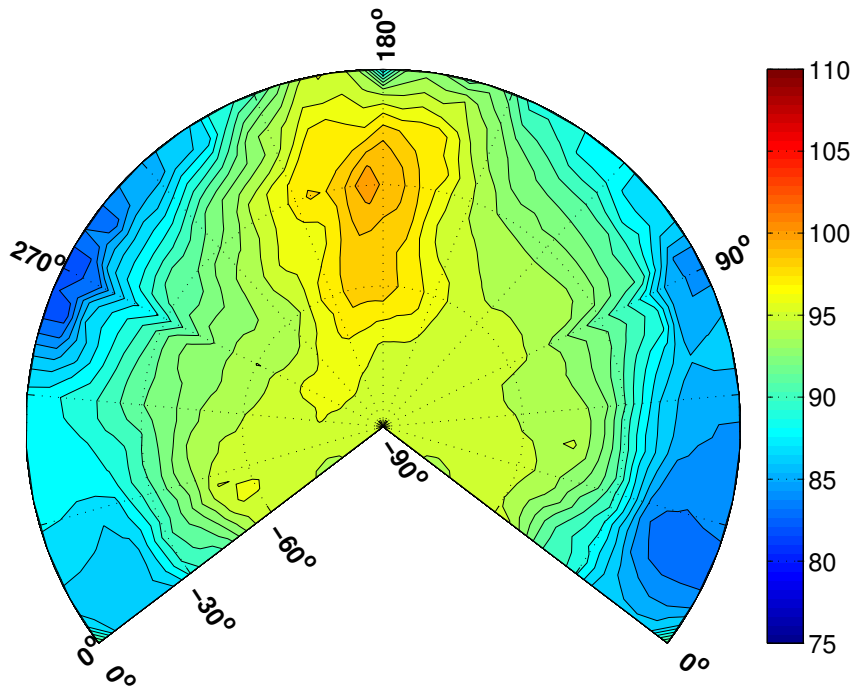


(b) BVISPL, dB

Figure 69: Descent hemisphere Be430191, 63.3 KTAS,  $-5.8^\circ$

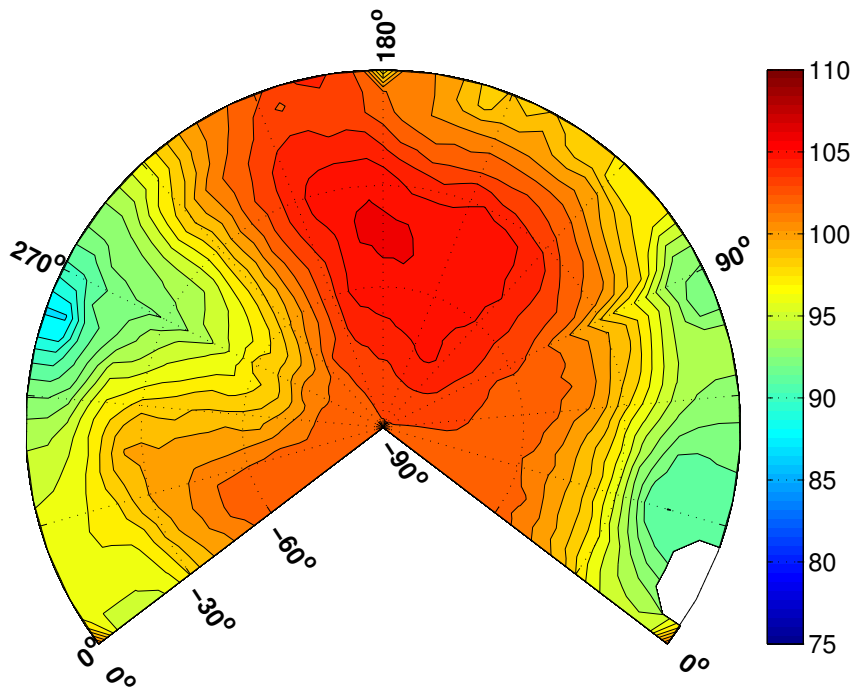


(a) OASPL, dB

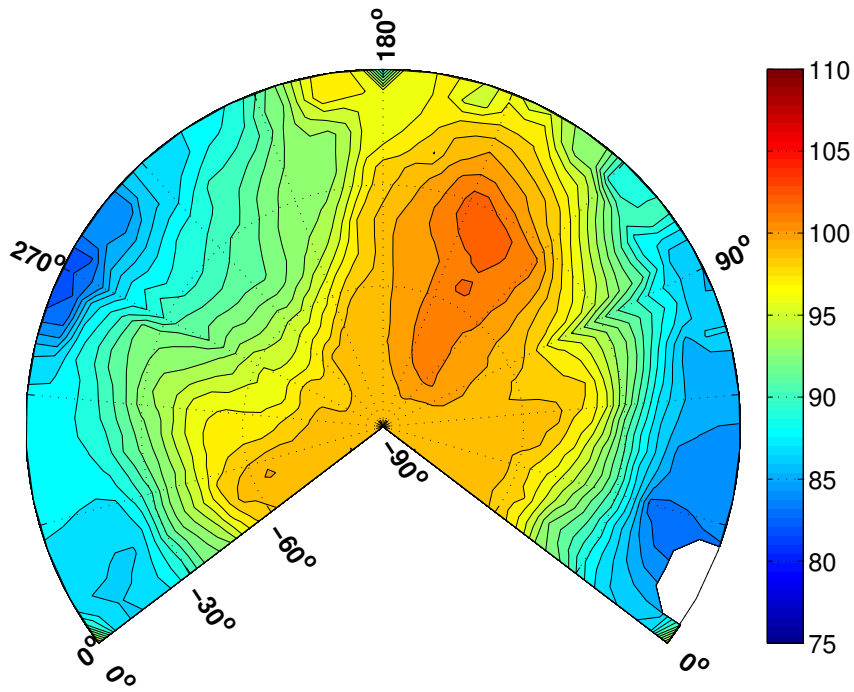


(b) BVISPL, dB

Figure 70: Descent hemi-sphere Be430192, 68.9 KTAS,  $-11.2^\circ$



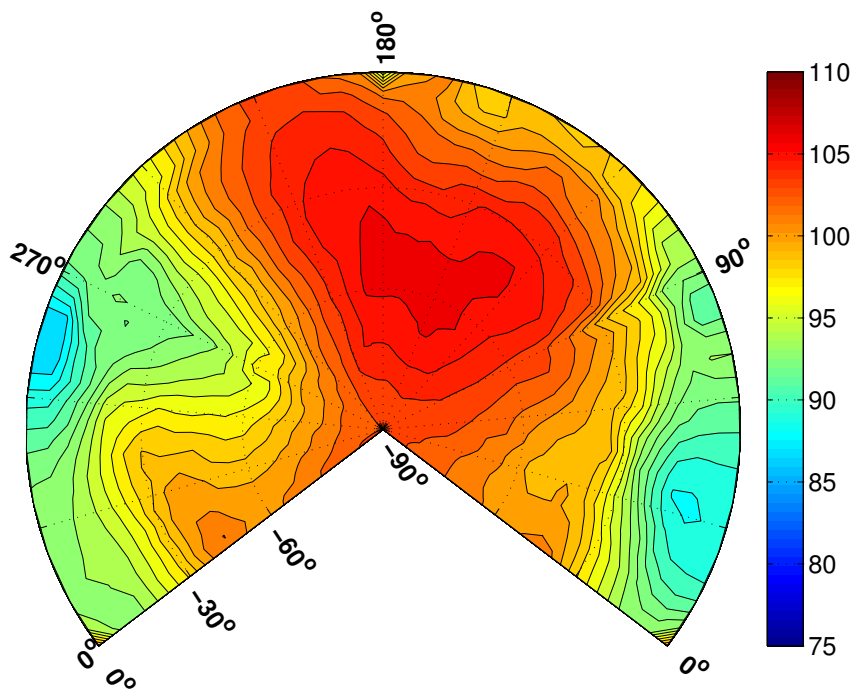


(a) OASPL, dB

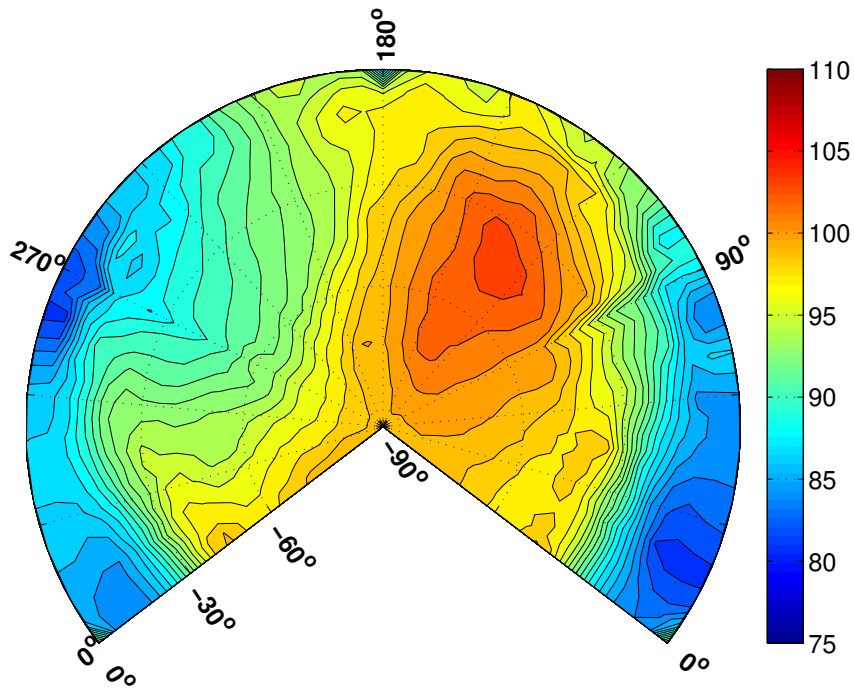


(b) BVISPL, dB

Figure 71: Descent hemi-sphere Be430193, 72.2 KTAS,  $-11.6^\circ$

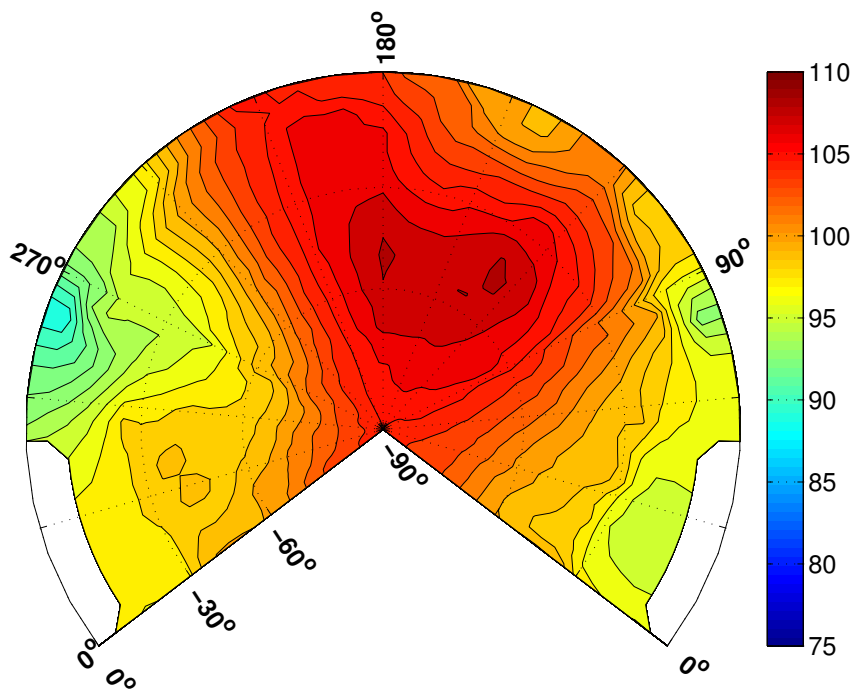


(a) OASPL, dB

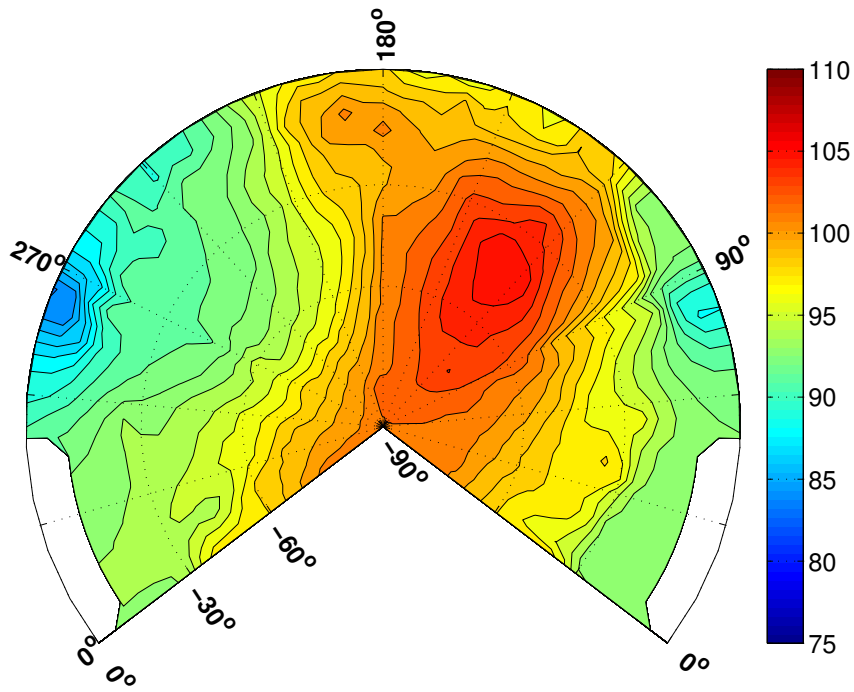


(b) BVISPL, dB

Figure 72: Descent hemi-sphere Be430194, 93.6 KTAS,  $-11.5^\circ$

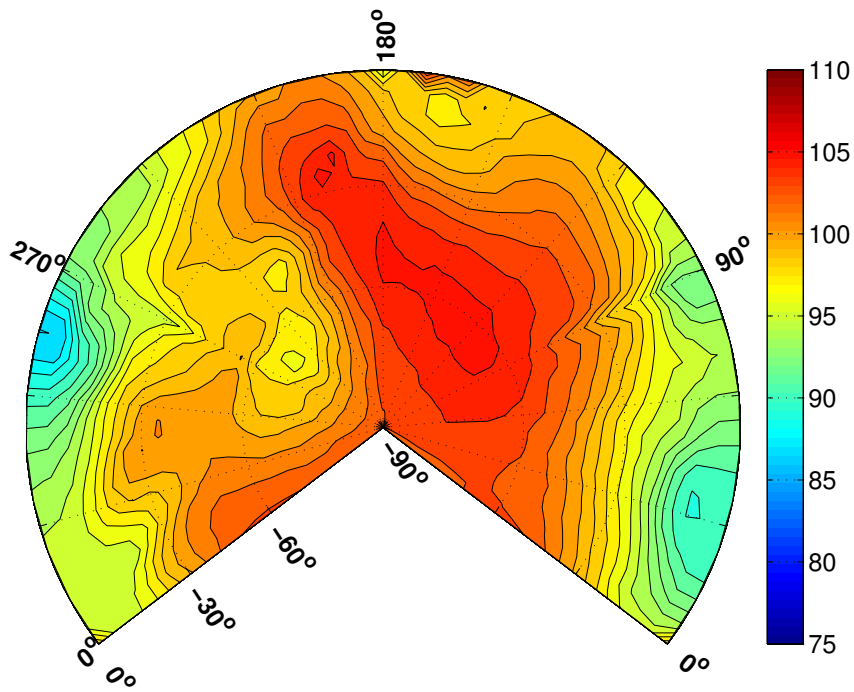


(a) OASPL, dB

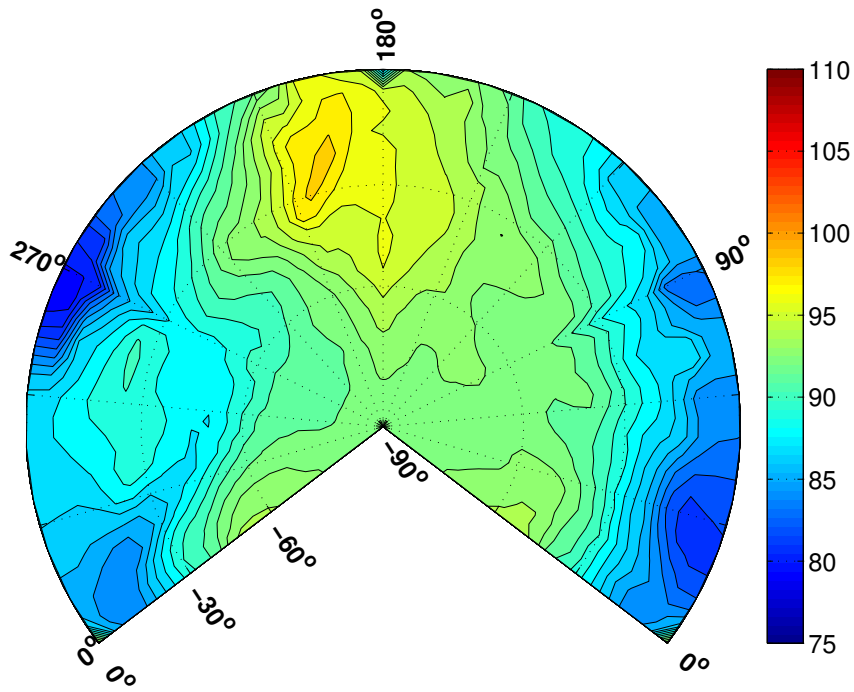


(b) BVISPL, dB

Figure 73: Descent hemi-sphere Be430195, 45.4 KTAS,  $-9.2^\circ$

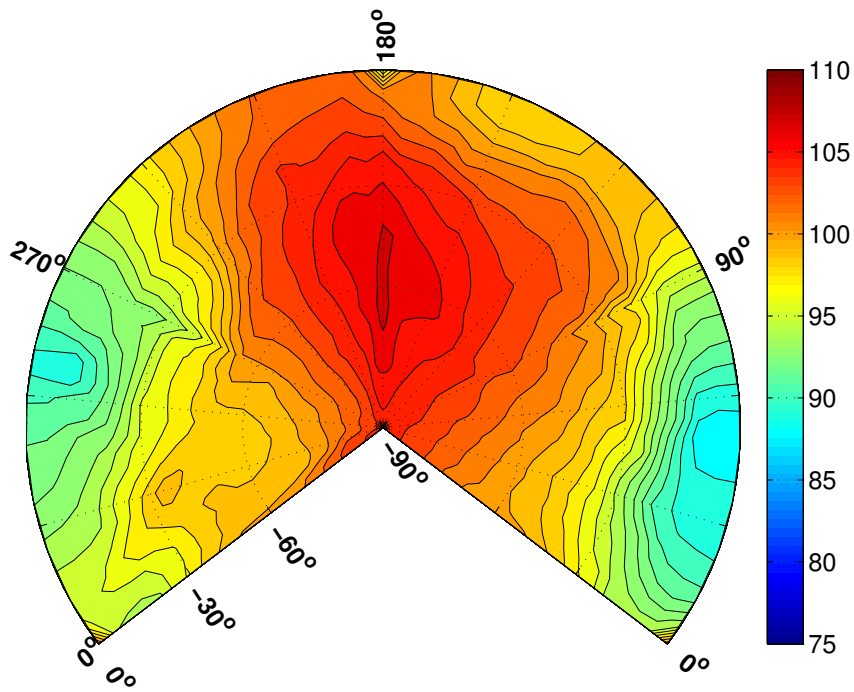


(a) OASPL, dB

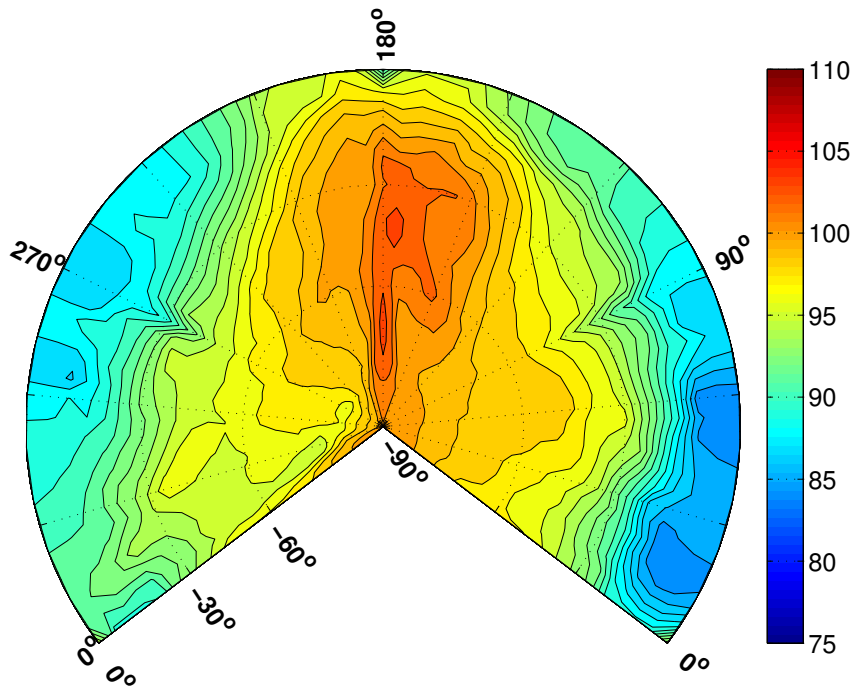


(b) BVISPL, dB

Figure 74: Descent hemisphere Be430196, 72.9 KTAS,  $-7.6^\circ$

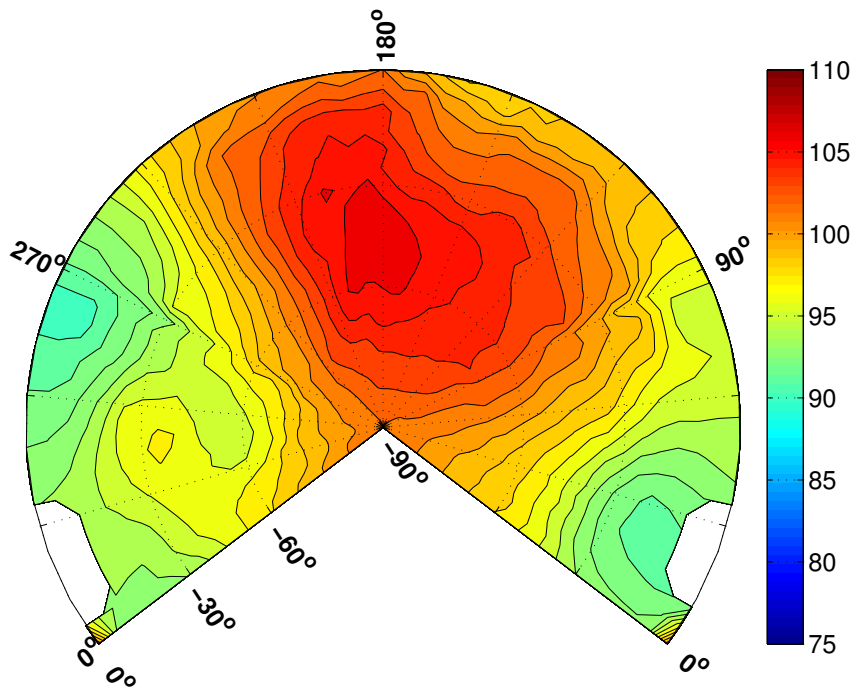


(a) OASPL, dB

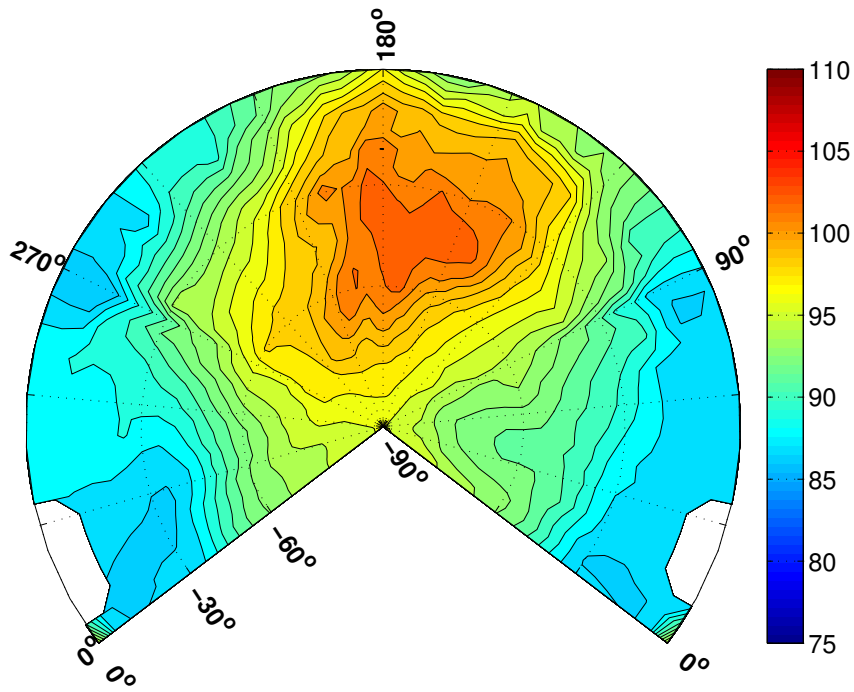


(b) BVISPL, dB

Figure 75: Descent hemi-sphere Be430197, 78.0 KTAS,  $-8.1^\circ$

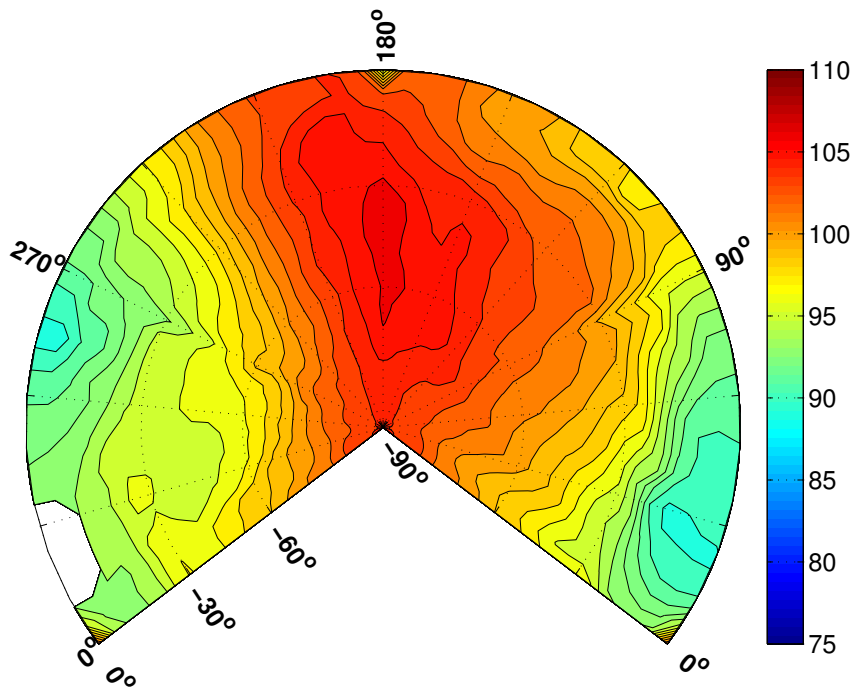


(a) OASPL, dB

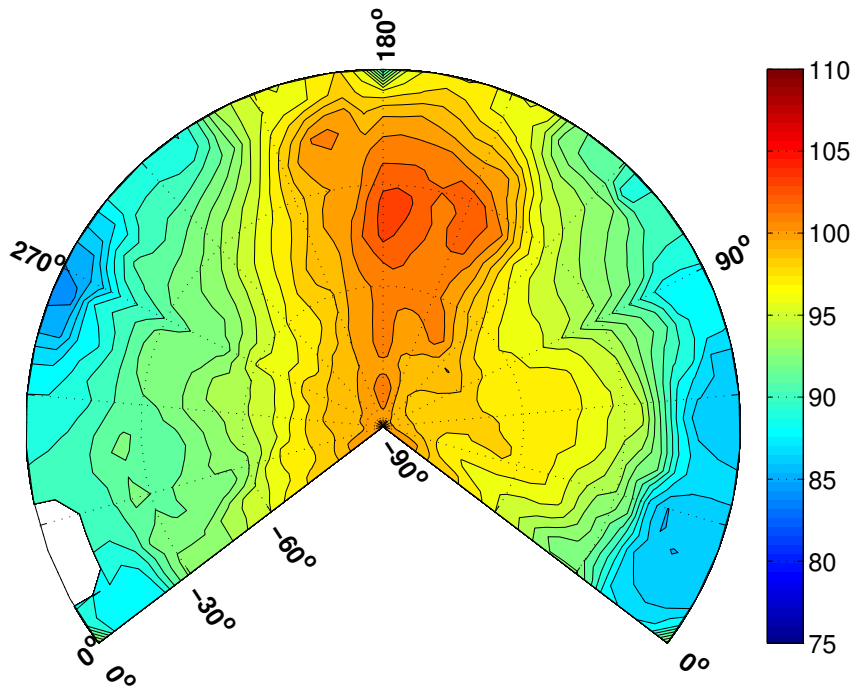


(b) BVISPL, dB

Figure 76: Descent hemisphere Be430198, 89.4 KTAS,  $-8.6^\circ$

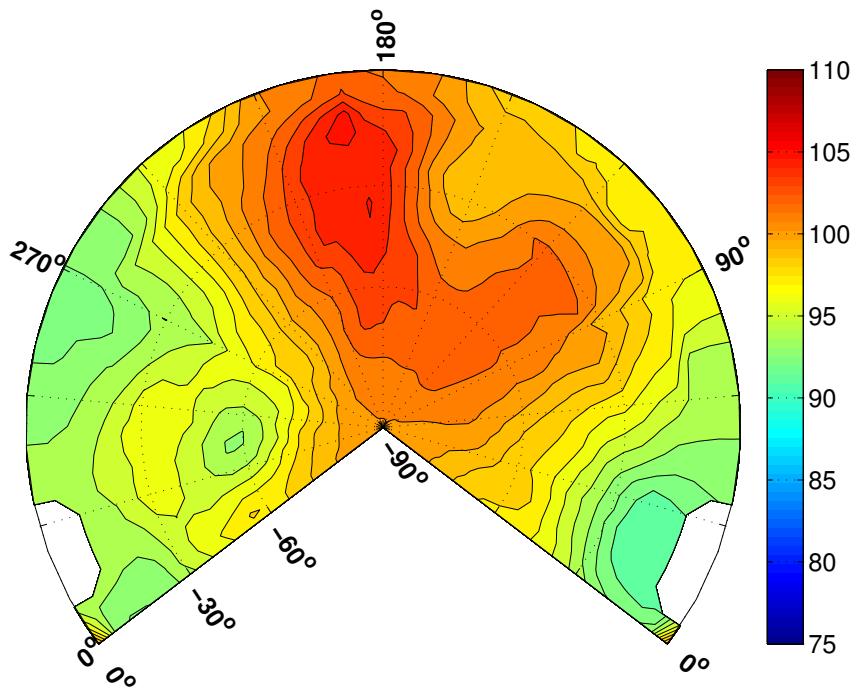


(a) OASPL, dB

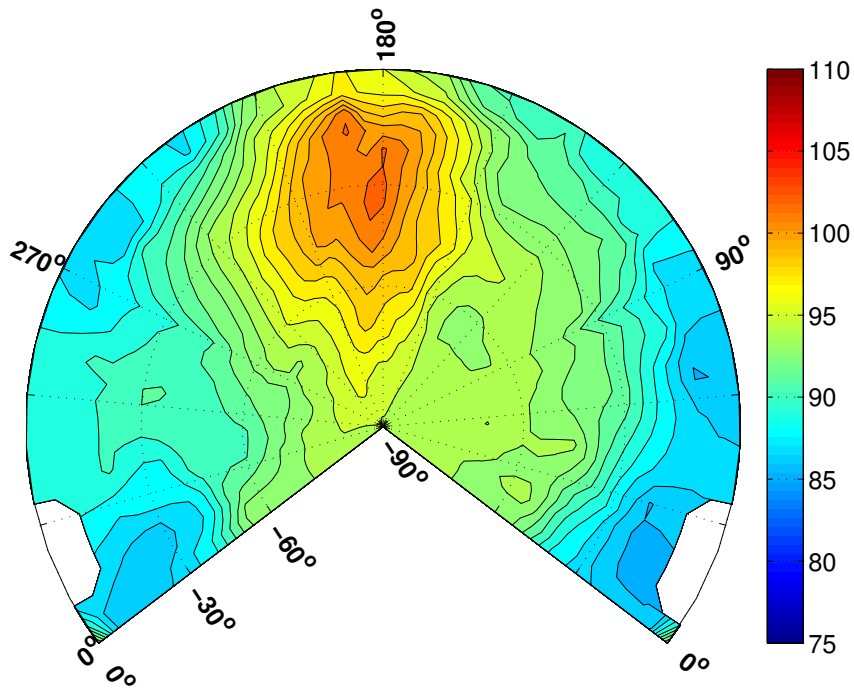


(b) BVISPL, dB

Figure 77: Descent hemisphere Be430199, 80.4 KTAS,  $-5.0^\circ$

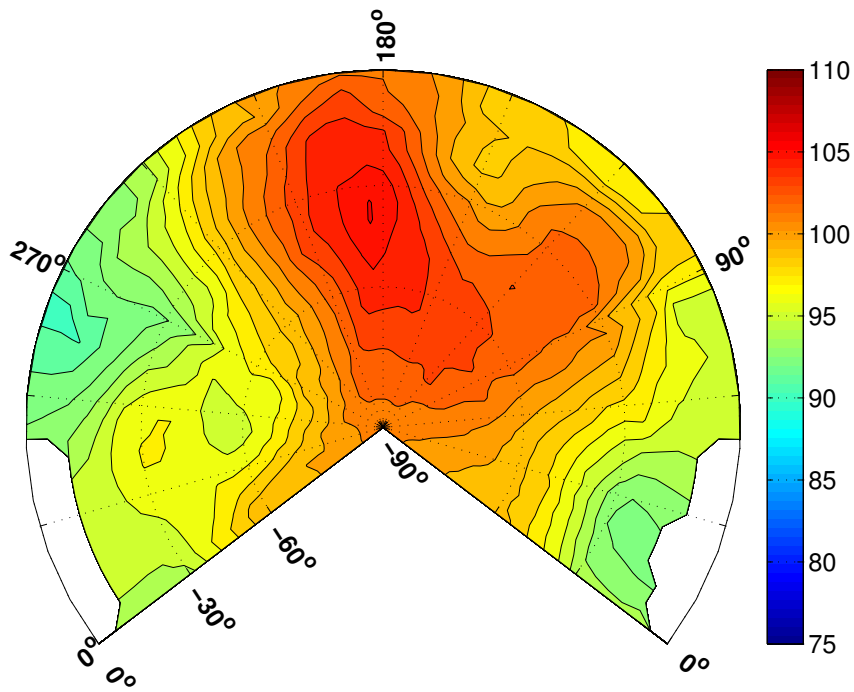


(a) OASPL, dB

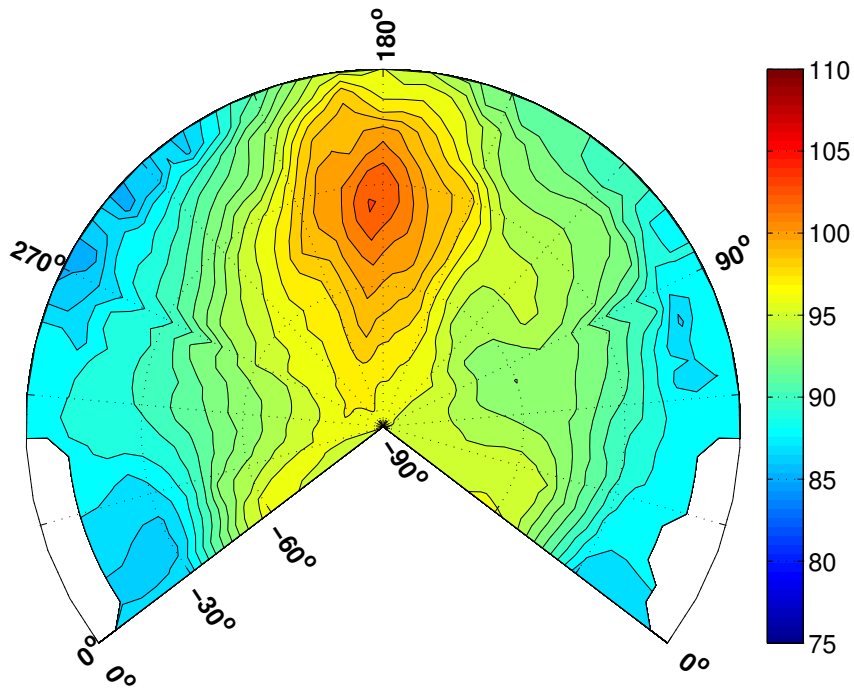


(b) BVISPL, dB

Figure 78: Descent hemisphere Be430200, 78.3 KTAS,  $-5.9^\circ$



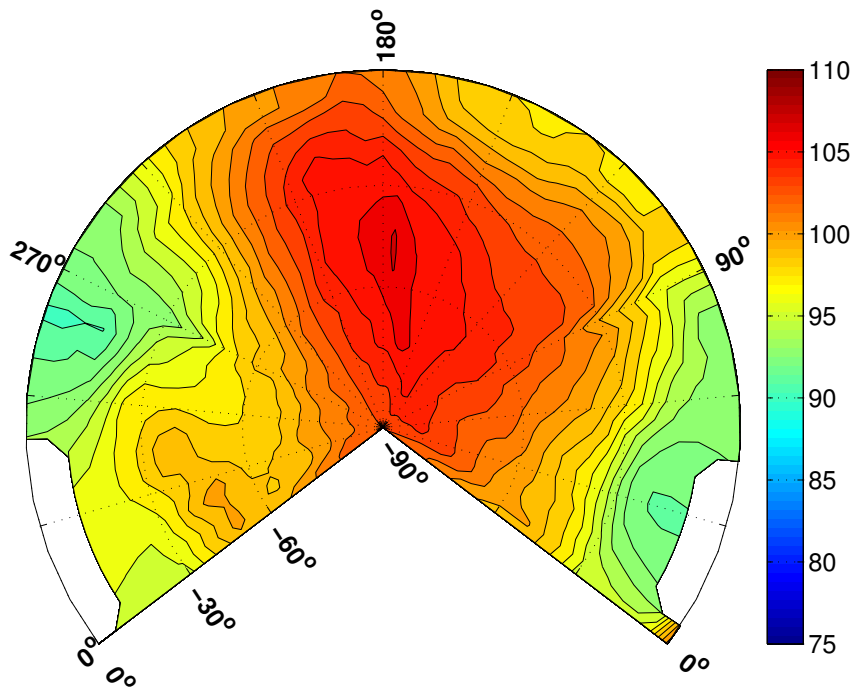


(a) OASPL, dB

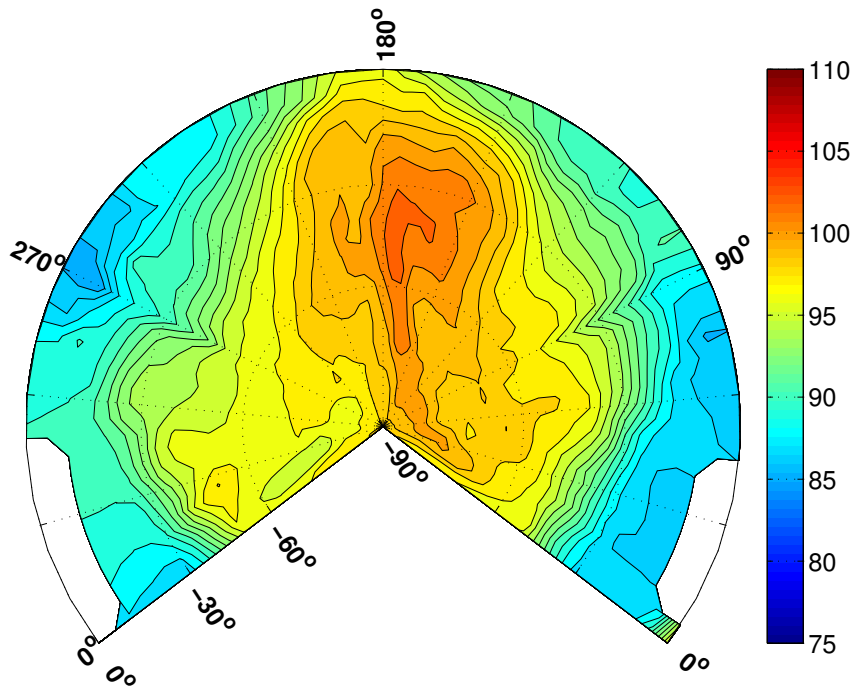


(b) BVISPL, dB

Figure 79: Descent hemisphere Be430201, 68.9 KTAS,  $-6.7^\circ$

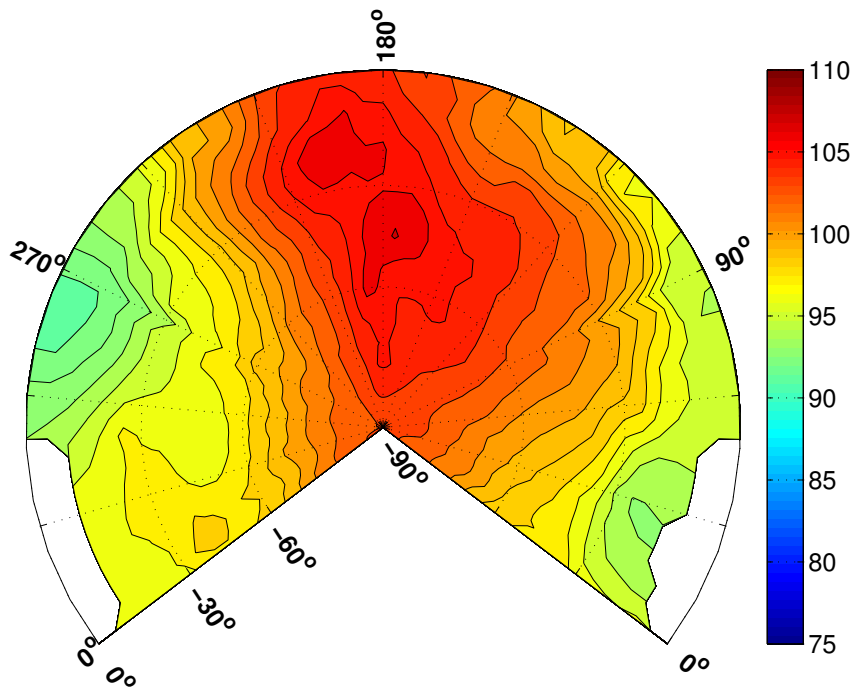

(a) OASPL, dB

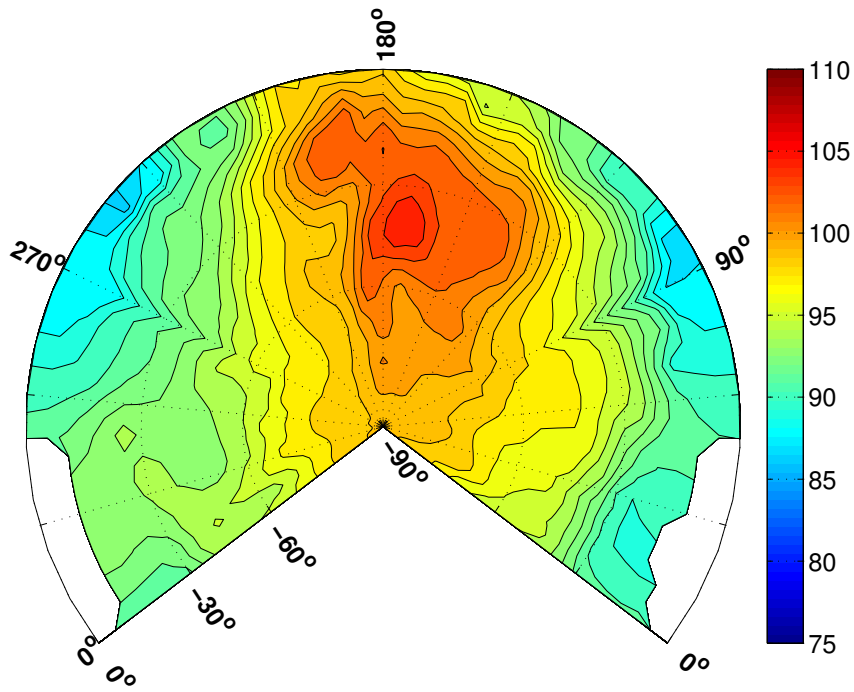

(b) BVISPL, dB

Figure 80: Descent hemi-sphere Be430202, 91.2 KTAS,  $-7.1^\circ$

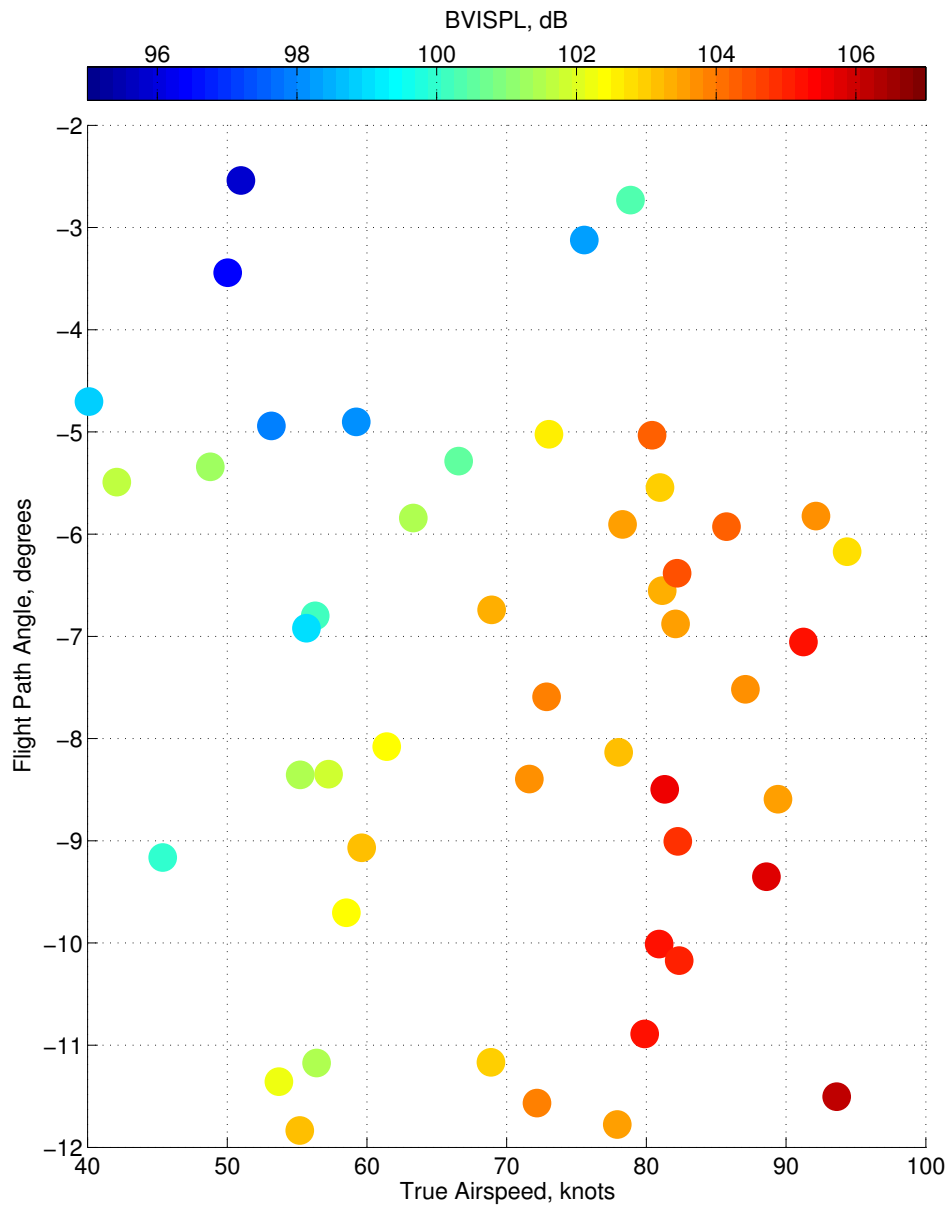


Figure 81: Source noise descent matrix maximum BVISPL.

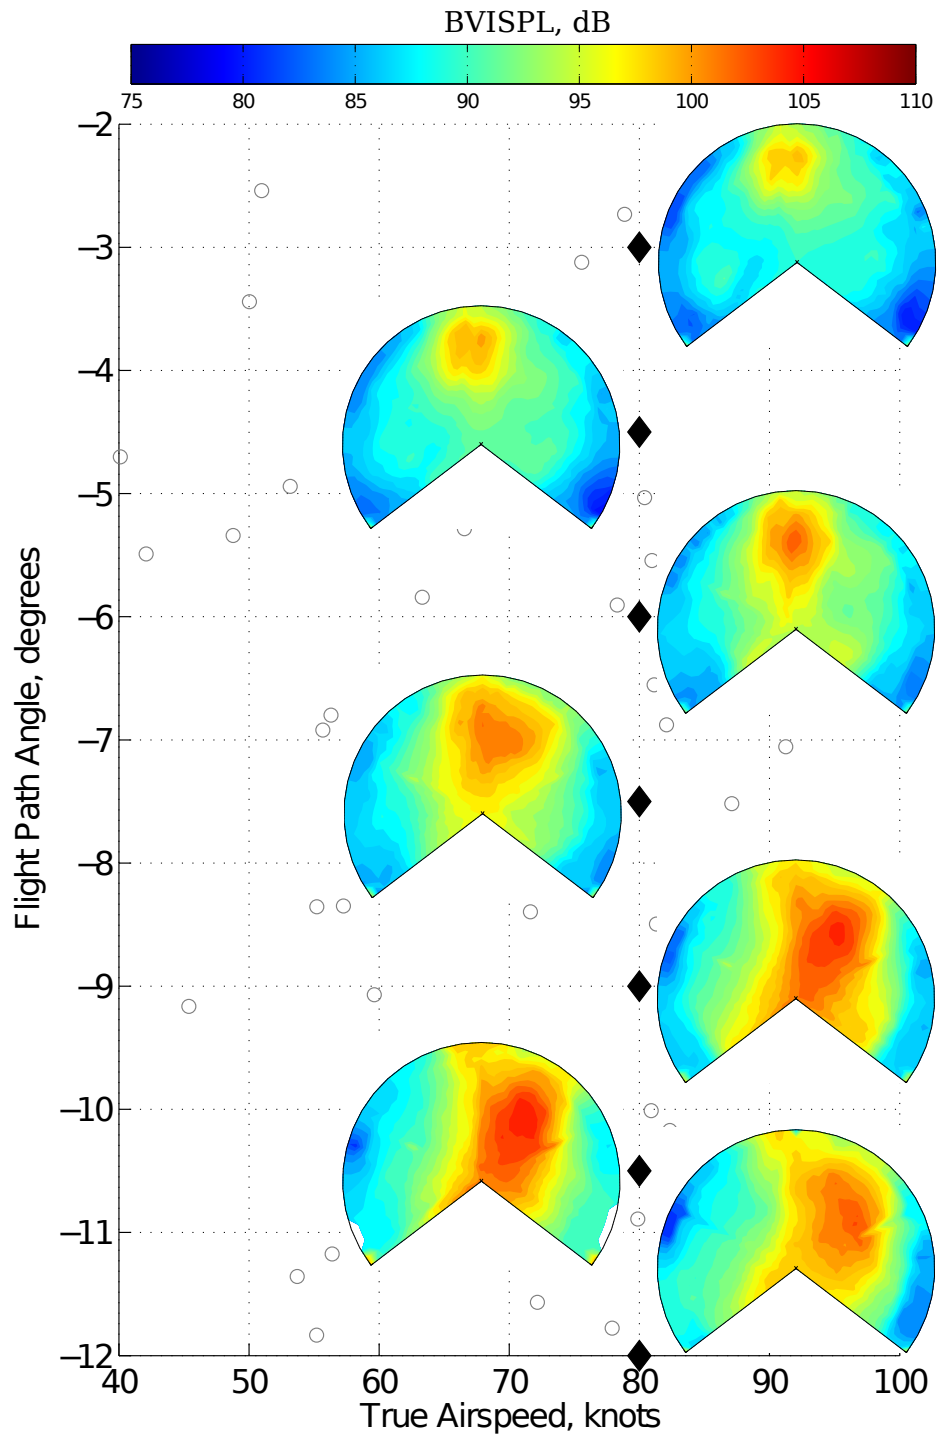


Figure 82: Flight path angle sweep at 80 knots true airspeed.

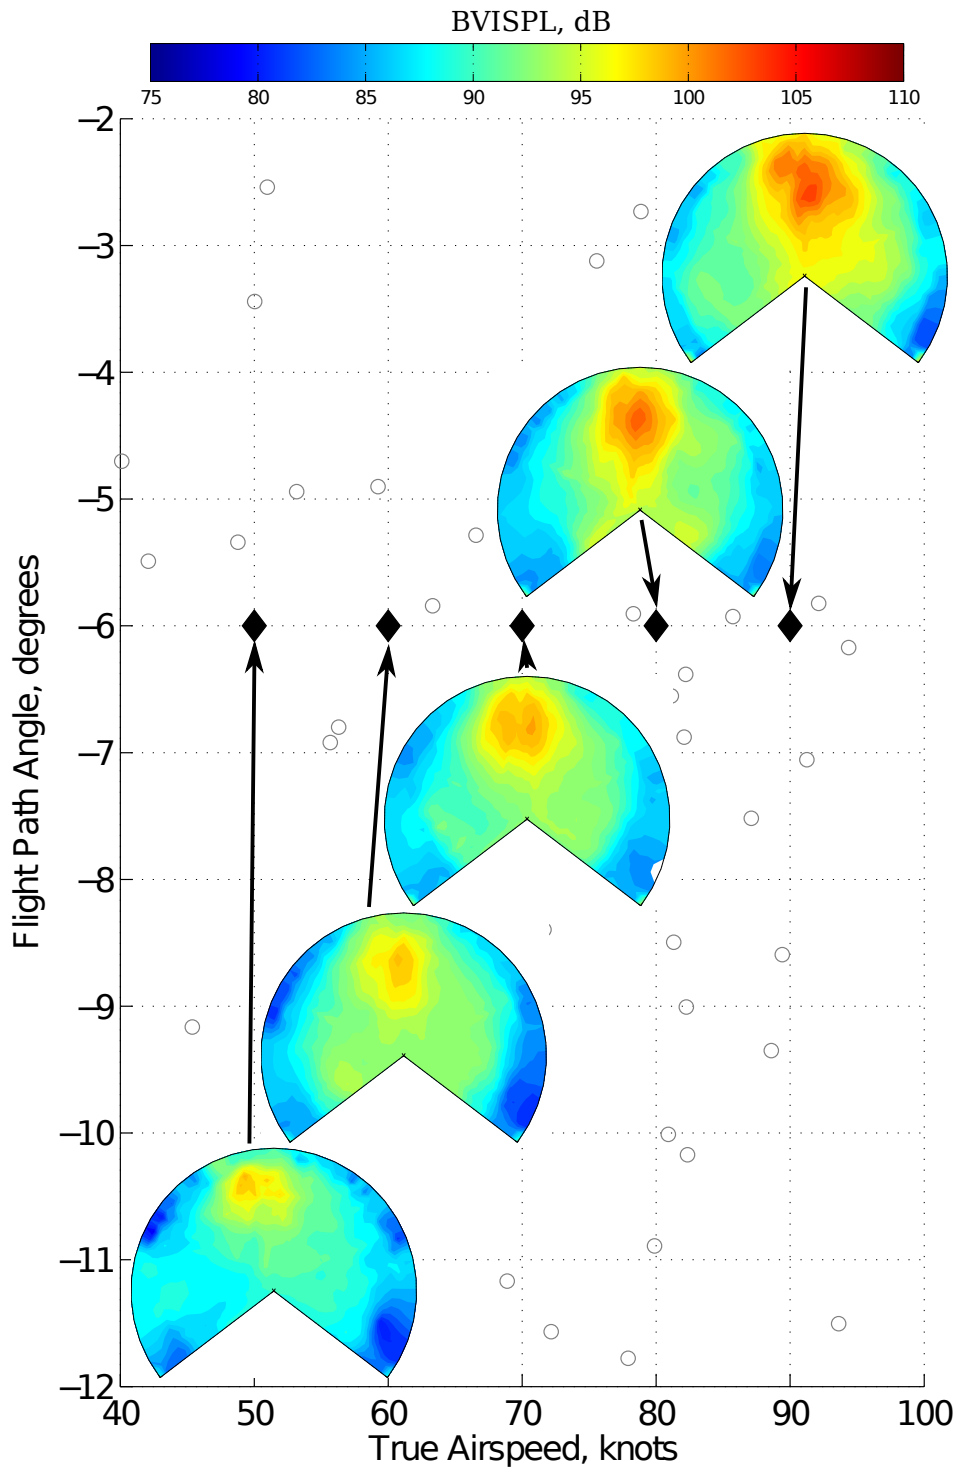


Figure 83: True airspeed sweep at  $-6^\circ$  flight path angle.

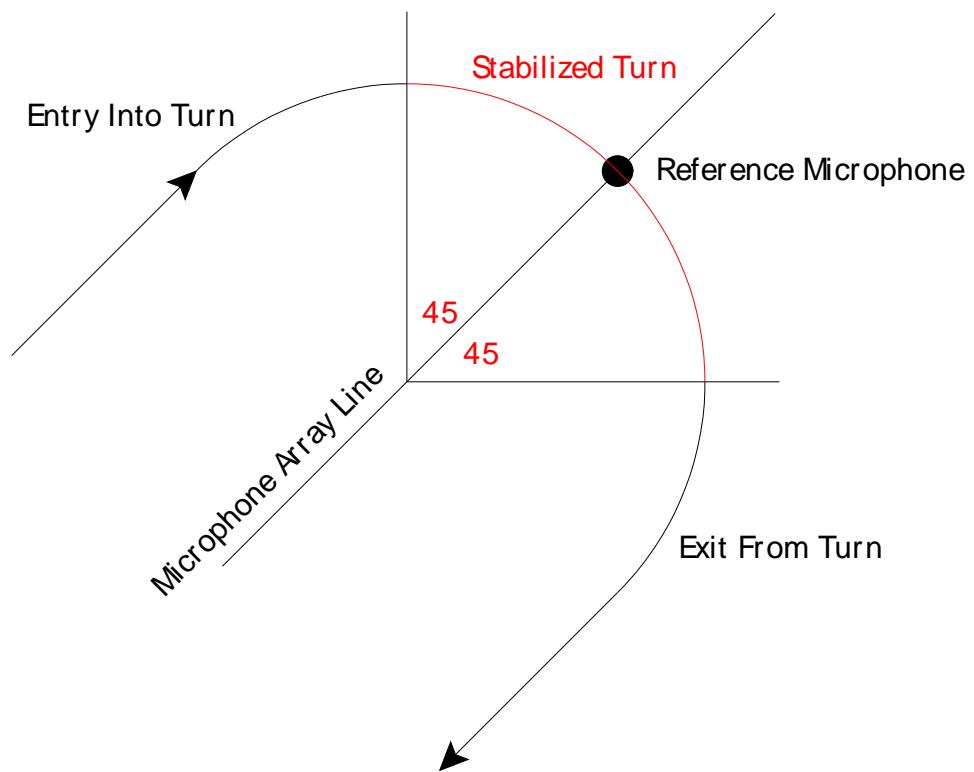


Figure 84: Steady turn procedure sketch.

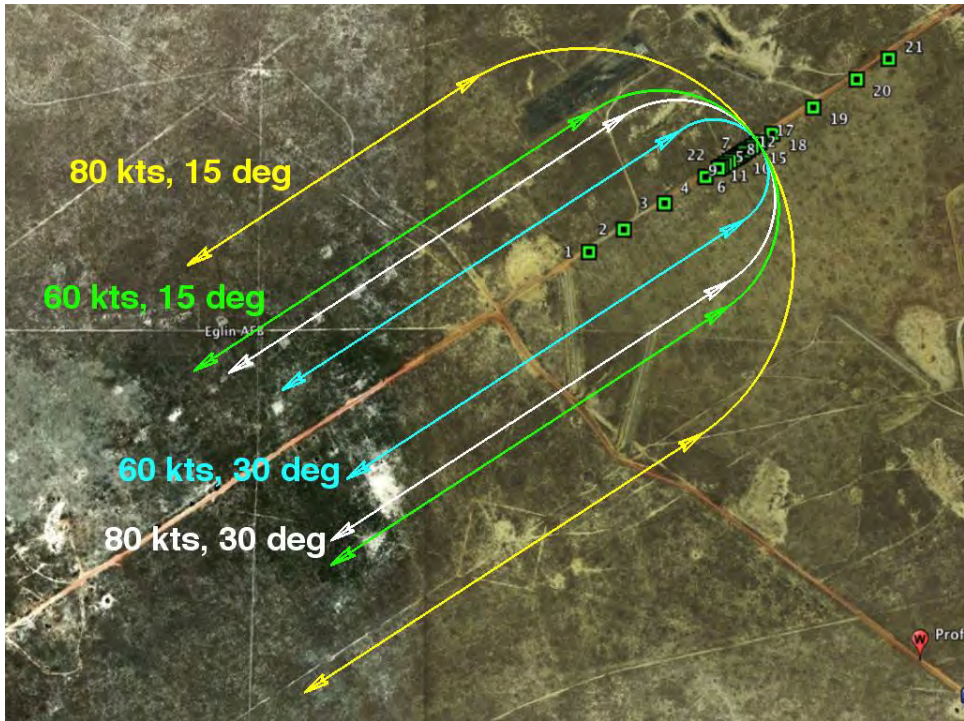


Figure 85: Steady turn flight paths (radius is to scale).

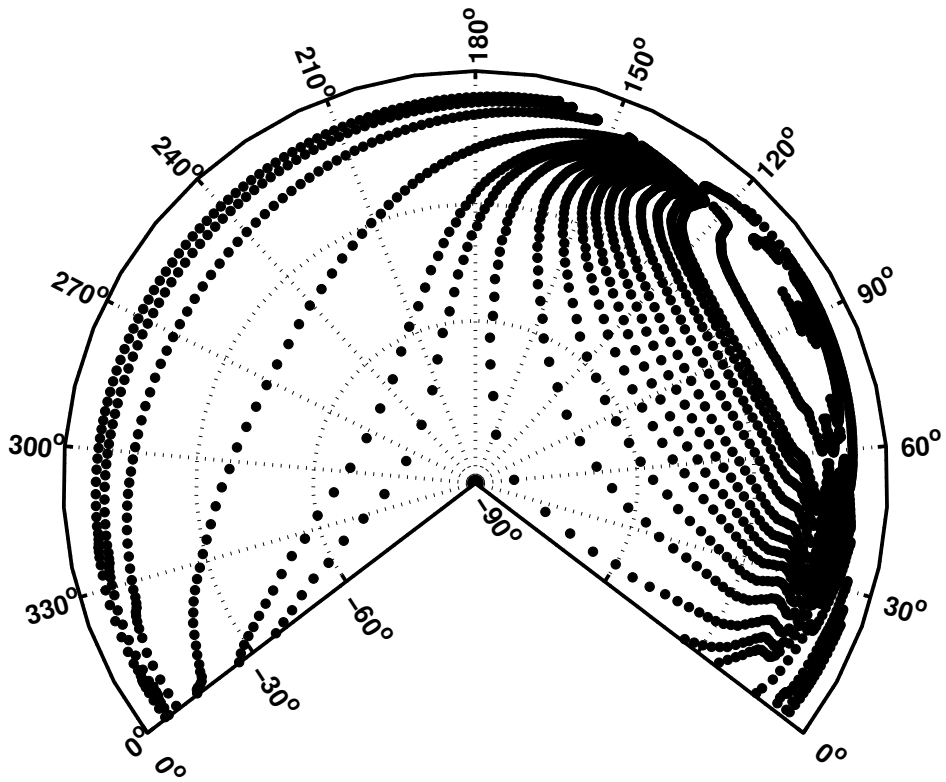


Figure 86: Steady 80 knots, 30° right turn microphone projection.



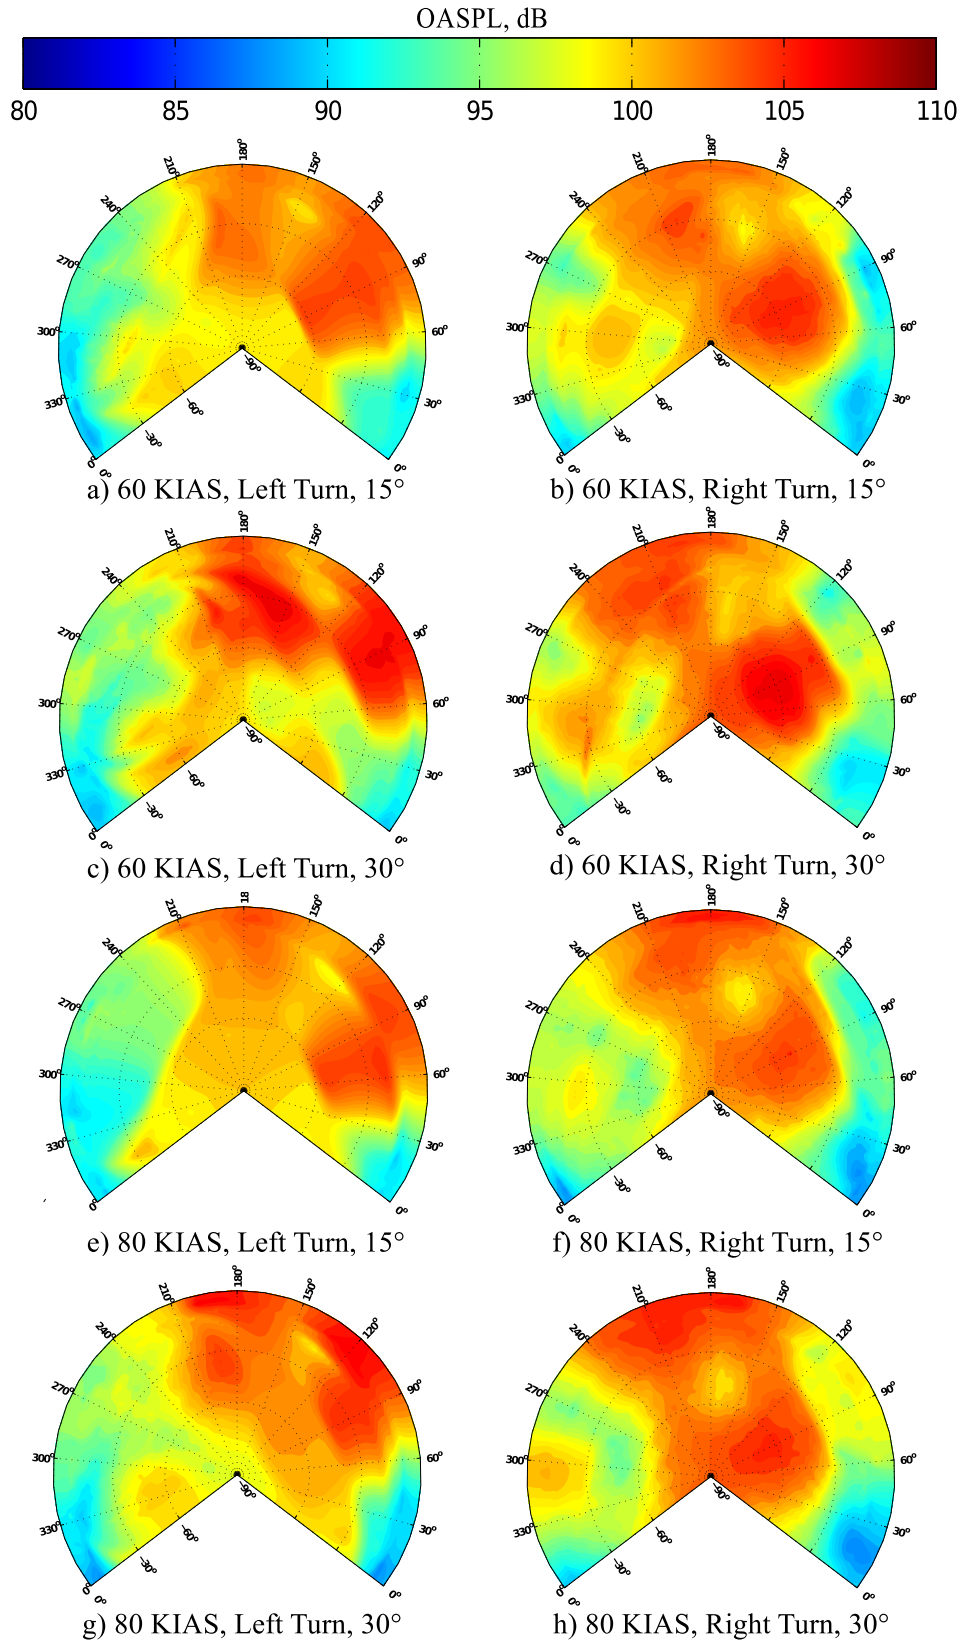


Figure 87: Steady turn OASPL semi-spheres.

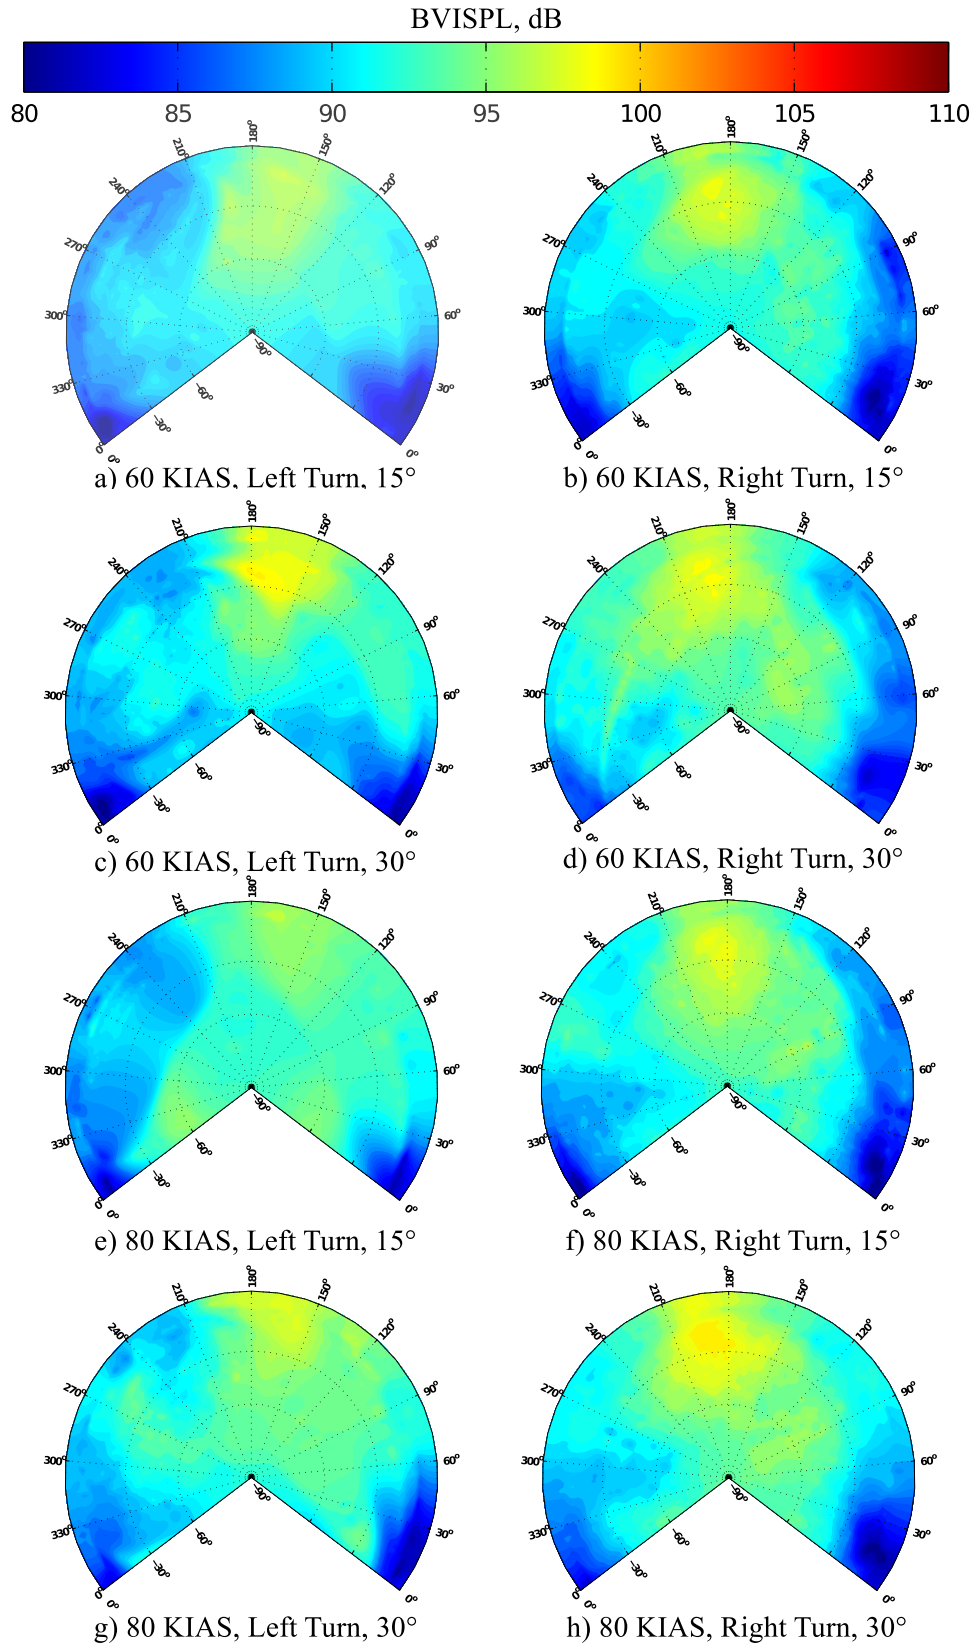


Figure 88: Steady turn BVISPL semi-spheres.

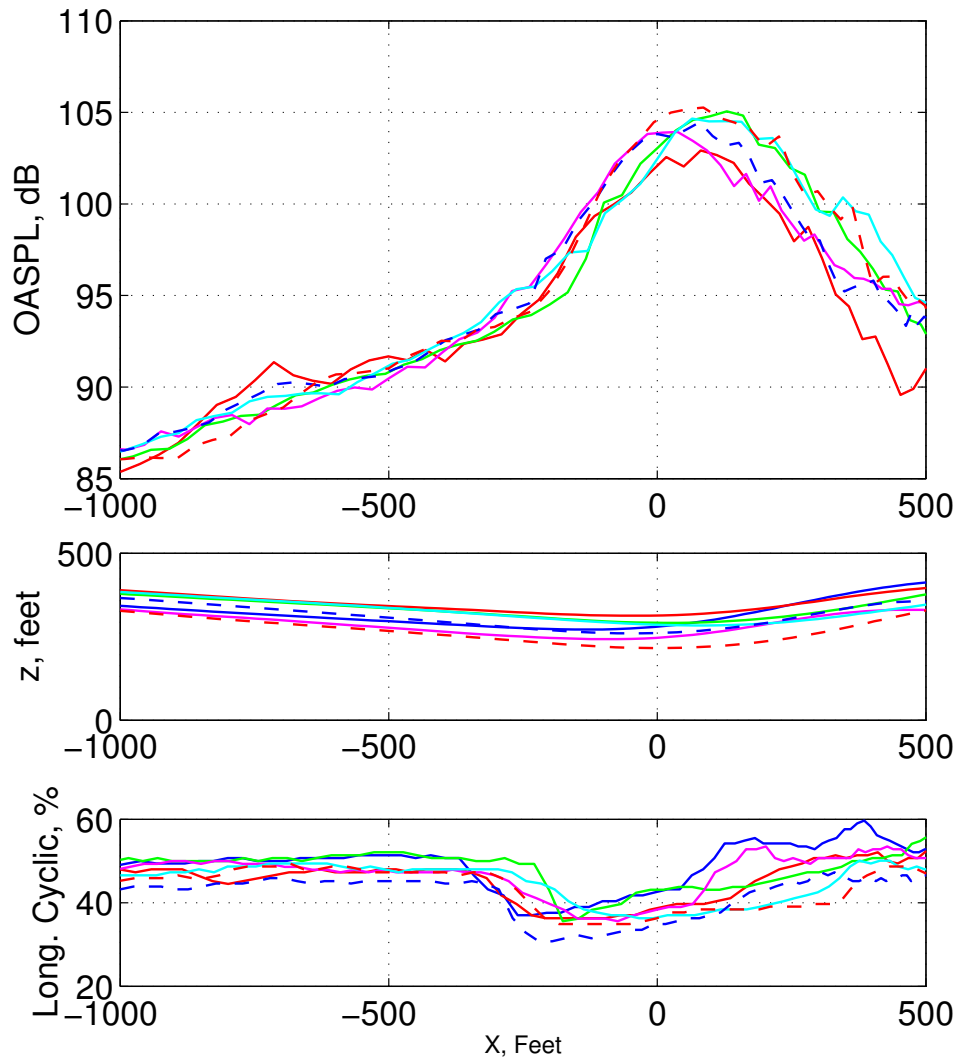


Figure 89: Cyclic pitch up from 80 knot, 6° descent housekeeping points.

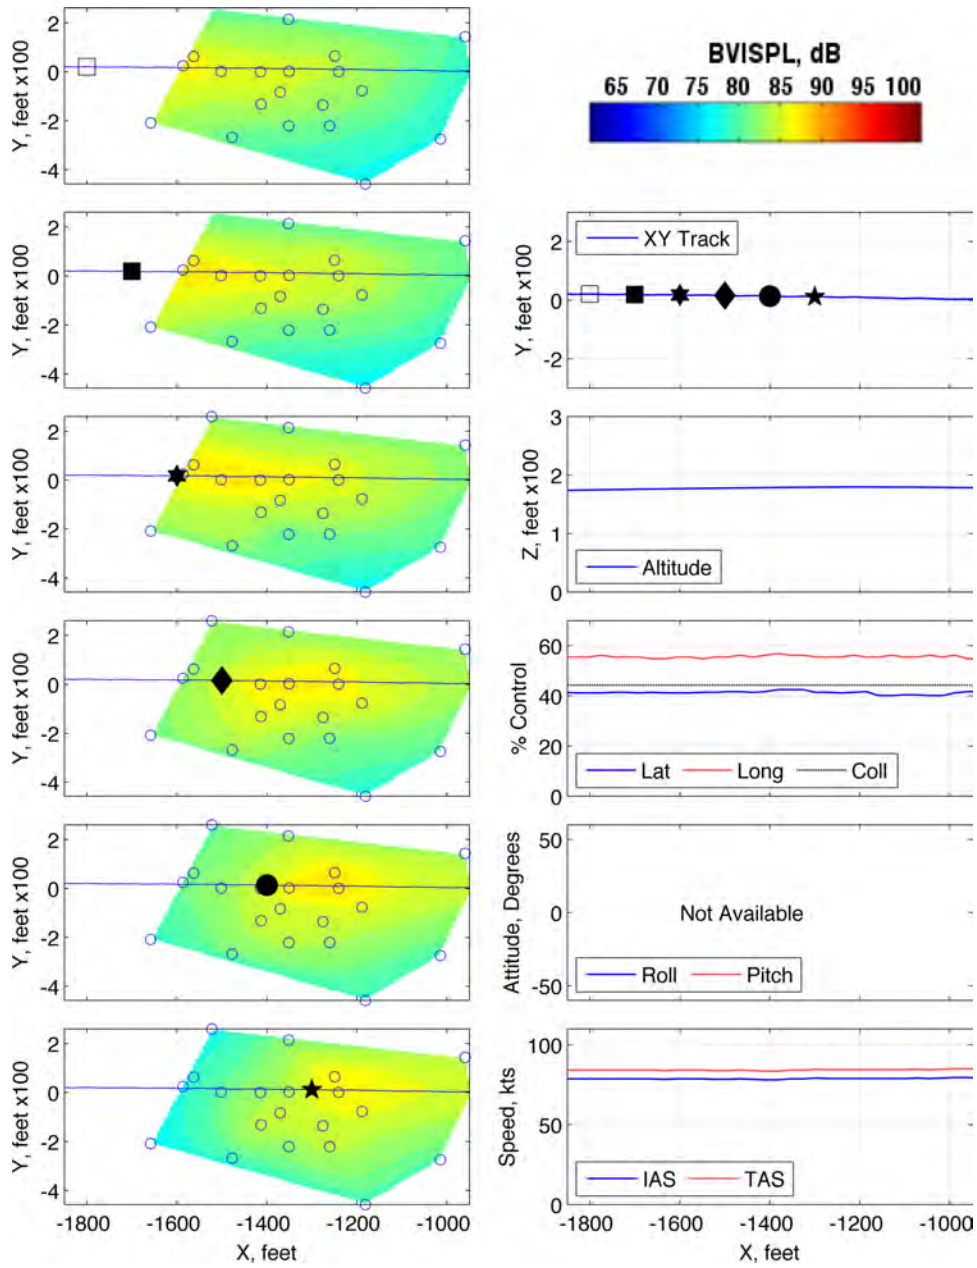


Figure 90: Maneuver condition L1, 80 KIAS, level, run number 278301

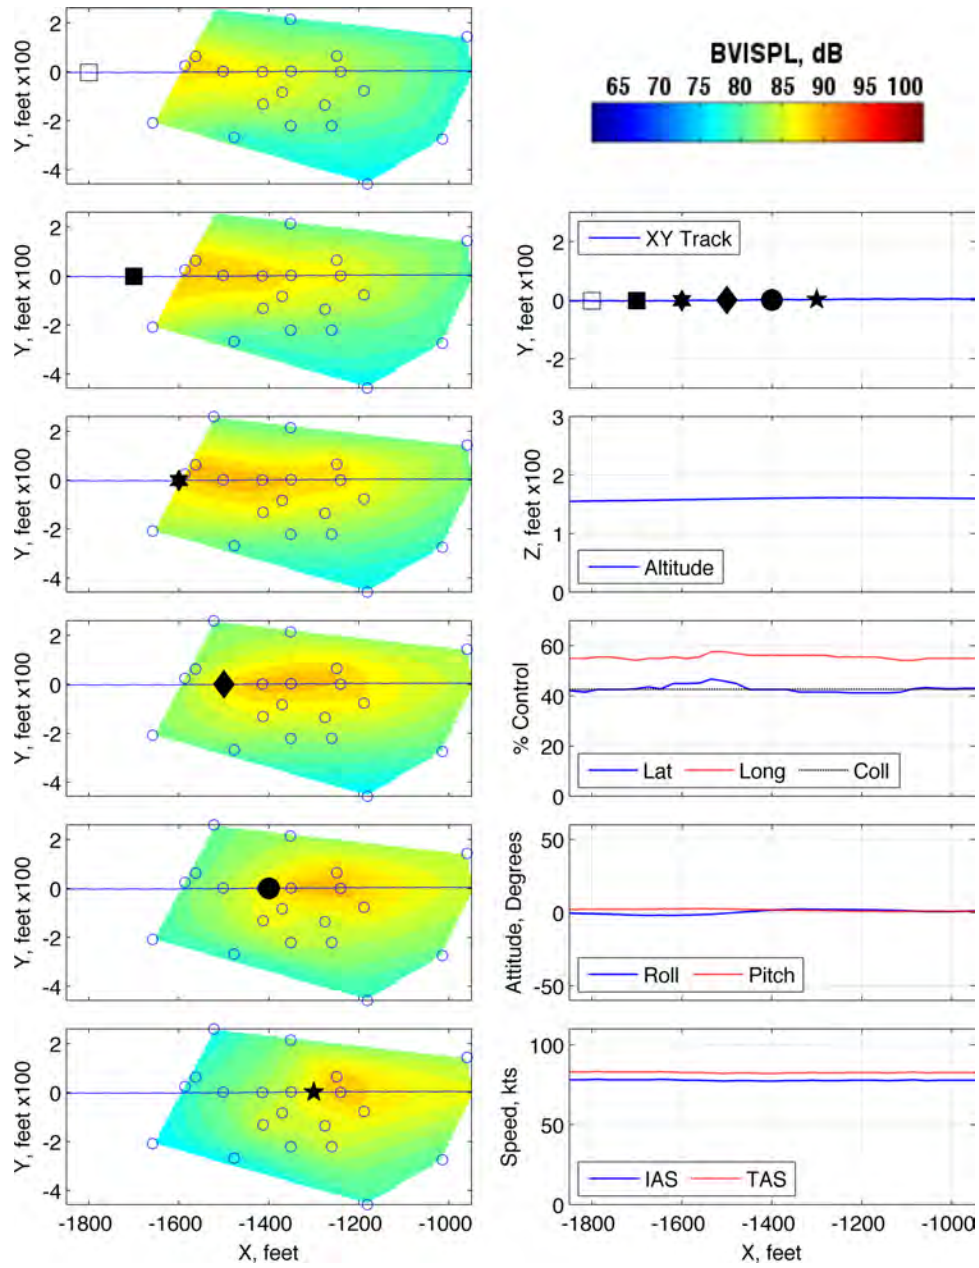


Figure 91: Maneuver condition L1, 80 KIAS, level, run number 280341

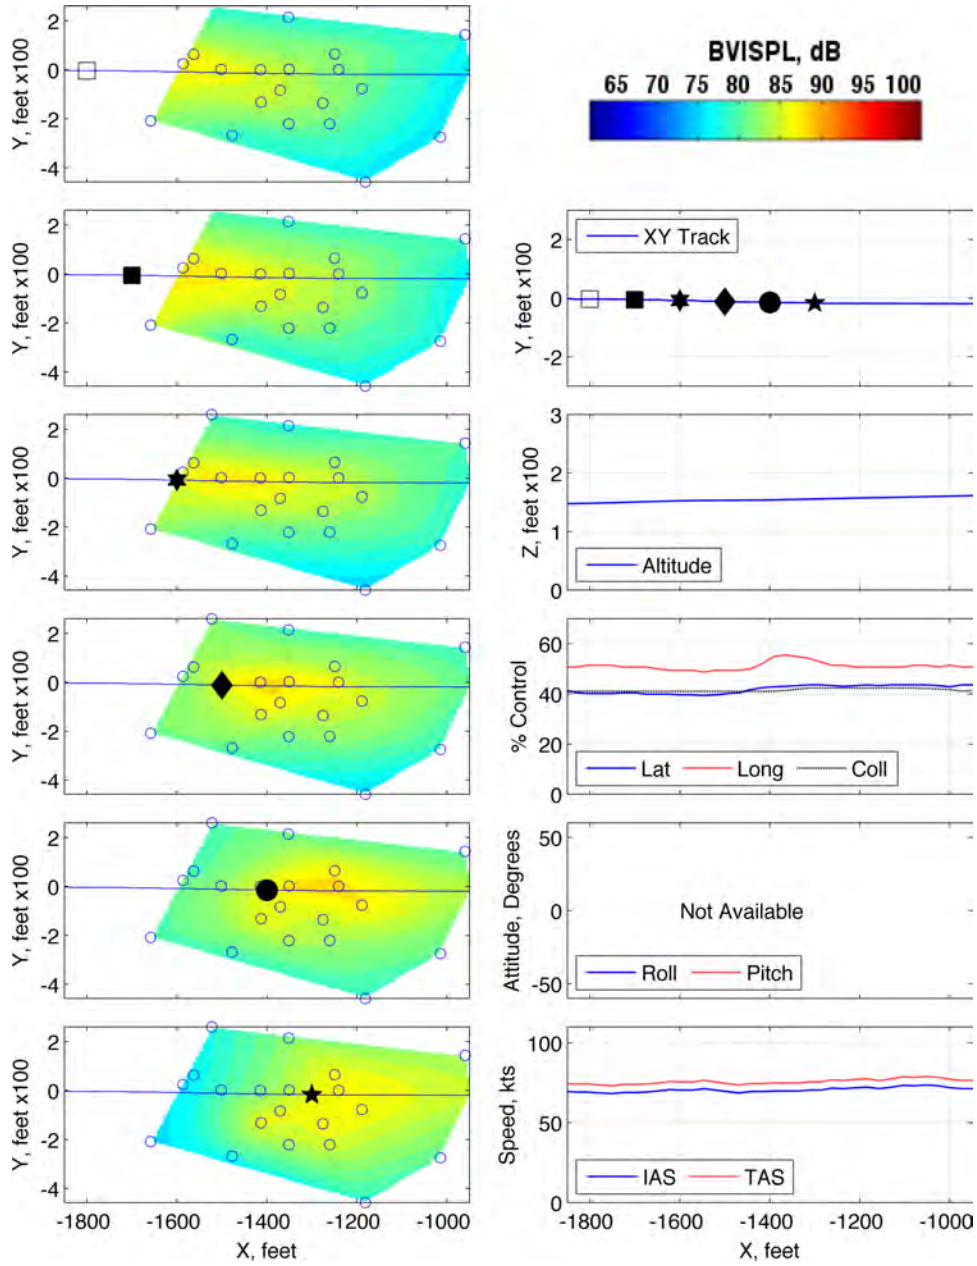


Figure 92: Maneuver condition L1,80 KIAS, level, run number 280405

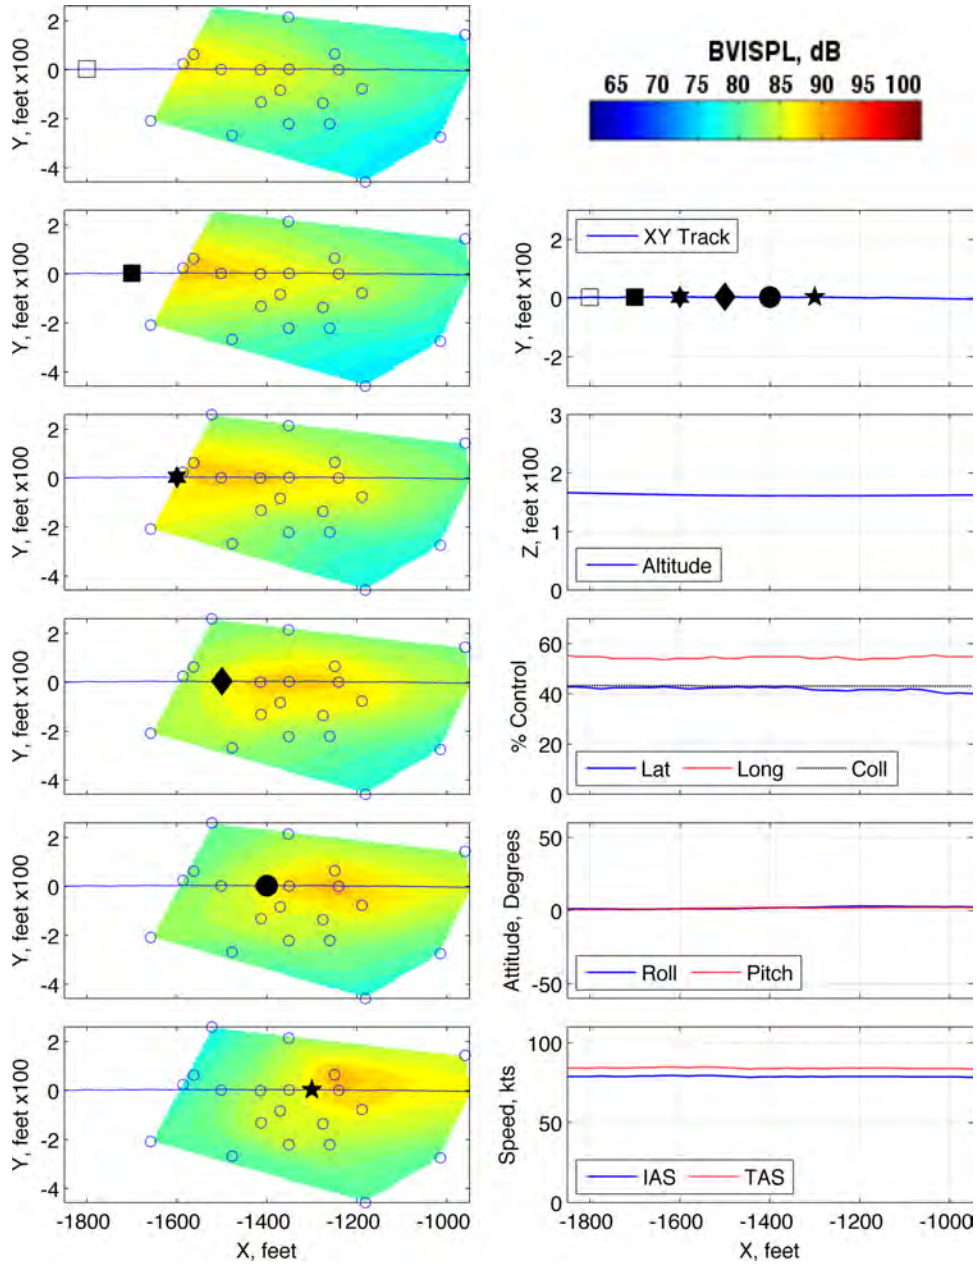


Figure 93: Maneuver condition L1, 80 KIAS, level, run number 282411

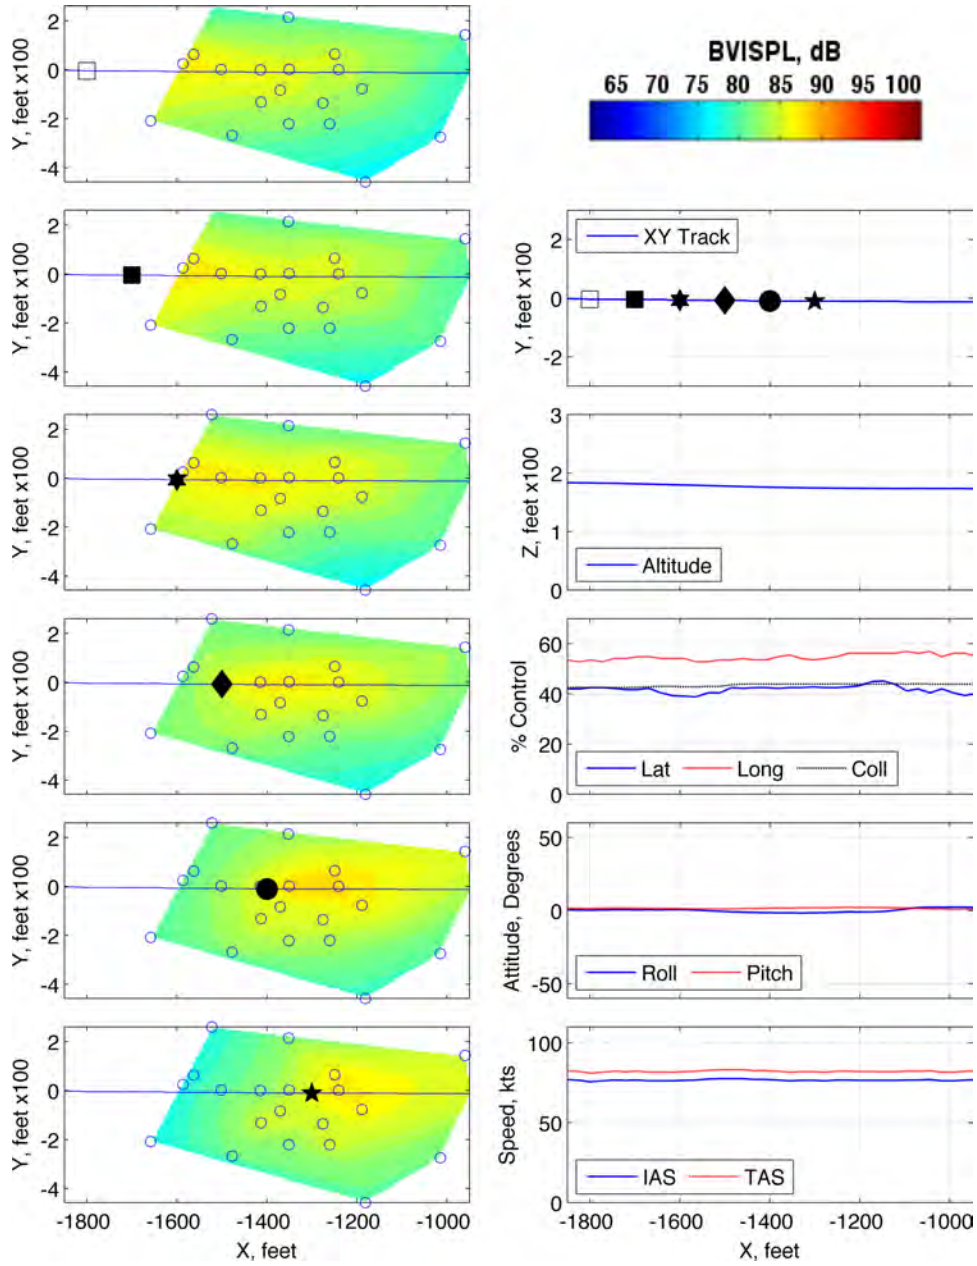


Figure 94: Maneuver condition L1, 80 KIAS, level, run number 282440



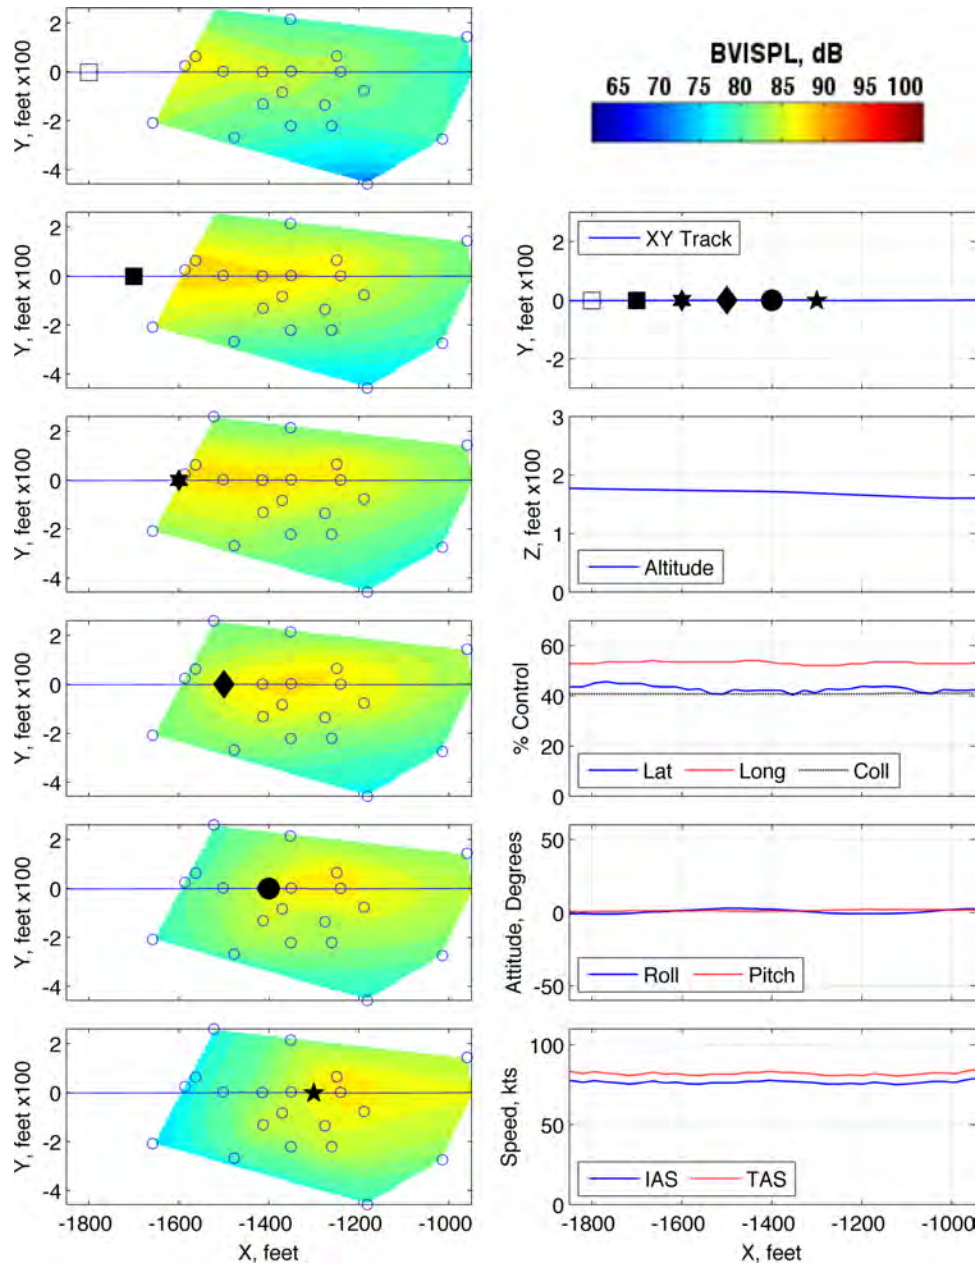


Figure 95: Maneuver condition L1, 80 KIAS, level, run number 282451

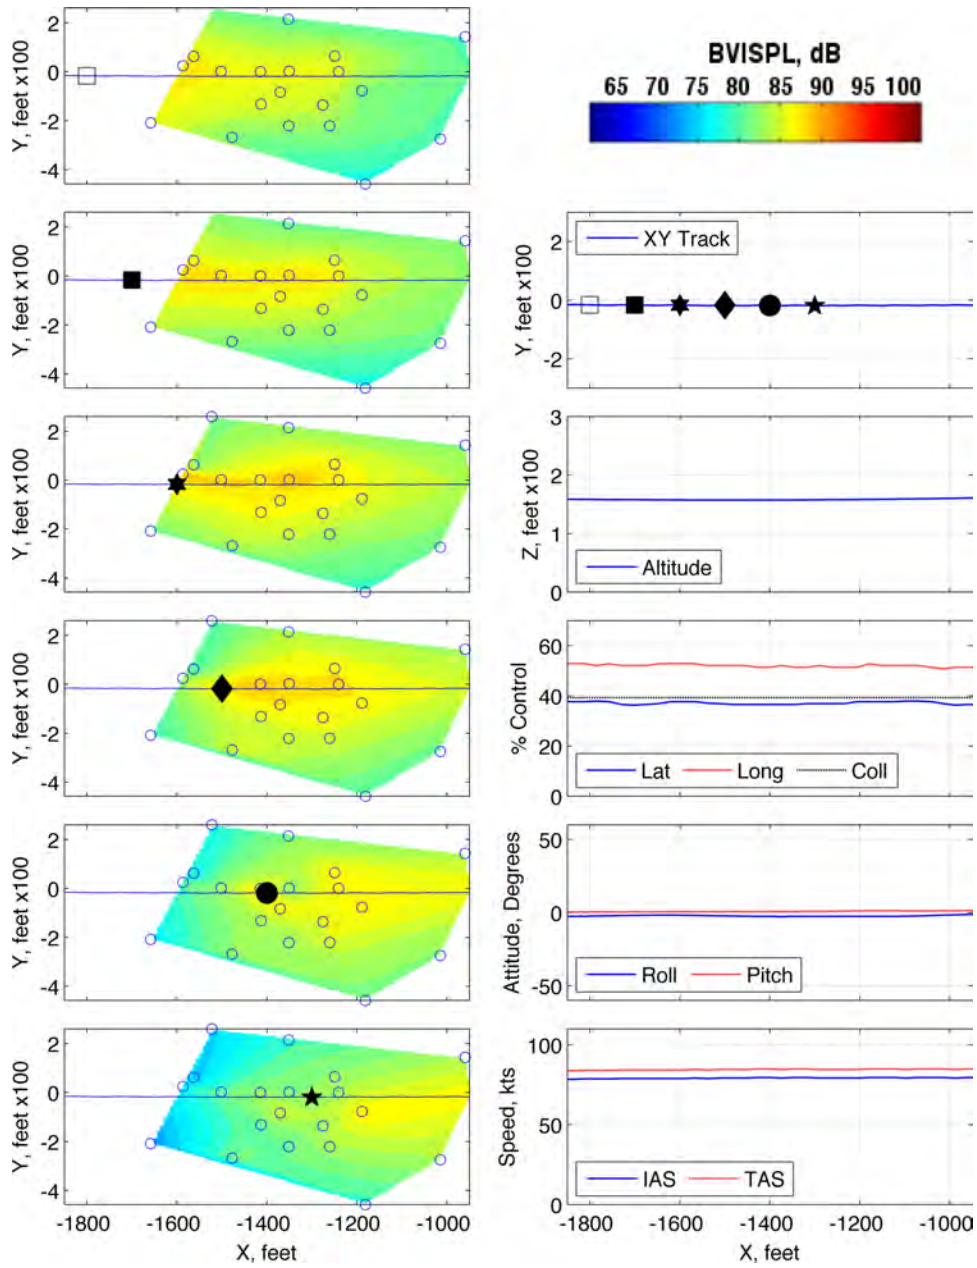


Figure 96: Maneuver condition L1, 80 KIAS, level, run number 285461

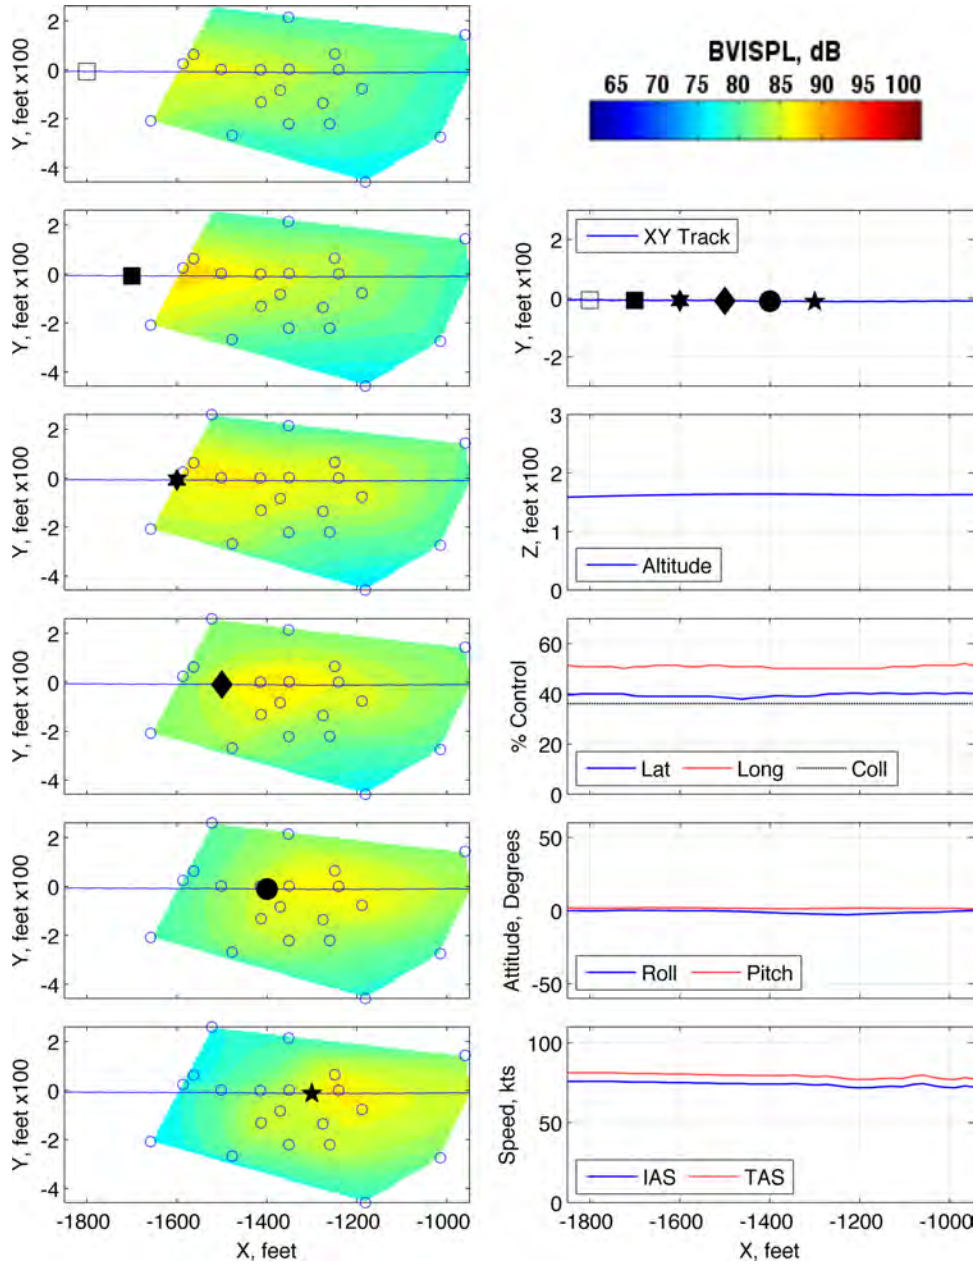


Figure 97: Maneuver condition L1, 80 KIAS, level, run number 285516

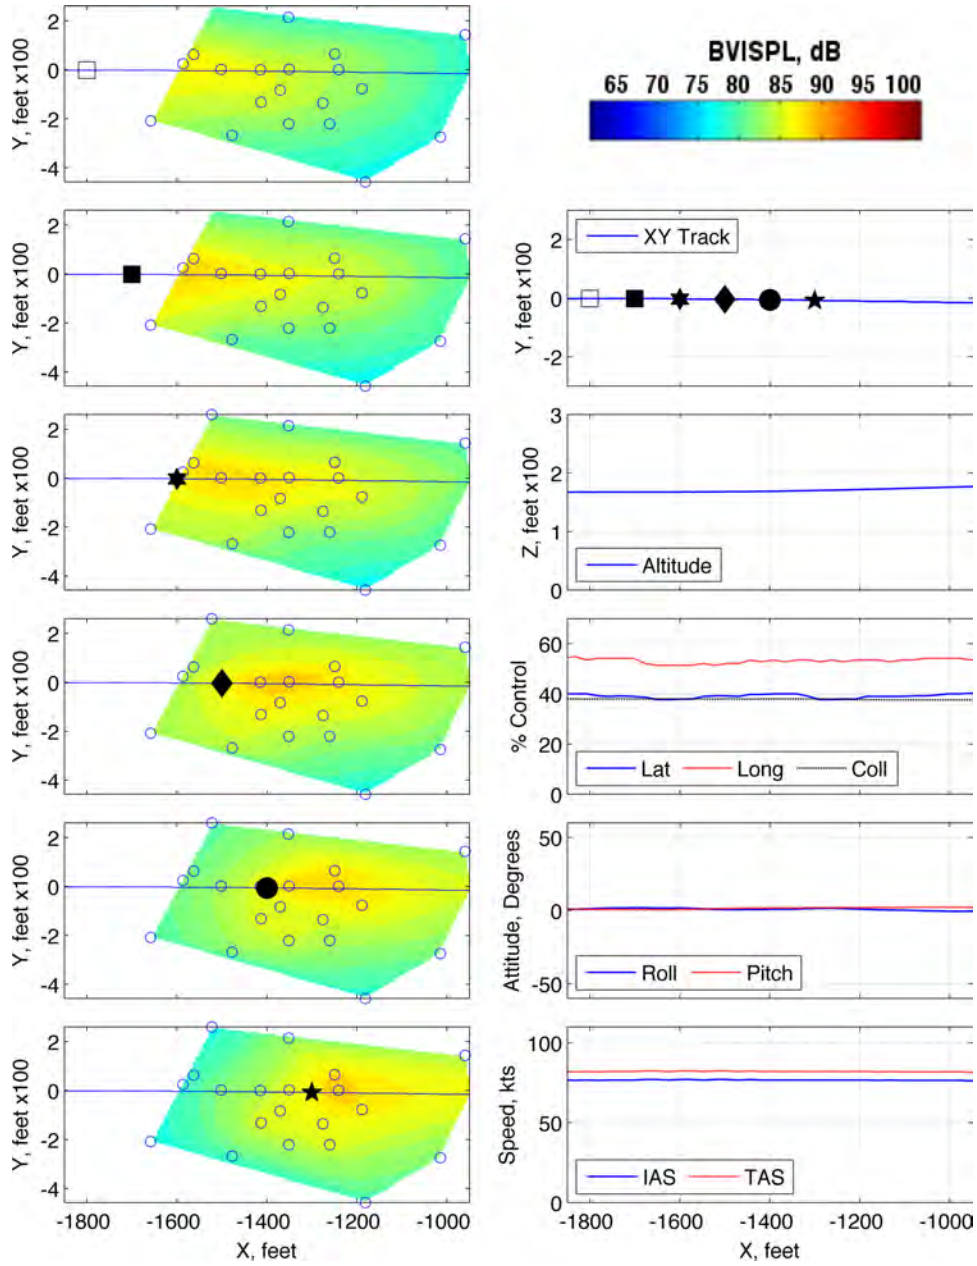


Figure 98: Maneuver condition L1, 80 KIAS, level, run number 287521

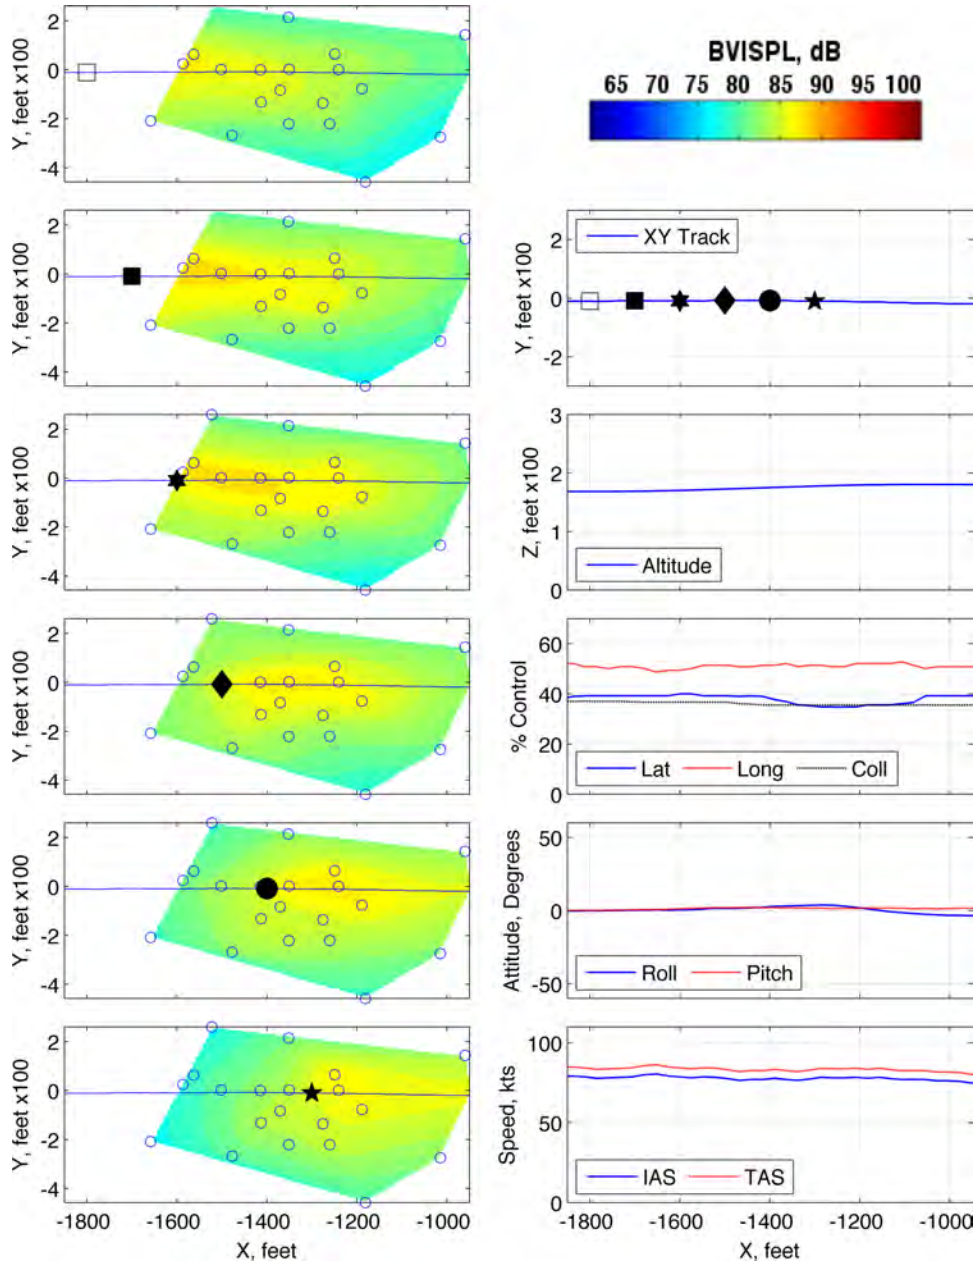


Figure 99: Maneuver condition L1, 80 KIAS, level, run number 287574

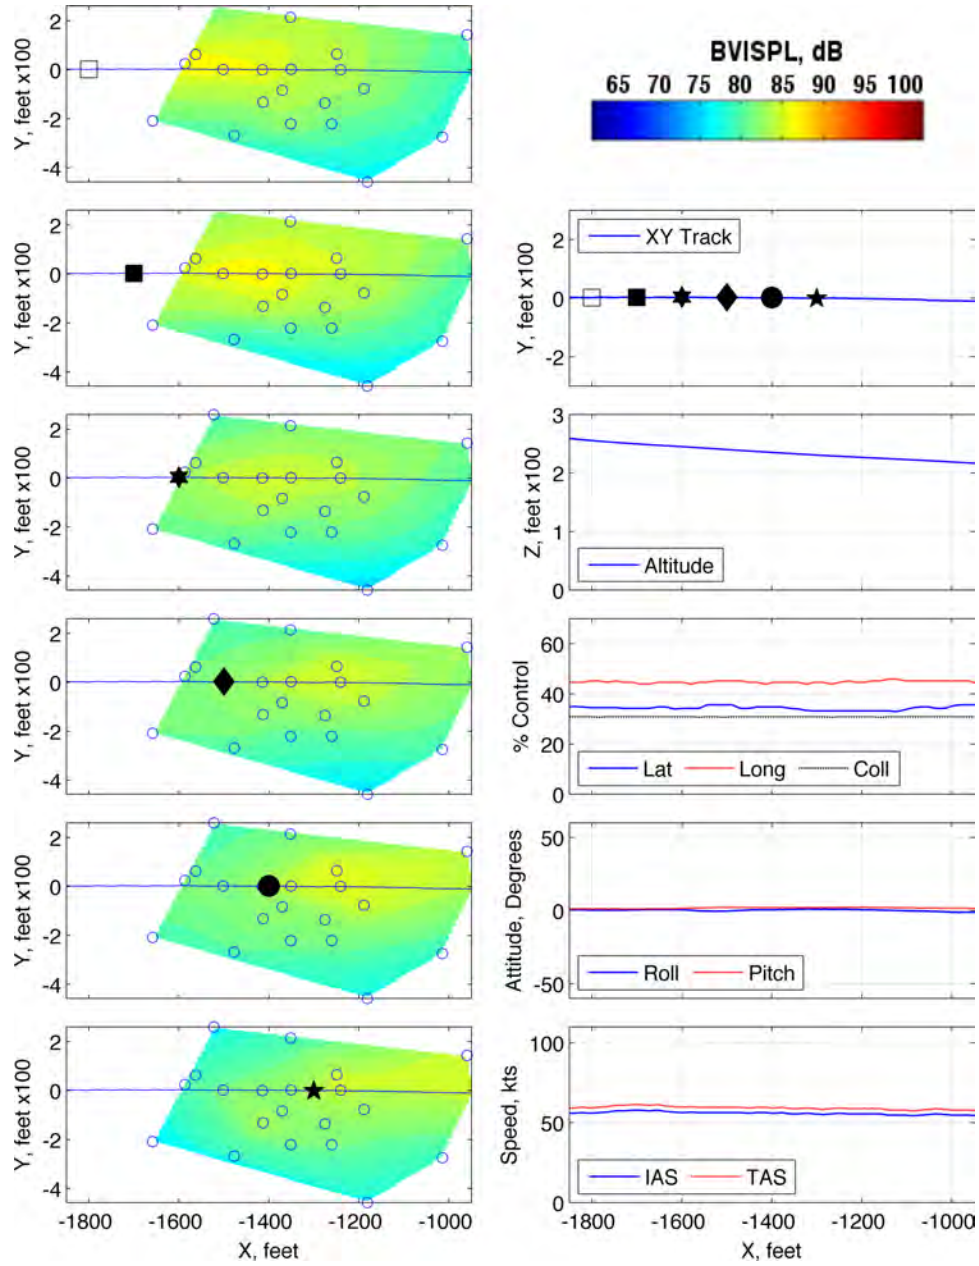


Figure 100: Maneuver condition A4, 60 KIAS,  $-3^\circ$ , run number 285497

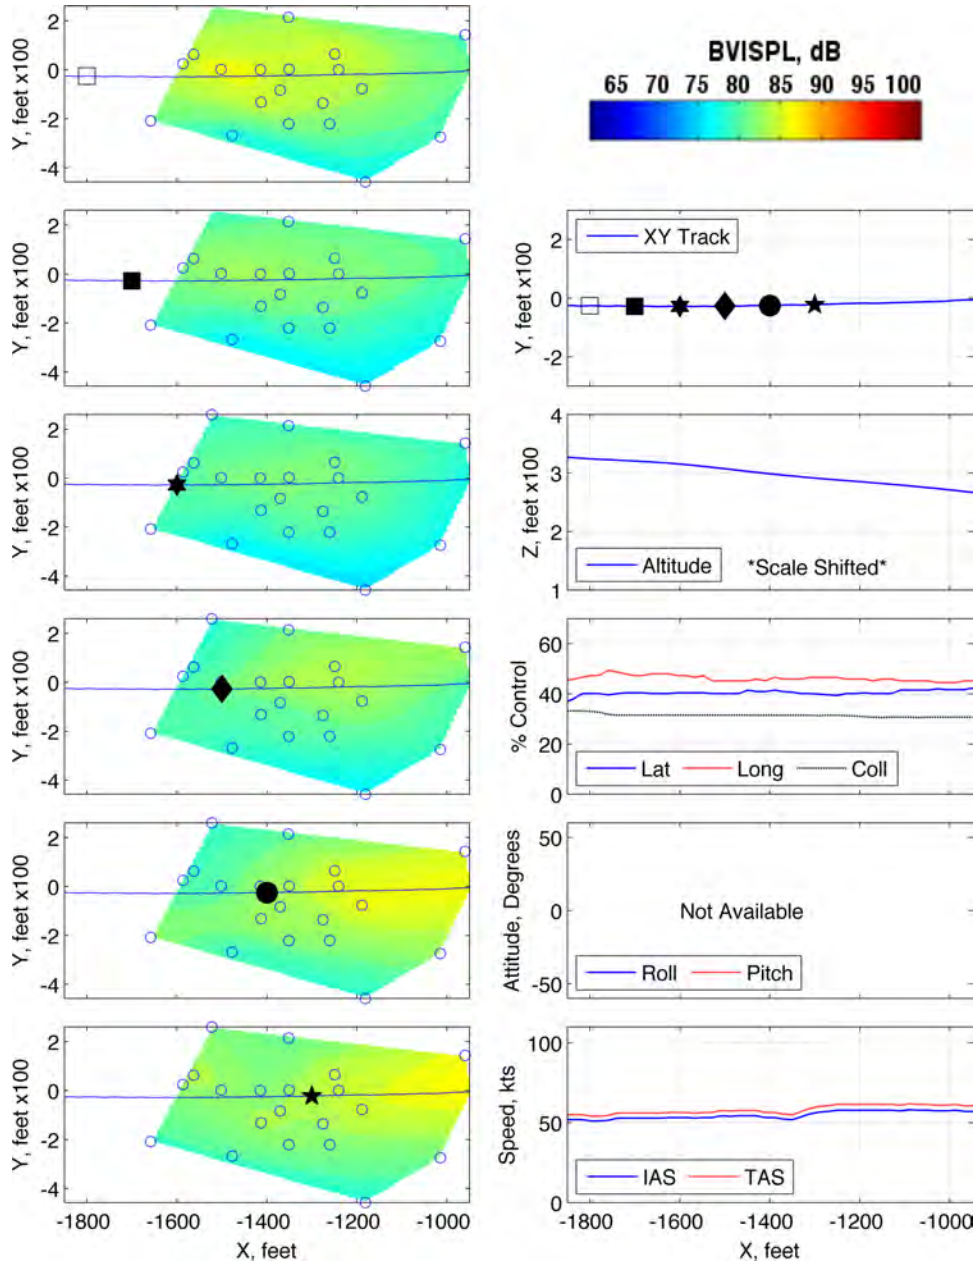


Figure 101: Maneuver condition A5, 60 KIAS,  $-4.5^\circ$ , run number 280398

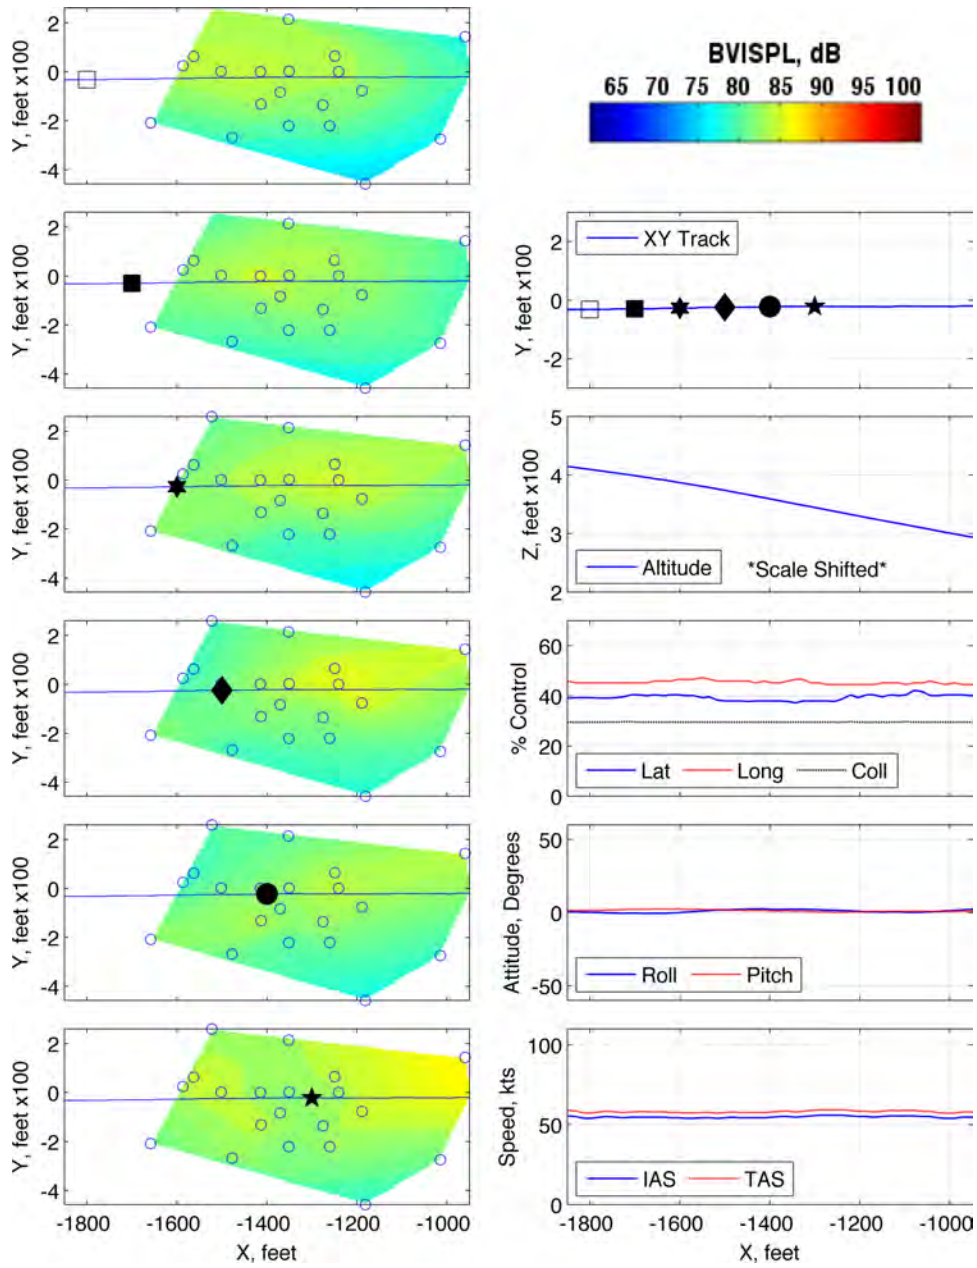


Figure 102: Maneuver condition A6, 60 KIAS,  $-6^\circ$ , run number 282446



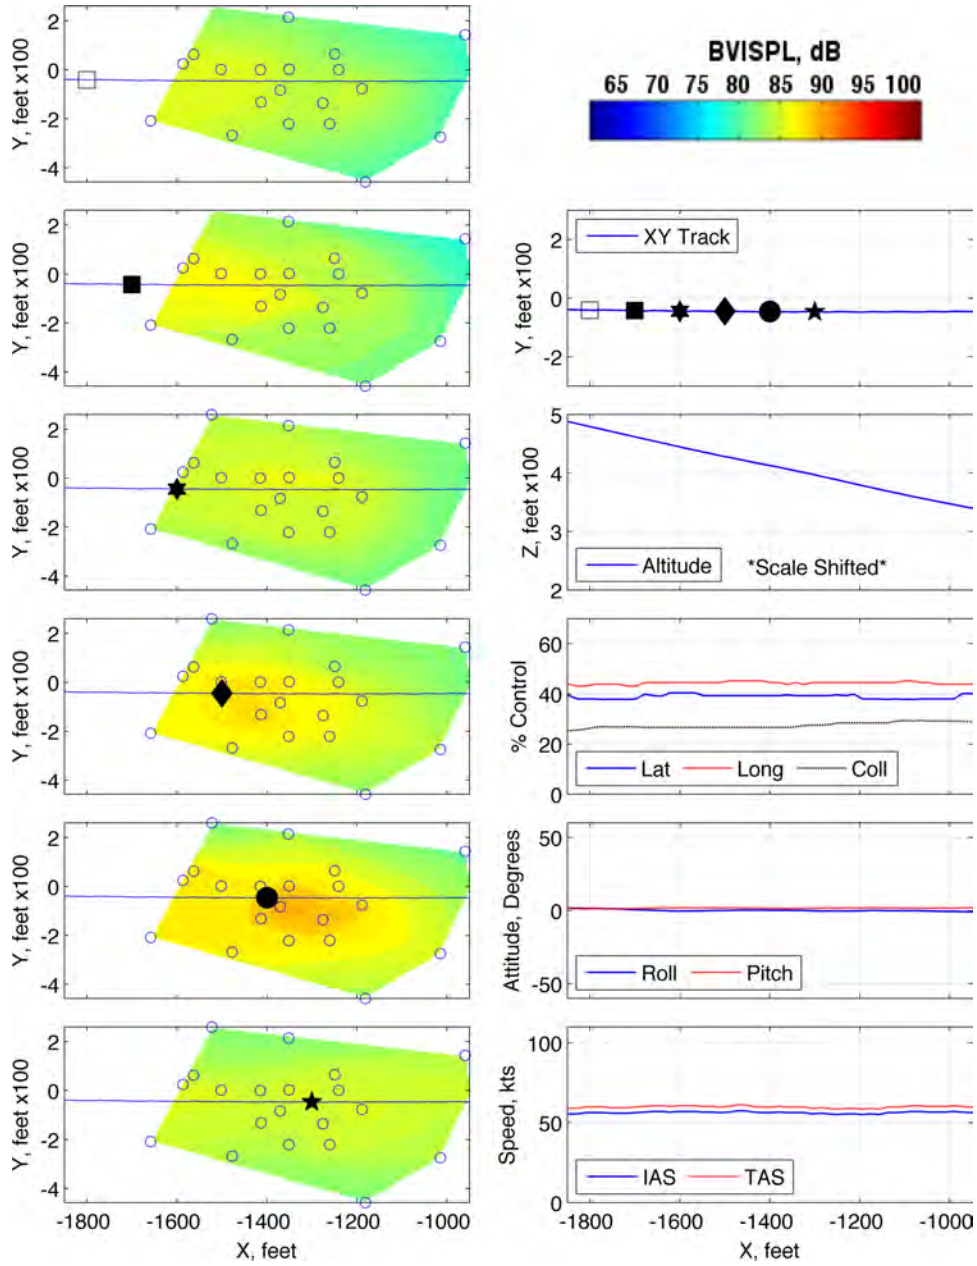


Figure 103: Maneuver condition A8, 60 KIAS, -9° , run number 282444

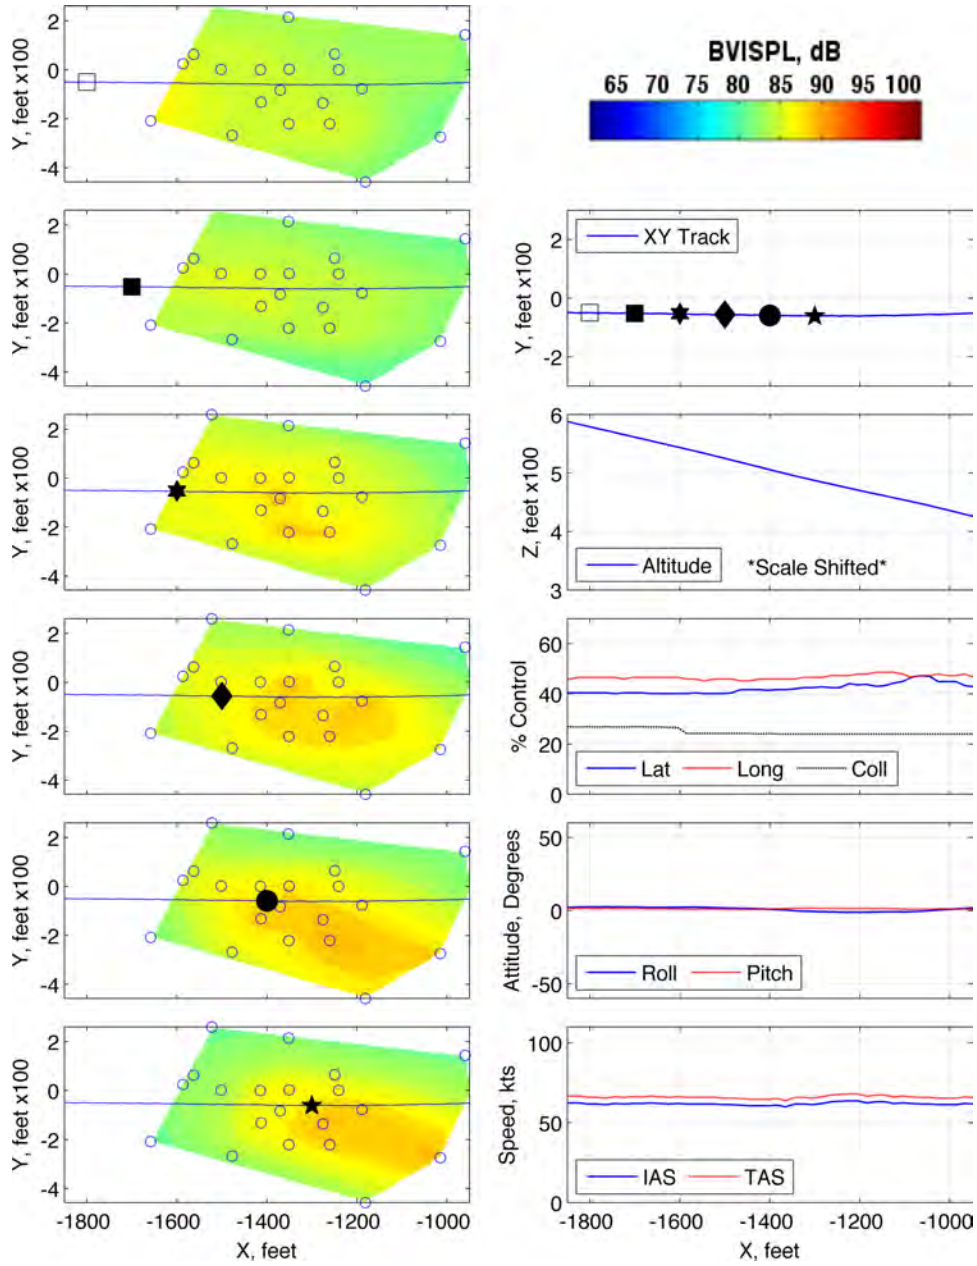


Figure 104: Maneuver condition A10, 60 KIAS,  $-12^\circ$ , run number 282441

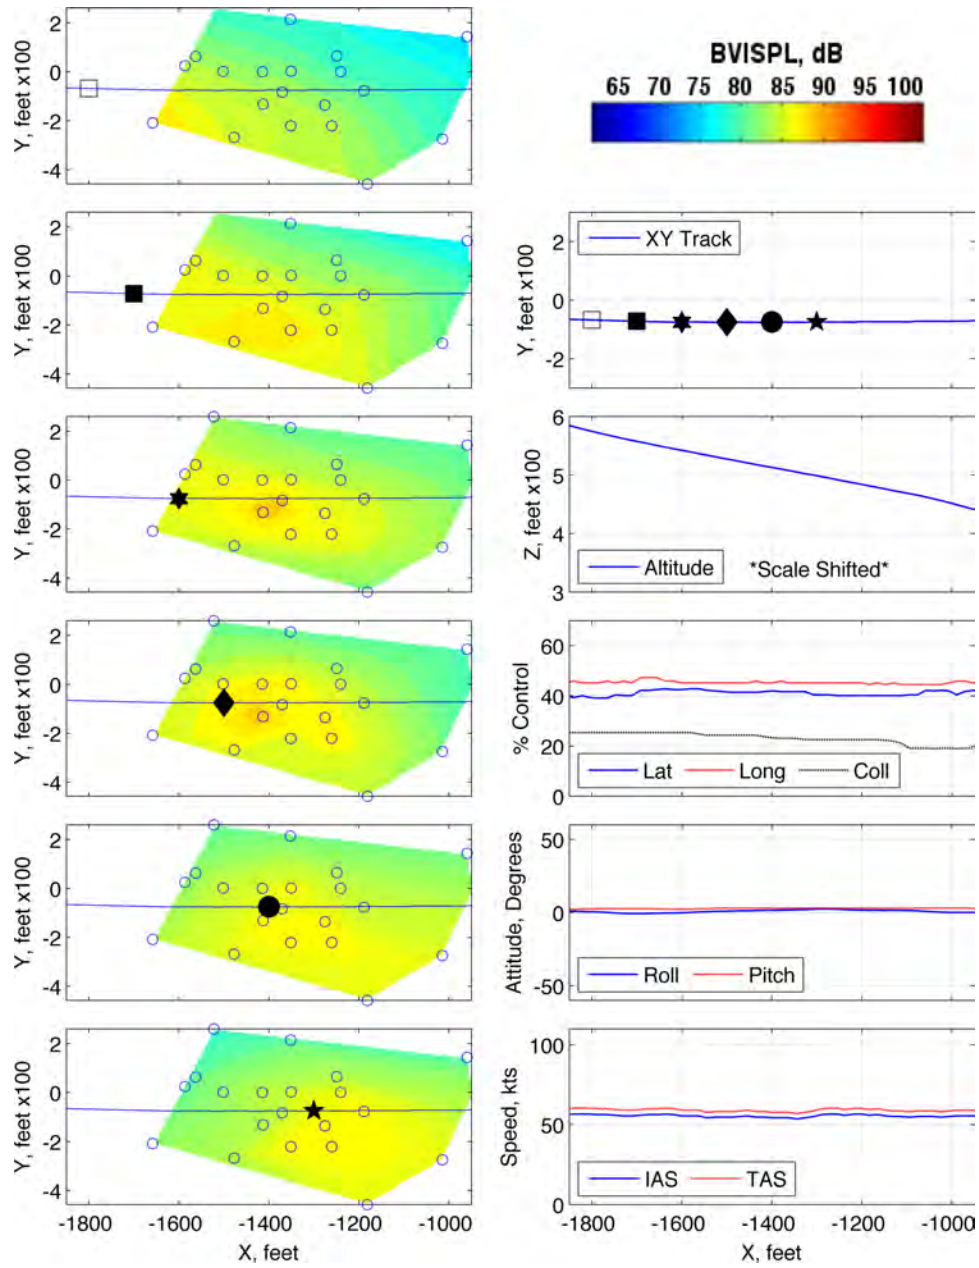


Figure 105: Maneuver condition A10, 60 KIAS,  $-12^\circ$ , run number 282442

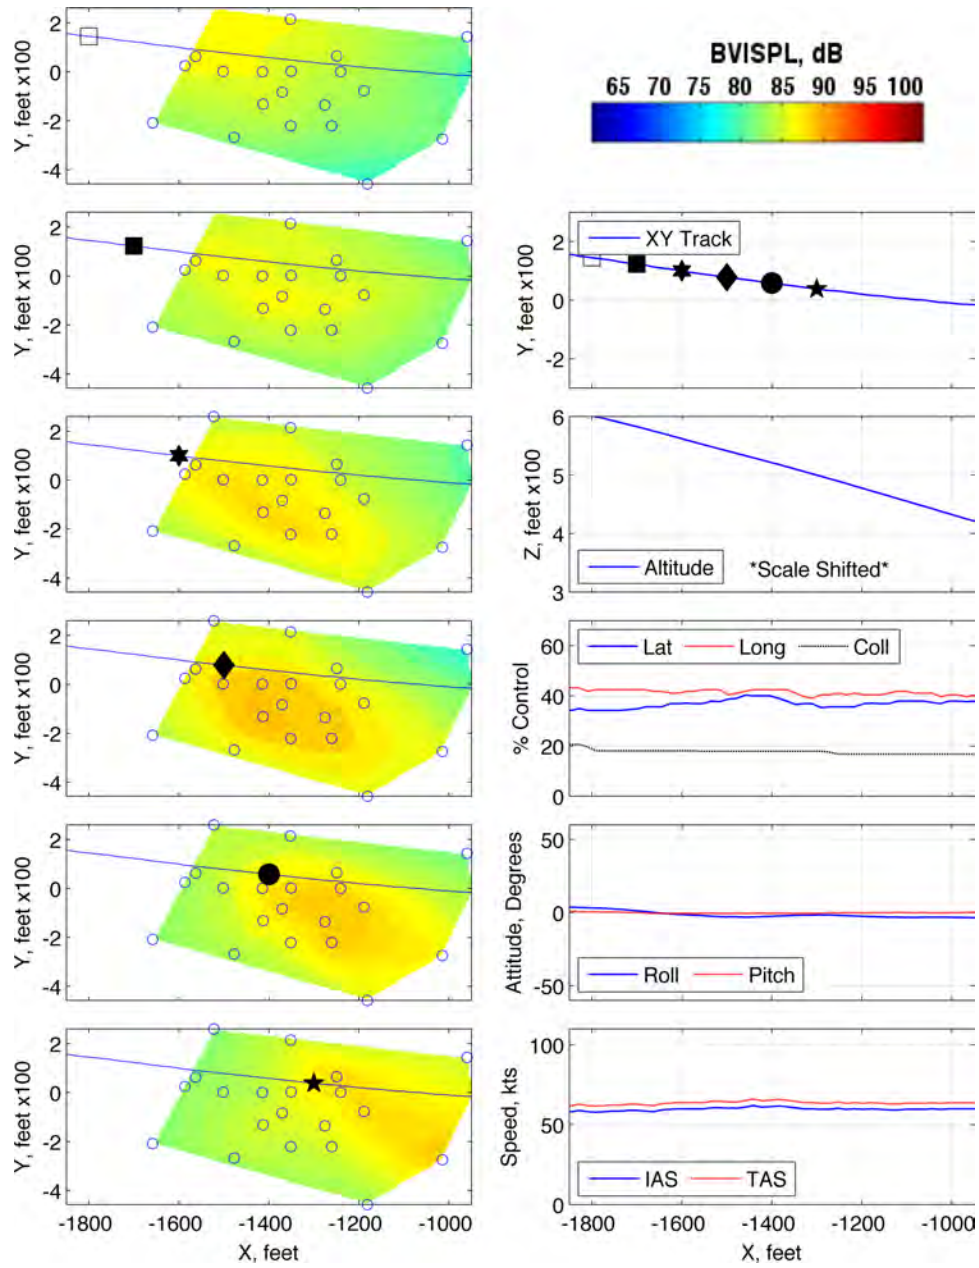


Figure 106: Maneuver condition A10, 60 KIAS,  $-12^\circ$ , run number 285494

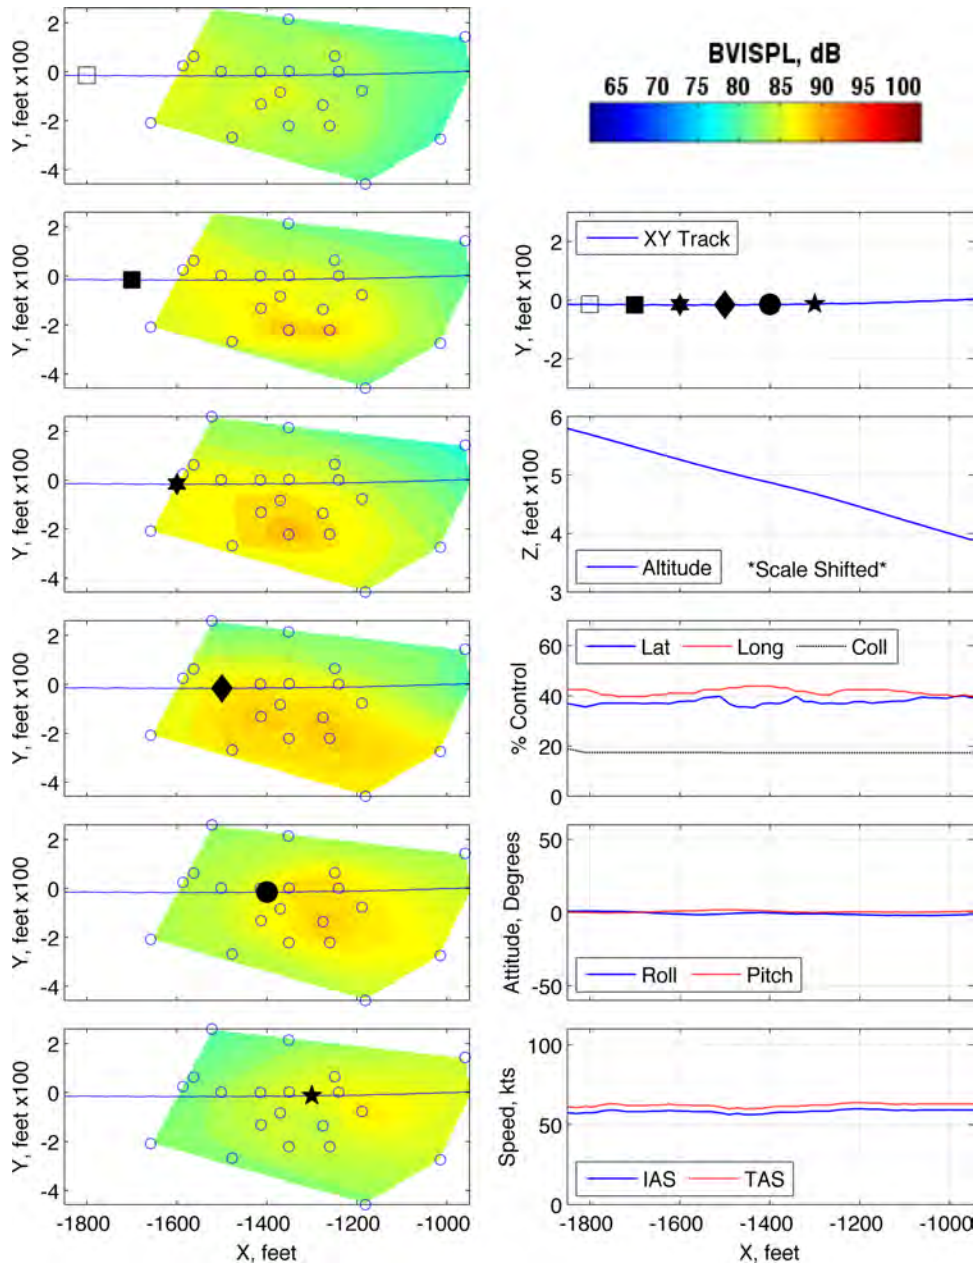


Figure 107: Maneuver condition A10, 60 KIAS,  $-12^\circ$ , run number 285495

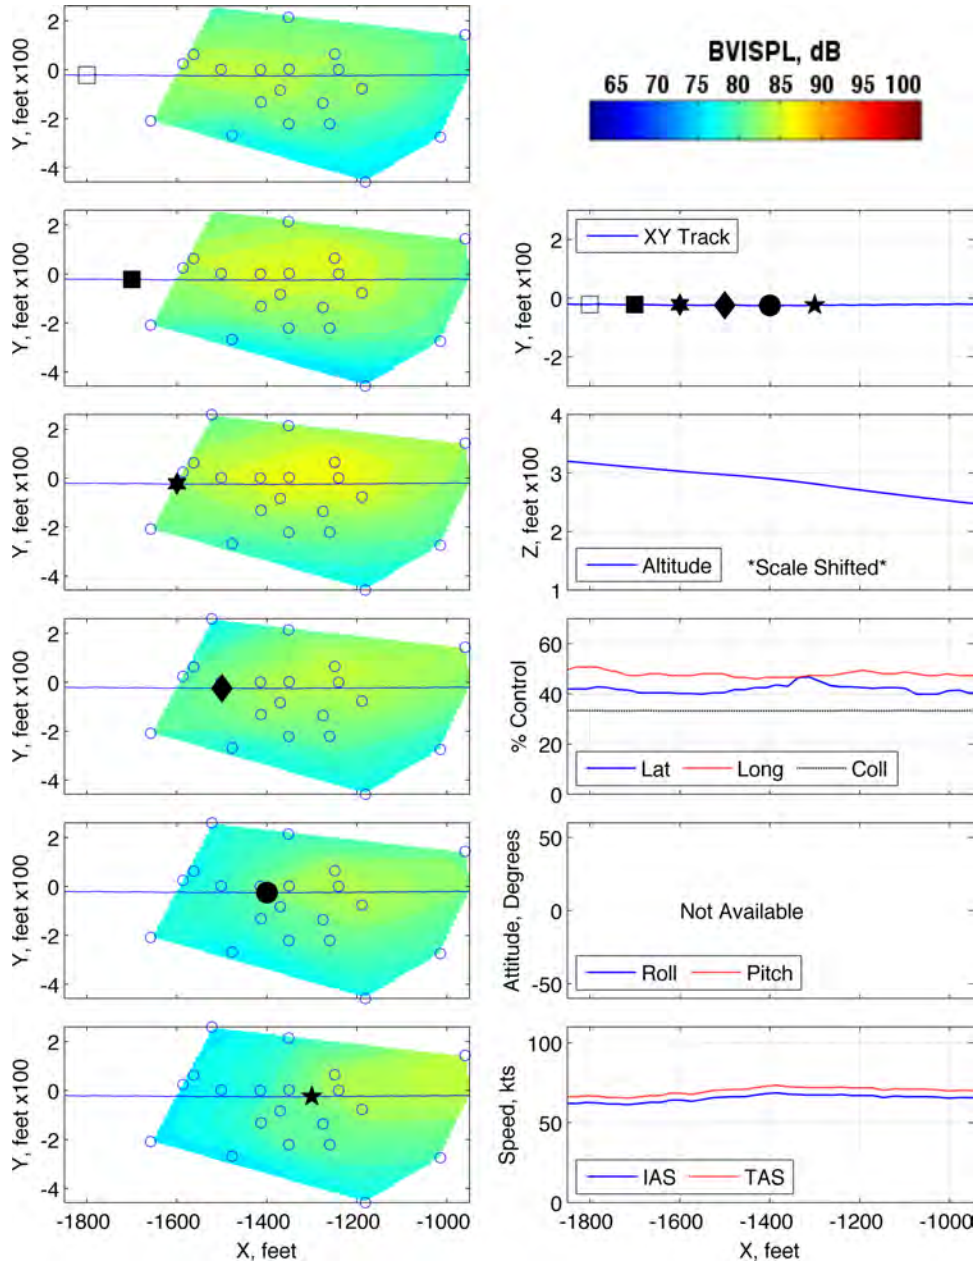


Figure 108: Maneuver condition A12, 70 KIAS,  $-4.5^\circ$ , run number 280399

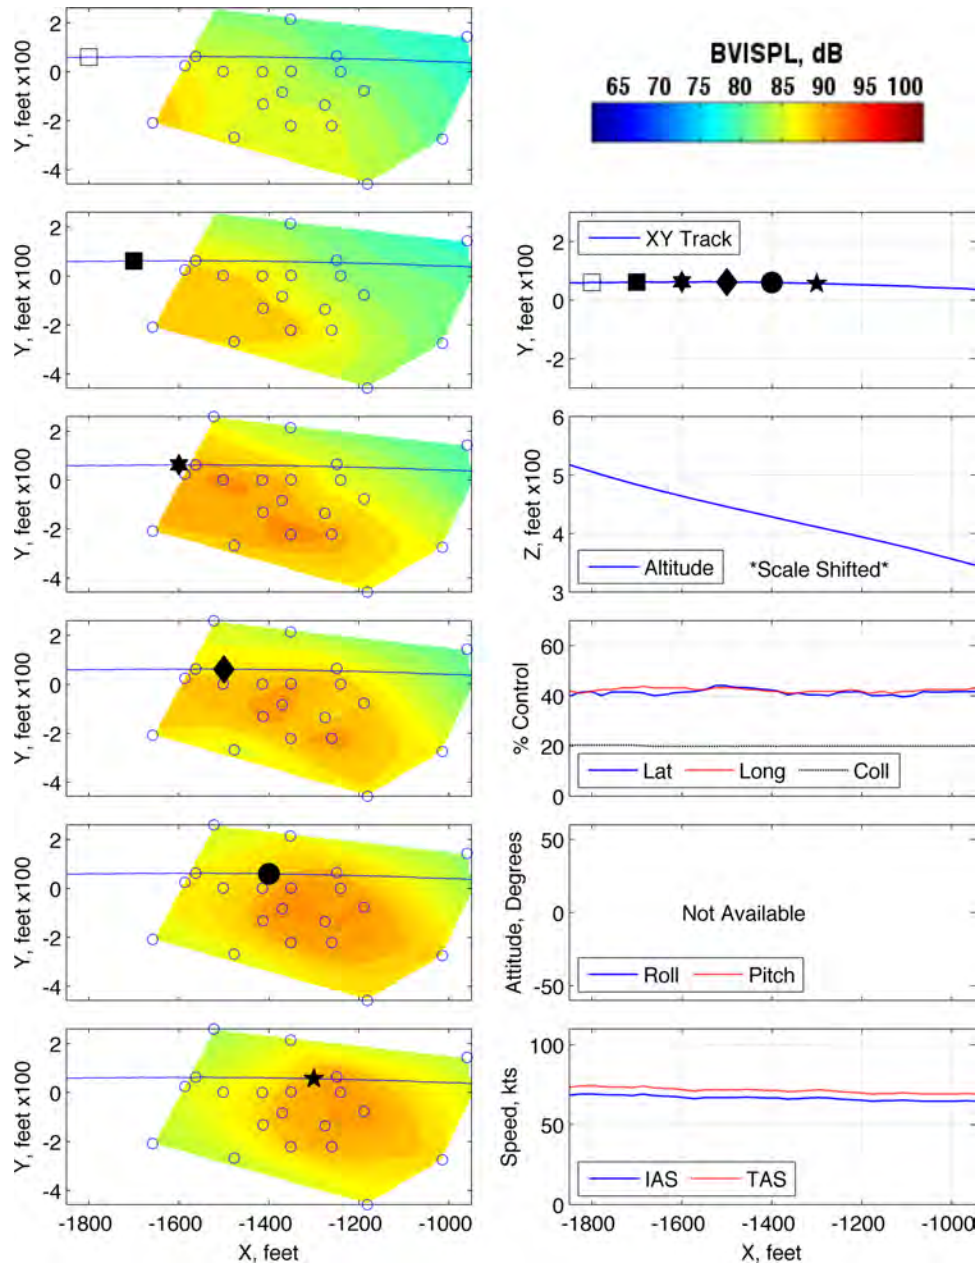


Figure 109: Maneuver condition A16, 70 KIAS,  $-10.5^\circ$ , run number 280402

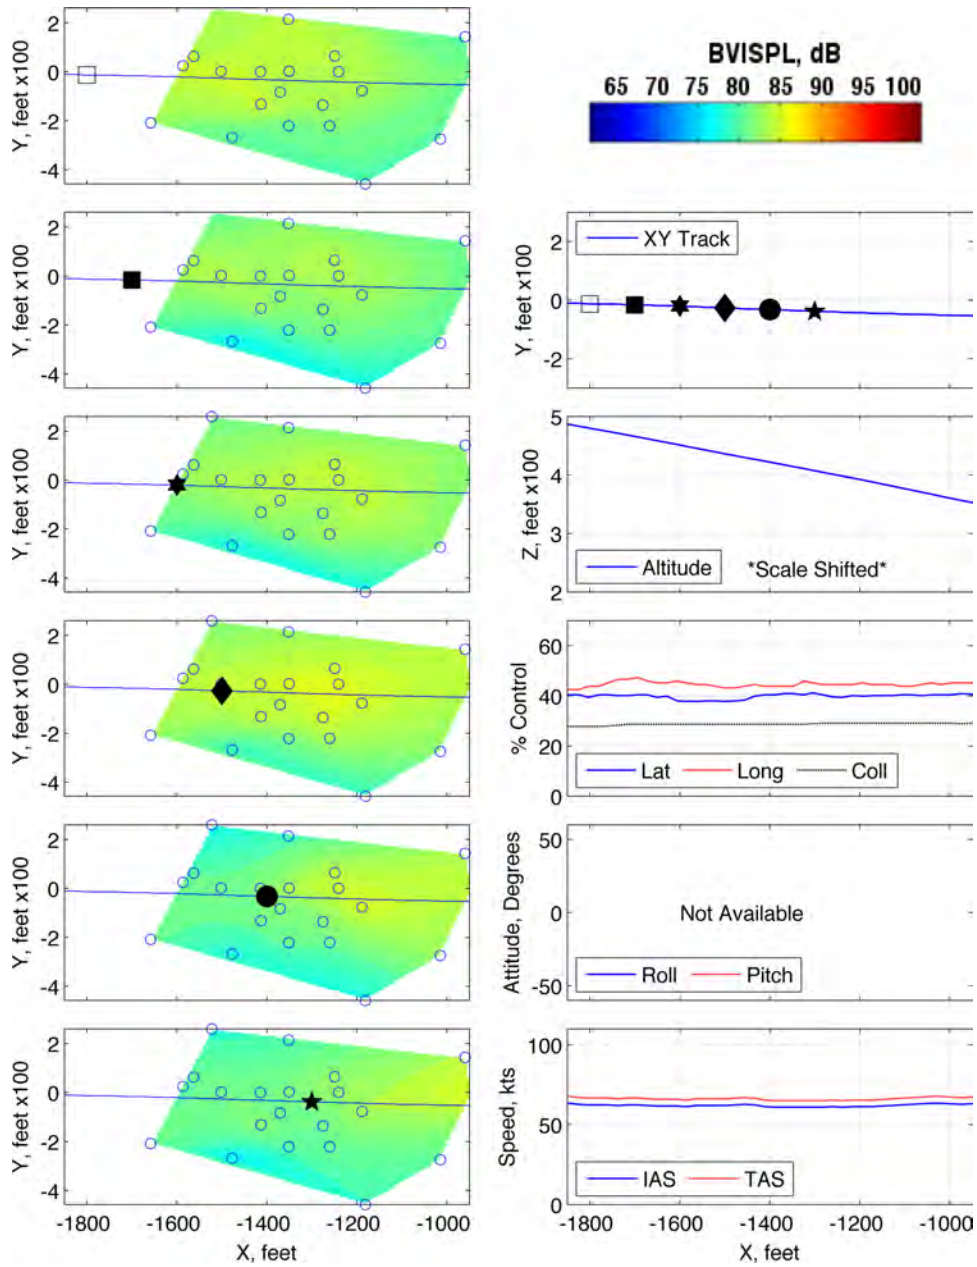


Figure 110: Maneuver condition A16, 70 KIAS,  $-10.5^\circ$ , run number 280403



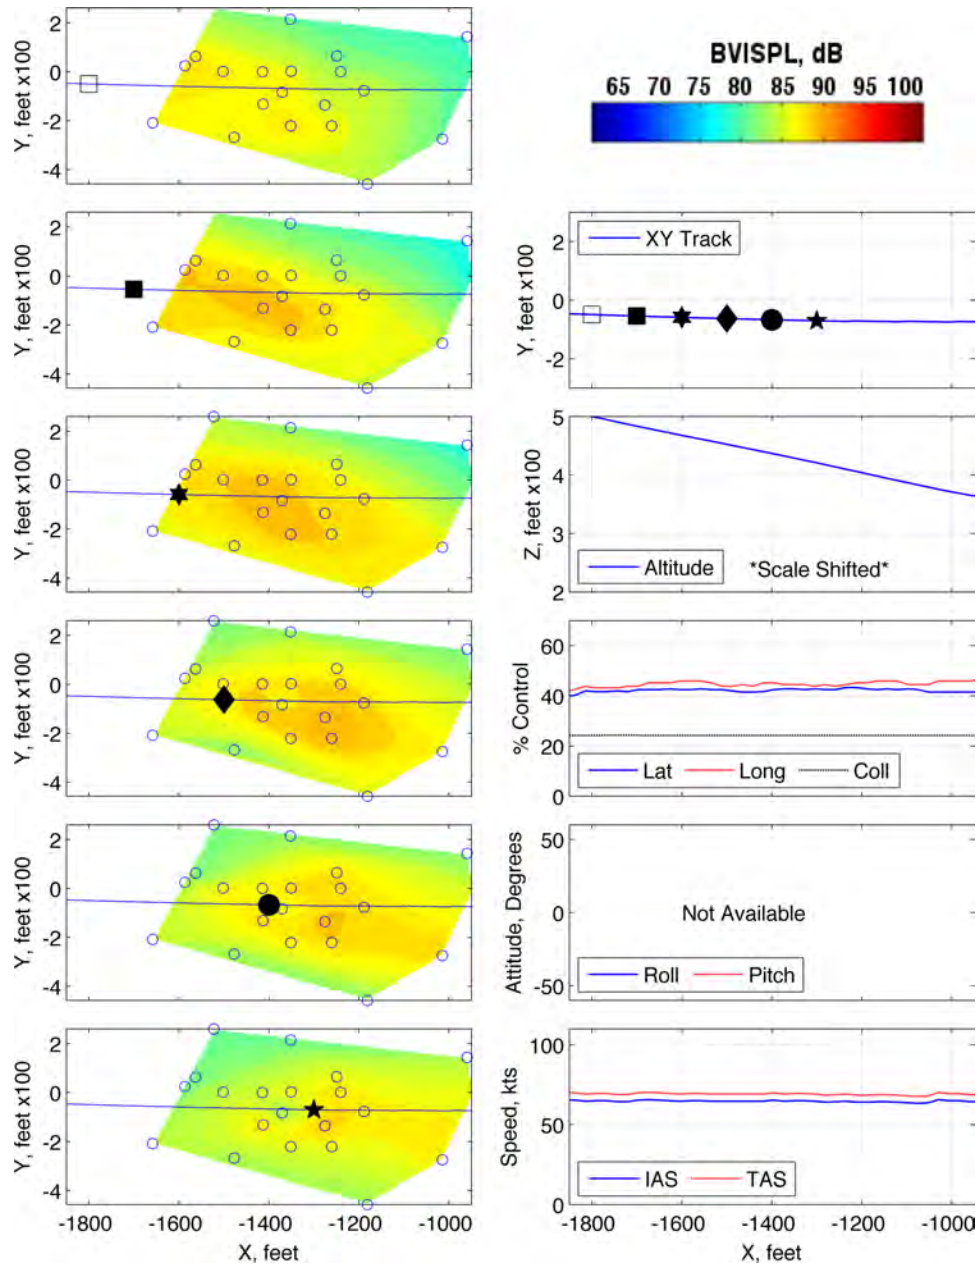


Figure 111: Maneuver condition A16, 70 KIAS,  $-10.5^\circ$ , run number 280404

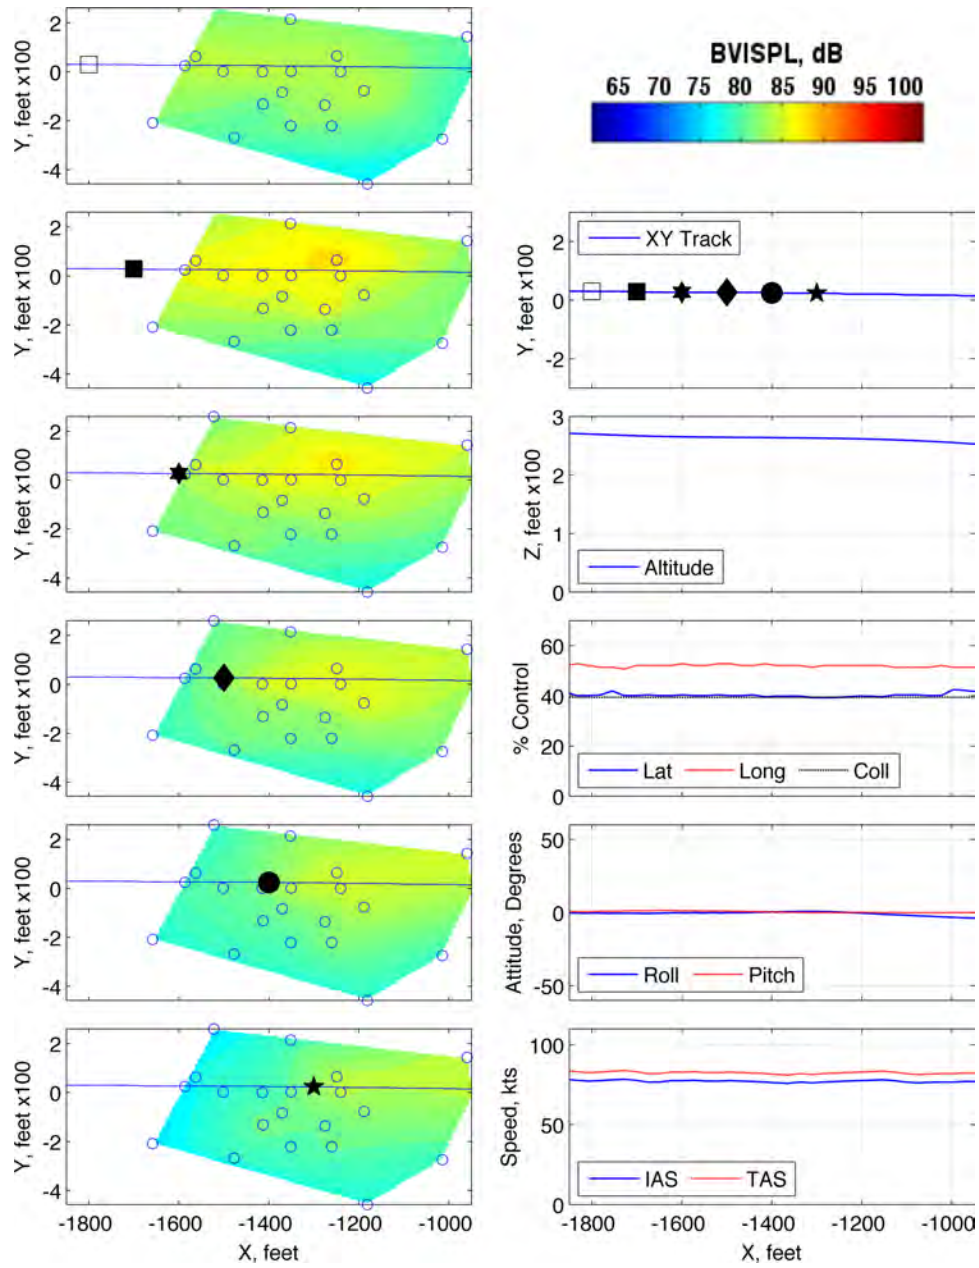


Figure 112: Maneuver condition A18, 80 KIAS,  $-3^\circ$ , run number 282449

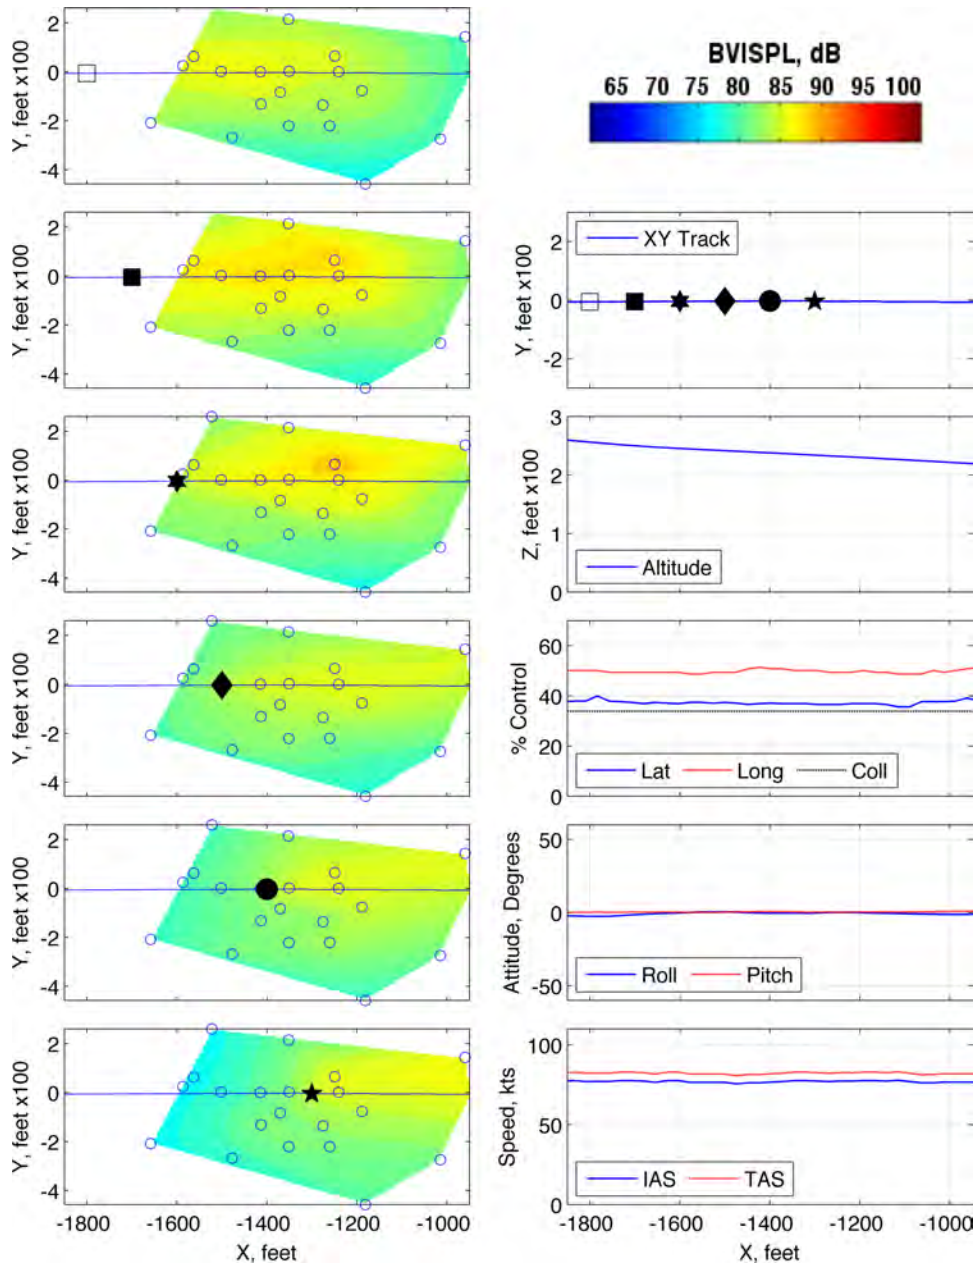


Figure 113: Maneuver condition A18, 80 KIAS,  $-3^\circ$ , run number 285498

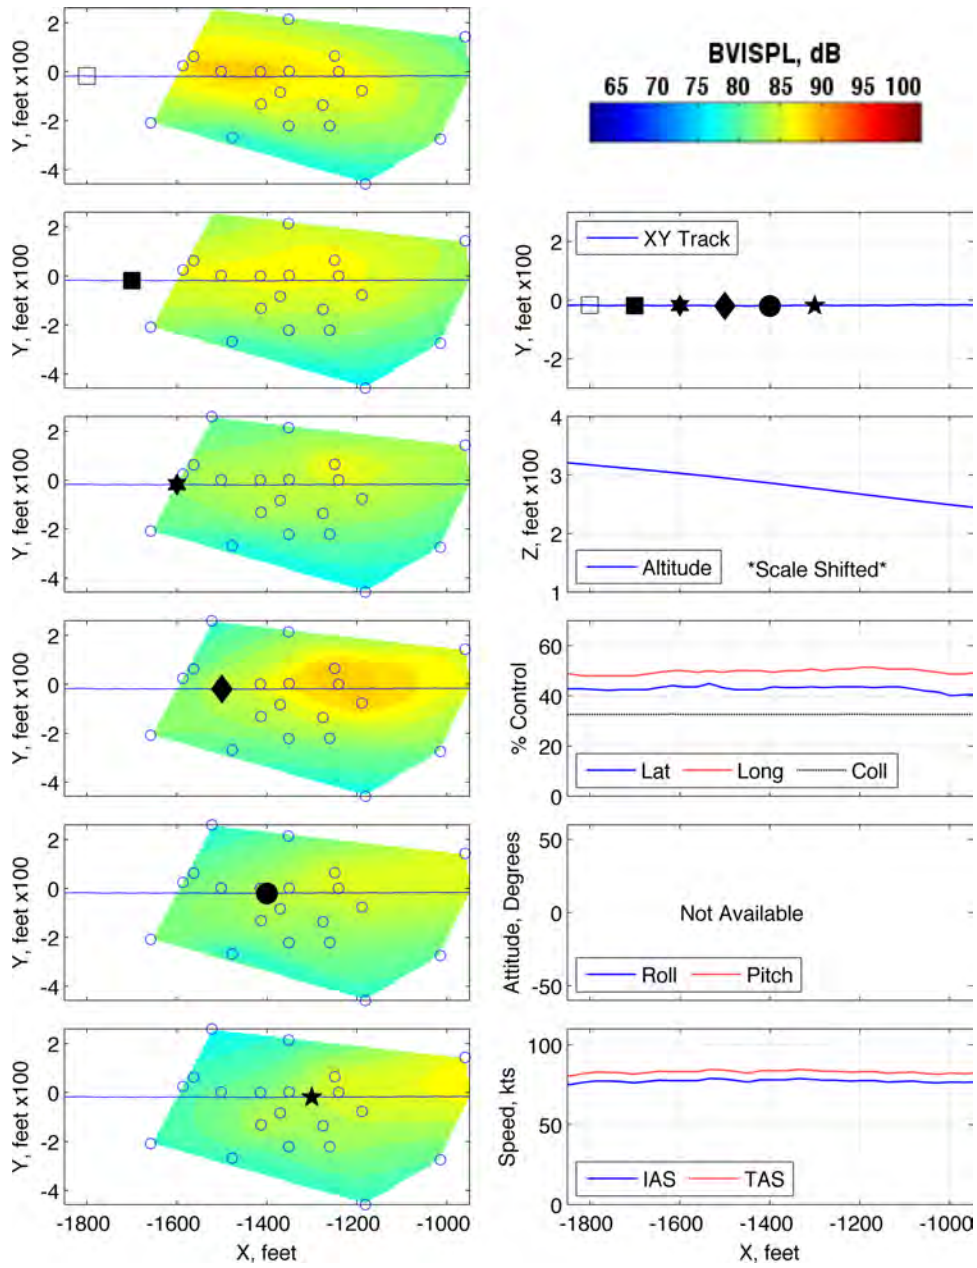


Figure 114: Maneuver condition A19, 80 KIAS,  $-4.5^\circ$ , run number 280400

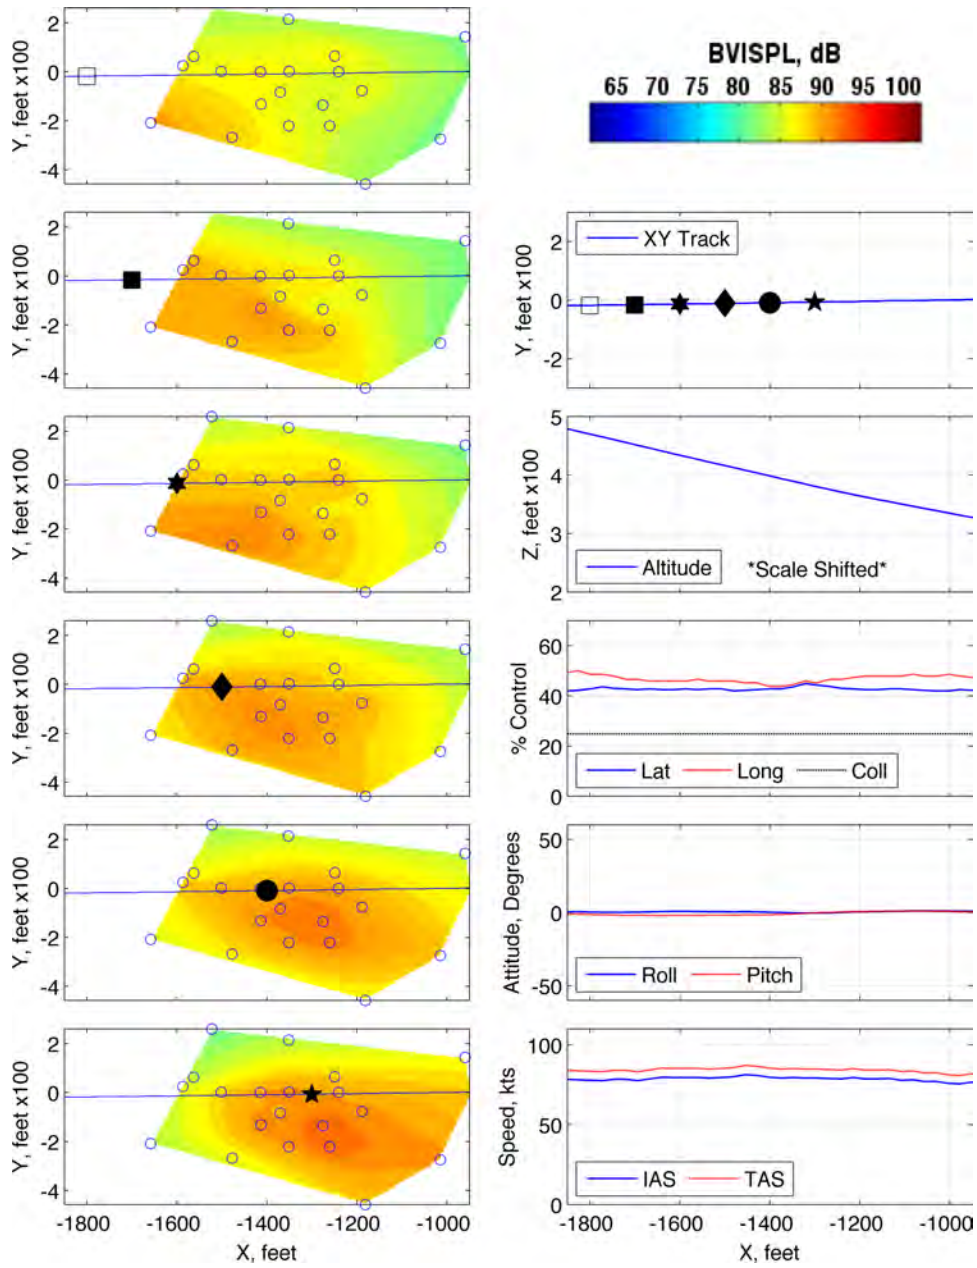


Figure 115: Maneuver condition A22, 80 KIAS,  $-9^\circ$ , run number 282445

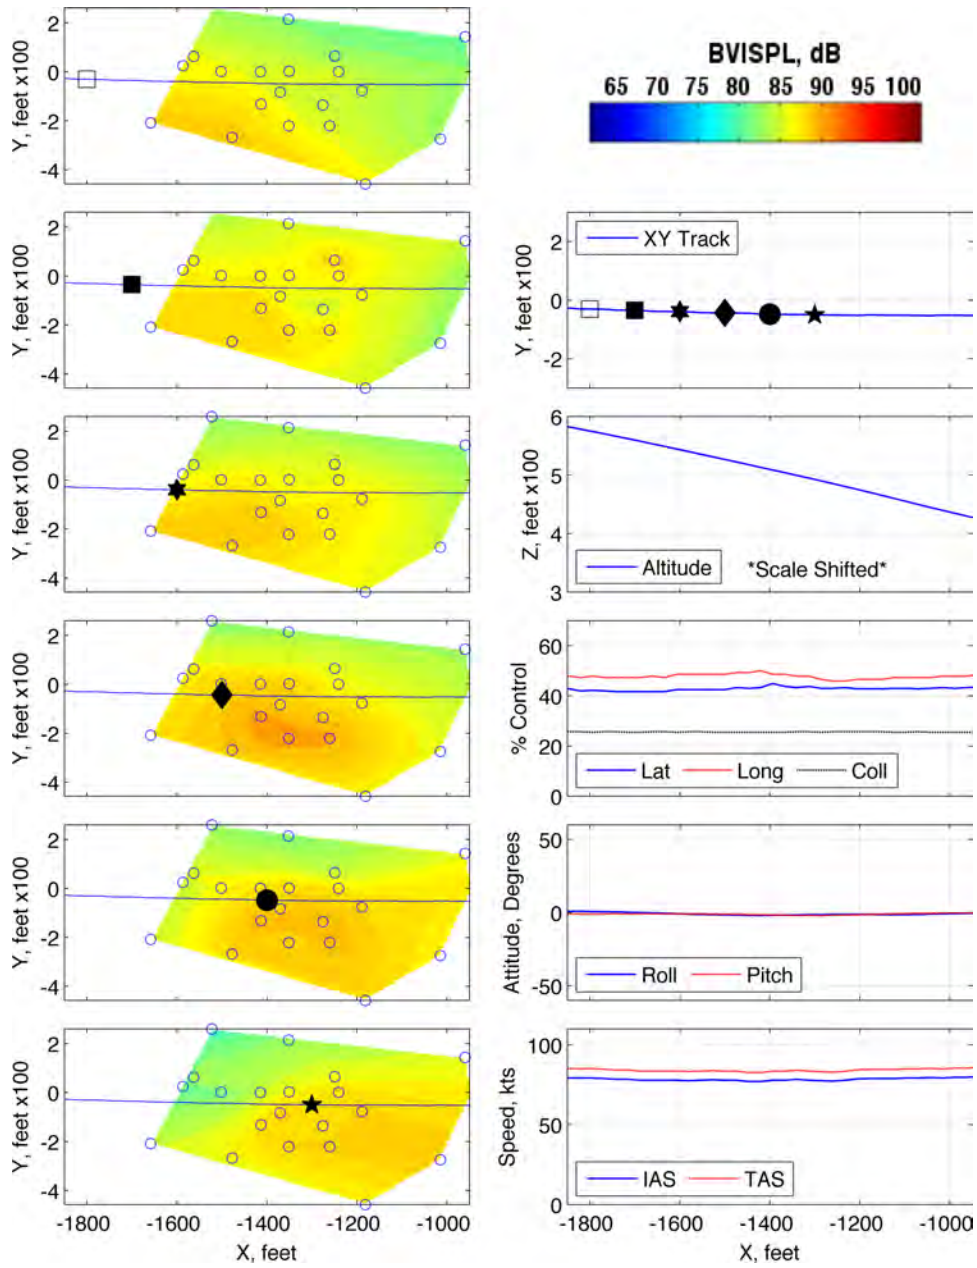


Figure 116: Maneuver condition A24, 80 KIAS,  $-12^\circ$ , run number 282443

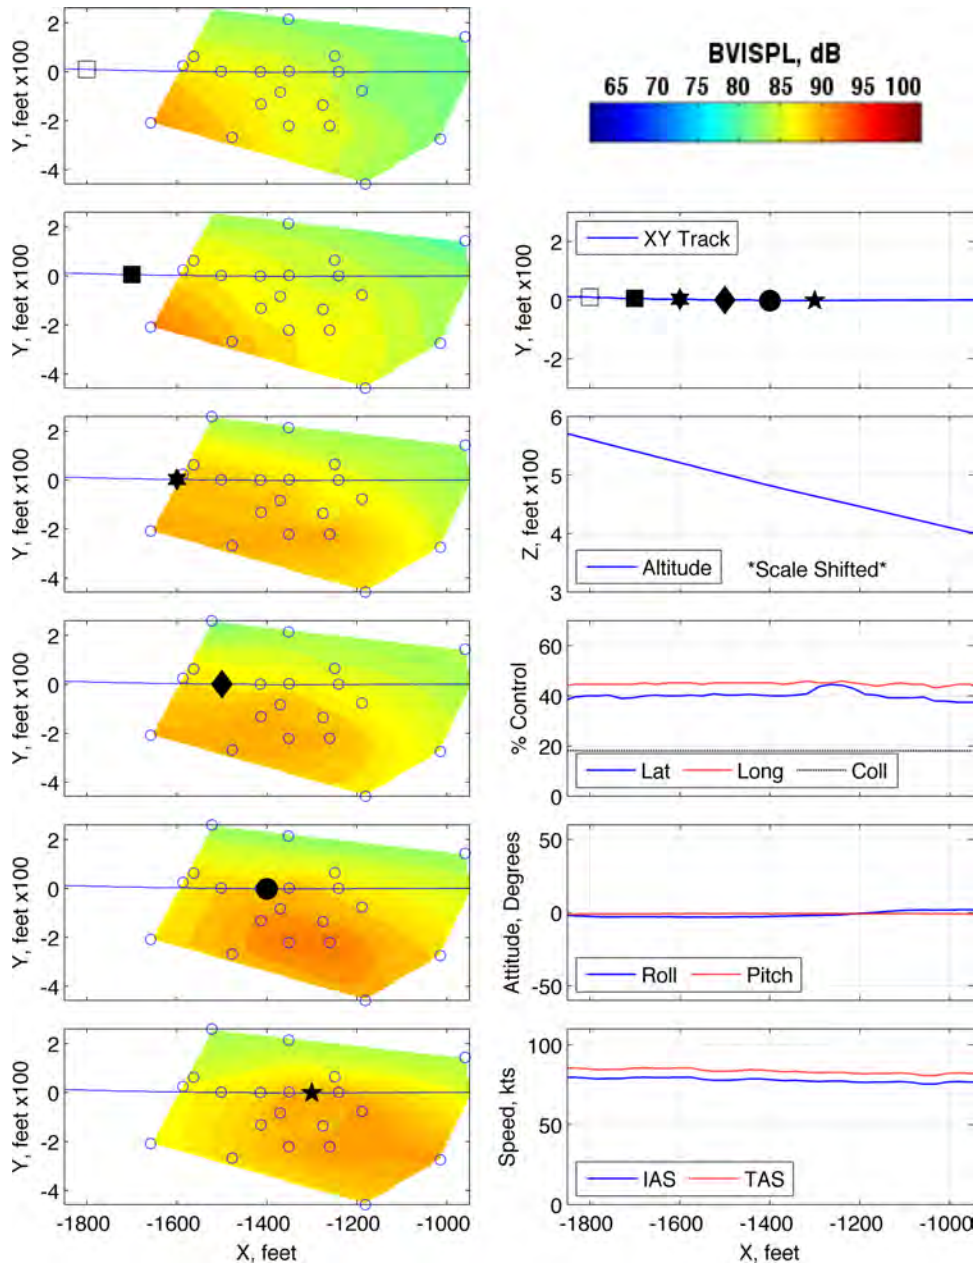


Figure 117: Maneuver condition A24, 80 KIAS,  $-12^\circ$ , run number 285496

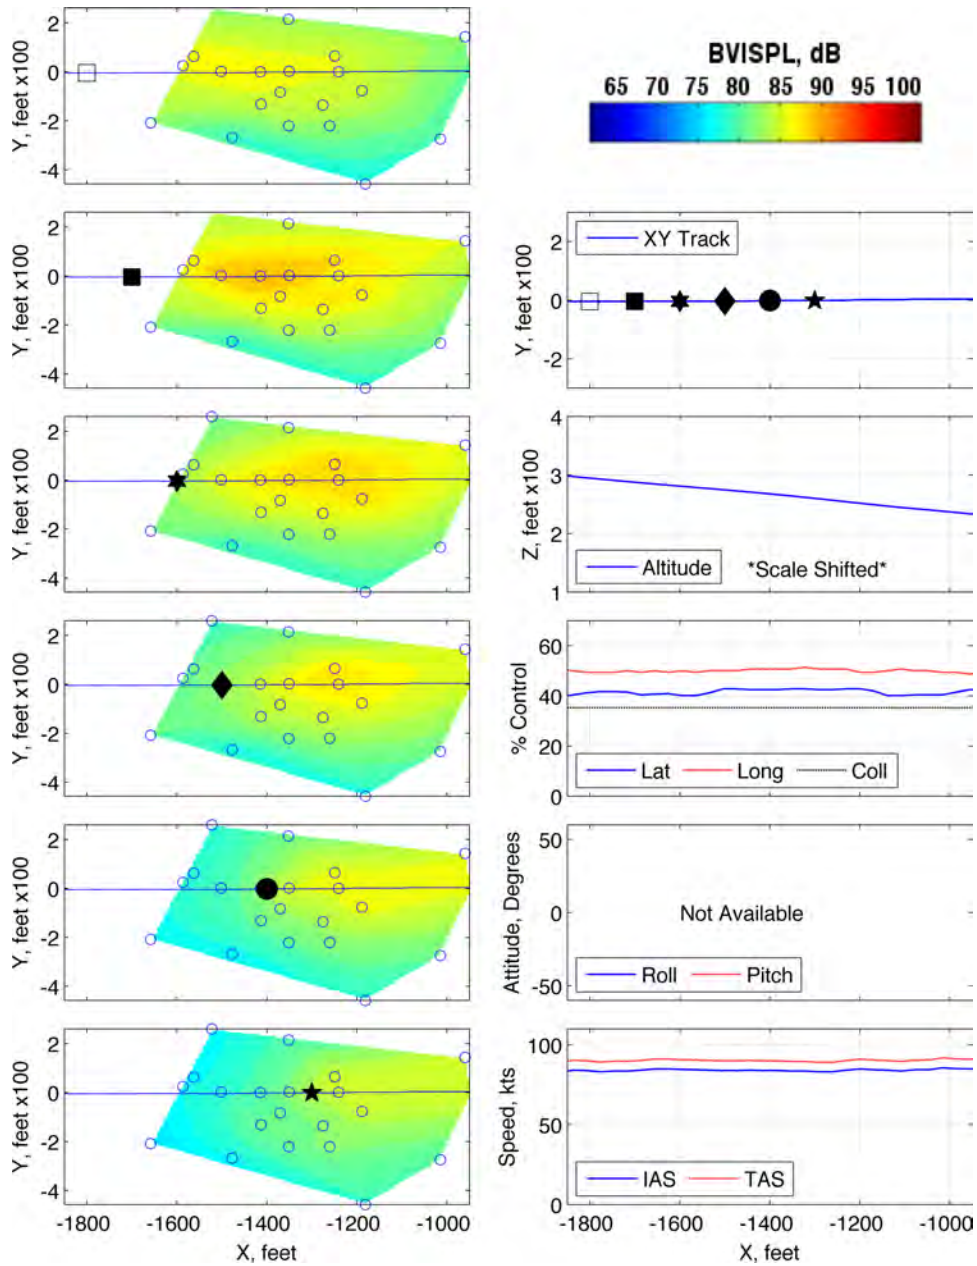


Figure 118: Maneuver condition A26, 90 KIAS,  $-4.5^\circ$  run number 280401



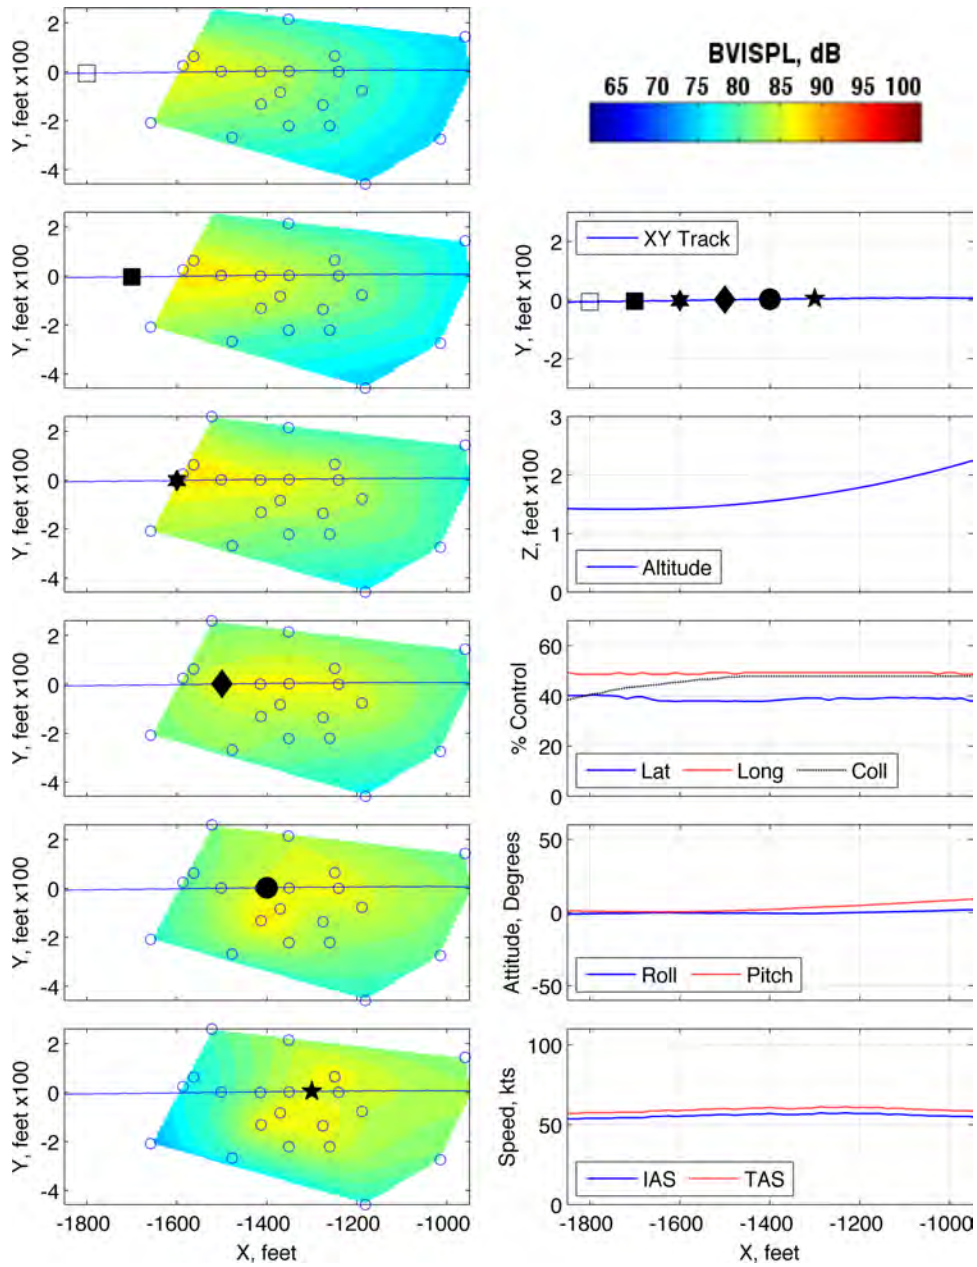


Figure 119: Maneuver condition C1, 60 KIAS, slow collective pull-up, run number 282435

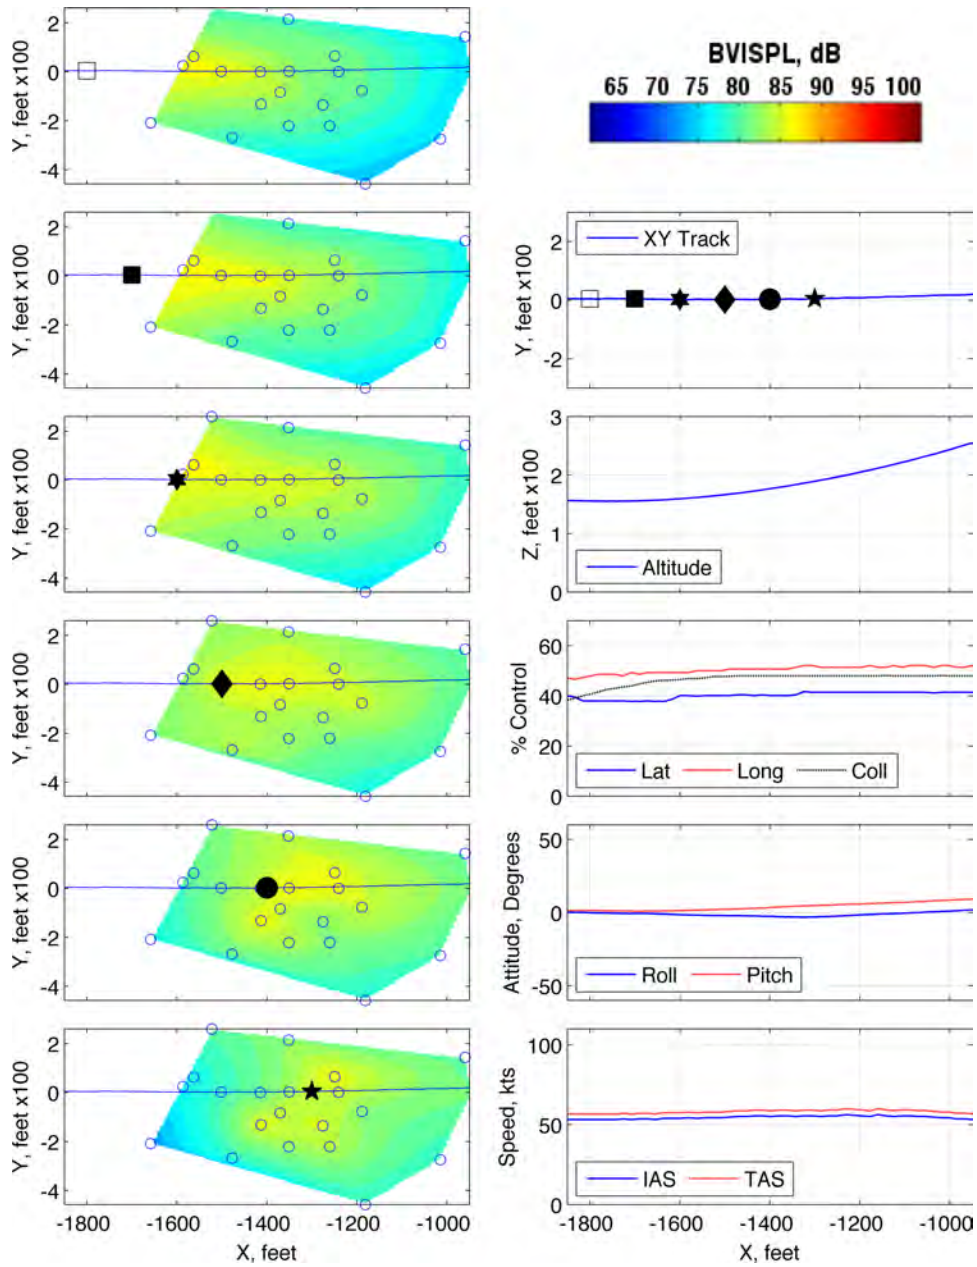


Figure 120: Maneuver condition C1, 60 KIAS, slow collective pull-up, run number 282436

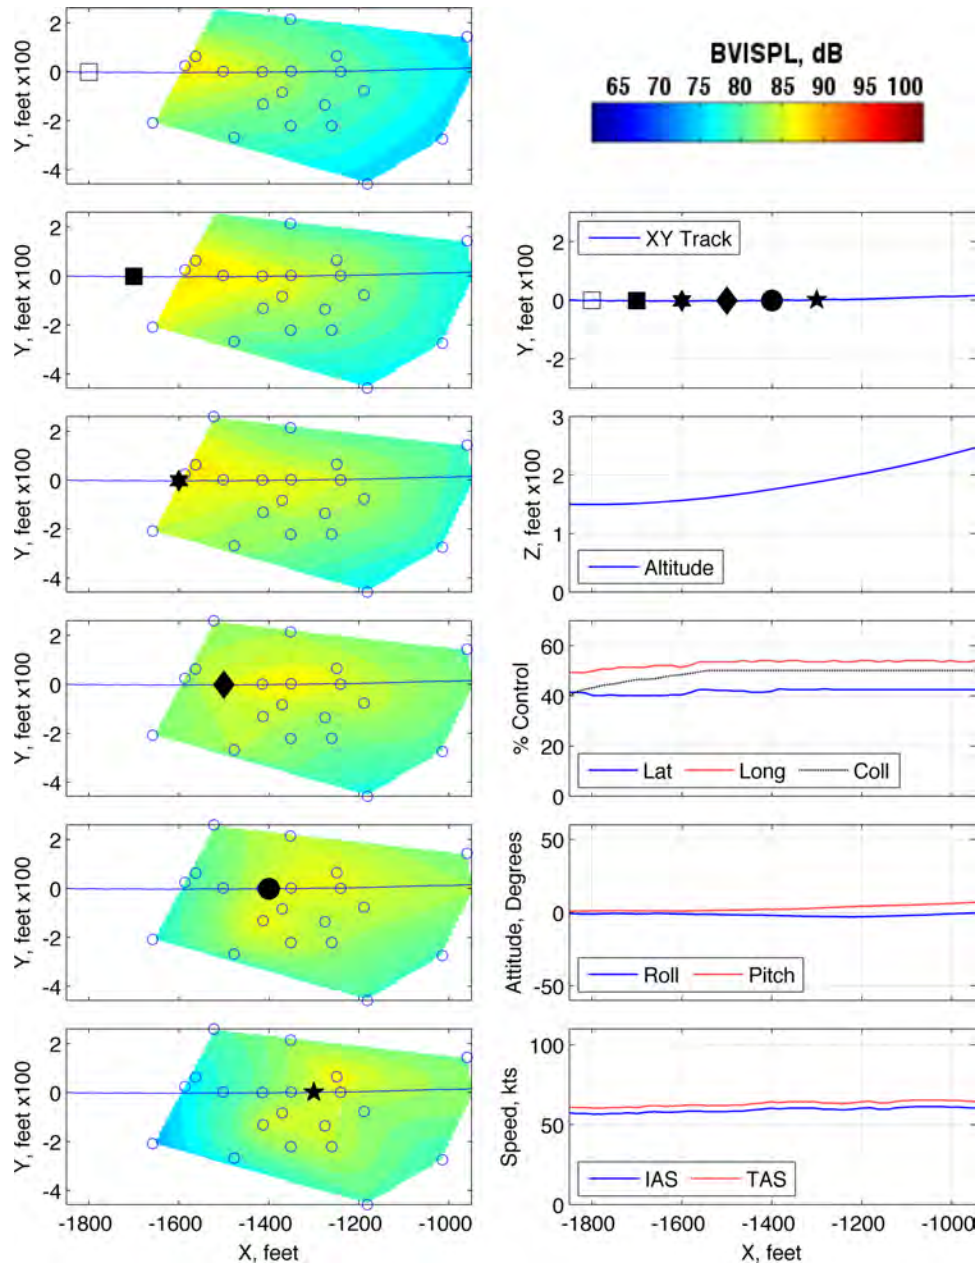


Figure 121: Maneuver condition C3, 60 KIAS, fast collective pull-up, run number 282437

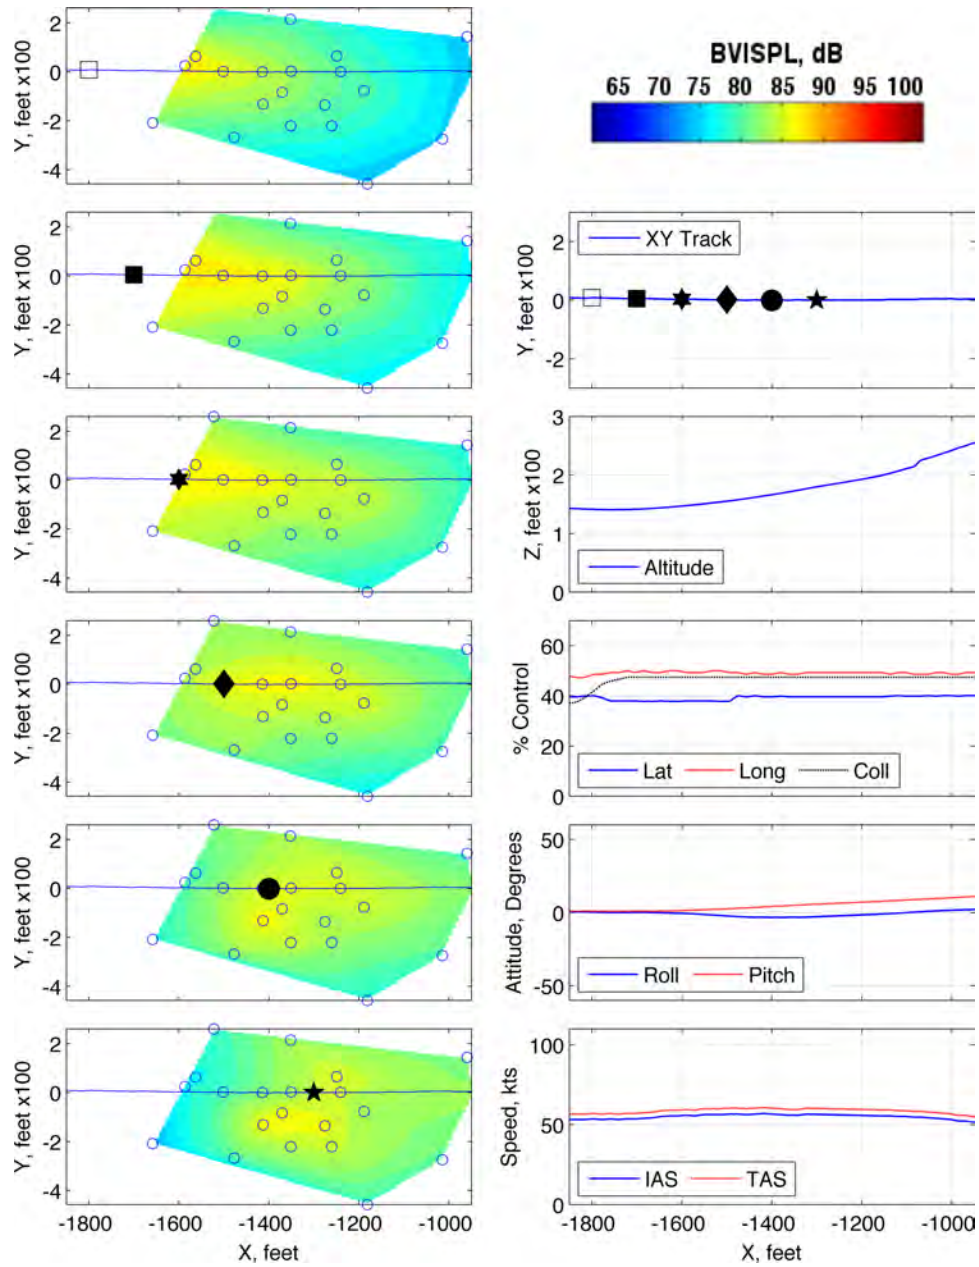


Figure 122: Maneuver condition C3, 60 KIAS, fast collective pull-up, run number 282438

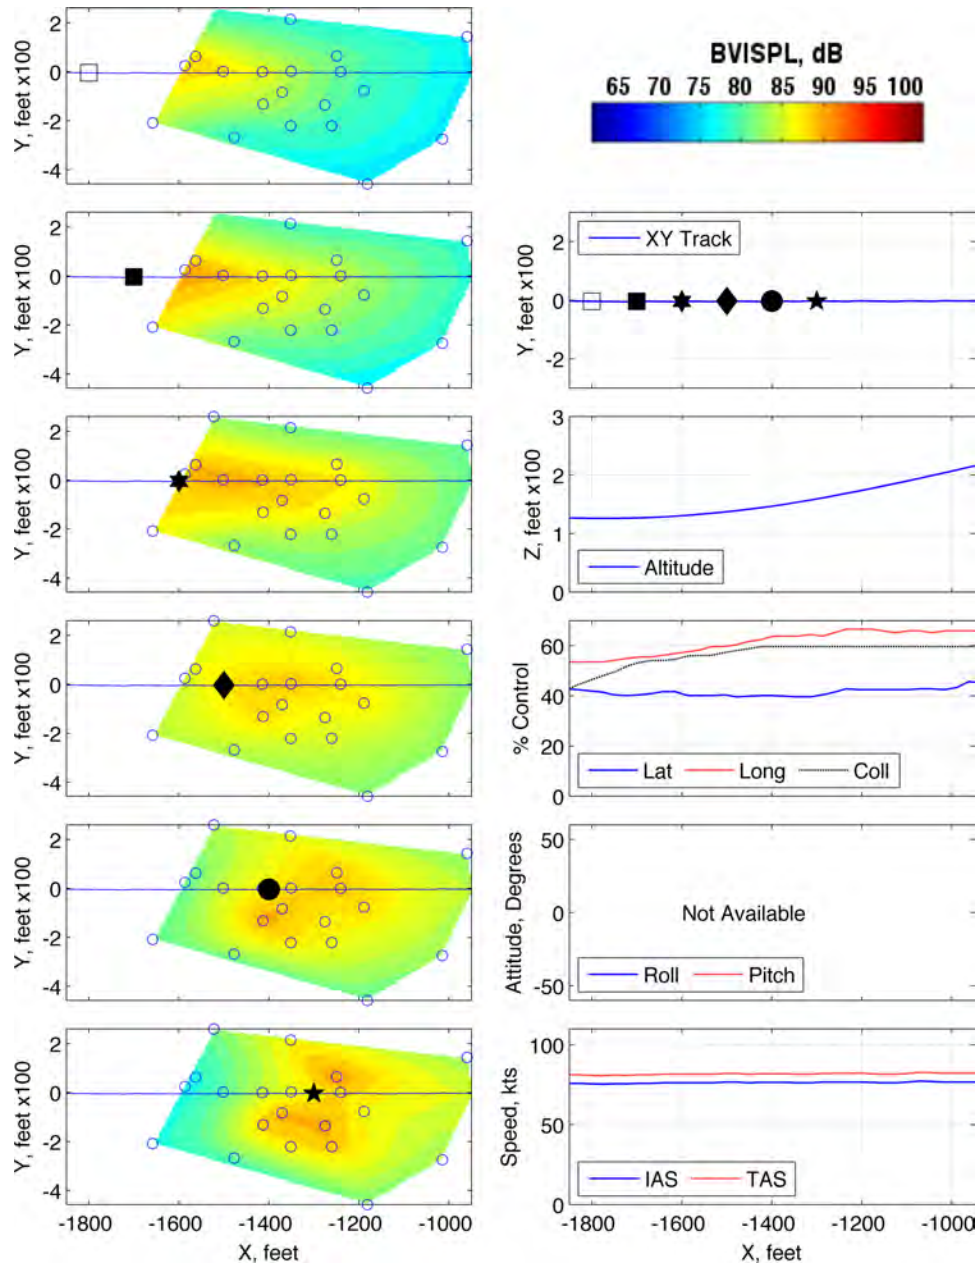


Figure 123: Maneuver condition C4, 80 KIAS, slow collective pull-up, run number 280390

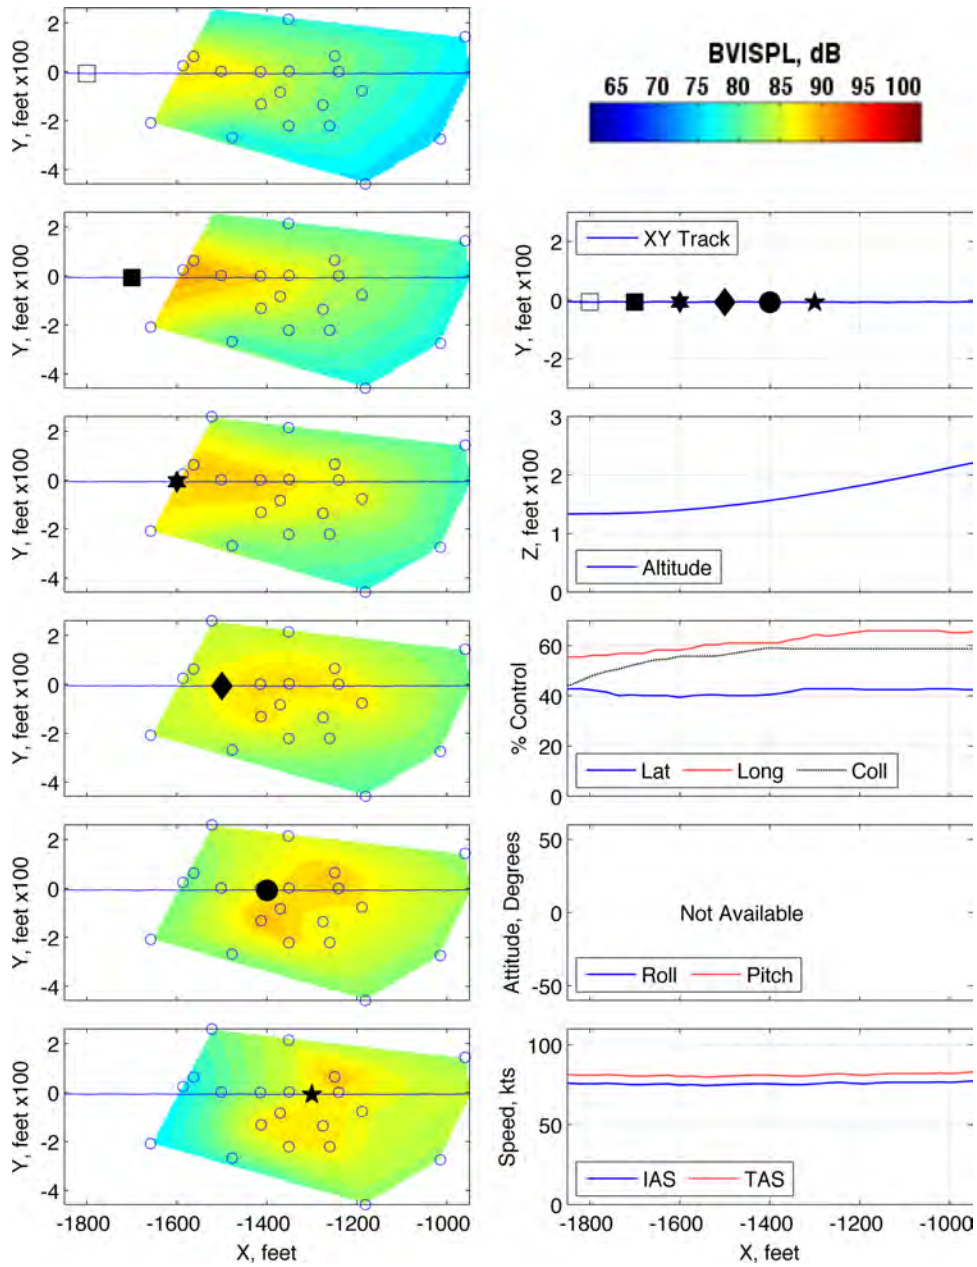


Figure 124: Maneuver condition C4, 80 KIAS, slow collective pull-up, run number 280391

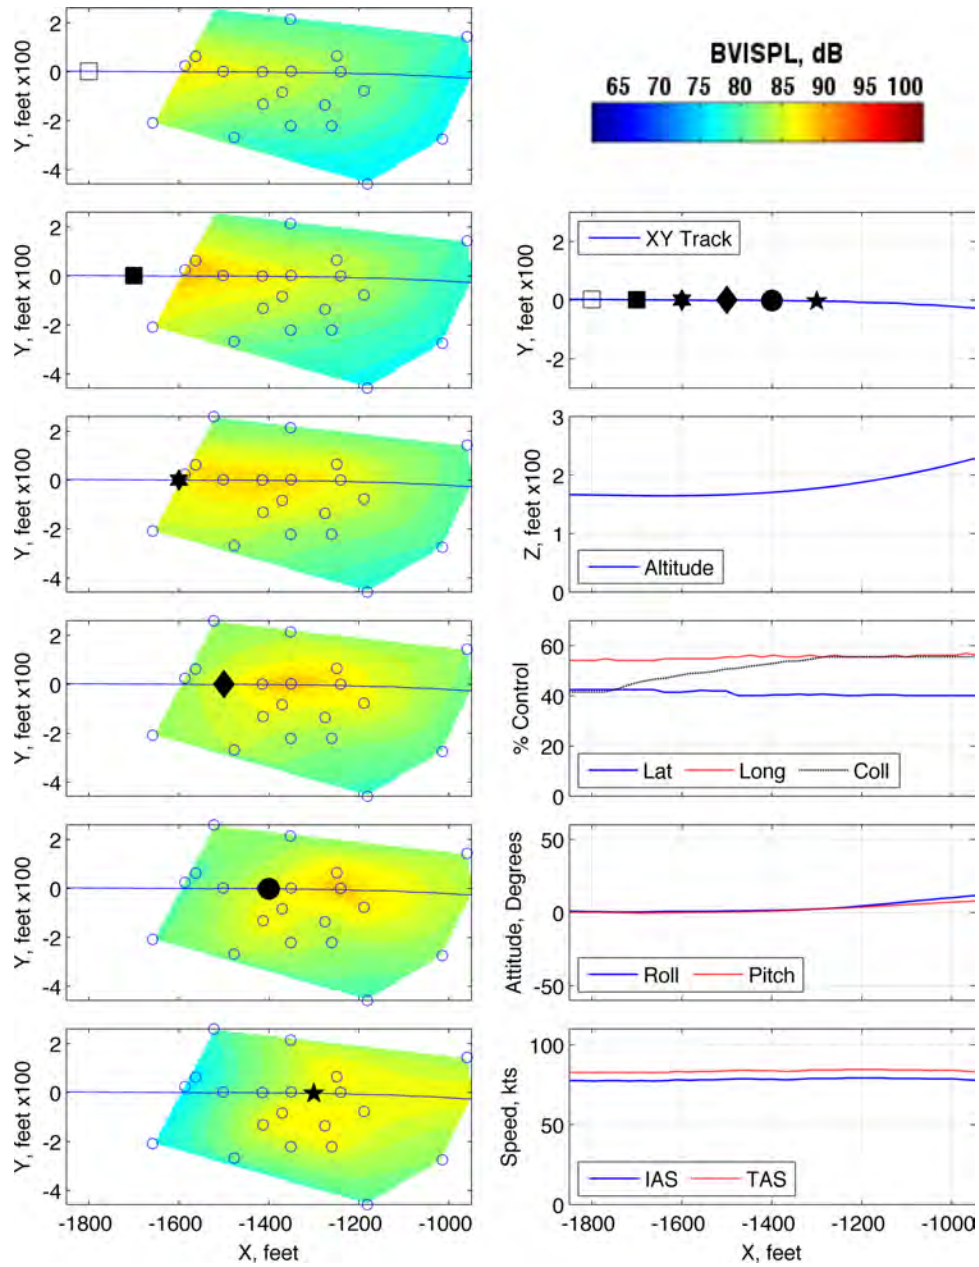


Figure 125: Maneuver condition C4, 80 KIAS, slow collective pull-up, run number 282434

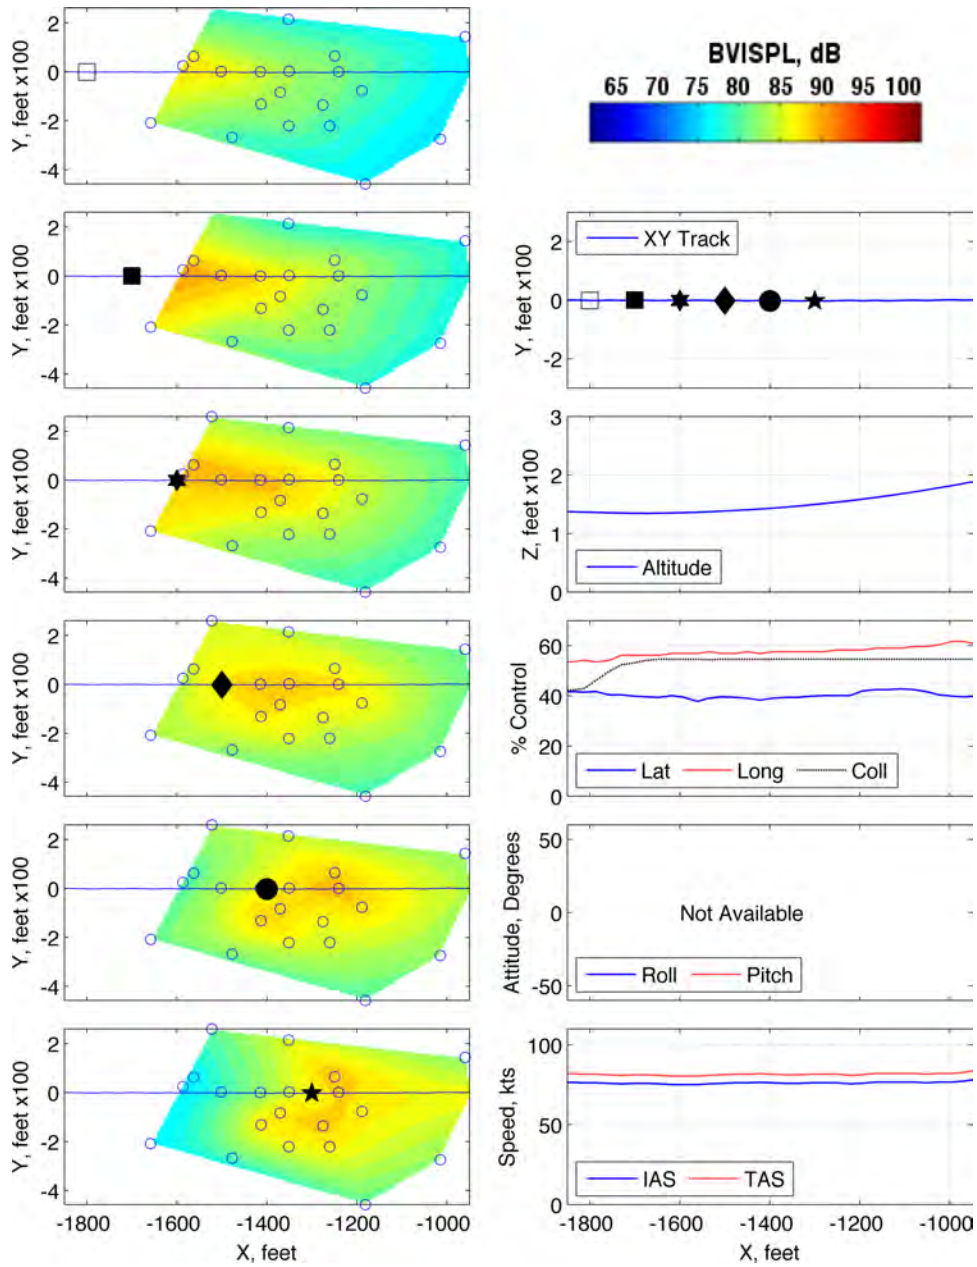


Figure 126: Maneuver condition C6, 80 KIAS, fast collective pull-up, run number 280392



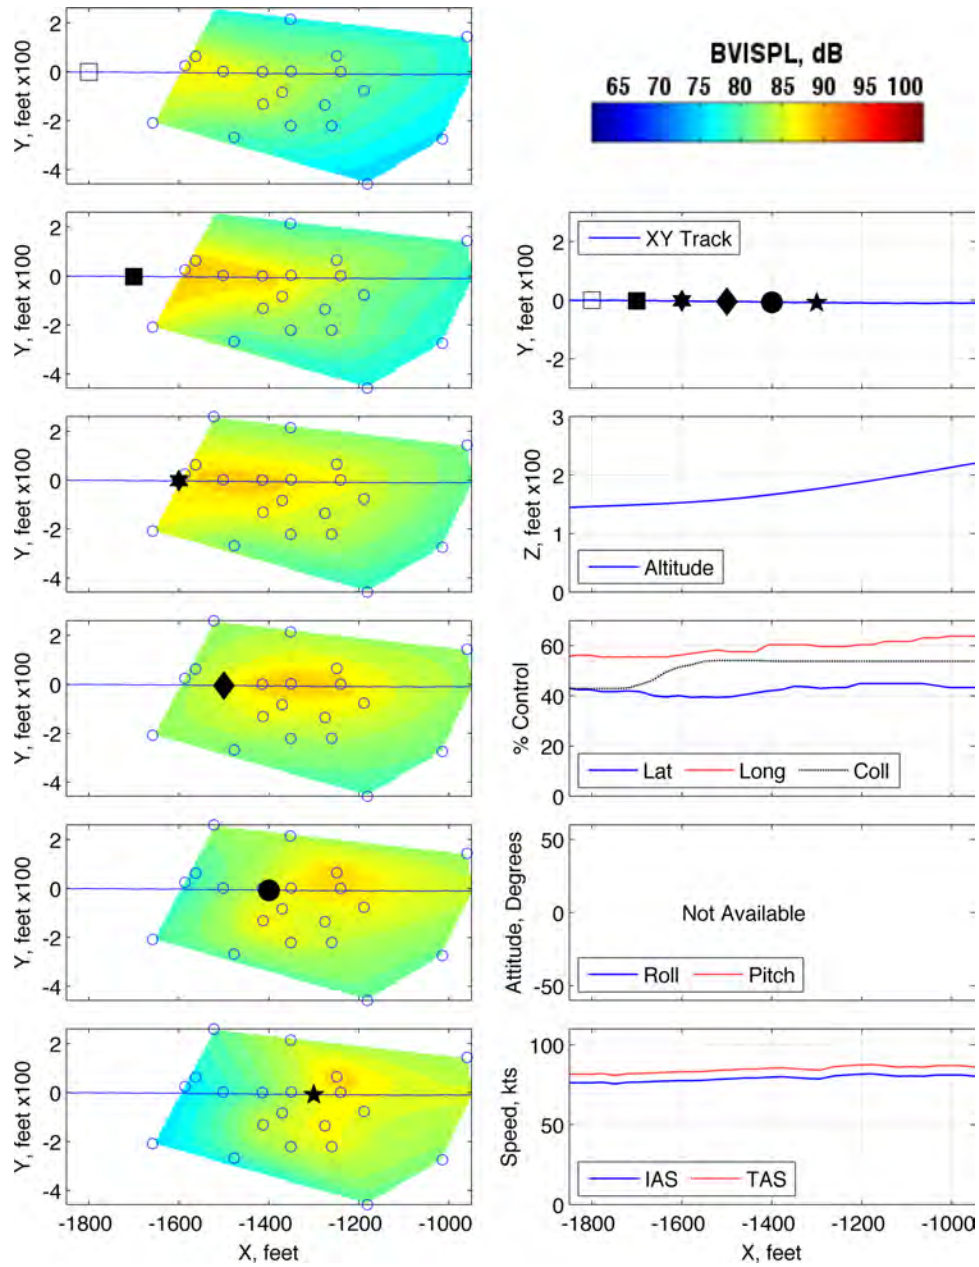


Figure 127: Maneuver condition C6, 80 KIAS, fast collective pull-up, run number 280393

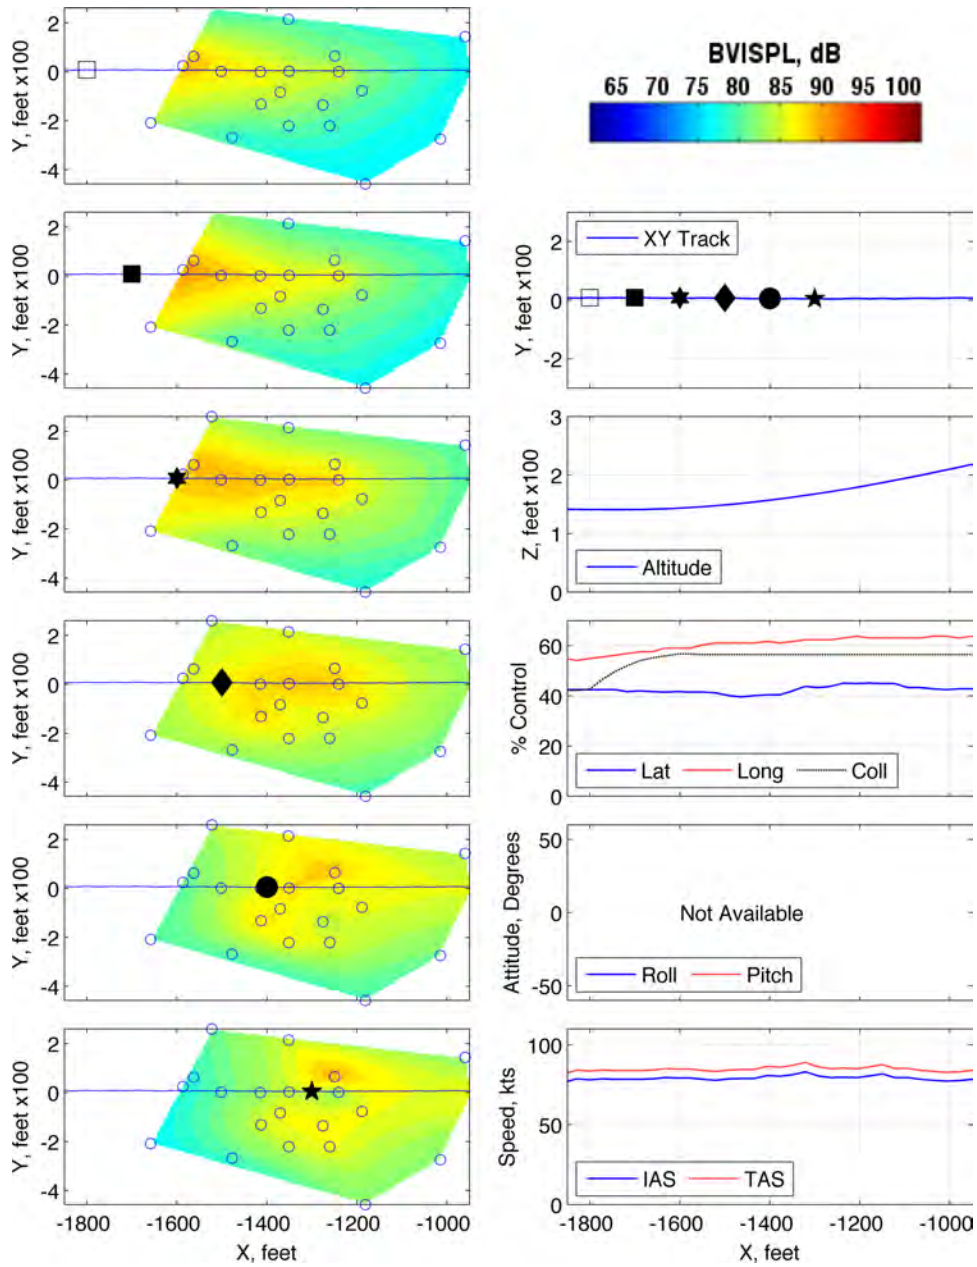


Figure 128: Maneuver condition C6, 80 KIAS, fast collective pull-up, run number 280394

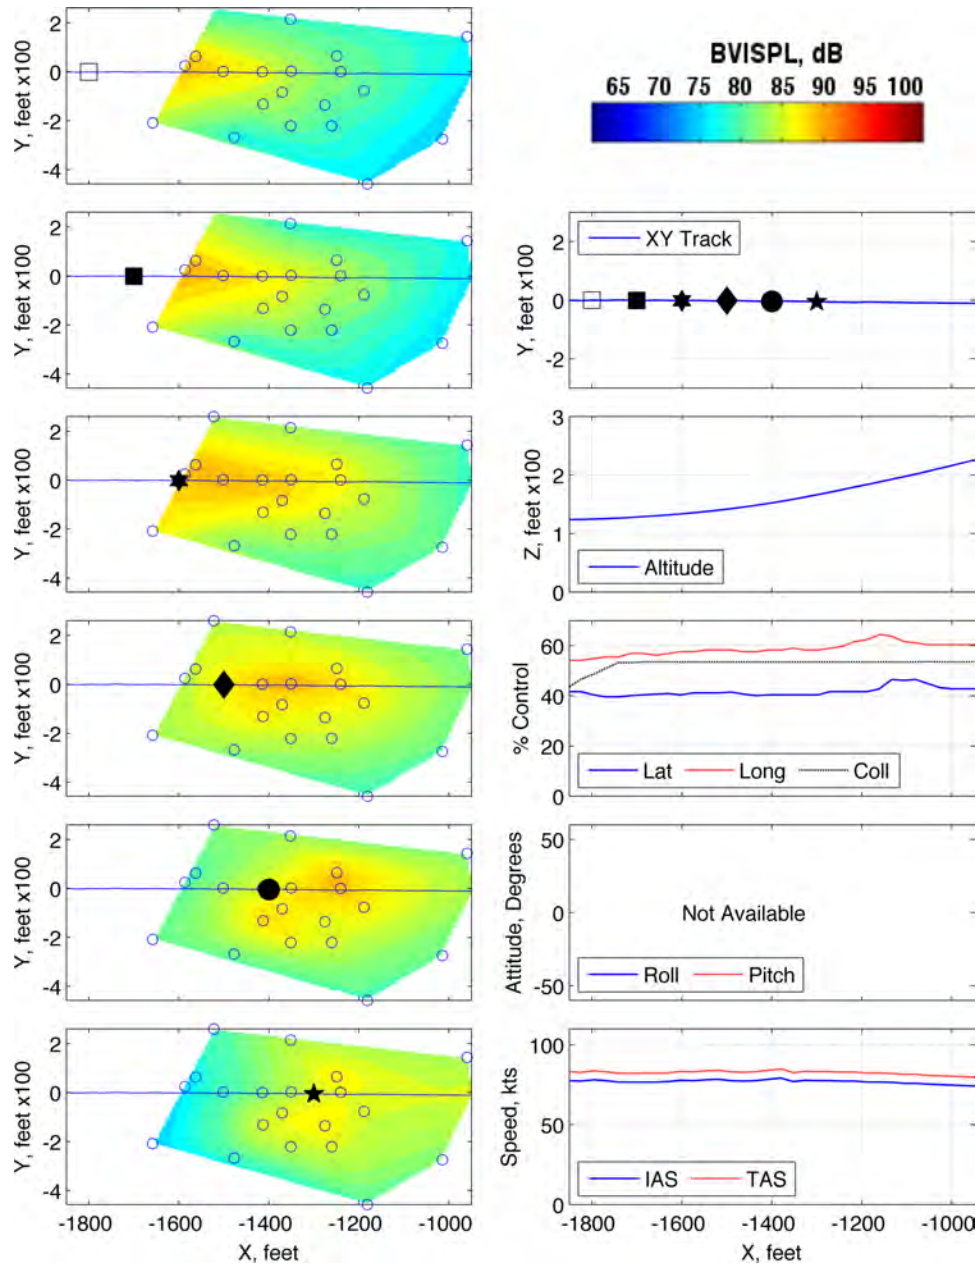


Figure 129: Maneuver condition C6, 80 KIAS, fast collective pull-up, run number 280395

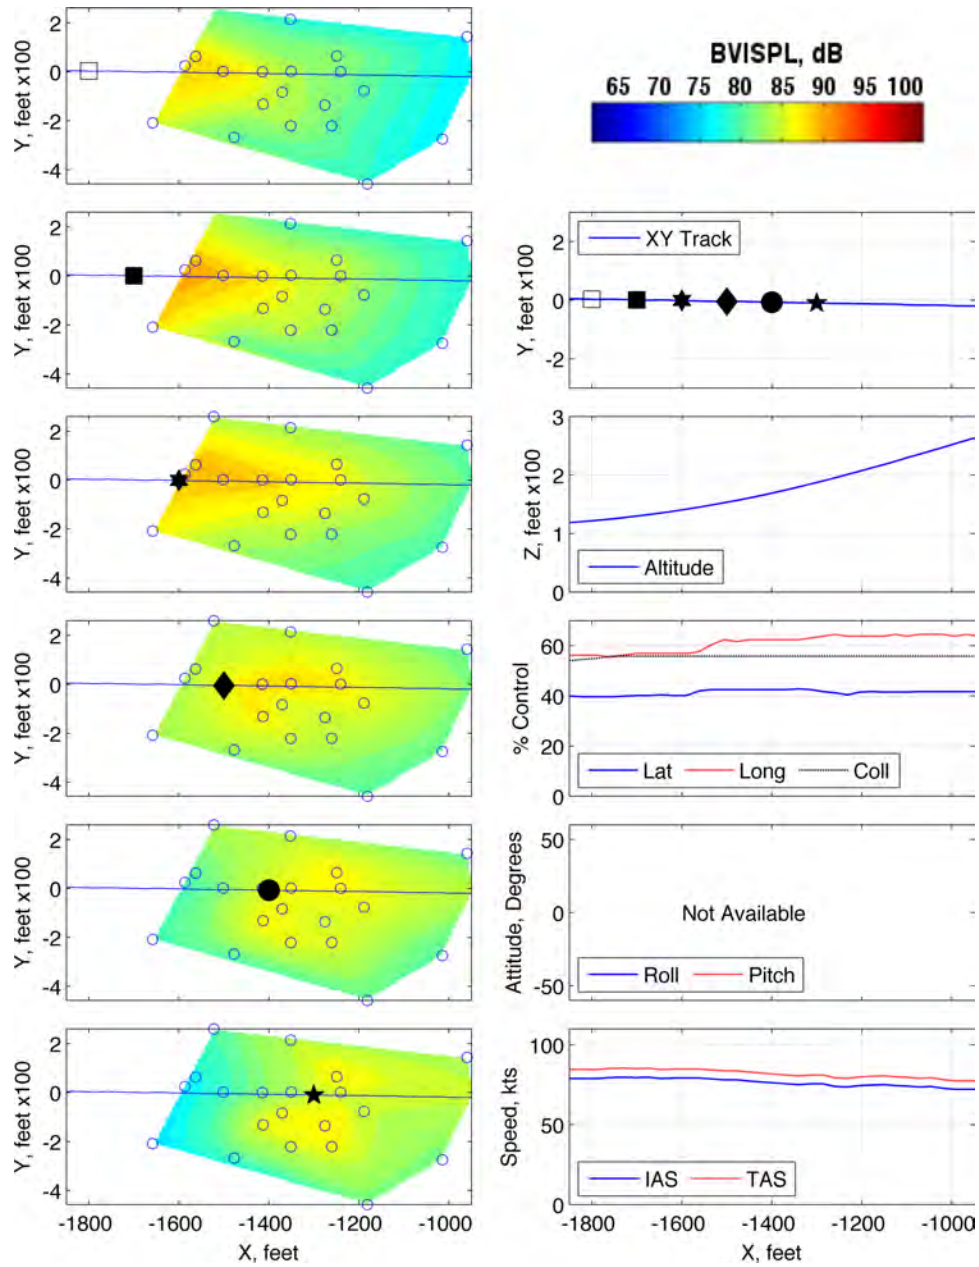


Figure 130: Maneuver condition C6, 80 KIAS, fast collective pull-up, run number 280396

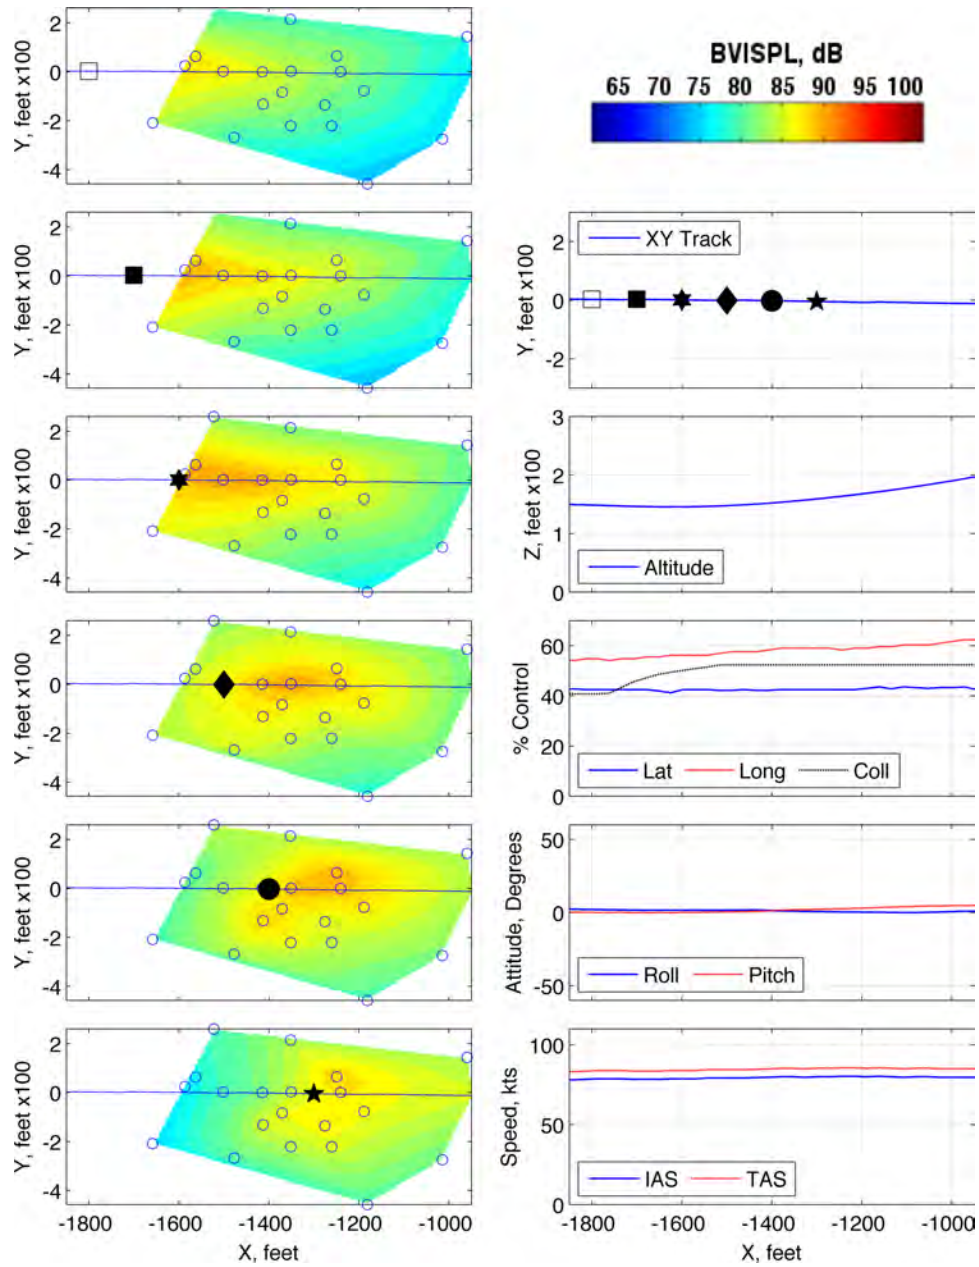


Figure 131: Maneuver condition C6, 80 KIAS, fast collective pull-up, run number 282433

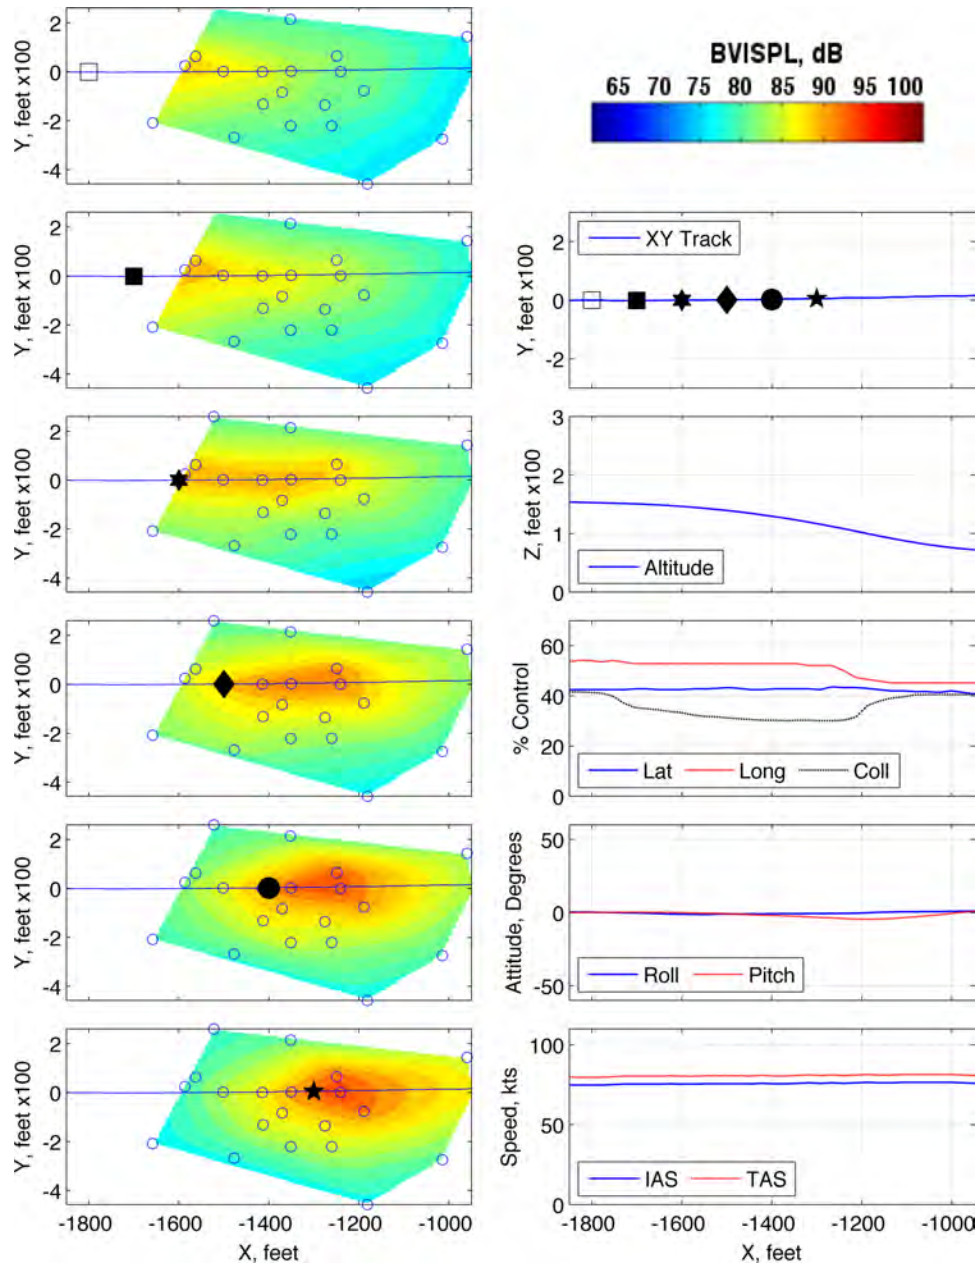


Figure 132: Maneuver condition C10, 80 KIAS, slow collective push-over, run number 282426

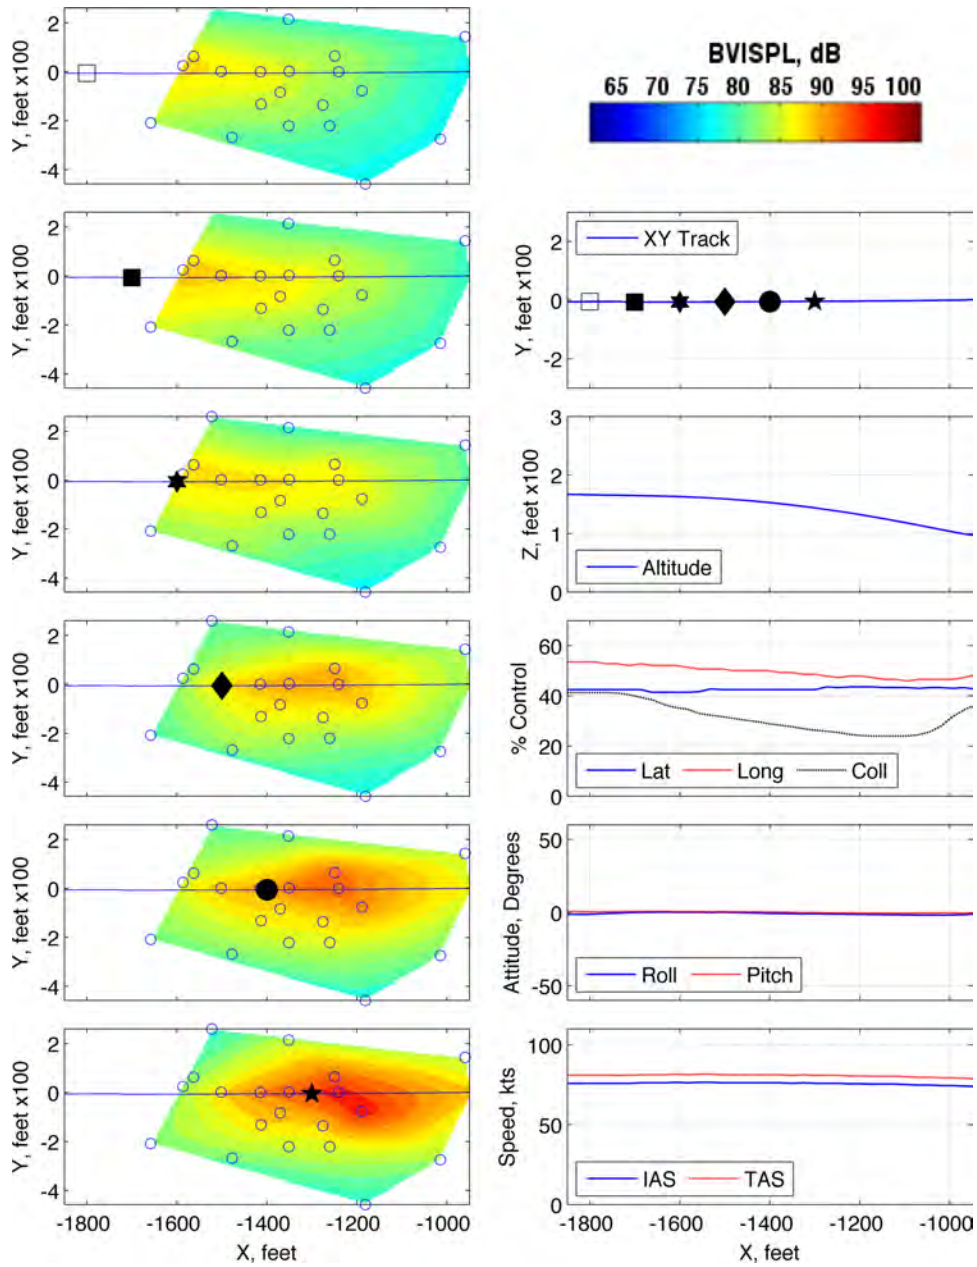


Figure 133: Maneuver condition C10, 80 KIAS, slow collective push-over, run number 282427

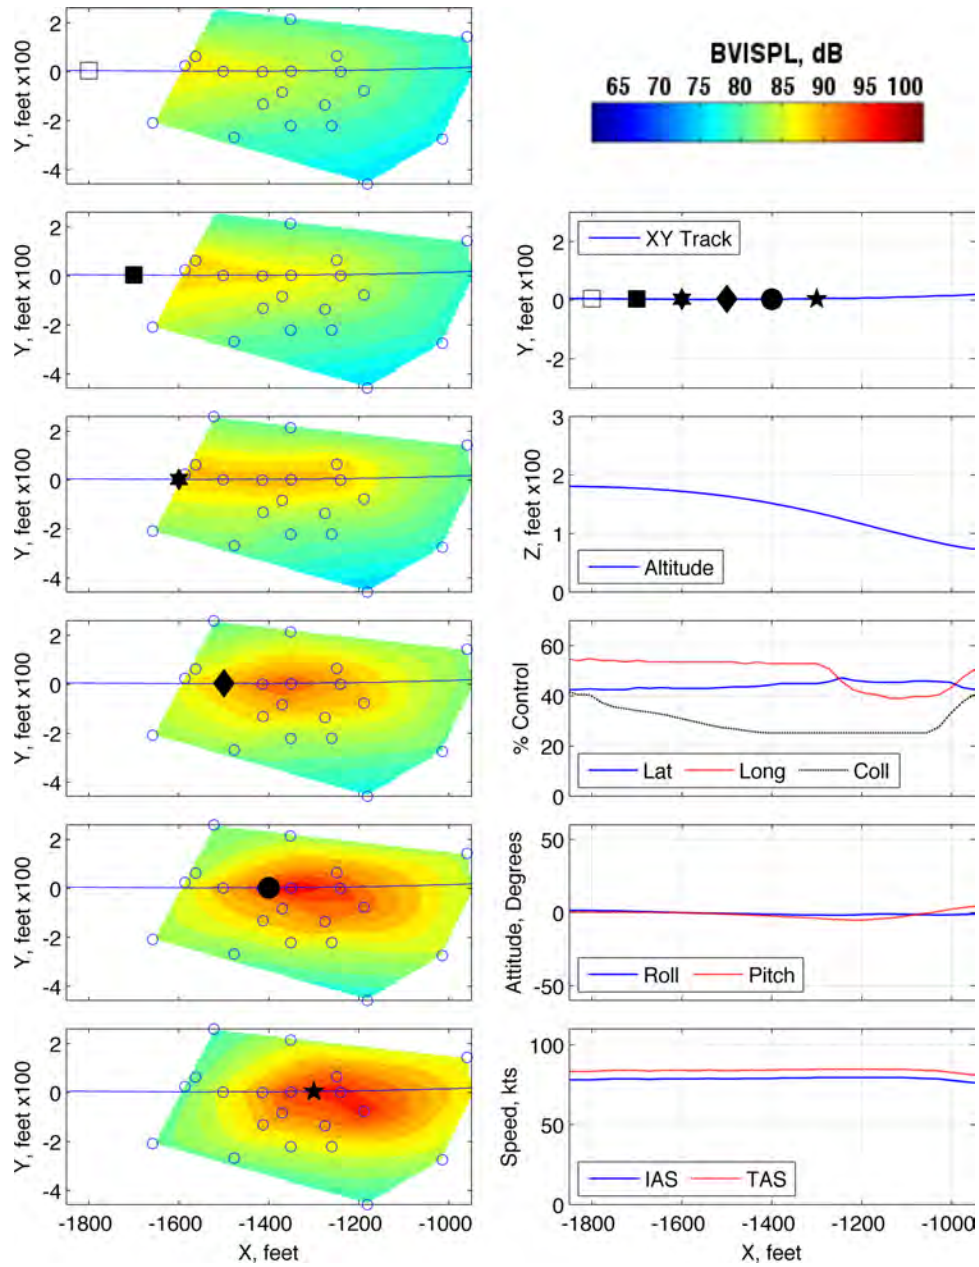


Figure 134: Maneuver condition C10, 80 KIAS, slow collective push-over, run number 282428



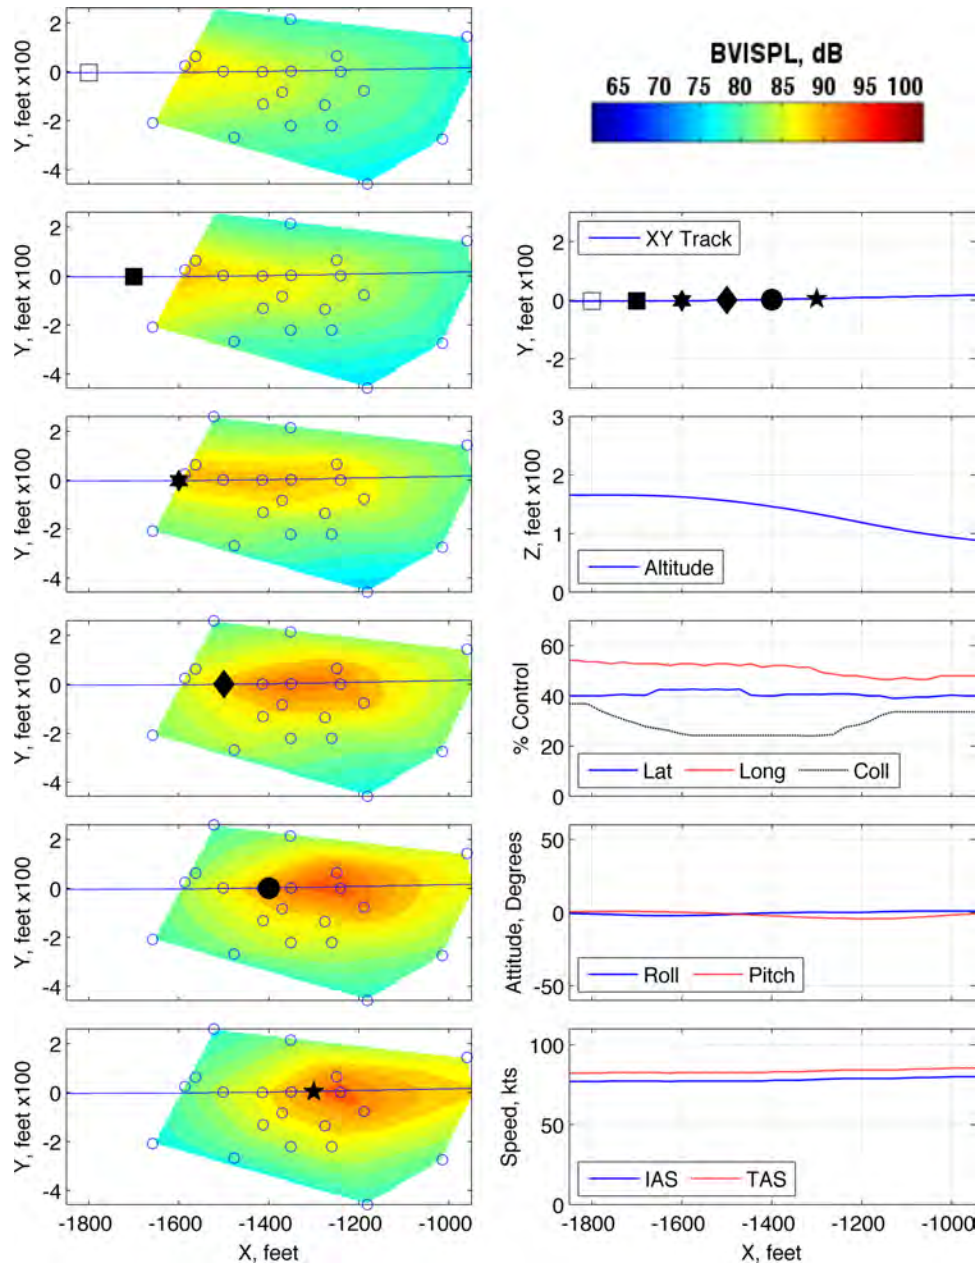


Figure 135: Maneuver condition C10, 80 KIAS, slow collective push-over, run number 287535

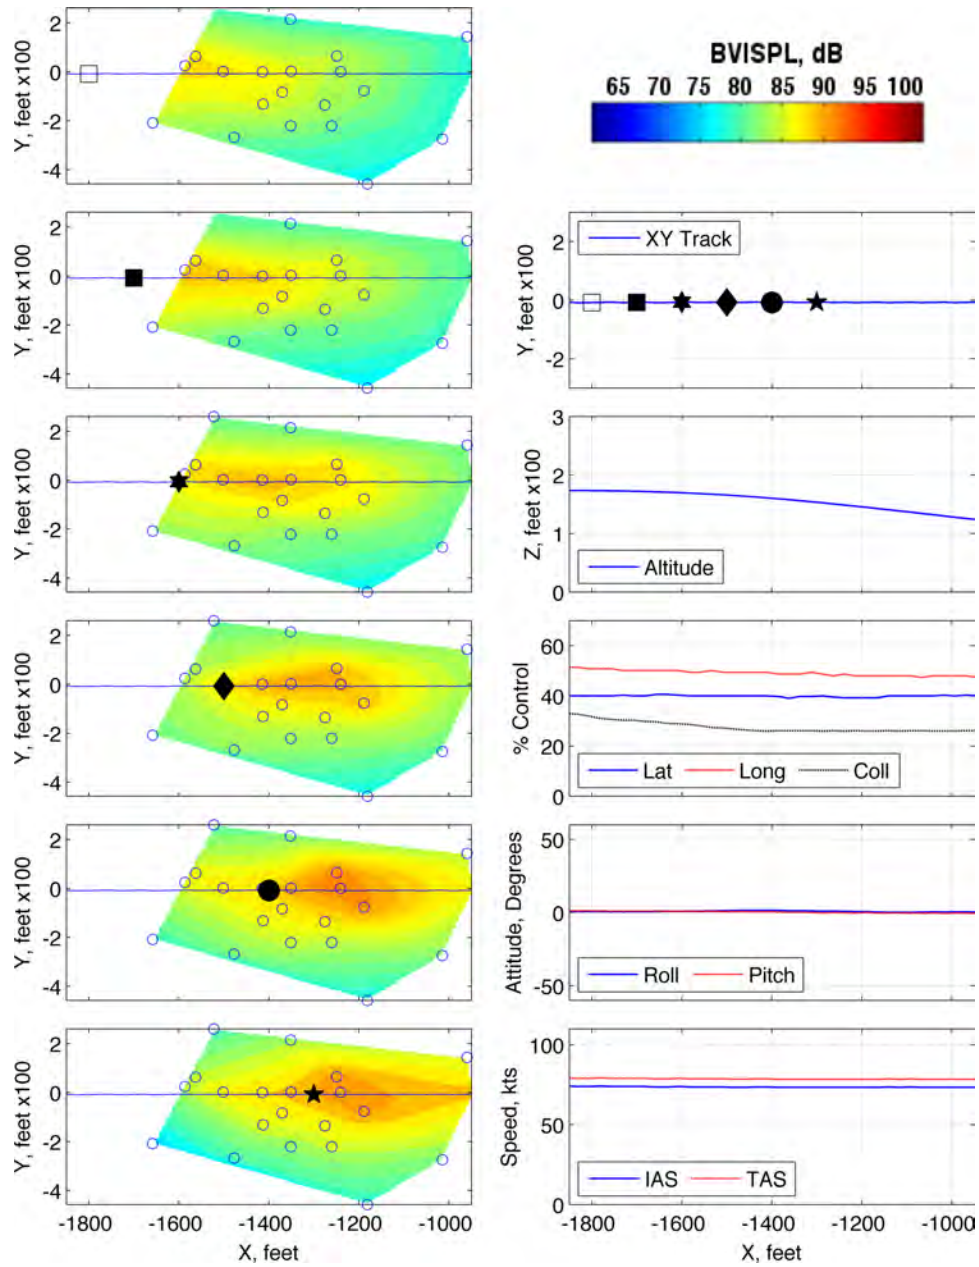


Figure 136: Maneuver condition C10, 80 KIAS, slow collective push-over, run number 287536

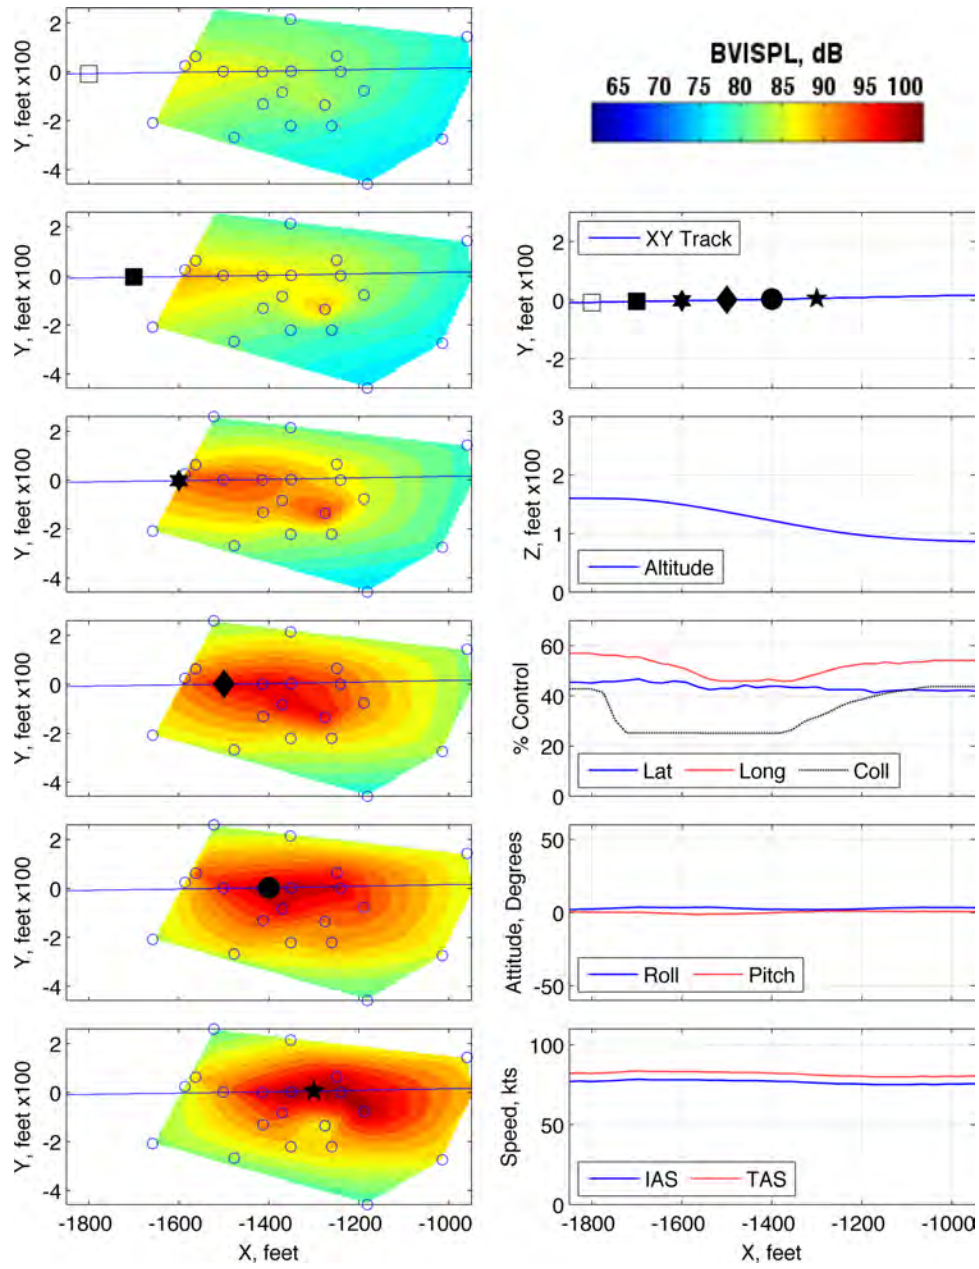


Figure 137: Maneuver condition C12, 80 KIAS, fast collective push-over, run number 282429

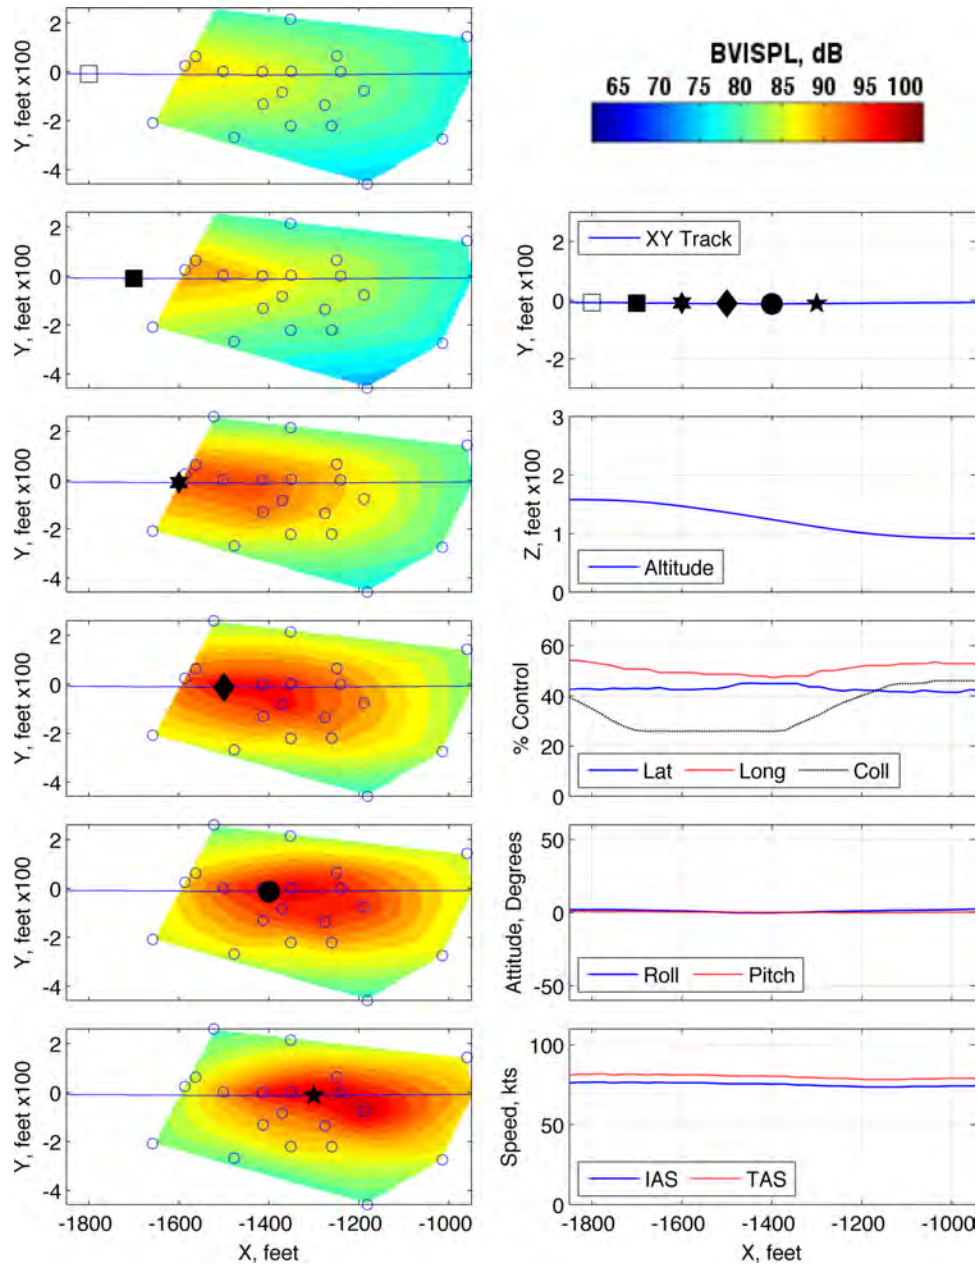


Figure 138: Maneuver condition C12, 80 KIAS, slow collective push-over, run number 282430

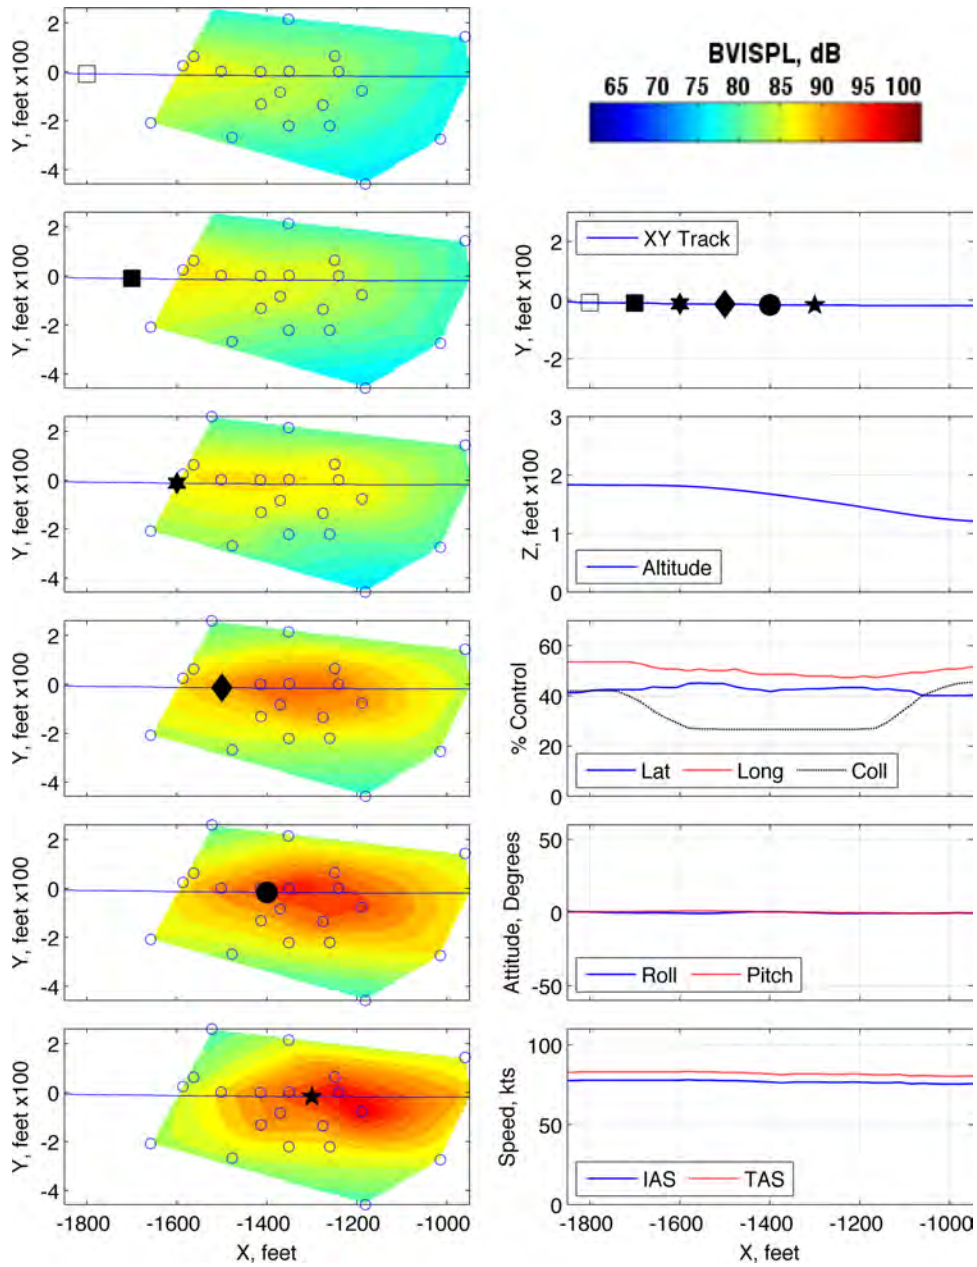


Figure 139: Maneuver condition C12, 80 KIAS, slow collective push-over, run number 282431

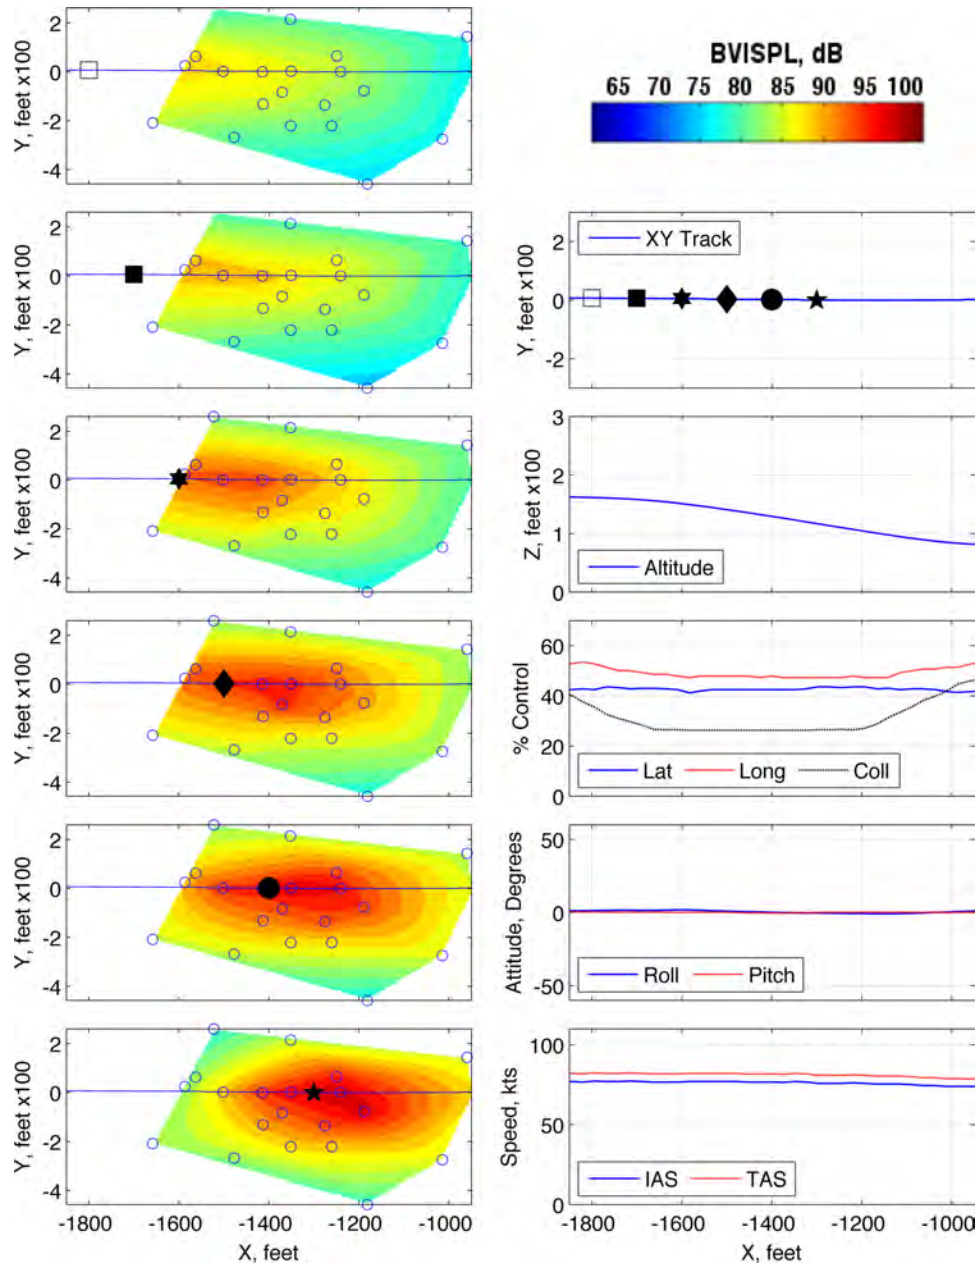


Figure 140: Maneuver condition C12, 80 KIAS, slow collective push-over, run number 282432

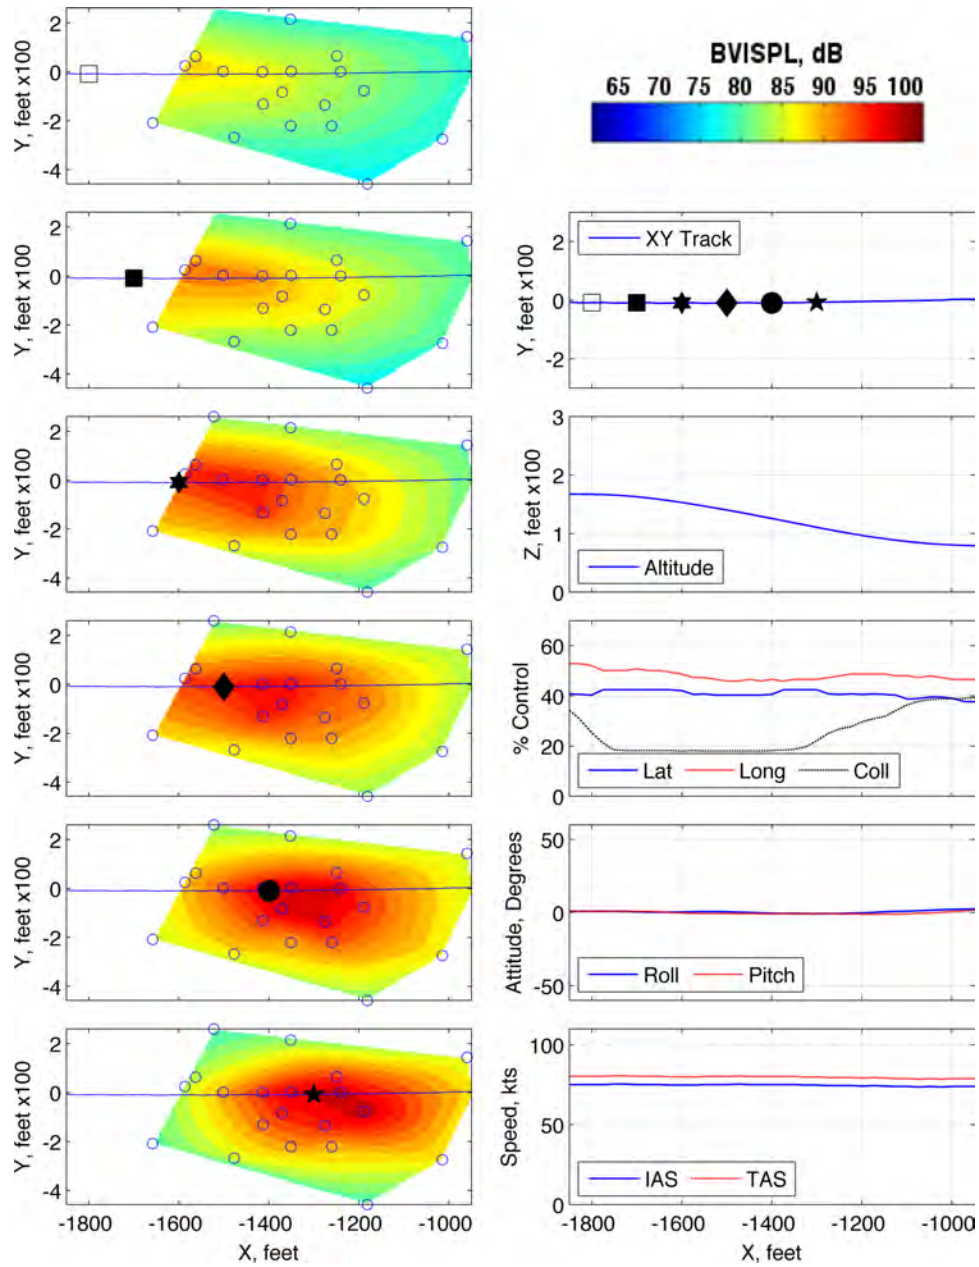


Figure 141: Maneuver condition C12, 80 KIAS, slow collective push-over, run number 287537

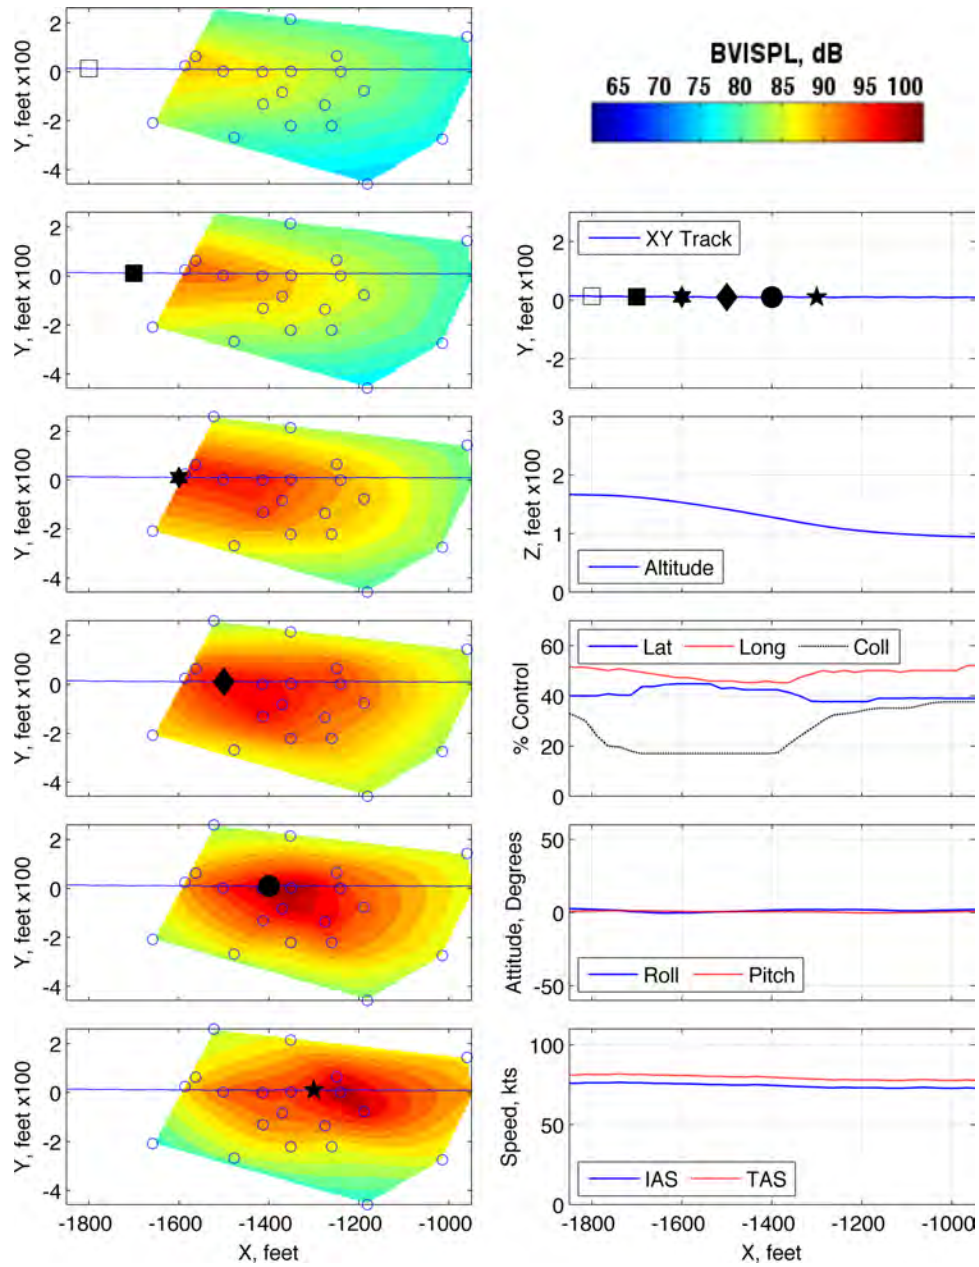


Figure 142: Maneuver condition C12, 80 KIAS, slow collective push-over, run number 287538



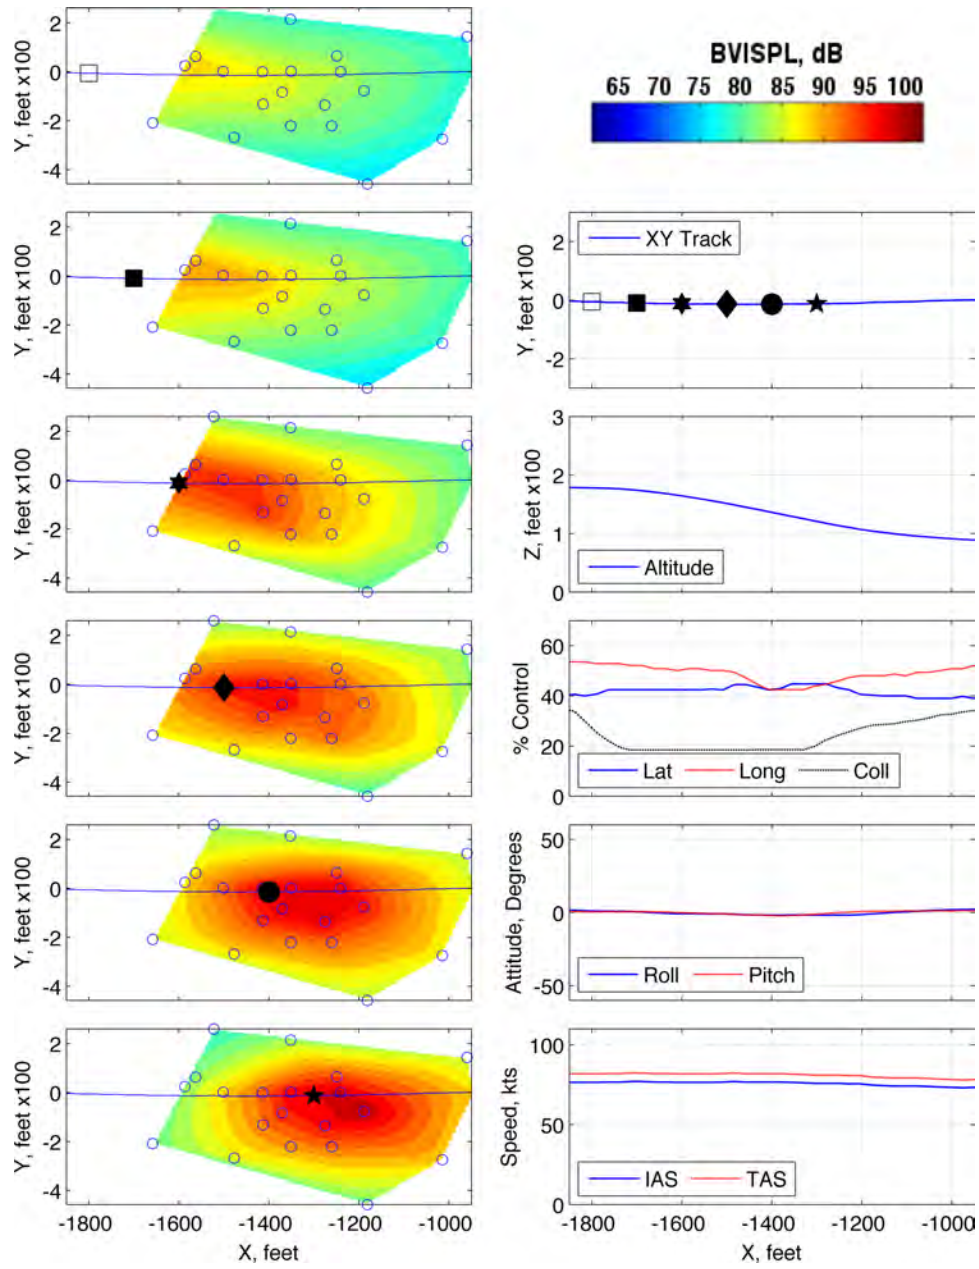


Figure 143: Maneuver condition C12, 80 KIAS, slow collective push-over, run number 287539

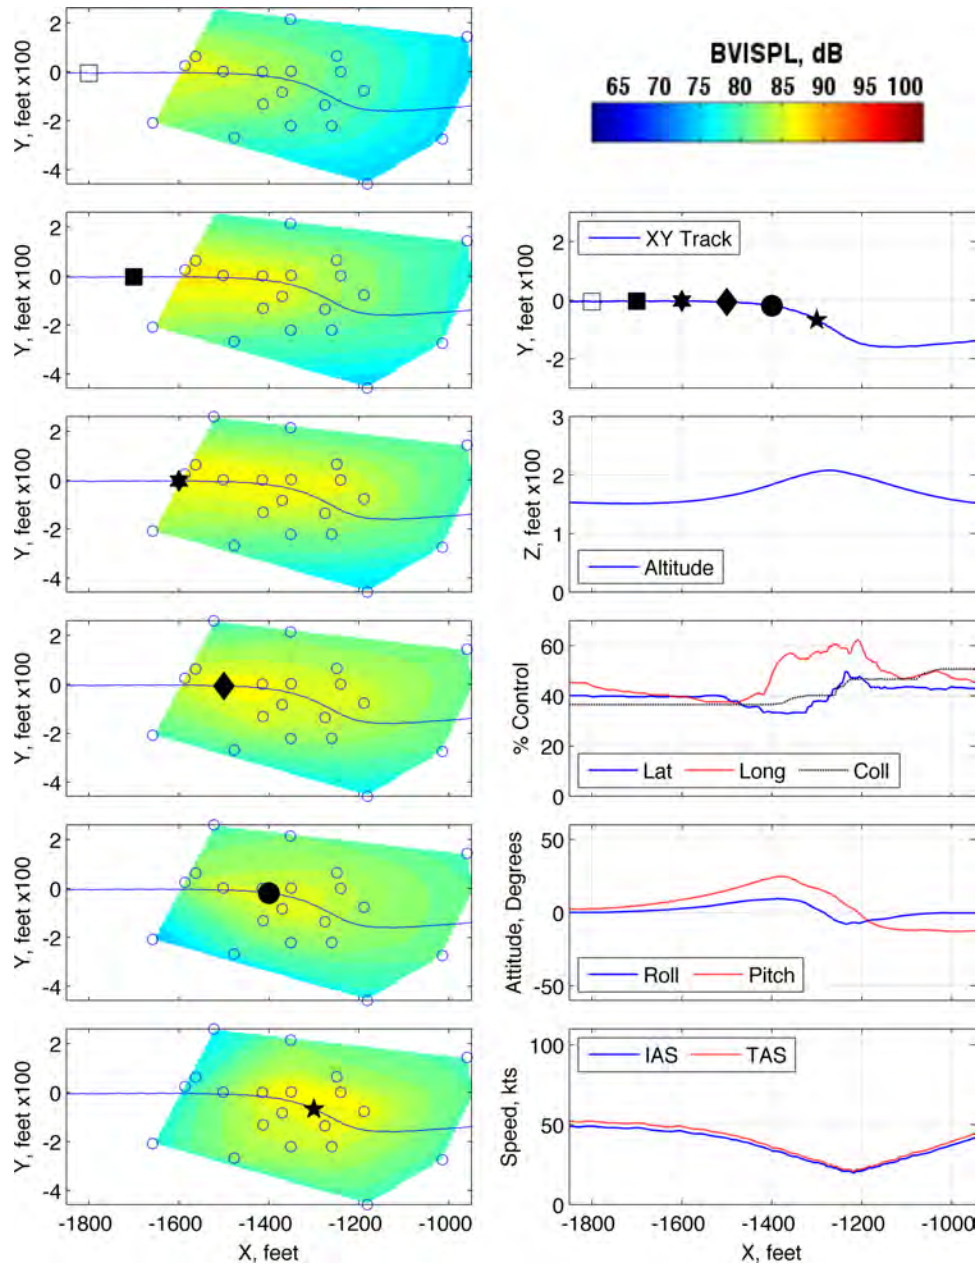


Figure 144: Maneuver condition D1, 60 KIAS, level, slow cyclic pitch up, run number 282439

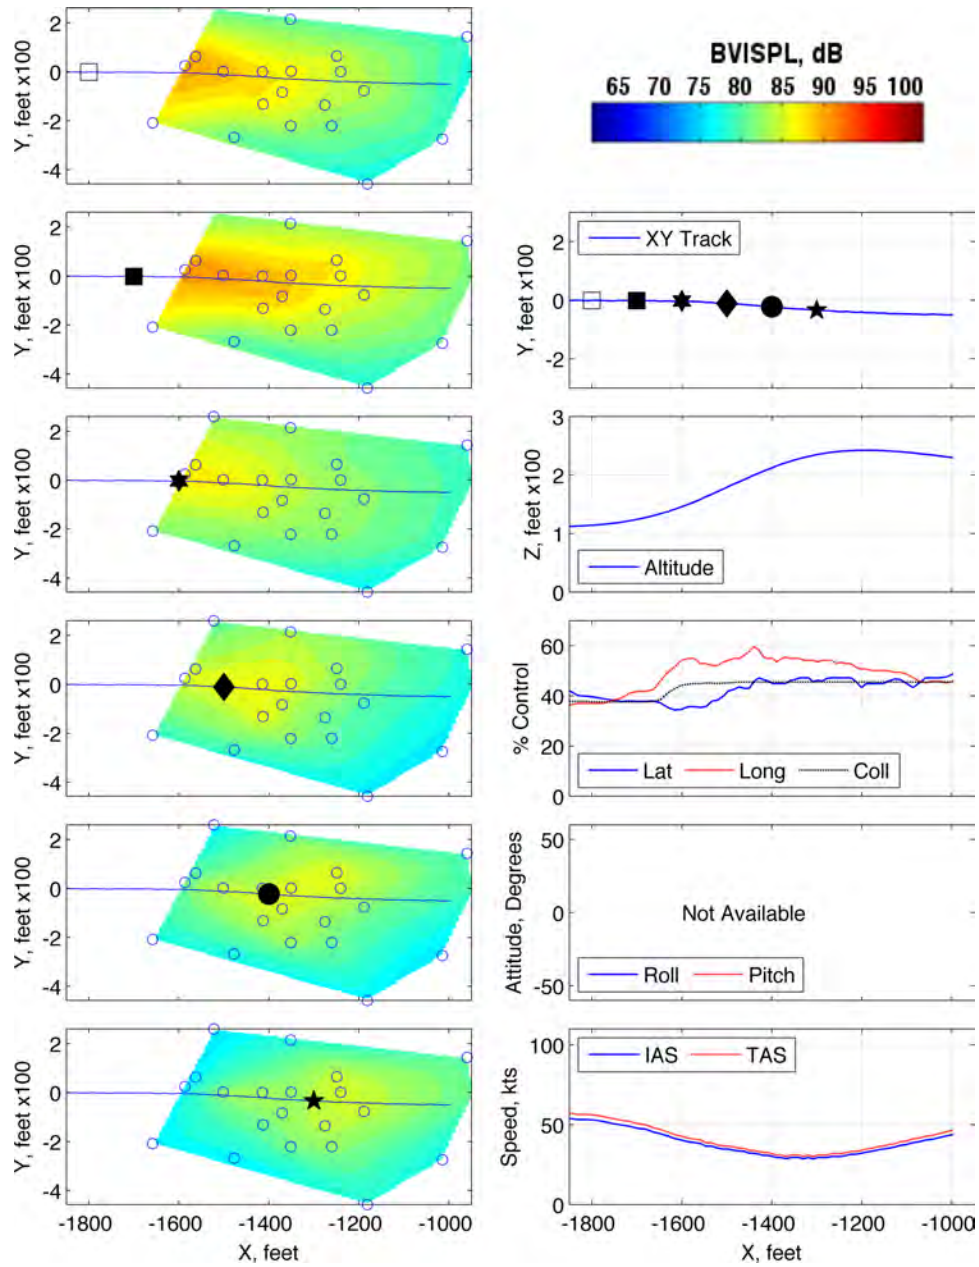


Figure 145: Maneuver condition D3, 60 KIAS, level, fast cyclic pitch up, run number 280363

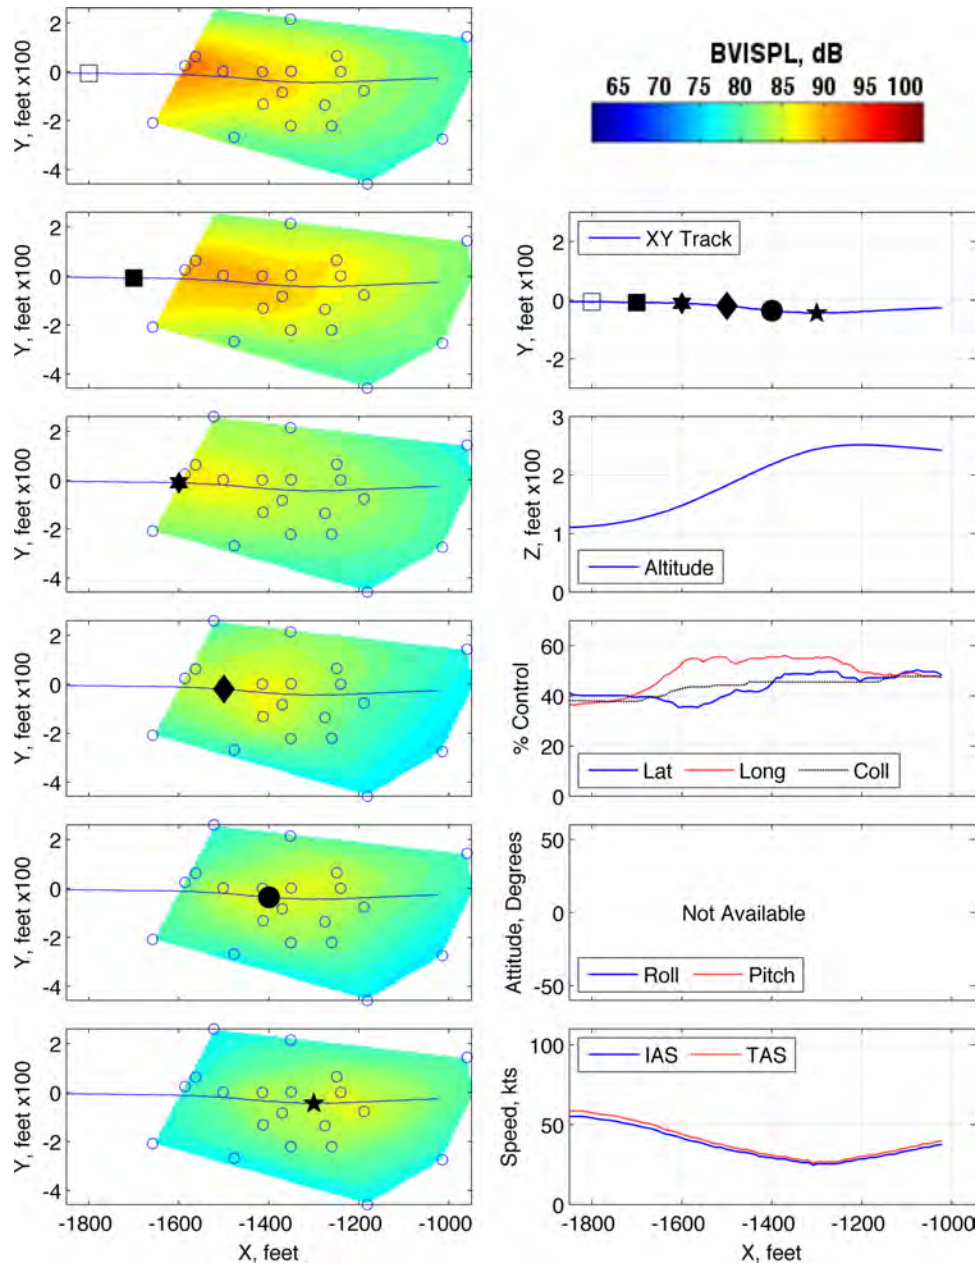


Figure 146: Maneuver condition D3, 60 KIAS, level, fast cyclic pitch up, run number 280364

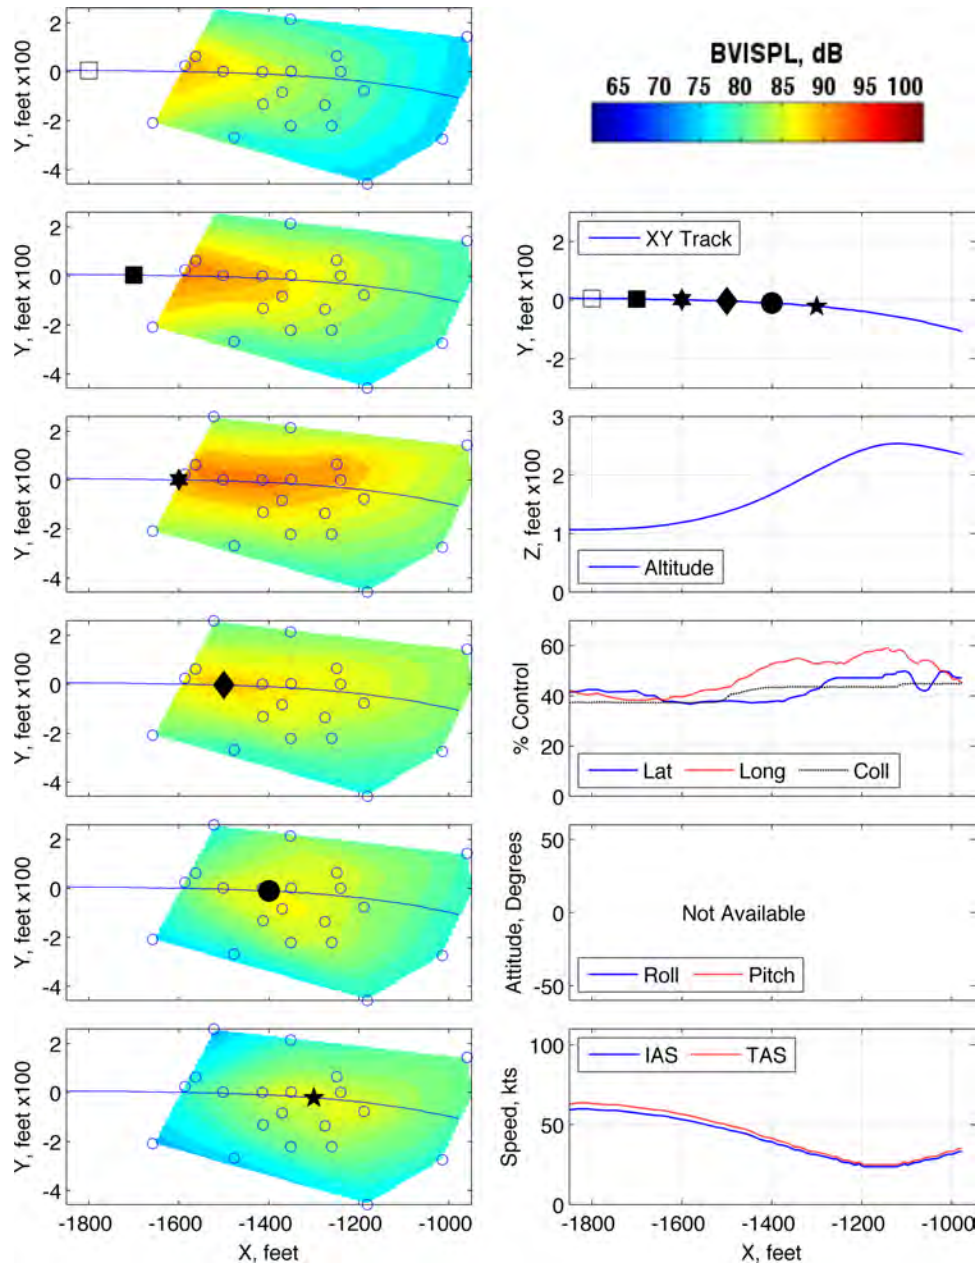


Figure 147: Maneuver condition D3, 60 KIAS, level, fast cyclic pitch up, run number 280365

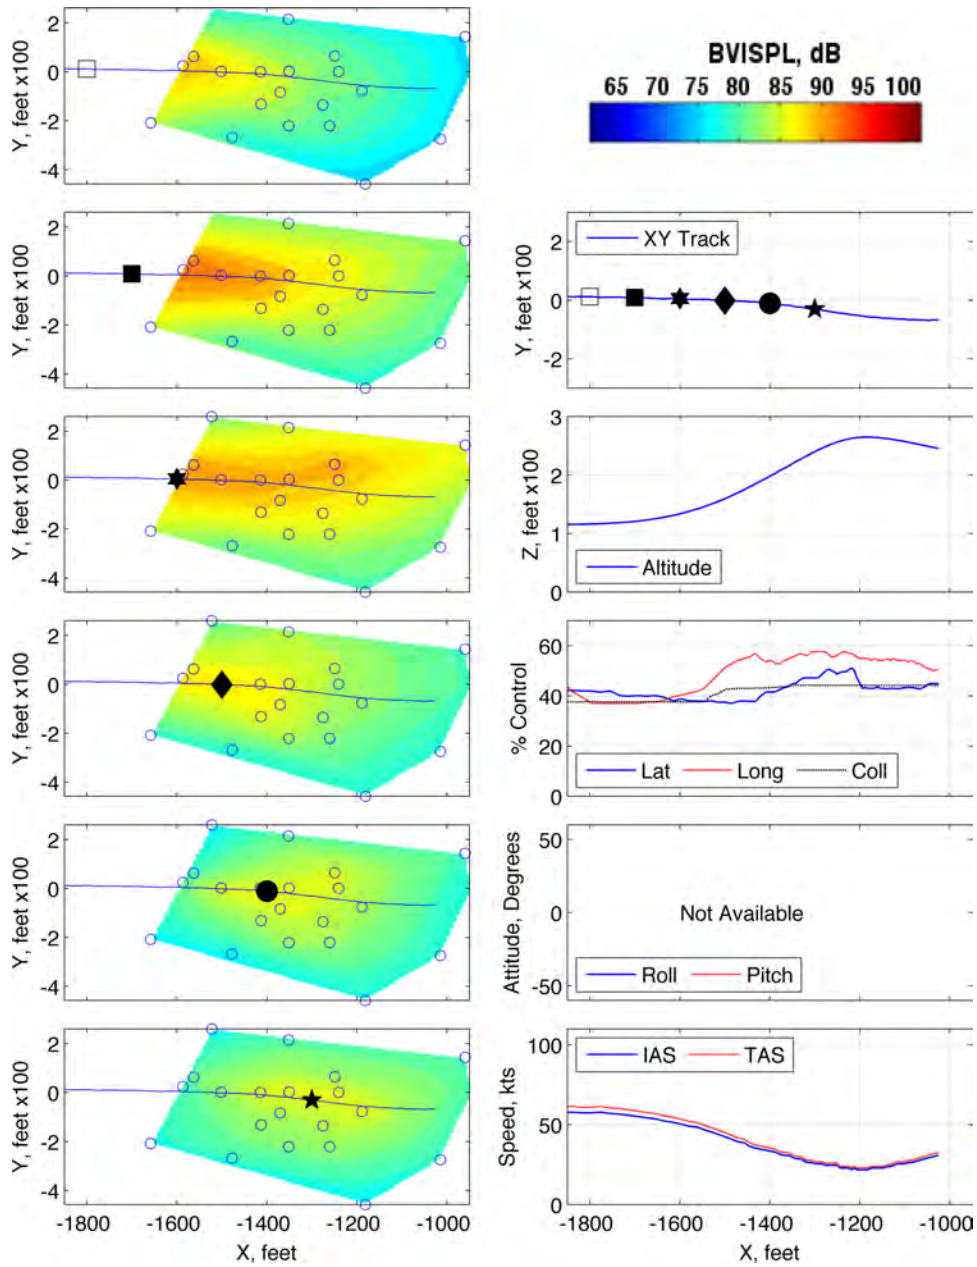


Figure 148: Maneuver condition D3, 60 KIAS, level, fast cyclic pitch up, run number 280366

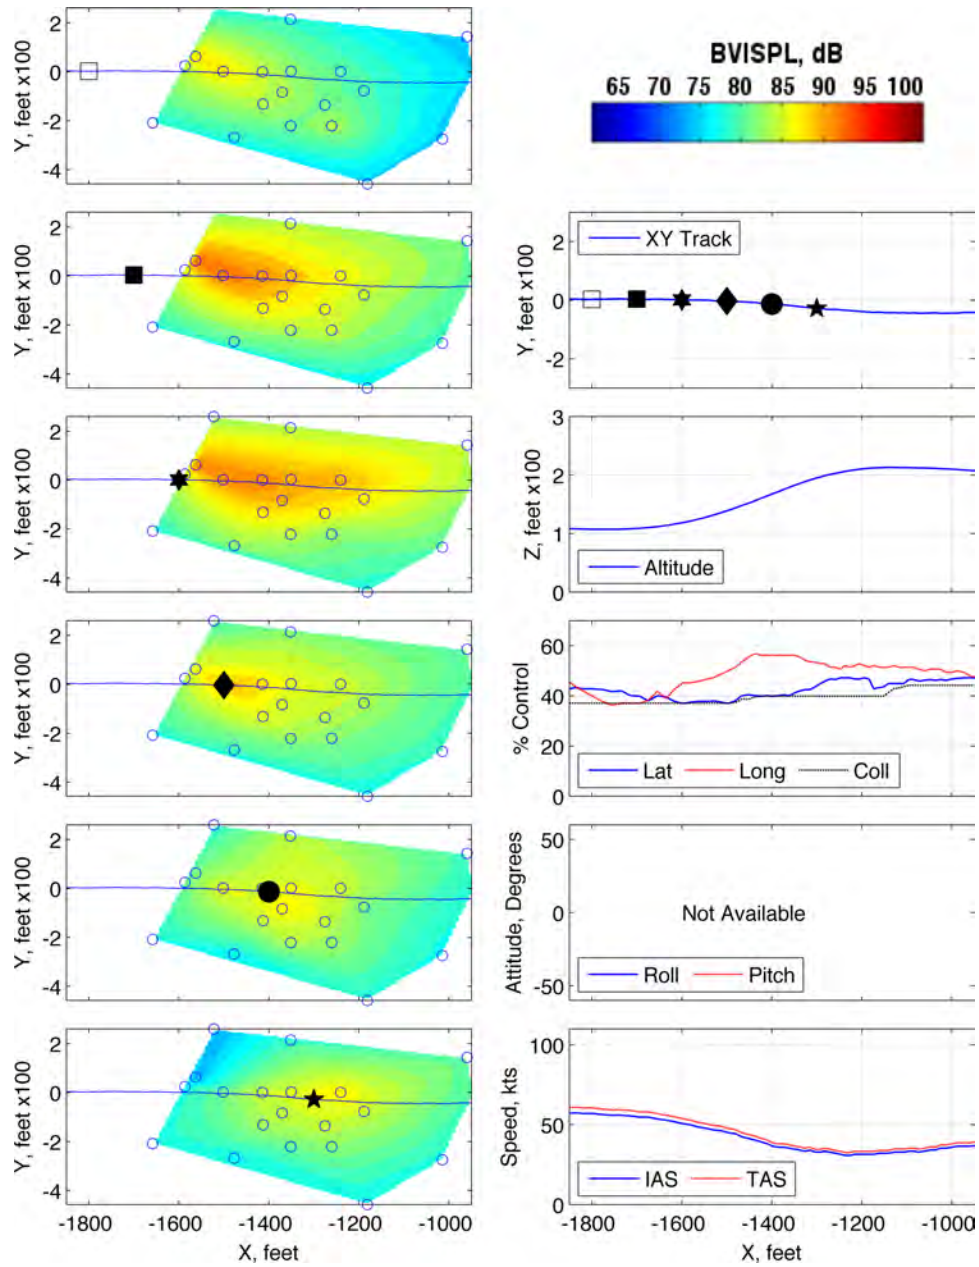


Figure 149: Maneuver condition D3, 60 KIAS, level, fast cyclic pitch up, run number 280367

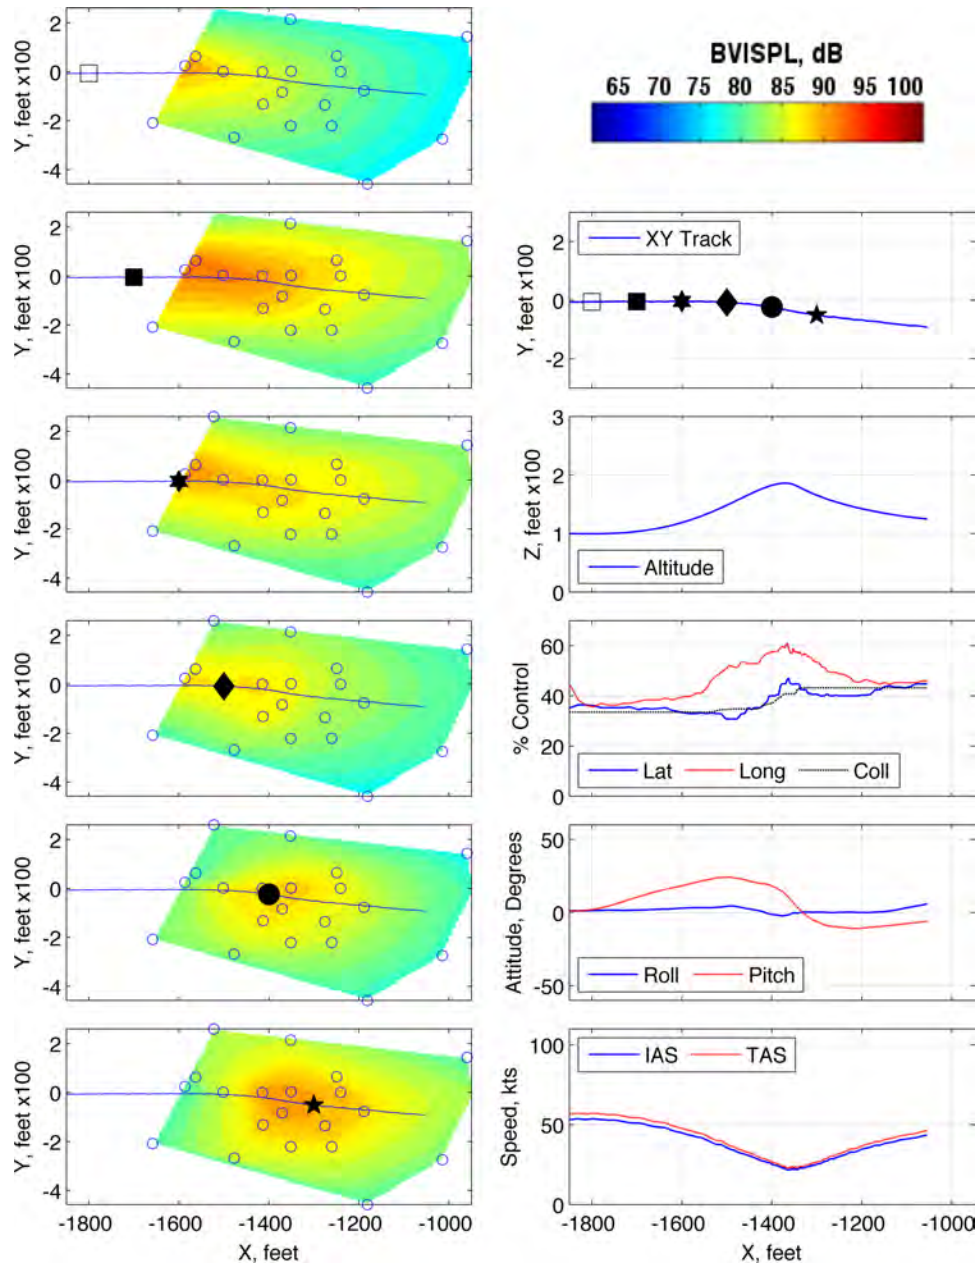


Figure 150: Maneuver condition D3, 60 KIAS, level, fast cyclic pitch up, run number 287531



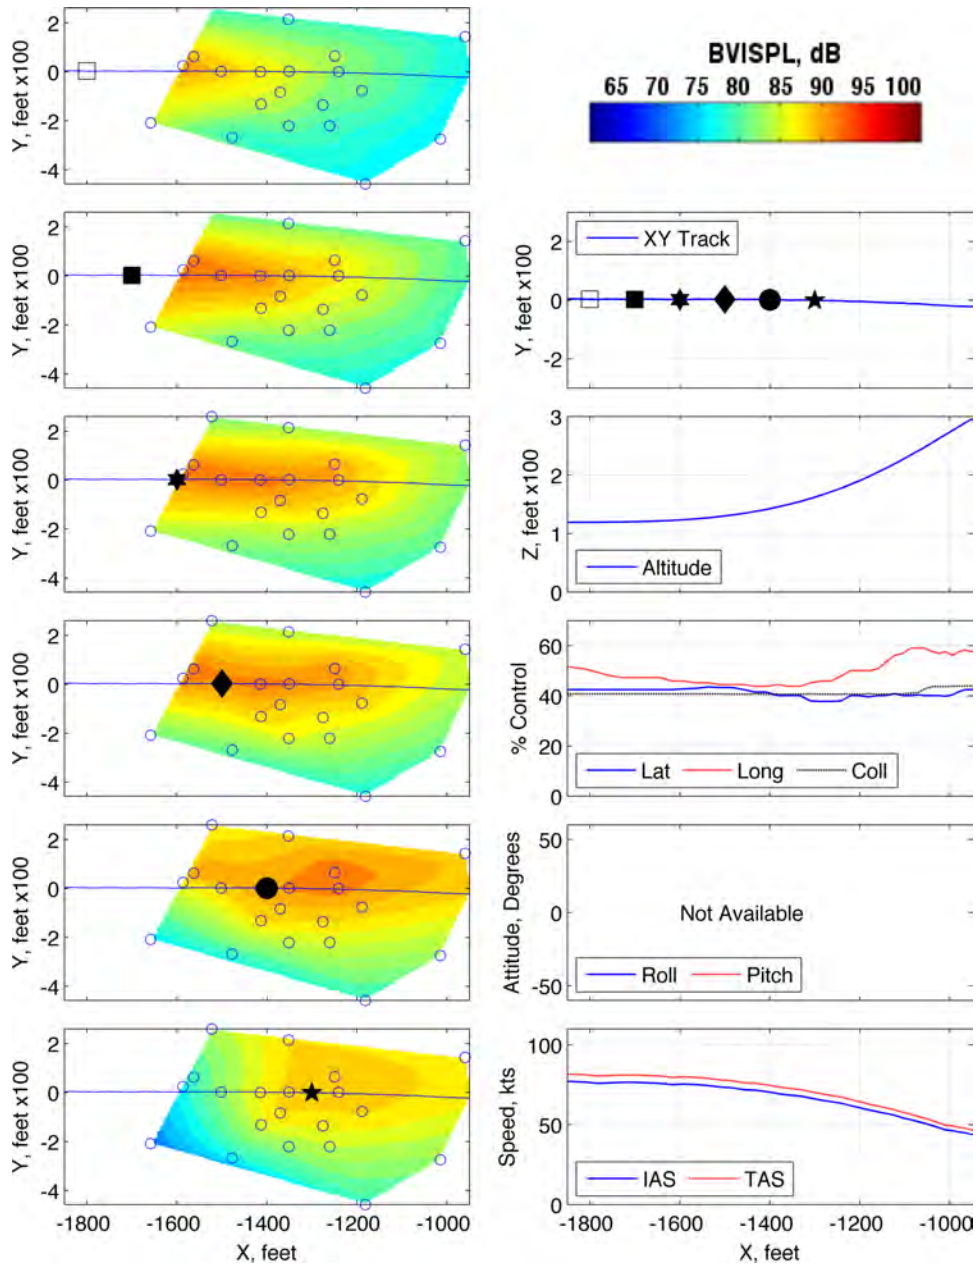


Figure 151: Maneuver condition D4, 80 KIAS, level, slow cyclic pitch up, run number 280356

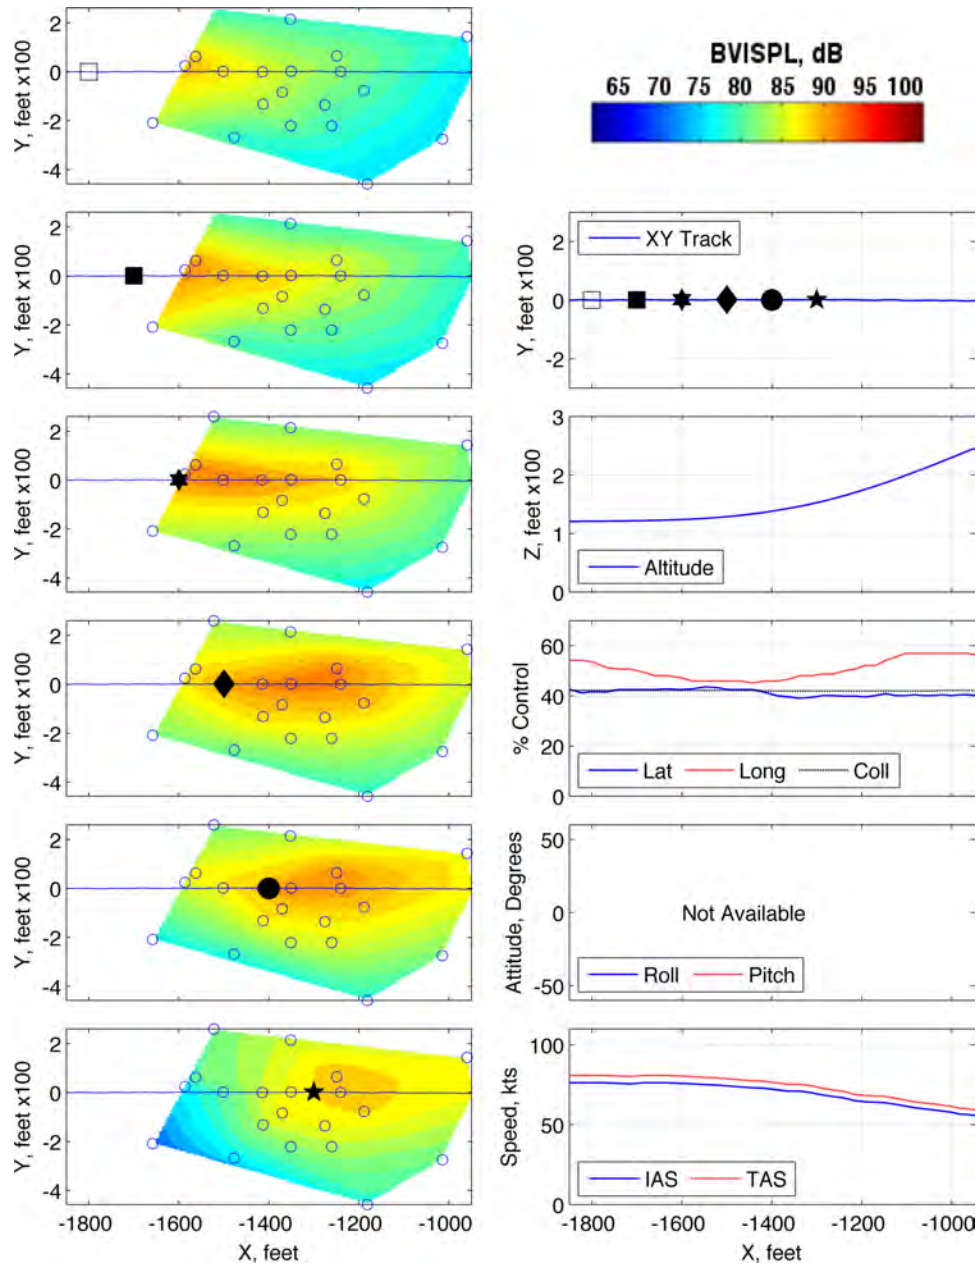


Figure 152: Maneuver condition D4, 80 KIAS, level, slow cyclic pitch up, run number 280357

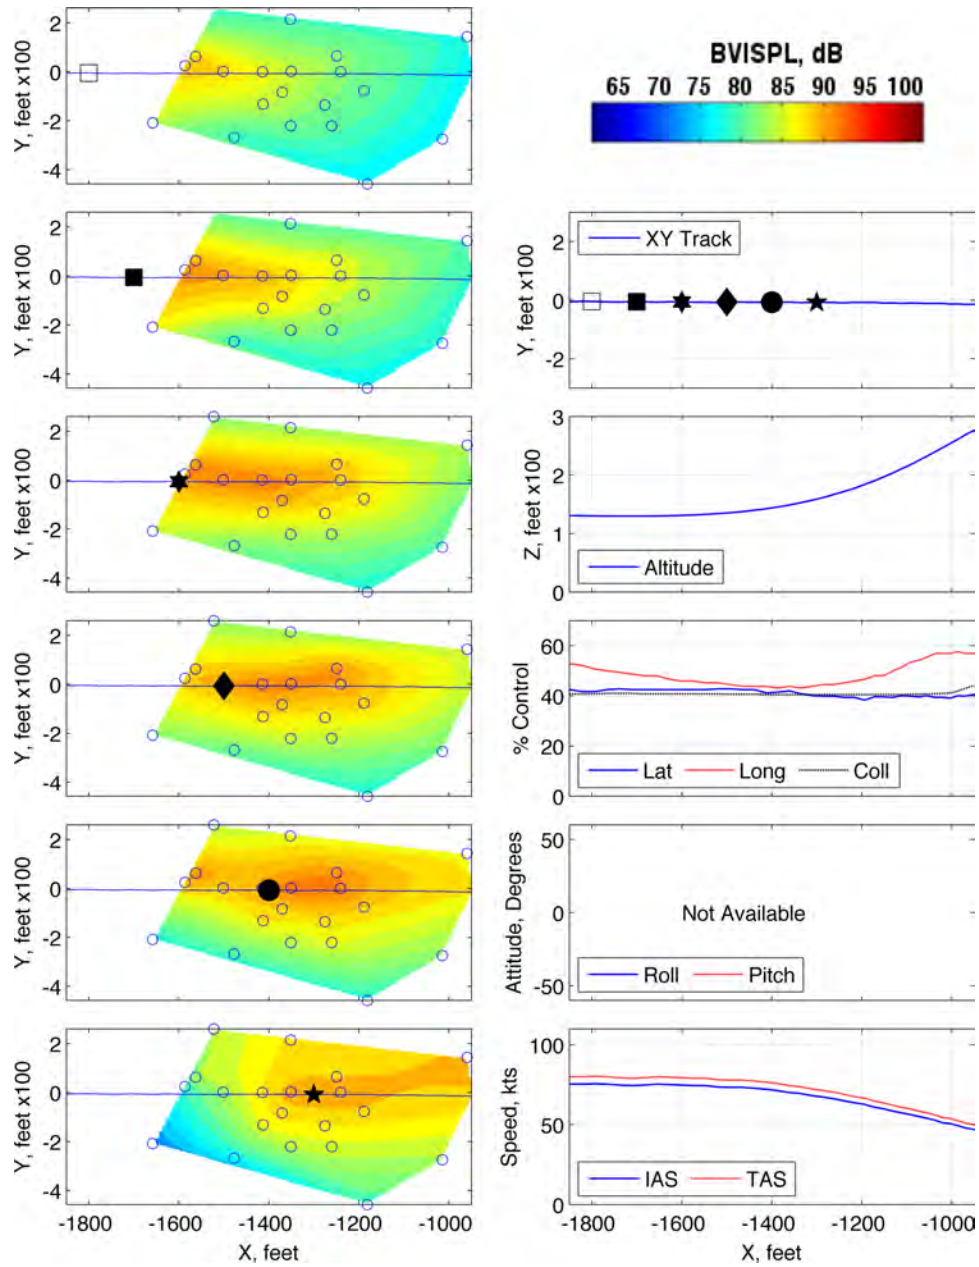


Figure 153: Maneuver condition D4, 80 KIAS, level, slow cyclic pitch up, run number 280358

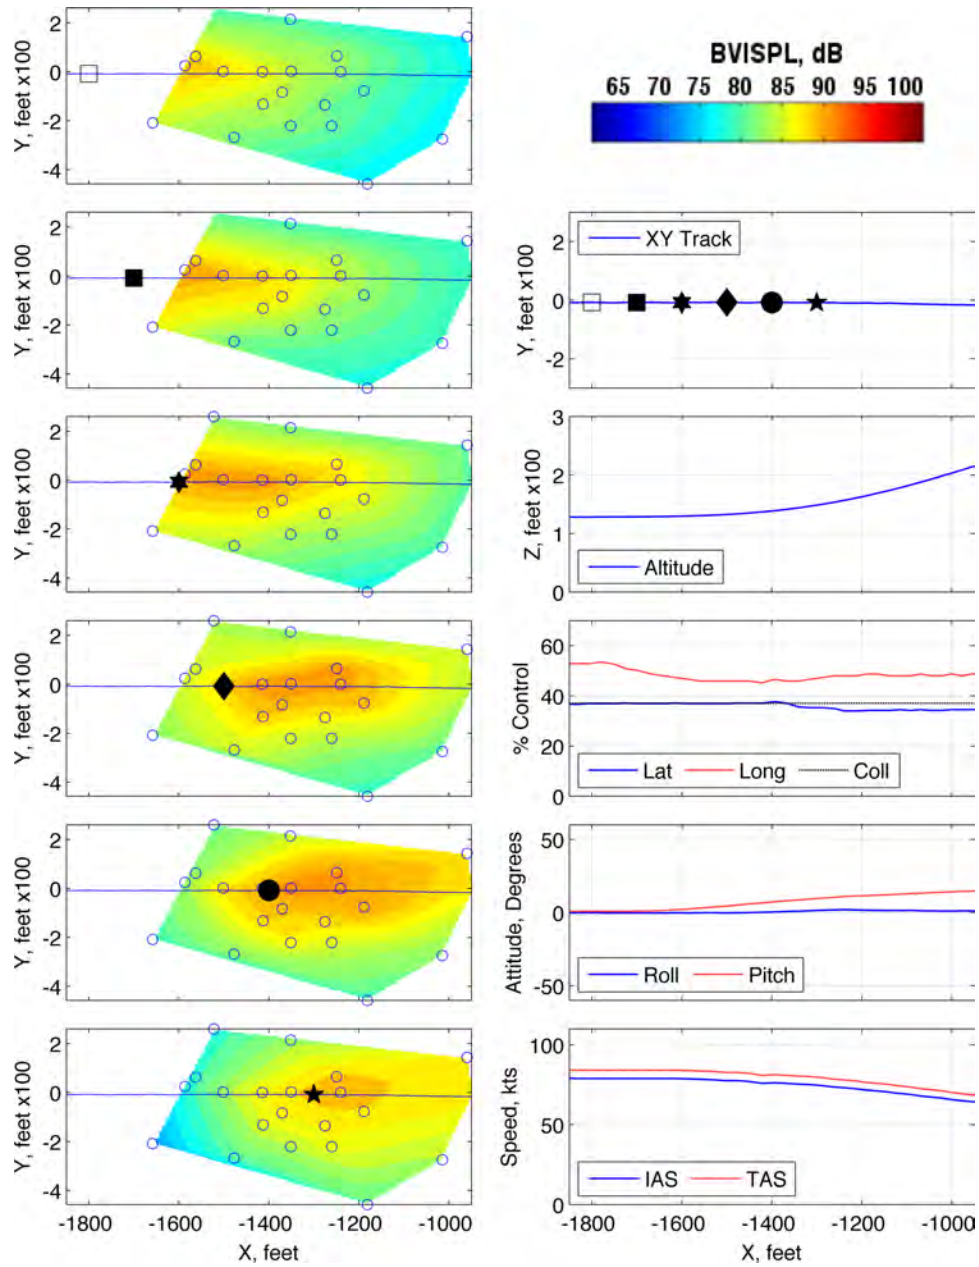


Figure 154: Maneuver condition D5, 80 KIAS, level, medium cyclic pitch up, run number 285475

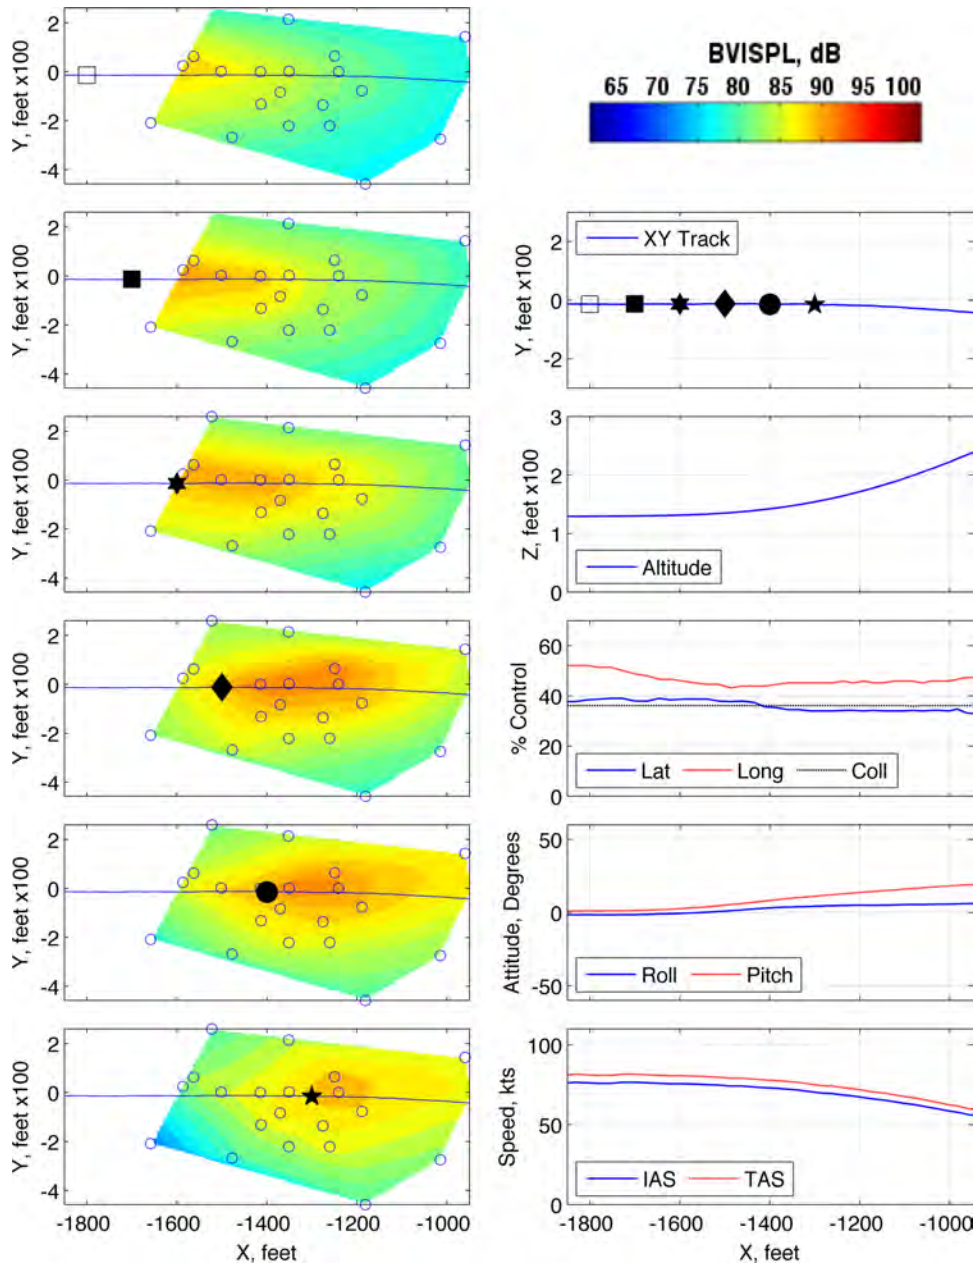


Figure 155: Maneuver condition D5, 80 KIAS, level, medium cyclic pitch up, run number 285476

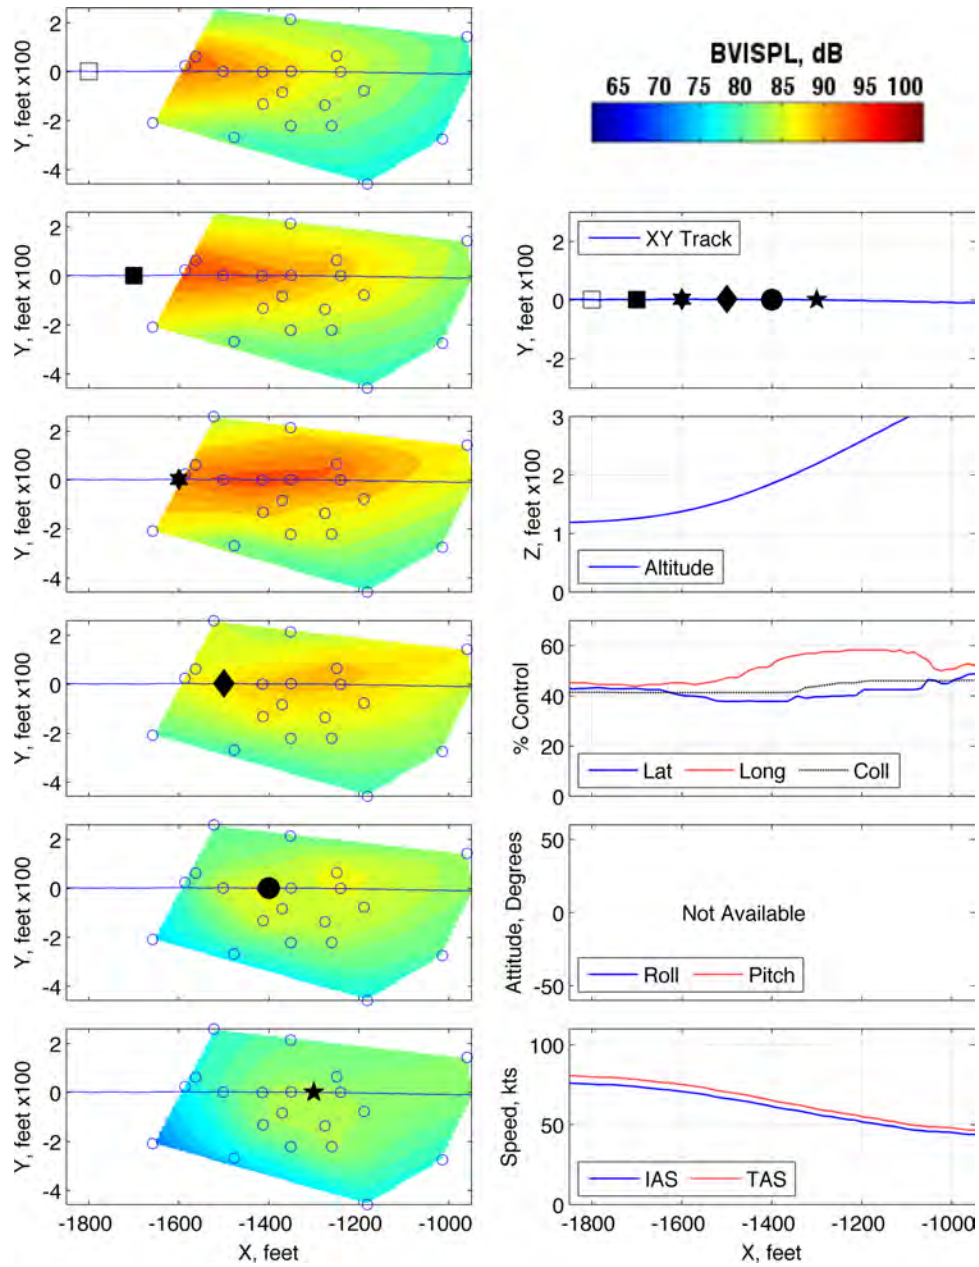


Figure 156: Maneuver condition D6, 80 KIAS, level, fast cyclic pitch up, run number 280359

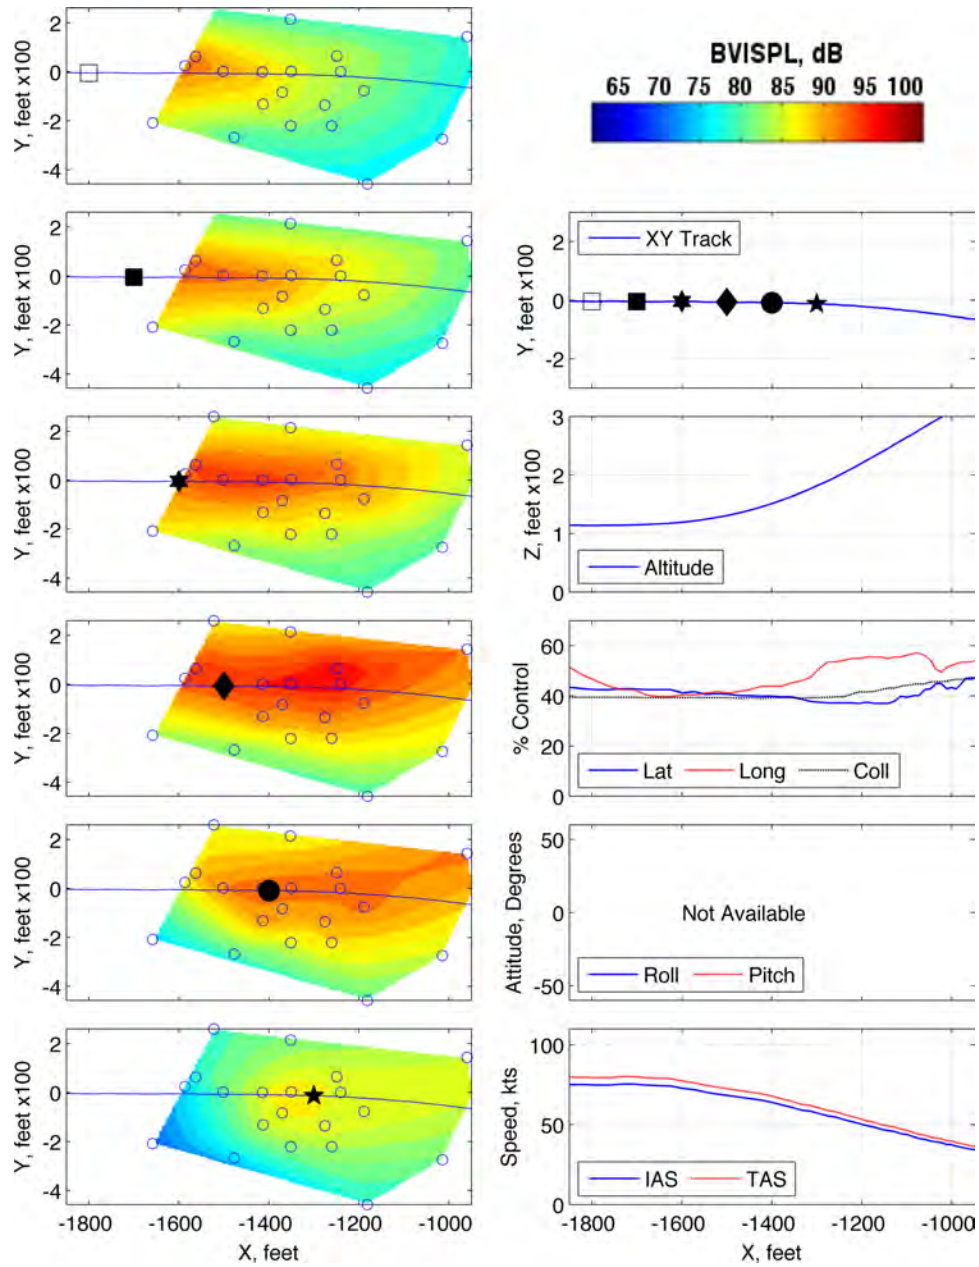


Figure 157: Maneuver condition D6, 80 KIAS, level, fast cyclic pitch up, run number 280360

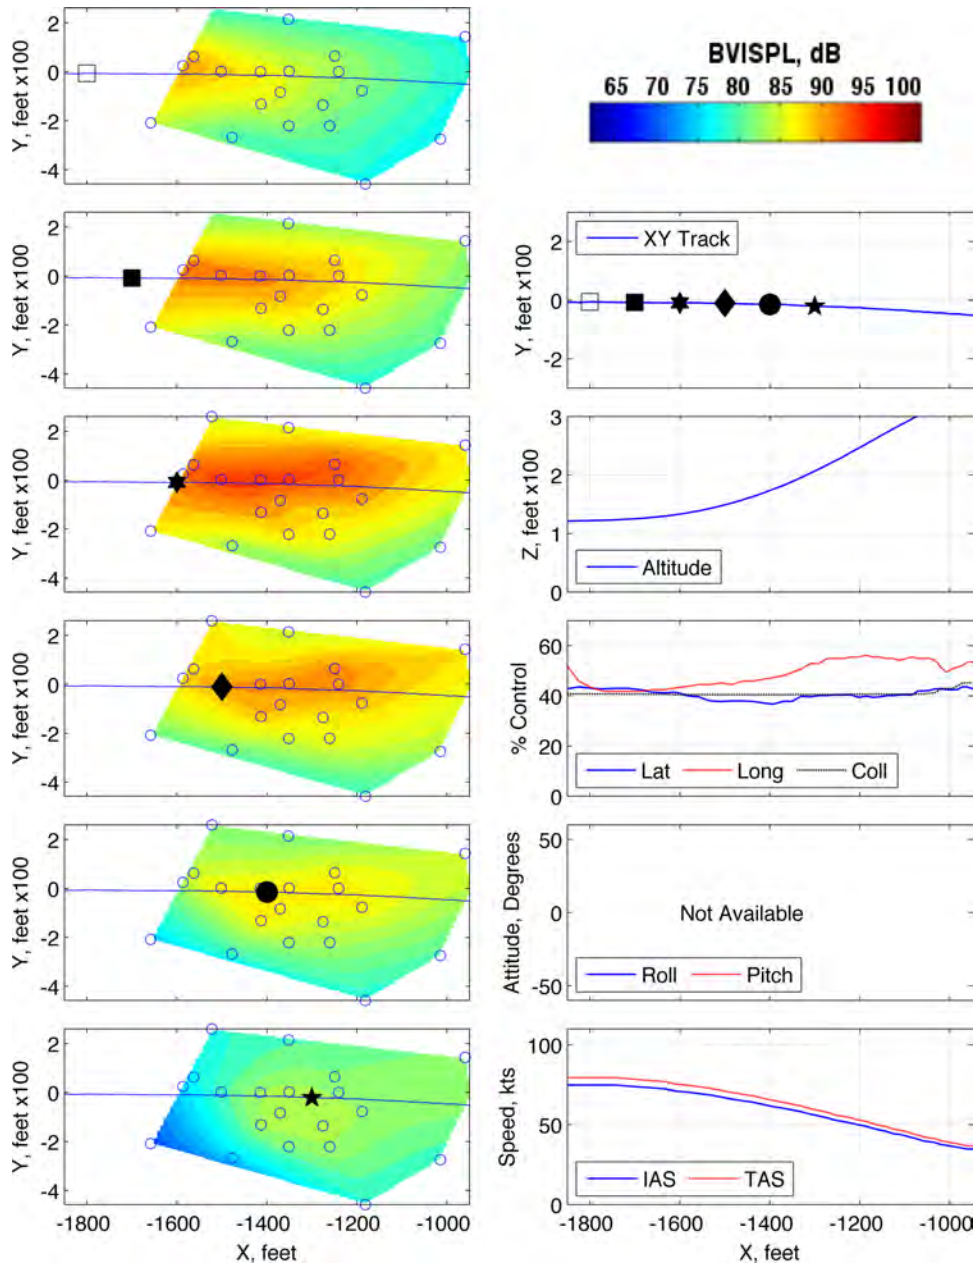


Figure 158: Maneuver condition D6, 80 KIAS, level, fast cyclic pitch up, run number 280361



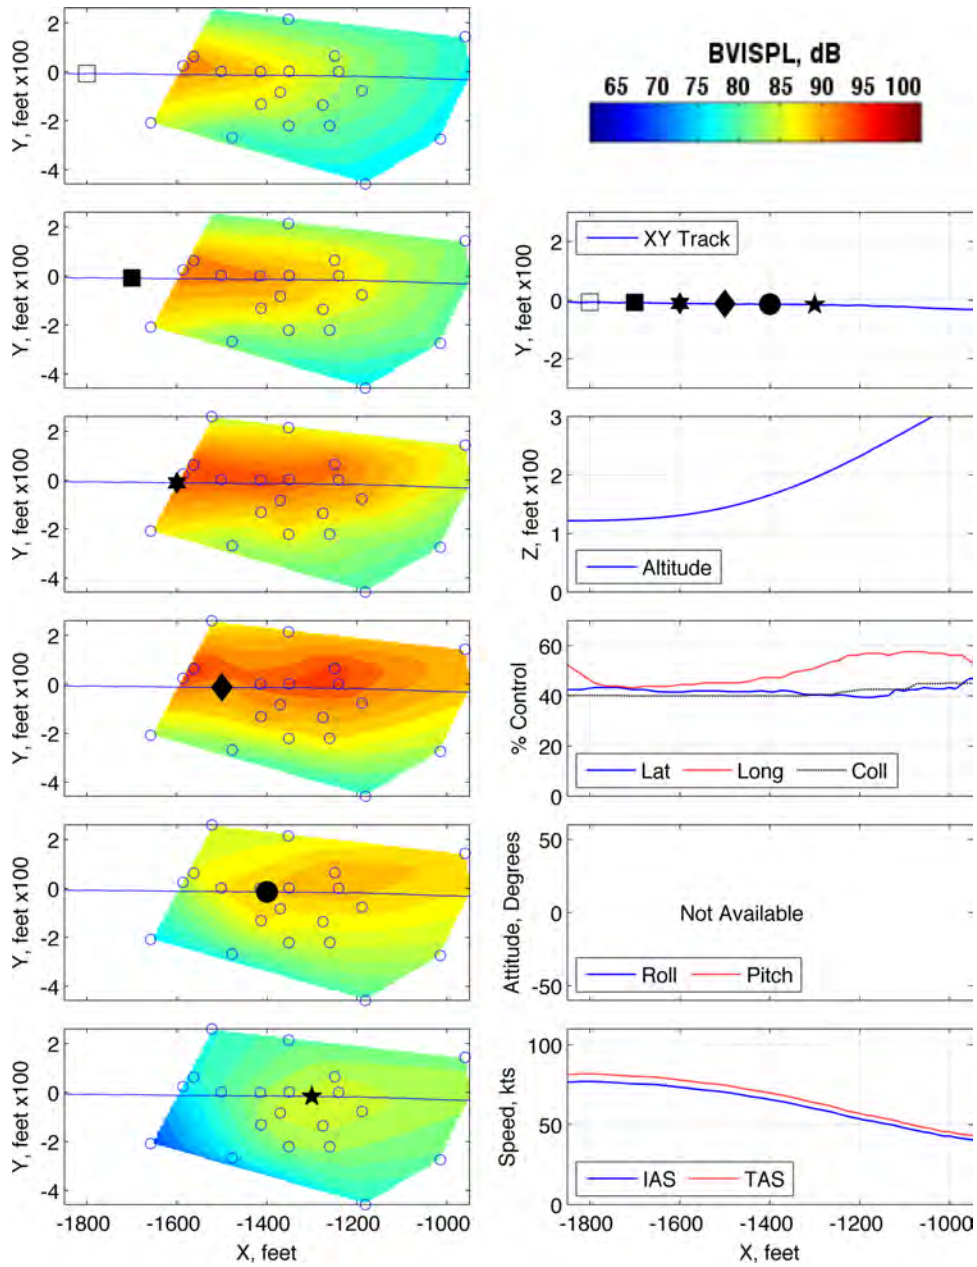


Figure 159: Maneuver condition D6, 80 KIAS, level, fast cyclic pitch up, run number 280362

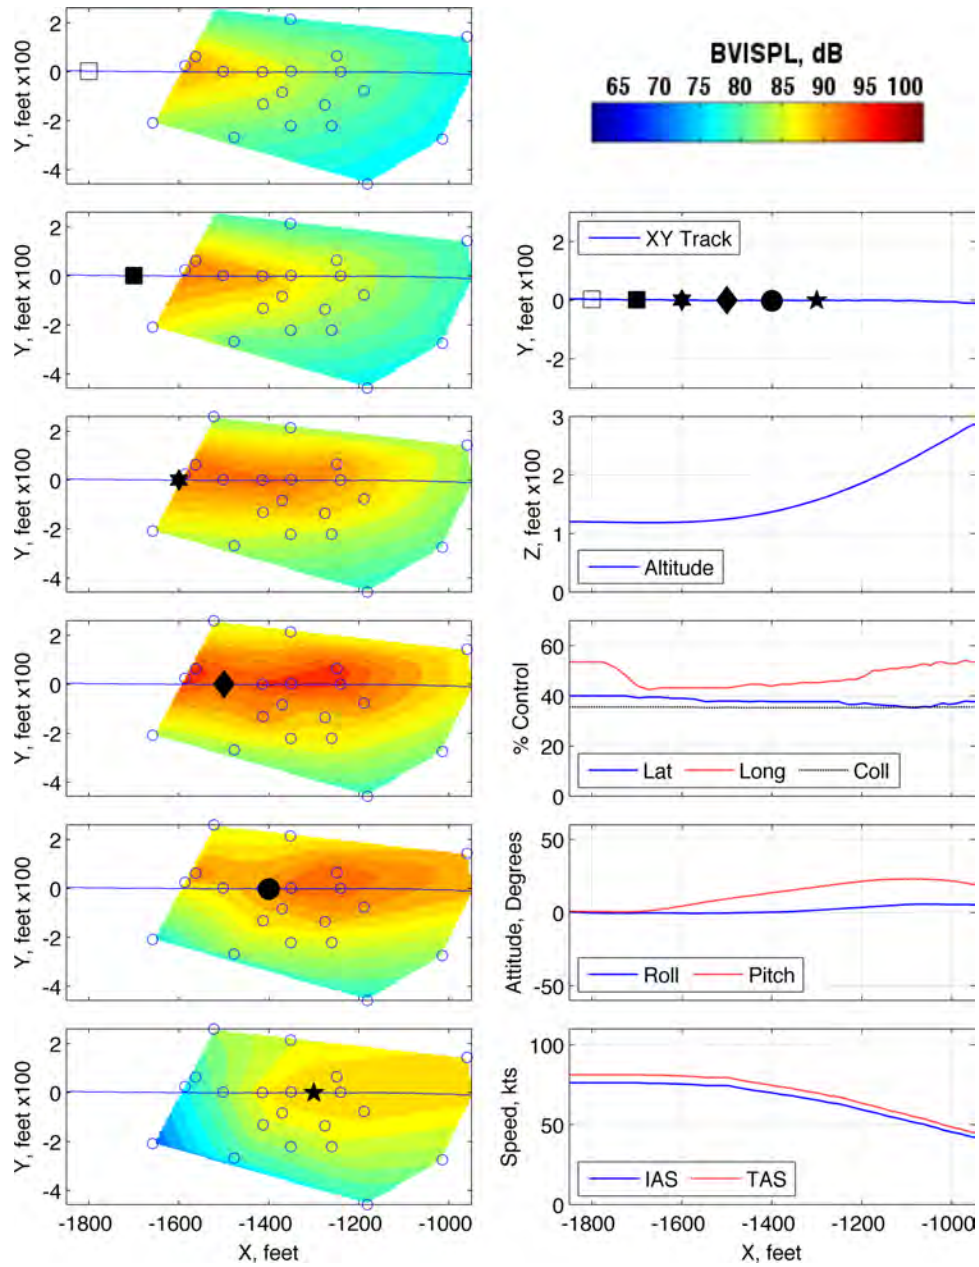


Figure 160: Maneuver condition D6, 80 KIAS, level, fast cyclic pitch up, run number 287530

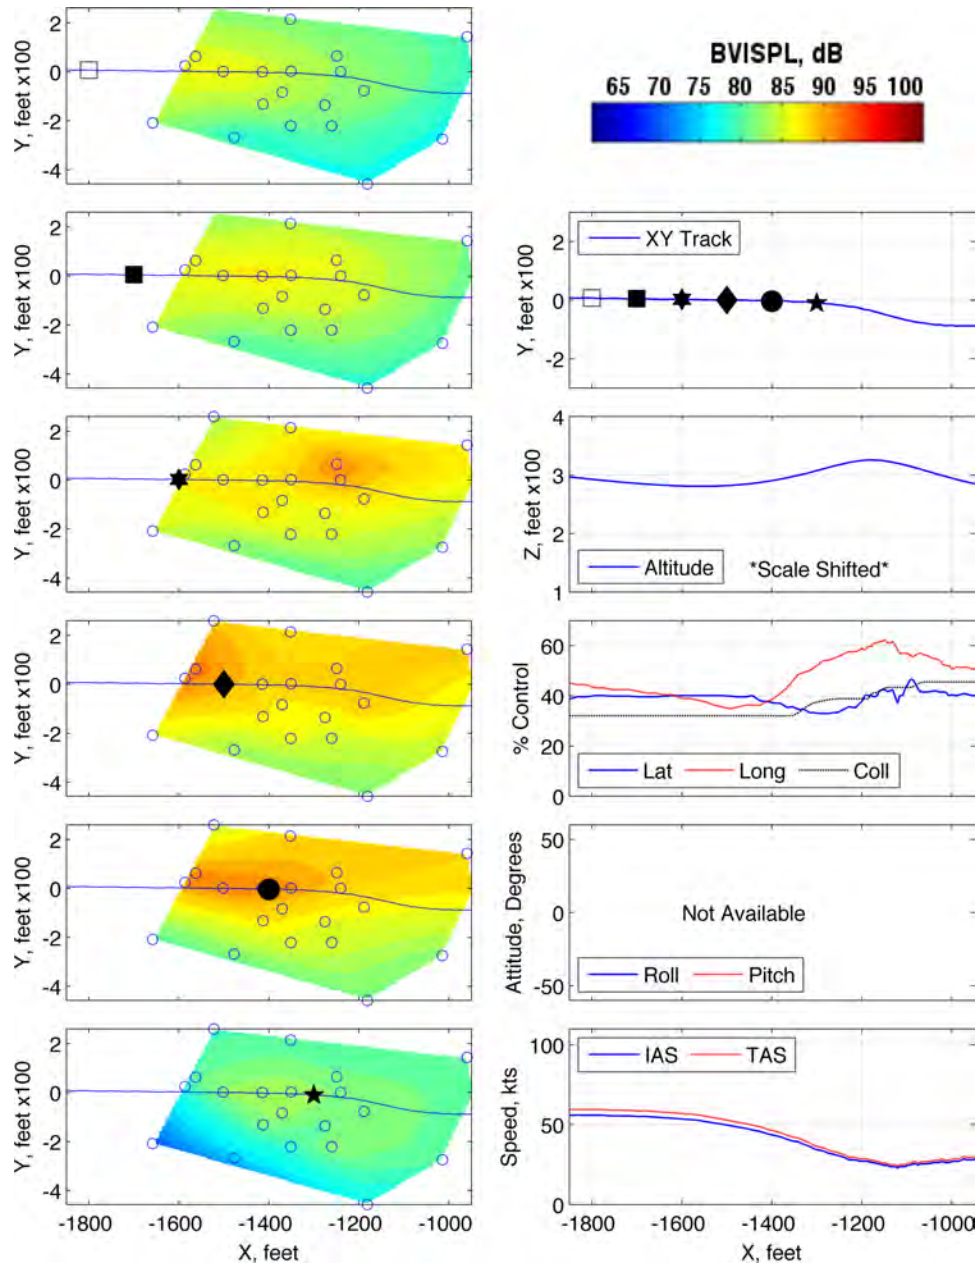


Figure 161: Maneuver condition D7, 60 KIAS,  $-6^\circ$ , slow cyclic pitch up, run number 280350

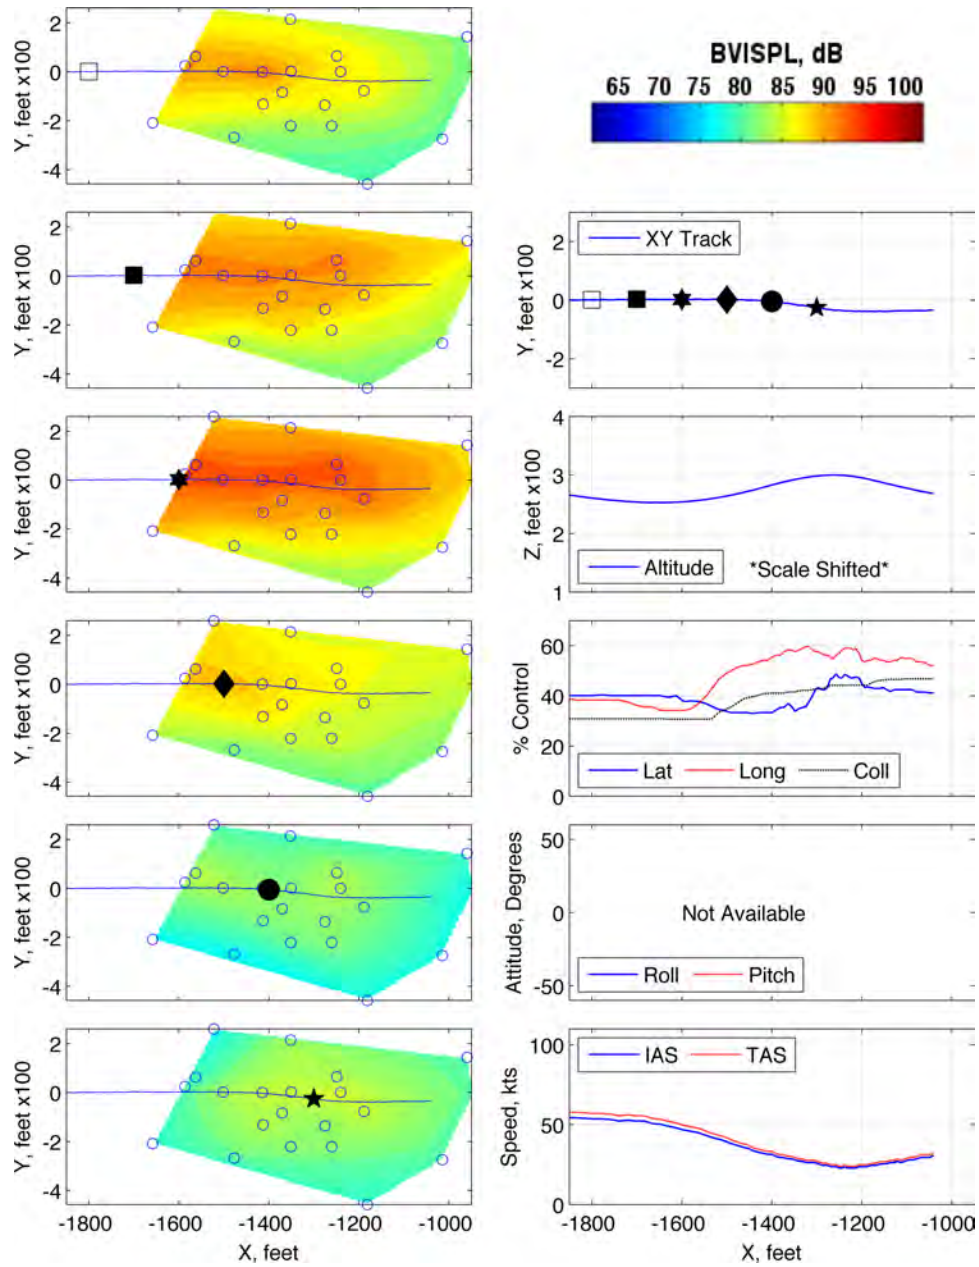


Figure 162: Maneuver condition D7, 60 KIAS,  $-6^\circ$ , slow cyclic pitch up, run number 280351

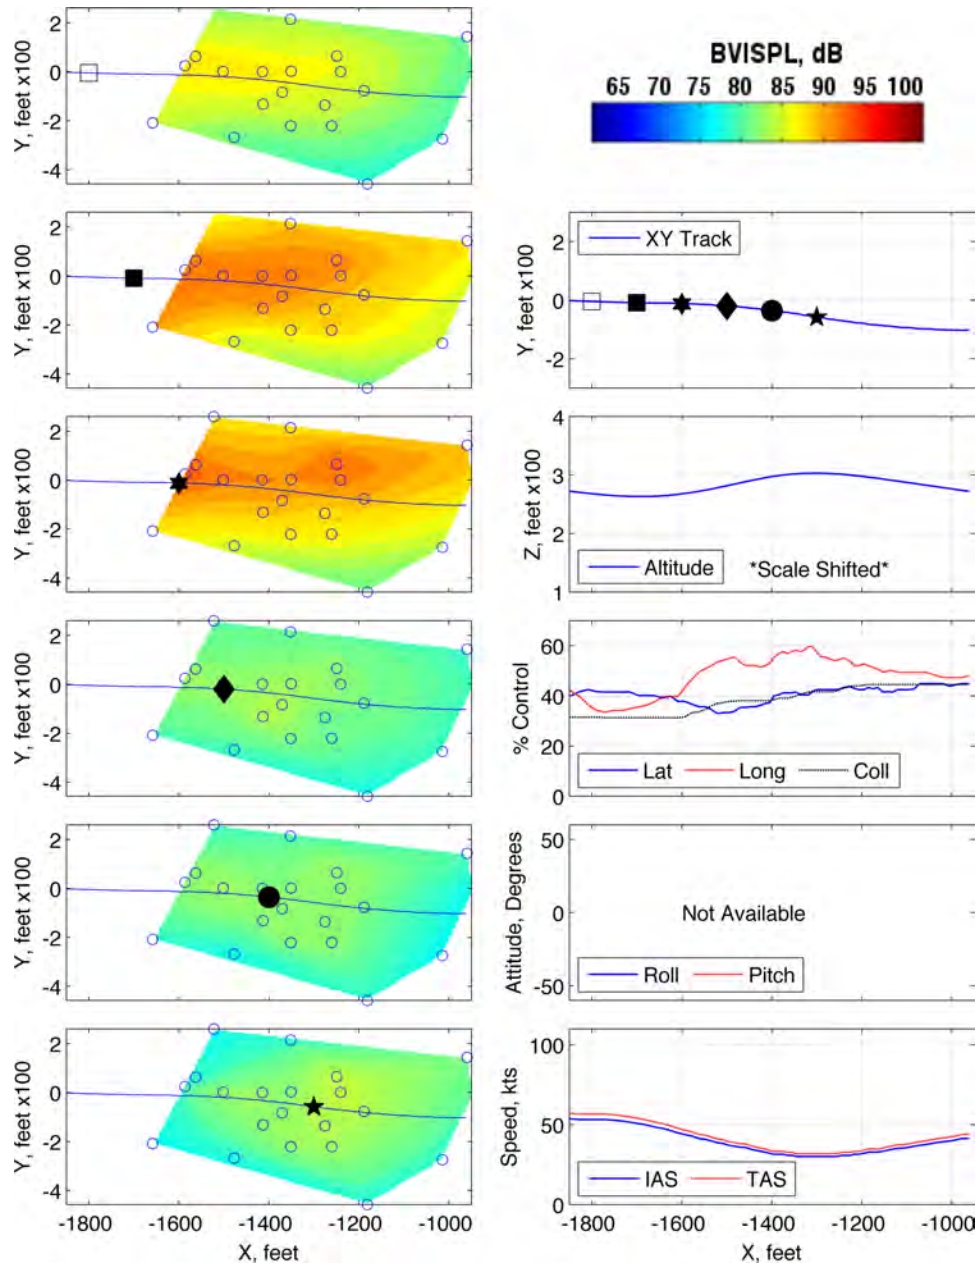


Figure 163: Maneuver condition D9, 60 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 280352

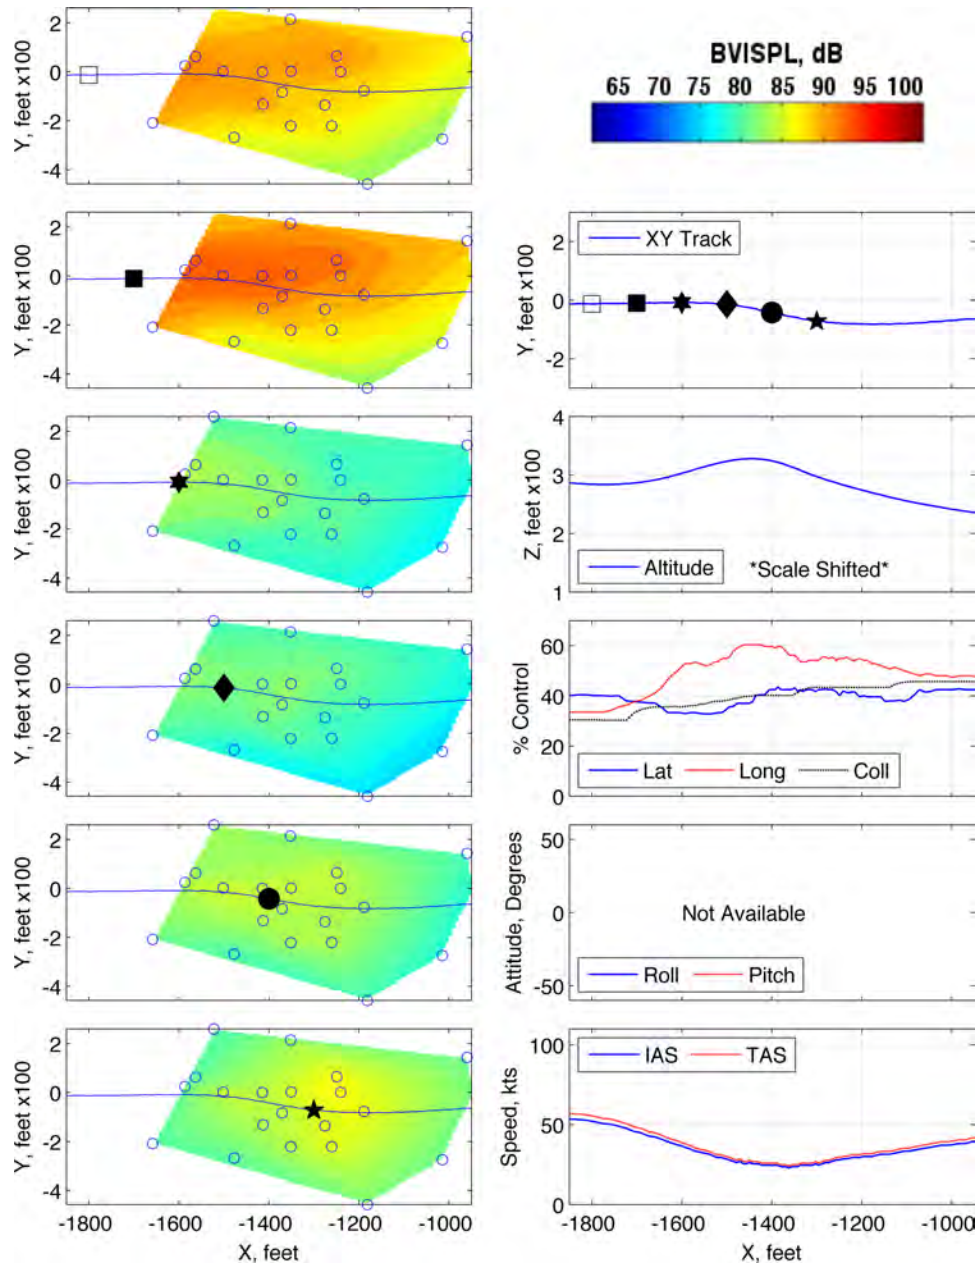


Figure 164: Maneuver condition D9, 60 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 280353

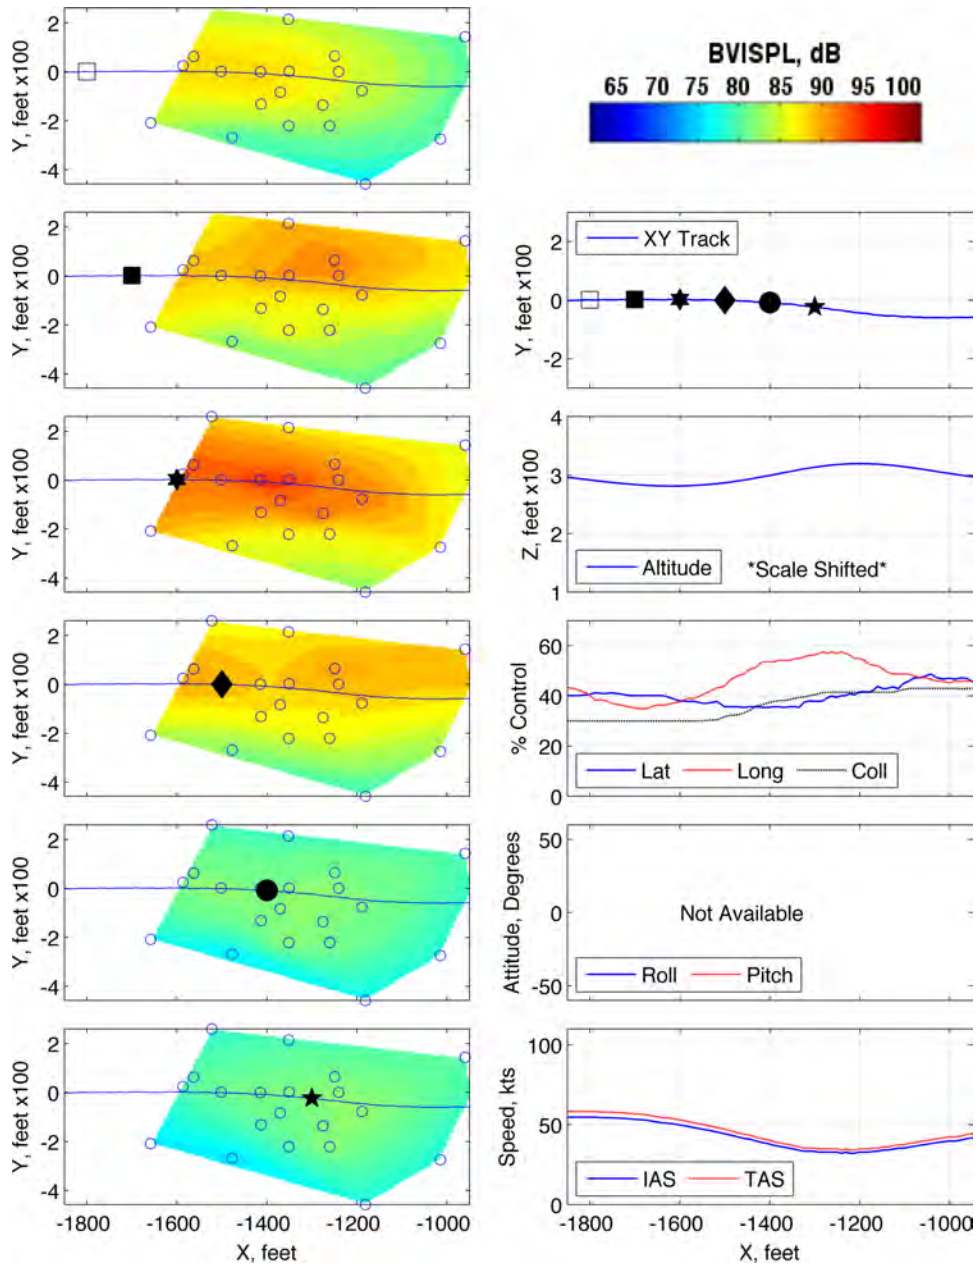


Figure 165: Maneuver condition D9, 60 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 280354

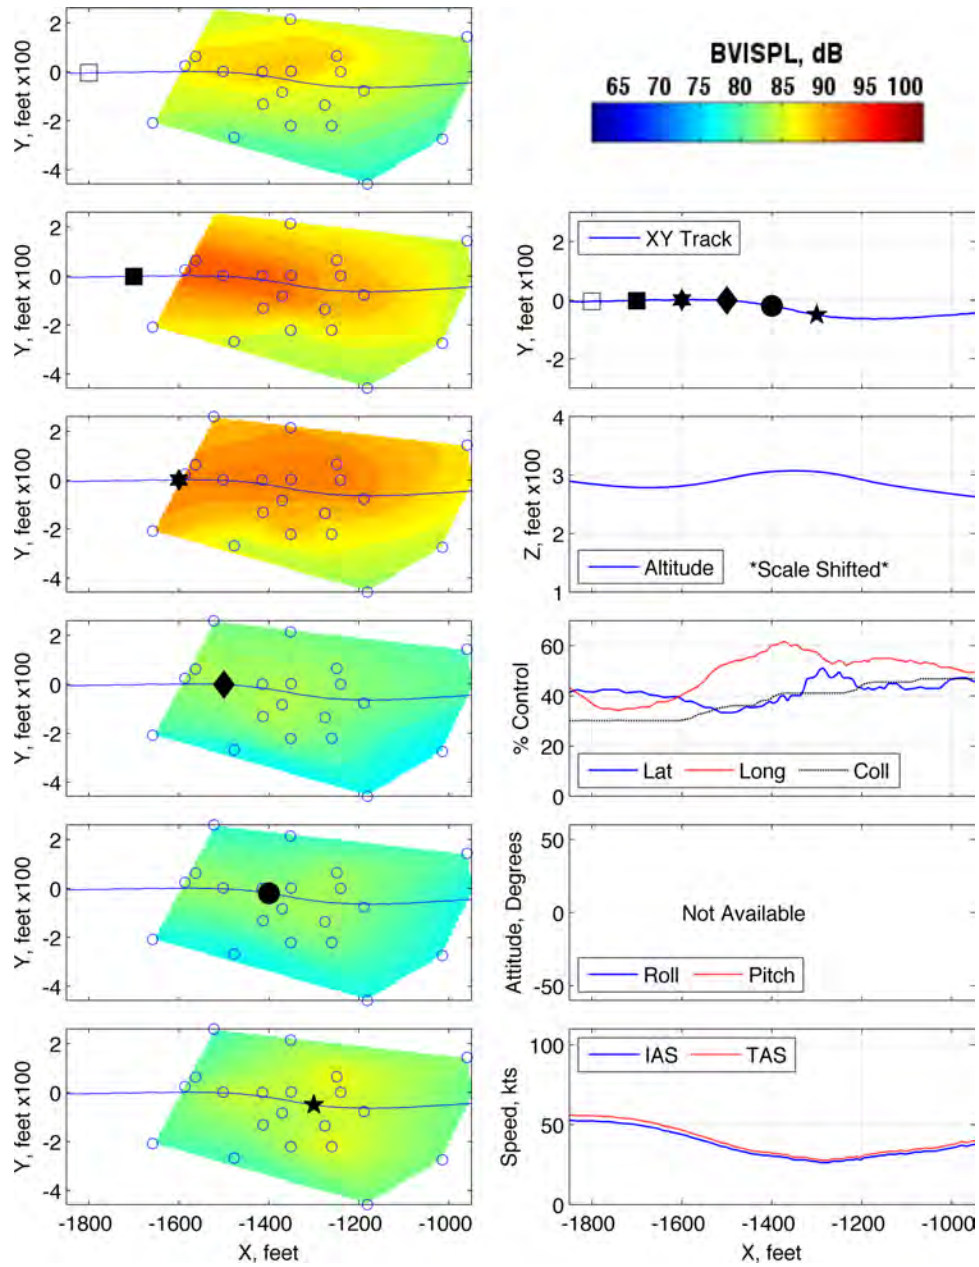


Figure 166: Maneuver condition D9, 60 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 280355



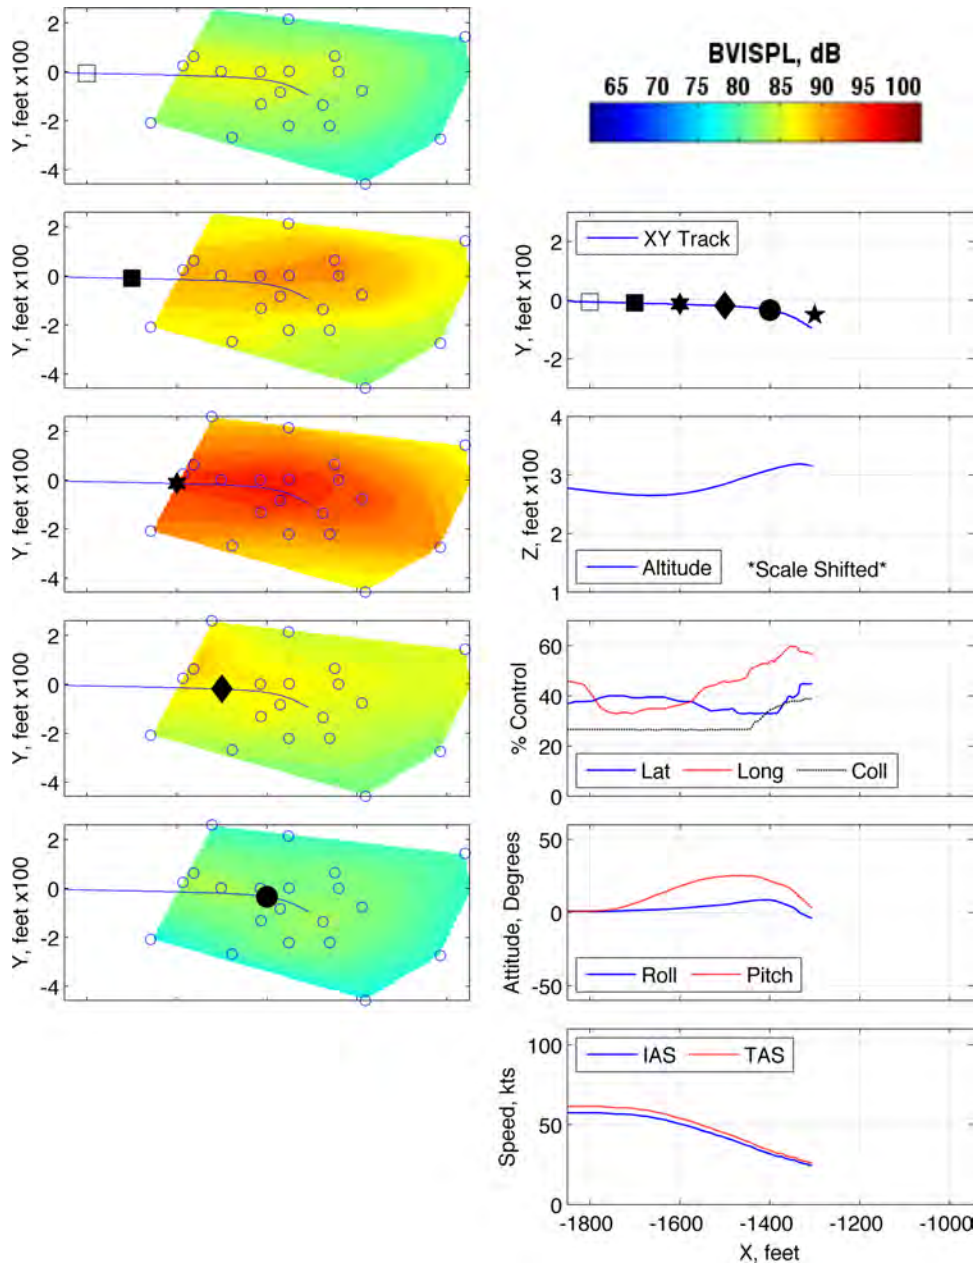


Figure 167: Maneuver condition D9, 60 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 287533

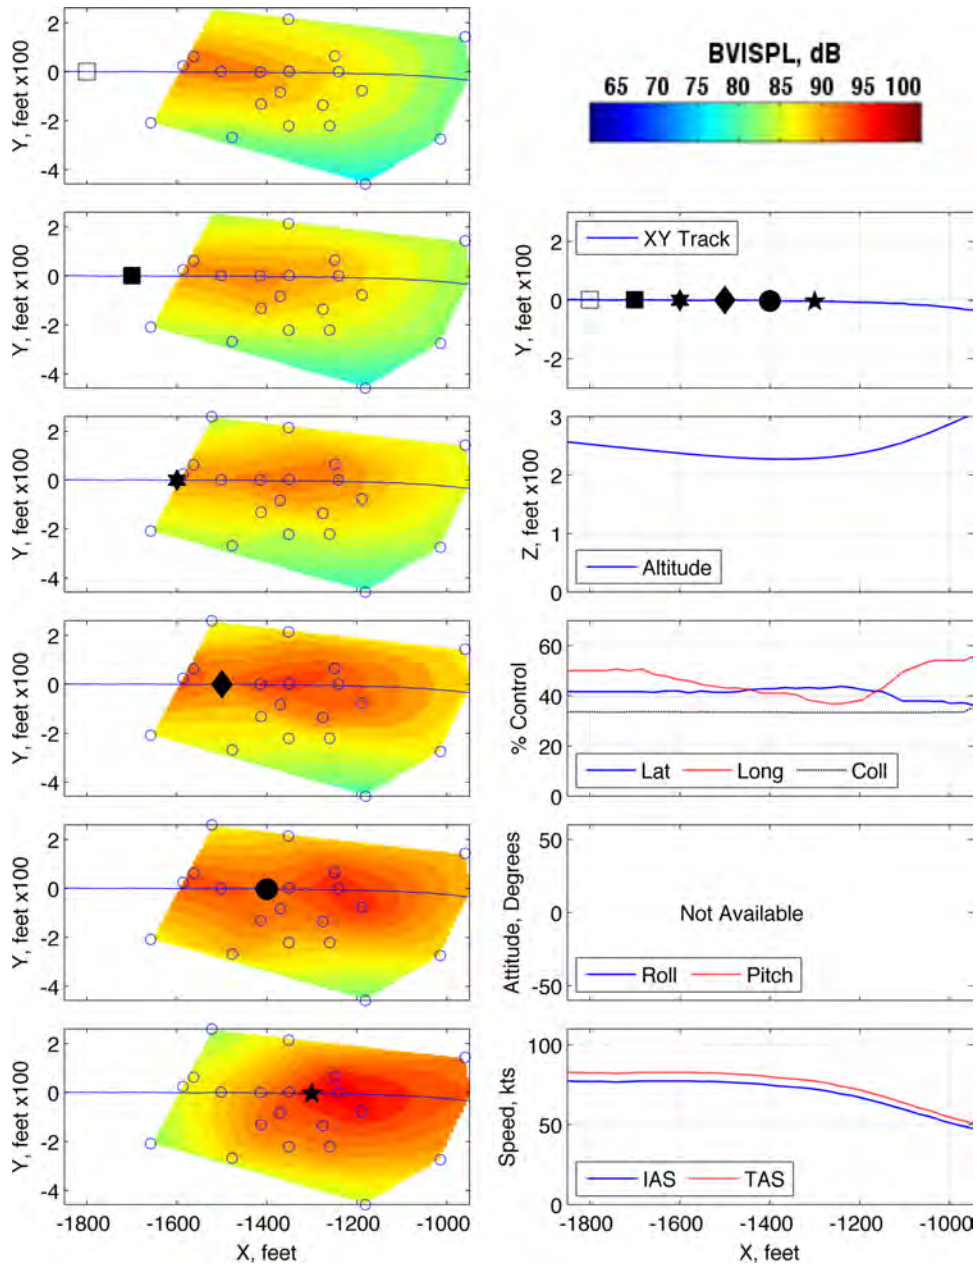


Figure 168: Maneuver condition D10, 80 KIAS,  $-6^\circ$ , slow cyclic pitch up, run number 278303

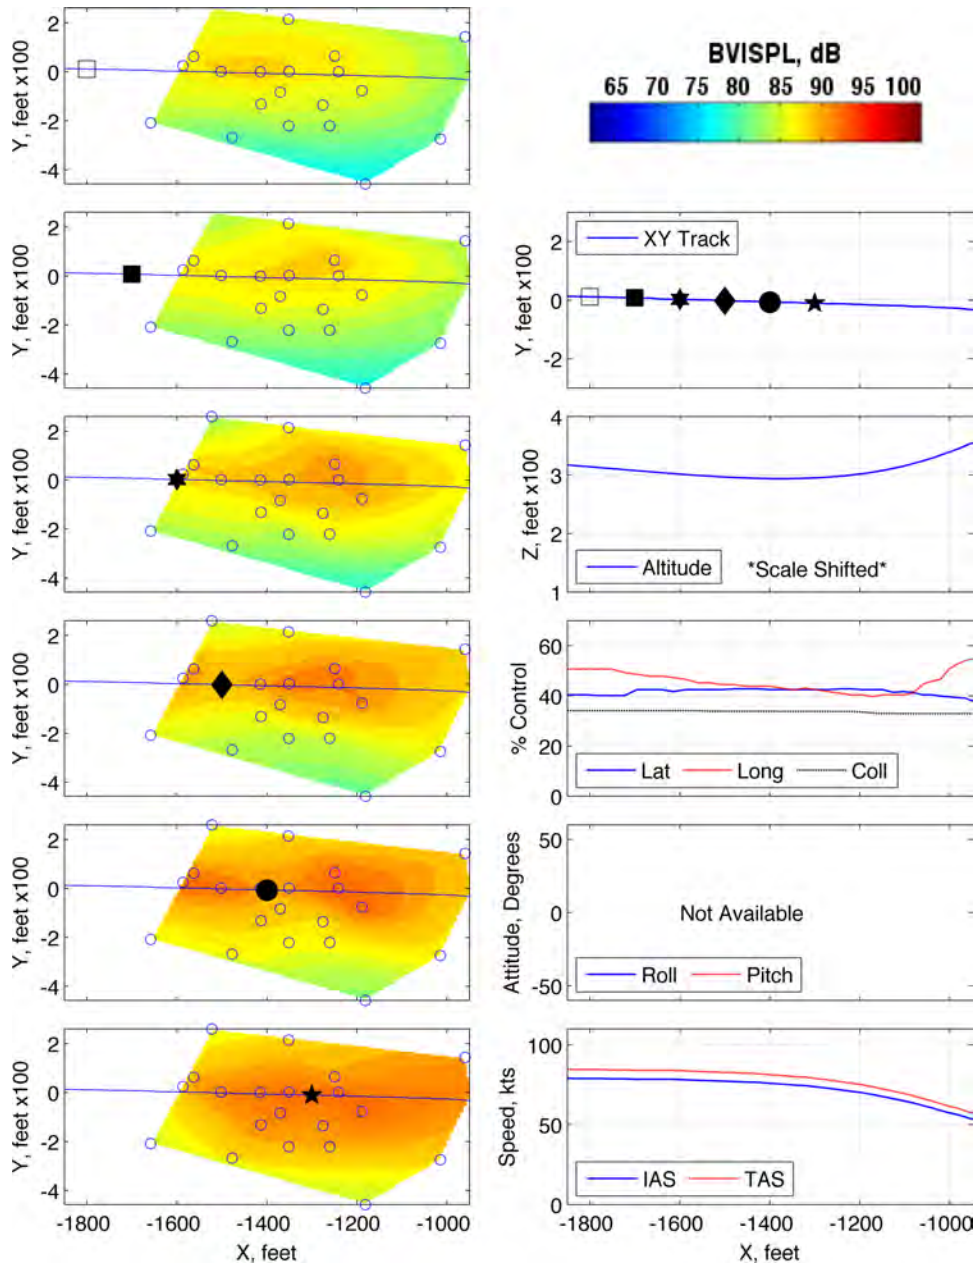


Figure 169: Maneuver condition D10, 80 KIAS,  $-6^\circ$ , slow cyclic pitch up, run number 278304

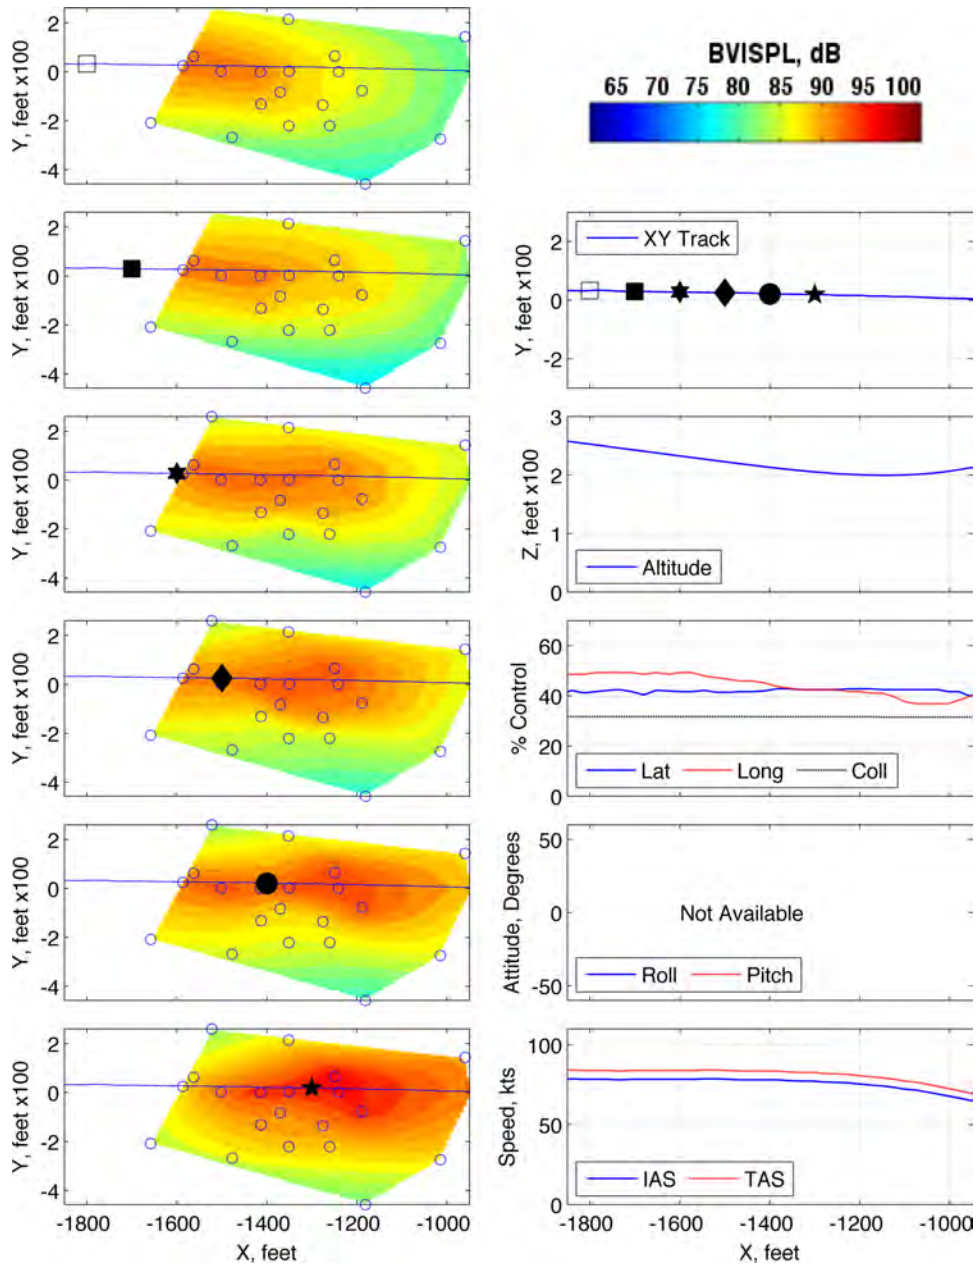


Figure 170: Maneuver condition D10, 80 KIAS,  $-6^\circ$ , slow cyclic pitch up, run number 278305

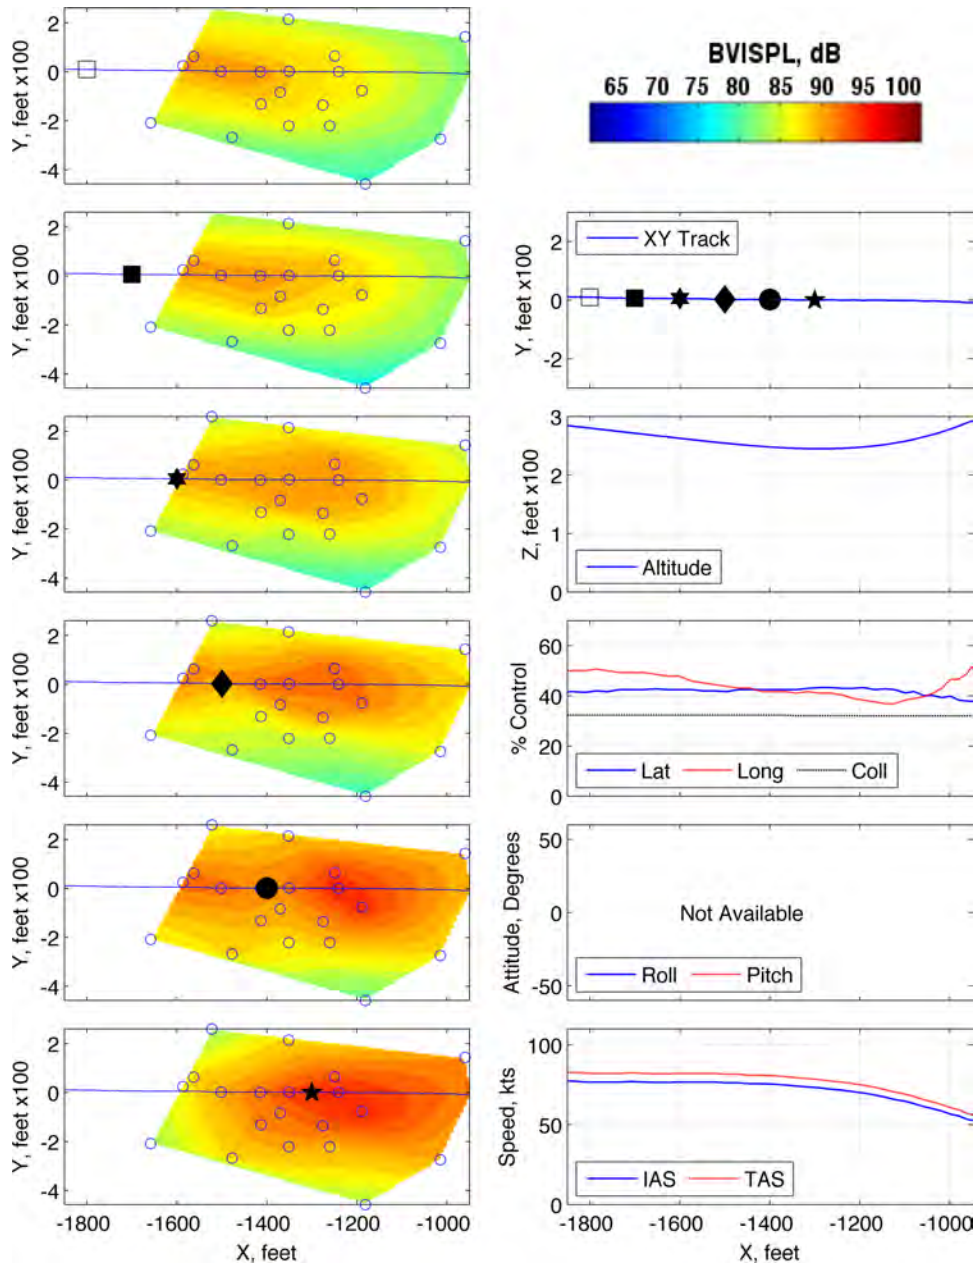


Figure 171: Maneuver condition D10, 80 KIAS,  $-6^\circ$ , slow cyclic pitch up, run number 278306

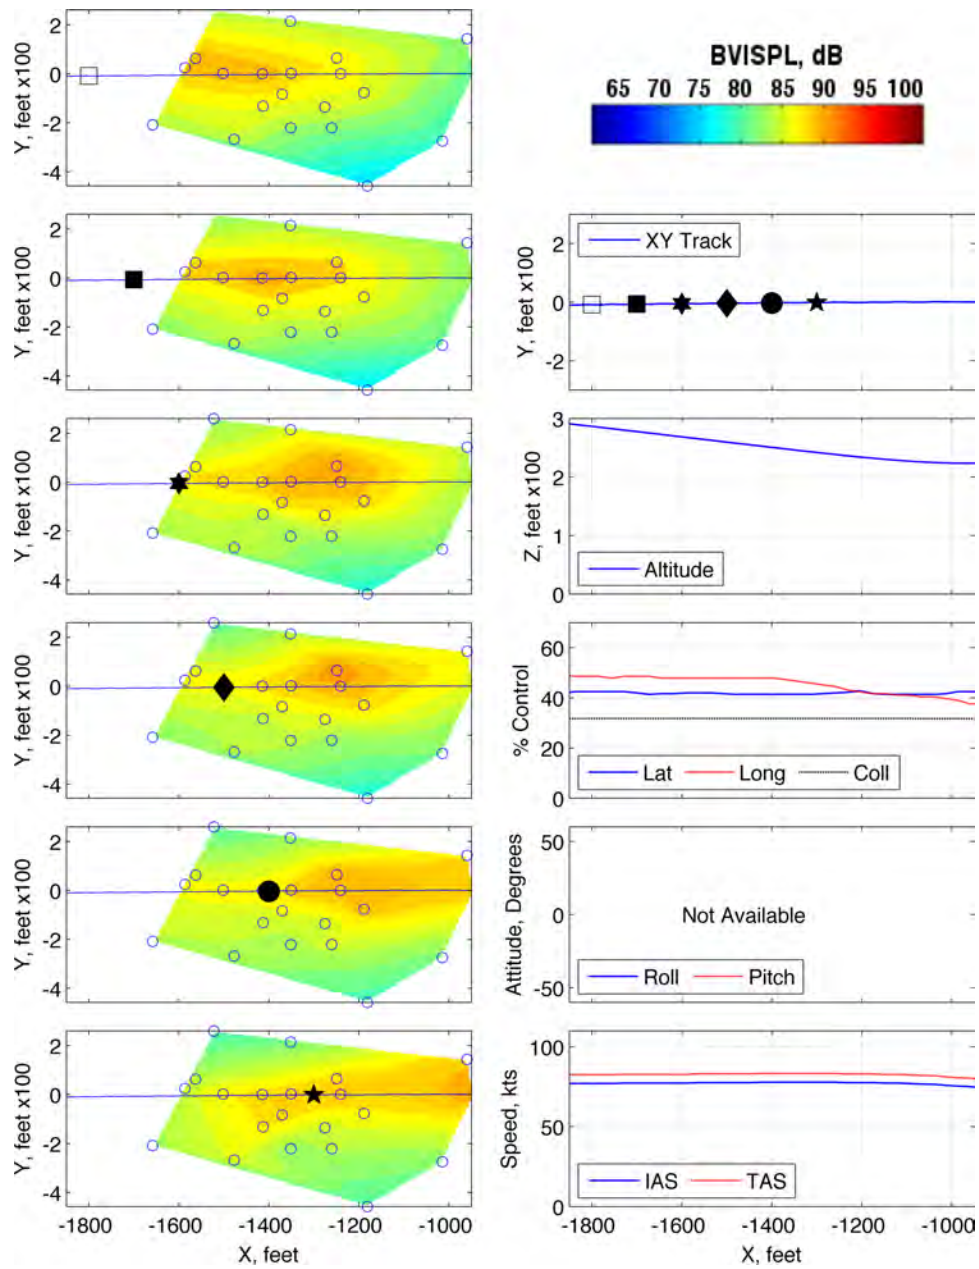


Figure 172: Maneuver condition D10, 80 KIAS,  $-6^\circ$ , slow cyclic pitch up, run number 278330

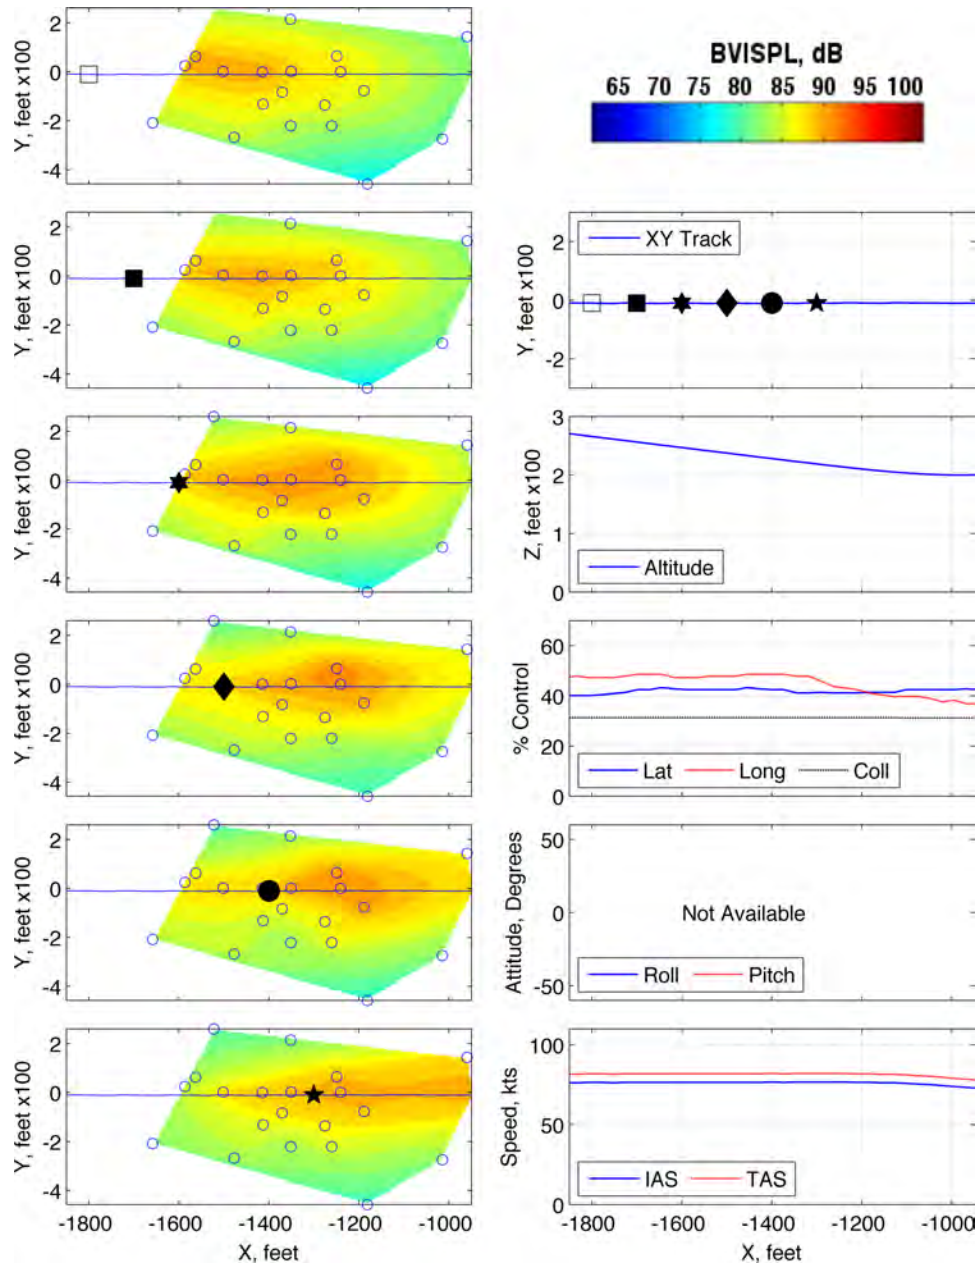


Figure 173: Maneuver condition D10, 80 KIAS,  $-6^\circ$ , slow cyclic pitch up, run number 278331

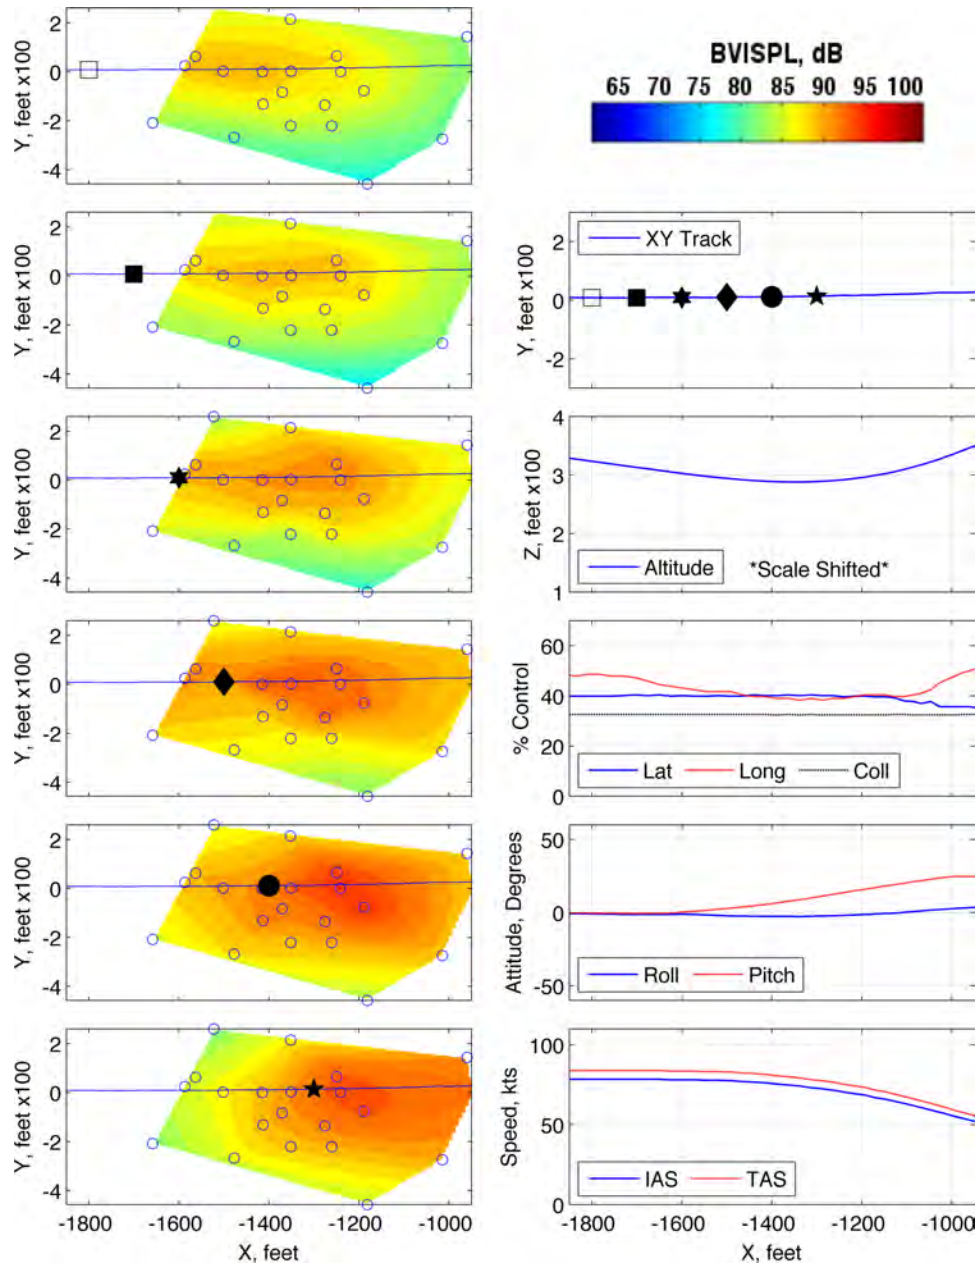


Figure 174: Maneuver condition D10, 80 KIAS,  $-6^\circ$ , slow cyclic pitch up, run number 282413



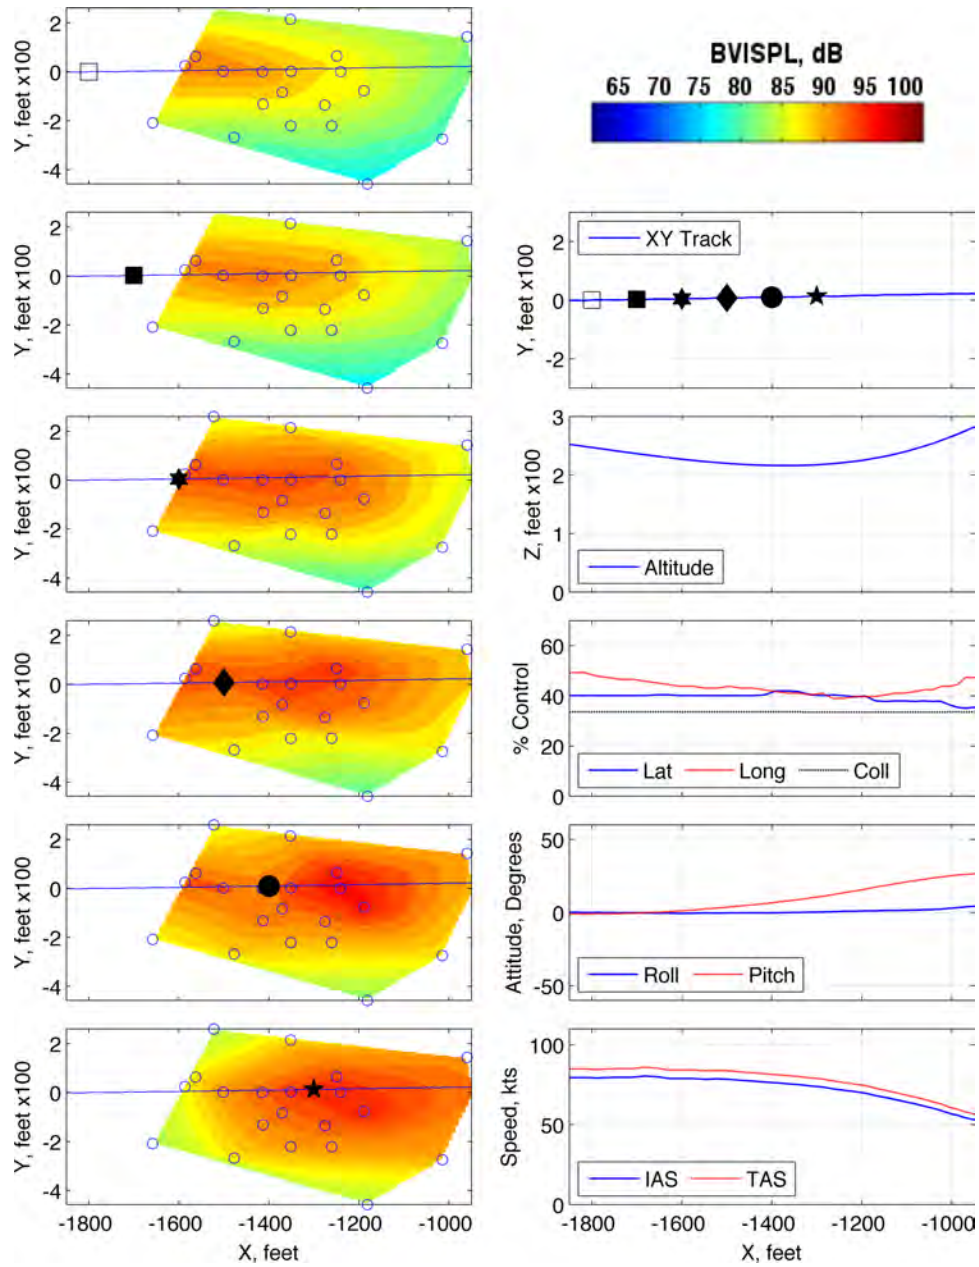


Figure 175: Maneuver condition D10, 80 KIAS,  $-6^\circ$ , slow cyclic pitch up, run number 282414

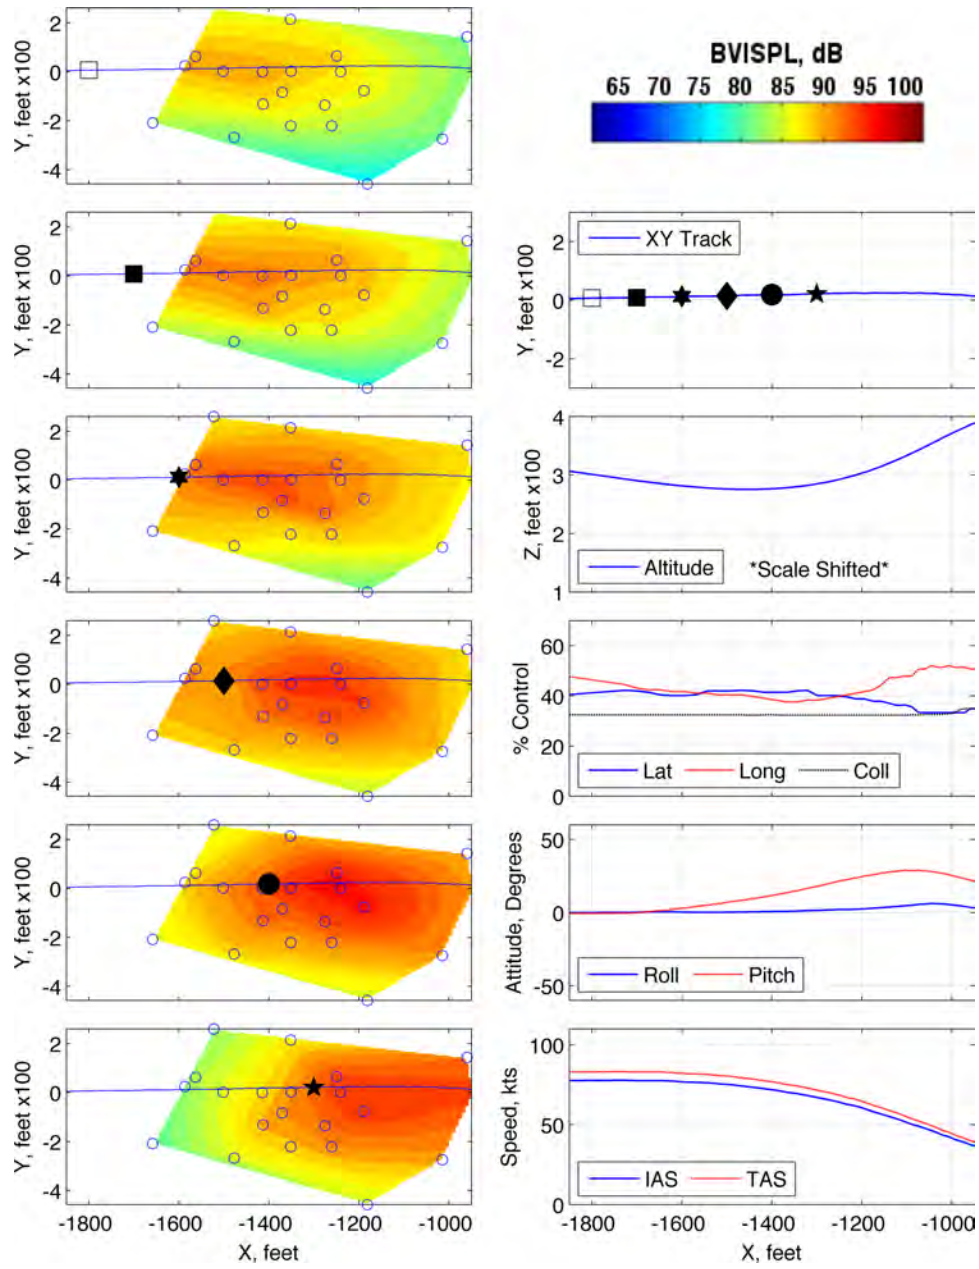


Figure 176: Maneuver condition D10, 80 KIAS,  $-6^\circ$ , slow cyclic pitch up, run number 282415

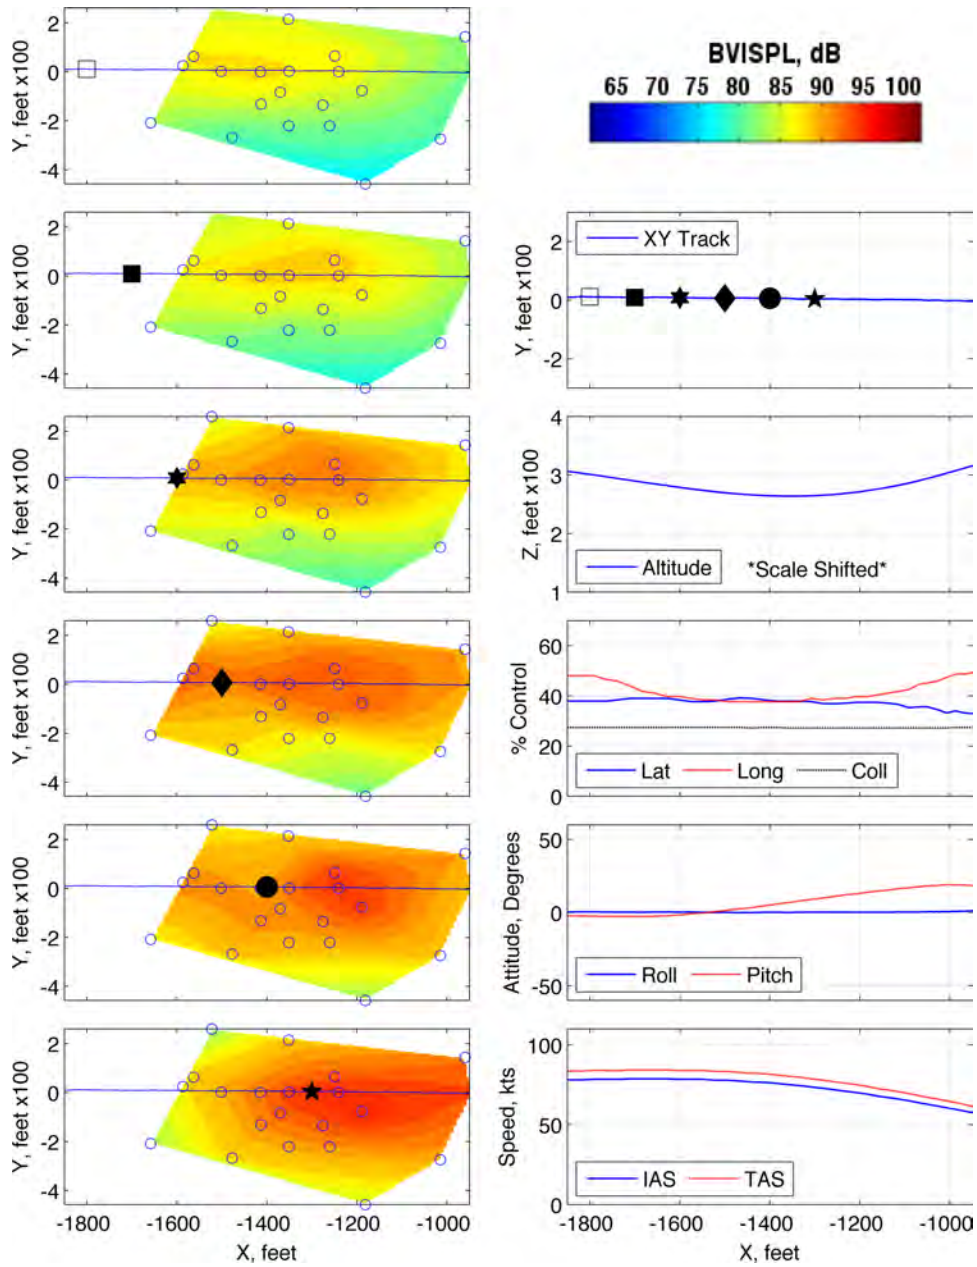


Figure 177: Maneuver condition D11, 80 KIAS,  $-6^\circ$ , medium cyclic pitch up, run number 285478

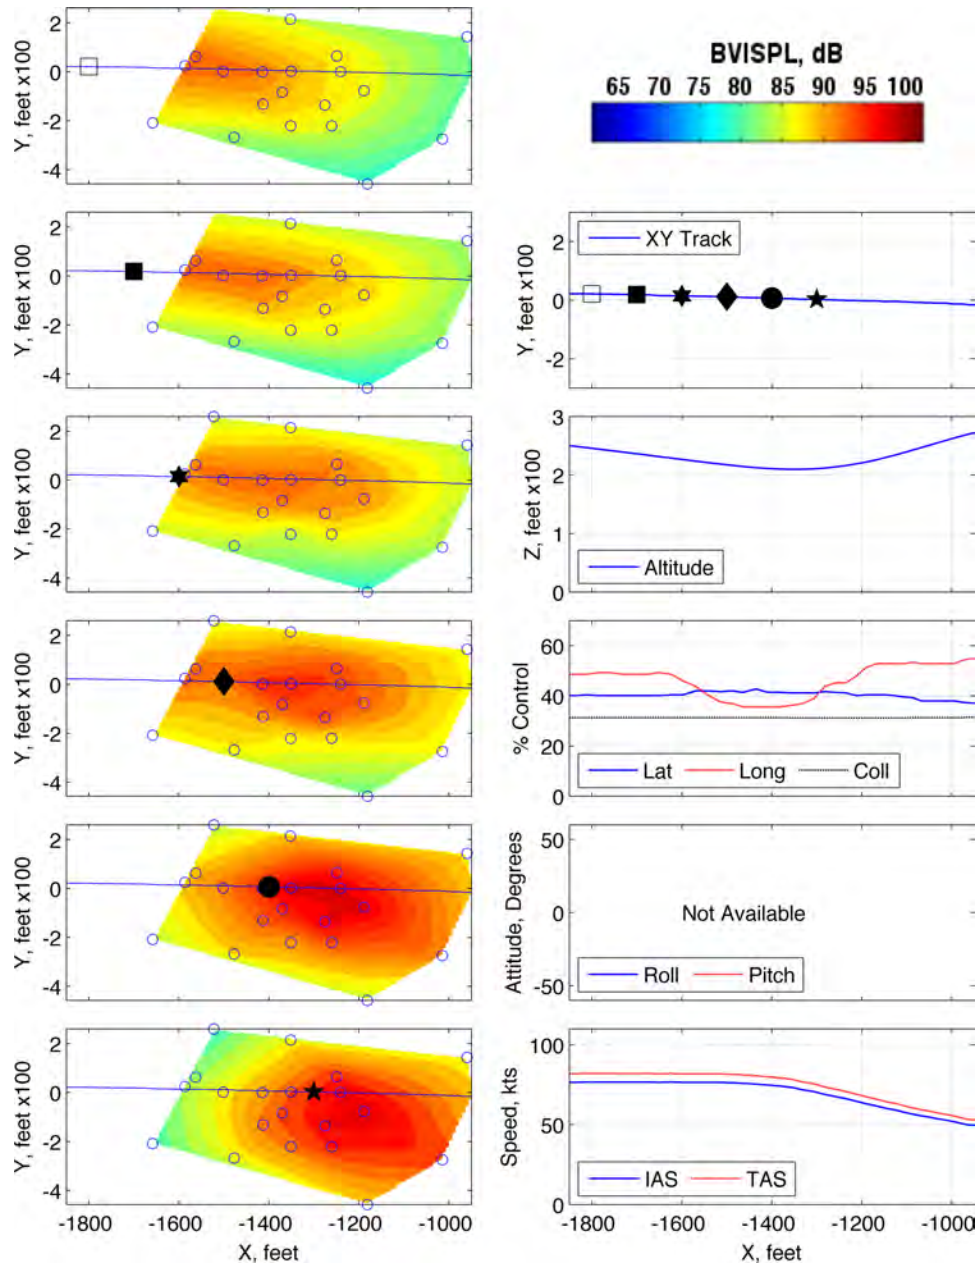


Figure 178: Maneuver condition D12, 80 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 278302

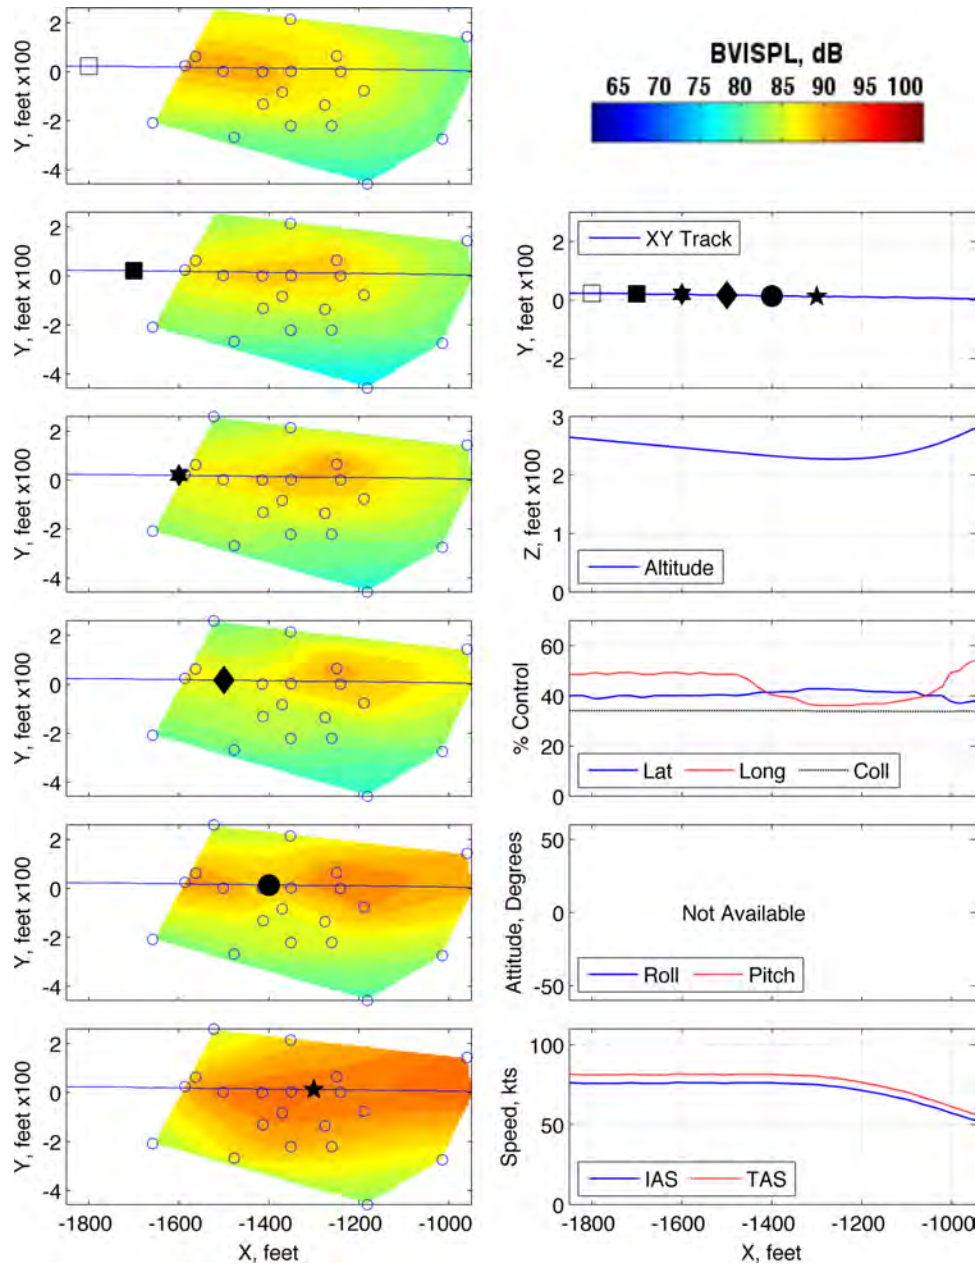


Figure 179: Maneuver condition D12, 80 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 278307

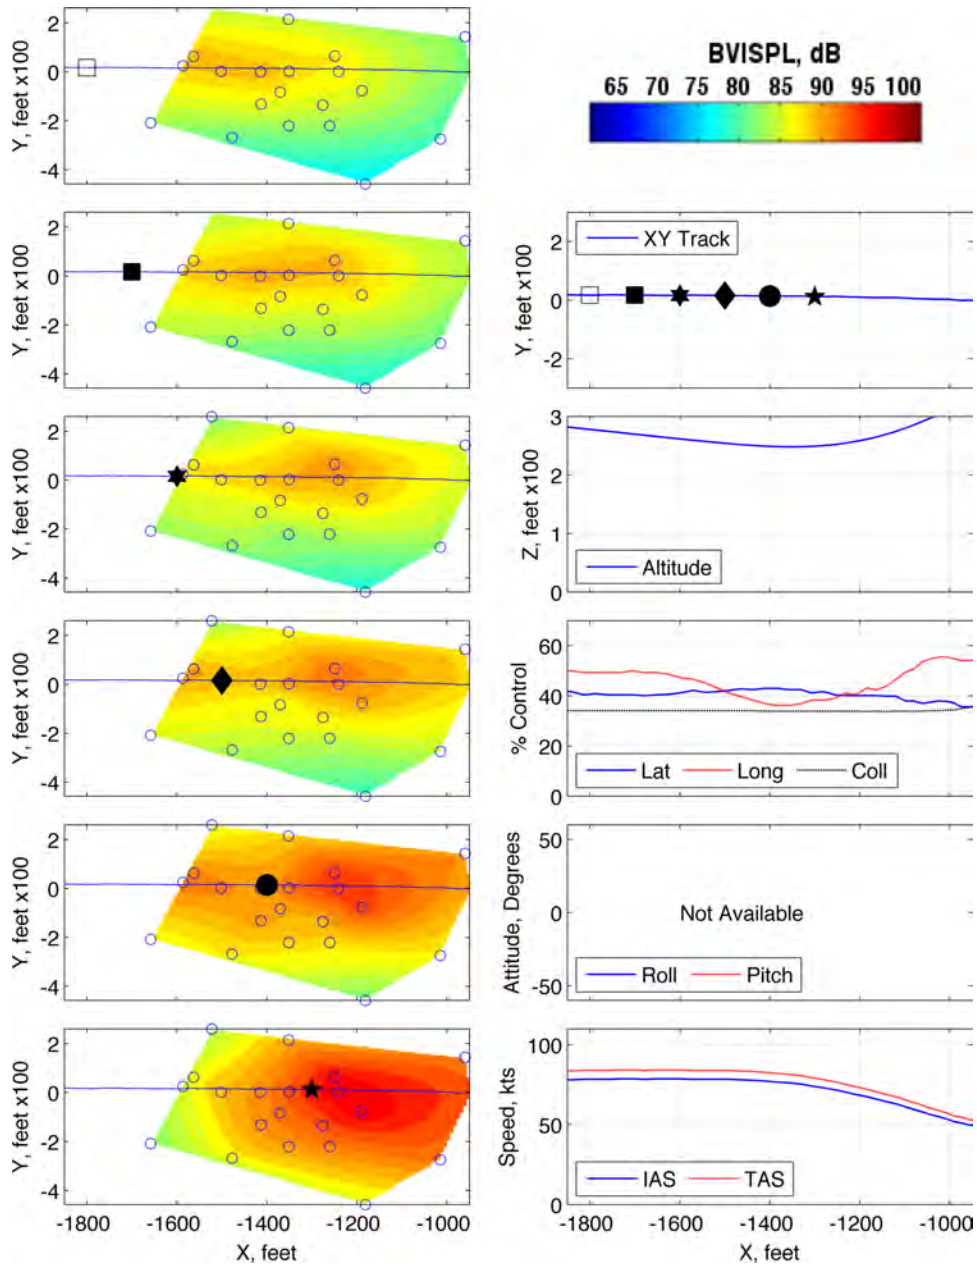


Figure 180: Maneuver condition D12, 80 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 278308

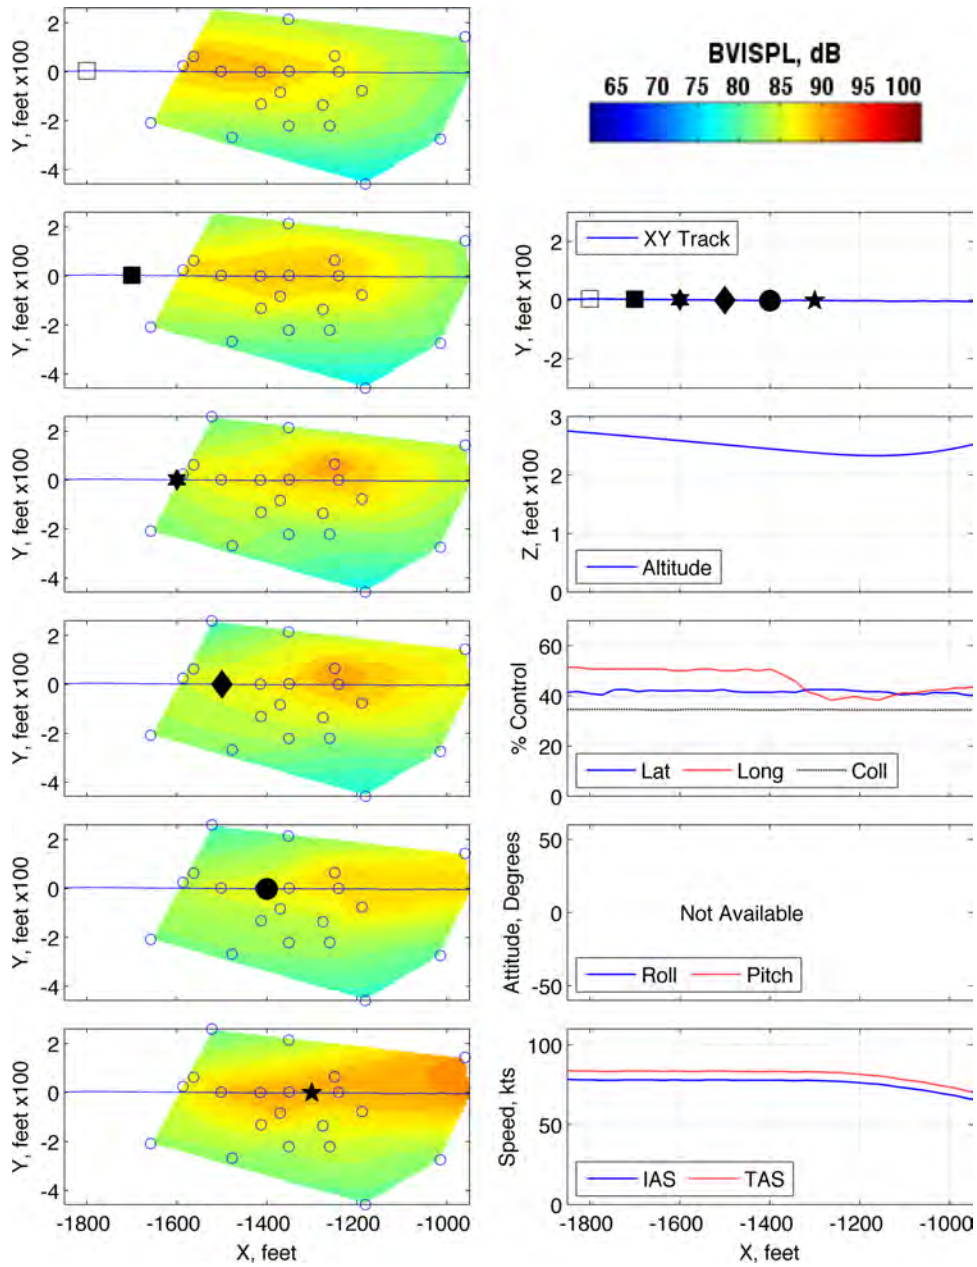


Figure 181: Maneuver condition D12, 80 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 278309

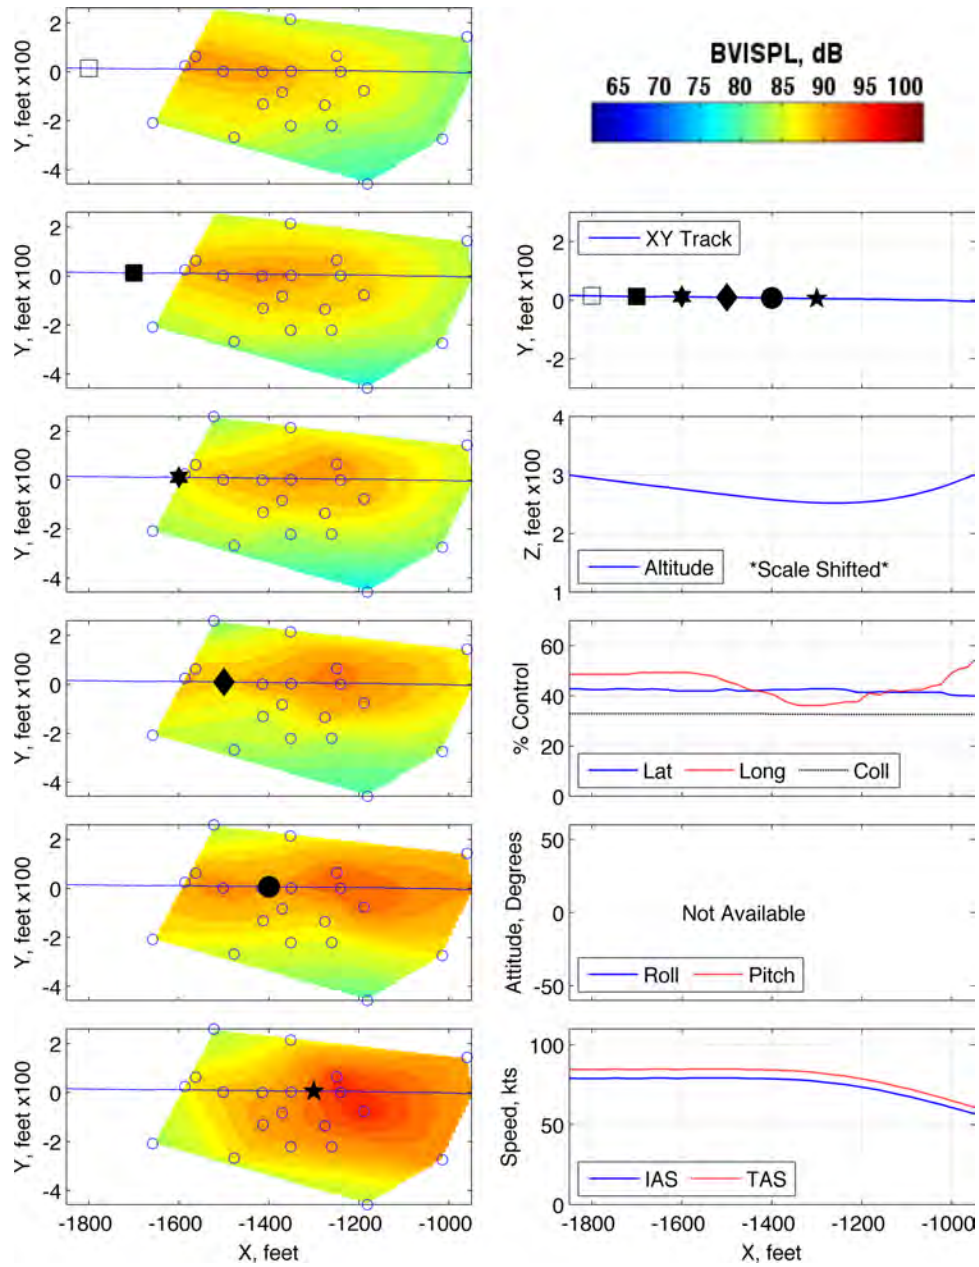


Figure 182: Maneuver condition D12, 80 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 278310



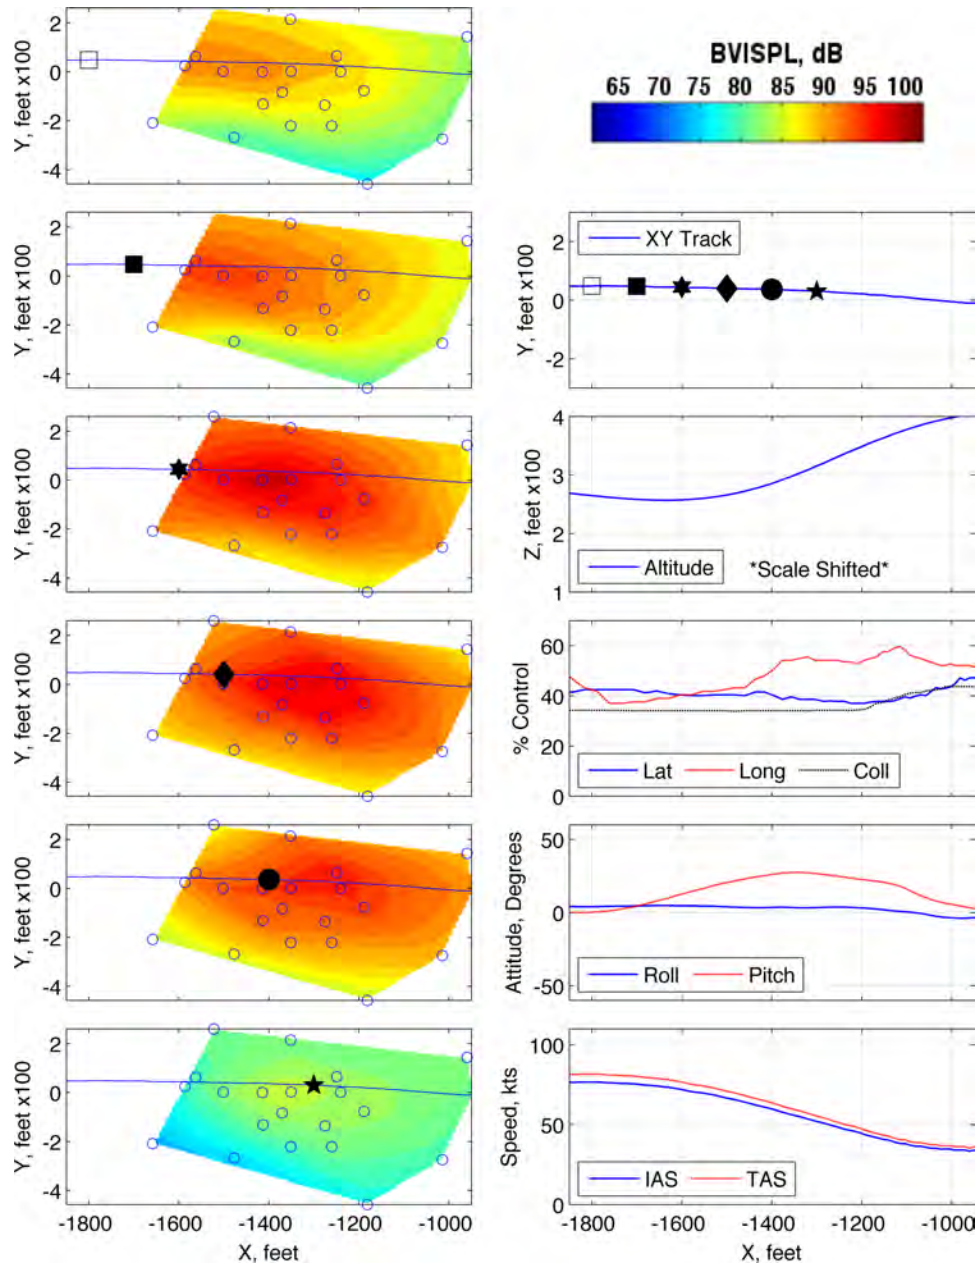


Figure 183: Maneuver condition D12, 80 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 280342

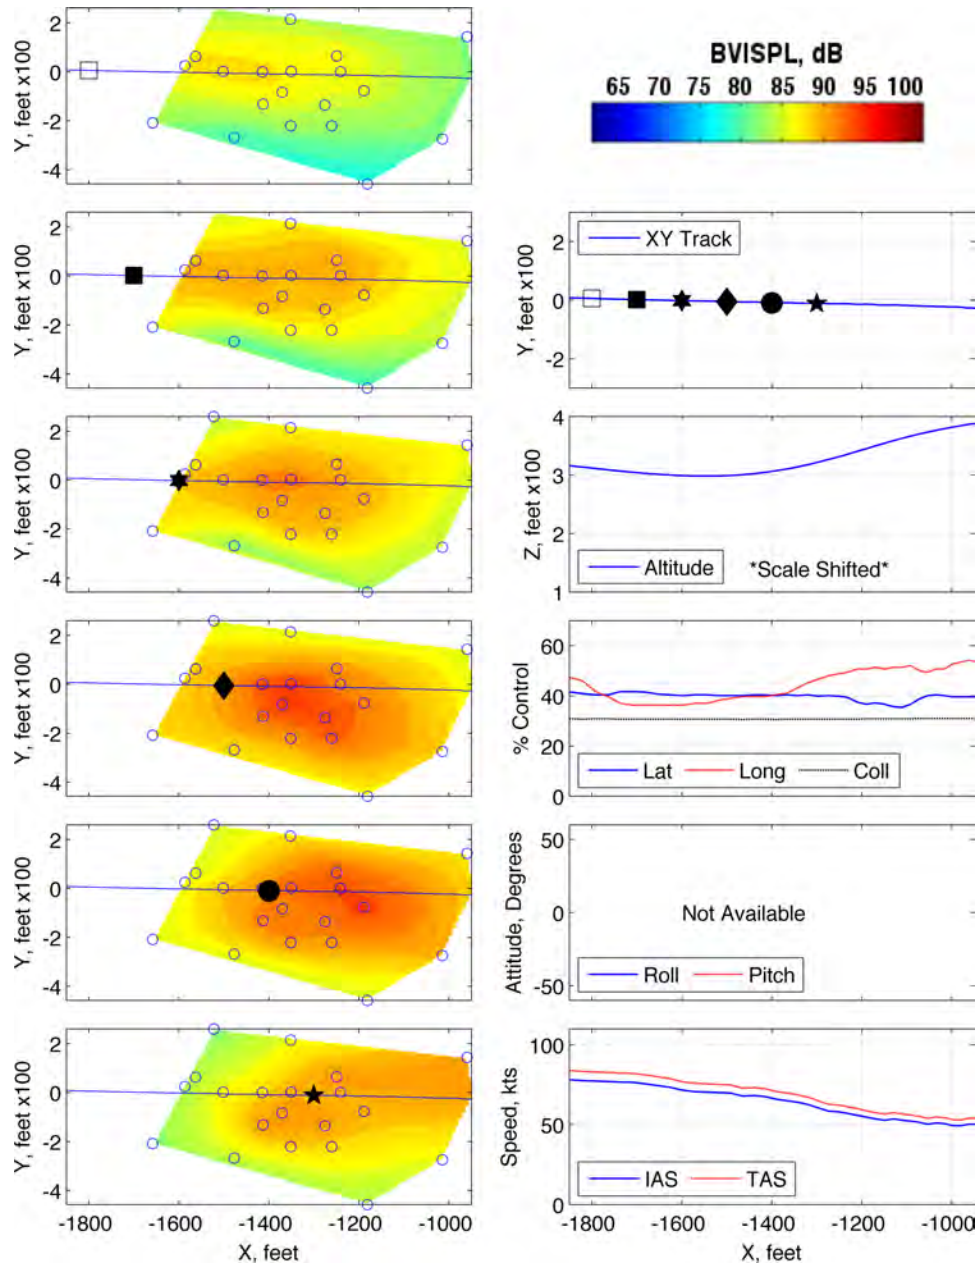


Figure 184: Maneuver condition D12, 80 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 280406

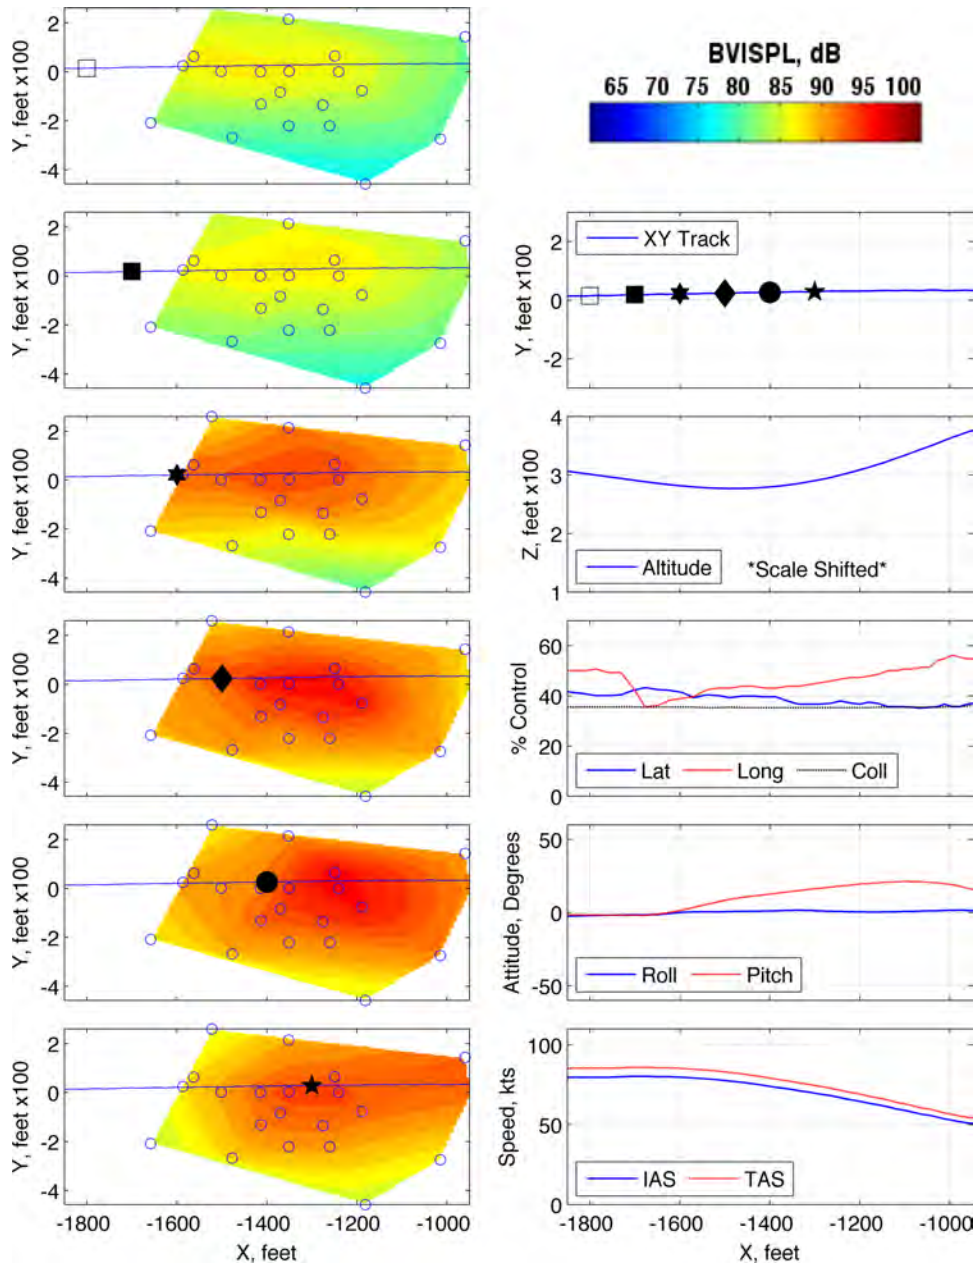


Figure 185: Maneuver condition D12, 80 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 282412

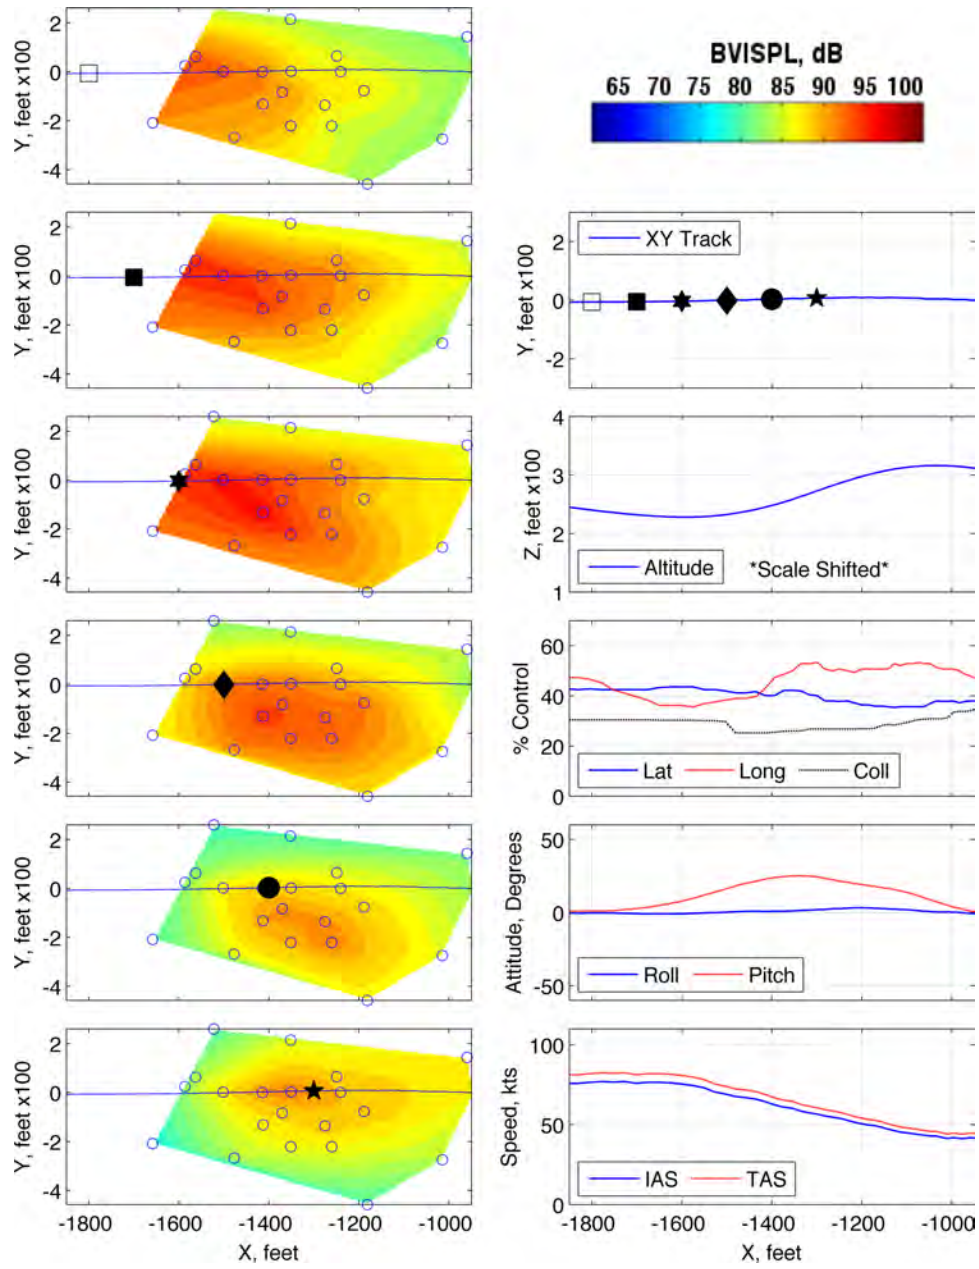


Figure 186: Maneuver condition D12, 80 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 282450

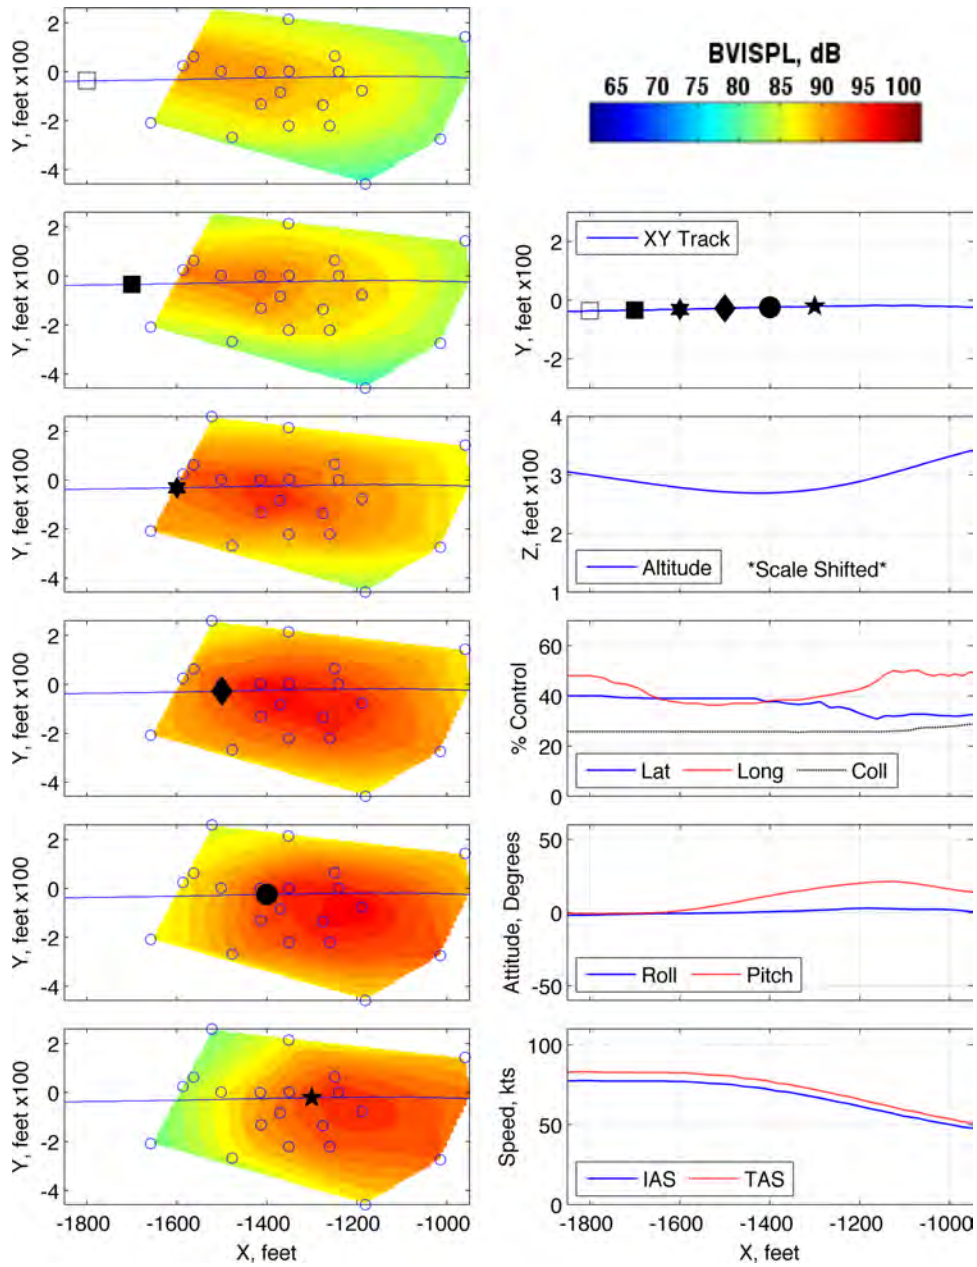


Figure 187: Maneuver condition D12, 80 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 285462

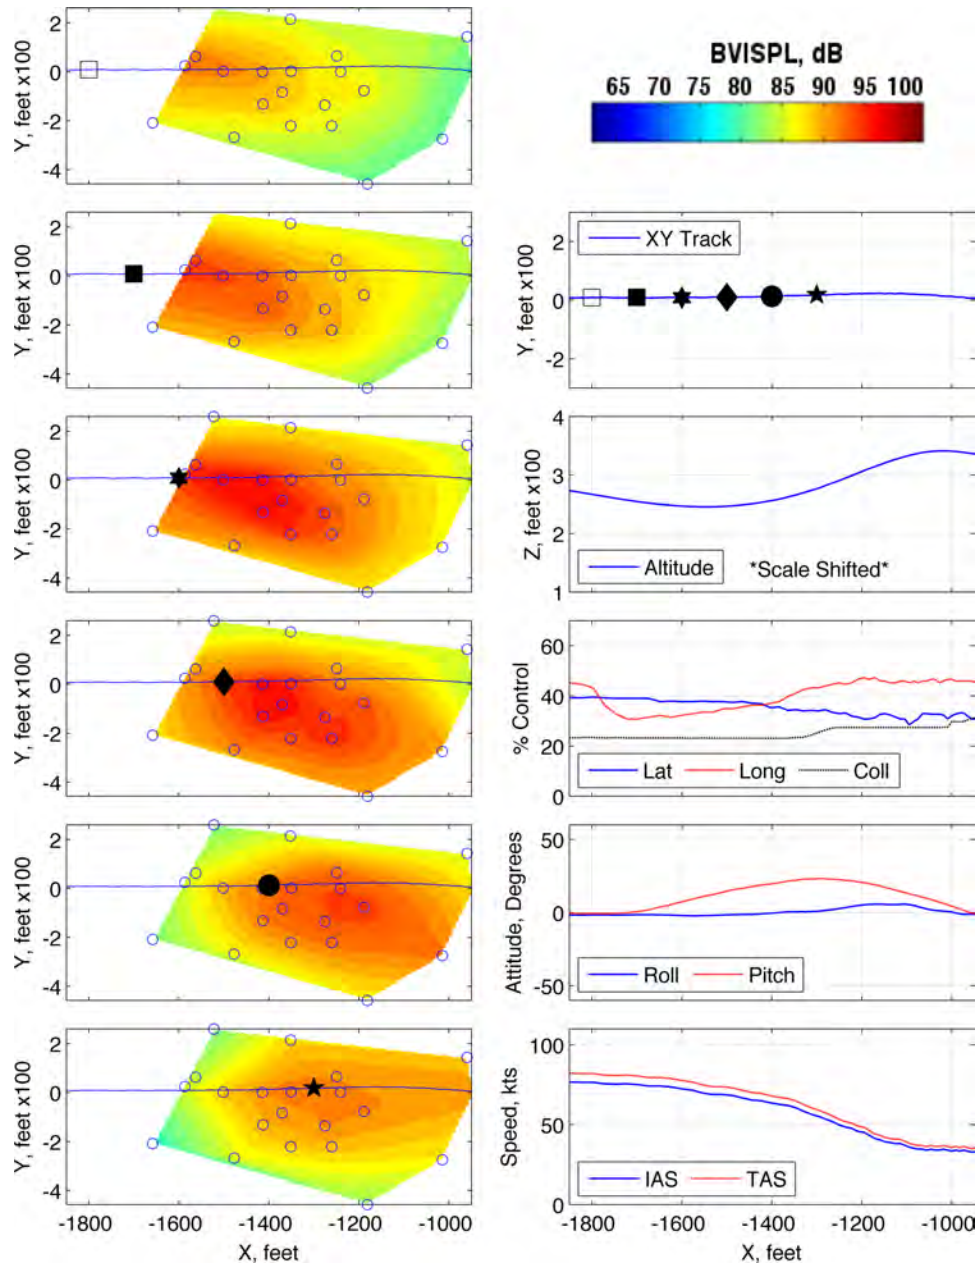


Figure 188: Maneuver condition D12, 80 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 285517

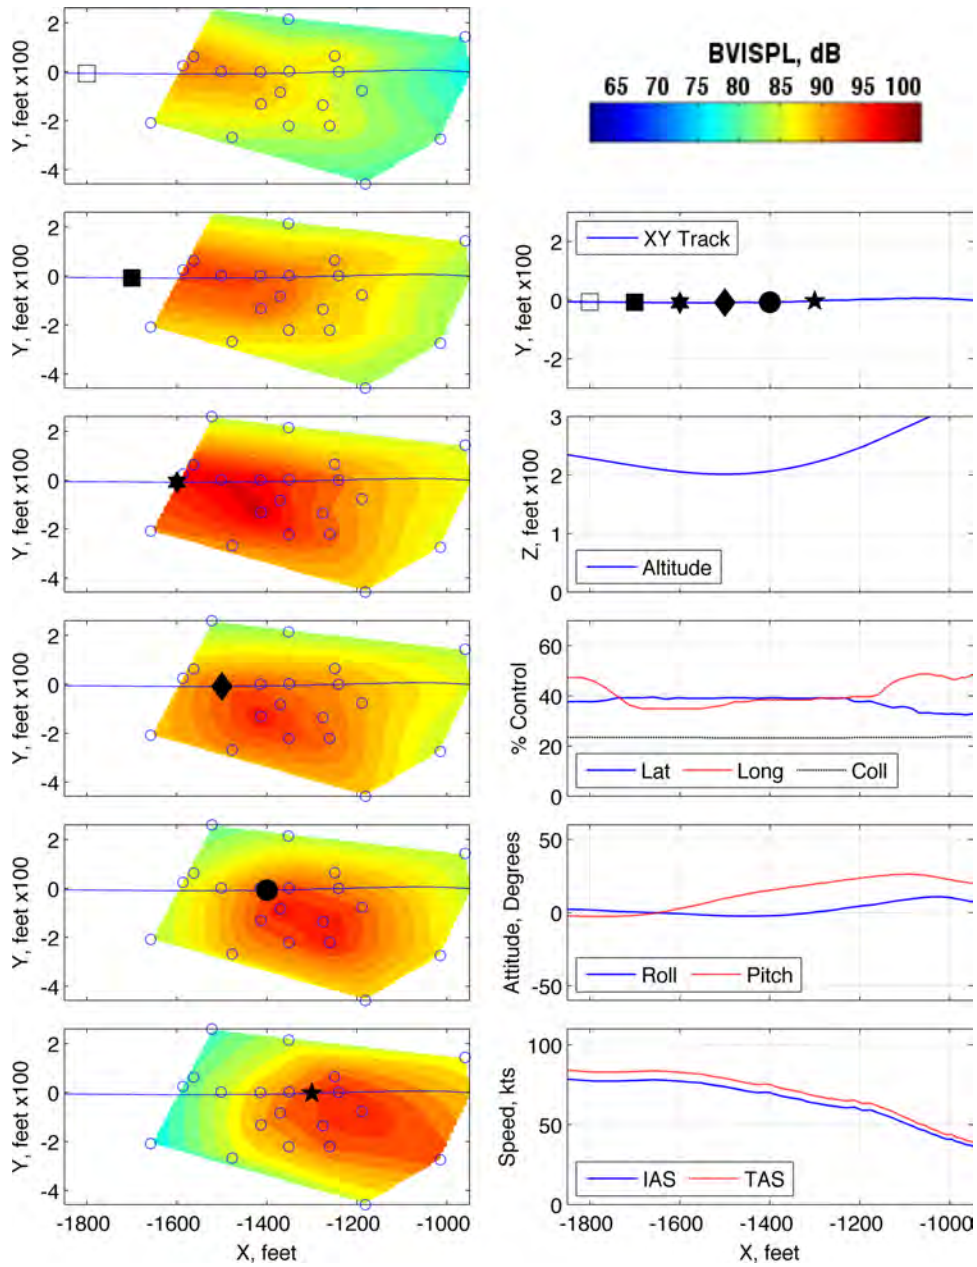


Figure 189: Maneuver condition D12, 80 KIAS,  $-6^\circ$ , fast cyclic pitch up, run number 287575

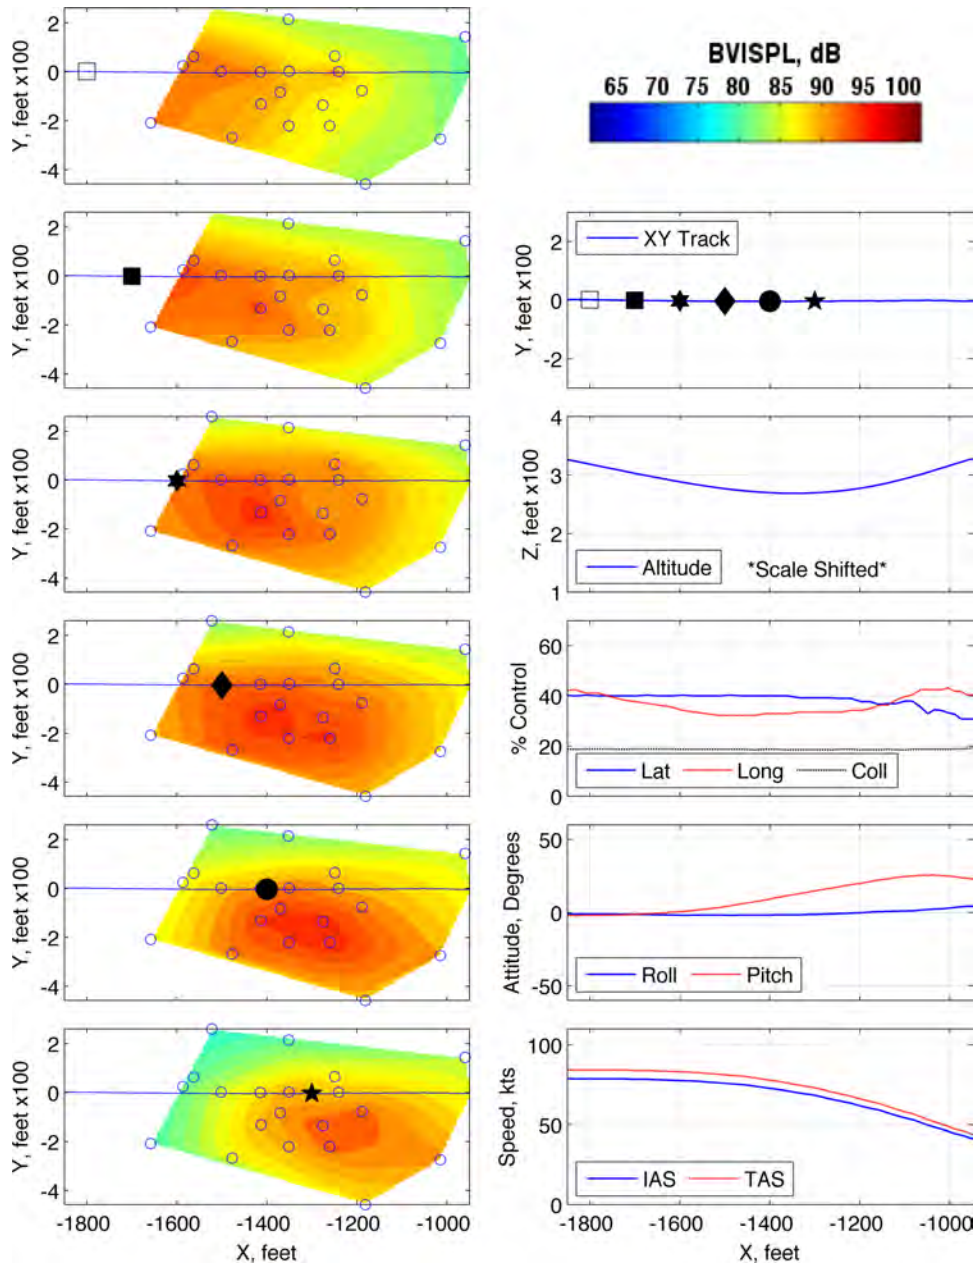


Figure 190: Maneuver condition D19, 80 KIAS,  $-9^\circ$ , slow cyclic pitch up, run number 285490



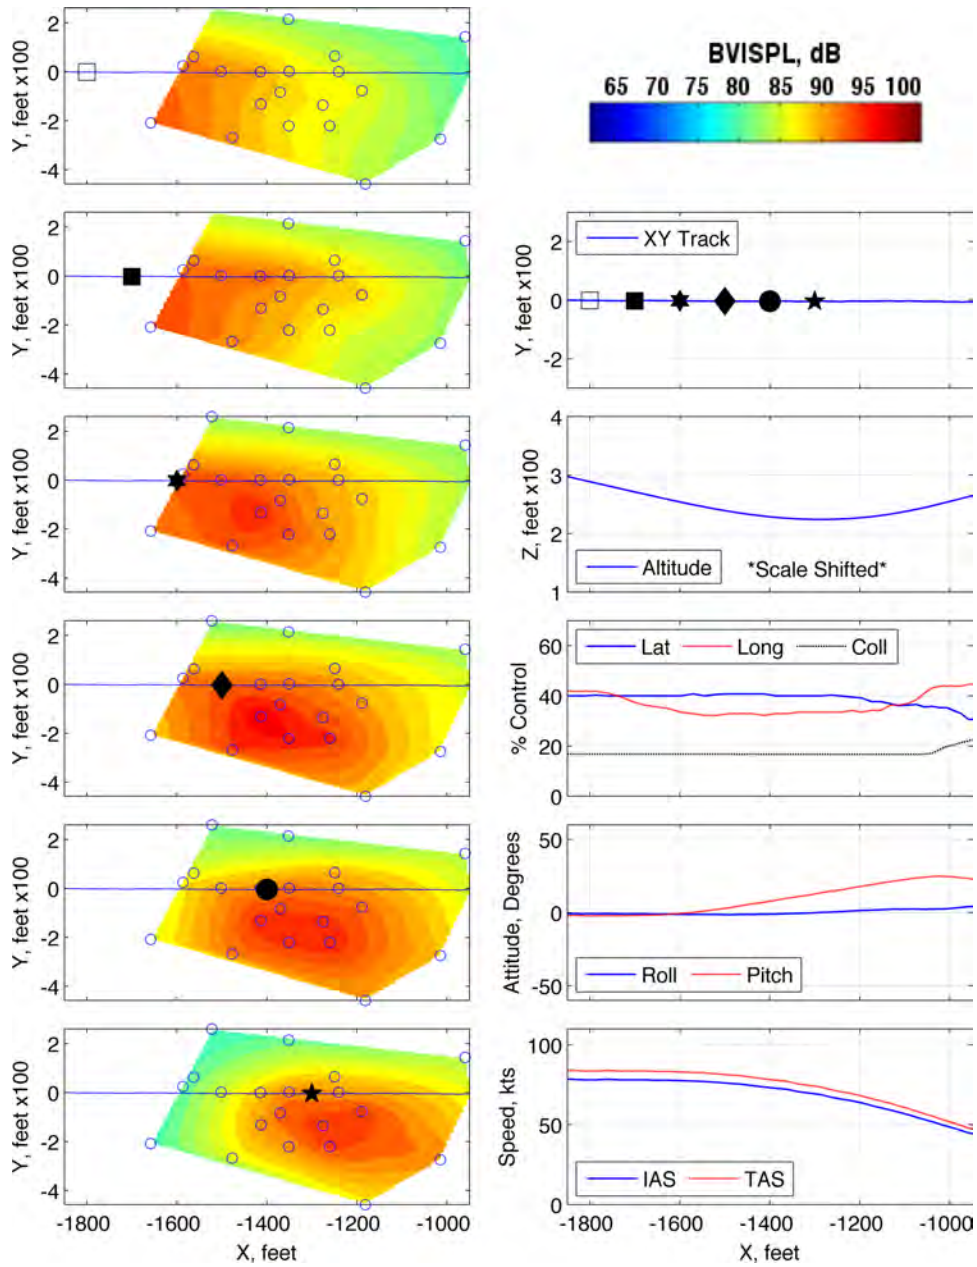


Figure 191: Maneuver condition D19, 80 KIAS,  $-9^\circ$ , slow cyclic pitch up, run number 285491

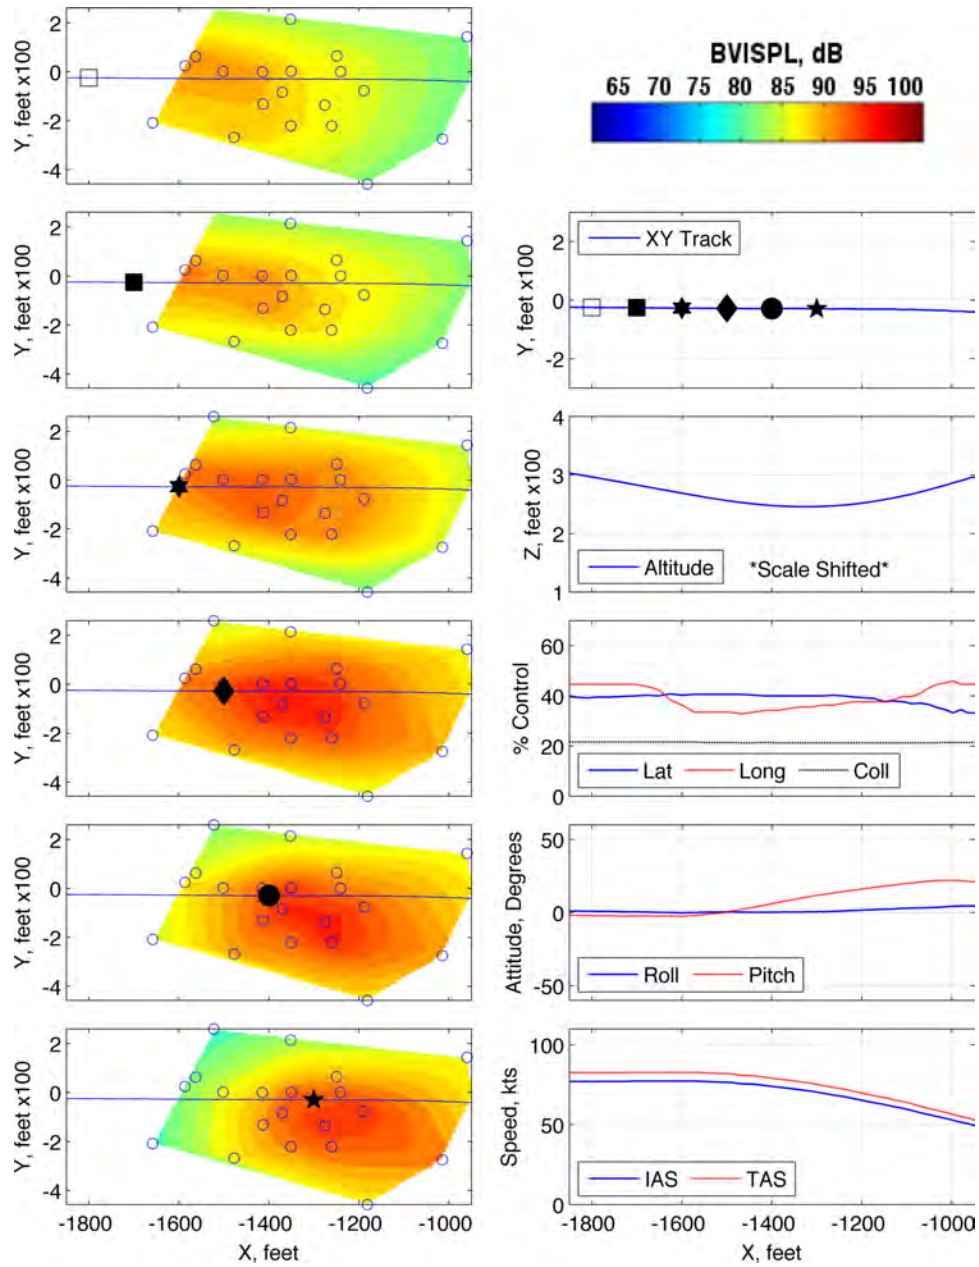


Figure 192: Maneuver condition D21, 80 KIAS,  $-9^\circ$ , fast cyclic pitch up, run number 285492

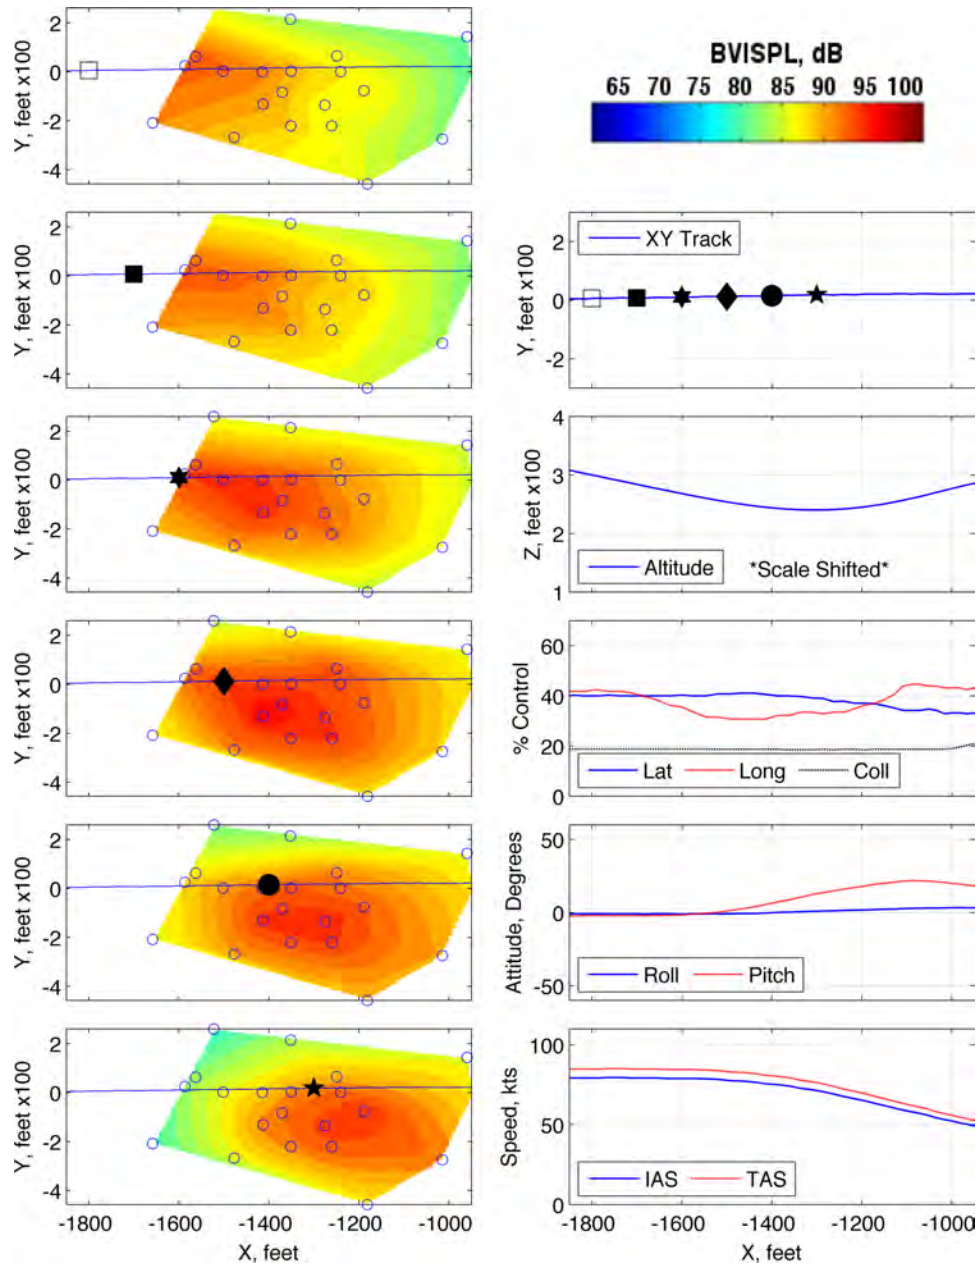


Figure 193: Maneuver condition D21, 80 KIAS,  $-9^\circ$ , fast cyclic pitch up, run number 285493

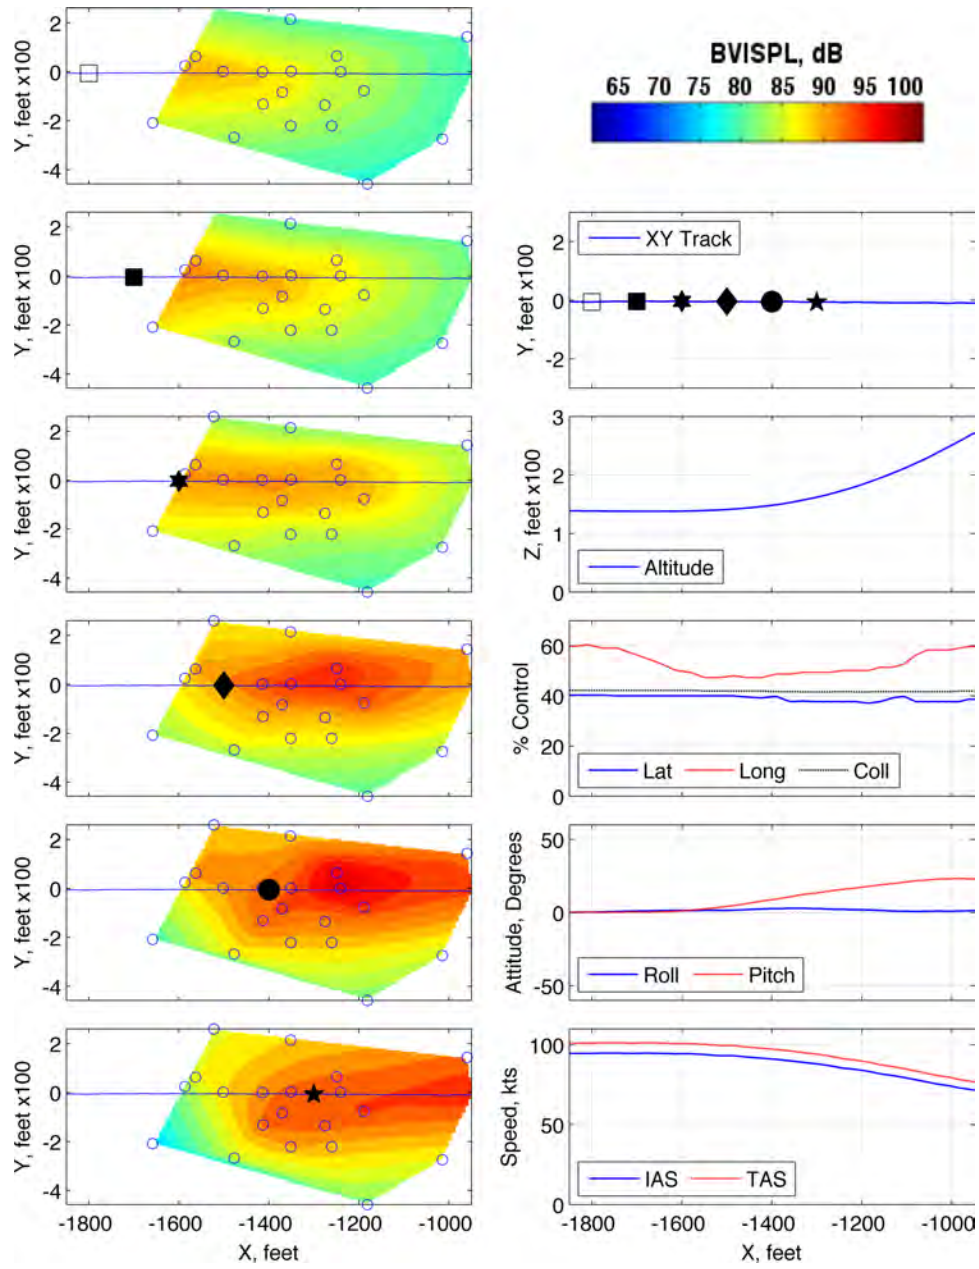


Figure 194: Maneuver condition D22, 100 KIAS, level, medium cyclic pitch up, run number 287526

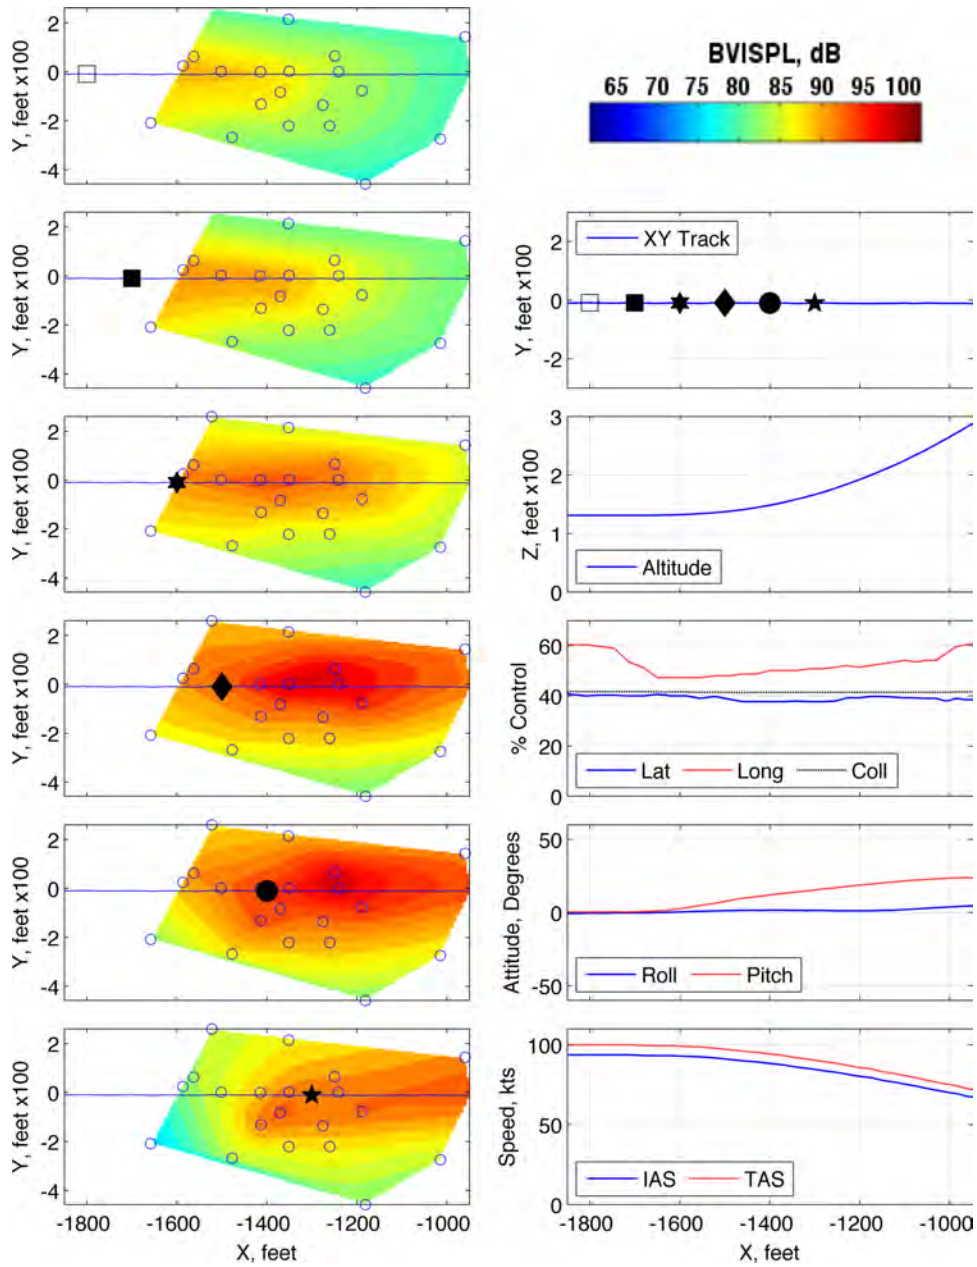


Figure 195: Maneuver condition D22, 100 KIAS, level, medium cyclic pitch up, run number 287527

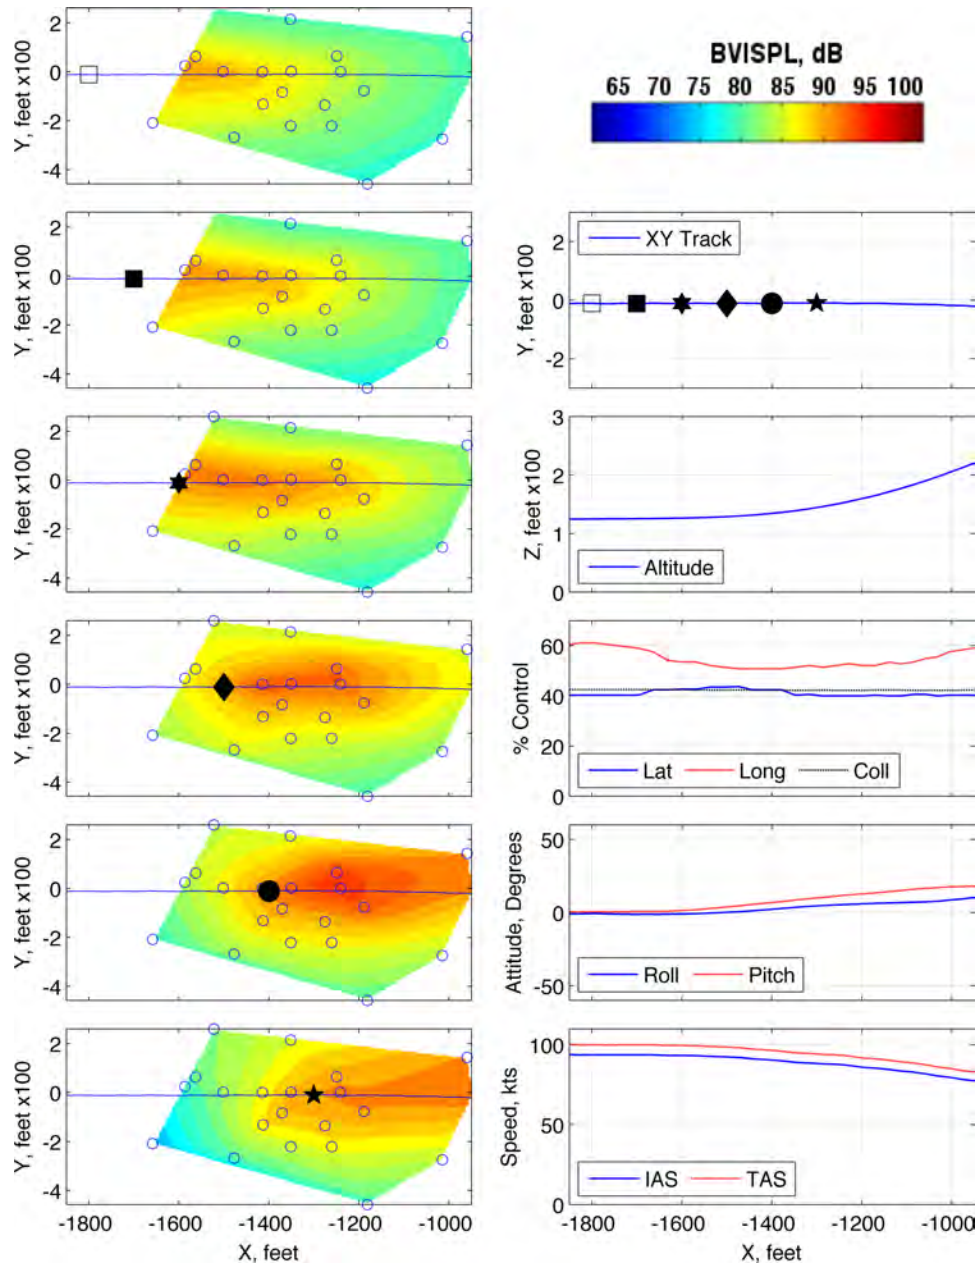


Figure 196: Maneuver condition D22, 100 KIAS, level, medium cyclic pitch up, run number 287528

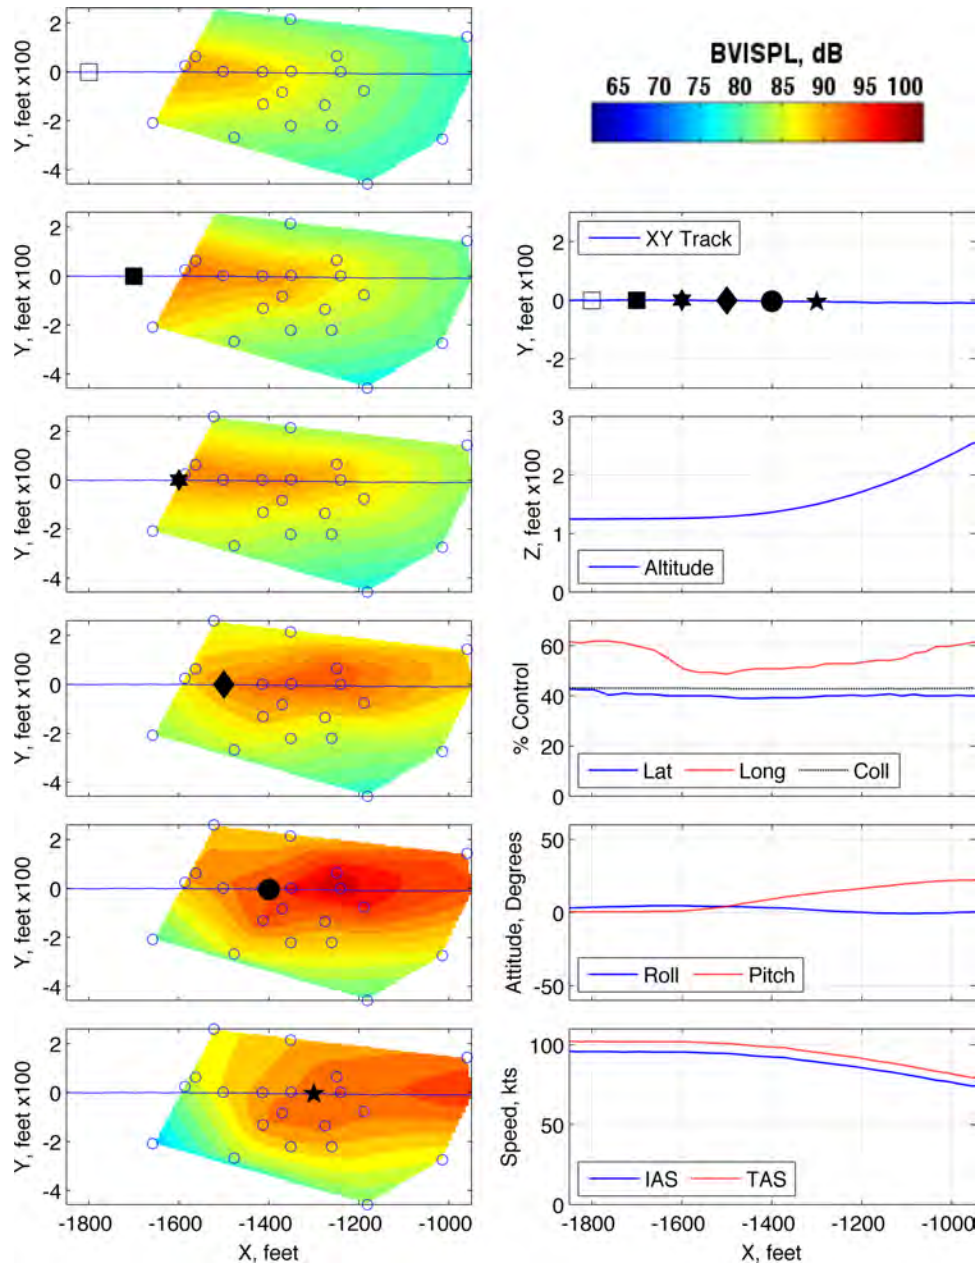


Figure 197: Maneuver condition D23, 100 KIAS, level, fast cyclic pitch up, run number 287529

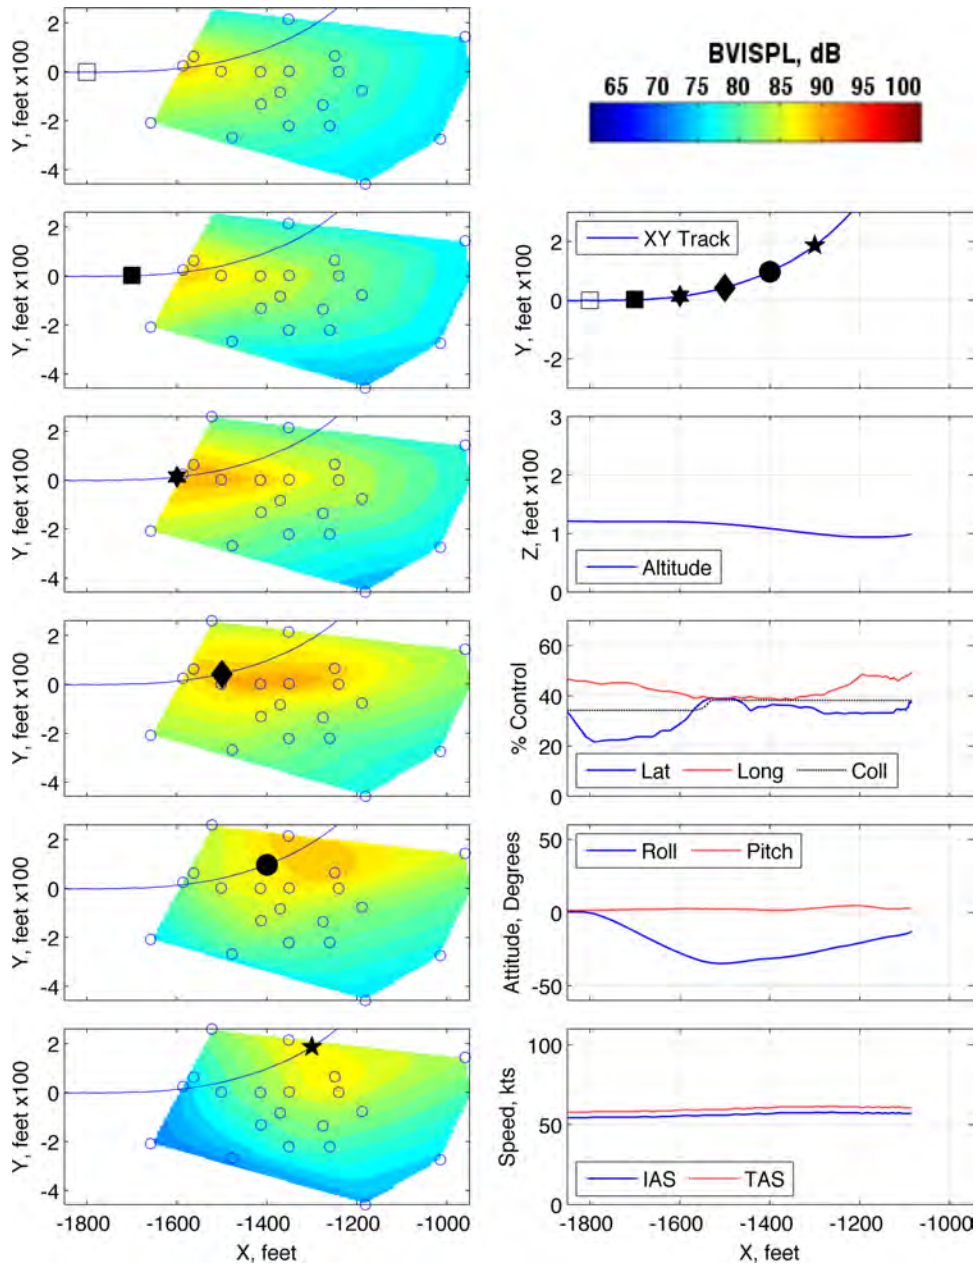


Figure 198: Maneuver condition R3, 60 KIAS, level, fast cyclic roll left, run number 285465



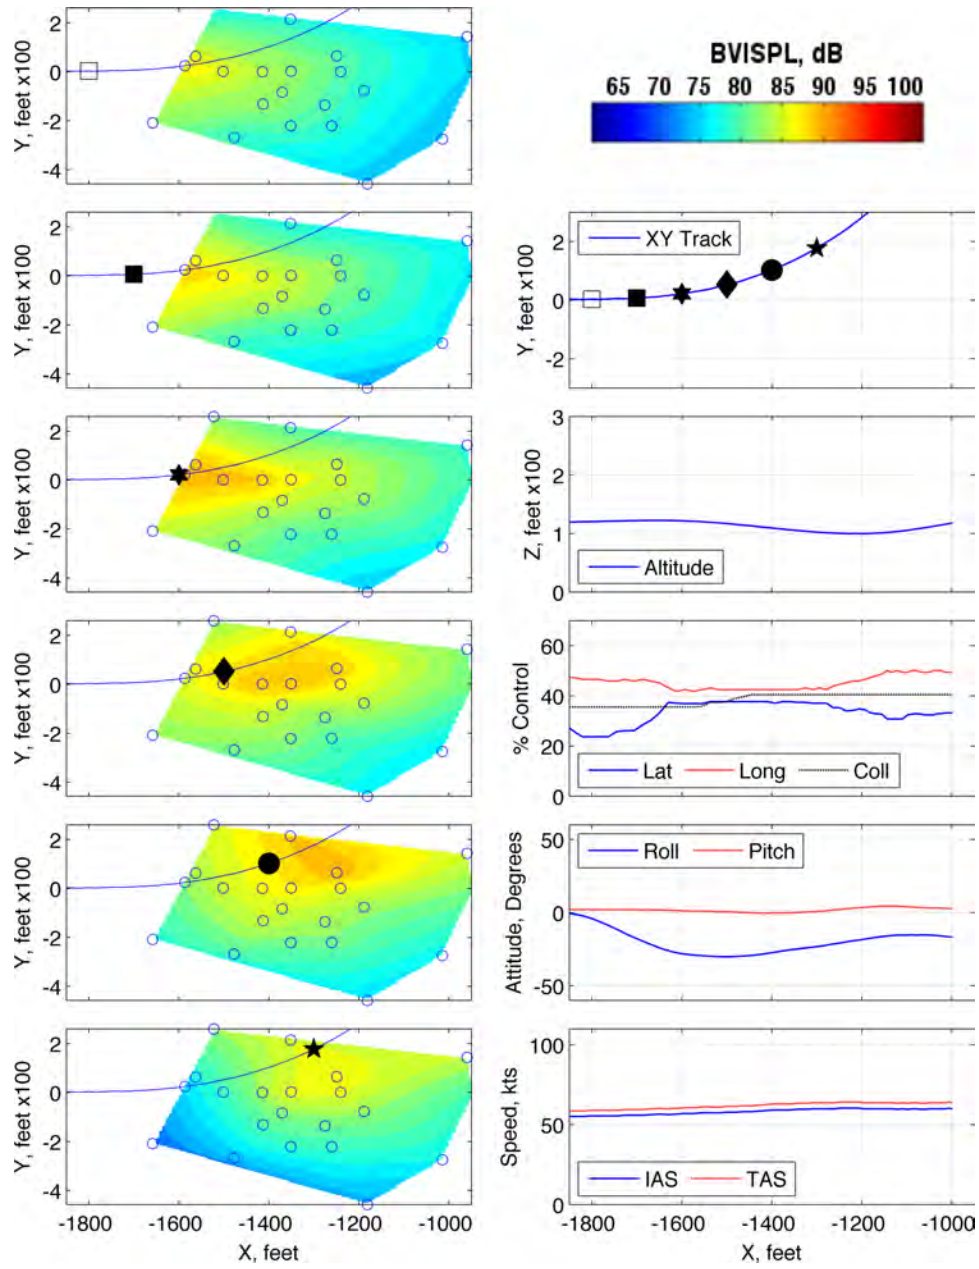


Figure 199: Maneuver condition R3, 60 KIAS, level, fast cyclic roll left, run number 285466

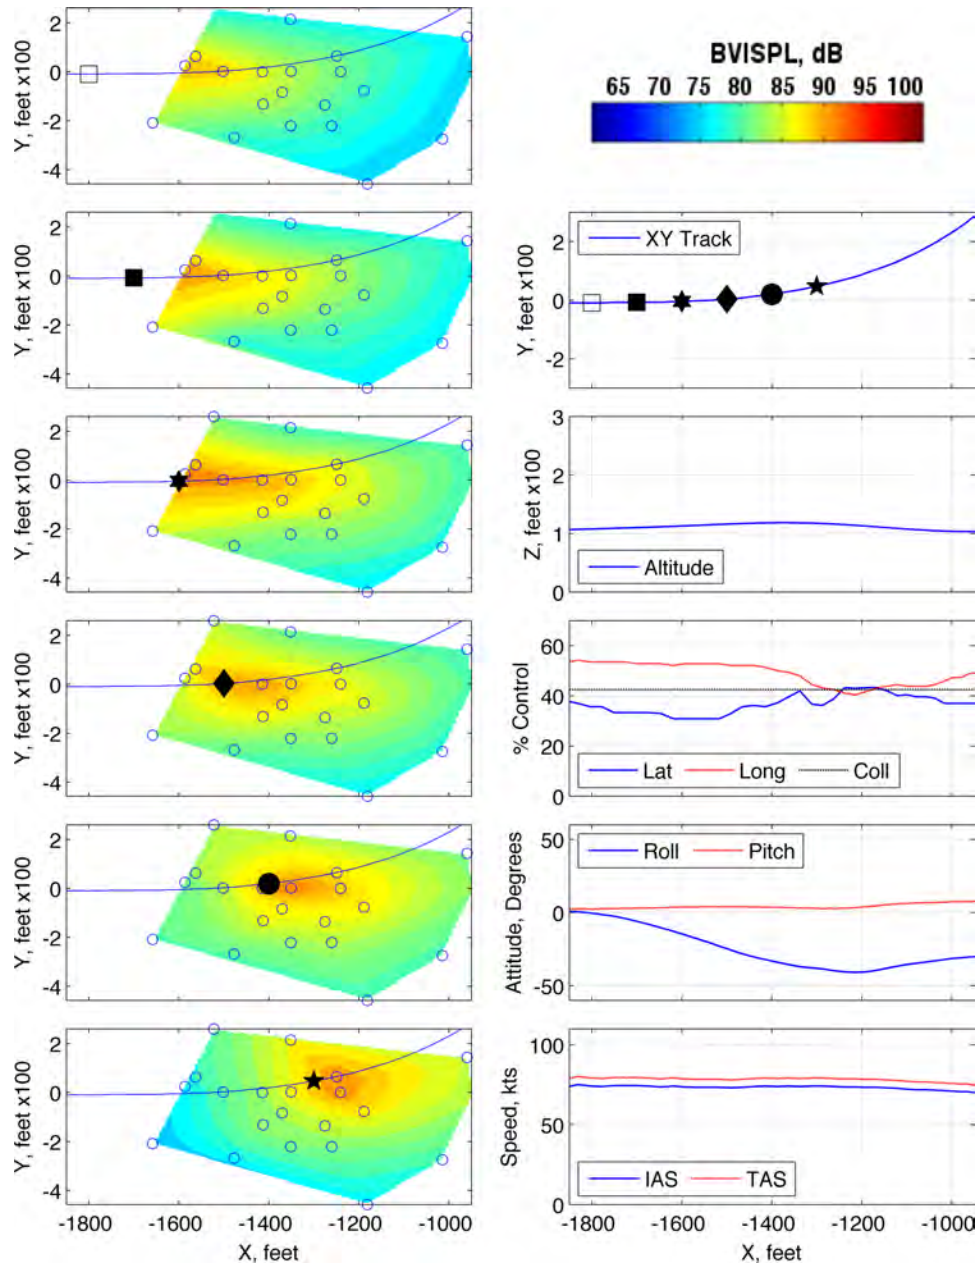


Figure 200: Maneuver condition R4, 80 KIAS, level, slow cyclic roll left, run number 280373

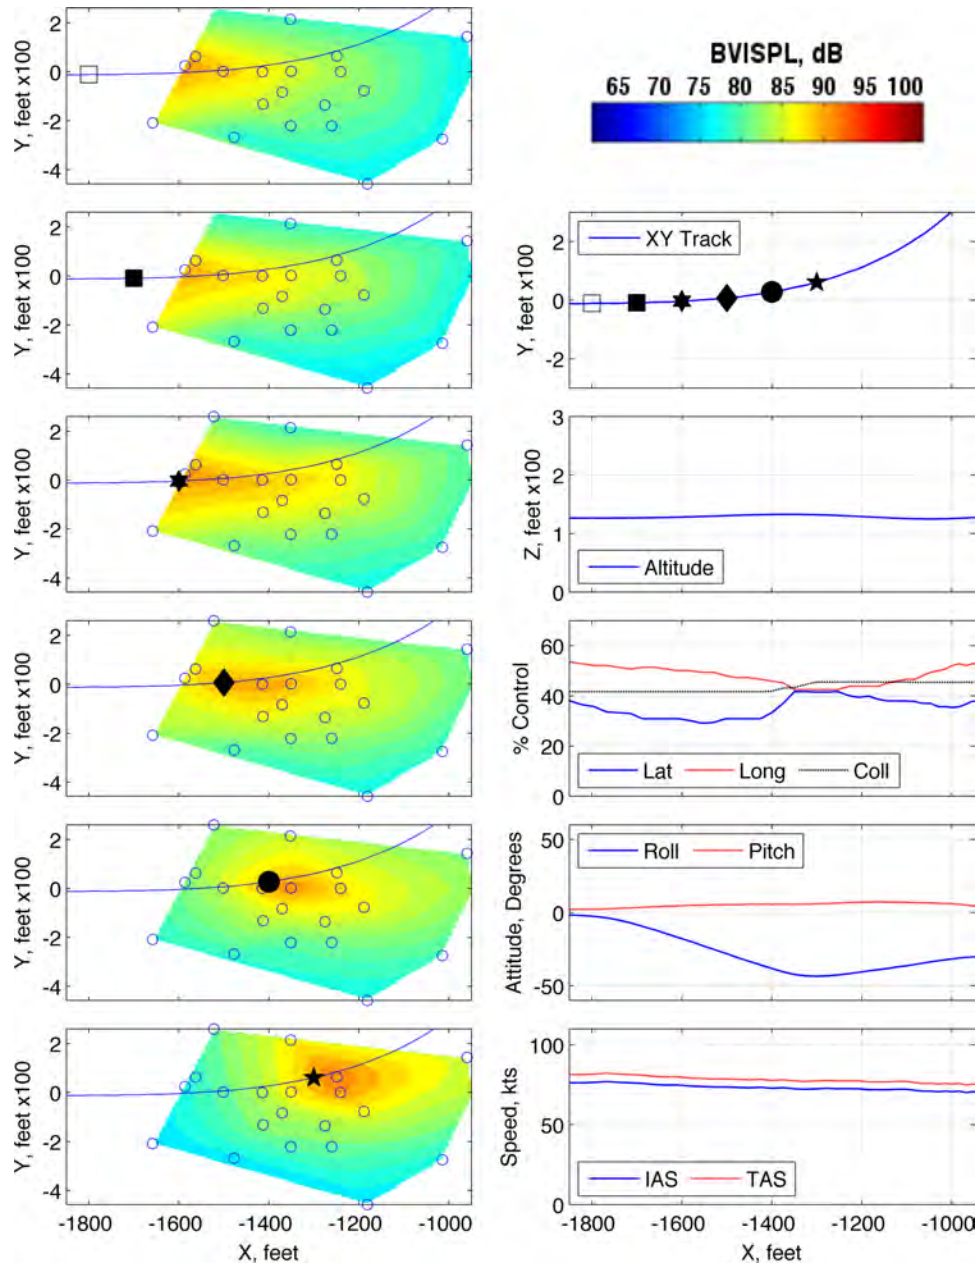


Figure 201: Maneuver condition R4, 80 KIAS, level, slow cyclic roll left, run number 280374

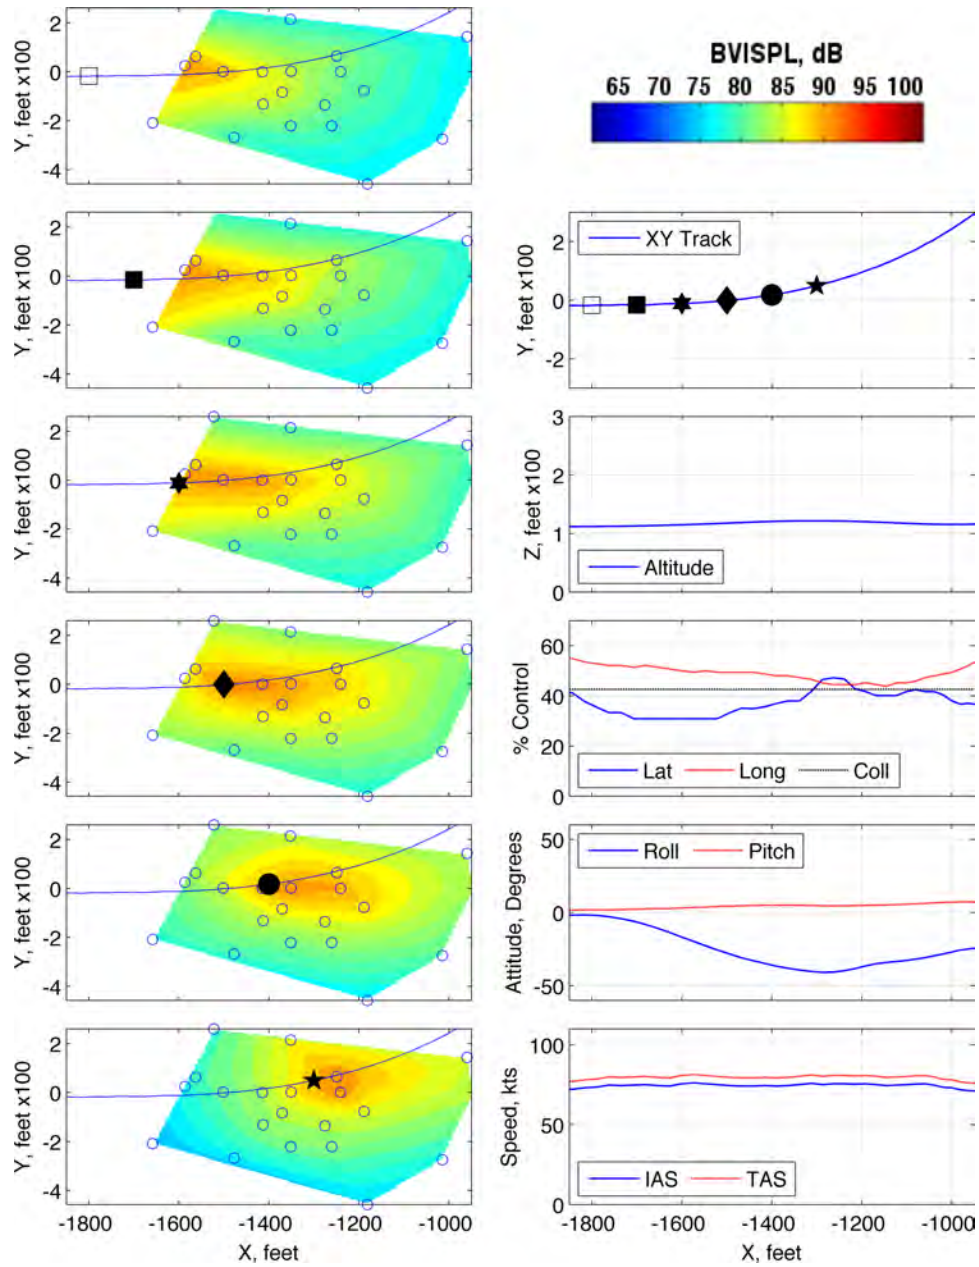


Figure 202: Maneuver condition R4, 80 KIAS, level, slow cyclic roll left, run number 280375

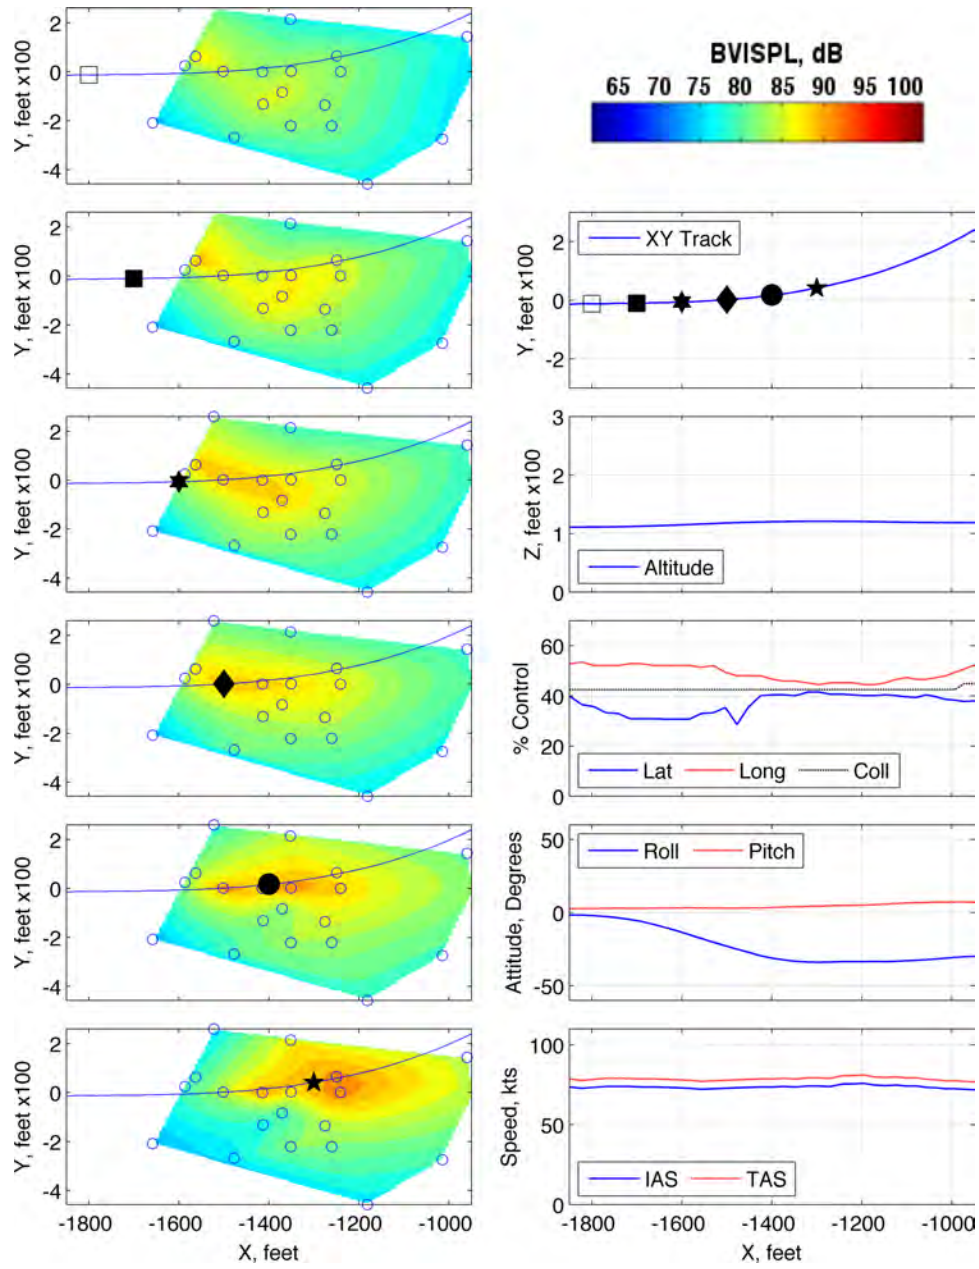


Figure 203: Maneuver condition R4, 80 KIAS, level, slow cyclic roll left, run number 280376

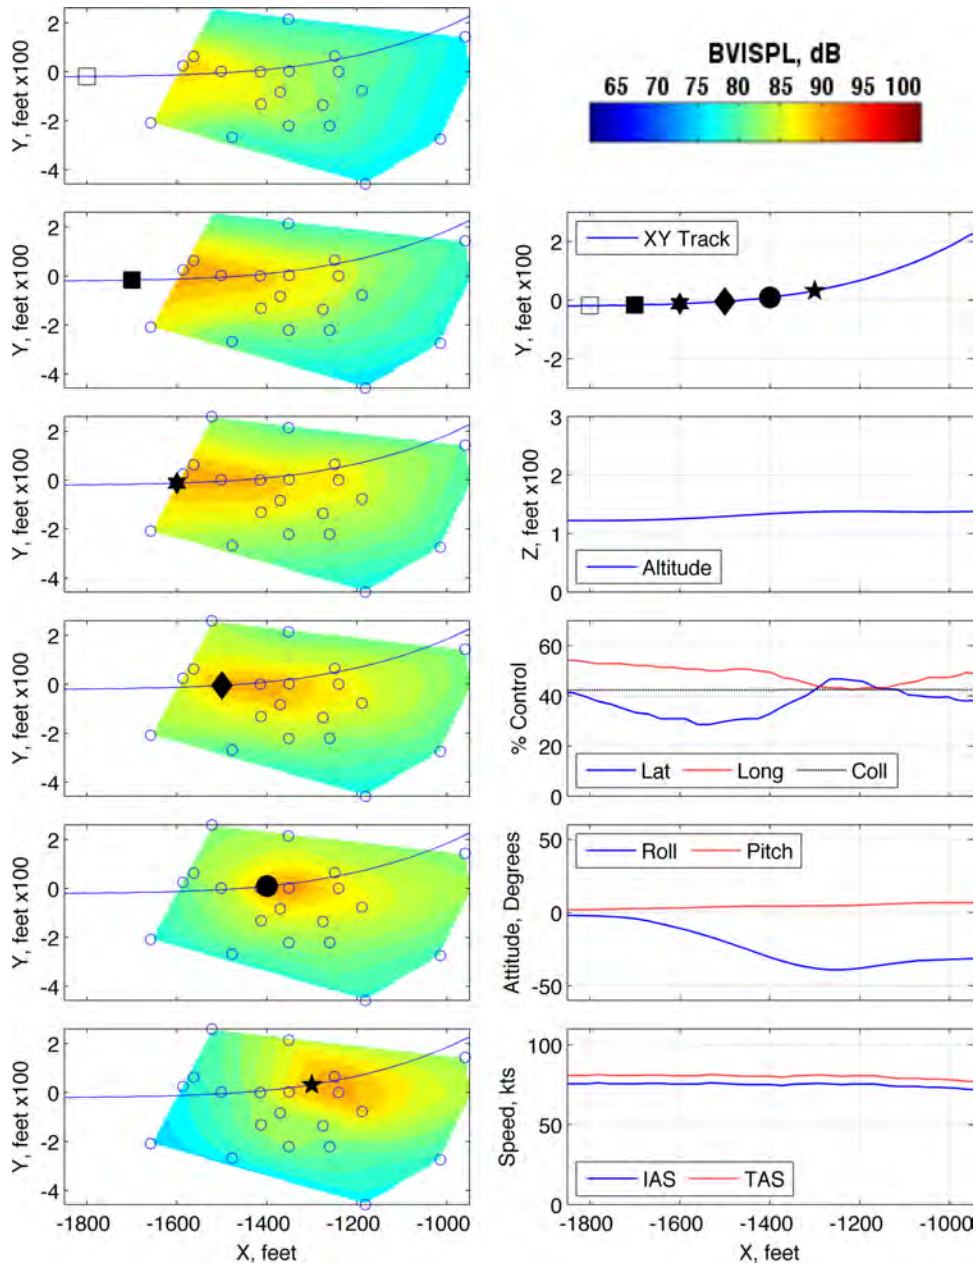


Figure 204: Maneuver condition R4, 80 KIAS, level, slow cyclic roll left, run number 280377

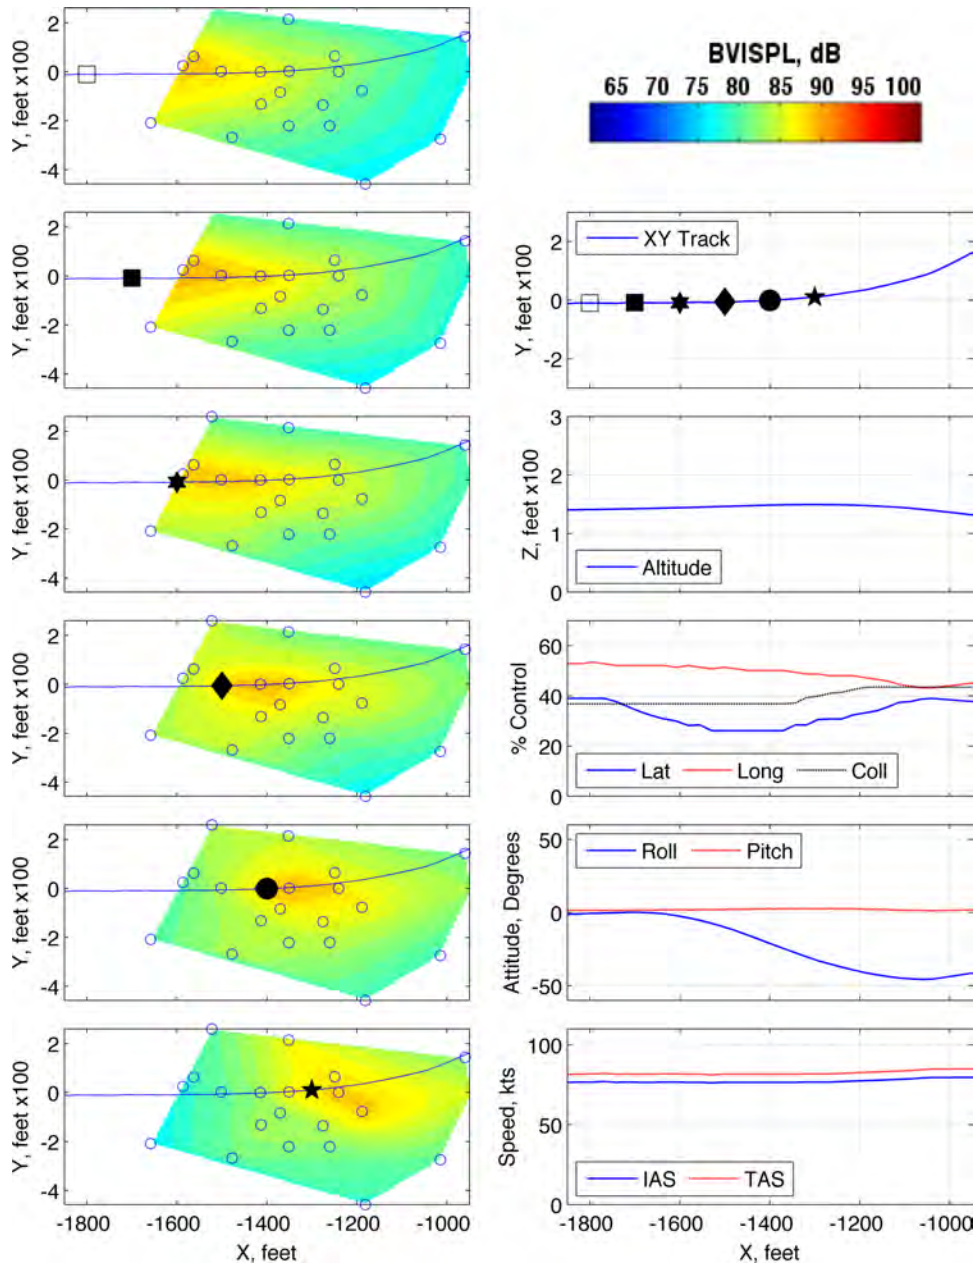


Figure 205: Maneuver condition R5, 80 KIAS, level, medium cyclic roll left, run number 285473

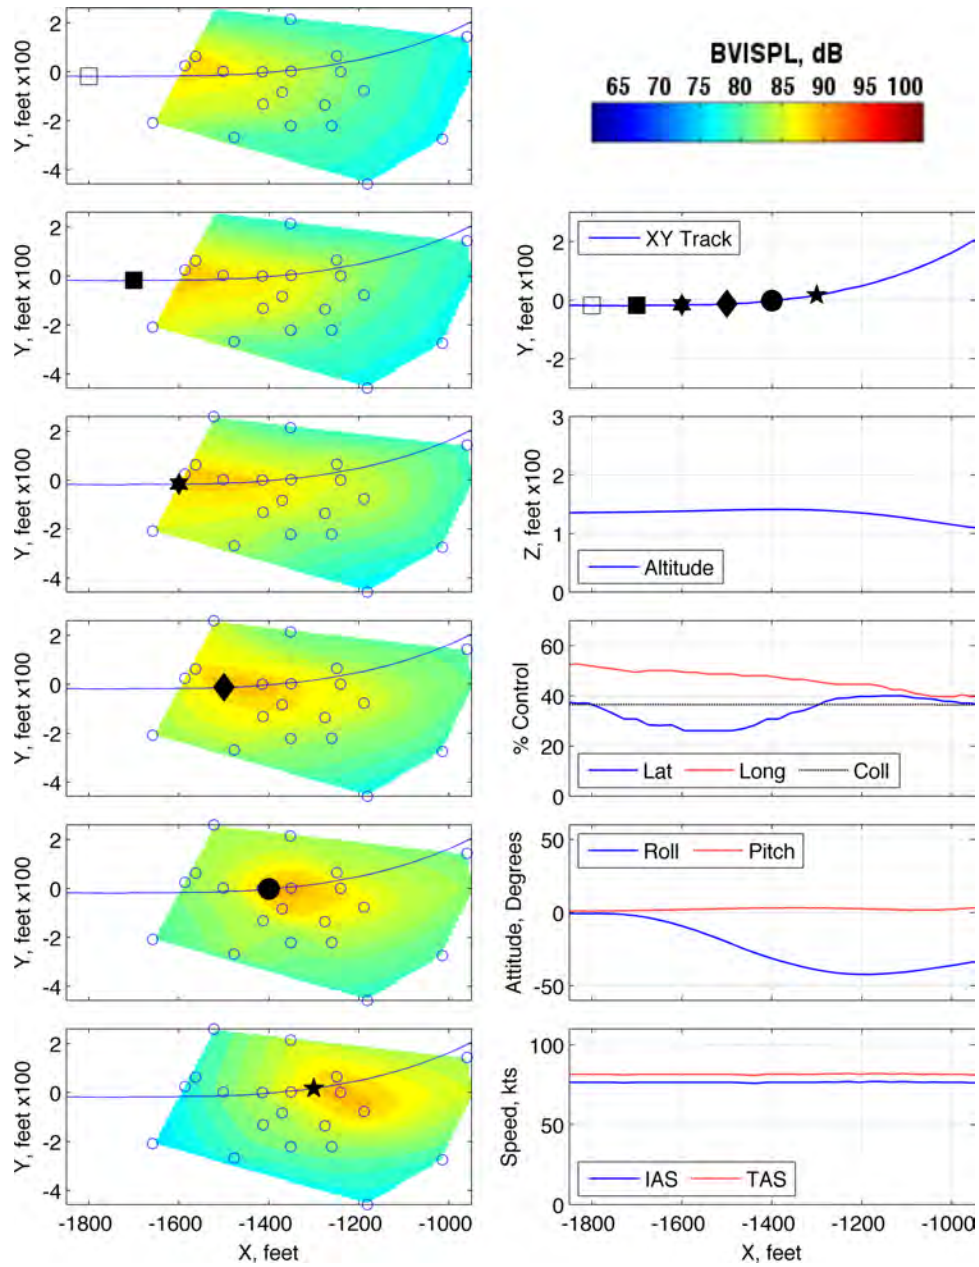


Figure 206: Maneuver condition R5, 80 KIAS, level, medium cyclic roll left, run number 285474



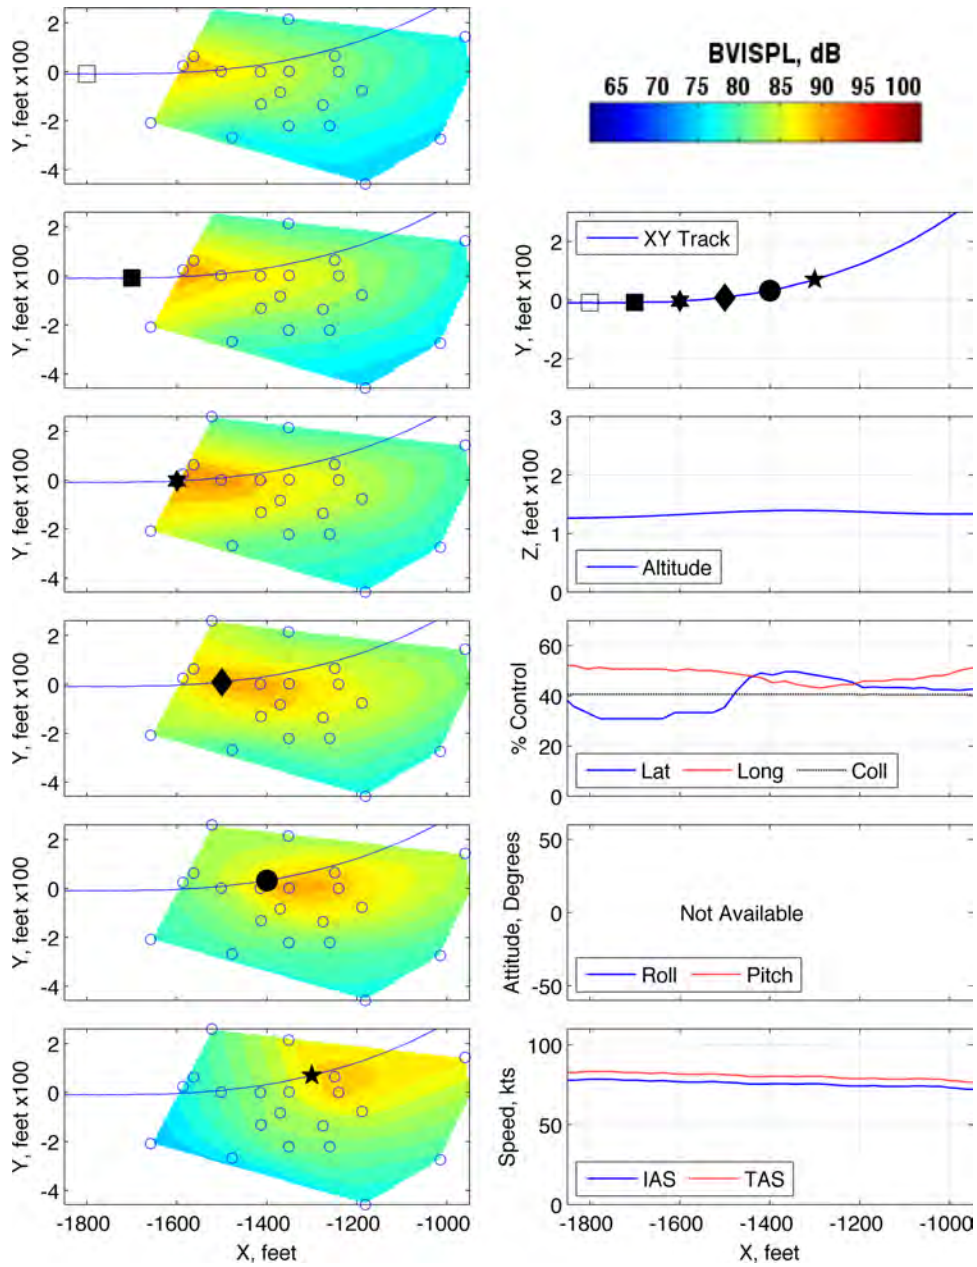


Figure 207: Maneuver condition R6, 80 KIAS, level, fast cyclic roll left, run number 280368

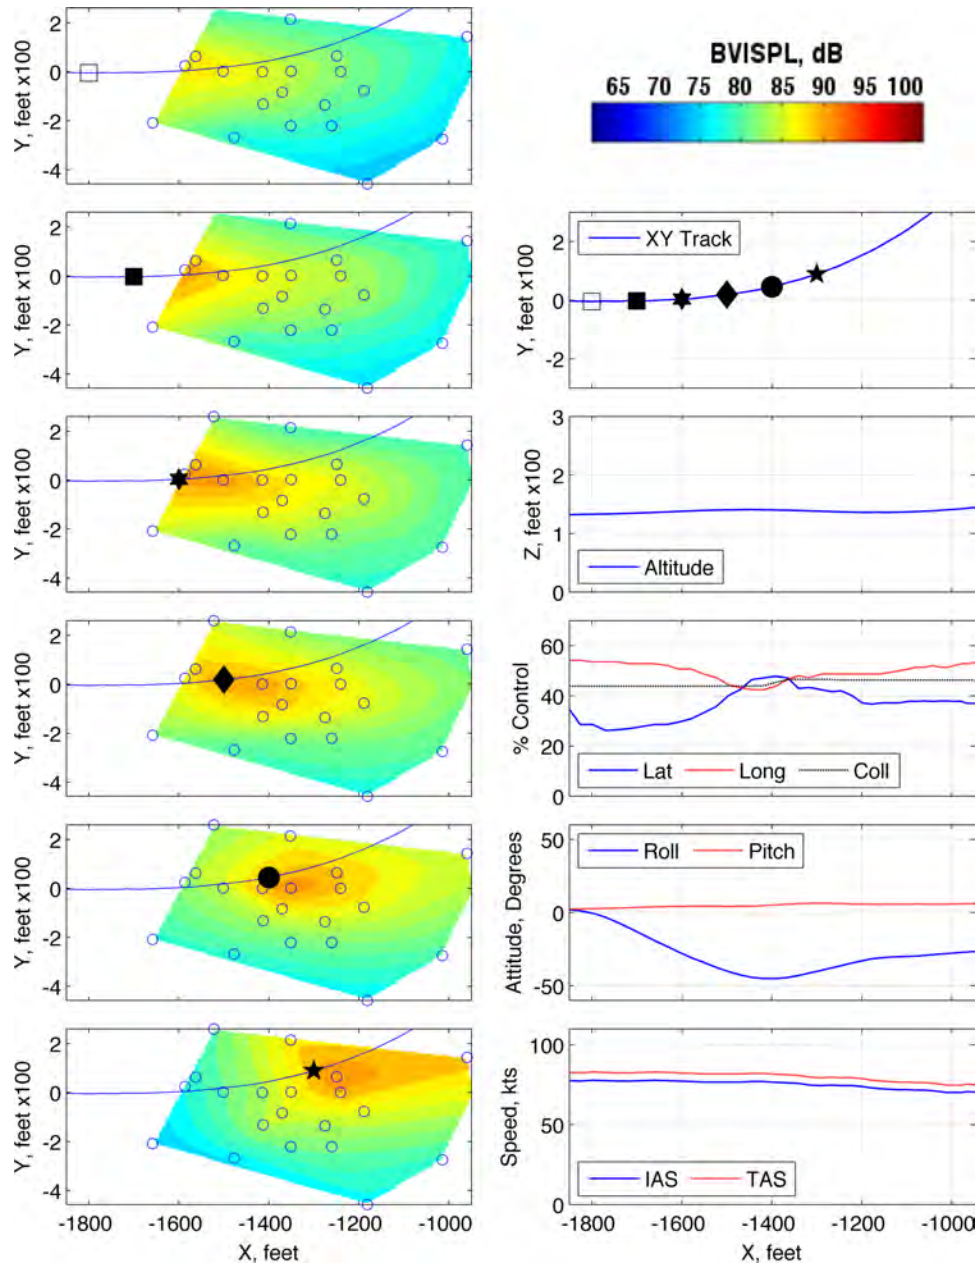


Figure 208: Maneuver condition R6, 80 KIAS, level, fast cyclic roll left, run number 280369

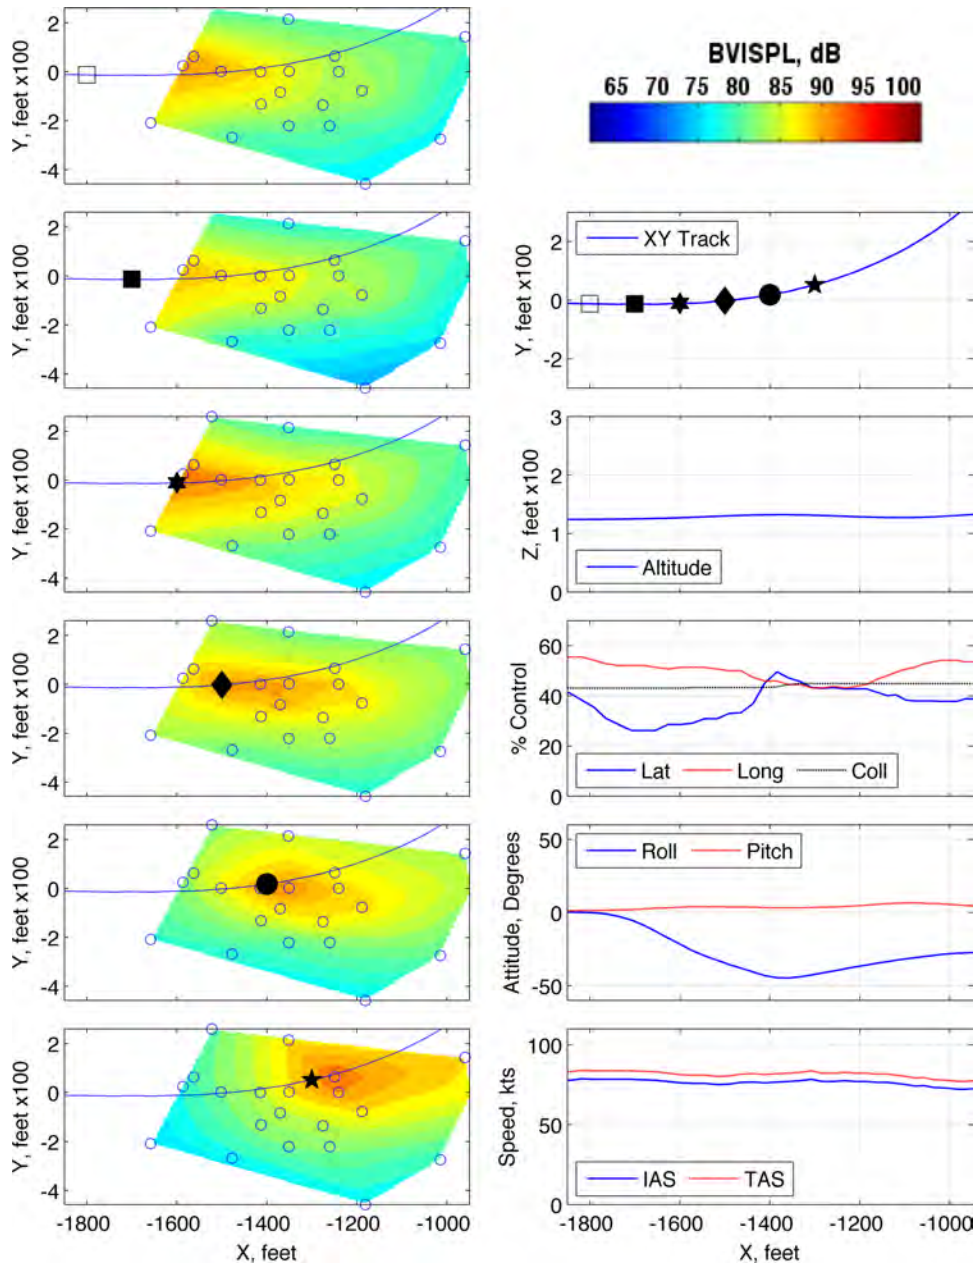


Figure 209: Maneuver condition R6, 80 KIAS, level, fast cyclic roll left, run number 280371

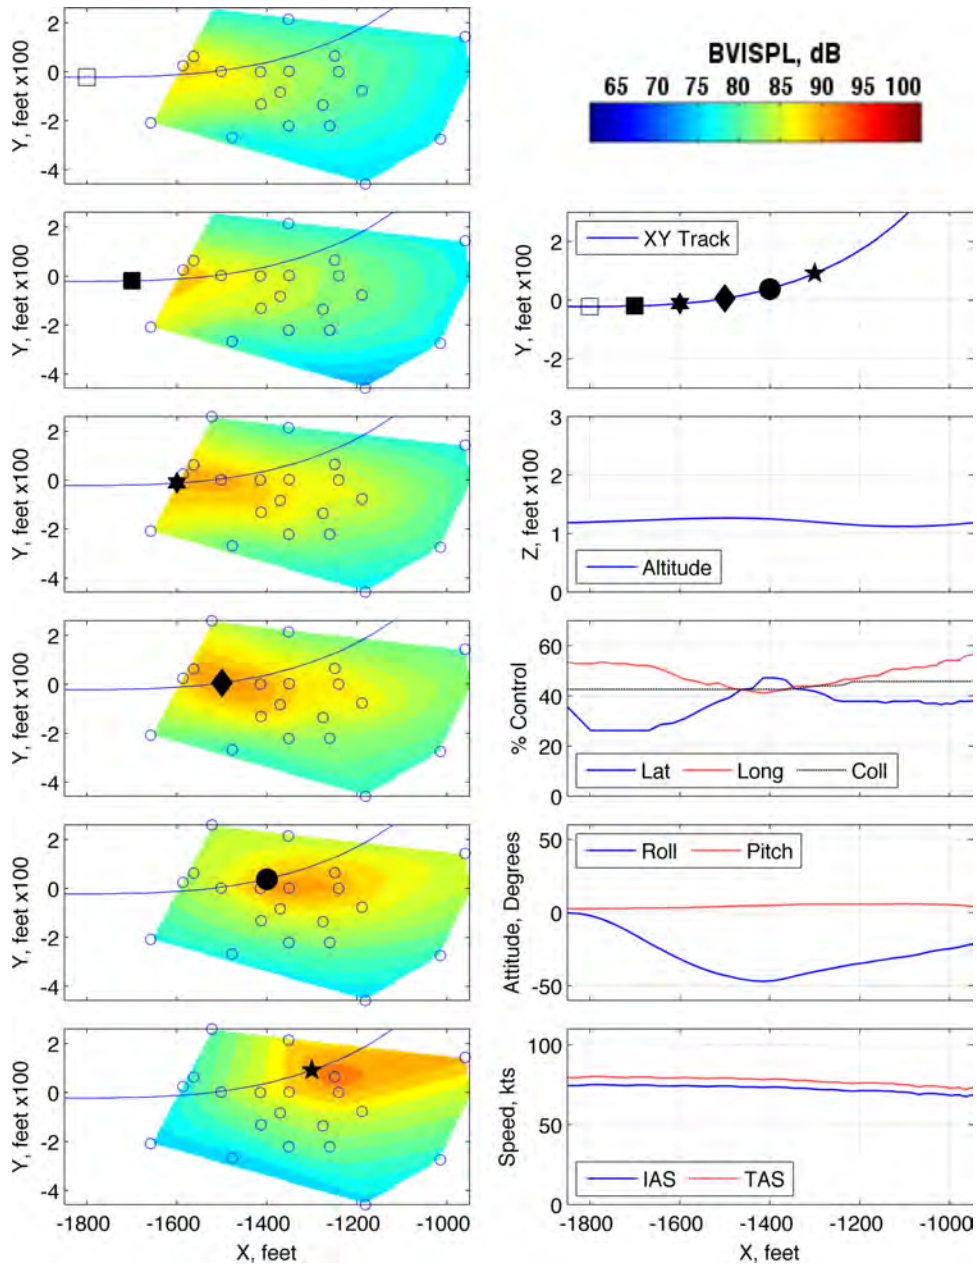


Figure 210: Maneuver condition R6, 80 KIAS, level, fast cyclic roll left, run number 280372

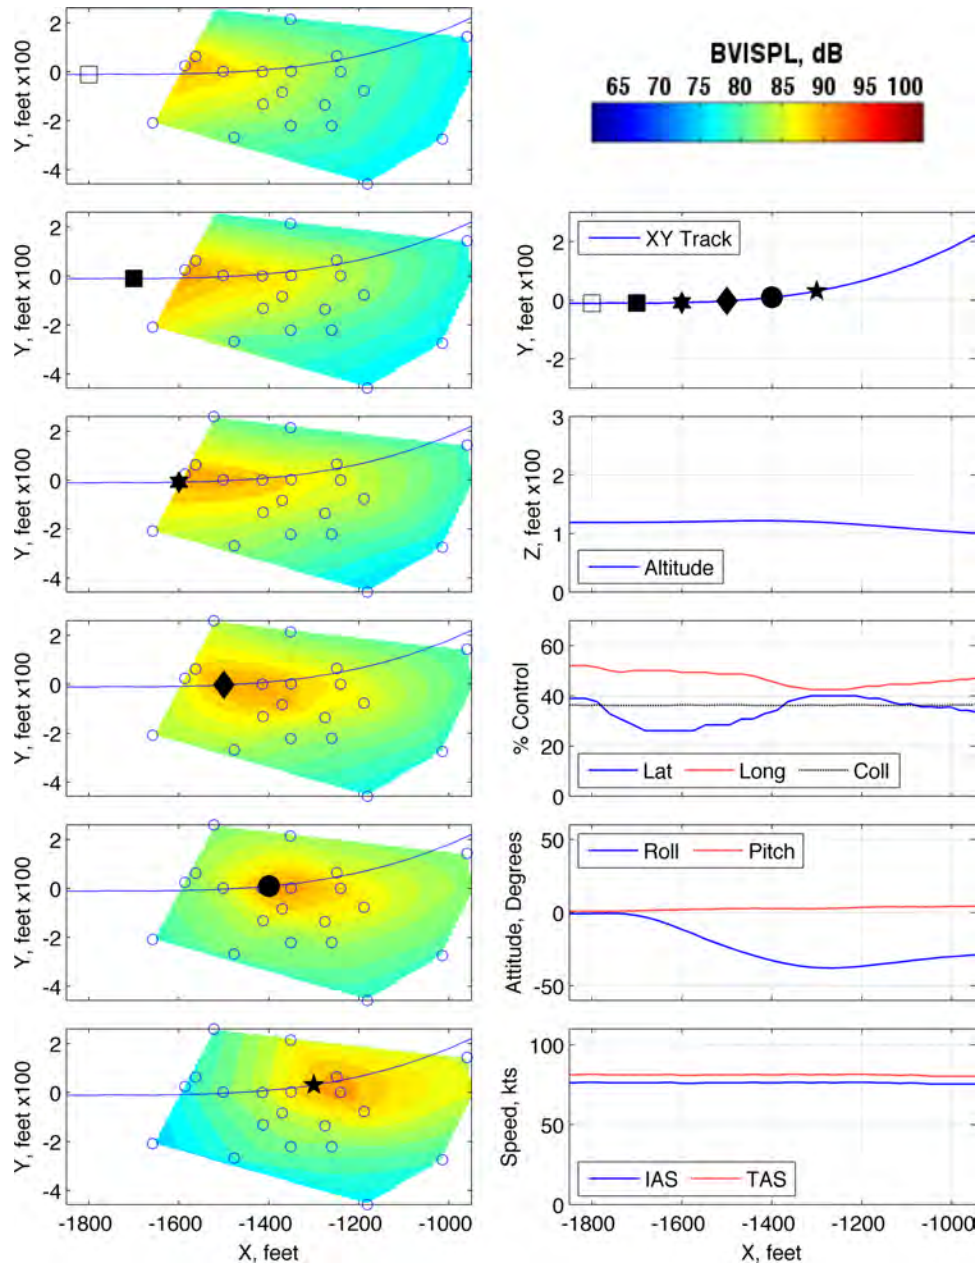


Figure 211: Maneuver condition R6, 80 KIAS, level, fast cyclic roll left, run number 285471

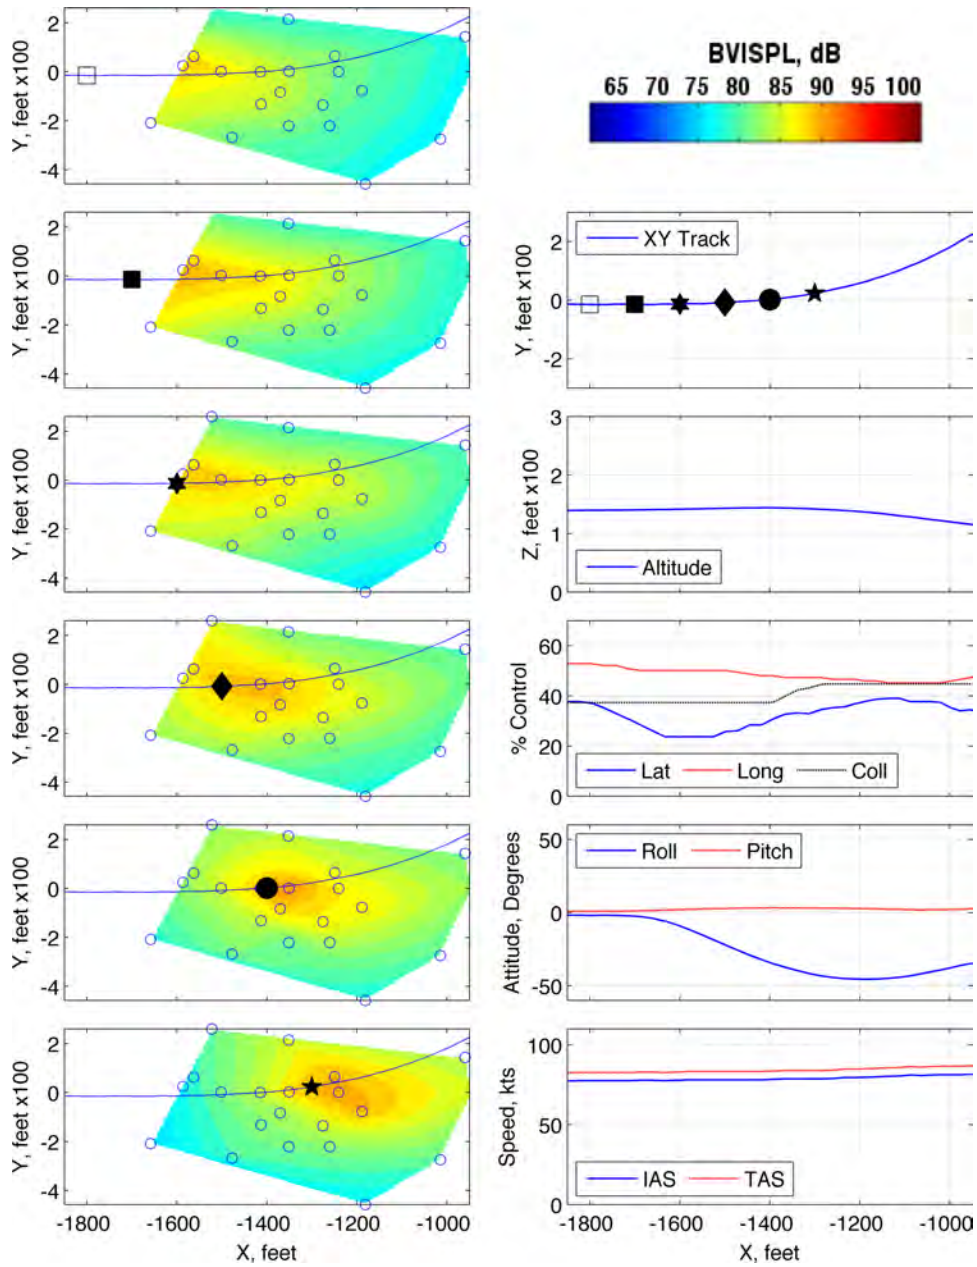


Figure 212: Maneuver condition R6, 80 KIAS, level, fast cyclic roll left, run number 285472

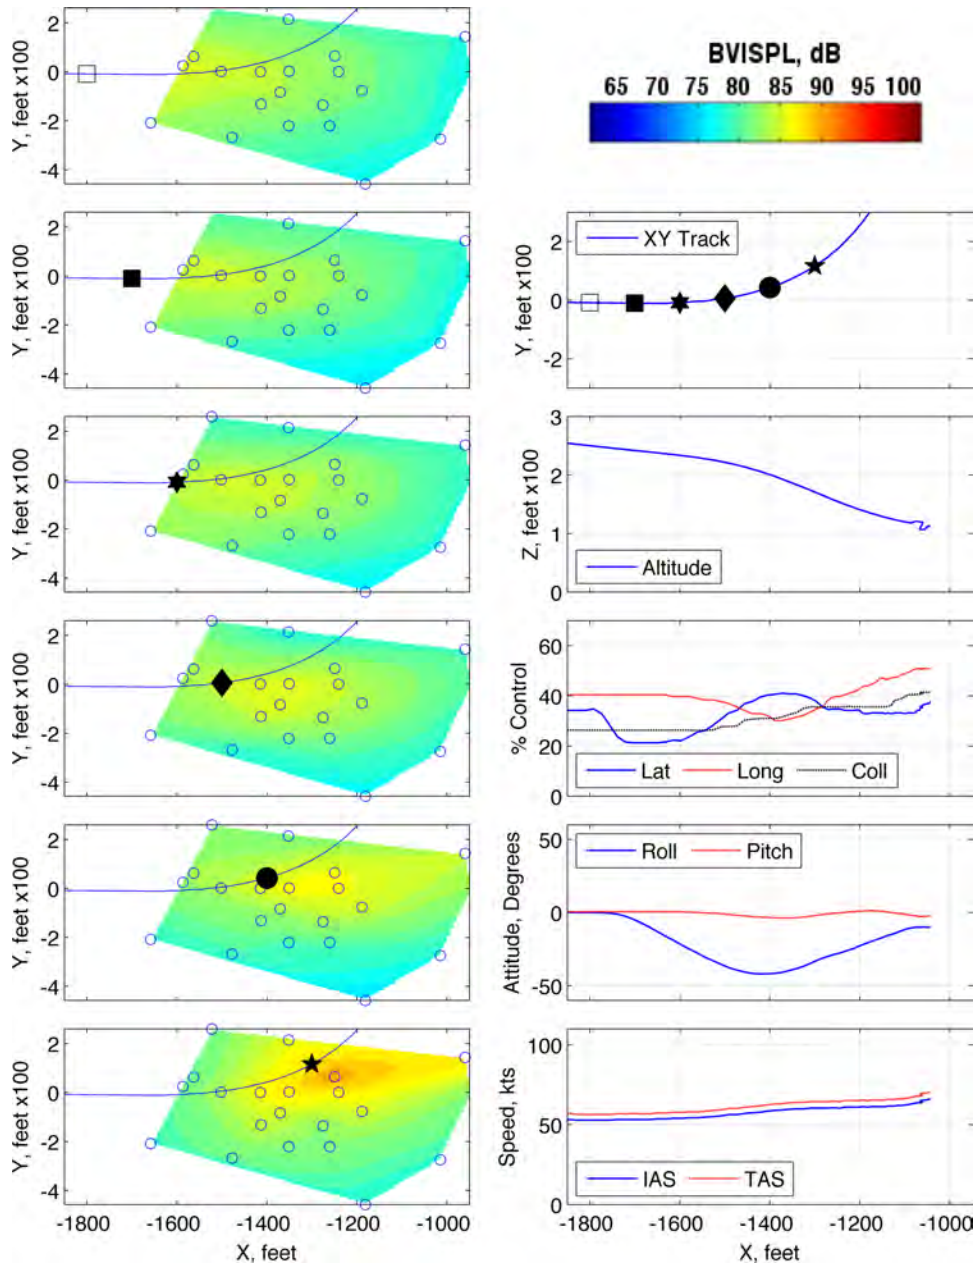


Figure 213: Maneuver condition R9, 60 KIAS,  $-6^\circ$ , fast cyclic roll left, run number 285488

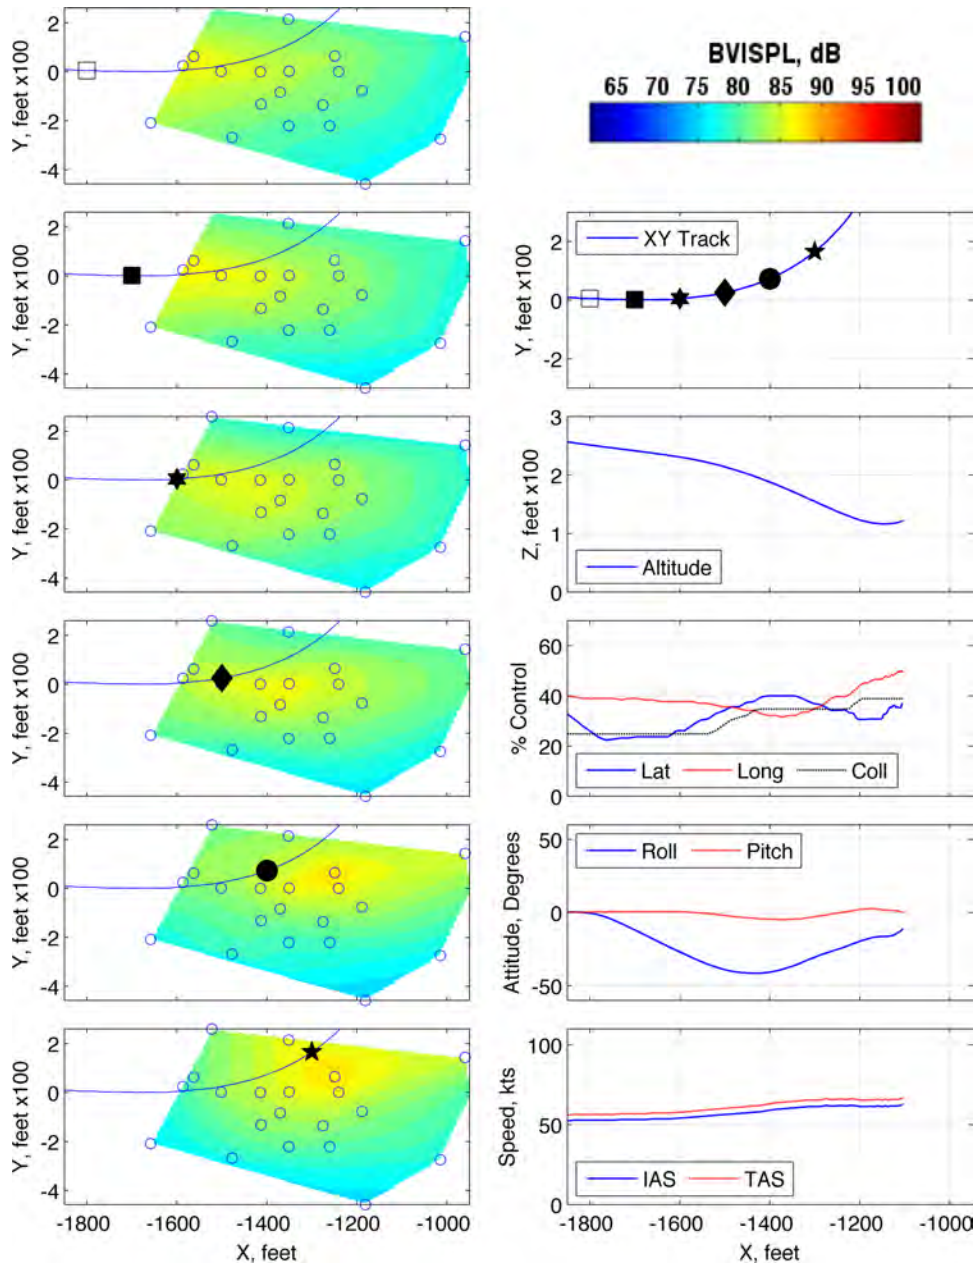


Figure 214: Maneuver condition R9, 60 KIAS,  $-6^\circ$ , fast cyclic roll left, run number 285489



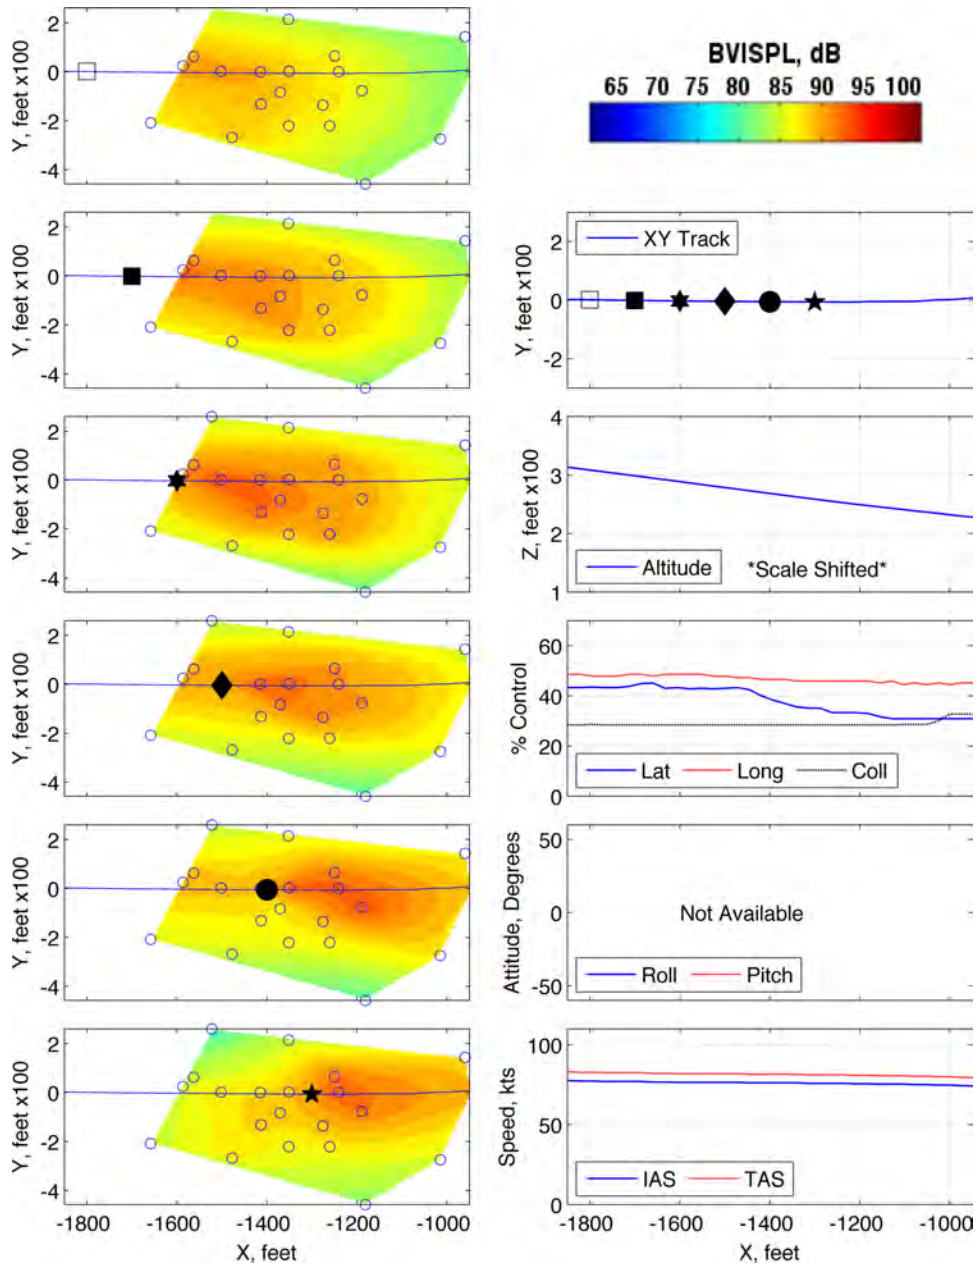


Figure 215: Maneuver condition R10, 80 KIAS,  $-6^\circ$ , slow cyclic roll left, run number 278316

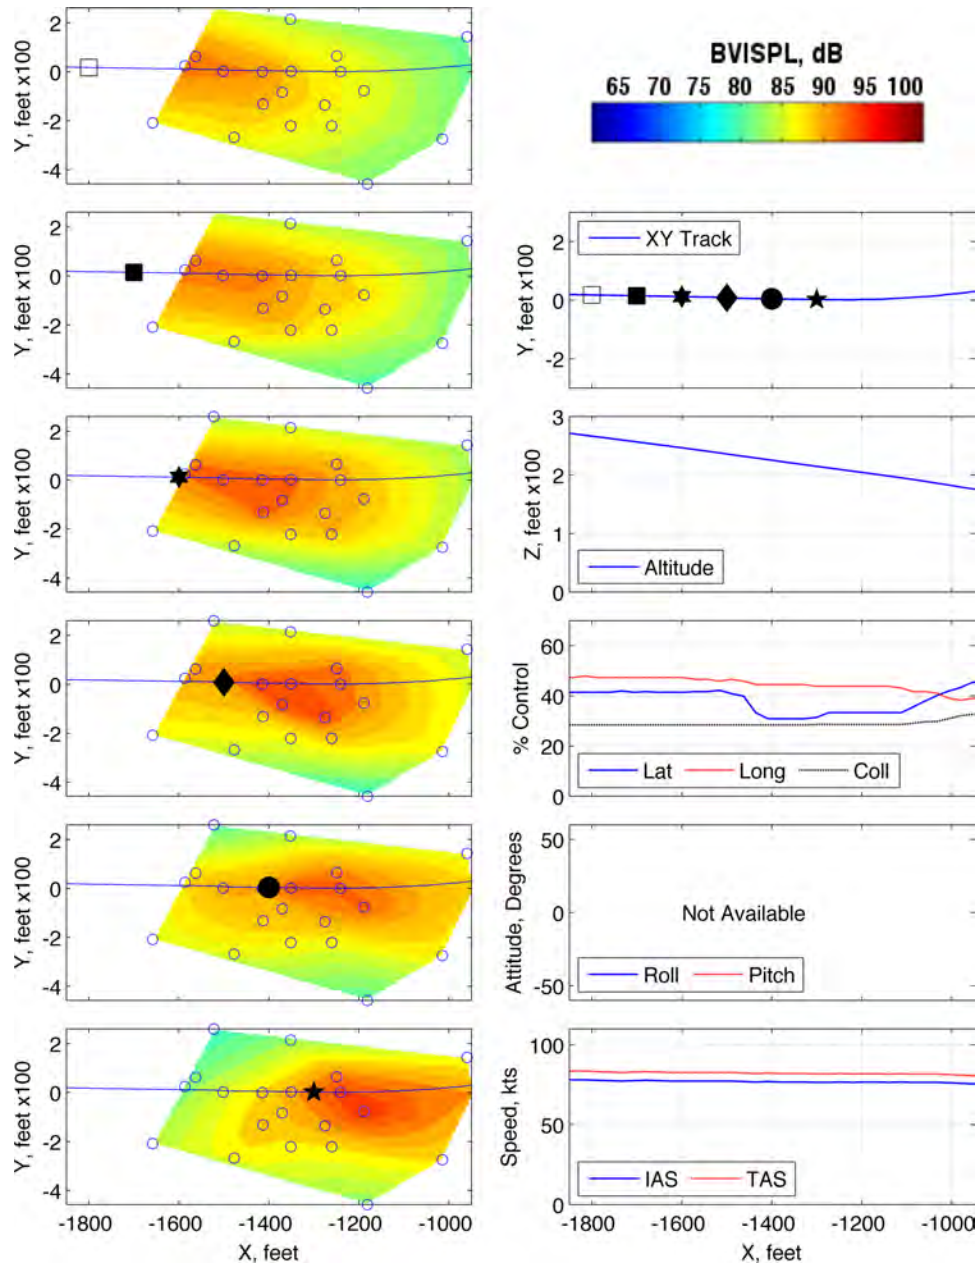


Figure 216: Maneuver condition R10, 80 KIAS,  $-6^\circ$ , slow cyclic roll left, run number 278317

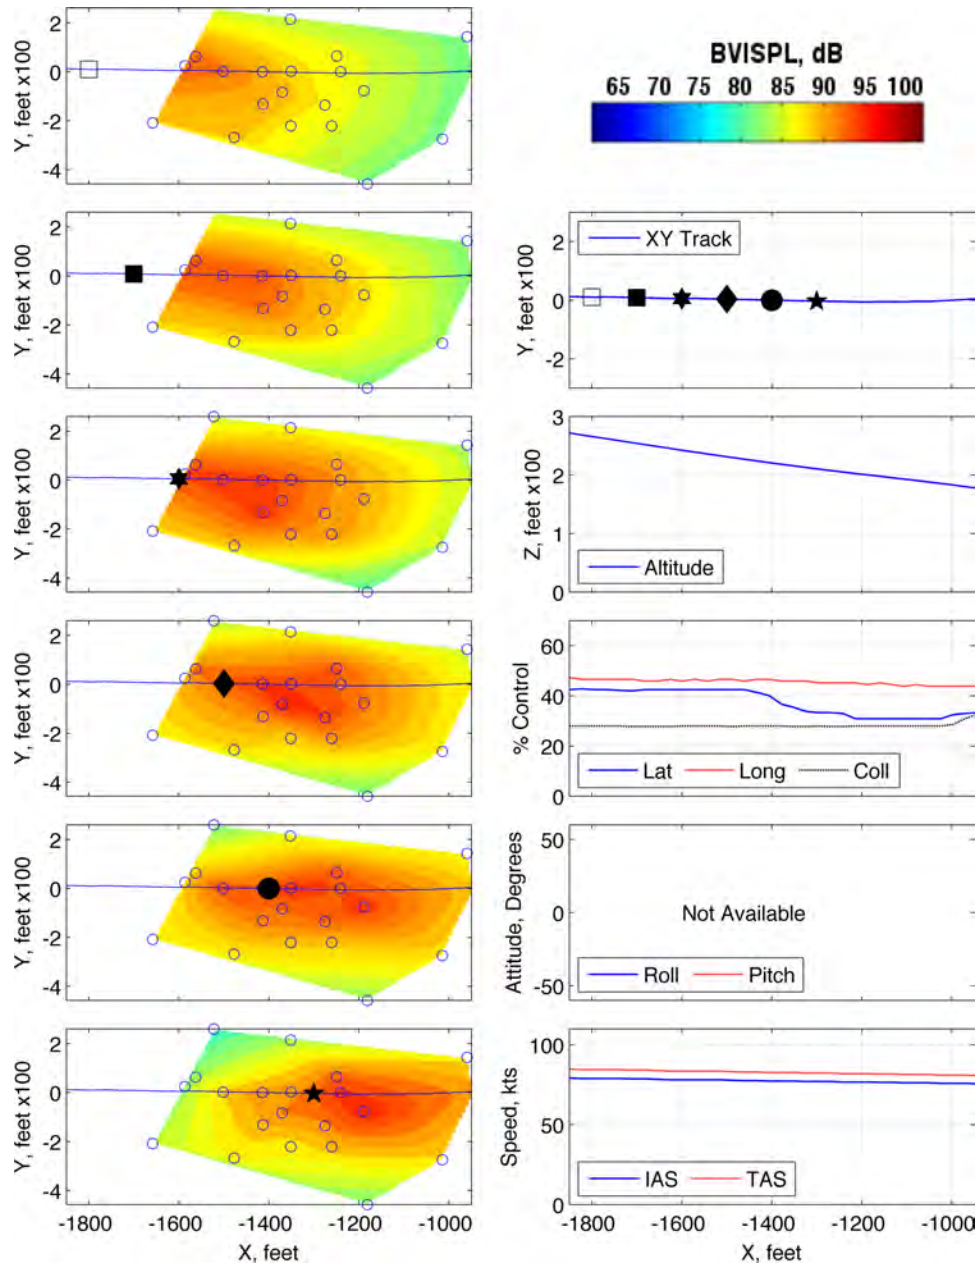


Figure 217: Maneuver condition R10, 80 KIAS,  $-6^\circ$ , slow cyclic roll left, run number 278318

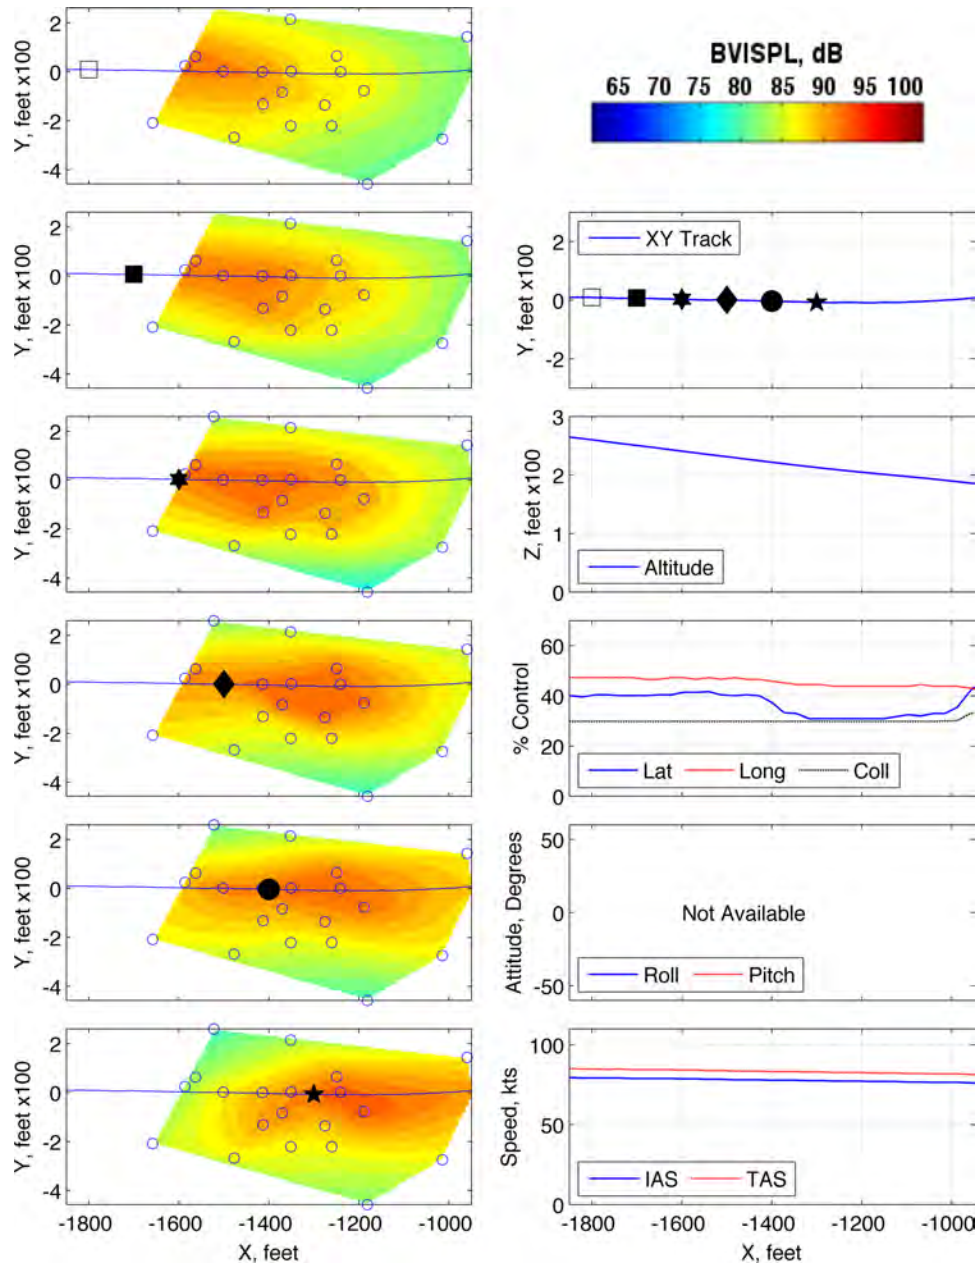


Figure 218: Maneuver condition R10, 80 KIAS,  $-6^\circ$ , slow cyclic roll left, run number 278319

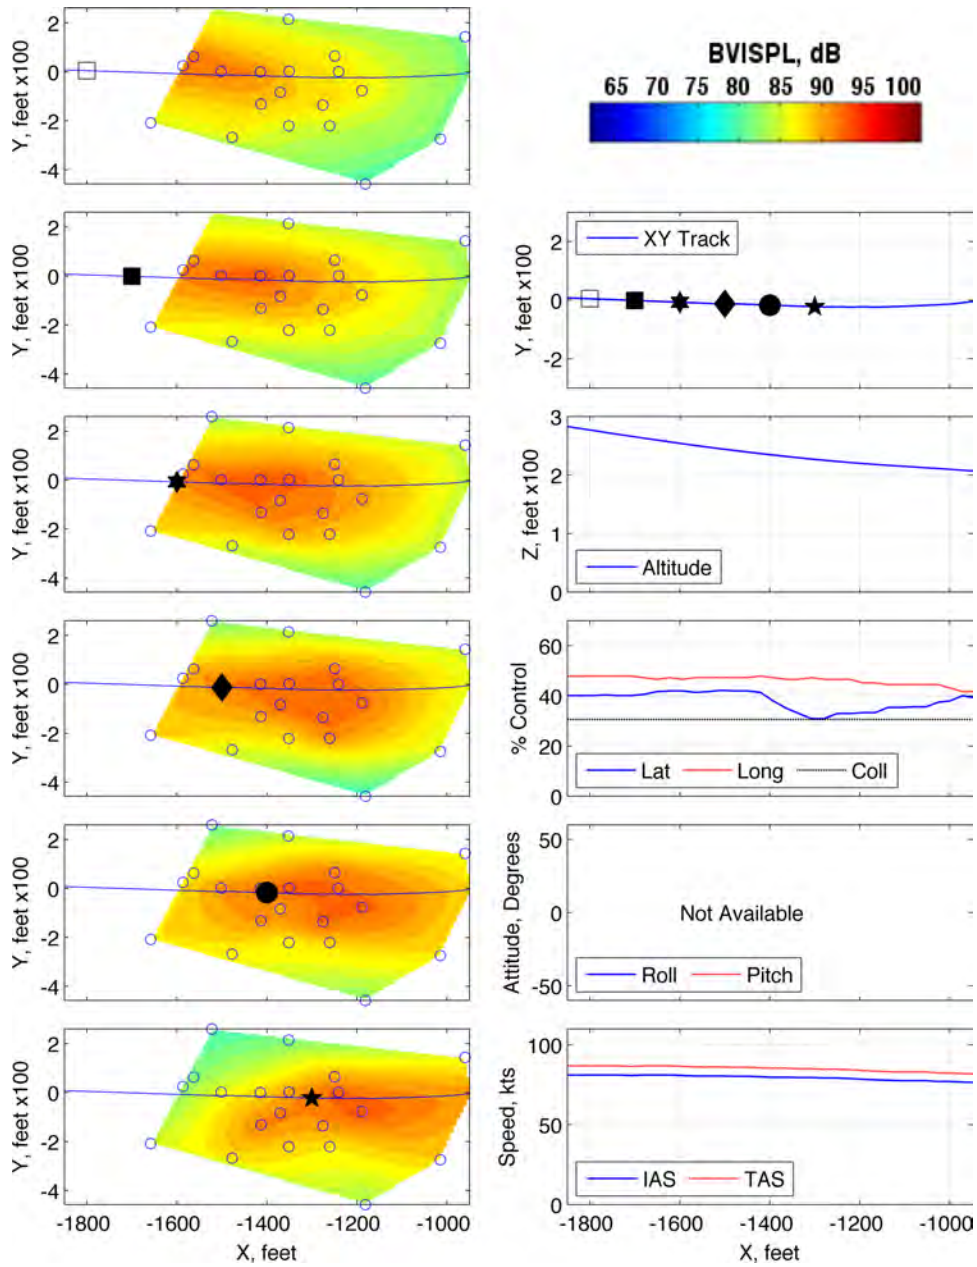


Figure 219: Maneuver condition R10, 80 KIAS,  $-6^\circ$ , slow cyclic roll left, run number 278320

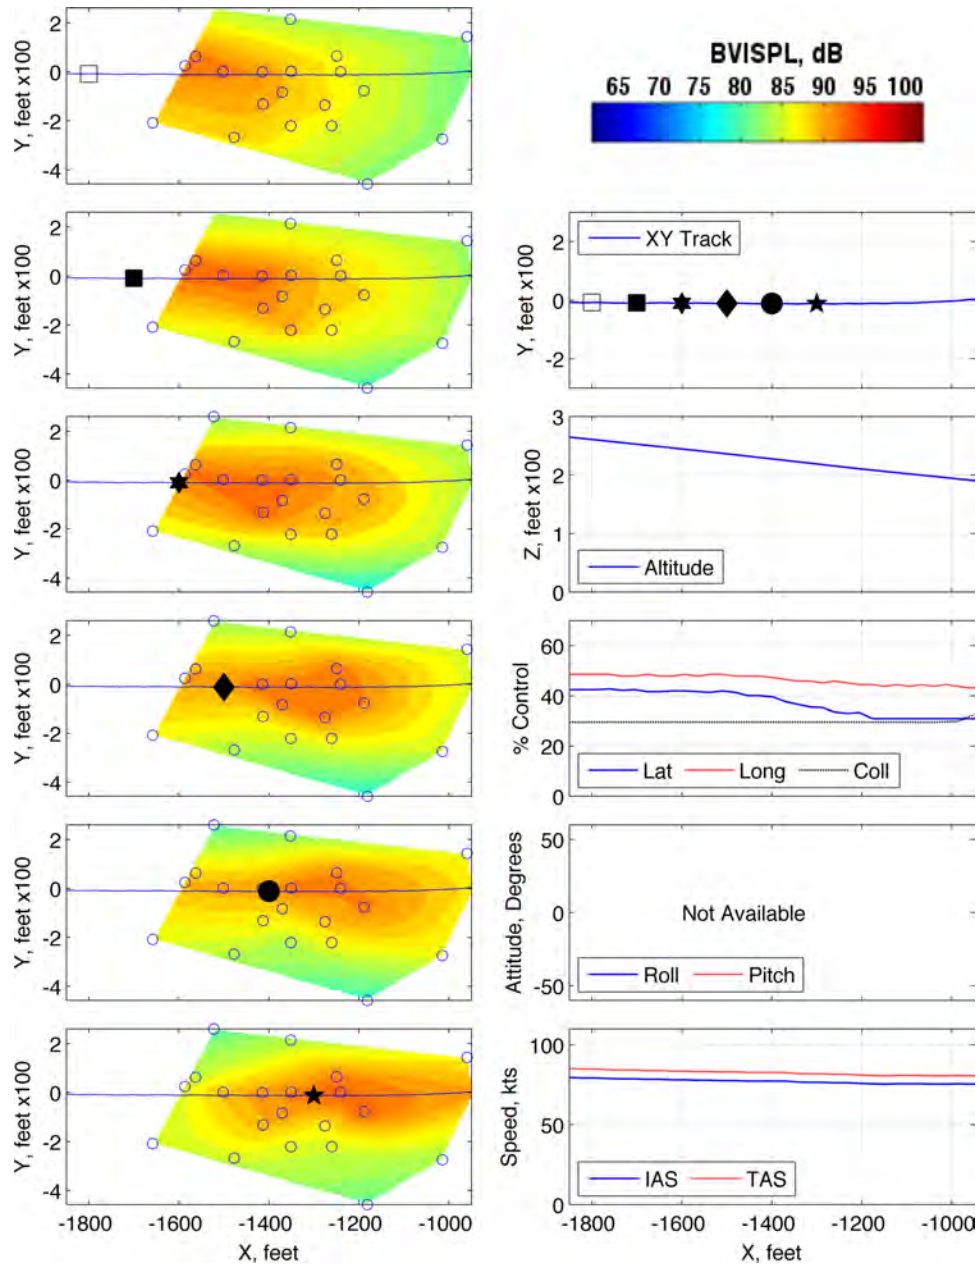


Figure 220: Maneuver condition R10, 80 KIAS,  $-6^\circ$ , slow cyclic roll left, run number 278321

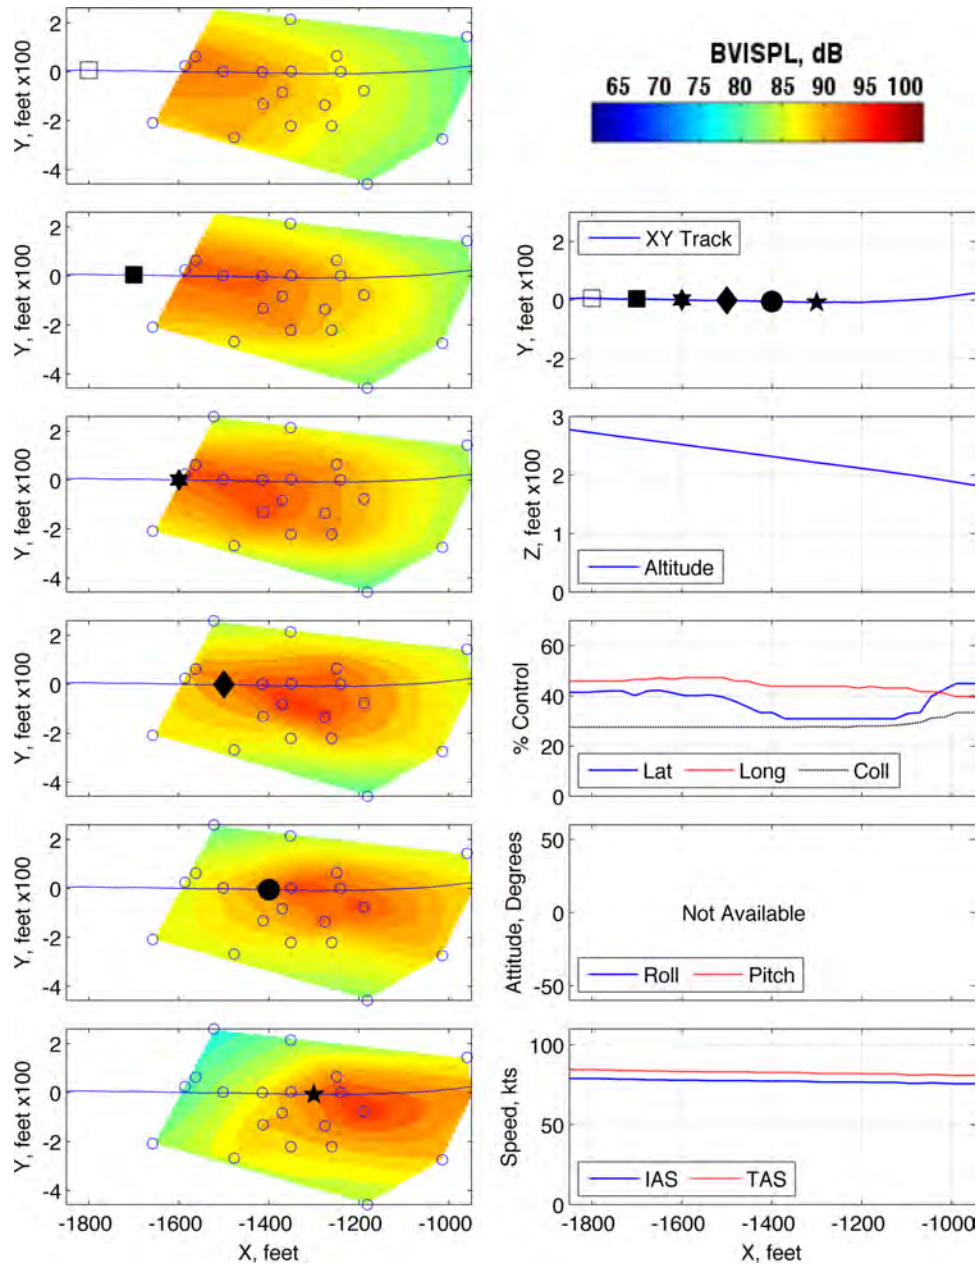


Figure 221: Maneuver condition R10, 80 KIAS,  $-6^\circ$ , slow cyclic roll left, run number 278322

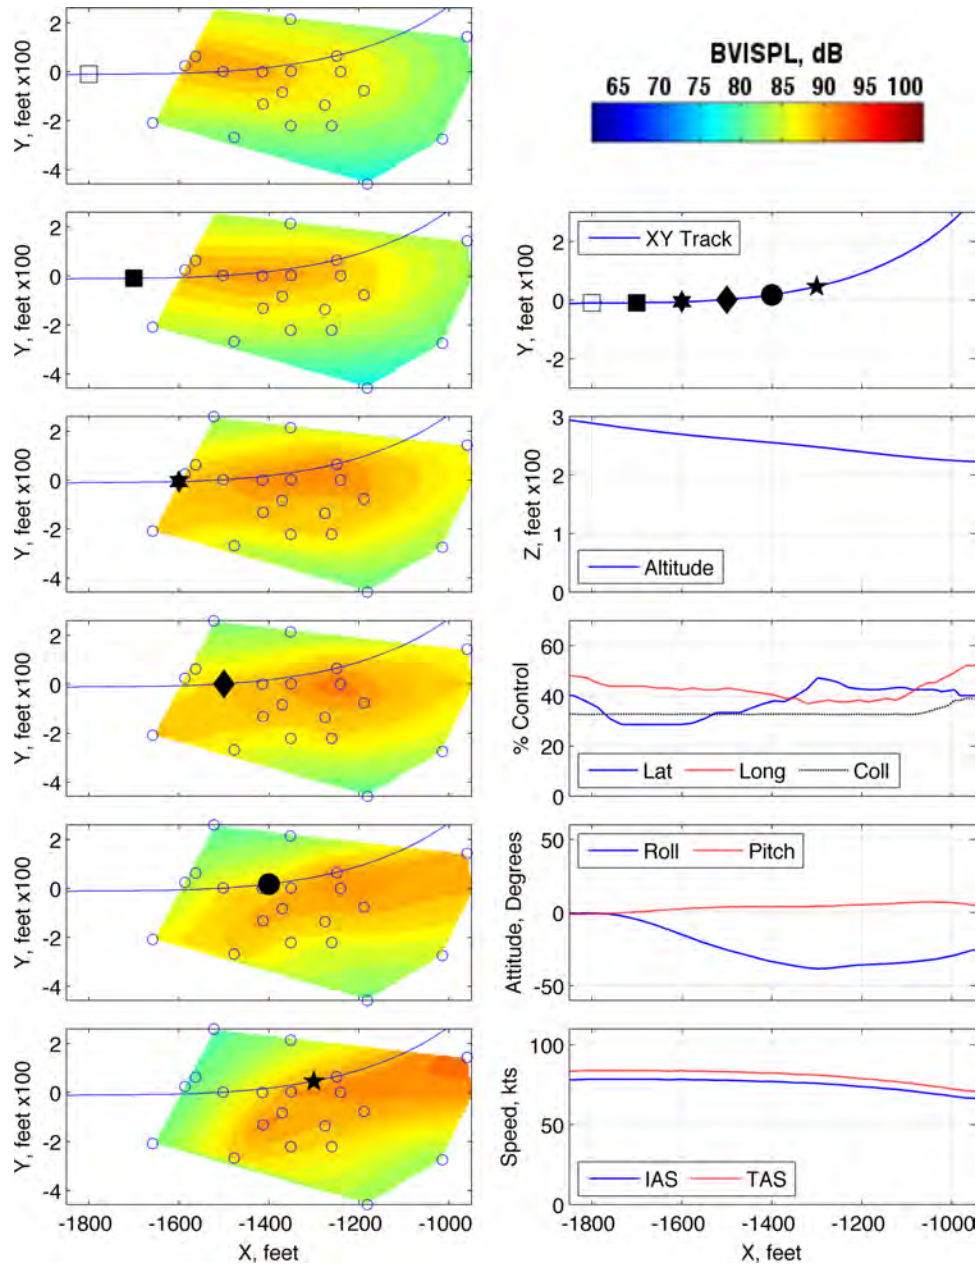


Figure 222: Maneuver condition R10, 80 KIAS,  $-6^\circ$ , slow cyclic roll left, run number 282418



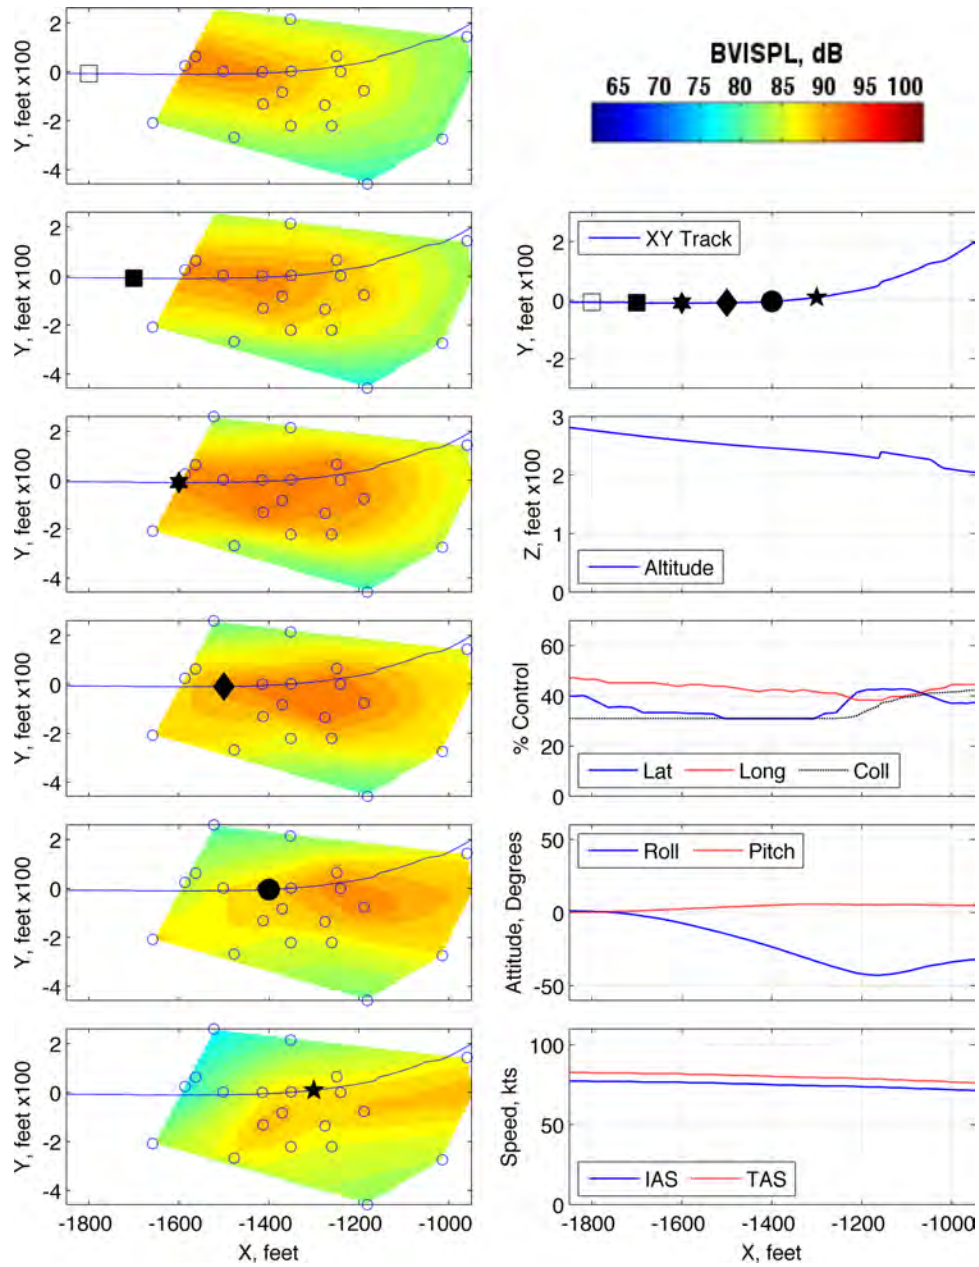


Figure 223: Maneuver condition R10, 80 KIAS,  $-6^\circ$ , slow cyclic roll left, run number 282419

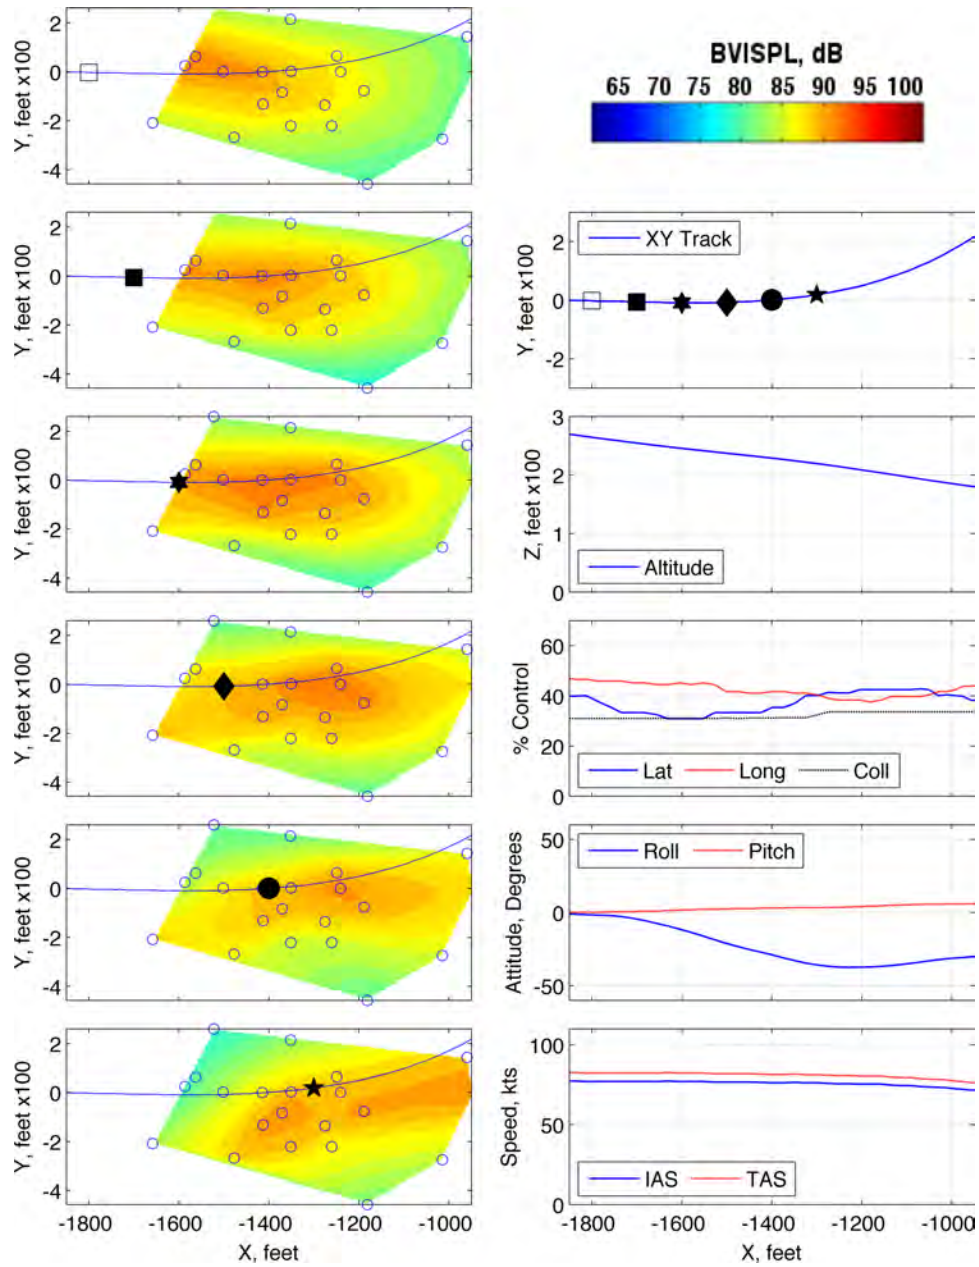


Figure 224: Maneuver condition R10, 80 KIAS,  $-6^\circ$ , slow cyclic roll left, run number 282420

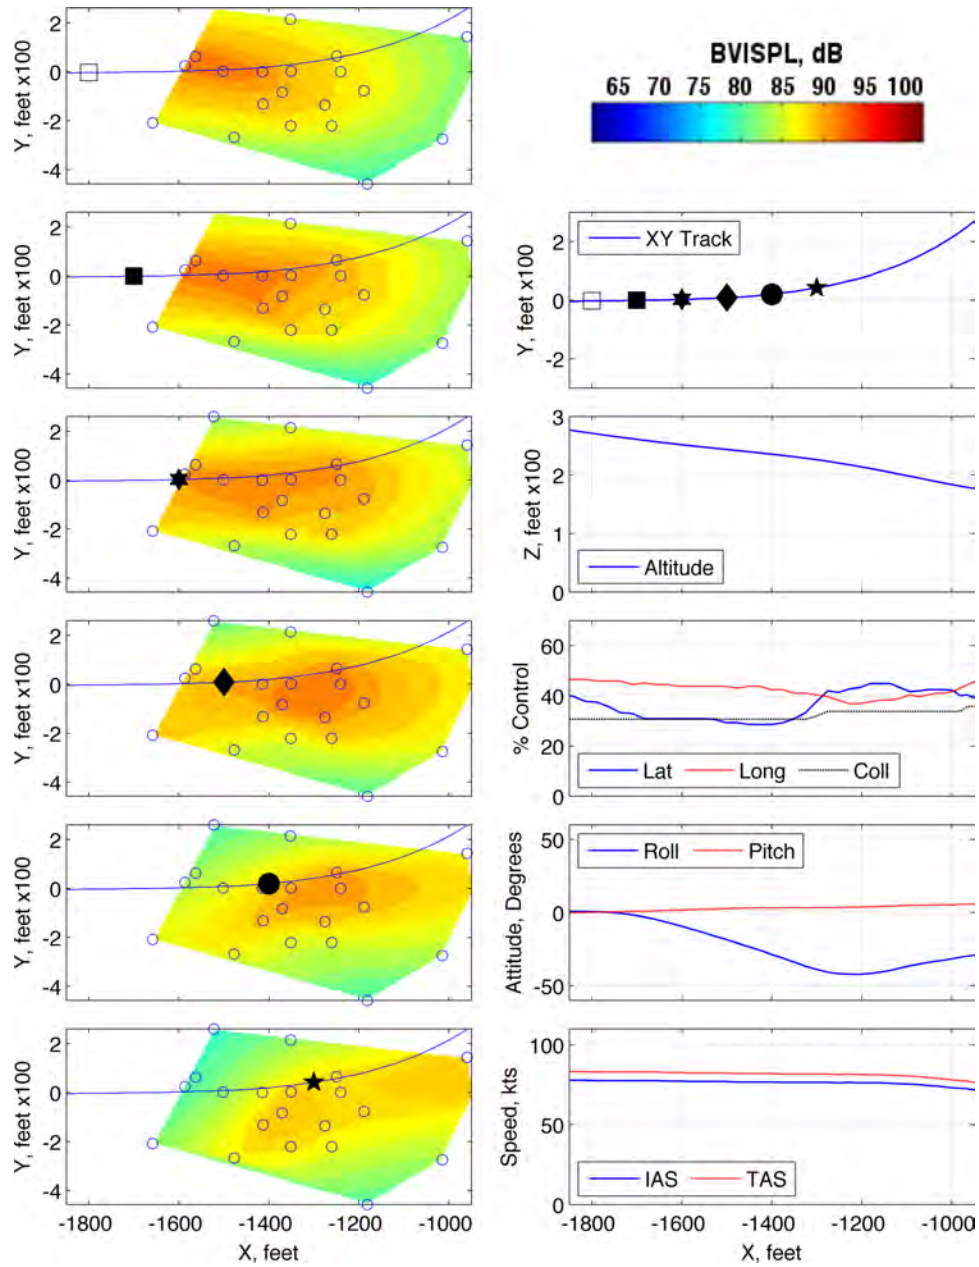


Figure 225: Maneuver condition R10, 80 KIAS,  $-6^\circ$ , slow cyclic roll left, run number 282421

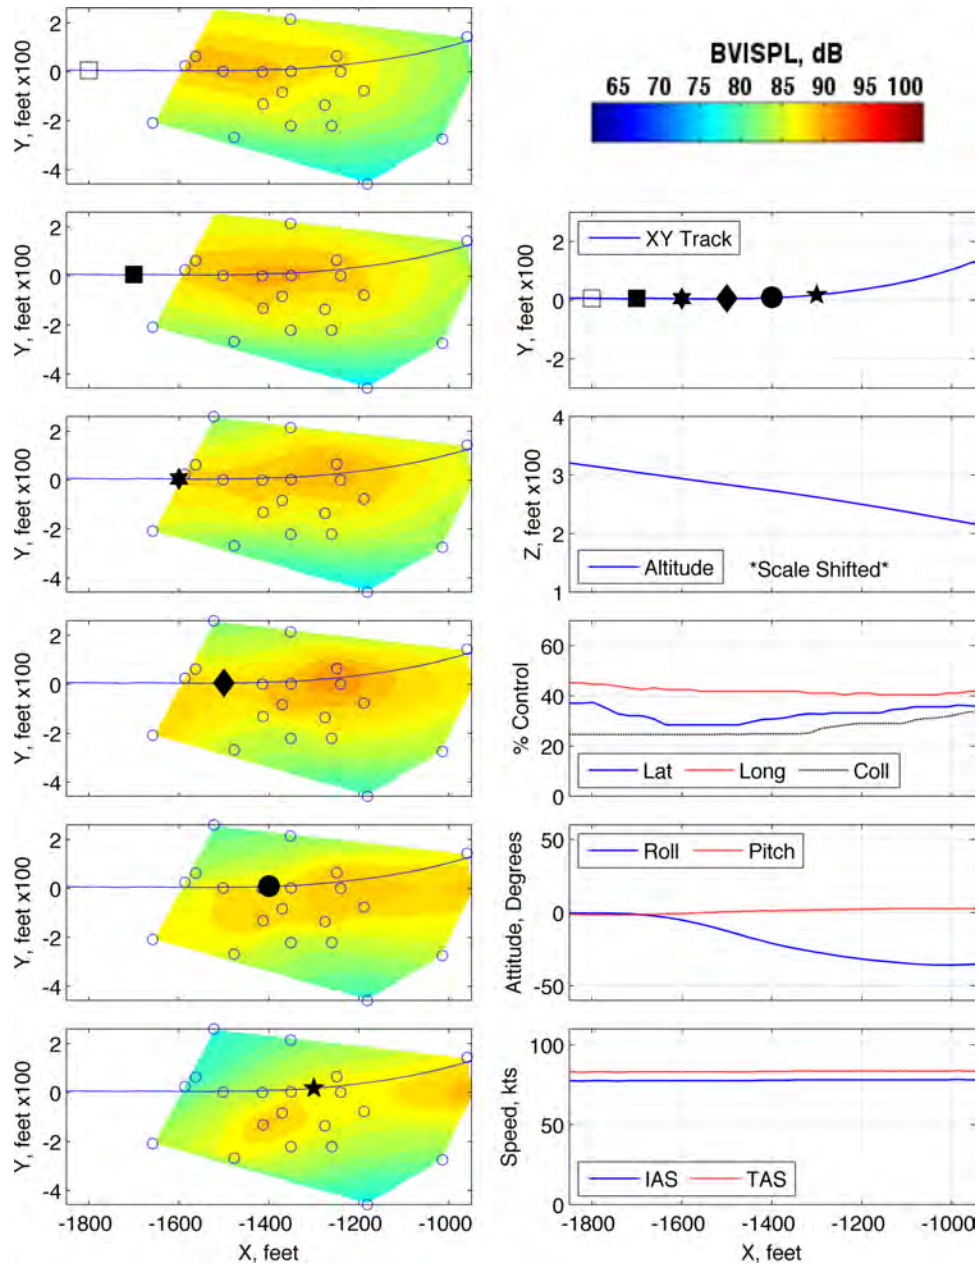


Figure 226: Maneuver condition R11, 80 KIAS,  $-6^\circ$ , medium cyclic roll left, run number 285481

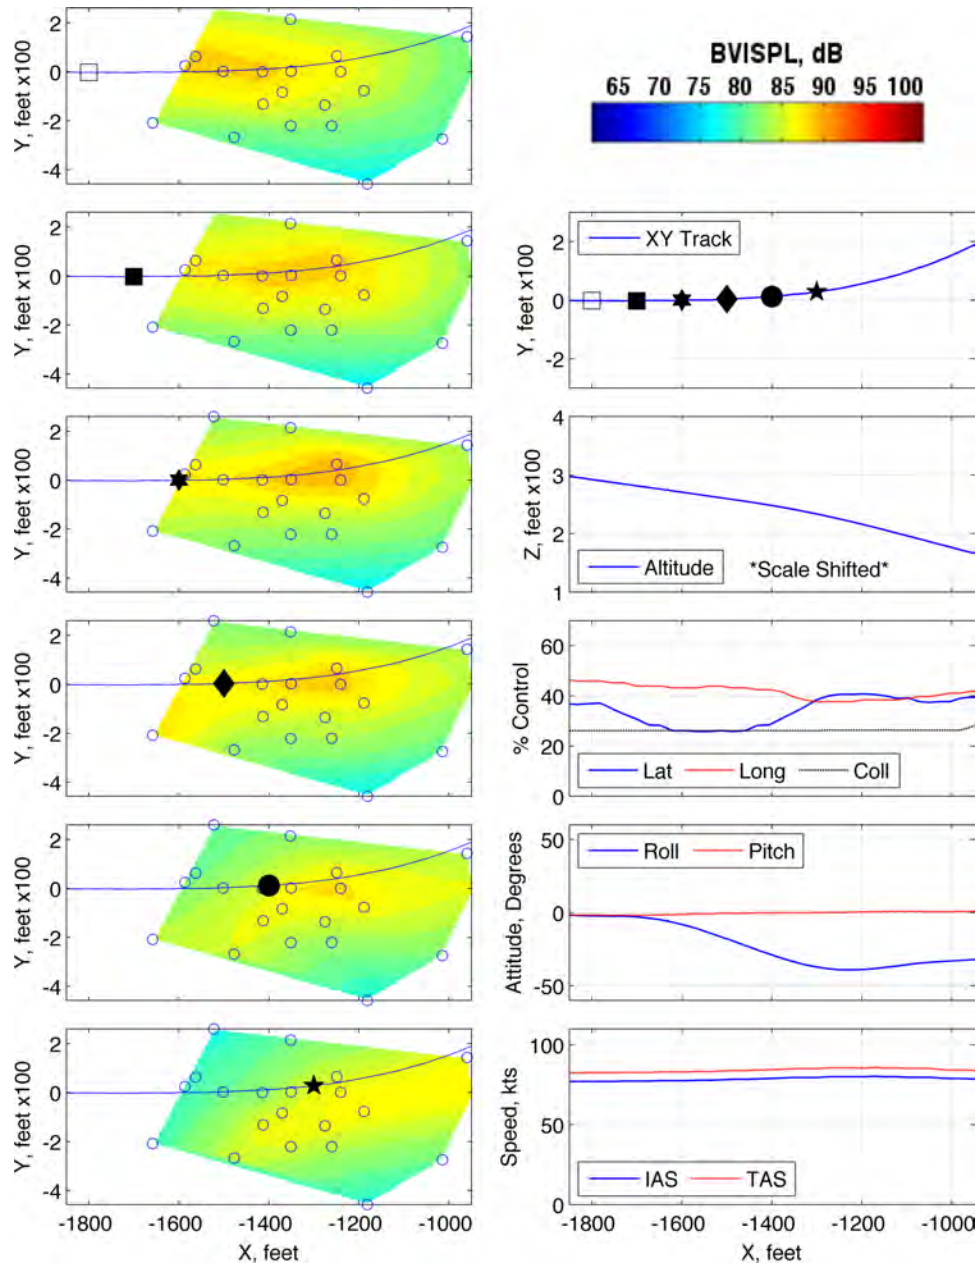


Figure 227: Maneuver condition R11, 80 KIAS,  $-6^\circ$ , medium cyclic roll left, run number 285482

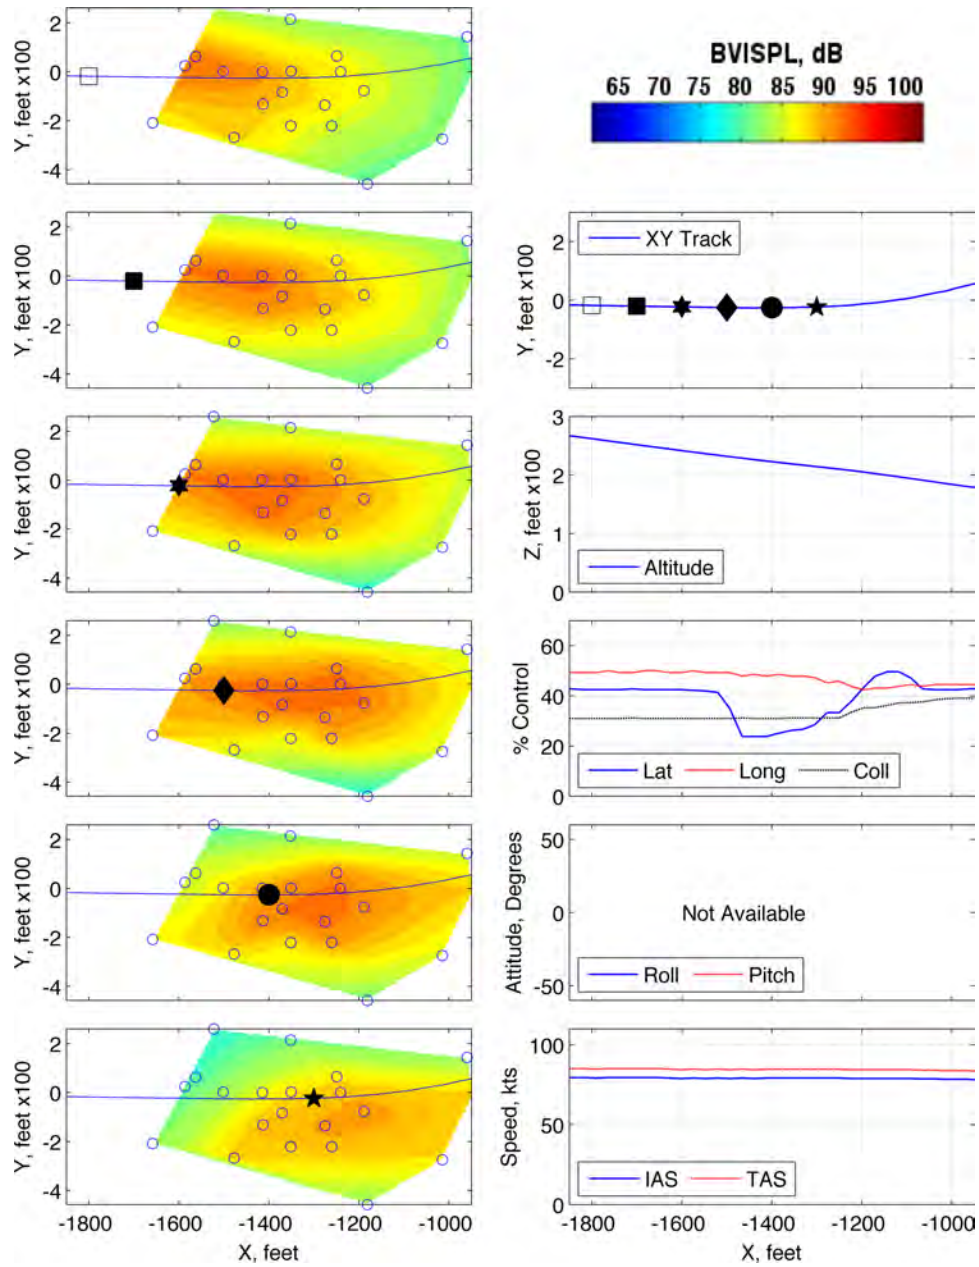


Figure 228: Maneuver condition R12, 80 KIAS,  $-6^\circ$ , fast cyclic roll left, run number 278311

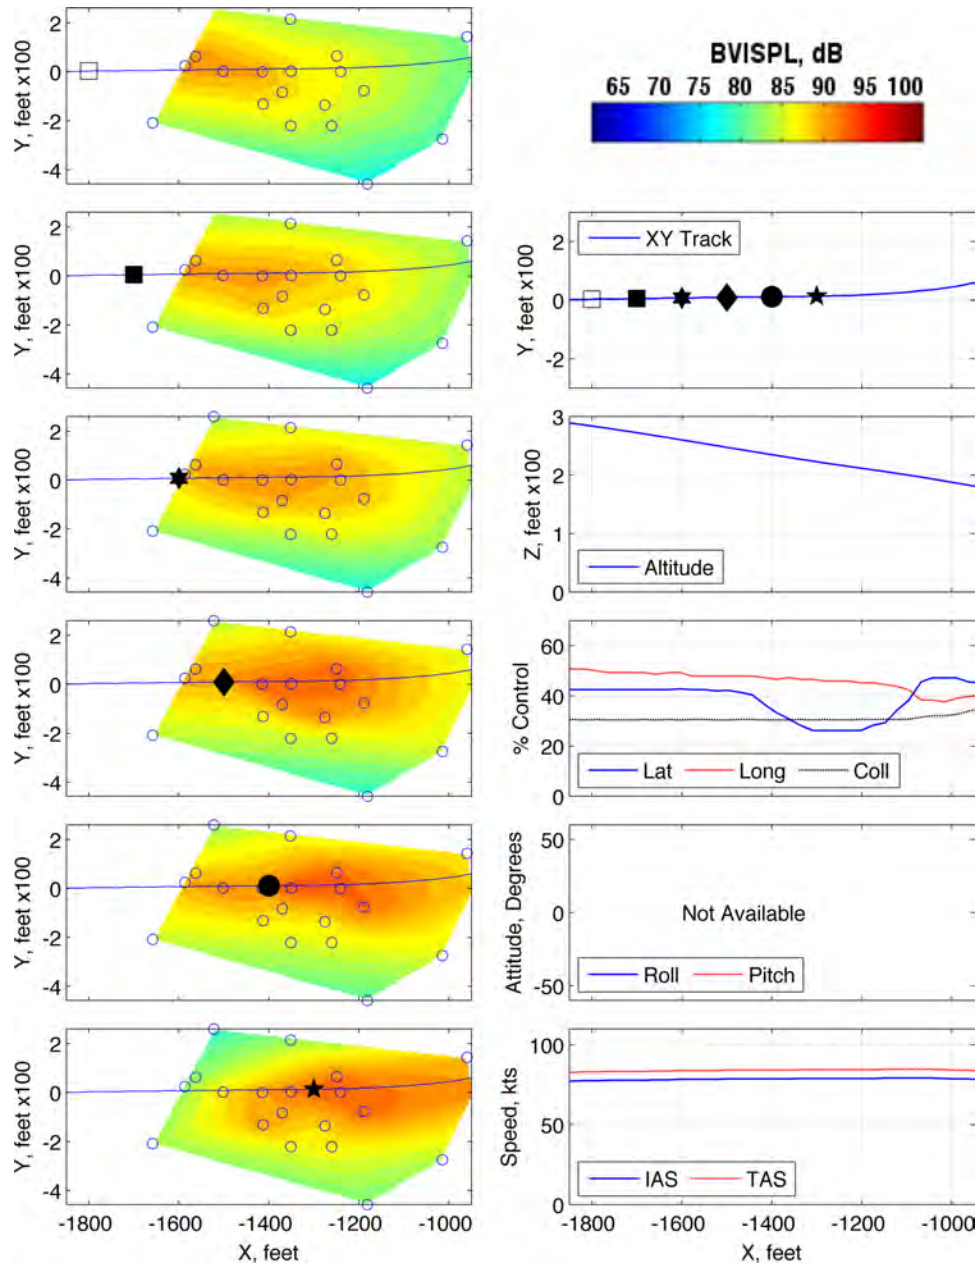


Figure 229: Maneuver condition R12, 80 KIAS,  $-6^\circ$ , fast cyclic roll left, run number 278312

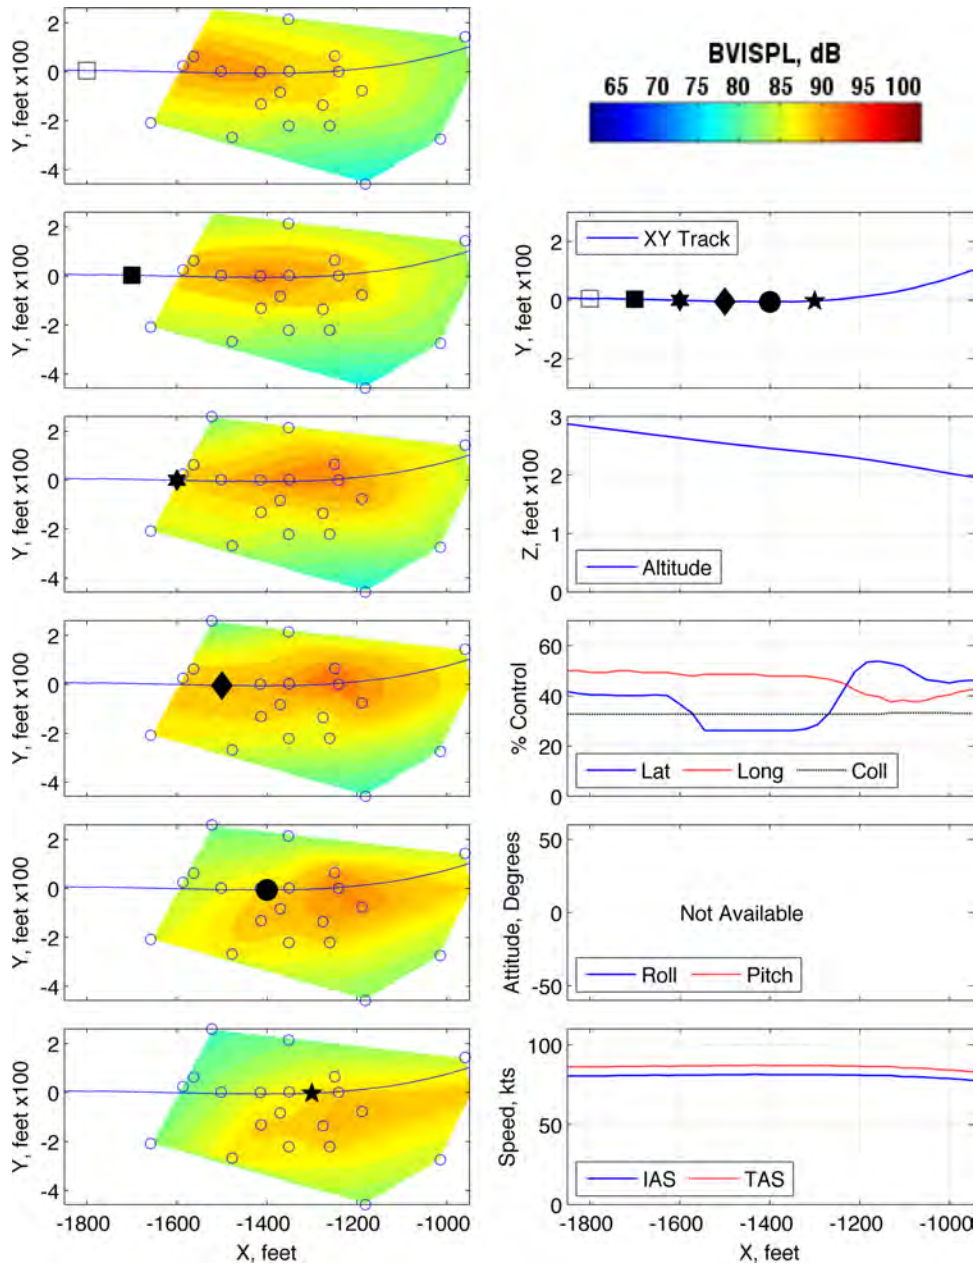


Figure 230: Maneuver condition R12, 80 KIAS,  $-6^\circ$ , fast cyclic roll left, run number 278313



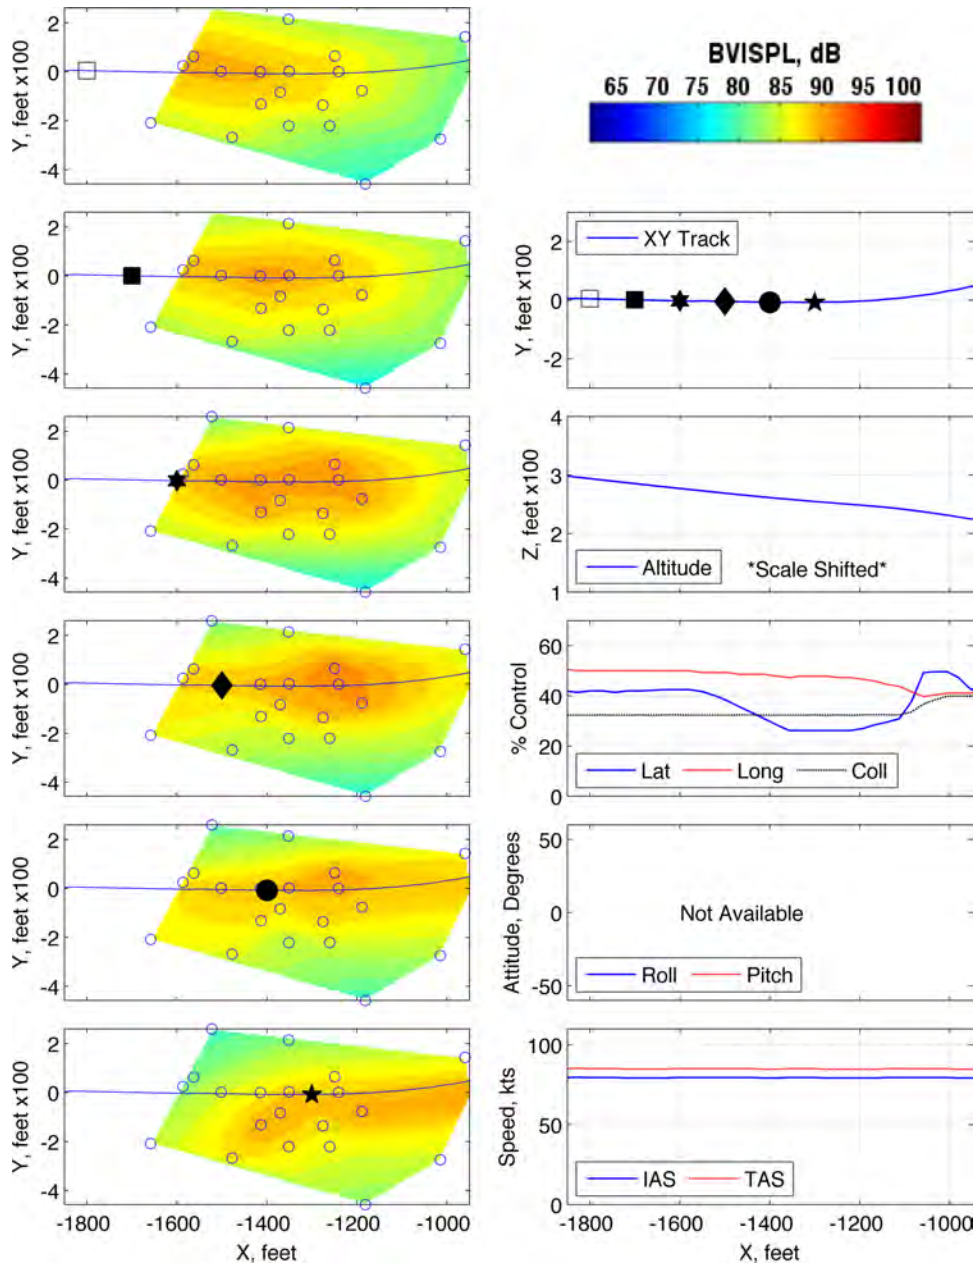


Figure 231: Maneuver condition R12, 80 KIAS,  $-6^\circ$ , fast cyclic roll left, run number 278314

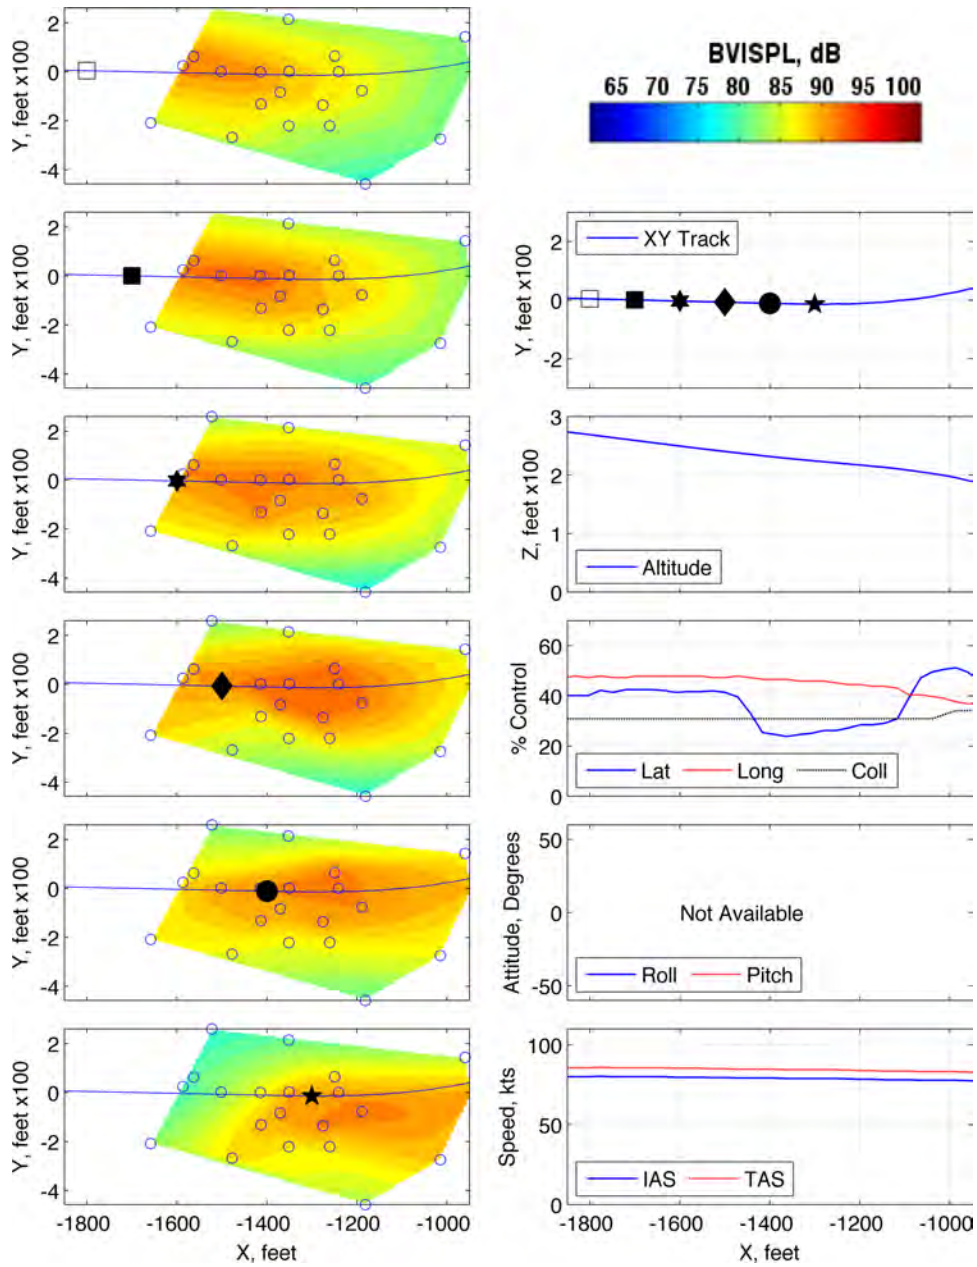


Figure 232: Maneuver condition R12, 80 KIAS,  $-6^\circ$ , fast cyclic roll left, run number 278315

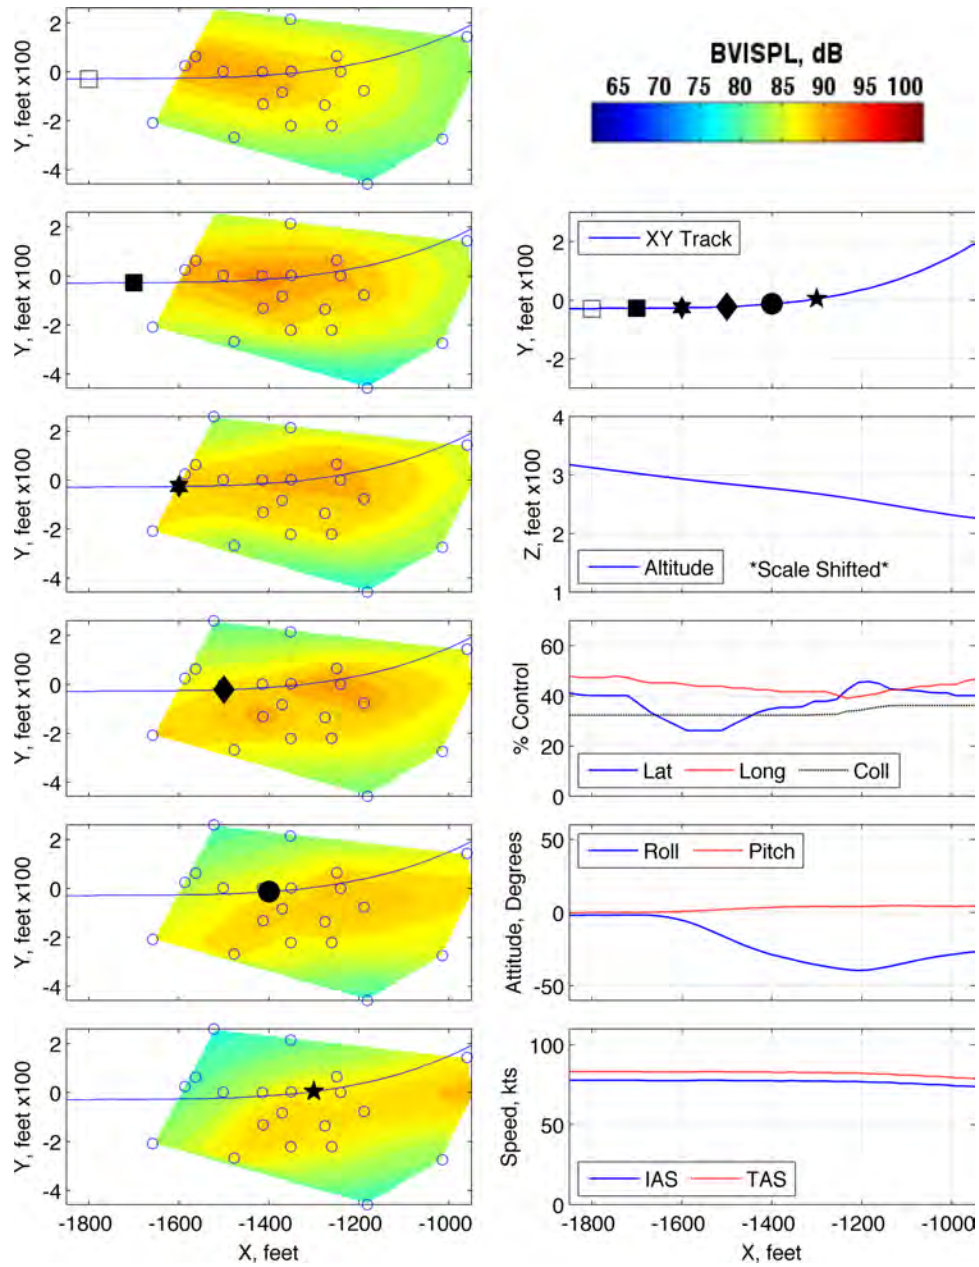


Figure 233: Maneuver condition R12, 80 KIAS,  $-6^\circ$ , fast cyclic roll left, run number 282416

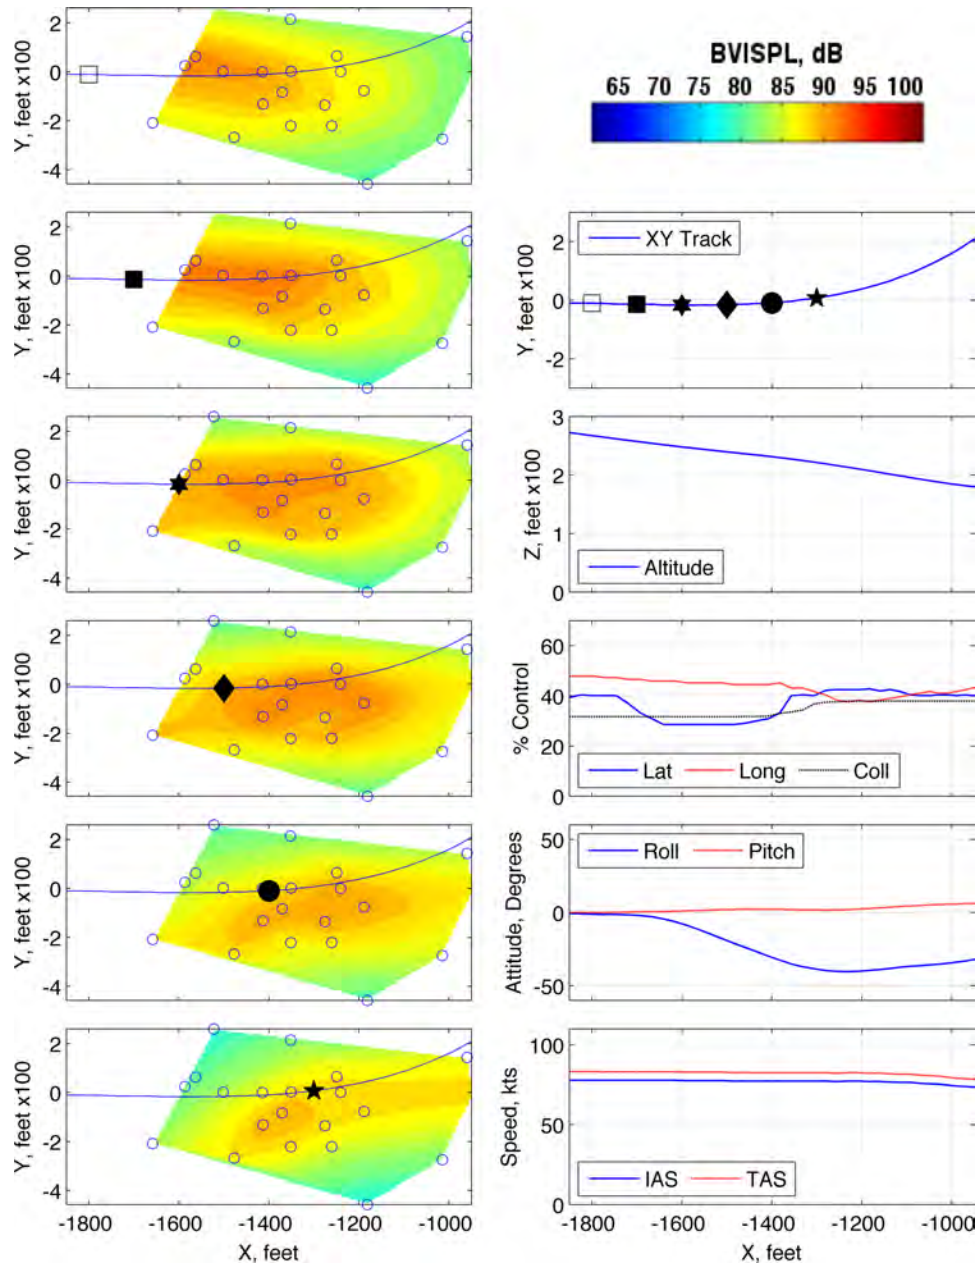


Figure 234: Maneuver condition R12, 80 KIAS,  $-6^\circ$ , fast cyclic roll left, run number 282417

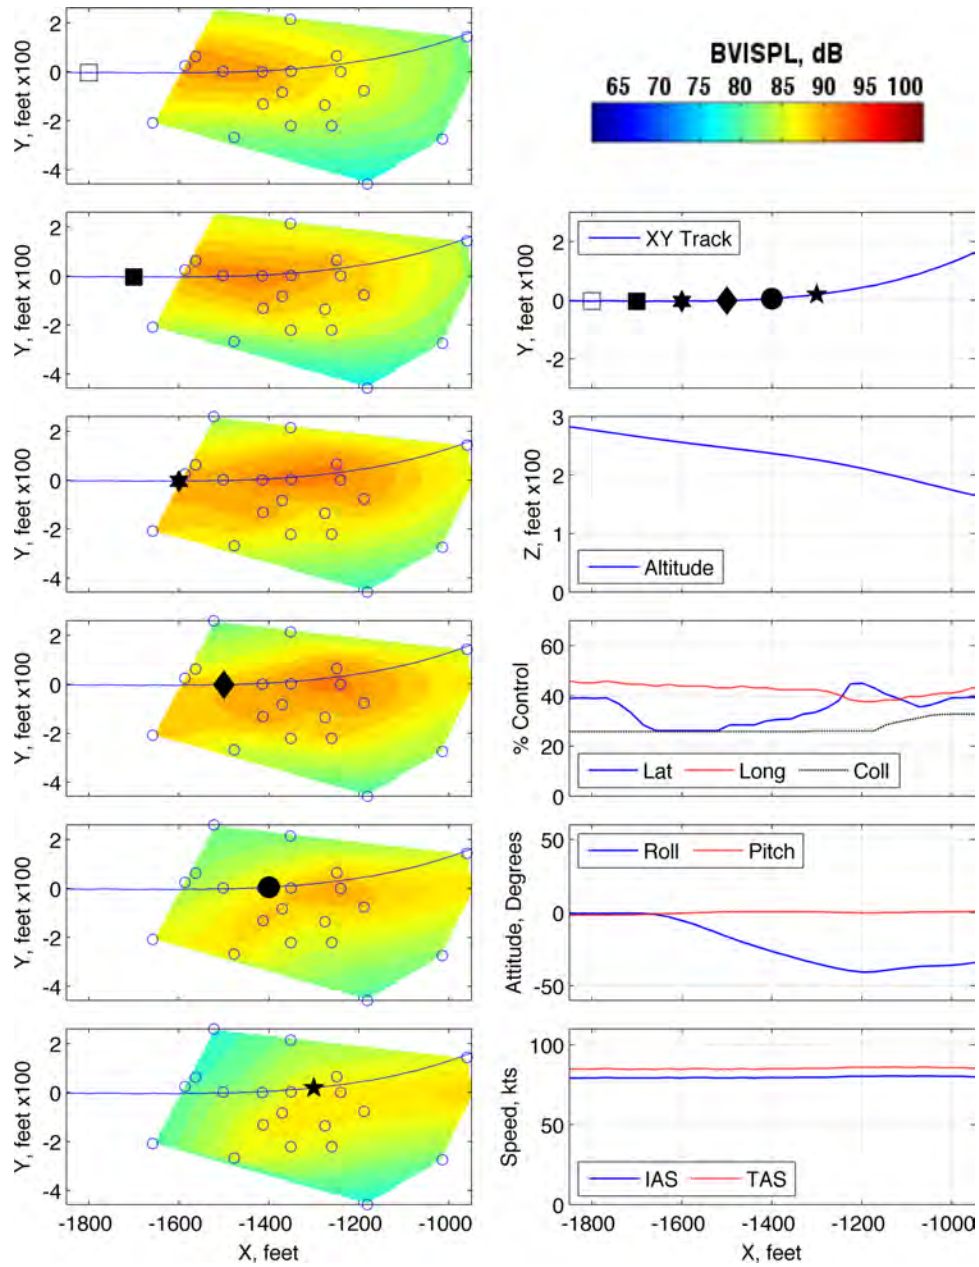


Figure 235: Maneuver condition R12, 80 KIAS,  $-6^\circ$ , fast cyclic roll left, run number 285479

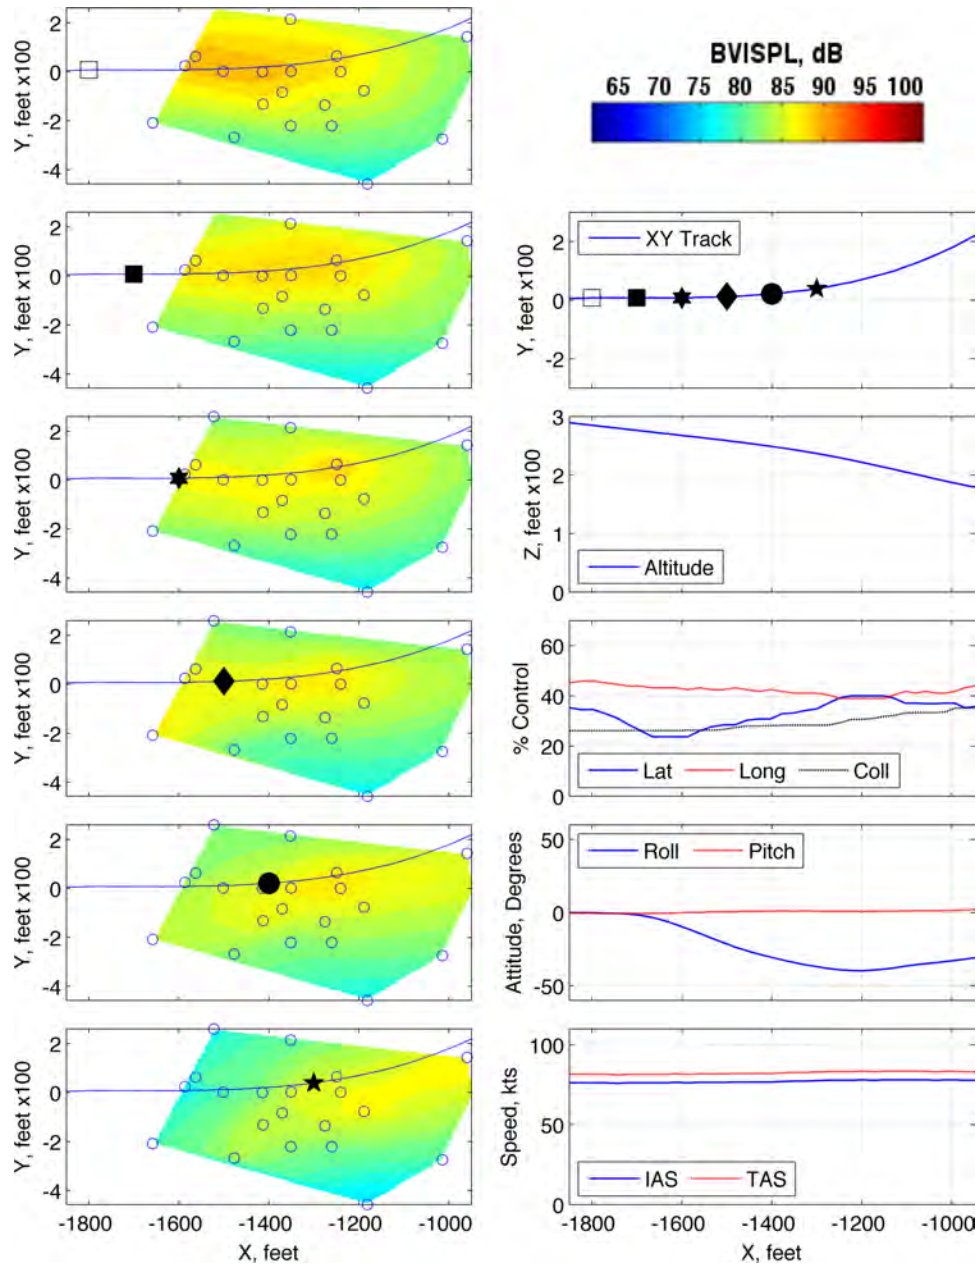


Figure 236: Maneuver condition R12, 80 KIAS,  $-6^\circ$ , fast cyclic roll left, run number 285480

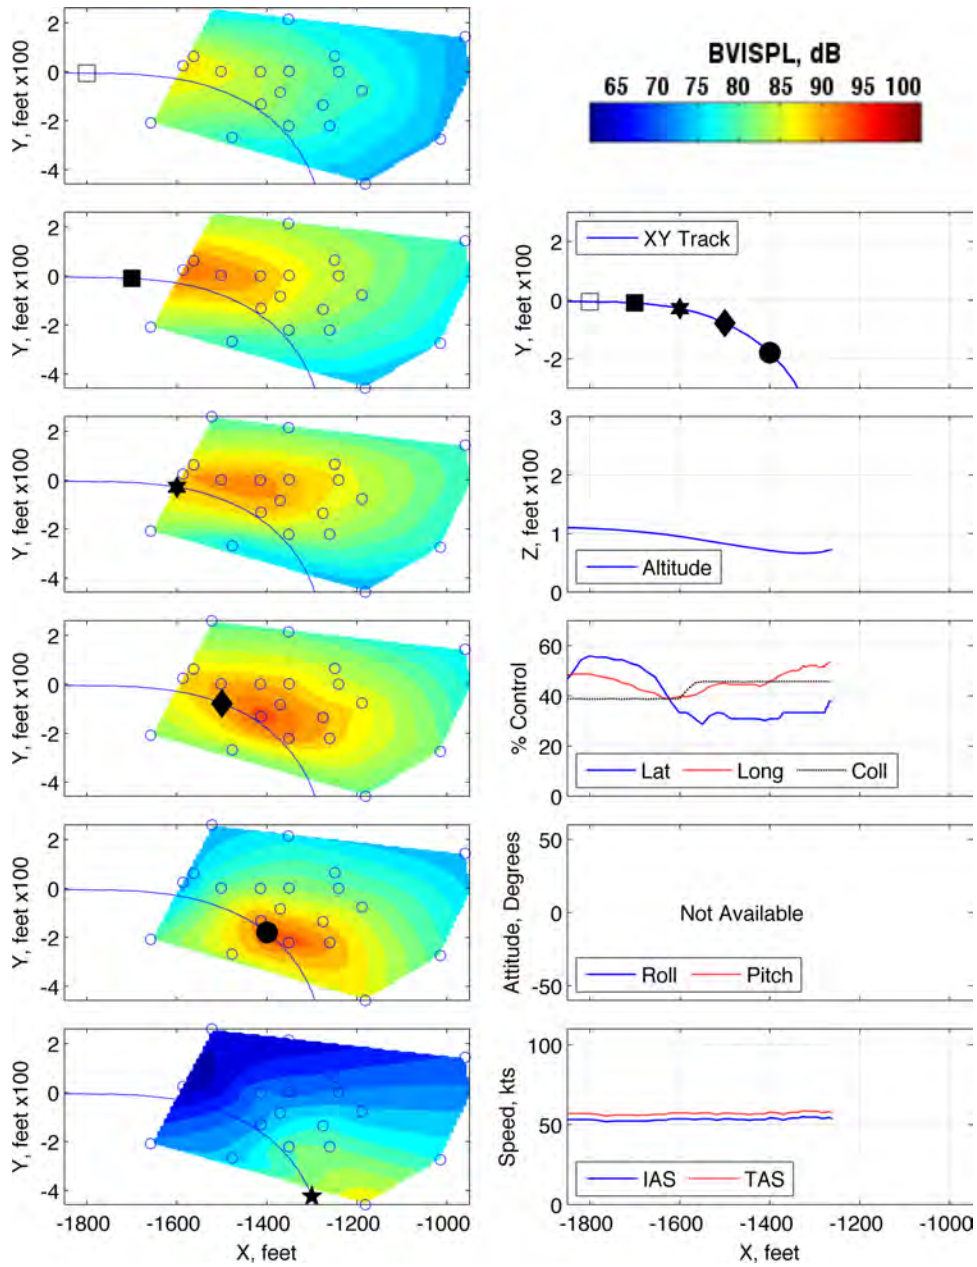


Figure 237: Maneuver condition R15, 60 KIAS, level, fast cyclic roll right, run number 280386

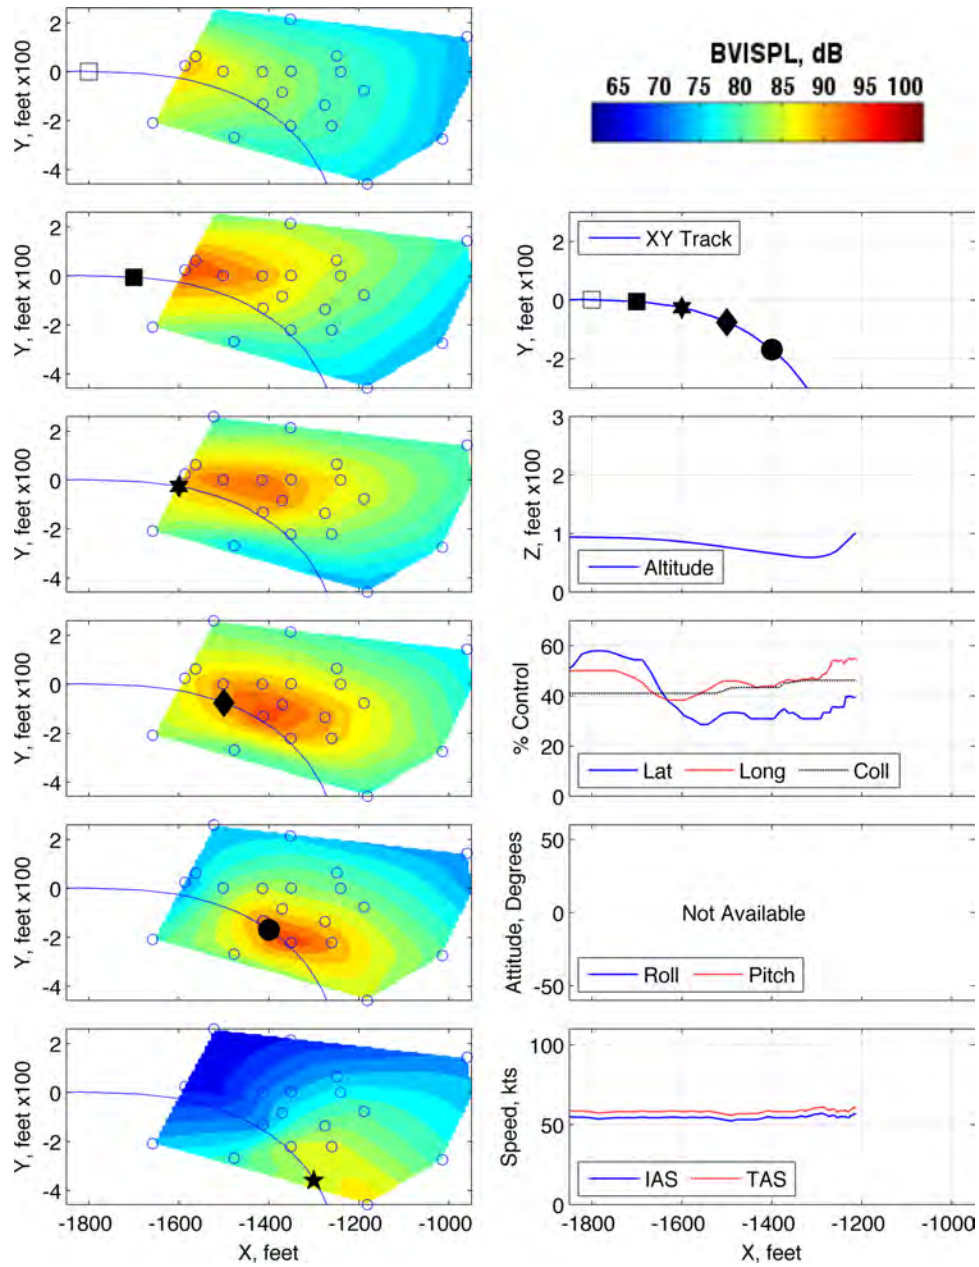


Figure 238: Maneuver condition R15, 60 KIAS, level, fast cyclic roll right, run number 280387



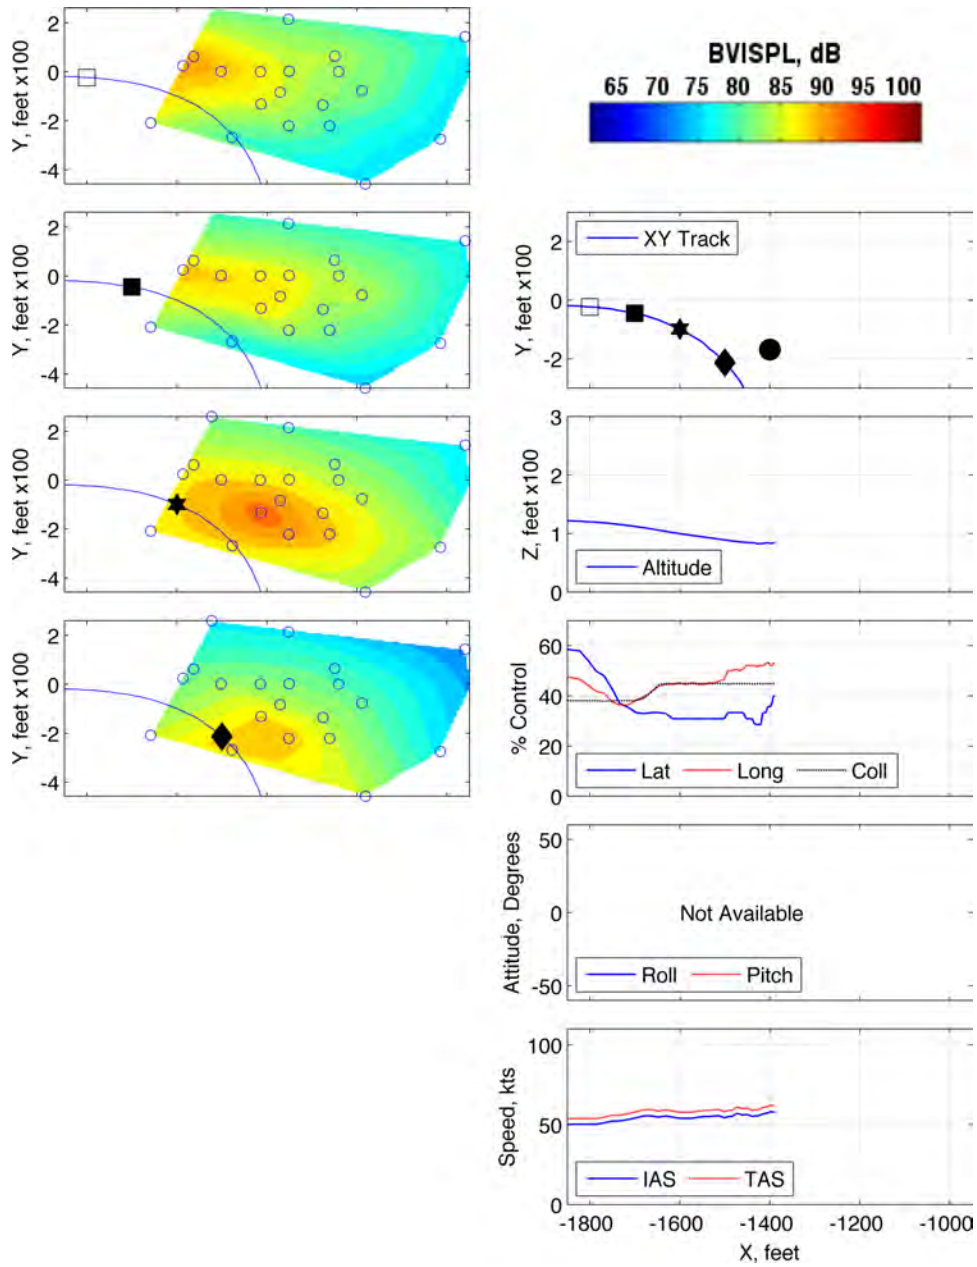


Figure 239: Maneuver condition R15, 60 KIAS, level, fast cyclic roll right, run number 280388

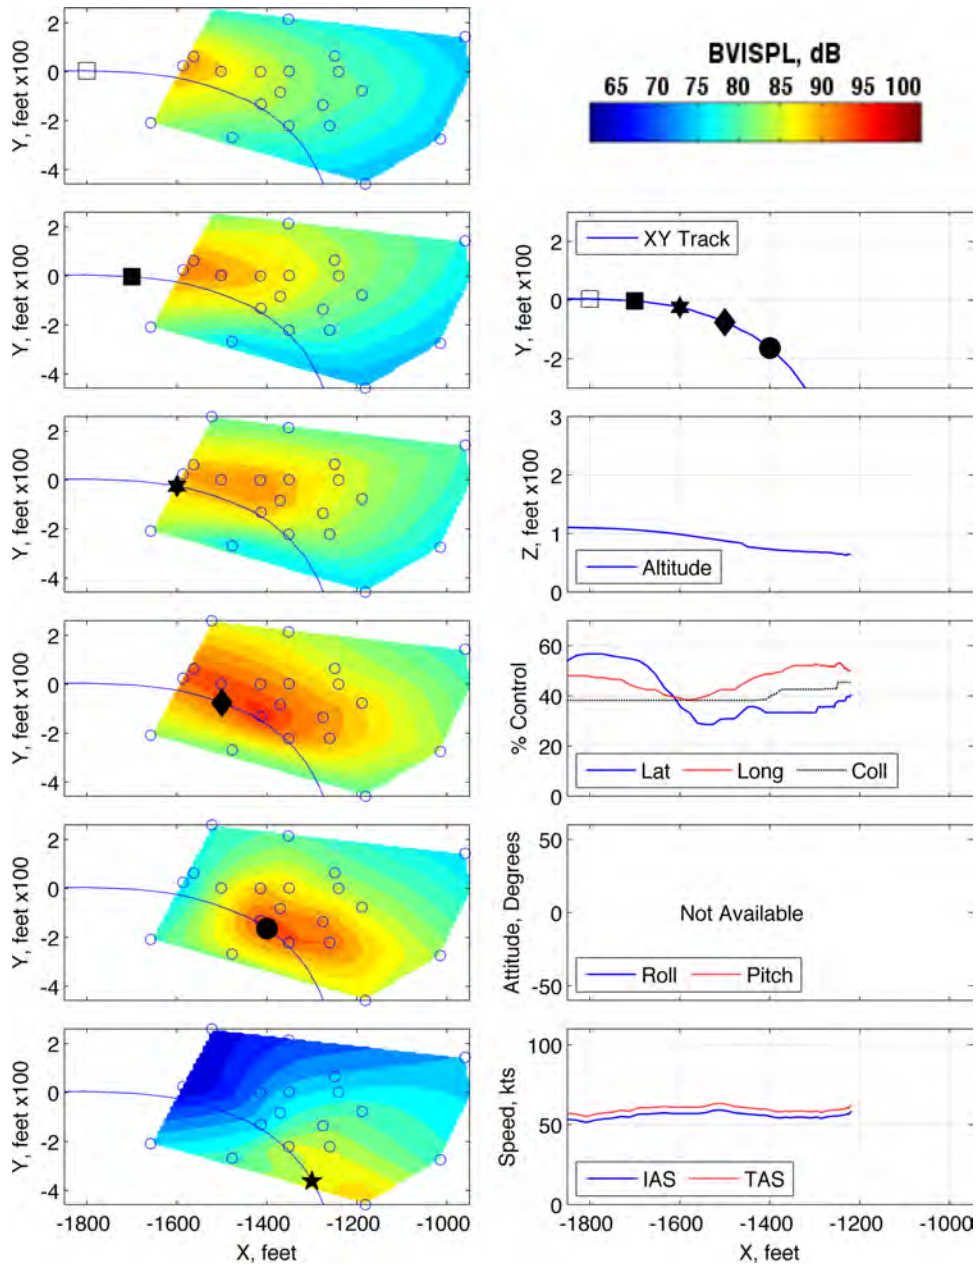


Figure 240: Maneuver condition R15, 60 KIAS, level, fast cyclic roll right, run number 280389

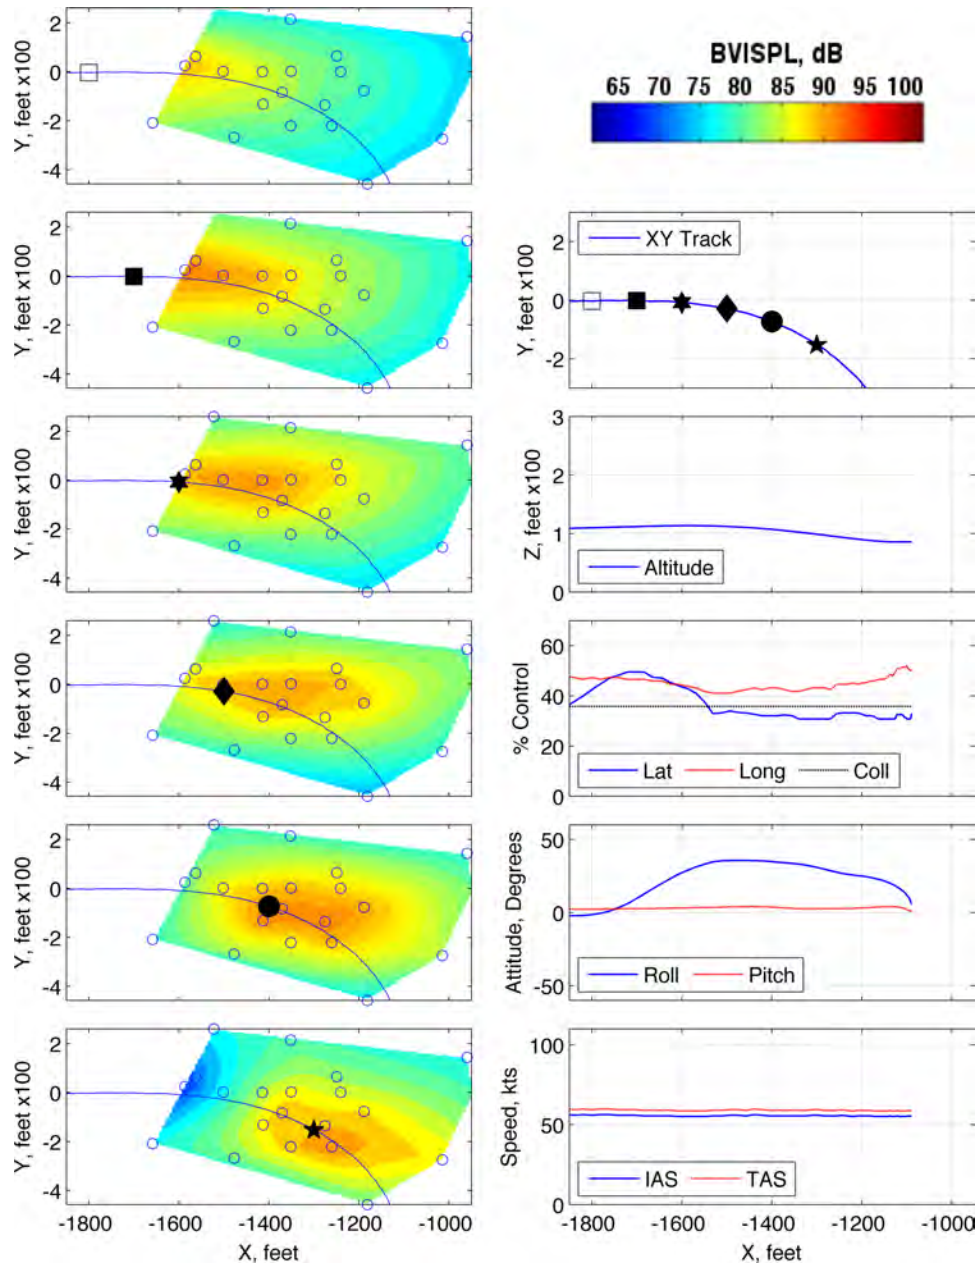


Figure 241: Maneuver condition R15, 60 KIAS, level, fast cyclic roll right, run number 285463

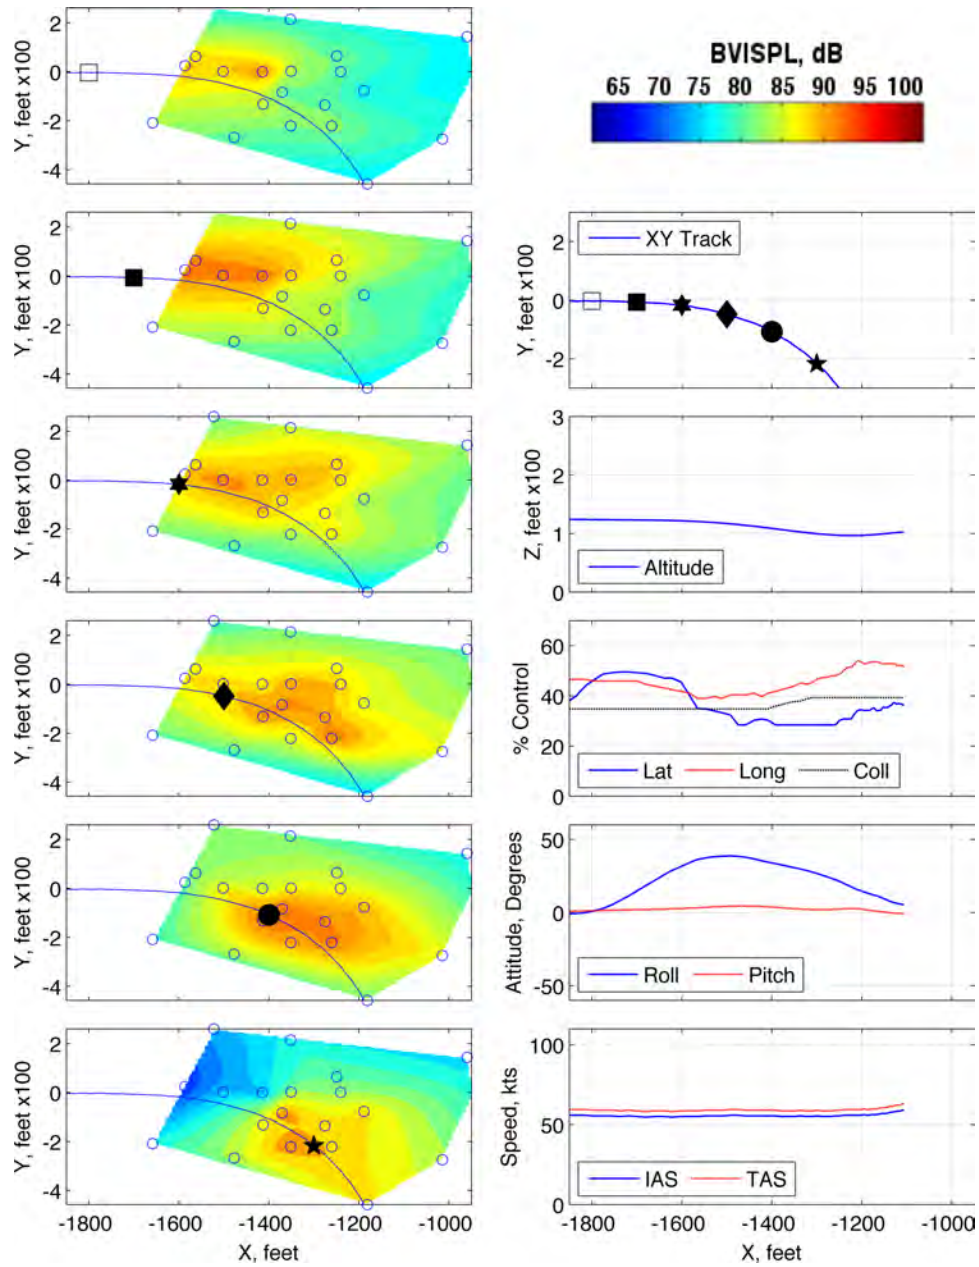


Figure 242: Maneuver condition R15, 60 KIAS, level, fast cyclic roll right, run number 285464

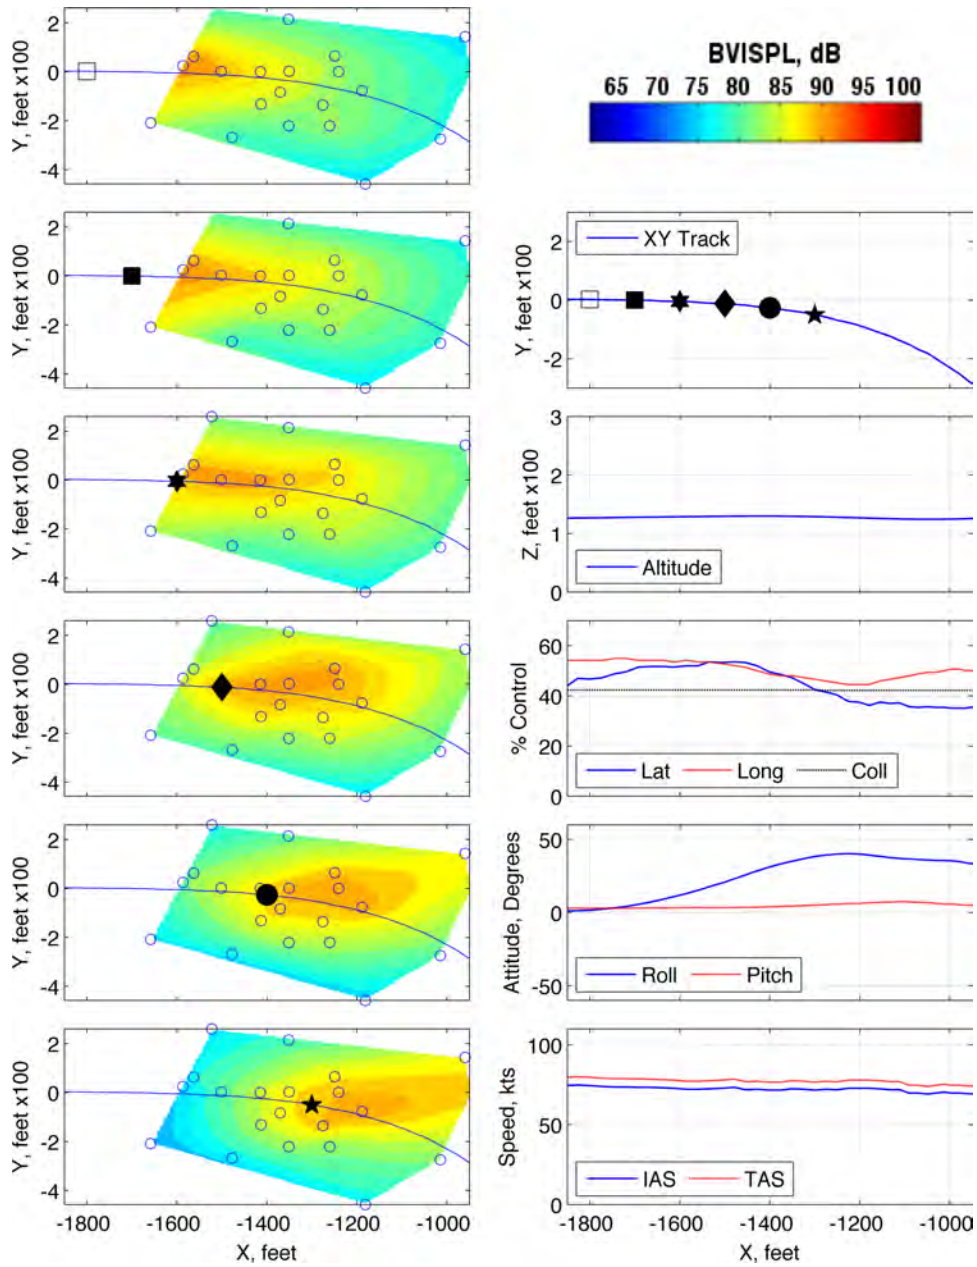


Figure 243: Maneuver condition R16, 80 KIAS, level, slow cyclic roll right, run number 280382

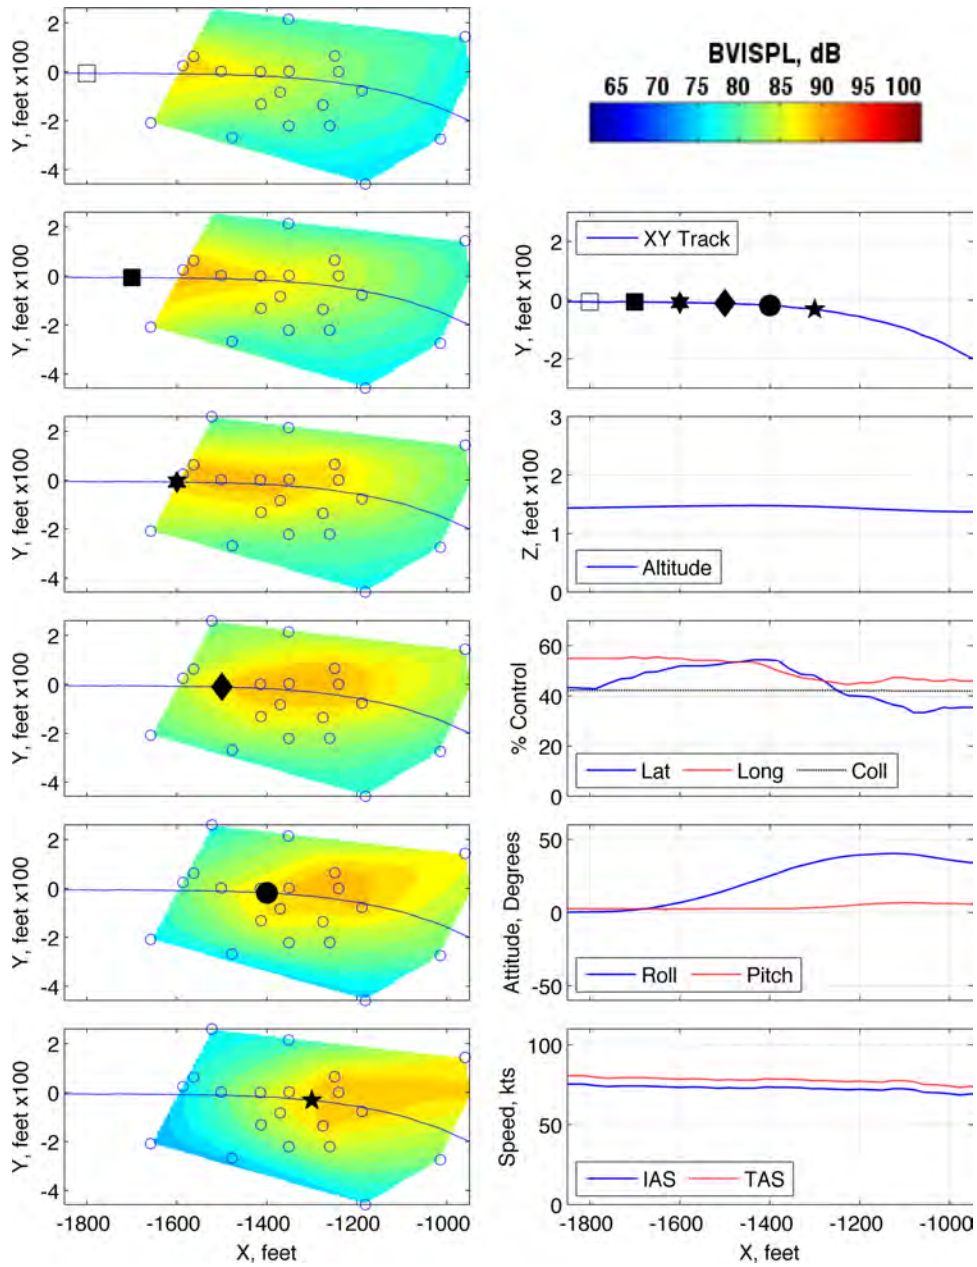


Figure 244: Maneuver condition R16, 80 KIAS, level, slow cyclic roll right, run number 280383

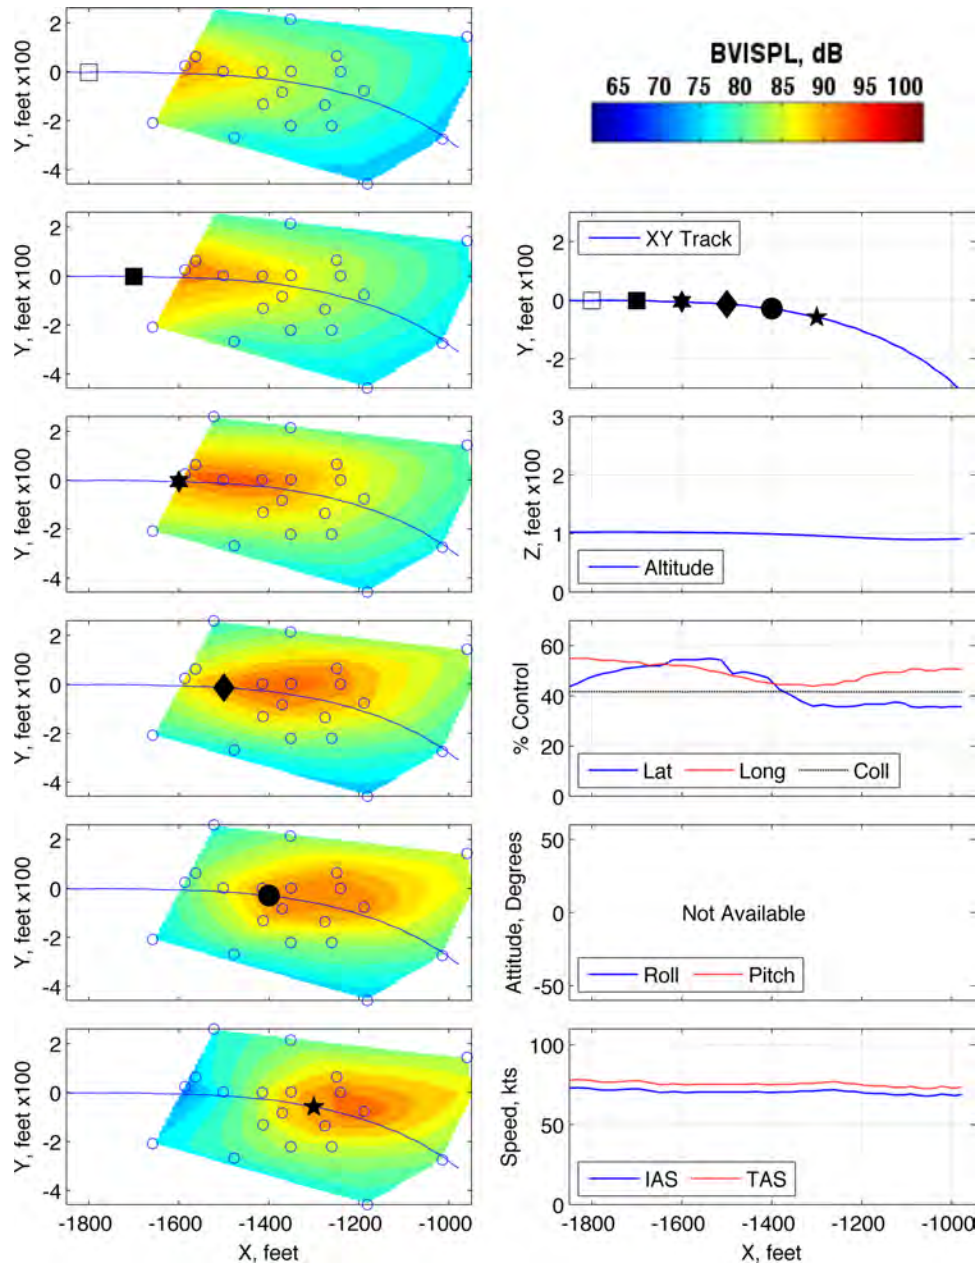


Figure 245: Maneuver condition R16, 80 KIAS, level, slow cyclic roll right, run number 280384

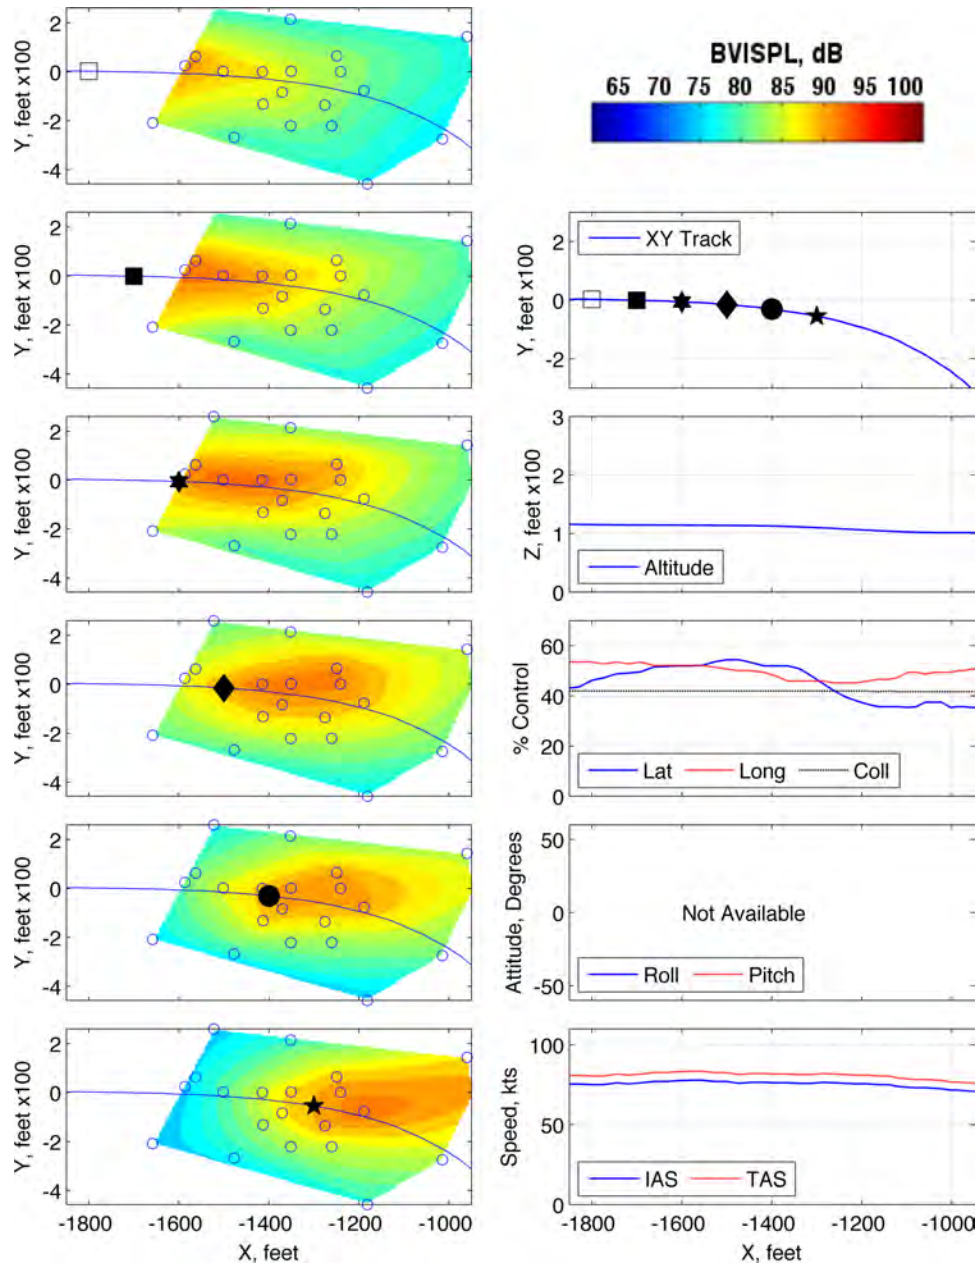


Figure 246: Maneuver condition R16, 80 KIAS, level, slow cyclic roll right, run number 280385



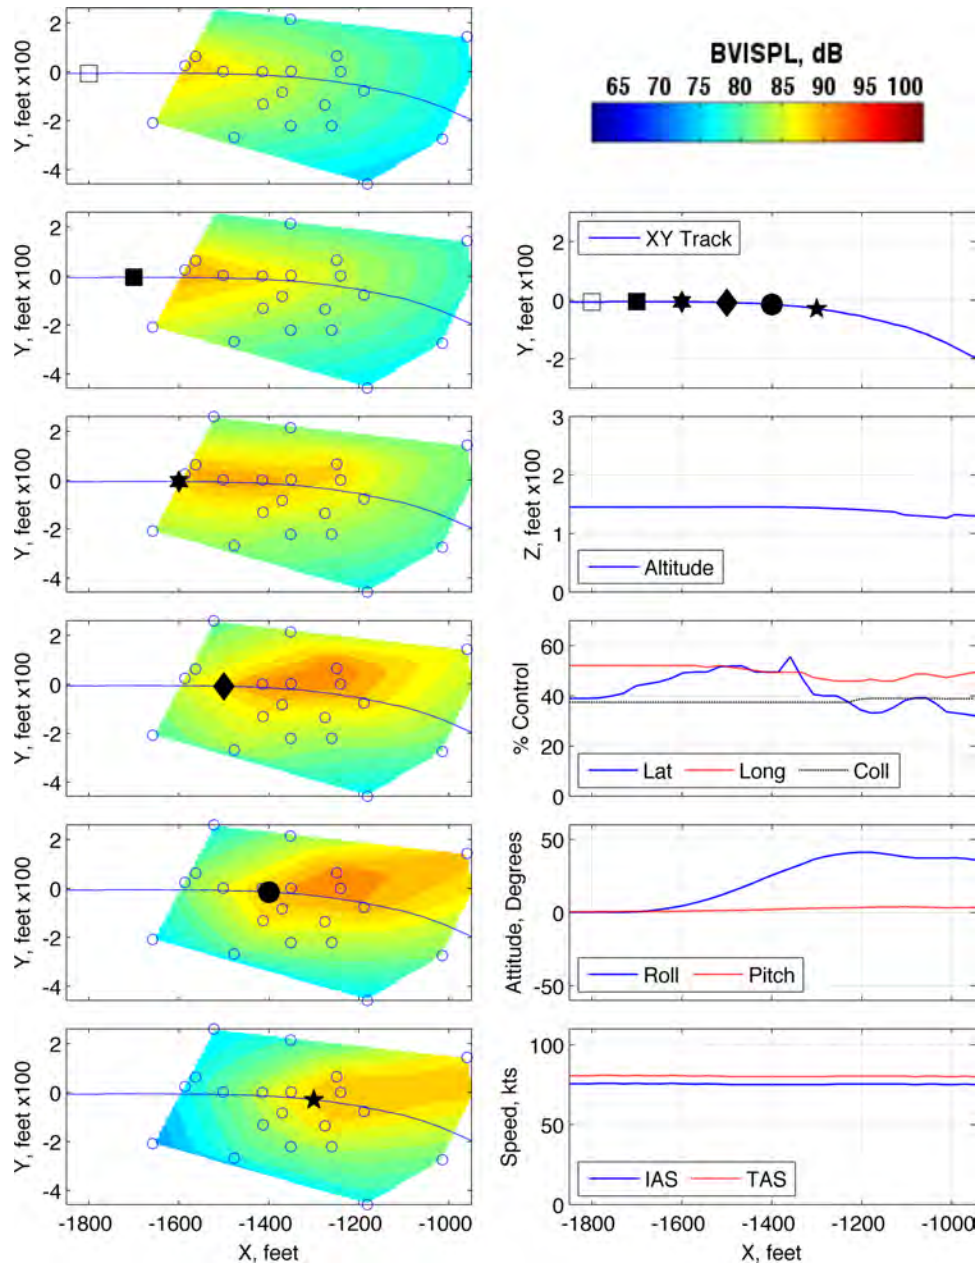


Figure 247: Maneuver condition R17, 80 KIAS, level, medium cyclic roll right, run number 285469

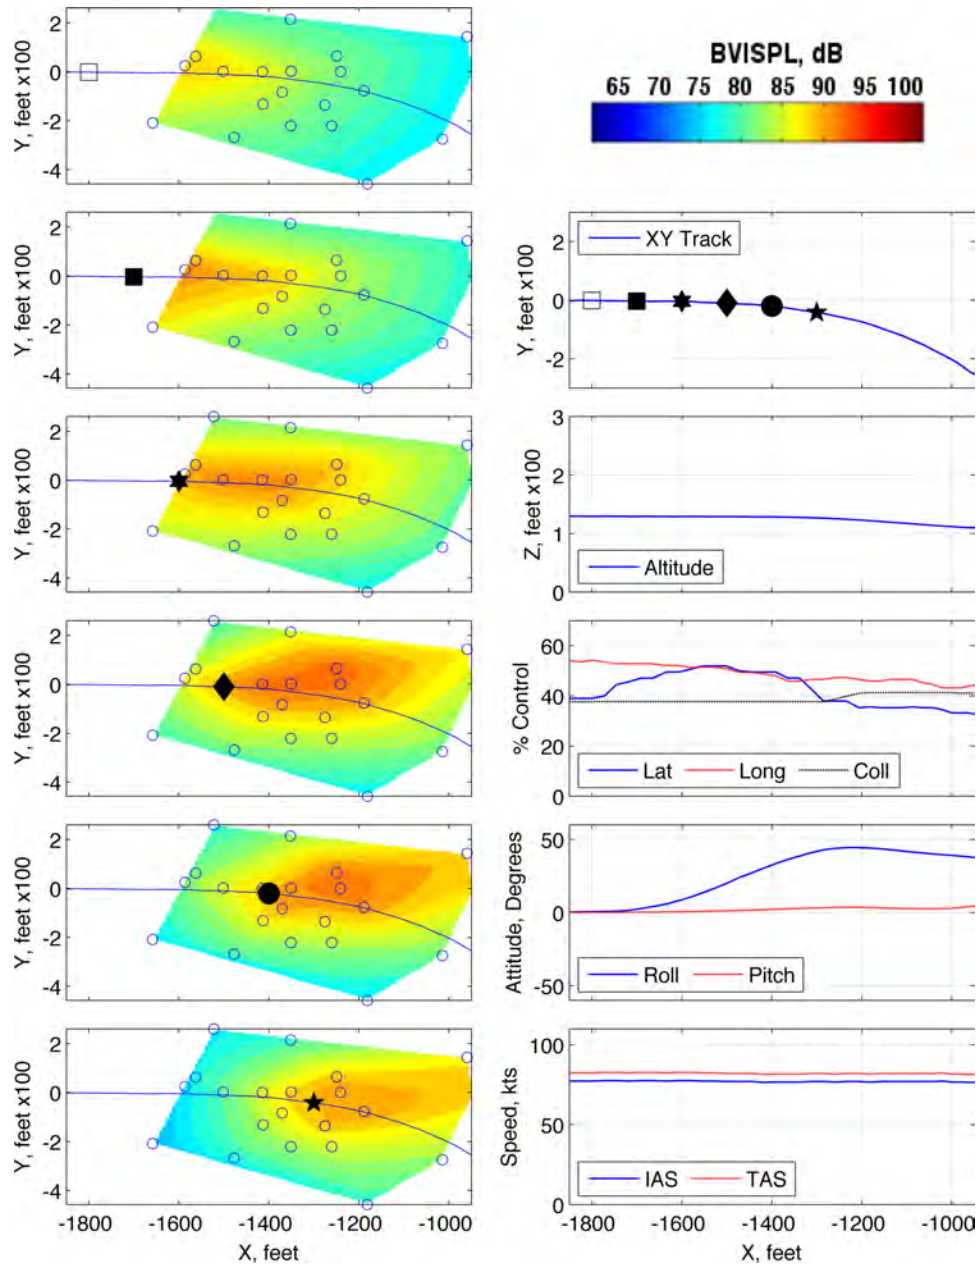


Figure 248: Maneuver condition R17, 80 KIAS, level, medium cyclic roll right, run number 285470

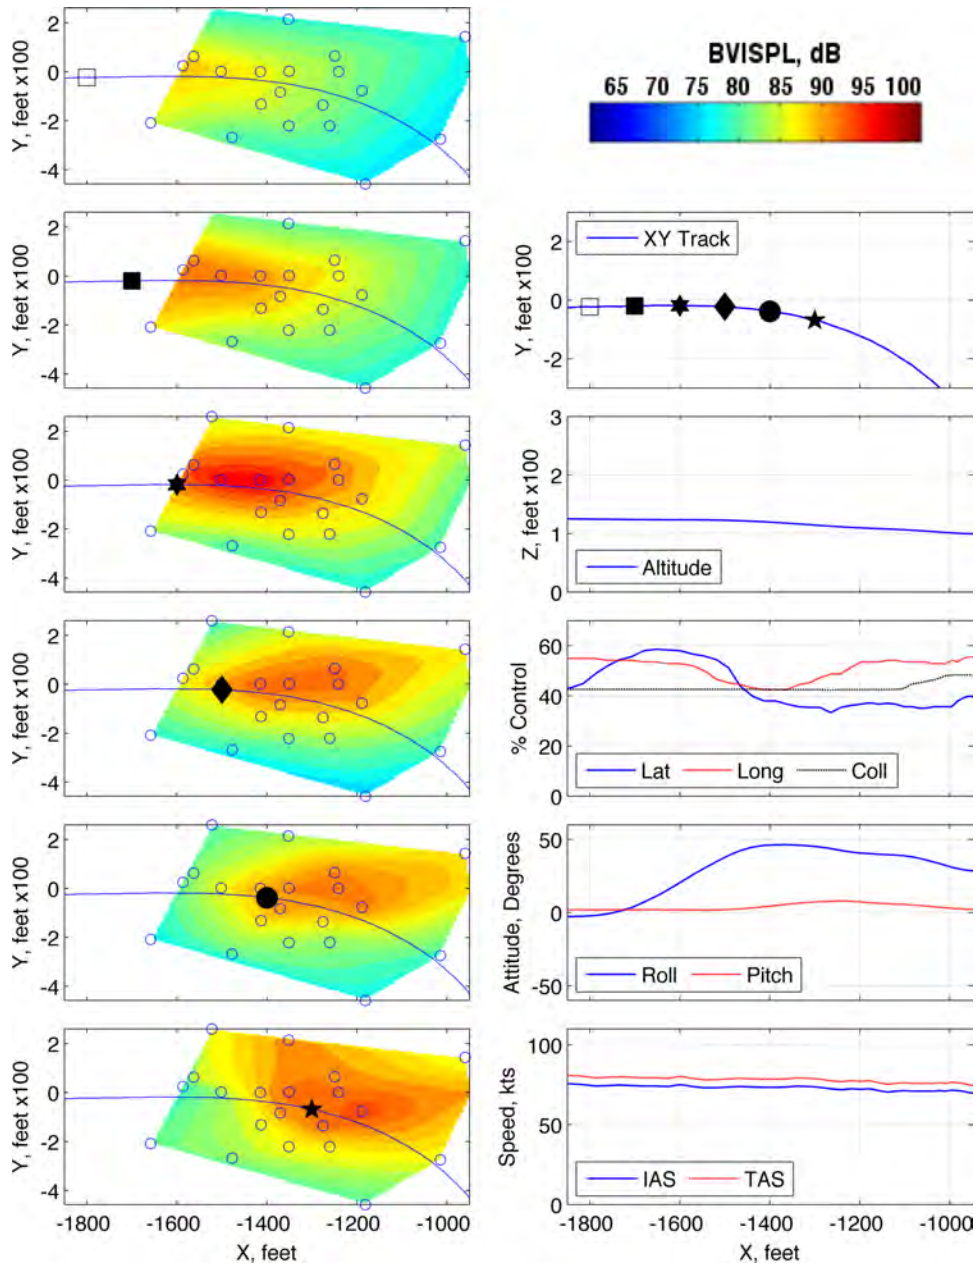


Figure 249: Maneuver condition R18, 80 KIAS, level, fast cyclic roll right, run number 280378

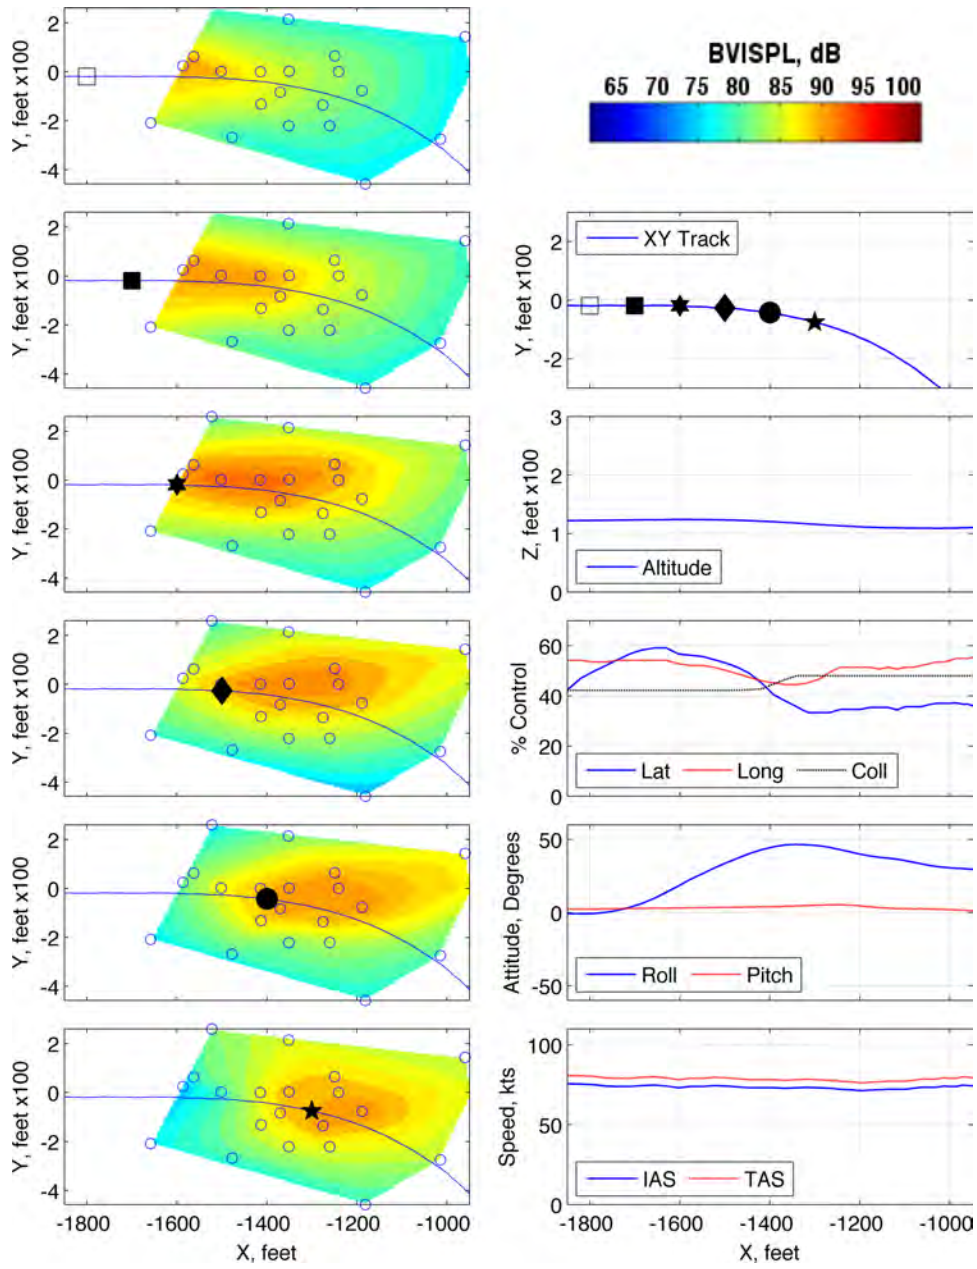


Figure 250: Maneuver condition R18, 80 KIAS, level, fast cyclic roll right, run number 280379

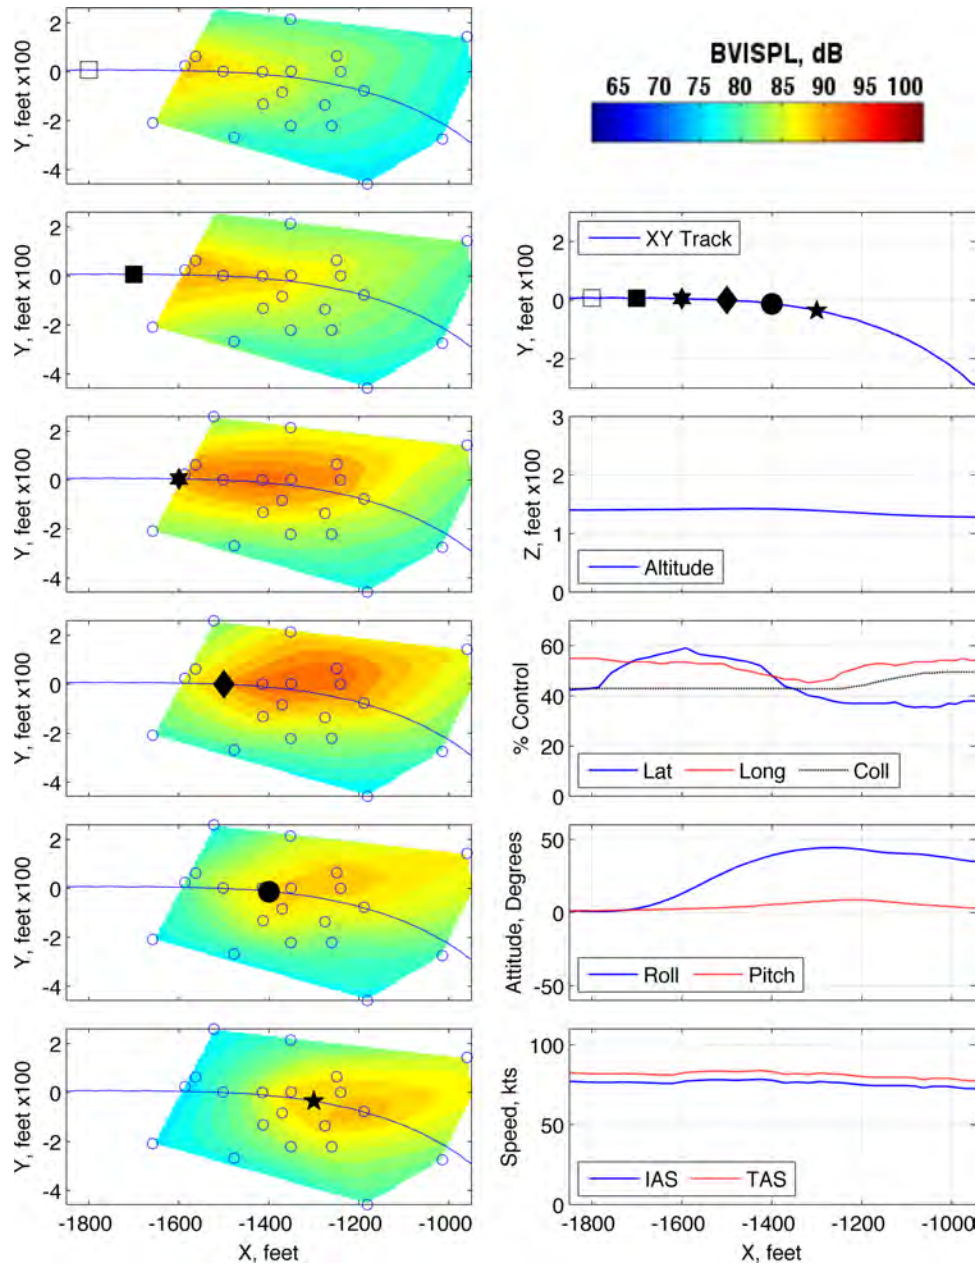


Figure 251: Maneuver condition R18, 80 KIAS, level, fast cyclic roll right, run number 280380

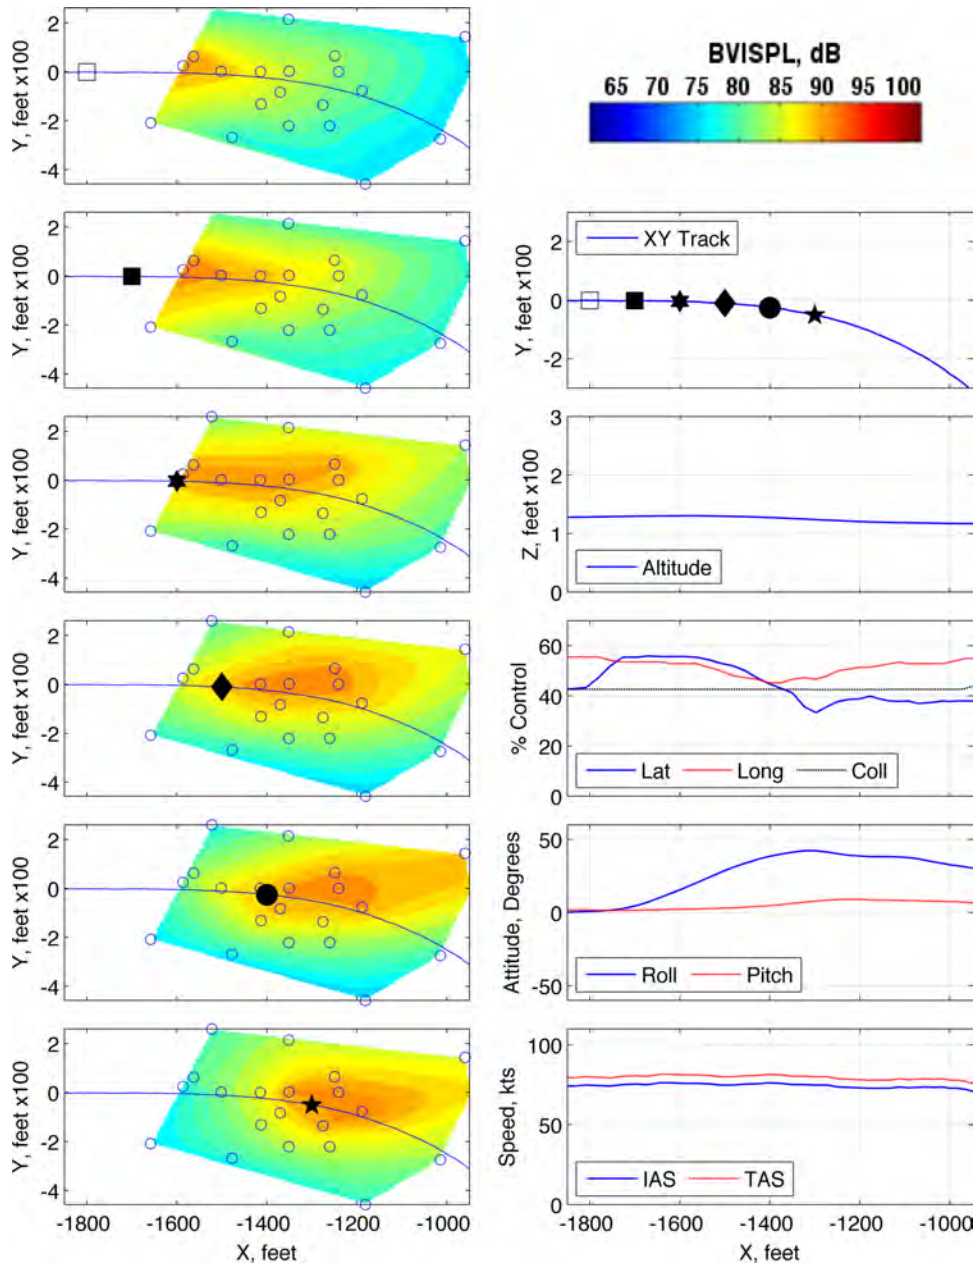


Figure 252: Maneuver condition R18, 80 KIAS, level, fast cyclic roll right, run number 280381

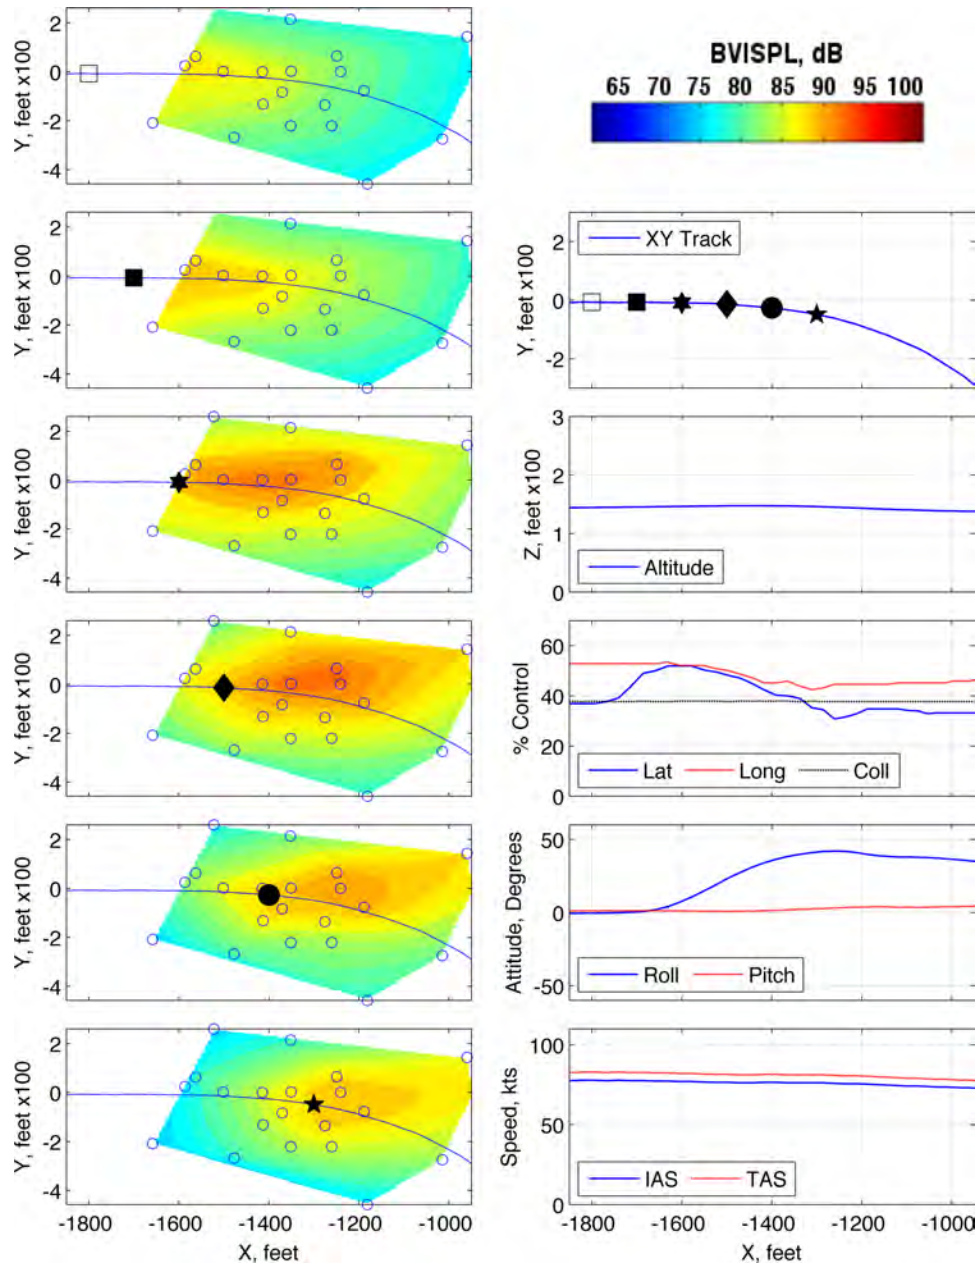


Figure 253: Maneuver condition R18, 80 KIAS, level, fast cyclic roll right, run number 285467

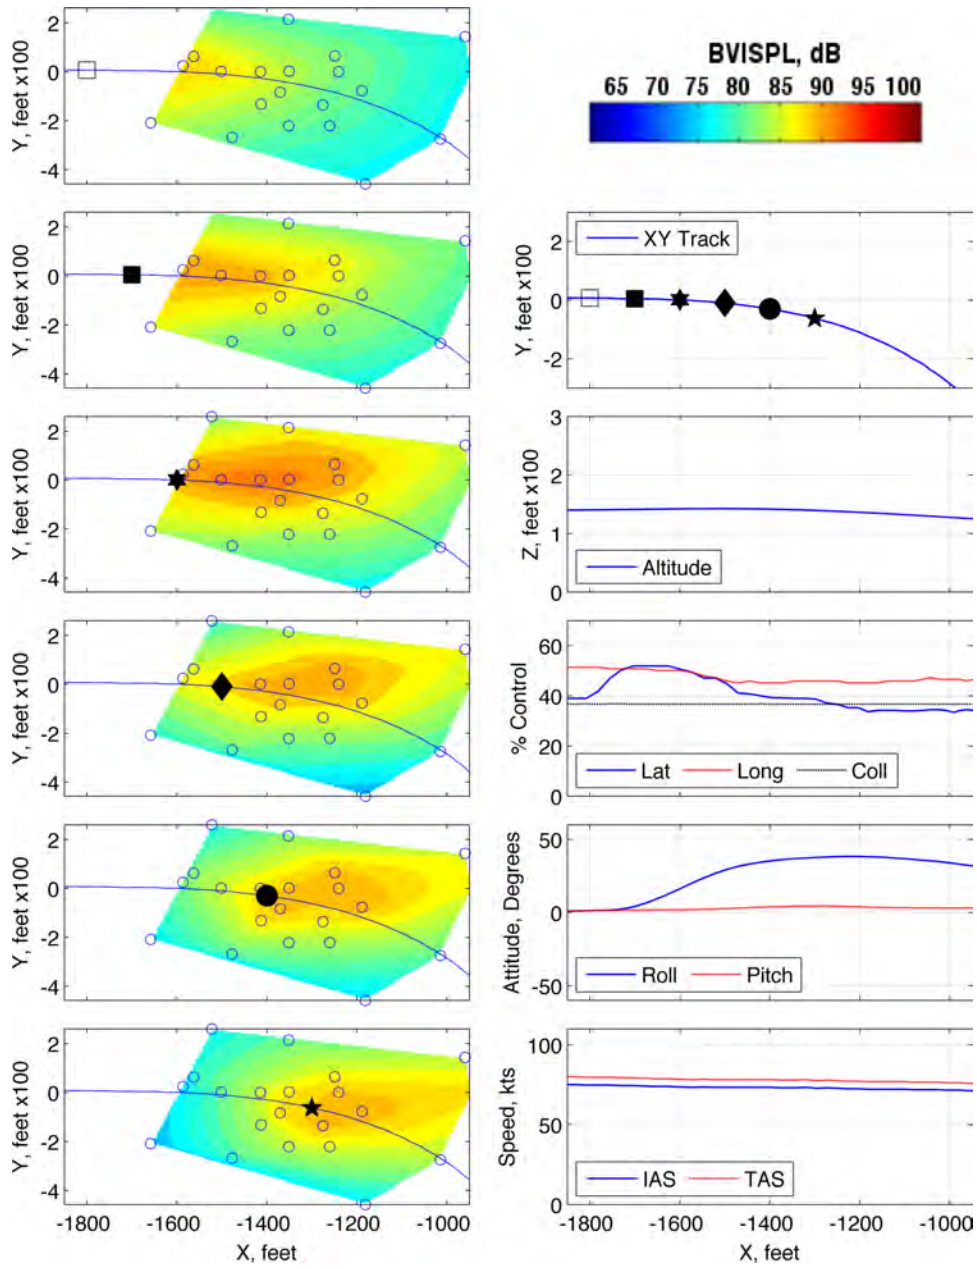


Figure 254: Maneuver condition R18, 80 KIAS, level, fast cyclic roll right, run number 285468



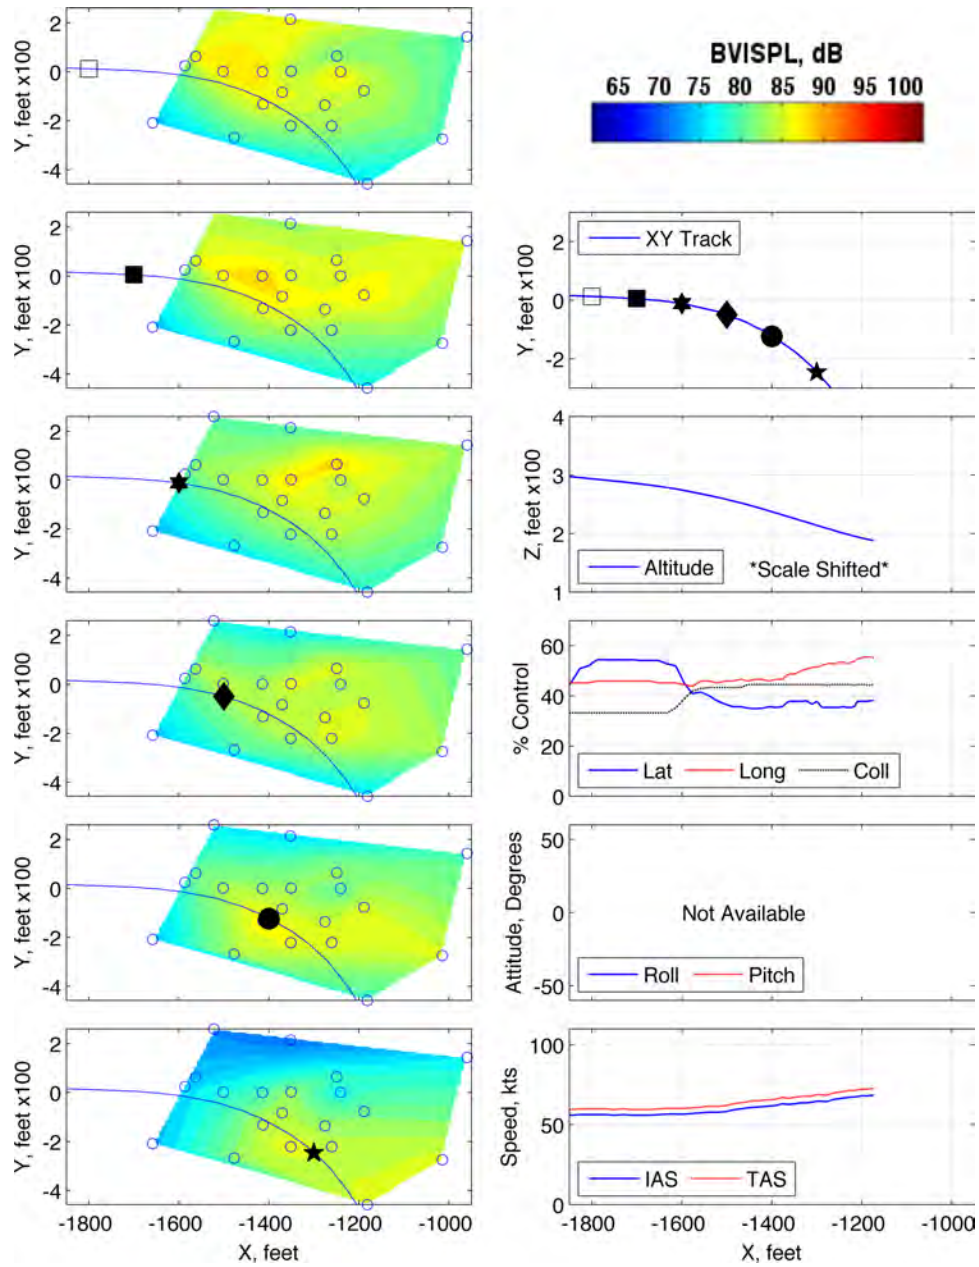


Figure 255: Maneuver condition R21, 60 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 280346

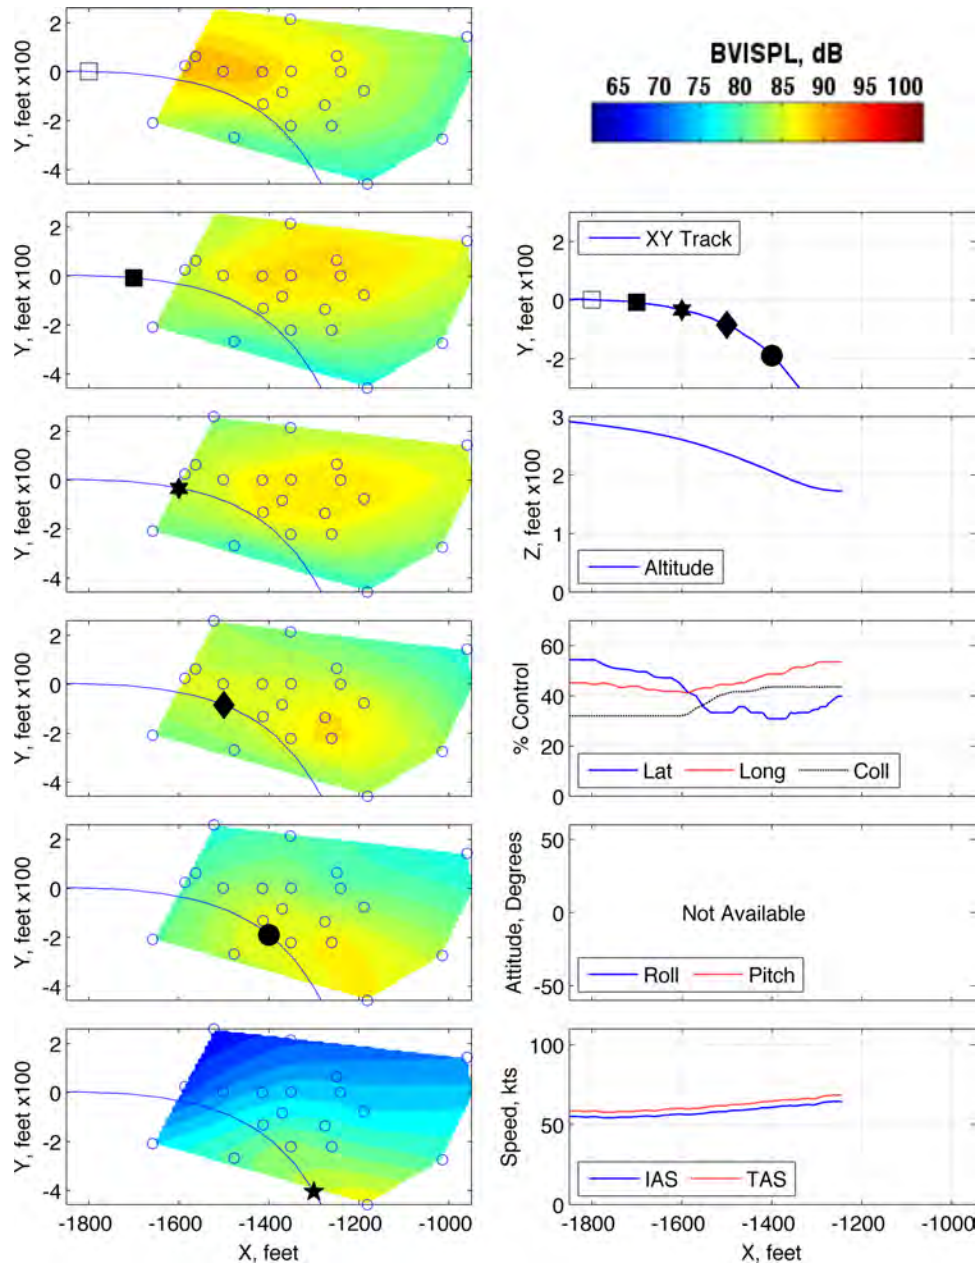


Figure 256: Maneuver condition R21, 60 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 280347

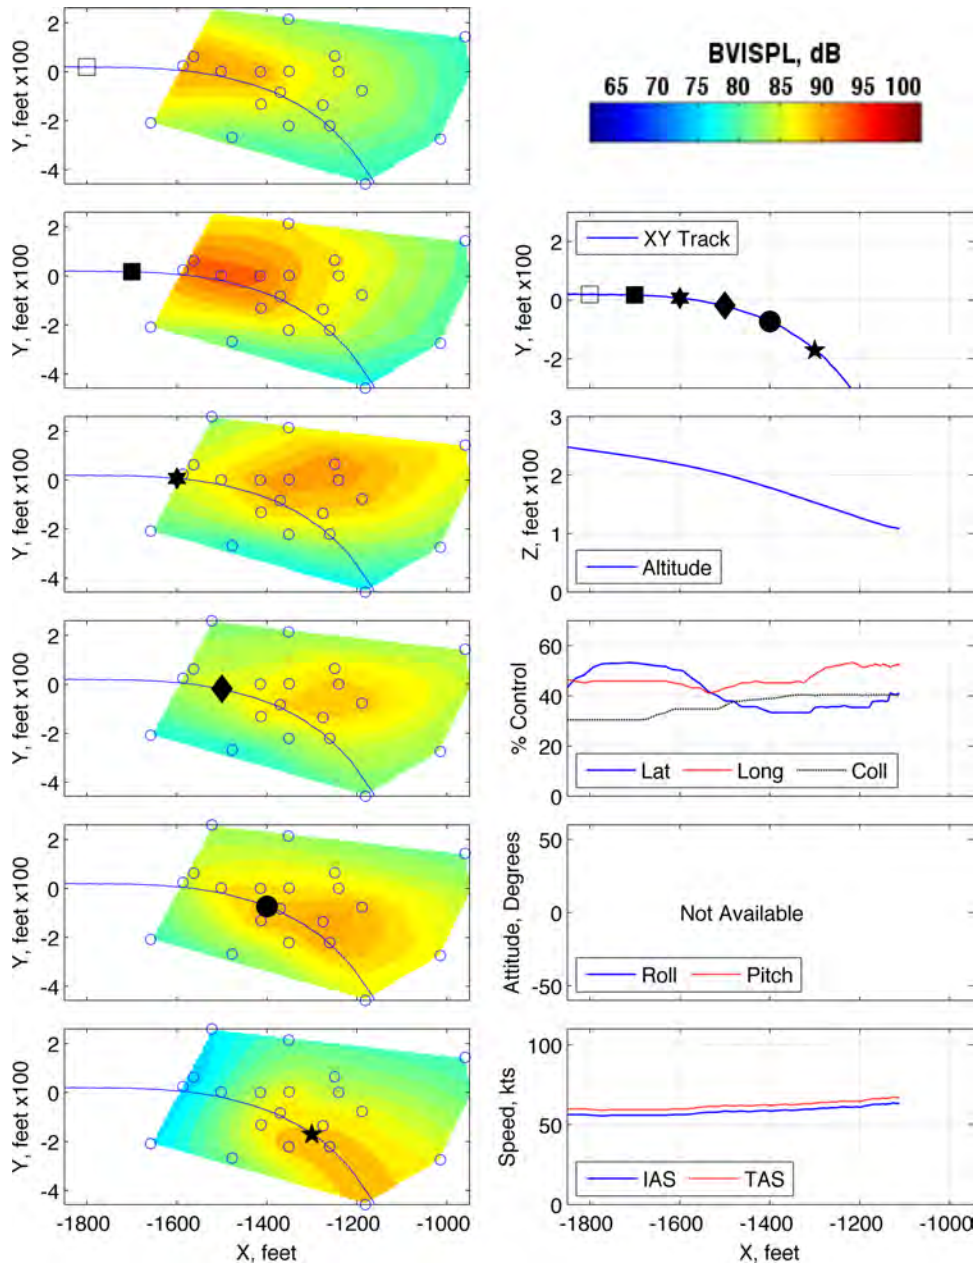


Figure 257: Maneuver condition R21, 60 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 280348

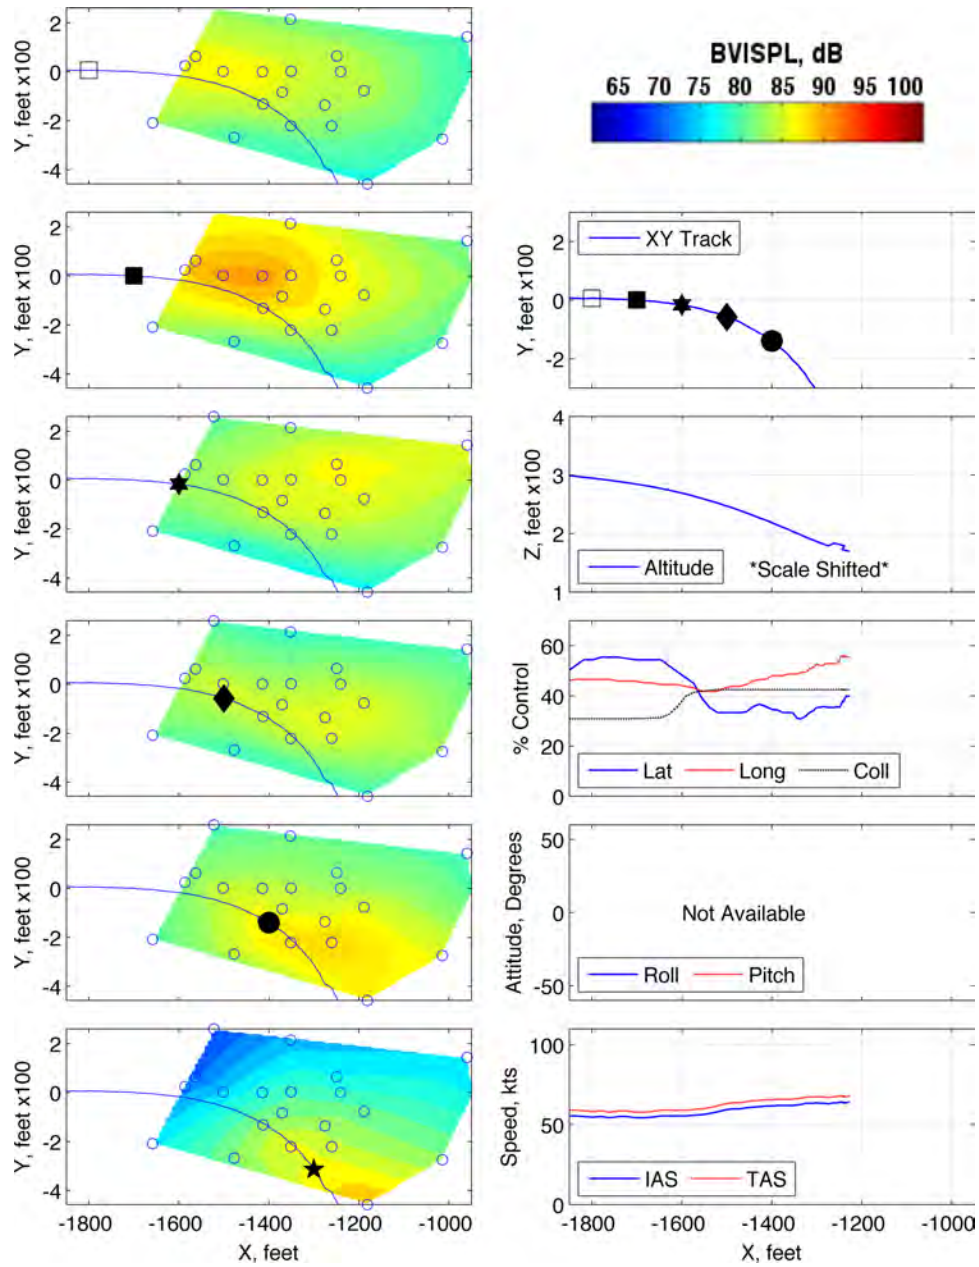


Figure 258: Maneuver condition R21, 60 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 280349

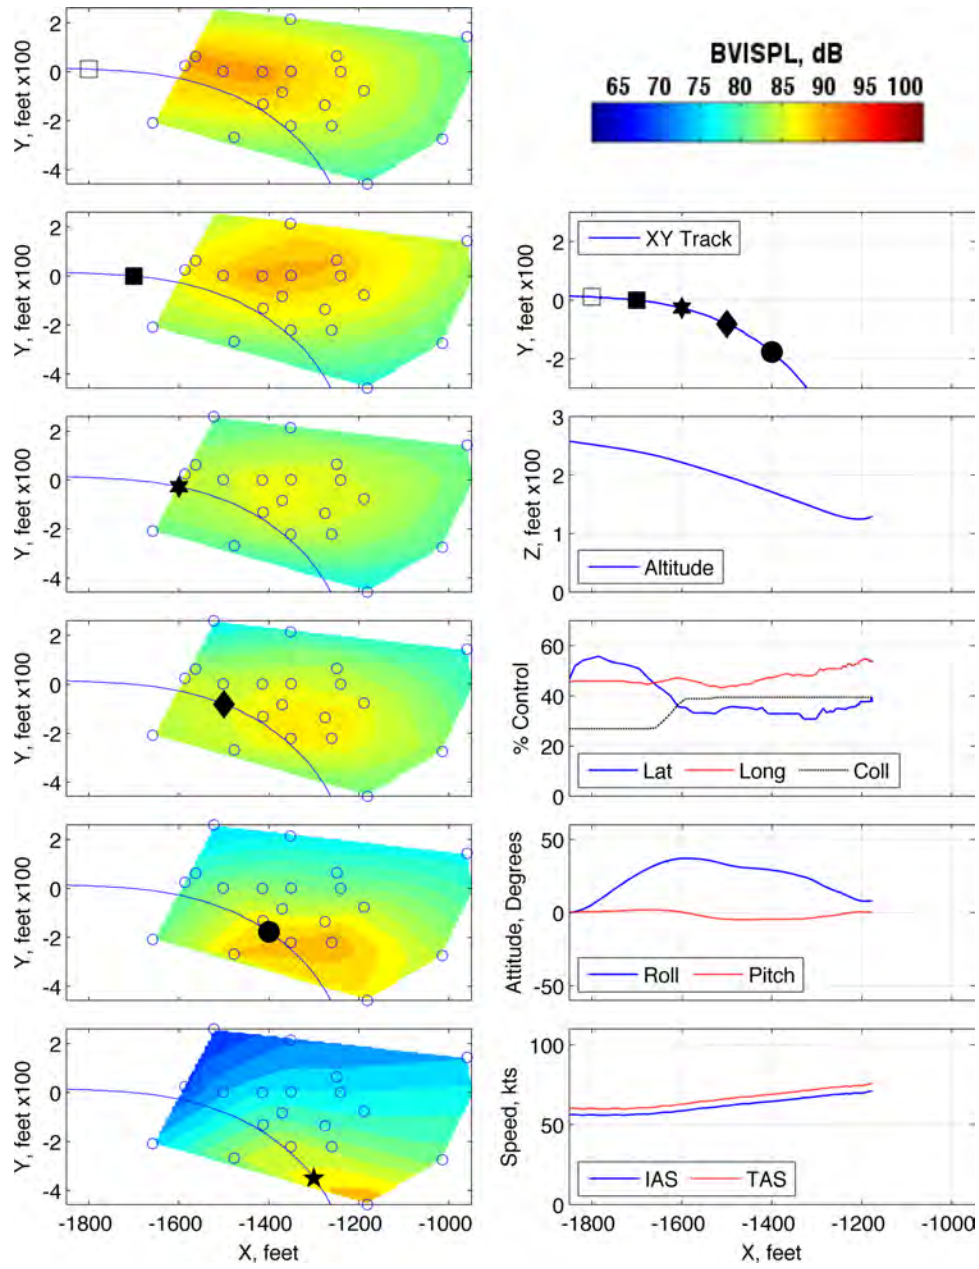


Figure 259: Maneuver condition R21, 60 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 287532

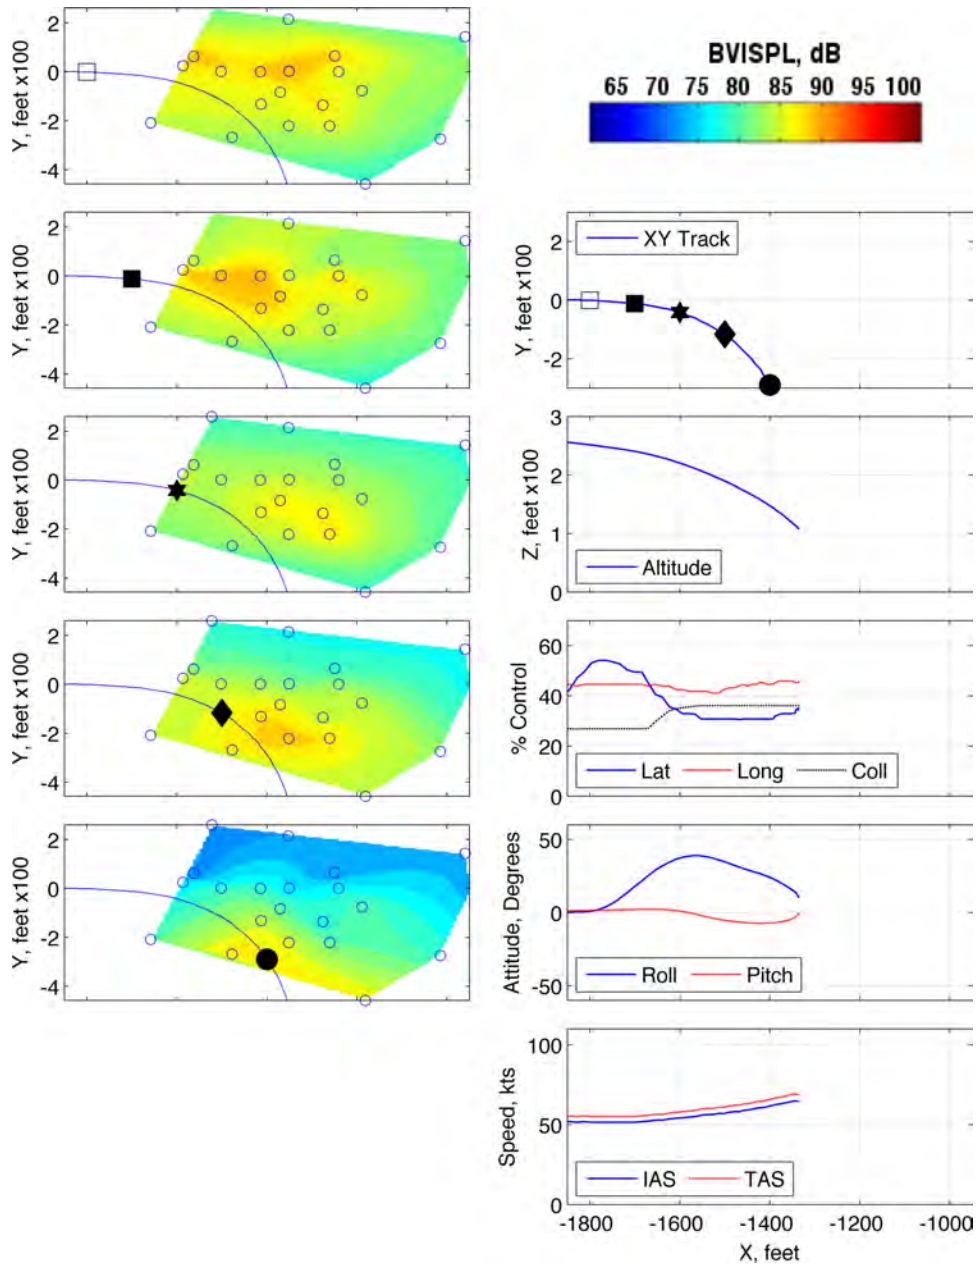


Figure 260: Maneuver condition R21, 60 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 287534

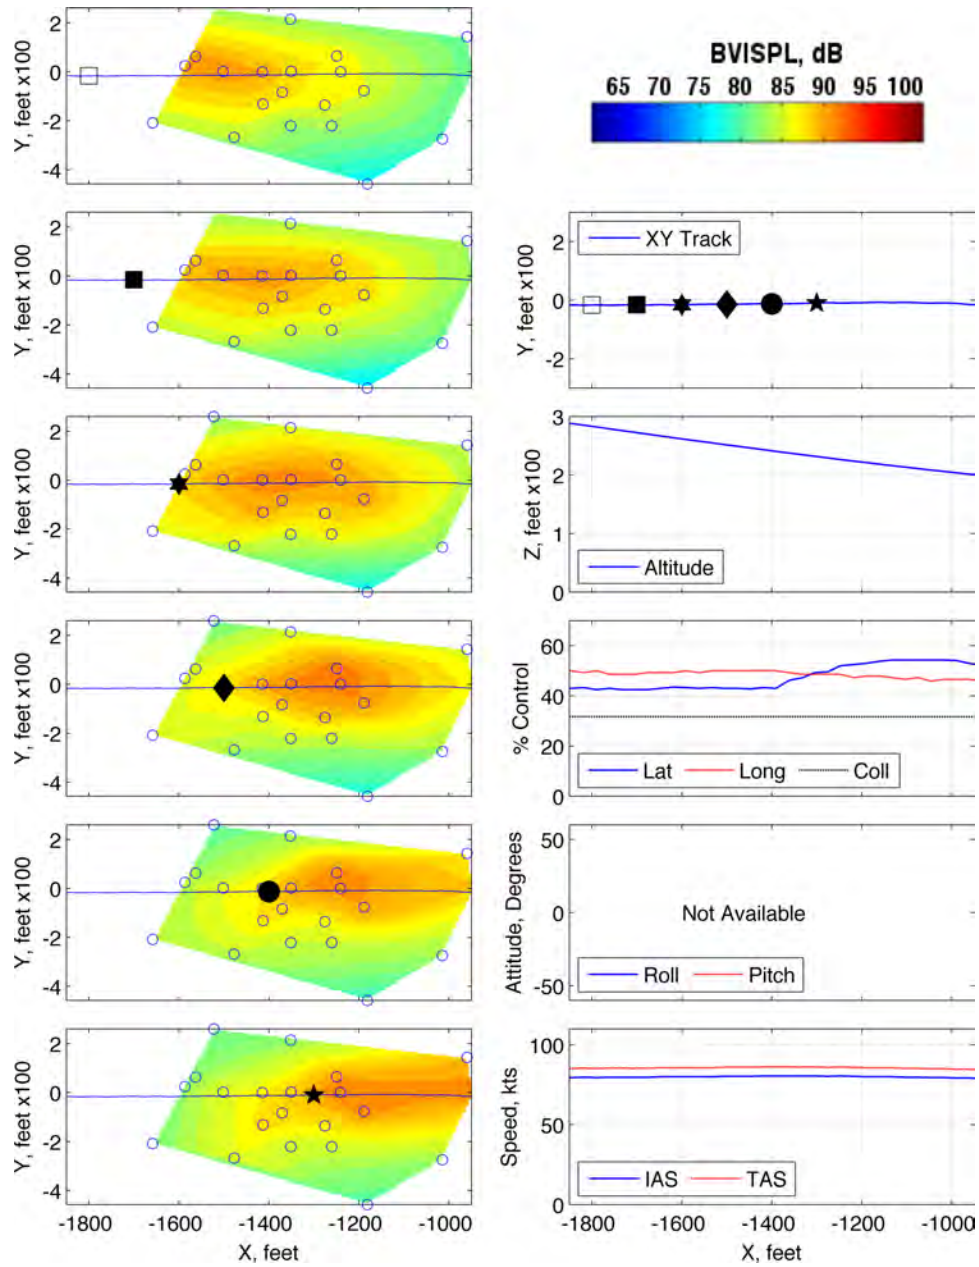


Figure 261: Maneuver condition R22, 80 KIAS,  $-6^\circ$ , slow cyclic roll right, run number 278327

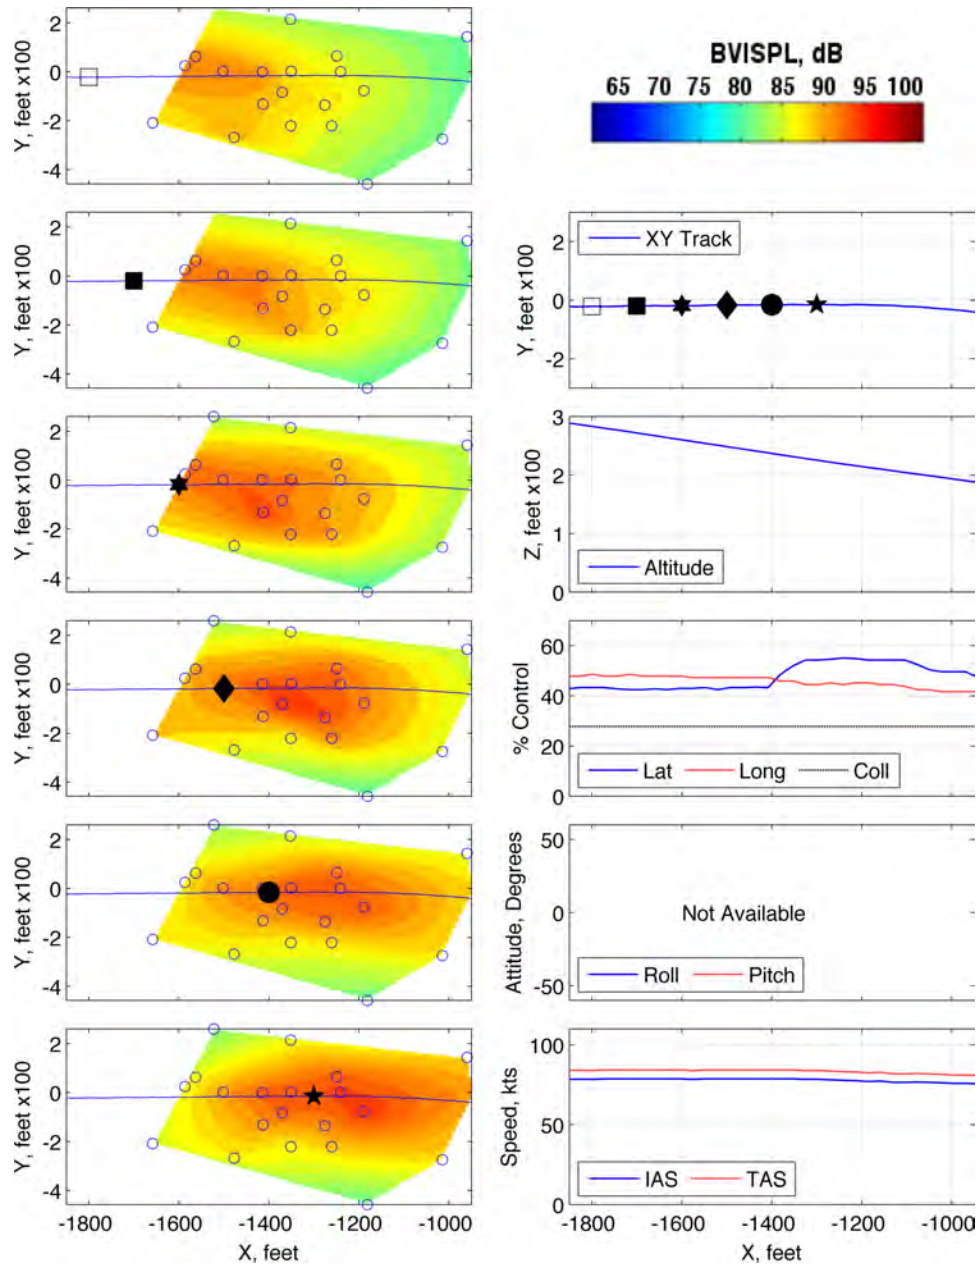


Figure 262: Maneuver condition R22, 80 KIAS,  $-6^\circ$ , slow cyclic roll right, run number 278328



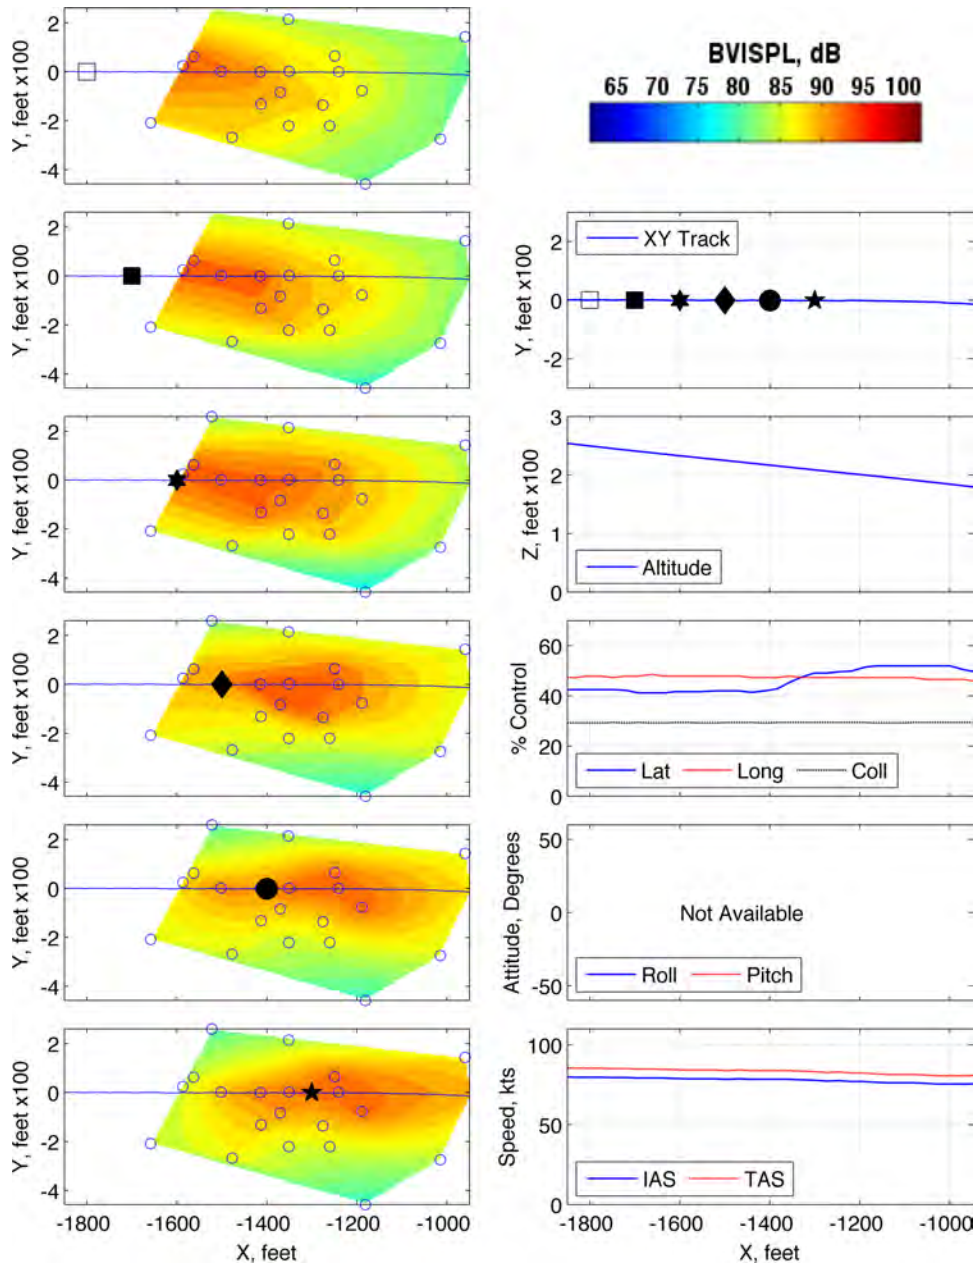


Figure 263: Maneuver condition R22, 80 KIAS,  $-6^\circ$ , slow cyclic roll right, run number 278329

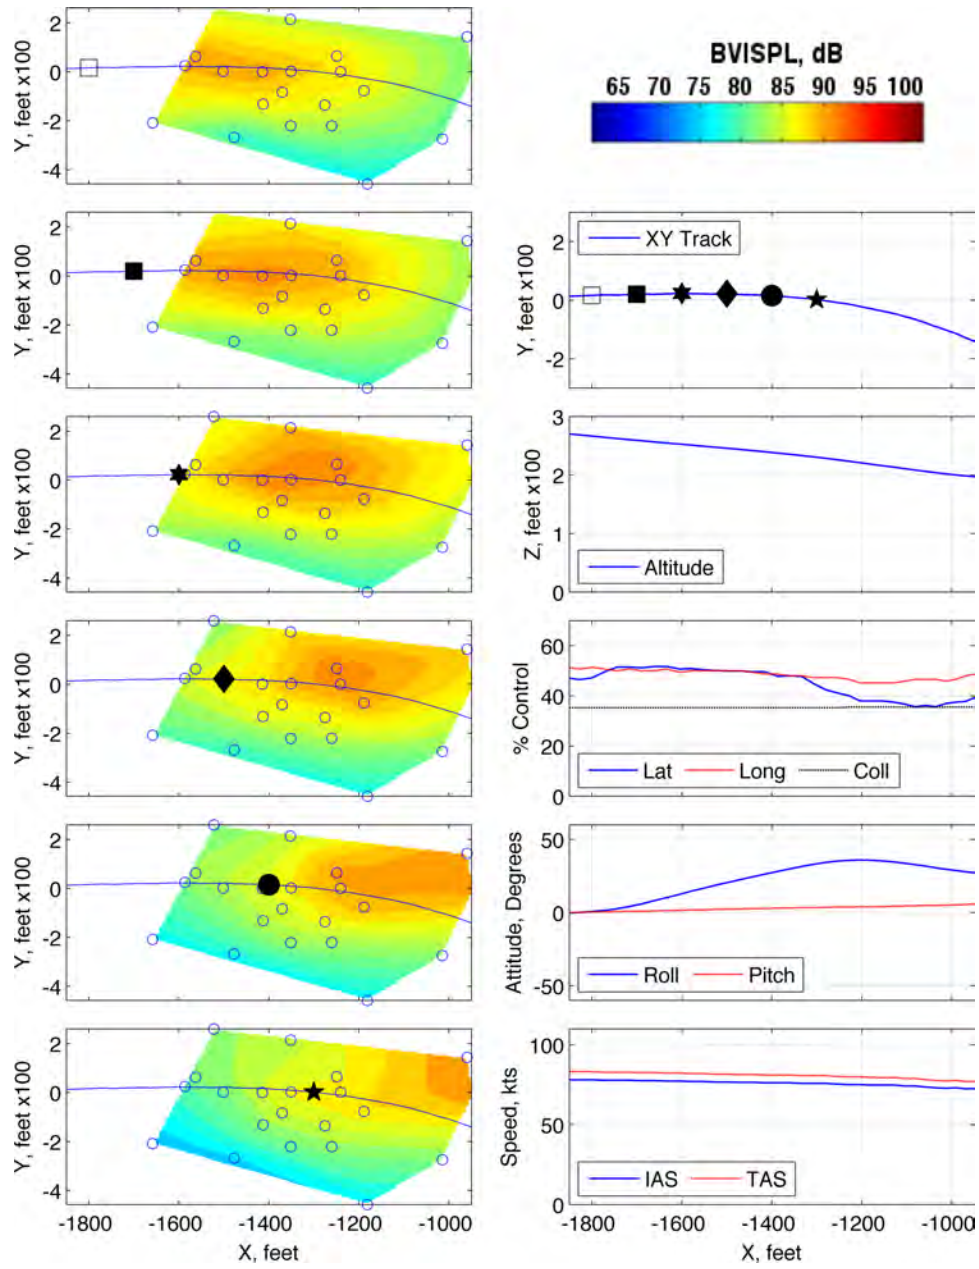


Figure 264: Maneuver condition R22, 80 KIAS,  $-6^\circ$ , slow cyclic roll right, run number 280343

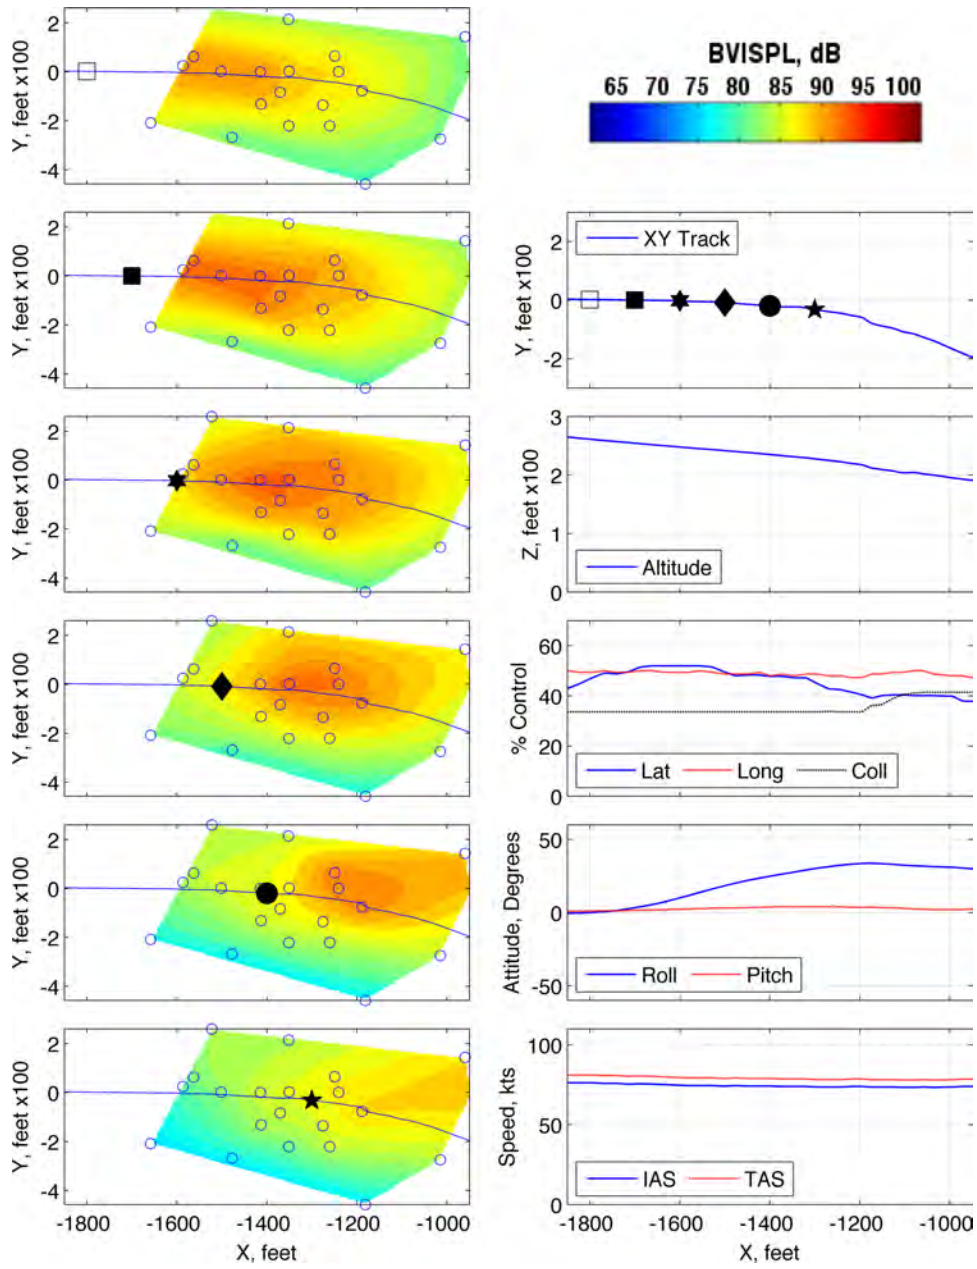


Figure 265: Maneuver condition R22, 80 KIAS,  $-6^\circ$ , slow cyclic roll right, run number 280344

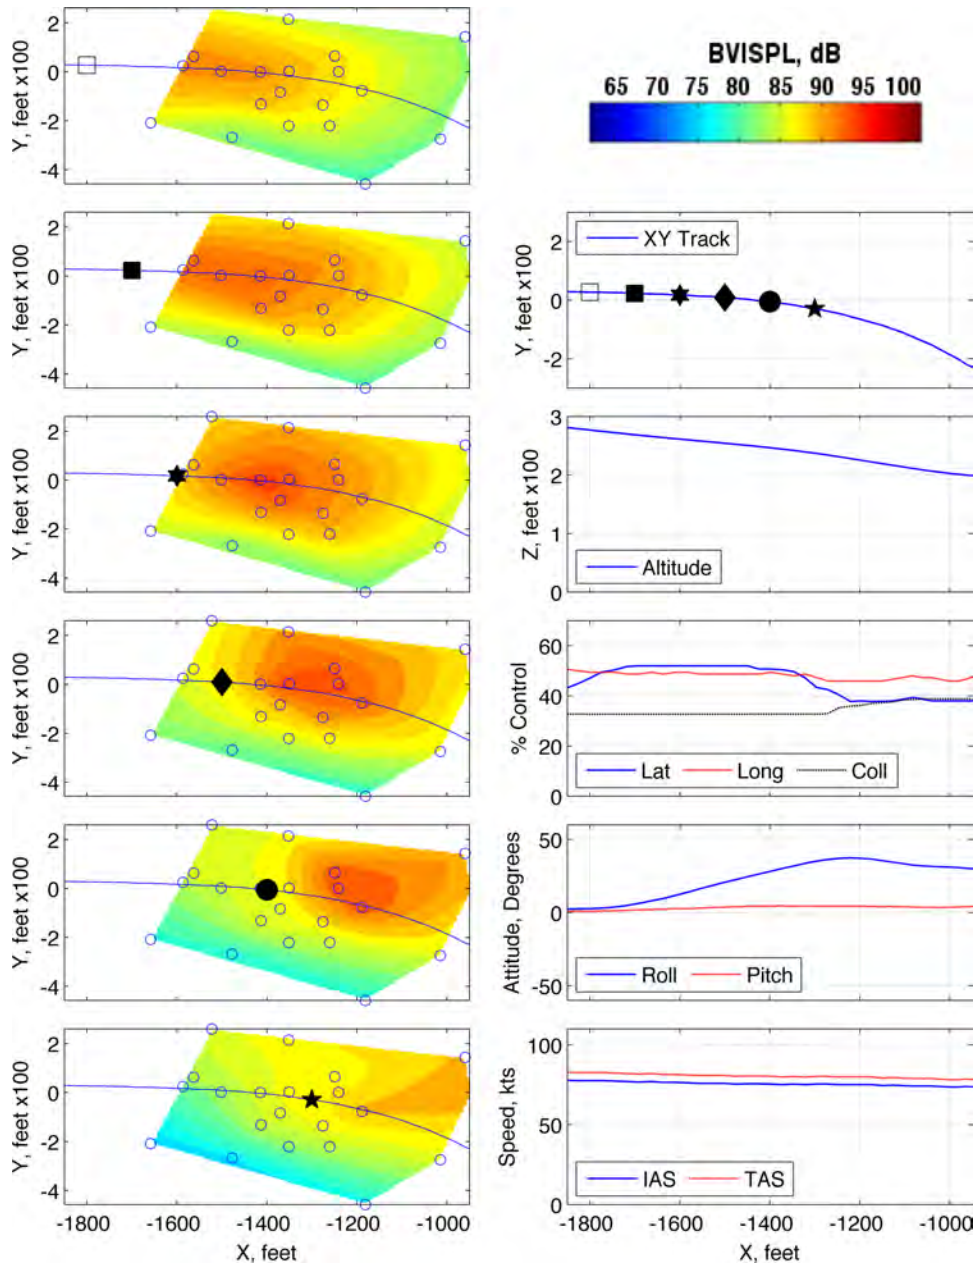


Figure 266: Maneuver condition R22, 80 KIAS,  $-6^\circ$ , slow cyclic roll right, run number 280345

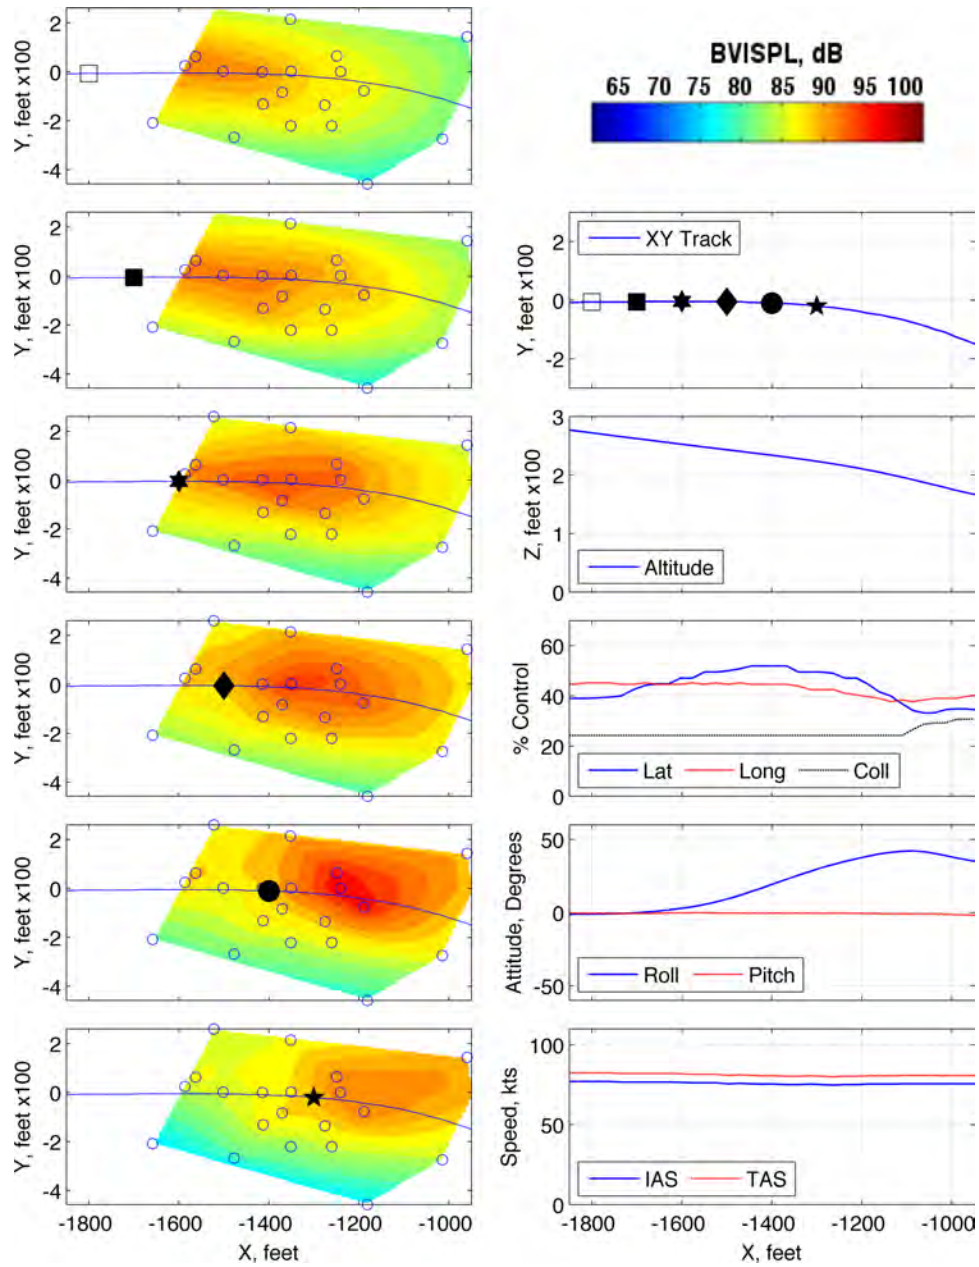


Figure 267: Maneuver condition R23, 80 KIAS,  $-6^\circ$ , medium cyclic roll right, run number 285486

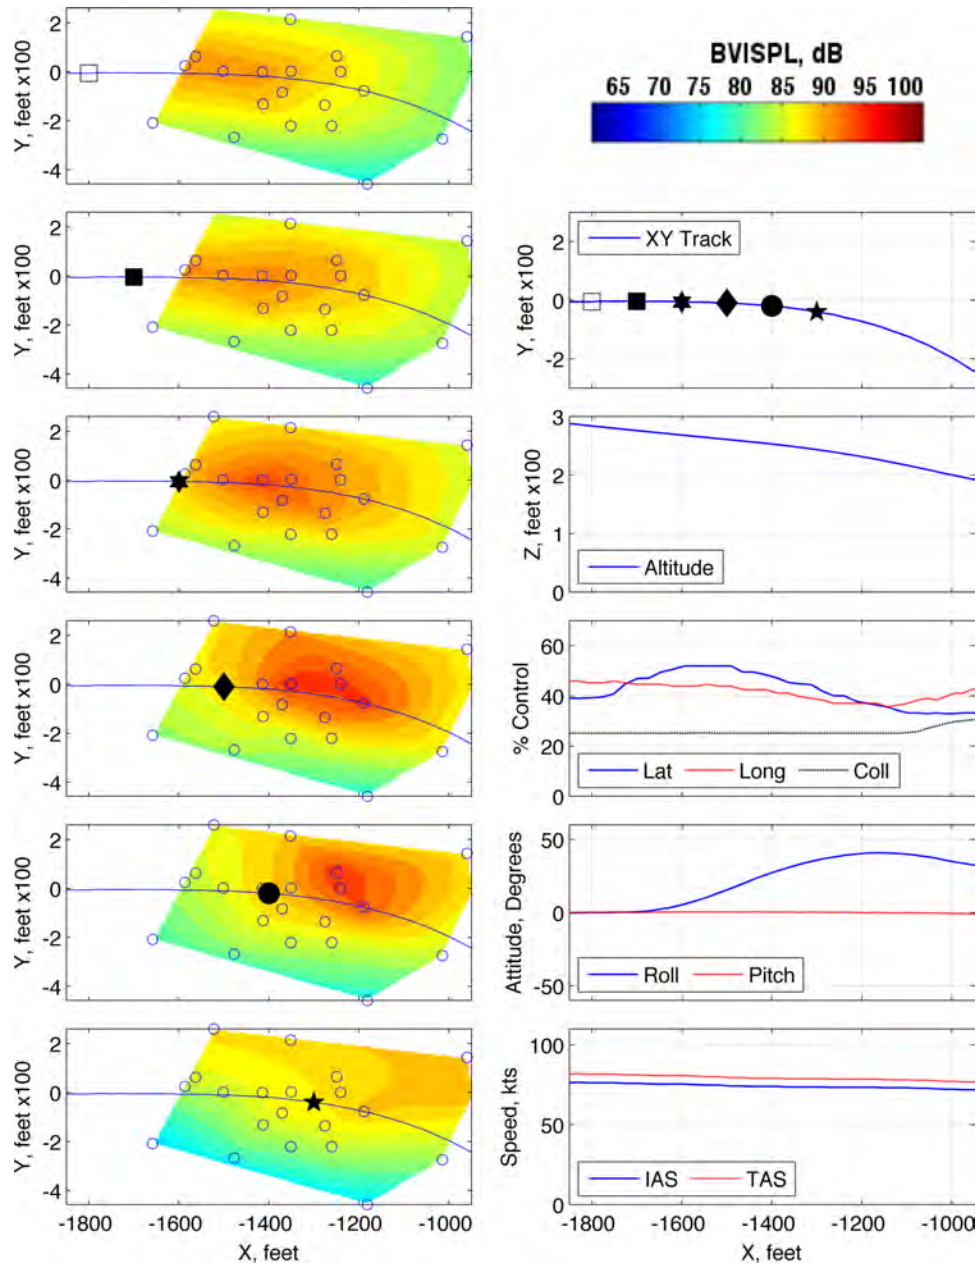


Figure 268: Maneuver condition R23, 80 KIAS,  $-6^\circ$ , medium cyclic roll right, run number 285487

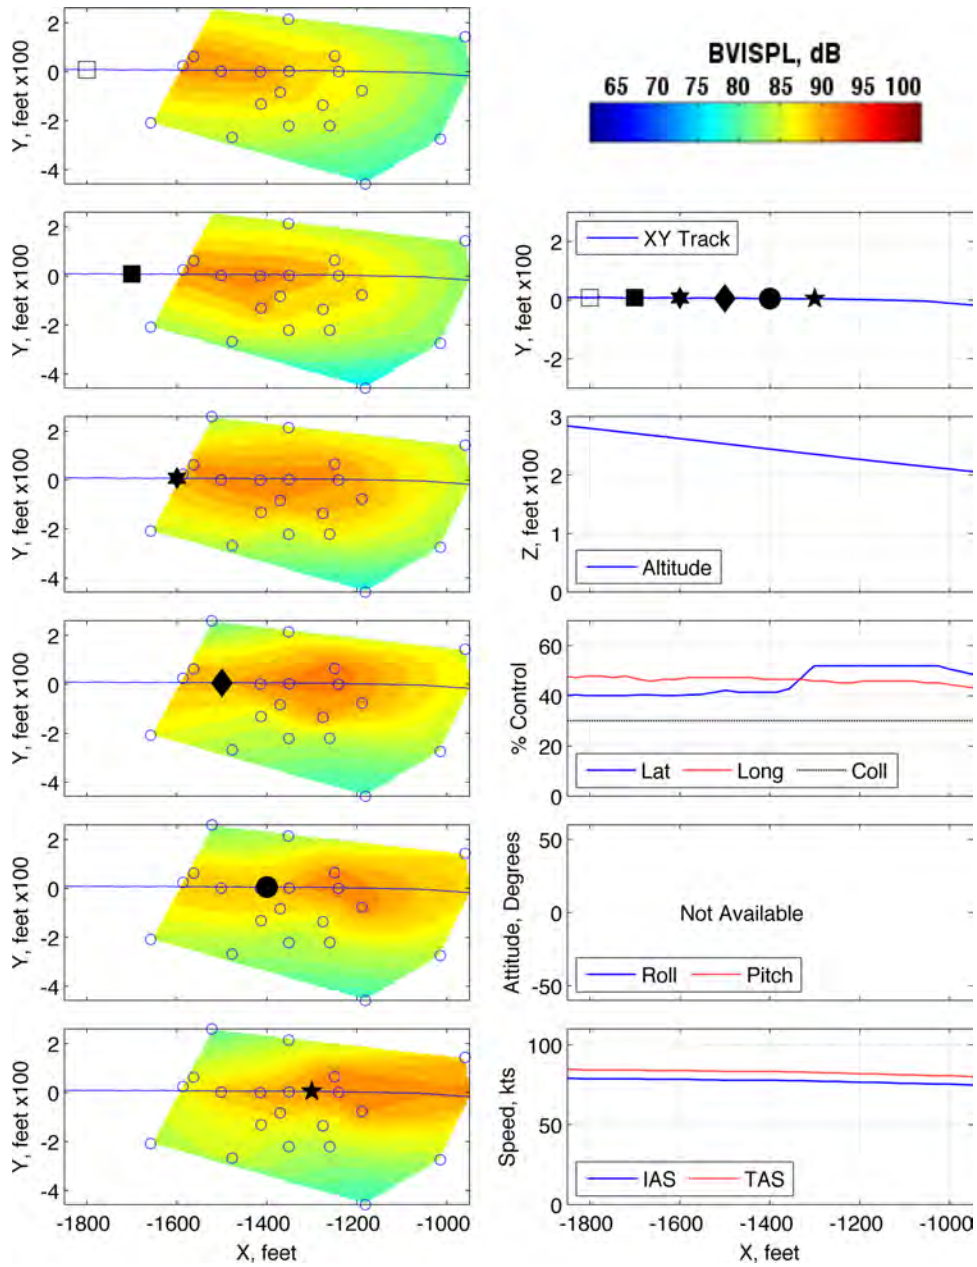


Figure 269: Maneuver condition R24, 80 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 278323

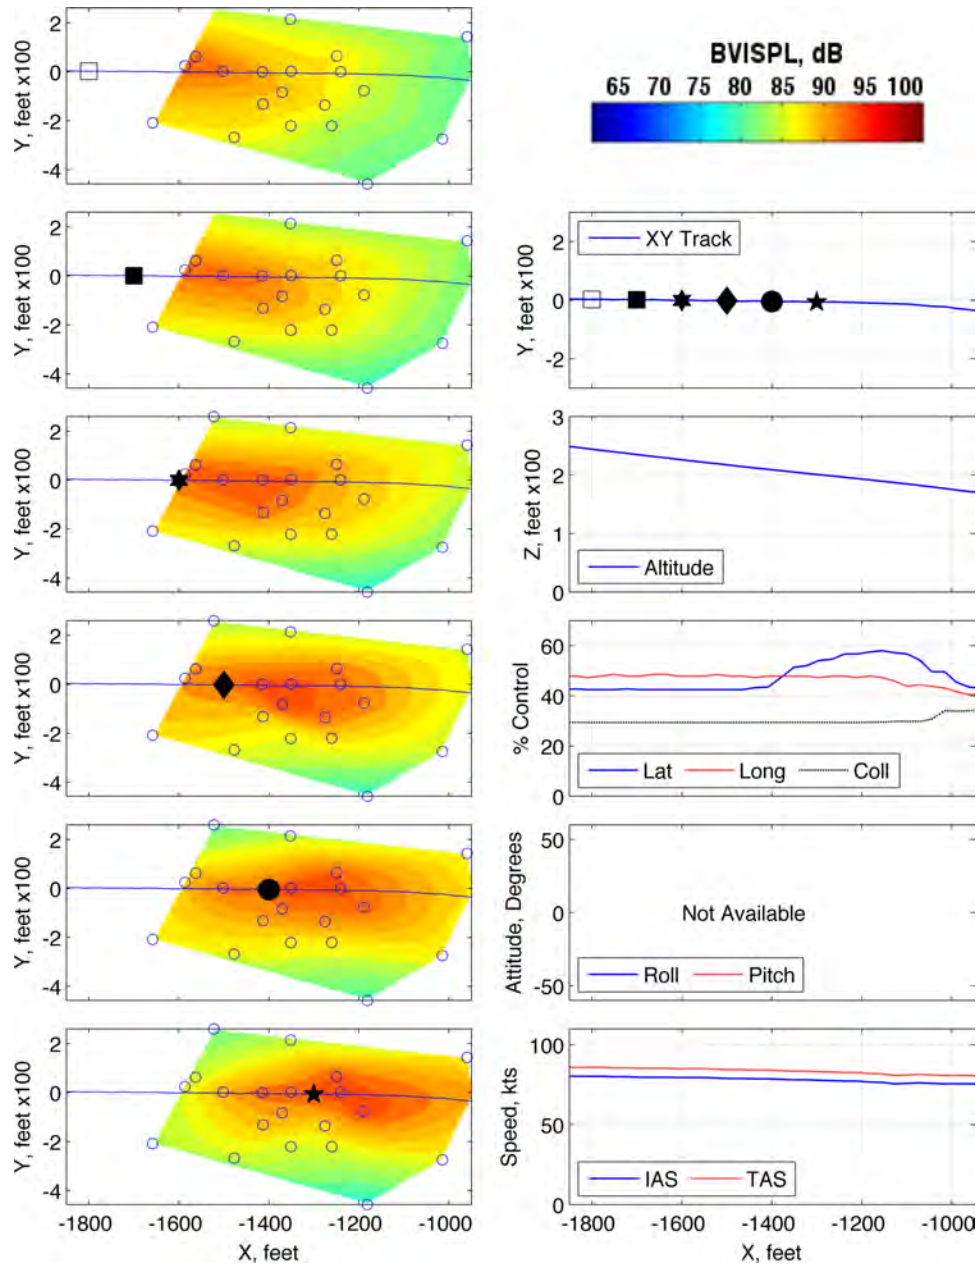


Figure 270: Maneuver condition R24, 80 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 278324



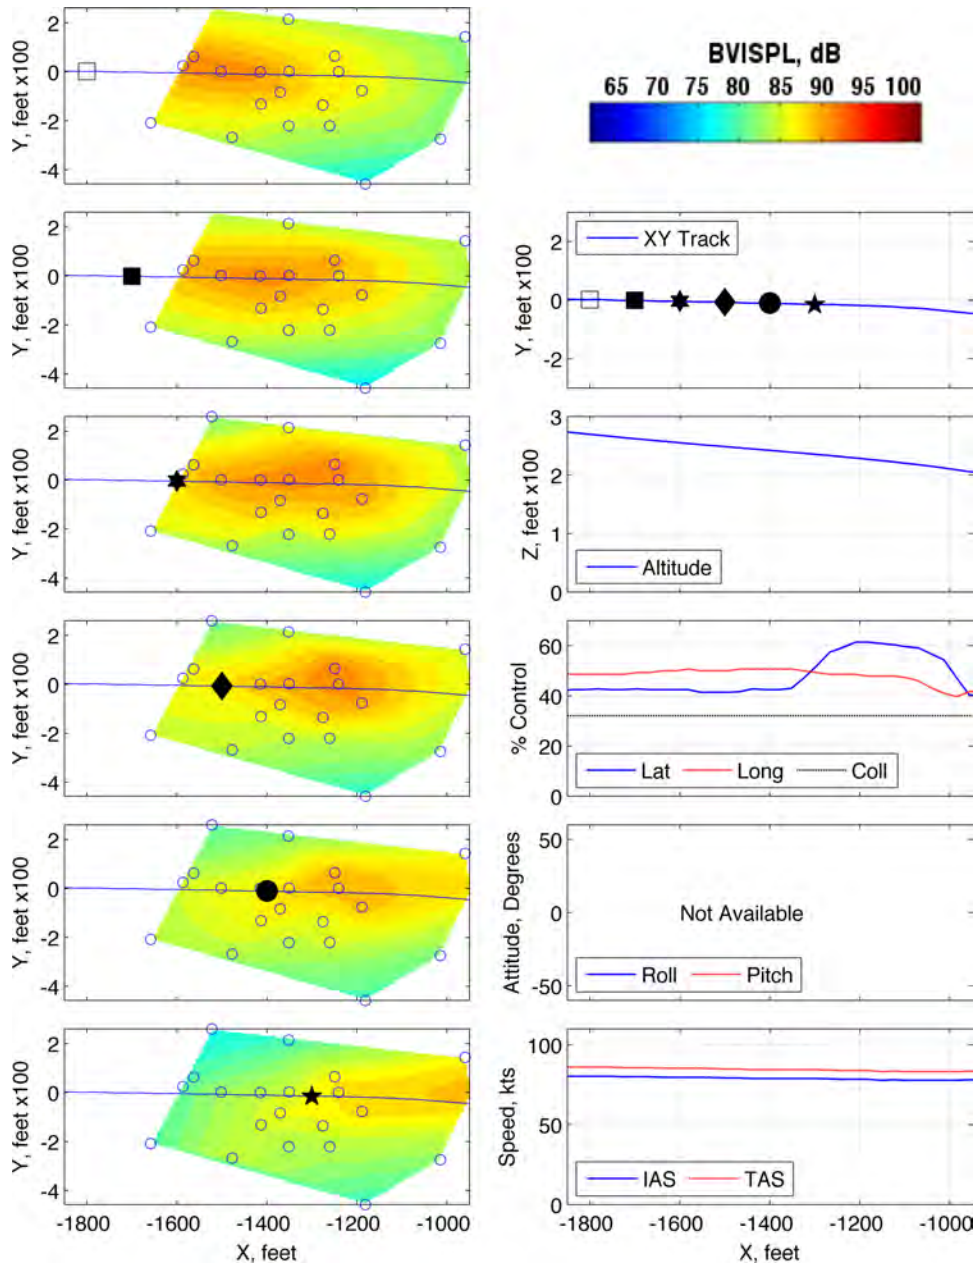


Figure 271: Maneuver condition R24, 80 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 278325

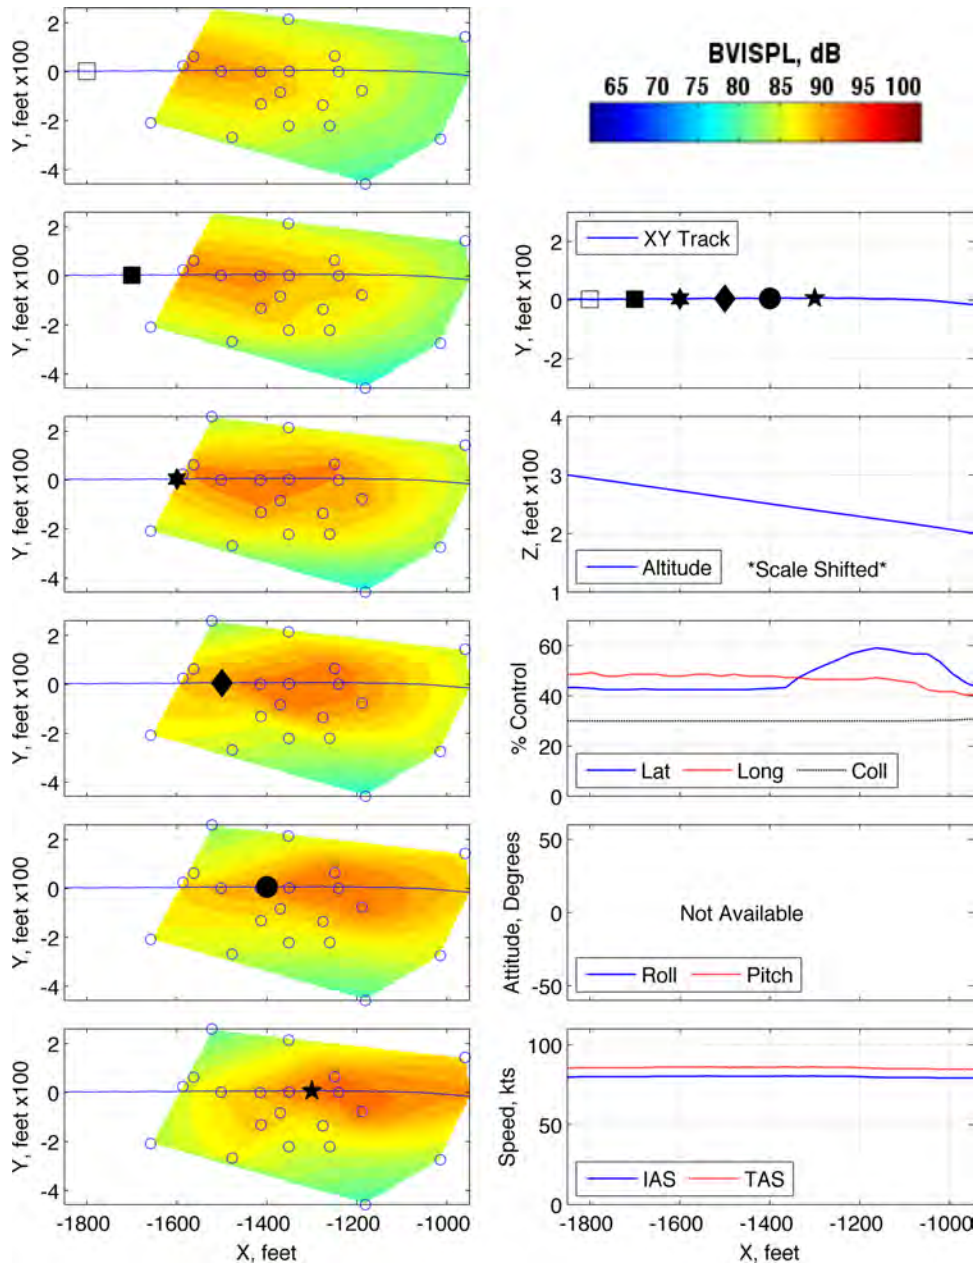


Figure 272: Maneuver condition R24, 80 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 278326

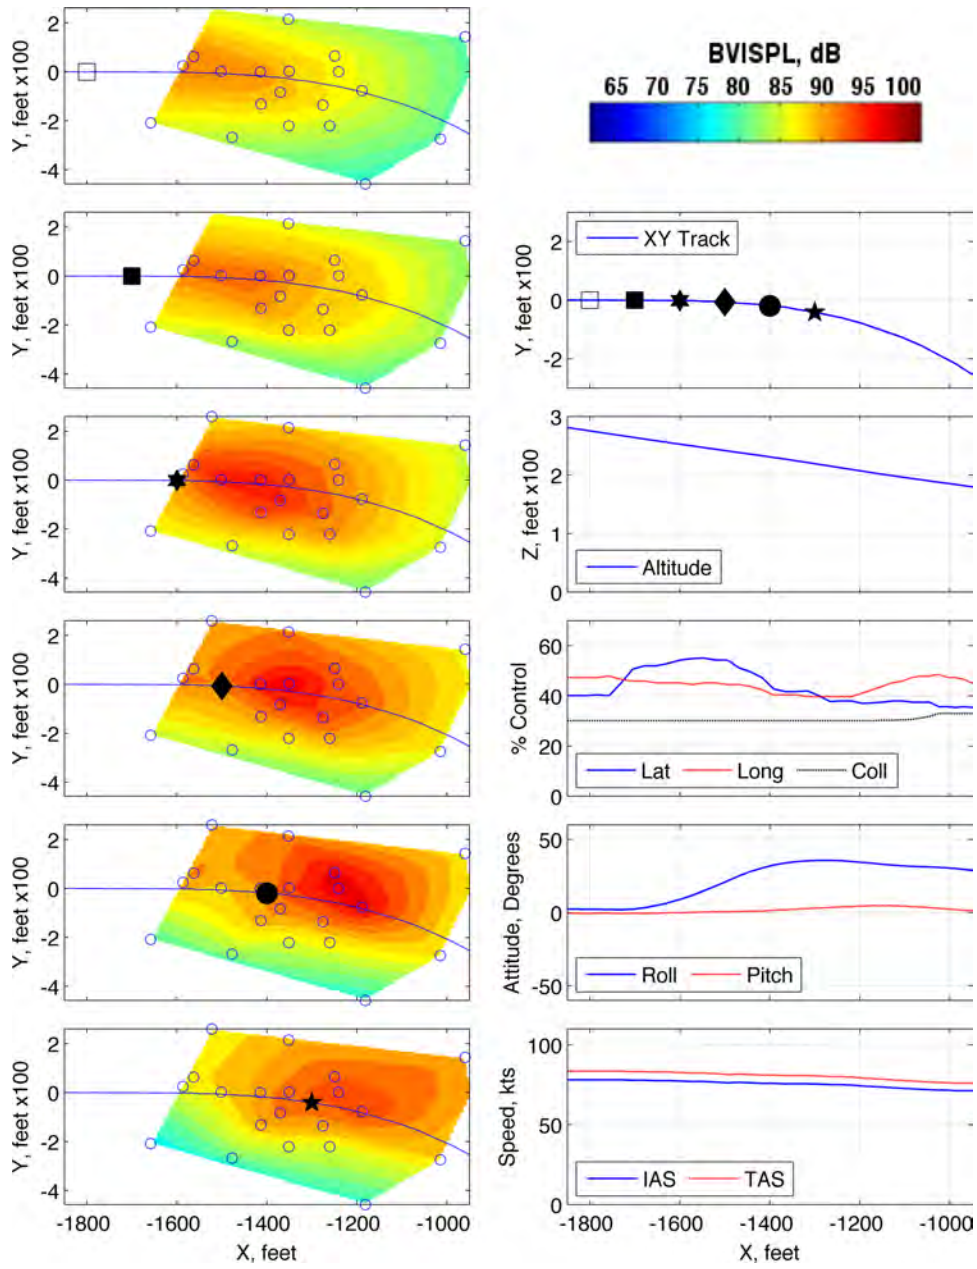


Figure 273: Maneuver condition R24, 80 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 282422

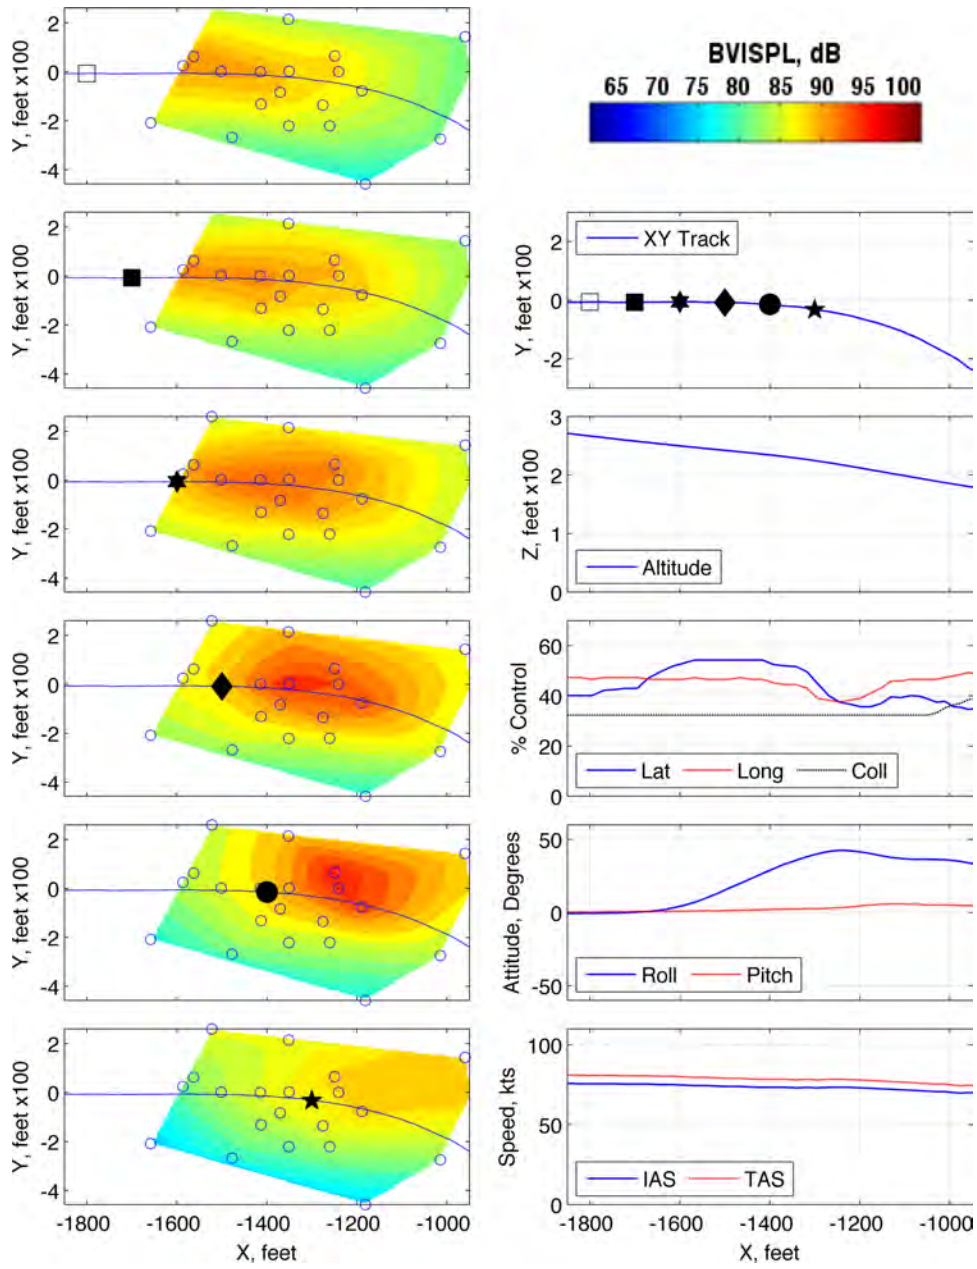


Figure 274: Maneuver condition R24, 80 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 282423

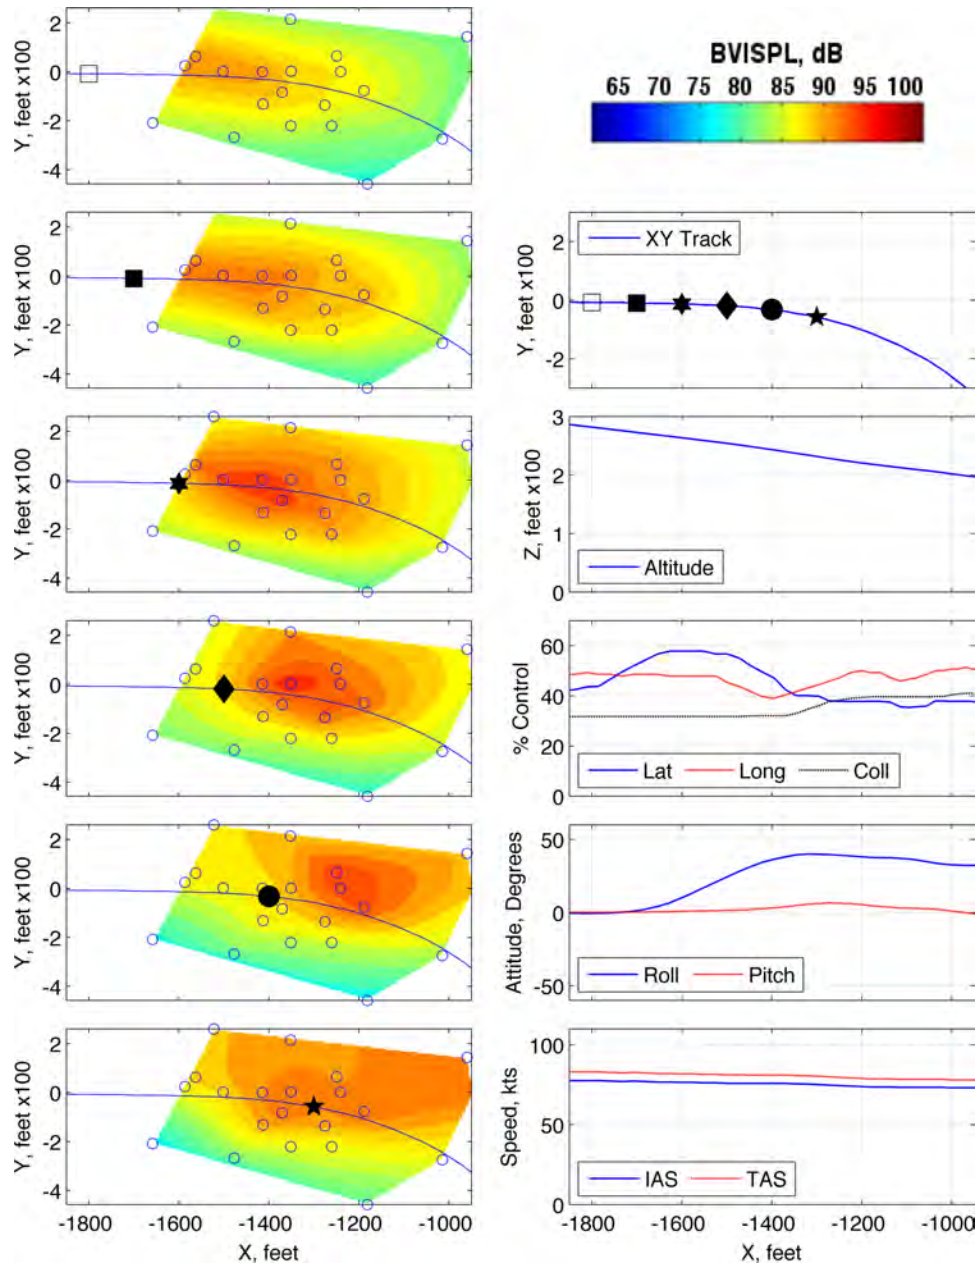


Figure 275: Maneuver condition R24, 80 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 282424

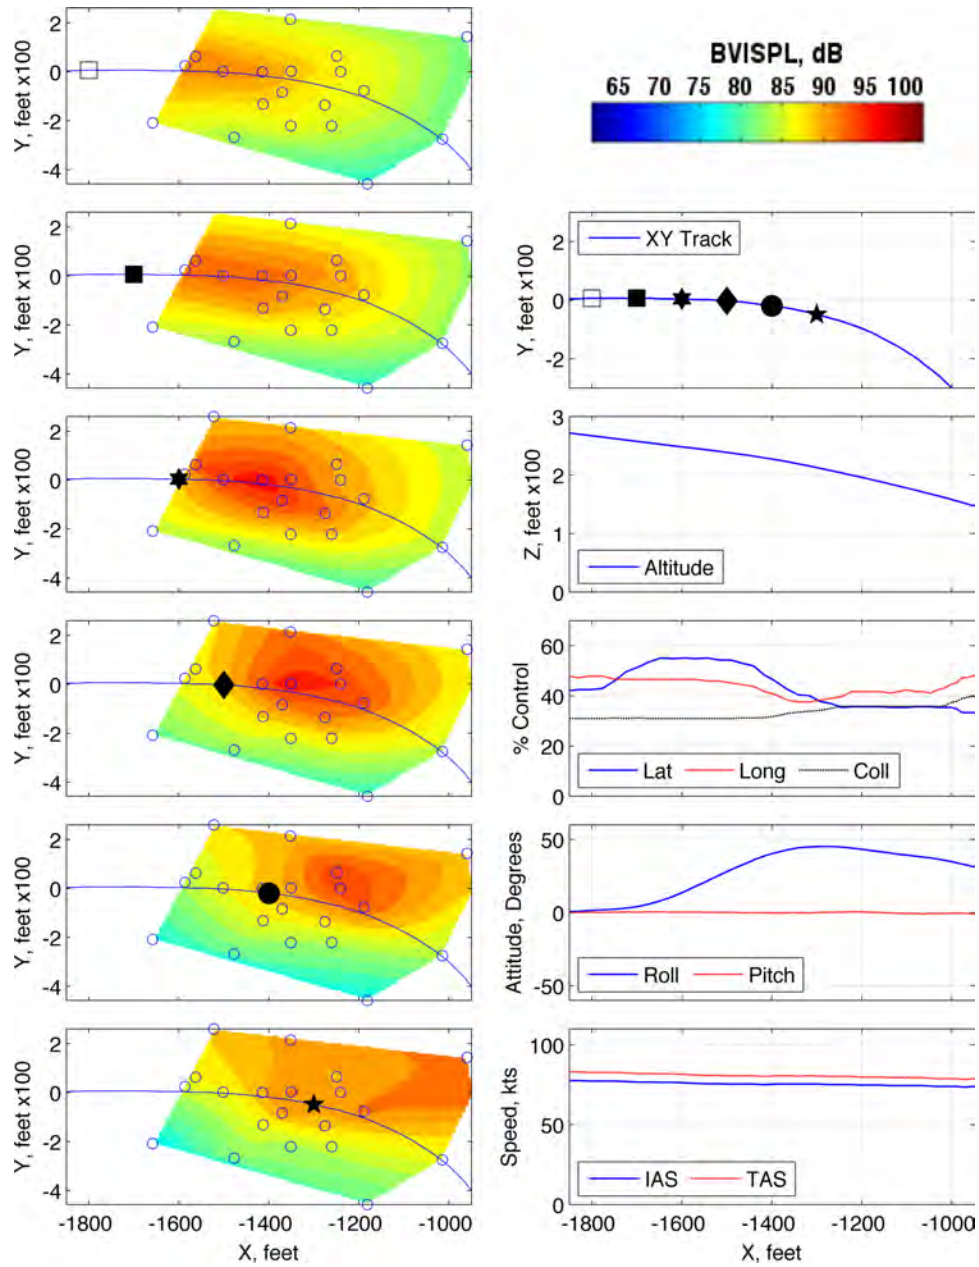


Figure 276: Maneuver condition R24, 80 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 282425

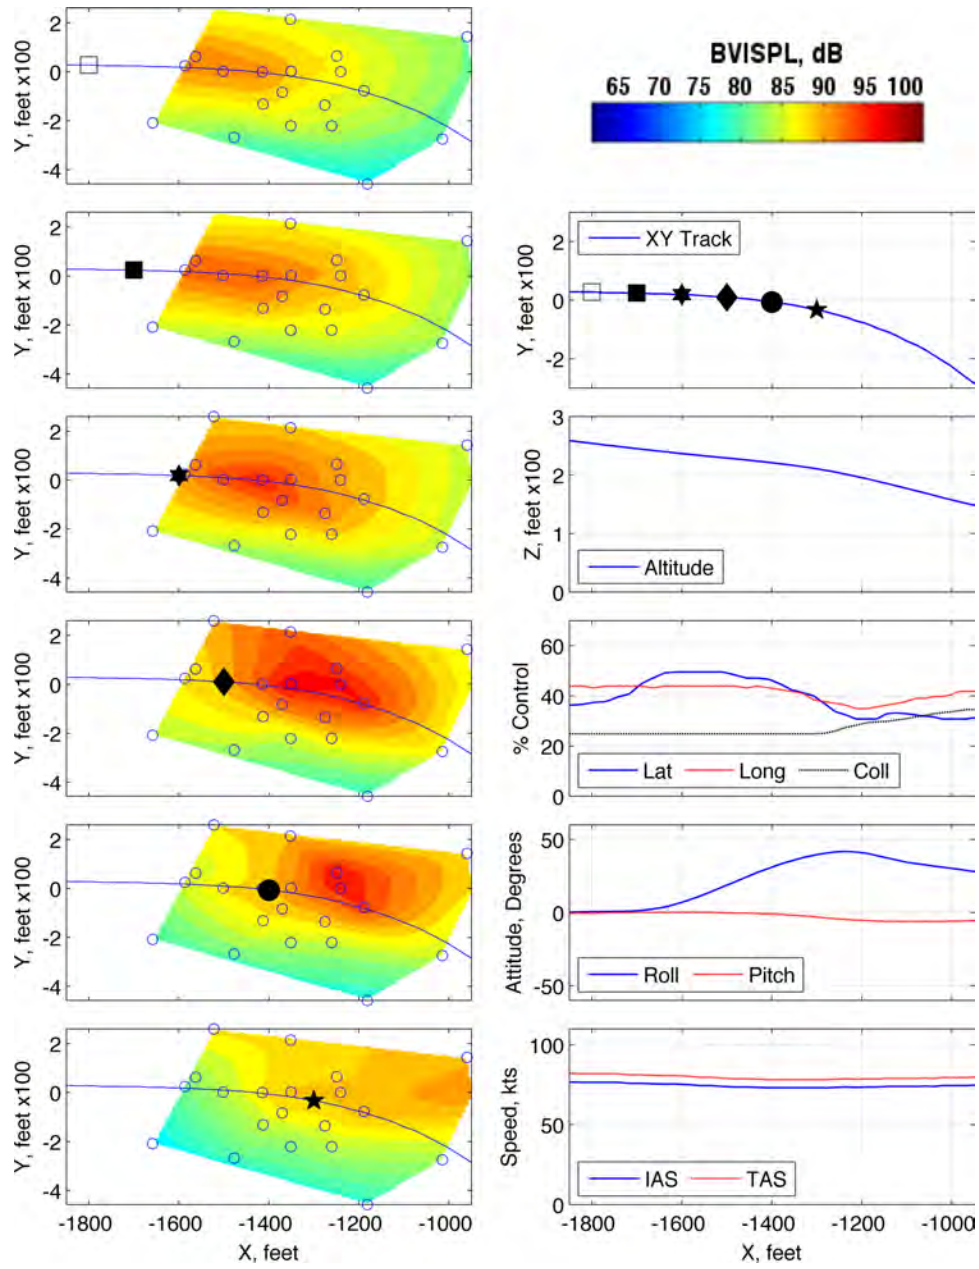


Figure 277: Maneuver condition R24, 80 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 285483

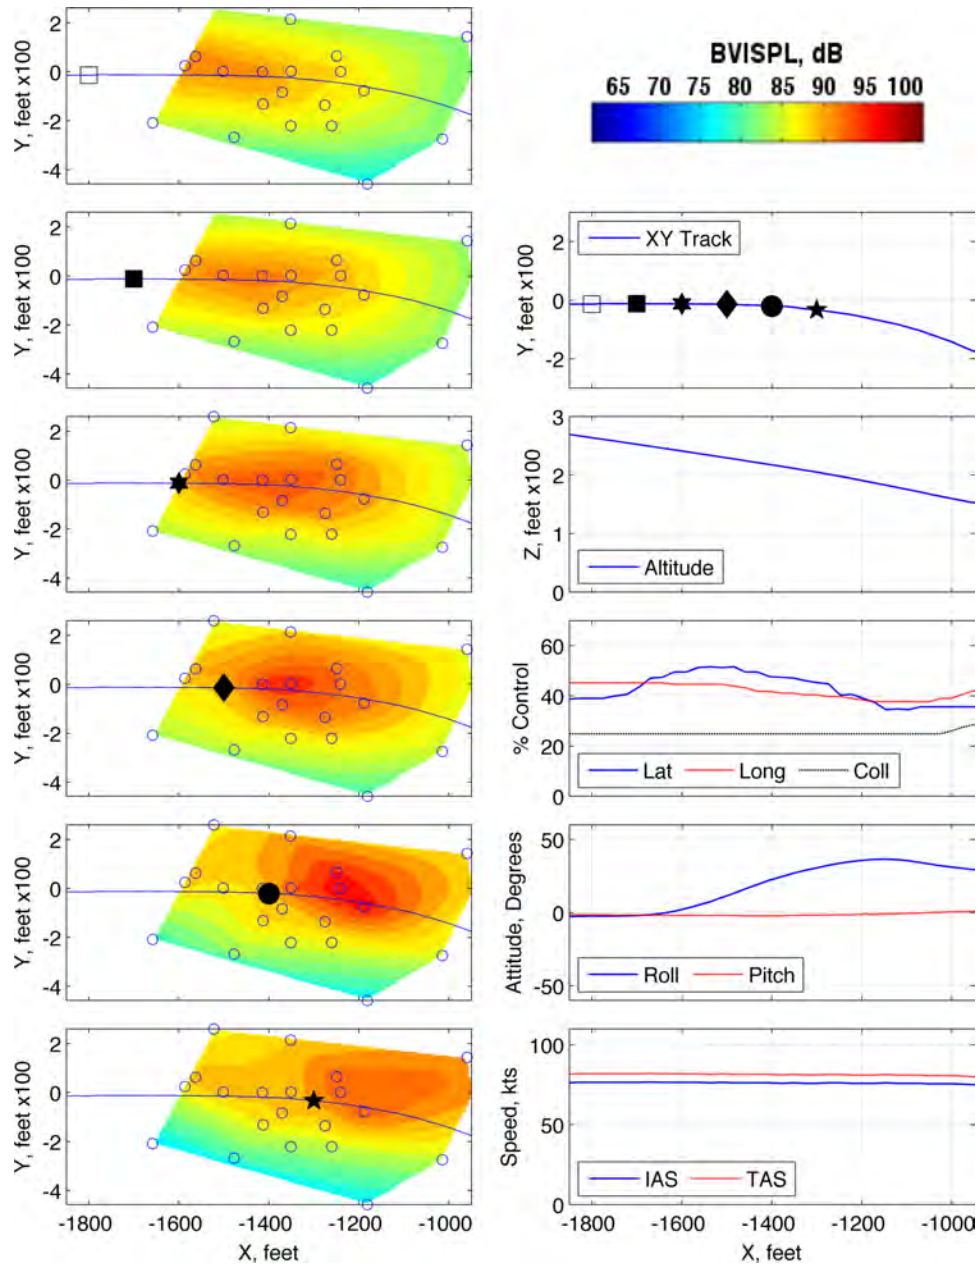


Figure 278: Maneuver condition R24, 80 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 285484



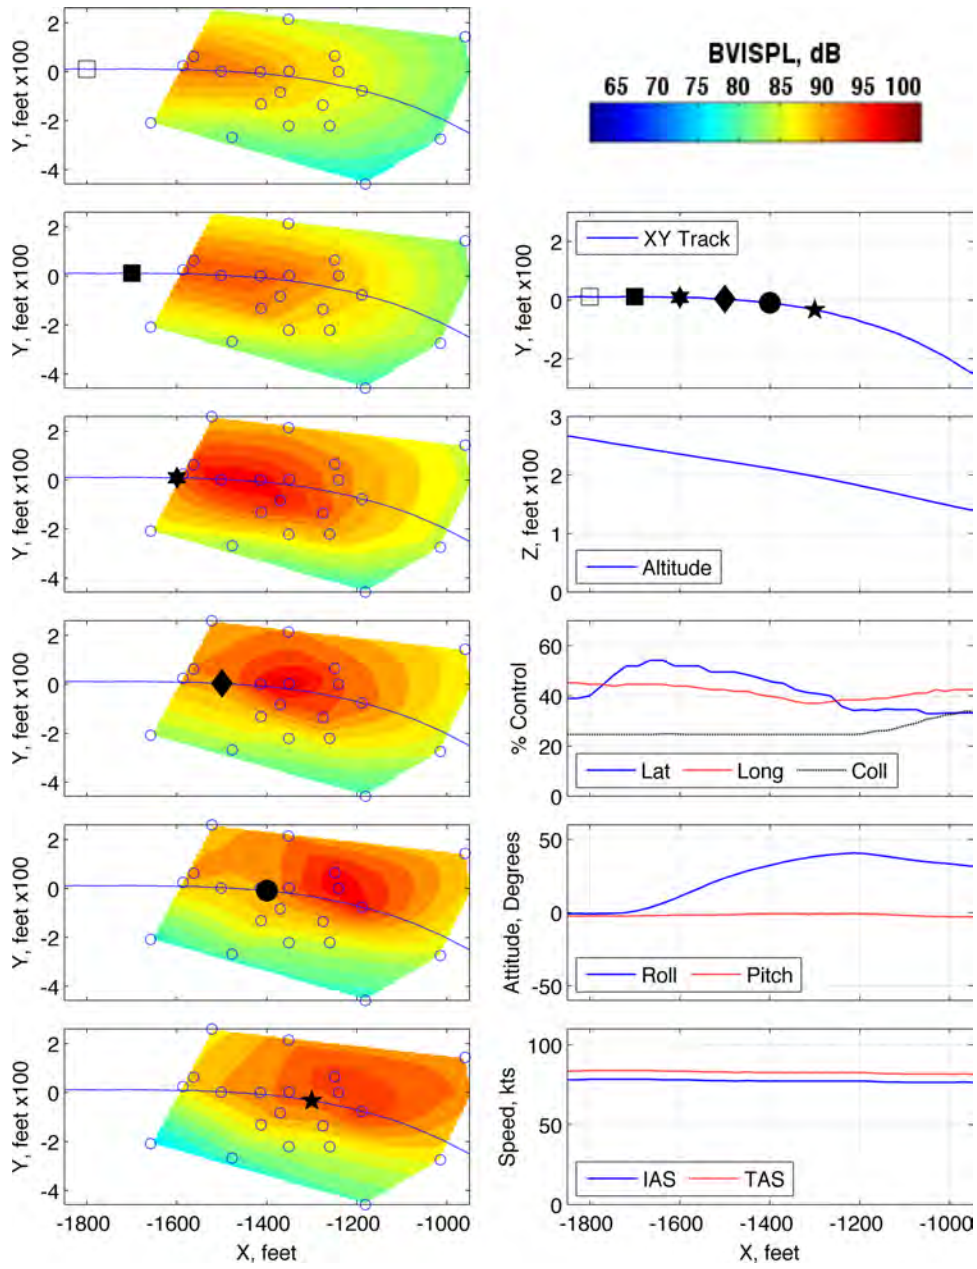


Figure 279: Maneuver condition R24, 80 KIAS,  $-6^\circ$ , fast cyclic roll right, run number 285485

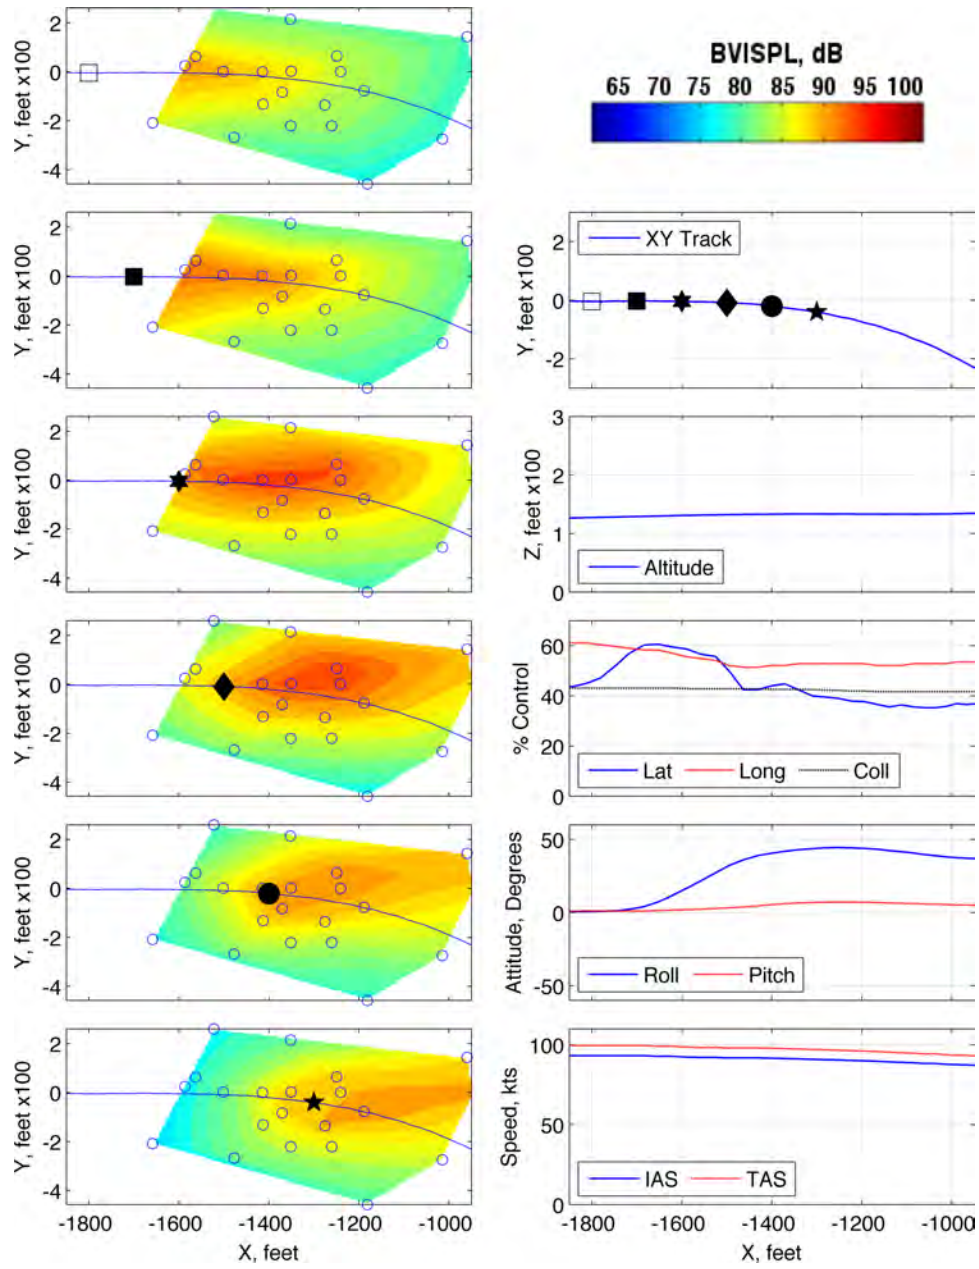


Figure 280: Maneuver condition R25, 100 KIAS, level, fast cyclic roll right, run number 287524

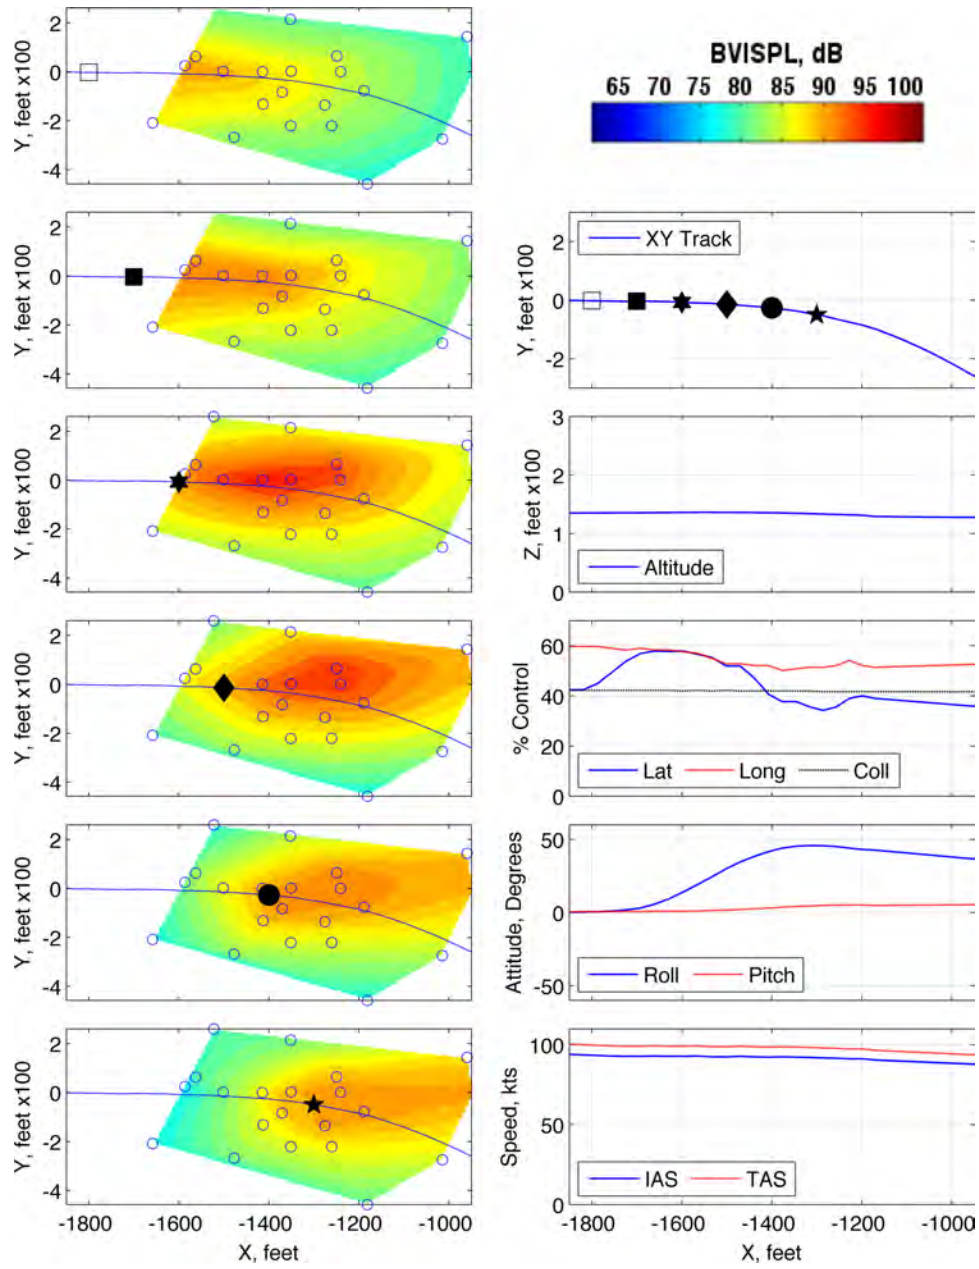


Figure 281: Maneuver condition R25, 100 KIAS, level, fast cyclic roll right, run number 287525

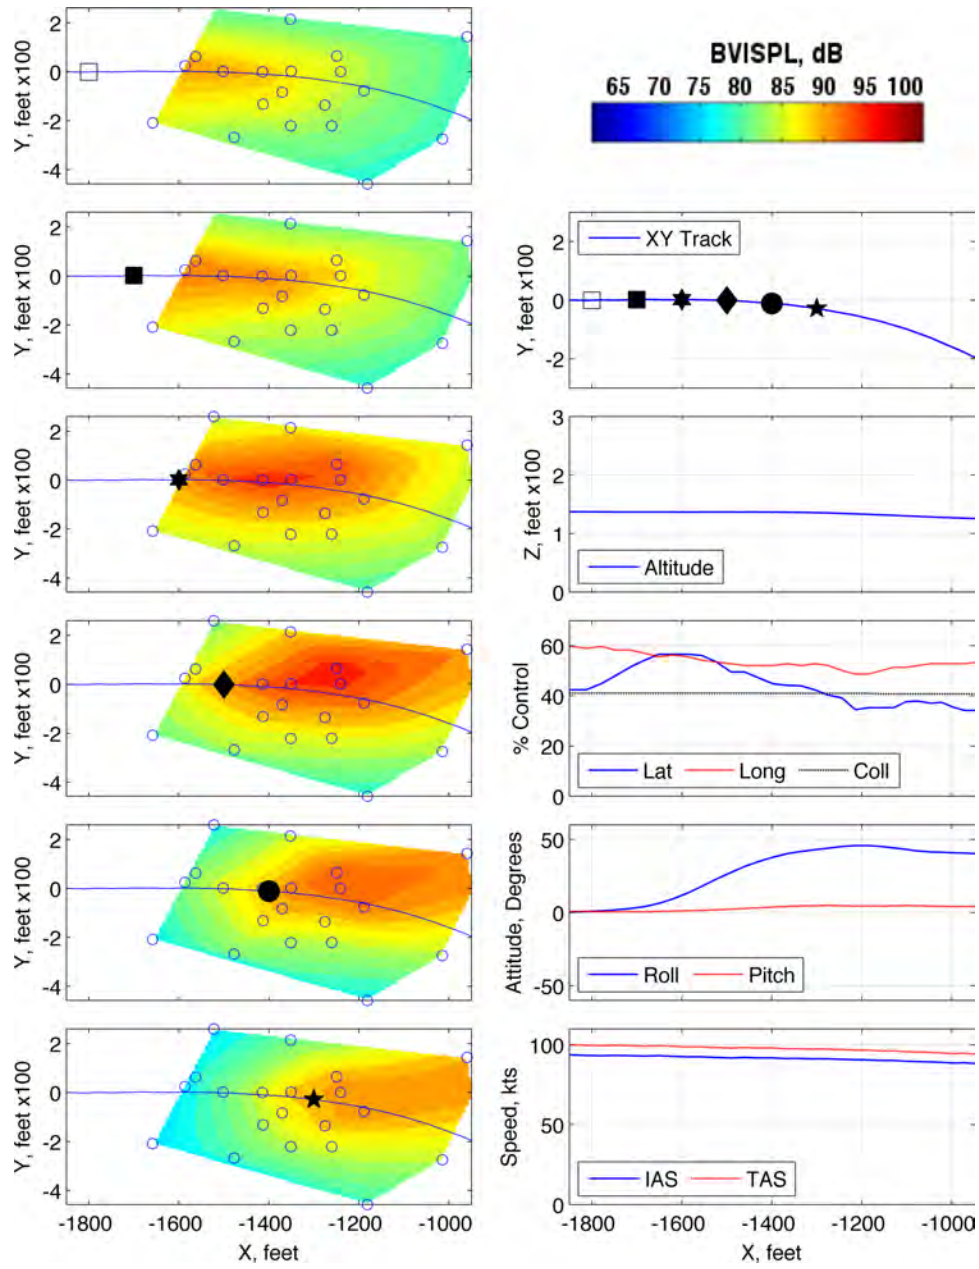


Figure 282: Maneuver condition R26, 100 KIAS, level, medium cyclic roll right, run number 287522

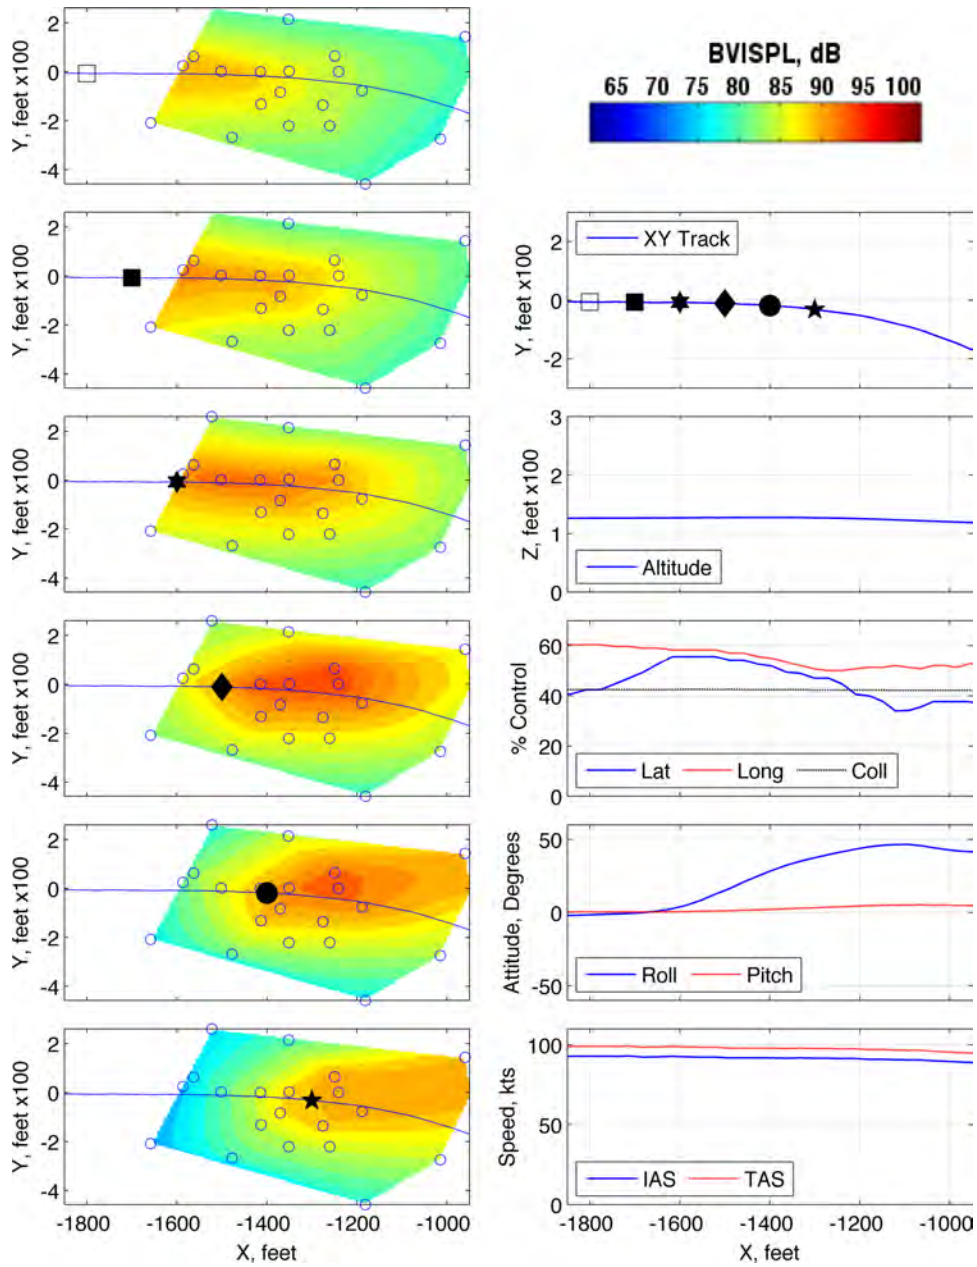


Figure 283: Maneuver condition R26, 100 KIAS, level, medium cyclic roll right, run number 287523

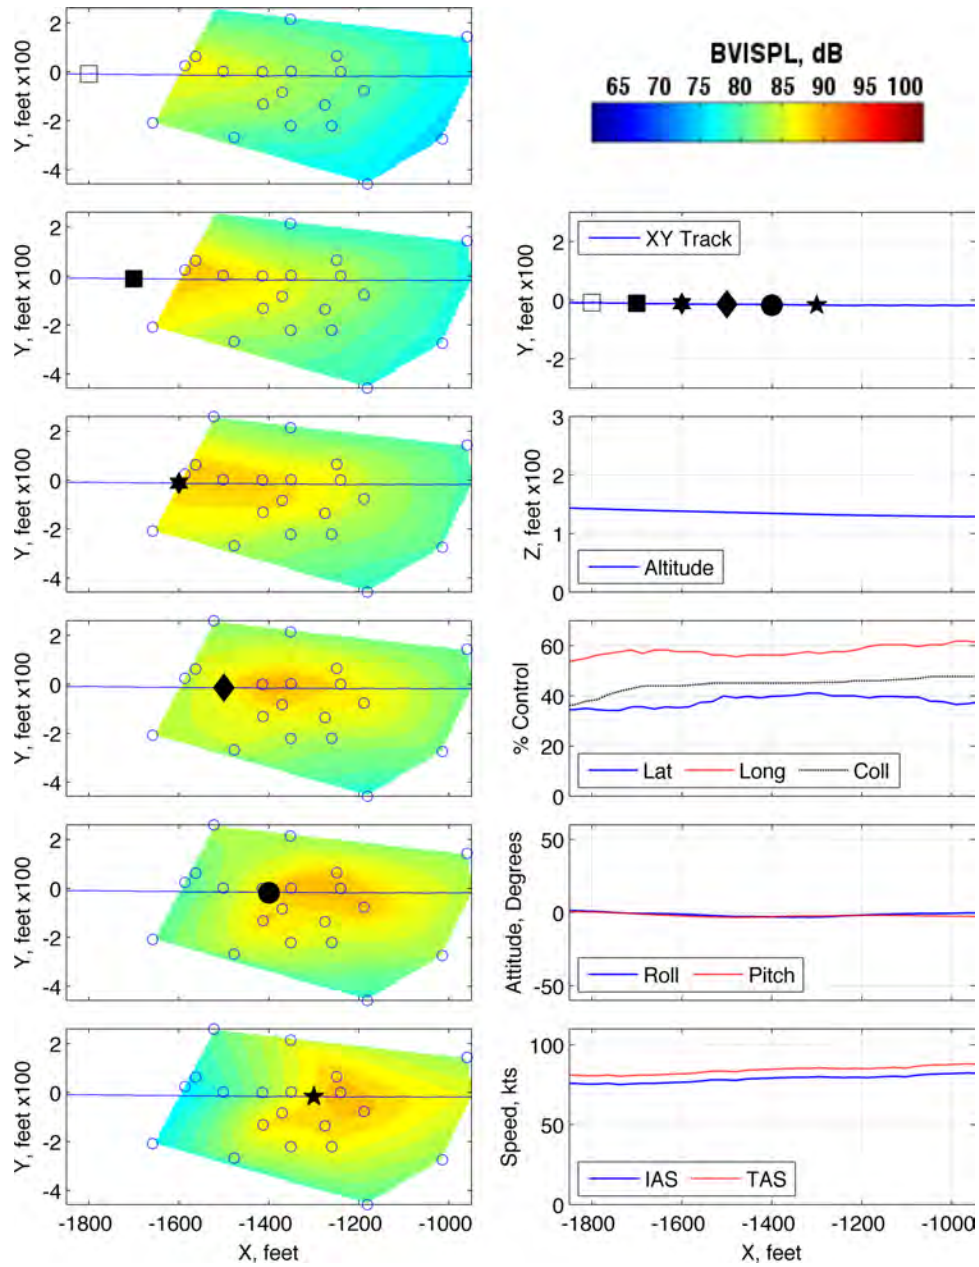


Figure 284: Maneuver condition M2, 80 to 100 KIAS, medium quick start, run number 285499

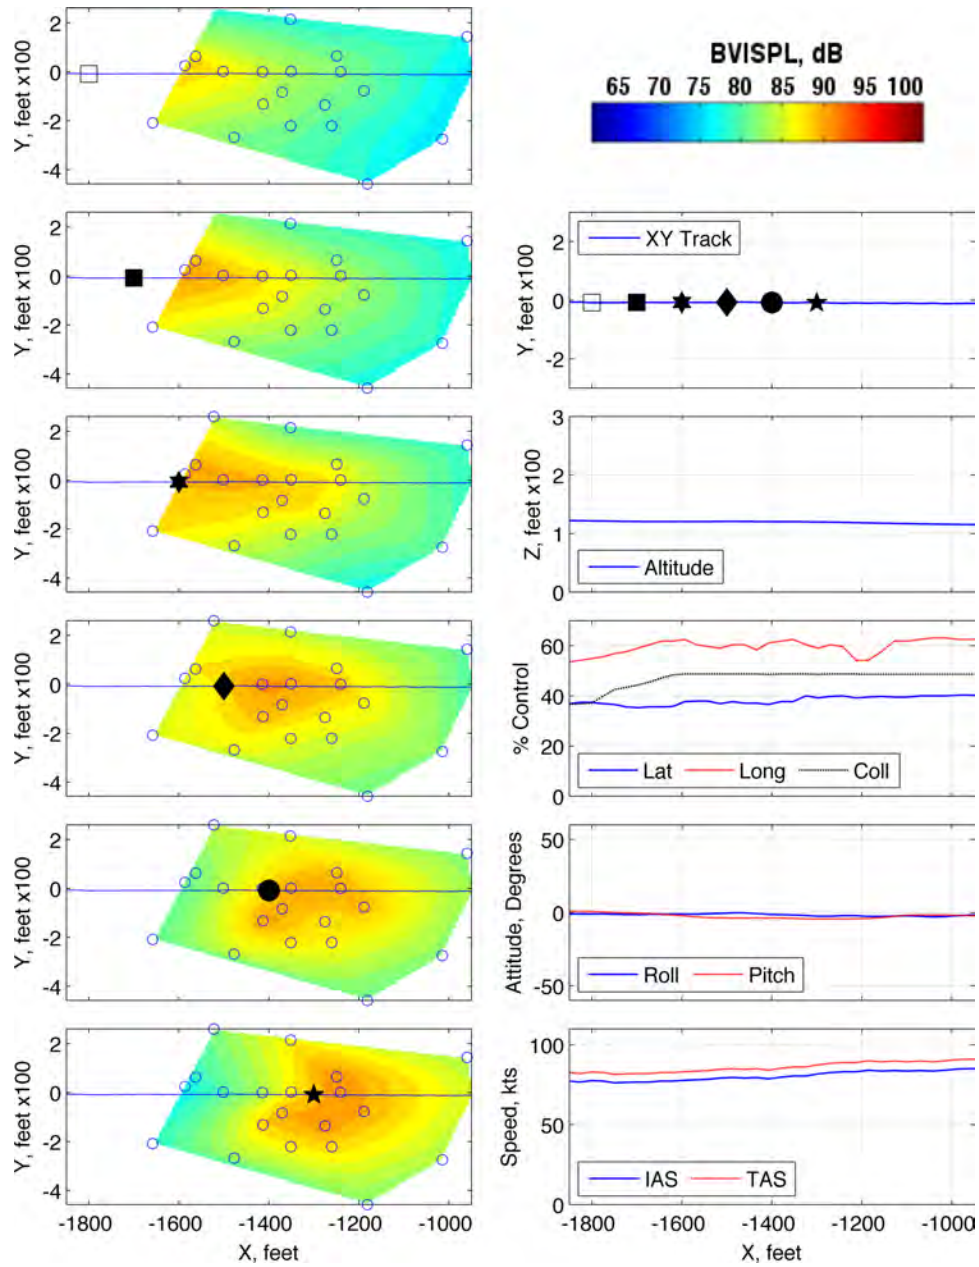


Figure 285: Maneuver condition M2, 80 to 100 KIAS, medium quick start, run number 285500

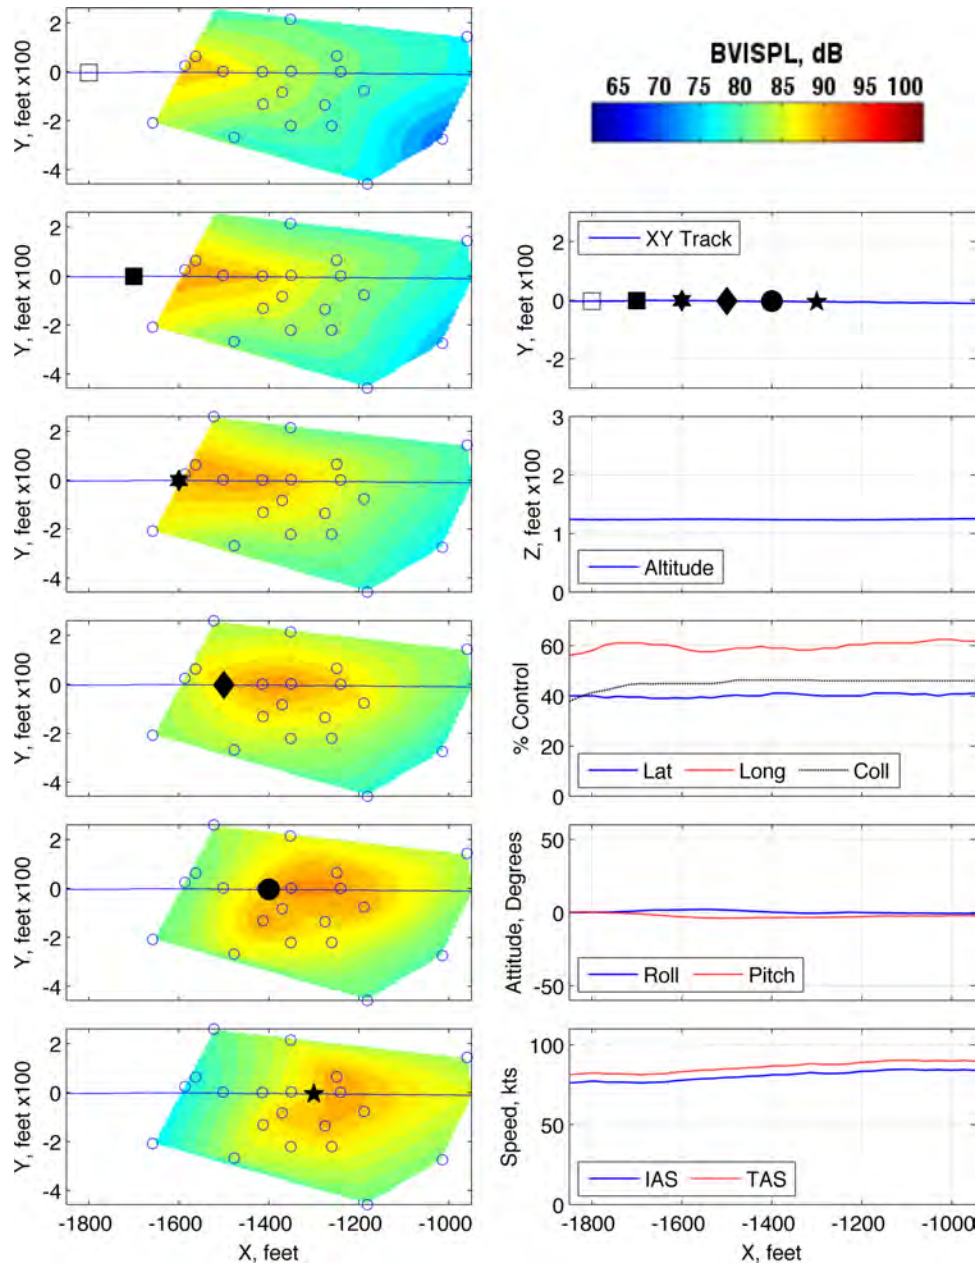


Figure 286: Maneuver condition M2, 80 to 100 KIAS, medium quick start, run number 287545



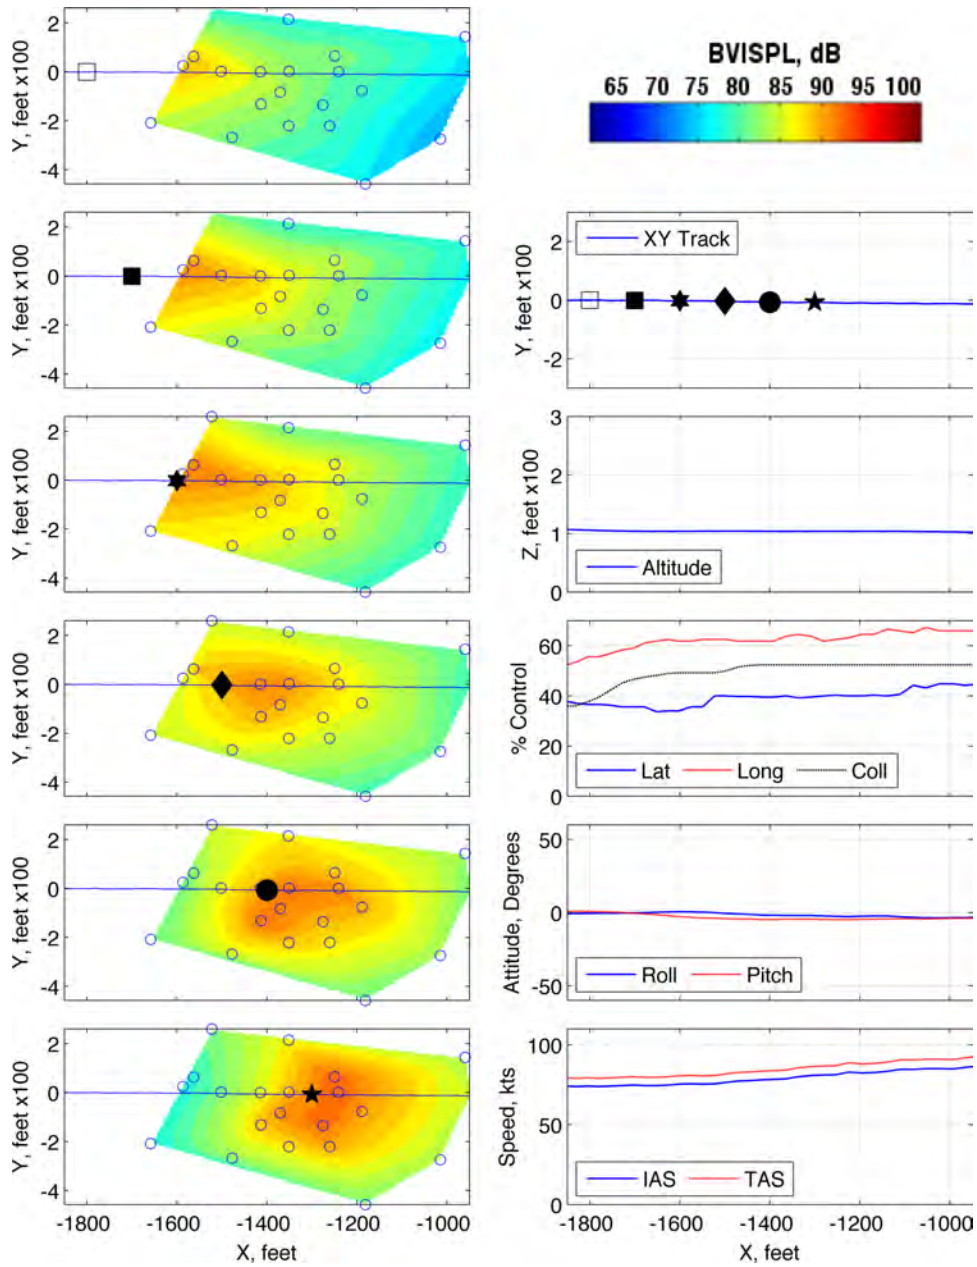


Figure 287: Maneuver condition M3, 80 to 100 KIAS, fast quick start, run number 285501

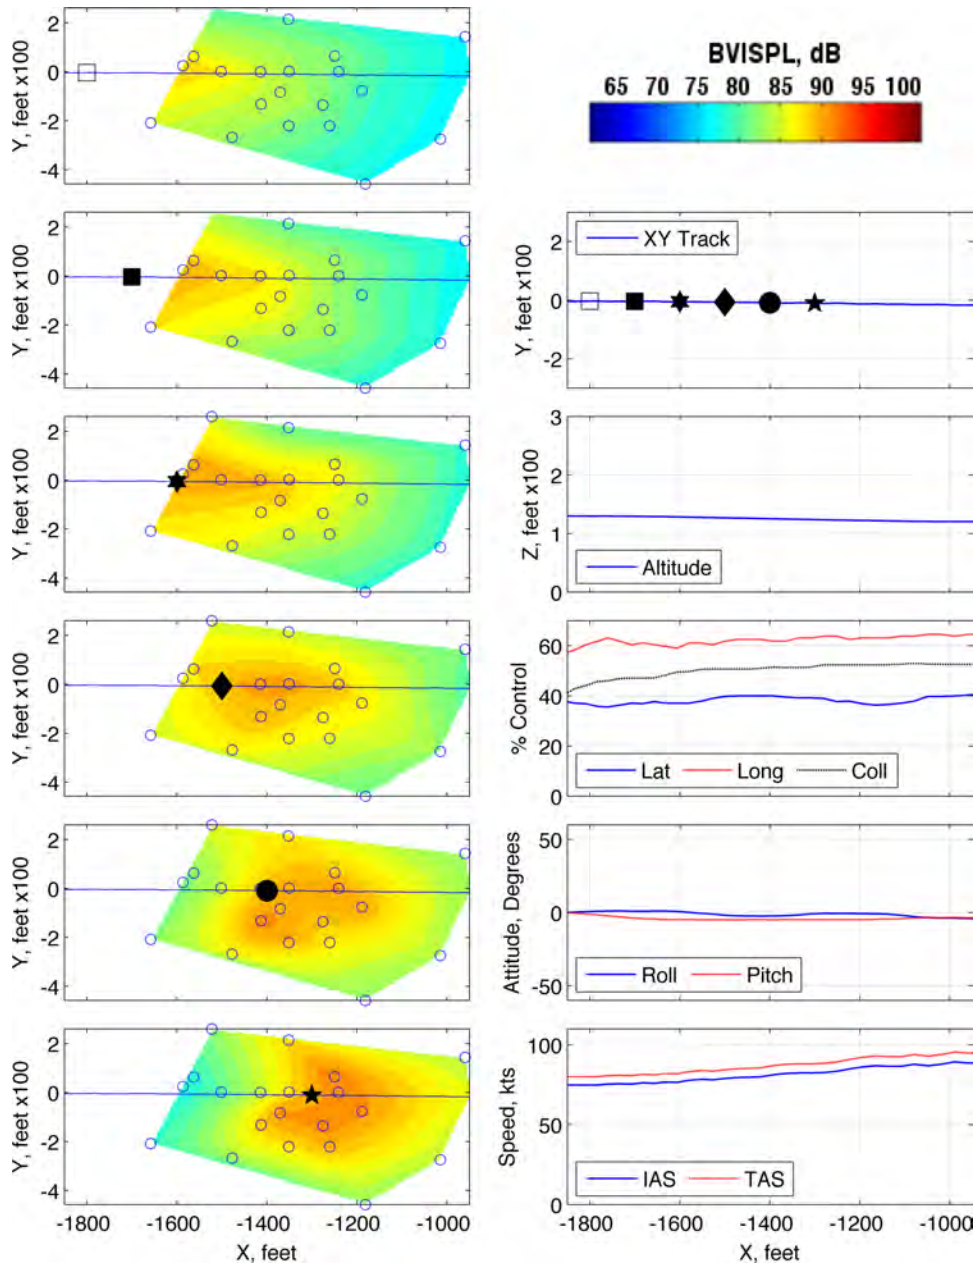


Figure 288: Maneuver condition M3, 80 to 100 KIAS, fast quick start, run number 285502

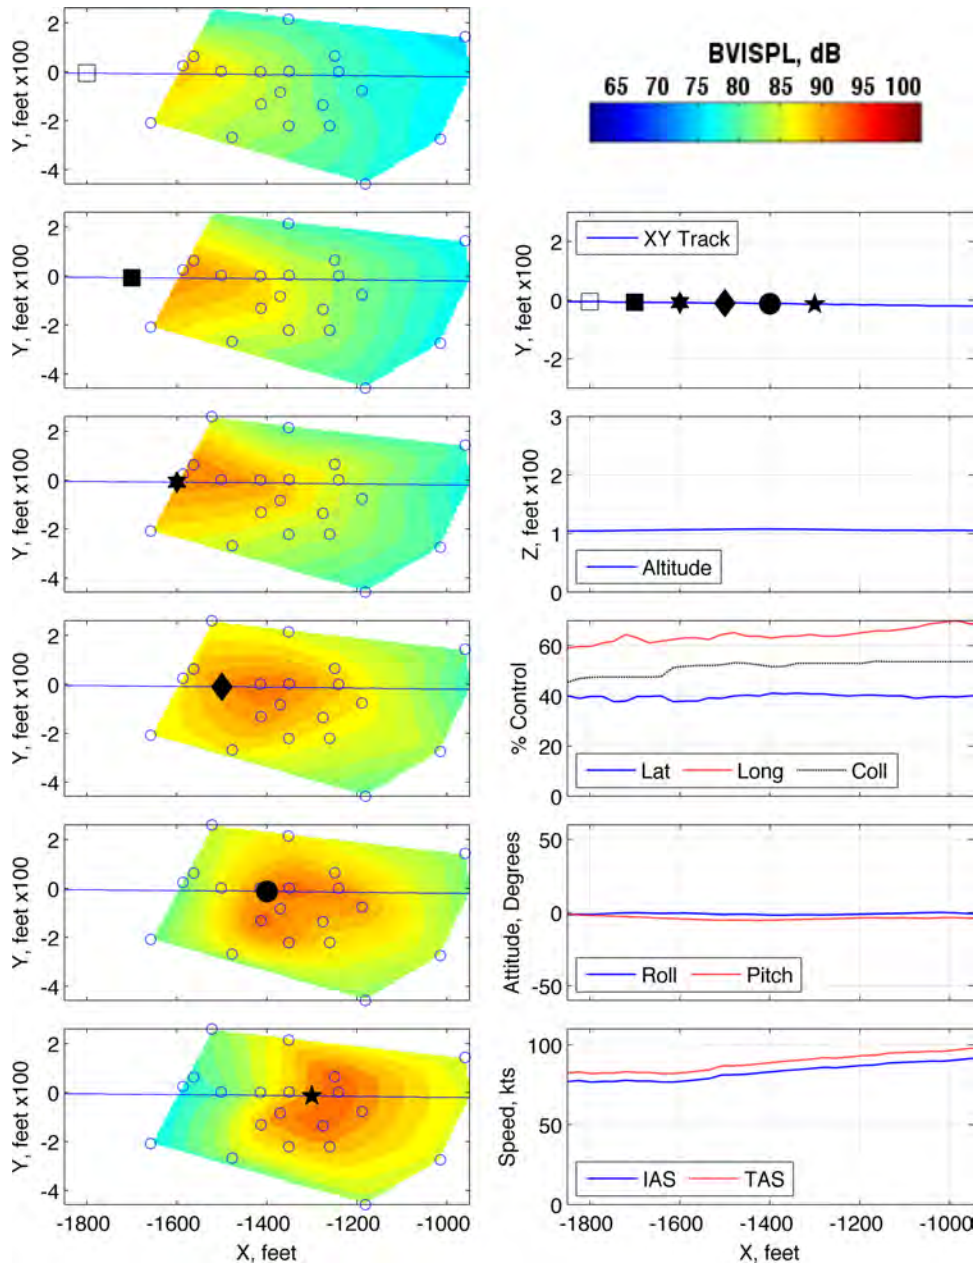


Figure 289: Maneuver condition M3, 80 to 100 KIAS, fast quick start, run number 285503

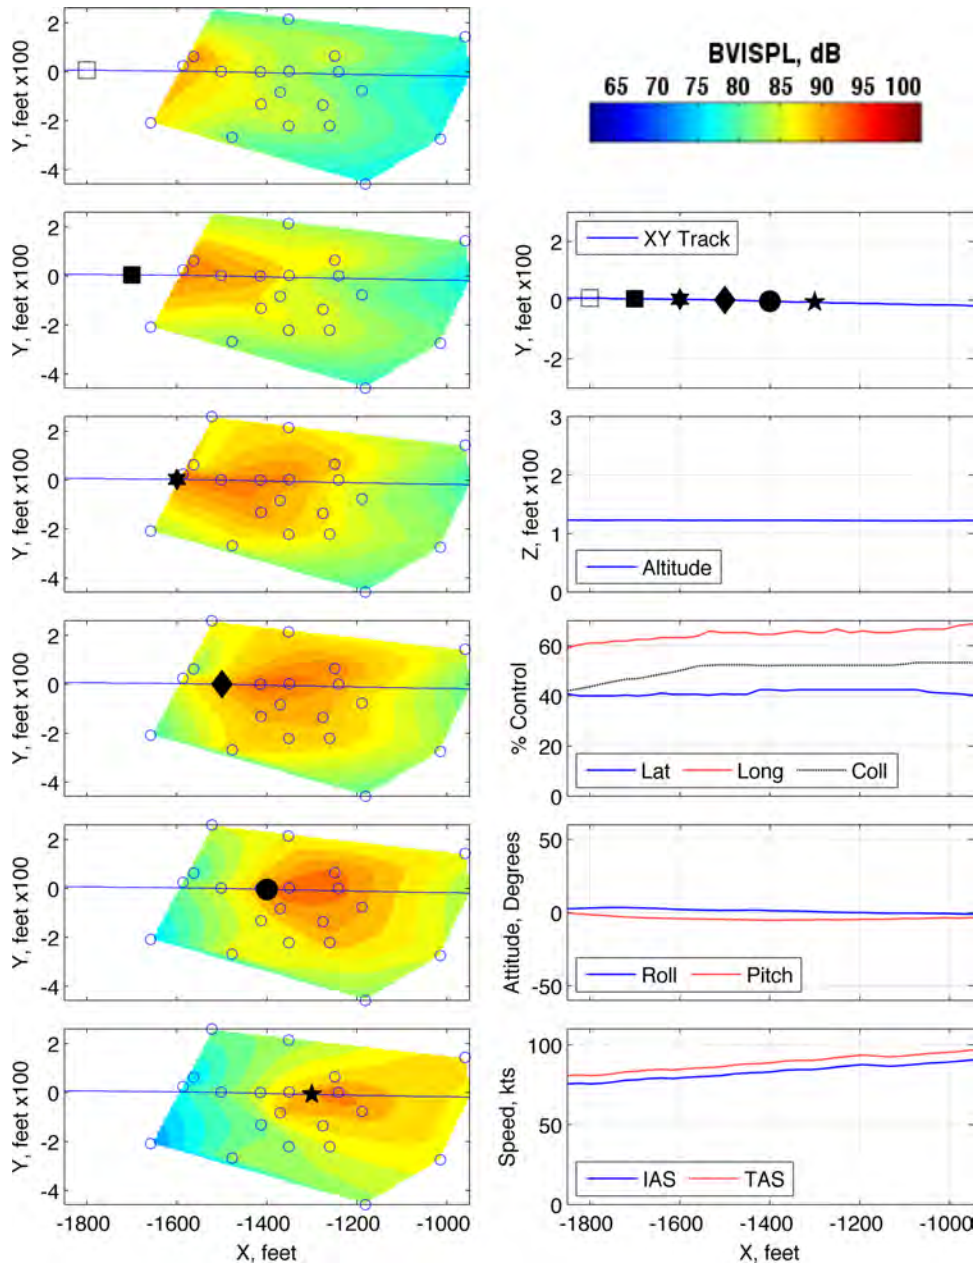


Figure 290: Maneuver condition M3, 80 to 100 KIAS, fast quick start, run number 287546

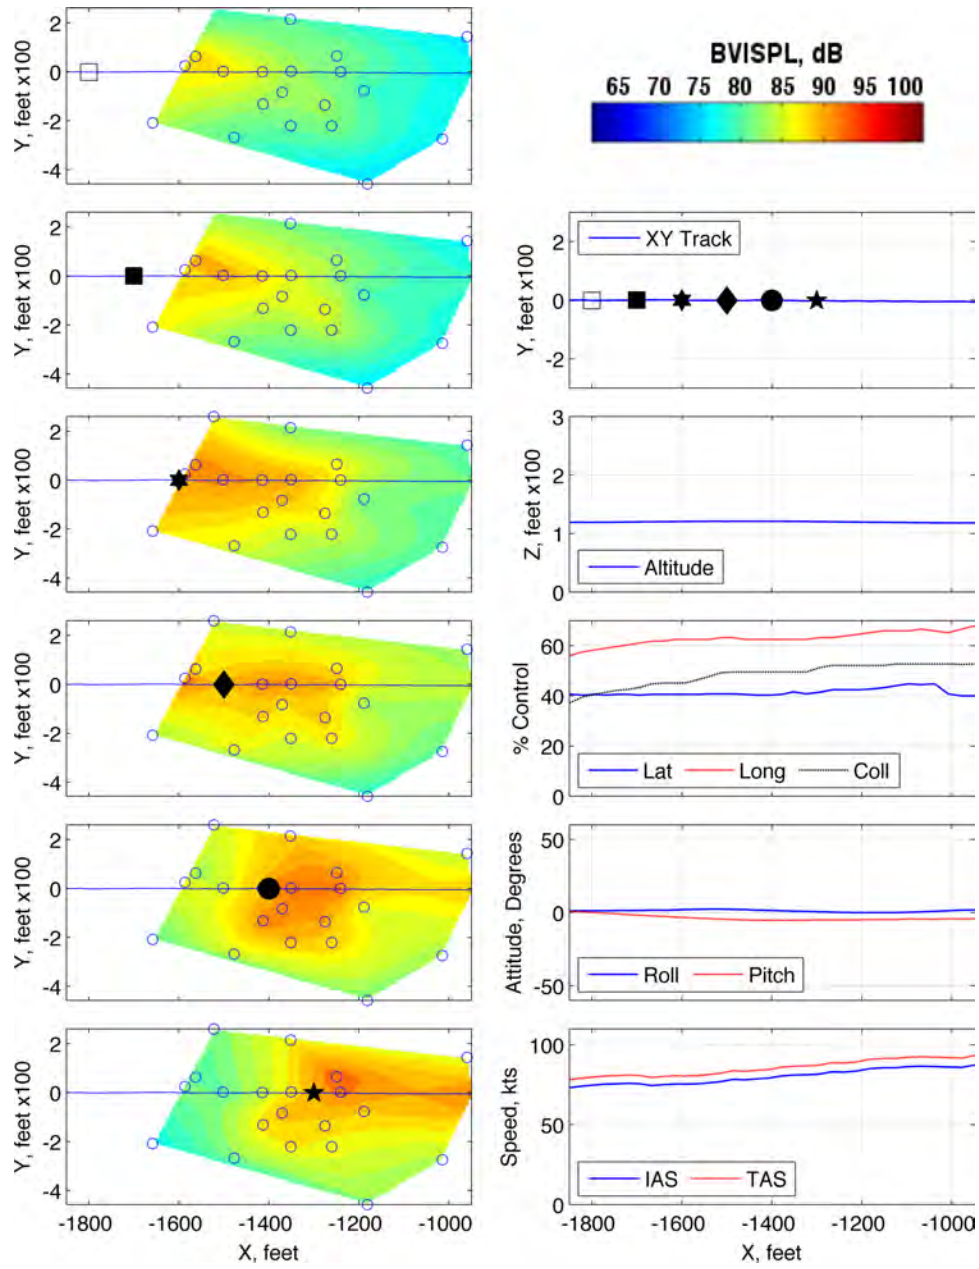


Figure 291: Maneuver condition M3, 80 to 60 KIAS, fast quick start, run number 287547

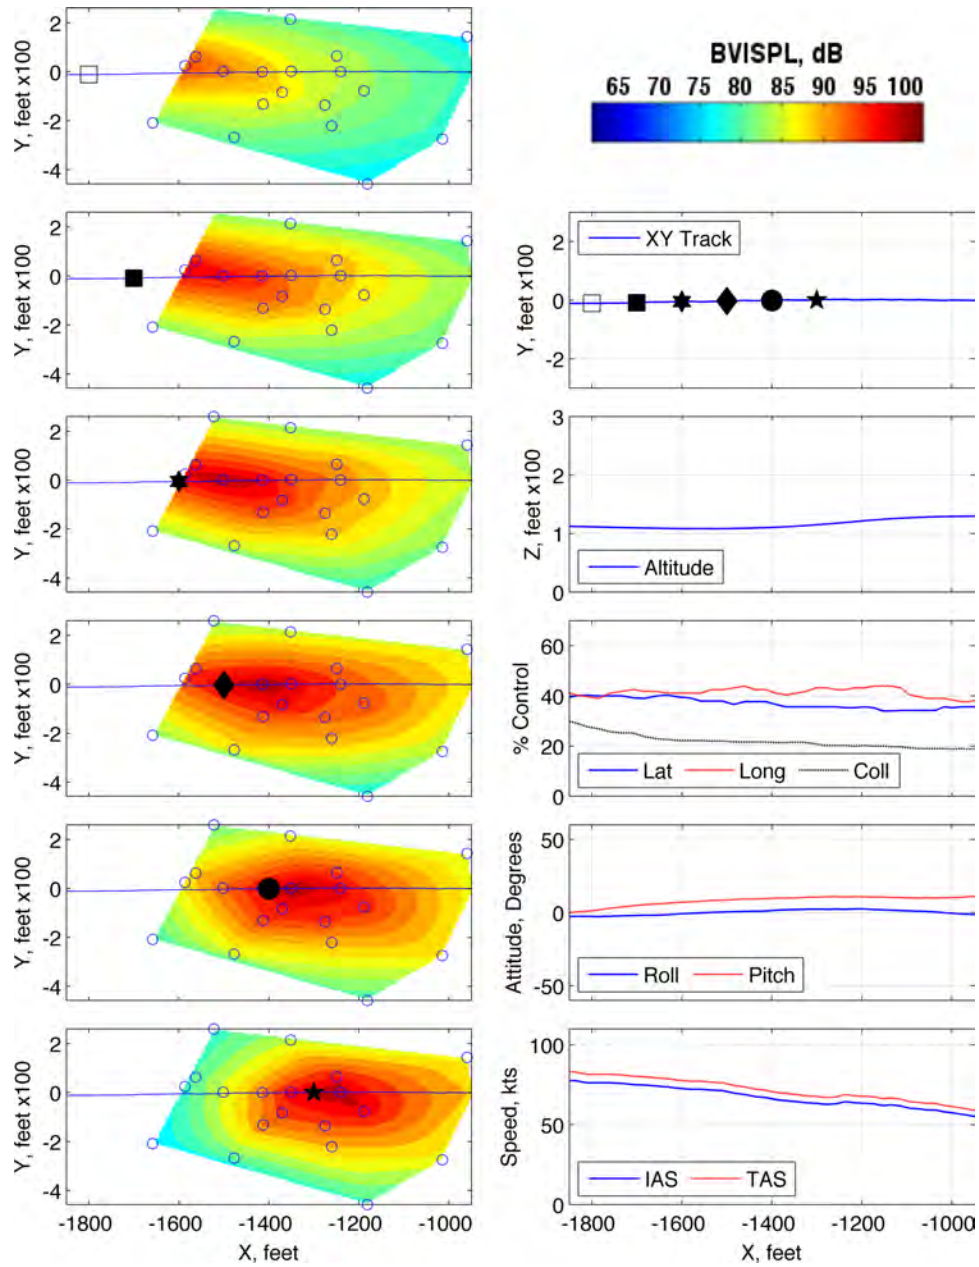


Figure 292: Maneuver condition M4, 80 to 60 KIAS, slow quick stop, run number 285504

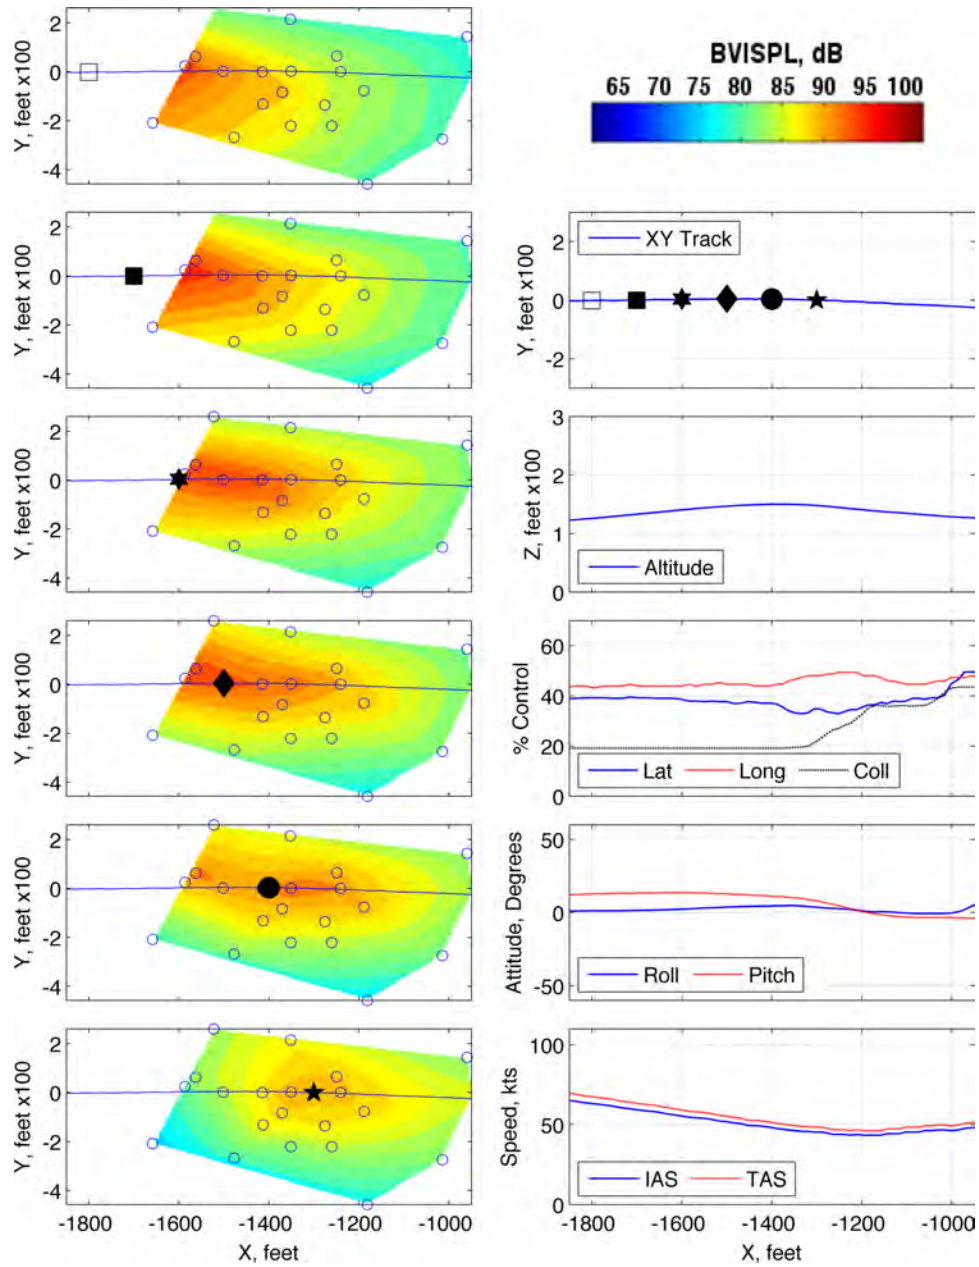


Figure 293: Maneuver condition M5, 80 to 60 KIAS, medium quick stop, run number 287540

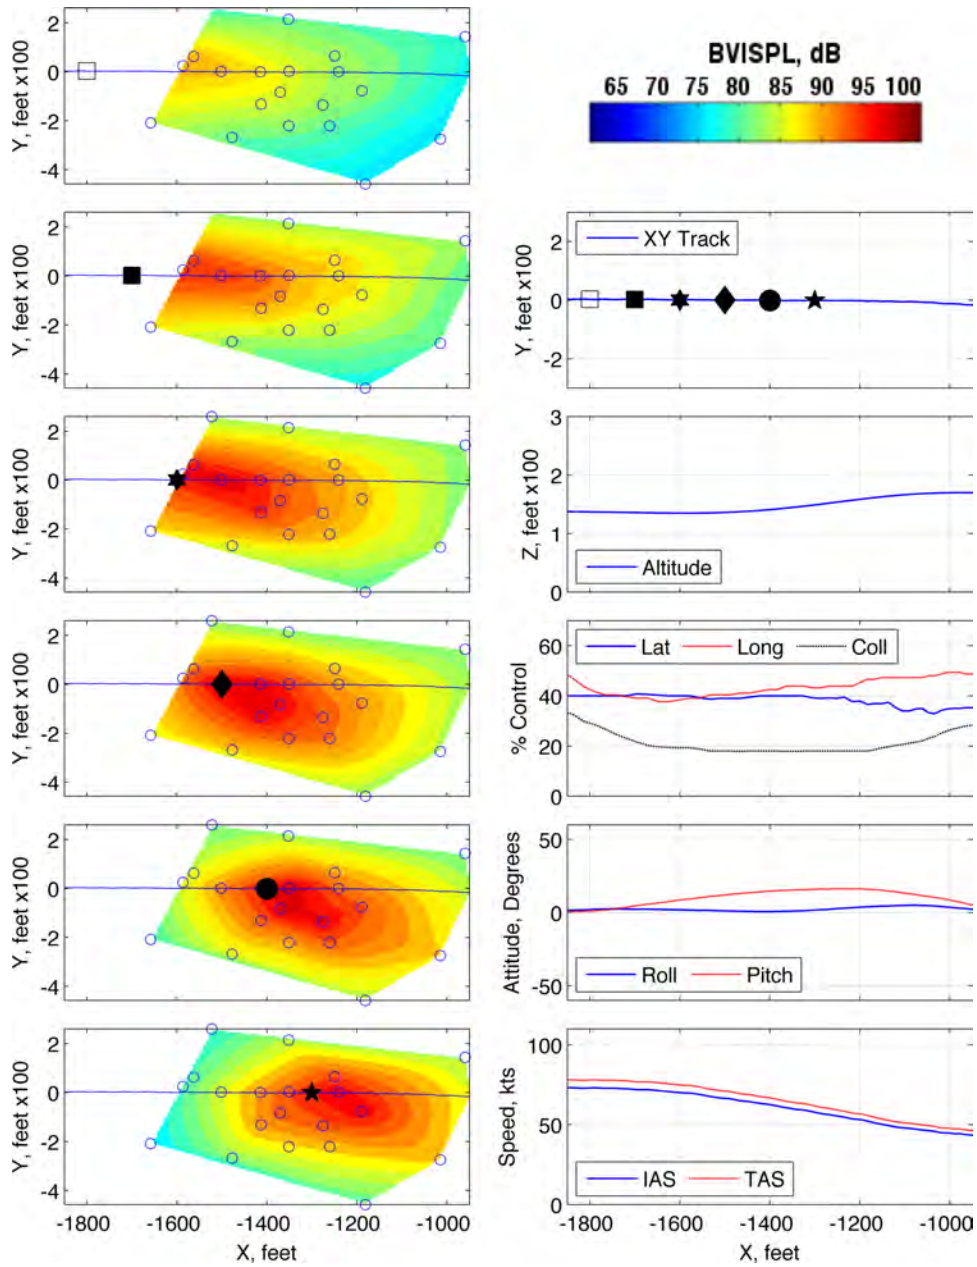


Figure 294: Maneuver condition M5, 80 to 60 KIAS, medium quick stop, run number 287541



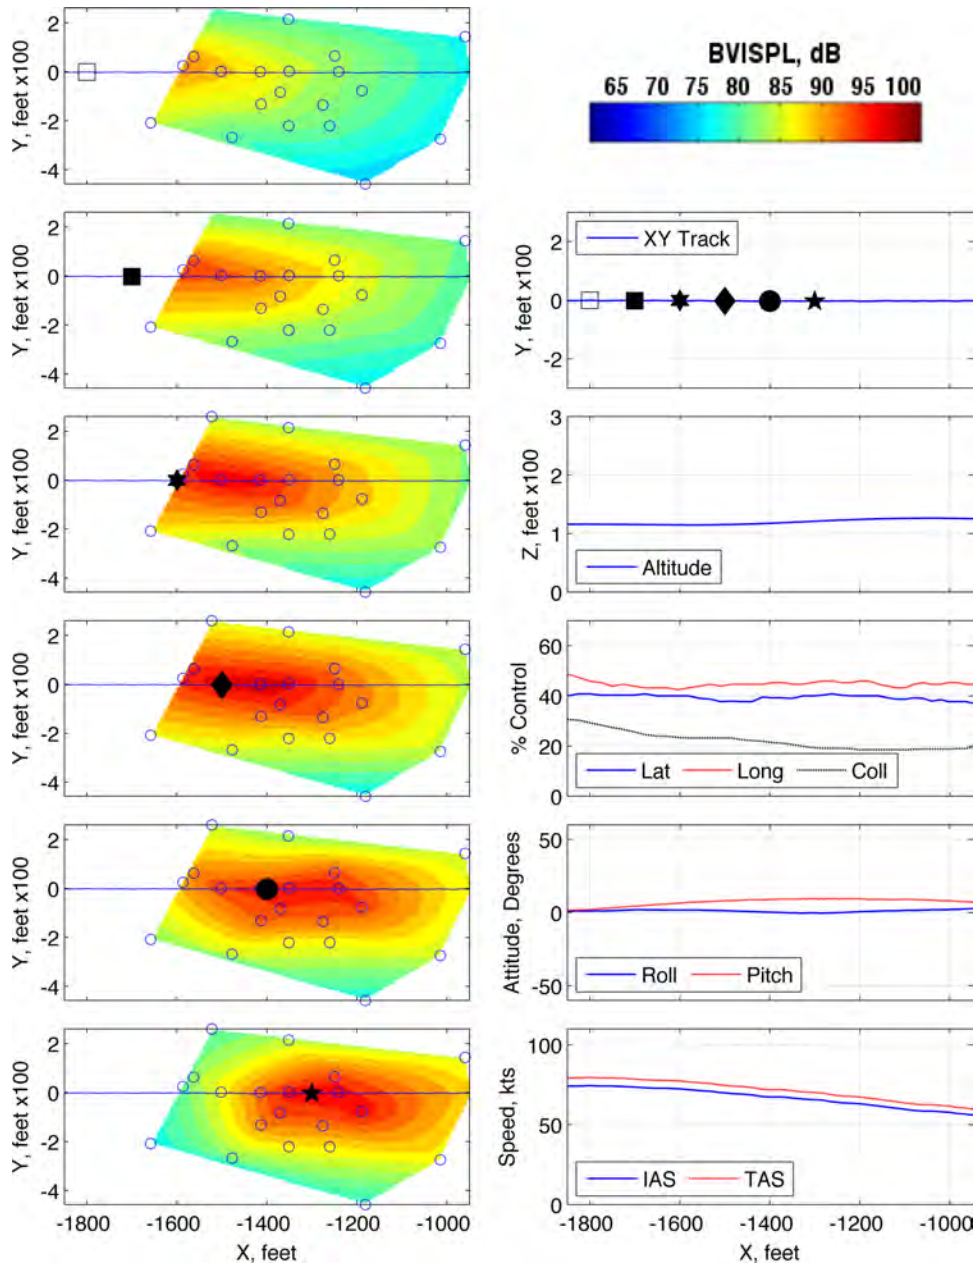


Figure 295: Maneuver condition M5, 80 to 60 KIAS, medium quick stop, run number 287542

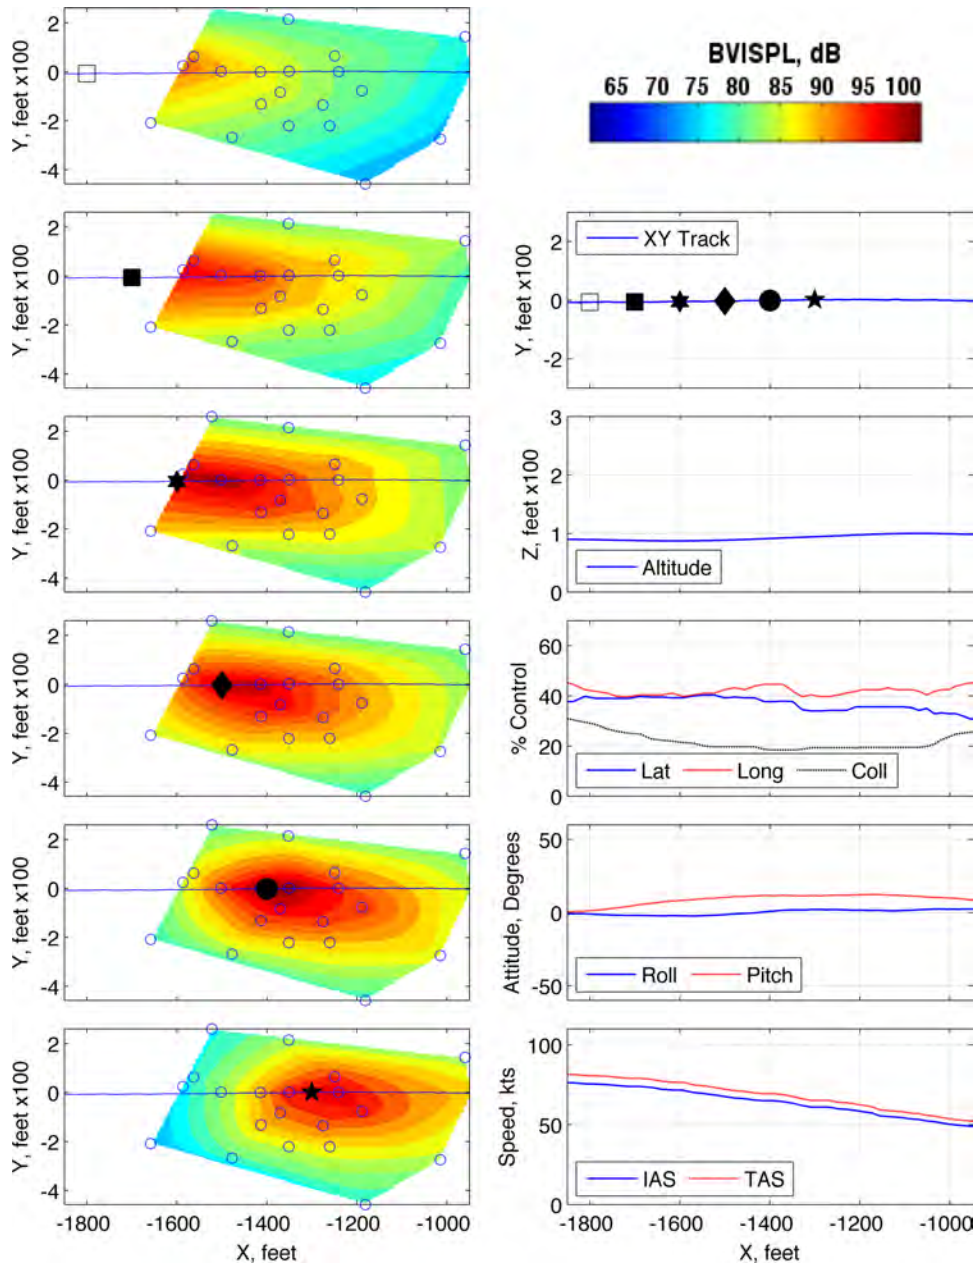


Figure 296: Maneuver condition M5, 80 to 60 KIAS, medium quick stop, run number 285505

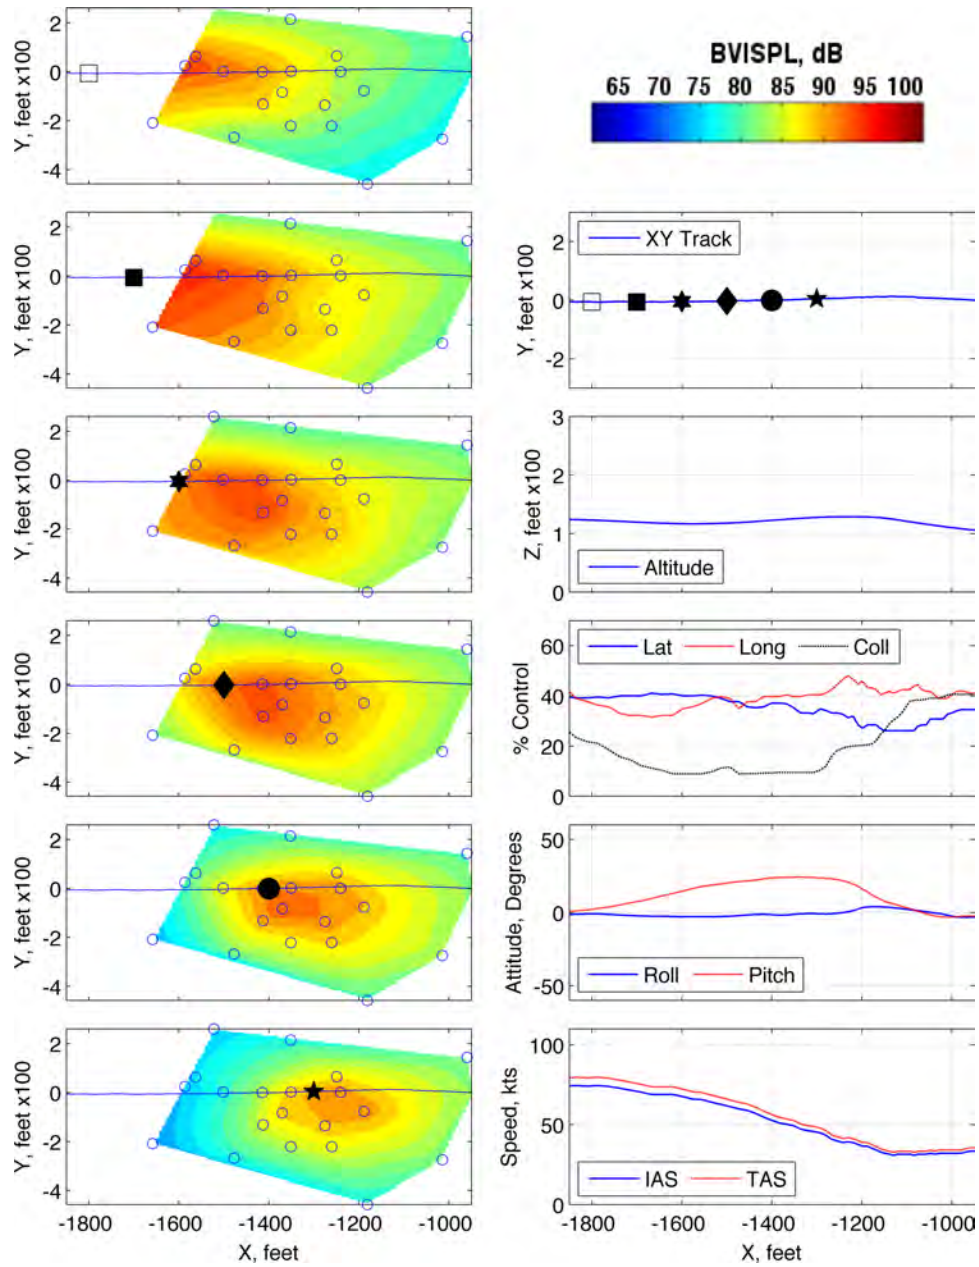


Figure 297: Maneuver condition M6, 80 to 60 KIAS, fast quick stop, run number 285506

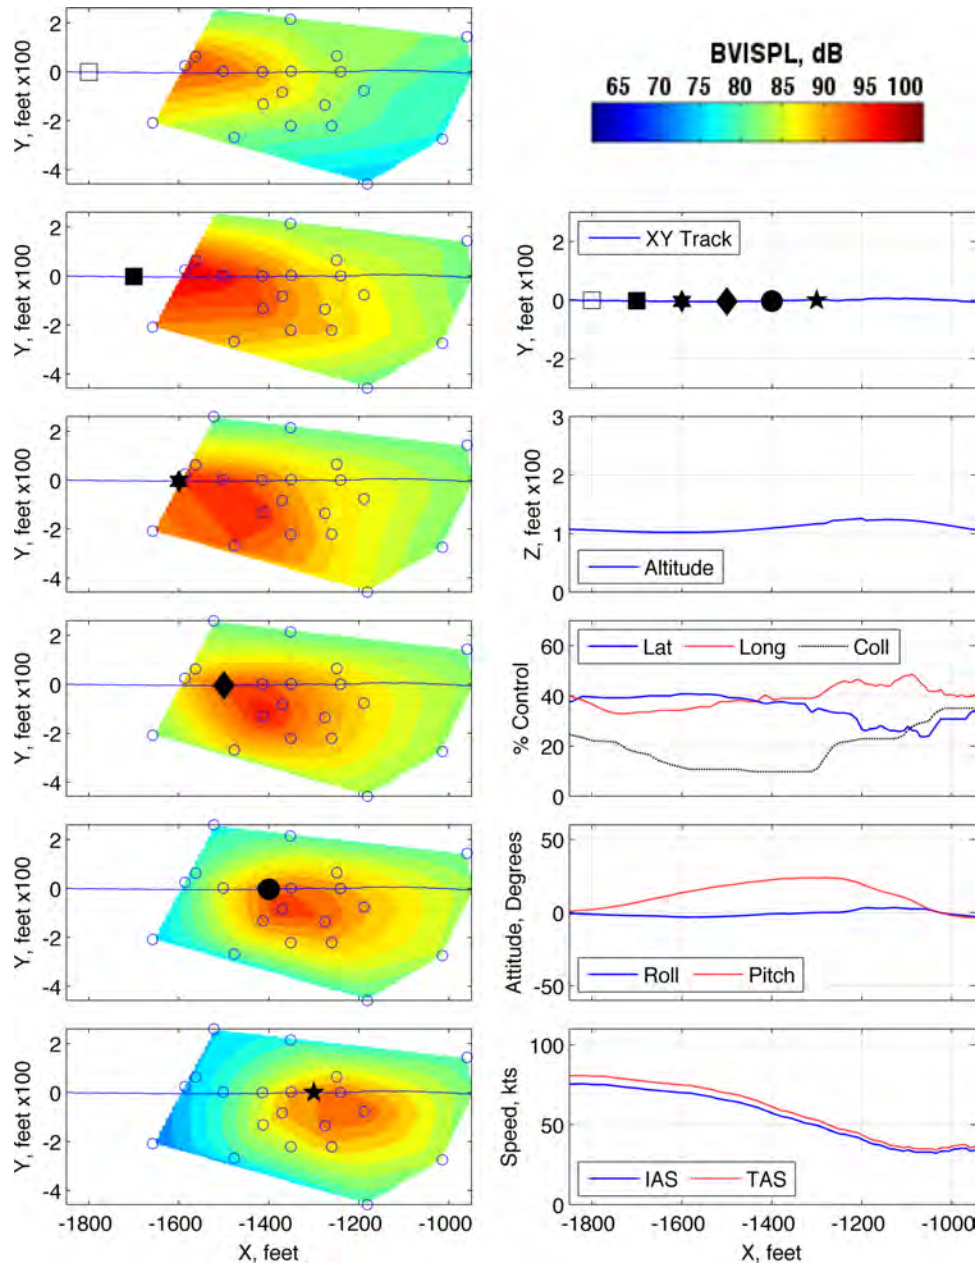


Figure 298: Maneuver condition M6, 80 to 60 KIAS, fast quick stop, run number 285507

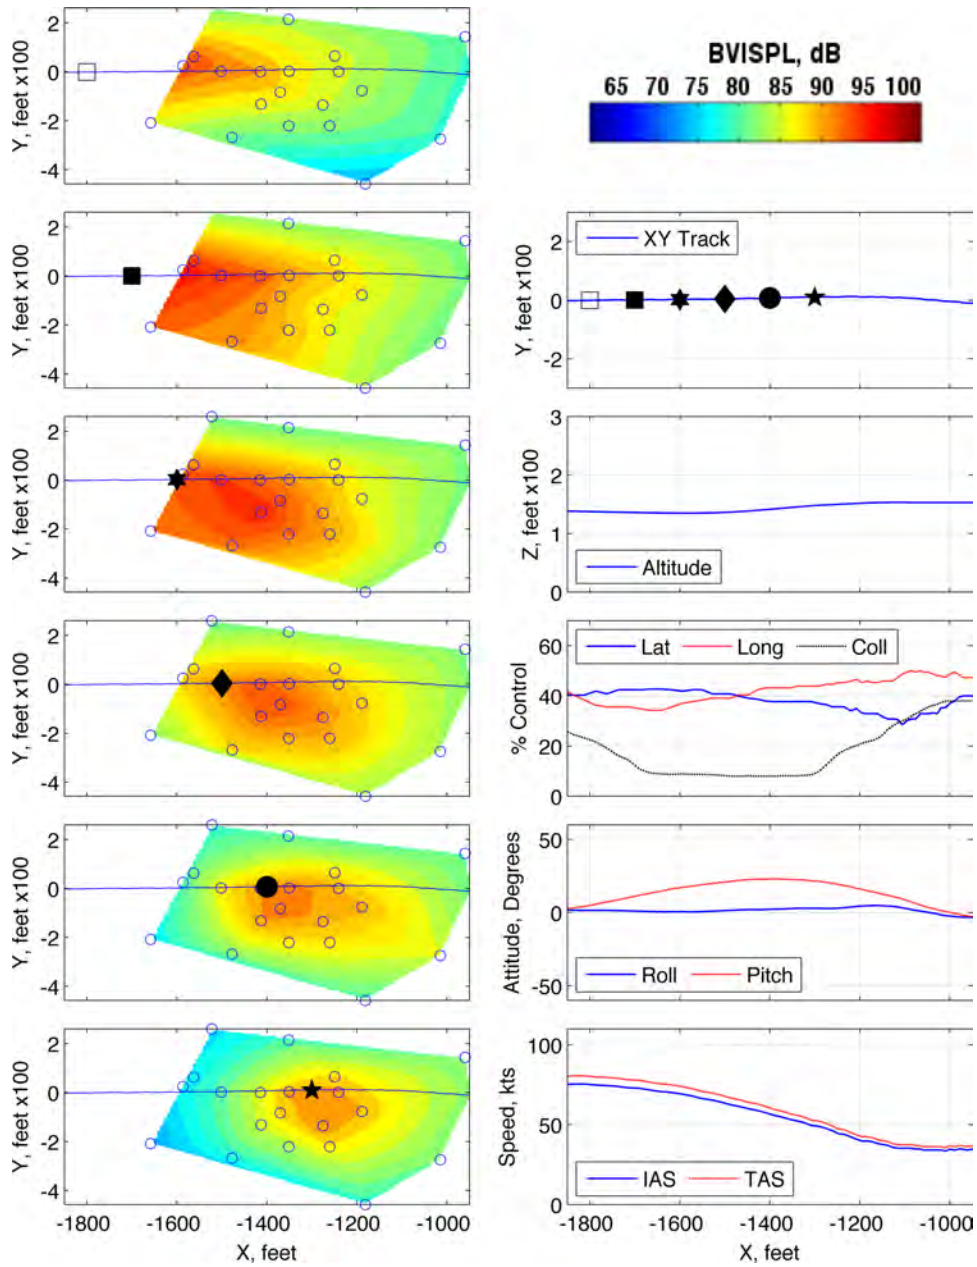


Figure 299: Maneuver condition M6, 80 to 60 KIAS, fast quick stop, run number 287543

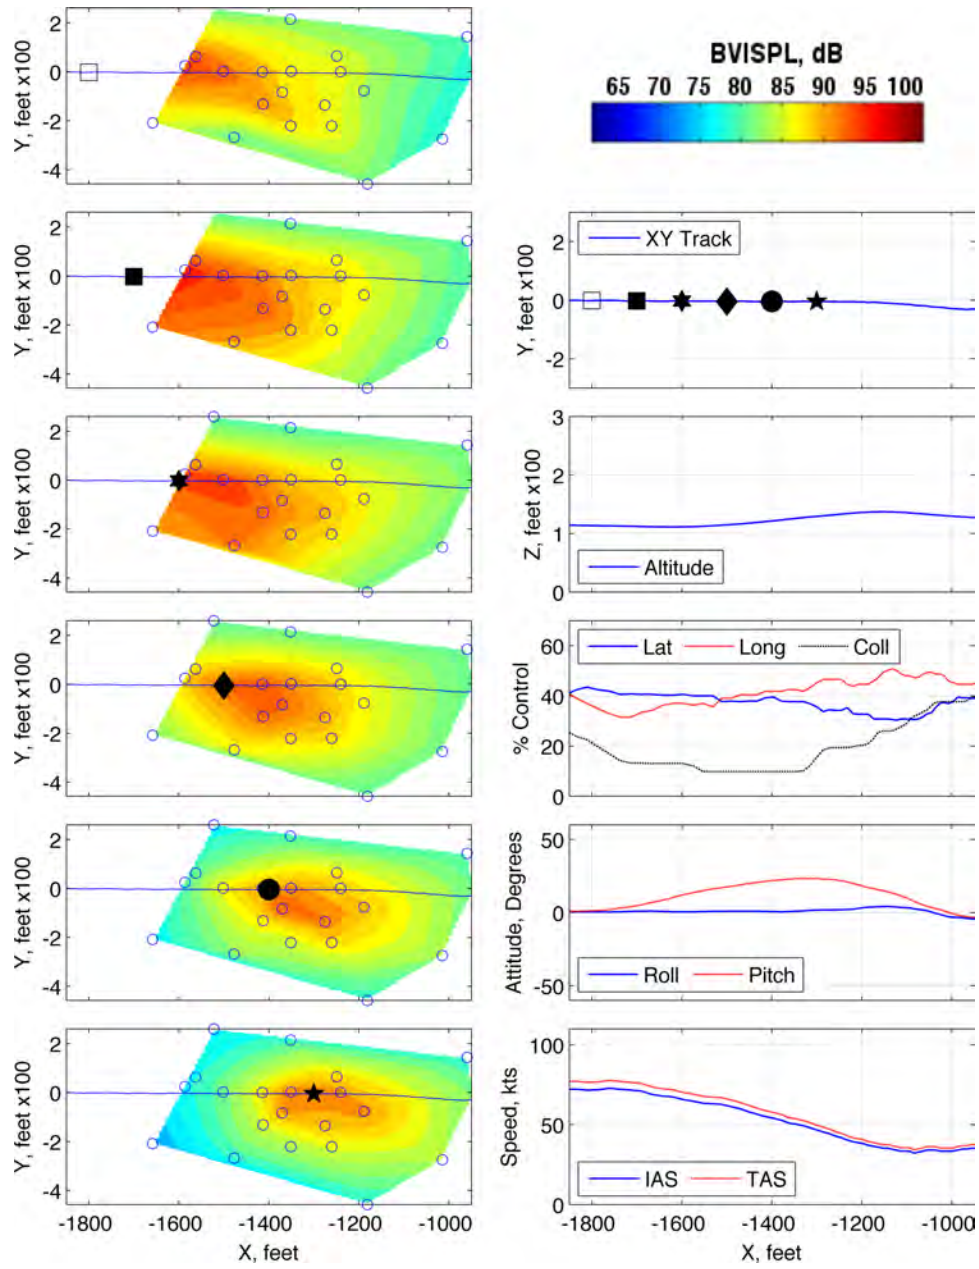


Figure 300: Maneuver condition M6, 80 to 60 KIAS, fast quick stop, run number 287544

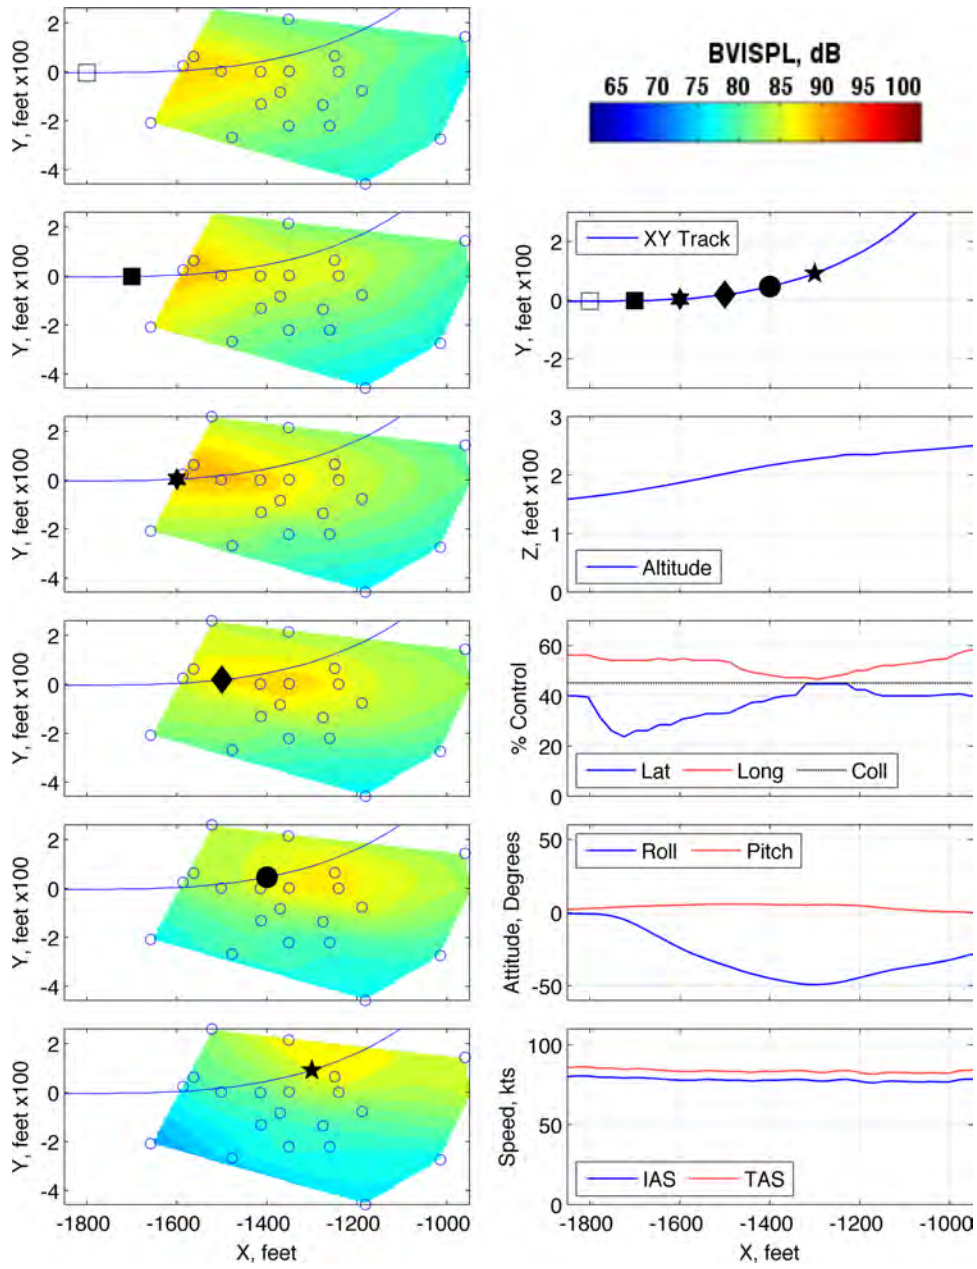


Figure 301: Maneuver condition Z6, 80 KIAS,  $0^\circ$  to  $6^\circ$ , roll left, run number 287550

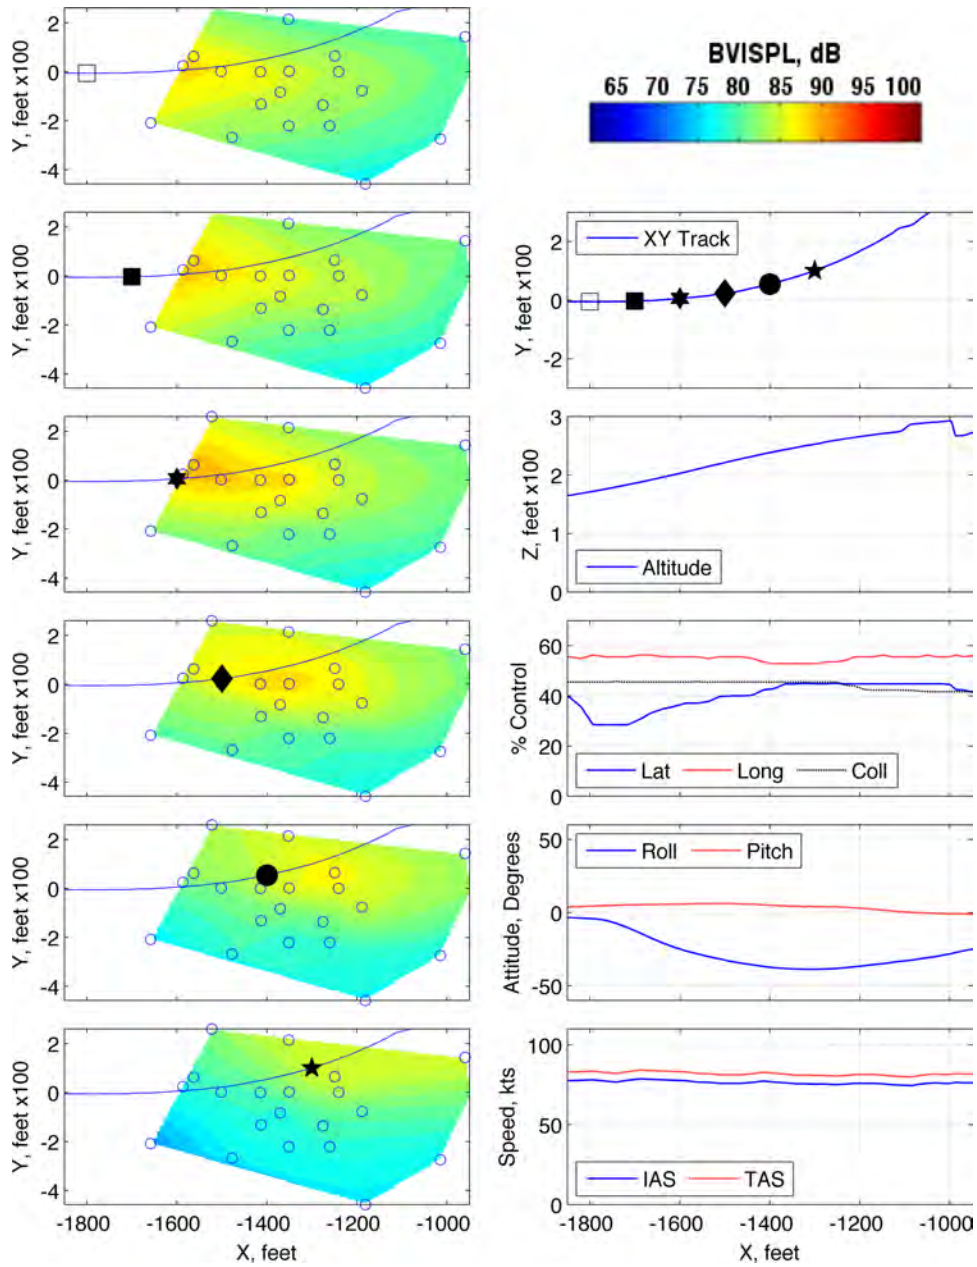


Figure 302: Maneuver condition Z6, 80 KIAS, 0° to 6° , roll left, run number 287551



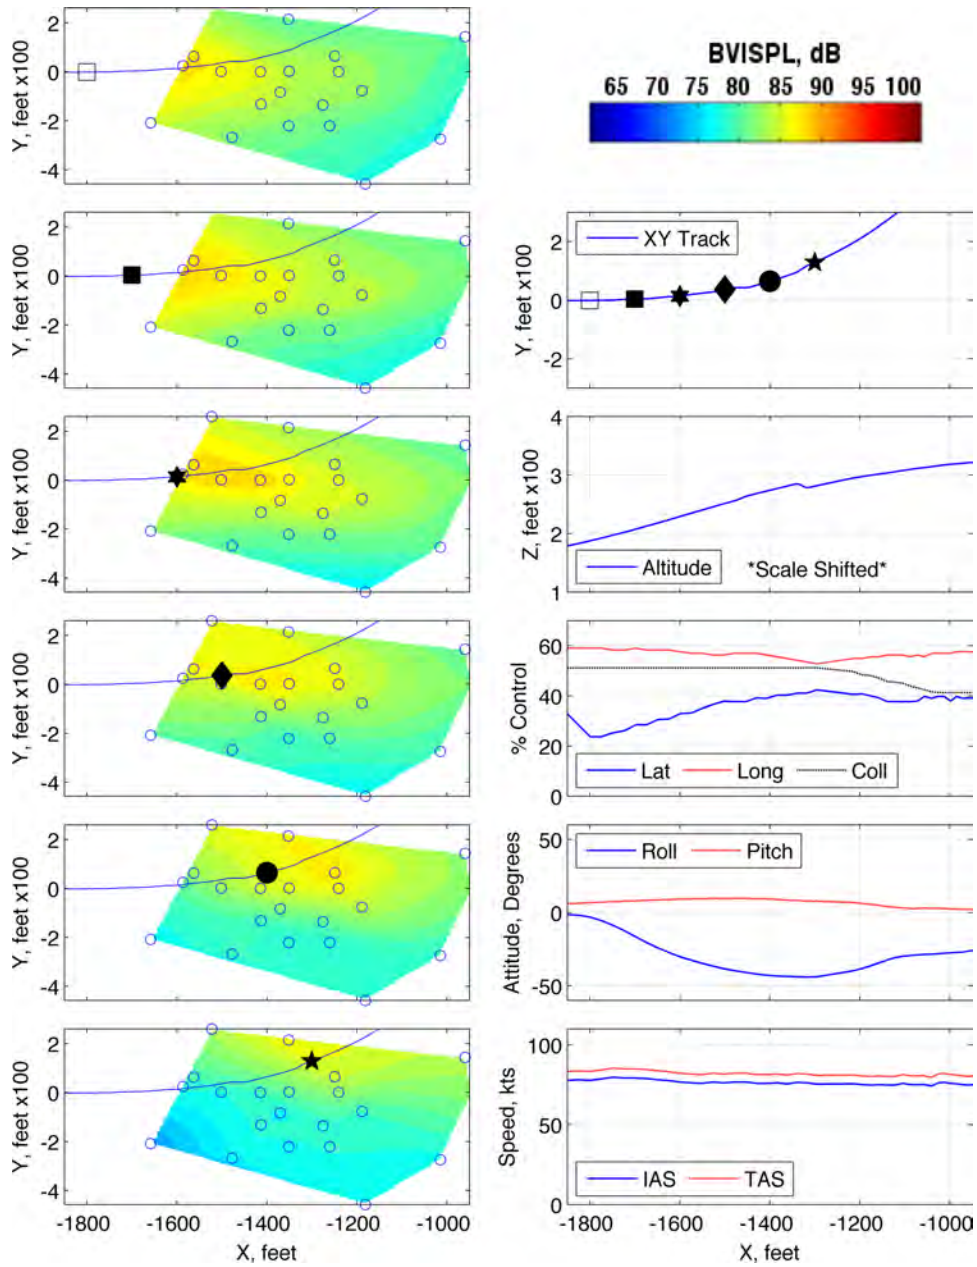


Figure 303: Maneuver condition Z9, 80 KIAS, 0° to 9° , roll left, run number 287555

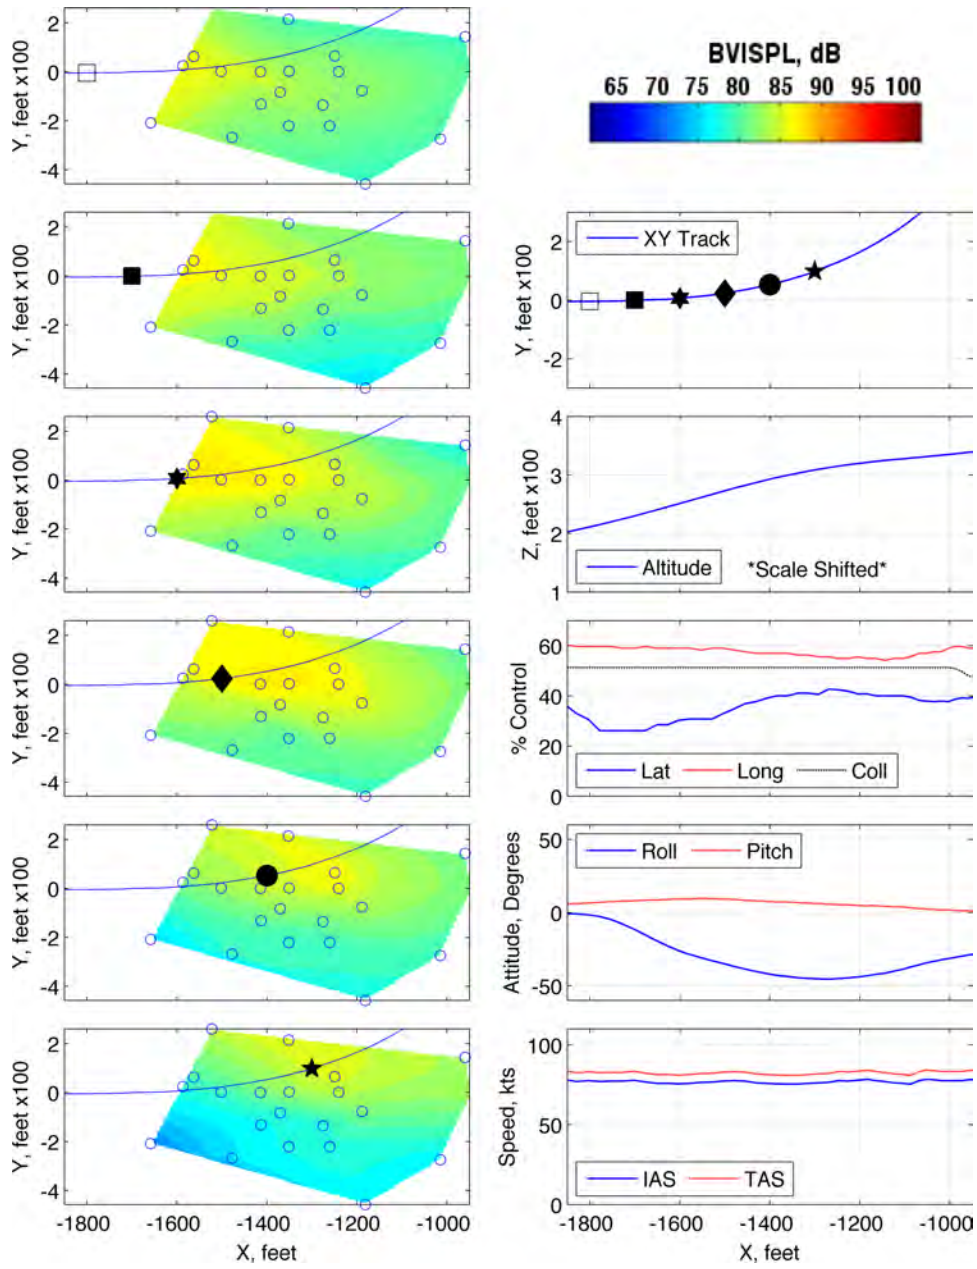


Figure 304: Maneuver condition Z9, 80 KIAS, 0° to 9° , roll left, run number 287556

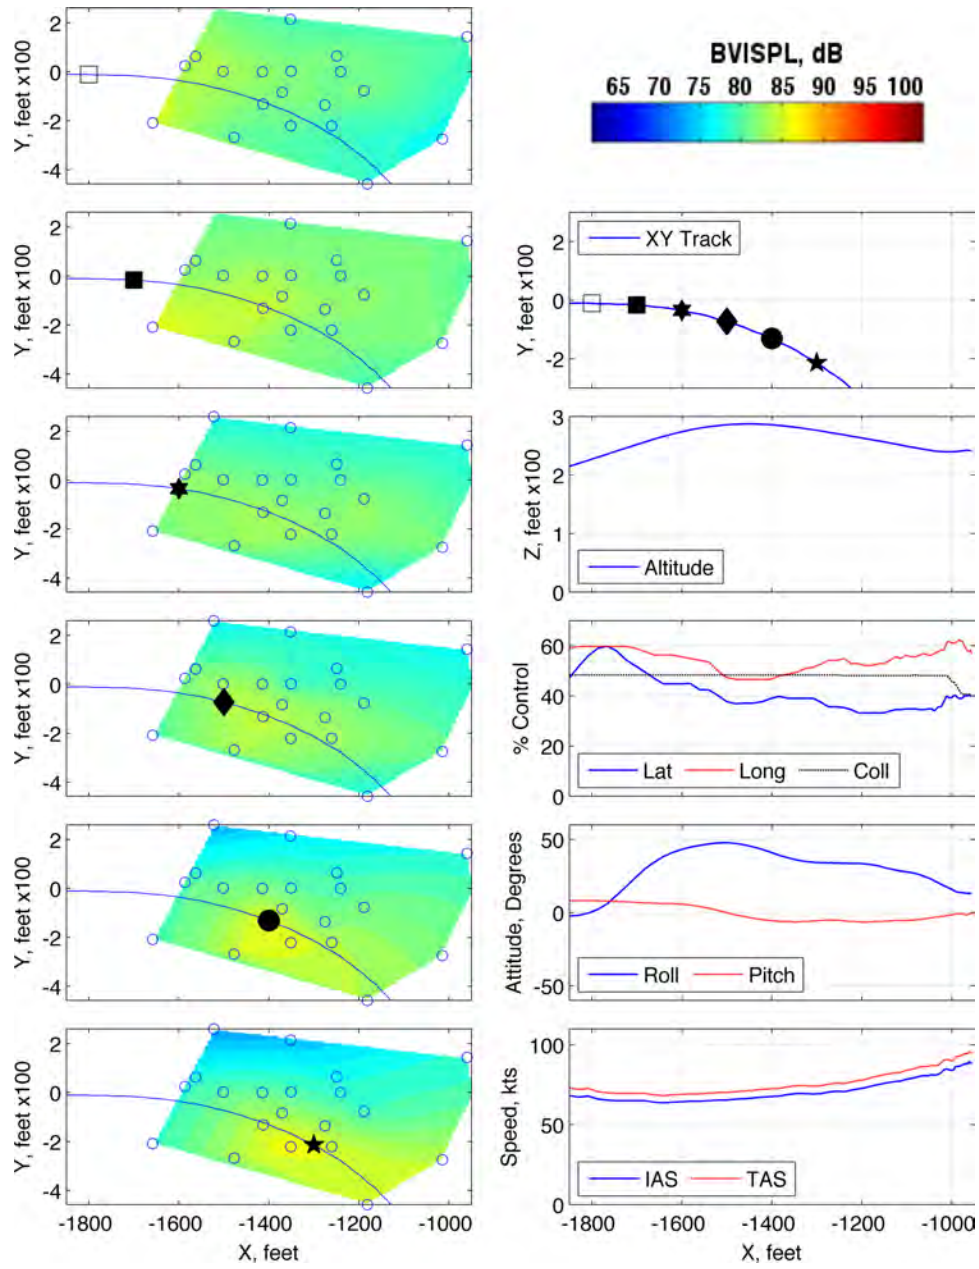


Figure 305: Maneuver condition Z15, 80 KIAS, 0° to 6° , roll right, run number 285513

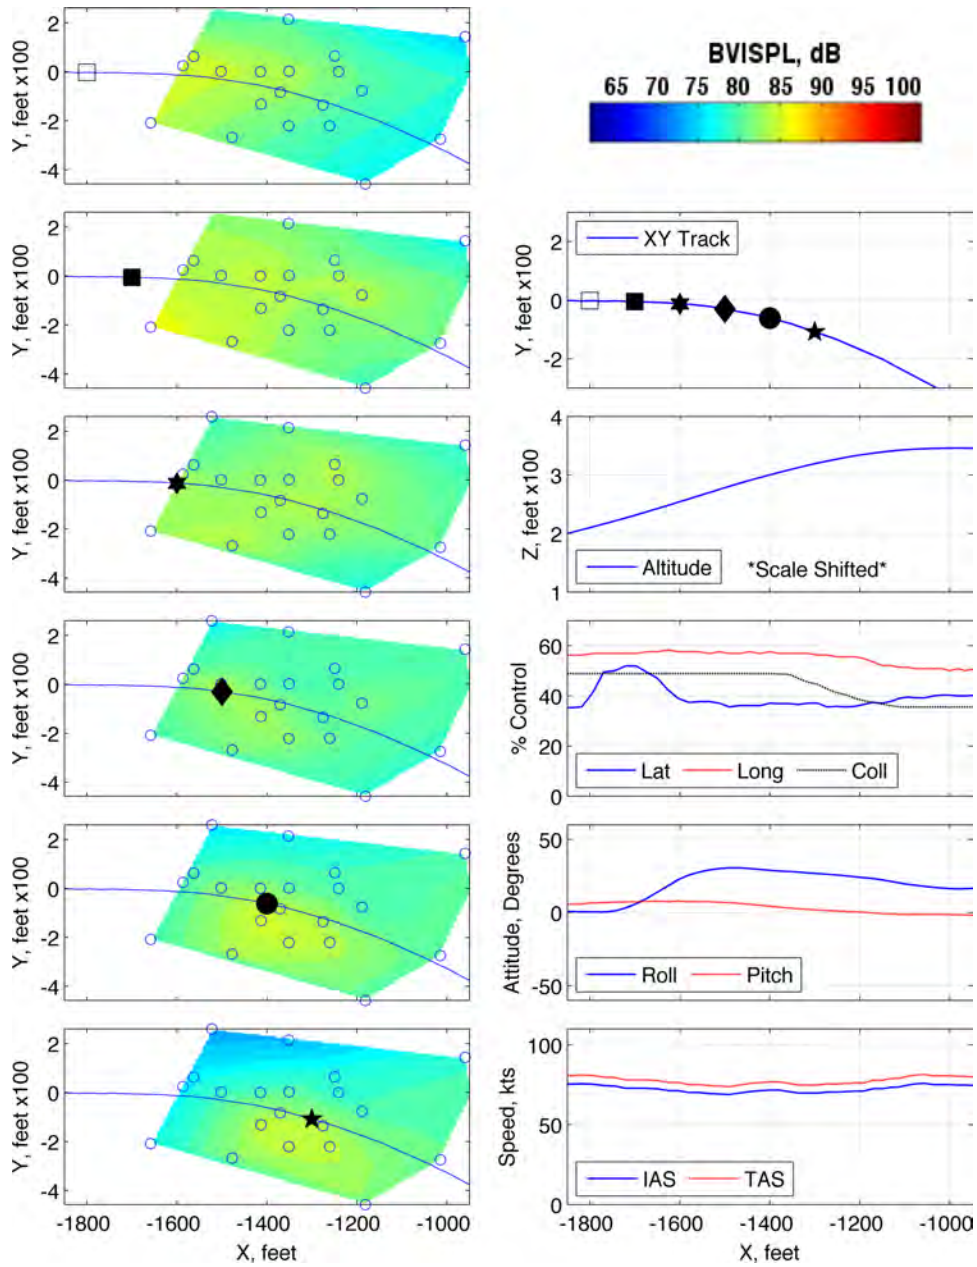


Figure 306: Maneuver condition Z15, 80 KIAS, 0° to 6° , roll right, run number 285514

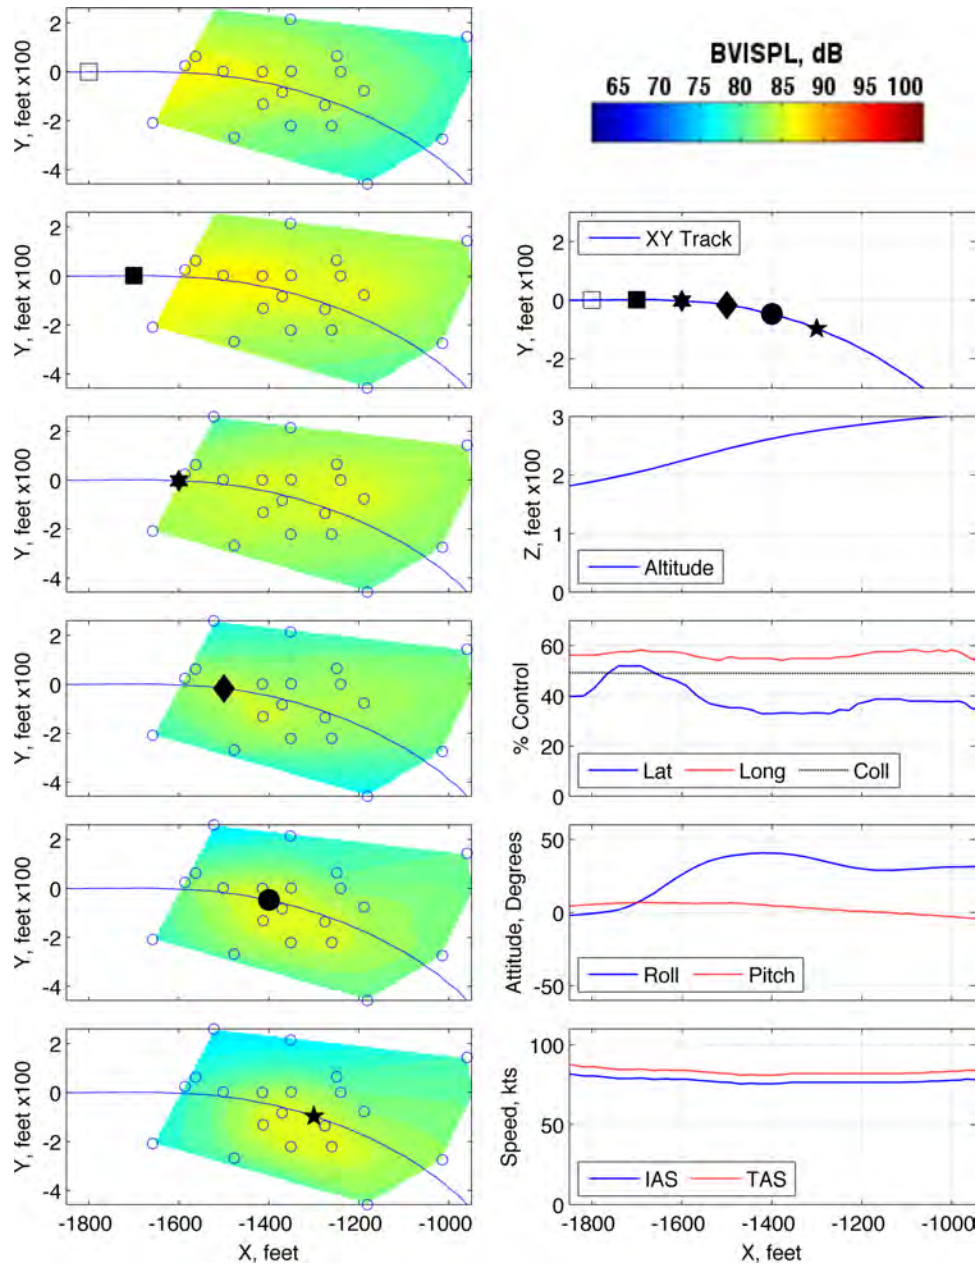


Figure 307: Maneuver condition Z15, 80 KIAS, 0° to 6°, roll right, run number 285515

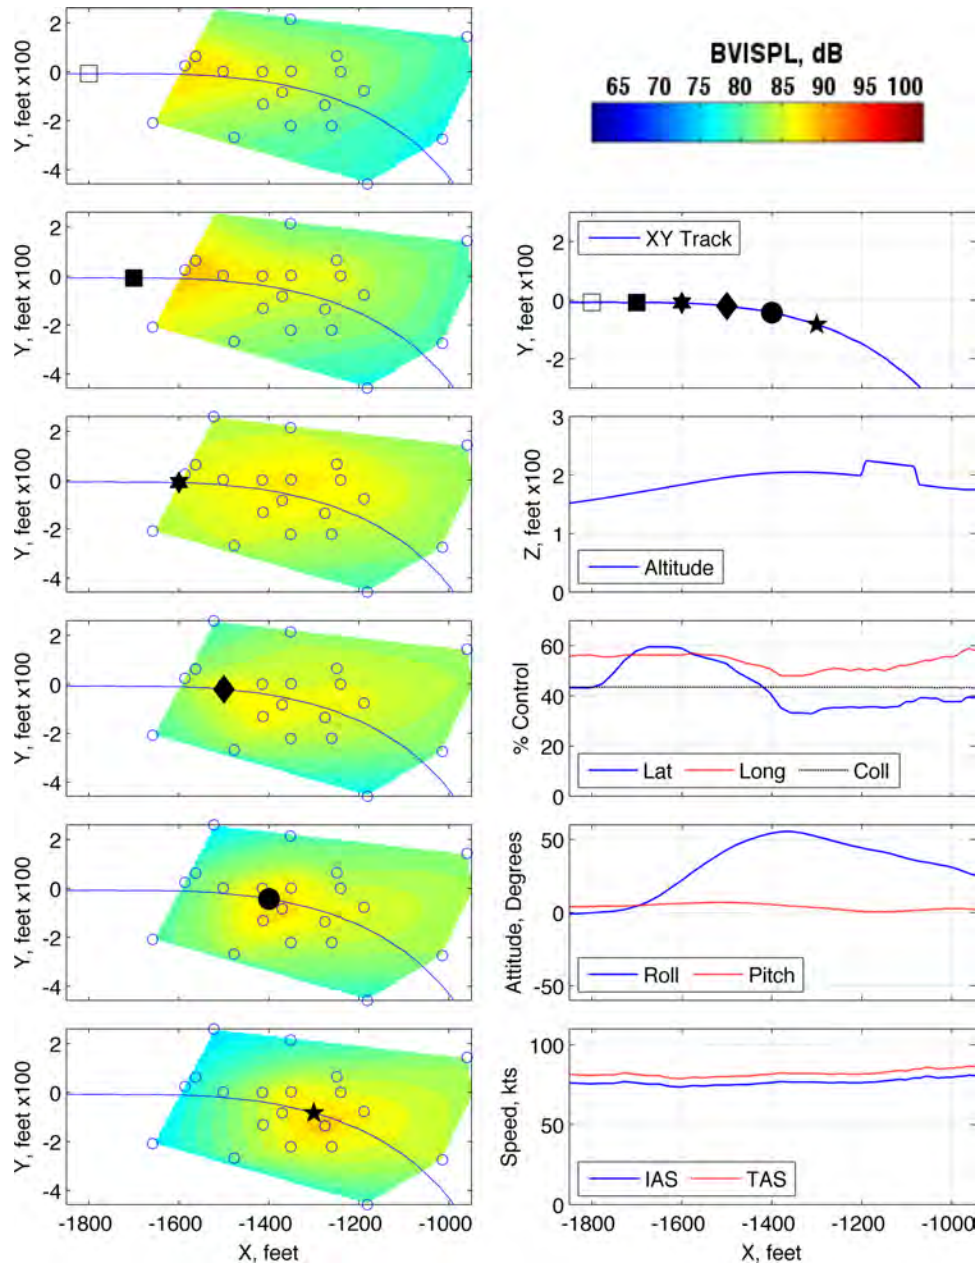


Figure 308: Maneuver condition Z15, 80 KIAS, 0° to 6° , roll right, run number 287548

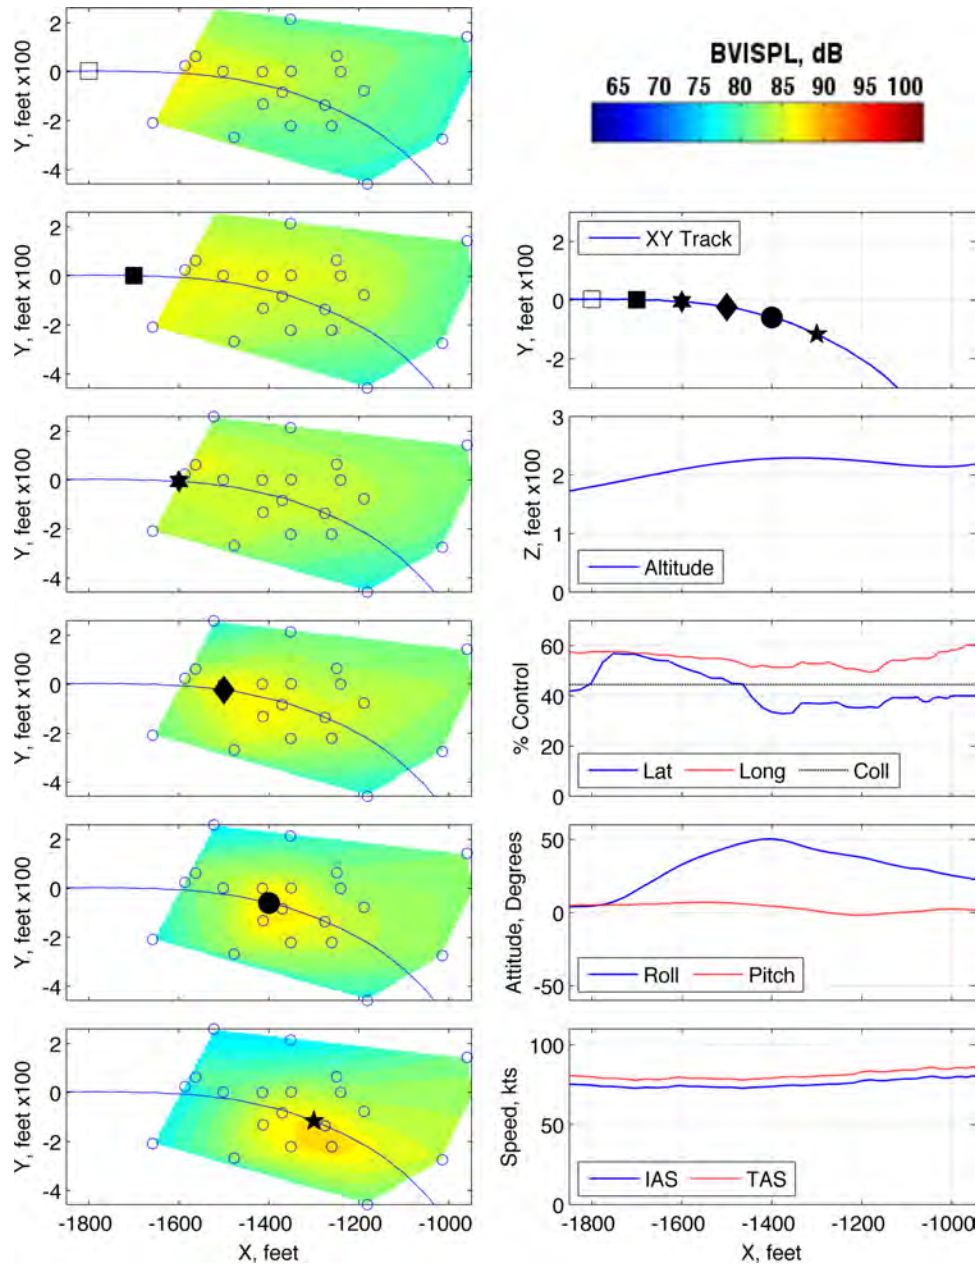


Figure 309: Maneuver condition Z15, 80 KIAS, 0° to 6° , roll right, run number 287549

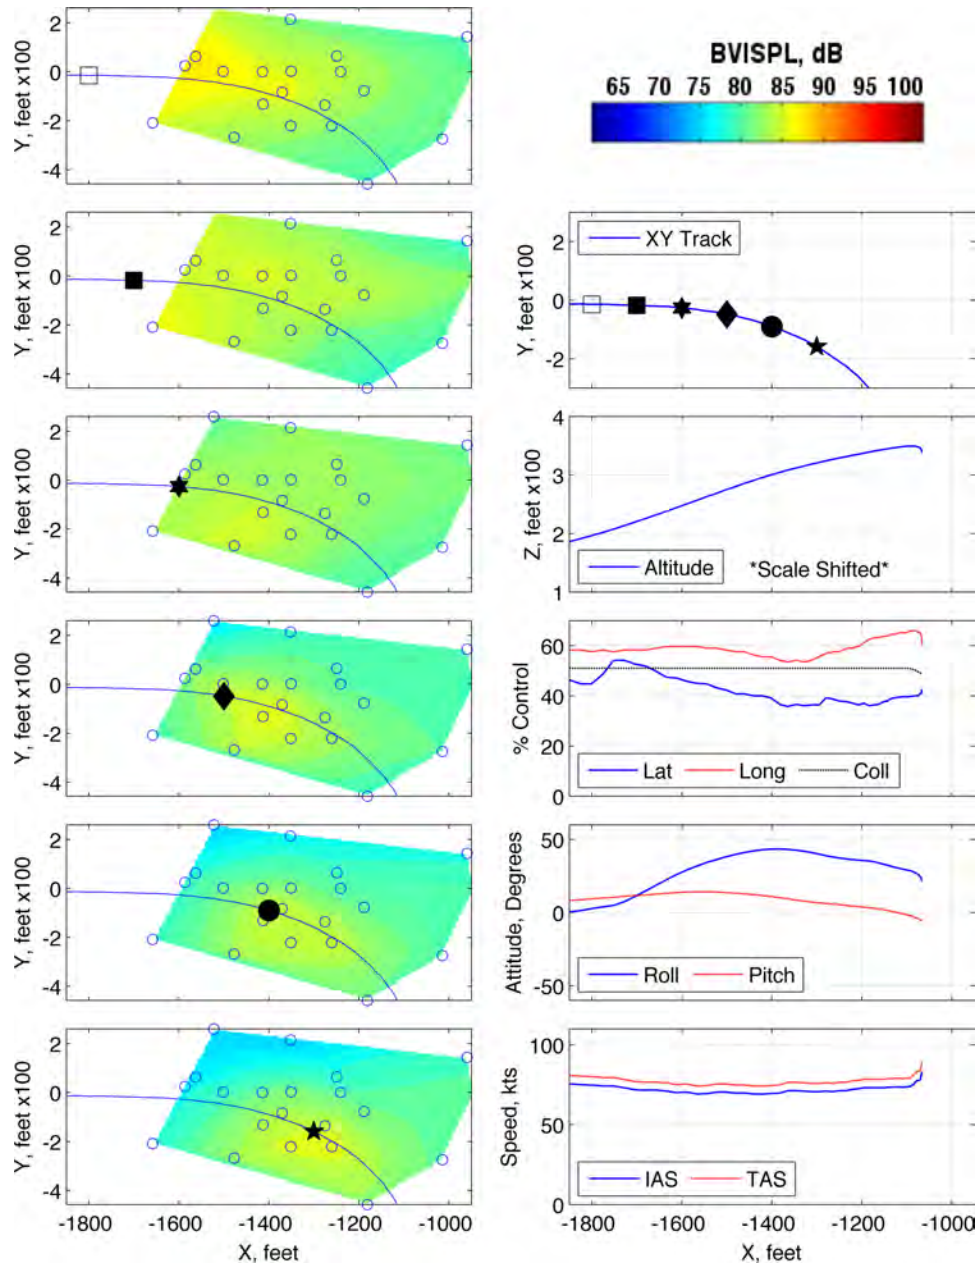


Figure 310: Maneuver condition Z18, 80 KIAS, 0° to 9° , roll right, run number 287552



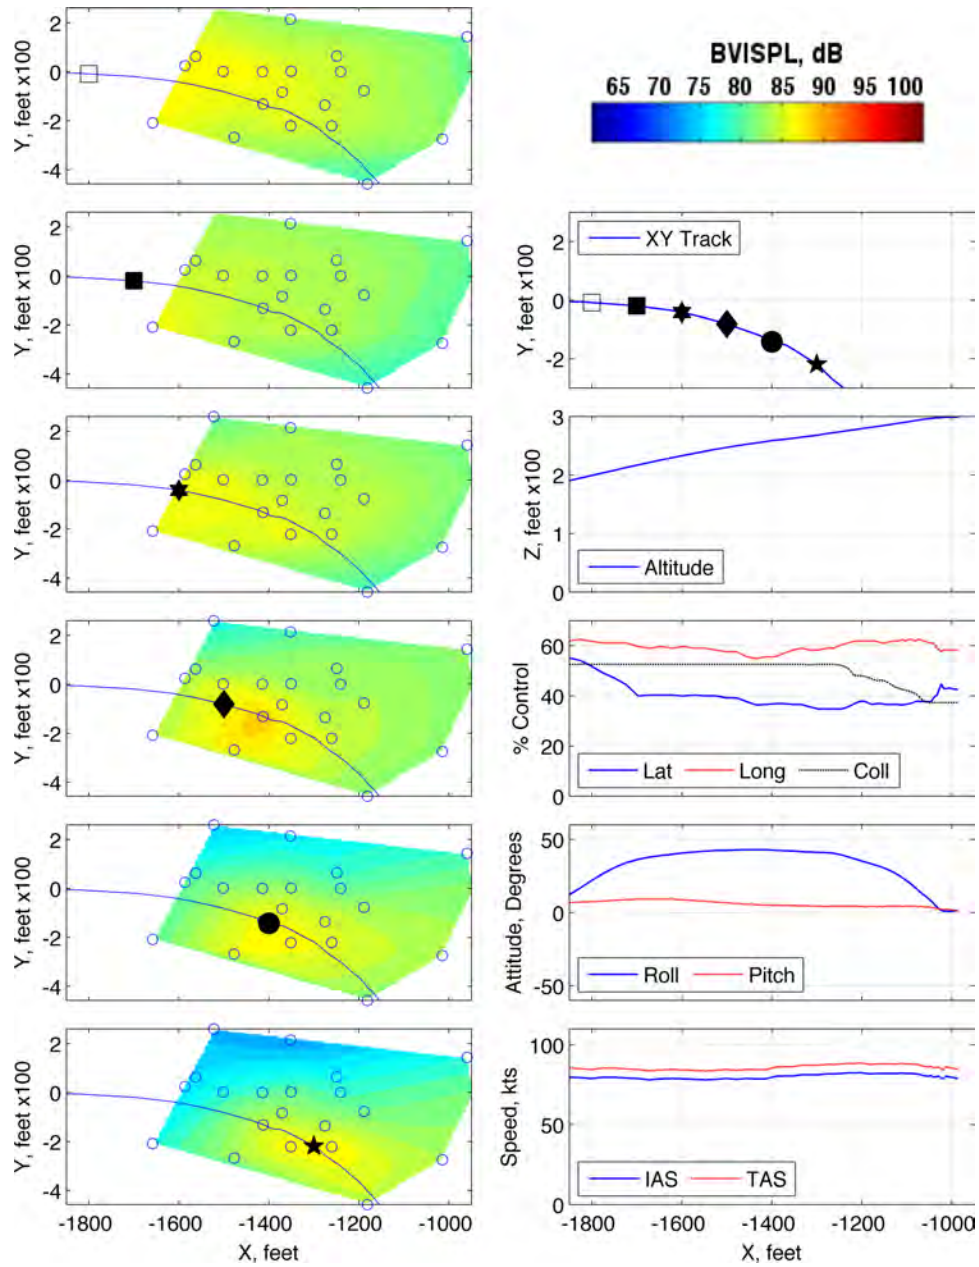


Figure 311: Maneuver condition Z18, 80 KIAS, 0° to 9°, roll right, run number 287553

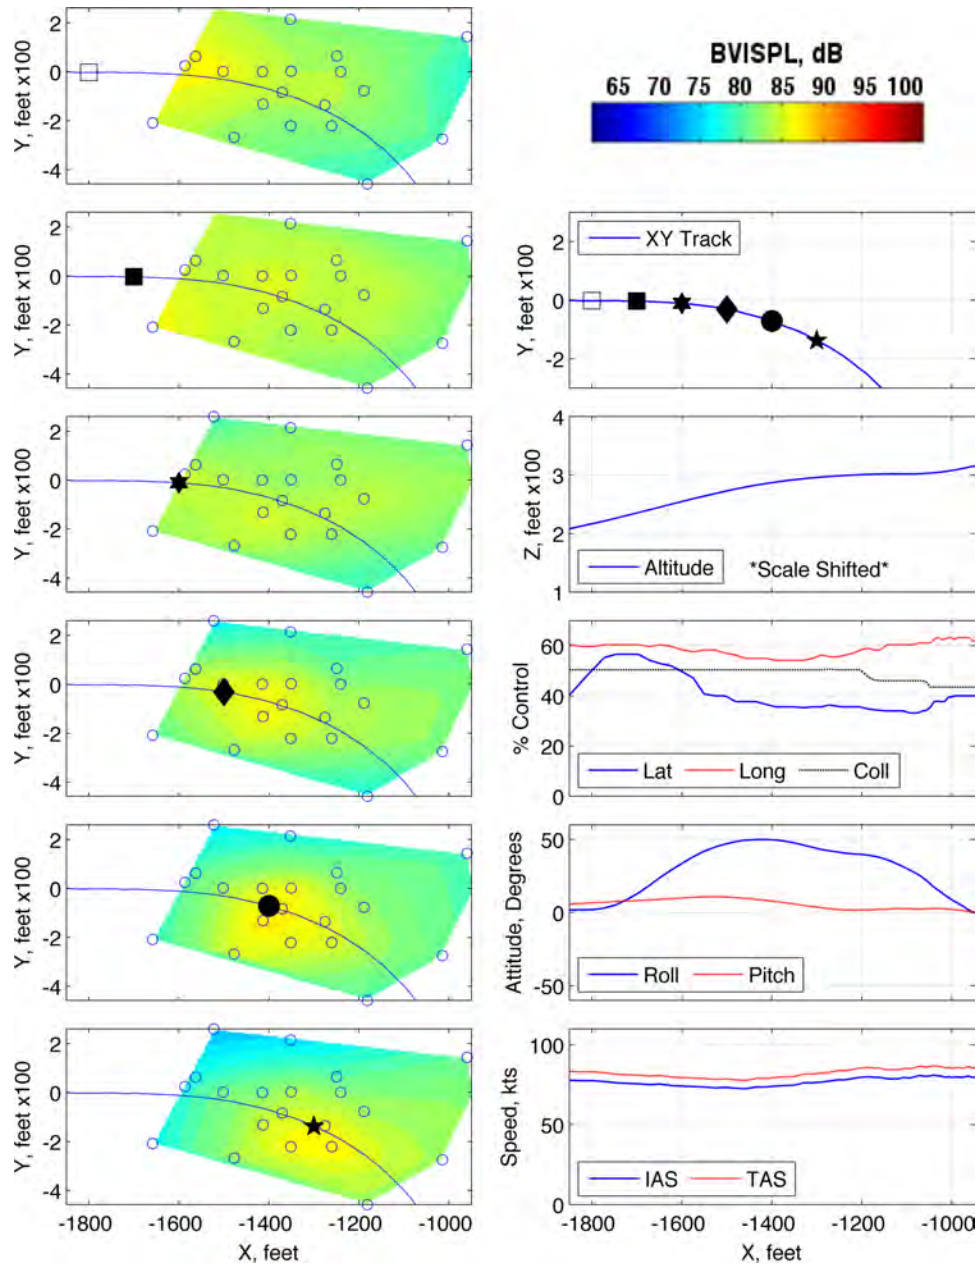


Figure 312: Maneuver condition Z18, 80 KIAS,  $0^\circ$  to  $9^\circ$ , roll right, run number 287554

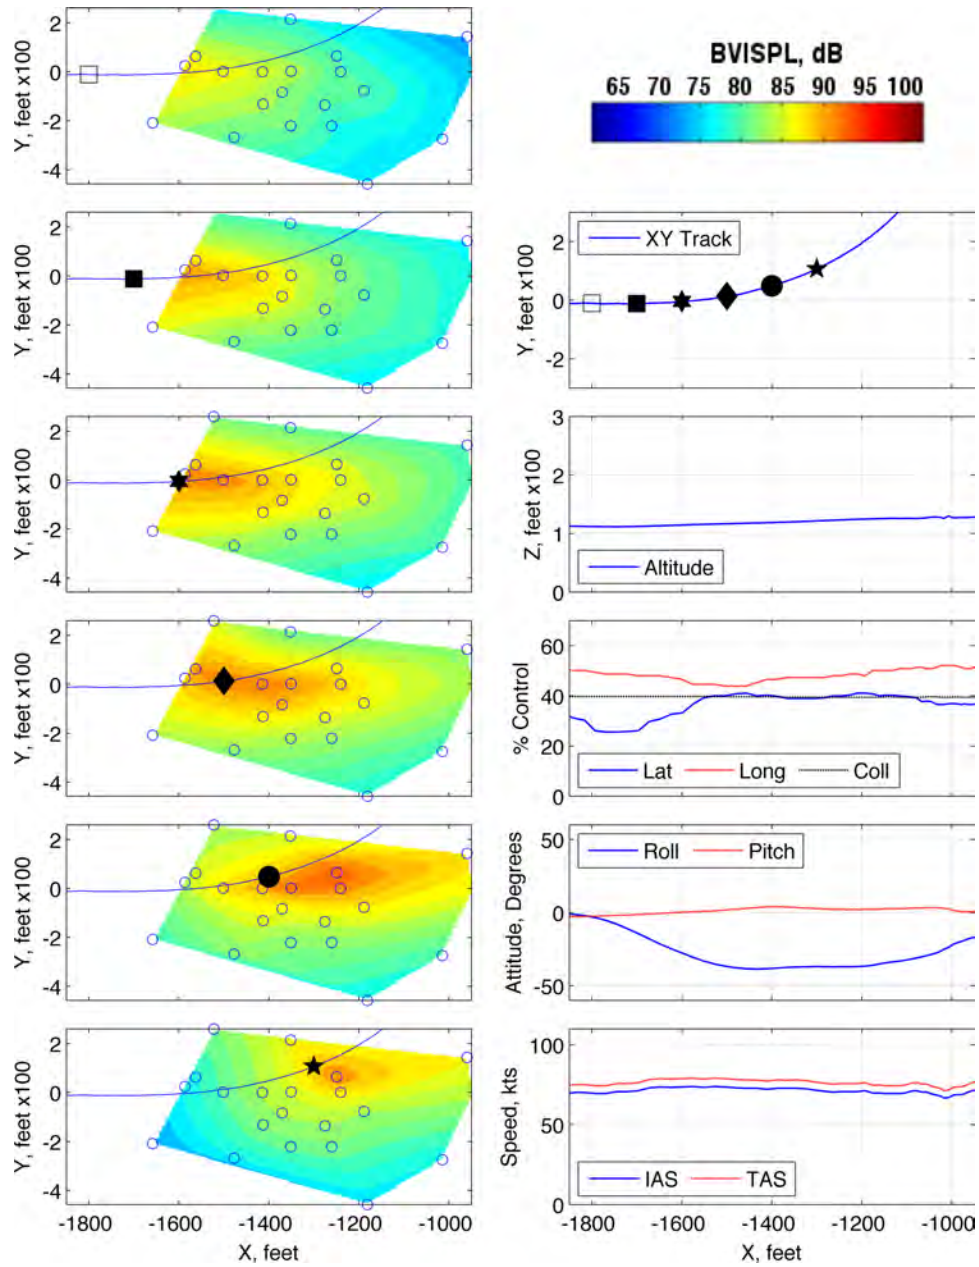


Figure 313: Maneuver condition Y3, 60 to 80 KIAS at 1 kt/s, level cyclic roll left, run number 287568

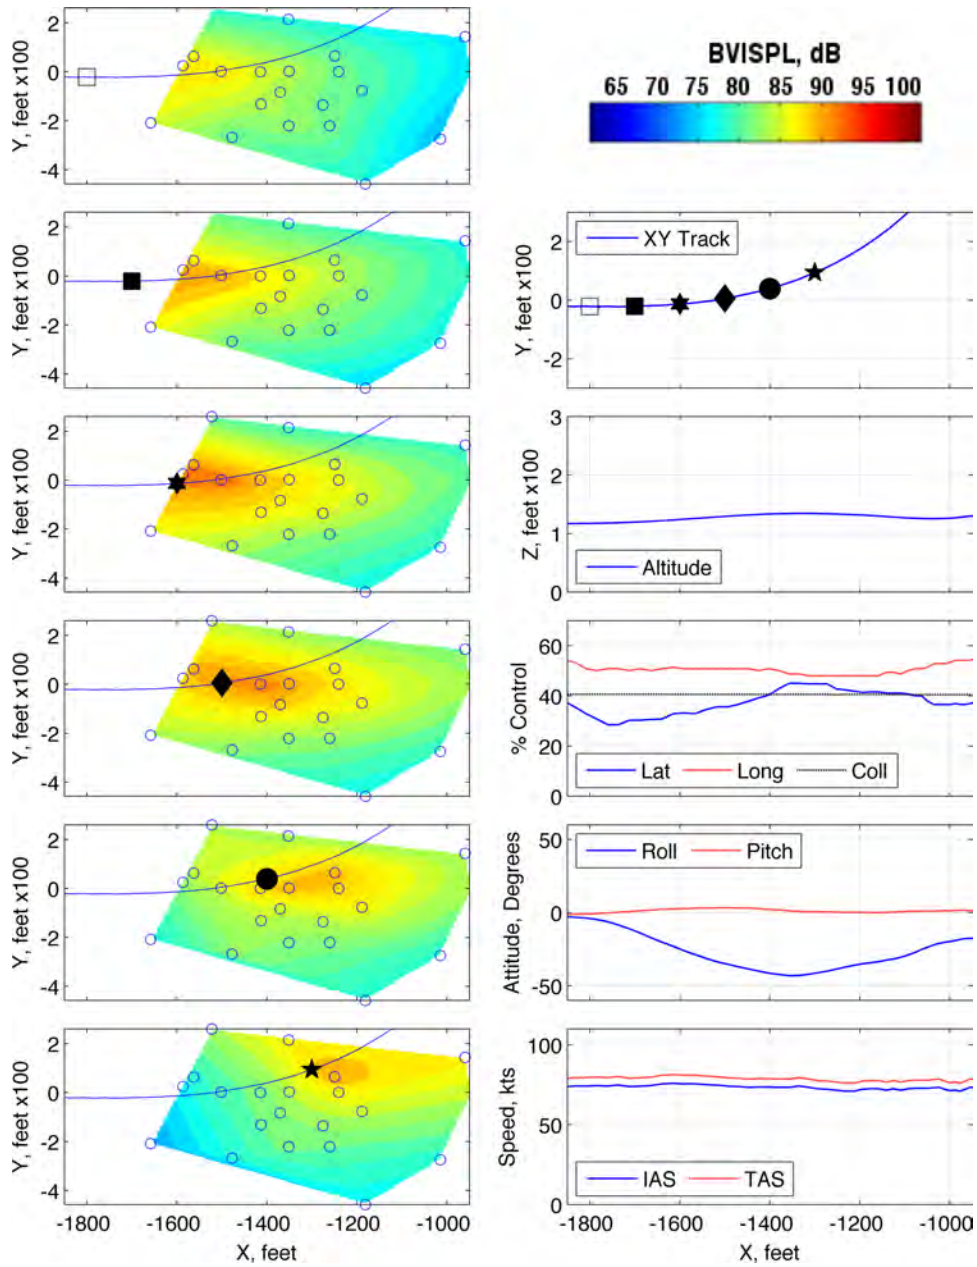


Figure 314: Maneuver condition Y3, 60 to 80 KIAS at 1 kt/s, level cyclic roll left, run number 287569

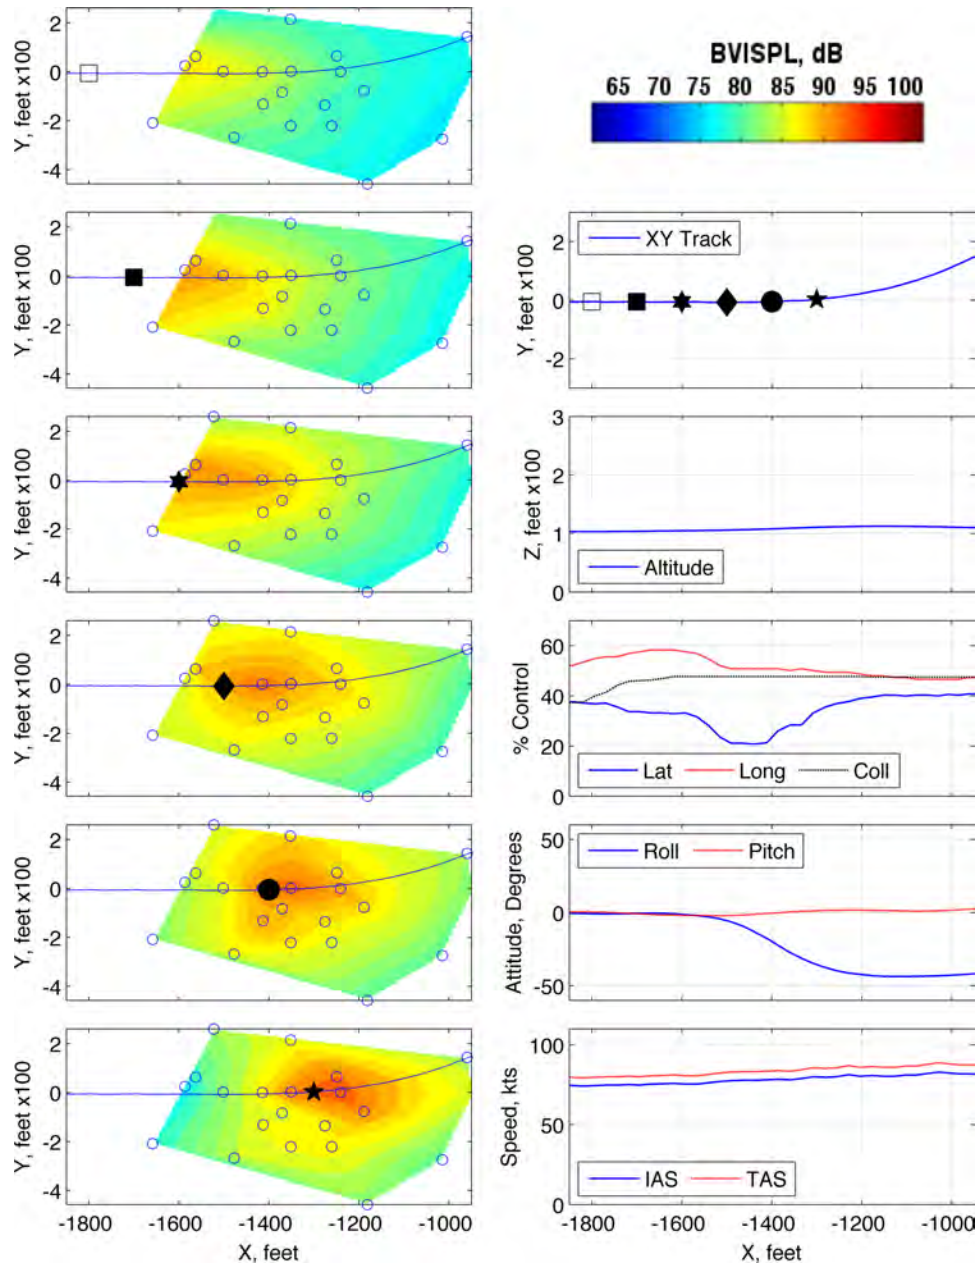


Figure 315: Maneuver condition Y6, 60 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 285508

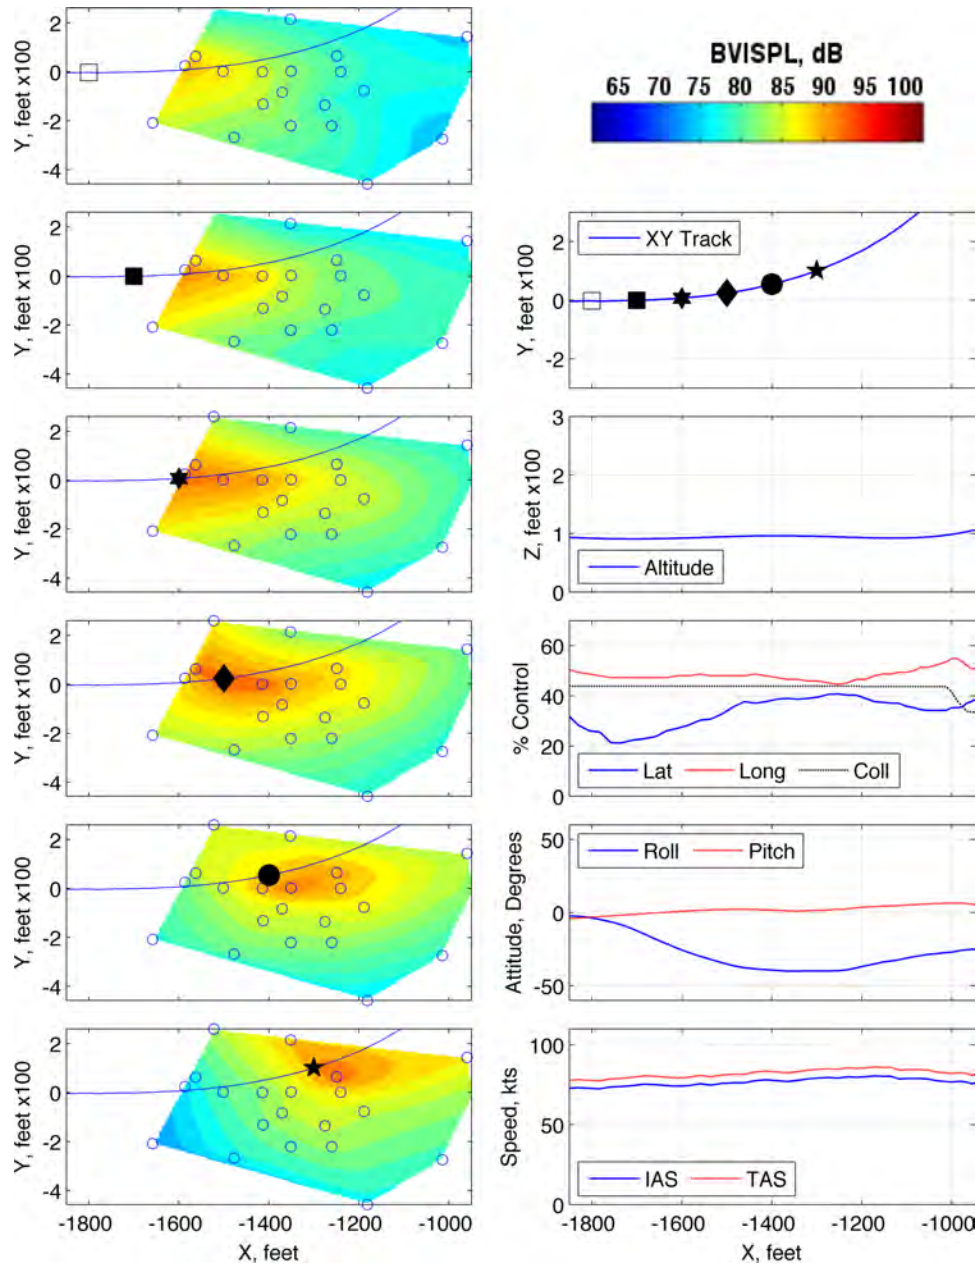


Figure 316: Maneuver condition Y6, 60 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 285509

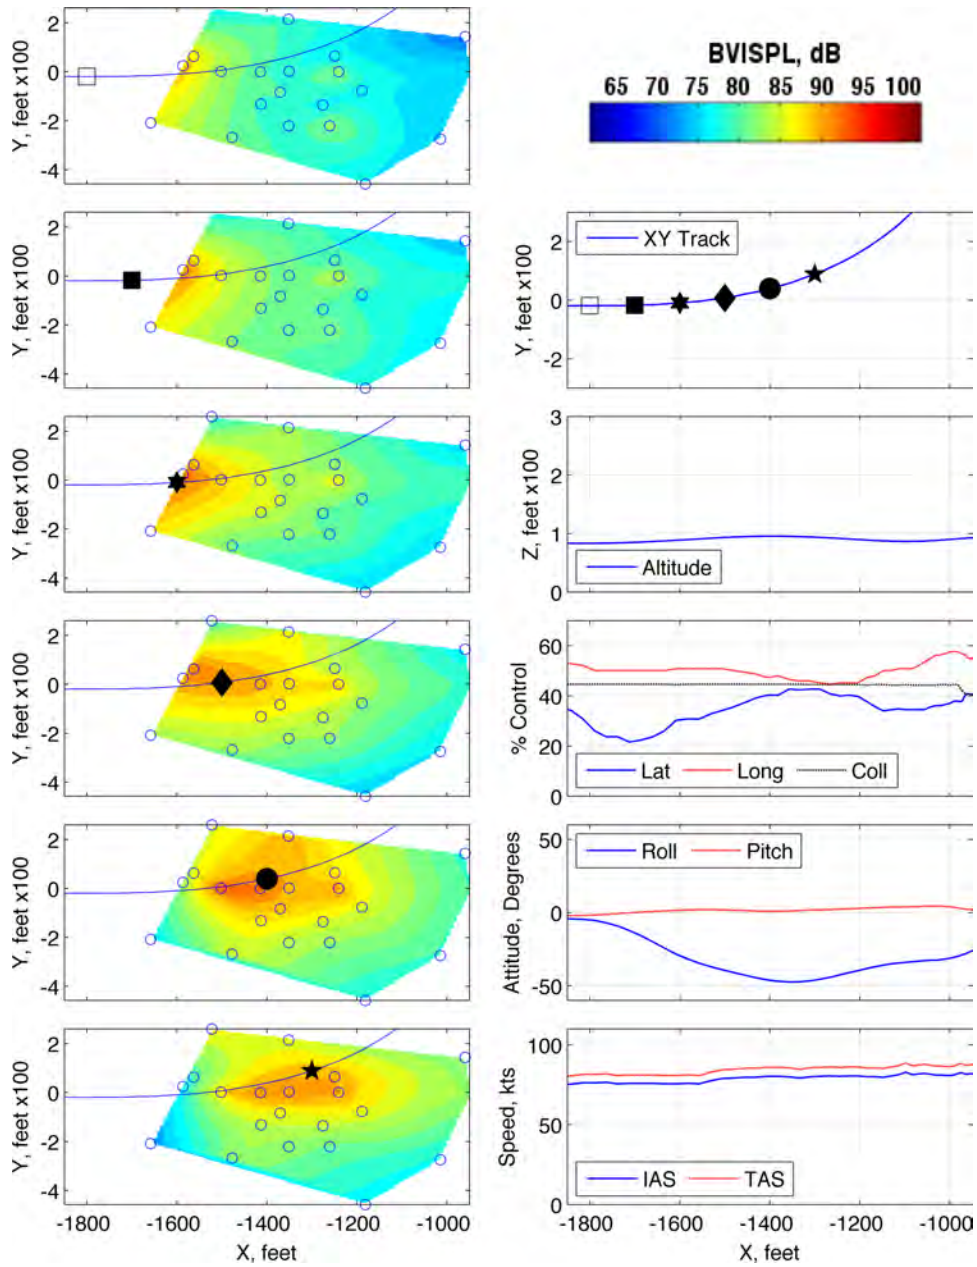


Figure 317: Maneuver condition Y6, 60 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 285510

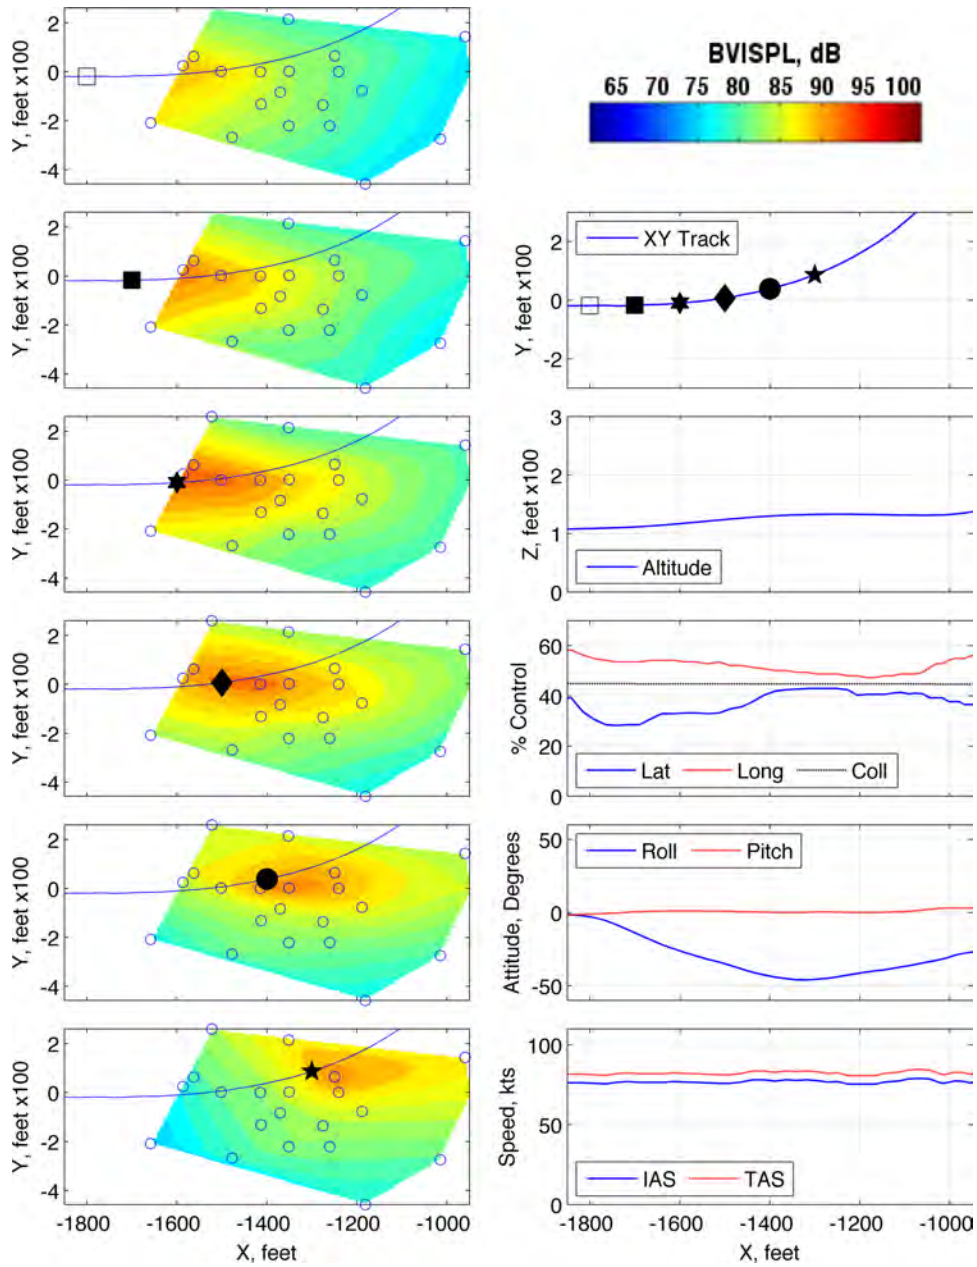


Figure 318: Maneuver condition Y6, 60 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 287571



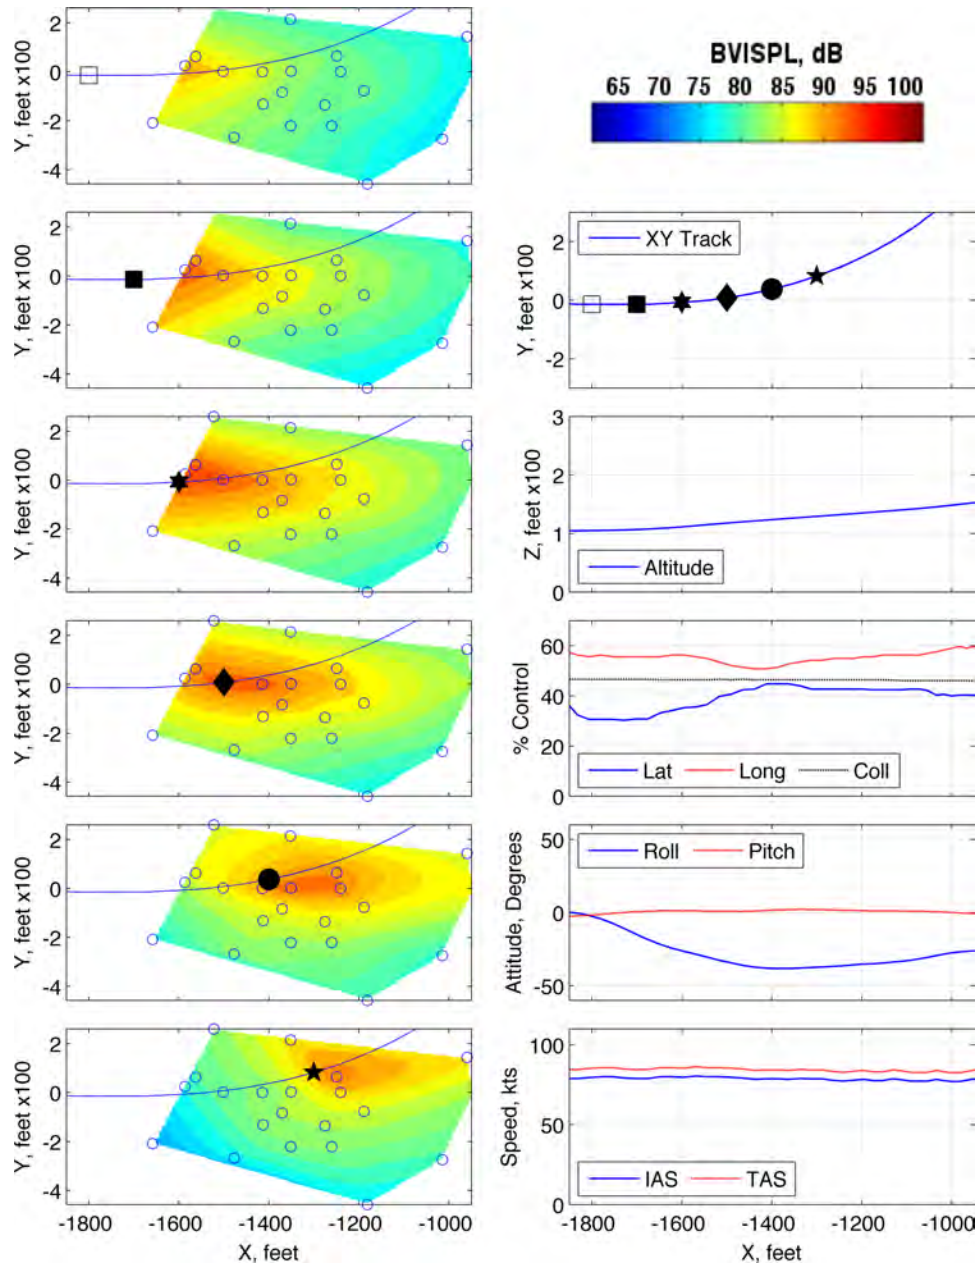


Figure 319: Maneuver condition Y6, 60 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 287573

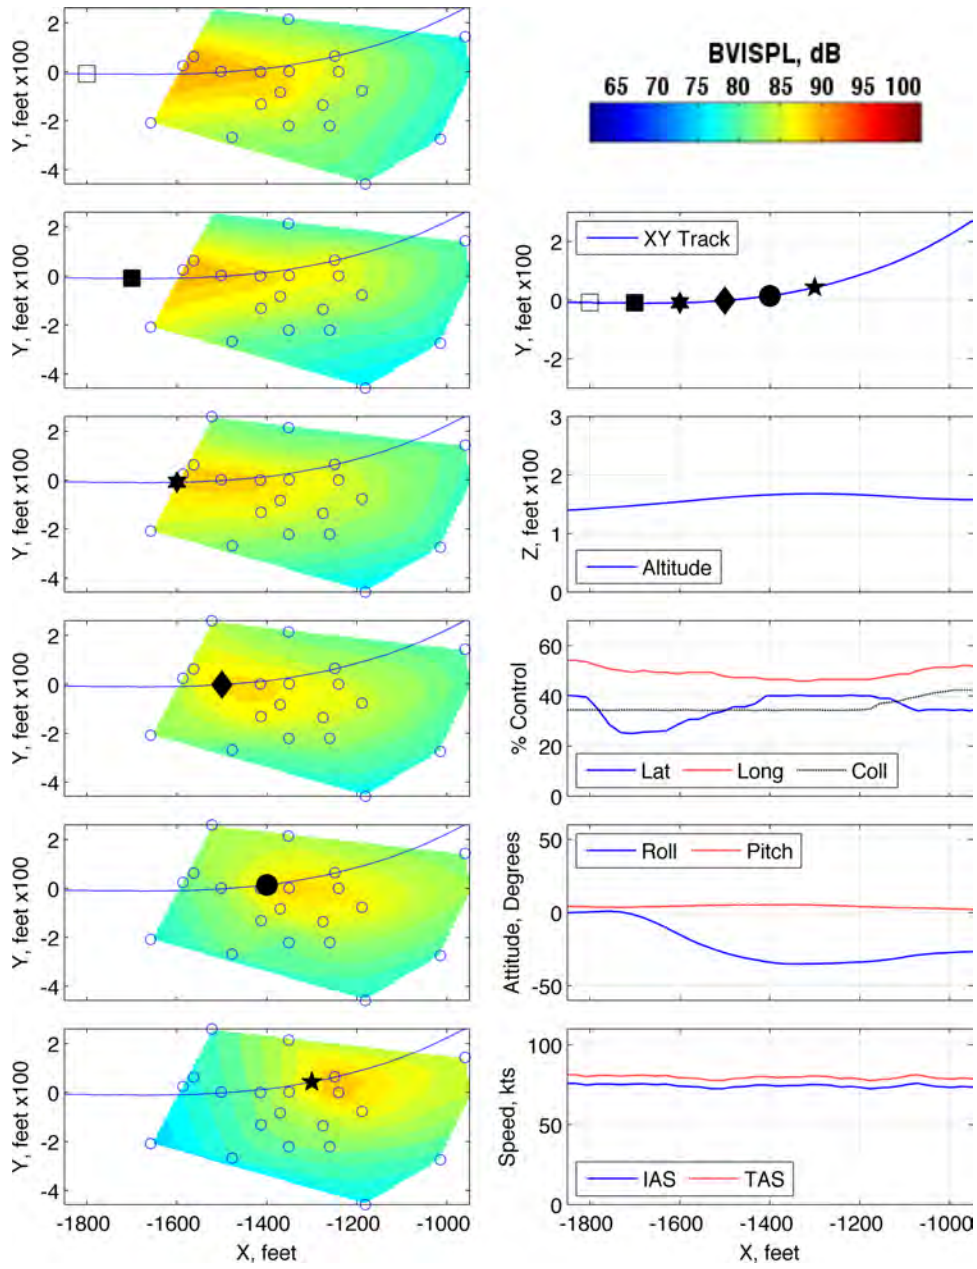


Figure 320: Maneuver condition Y12, 100 to 80 KIAS at 1 kt/s, level cyclic roll left, run number 287560

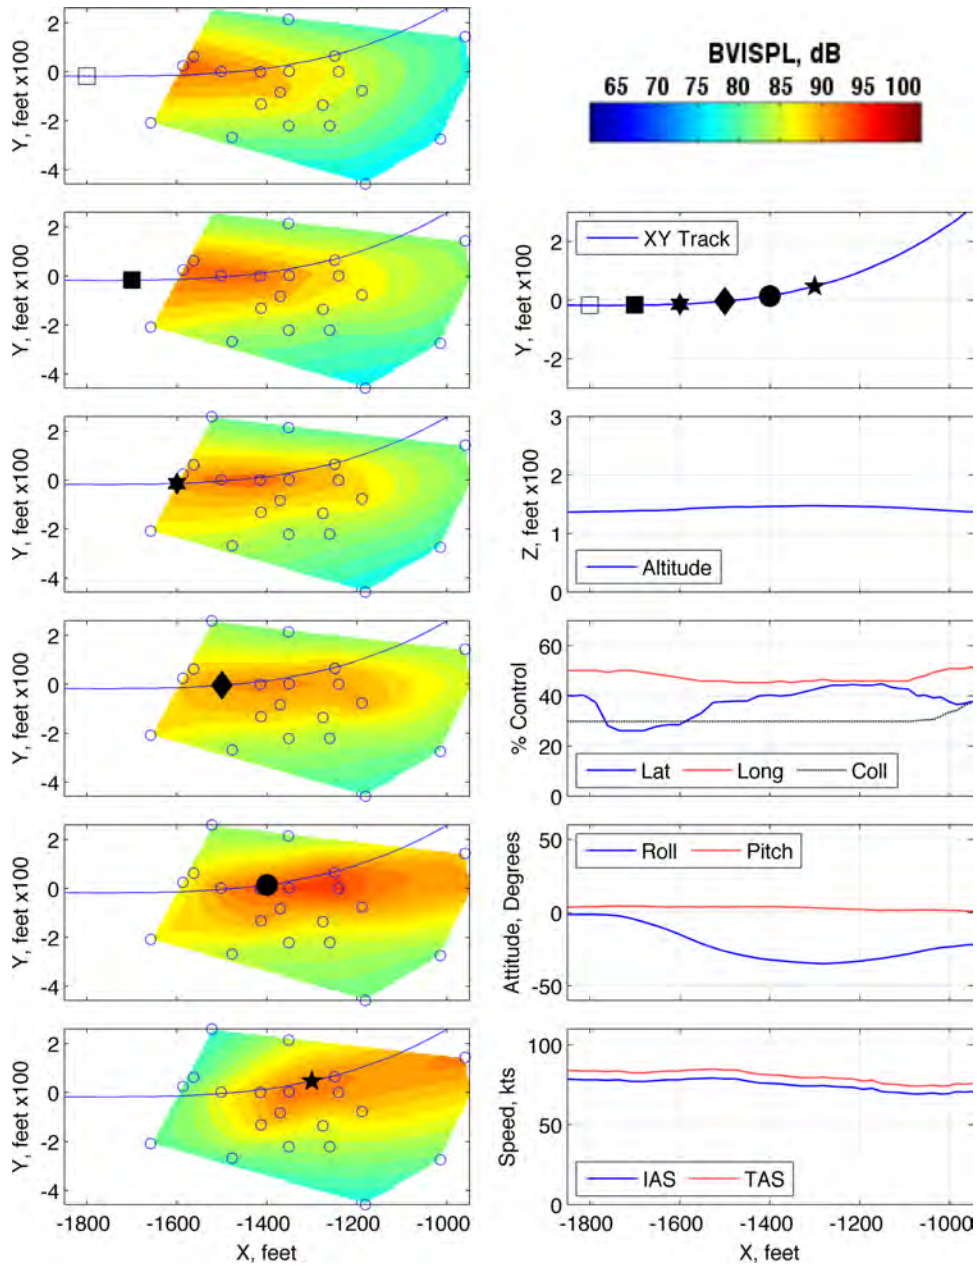


Figure 321: Maneuver condition Y12, 100 to 80 KIAS at 1 kt/s, level cyclic roll left, run number 287561

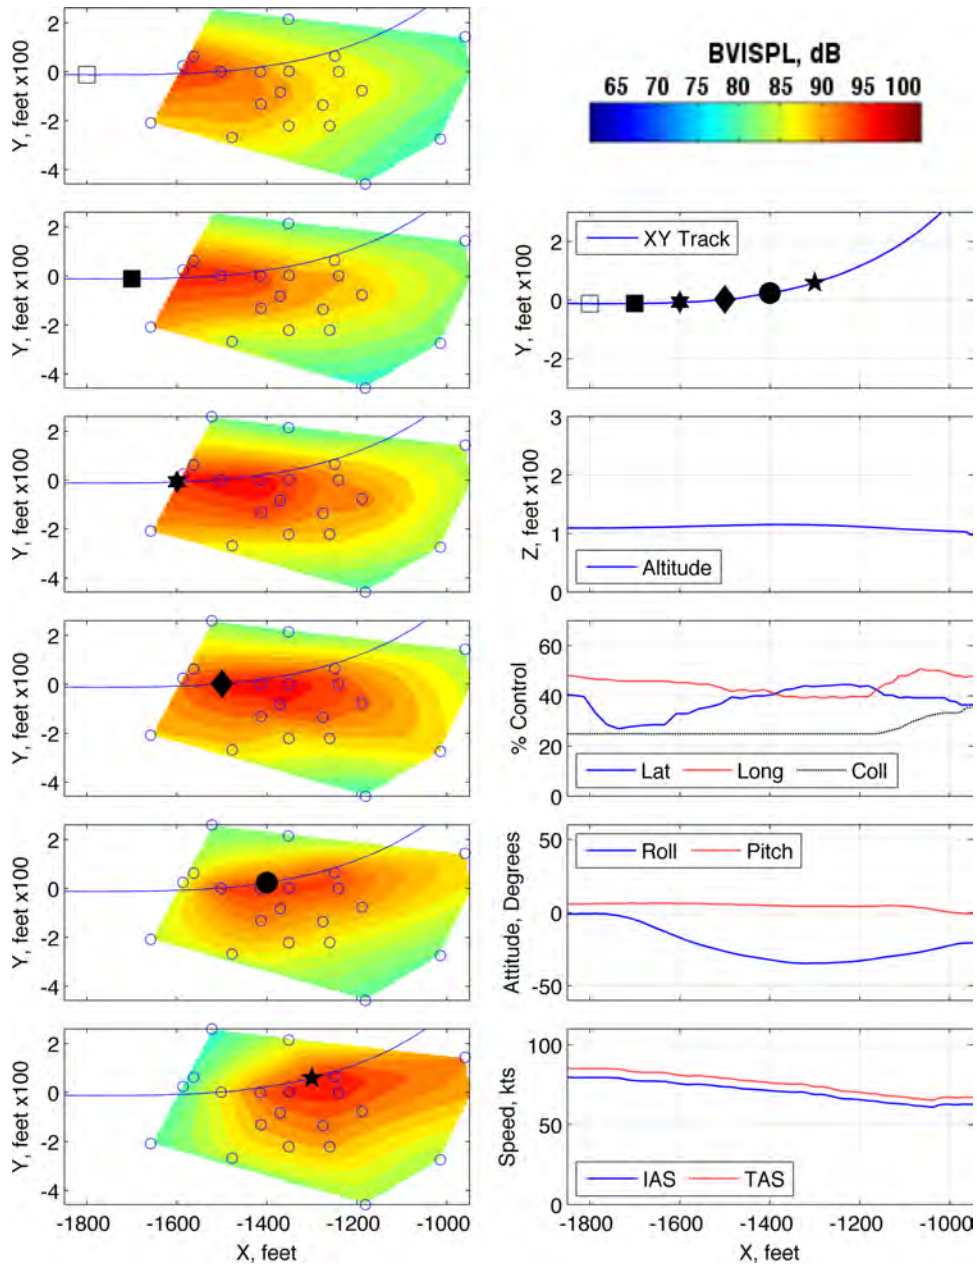


Figure 322: Maneuver condition Y15, 100 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 287564

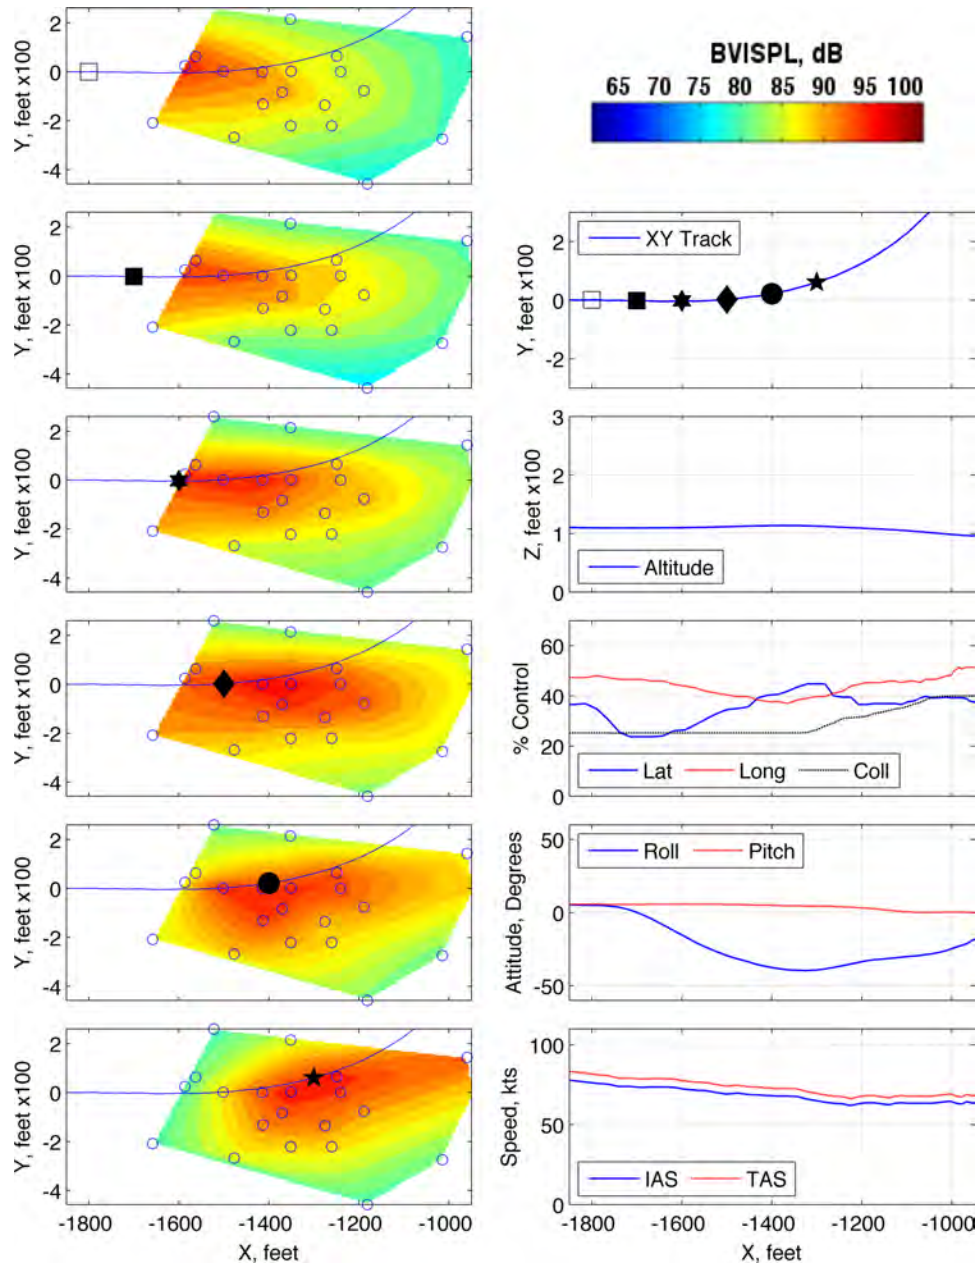


Figure 323: Maneuver condition Y15, 100 to 80 KIAS at 2 kt/s, level cyclic roll left, run number 287565

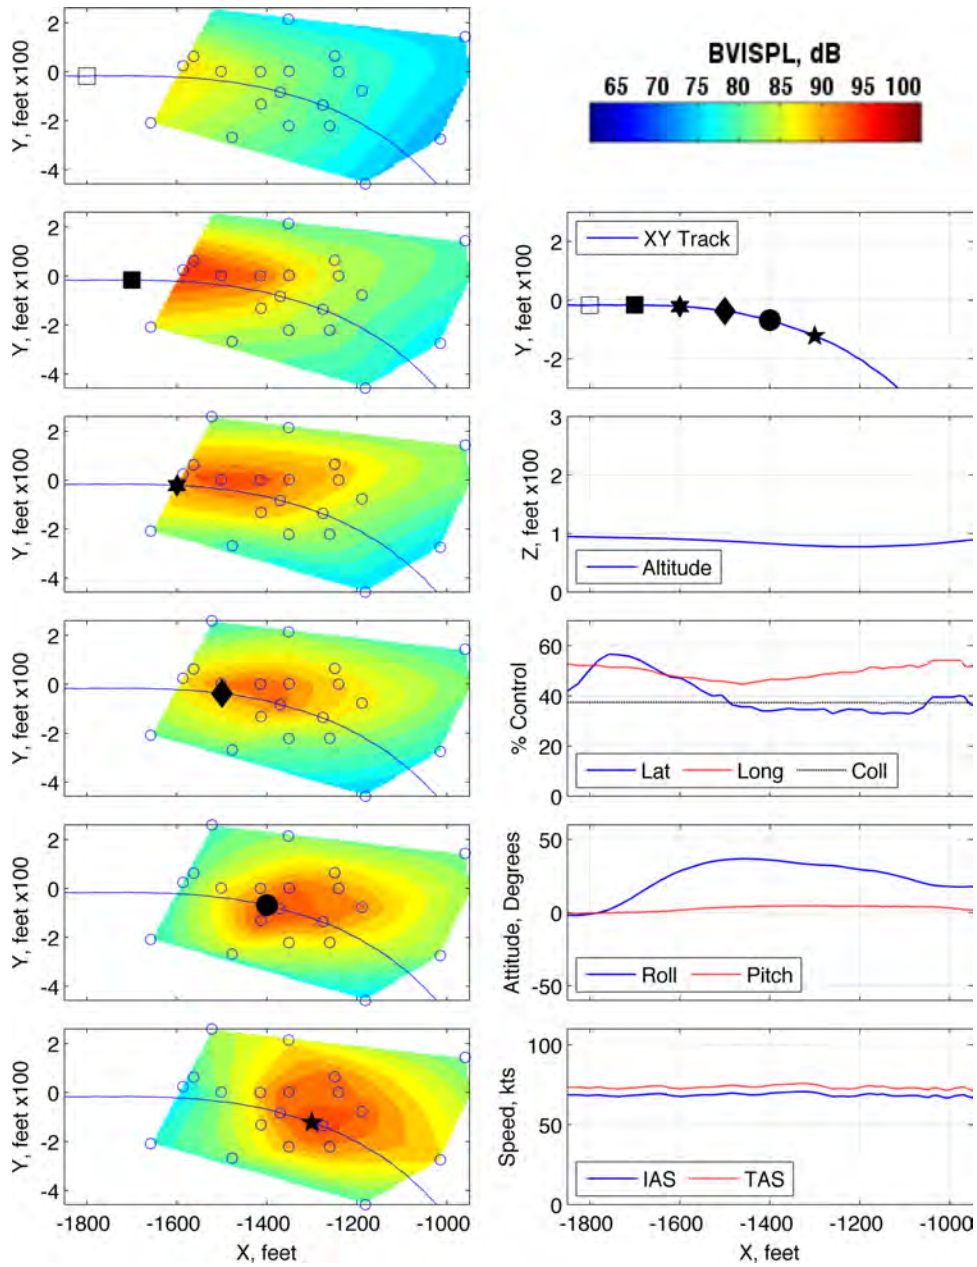


Figure 324: Maneuver condition Y21, 60 to 80 KIAS at 1 kt/s, level cyclic roll right, run number 287566

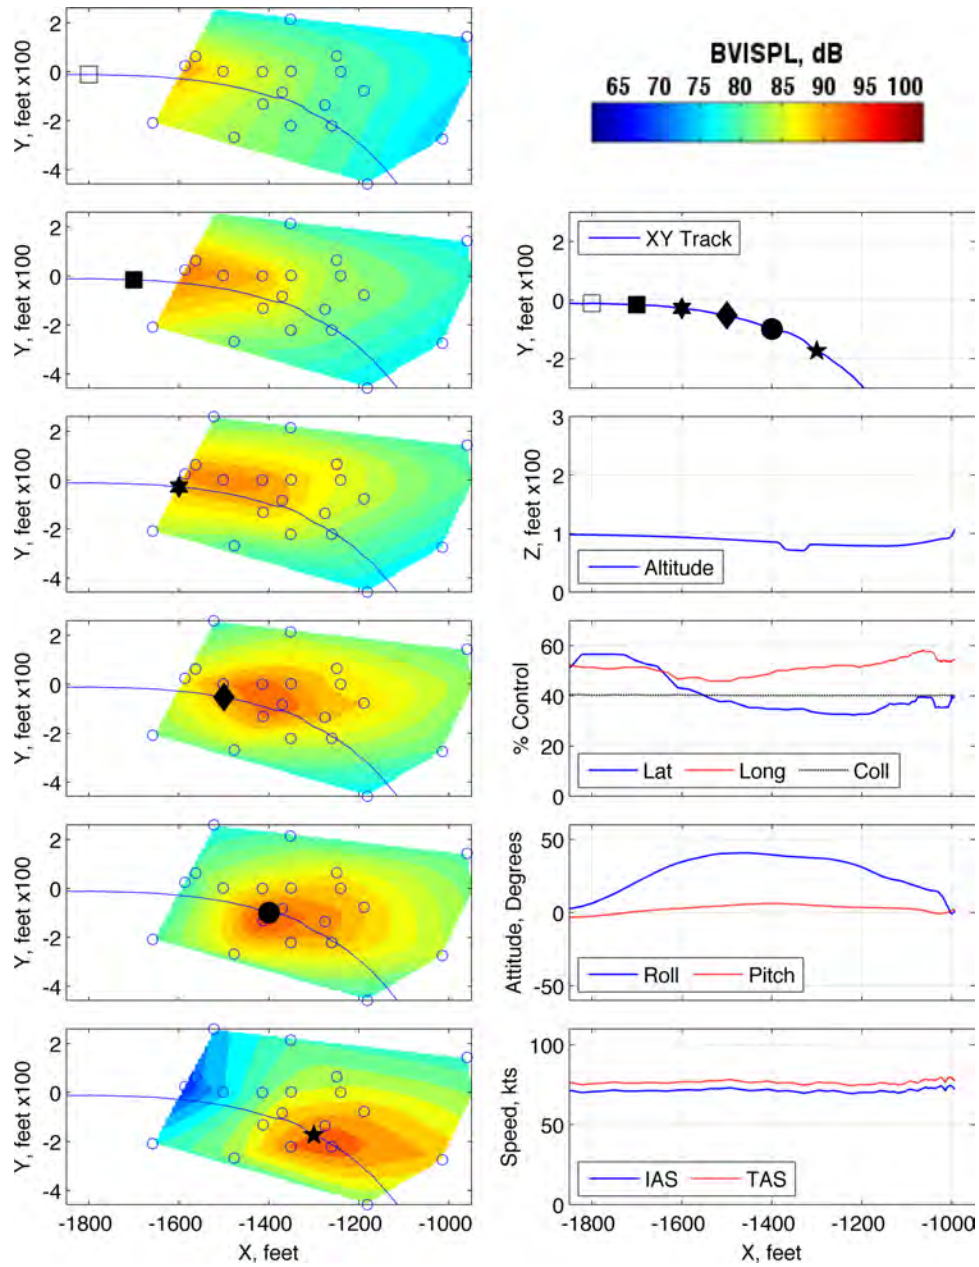


Figure 325: Maneuver condition Y21, 60 to 80 KIAS at 1 kt/s, level cyclic roll right, run number 287567

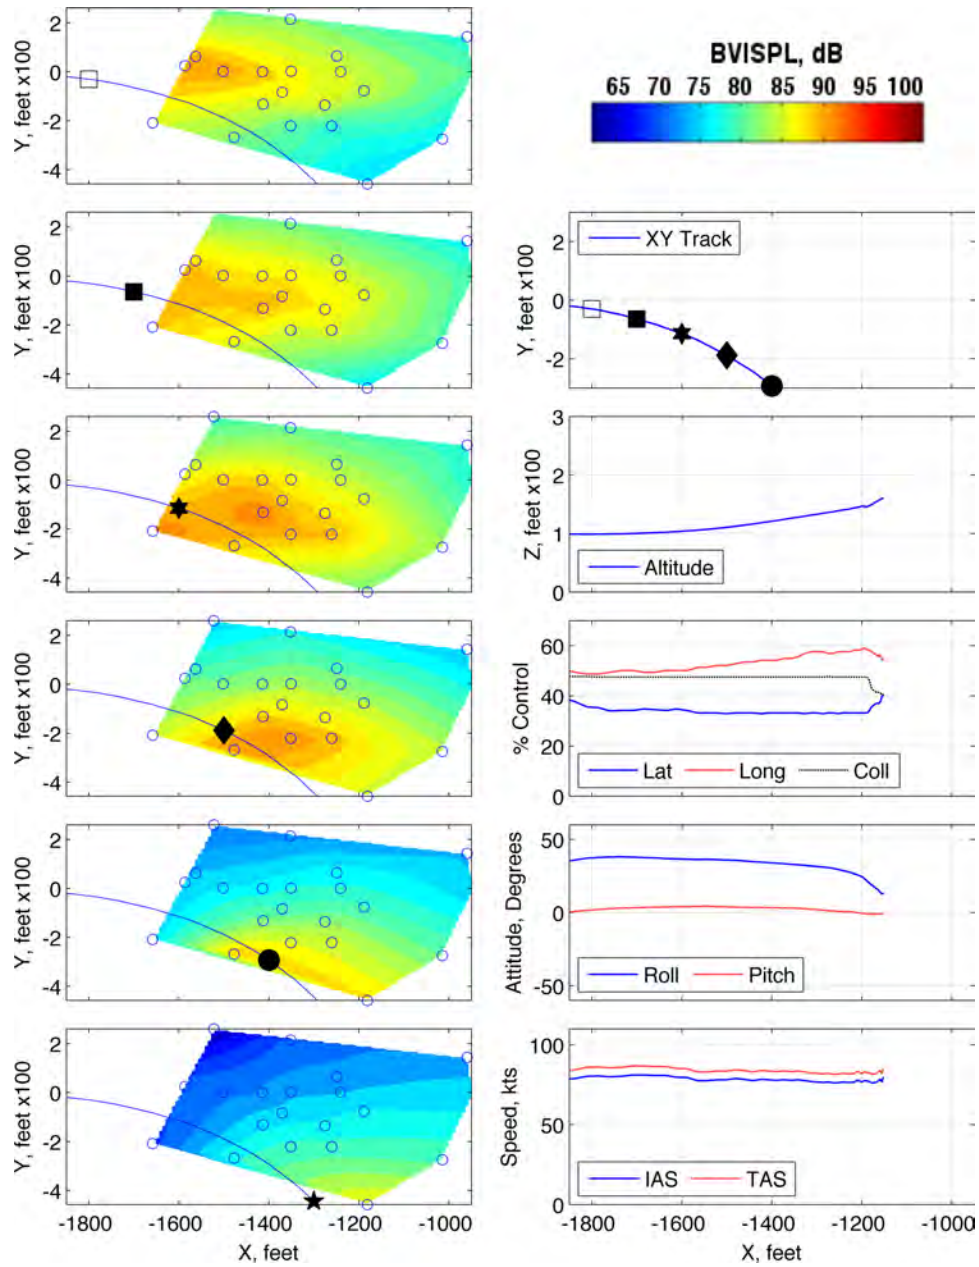


Figure 326: Maneuver condition Y24, 60 to 80 KIAS at 2 kt/s, level cyclic roll right, run number 285511



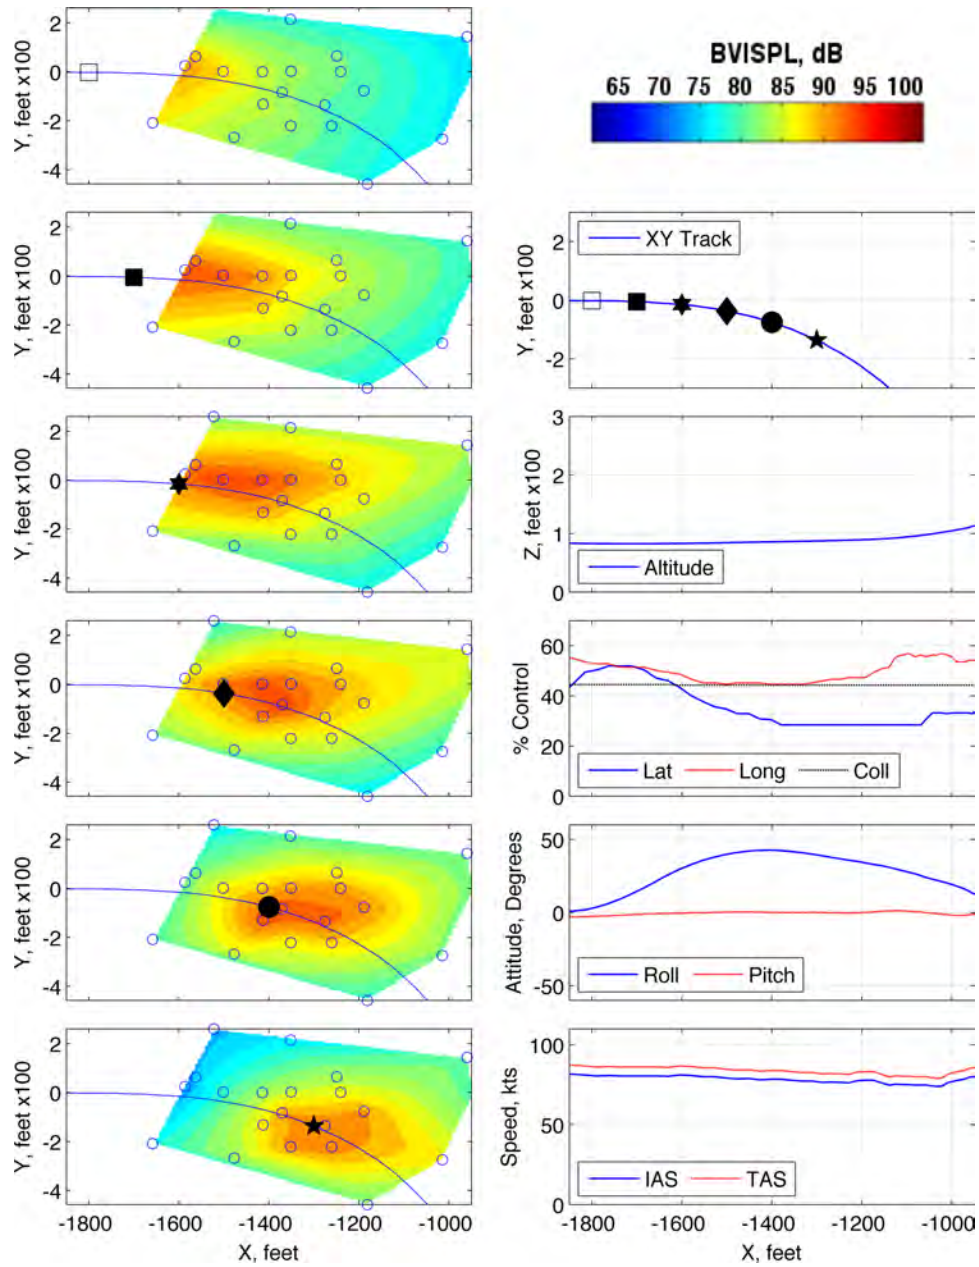


Figure 327: Maneuver condition Y24, 60 to 80 KIAS at 2 kt/s, level cyclic roll right, run number 285512

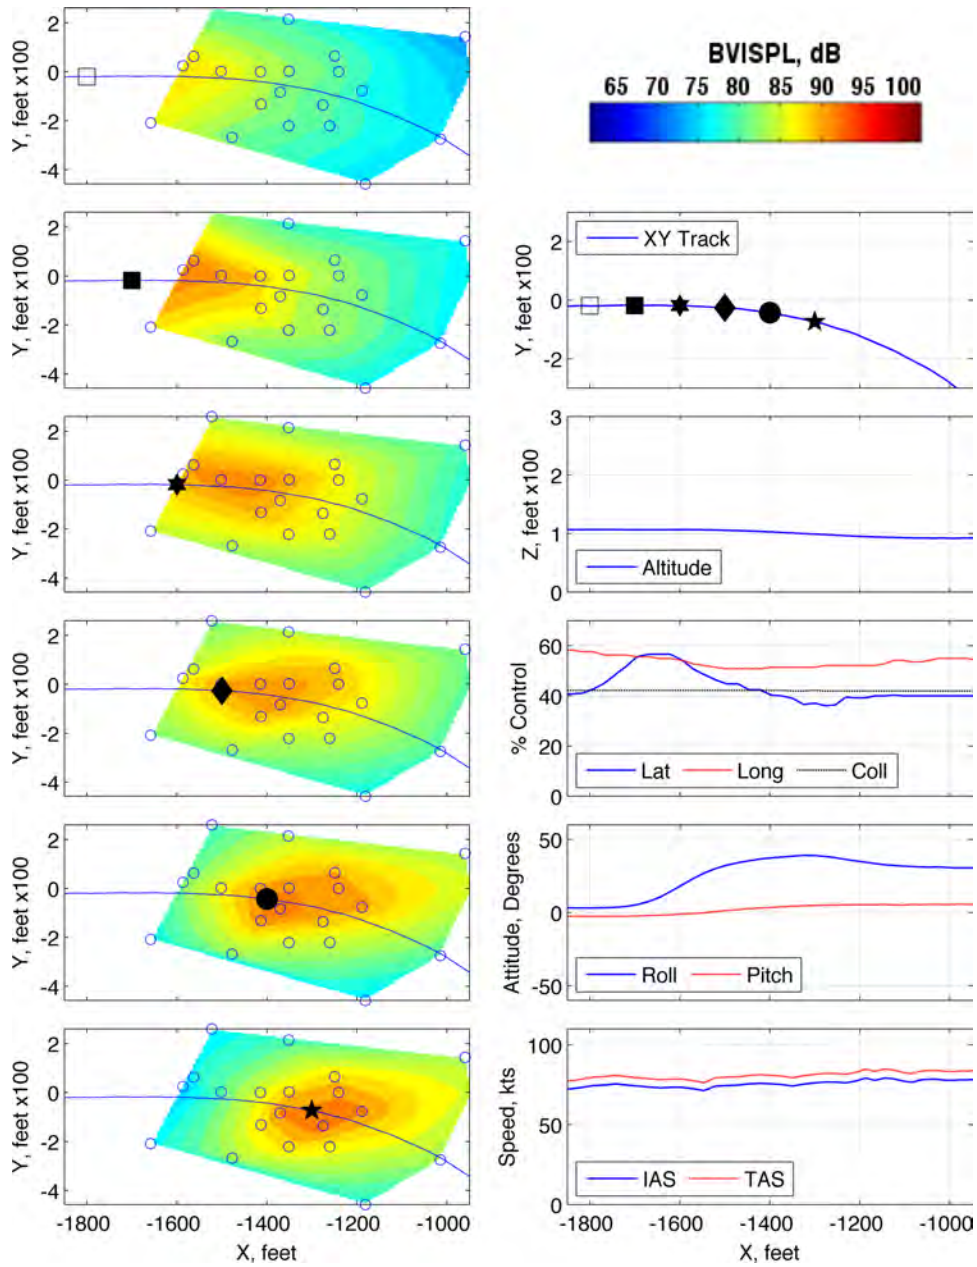


Figure 328: Maneuver condition Y24, 60 to 80 KIAS at 2 kt/s, level cyclic roll right, run number 287570

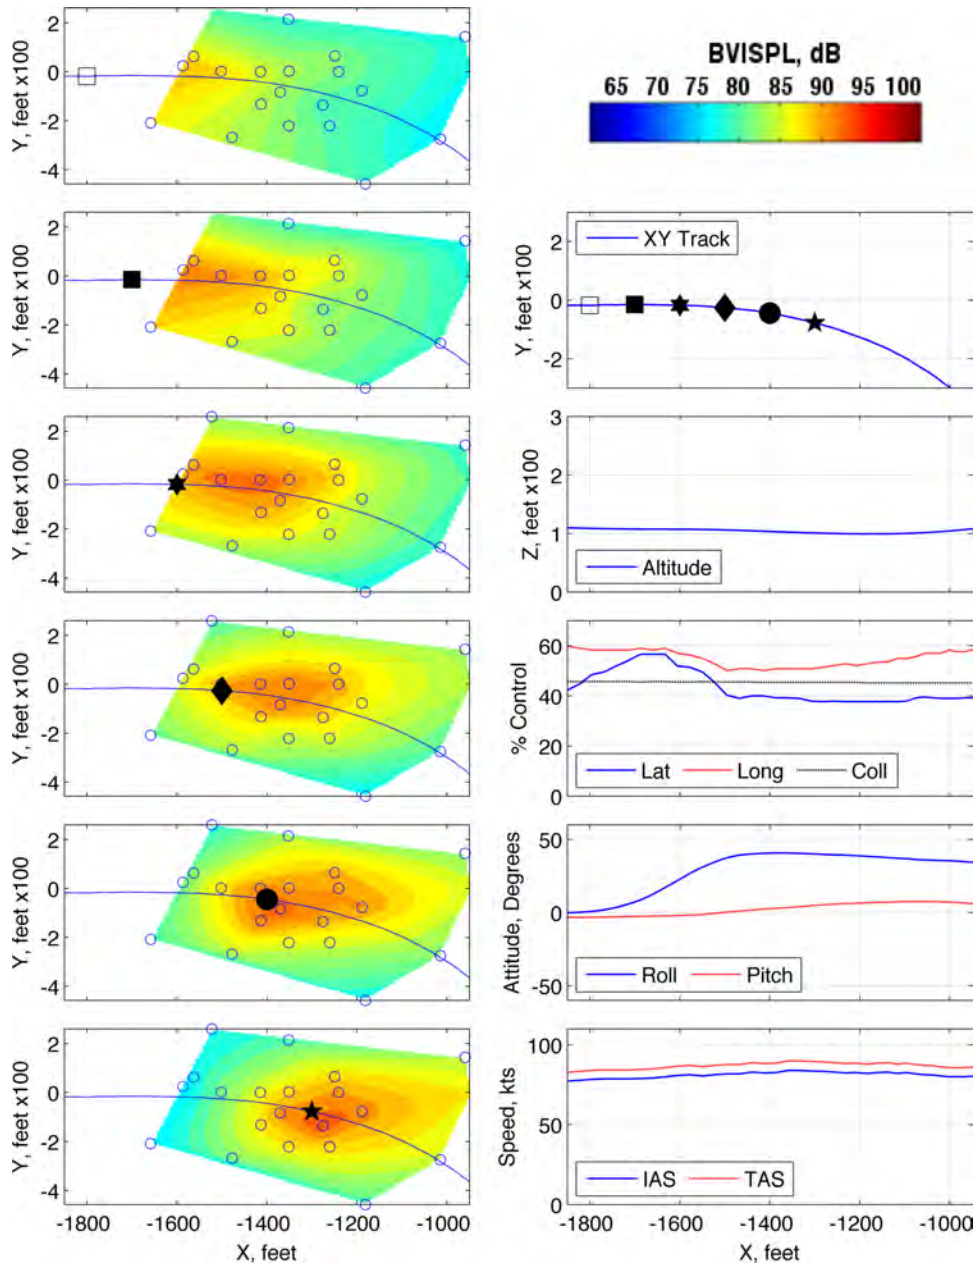


Figure 329: Maneuver condition Y24, 60 to 80 KIAS at 2 kt/s, level cyclic roll right, run number 287572

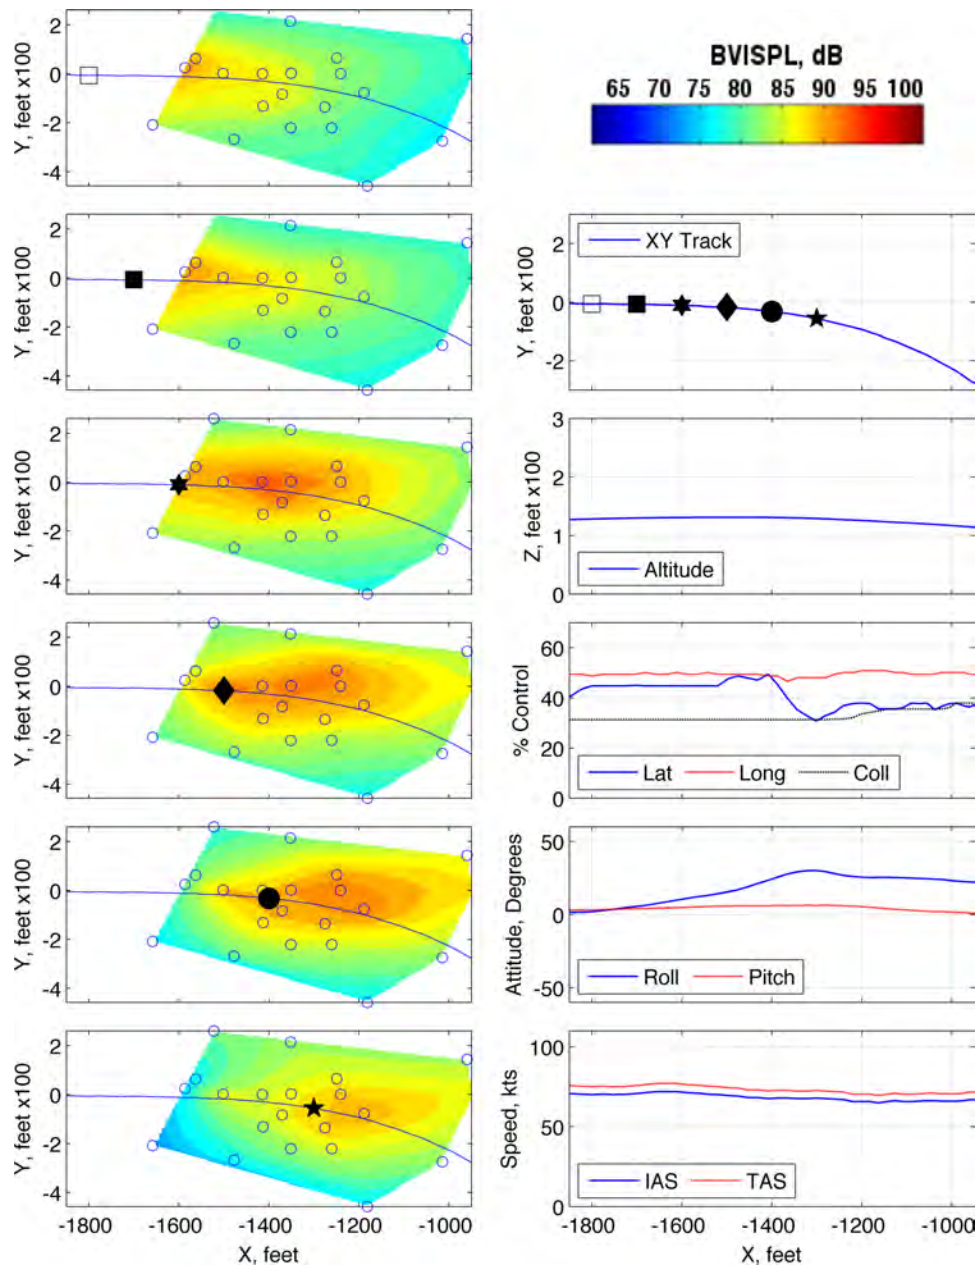


Figure 330: Maneuver condition Y30, 100 to 80 KIAS at 1 kt/s, level cyclic roll right, run number 287557

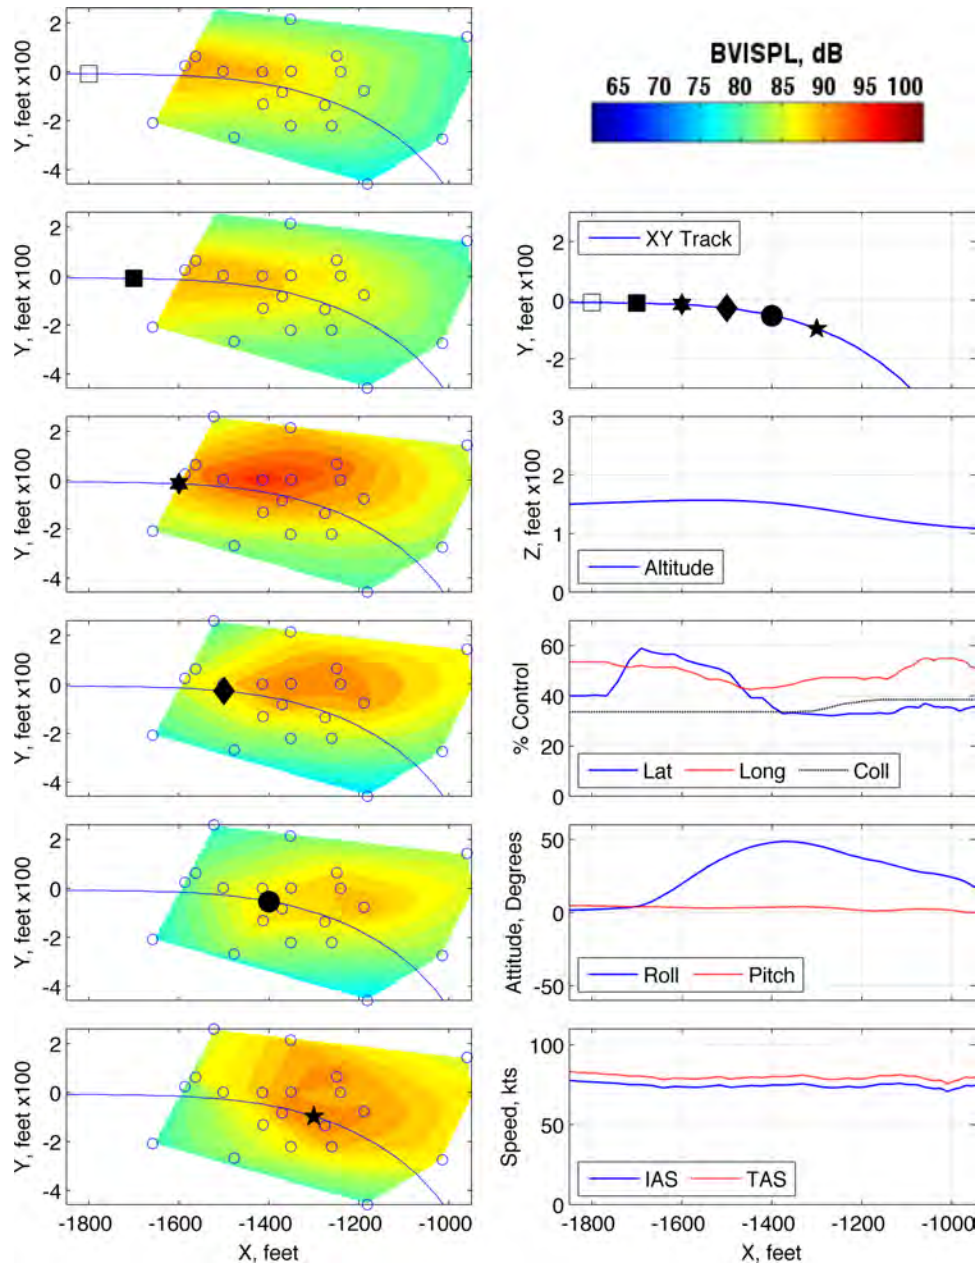


Figure 331: Maneuver condition Y30, 100 to 80 KIAS at 1 kt/s, level cyclic roll right, run number 287558

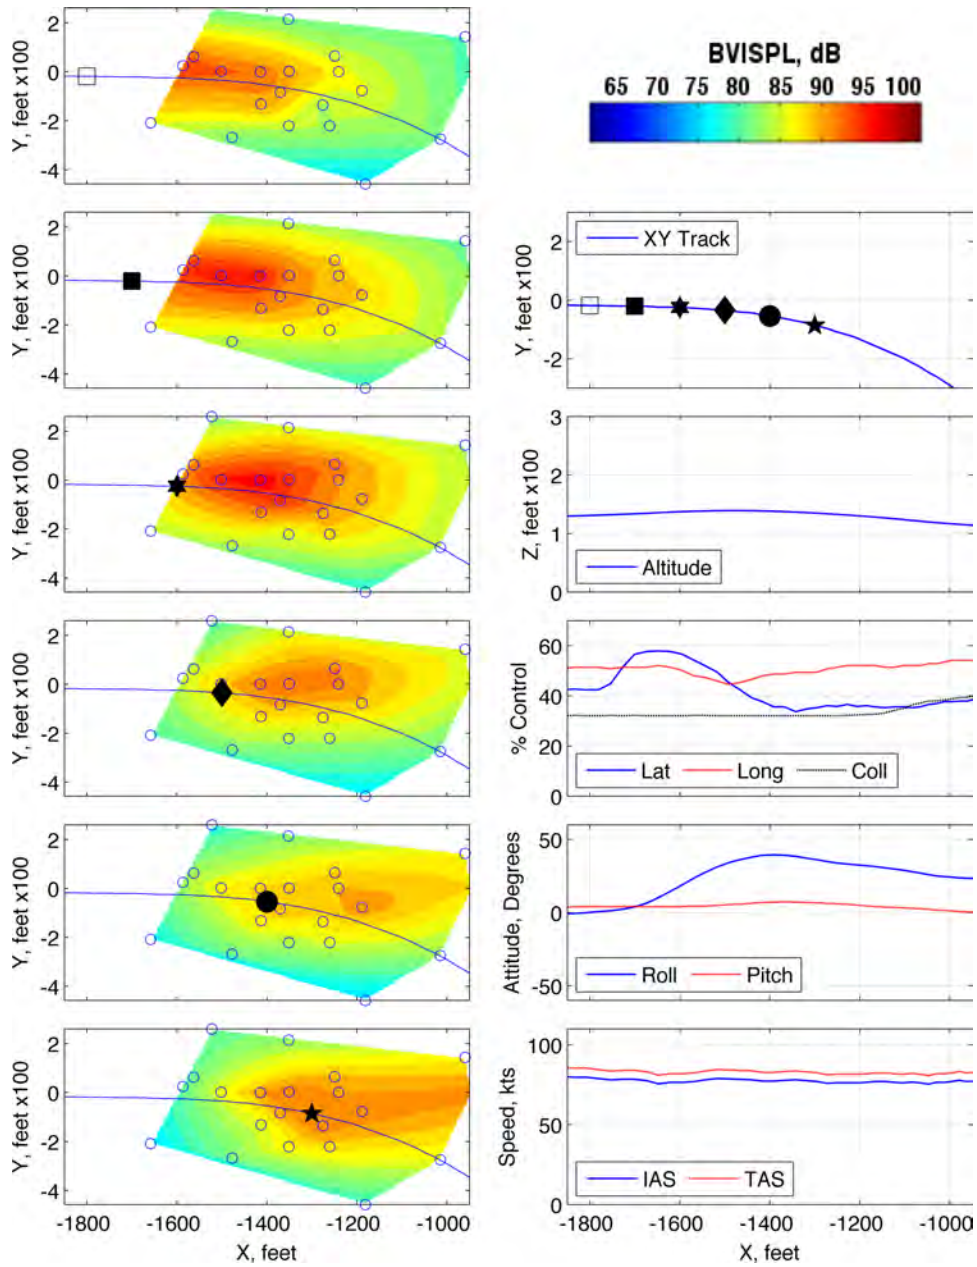


Figure 332: Maneuver condition Y30, 100 to 80 KIAS at 1 kt/s, level cyclic roll right, run number 287559

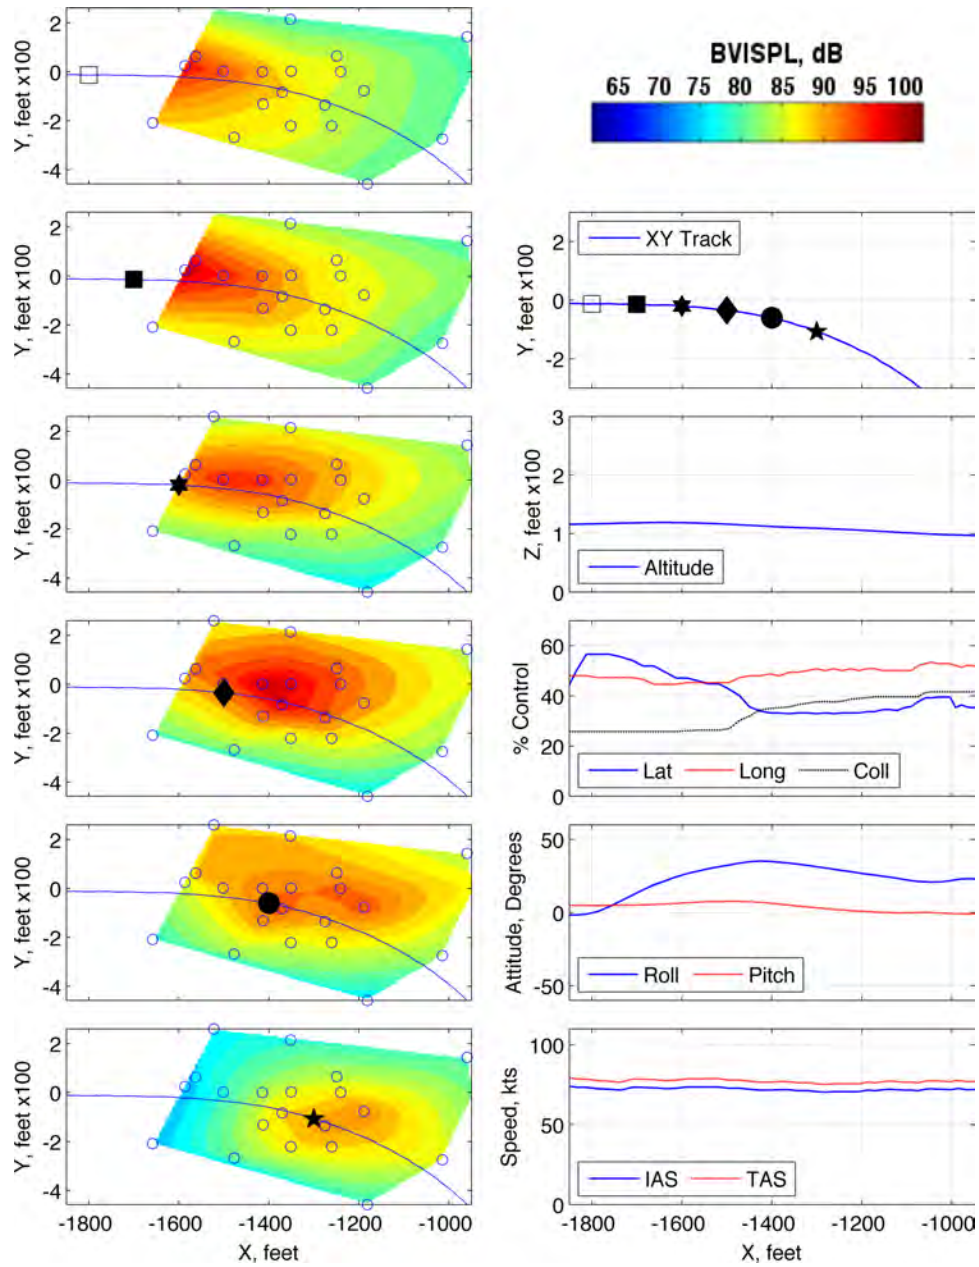


Figure 333: Maneuver condition Y33, 100 to 80 KIAS at 2 kt/s, level cyclic roll right, run number 287562

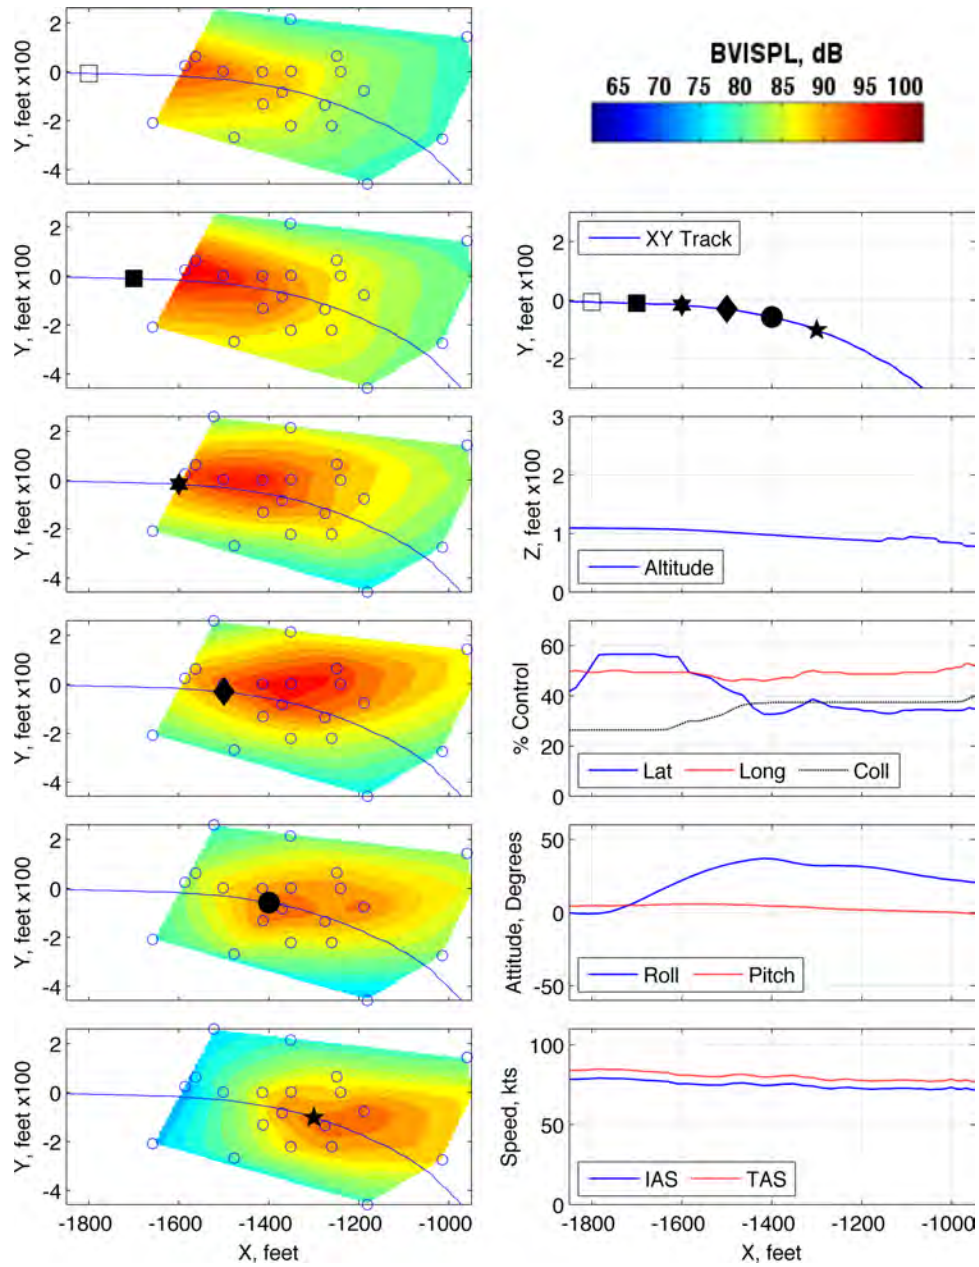


Figure 334: Maneuver condition Y33, 100 to 80 KIAS at 2 kt/s, level cyclic roll right, run number 287563



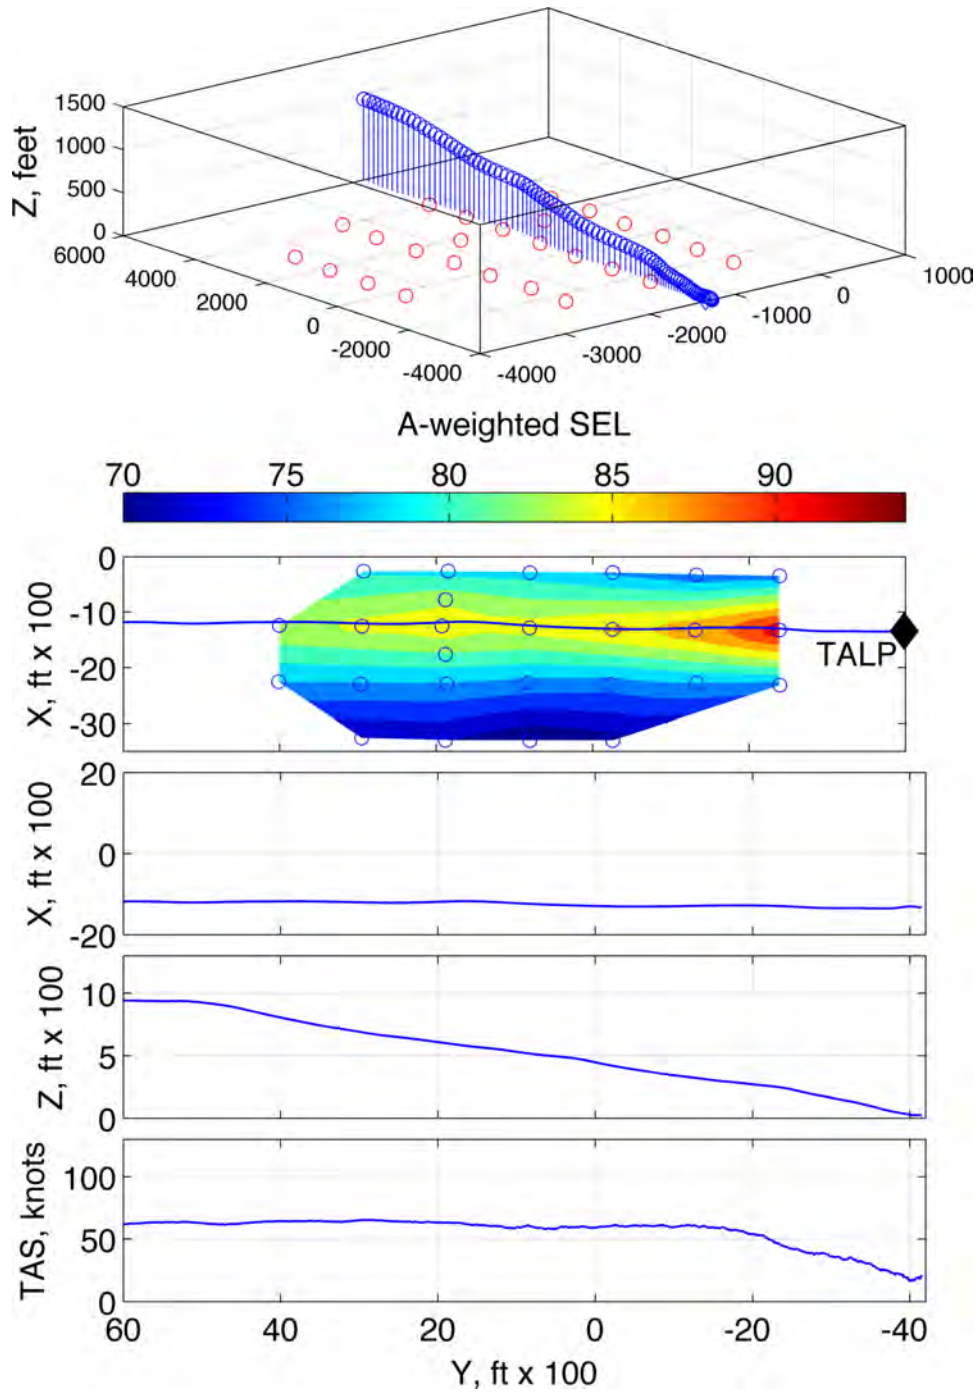


Figure 335: Terminal area condition T1, 60 KIAS constant speed,  $-6^\circ$ , run number 288621

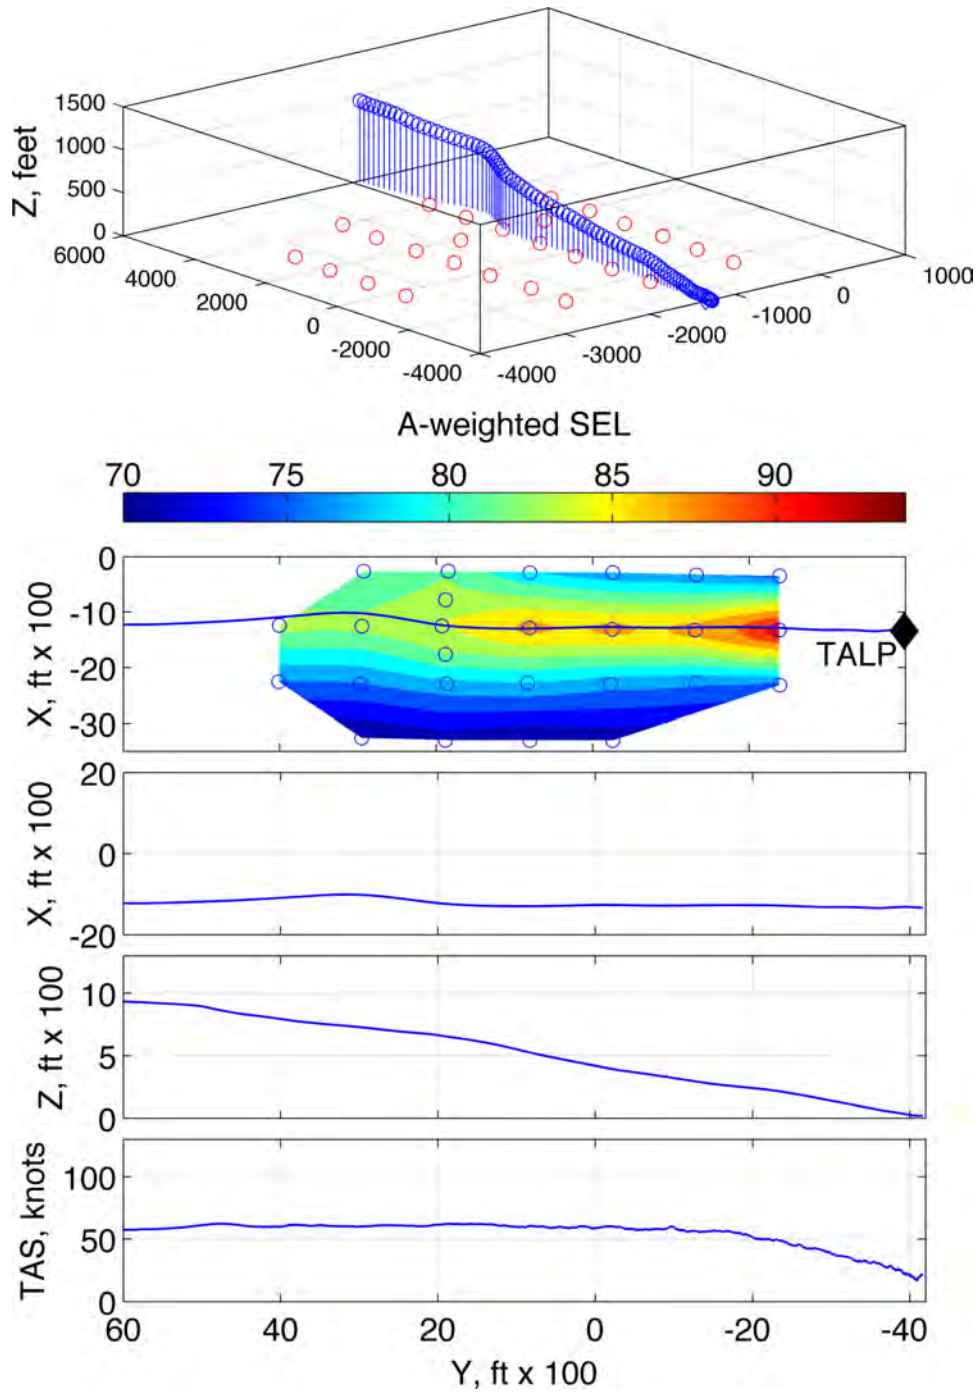


Figure 336: Terminal area condition T1, 60 KIAS constant speed,  $-6^\circ$ , run number 288623

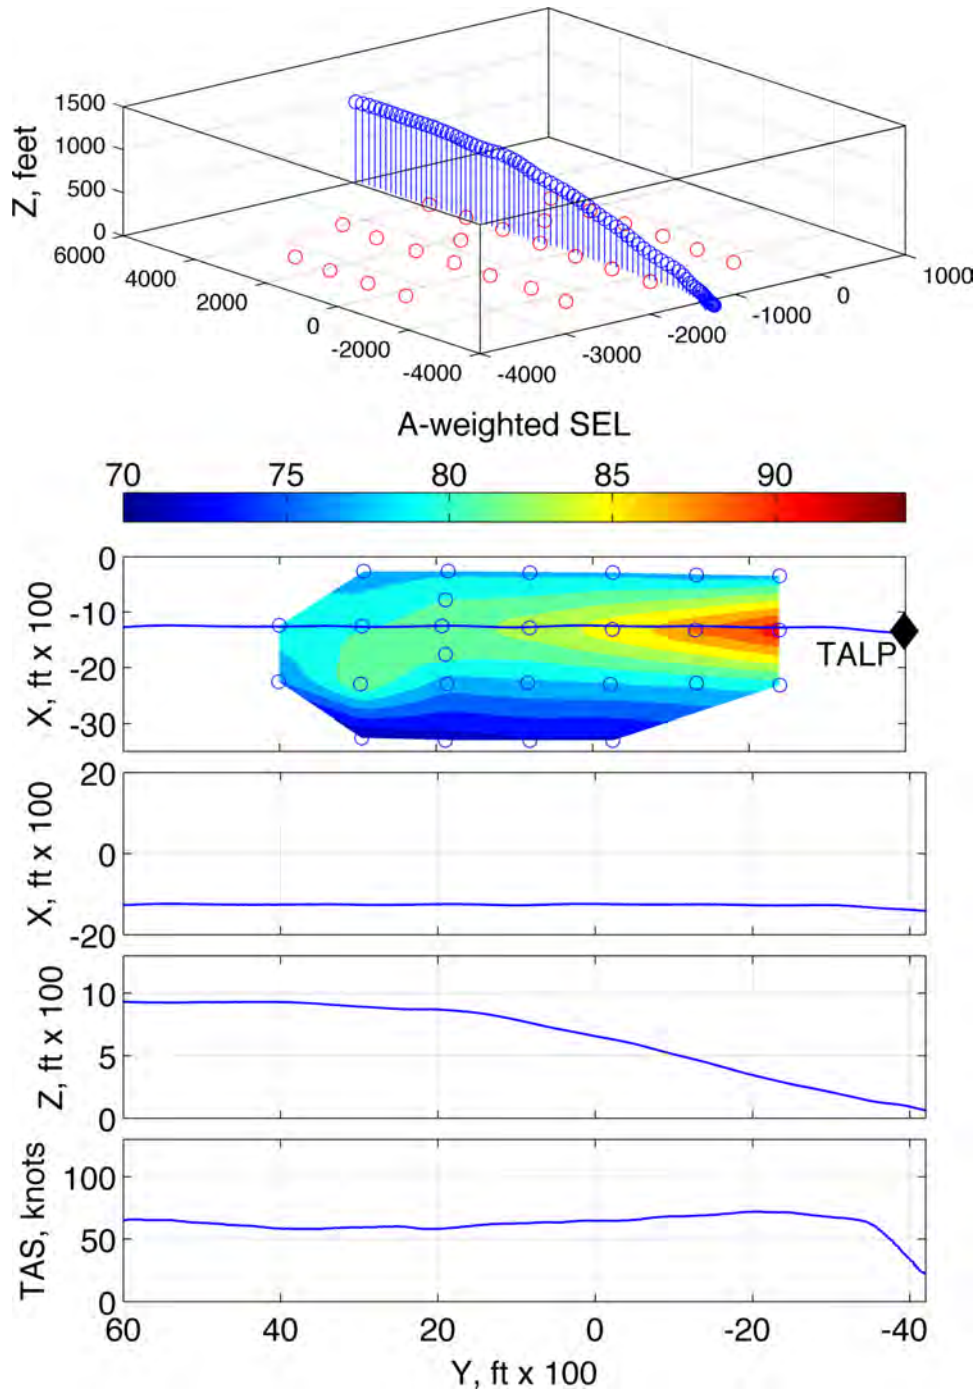


Figure 337: Terminal area condition T2, 60 KIAS constant speed,  $-9^\circ$ , run number 288610

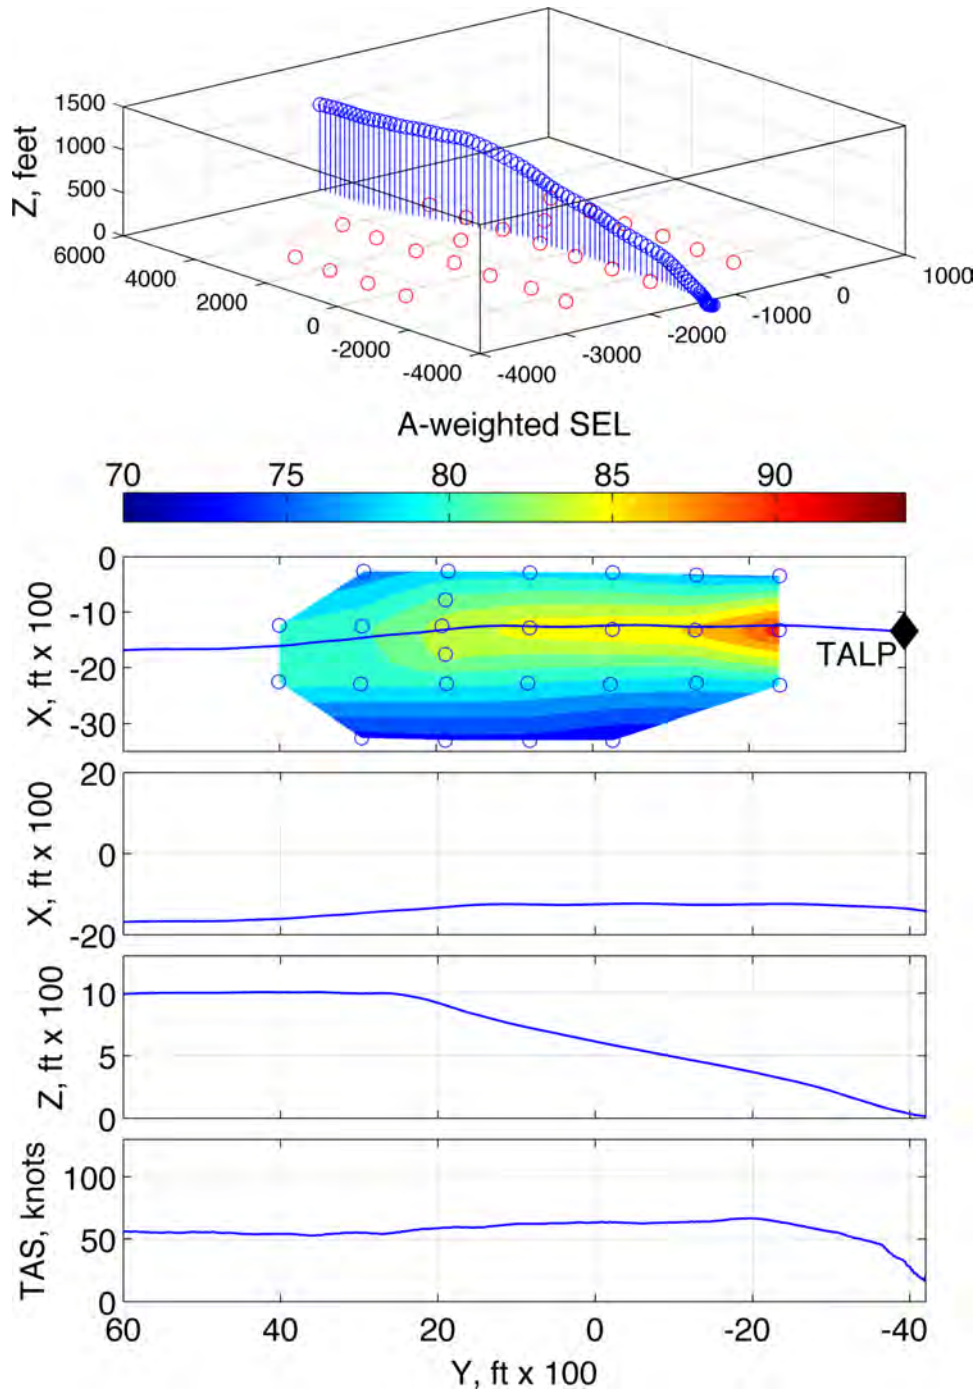


Figure 338: Terminal area condition T2, 60 KIAS constant speed,  $-9^\circ$ , run number 288611

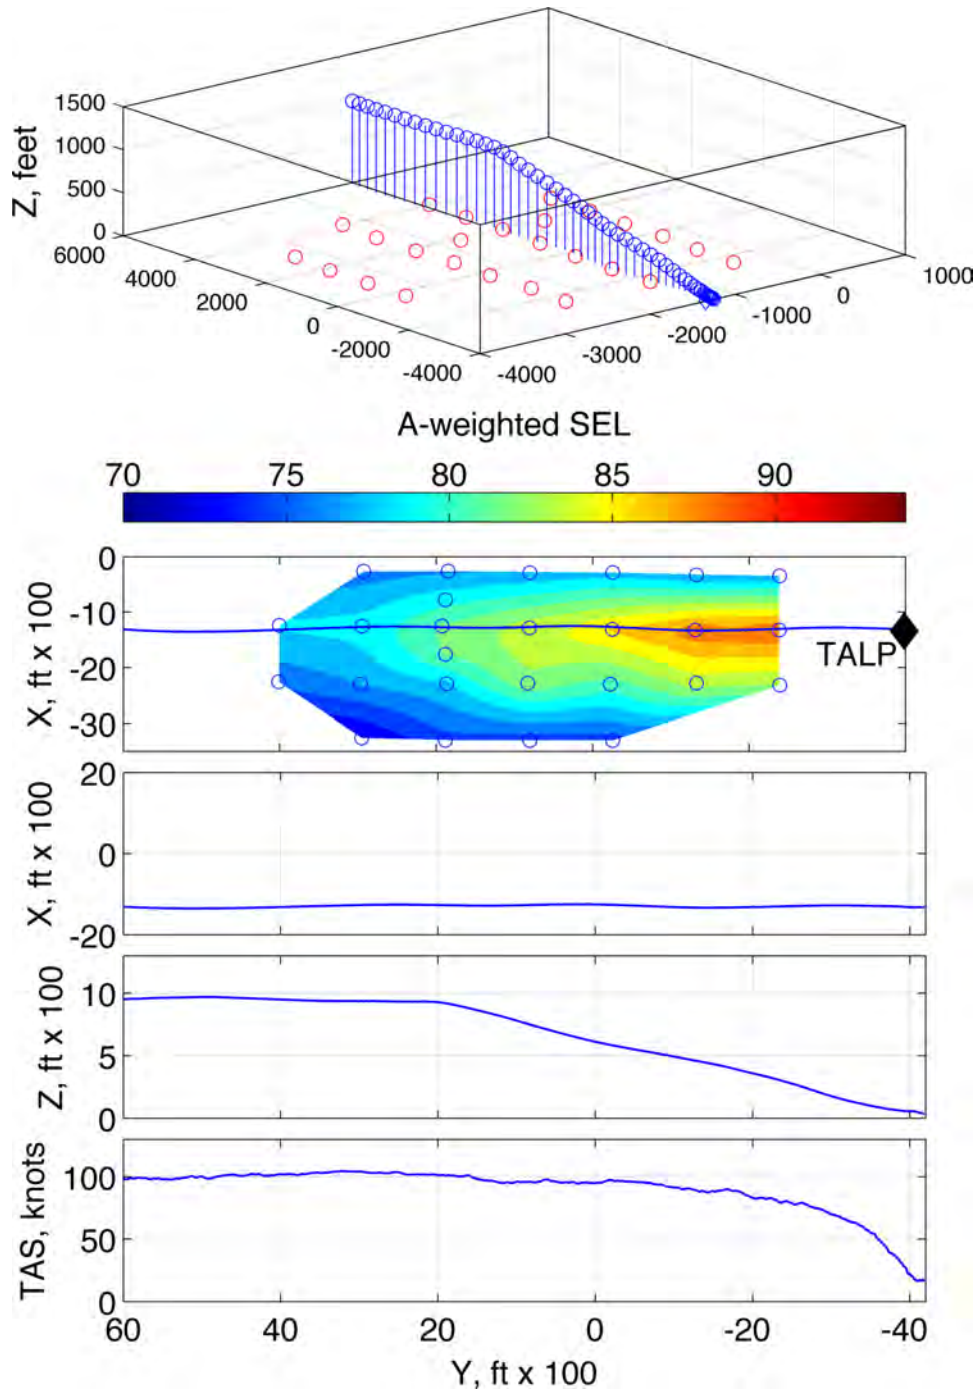


Figure 339: Terminal area condition T2, 60 KIAS constant speed,  $-9^\circ$ , run number 288639

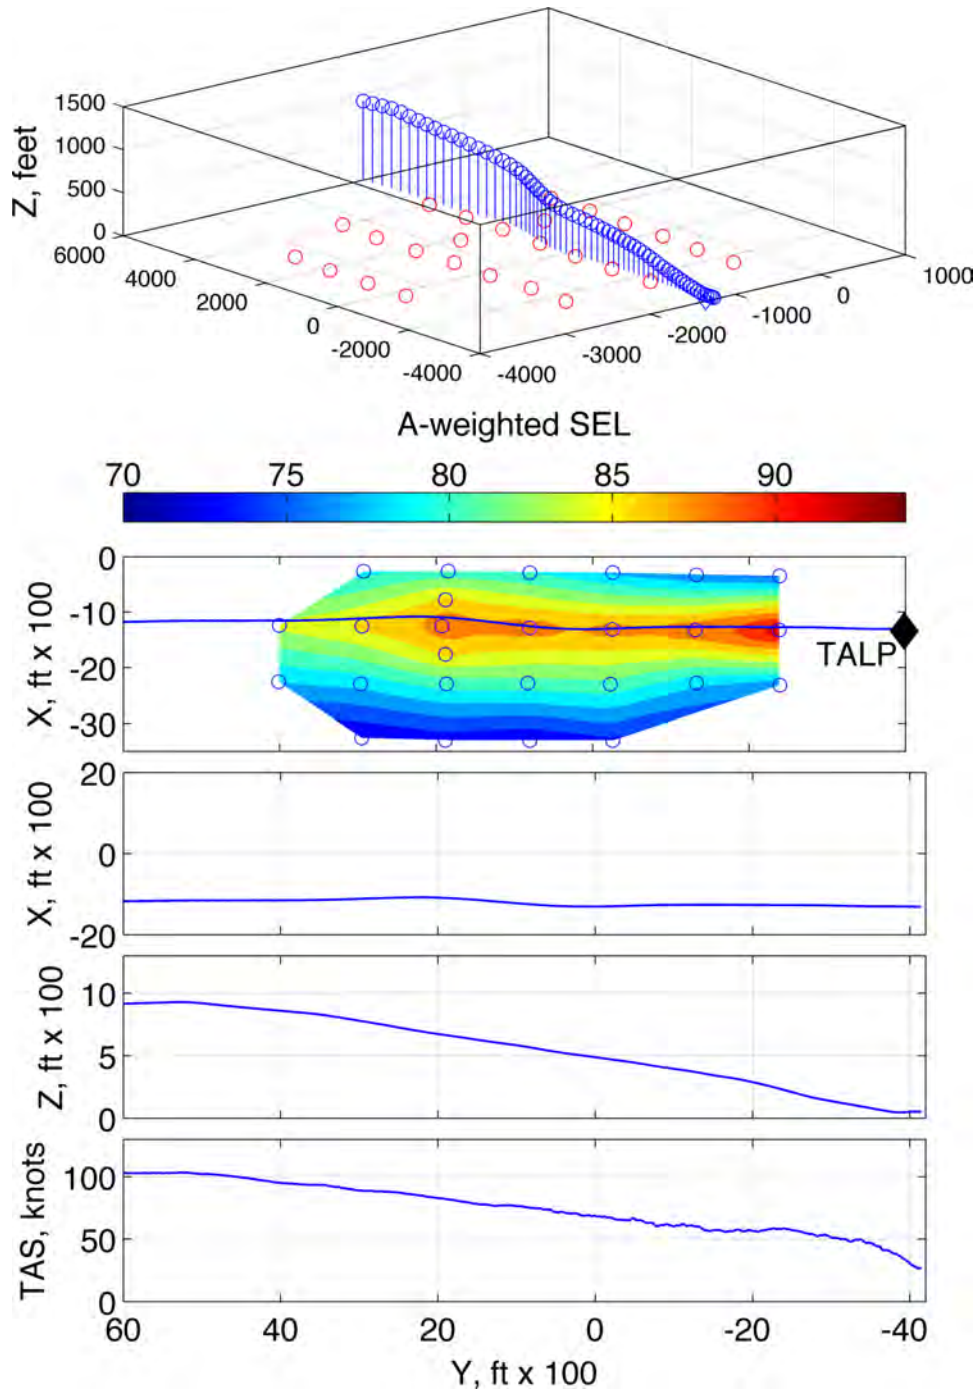


Figure 340: Terminal area condition T3, 100 KIAS decelerating,  $-6^\circ$ , run number 288624

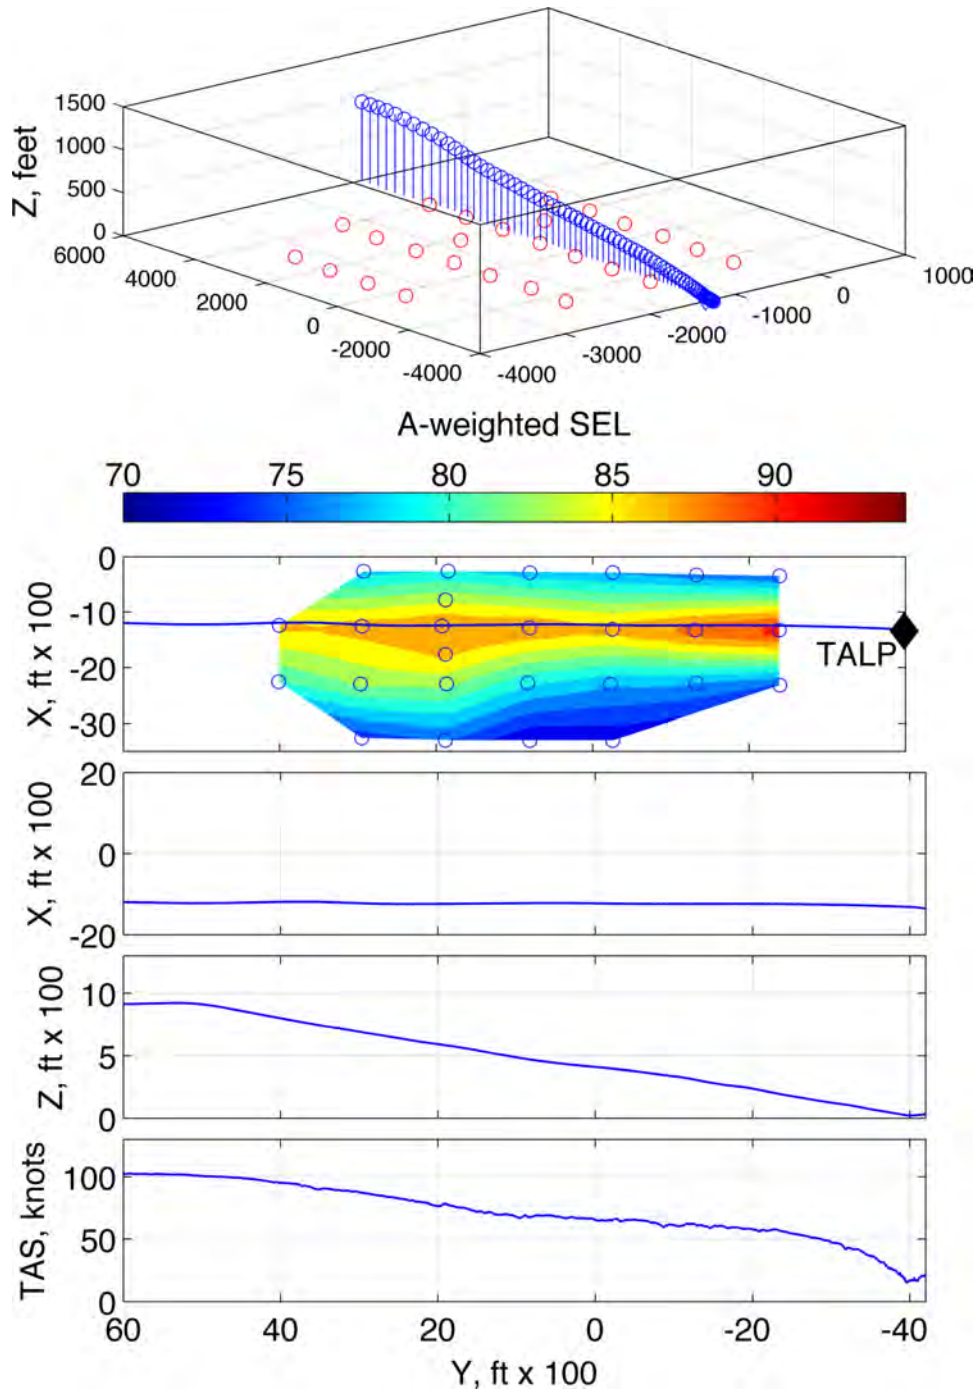


Figure 341: Terminal area condition T3, 100 KIAS decelerating,  $-6^\circ$ , run number 288625

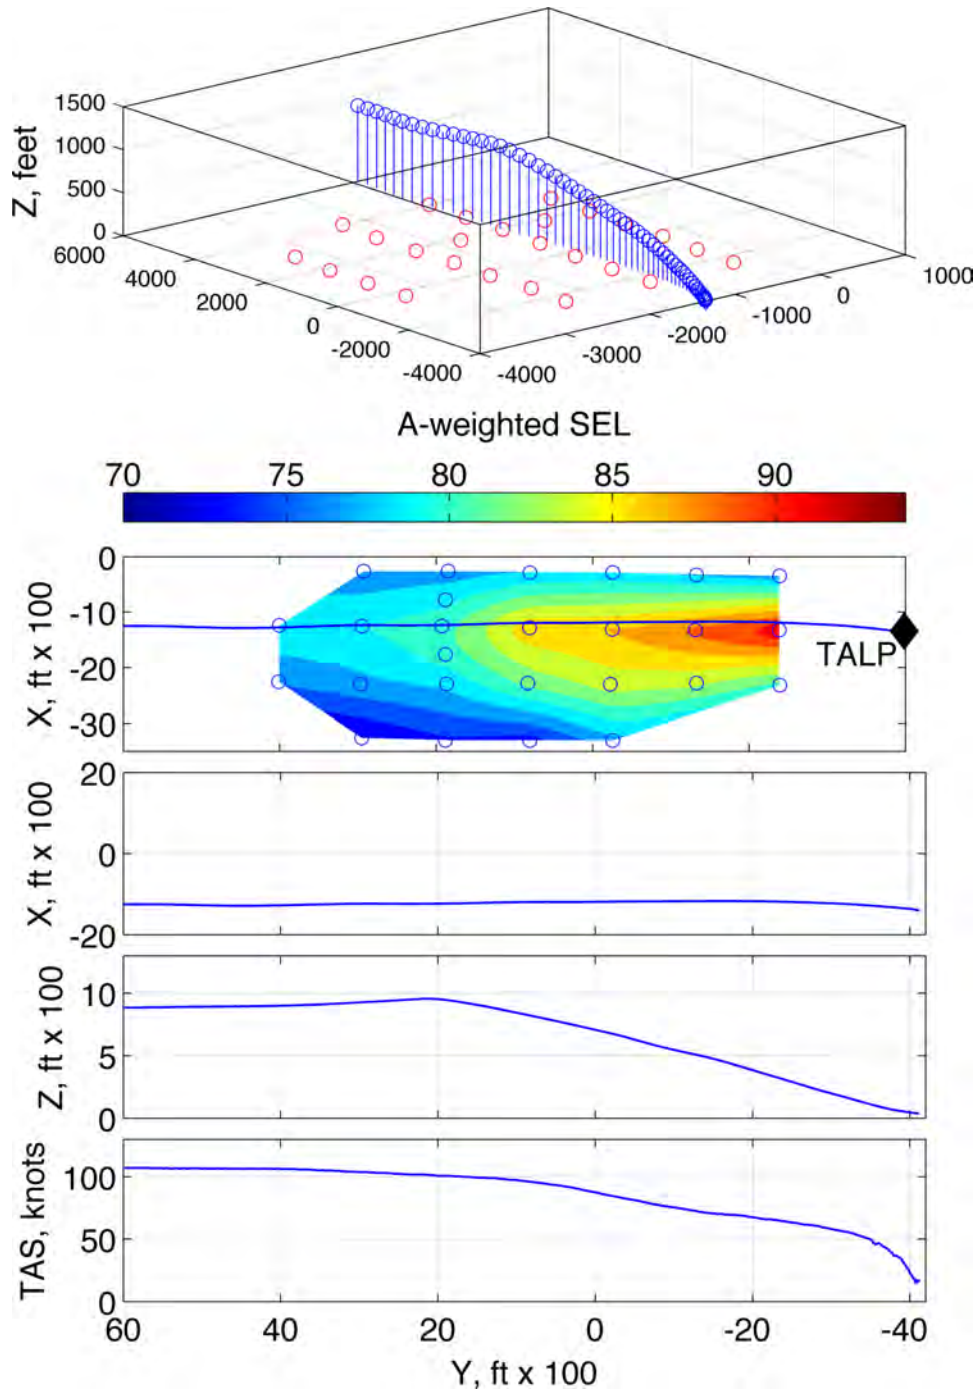


Figure 342: Terminal area condition T4, 100 KIAS decelerating,  $-9^\circ$ , run number 288612



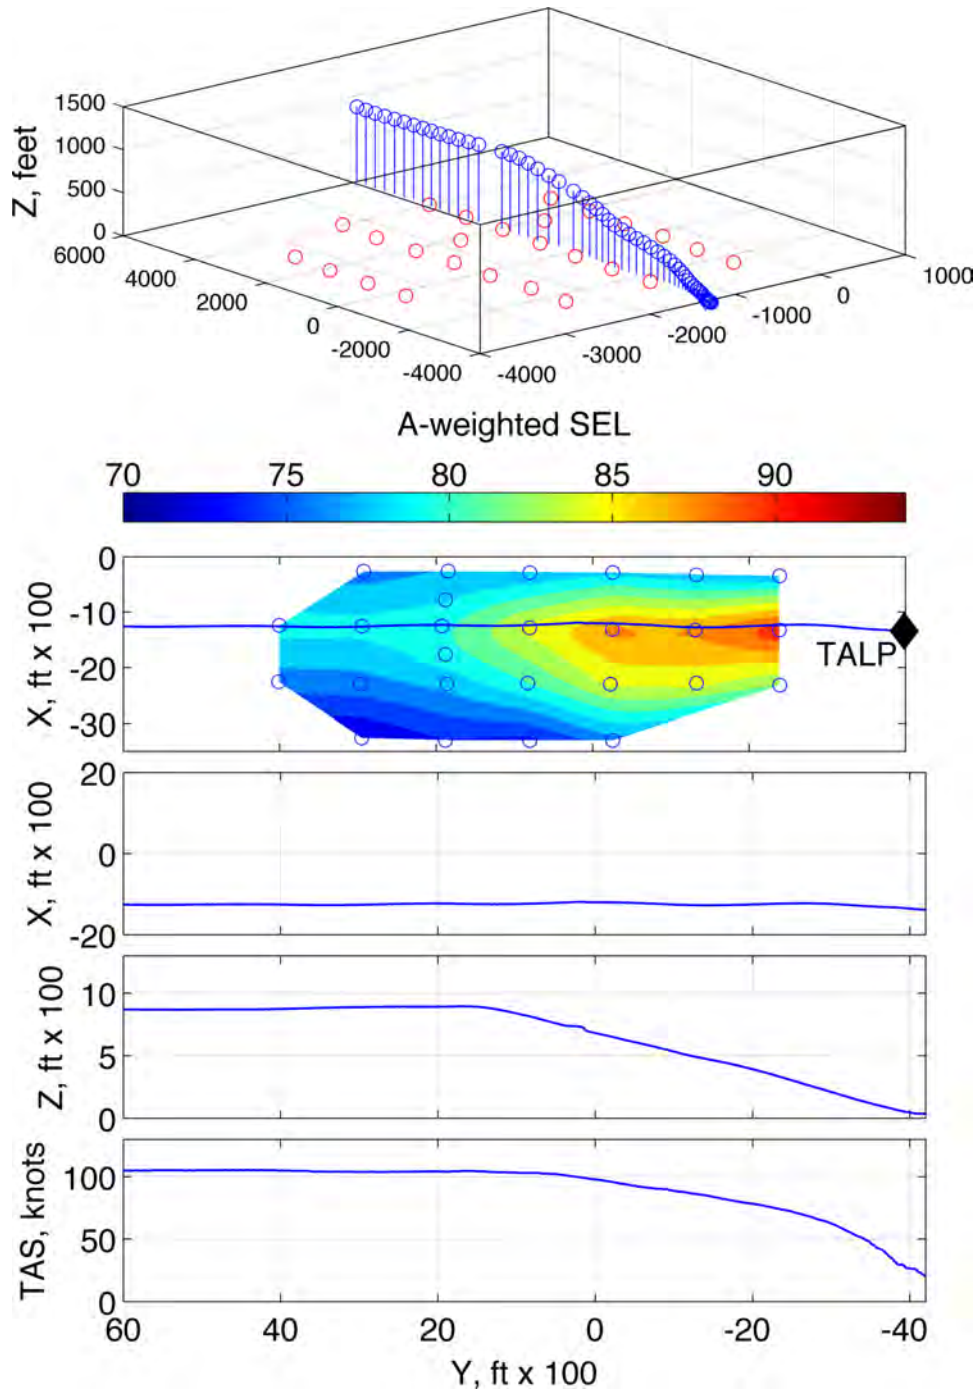


Figure 343: Terminal area condition T4, 100 KIAS decelerating,  $-9^\circ$ , run number 288613

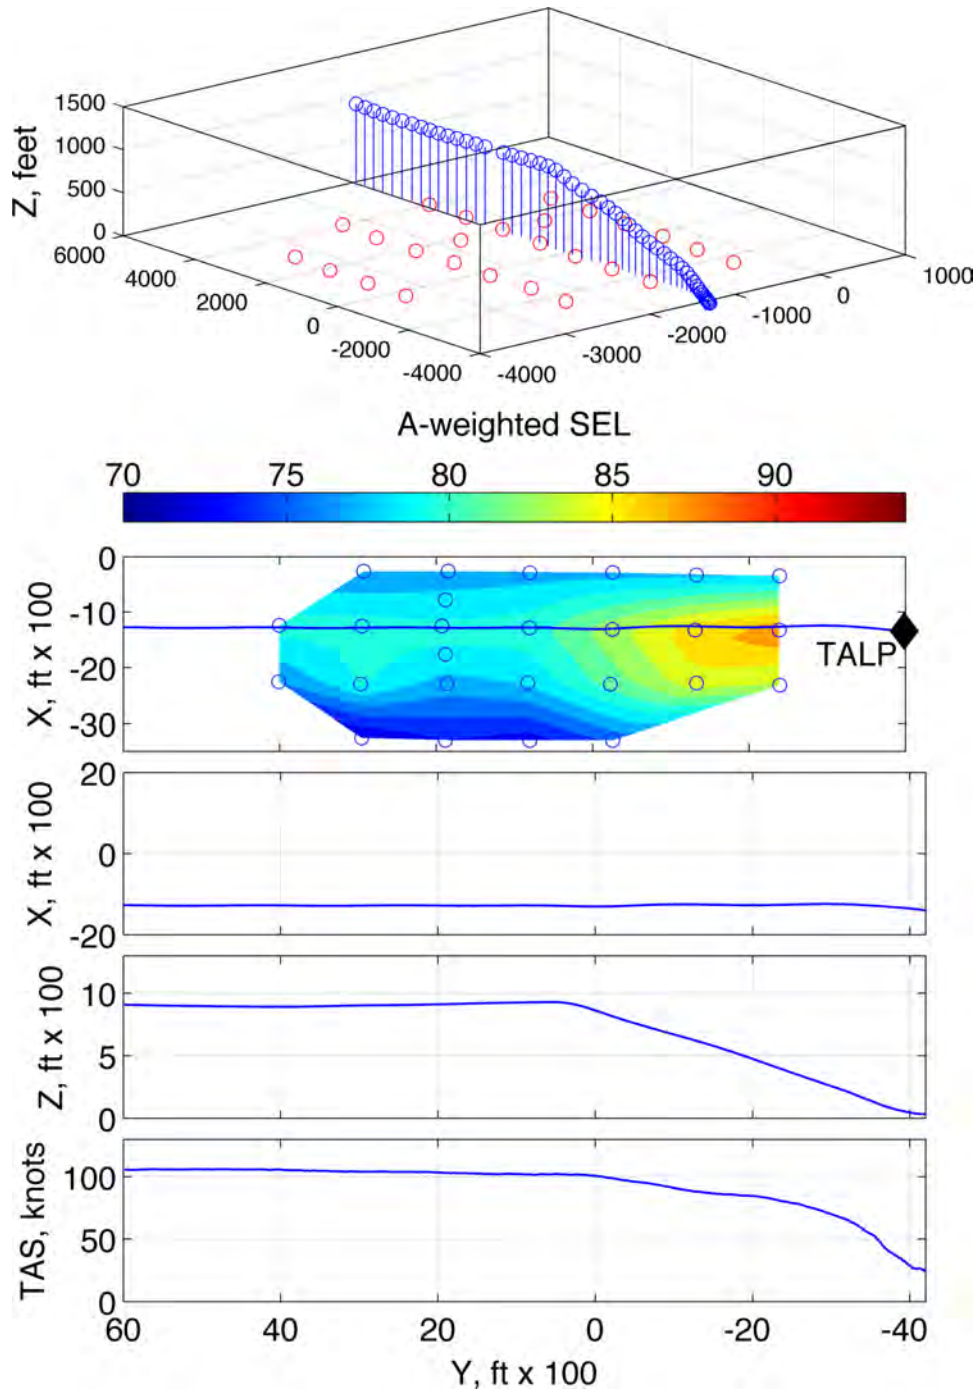


Figure 344: Terminal area condition T5, 100 KIAS decelerating,  $-12^\circ$ , run number 288614

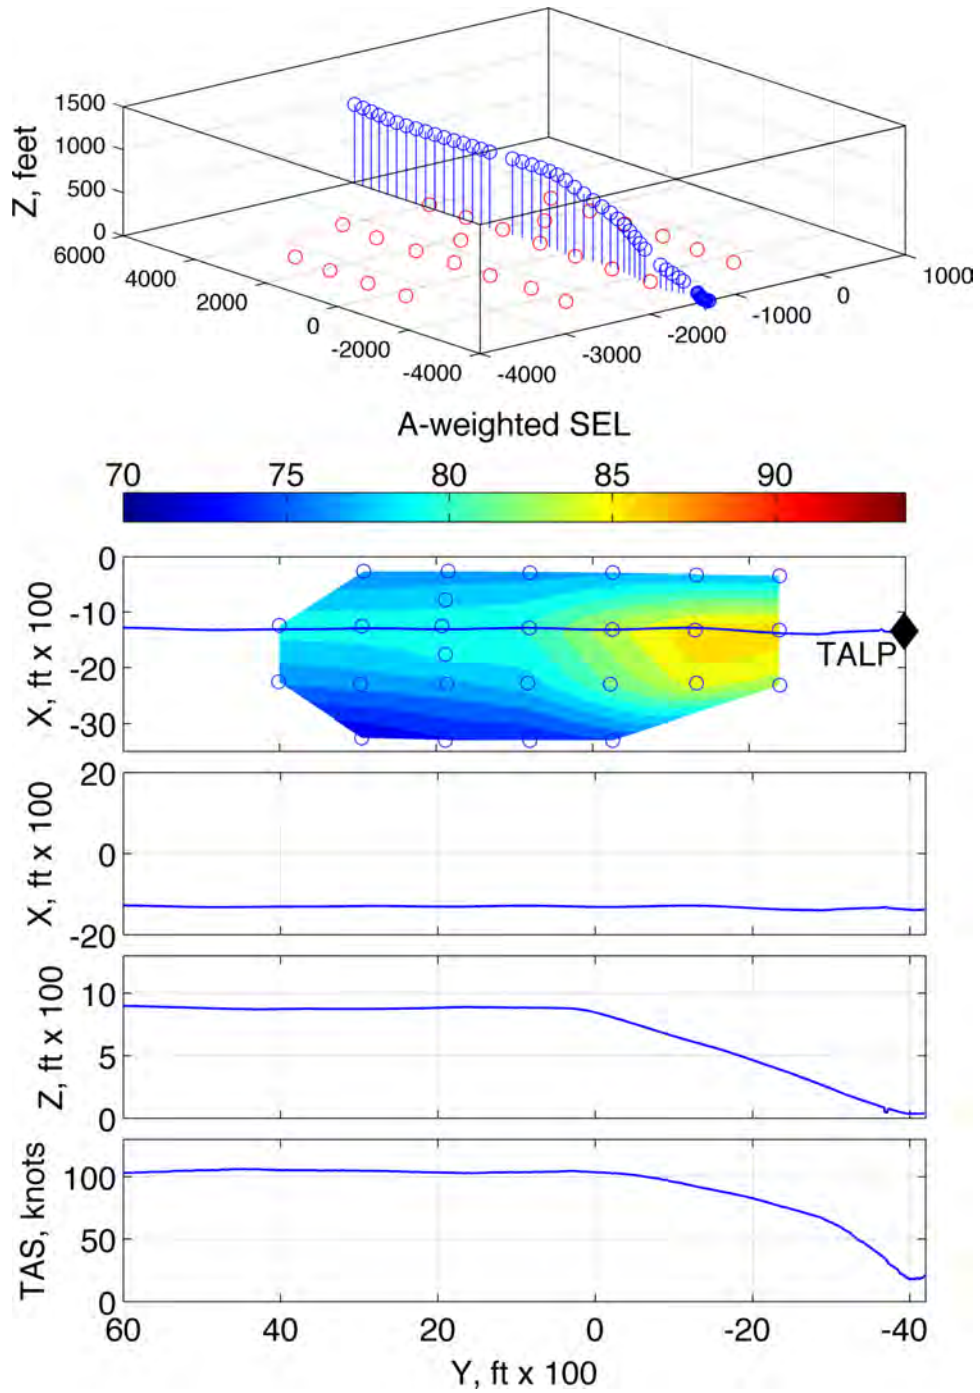


Figure 345: Terminal area condition T5, 100 KIAS decelerating,  $-12^\circ$ , run number 288615. Quietest approach profile flown.

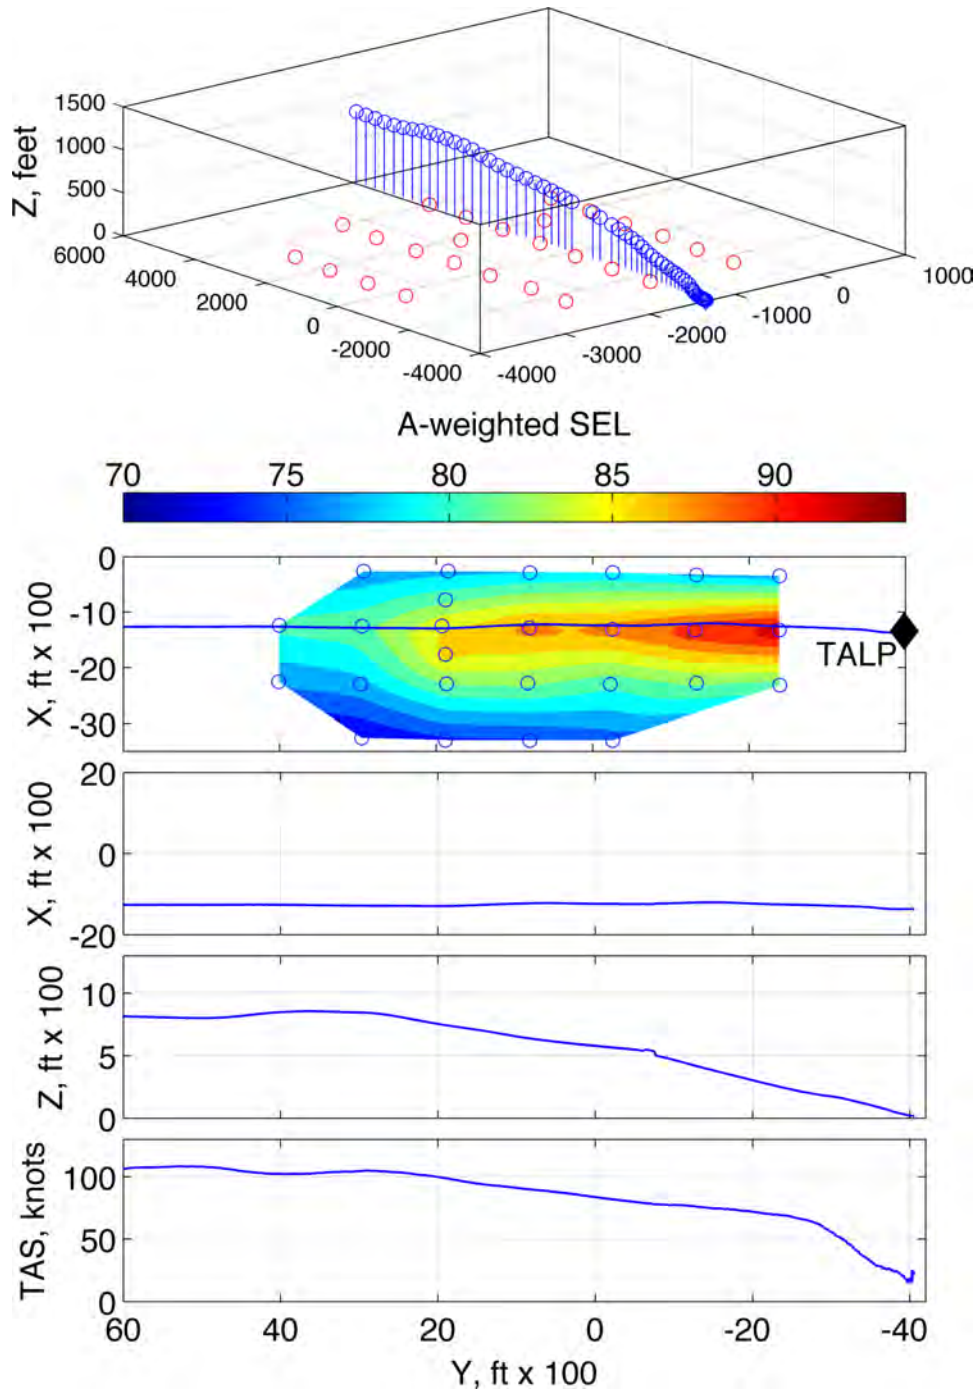


Figure 346: Terminal area condition T6, segmented 100 - 40 KIAS,  $-6^\circ$  , 40 - 0 KIAS,  $-12^\circ$  , run number 288616

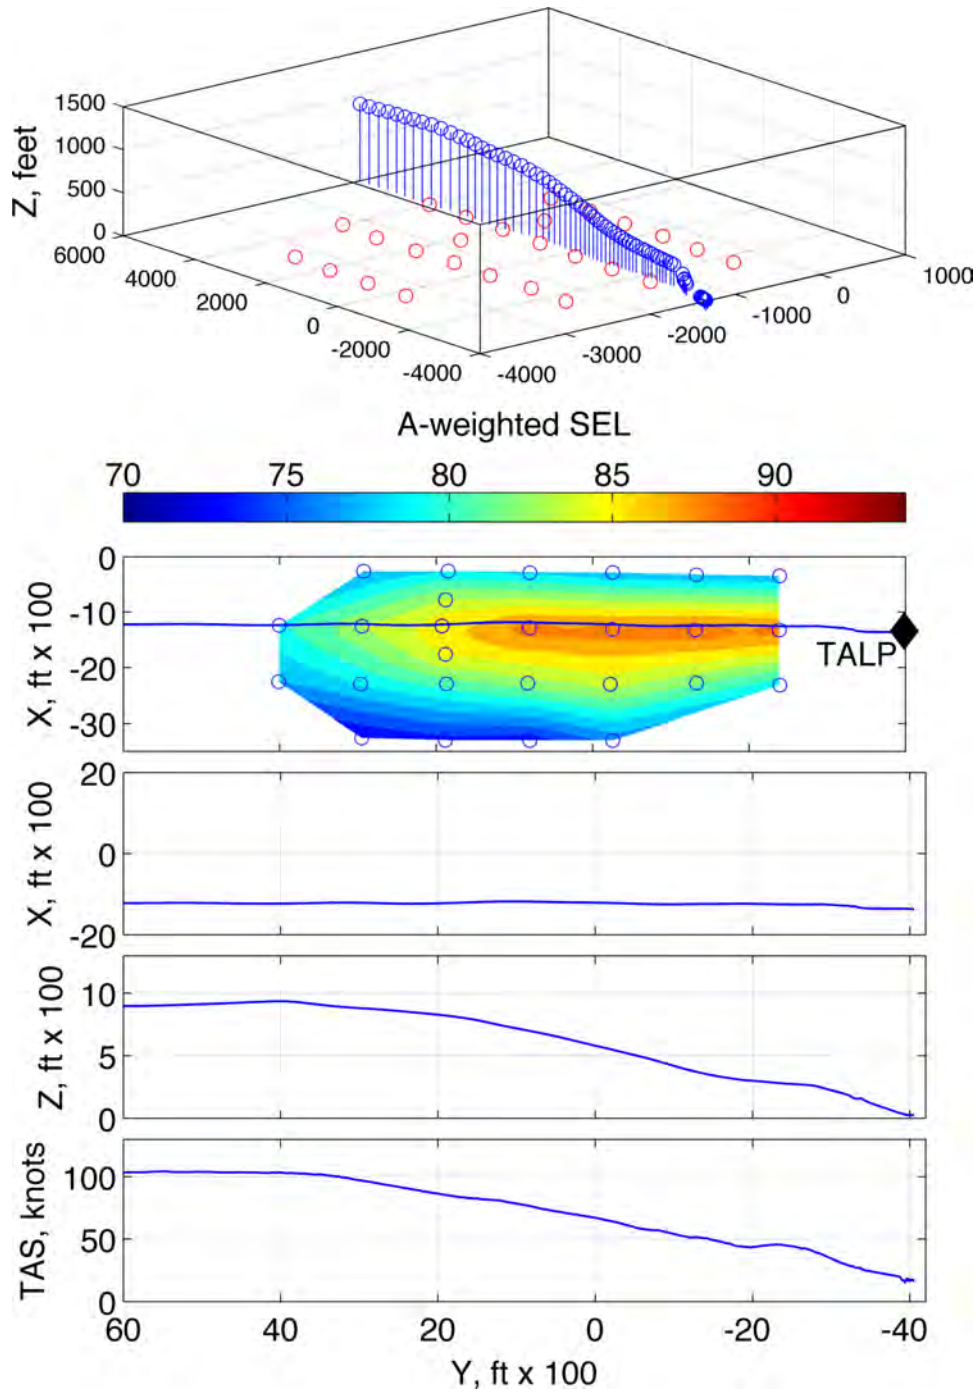


Figure 347: Terminal area condition T6, segmented 100 - 40 KIAS,  $-6^\circ$  , 40 - 0 KIAS,  $-12^\circ$  , run number 288617

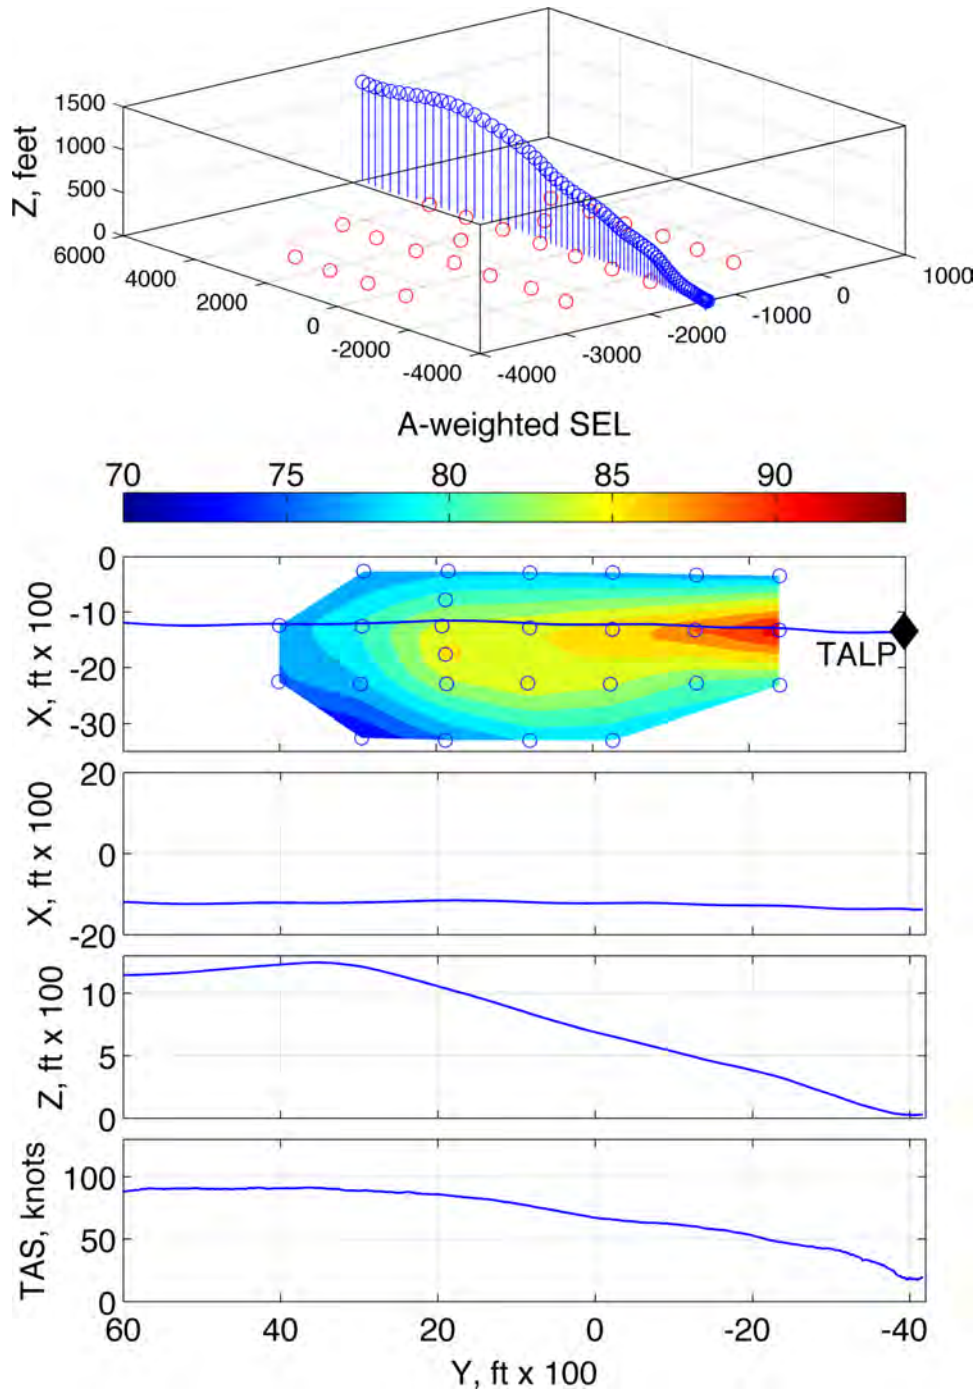


Figure 348: Terminal area condition T7, segmented 100 - 90 KIAS,  $3^\circ$  , 90 - 0 KIAS,  $-9.5^\circ$  , run number 288618

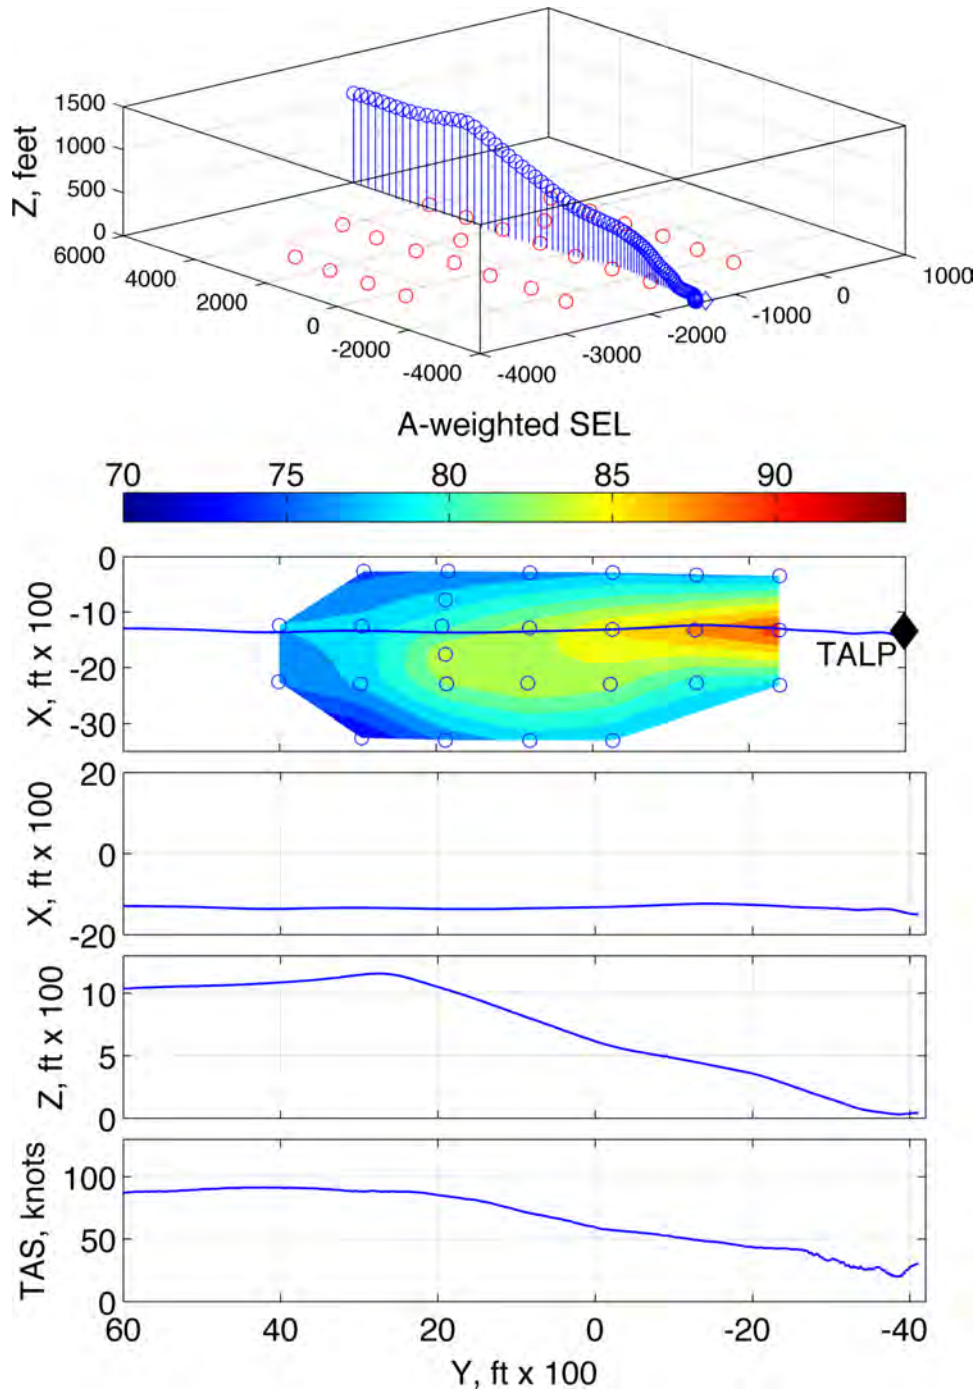


Figure 349: Terminal area condition T7, segmented 100 - 90 KIAS,  $3^\circ$  , 90 - 0 KIAS,  $-9.5^\circ$  , run number 288619

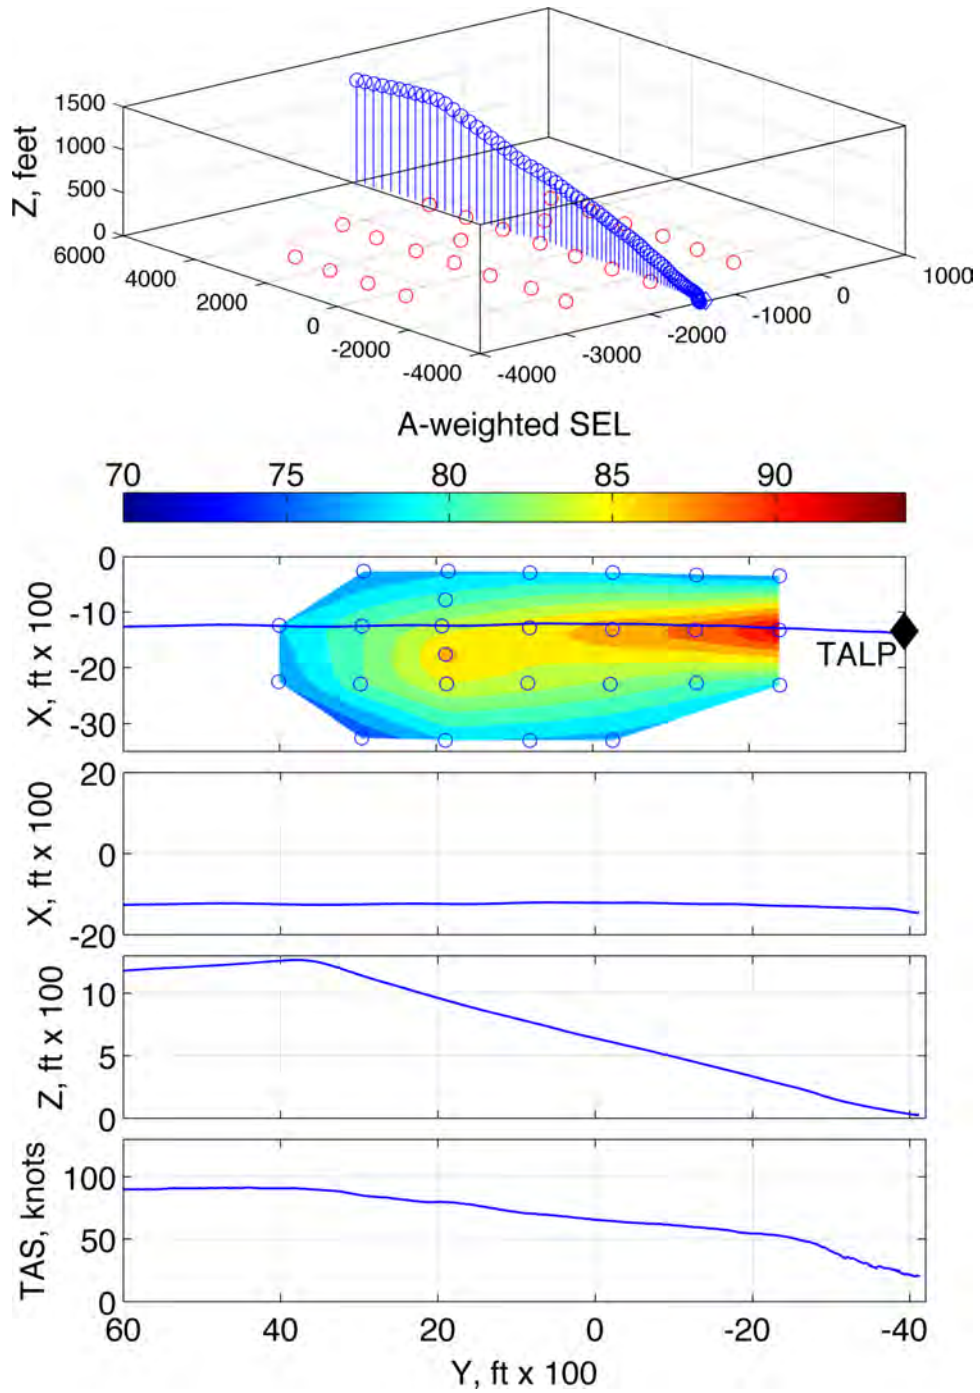


Figure 350: Terminal area condition T7, segmented 100 - 90 KIAS,  $3^\circ$  , 90 - 0 KIAS,  $-9.5^\circ$  , run number 288620



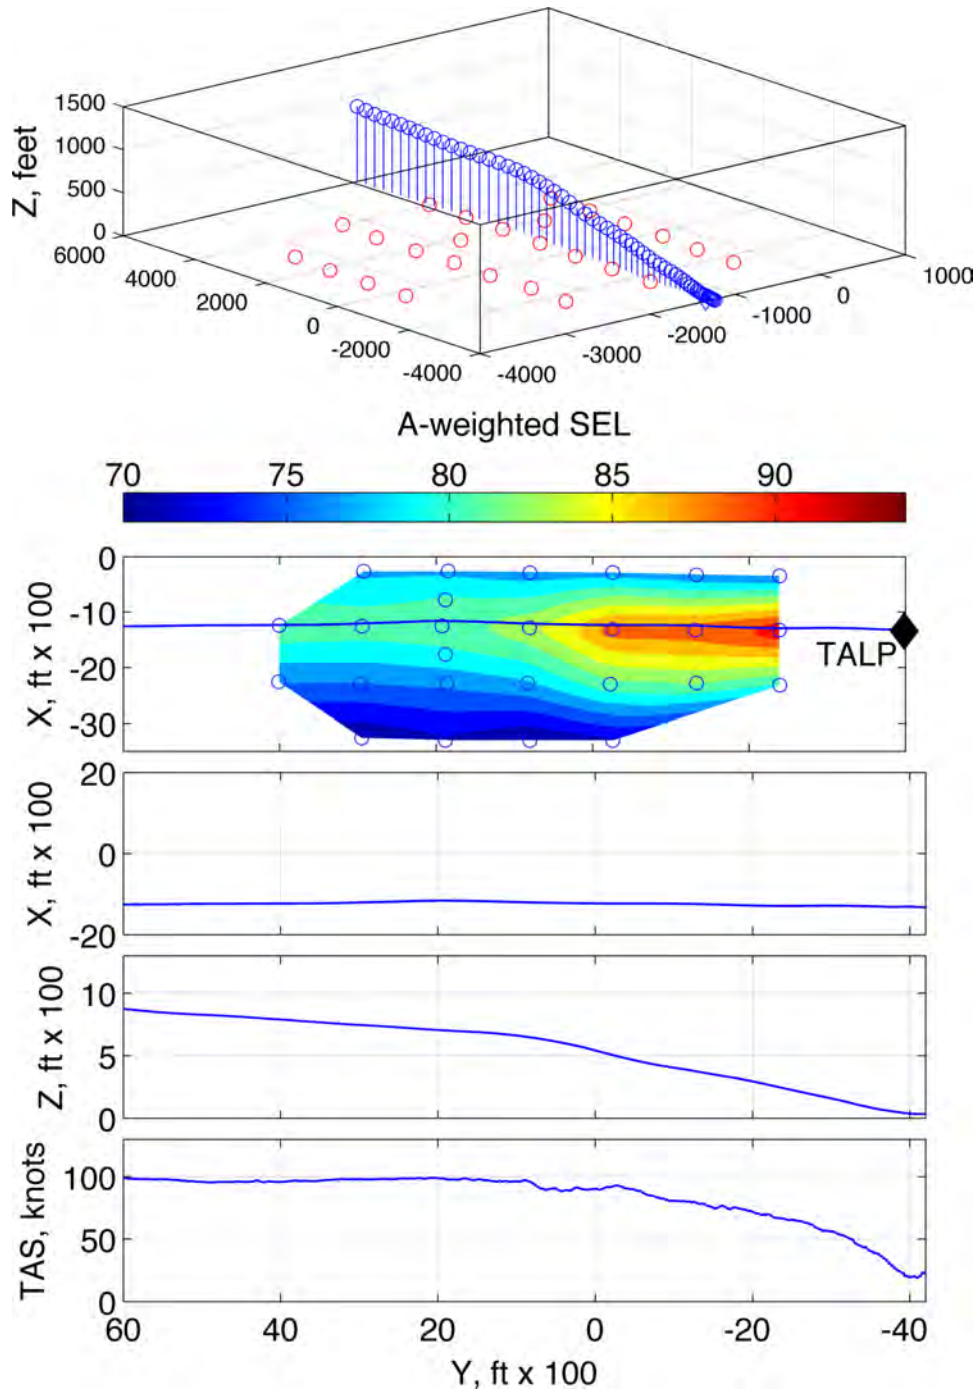


Figure 351: Terminal area condition T8, segmented 100 - 95 KIAS,  $-3^\circ$  , 95 - 0 KIAS,  $-7.5^\circ$  , run number 288626

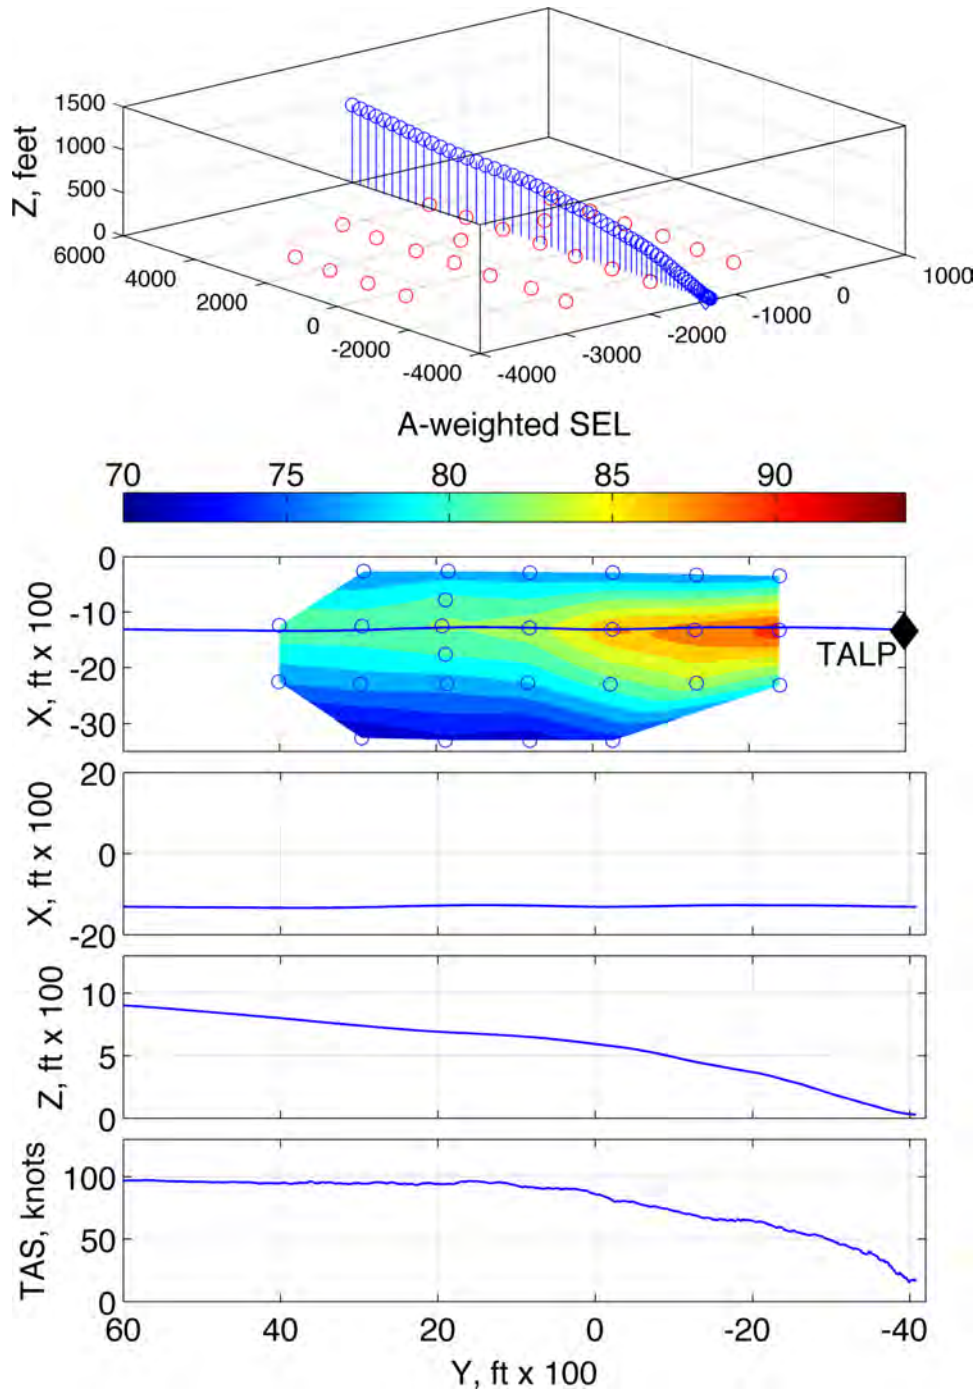


Figure 352: Terminal area condition T8, segmented 100 - 95 KIAS,  $-3^\circ$  , 95 - 0 KIAS,  $-7.5^\circ$  , run number 288627

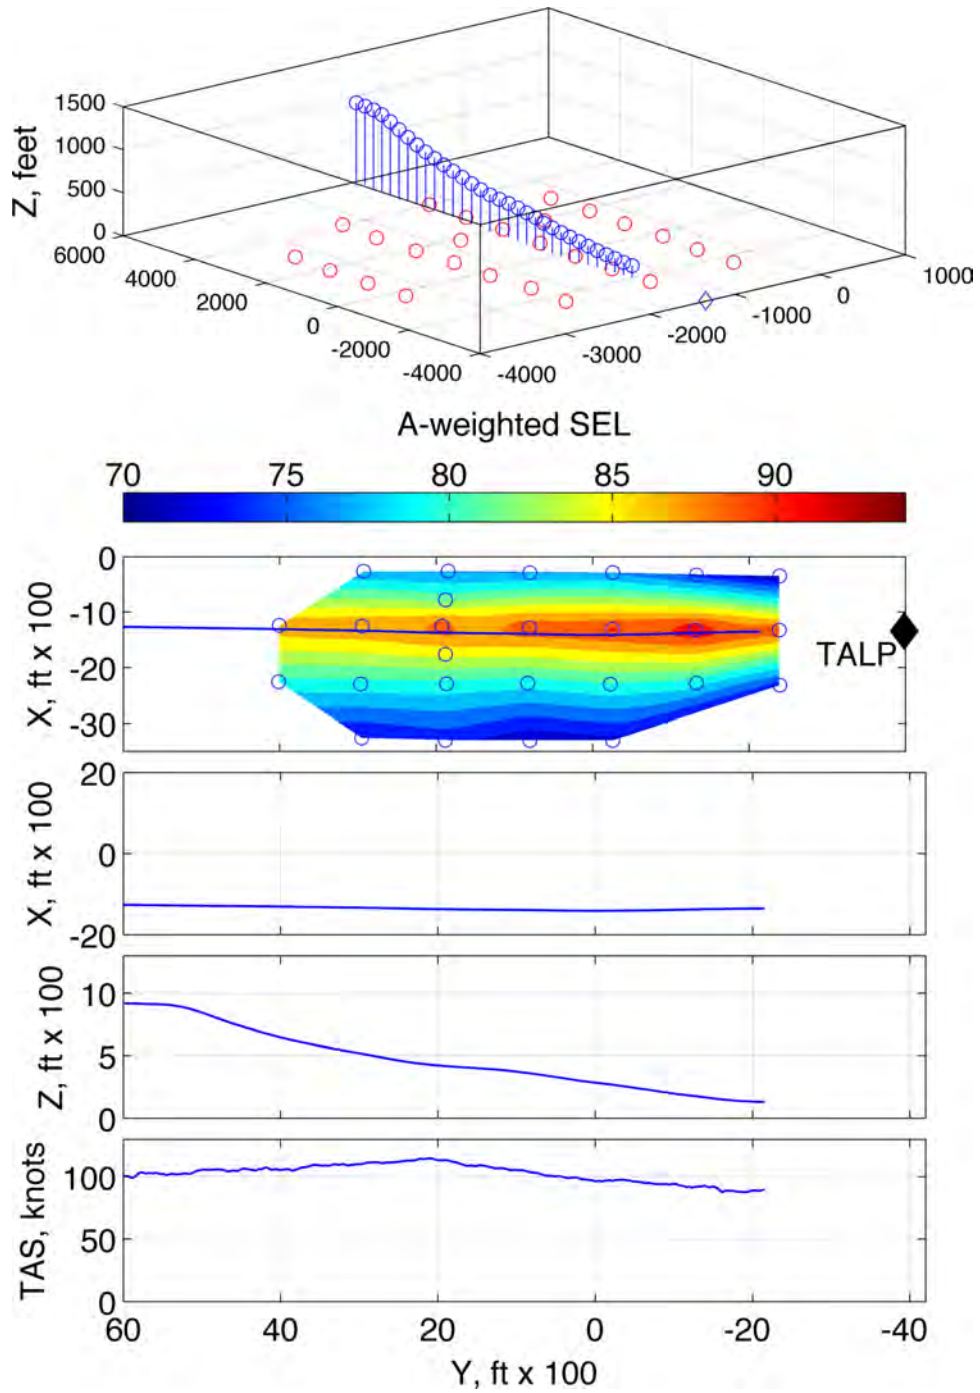


Figure 353: Terminal area condition T9, segmented 100 - 110 KIAS,  $-9^\circ$  , 110 - 90 KIAS,  $-7.5^\circ$  , 90 - 0 KIAS,  $-4^\circ$  , run number 288629

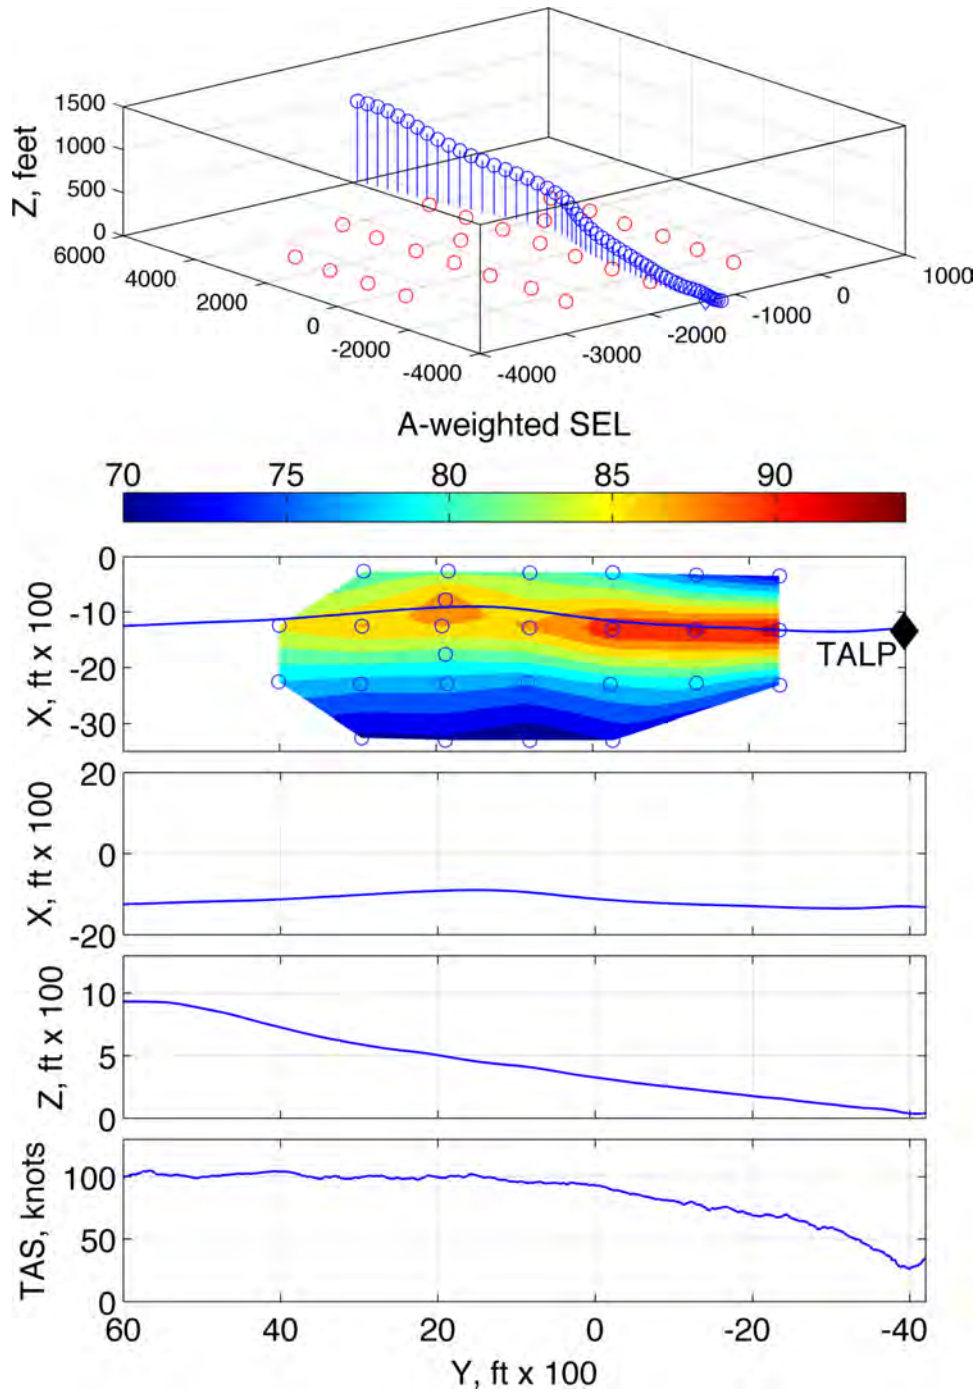


Figure 354: Terminal area condition T9, segmented 100 - 110 KIAS,  $-9^\circ$  , 110 - 90 KIAS,  $-7.5^\circ$  , 90 - 0 KIAS,  $-4^\circ$  , run number 288630

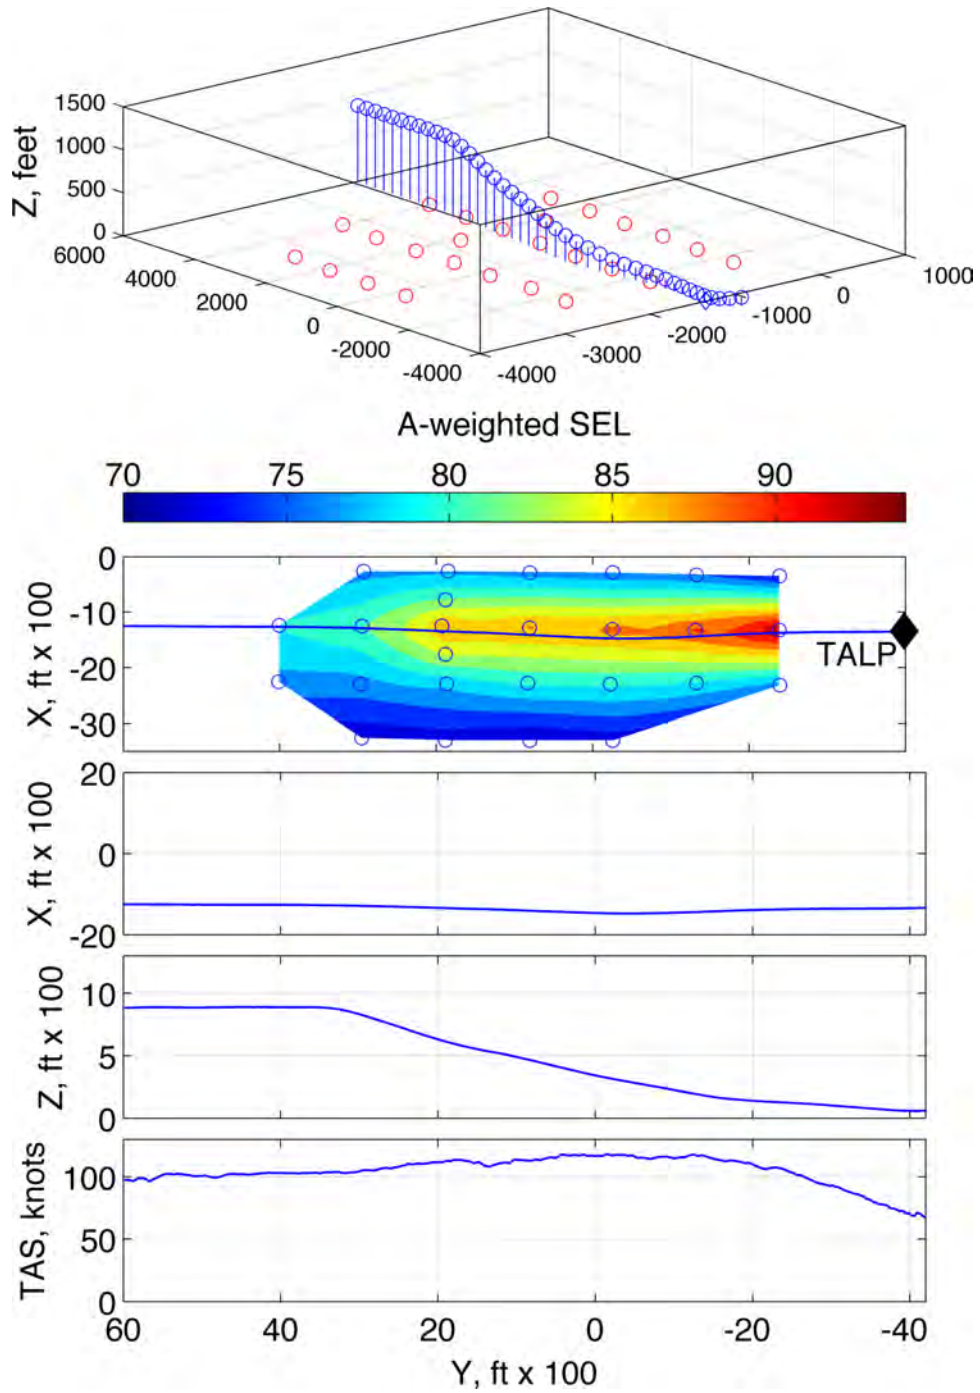


Figure 355: Terminal area condition T9A, segmented 100 - 110 KIAS,  $-9^\circ$ , 110 - 90 KIAS,  $-7.5^\circ$ , 90 - 0 KIAS,  $-4^\circ$ , run number 288631

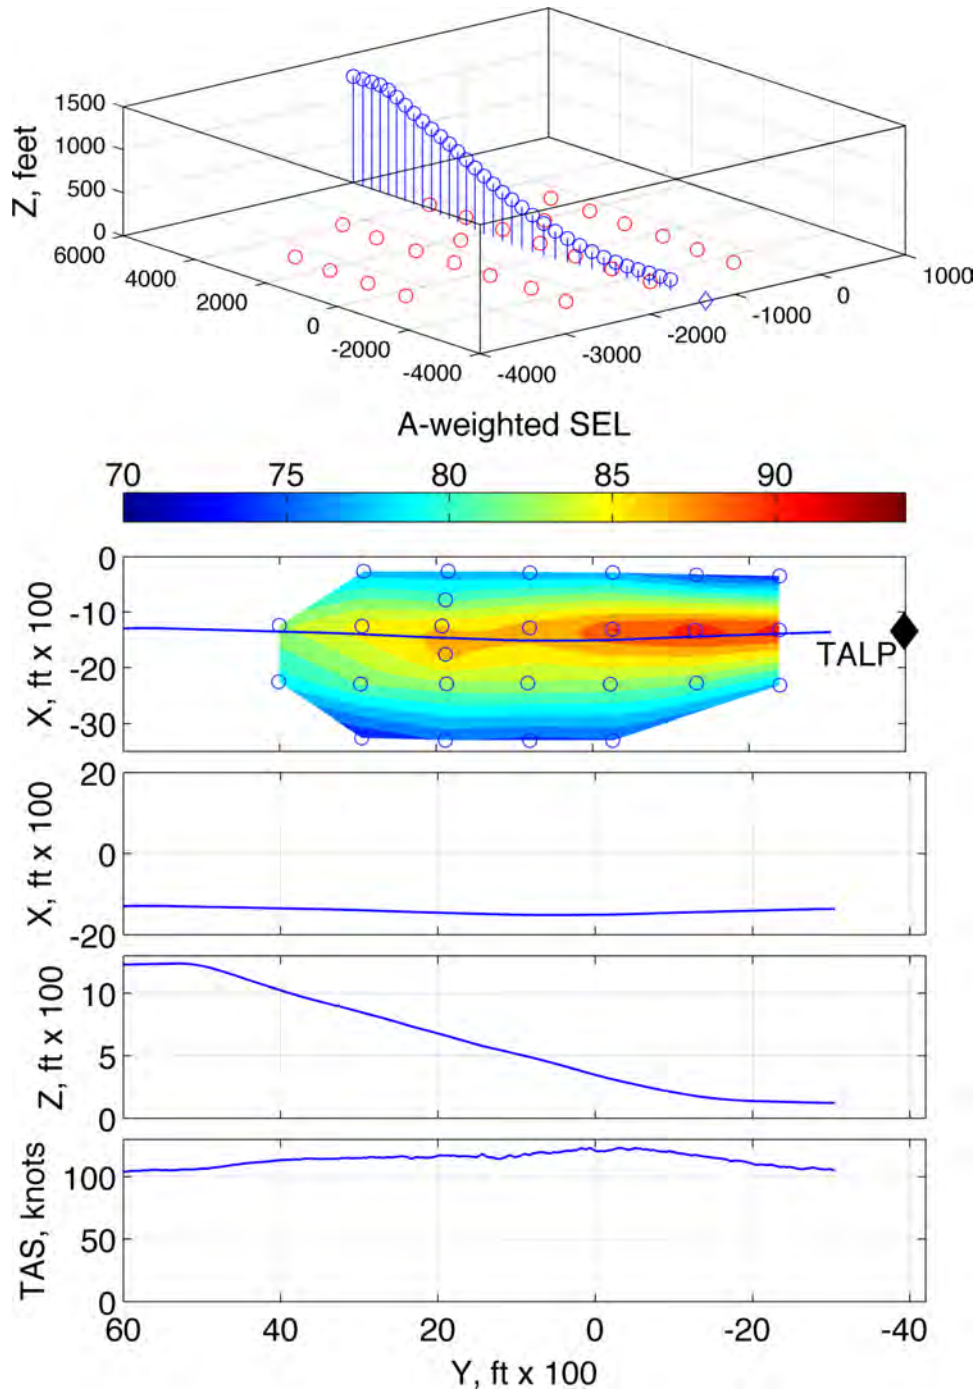


Figure 356: Terminal area condition T9A, segmented 100 - 110 KIAS,  $-9^\circ$ , 110 - 90 KIAS,  $-7.5^\circ$ , 90 - 0 KIAS,  $-4^\circ$ , run number 288632

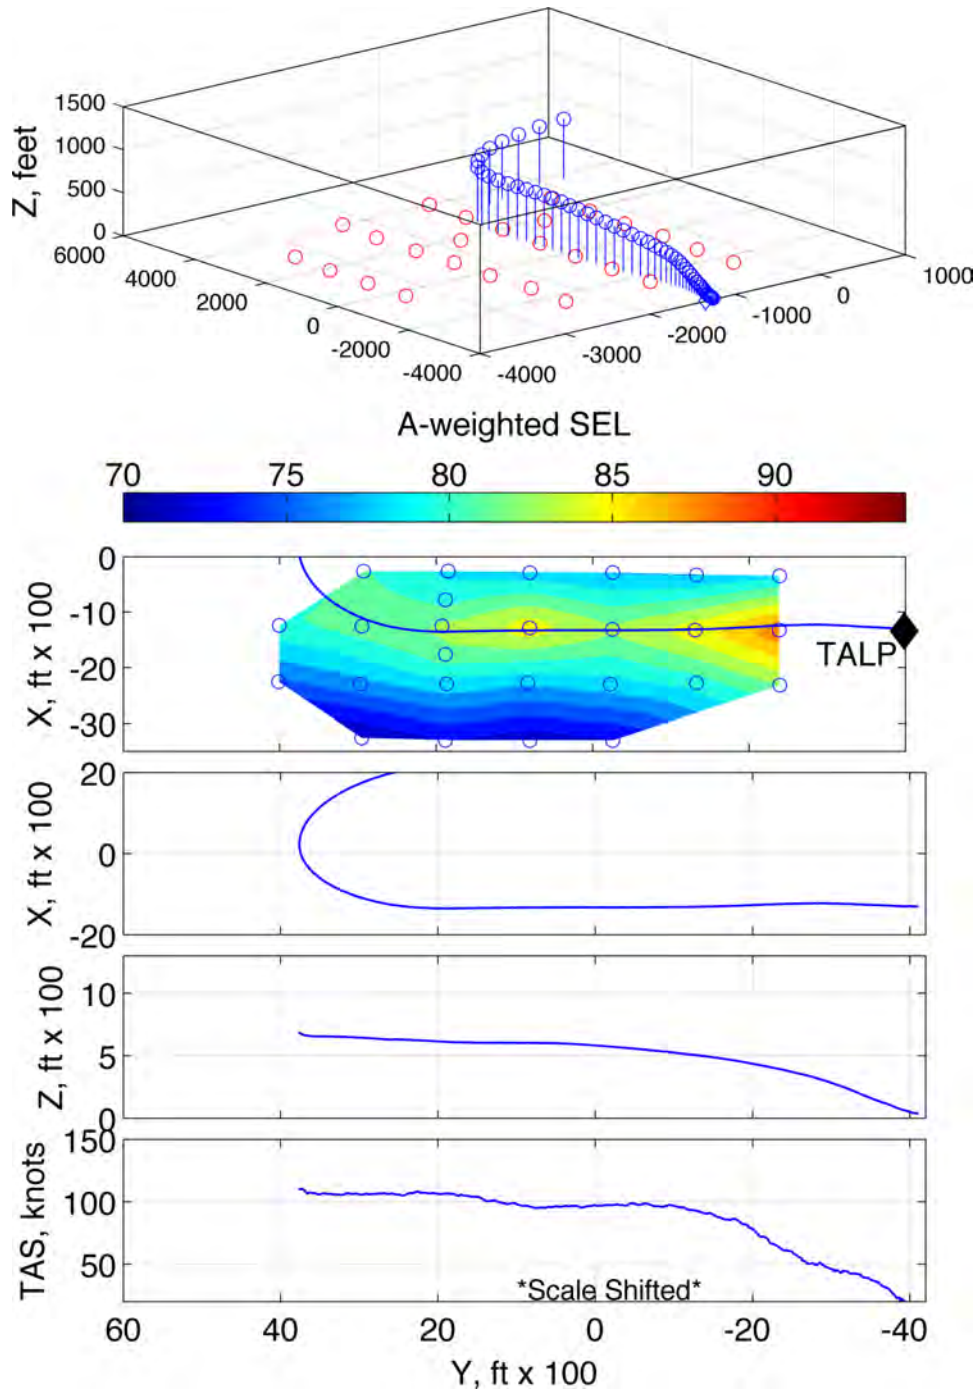


Figure 357: Terminal area condition T10A, U shaped, 100 KIAS,  $-9^\circ$ , run number 288638

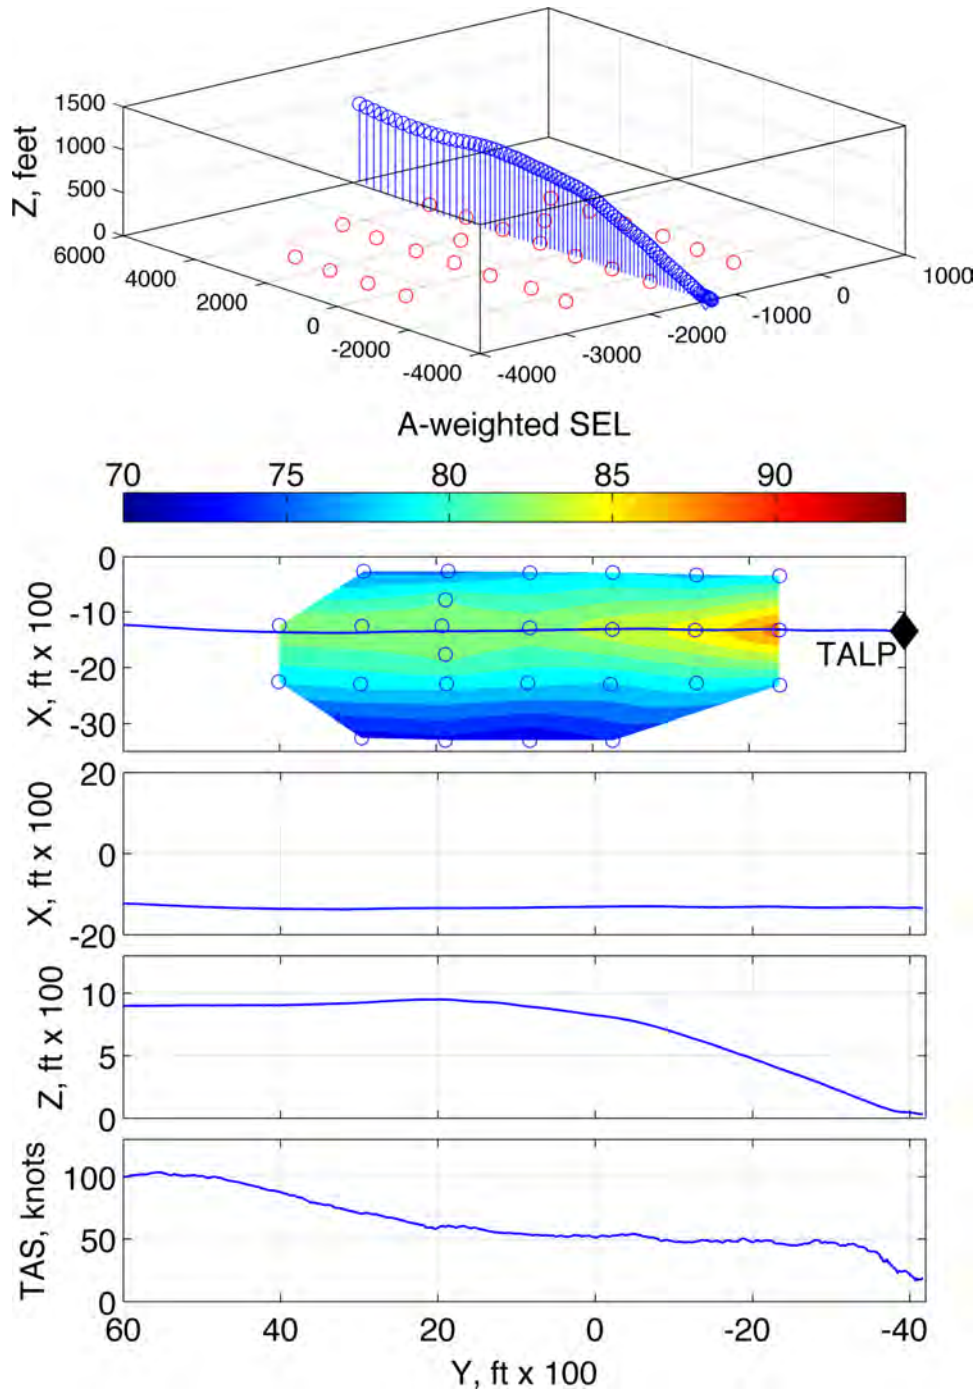


Figure 358: Terminal area condition T11, pilot discretion, run number 288633



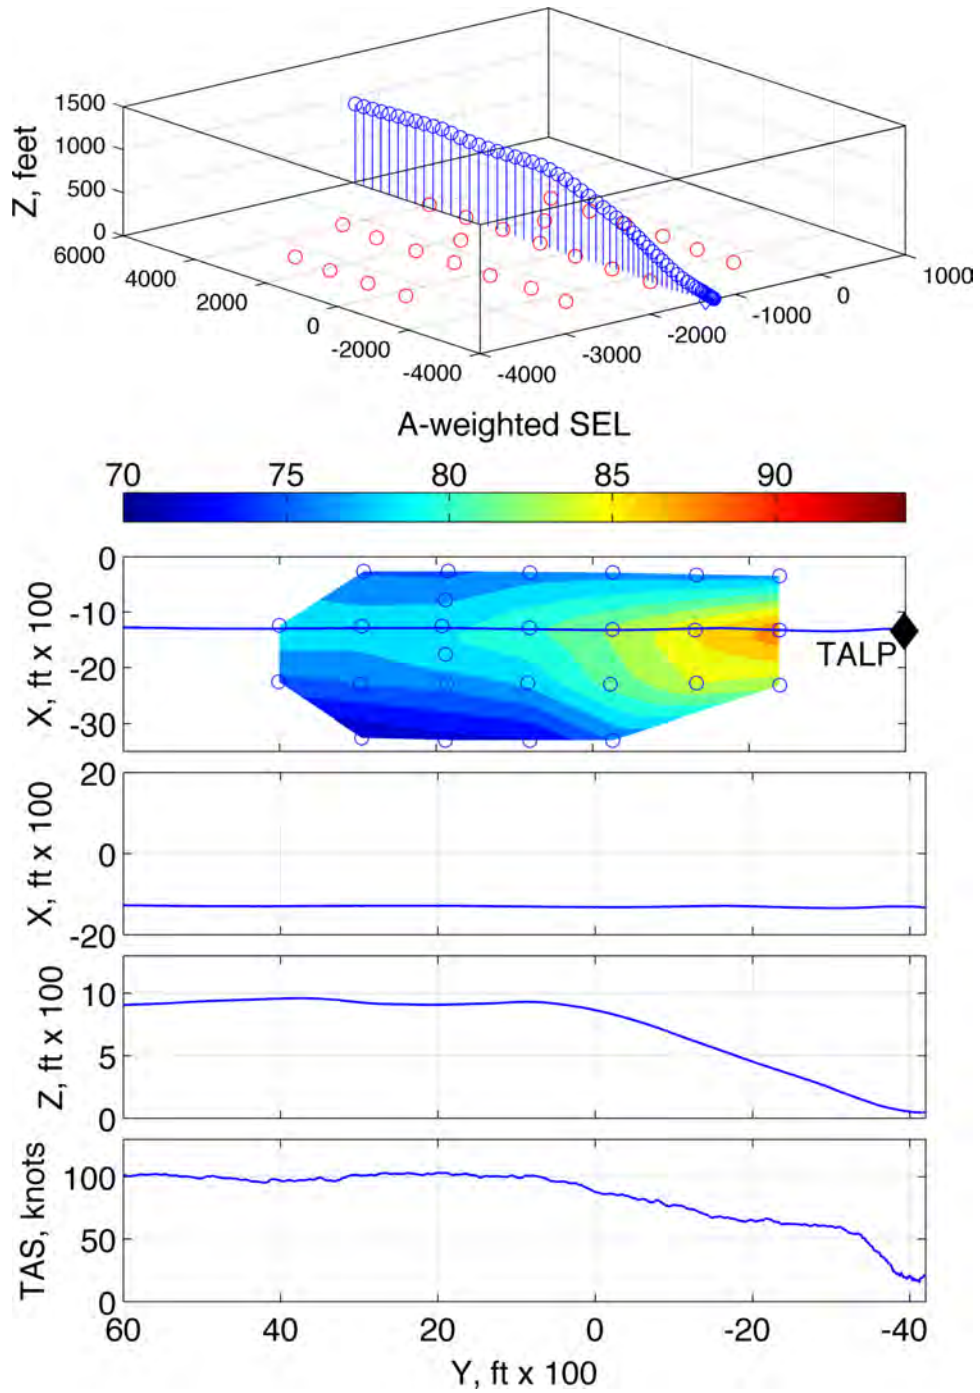


Figure 359: Terminal area condition T11, pilot discretion, run number 288634

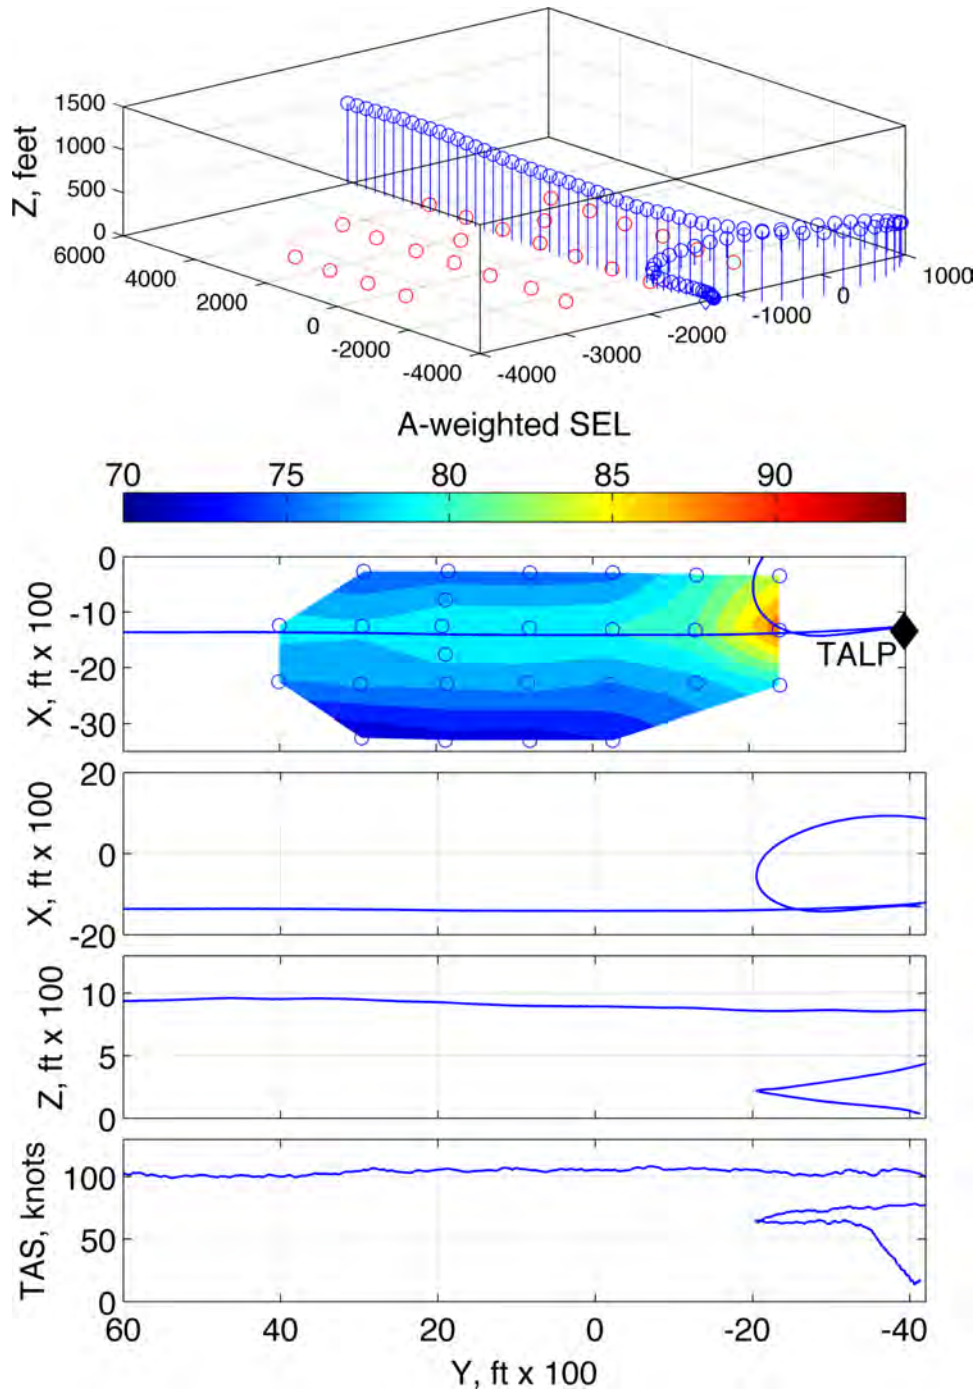


Figure 360: Terminal area condition T11A, pilot discretion, run number 288635

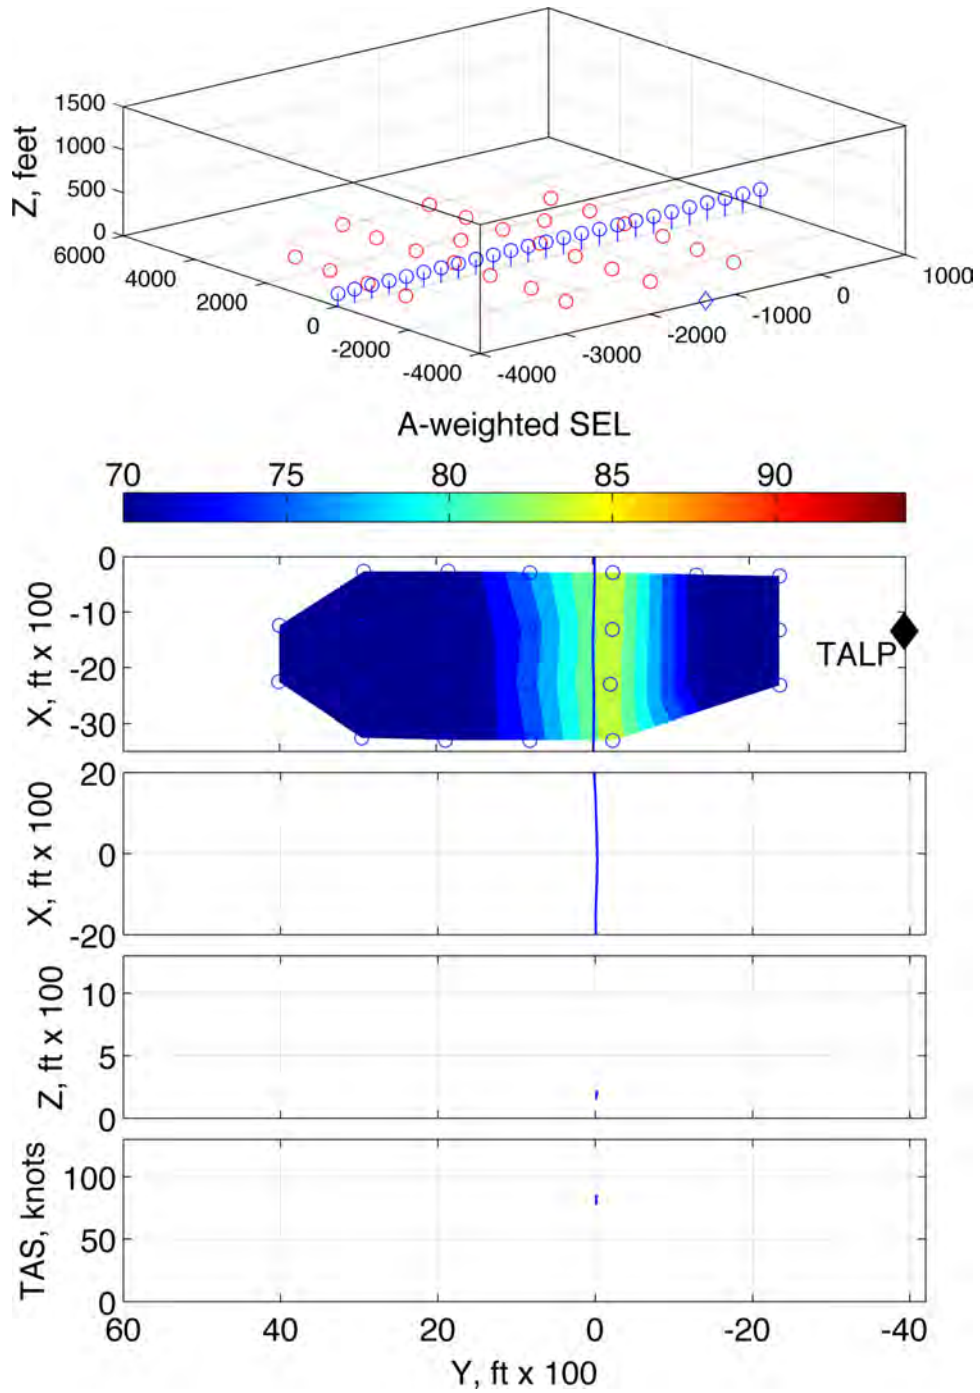


Figure 361: Terminal area condition L1, 80 KIAS, level, run number 288601

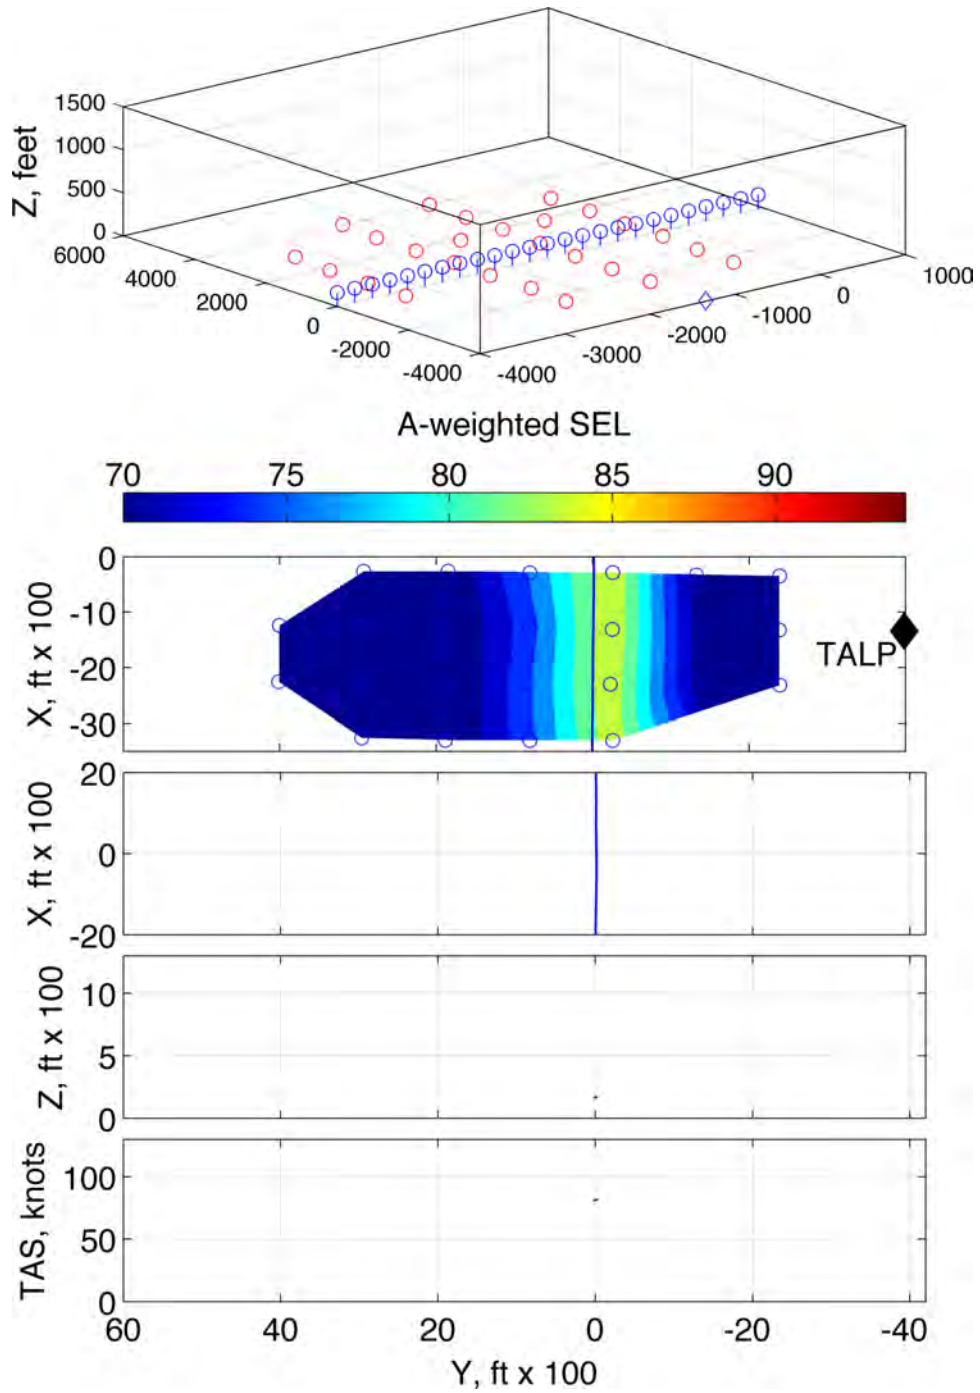


Figure 362: Terminal area condition L1, 80 KIAS, level, run number 288602

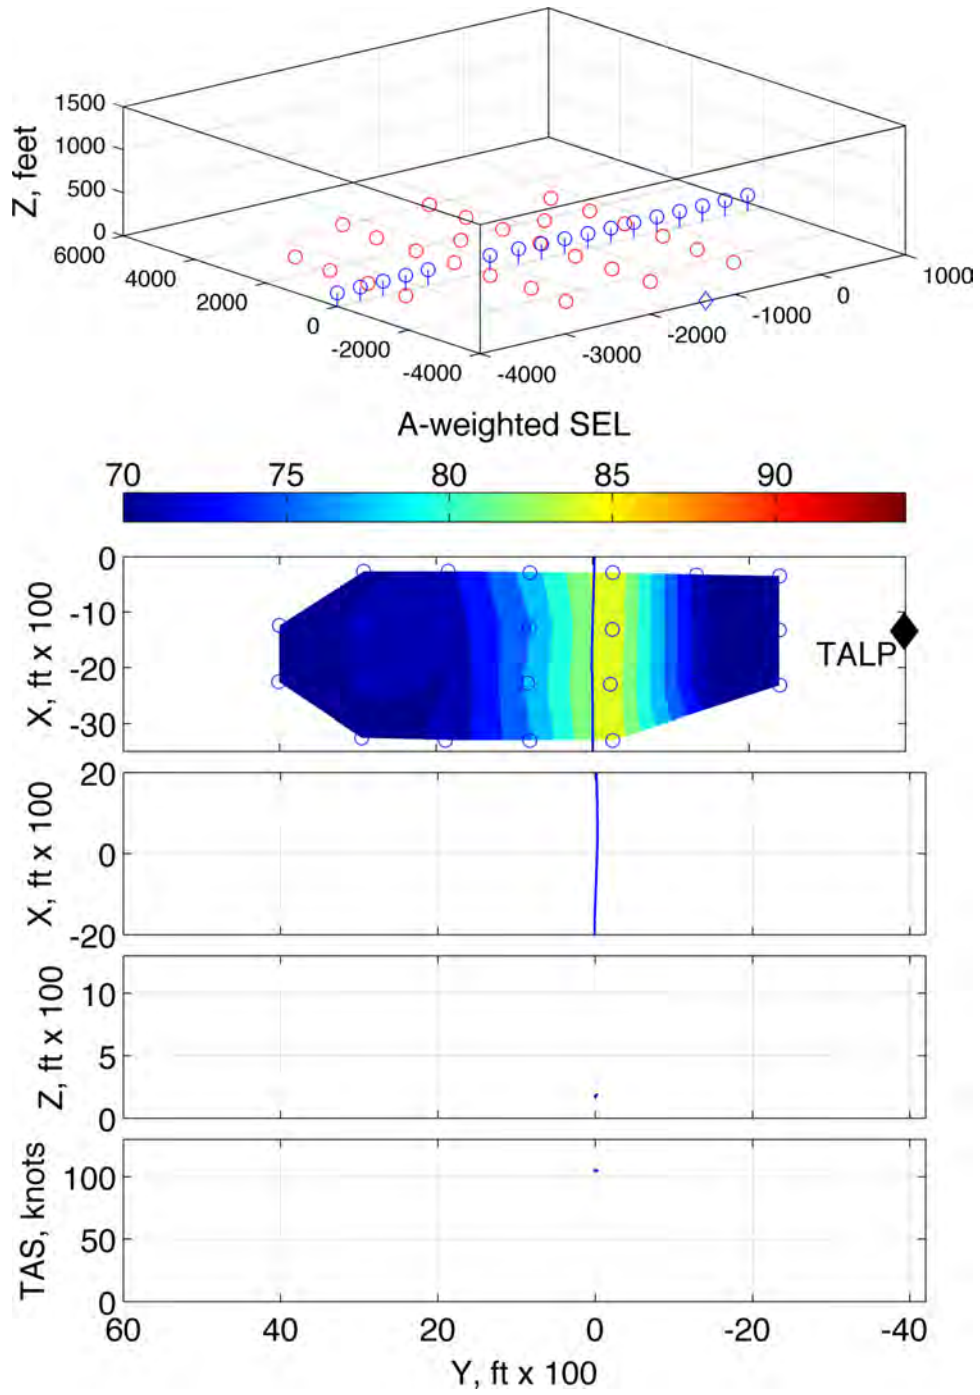


Figure 363: Terminal area condition L6, 100 KIAS, level, run number 288603

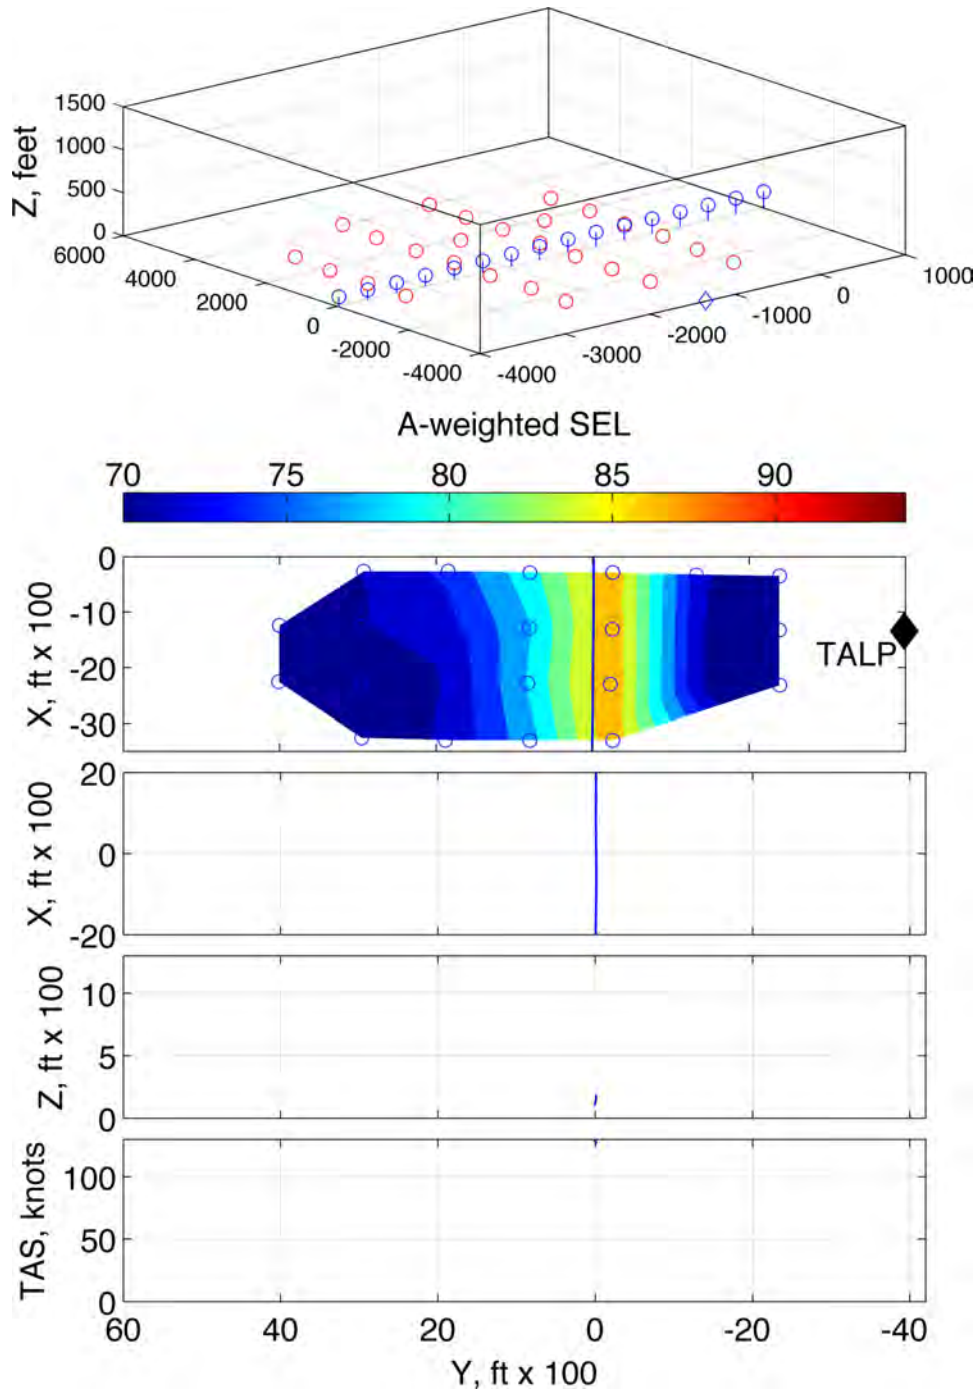


Figure 364: Terminal area condition L8, 120 KIAS, level, run number 288604

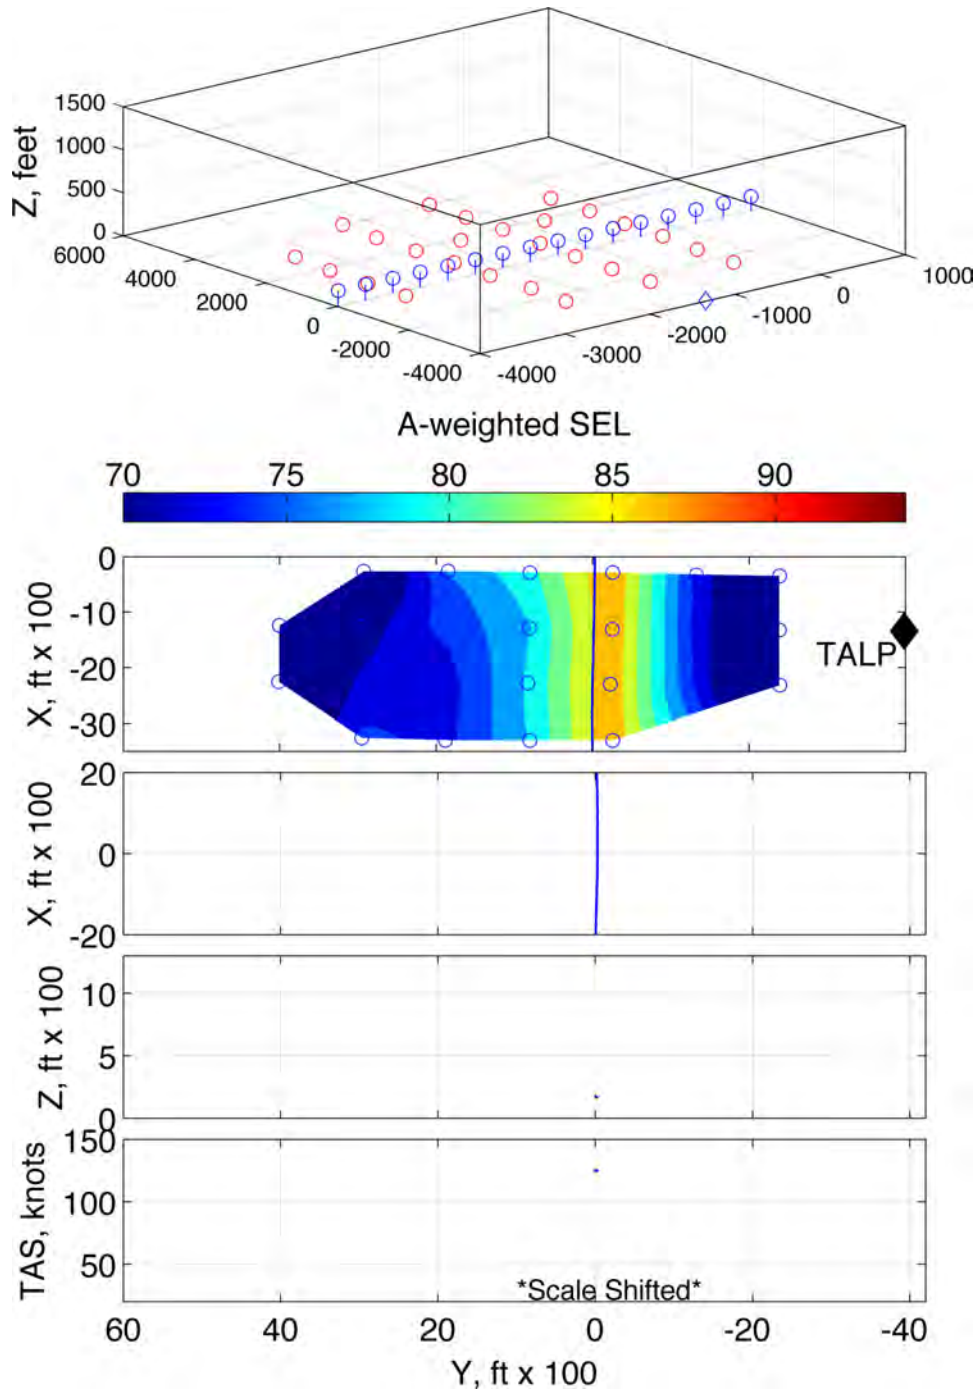


Figure 365: Terminal area condition L8, 120 KIAS, level, run number 288605

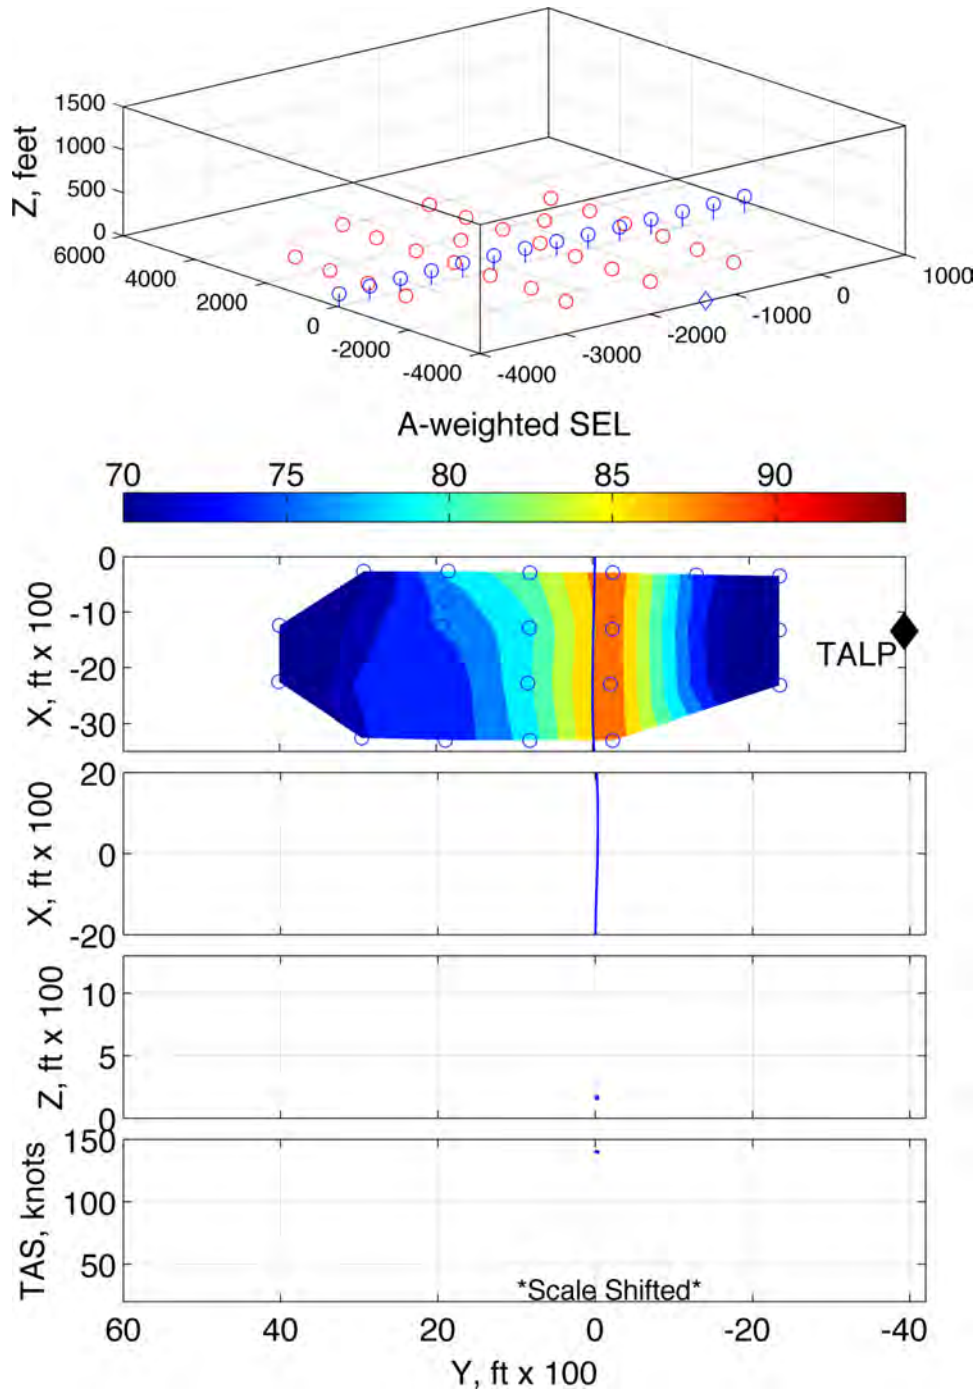


Figure 366: Terminal area condition L10, 140 KIAS, level, run number 288606



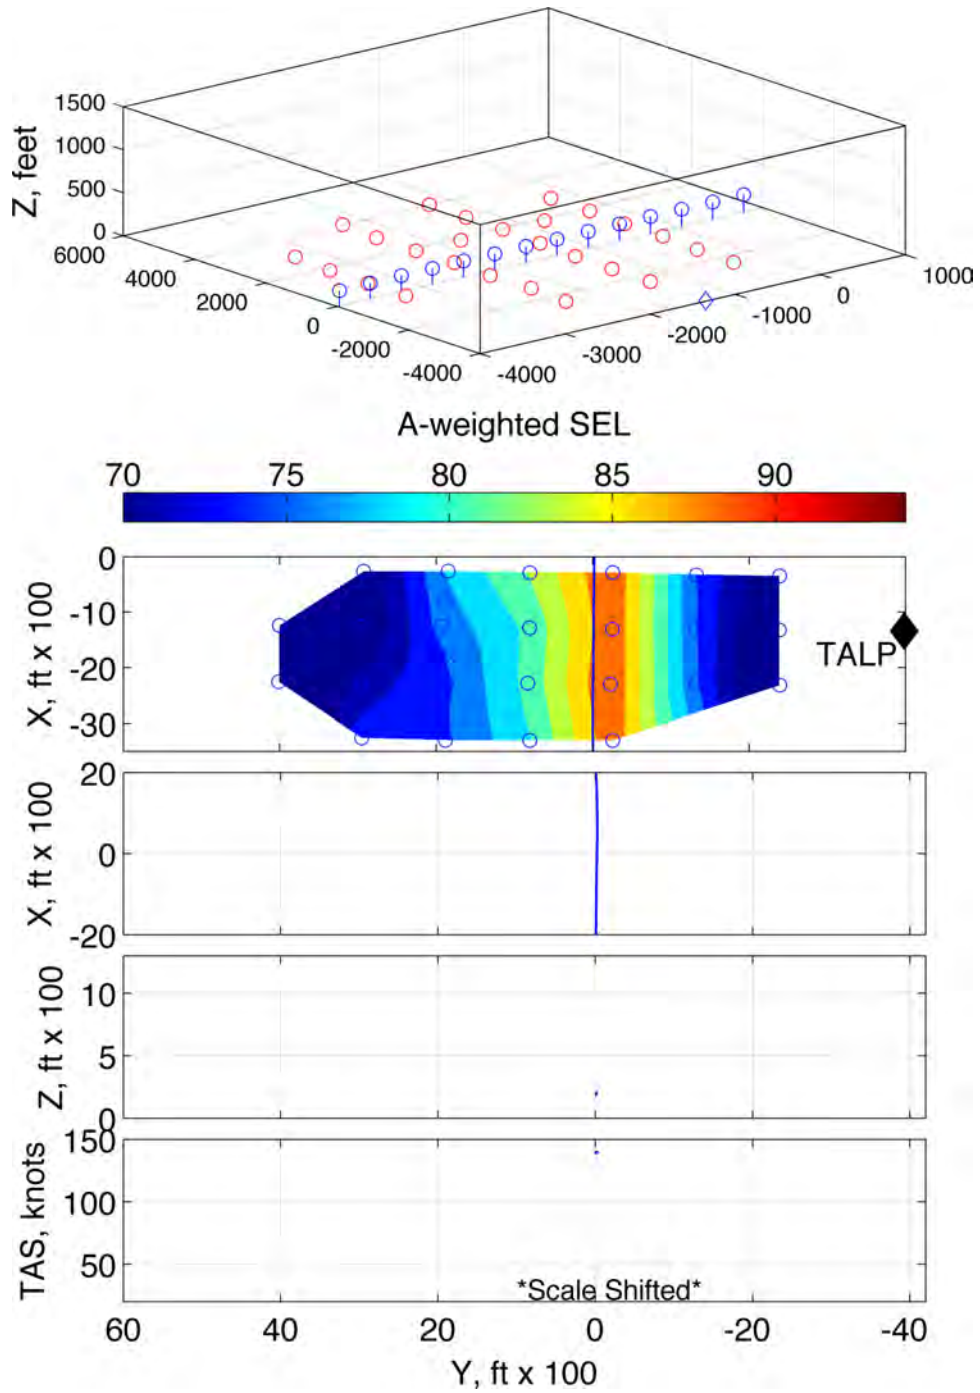


Figure 367: Terminal area condition L10, 140 KIAS, level, run number 288607

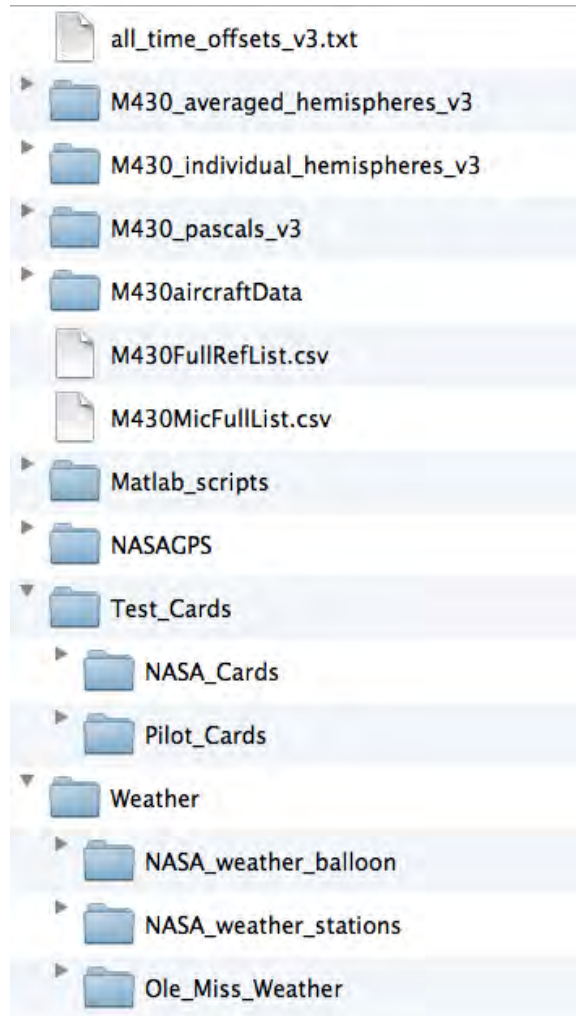


Figure 368: Electronic data file structure.

Flt 280:Profile 17, Start Time = 07:03:34, End Time = 07:09:10

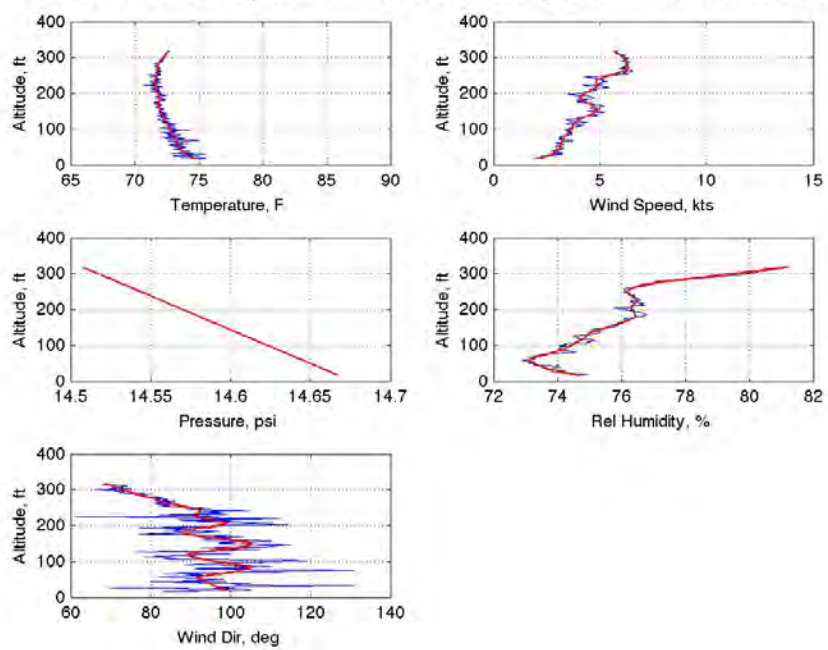


Figure 369: Flight 280, profile number 16.

**REPORT DOCUMENTATION PAGE**

*Form Approved  
OMB No. 0704-0188*

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.  
**PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**

<b>1. REPORT DATE (DD-MM-YYYY)</b> 01-05-2014		<b>2. REPORT TYPE</b> Technical Memorandum		<b>3. DATES COVERED (From - To)</b>	
<b>4. TITLE AND SUBTITLE</b>  Maneuver Acoustic Flight Test of the Bell 430 Helicopter Data Report				<b>5a. CONTRACT NUMBER</b>	
				<b>5b. GRANT NUMBER</b>	
				<b>5c. PROGRAM ELEMENT NUMBER</b>	
<b>6. AUTHOR(S)</b>  Watts, Michael E.; Greenwood, Eric; Smith, Charles D.; Snider, Royce; Conner, David A.				<b>5d. PROJECT NUMBER</b>	
				<b>5e. TASK NUMBER</b>	
				<b>5f. WORK UNIT NUMBER</b>  380046.02.07.03.01.02	
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> NASA Langley Research Center Hampton, VA 23681-2199				<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b>  L-20367	
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b> National Aeronautics and Space Administration Washington, DC 20546-0001				<b>10. SPONSOR/MONITOR'S ACRONYM(S)</b>  NASA	
				<b>11. SPONSOR/MONITOR'S REPORT NUMBER(S)</b>  NASA/TM-2014-218266	
<b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b> Unclassified - Unlimited Subject Category 71 Availability: NASA CASI (443) 757-5802					
<b>13. SUPPLEMENTARY NOTES</b>					
<b>14. ABSTRACT</b>  A cooperative flight test by NASA, Bell Helicopter and the U.S. Army to characterize the steady state acoustics and measure the maneuver noise of a Bell Helicopter 430 aircraft was accomplished. The test occurred during June/July 2011 at Eglin Air Force Base, Florida. This test gathered a total of 410 test points over 10 test days and compiled an extensive database of dynamic maneuver measurements. Three microphone arrays with up to 31 microphones in each were used to acquire acoustic data. Aircraft data included Differential Global Positioning System, aircraft state and rotor state information. This paper provides an overview of the test and documents the data acquired.					
<b>15. SUBJECT TERMS</b>  Acoustics; Bell helicopter; Data base; Global positioning system; Helicopter; Rotors; Steady state					
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b>	<b>18. NUMBER OF PAGES</b>	<b>19a. NAME OF RESPONSIBLE PERSON</b>
<b>a. REPORT</b>	<b>b. ABSTRACT</b>	<b>c. THIS PAGE</b>			STI Help Desk (email: help@sti.nasa.gov)
U	U	U	UU	452	<b>19b. TELEPHONE NUMBER (Include area code)</b>  (443) 757-5802