

Development of Modeling Approaches for Nuclear Thermal Propulsion Test Facilities




D. Jones, D. Allgood, K. Nguyen and D. Coote
NASA John C. Stennis Space Center
Engineering and Test Directorate

Nuclear and Emerging Technologies for Space (NETS) Conference
Infinity Science Center, Mississippi
February 24-26, 2014




SSC Regional Map

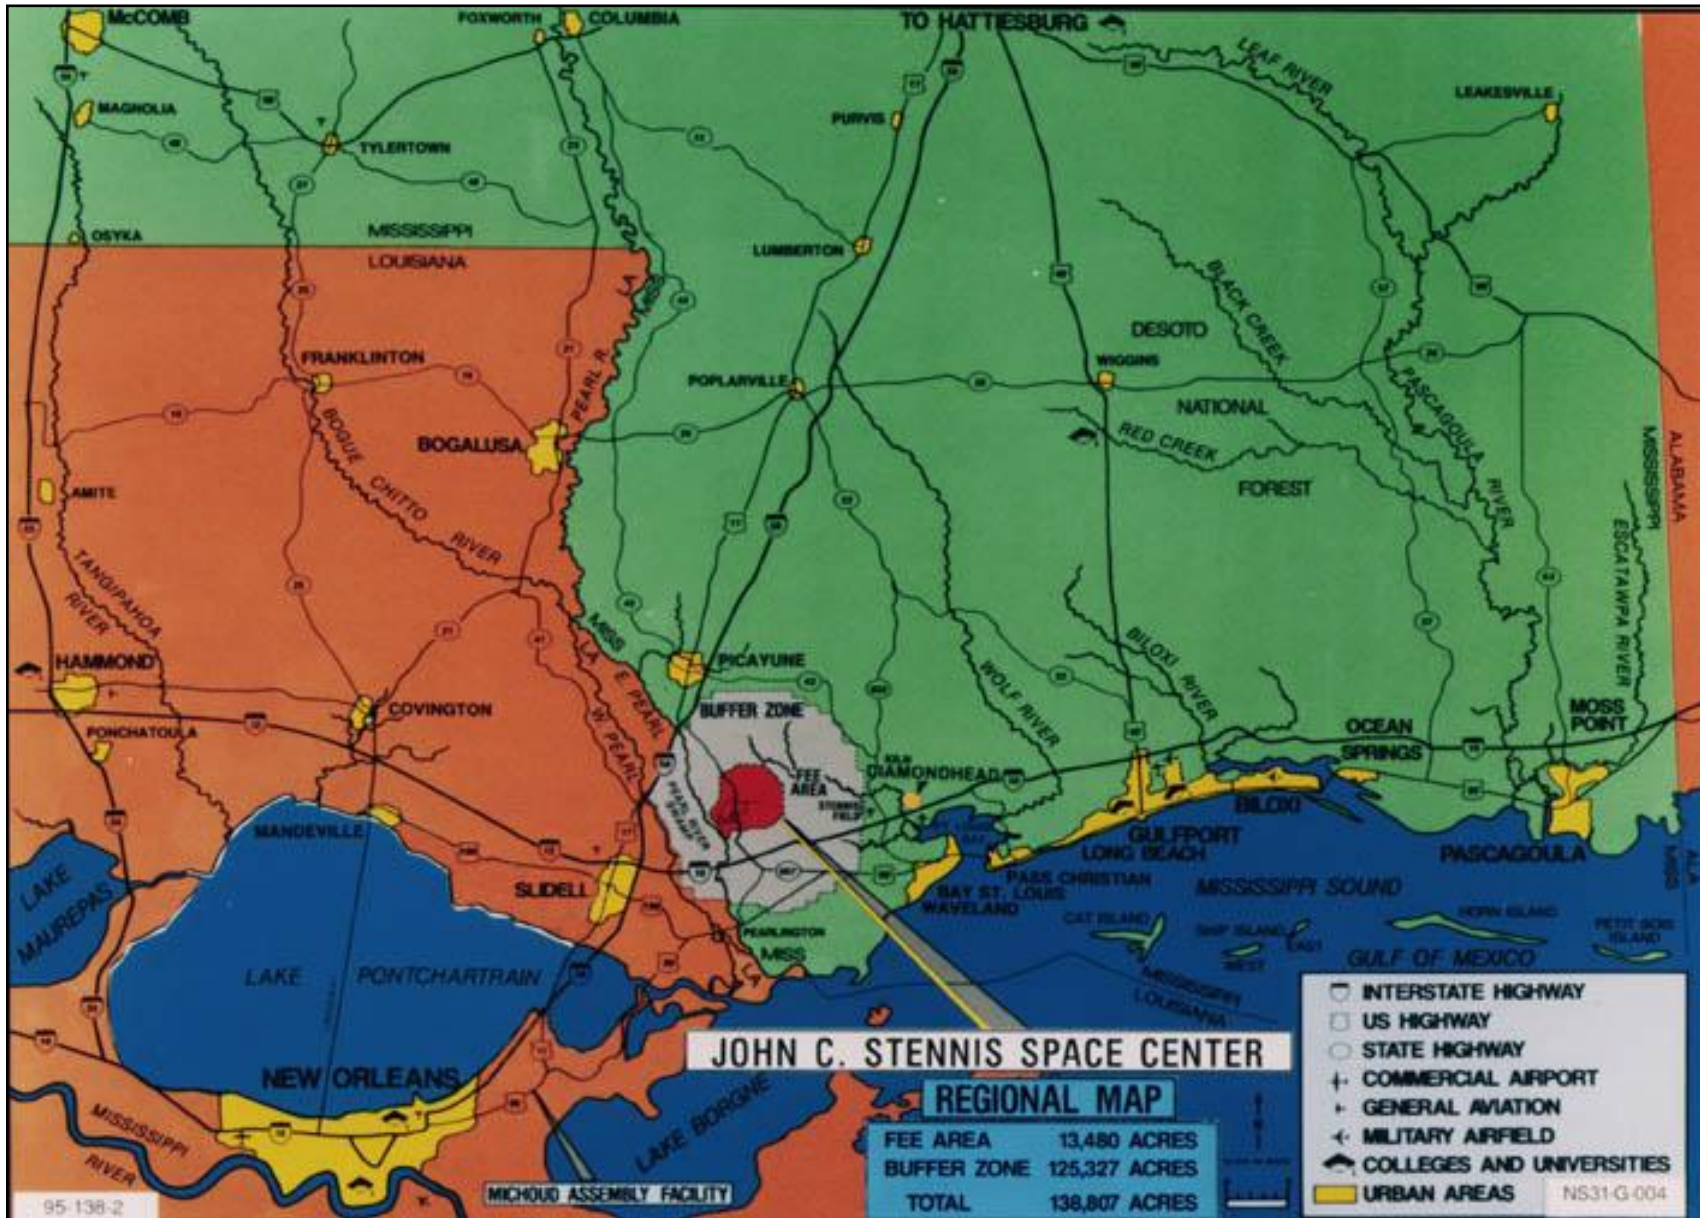



SSC Test Stands

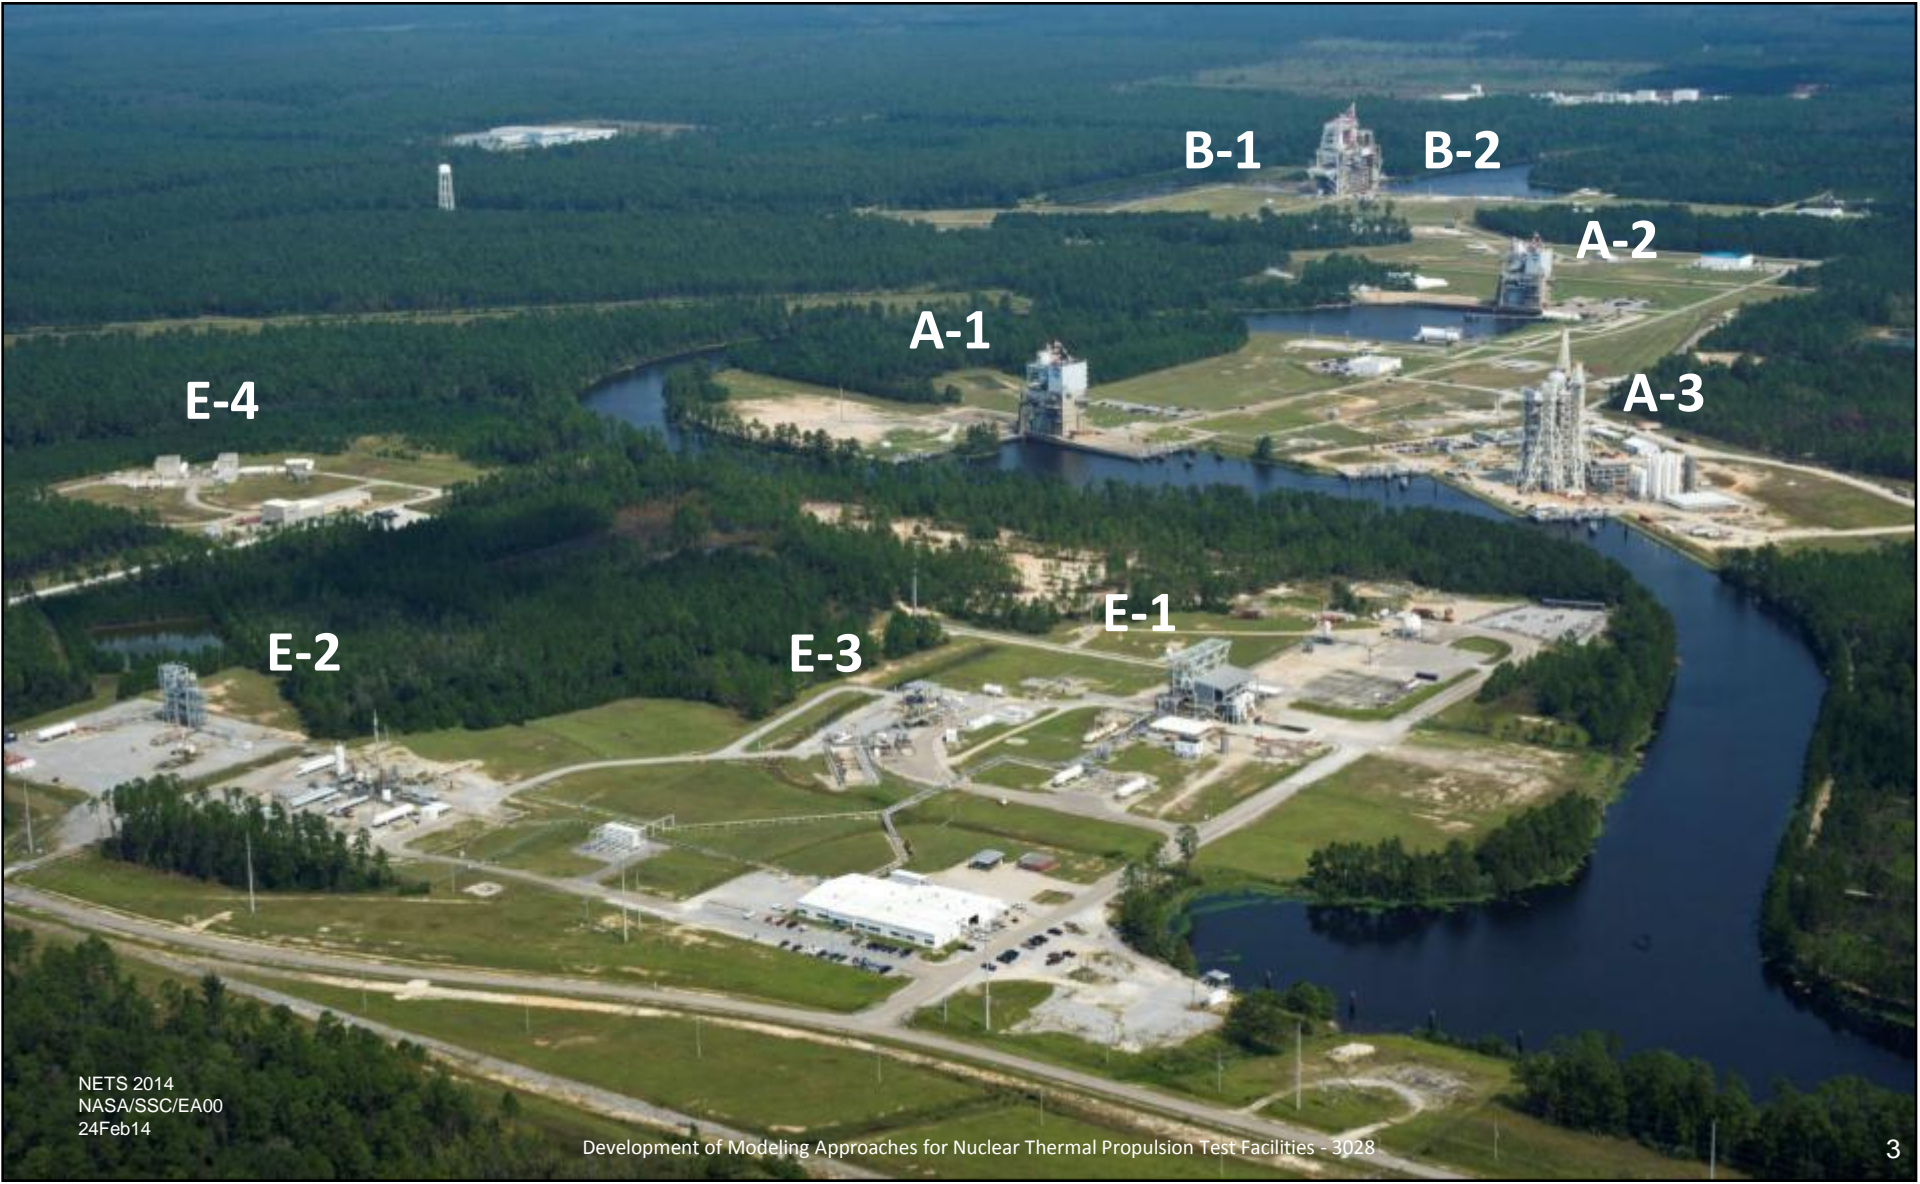



SSC Test Capability



A-1 Test Stand
Max Thrust (Klbf)
 1,500 (designed)
 650 (current)
Altitude (Kft)
 Ambient
Propellants
 LOX/LH2



A-2 Test Stand
Max Thrust (Klbf)
 1,500 (designed)
 650 (current)
Altitude (Kft)
 60
Propellants
 LOX/LH2



B-1 Test Stand
Max Thrust (Klbf)
 11,000 (designed)
 750 (current)
Altitude (Kft)
 Ambient
Propellants
 LOX/LH2



E-1 Test Facility Cells 1-3
Max Thrust (Klbf)
 1,200
Altitude (Kft)
 Ambient
Propellants
 LOX/LH2/RP

E-2 Test Facility Cell 1
Max Thrust (Klbf)
 100
Altitude (Kft)
 Ambient
Propellants
 LOX/LH2/RP



B-2 Test Stand
Max Thrust (Klbf)
 11,000 (designed)
Altitude (Kft)
 Ambient
Propellants
 LOX/LH2



E-3 Test Facility Cell 1
Max Thrust (Klbf)
 60
Altitude (Kft)
 Ambient
Propellants
 LOX/H2O2/JP-8



E-3 Test Facility Cell 2
Max Thrust (Klbf)
 25
Altitude (Kft)
 Ambient
Propellants
 LOX/H2O2/CH4/JP-8



E-2 Test Facility Cell 2
Max Thrust (Klbf)
 150
Altitude (Kft)
 Ambient
Propellants
 LOX/RP/H2O2





SSC Test Support Facilities


Available Additional Support:

- Laboratories
 - Environmental
 - Gas and Material Analysis
 - Measurement Standards and Calibration
- Shops
 - Machine/Weld/Carpenter/Paint/Electrical
 - Valve/Component Cleaning/Rework
- Utilities



High Pressure Industrial Water (HPIW)

330,000 gpm (66 M gallon reservoir storage capacity)

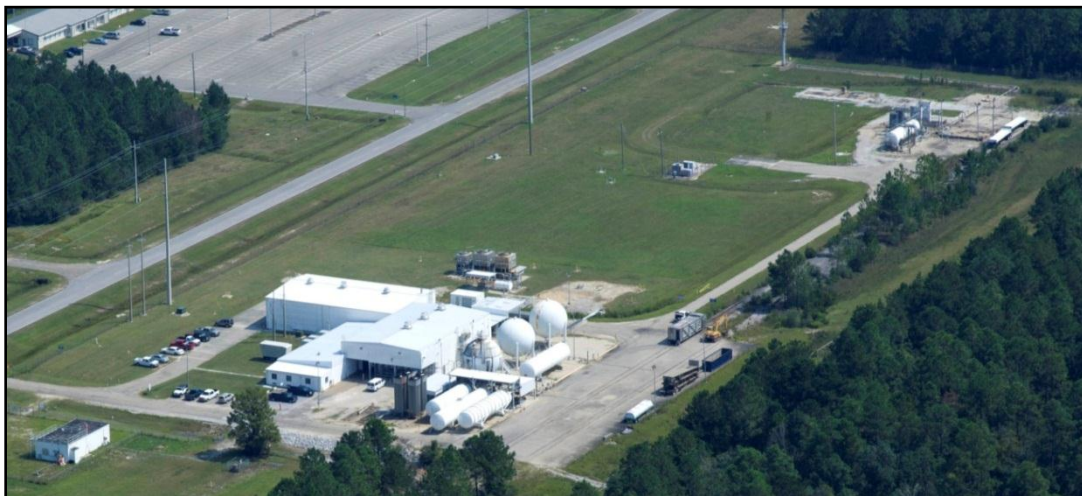

High Pressure Gas Facility (HPGF)

(GN, GHe, GH, Air)



Cryogenic Propellant Storage Facility

Six (6) 100,000 Gallons LOX Barges

Three (3) 240,000 Gallons LH Barges




NASA/SSC's Participation in Nuclear Thermal Propulsion Technology Development

- SSC's Office of Chief Technologist has provided funding since FY05 via its Center Innovation Funding (CIF) budget to investigate two NTP engine test exhaust processing approaches.
 - Non-Nuclear NTP engine technology development (FY05,06,12).
 - Direct gas treatment (effluent scrubbing) (FY13).
 - Total exhaust containment (FY14).
 - Goal has been to investigate feasibility and identify preliminary design requirements.
- SSC was approached by MSFC for support of its 2013/14 Nuclear Cryogenic Propulsion Stage (NCPS) Project.
 - Project goal is to demonstrate the affordability and viability of nuclear thermal rocket propulsion with an emphasis on a human rated mission to Mars in the 2033 time frame.
 - SSC is supporting MSFC efforts in the definition of affordable development and qualification strategy:
 - Task is to scope and estimate the cost to develop an NTP engine test exhaust processing facility.
 - Identify the latest technologies in radioactive effluent scrubbing.
 - Investigate total exhaust containment feasibility.



NTP Total Containment Test Facility Concept

Total Containment NTP Exhaust System

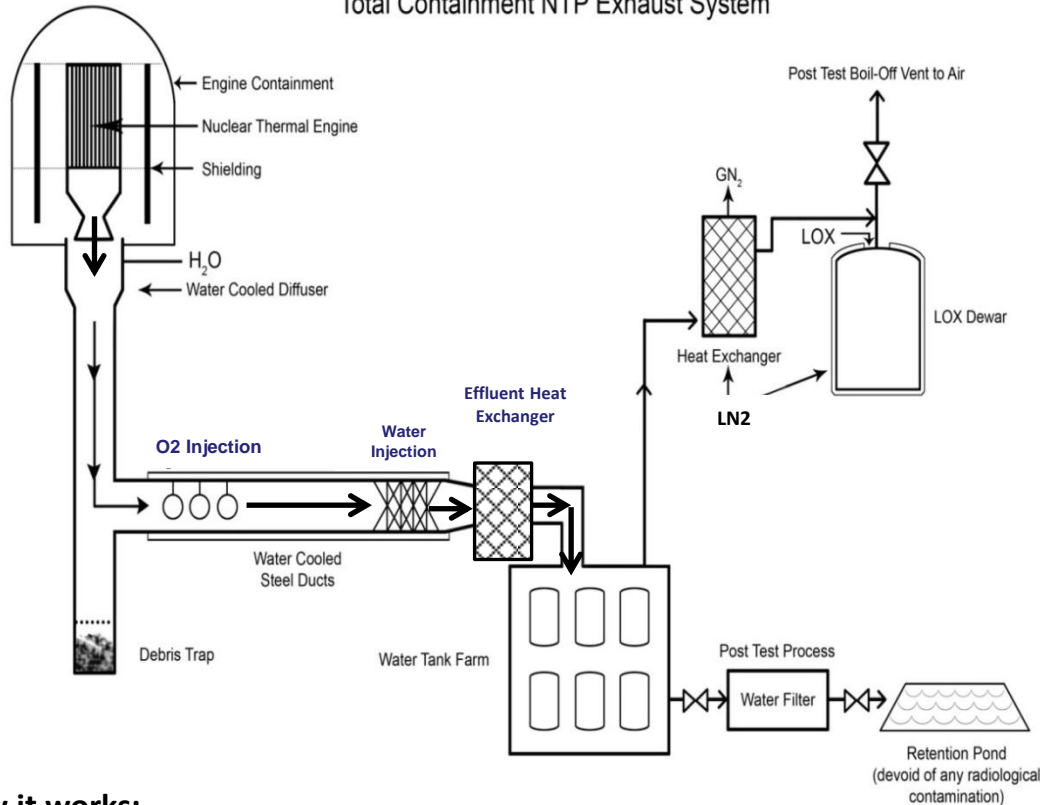

Strategy:

- Fully contain NTP engine exhaust during burns
- Slowly drain containment vessels after test

How it works:

- Hot hydrogen exhaust from the NTP engine flows through a water cooled diffuser that transitions the flow from supersonic to subsonic to enable stable burning with injected LO₂
- Products include steam, excess O₂ and a small fraction of noble gases (e.g., xenon and krypton)
- Heat exchanger and water spray dissipates heat from steam/O₂/noble gas mixture to lower the temperature and condense steam
- Water tank farm collects H₂O and any radioactive particulates potentially present in flow. Drainage is filtered post test.
- Heat exchanger-cools residual gases to LN₂ temperatures (freezes and collects noble gases) and condenses O₂.
- LOX Dewar stores LO₂, to be drained post test via boil-off




NTP Total Containment Test Facility

Preliminary System Sizing

NTP Engine Assumptions:

- 25,000 lb_f thrust
- 28 lbm/s GH₂ Flow.
- 3000 K Stagnation Temperature

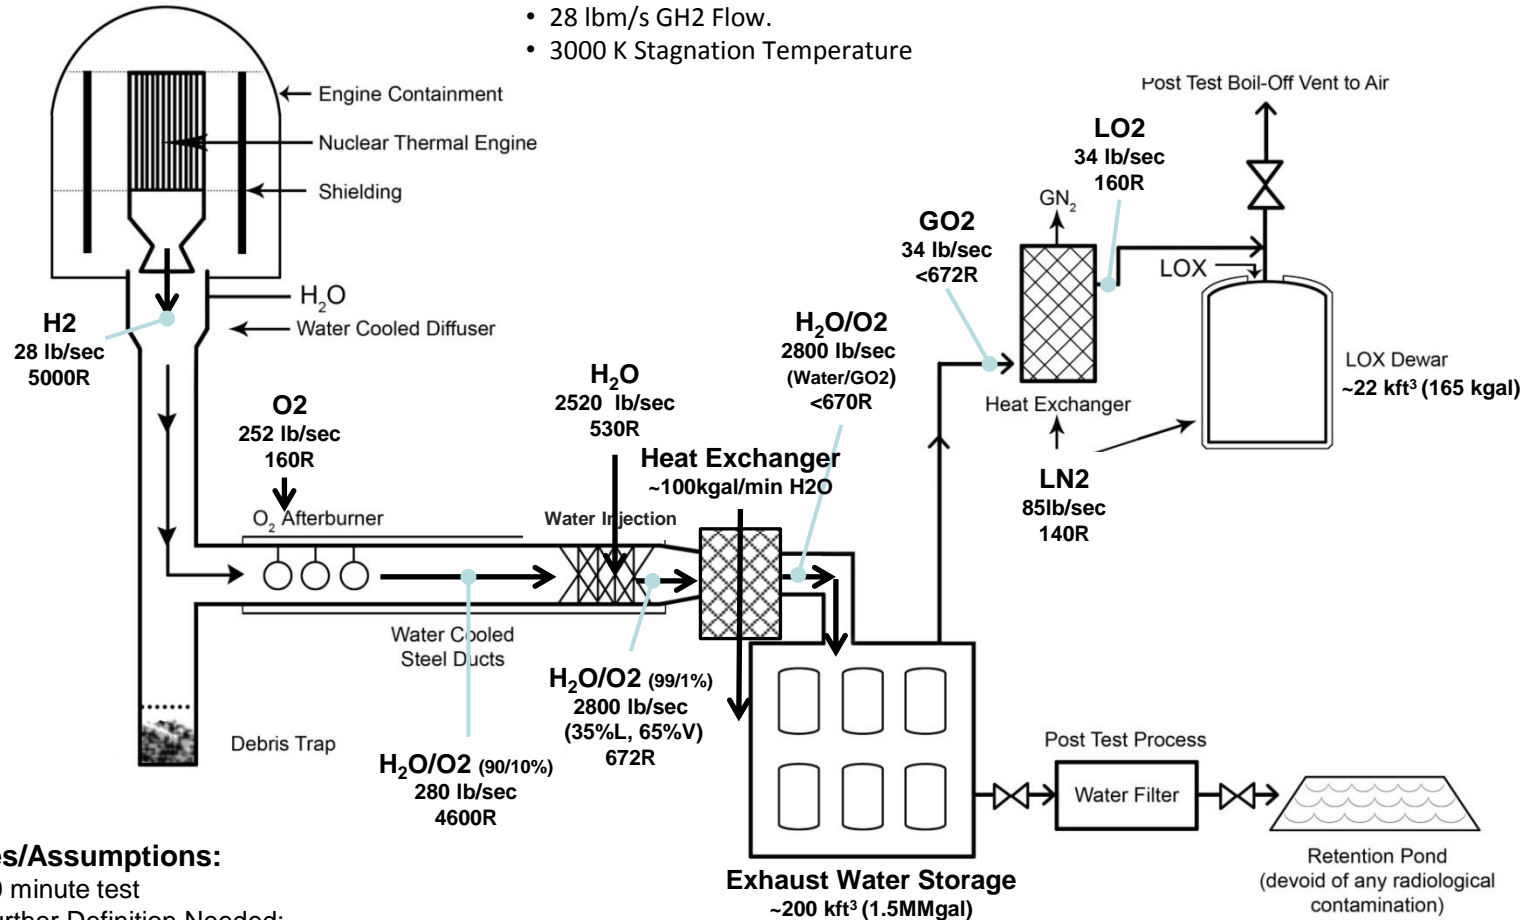

Notes/Assumptions:

- 60 minute test
- Further Definition Needed:
 - Debris Trap
 - Water Injection/Steam Condenser Concept
 - O₂/LN₂ Heat Exchanger



Diffuser Sizing

Coupled Diffuser Performance and Combustion Analysis Approach:

- Find initial diffuser inlet area by assuming minimum allowable static pressure to be 2 psia.
- Use analytical methods in reference documents AEDC-TR-68-84, AEDC-TMR-85-E20, and NACA ACR No. L5D20 to determine other critical diffuser geometry parameters.
- Employ CRAFT Tech CRUNCH CFD to refine the basic design, visualize oblique shock interactions, and provide accurate predictions of test cell pressure and diffuser performance.
- Run simulation with downstream O₂ combustion to determine effect of additional back pressure on the diffuser.

CFD Analysis Assumptions:

- System Back Pressure: 20 psia.
- O₂ injector assumed to be annular and placed 13.6 m after the diffuser, where Mach = 0.3 in the non-combustion simulation.
- O₂ injection annulus sized for equal momentum in O₂ and H₂ flows.
- Adiabatic pipe flow
- Used CRUNCH's finite-rate chemistry model.
- O₂/GH₂ ratio of 9 to minimize H₂ residuals.



Combustion Analysis

O₂ Injection

Task:

- Obtain amount of oxygen to combust hydrogen from NTP engine.

Approach:


- Use MATLAB implementation of NASA's Chemical Equilibrium with Applications (CEA) method to determine adiabatic flame temperature and combustion products.

Assumptions:


- LOX is injected at its boiling point of 90.17 K.

Outcome:

- At an O/F of 9, most of the hydrogen is consumed.
- O/F = 9 baselined for diffuser sizing and other system analyses.

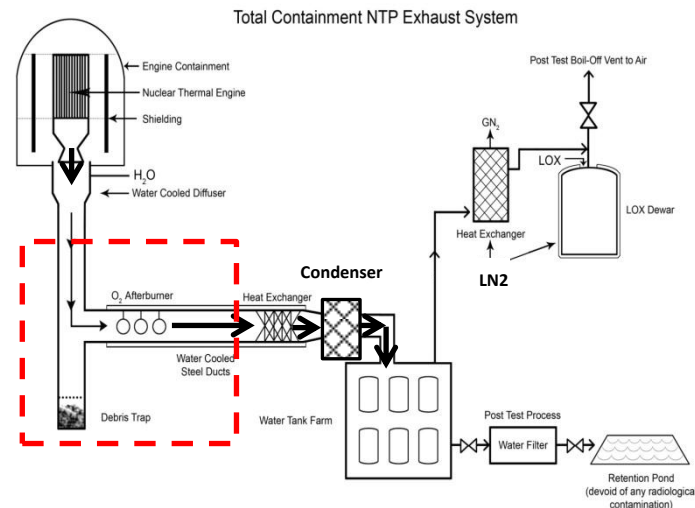

Mass Fractions vs. O/F Ratio, Ambient Pressure

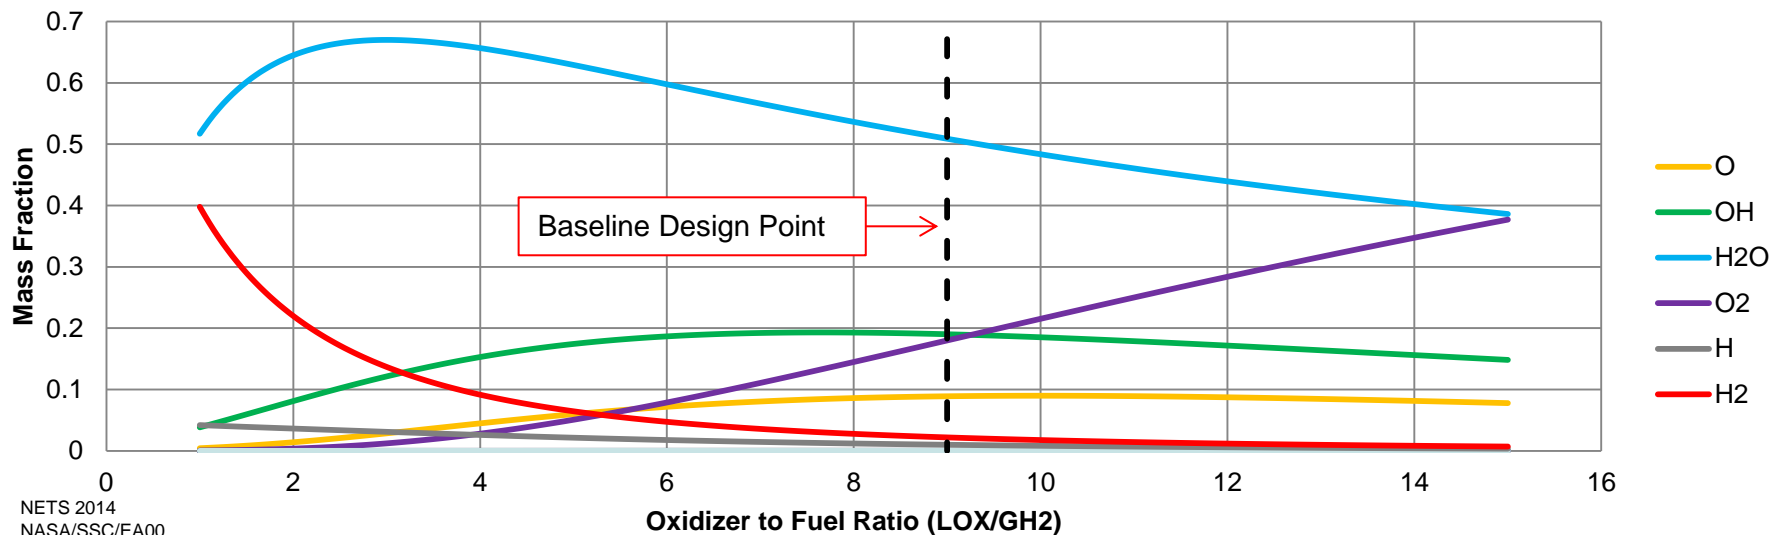





Diffuser Performance Assessment

Mach Number Contours

Results:



- Diffuser Length = 6.43 m.
 - Based on adiabatic system.
- Flow is subsonic at diffuser exit.
- Diffuser isolates engine from higher downstream pressure.

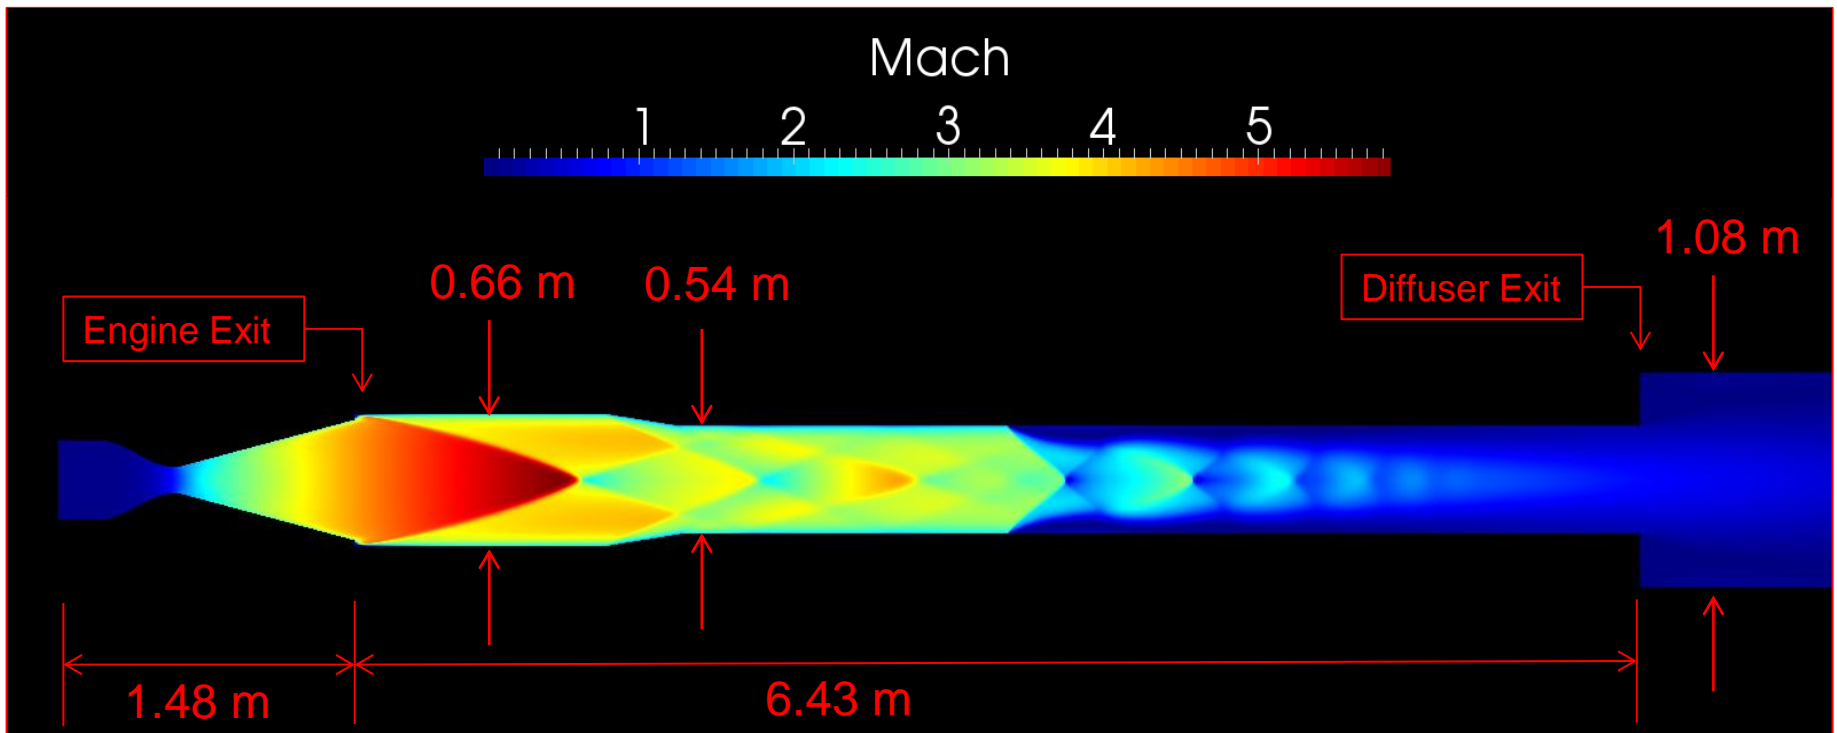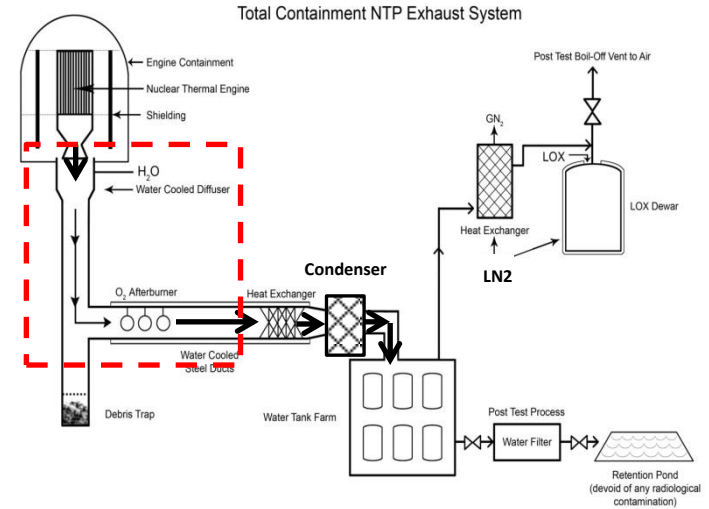



Diffuser Performance Assessment

Mach Number Along the Centerline

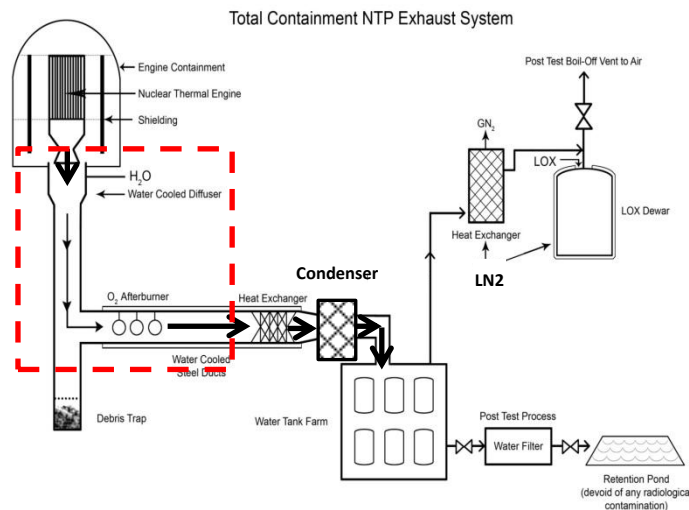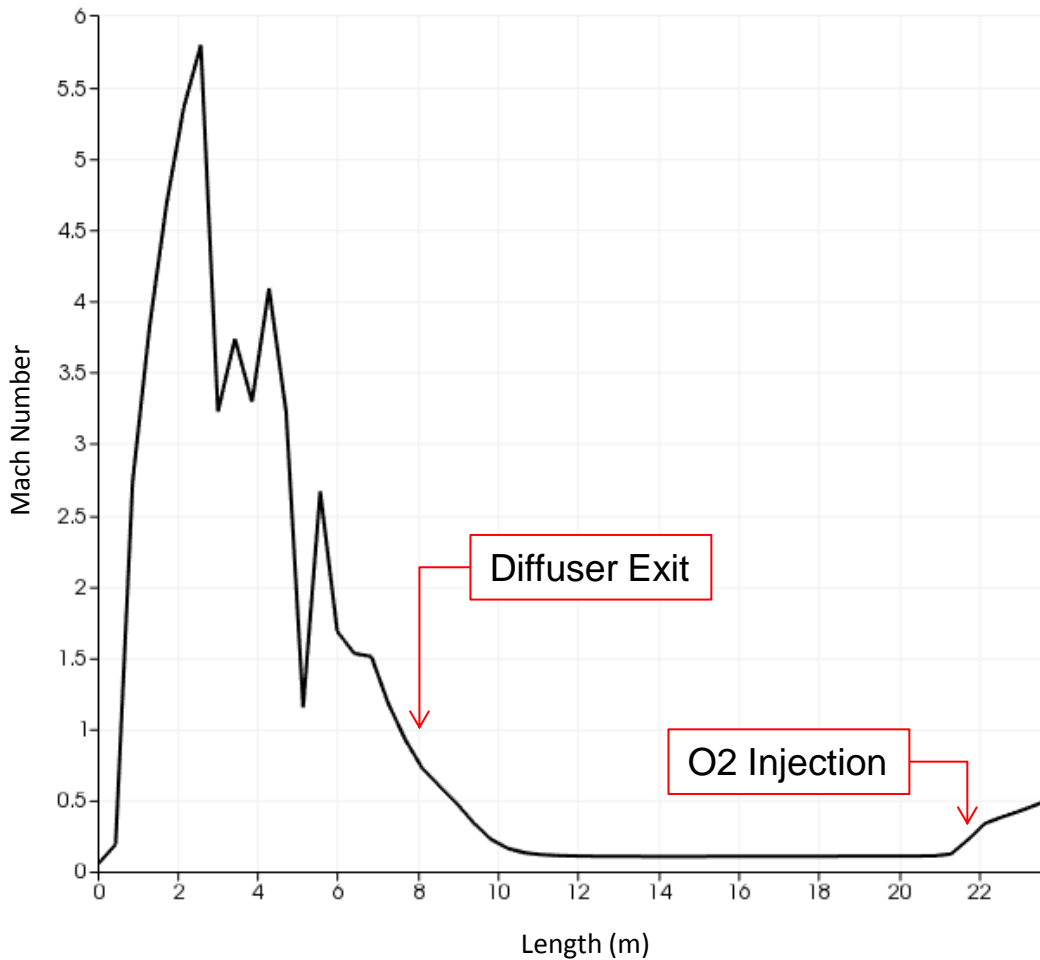


- Flow is subsonic at diffuser exit
- O₂ combustion increases back pressure on the diffuser.
- Mach Number ~0.15 at O₂ injection point





Oxygen Injection and Combustion

Temperature Contours

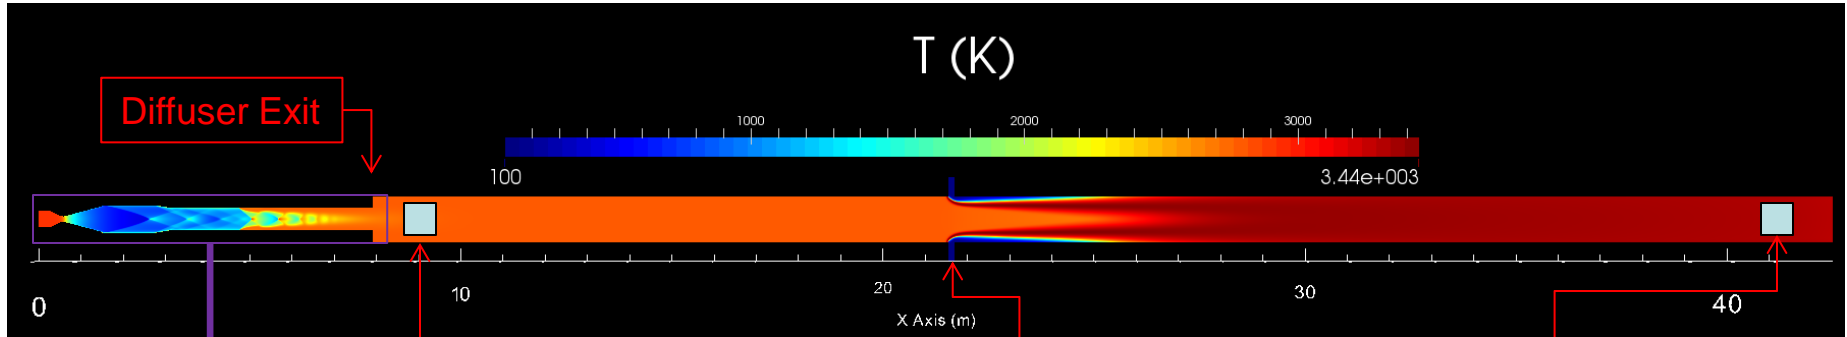

Chemical Composition:


- 99.8% H₂
- 0.02% H

O₂ Injection

Chemical Composition:

- 58.0% H₂O
- 16.2% OH
- 15.9% O₂
- 6.4% O
- Remainder: H, H₂


Note:
Radicals will disappear when the flow is doused with cooling water.

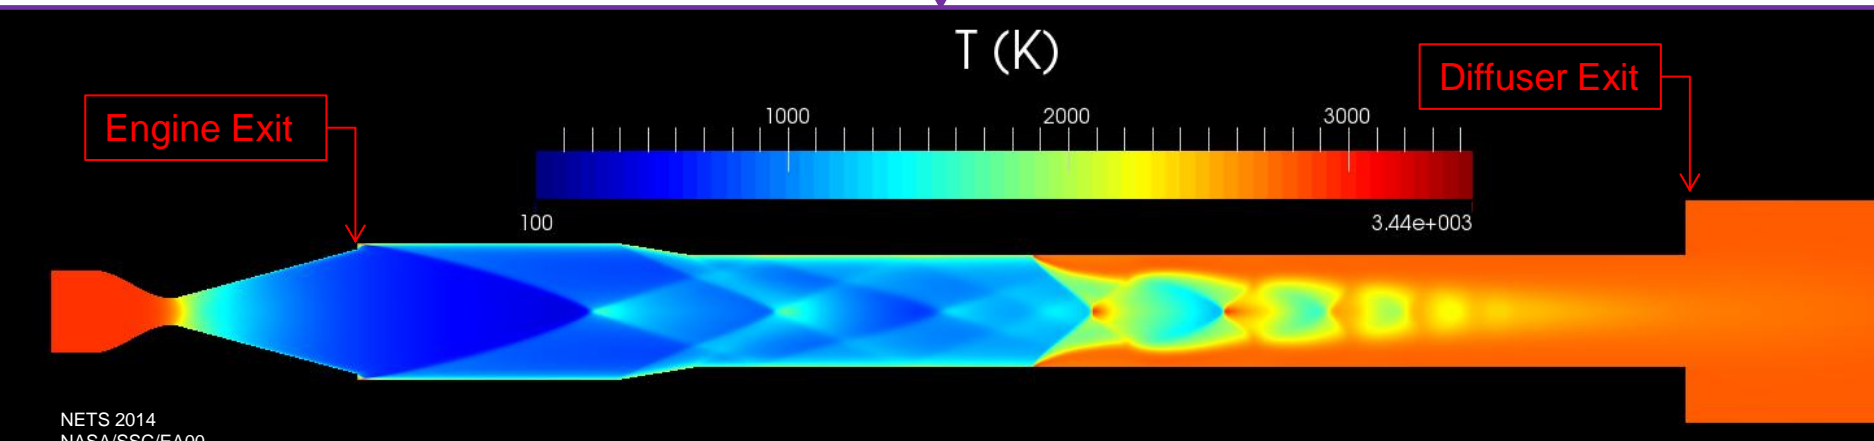



Water Injection and Heat Exchanger Flow Rate Assessment

Cooling Water Flow Rate Considerations

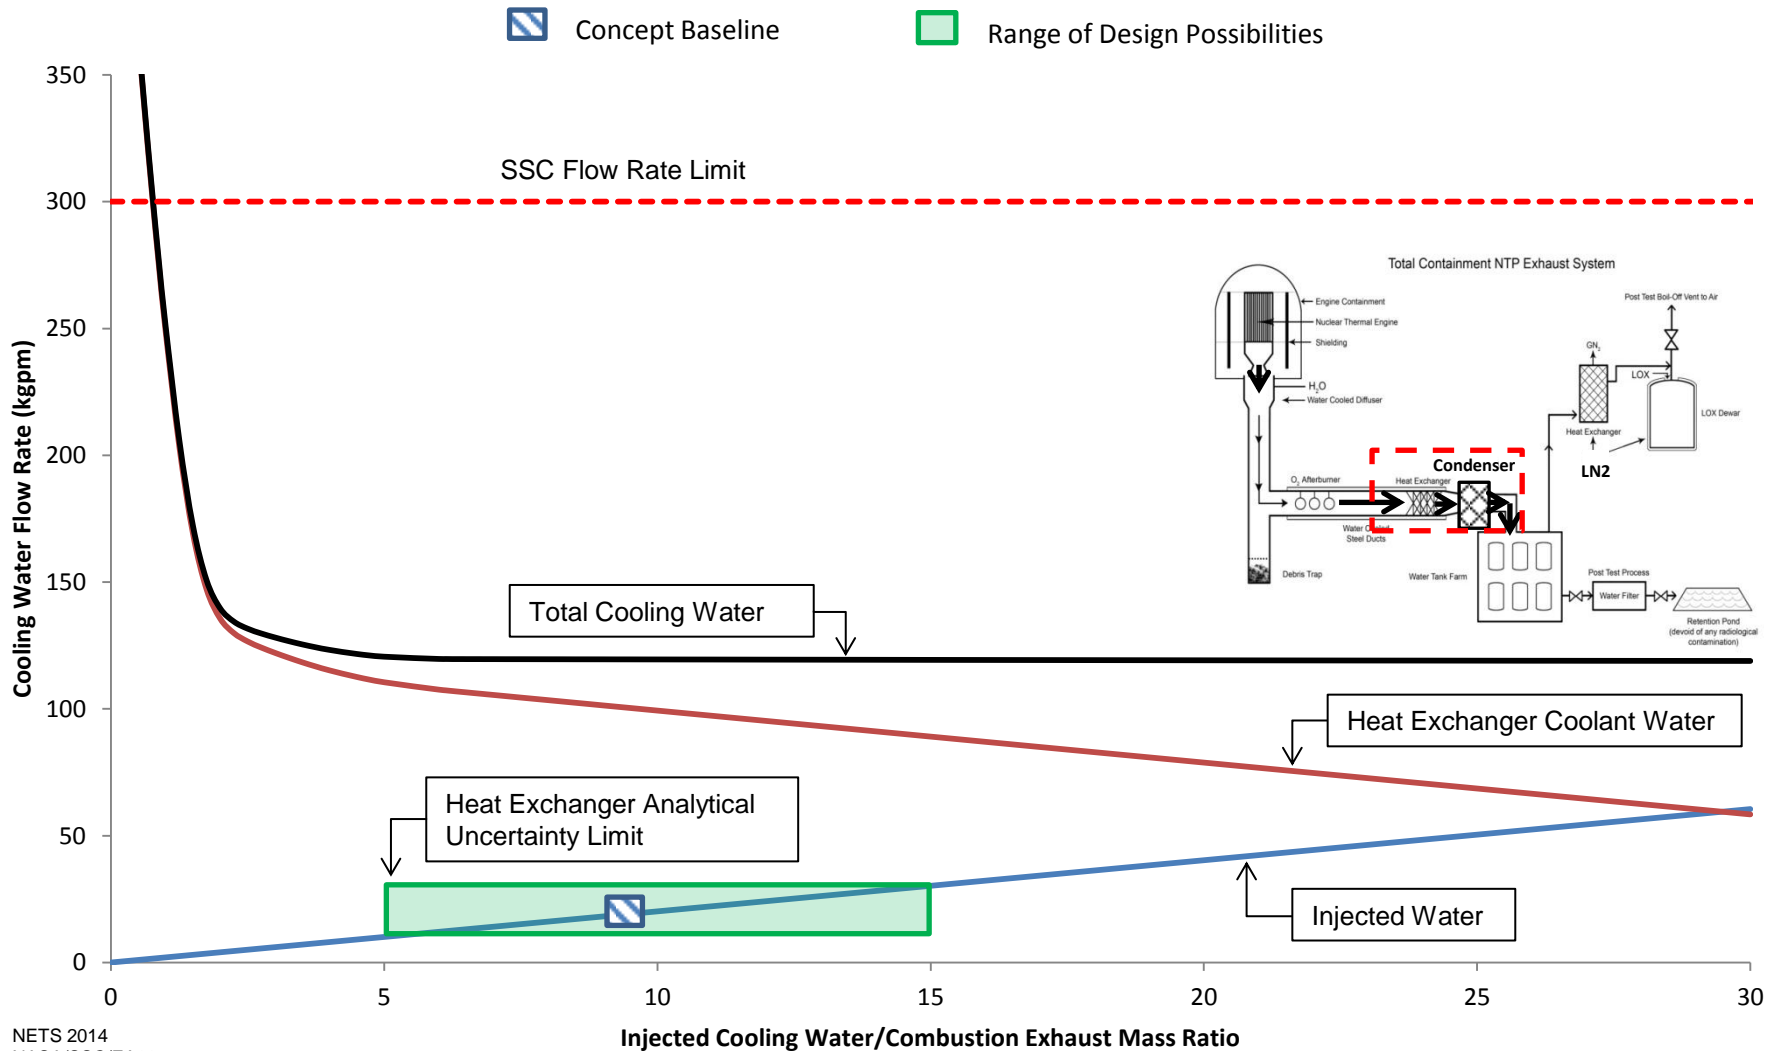




Cooling Water Injection

Steam Condensation

Residual Composition vs. Cooling Water/Combustion Exhaust Mass Ratio

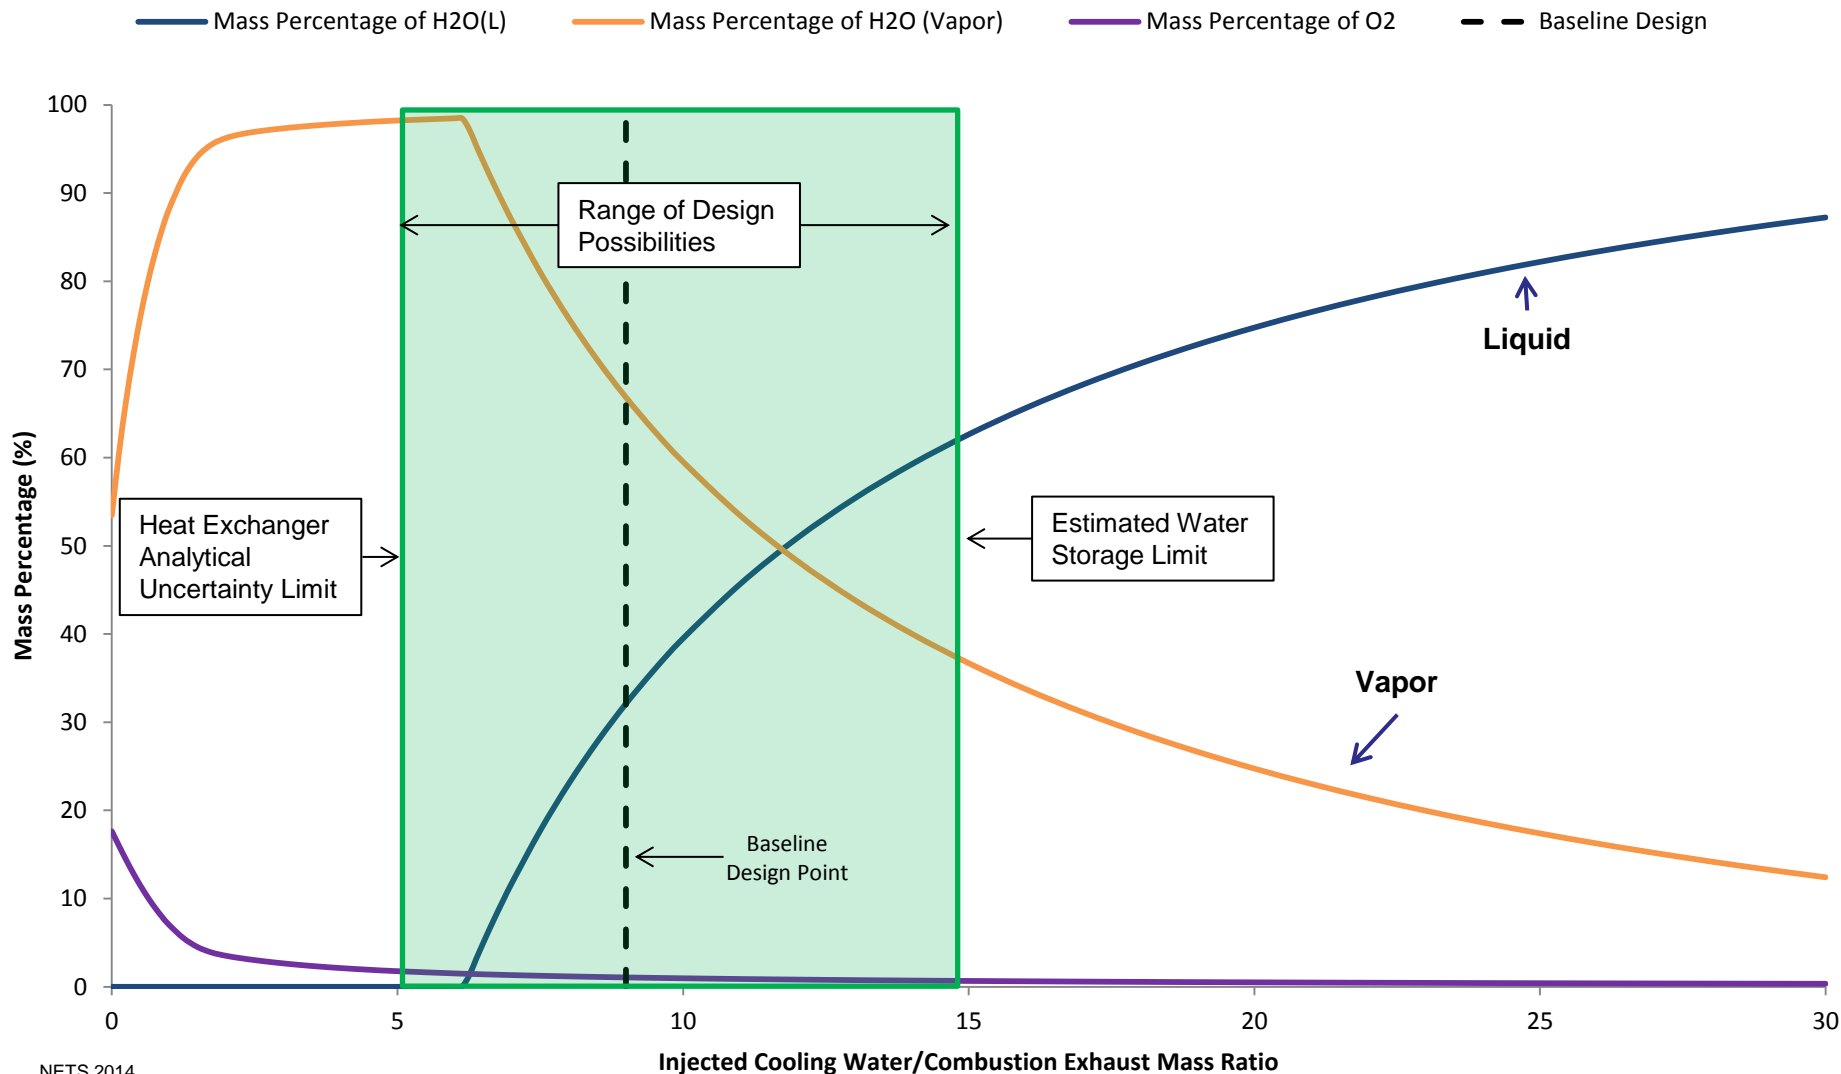





Water Collection Tank

Task:

- Size water tank to collect exhaust water and external cooling water.
- Determine vent flowrate required to keep tank below 1 psig during loading process.
- Used in-house Rocket Propulsion Test Analysis (RPTA), Fortran-based code to model water collection tank.
 - 2,800 lbm/sec water flow rate @ 660°R (200°F).
 - 25% ullage at the end of test.

Results:


- Water tank volume: ~200,000 ft³
- Required vent flowrate: ~ 34.0 lbm/sec.

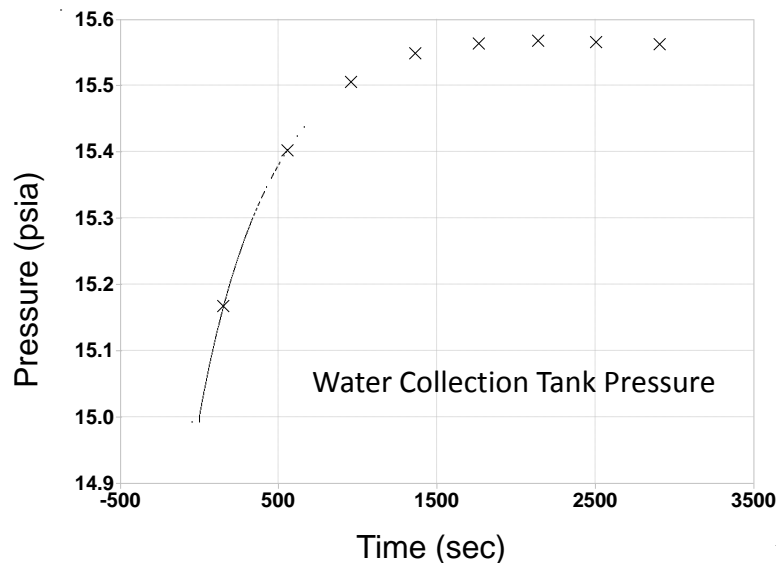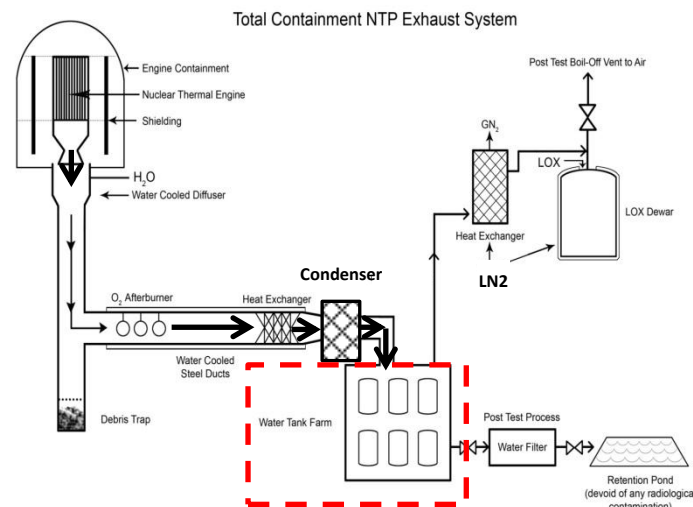



Summary

- Proof of concept has been analytically demonstrated for an NTP engine test total exhaust containment system; salient features include
 - Primary engine exhaust ducting: <1m diameter, <40m length
 - Water requirements :<~150kgal/min (~2.5 kgal/min direct exhaust injection, ~100 kgal/min heat exchanger, + exhaust duct cooling)
 - Contaminant Storage: ~1.5 million gallons (water), ~165 kgal (LO2)
 - LH2/LO2/LN2 requirements well within Liquid Rocket Engine supply experience
 - Low pressure operations: < 60 psi throughout exhaust processing system
- Analysis has not identified any significant technical issues with total exhaust containment approach
 - Preliminary, fully coupled, multi-physics CFD modeling of diffuser and O2 injection performance completed
 - Effluent transport and storage modeled with validated in-house and commercial facility fluid/thermodynamic codes

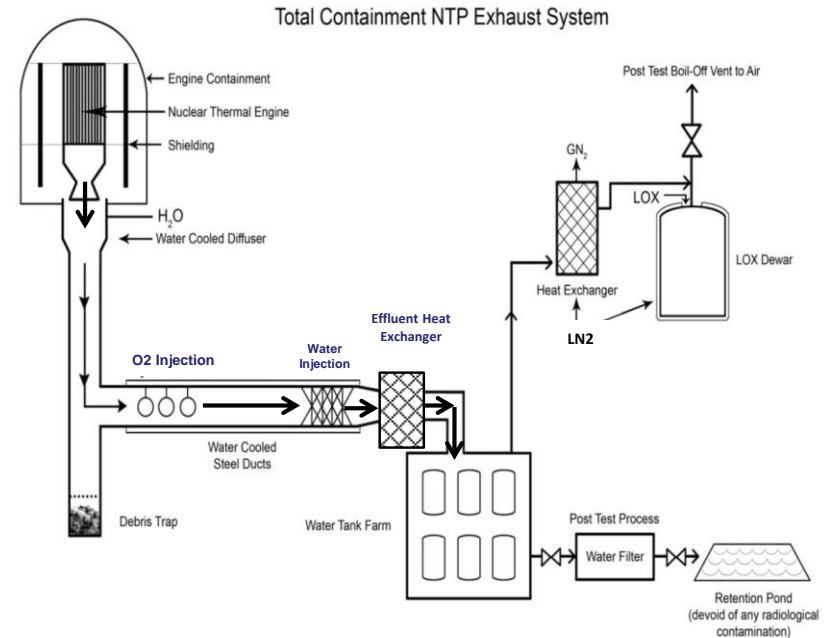



Forward Plans

FY14

- Complete preliminary concept definition and modeling
 - Exhaust heat exchanger sizing & operation (Water & LO2 systems)
 - O2 and water injection system designs
 - Exhaust debris containment system
- Complete ROM cost estimate of facility for NCPS project effort

FY15 & beyond

- Optimize system design:
 - O/F ratios for LO2 and water injection
 - O2 injection location
 - Exhaust debris containment system
- Subscale demonstration of concept (proposed)



Development of Modeling Approaches for Nuclear Thermal Propulsion Test Facilities



Back-Up Slides

NETS 2014
NASA/SSC/EA00
24Feb14




NASA SSC CFD Capability

- NASA-SSC routinely conducts CFD analysis in support of rocket engine testing.
 - multi-species reacting plumes
 - propellant feed systems
 - cryogenic cavitation
 - thermal environments
 - blast-wave propagations in test complex
 - etc.

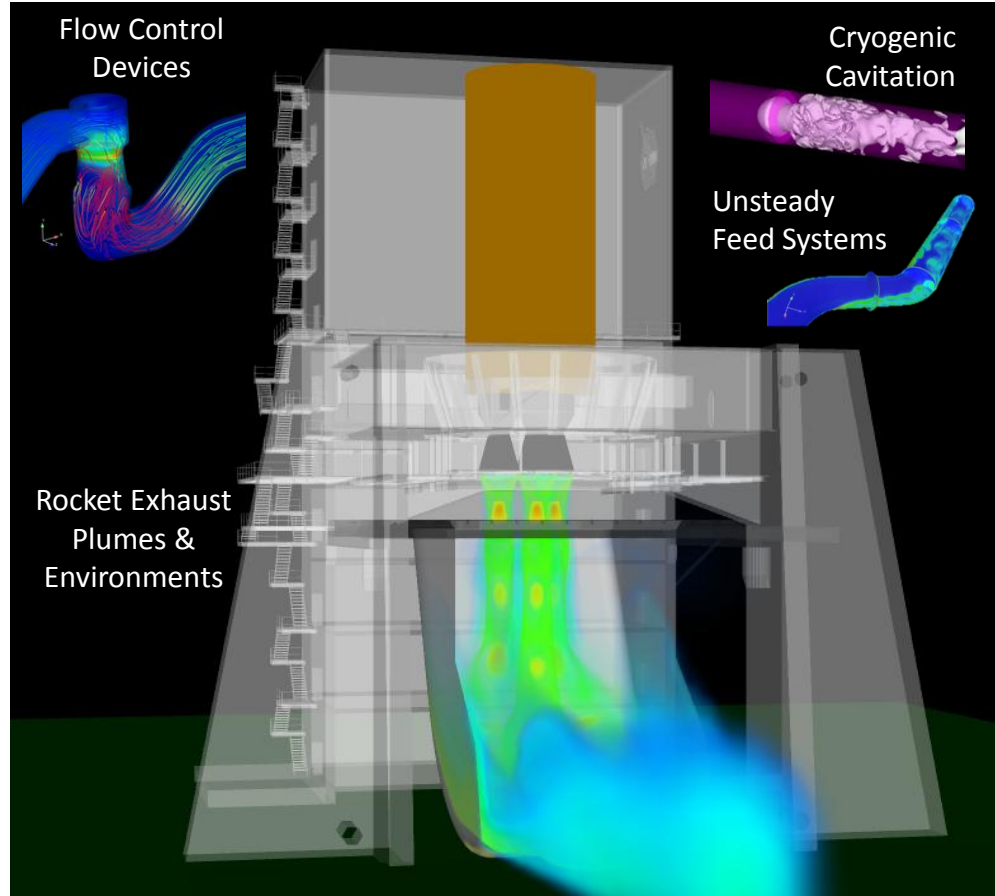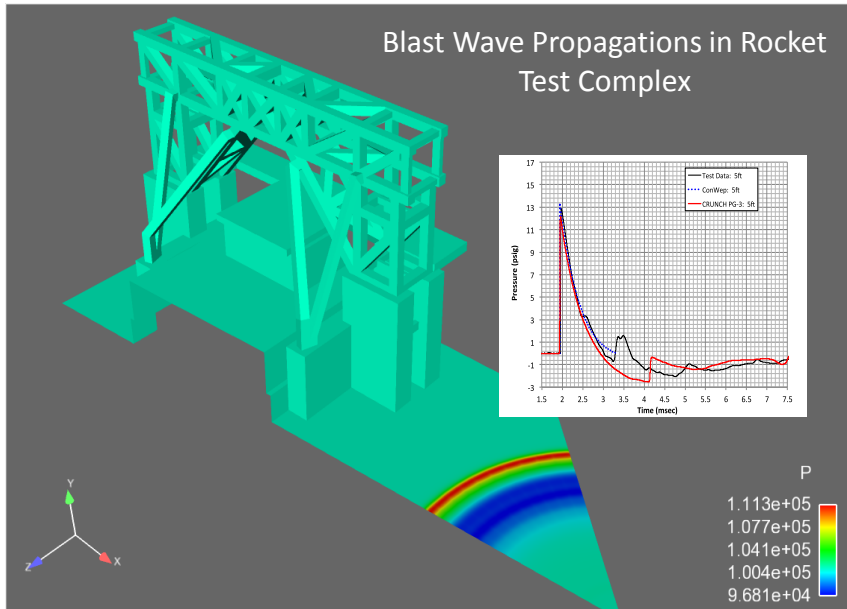

- CRUNCH CFD® is a multi-physics analysis tool that allows multiple domain-specific flow and heat transfer solvers to be used in a single simulation environment while still allowing efficient communication for time-accurate simulations.

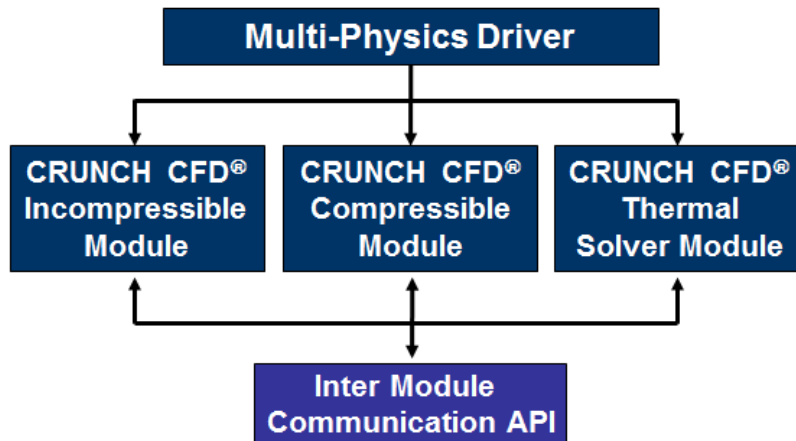

Compressible Module:

Generalized “all-speed” preconditioned density-based solver for perfect gas, imperfect gas, real-fluid multi-phase and combusting flows.

Incompressible Module:


Flow solver capable of modeling liquid flows with strong thermal dependency (e.g. cryogenes).

Thermal Module:

Transient heat conduction solver.

Example Problem: Rocket Conjugate Heat Transfer

- Module 1 - compressible reacting flow solver for plume
- Module 2 - thermal solver for wall conduction
- Module 3 - incompressible flow solver for water cooling channel

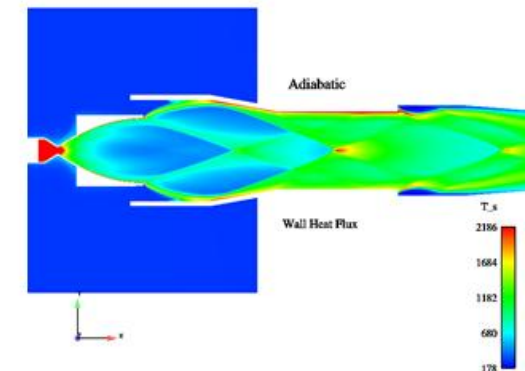



CRUNCH CFD Compressible Module Overview

NUMERICS

- Finite-Volume Roe/TVD Flux Construction, Vertex Storage

INTEGRATION

- Implicit GMRES, Implicit Gauss-Seidel, Explicit Four-Step Runge-Kutta

GRID ELEMENTS

- Unstructured: Tetrahedral, Hexahedral, Prismatic, Pyramid

PARALLEL PROCESSING

- Domain Decomposition MPI, Independent Grids with Noncontiguous Interfacing, Automated Load Balancing

DYNAMIC GRID CAPABILITIES

- Node Movement Solver (Implicit Elasticity Approach), Sliding Interfaces for Rotor-Stator Applications

GRID ADAPTATION

- Works with CRISP CFD[®], keyed to both cell quality and flow gradients
- Hands off mesh motion / adaptation using CRISP CFD[®]

THERMOCHEMISTRY

- Combusting Imperfect Gas Mixtures
- Generalized Non-ideal Formulations for Gas/Liquid Mixtures and Supercritical Fluids
- Cantera/Chemkin compatibility
- Advanced Chemical Kinetic ODE Solver, ISAT/ANN Run Options

TURBULENCE RANS/LES

- k-e Based Formulations with Specialized Corrections
- Scalar Fluctuation Model (SFM) → Variable Prandtl / Schmidt Number
- Generalized Hybrid RANS/LES Formulation

MULTIPHASE FLOW

- Generalized gas/bulk liquid framework
- Steady/unsteady cavitation model with bubble dynamics
- Nonequilibrium Particle/Droplet Solvers (Eulerian Formulation)


NETS 2014
NASA/SSC/EA00
24Feb14



Rocket Propulsion Test Analysis (RPTA) Model

- The Rocket Propulsion Test Analysis (RPTA) model is a FORTRAN-based in-house code used to simulate the temporal transient thermodynamic processes of integrated propellant systems.
- Thermodynamic Control Volume Solver Model Accurately Models High-Pressure Cryogenic Fluids and High-Pressure Gaseous Systems. Model Features Include:
 - High-Fidelity Pressure Control Valve (PCV) & Closed Loop Control System Model
- RPTA Model Validated Through Test Data Comparisons.

Pressure Control Valve (PCV) Model Developed & Validated

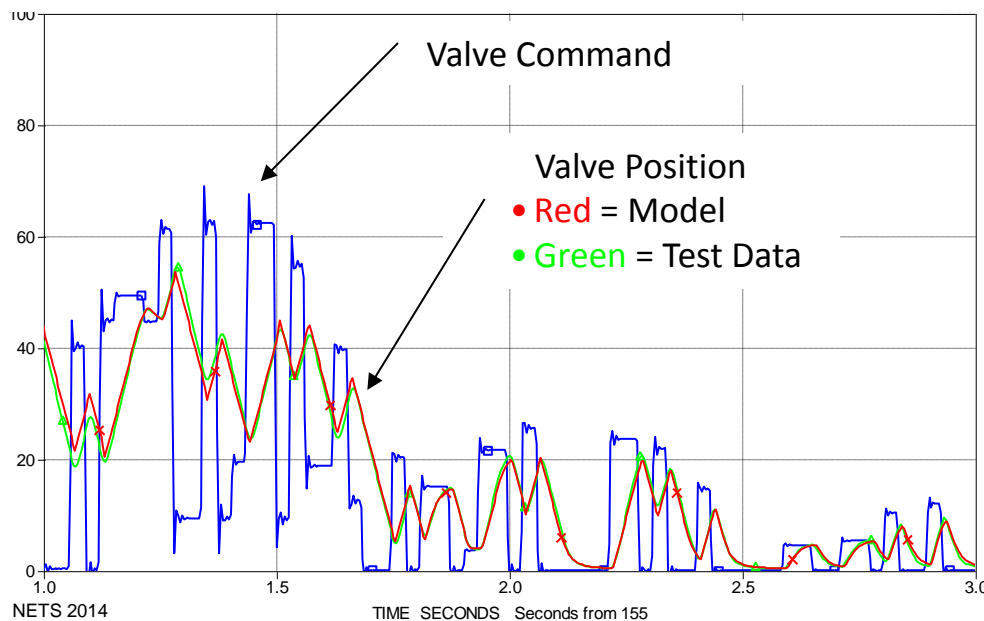

NETS 2014
NASA/SSC/EA00
24Feb14

A Significant Advantage of the RPTA Model is the Coupling of Control Logic (Electro-Mechanical Process) with Thermodynamic Processes.