


Medium Spatial Resolution Satellite Characterization

Presented to JACIE Workshop,
14 Mar 2006

Greg Stensaas, USGS Project Chief
Remote Sensing Technologies



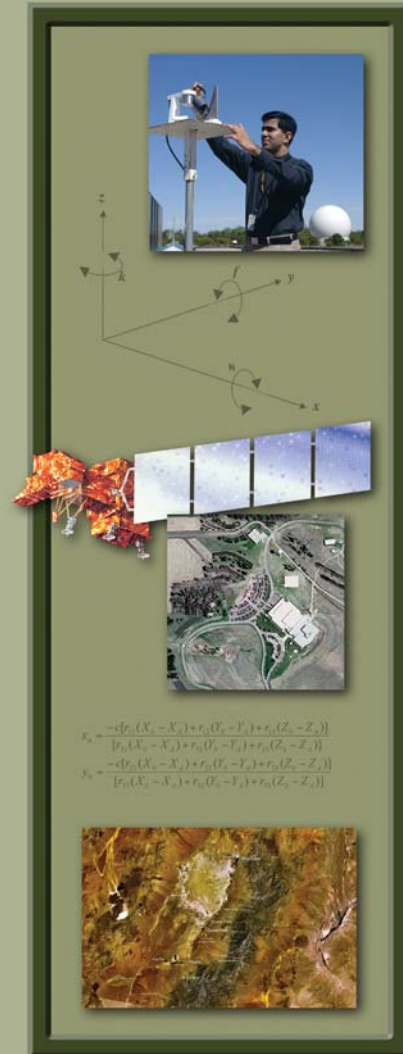

Project Introduction

- USGS Remote Sensing Technologies (RST) Project
 - ◆ calval.cr.usgs.gov
 - ◆ Greg Stensaas - (605) 594-2569 - stensaas@usgs.gov
- Project provides:
 - ◆ characterization and calibration of aerial and satellite systems in support of quality acquisition and understanding of remote sensing data,
 - ◆ and verifies and validates the associated data products with respect to ground and atmospheric truth so that accurate value-added science can be performed.
 - ◆ assessment of new remote sensing technologies




System/Product Characterization

- **System Characterization** is related to understanding the sensor system, how it produces data, and the quality of the produced data
- **Imagery attempts to accurately report the conditions of the Earth's surface at a given the time.**
 - ◆ Assessed by *product characterization* categories:
 - **Geometric/Geodetic:** The positional accuracy with which the image represents the surface (pixel coordinates vs. known ground points)
 - **Spatial:** The accuracy with which each pixel represents the image within its precise portion of the surface and no other portion
 - **Spectral:** The wavelengths of light measured in each spectral "band" of the image
 - **Radiometric:** The accuracy of the spectral data in representing the actual reflectance from the surface
 - **Dataset Usability:** The image data and understanding of the data is easily usable for science application

Medium Resolution Characterization

- **DCWG “Data Characterization Working Group” feeds Tech Group**
 - ◆ GSFC Team led by Brian Markham
 - ◆ SSC Team led by Tom Stanley
 - ◆ USGS Team led by Greg Stensaas
- **Using JACIE methods**

Data Scene Characteristics

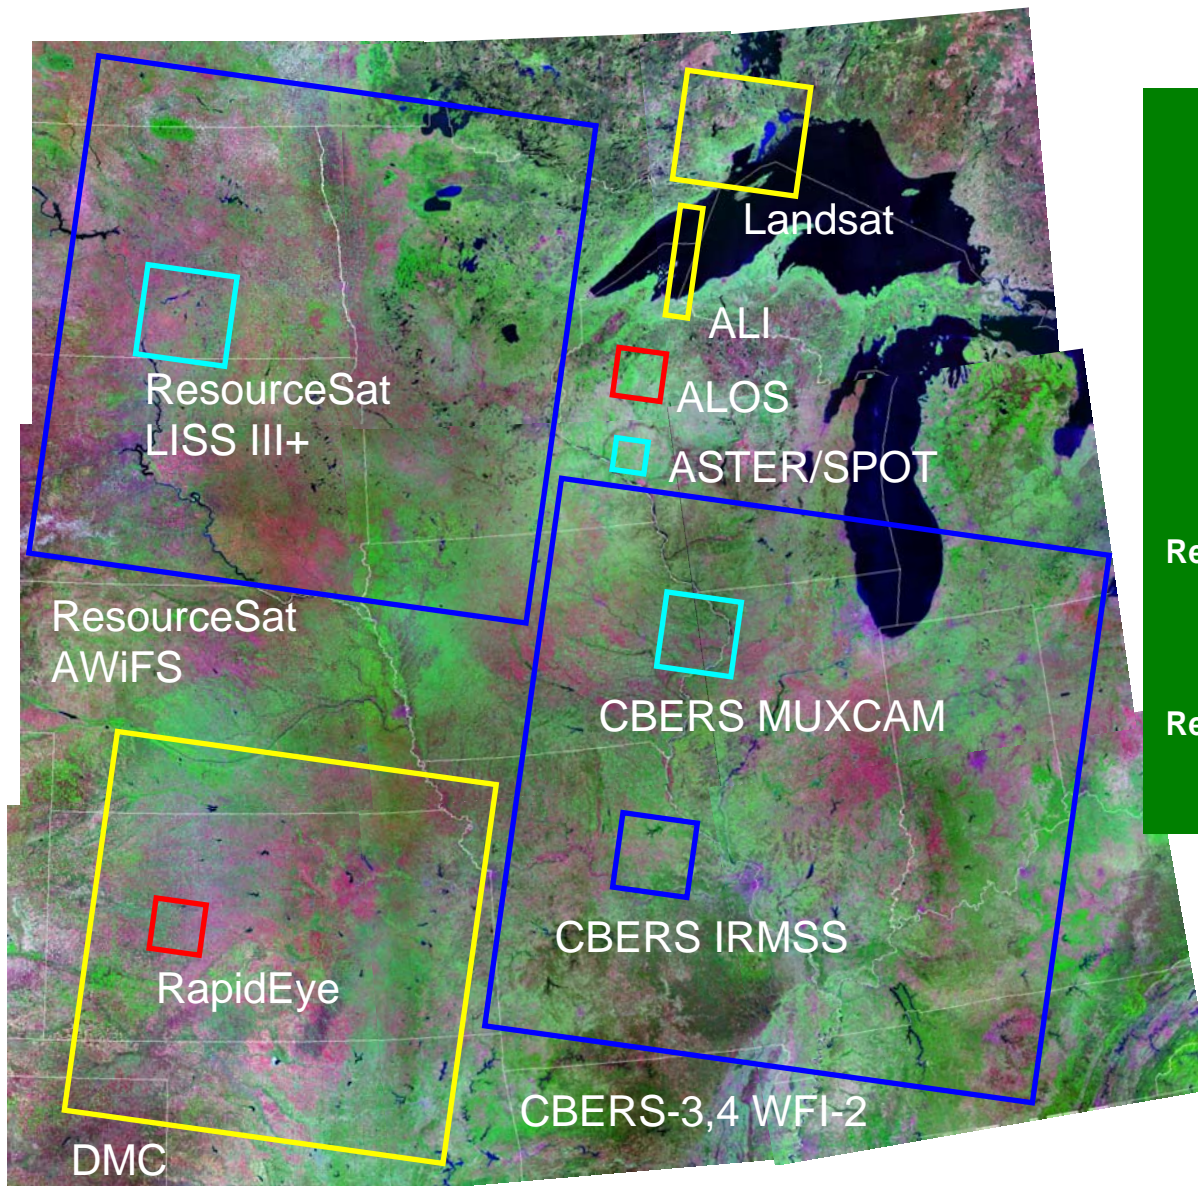


Satellite	Sensor	Ground Sample Distance (m)
RapidEye	REIS	6.5
ALOS	AVNIR	10
CBERS-3,4	MUXCAM	20
SPOT 5	HRG	10/20
Terra	ASTER	15/30/90
ResourceSat-1	LISS III+	23.5
Landsat 7	ETM+	15/30/60
EO-1	ALI	30
DMC	MSDMC	32
ResourceSat-1	AWiFS*	56
CBERS-3,4	WFI-2	73
CBERS-3,4	IRMSS	40/80

Note: For purposes of scene size comparison only. Locations do not represent actual orbital paths or operational acquisitions.

ASPRS Study

Mid-Res Land Imaging Satellites

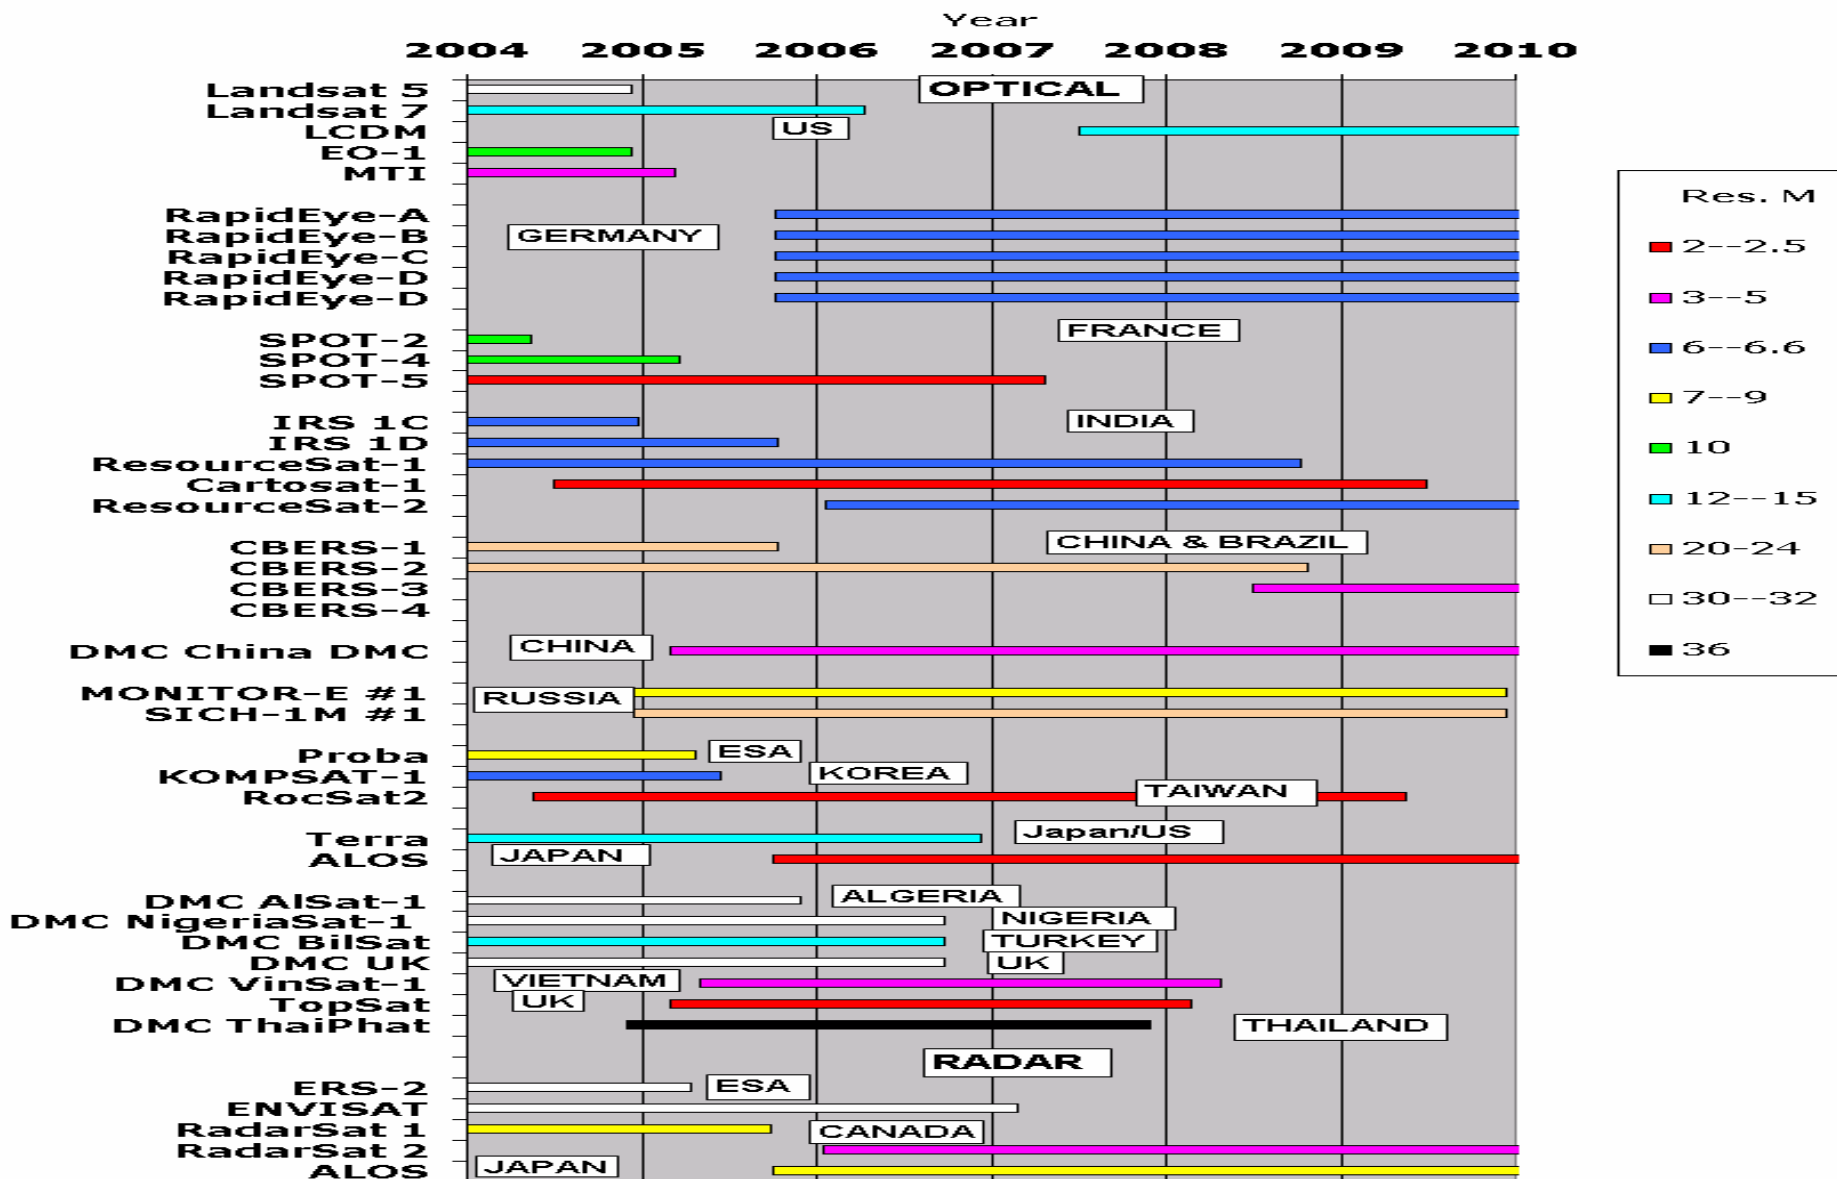

Systems Considered

- IRS ResourceSat – 1, 2 (India)
- CBERS – 2, 2A, 3, 4 (China & Brazil)
- RapidEye – 1, 2, 3, 4, 5 (Germany)
- DMC (Algeria, Nigeria, UK, China)
- Terra/ASTER (US & Japan)
- High-resolution U.S. commercial systems
- SPOT – 4, 5 (France)
- ALOS (Japan)
- EO-1/ALI (US)

Advanced Land Observing Satellite (ALOS)



- ALOS to be launched in 2005 by Japan Aerospace EXploration Agency (JAXA)
- Revisit time is 46 days, but it can observe any area within 2 days
- Orbital altitude/inclination: 692 km/~98 degrees
- Nodal crossing: 10:30 a.m.
- System life: 3 - 5 years
- Three instruments devoted to land imaging
 - ◆ **Panchromatic Remote Sensing Instruments for Stereo Mapping (PRISM)**
 - ◆ **Advanced Visible and Near Infrared Radiometer (AVNIR-2)**
 - ◆ **Phased Array L-band Synthetic Aperture Radar (PALSAR)**
- Availability of data and products, data policy, and pricing is TBD
- Website: <http://alos.nasda.go.jp/>



	<u>PRISM</u>	<u>AVNIR-2</u>	<u>PALSAR</u>
Spectral bands	0.52-0.77um	0.42-0.50um 0.52-0.60um 0.61-0.69um 0.76-0.89um	1.27GHz (L-band)
Resolution	2.5m	10m	10m/100m
Swath width	35km/70km	70km	70km/350km
Pointing (+-)	1.5 degrees	44 degrees	10-51 degree
Revisit	-	2 days	2 days
Actual revisit	46 days	46 days	46 days

Advanced Spaceborne Thermal Emission and Reflection Radiometer (ASTER)

- ASTER was launched on December 18, 1999 on the Terra satellite
- Orbital altitude/inclination: 705 km/98.2 degrees
- Nodal crossing: 10:30 a.m.
- System life: 6 years
- Three instruments are
 - ◆ **Visible and Near-Infrared Radiometer(VNIR)**
 - ◆ **Short Wave Infrared Radiometer (SWIR)**
 - ◆ **Thermal Infrared Radiometer(TIR)**
- Archive data sets are available at \$60/scene
- Website: <http://asterweb.jpl.nasa.gov/>

	<u>VNIR</u>	<u>SWIR</u>	<u>TIR</u>
Spectral bands	0.52-0.60um	1.60-1.70um	8.12-8.47um
	0.63-0.69um	2.14-2.18um	8.47-8.82um
	0.76-0.86um	2.18-2.22um	8.92-9.27um
		2.23-2.28um	10.25-10.95um
		2.29-2.36um	10.95-11.65um
		2.36-2.43um	
Resolution	15m	30m	90m
Swath width	60km	60km	60km
Pointing (+-)	24 degrees	8.55 degrees	8.55 degrees
Revisit	-	-	-
Actual revisit	16 days	16 days	16 days

China-Brazil Earth Resources Satellite (CBERS 1-2)



- CBERS-1 launched on October 14, 1999; CBERS-2 on October 21, 2003; CBERS-2B to be launched in 2006
- Revisit time is 26 days
- Orbital altitude/inclination: 778 km/98.5 degrees
- Nodal crossing: 10:30 a.m.
- System life: 2 years
- Data only downlinked to Brazil and China, may commercialize in future
- Each satellite has 3 cameras (see below)
- Availability of data and products, data policy, and pricing is TBD
- Website: <http://www.cbears.inpe.br/en/>



	<u>CCD</u>	<u>IRMSS</u>	<u>WFI</u>
Spectral bands	0.51-0.73um	0.50-1.10um	0.63-0.69um
	0.45-0.52um	1.55-1.75um	0.77-0.89um
	0.52-0.59um	2.08-2.35um	
	0.63-0.69um	10.4-12.5um	
	0.77-0.89um		
Resolution	20m	80m/160m	260m
Swath width	113km	120km	890km
Pointing (+-)	32 degrees	none	none
Revisit	3 days	-	-
Actual revisit	26 days	26 days	5 days

China-Brazil Earth Resources Satellite (CBERS 3-4)


- CBERS-3 to be launched in 2007 or 2008; CBERS-4 after 2007
- Revisit time is 26 days
- Orbital altitude/inclination: 778 km/98.5 degrees
- Nodal crossing: 10:30 a.m.
- System life: 2 years
- Each satellite will have 4 cameras (see below)
- Availability of data and products, data policy, and pricing is TBD
- Website: <http://www.cbbers.inpe.br/en/>

	<u>MUXCAN</u>	<u>PANMUX</u>	<u>IRMSS</u>	<u>WFI</u>
Sprectral bands	0.45-0.52um	0.51-0.75um	0.76-0.90um	0.52-0.59um
	1.55-1.75um	0.51-0.85um	0.76-1.10um	0.63-0.69um
	0.52-0.59um	0.52-0.59um	1.55-1.75um	0.77-0.89um
	0.63-0.69um	0.63-0.69um	2.08-2.35um	1.55-1.75um
	0.77-0.89um	0.77-0.89um	10.4-12.5um	
Resolution	20m	5m/10m	40m/80m	73m
Swath width	120km	60km	120km	866km
Pointing (+-)	32 degrees	32 degrees	none	none
Revisit	3 days	5 days	-	-
Actual revisit	26 days	none	26 days	5 days

Disaster Monitoring Constellation (DMC)



- DMC is a constellation of microsattellites being developed by Surrey Satellite Technology Limited (SSTL) that would provide daily global coverage
- A five satellite constellation could collect 400-600 scenes/day
- Four satellites are currently operational; AISAT-1 was launched on November 28, 2002; UK-DMC, NigeriaSat-1, and BILSAT-1 were launched on September 27, 2003
- An enhanced satellite for China will be launched in 2005
- Orbital altitude/inclination: 686 km/98 degrees
- Nodal crossing: 10:30 a.m.
- System life: 5 years
- Data characteristics are satellite dependent
- Availability of data and products, data policy, and pricing is TBD
- Website: <http://www.sstl.co.uk/>

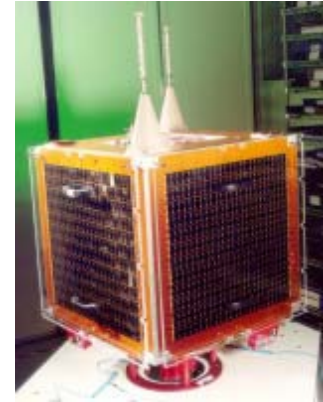

	<u>Standard</u>	<u>BILSAT-1</u>	<u>China DMC +4</u>
	0.52-0.60 um	0.52-0.60 um	0.52-0.60 um
	0.63-0.69 um	0.63-0.69 um	0.63-0.69 um
Spectral bands	0.77-0.90 um	0.77-0.90 um	0.77-0.90 um
		pan	pan
Resolution	32 m	28 m/ 12 m	32 m/ 4 m
Swath width	600 km	55 km/ 24.5 km	600 km/
Polarization (+)	-	30	-
Revisit	-	4-5 days	-
Actual revisit	4-5 days	16 days	4-5 days
Standard = AISAT-1, NigeriaSat-1, UK-DMC			

Earth Observing-1 (EO-1)

- EO-1 was launched on November 21, 2000 by NASA, and continues today as the EO-1 Extended Mission operated by NASA and the USGS
- Revisit time is 16 days
- Cross track pointing: Three times in a 16 day cycle
- Orbital altitude/inclination: 705 km/98.2 degrees
- Nodal crossing: 10:15 a.m.
- System life: 1 year
- Two instruments devoted to land imaging
 - ◆ **Advanced Land Imager (ALI)**
 - ◆ **Hyperion**
- ALI, 9 multispectral bands at 30 m (0.43-0.45um, 0.45-0.51um, 0.52-0.60um, 0.63-0.69um, 0.77-0.80um, 0.84-0.89um, 1.20-1.30um, 1.55-1.75um, 2.08-2.35um) and 1 pan band at 10 m (0.48-0.69um)
- Swath width: 37 km by 42 km
- Capable of acquiring approximately 20 scenes/day on WRS-2 grid
- Archived data available at \$250 or \$500/scene; data acquisition requests are additional \$1,500/scene
- Website: <http://eo1.usgs.gov/> or <http://eo1.gsfc.nasa.gov/>


RapidEye

- RapidEye to be launched in late 2007, a total of 5 satellites is proposed, all launched at once and 19 minutes apart on orbit
- Commercial effort focused on providing information to the agricultural and cartographic communities
- Revisit time is 1 day, average coverage repeat is < 5 days with all satellites operating
- Orbital altitude/inclination: 622 km/97.8 degrees
- Imaging area: +/- 75 degrees
- Cross track pointing: +/- 25 degrees
- Nodal crossing: 11:00 a.m.
- System life: 7 years
- Multi-Spectral Imager (push-broom scanner), 5 bands (0.44-0.51um, 0.52-0.59um, 0.63-0.685um, 0.69-0.73um, 0.76-0.85um)
- Ground resolution: 6.5 m
- Swath width: 78-80 km by 1,500 km
- Availability of data and products, data policy, and pricing is TBD
- Website: <http://www.rapideye.de/>

ResourceSat-1 (IRS-P6)



- ResourceSat-1 was launched on October 17, 2003 by Indian Remote Sensing (IRS)
- Orbital altitude/inclination: 817 km/98.69 degrees
- Nodal crossing: 10:30 a.m.
- System life: 5 years
- Three instruments devoted to land imaging
 - ◆ Linear Imaging Self-Scanner (LISS-IV)
 - ◆ Linear Imaging Self-Scanner (LISS-III)
 - ◆ Advanced Wide Field Sensor (AWiFS)
- Space Imaging has distribution rights outside of India
 - ◆ LISS-III and LISS-IV are \$2,750/scene; AWiFS is \$850/scene
- Website:
<http://www.spaceimaging.com/product/s/irs/>

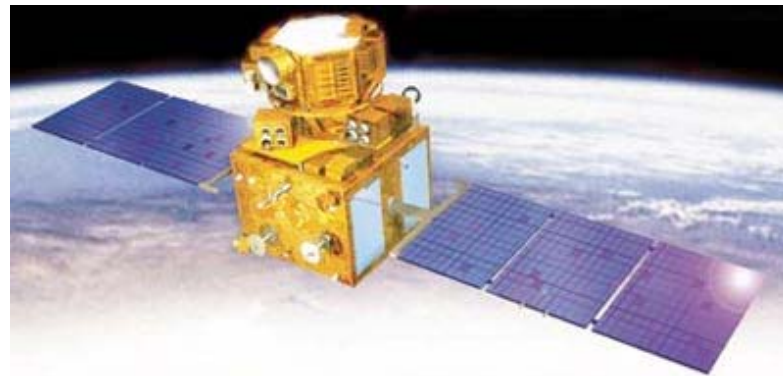

	LISS-IV	LISS-III	AWiFS
Spectral bands	0.52-0.59um	0.52-0.59um	0.52-0.59um
	0.62-0.68um	0.62-0.68um	0.62-0.68um
	0.77-0.86um	0.77-0.86um	0.77-0.86um
		1.55-1.70um	1.55-1.70um
Resolution	5.8m	23.5m	56m
Swath width	23.9km/70km	141km	740km
Pointing (+-)	26 degrees	-	-
Revisit	5 days	-	-
Actual revisit	24 days	24 days	5 days

SPOT



- SPOT 2 was launched on January 22, 1990; SPOT 4 was launched on March 24, 1998; and SPOT 5 was launched on May 4, 2002
- Orbital altitude/inclination: 822 km/98.7 degrees
- Nodal crossing: 10:30 a.m.
- System life: 3 and 5 years for SPOT 2, and SPOT 4 and 5, respectively
- Instruments on each satellite
 - ◆ **SPOT 2 - High Resolution Visible (HRV)**
 - ◆ **SPOT 4 - High Resolution Visible Infra Red (HRVIR)**
 - ◆ **SPOT 5 - High Geometric Resolution (HRG)**
- Single user price of geometrically (systematic) corrected archive scene (systematic) ranges from \$2,400 (10m/20m) to over \$10,000 (2.5m color)



	<u>HRV</u>	<u>HRVIR</u>	<u>HRG</u>
Spectral bands	0.50-0.73um	0.61-0.68um	0.48-0.71um
	0.50-0.59um	0.50-0.59um	0.50-0.59um
	0.61-0.68um	0.61-0.68um	0.61-0.68um
	0.78-0.89um	0.78-0.89um	0.78-0.89um
		1.58-1.75um	1.58-1.75um
Resolution	10m/20m	10m/20m	2.5m/5m/10m/2
Swath width	60km	60km	60km
Pointing (+-)	27 degrees	27 degrees	27 degrees
Revisit	2-3 days	2-3 days	2-3 days
Actual revisit	26 days	26 days	26 days




● Website: <http://www.spotimage.fr/>

USDA AWiFS Data



DCWG ResourceSat Holdings

- USGS Green, SSC Blue

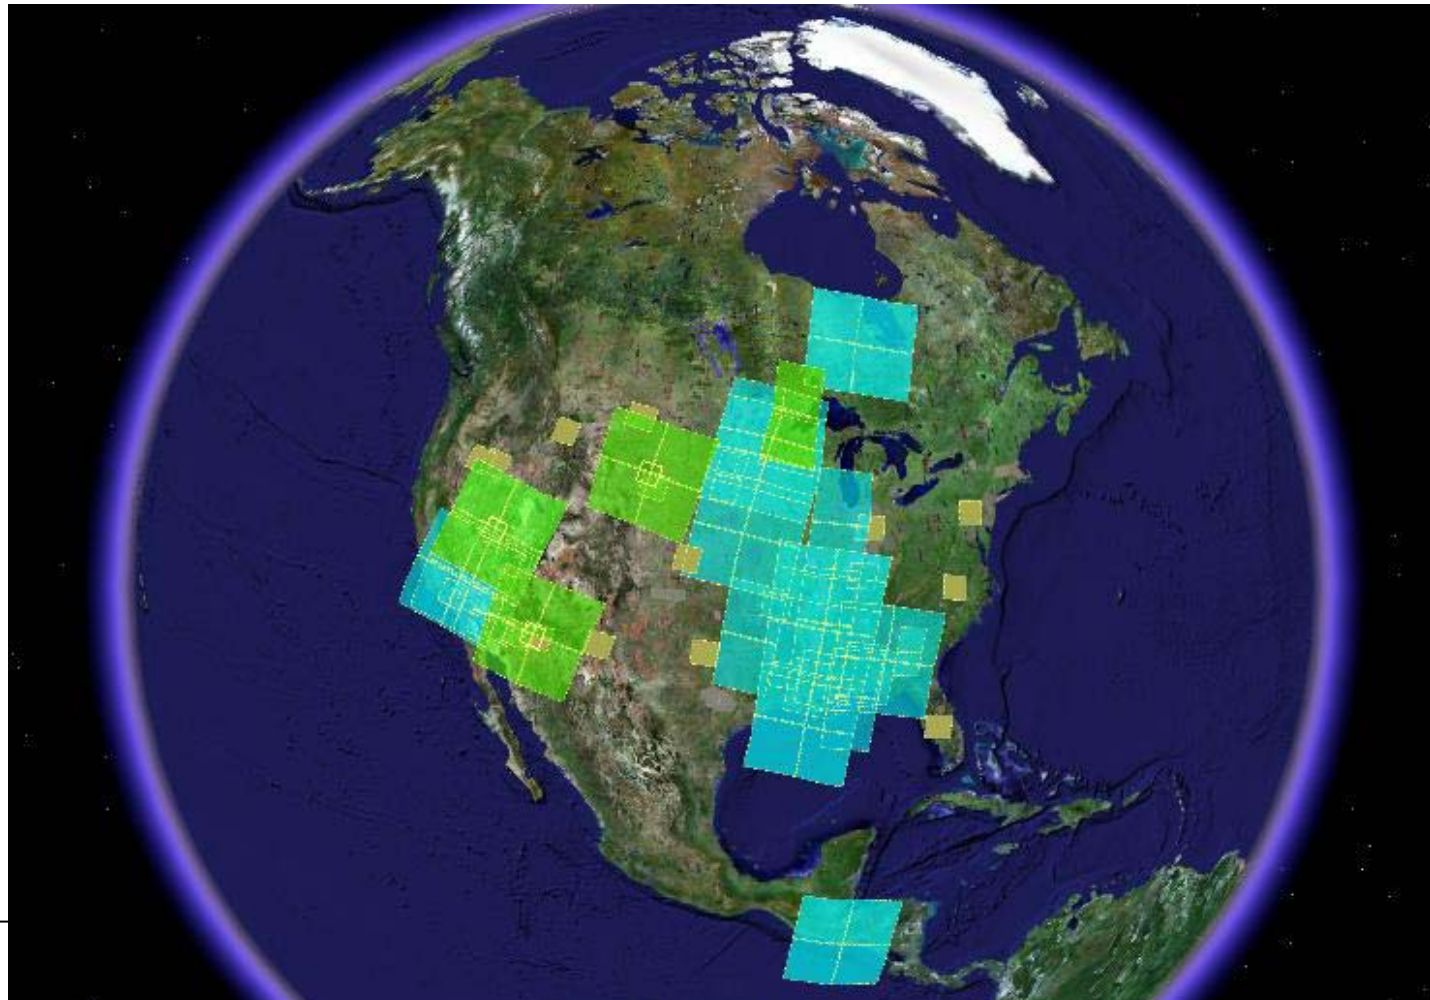

Satellite Characterization Summary (1)

- There are many instruments providing image data for civil science purposes
 - ◆ **Support of Global Earth Observing System of Systems**
- Some systems maybe available candidate sensing systems may be able to meet at least some of the needs of the Landsat user community.
- Technical advances have enabled the creation of many multi-spectral satellites
 - ◆ **14 -15 countries have mid to hi resolution satellites in orbit**
 - ◆ **By the end of the decade, there will be 20+ countries**
 - ◆ **66 Civil Land Imaging Satellites by 2010**
- All the data has value but it needs to be well understood
 - ◆ **System characterization and calibration needed**
 - Cal parameter files and metadata important
 - ◆ **Product verification and validation needed**
 - Cross calibration and international test areas must be used

Satellite Characterization Summary (2)

- Assessing ResourceSat-1 (AWiFS, LISS-III LISS-IV), and SurreySat DMC, and working with INPE to access CBERS-2
- Technologies are becoming robust enough to fill niches and cheap enough to cover many areas; **however, there are major issues to be address:**
 - ◆ Resolution and required bands – SWIR bands?
 - ◆ Accuracy and stability
 - ◆ Calibration concerns/Cross calibration concerns
 - ◆ Data acquisition
 - ◆ Data availability
- Cross calibration requires a stable base with cross band coverage (GEOSS)
 - ◆ **Strong need for a base, long term mission (Landsat)**
- Precise high resolution data provides a great compliment to global assessment and is a must for ER

Summary

- **JACIE teams moving forward in support of digital imagery processes and guidelines**
- **Satellite characterization efforts continue**
 - ◆ Future assessments – IRS-6, CBERS-2, DMC, TopSat, ChinaSat, ALOS, RapidEye,
- **Future is very bright – many new technologies – many new aerial and satellite products**
- **New systems and integrated products require characterization and calibration**
- **Strong position to support US GEO and GEOSS**
- **UAV and miniaturization technologies**
- **Real time products – what do we do with all the data?**
- **Forecasts available showing continued growth**

Forecasts

