

NASA MEMO 4-21-59A

1A-08
394675

NASA

MEMORANDUM

LONGITUDINAL STABILITY AND CONTROL CHARACTERISTICS AT
MACH NUMBERS FROM 0.70 TO 2.22 OF A TRIANGULAR
WING CONFIGURATION EQUIPPED WITH A CANARD
CONTROL, A TRAILING-EDGE-FLAP CONTROL,
OR A CAMBERED FOREBODY

By John W. Boyd and Gene P. Menees


Ames Research Center
Moffett Field, Calif.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

WASHINGTON

April 1959

Declassified May 29, 1961

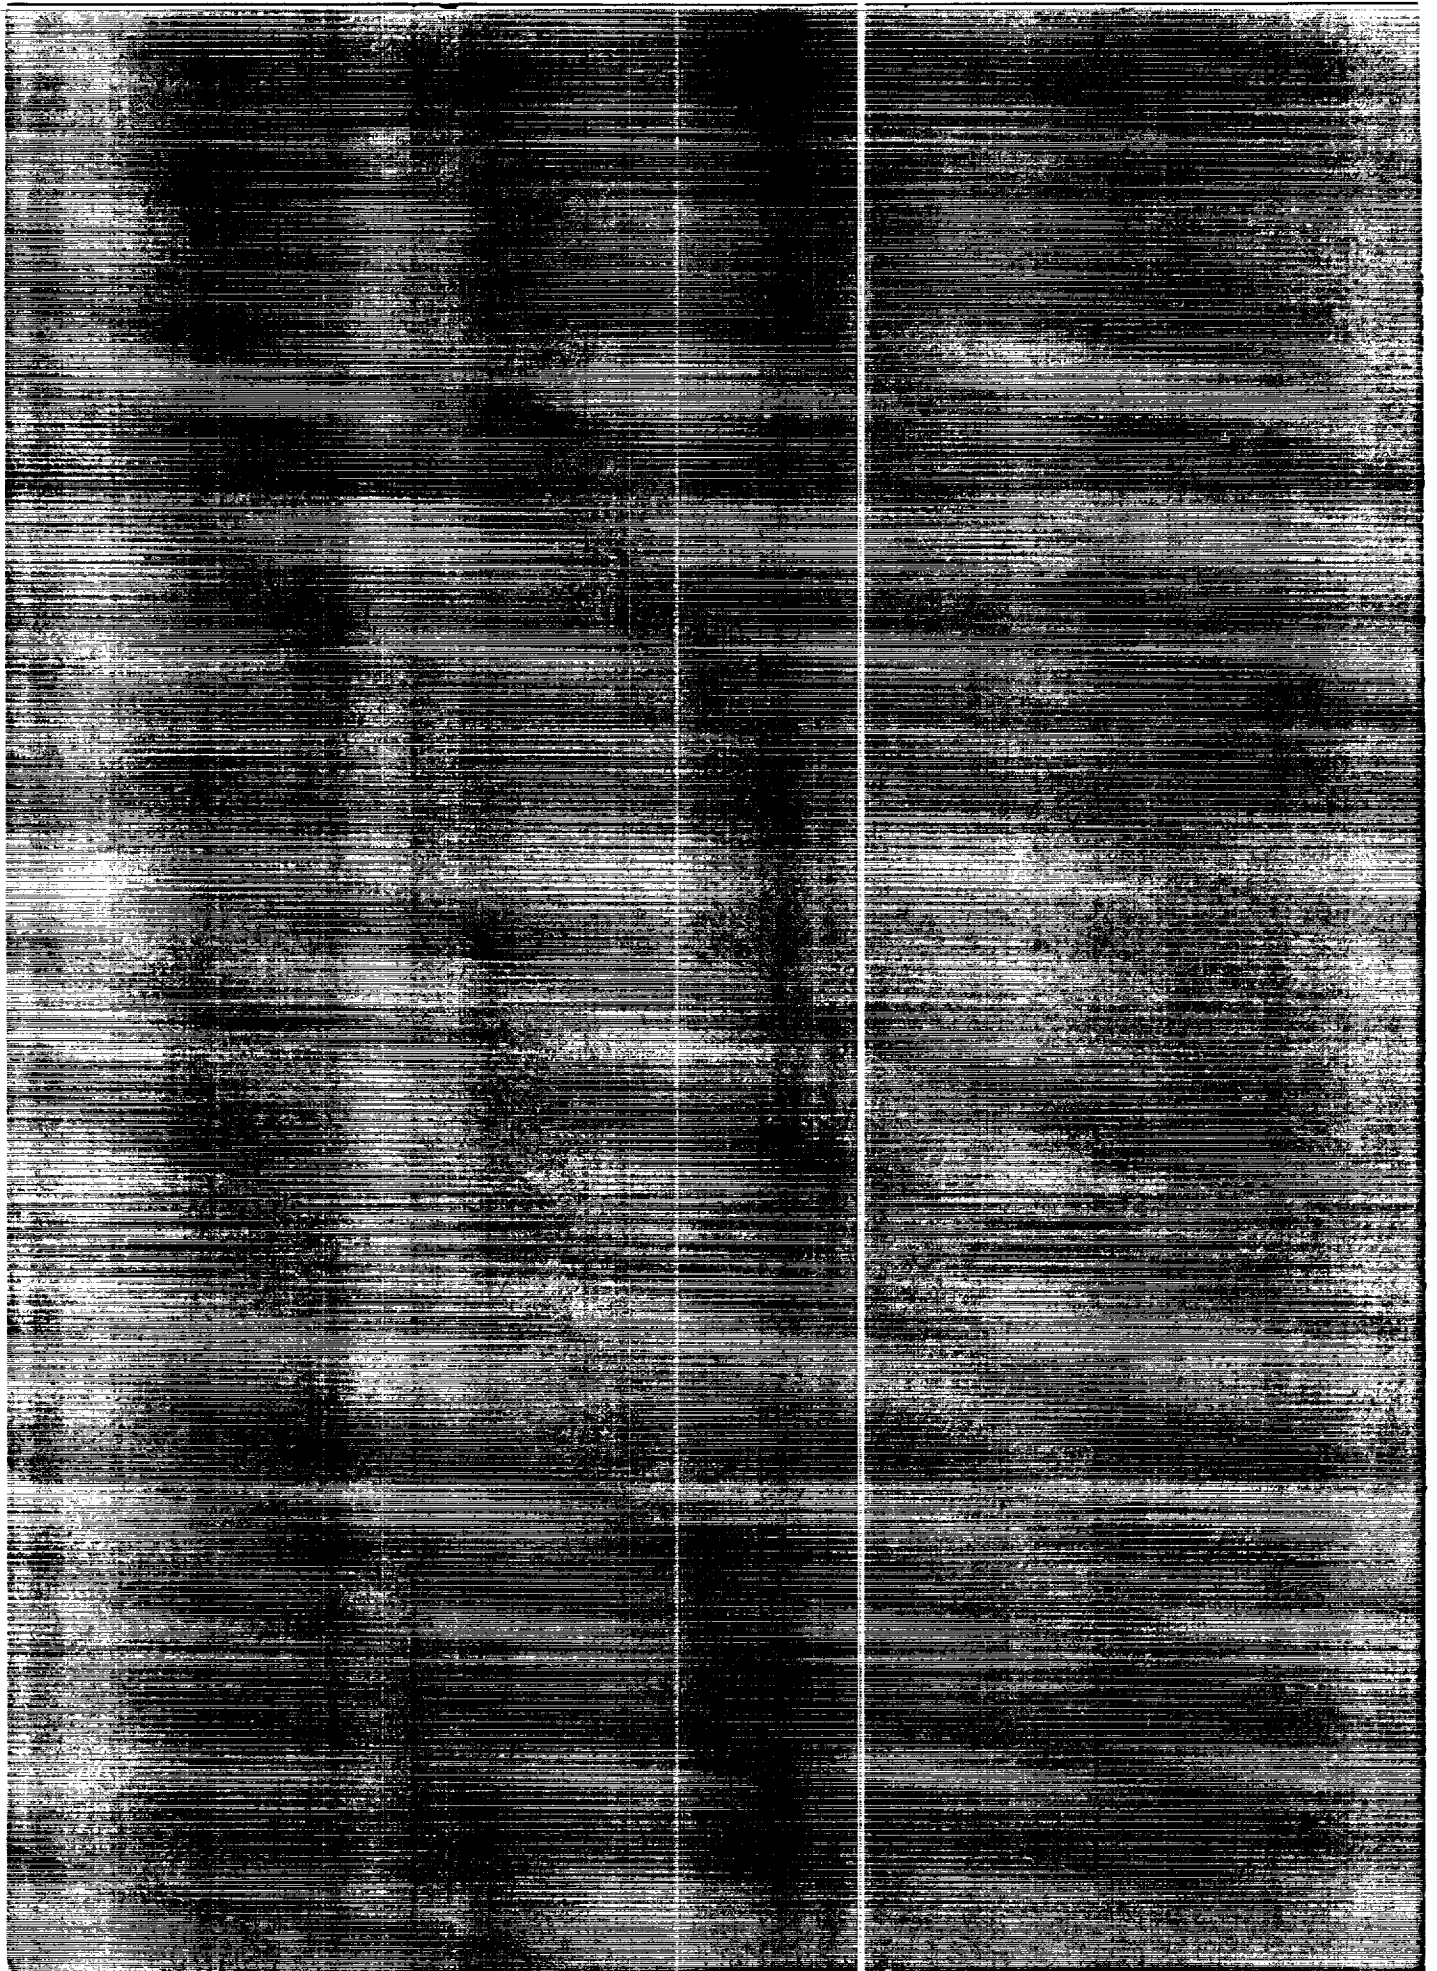

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

MEMORANDUM 4-21-59A

LONGITUDINAL STABILITY AND CONTROL CHARACTERISTICS AT
MACH NUMBERS FROM 0.70 TO 2.22 OF A TRIANGULAR
WING CONFIGURATION EQUIPPED WITH A CANARD
CONTROL, A TRAILING-EDGE-FLAP CONTROL,
OR A CAMBERED FOREBODY*

By John W. Boyd and Gene P. Menees

SUMMARY

Results of an investigation to determine the static longitudinal stability and control characteristics of an aspect-ratio-2 triangular wing and body configuration equipped with either a canard control, a trailing-edge-flap control, or a cambered forebody are presented without analysis for Mach numbers from 0.70 to 2.22. The canard surface had a triangular plan form and a ratio of exposed area to total wing area of 7.8 percent. The hinge line of the canard was in the extended wing chord plane, 0.83 wing mean aerodynamic chord ahead of the reference center of moments. The trailing-edge controls were constant-chord full-span flaps with exposed area equal to 10.7 percent of the total wing area. The cambered body was a modified Sears-Haack body with camber only ahead of the wing apex. Data are presented for various canard and flap deflections at angles of attack ranging from -6° to $+18^{\circ}$.

INTRODUCTION

A general research program directed at the investigation of longitudinal control devices capable of achieving low trim drag and adequate maneuverability for aircraft flying at supersonic speeds is in progress at the Ames Research Center. As a part of this program, several reports have already been published showing the longitudinal and directional characteristics of configurations employing canard controls (see refs. 1 through 7).

The present report presents without analysis the longitudinal stability and control characteristics of three additional configurations. One was a triangular canard configuration supplementing the previous

*Title, Unclassified

canard studies and differing from that of reference 1 in that the canard surface was slightly larger and had a shorter lever arm. A second model was equipped with a full-span trailing-edge flap to assess the relative merits of this type control compared to the canard. The third configuration incorporated camber in the forward part of the body to assess the trimming capabilities of the cambered body. The basic configuration for the canard and flap models was identical to that of reference 1 and consisted of a triangular wing of aspect ratio 2.0 and a low-aspect-ratio vertical tail mounted on a Sears-Haack body of fineness ratio 12.5. The cambered body also utilized the same wing and vertical tail as the two previous models.

NOTATION

\bar{c}	mean aerodynamic chord of wing, ft
\bar{c}_c	mean aerodynamic chord of canard, ft
C_D	drag coefficient, $\frac{\text{drag}}{qS}$
C_{D_0}	drag coefficient at zero lift
C_L	lift coefficient, $\frac{\text{lift}}{qS}$
C_{L_α}	lift-curve slope, taken through zero angle of attack, per deg
C_m	pitching-moment coefficient, $\frac{\text{pitching moment}}{qS\bar{c}}$
$\left(\frac{L}{D}\right)_{\text{max}}$	maximum lift-drag ratio
M	free-stream Mach number
q	free-stream dynamic pressure, lb/sq ft
S	wing area formed by extending the leading and trailing edges to the plane of symmetry, sq ft
α	angle of attack of wing root chord, deg
δ_c	angle of deflection of canard control surface, positive when trailing edge is down, deg
δ_f	angle of deflection of flap, positive when trailing edge is down, deg

Configurations are denoted by the following letters used in combination:

B	symmetrical body
B _c	cambered body
C	canard
V	vertical tail
W	wing

APPARATUS

The experimental data were obtained in the Ames 6- by 6-foot supersonic wind tunnel which is a closed-circuit variable-pressure type with a Mach number range continuous from 0.70 to 2.22. The tunnel floor and ceiling have perforations to permit transonic testing. A somewhat more detailed description of this facility may be found in reference 1.

The models were sting mounted and the forces and moments were measured with an internal, strain-gage-type, six-component balance.

MODELS

Results of investigations of three models are reported herein. Two of the models incorporated movable control surfaces in combination with an aspect-ratio-2 triangular wing, a fineness ratio 12.5 Sears-Haack body, and a low-aspect-ratio vertical tail. The other model used the same wing and vertical tail with camber in the forward part of the body. Dimensional sketches of each of the three models are shown in figures 1, 2, and 3. Both the wing and the vertical tail had NACA 0003-63 thickness distributions streamwise.

One of the control devices was an all-movable triangular canard of aspect ratio 2 hinged about the 0.35 point of the canard mean aerodynamic chord (see fig. 1(a)). The hinge line was 0.83 \bar{c} ahead of the reference center of moments (0.28 \bar{c}). The constant thickness canard detailed in figure 1(b) had beveled leading and trailing edges. The ratio of the area of the exposed canard panels to the total wing area was 7.8 percent and the ratio of the total areas was 18 percent. This configuration was different from that of reference 1 in that the canard was slightly larger and was mounted farther aft on the body.

The other control device was a full-span trailing-edge flap with exposed area equal to 10.7 percent of the total wing area (see fig. 2).

The third configuration tested used a modified Sears-Haack body of fineness ratio 12.5, the forward 20.25 inches of which was cambered to provide a positive trimming moment. The camber in the forward part of the body was obtained simply by displacing the nose of the body upward until it was in line with a point on the upper surface of the body at station 20.25 inches (see fig. 3). Using the line connecting these two points as the reference axis the normal Sears-Haack distribution was used to form the forward portion of the body.

All of the component parts used herein were of solid steel construction to minimize aeroelastic effects. The surfaces were polished to give a smooth surface and were further treated to prevent corrosion.

TEST AND PROCEDURES

Range of Test Variables

Mach numbers of 0.70, 0.90, 1.00, 1.10, 1.30, 1.70, and 2.22 and angles of attack ranging from -6° to $+18^{\circ}$ were covered in the investigation. The test Reynolds number based on the wing mean aerodynamic chord was 1.84 million at Mach numbers of 1.0 and 1.10 and 3.68 million at all other Mach numbers. The smaller Reynolds number at transonic speeds was necessary because of model structural limitations. Canard deflections from 0° to 20° were investigated with the wing on and off. Flap deflections from $+4^{\circ}$ to -28° were tested. The exact control deflections are noted in tables I and II. Data were also obtained with the canard off for the wing on and off. Wires were placed on all of the models at the locations shown in figures 1, 2, and 3 to induce transition.

Reduction of Data

The data presented herein have been reduced to standard coefficient form. The pitching moments were referred to the 0.28 point of the wing mean aerodynamic chord for the canard configuration and the 0.33 point of the wing mean aerodynamic chord for the flap and cambered-body configurations. The results have been adjusted to account for the following effects:

Base drag.- The base pressure was measured and the data were adjusted to correspond to a base pressure equal to the free-stream static pressure.

Stream inclination.- The data were corrected for stream angle inclinations which were never greater than 0.30° throughout the Mach number range of the tests.

RESULTS

The results in this report are presented without analysis in order to expedite publication. All of the experimental data are presented in tables I through III. Selected portions of the data for each configuration are shown in figures 4 through 6.

Figure 4 presents the lift, drag, and pitching-moment characteristics with the canard on and deflected and with the canard off for three test Mach numbers. Figure 5 shows similar data for various trailing-edge-flap deflections, and figure 6 presents the lift, drag, and pitching-moment characteristics for the cambered- and symmetrical-body configurations. Summarized in figure 7 are the maximum lift-drag ratios, the lift-curve slopes, minimum drag coefficients, and the aerodynamic centers as functions of Mach number for the canard configuration at zero deflection, and for the canard off or the trailing-edge-flap configuration at zero deflection. Figure 8 summarizes these same characteristics for the cambered- and symmetrical-body configurations.

Ames Research Center

National Aeronautics and Space Administration
Moffett Field, Calif., Jan. 21, 1959

REFERENCES

1. Boyd, John W., and Peterson, Victor L.: Static Stability and Control of Canard Configurations at Mach Numbers From 0.70 to 2.22 - Longitudinal Characteristics of a Triangular Wing and Canard. NACA RM A57J15, 1958.
2. Peterson, Victor L., and Menees, Gene P.: Static Stability and Control of Canard Configurations at Mach Numbers From 0.70 to 2.22 - Lateral-Directional Characteristics of a Triangular Wing and Canard. NACA RM A57L18, 1958.
3. Boyd, John W., and Peterson, Victor L.: Static Stability and Control of Canard Configurations at Mach Numbers From 0.70 to 2.22 - Triangular Wing and Canard on an Extended Body. NACA RM A57K14, 1958.

4. Peterson, Victor L., and Menees, Gene P.: Static Stability and Control of Canard Configurations at Mach Numbers From 0.70 to 2.22 - Longitudinal Characteristics of Triangular Wing and Unswept Canard. NACA RM A57K26, 1958.
5. Peterson, Victor L., and Boyd, John W.: Static Stability and Control of Canard Configurations at Mach Numbers From 0.70 to 2.22 - Longitudinal Characteristics of Unswept Wing and Canard. NACA RM A57K27, 1958.
6. Hedstrom, C. Ernest, Blackaby, James R., and Peterson, Victor L.: Static Stability and Control Characteristics of a Triangular Wing and Canard Configuration at Mach Numbers From 2.58 to 3.53. NACA RM A58C05, 1958.
7. Hall, Charles F., and Boyd, John W.: Effects of Canards on Airplane Performance and Stability. NACA RM A58D24, 1958.

TABLE I.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
THE CANARD
(a) BVW

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m	
0.70	-6.4	-0.311	0.0404	0.0364	1.30	6.0	0.278	0.0399	-0.0580	
	-4.2	-.196	.0214	.0236		8.0	.374	.0620	-.0779	
	-2.2	-.101	.0130	.0127		10.0	.470	.0910	-.0983	
	-.7	-.039	.0107	.0076		12.0	.562	.1264	-.1175	
	-.2	-.018	.0104	.0056		14.1	.650	.1677	-.1359	
	.4	.004	.0103	.0040		16.1	.735	.2146	-.1530	
	1.9	.066	.0113	-.0028		18.1	.809	.2660	-.1633	
	3.9	.164	.0183	-.0135		1.70	-6.3	-.239	.0376	.0511
	5.8	.260	.0317	-.0240			-4.1	-.160	.0238	.0348
	7.8	.368	.0538	-.0354			-2.2	-.084	.0163	.0187
	9.8	.478	.0844	-.0455			-.7	-.031	.0140	.0074
	11.7	.588	.1210	-.0563			-.1	-.010	.0136	.0036
	13.8	.702	.1681	-.0681			.4	.012	.0137	-.0010
	15.8	.808	.2225	-.0759			1.8	.065	.0152	-.0119
	17.8	.919	.2862	-.0840			3.8	.143	.0215	-.0276
0.90	-6.0	-.324	.0411	.0481	5.8		.216	.0327	-.0429	
	-3.9	-.202	.0221	.0293	7.8		.290	.0493	-.0573	
	-1.9	-.098	.0125	.0150	9.8		.362	.0721	-.0720	
	-.6	-.037	.0110	.0085	11.8		.430	.0988	-.0853	
	0	-.012	.0107	.0061	13.9		.499	.1299	-.0980	
	.6	.010	.0107	.0031	15.9		.565	.1666	-.1094	
	2.0	.077	.0120	-.0055	17.9		.627	.2063	-.1176	
	4.0	.180	.0200	-.0201	2.22	-5.9	-.185	.0308	.0353	
	6.0	.291	.0370	-.0361		-3.6	-.114	.0191	.0226	
	7.9	.410	.0620	-.0549		-1.7	-.057	.0139	.0120	
	10.0	.540	.0992	-.0770		-.3	-.013	.0124	.0037	
	12.0	.661	.1434	-.0976		.2	.003	.0123	.0005	
	14.0	.789	.1983	-.1253		.8	.022	.0126	-.0023	
	16.0	.913	.2627	-.1521		2.2	.068	.0145	-.0115	
	1.30	-6.0	-.291	.0418		.0650	4.2	.129	.0207	-.0230
-4.0		-.189	.0254	.0425		6.2	.187	.0309	-.0336	
-2.0		-.093	.0169	.0209		8.3	.244	.0453	-.0437	
-.5		-.026	.0145	.0067		10.2	.300	.0629	-.0528	
0		-.005	.0139	.0032		12.3	.357	.0862	-.0620	
.6		.019	.0145	-.0024		14.2	.409	.1115	-.0687	
2.1		.087	.0167	-.0167		16.2	.465	.1426	-.0746	
4.0		.181	.0246	-.0369		18.3	.519	.1777	-.0806	

TABLE I.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE CANARD - Continued
 (b) BVWC, $\delta_c = 0^\circ$

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m		
0.70	-5.1	-0.252	0.0307	0.0129	1.30	2.0	0.087	0.0185	-0.0123		
	-4.0	-.199	.0228	.0113		4.0	.183	.0274	-.0263		
	-2.1	-.100	.0137	.0065		8.0	.375	.0660	-.0531		
	-.1	-.009	.0110	.0025		12.0	.566	.1325	-.0764		
	.9	.037	.0115	-.0003		16.1	.751	.2264	-.0954		
	1.8	.081	.0127	-.0022		18.0	.839	.2818	-.1049		
	3.9	.181	.0209	-.0067		1.70	-4.0	-.160	.0252	.0223	
	7.9	.392	.0602	-.0134			-2.0	-.083	.0176	.0125	
	11.9	.621	.1340	-.0177			-.1	-.005	.0149	.0019	
	15.8	.856	.2434	-.0212			.9	.034	.0154	-.0037	
	17.9	.971	.3130	-.0224			1.9	.071	.0170	-.0087	
	0.90	-4.8	-.265	.0312			.0235	3.9	.150	.0244	-.0185
		-3.9	-.207	.0235			.0183	7.9	.296	.0542	-.0347
-1.9		-.096	.0137	.0090	11.9	.442	.1054	-.0502			
0		-.003	.0109	.0012	16.0	.586	.1785	-.0623			
1.1		.047	.0118	-.0022	17.9	.652	.2204	-.0658			
2.1		.101	.0135	-.0071	2.22	-3.7	-.114	.0204	.0134		
4.1		.211	.0239	-.0162		-1.7	-.052	.0145	.0069		
8.1		.442	.0703	-.0359		.2	.009	.0129	-.0008		
12.0		.691	.1542	-.0638		1.3	.043	.0138	-.0045		
16.1		.943	.2807	-.0960		2.3	.073	.0156	-.0079		
18.1	1.056	.3534	-.1175	4.4		.138	.0229	-.0144			
1.30	-4.9	-.234	.0340	.0348	8.3	.254	.0488	-.0248			
	-3.9	-.182	.0266	.0273	12.3	.368	.0916	-.0332			
	-1.9	-.091	.0186	.0149	16.3	.484	.1525	-.0385			
	0	0	.0158	.0013	18.4	.541	.1903	-.0412			
	1.1	.045	.0166	-.0063							

TABLE I.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE CANARD - Continued
 (c) BVWC, $\delta_c = 10^\circ$

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m
0.70	-6.0	-0.298	0.0378	0.0358	1.30	4.0	0.177	0.0336	-0.0084
	-4.0	-.190	.0221	.0301		7.9	.371	.0737	-.0356
	-2.1	-.092	.0151	.0259		12.0	.568	.1452	-.0597
	0	-.007	.0150	.0218		15.9	.748	.2382	-.0809
	.9	.041	.0161	.0208		18.0	.830	.2938	-.0887
	1.9	.084	.0183	.0183		1.70	-6.1	-.230	.0373
	3.8	.176	.0267	.0111	-4.1		-.154	.0257	.0411
	7.8	.404	.0735	.0067	-2.1		-.076	.0194	.0305
	11.9	.631	.1534	.0037	-.1		-.001	.0182	.0206
	0.90	15.8	.869	.2683	-.0086	.9	.037	.0196	.0151
17.8		.982	.3365	-.0153	1.9	.077	.0221	.0090	
0.90		-5.9	-.315	.0401	.0500	3.9	.148	.0303	-.0016
		-3.9	-.198	.0230	.0377	7.8	.296	.0619	-.0203
-1.9		-.095	.0154	.0291	11.8	.440	.1146	-.0346	
0		0	.0151	.0224	15.7	.576	.1853	-.0462	
1.1		.057	.0171	.0180	17.9	.646	.2309	-.0511	
2.1		.103	.0197	.0134	2.22	-5.7	-.164	.0289	.0345
4.1		.205	.0304	.0013		-3.6	-.105	.0205	.0288
8.1		.451	.0841	-.0167		-1.6	-.041	.0164	.0214
12.1	.706	.1745	-.0525	.2		.016	.0163	.0139	
16.0	.946	.2960	-.0945	1.3		.050	.0179	.0092	
18.0	1.058	.3706	-.1146	2.4		.080	.0203	.0054	
1.30	-5.9	-.278	.0415	.0635	4.3	.141	.0280	-.0024	
	-4.0	-.187	.0281	.0503	8.3	.261	.0567	-.0141	
	-1.9	-.093	.0209	.0365	12.3	.375	.1015	-.0211	
	0	-.004	.0199	.0230	16.2	.481	.1604	-.0248	
	1.1	.043	.0214	.0157	18.2	.535	.1973	-.0258	
	2.0	.085	.0238	.0089					

TABLE I.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE CANARD - Continued
 (d) BVWC, $\delta_c = 20^\circ$

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m	
0.70	-6.1	-0.287	0.0463	0.0551	1.30	4.0	0.171	0.0479	0.0074	
	-4.1	-.181	.0327	.0510		8.0	.360	.0890	-.0262	
	-2.0	-.070	.0269	.0456		12.0	.559	.1591	-.0515	
	-.1	.012	.0296	.0453		15.0	.739	.2526	-.0729	
	.9	.057	.0321	.0436		18.0	.825	.3090	-.0850	
	1.9	.098	.0357	.0403		1.70	-6.0	-.215	.0431	.0679
	3.8	.183	.0448	.0303			-4.1	-.141	.0333	.0579
	7.8	.381	.0850	.0088			-2.1	-.065	.0283	.0462
	11.9	.609	.1605	-.0057			-.1	.009	.0286	.0349
	15.8	.871	.2817	-.0239			.9	.048	.0304	.0287
17.8	.983	.3491	-.0350	1.9	.084		.0336	.0224		
0.90	-5.9	-.308	.0497	.0710	3.9		.148	.0420	.0120	
	-3.9	-.188	.0346	.0587	7.8		.293	.0744	-.0107	
	-1.9	-.075	.0287	.0491	11.8		.440	.1293	-.0227	
	0	.021	.0309	.0434	15.8		.576	.2014	-.0345	
	1.1	.070	.0338	.0390	17.8	.638	.2433	-.0390		
	2.1	.117	.0377	.0340	2.22	-5.6	-.149	.0338	.0475	
	4.0	.205	.0493	.0222		-3.7	-.091	.0271	.0407	
	8.0	.427	.0927	-.0169		-1.5	-.026	.0241	.0327	
	12.1	.670	.1798	-.0422		.2	.030	.0253	.0251	
	16.0	.944	.3120	-.0963		1.3	.061	.0274	.0211	
18.0	1.038	.3766	-.1076	2.4		.089	.0307	.0165		
1.30	-5.9	-.274	.0501	.0862		4.3	.148	.0388	.0085	
	-3.9	-.177	.0372	.0711		8.3	.261	.0680	-.0039	
	-1.9	-.083	.0314	.0553		12.2	.378	.1140	-.0098	
	0	-.001	.0321	.0413		16.2	.482	.1752	-.0101	
	1.1	.046	.0343	.0329	18.2	.530	.2107	-.0106		
	2.0	.087	.0376	.0254						

TABLE I.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
THE CANARD - Continued
(e) BV

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m	
0.70	-6.3	-0.007	0.0068	-0.0132	1.30	4.1	0.007	0.0081	0.0087	
	-4.3	-.003	.0064	-.0095		6.0	.008	.0084	.0127	
	-2.2	-.002	.0060	-.0053		8.0	.013	.0093	.0168	
	-.7	0	.0057	-.0018		10.1	.019	.0107	.0213	
	-.2	.001	.0057	-.0007		12.0	.027	.0130	.0261	
	.3	.002	.0055	.0004		14.1	.035	.0162	.0314	
	1.7	.003	.0055	.0041		16.1	.047	.0199	.0371	
	3.8	.004	.0057	.0086		18.1	.059	.0247	.0433	
	5.7	.007	.0056	.0128		1.70	-6.2	-.012	.0106	-.0130
	7.8	.011	.0072	.0166			-4.1	-.009	.0092	-.0084
	9.8	.015	.0076	.0205			-2.1	-.005	.0087	-.0040
	11.8	.021	.0083	.0248			-.7	-.003	.0084	-.0010
	13.8	.029	.0102	.0293			-.2	-.001	.0084	.0001
	15.8	.036	.0126	.0339			.4	-.002	.0082	.0021
17.9	.043	.0159	.0398	1.8	.001		.0081	.0049		
0.90	-6.0	-.008	.0069	-.0136	3.9	.005	.0083	.0095		
	-3.9	-.004	.0062	-.0092	5.8	.009	.0088	.0140		
	-1.9	0	.0060	-.0051	9.8	.022	.0110	.0227		
	-.5	.001	.0057	-.0020	11.8	.032	.0140	.0272		
	.1	.001	.0053	-.0002	13.9	.042	.0177	.0326		
	.5	.002	.0054	.0007	15.9	.058	.0236	.0390		
	2.0	.003	.0053	.0041	17.9	.076	.0314	.0467		
	4.1	.005	.0054	.0090	2.22	-5.7	-.016	.0092	-.0113	
	6.0	.009	.0058	.0128		-3.6	-.010	.0081	-.0069	
	8.0	.012	.0065	.0170		-1.7	-.007	.0073	-.0026	
	10.1	.019	.0078	.0209		-.2	-.002	.0070	.0004	
	12.1	.024	.0091	.0255		.3	-.003	.0070	.0016	
	14.1	.031	.0117	.0301		.8	-.001	.0070	.0030	
	16.1	.038	.0140	.0352		2.2	.001	.0069	.0059	
18.1	.048	.0176	.0412	4.3	.005	.0069	.0106			
1.30	-6.0	-.010	.0099	-.0133	6.3	.011	.0080	.0149		
	-4.0	-.005	.0088	-.0094	8.3	.017	.0093	.0190		
	-1.9	-.001	.0084	-.0050	10.3	.028	.0119	.0237		
	-.5	0	.0082	-.0017	12.3	.041	.0157	.0280		
	0	.001	.0082	-.0004	14.3	.058	.0213	.0341		
	.6	.001	.0081	.0005	16.4	.075	.0289	.0408		
	2.0	.004	.0073	.0040	18.4	.093	.0372	.0471		

TABLE I.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE CANARD - Continued
 (f) BVC, $\delta_c = 0^\circ$

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m
0.70	-6.2	-0.052	0.0120	-0.0385	1.30	4.0	0.028	0.0111	0.0229
	-4.1	-.034	.0094	-.0255		7.9	.058	.0170	.0463
	-2.1	-.019	.0077	-.0131		11.9	.092	.0286	.0700
	-.1	-.003	.0069	-.0015		16.0	.129	.0453	.0932
	.8	.005	.0068	.0044		18.0	.147	.0560	.1044
	1.8	.010	.0070	.0109	1.70	-6.2	-.042	.0141	-.0314
	3.9	.026	.0079	.0239		-4.3	-.031	.0120	-.0220
	7.8	.061	.0134	.0501		-2.2	-.017	.0101	-.0111
	11.8	.100	.0251	.0785		-.2	-.005	.0092	.0001
	15.8	.139	.0422	.1075		.7	.002	.0090	.0048
17.9	.155	.0518	.1194	1.7		.008	.0094	.0103	
0.90	-6.1	-.052	.0120	-.0396		3.8	.023	.0104	.0206
	-4.0	-.033	.0090	-.0253		7.8	.049	.0158	.0408
	-2.1	-.018	.0076	-.0134		11.7	.079	.0262	.0609
	0	-.001	.0069	-.0004		15.7	.115	.0425	.0789
	.9	.005	.0068	.0068	17.8	.141	.0549	.0871	
	1.8	.013	.0069	.0122	2.22	-5.8	-.037	.0119	-.0244
	3.9	.031	.0087	.0248		-3.7	-.025	.0095	-.0155
	7.9	.069	.0150	.0530		-1.7	-.013	.0080	-.0066
	11.7	.107	.0269	.0814		.3	0	.0074	.0025
	15.9	.149	.0460	.1109		1.2	.005	.0077	.0069
17.9	.164	.0557	.1219	2.3		.011	.0081	.0118	
1.30	-6.0	-.047	.0147	-.0352		4.3	.024	.0095	.0205
	-4.0	-.031	.0119	-.0235		6.2	.049	.0153	.0381
	-2.0	-.015	.0104	-.0118		12.2	.079	.0255	.0525
	0	-.001	.0097	-.0006		16.3	.123	.0450	.0642
	.9	.006	.0098	.0046	18.3	.147	.0582	.0711	
	1.9	.011	.0098	.0111					

TABLE I.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE CANARD - Continued
 (g) BVC, $\delta_c = 10^\circ$

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m	
0.70	-6.2	-0.003	0.0078	-0.0106	1.30	3.9	0.064	0.0218	0.0466	
	-4.1	.009	.0080	.0024		7.9	.093	.0330	.0670	
	-2.1	.025	.0095	.0150		11.9	.123	.0484	.0890	
	-.1	.041	.0121	.0269		15.9	.151	.0678	.1111	
	.8	.051	.0138	.0346		18.0	.166	.0787	.1221	
	1.8	.058	.0155	.0409		1.70	-6.2	-.009	.0110	-.0106
	3.9	.076	.0200	.0555			-4.2	.004	.0107	-.0015
	7.8	.113	.0333	.0816			-2.2	.017	.0114	.0093
	11.7	.141	.0491	.1043			-.2	.029	.0131	.0203
	15.8	.162	.0654	.1203			.7	.035	.0144	.0250
17.9	.165	.0715	.1236	1.6	.040		.0156	.0300		
0.90	-6.1	-.003	.0077	-.0108	3.7		.052	.0190	.0400	
	-4.0	.010	.0082	.0019	7.7		.077	.0284	.0571	
	-2.0	.029	.0094	.0162	11.6		.100	.0411	.0755	
	0	.046	.0122	.0297	15.7		.128	.0583	.0938	
	.8	.054	.0138	.0355	17.7	.148	.0703	.1031		
	1.8	.064	.0165	.0435	2.22	-5.7	-.008	.0098	-.0080	
	3.9	.082	.0213	.0566		-3.7	.003	.0093	.0011	
	7.9	.120	.0360	.0833		-1.7	.016	.0098	.0103	
	11.8	.143	.0506	.1031		.2	.027	.0112	.0186	
	15.9	.158	.0644	.1136		1.2	.031	.0123	.0232	
17.9	.172	.0747	.1237	2.2		.036	.0136	.0272		
1.30	-6.0	-.006	.0112	-.0108		4.3	.046	.0165	.0360	
	-4.0	.009	.0111	-.0001		8.2	.069	.0256	.0510	
	-2.0	.023	.0124	.0121		12.1	.092	.0374	.0670	
	0	.037	.0146	.0238		16.2	.135	.0589	.0799	
	.9	.045	.0160	.0298	18.3	.158	.0731	.0874		
	1.9	.051	.0176	.0348						

TABLE I.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE CANARD - Concluded.
 (h) BVC, $\delta_c = 20^\circ$

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m	
0.70	-6.1	0.033	0.0157	0.0178	1.30	3.8	0.089	0.0388	0.0614	
	-4.1	.051	.0191	.0289		7.9	.113	.0531	.0798	
	-2.1	.067	.0235	.0414		11.8	.130	.0690	.0989	
	-.1	.081	.0289	.0538		15.8	.151	.0862	.1147	
	.8	.089	.0323	.0609		18.1	.163	.0969	.1242	
	1.8	.095	.0354	.0669	1.70	-6.2	.016	.0162	.0074	
	3.9	.111	.0431	.0793		-4.2	.029	.0178	.0158	
	7.8	.130	.0563	.0958		-2.2	.040	.0203	.0256	
	11.8	.132	.0633	.0984		-.2	.051	.0238	.0343	
	15.8	.141	.0745	.1096		.7	.057	.0258	.0383	
	17.9	.154	.0833	.1190		1.7	.063	.0282	.0422	
	0.90	-6.1	.036	.0162		.0177	3.7	.074	.0332	.0510
		-4.1	.053	.0196		.0292	7.7	.090	.0442	.0674
		-2.1	.069	.0248		.0415	11.6	.110	.0586	.0839
-.1		.084	.0300	.0539	15.7	.134	.0765	.1013		
.8		.091	.0334	.0596	17.9	.155	.0902	.1110		
1.8		.098	.0367	.0660	2.22	-5.7	.012	.0145	.0060	
3.9		.113	.0440	.0783		-3.7	.025	.0156	.0136	
7.8		.124	.0550	.0917		-1.7	.035	.0176	.0222	
11.9		.136	.0667	.1014		.2	.044	.0204	.0295	
15.9		.148	.0801	.1175		1.2	.050	.0224	.0333	
17.9	.164	.0916	.1289	2.2	.054	.0242	.0379			
1.30	-6.0	.026	.0175	.0118	4.2	.063	.0285	.0451		
	-4.1	.038	.0198	.0212	8.2	.079	.0390	.0604		
	-1.9	.053	.0235	.0317	12.1	.100	.0528	.0744		
	-.1	.065	.0276	.0406	16.3	.143	.0765	.0916		
	.9	.071	.0303	.0466	18.2	.161	.0897	.1002		
	1.8	.077	.0328	.0504						

TABLE II.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE TRAILING-EDGE FLAP
 (a) $\delta_f = 4.1^\circ$

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m
0.70	-6.2	-0.235	0.0321	-0.0128	1.10	2.2	0.165	0.0234	-0.0490
	-.2	.060	.0116	-.0323		6.0	.389	.0565	-.0922
	1.8	.148	.0148	-.0385		10.0	.604	.1194	-.1209
	5.7	.346	.0411	-.0515					
	9.9	.579	.1046	-.0641					
0.90	-6.0	-.242	.0340	-.0118	1.30	-5.9	-.260	.0389	.0311
	-2.0	-.016	.0123	-.0345		-1.9	-.062	.0163	-.0039
	0	.082	.0129	-.0440	.2	.033	.0160	-.0199	
	2.1	.181	.0176	-.0519	2.1	.125	.0195	-.0360	
	6.0	.402	.0507	-.0748	6.0	.315	.0454	-.0689	
	10.1	.646	.1207	-.1038	10.1	.507	.1006	-.0994	
1.00	-5.8	-.296	.0439	.0242	1.70	-6.2	-.217	.0348	.0274
	-1.7	-.049	.0177	-.0155		-2.0	-.066	.0166	.0024
	.2	.059	.0169	-.0342	-.1	.014	.0148	-.0105	
	2.3	.181	.0230	-.0561	1.9	.088	.0175	-.0231	
	6.2	.415	.0586	-.0973	5.8	.238	.0370	-.0467	
	10.2	.645	.1294	-.1307	9.9	.380	.0778	-.0683	
1.10	-6.0	-.284	.0446	.0290	2.22	-5.7	-.184	.0301	.0202
	-2.0	-.059	.0193	-.0069		-1.7	-.066	.0152	.0040
	.1	.056	.0184	-.0287	.3	.009	.0133	-.0070	
					2.3	.081	.0156	-.0176	
					6.2	.197	.0334	-.0335	
				10.3	.310	.0672	-.0472		

TABLE II.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE TRAILING-EDGE FLAP - Continued
 (b) $\delta_f = 0^\circ$

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m		
0.70	-6.4	-0.311	0.0404	0.0227	1.10	4.1	0.213	0.0279	-0.0326		
	-4.2	-.197	.0216	.0155		6.1	.330	.0469	-.0532		
	-2.2	-.101	.0130	.0085		8.1	.446	.0724	-.0719		
	-.7	-.039	.0108	.0060		10.1	.544	.1043	-.0821		
	-.2	-.018	.0104	.0050		12.1	.637	.1450	-.0990		
	.4	.003	.0103	.0044		14.1	.740	.1938	-.1195		
	1.9	.066	.0113	.0004		16.1	.841	.2513	-.1348		
	3.9	.164	.0182	-.0062		18.1	.924	.3103	-.1474		
	5.8	.259	.0316	-.0123		1.30	-6.0	-.292	.0420	.0530	
	7.8	.368	.0537	-.0189			-4.0	-.139	.0254	.0345	
	9.8	.477	.0844	-.0240			-2.0	-.094	.0170	.0175	
	11.7	.587	.1210	-.0298			-.5	-.026	.0145	.0056	
	13.8	.702	.1682	-.0365			0	-.005	.0139	.0029	
	15.8	.807	.2224	-.0389			.6	.019	.0145	-.0010	
	17.8	.918	.2860	-.0417			2.1	.037	.0167	-.0125	
	0.90	-6.0	-.325	.0411			.0338	4.0	.130	.0246	-.0237
		-3.9	-.204	.0222			.0210	6.0	.278	.0399	-.0453
		-1.9	-.099	.0126			.0113	8.0	.373	.0619	-.0609
		-.6	-.038	.0111		.0069	10.0	.459	.0909	-.0767	
0		-.013	.0107	.0055	12.0	.551	.1262	-.0916			
.6		.009	.0106	.0039	14.1	.650	.1678	-.1062			
2.0		.076	.0119	-.0019	16.1	.735	.2146	-.1191			
4.0		.179	.0199	-.0121	18.1	.809	.2661	-.1276			
6.0		.291	.0370	-.0231	1.70	-6.3	-.239	.0377	.0409		
7.9		.409	.0618	-.0361		-4.1	-.150	.0239	.0279		
10.0		.540	.0992	-.0527		-2.2	-.095	.0164	.0154		
12.0		.660	.1433	-.0675		-.7	-.031	.0140	.0065		
14.0		.788	.1981	-.0888		-.1	-.010	.0136	.0034		
16.0		.913	.2627	-.1104		.4	.012	.0137	0		
1.00	-5.8	-.347	.0484	.0603		1.8	.054	.0152	-.0087		
	-3.8	-.223	.0296	.0406		3.8	.143	.0216	-.0212		
	-1.8	-.110	.0175	.0213	5.8	.215	.0327	-.0330			
	-.3	-.031	.0149	.0096	7.8	.289	.0494	-.0443			
	.2	-.007	.0154	.0046	9.8	.351	.0721	-.0553			
	.7	.024	.0155	.0008	11.8	.429	.0988	-.0657			
	2.2	.103	.0177	-.0112	13.9	.499	.1299	-.0754			
	4.2	.222	.0287	-.0312	15.9	.554	.1665	-.0831			
	6.3	.345	.0491	-.0517	17.9	.626	.2063	-.0883			
	8.2	.459	.0768	-.0705	2.22	-5.9	-.136	.0309	.0273		
	10.3	.579	.1153	-.0897		-3.6	-.114	.0191	.0176		
	12.2	.686	.1586	-.1065		-1.7	-.057	.0139	.0097		
	14.2	.793	.2091	-.1234		-.3	-.013	.0124	.0034		
	16.3	.898	.2706	-.1400		.2	.002	.0123	.0009		
18.2	.989	.3323	-.1537	.8		.021	.0126	-.0013			
1.10	-6.0	-.334	.0484	.0625		2.2	.058	.0145	-.0082		
	-4.0	-.216	.0295	.0437		4.2	.129	.0207	-.0172		
	-2.0	-.106	.0195	.0237	6.2	.137	.0309	-.0253			
	-.4	-.028	.0162	.0116	8.3	.245	.0453	-.0327			
	.1	-.004	.0160	.0072	10.2	.330	.0629	-.0394			
	.6	.024	.0163	.0020	12.3	.356	.0862	-.0456			
	2.1	.101	.0185	-.0108	14.2	.409	.1115	-.0502			
					16.2	.454	.1422	-.0531			
					18.3	.519	.1776	-.0574			

TABLE II.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE TRAILING-EDGE FLAP - Continued
 (c) $\delta_F = -4.2^\circ$

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m
0.70	-6.3	-0.393	0.0505	0.0585	1.10	10.0	0.501	0.0974	-0.0565
	-2.2	-.178	.0170	.0427		14.1	.691	.1810	-.0890
	-.3	-.090	.0118	.0343		18.1	.874	.2928	-.1150
	1.8	.002	.0103	.0286	1.30	-6.0	-.318	.0464	.0714
	5.7	.195	.0254	.0159		-1.9	-.120	.0186	.0351
	9.8	.405	.0715	.0080		.1	-.031	.0152	.0192
	13.8	.637	.1528	-.0042		2.1	.059	.0162	.0035
	17.9	.856	.2668	-.0107		6.0	.249	.0371	-.0282
0.90	-2.0	-.194	.0180	.0559		10.0	.438	.0850	-.0588
	0	-.094	.0127	.0455		14.1	.621	.1595	-.0881
	2.1	.005	.0111	.0351	18.1	.786	.2562	-.1109	
	6.0	.226	.0315	.0121	1.70	-6.2	-.255	.0410	.0519
	10.1	.470	.0884	-.0143		-2.2	-.100	.0178	.0262
1.00	-5.8	-.417	.0592	.1017		-.2	-.026	.0146	.0130
	-1.8	-.167	.0239	.0547	1.9	.048	.0154	.0009	
	.2	-.054	.0190	.0348	5.8	.200	.0312	-.0223	
	2.2	.060	.0173	.0145	9.8	.343	.0685	-.0443	
	6.2	.296	.0454	-.0260	13.8	.477	.1229	-.0637	
	10.2	.522	.1050	-.0574	17.8	.606	.1968	-.0766	
	14.3	.739	.1971	-.0902	2.22	-5.8	-.189	.0320	.0332
	18.3	.935	.3157	-.1186		-1.6	-.065	.0148	.0159
1.10	-6.0	-.390	.0564	.0991		.3	-.006	.0126	.0070
	-2.0	-.153	.0232	.0533		2.3	.054	.0141	-.0016
	.1	-.050	.0182	.0334	6.3	.174	.0292	-.0176	
	2.1	.063	.0180	.0128	10.3	.286	.0601	-.0313	
	6.0	.281	.0416	-.0271	14.3	.392	.1075	-.0406	
	18.4	.501	.1709	-.0475					

TABLE II.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE TRAILING-EDGE FLAP - Continued
 (d) $\delta_f = -8.2^\circ$

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m
0.70	-6.3	-0.466	0.0626	0.0917	1.10	10.0	0.461	0.0937	-0.0303
	-2.3	-.254	.0237	.0761		14.1	.667	.1790	-.0671
	-.2	-.158	.0154	.0682		18.1	.844	.2861	-.0905
	1.9	-.067	.0115	.0621	1.30	-6.0	-.359	.0547	.0958
	5.8	.120	.0214	.0498		-2.0	-.157	.0236	.0572
	9.8	.333	.0620	.0381		0	-.066	.0181	.0405
	13.9	.568	.1389	.0273		2.2	.030	.0181	.0235
	17.3	.760	.2379	.0255		5.9	.216	.0353	-.0095
				10.0		.414	.0825	-.0425	
0.90	-6.1	-.504	.0687	.1235	14.1	.598	.1551	-.0712	
	-2.0	-.267	.0262	.0944	18.1	.765	.2511	-.0931	
	0	-.166	.0178	.0838	1.70	-6.1	-.273	.0458	.0646
	2.1	-.075	.0138	.0748		-2.2	-.122	.0217	.0389
	6.0	.138	.0269	.0541		-.2	-.044	.0170	.0256
	10.0	.388	.0781	.0270		1.8	.026	.0170	.0132
	14.0	.642	.1671	-.0071		5.8	.184	.0315	-.0128
	18.1	.805	.2703	-.0215		9.8	.328	.0669	-.0343
1.00	-5.8	-.490	.0720	.1363	13.9	.469	.1221	-.0543	
	-1.8	-.250	.0301	.1004	17.9	.598	.1953	-.0672	
	.2	-.127	.0226	.0772	2.22	-5.8	-.204	.0359	.0421
	2.3	-.005	.0206	.0534		-1.7	-.080	.0173	.0243
	6.2	.243	.0437	.0091		.3	-.016	.0140	.0150
	10.2	.485	.1018	-.0303		2.2	.044	.0152	.0057
	14.2	.702	.1902	-.0621		6.3	.166	.0294	-.0117
	18.3	.906	.3073	-.0916		10.3	.279	.0595	-.0255
1.10	-6.1	-.458	.0703	.1316	14.3	.389	.1056	-.0353	
	-1.9	-.216	.0299	.0870	18.3	.498	.1691	-.0418	
	.1	-.109	.0223	.0686					
	2.1	.004	.0210	.0459					

TABLE II.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE TRAILING-EDGE FLAP - Continued
 (e) $\delta_f = -12.3^\circ$

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m
0.70	-6.3	-0.535	0.0767	0.1232	1.10	6.0	0.188	0.0424	0.0305
	-2.3	-.323	.0330	.1075		10.0	.417	.0923	-.0049
	-.3	-.226	.0220	.0983		14.1	.631	.1733	-.0471
	1.9	-.135	.0159	.0928		18.0	.809	.2784	-.0683
	5.8	.045	.0191	.0808	1.30	-6.1	-.392	.0645	.1174
	9.8	.260	.0548	.0701		-2.0	-.188	.0301	.0781
	13.8	.484	.1229	.0587		0	-.096	.0235	.0609
	17.8	.675	.2161	.0554		2.1	-.005	.0217	.0442
0.90	-6.1	-.550	.0816	.1525		6.0	.189	.0375	.0085
	-2.0	-.315	.0357	.1242	10.0	.385	.0809	-.0256	
	.1	-.218	.0255	.1121	14.1	.571	.1515	-.0559	
	2.1	-.129	.0191	.1034	18.0	.736	.2428	-.0780	
	6.0	.078	.0285	.0841	1.70	-6.3	-.296	.0535	.0765
	10.0	.331	.0752	.0560		-2.2	-.139	.0267	.0509
	14.0	.598	.1610	.0116		-.1	-.060	.0210	.0370
	18.1	.757	.2591	.0026		1.9	.012	.0200	.0244
1.00	-5.9	-.526	.0867	.1602		5.8	.164	.0325	-.0015
	-1.8	-.295	.0408	.1291	9.8	.314	.0666	-.0252	
	.1	-.188	.0310	.1127	13.9	.452	.1200	-.0441	
	2.3	-.067	.0270	.0895	17.9	.579	.1905	-.0568	
	6.2	.194	.0452	.0378	2.22	-5.8	-.215	.0411	.0495
	10.2	.441	.1002	-.0028		-1.7	-.091	.0207	.0316
	14.2	.664	.1861	-.0419		.3	-.029	.0172	.0226
	18.2	.860	.2962	-.0702		2.3	.030	.0175	.0135
1.10	-6.0	-.498	.0823	.1569		6.3	.152	.0299	-.0042
	-2.0	-.266	.0406	.1185	10.3	.265	.0584	-.0186	
	.1	-.158	.0313	.0984	14.3	.373	.1023	-.0276	
	2.0	-.047	.0262	.0773	18.3	.479	.1631	-.0338	

TABLE II.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE TRAILING-EDGE FLAP - Continued
 (f) $\delta_f = -20.3^\circ$

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m
1.00	0.2	-0.282	0.0525	0.1581	1.30	10.0	0.331	0.0833	0.0072
	2.3	-.179	.0445	.1455		14.1	.527	.1499	-.0283
	6.2	.079	.0536	.0984		18.1	.698	.2388	-.0532
	10.2	.358	.1033	.0442	1.70	-6.2	-.328	.0701	.1000
	14.3	.600	.1834	-.0017		-2.2	-.172	.0398	.0729
	18.3	.802	.2911	-.0339		-.2	-.098	.0328	.0597
1.10	.1	-.251	.0511	.1463	1.9	-.019	.0298	.0458	
	2.1	-.137	.0432	.1259	5.8	.130	.0392	.0196	
	6.0	.100	.0511	.0777	9.7	.279	.0680	-.0053	
	10.0	.343	.0945	.0374	13.9	.424	.1189	-.0275	
	14.1	.568	.1709	-.0098	17.9	.551	.1867	-.0403	
	18.1	.755	.2719	-.0360	2.22	-5.8	-.241	.0553	.0667
1.30	-6.1	-.454	.0881	.1563		-1.7	-.111	.0314	.0469
	-2.0	-.249	.0476	.1152		.3	-.053	.0266	.0378
	.1	-.155	.0380	.0973		2.3	.009	.0252	.0278
	2.0	-.064	.0336	.0802		6.3	.132	.0347	.0090
	6.0	.128	.0446	.0450		14.4	.362	.1032	-.0184
	18.2	.461	.1589	-.0235					

TABLE II.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE TRAILING-EDGE FLAP - Concluded
 (g) $\delta_f = -28.3^\circ$


M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m
1.00	0.2	-0.330	0.0784	0.1793	1.30	10.0	0.286	0.0905	0.0311
	2.2	-.241	.0678	.1730		14.0	.481	.1509	-.0042
	6.2	0	.0688	.1346		18.1	.653	.2377	-.0290
	10.2	.272	.1128	.0866	1.70	-.2	-.123	.0439	.0759
	14.2	.535	.1866	.0285		1.9	-.048	.0398	.0620
	18.2	.732	.2886	.0012		5.8	.100	.0460	.0368
1.10	0	-.309	.0723	.1731	9.9	.255	.0748	.0109	
	2.0	-.213	.0618	.1598	13.9	.400	.1208	-.0128	
	6.0	.032	.0658	.1116	17.9	.531	.1879	-.0266	
	10.0	.270	.1043	.0732	2.22	.4	-.068	.0366	.0500
	14.1	.510	.1746	.0189		2.3	-.010	.0342	.0404
	18.1	.694	.2721	-.0027		6.3	.112	.0409	.0210
1.30	.1	-.213	.0546	.1244	10.3	.230	.0638	.0030	
	2.1	-.110	.0472	.1054	14.3	.342	.1029	-.0086	
	6.0	.078	.0552	.0716	18.4	.448	.1606	-.0153	

TABLE III.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
THE CAMBERED BODY
(a) BVW

M	α , deg	C_L	C_D	C_m	M	α , deg	C_L	C_D	C_m		
0.70	-6.4	-0.311	0.0404	0.0227	1.10	4.1	0.213	0.0279	-0.0326		
	-4.2	-.197	.0216	.0155		6.1	.330	.0469	-.0532		
	-2.2	-.101	.0130	.0085		8.1	.446	.0724	-.0719		
	-.7	-.039	.0108	.0060		10.1	.544	.1043	-.0821		
	-.2	-.018	.0104	.0050		12.1	.637	.1450	-.0990		
	.4	.003	.0103	.0044		14.1	.740	.1938	-.1195		
	1.9	.066	.0113	.0004		16.1	.841	.2513	-.1348		
	3.9	.164	.0182	-.0062		18.1	.924	.3103	-.1474		
	5.8	.259	.0316	-.0123		1.30	-6.0	-.232	.0420	.0530	
	7.8	.368	.0537	-.0189			-4.0	-.139	.0254	.0345	
	9.8	.477	.0844	-.0240			-2.0	-.034	.0170	.0175	
	11.7	.587	.1210	-.0298			-.5	-.026	.0145	.0056	
	13.8	.702	.1682	-.0365			0	-.005	.0139	.0029	
	15.8	.807	.2224	-.0389			.6	.019	.0145	-.0010	
	17.8	.918	.2860	-.0417			2.1	.037	.0167	-.0125	
	0.90	-6.0	-.325	.0411			.0338	4.0	.130	.0246	-.0287
		-3.9	-.204	.0222			.0210	6.0	.278	.0399	-.0453
-1.9		-.099	.0126	.0113	8.0		.373	.0619	-.0609		
-.6		-.038	.0111	.0069	10.0	.459	.0909	-.0767			
0		-.013	.0107	.0055	12.0	.551	.1262	-.0916			
.6		.009	.0106	.0039	14.1	.630	.1678	-.1062			
2.0		.076	.0119	-.0019	16.1	.735	.2146	-.1191			
4.0		.179	.0199	-.0121	18.1	.839	.2661	-.1276			
6.0		.291	.0370	-.0231	1.70	-6.3	-.239	.0377	.0409		
7.9		.409	.0618	-.0361		-4.1	-.150	.0239	.0279		
10.0		.540	.0992	-.0527		-2.2	-.035	.0164	.0154		
12.0		.660	.1433	-.0675		-.7	-.031	.0140	.0065		
14.0		.788	.1981	-.0888		-.1	-.010	.0136	.0034		
16.0		.913	.2627	-.1104		.4	.012	.0137	0		
1.00	-5.8	-.347	.0484	.0603		1.8	.034	.0152	-.0087		
	-3.8	-.223	.0296	.0406		3.8	.113	.0216	-.0218		
	-1.8	-.110	.0175	.0213	5.8	.25	.0327	-.0340			
	-.3	-.031	.0149	.0096	7.8	.239	.0494	-.0445			
	.2	-.007	.0154	.0046	9.8	.331	.0721	-.0553			
	.7	.024	.0155	.0008	11.8	.429	.0938	-.0657			
	2.2	.103	.0177	-.0112	13.9	.499	.1299	-.0754			
	4.2	.222	.0287	-.0312	15.9	.554	.1665	-.0831			
	6.3	.345	.0491	-.0517	17.9	.626	.2063	-.0883			
	8.2	.459	.0768	-.0705	2.22	-5.9	-.136	.0309	.0273		
	10.3	.579	.1153	-.0897		-3.6	-.14	.0191	.0176		
	12.2	.686	.1586	-.1065		-1.7	-.037	.0139	.0097		
	14.2	.793	.2091	-.1234		-.3	-.03	.0124	.0034		
	16.3	.898	.2706	-.1400		.2	.02	.0123	.0009		
	18.2	.989	.3323	-.1537		.8	.021	.0126	-.0013		
	1.10	-6.0	-.334	.0484		.0625	2.2	.038	.0145	-.0082	
		-4.0	-.216	.0295		.0437	4.2	.119	.0207	-.0172	
-2.0		-.106	.0195	.0237		6.2	.137	.0309	-.0253		
-.4		-.028	.0162	.0116		8.3	.25	.0453	-.0327		
.1		-.004	.0160	.0072	10.2	.300	.0629	-.0394			
.6		.024	.0163	.0020	12.3	.336	.0862	-.0456			
2.1		.101	.0185	-.0108	14.2	.409	.1115	-.0502			
					16.2	.404	.1422	-.0531			
					18.3	.59	.1776	-.0574			


TABLE III.- AERODYNAMIC CHARACTERISTICS OF THE CONFIGURATION WITH
 THE CAMBERED BODY - Concluded
 (b) B_cVW

M	α , deg	C _L	C _D	C _m	M	α , deg	C _L	C _D	C _m	
0.70	-6.3	-0.312	0.0402	0.0305	1.10	6.0	0.328	0.0469	-0.0492	
	-4.3	-.203	.0227	.0230		7.9	.455	.0739	-.0712	
	-2.2	-.101	.0136	.0158		10.1	.559	.1099	-.0798	
	-.8	-.037	.0111	.0110		14.1	.761	.2030	-.1134	
	.3	.008	.0106	.0079		18.1	.943	.3222	-.1369	
	1.8	.078	.0115	.0028	1.30	-6.1	-.290	.0424	.0573	
	3.7	.172	.0186	-.0037		-4.1	-.192	.0266	.0403	
	5.8	.281	.0343	-.0102		-2.0	-.090	.0175	.0219	
	7.7	.383	.0560	-.0156		-.6	-.028	.0153	.0106	
	9.7	.495	.0871	-.0204		.5	.027	.0151	.0013	
	13.8	.719	.1744	-.0284		2.0	.095	.0176	-.0103	
	0.90	-6.1	-.330	.0421		.0440	4.1	.196	.0261	-.0271
		-3.9	-.206	.0226		.0297	6.1	.289	.0426	-.0419
		-2.0	-.104	.0131		.0183	8.1	.383	.0655	-.0561
-.4		-.028	.0108	.0110	9.9	.466	.0917	-.0677		
.5		.020	.0106	.0069	14.0	.647	.1704	-.0913		
2.1		.096	.0125	-.0005	1.70	-6.2	-.233	.0371	.0462	
4.0		.208	.0224	-.0126		-4.1	-.157	.0243	.0336	
6.0		.317	.0399	-.0231		-2.2	-.082	.0171	.0209	
8.1		.455	.0703	-.0402		-.6	-.024	.0148	.0109	
10.0		.566	.1046	-.0528		.3	.012	.0139	.0053	
14.1	.823	.2104	-.0915	1.8		.070	.0159	-.0042		
1.00	-5.8	-.345	.0476	.0687	3.8	.145	.0228	-.0165		
	-3.7	-.218	.0283	.0484	5.9	.224	.0356	-.0275		
	-1.8	-.104	.0191	.0272	7.8	.293	.0527	-.0361		
	-.3	-.025	.0176	.0126	9.9	.368	.0762	-.0447		
	.7	.031	.0152	.0045	13.9	.503	.1367	-.0544		
	2.2	.118	.0198	-.0116	17.9	.634	.2177	-.0604		
	4.2	.240	.0284	-.0324	2.22	-5.9	-.171	.0298	.0339	
	6.2	.366	.0521	-.0532		-3.7	-.111	.0200	.0249	
	8.2	.484	.0818	-.0714		-1.7	-.046	.0142	.0156	
	10.3	.601	.1206	-.0886		-.3	-.003	.0133	.0097	
	14.3	.820	.2205	-.1191		.7	.027	.0135	.0056	
	18.3	1.015	.3463	-.1451		2.3	.078	.0161	-.0012	
1.10	-6.0	-.338	.0502	.0705	4.2	.137	.0229	-.0084		
	-4.0	-.215	.0309	.0488	6.2	.192	.0335	-.0138		
	-1.9	-.109	.0200	.0308	8.3	.252	.0490	-.0181		
	-.6	-.037	.0188	.0168	10.3	.308	.0691	-.0206		
	.3	.019	.0166	.0076	14.4	.420	.1217	-.0266		
	2.1	.108	.0206	-.0082	18.2	.525	.1882	-.0336		
	4.0	.219	.0294	-.0286						

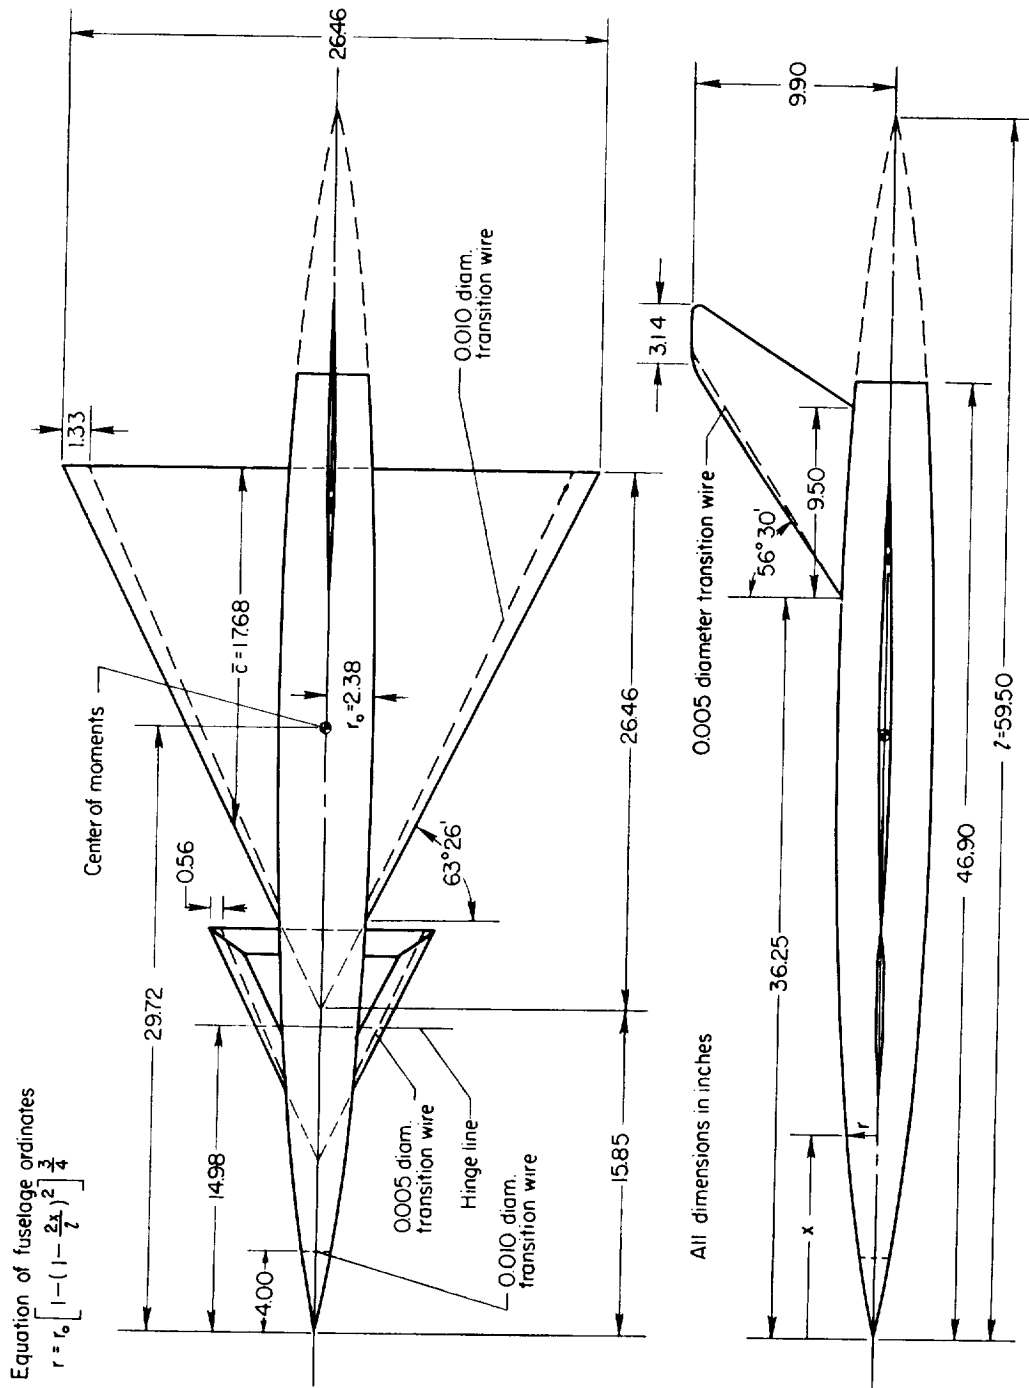

(a) Dimensional sketch of complete model.

Figure 1.- Details and dimensions of canard model.

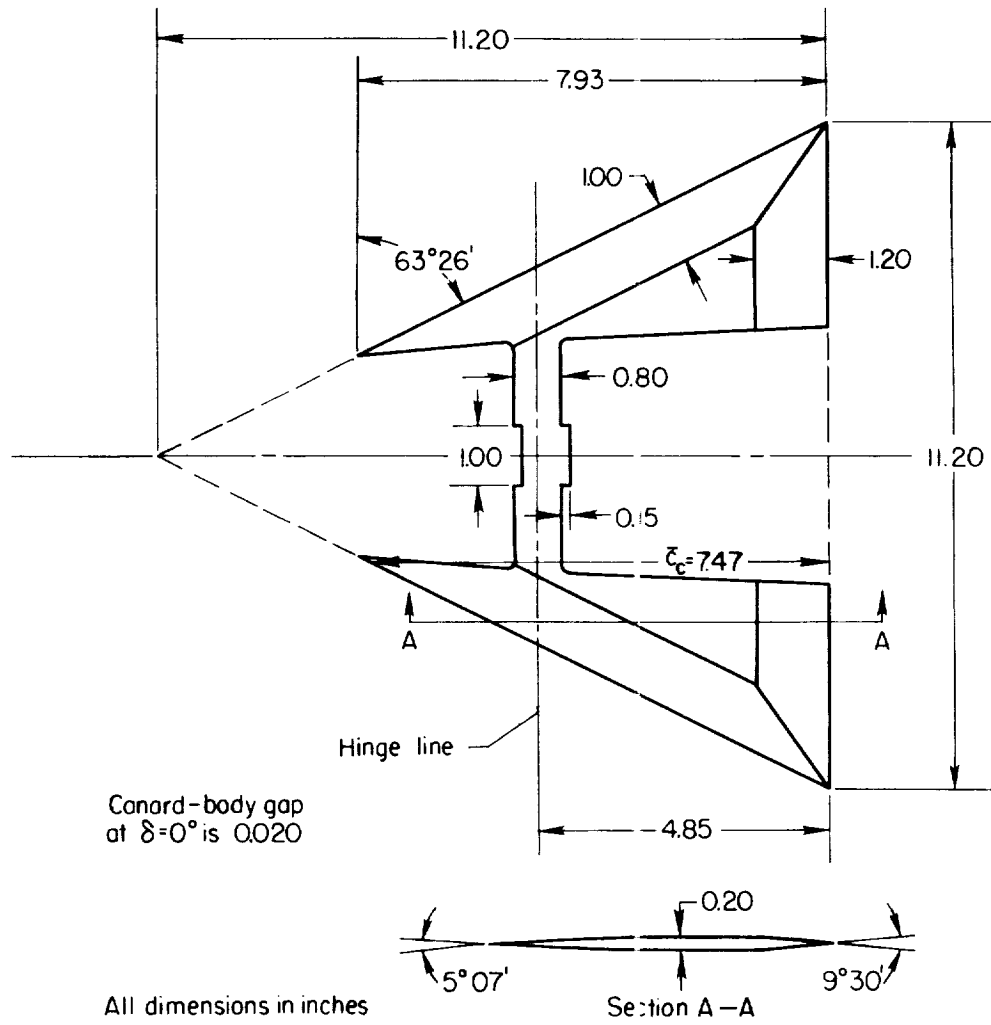

(b) Details of canard surface.

Figure 1.- Concluded.

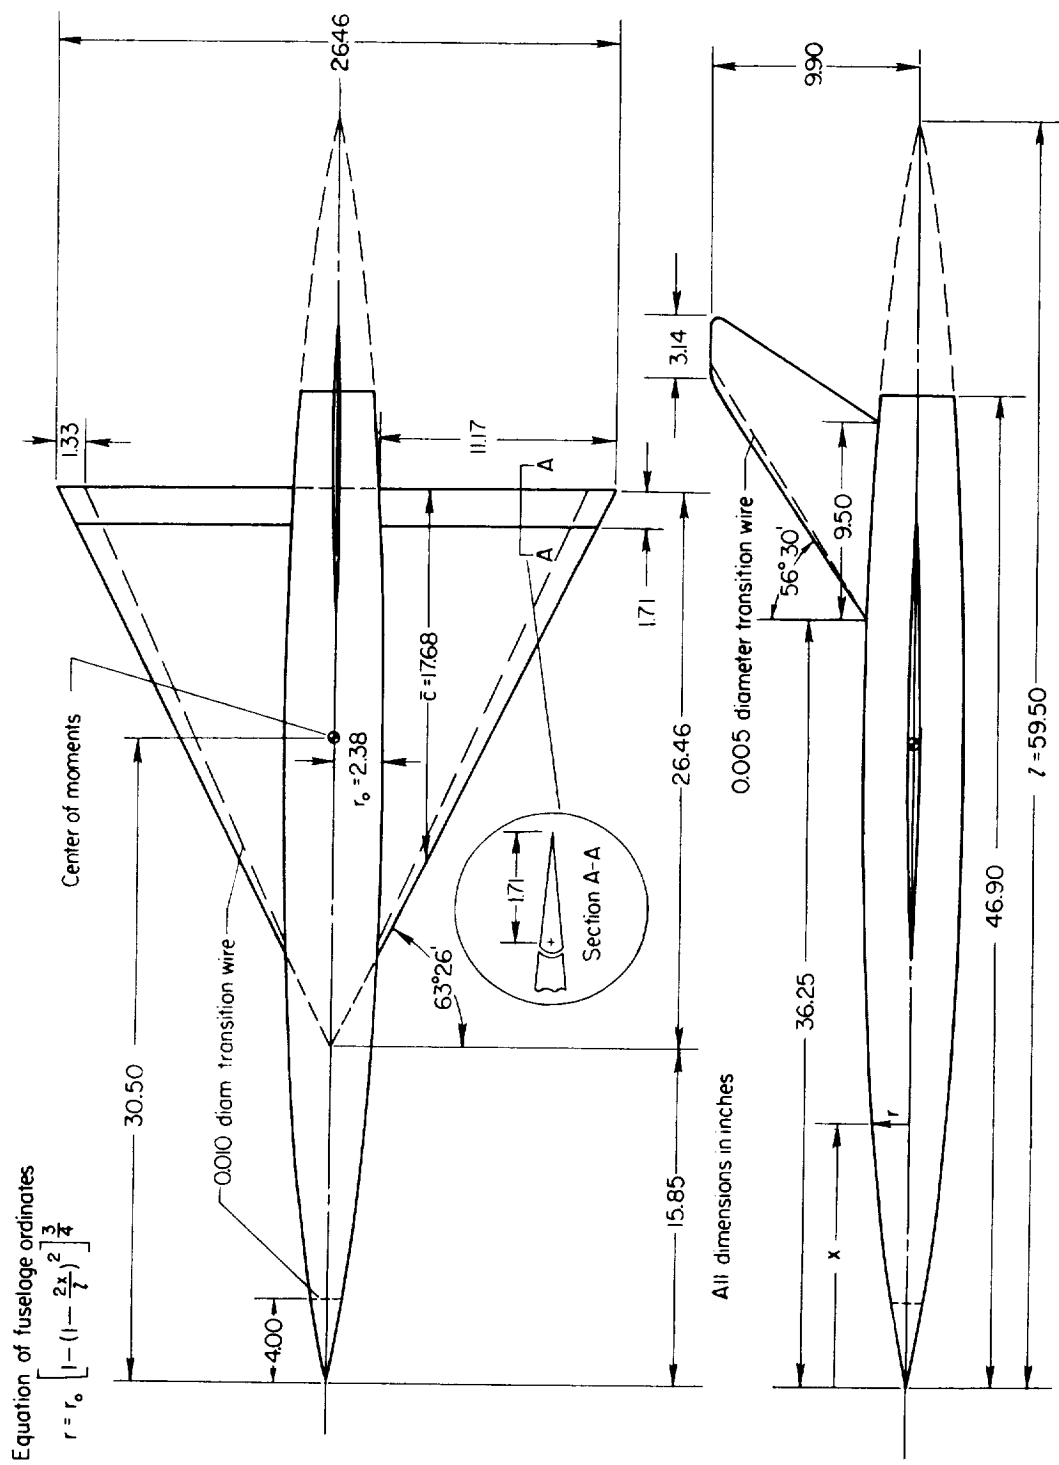


Figure 2.- Details and dimensions of flap model.



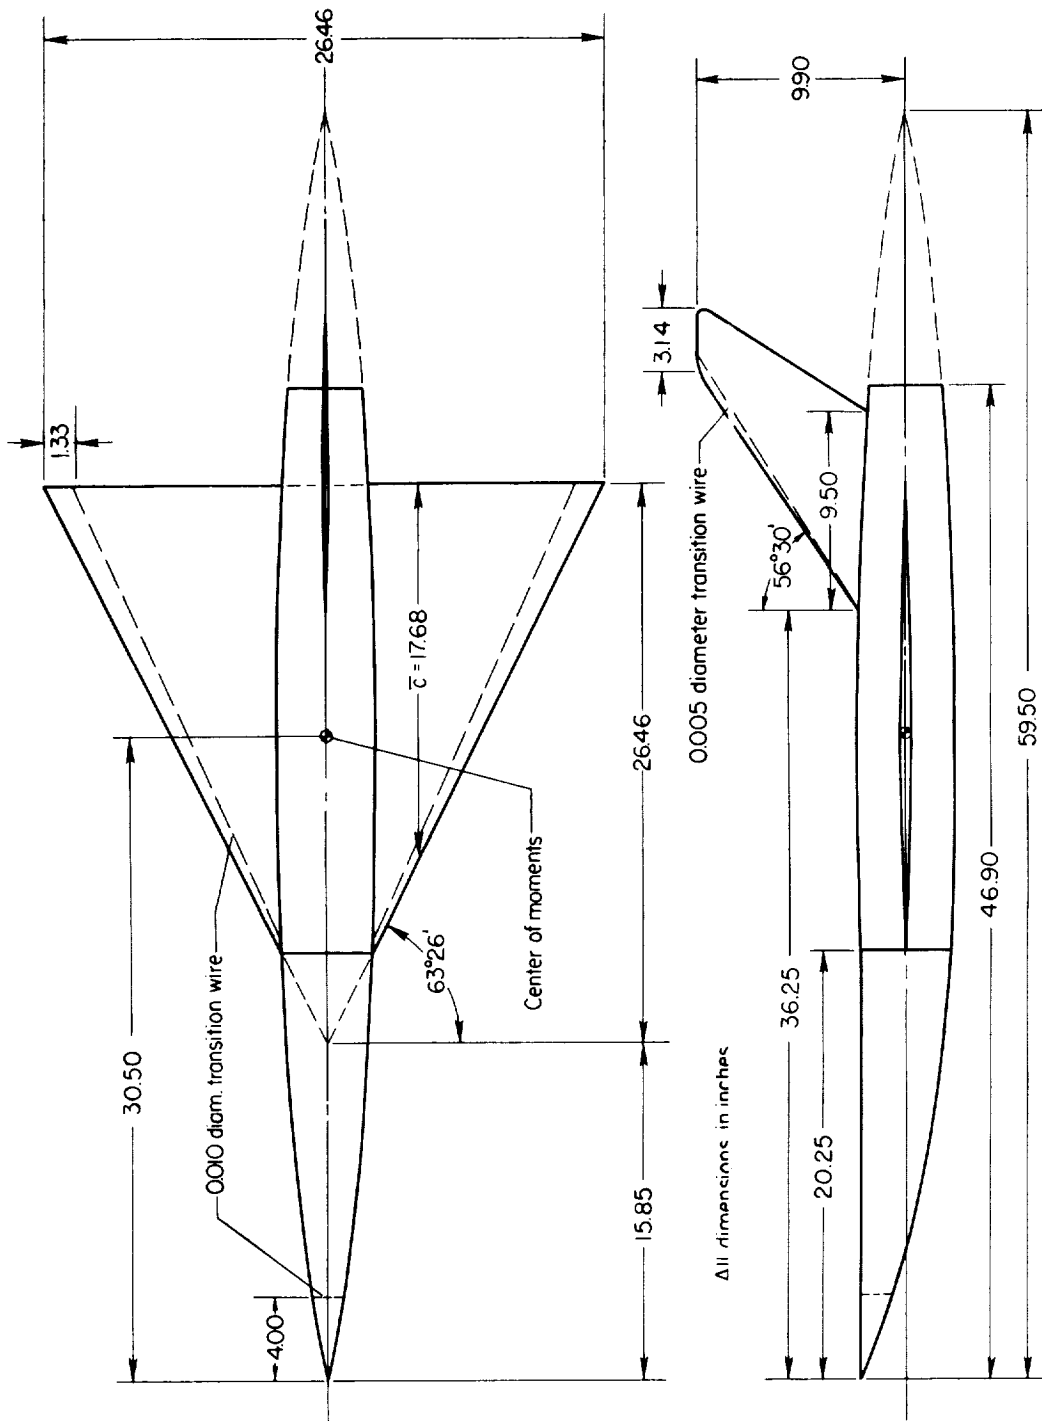


Figure 3.- Details and dimensions of cambered body model.

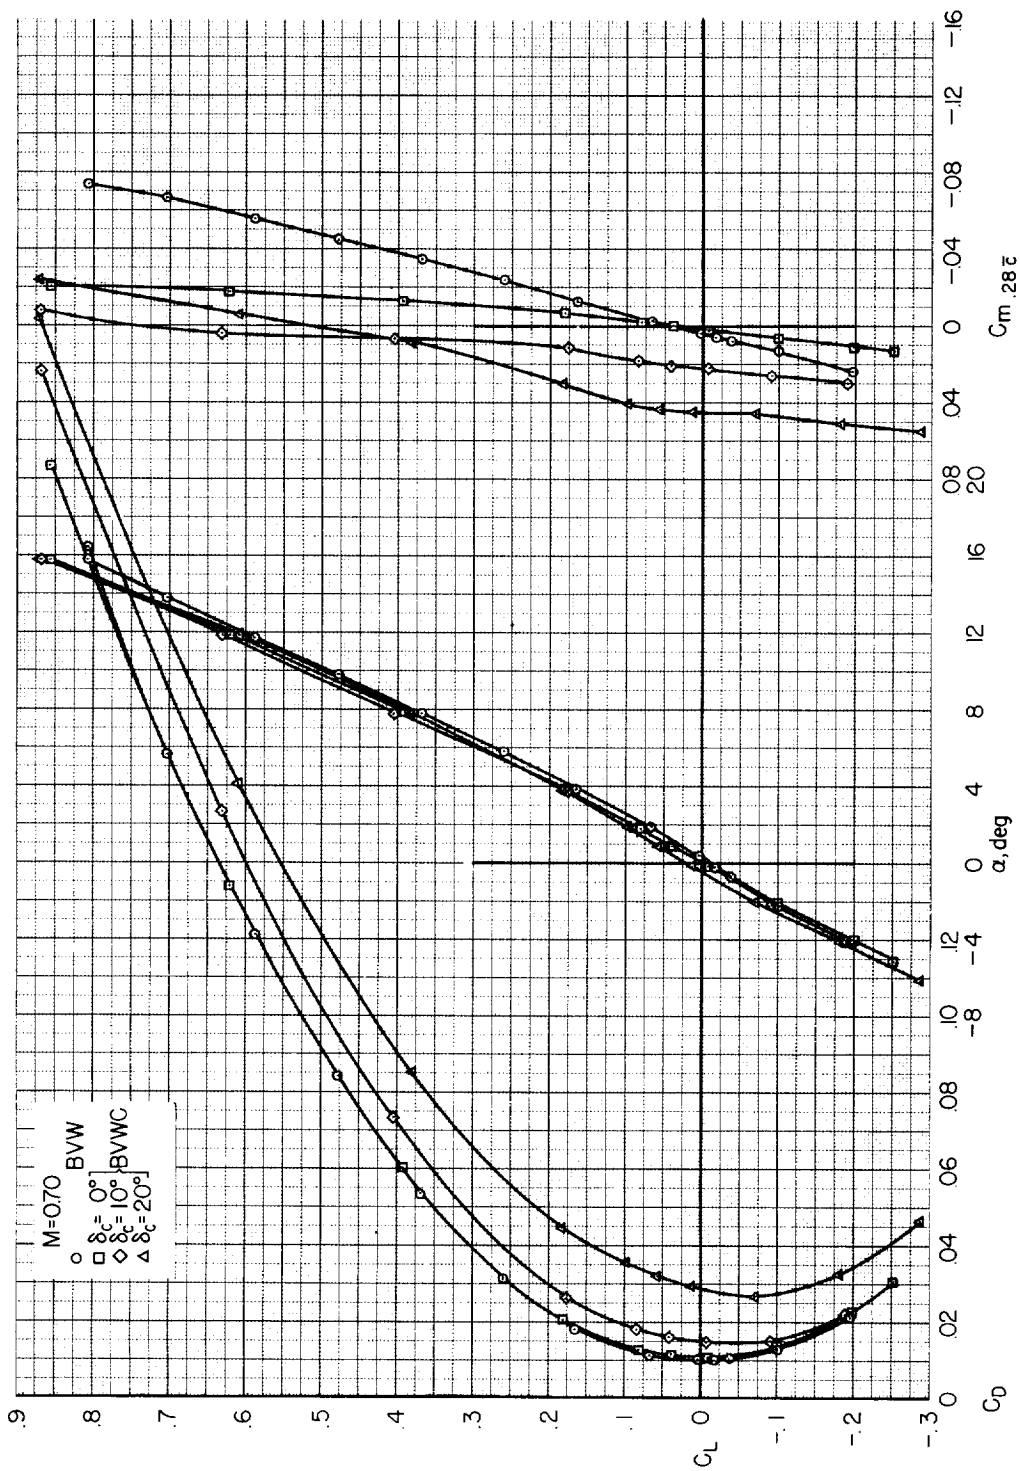


(a) $M = 0.70$

Figure 4.- Lift, drag, and pitching-moment characteristics of the canard model.

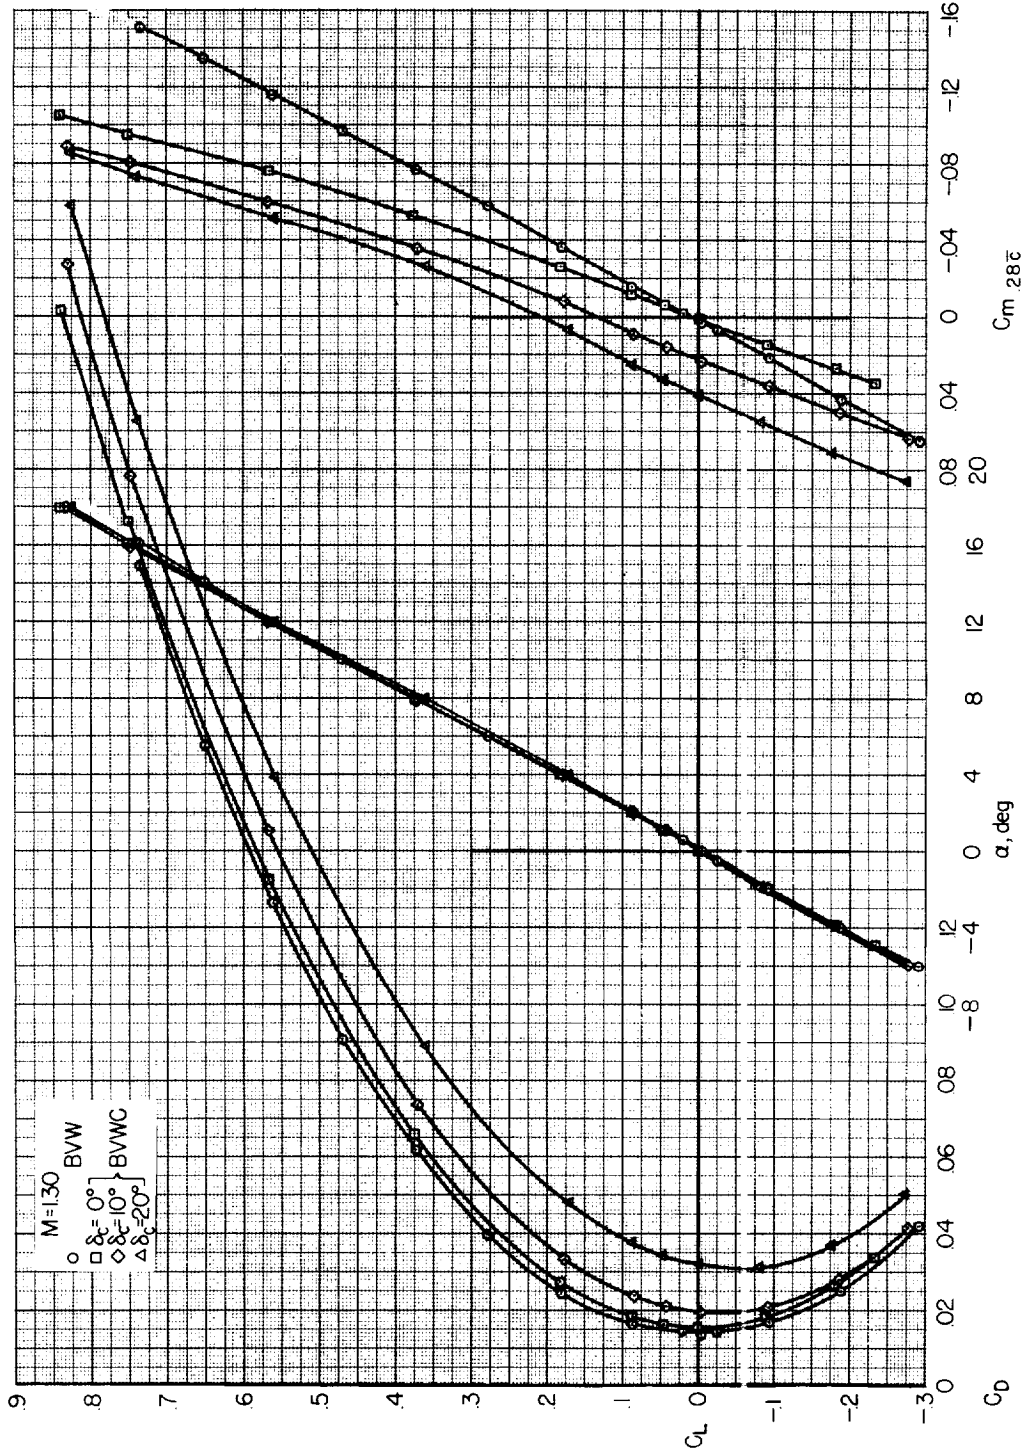


(b) $M = 1.30$

Figure 4.- Continued.

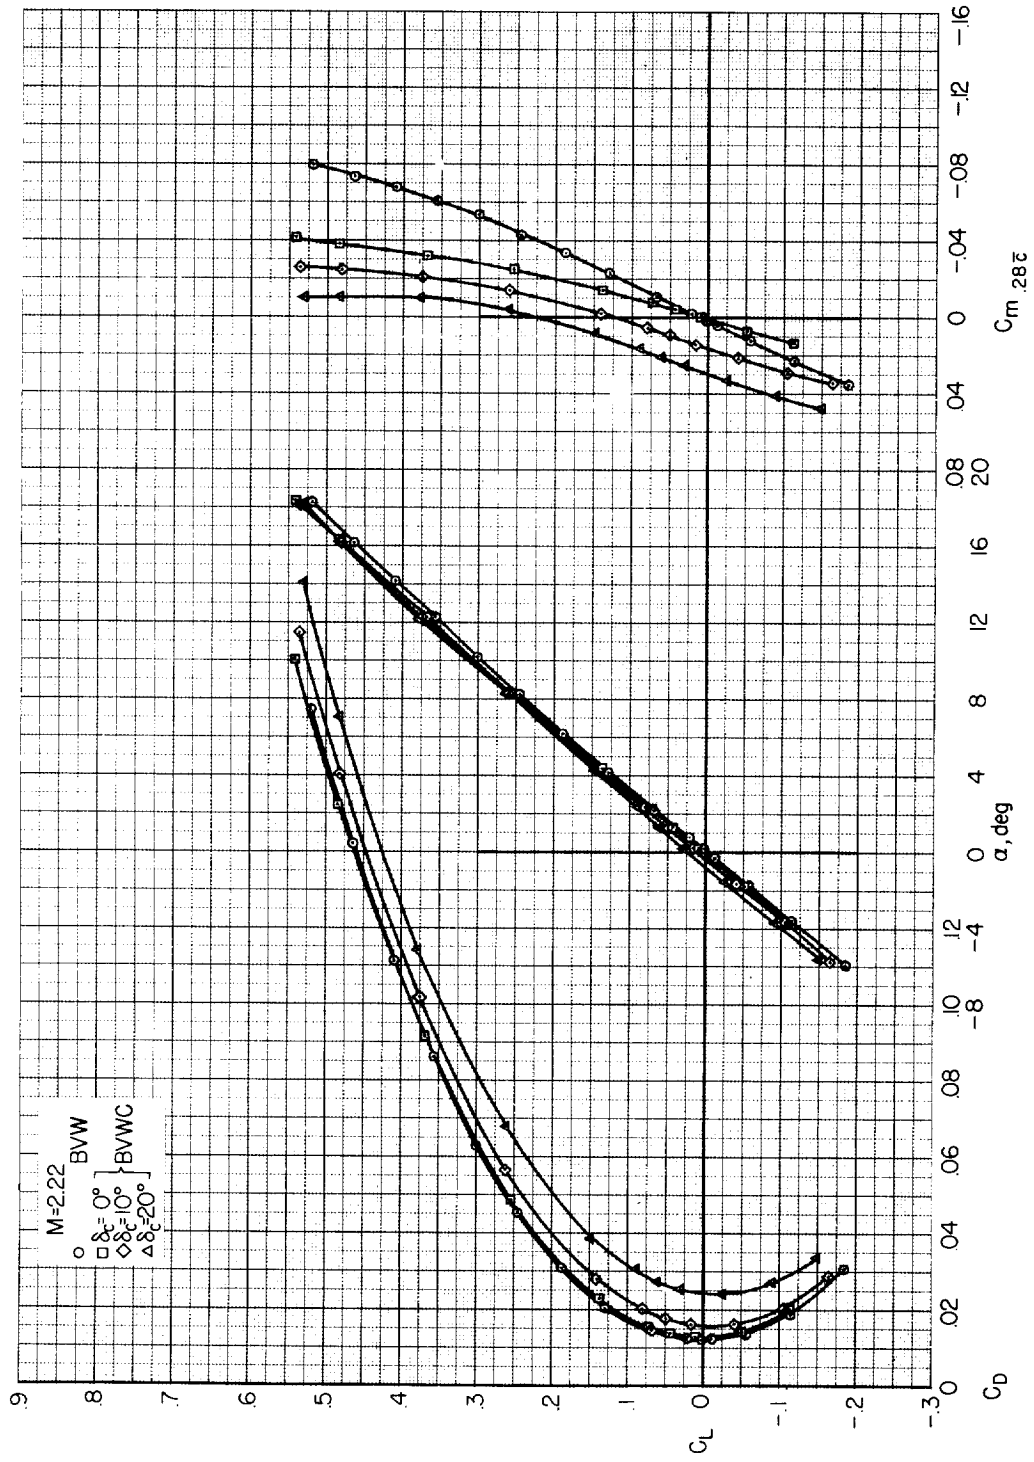


(c) $M = 2.22$

Figure 4.- Concluded.

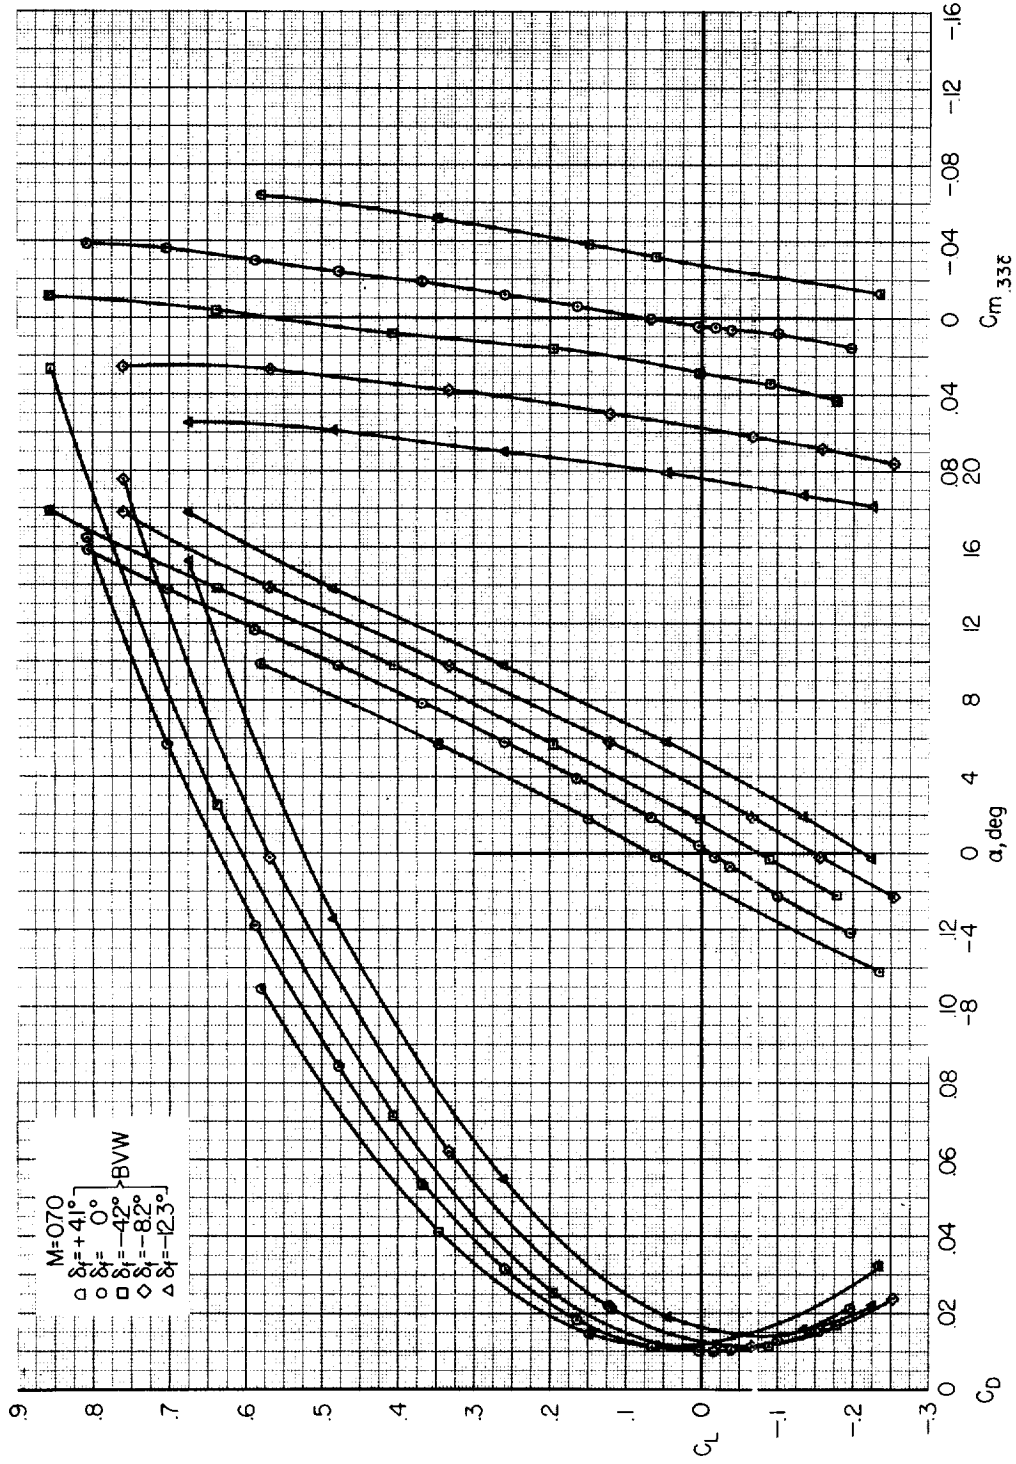


(a) $M = 0.70$

Figure 5.- Lift, drag, and pitching-moment characteristics of the flap model.

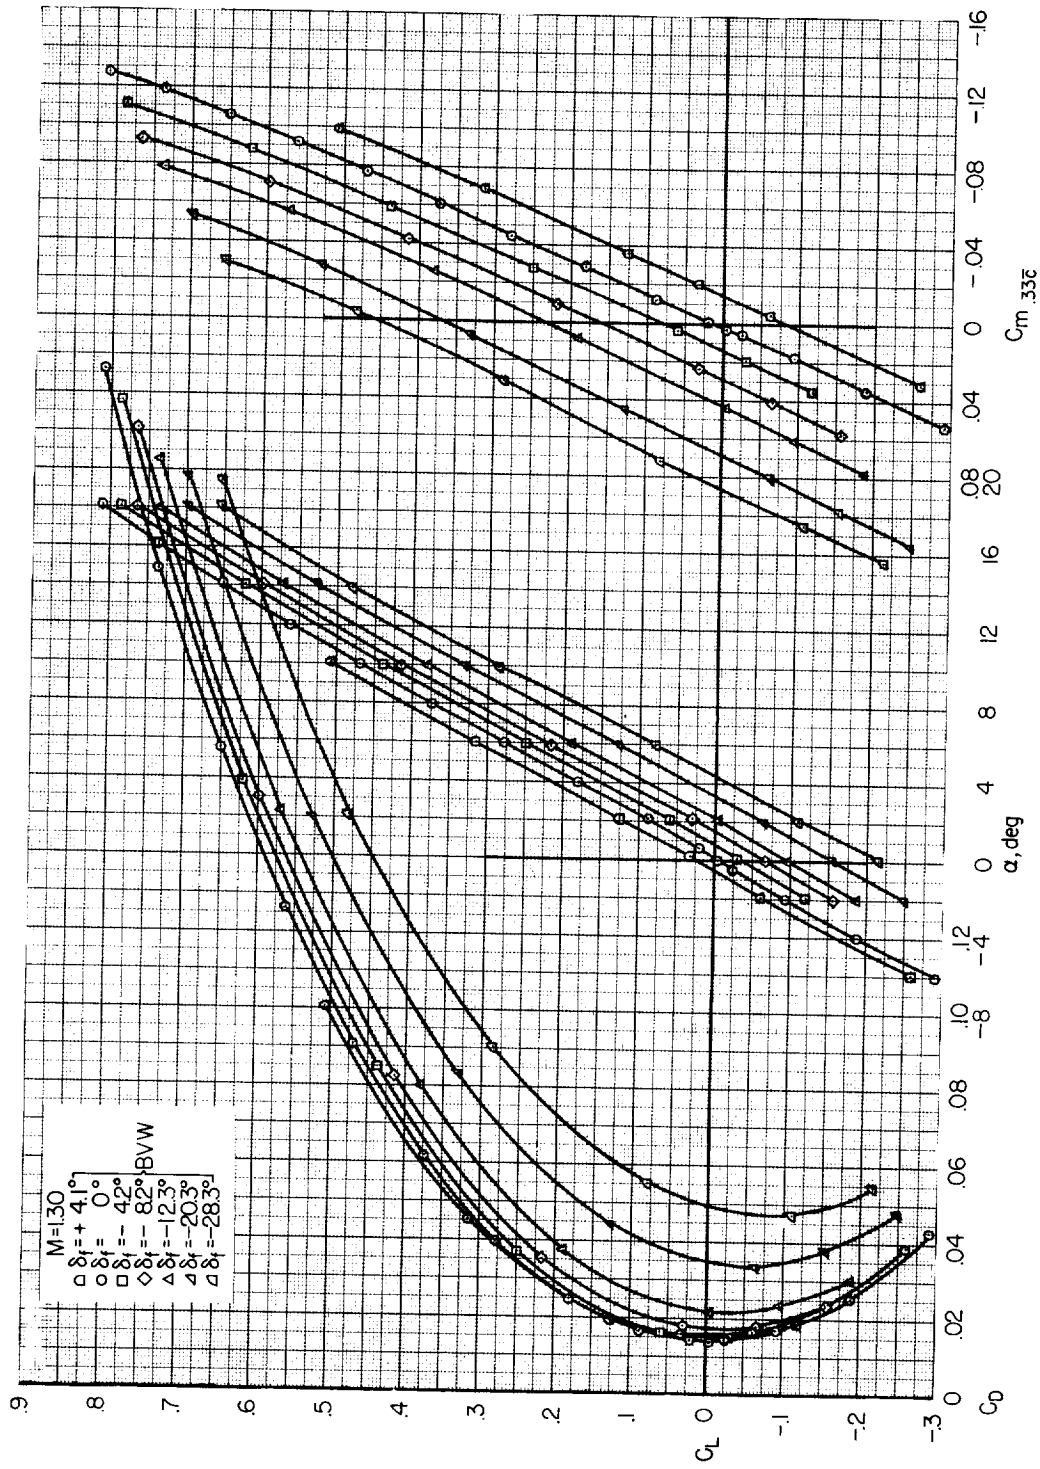


(b) $M = 1.30$

Figure 5.- Continued.

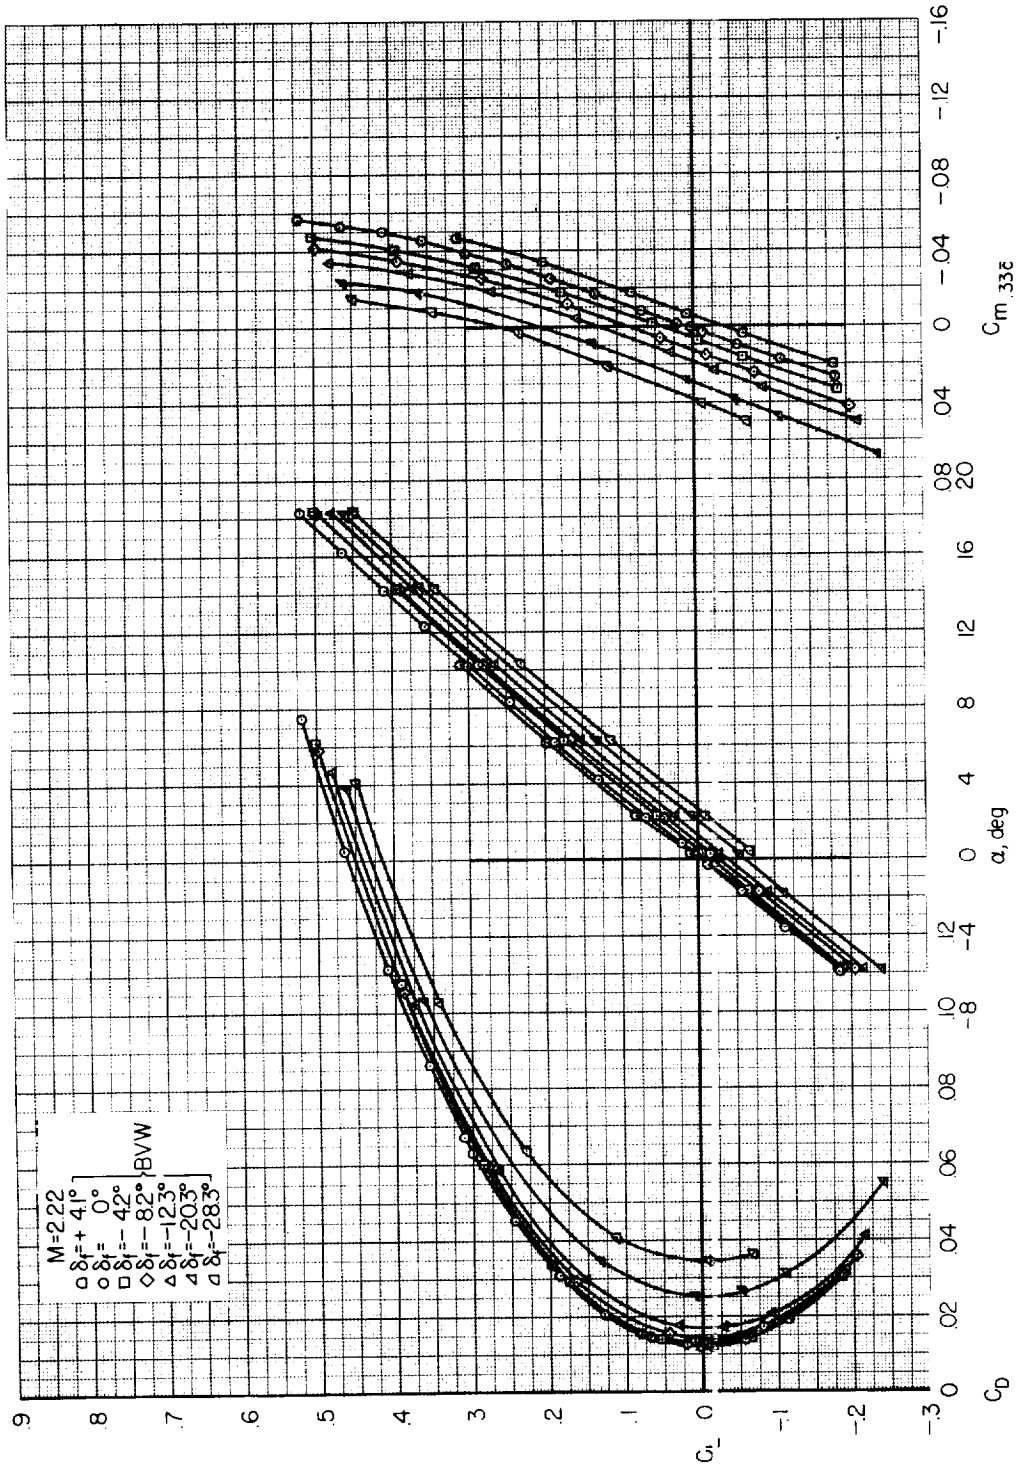


(c) $M = 2.22$

Figure 5.- Concluded.

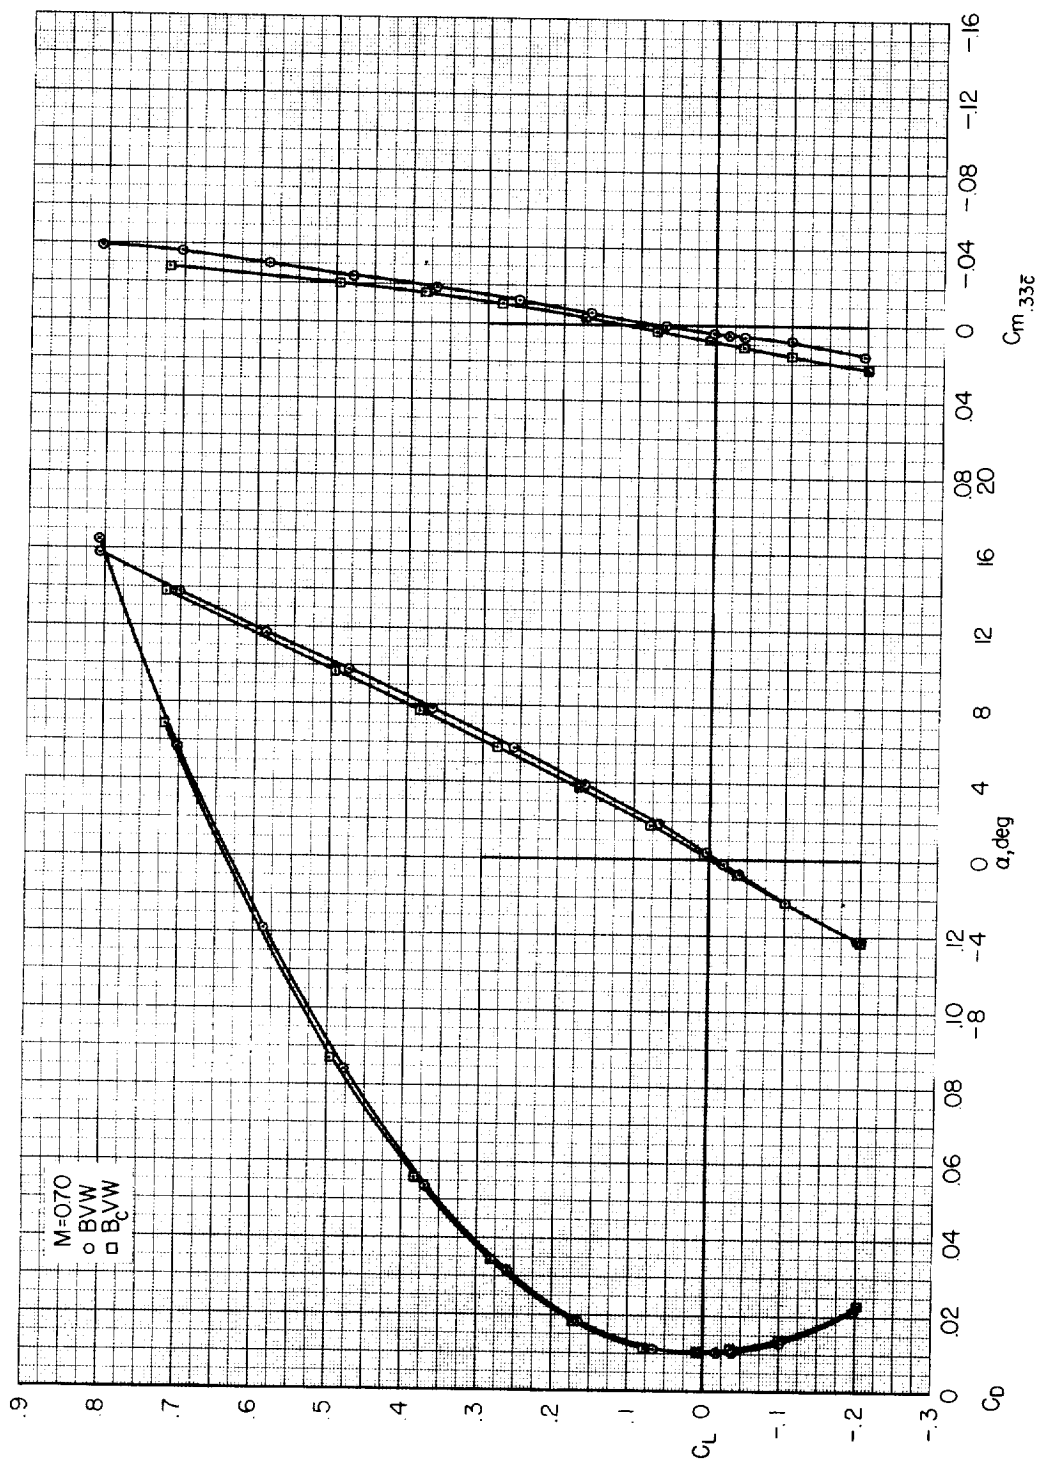


(a) $M = 0.70$

Figure 6.- Lift, drag, and pitching-moment characteristics of the cambered- and symmetrical-body models.

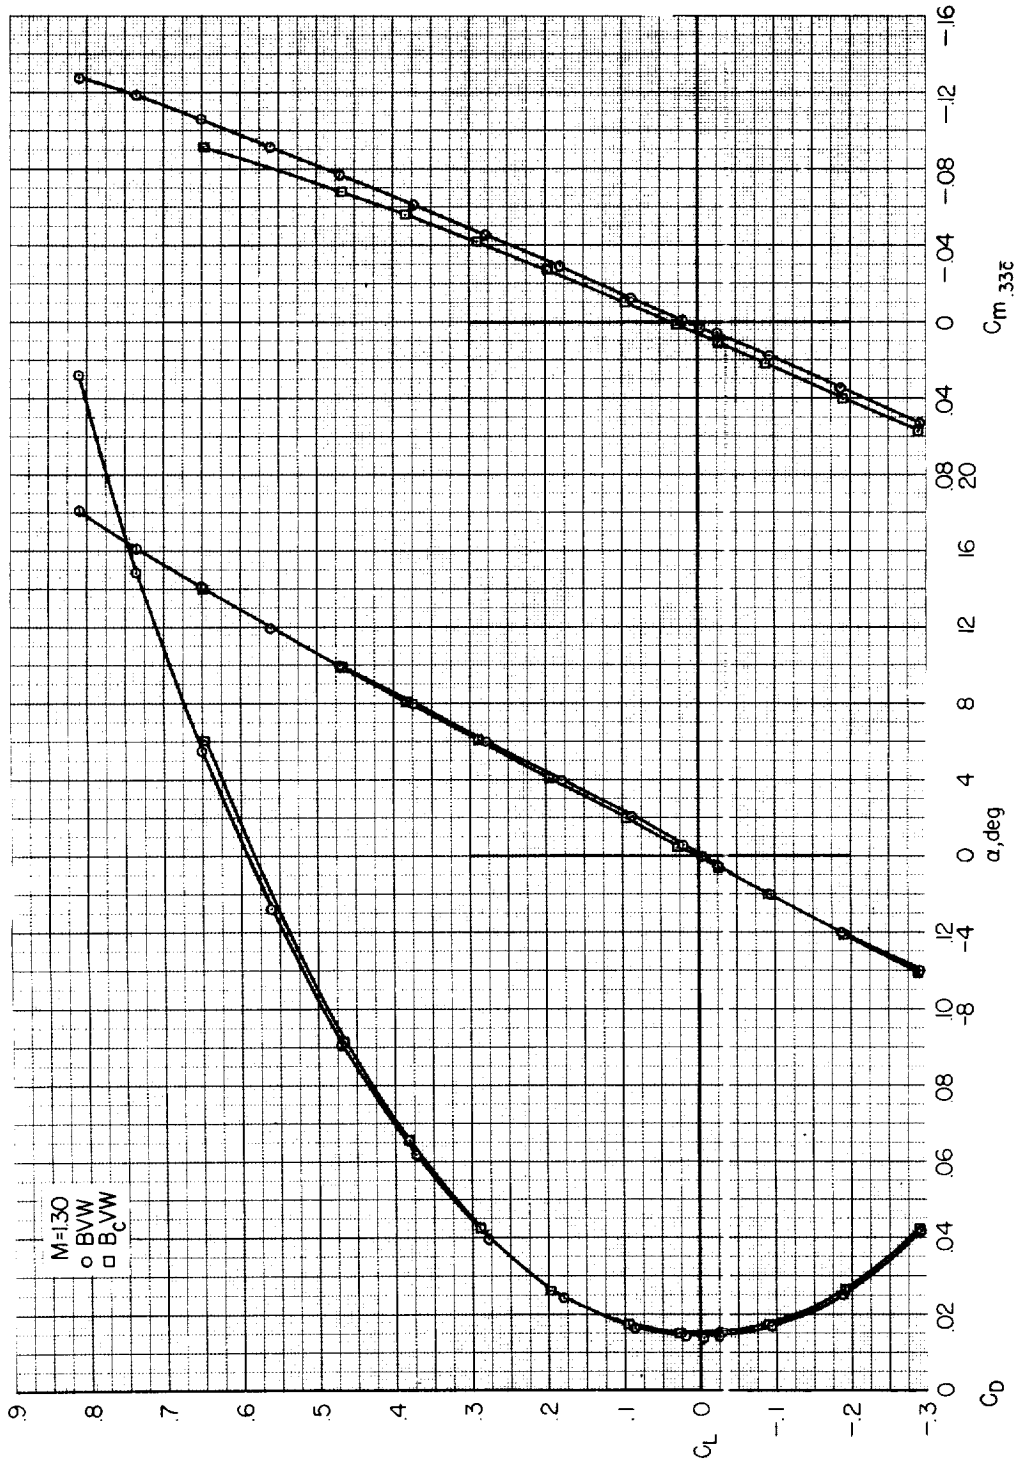

(b) $M = 1.30$

Figure 6.- Continued.

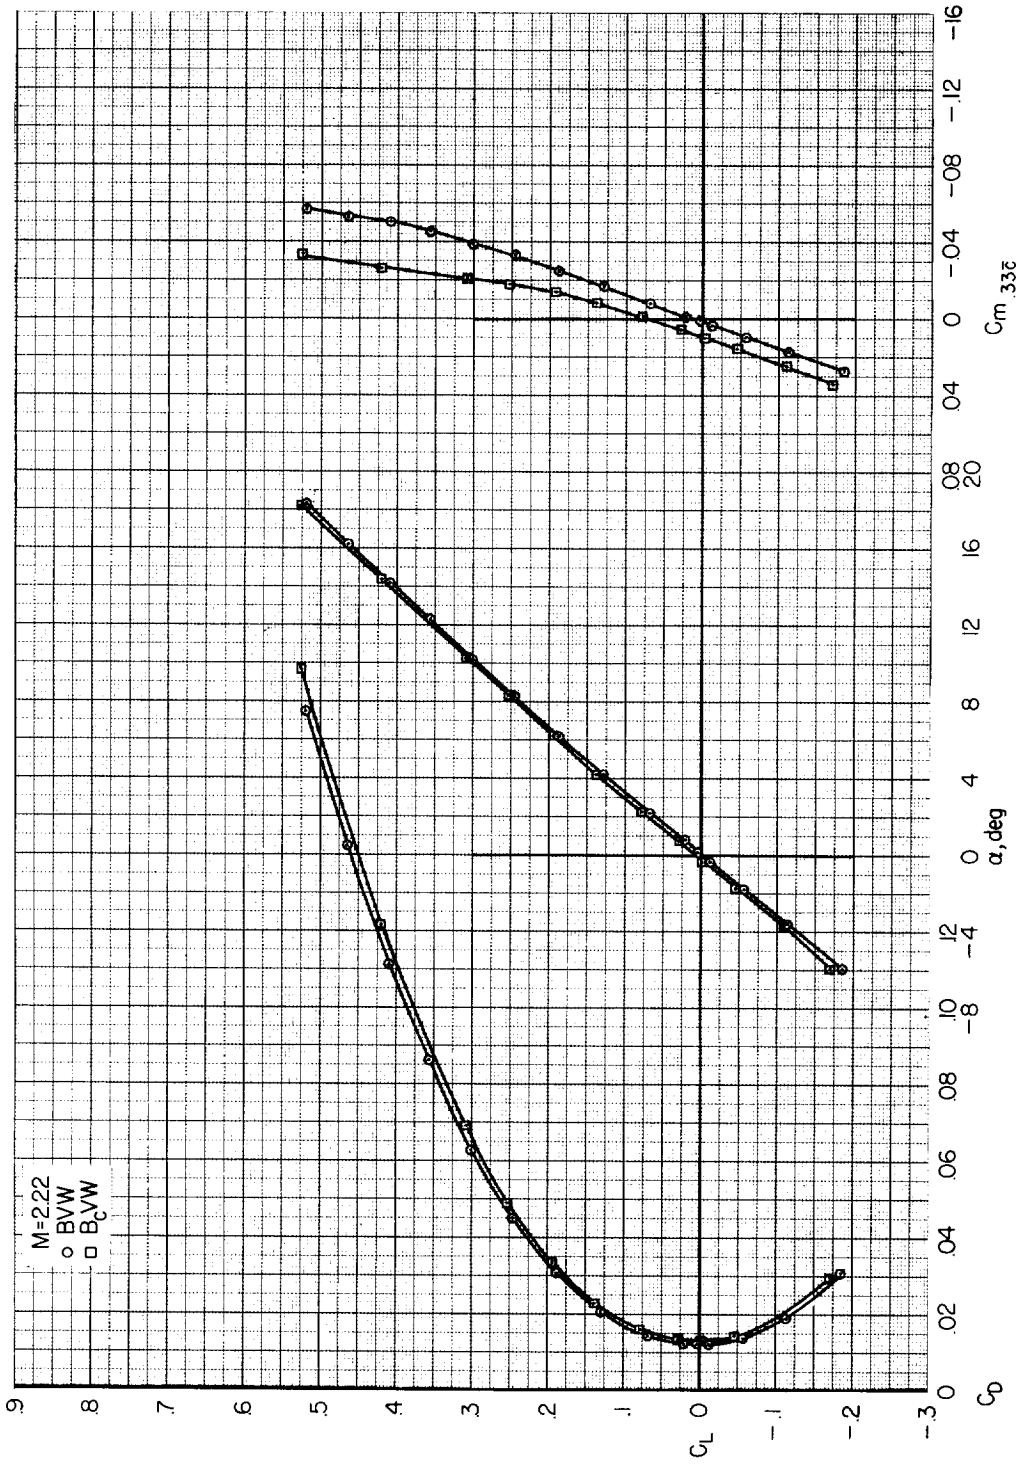

(c) $M = 2.22$

Figure 6.- Concluded.

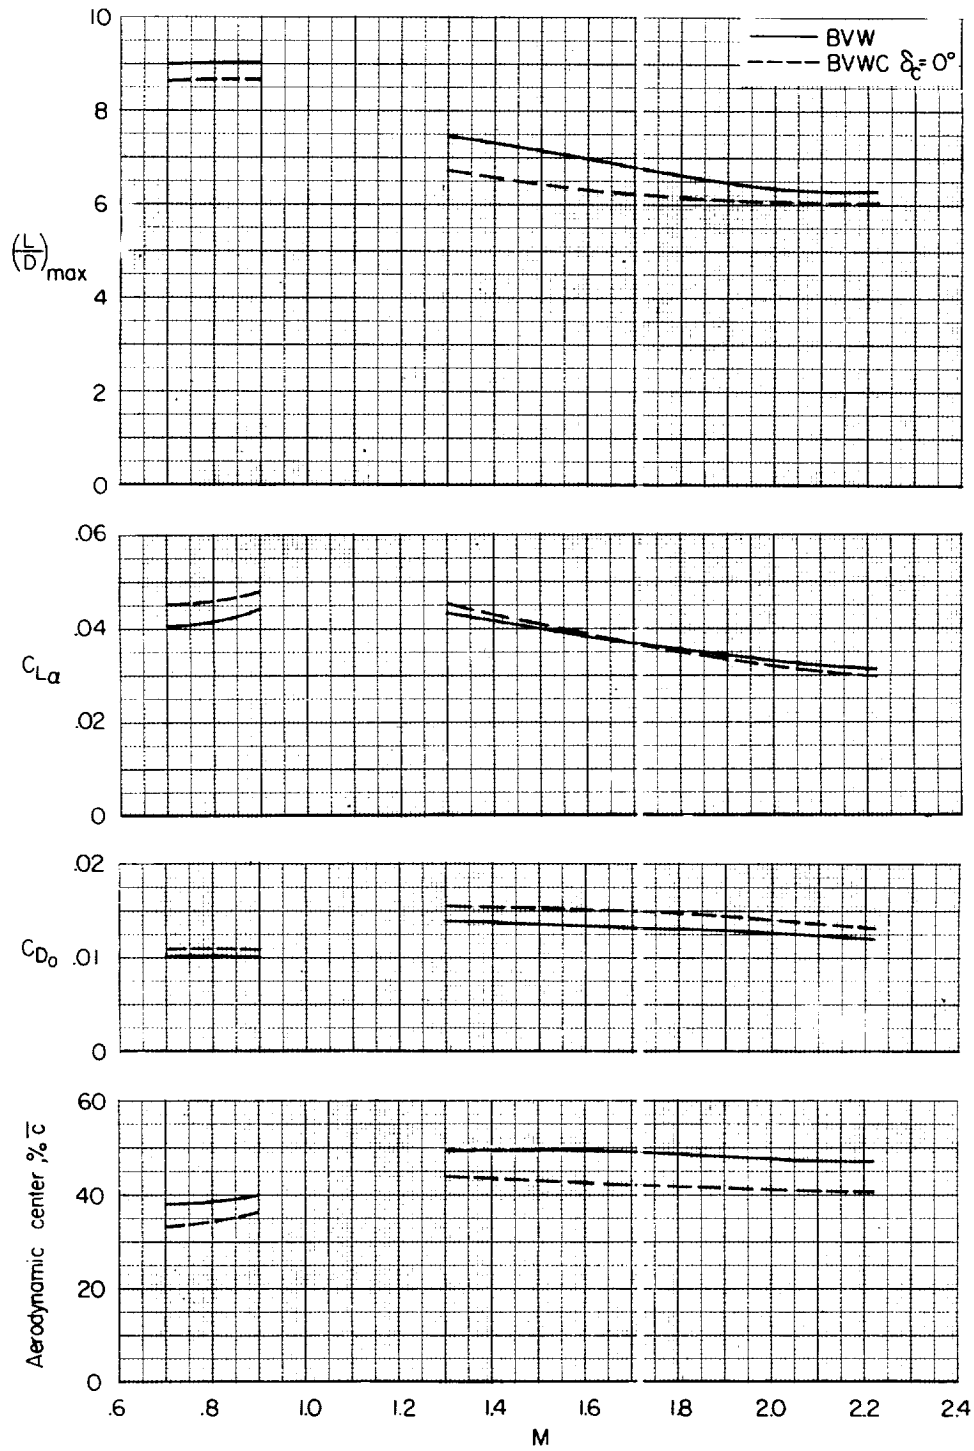


Figure 7.- Variation with Mach number of maximum lift-drag ratios, lift-curve slopes, minimum drag coefficients, and aerodynamic center locations for canard on and off.

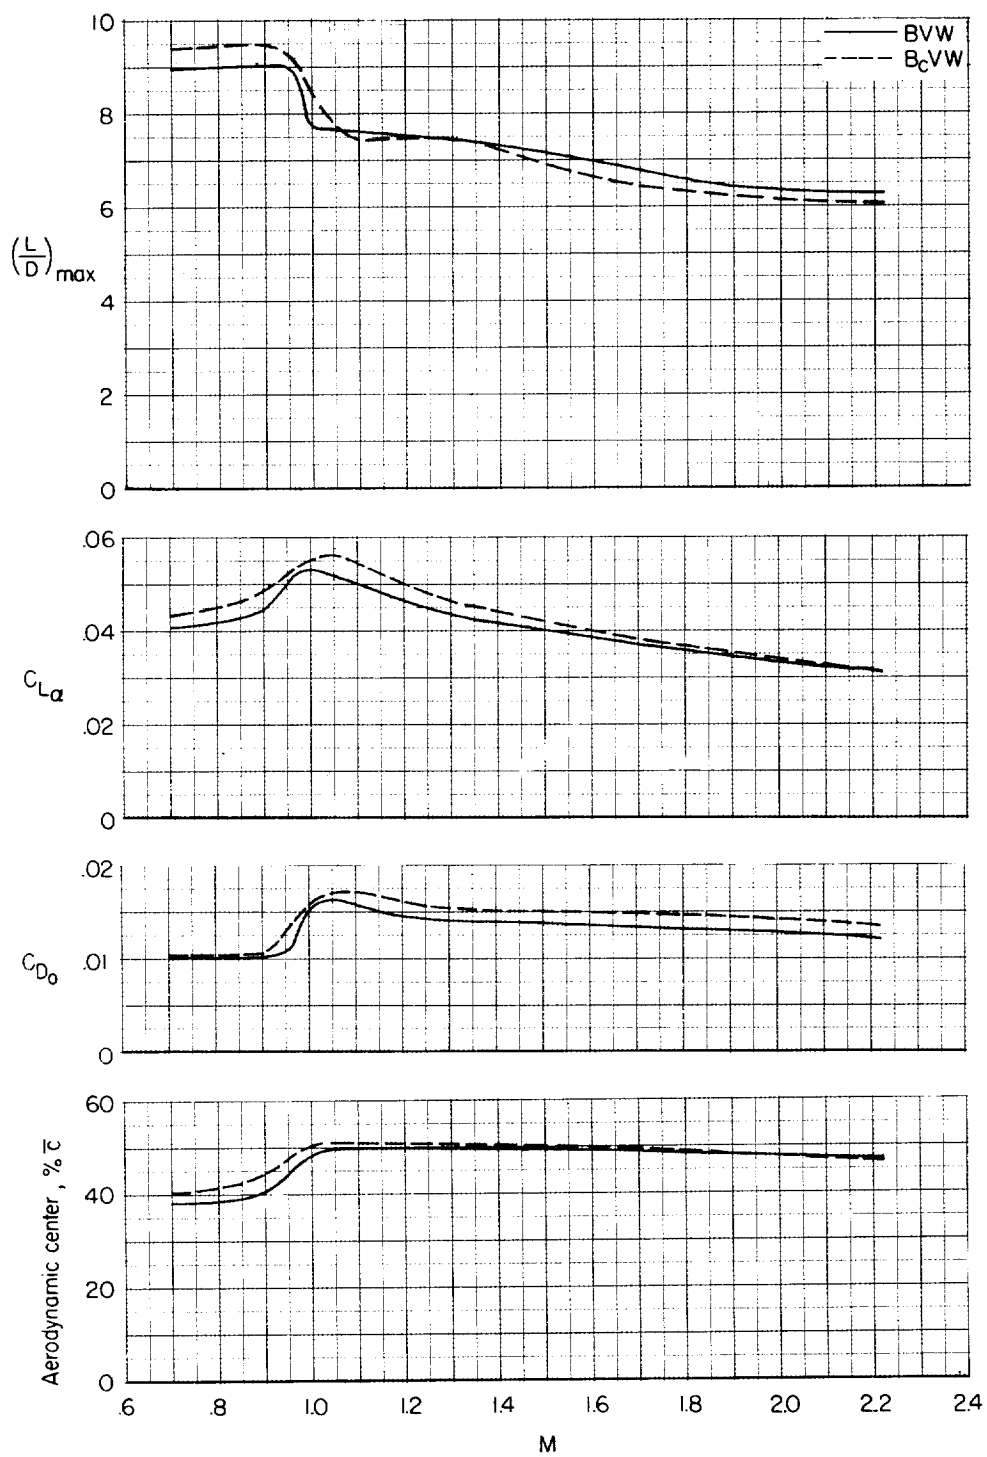


Figure 8.- Variation with Mach number of maximum lift-drag ratios, lift-curve slopes, minimum drag coefficients, and aerodynamic center locations for the cambered- and symmetrical-body configurations.

