


NASA Contractor Report 198268



# Piloted Parameter Identification Flight Test Maneuvers for Closed Loop Modeling of the F-18 High Alpha Research Vehicle (HARV)

E. A. Morelli  
*Lockheed Martin Engineering & Sciences Company  
Hampton, Virginia*

Contract NAS1-19000

May 1996

National Aeronautics and  
Space Administration  
Langley Research Center  
Hampton, Virginia 23681-0001



## Table of Contents

Abstract.....	ii
Nomenclature .....	iii
I. Introduction.....	1
II. Maneuver Descriptions.....	2
III. Acknowledgments .....	4
IV. References .....	4
V. Input Specification Tables .....	5
VI. Control Time Histories.....	17

## **Abstract**

Flight test maneuvers are specified for the F-18 High Alpha Research Vehicle (HARV). The maneuvers were designed for closed loop parameter identification purposes, specifically for longitudinal and lateral linear model parameter estimation at 5, 20, 30, 45, and 60 degrees angle of attack, using the NASA 1A control law. Each maneuver is to be realized by the pilot applying square wave inputs to specific pilot station controls. Maneuver descriptions and complete specifications of the time / amplitude points defining each input are included, along with plots of the input time histories.

## Nomenclature

$h$	altitude, feet
$t$	time, seconds
$V$	airspeed, feet/second
$\alpha$	angle of attack, degrees
$\eta_a$	lateral stick deflection in inches, positive for right stick
$\eta_e$	longitudinal stick deflection in inches, positive for aft deflection from neutral
$\eta_r$	rudder pedal force in pounds, positive for right rudder
$\tau$	time constant, seconds

### subscripts

$o$	nominal or trim value
-----	-----------------------



## I. Introduction

The F-18 High Alpha Research Vehicle (HARV) is a highly instrumented research aircraft used in the NASA High Alpha Technology Program<sup>1</sup>. Objectives for this program include validating advanced control system design techniques in flight.

In this work, the technique described in references [2] and [3] was used to design flight test maneuvers consisting of optimal closed loop square wave inputs. These square wave inputs are to be applied by the pilot. The optimal input design technique uses dynamic programming to compute globally optimal square wave inputs for model parameter estimation experiments, based on *a priori* dynamic models. Previous flight test results<sup>4</sup> demonstrated that pilot implementations of such optimal square wave inputs produce superior parameter estimation results compared to conventional inputs. Linear *a priori* dynamic models for the optimal input designs were obtained from an F-18 HARV nonlinear simulation<sup>5</sup>. The maneuvers were designed specifically to collect flight data with maximum information content for dynamic modeling purposes.

Specific objectives addressed by the maneuvers specified in this document are:

1. Identify closed loop longitudinal and lateral linear dynamic models for validation of the control law design methods implemented by the NASA 1A control law.
2. Identify closed loop longitudinal and lateral linear models for comparison and correlation with military specifications for flying qualities of piloted aircraft, pilot comments and handling qualities ratings.
3. Update and verify existing aerodynamic models.

The purpose of this report is to document the specifications for the maneuvers designed to achieve the above objectives.

## II. Maneuver Descriptions

There are ten (10) optimal square wave input maneuvers described in this report. The maneuvers can be divided into two groups:

1. Five (5) maneuvers for longitudinal closed loop model identification.
2. Five (5) maneuvers for lateral-directional closed loop model identification.

All maneuvers are to be flown using the NASA 1A control law<sup>6</sup>. Control definitions and sign conventions are given above in the **Nomenclature** section. Detailed descriptions of the maneuvers in each group appear below, with numbering corresponding to that given above.

1. This group of five maneuvers is for identifying closed loop longitudinal dynamic models and for control law design validation. Initial flight conditions are trim angle of attack 5, 20, 30, 45, and 60 degrees and approximately 25,000 feet altitude, with the NASA 1A control law. These maneuvers involve pure longitudinal stick deflection by the pilot.

Optimal longitudinal stick input specifications for  $\alpha = 5, 20, 30, 45$  and 60 degrees are given in Tables 1–5, respectively. Each input specification consists of the initial flight condition for the maneuver, followed by a tabulation of the time / amplitude points for the input. Figures 1–5 show time histories for the optimal longitudinal stick inputs at  $\alpha = 5, 20, 30, 45$  and 60 degrees, respectively. Pilot station controls for the initial steady flight condition are defined as zero for the inputs shown in the figures. The inputs included a rate limit of 12 inches per second and a first order lag with time constant  $\tau = 0.05$  seconds for the longitudinal stick input. These modifications to the square wave input were incorporated in the input design optimization, and were included to model human pilot capabilities. Figures 1–5 show the effects of the first order lag and the rate limiting. The data in Tables 1–5 describe pure square wave inputs. The pilot should attempt to produce the sharp-edged square waves specified in the tables, not the waveforms shown in the figures, which include lag and rate limiting representative of human pilot capabilities. The amplitude of the longitudinal stick deflection is  $\pm 1.0$  inch for all maneuvers in this group. The inputs should be sharp-edged, well-timed, and as close as possible to the target amplitudes. The maneuvers were designed so that each square wave pulse was an integral number of 0.4 second pulses. This was done to accommodate human pilot capability and to facilitate accurate timing of the square wave inputs. The input design optimization included all these practical constraints.

Each maneuver in this group is to be flown two (2) times, for a total of ten (10) runs. Each run should be preceded by at least two seconds of steady trimmed flight, and followed by at least two seconds of free response before the pilot takes action to control the aircraft. The duration of each maneuver is 12 seconds. Estimated flight time for this set of maneuvers (including repeats) is approximately 30 minutes.



2. This group of five maneuvers is for identifying closed loop lateral-directional dynamic models and for control law design validation. Initial flight conditions are trim angle of attack 5, 20, 30, 45, and 60 degrees and approximately 25,000 feet altitude, with the NASA 1A control law. These maneuvers involve sequential rudder pedal and lateral stick deflection by the pilot.

Optimal rudder pedal and lateral stick input specifications for  $\alpha = 5, 20, 30, 45$  and 60 degrees are given in Tables 6–10, respectively. Each input specification consists of the initial flight condition for the maneuver, followed by a tabulation of the time / amplitude points for the inputs. Figures 6–10 show time histories for the optimal rudder pedal and lateral stick inputs at  $\alpha = 5, 20, 30, 45$  and 60 degrees, respectively. Pilot station controls for the initial steady flight condition are defined as zero for the inputs shown in the figures. The inputs included a rate limit of 4 inches per second on the rudder pedal input and 12 inches per second on the lateral stick input, and a first order lag with time constant  $\tau = 0.05$  on both rudder pedal and lateral stick. These modifications to the square wave input were incorporated in the input design optimization, and were included to model human pilot capabilities. Figures 6–10 show the effects of the first order lag and the rate limiting. The data in Tables 6–10 describe pure square wave inputs. The pilot should attempt to produce the sharp-edged square waves specified in the tables, not the waveforms shown in the figures, which include the lag and rate limiting representative of human pilot capabilities. The amplitudes of the rudder pedal and lateral stick deflections are  $\pm 100$  pounds and  $\pm 1.5$  inches, respectively, for all maneuvers in this group. The inputs should be sharp-edged, well-timed, and as close as possible to the target amplitudes. The maneuvers were designed so that each square wave pulse was an integral number of 0.5 second pulses, in order to accommodate human pilot capability and to facilitate accurate timing of the square wave inputs. Each maneuver in this group consists of a period of pure rudder pedal deflection, followed by one second of neutral controls, followed by a period of pure lateral stick deflection. Therefore, only one pilot input must be moved at any time, and one second is allowed to switch from rudder pedal deflection to lateral stick deflection. Informal fixed-base simulator studies indicated that this arrangement helped the pilot accurately realize the desired square wave input. The input design optimization included all these practical constraints.

Each maneuver in this group is to be flown two (2) times, for a total of ten (10) runs. Each run should be preceded by at least two seconds of steady trimmed flight, and followed by at least two seconds of free response before the pilot takes action to control the aircraft. The duration of each maneuver is 16 seconds, and consists of 8 seconds of pure rudder pedal input followed by 8 seconds of pure lateral stick input. Estimated flight time for this set of maneuvers (including repeats) is approximately 30 minutes.

### **III. Acknowledgments**

This research was conducted at the NASA Langley Research Center under NASA contract NAS1-19000.

### **IV. References**

1. Gilbert, W.P. and Gatlin, D.H. "Review of the NASA High-Alpha Technology Program", NASA CP 3149, Volume I, Part I, High Angle-of-Attack Technology Conference, NASA Langley Research Center, Hampton, Virginia. October 30 - November 1, 1990, pp. 23-59.
2. Morelli, E. A. and Klein, V. "Optimal Input Design for Aircraft Parameter Estimation using Dynamic Programming Principles", AIAA paper 90-2801, Atmospheric Flight Mechanics Conference, Portland, Oregon. August 1990.
3. Morelli, E. A. "Practical Input Optimization for Aircraft Parameter Estimation Experiments", NASA CR 191462. May 1993.
4. Morelli, E.A. "Flight Test Validation of Optimal Input Design using Pilot Implementation", IFAC paper IFAC-559, 10th IFAC Symposium on System Identification, Copenhagen, Denmark. July 1994.
5. Messina, M.D. et al. "F/A-18 High Angle-of-Attack Research Vehicle Simulation Modifications to Assist the Design of Advanced Control Laws", NASA TM 110216, NASA Langley Research Center, Hampton, Virginia. 1996.
6. HARV Control Law Design Team. "Design Specification for a Thrust-Vectoring, Actuated-Nose-Strake Flight Control Law for the High-Alpha Research Vehicle", NASA TM 110217, NASA Langley Research Center, Hampton, Virginia. 1996.

## **V. Input Specification Tables**

### **LONGITUDINAL CLOSED LOOP OPTIMAL INPUT MANEUVERS**

**F-18 HARV using the NASA 1A Control Law**

## 5 $\alpha$ OPTIMAL LONGITUDINAL STICK MANEUVER

### Initial Conditions

$$\alpha_o = 5^\circ$$

$$V_o = 370 \text{ knots} \quad h_o = 25,000 \text{ feet}$$

$$|\text{OBES } \eta_e|_{\max} = 1.0 \text{ inch}$$

**Table 1**

(Figure 1)

OBES longitudinal stick	
Time (seconds)	OBES $\eta_e$ (inches)
0.00	0.0
0.02	1.0
0.40	1.0
0.42	-1.0
1.20	-1.0
1.22	0.0
2.00	0.0
2.02	-1.0
2.80	-1.0
2.82	1.0
3.60	1.0
3.62	-1.0
4.40	-1.0
4.42	1.0
5.20	1.0
5.22	0.0
5.60	0.0
5.62	1.0
6.00	1.0
6.02	0.0
6.40	0.0

OBES longitudinal stick	
Time (seconds)	OBES $\eta_e$ (inches)
6.42	-1.0
6.80	-1.0
6.82	1.0
7.60	1.0
7.62	-1.0
8.40	-1.0
8.42	1.0
9.20	1.0
9.22	-1.0
10.00	-1.0
10.02	1.0
10.80	1.0
10.82	-1.0
11.60	-1.0
11.62	0.0
12.00	0.0

(cont.)

## 20 $\alpha$ OPTIMAL LONGITUDINAL STICK MANEUVER

### Initial Conditions

$$\alpha_o = 20^\circ$$

$$V_o = 198 \text{ knots} \quad h_o = 25,000 \text{ feet}$$

$$| \text{OBES } \eta_e |_{\max} = 1.0 \text{ inch}$$

**Table 2**

(Figure 2)

OBES longitudinal stick	
Time (seconds)	OBES $\eta_e$ (inches)
0.00	0.0
0.02	-1.0
0.40	-1.0
0.42	0.0
1.20	0.0
1.22	-1.0
1.60	-1.0
1.62	0.0
2.00	0.0
2.02	1.0
2.40	1.0
2.42	0.0
3.20	0.0
3.22	-1.0
3.60	-1.0
3.62	1.0
4.40	1.0
4.42	-1.0
5.20	-1.0
5.22	1.0
6.00	1.0

OBES longitudinal stick	
Time (seconds)	OBES $\eta_e$ (inches)
6.02	-1.0
6.80	-1.0
6.82	1.0
7.60	1.0
7.62	-1.0
8.40	-1.0
8.42	1.0
8.80	1.0
8.82	-1.0
9.20	-1.0
9.22	0.0
9.60	0.0
9.62	1.0
10.00	1.0
10.02	0.0
10.40	0.0
10.42	-1.0
10.80	-1.0
10.82	0.0
12.00	0.0

(cont.)

### 30 $\alpha$ OPTIMAL LONGITUDINAL STICK MANEUVER

#### Initial Conditions

$$\alpha_o = 30^\circ$$

$$V_o = 167 \text{ knots} \quad h_o = 25,000 \text{ feet}$$

$$|\text{OBES } \eta_e|_{\max} = 1.0 \text{ inch}$$

**Table 3**

(Figure 3)

OBES longitudinal stick

Time (seconds)	OBES $\eta_e$ (inches)
0.00	0.0
0.02	1.0
0.40	1.0
0.42	0.0
0.80	0.0
0.82	1.0
1.20	1.0
1.22	0.0
1.60	0.0
1.62	-1.0
2.00	-1.0
2.02	1.0
2.40	1.0
2.42	-1.0
3.20	-1.0
3.22	0.0
3.60	0.0
3.62	1.0
4.00	1.0
4.02	-1.0
4.80	-1.0
4.82	1.0
5.20	1.0

OBES longitudinal stick

Time (seconds)	OBES $\eta_e$ (inches)
5.22	-1.0
6.00	-1.0
6.02	0.0
6.40	0.0
6.42	1.0
6.80	1.0
6.82	0.0
7.60	0.0
7.62	-1.0
8.00	-1.0
8.02	1.0
8.80	1.0
8.82	-1.0
9.60	-1.0
9.62	1.0
10.40	1.0
10.42	-1.0
11.20	-1.0
11.22	1.0
11.60	1.0
11.62	0.0
12.00	0.0

(cont.)

## 45 $\alpha$ OPTIMAL LONGITUDINAL STICK MANEUVER

### Initial Conditions

$$\alpha_o = 45^\circ$$

$$V_o = 156 \text{ knots} \quad h_o = 25,000 \text{ feet}$$

$$| \text{OBES } \eta_e |_{\max} = 1.0 \text{ inch}$$

**Table 4**

(Figure 4)

OBES longitudinal stick	
Time (seconds)	OBES $\eta_e$ (inches)
0.00	0.0
0.02	-1.0
0.40	-1.0
0.42	0.0
0.80	0.0
0.82	1.0
1.20	1.0
1.22	-1.0
2.00	-1.0
2.02	0.0
2.80	0.0
2.82	-1.0
3.20	-1.0
3.22	1.0
4.00	1.0
4.02	-1.0
4.80	-1.0
4.82	1.0
5.60	1.0
5.62	0.0
6.00	0.0
6.02	-1.0

OBES longitudinal stick	
Time (seconds)	OBES $\eta_e$ (inches)
6.40	-1.0
6.42	0.0
6.80	0.0
6.82	1.0
7.60	1.0
7.62	-1.0
8.40	-1.0
8.42	1.0
9.20	1.0
9.22	-1.0
9.60	-1.0
9.62	1.0
10.00	1.0
10.02	-1.0
10.80	-1.0
10.82	1.0
11.60	1.0
11.62	0.0
12.00	0.0

(cont.)

## 60 $\alpha$ OPTIMAL LONGITUDINAL STICK MANEUVER

### Initial Conditions

$$\alpha_o = 60^\circ$$

$$V_o = 163 \text{ knots} \quad h_o = 25,000 \text{ feet}$$

$$| \text{OBES } \eta_e |_{\max} = 1.0 \text{ inch}$$

**Table 5**

(Figure 5)

OBES longitudinal stick

Time (seconds)	OBES $\eta_e$ (inches)
0.00	0.0
0.02	-1.0
0.40	-1.0
0.42	0.0
0.80	0.0
0.82	-1.0
1.20	-1.0
1.22	1.0
2.00	1.0
2.02	-1.0
2.40	-1.0
2.42	1.0
3.20	1.0
3.22	0.0
3.60	0.0
3.62	1.0
4.00	1.0
4.02	0.0
4.40	0.0
4.42	-1.0
4.80	-1.0
4.82	1.0

OBES longitudinal stick

Time (seconds)	OBES $\eta_e$ (inches)
5.60	1.0
5.62	0.0
6.00	0.0
6.02	-1.0
6.40	-1.0
6.42	0.0
7.20	0.0
7.22	-1.0
7.60	-1.0
7.62	1.0
8.40	1.0
8.42	-1.0
9.20	-1.0
9.22	0.0
9.60	0.0
9.62	1.0
10.40	1.0
10.42	-1.0
11.20	-1.0
11.22	0.0
12.00	0.0

(cont.)



**LATERAL CLOSED LOOP OPTIMAL INPUT MANEUVERS**

**F-18 HARV using the NASA 1A Control Law**

## 5 $\alpha$ OPTIMAL RUDDER PEDAL / LATERAL STICK MANEUVER

### Initial Conditions

$$\alpha_o = 5^\circ$$

$$V_o = 370 \text{ knots}$$

$$h_o = 25,000 \text{ feet}$$

$$|\text{OBES } \eta_r|_{\max} = 100.0 \text{ pounds}$$

$$|\text{OBES } \eta_a|_{\max} = 1.5 \text{ inches}$$

**Table 6**

(Figure 6)

OBES rudder pedal		OBES lateral stick	
Time (seconds)	OBES $\eta_r$ (pounds)	Time (seconds)	OBES $\eta_a$ (inches)
0.00	0.0	0.00	0.0
0.02	100.0	9.00	0.0
0.50	100.0	9.02	1.5
0.52	0.0	9.50	1.5
1.00	0.0	9.52	-1.5
1.02	100.0	10.50	-1.5
1.50	100.0	10.52	1.5
1.52	-100.0	11.50	1.5
2.50	-100.0	11.52	-1.5
2.52	100.0	12.50	-1.5
3.00	100.0	12.52	1.5
3.02	-100.0	13.00	1.5
4.00	-100.0	13.02	0.0
4.02	100.0	13.50	0.0
5.00	100.0	13.52	-1.5
5.02	-100.0	14.00	-1.5
6.00	-100.0	14.02	1.5
6.02	0.0	15.00	1.5
6.50	0.0	15.02	-1.5
6.52	100.0	15.50	-1.5
7.00	100.0	15.52	0.0
7.02	0.0	16.00	0.0
7.50	0.0		
7.52	100.0		
8.00	100.0		
8.02	0.0		
16.00	0.0		

## 20 $\alpha$ OPTIMAL RUDDER PEDAL / LATERAL STICK MANEUVER

### Initial Conditions

$$\alpha_o = 20^\circ$$

$$V_o = 198 \text{ knots} \quad h_o = 25,000 \text{ feet}$$

$$|\text{OBES } \eta_r|_{\max} = 100.0 \text{ pounds}$$

$$|\text{OBES } \eta_a|_{\max} = 1.5 \text{ inches}$$

**Table 7**

(Figure 7)

OBES rudder pedal

Time (seconds)	OBES $\eta_r$ (pounds)
0.00	0.0
0.02	100.0
0.50	100.0
0.52	0.0
1.00	0.0
1.02	100.0
1.50	100.0
1.52	-100.0
2.50	-100.0
2.52	100.0
3.00	100.0
3.02	-100.0
4.00	-100.0
4.02	0.0
4.50	0.0
4.52	100.0
5.00	100.0
5.02	-100.0
6.00	-100.0
6.02	100.0
7.00	100.0
7.02	0.0
7.50	0.0
7.52	100.0
8.00	100.0
8.02	0.0
16.00	0.0

OBES lateral stick

Time (seconds)	OBES $\eta_a$ (inches)
0.00	0.0
9.00	0.0
9.02	-1.5
9.50	-1.5
9.52	1.5
11.50	1.5
11.52	-1.5
14.00	-1.5
14.02	1.5
15.50	1.5
15.52	0.0
16.00	0.0

### 30 $\alpha$ OPTIMAL RUDDER PEDAL / LATERAL STICK MANEUVER

Initial Conditions

$$\alpha_o = 30^\circ$$

$$V_o = 167 \text{ knots} \quad h_o = 25,000 \text{ feet}$$

$$|\text{OBES } \eta_r|_{\max} = 100.0 \text{ pounds}$$

$$|\text{OBES } \eta_a|_{\max} = 1.5 \text{ inches}$$

**Table 8**

(Figure 8)

OBES rudder pedal

Time (seconds)	OBES $\eta_r$ (pounds)
0.00	0.0
0.02	100.0
1.00	100.0
1.02	0.0
1.50	0.0
1.52	-100.0
2.00	-100.0
2.02	100.0
3.00	100.0
3.02	0.0
4.00	0.0
4.02	-100.0
5.00	-100.0
5.02	0.0
5.50	0.0
5.52	100.0
7.00	100.0
7.02	0.0
16.00	0.0

OBES lateral stick

Time (seconds)	OBES $\eta_a$ (inches)
0.00	0.0
8.00	0.0
8.02	1.5
9.50	1.5
9.52	-1.5
12.50	-1.5
12.52	0.0
13.00	0.0
13.02	1.5
15.50	1.5
15.52	0.0
16.00	0.0

## 45 $\alpha$ OPTIMAL RUDDER PEDAL / LATERAL STICK MANEUVER

### Initial Conditions

$$\alpha_o = 45^\circ$$

$$V_o = 156 \text{ knots} \quad h_o = 25,000 \text{ feet}$$

$$|\text{OBES } \eta_r|_{\max} = 100.0 \text{ pounds}$$

$$|\text{OBES } \eta_a|_{\max} = 1.5 \text{ inches}$$

**Table 9**

(Figure 9)

OBES rudder pedal

Time (seconds)	OBES $\eta_r$ (pounds)
0.00	0.0
0.02	100.0
1.00	100.0
1.02	0.0
1.50	0.0
1.52	100.0
2.00	100.0
2.02	0.0
2.50	0.0
2.52	100.0
3.50	100.0
3.52	-100.0
4.50	-100.0
4.52	0.0
5.00	0.0
5.02	100.0
6.00	100.0
6.02	0.0
6.50	0.0
6.52	-100.0
7.00	-100.0
7.02	0.0
16.00	0.0

OBES lateral stick

Time (seconds)	OBES $\eta_a$ (inches)
0.00	0.0
8.00	0.0
8.02	1.5
10.00	1.5
10.02	-1.5
12.50	-1.5
12.52	1.5
13.50	1.5
13.52	-1.5
15.50	-1.5
15.52	0.0
16.00	0.0

## 60 $\alpha$ OPTIMAL RUDDER PEDAL / LATERAL STICK MANEUVER

### Initial Conditions

$$\alpha_o = 60^\circ$$

$$V_o = 163 \text{ knots}$$

$$h_o = 25,000 \text{ feet}$$

$$|\text{OBES } \eta_r|_{\max} = 100.0 \text{ pounds}$$

$$|\text{OBES } \eta_a|_{\max} = 1.5 \text{ inches}$$


**Table 10**

(Figure 10)

OBES rudder pedal	
Time (seconds)	OBES $\eta_r$ (pounds)
0.00	0.0
0.02	-100.0
1.00	-100.0
1.02	0.0
1.50	0.0
1.52	-100.0
2.00	-100.0
2.02	100.0
2.50	100.0
2.52	-100.0
3.50	-100.0
3.52	100.0
5.00	100.0
5.02	-100.0
6.00	-100.0
6.02	0.0
6.50	0.0
6.52	100.0
7.00	100.0
7.02	0.0
16.00	0.0


OBES lateral stick	
Time (seconds)	OBES $\eta_a$ (inches)
0.00	0.0
8.00	0.0
8.02	1.5
11.00	1.5
11.02	-1.5
12.00	-1.5
12.02	0.0
12.50	0.0
12.52	1.5
14.00	1.5
14.02	-1.5
15.50	-1.5
15.52	0.0
16.00	0.0

## **VI. Control Time Histories**

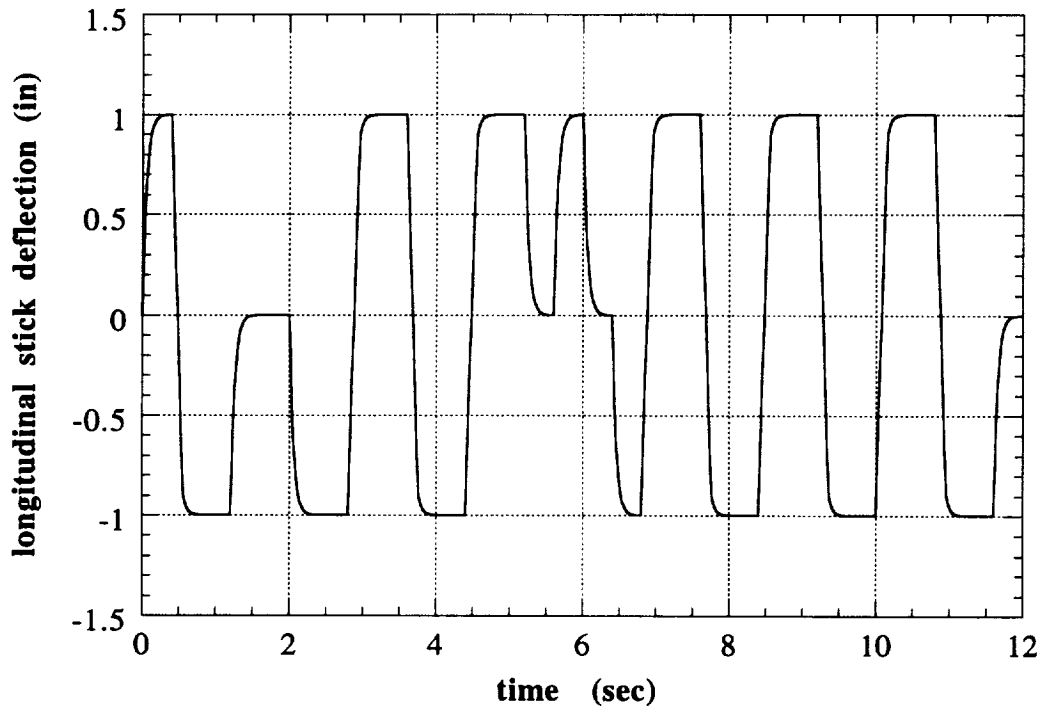


**Figure 1** F-18 HARV Optimal Longitudinal Stick Input,  $\alpha = 5$  degrees




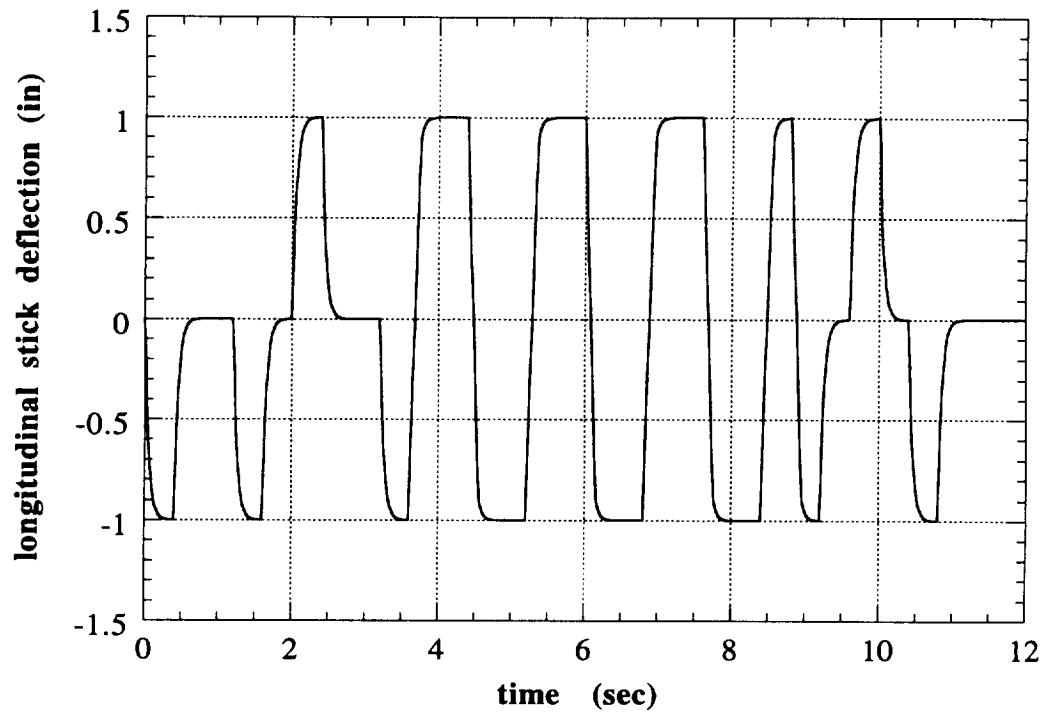


**Figure 2** F-18 HARV Optimal Longitudinal Stick Input,  $\alpha = 20$  degrees

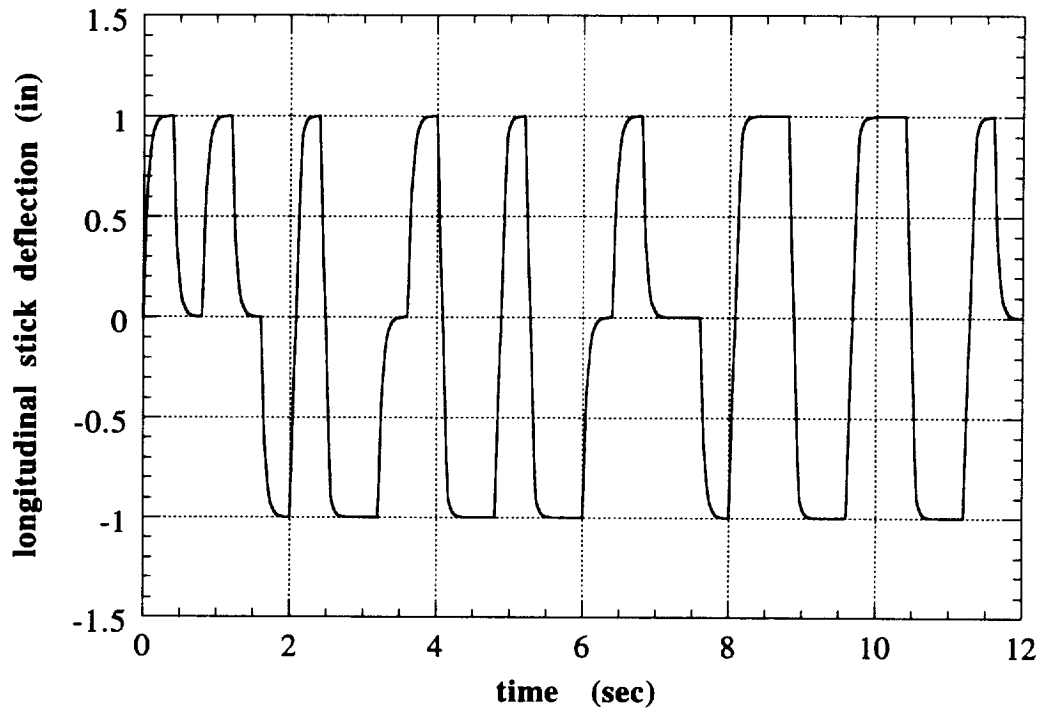



**Figure 3** F-18 HARV Optimal Longitudinal Stick Input,  $\alpha = 30$  degrees

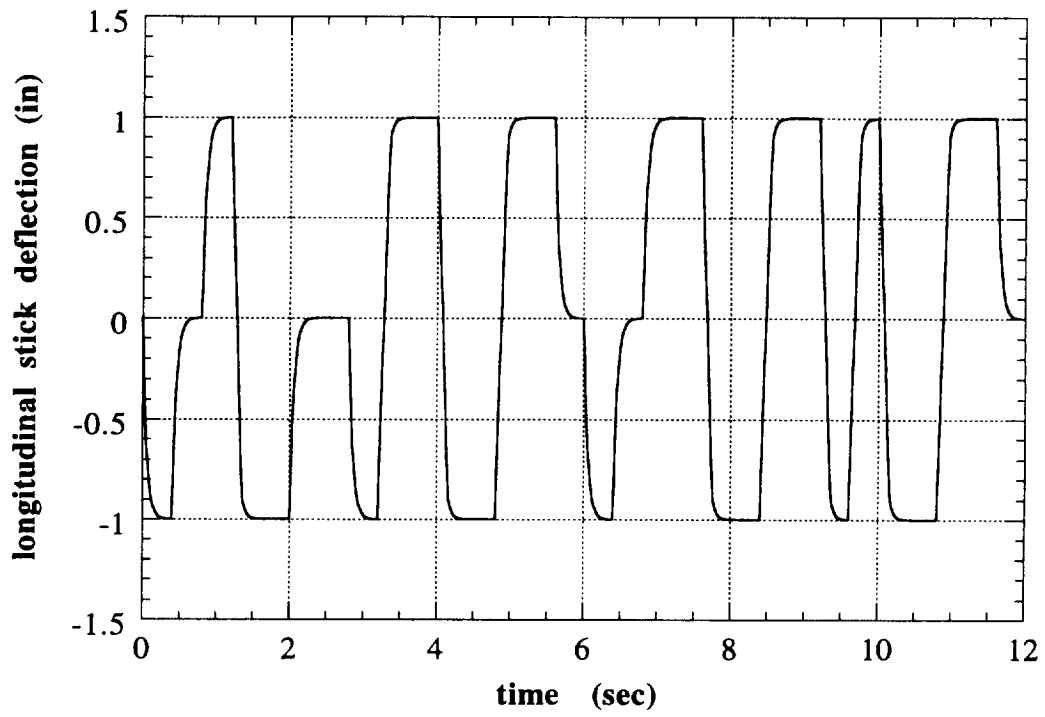



**Figure 4** F-18 HARV Optimal Longitudinal Stick Input,  $\alpha = 45$  degrees

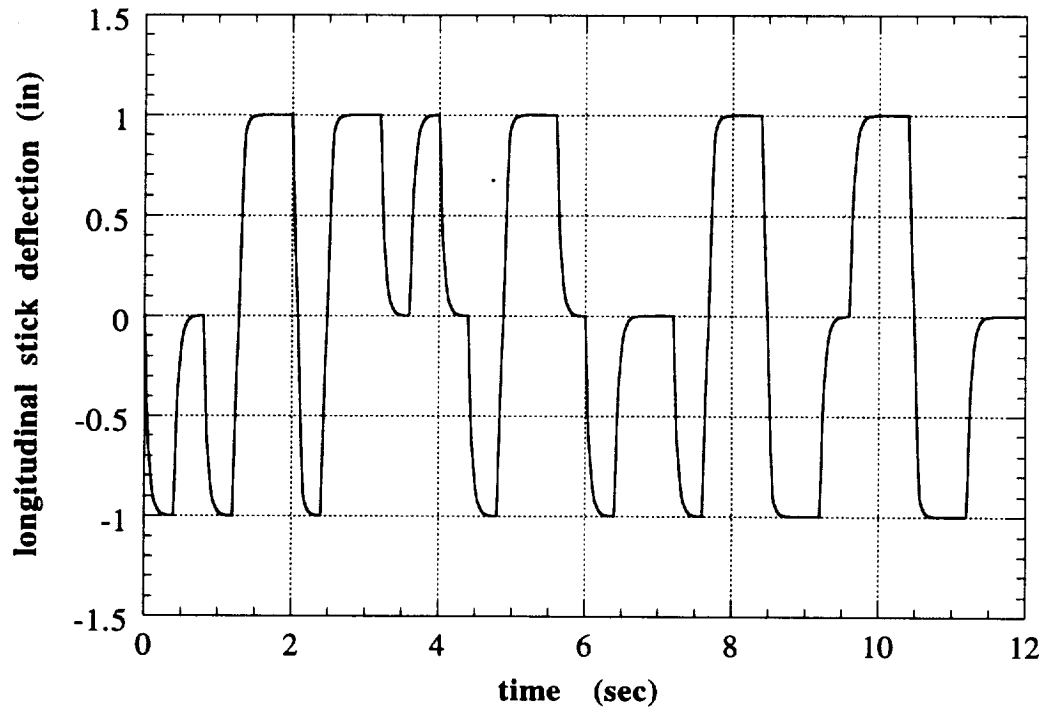



**Figure 5** F-18 HARV Optimal Longitudinal Stick Input,  $\alpha = 60$  degrees

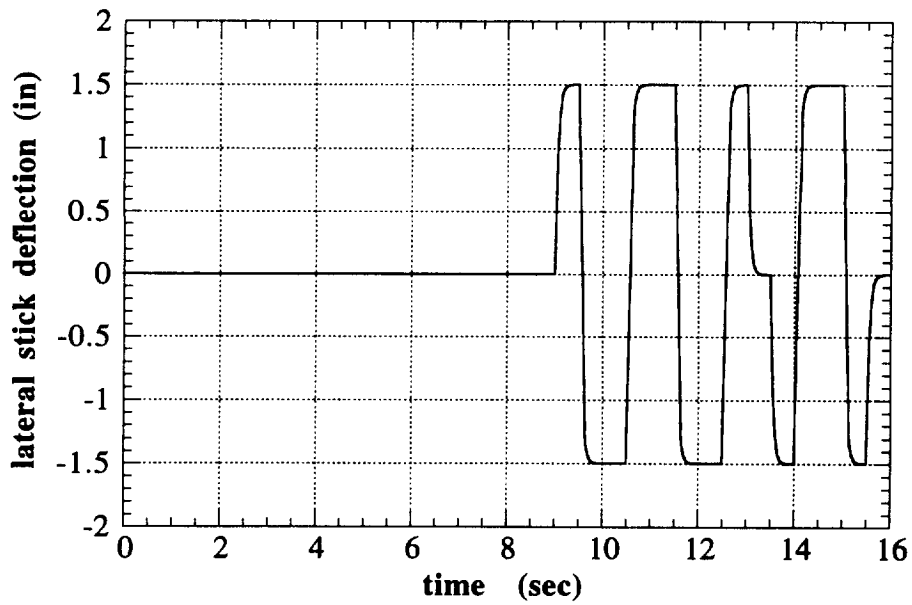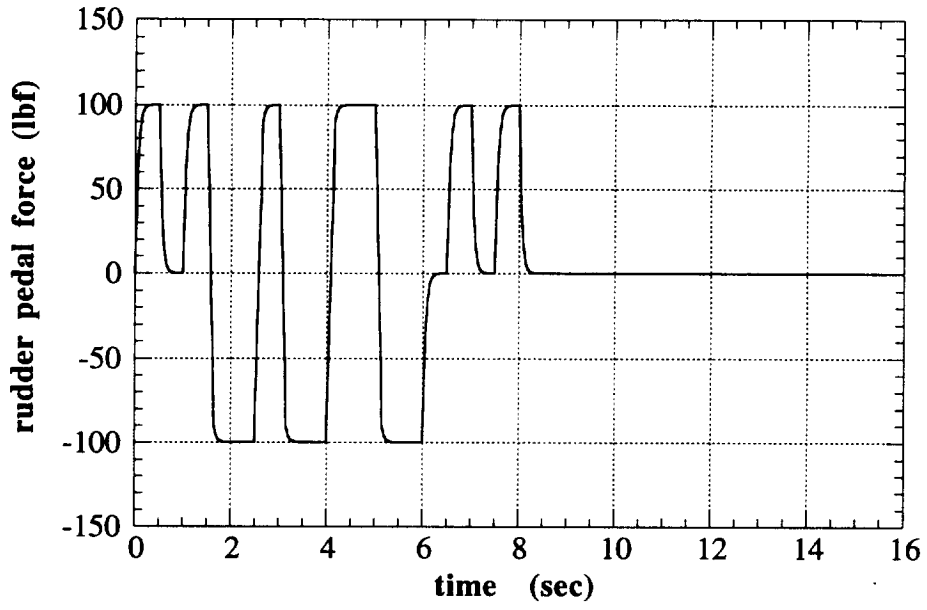



**Figure 6** F-18 HARV Optimal Rudder Pedal and Lateral Stick Inputs,  $\alpha = 5$  degrees

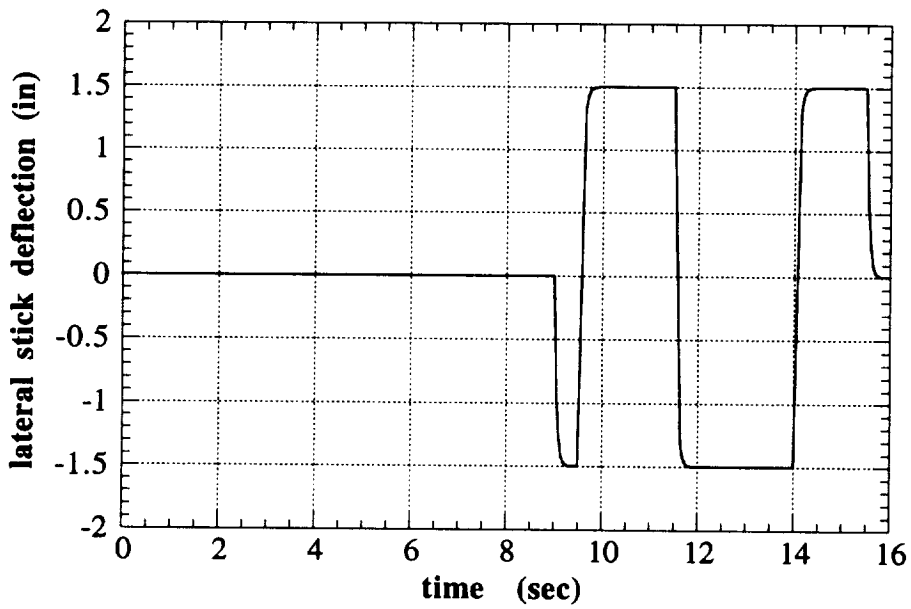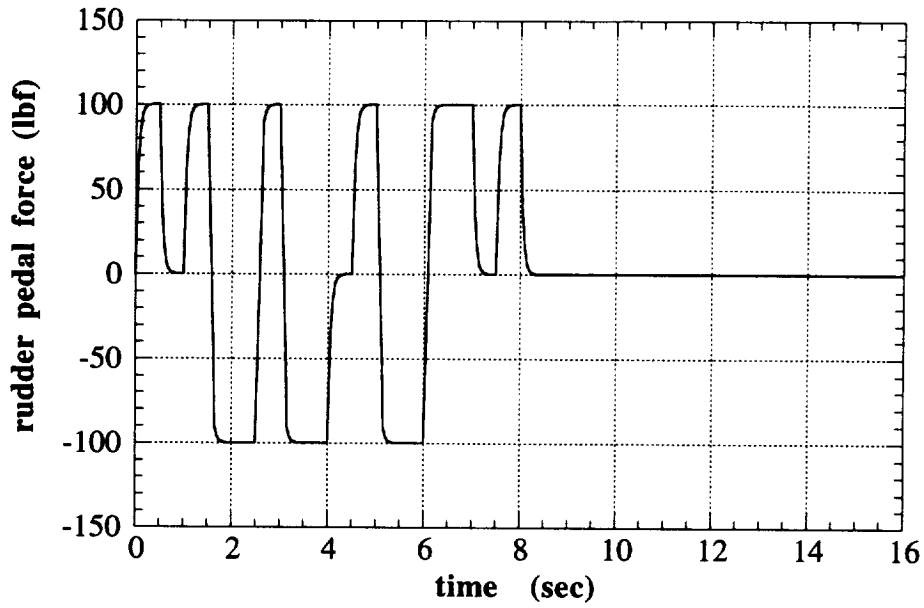

**Figure 7** F-18 HARV Optimal Rudder Pedal and Lateral Stick Inputs,  $\alpha = 20$  degrees

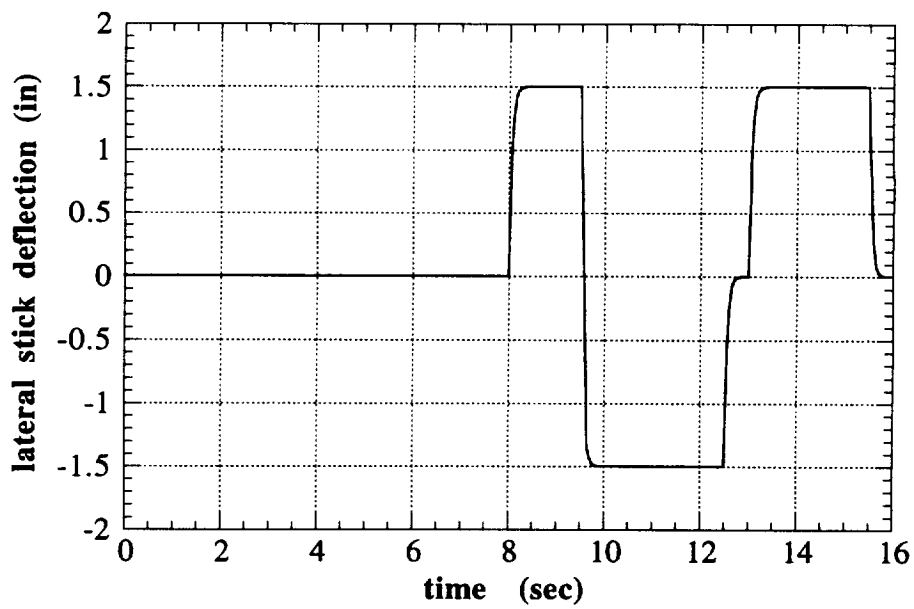
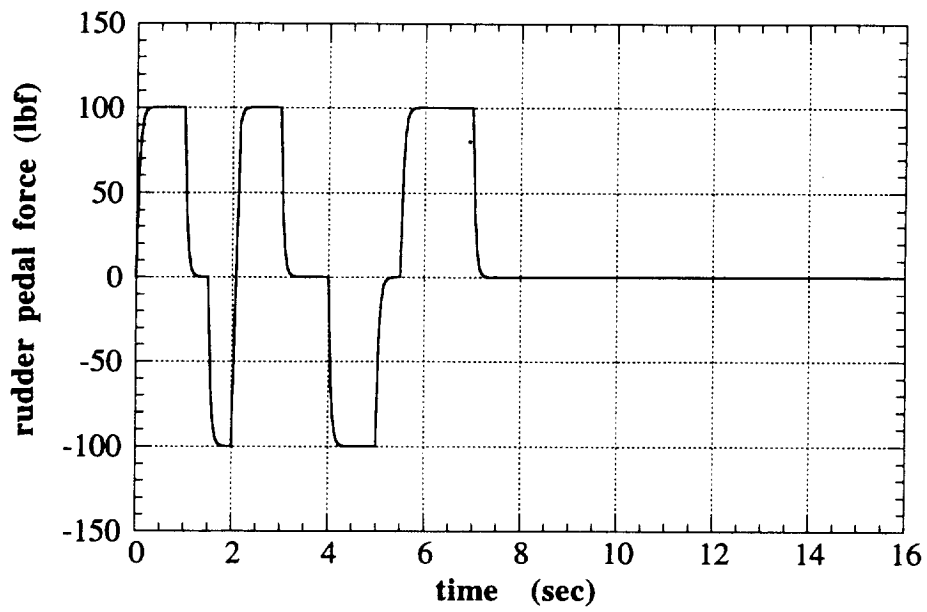


**Figure 8** F-18 HARV Optimal Rudder Pedal and Lateral Stick Inputs,  $\alpha = 30$  degrees

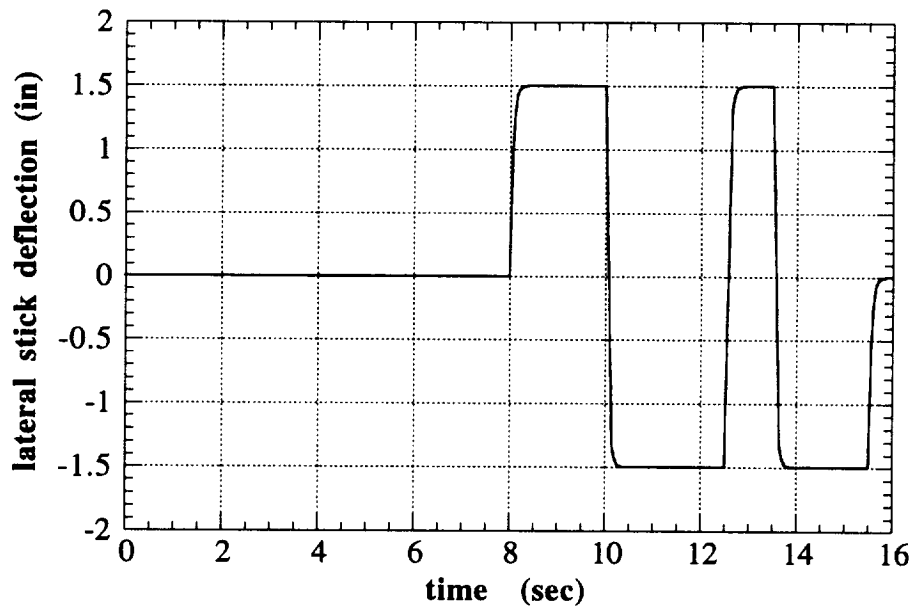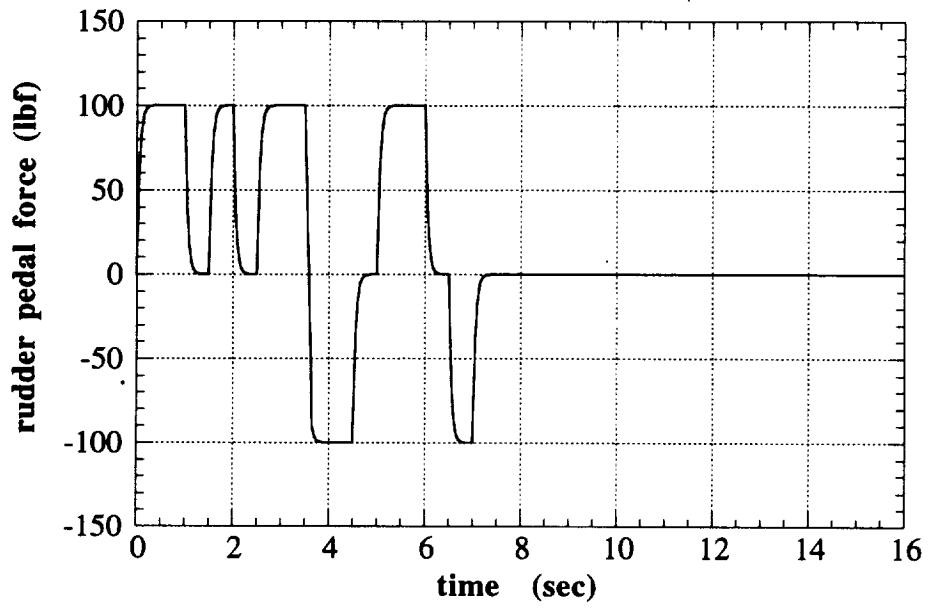

**Figure 9** F-18 HARV Optimal Rudder Pedal and Lateral Stick Inputs,  $\alpha = 45$  degrees



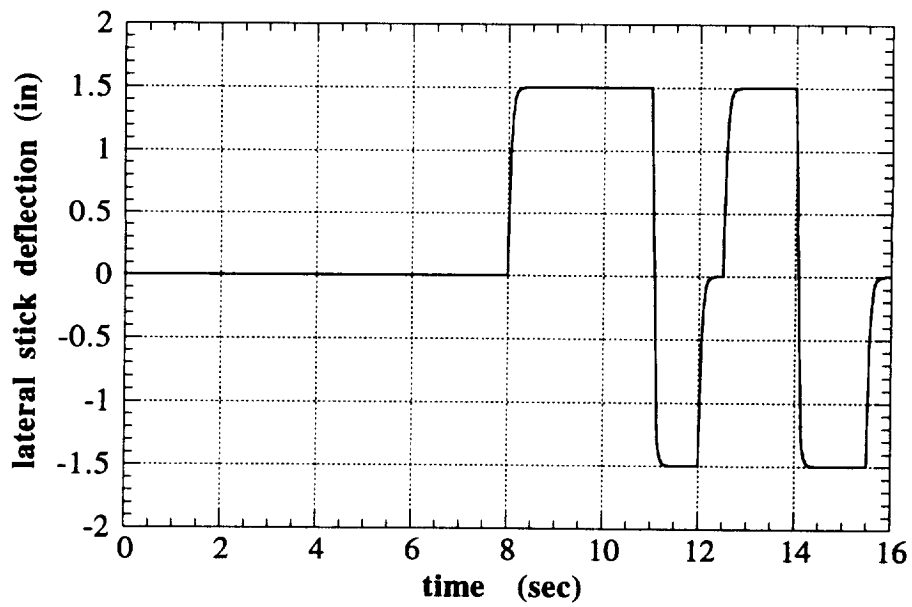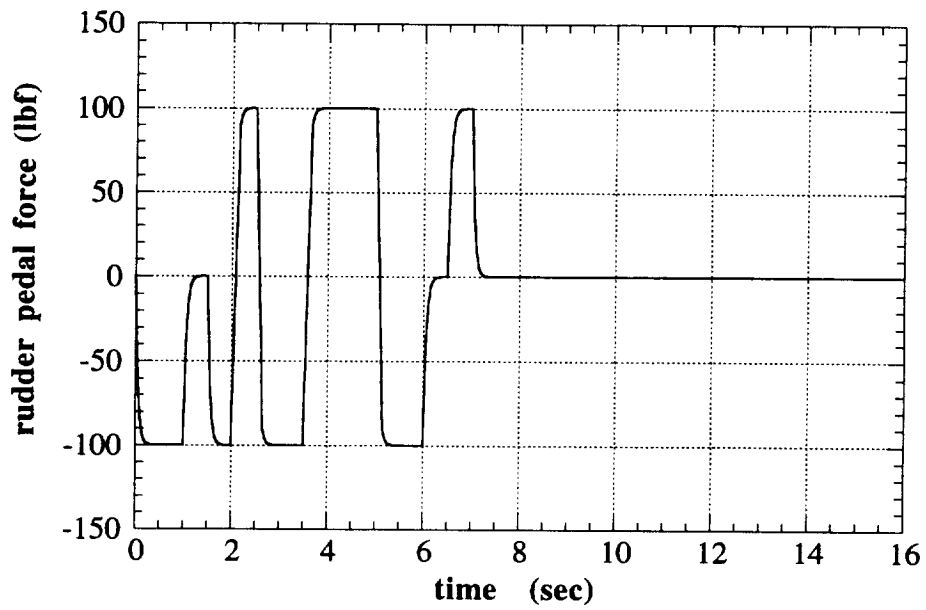

**Figure 10** F-18 HARV Optimal Rudder Pedal and Lateral Stick Inputs,  $\alpha = 60$  degrees

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE May 1996	3. REPORT TYPE AND DATES COVERED Contractor Report	
4. TITLE AND SUBTITLE Piloted Parameter Identification Flight Test Maneuvers for Closed Loop Modeling of the F-18 High Alpha Research Vehicle (HARV)			5. FUNDING NUMBERS C NAS1-19000 WU 505-64-52-01	
6. AUTHOR(S) Eugene A. Morelli				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Lockheed Martin Engineering & Sciences Co. Langley Program Office 144 Research Drive Hampton, VA 23666			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681-0001			10. SPONSORING / MONITORING AGENCY REPORT NUMBER NASA CR-198268	
11. SUPPLEMENTARY NOTES Langley Technical Monitor: James G. Batterson				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Unclassified Unlimited  Subject Category - 05			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) Flight test maneuvers are specified for the F-18 High Alpha Research Vehicle (HARV). The maneuvers were designed for closed loop parameter identification purposes, specifically for longitudinal and lateral linear model parameter estimation at 5, 20, 30, 45, and 60 degrees angle of attack, using the NASA 1A control law. Each maneuver is to be realized by the pilot applying square wave inputs to specific pilot station controls. Maneuver descriptions and complete specifications of the time/amplitude points defining each input are included, along with plots of the input time histories.				
14. SUBJECT TERMS Flight test maneuvers, parameter identification, optimal input design, closed loop modeling, pilot implementation, F-18 HARV			15. NUMBER OF PAGES 31	
			16. PRICE CODE A03	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT	



