

NASA-TM-107061

19960002569

NASA Technical Memorandum 107061  
AIAA-95-2380

## The BMDO Thruster-on-a-Pallet Program

Leonard H. Caveny  
*Ballistic Missile Defense Organization*  
*Washington, D.C.*

Francis M. Curran and John M. Sankovic  
*Lewis Research Center*  
*Cleveland, Ohio*


Douglas M. Allen  
*W.J. Schafer Associates, Inc.*  
*N. Olmsted, Ohio*

John R. Brophy and Charles Garner  
*Jet Propulsion Laboratory*  
*Pasadena, California*

Prepared for the  
31st Joint Propulsion Conference and Exhibit  
cosponsored by AIAA, ASME, SAE, and ASEE  
San Diego, California, July 10-12, 1995



National Aeronautics and  
Space Administration

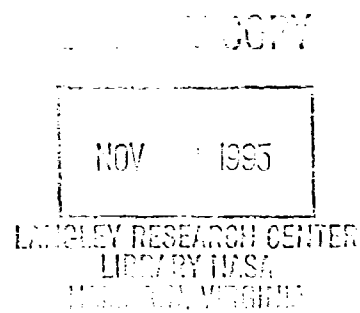



## The BMDO Thruster-on-a-Pallet Program

Leonard H. Caveny  
Ballistic Missile Defense Organization  
Washington, DC 20301-7100

Francis M. Curran and John M. Sankovic  
NASA Lewis Research Center  
Cleveland, OH 44135

Douglas M. Allen  
W. J. Schafer Associates, Inc.  
North Olmsted, OH 44070

John R. Brophy and Charles Garner  
Jet Propulsion Laboratory  
Pasadena, CA 91109

### ABSTRACT

*The Ballistic Missile Defense Organization sponsors an aggressive program to develop and demonstrate electric propulsion and space power technologies for future missions. This program supports a focused effort to design, fabricate, and space qualify a Russian Hall thruster system-on-a-pallet ready to take advantage of a near-term flight opportunity. The Russian Hall Effect Thruster Technology (RHETT) program will demonstrate an integrated pallet design in late FY95. The program also includes a parallel effort to develop advanced Solar Concentrator Arrays with Refractive Linear Element Technology (SCARLET). This synergistic technology will be demonstrated in a flight experiment this summer on the Comet satellite. This paper provides an overview of the RHETT and SCARLET programs with an emphasis on electric propulsion, recent progress, and near-term program plans.*

### INTRODUCTION

Satellite propulsion and power are critical to the performance of nearly all space missions. The Ballistic Missile Defense Organization's Directorate for Innovative Science and Technology (BMDO) sponsors aggressive programs in these synergistic technology areas. The objective of these programs is to bring high performance technologies to operational status in a timely and cost effective manner. For this, BMDO identifies advanced, high payoff technologies then rapidly moves to fabricate, integrate, qualify, and flight-demonstrate representative systems. At present, BMDO supports a substantial program focused on the development and demonstration of Russian Hall Effect Thruster Technology (RHETT).

Russian Hall effect electric thrusters, shown in Figure 1, provide very high specific impulse compared to state-of-art (SOA) chemical systems. Because of this, these devices offer significant performance

advantages for in-space functions such as orbit insertion, repositioning, station keeping, and evasive maneuvering. An example of this is shown in Figure 2. Here, propulsion system wet mass for an Atlas 2AS-class geostationary spacecraft is plotted against time on orbit for a Hall system and a SOA chemical system. In the analysis, the propulsion systems performed both North-South station keeping and two repositions a year (total  $\Delta V \sim 100$  m/s). From the figure it can be seen that the Hall system provides significant mass savings for missions longer than 5 years. The wet propellant mass for the Hall system is greater than that for the chemical system up to the 3 year point due to the Hall system's larger dry mass. Recently, the BMDO program has demonstrated the feasibility of Hall thruster technology.<sup>1,2</sup> Concurrently, an effort is directed toward the development of a self-contained thruster-on-a-pallet system ready to take advantage of a near-term flight opportunity. Key contributors to this program include Russian institutes, US

industry, universities, the Jet Propulsion Laboratory (JPL) and the NASA Lewis Research Center (LeRC). In addition to the RHETT program, BMDO is sponsoring the development and near-term flight testing of Solar Concentrator Arrays with Refractive Linear Element Technology (SCARLET). Partnered with both U. S. industry and NASA, the SCARLET program will flight demonstrate the first full scale, deployed concentrator array this summer. RHETT and SCARLET are synergistic technologies applicable to multiple space missions. A graphic depicting the BMDO program is shown in Figure 3.

This paper provides a programmatic overview of BMDO's RHETT and SCARLET programs with emphases on electric propulsion, recent progress, and near-term directions. Both programs are international efforts with multiple components. The contributions of organizations pursuing the several subsystems are reported elsewhere.

#### RHETT

In the early 1990's BMDO took the lead in identifying and evaluating advanced propulsion technologies developed in the former Soviet Union. Hall thrusters were quickly targeted as an area of interest. With over 60 operational units spanning more than 20 years, Stationary Plasma Thrusters (SPT's) appeared to be the most likely candidate for insertion into US commercial and Government space programs.<sup>3,4,5</sup> In 1991, BMDO commissioned a team from three Government laboratories to participate in testing the SPT thruster in Soviet laboratories. With the results obtained through that evaluation at the Scientific-Research Institute of Thermal Processes (NIITP) in Moscow and at "Fakel" Enterprise in Kaliningrad (Kaliningrad region) the team recommended further evaluation in the US. Flight-representative SPT-100, 1.35 kW thrusters manufactured at "Fakel" were obtained for endurance testing at the Jet Propulsion Laboratory (JPL) and evaluation of integration issues at Lewis Research Center (LeRC). At that time commercial interest was increasing, Space Systems/Loral (SS/L) developed a power processor for

the thruster and established an international consortium to begin marketing the system for Western spacecraft. To aid the commercialization, the BMDO continued supporting of the SPT-100 evaluation. A 6000 h endurance test was completed at JPL.<sup>6</sup> Integration issues such as plume erosion/deposition, induced torques, and optical emissions were completed.<sup>7,8,9</sup>

The charter of BMDO's Office of Innovative Technology is to continuously advance the state-of-art, and in that capacity BMDO sought to increase the performance of the existing Russian technology through sponsorship of US industry/Russian joint ventures. In 1992 the BMDO sponsored a second trip to Russia by Government electric propulsion specialists to identify second generation Hall thrusters. The NIITP T-100 advanced SPT and the Central Scientific-Research Institute of Machine Building (TsNIIMash) Thruster with Anode Layer (TAL) were identified. At NIITP, BMDO sponsored the development of an advanced versions of the SPT. The thrusters are designated the T-100 (1.35 kW) and T-160 (4.5 kW) and have target lifetimes of 8000 h. Also, under BMDO SBIR sponsorship, Space Power Inc. (SPI) developed a breadboard power processor for the device, and its sister company International Scientific Products (ISP) obtained marketing rights. Three T-100 thrusters were manufactured and obtained for evaluation at JPL and LeRC. With the use of metallic discharge chamber walls and a shorter acceleration zone, the TAL also held the possibility of improved life, and the BMDO obtained two D-55 (nominally 1.5 kW) thrusters for similar evaluation.

The BMDO has completed the evaluation of these advanced Hall thrusters and is focusing its effort on demonstrating the maturity of the technology through a flight demonstration of a system under the program. RHETT is a multiphase program to bring advanced Russian Hall thruster technology to operational status. In the first phase program, designated RHETT I, five years of BMDO investment in electric propulsion component technology is being brought together and demonstrated as a system in ground testing. The system demonstration will take place by the end

of FY95 and will lead to rapid transition to the next phase of the program. RHETT II is a flight demonstration of the propulsion pallet leading to operational status in the third and final phase.

The RHETT I design philosophy is to package a compact Hall thruster propulsion system with components which are flight-qualified or engineering models in the process of flight qualification. The RHETT assembly consists of a Hall thruster, a Power Processing Unit, a Propellant Management System, a Xenon Flow Controller, and required structure. Figure 4 shows an isometric view of the propulsion pallet.

The Power Processing Unit (PPU) converts the low voltage available from the spacecraft bus to the 300 V required by the thruster. The Propellant Management System (PMS) provides pressure regulation from the high pressure xenon storage tanks on board the spacecraft to the required input pressure for the flow controller. The Xenon Flow Controller (XFC) is installed inline between the thruster and the PMS. The PPU provides a constant voltage to the thruster. Discharge current is directly proportional to the xenon flow through the thruster. Using closed-loop control from the PPU the flow is regulated by the XFC. In line with a palletized design philosophy structure is minimized.

Because RHETT I is a modular system, all major components can be replaced as technology advances or user requirements change. The thruster to be integrated into the RHETT I package is the NIITP T-100 thruster. Power is provided by an SPI engineering model PPU which provides 300 V at 4.5 A to the thruster at an input voltage is 28 V. The efficiency is estimated to be 0.92. Higher voltage spacecraft busses would allow for weight reduction in future power processors. For cyclic operation, the 140 W of waste heat from the PPU can be handled by a phase-change thermal storage module. The existing design can accommodate one hour of operation every three hours; however, a small component design change increasing the mass of the thermal storage material would allow longer duty cycles. For long duration continuous operation the

existing thermal module would be replaced by a heat pipe panel and connected to the spacecraft thermal management system. The PMS is provided by MOOG Space Products Div. and uses a xenon regulator which drops the pressure from the propellant tanks located on the spacecraft to approximately two atmospheres. The XFC was also manufactured by NIITP and uses a thermal throttle to control the xenon flow to the thruster. Major components are used as structure, where possible, to minimize weight and to provide a compact package. The target mass for RHETT I is 20 kg.

The ground demonstration of RHETT I will include both pre-flight qualifications of the system and resolution of integration issues. The RHETT I system will be assembled in August and testing will begin in September 1995. The qualification test plan includes thermal-vacuum environment cycling, random vibration testing, electromagnetic interference assessment, and thruster cold-soak ignition reliability testing. Several RHETT/spacecraft integration issues have been identified. Many of those issues will be addressed during the RHETT I ground demonstration. These include spacecraft surface deposition/erosion from the high energy xenon ions in the plume, optical spectra definition to determine effects on star trackers and sensors, and induced torque determination via measurement of the azimuthal ion velocity. Currently ten integration issues have been identified and are in the processes of being addressed. Some may require the RHETT II flight demonstration test for resolution.

## SCARLET

Innovative, high-performance, power technology can benefit mission performance in several ways. Spacecraft power systems are often a major mass driver impacting launch mass, mission life, and/or payload capabilities. As noted above, the application of electric propulsion depends on the availability of space power and coupling advanced array technology with Hall thruster systems can provide substantial benefits for a wide range of missions.

BMDO sponsored the development of concentrator solar arrays for nine years, starting with survivable concentrator arrays to respond to Cold War threats in the late 1980s. More recently, concentrator solar array technology development has focused on low cost, low mass, and radiation hardened designs. Entech's innovative domed fresnel lens concentrators provided a promising pathway to meet these system goals, but development was slow due to fabrication and integration problems with the domed lens. A linear version of the design eliminated these problems and greatly simplified array design and spacecraft integration. This became the basis for the SCARLET program.

At present, BMDO's program is pursuing two complementary approaches to next generation concentrator array development, both involving linear optics. Both approaches provide for practical spacecraft integration due to the increase in pointing error tolerance over previous, point-focus designs. Linear optics reduce critical pointing requirements to a single axis and thus eliminate complex two axis gimbals. Additionally, creative approaches including the design of the convex linear Fresnel lens and the use of secondary reflectors result in pointing tolerances of  $\pm 2-3$  degrees in the critical axis while still minimizing the area of the expensive, heavy photovoltaic cells. This enables the use of off-the-shelf array components such as gimbals and sun sensors. A major program goal is to provide hardware required for an in-space demonstration of the technology.

A system based on linear reflective concentrator optics is being developed at the Ioffe Institute in St. Petersburg, Russia under BMDO funding. The near term goals of this effort are to fabricate a prototype working concentrator module and to develop high efficiency solar cells for the array. Using single junction GaAs cells, target BOL performance characteristics are  $240 \text{ W/m}^2$  at a specific mass of  $80 \text{ W/kg}$  and an operating temperature of  $100 \text{ C}$ . With tandem cells, the targets increase to  $300 \text{ W/m}^2$  and over  $90 \text{ W/kg}$  at the same operating

temperature. The array will use linear compound parabolic concentrators.

In a separate effort, the SCARLET array is being developed by AEC-Able with participation of Entech, Spectrolab, and Composite Optics.<sup>10,11</sup> The concept relies on the same general principles as the mini-dome point-focus device and also offers the potential for low-cost mass production of the concentrator lens material. SCARLET uses either GaAs or higher efficiency multiple band gap solar cells. The array using GaAs cells, will provide part of the power for the Comet satellite. Later advanced versions will use the higher efficiency cells. Technology goals are a specific mass greater than  $80 \text{ W/kg}$  and more than  $300 \text{ W/m}^2$  with a recurring cost below  $\$500/\text{W}$ .

## CONCLUDING REMARKS

BMDO's on-going space propulsion and power program sponsors aggressive efforts to advance innovative, high-performance technologies for near-term in-space application in both Government and commercial missions. Presently, BMDO focuses on two major efforts. RHETT will develop and demonstrate an integrated Russian Hall thruster system in ground tests in FY95 and plans to follow this with a near-term flight test. SCARLET will demonstrate a full scale deployed concentrator array in-space for the first time later this summer. It is hoped that RHETT and SCARLET will lead the way to operational use of these high performance technologies in the near future and initiate a bright new era in electric propulsion.

## REFERENCES

1. Allen, D. M., Caveny, L.H., Curran, F.M., Sankovic, J.M., Brophy, J.R., and Garner, C., "RHETT and SCARLET: Synergistic Power and Propulsion Technologies," AIAA Paper-95-368, August 1995.
2. Caveny, L. H., Curran, F. M., and Brophy, J. R., "An Overview of the Ballistic Missile Defense Organization's Electric Propulsion Program," *Proceedings of the 23rd*

*International Electric Propulsion Conference, September 1993.*

*Technology Conference, October 1992, pp. 206-216.*

3. Morozov, A.I., Esinchuk, Yu. V., Tilinin, G.N., Trofimov, A.V., Sharov, Yu. A., and Shchepkin, G. Ya., "Plasma Accelerator with Closed Electron Drift and Extended Acceleration Zone," *Soviet Physics--Technical Physics*, Vol. 17, No. 1, July 1972.
4. Bober, A.S., Kim, V., Koroteev, A.S., Latyshev, L.A., Morozov, A.I., Popov, G.A., Rylov, Yu. P., Zhurin, V.V., "State of Work on Electrical Thrusters in the USSR, *Proceedings of the 22nd International Electric Propulsion Conference, October 1991.*
5. Kaufman, H.R., "Technology of Closed-Drift Thrusters," *AIAA Journal*, Vol. 23, No. 1, January 1985.
6. Garner, C., Brophy, J.R., Polk, J., and Pless, L., "Cyclic Performance and Wear Test of the SPT-100," AIAA Paper-95-2667, July 1995.
7. Randolph, T., Pencil, E.J., and Manzella, D.H., "Far-Field Plume Contamination and Sputtering of the Stationary Plasma Thruster," AIAA Paper-94-2855, June 1994.
8. Manzella, D. H., "Stationary Plasma Thruster Plume Emissions," *Proceedings of the 23rd International Electric Propulsion Conference, September 1993.*
9. Manzella, D.H., "Stationary Plasma Thruster Ion Velocity Distribution," AIAA Paper-94-3141, June 1994.
10. Piszczor, M.F., "A Novel Space Photovoltaic Module Using a Linear Fresnel Lens and a Line-Focus Tandem Cell Receiver," *Proceedings of the 23rd IEEE Photovoltaic Specialists Conference, May 1993, pp. 1386-1391.*
11. Piszczor, M.F. and O'Niell, M.J., "Recent Developments in Refractive Concentrators for Space Photovoltaic Power Systems," *Proceedings of the 12th Space Photovoltaic Research and*

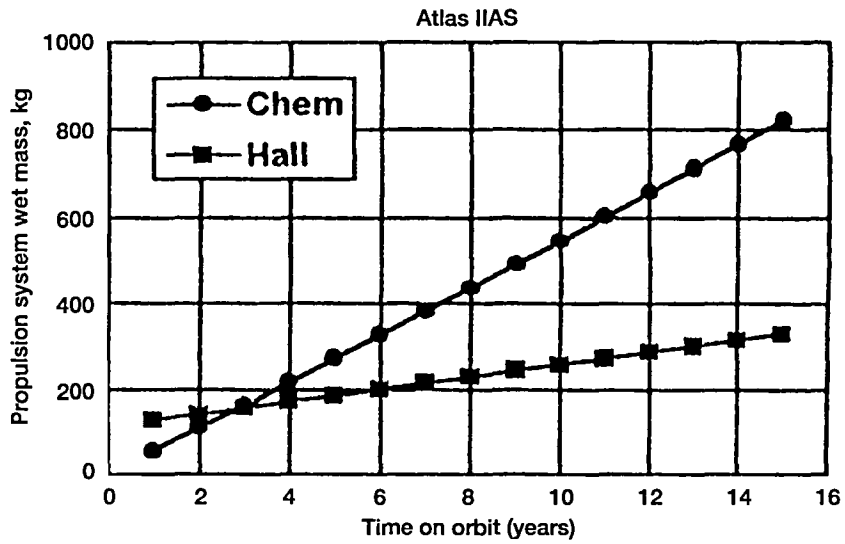


Figure 1.—Representative projection of mass savings achieved for a communications satellite station-keeping propellant.

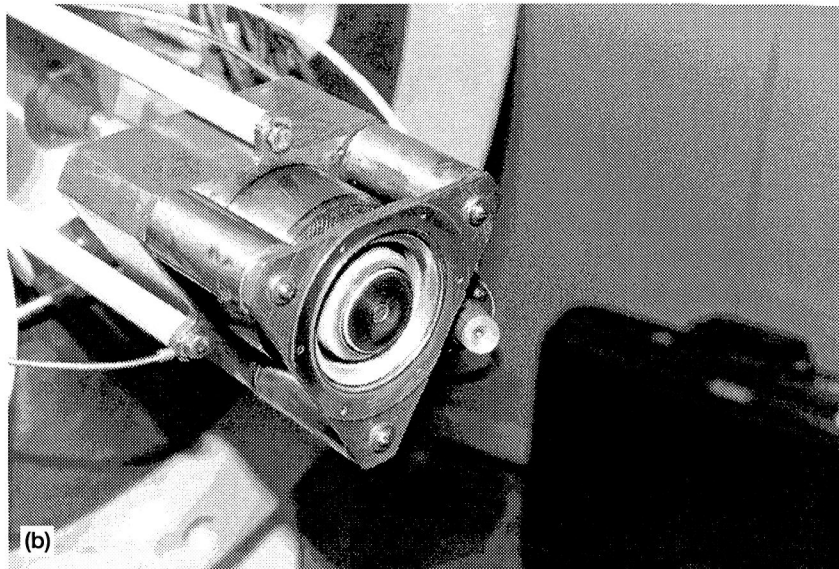
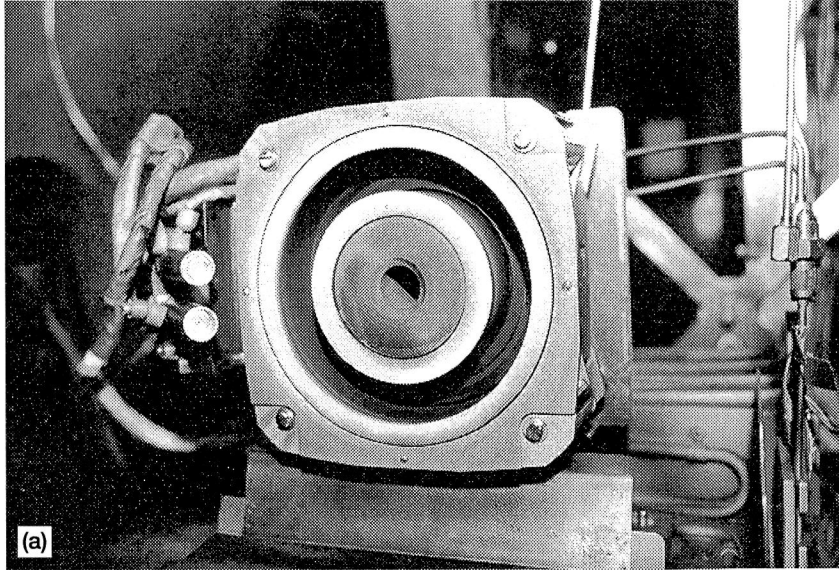


Figure 2.—Two variants of the Russian Hall thruster that incorporate recent improvements. Both thrusters are shown in test stands at NASA Lewis Research Center. (a) NIIP T-100 Hall thruster designed for BMDO for extended ifetime; note the smaller, heaterless cathodes. Thruster has 100 mm discharge passage and operates in the 1.0 to 1.5 kW range. (b) TsNIMash D-55 Anode Layer (Hall) thruster. Its relatively higher thrust density is indicated by the 55 mm toroidal discharge passage and its 1.0 to 2.5 kW operating range.





Figure 3.—International partnership combining advanced Hall thruster and concentrator array technology to usher in a bright new era in electric propulsion.

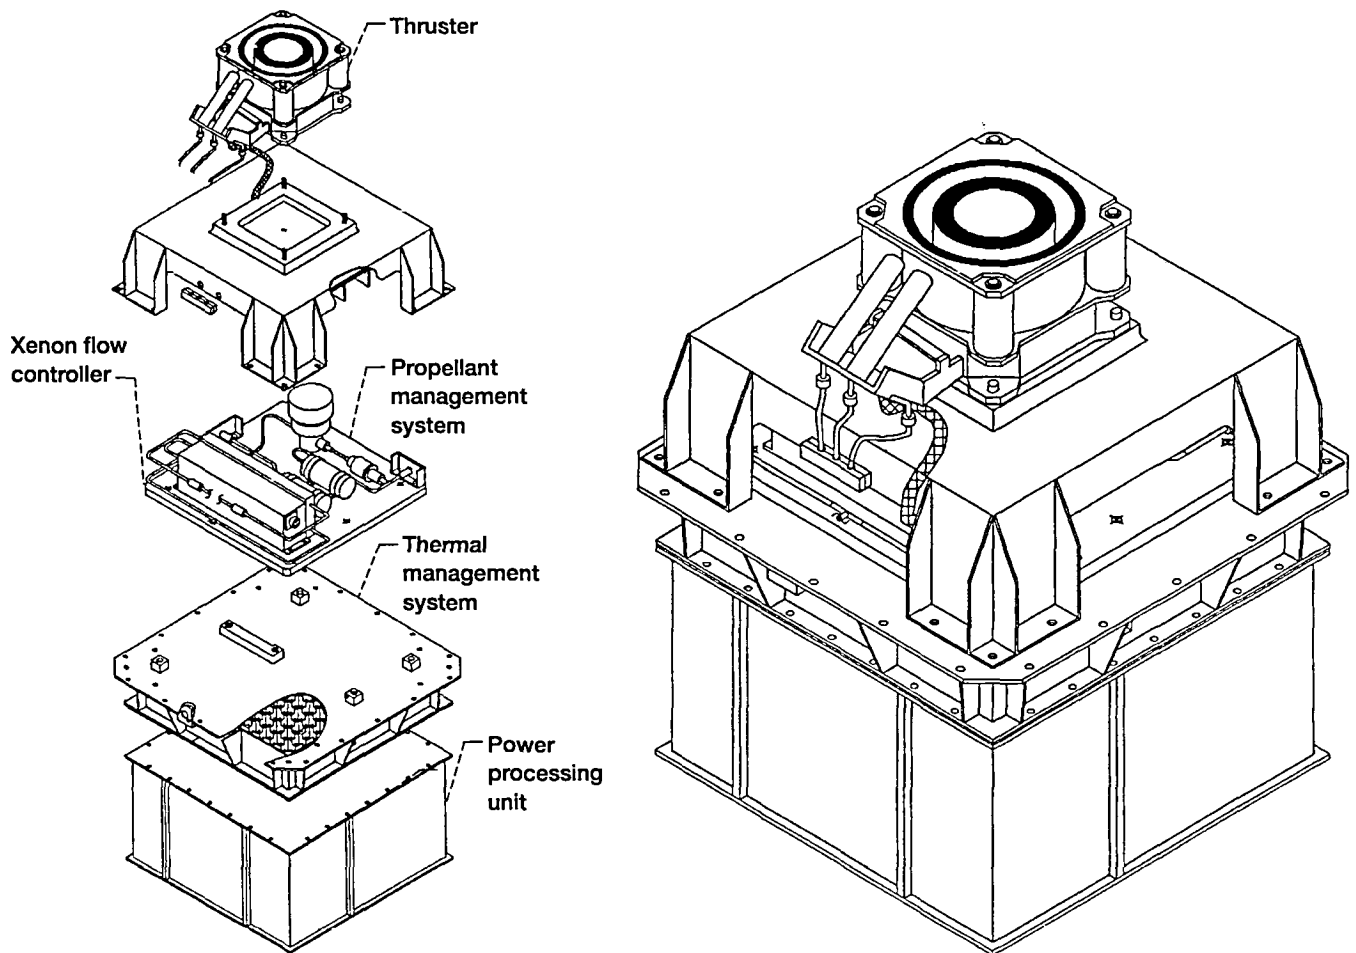


Figure 4.—The RHETT I configuration as being fabricated for the space qualification testing in September 1995. The mass goal is 20 kg and the major dimensions are 32 x 32 cm base and 28 cm high. This second generation configuration represents a mass and volume reduction of 50% compared to the 1993 conceptual design. The centrally located thermal management "plate" is application specific; the phase change system depicted is suitable for intermittent station keeping operation.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE October 1995	3. REPORT TYPE AND DATES COVERED Technical Memorandum		
4. TITLE AND SUBTITLE  The BMDO Thruster-on-a-Pallet Program		5. FUNDING NUMBERS  WU-242-02-0M		
6. AUTHOR(S)  Leonard H. Caveny, Francis M. Curran, John M. Sankovic, Douglas M. Allen, John R. Brophy, and Charles Garner				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)  National Aeronautics and Space Administration Lewis Research Center Cleveland, Ohio 44135-3191		8. PERFORMING ORGANIZATION REPORT NUMBER  E-9916		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)  National Aeronautics and Space Administration Washington, D.C. 20546-0001		10. SPONSORING/MONITORING AGENCY REPORT NUMBER  NASA TM-107061 AIAA-95-2380		
11. SUPPLEMENTARY NOTES  Prepared for the 31st Joint Propulsion Conference and Exhibit cosponsored by AIAA, ASME, SAE, and ASEE, San Diego, California, July 10-12, 1995. Leonard H. Caveny, Ballistic Missile Defense Organization, Washington, D.C. 20310-7100; Francis M. Curran and John M. Sankovic, NASA Lewis Research Center; Douglas M. Allen, WJ. Schafer Associates, Inc., North Olmsted, Ohio 44070; John R. Brophy and Charles Garner, Jet Propulsion Laboratory, Pasadena, California 91109. Responsible person, John M. Sankovic, organization code 5330, (216) 977-7429.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT  Unclassified - Unlimited Subject Category 20  This publication is available from the NASA Center for Aerospace Information, (301) 621-0390.		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words)  The Ballistic Missile Defense Organization sponsors an aggressive program to develop and demonstrate electric propulsion and space power technologies for future missions. This program supports a focused effort to design, fabricate, and space qualify a Russian Hall thruster system-on-a-pallet ready to take advantage of a near-term flight opportunity. The Russian Hall Effect Thruster Technology (RHETT) program will demonstrate an integrated pallet design in late FY95. The program also includes a parallel effort to develop advanced Solar Concentrator Arrays with Refractive Linear Element Technology (SCARLET). This synergistic technology will be demonstrated in a flight experiment this summer on the Comet satellite. This paper provides an overview of the RHETT and SCARLET programs with an emphasis on electric propulsion, recent progress, and near-term program plans.				
14. SUBJECT TERMS  Electric propulsion; Hall thrusters		15. NUMBER OF PAGES 11		16. PRICE CODE A03
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	