

11V-44
44385
P. 6

NASA Technical Memorandum 106879

Use of Advanced Solar Cells for Commercial Communication Satellites

Sheila G. Bailey
*National Aeronautics and Space Administration
Lewis Research Center
Cleveland, Ohio*

and

Geoffrey A. Landis
*NYMA Inc.
Engineering Services Division
Brook Park, Ohio*

Prepared for the
First World Conference on Photovoltaic Energy Conversion
cosponsored by the IEEE, PVSEC-JAPAN, and PVSEC-EUROPE
Waikoloa, Hawaii, December 5-9, 1994



National Aeronautics and
Space Administration

(NASA-TM-106879) USE OF ADVANCED
SOLAR CELLS FOR COMMERCIAL
COMMUNICATION SATELLITES (NASA.
Lewis Research Center) 6 p

N95-24560

Unclass

G3/44 0044585

USE OF ADVANCED SOLAR CELLS FOR COMMERCIAL COMMUNICATION SATELLITES

Sheila G. Bailey

NASA Lewis Research Center, Cleveland, OH 44135

Geoffrey A. Landis

Nyma, Inc., NASA Lewis Research Center, Cleveland, OH 44135

ABSTRACT

The current generation of communications satellites are located primarily in geosynchronous Earth orbit (GEO). Over the next decade, however, a new generation of communications satellites will be built and launched, designed to provide a world-wide interconnection of portable telephones. For this mission, the satellites must be positioned in lower polar and near-polar orbits. To provide complete coverage, large numbers of satellites will be required. Because the required number of satellites decreases as the orbital altitude is increased, fewer satellites would be required if the orbit chosen were raised from low to intermediate orbit. However, in intermediate orbits, satellites encounter significant radiation due to trapped electrons and protons. Radiation tolerant solar cells may be necessary to make such satellites feasible. We analyze the amount of radiation encountered in low and intermediate polar orbits at altitudes of interest to next-generation communication satellites, calculate the expected degradation for silicon, GaAs, and InP solar cells, and show that the lifetimes can be significantly increased by use of advanced solar cells.

INTRODUCTION

The current generation of communications satellites are located primarily in geosynchronous Earth orbit (GEO). Over the next decade, however, a new generation of communications satellites will be built and launched. A recent study indicated that there will be a market for as many as four of these worldwide communications satellites systems, and that these will produce a revenue of \$9 billion per year [1].

These next-generation communications satellites will be designed to provide a world-wide interconnection of portable telephones. For this mission, to allow the use of low-power hand-held telephones and very small aperture antennas, the satellites must be positioned in lower polar- and near-polar orbits. To provide complete coverage, large numbers of satellites will be required; as few as 66 satellites for the Iridium system, or as many as 900 satellites for the Teledesic system.

The required number decreases significantly as the orbital altitude is increased. Far fewer satellites are required if the orbit chosen is raised from Low

Earth Orbit (LEO) to intermediate Earth orbit. By doing this, however, the radiation environment of the satellite is significantly increased, resulting in decreased lifetime. It is the purpose of this paper to demonstrate the savings that can be achieved by use of higher orbits and to show that, by using improved, radiation-tolerant solar cells [2], the lifetimes can be increased substantially, allowing these higher orbits to be used.

REQUIREMENTS

The number of satellites required as a function of altitude can be calculated if the view angle for each satellite and the constellation geometry are known. We will assume here that the constellation consists of satellites in circular polar (or near-polar) orbits. This is not necessarily the optimum constellation for all purposes, however, it is similar to the constellations proposed for next-generation systems, and has the advantage of being easily calculable. For other constellation geometries, the number of satellites required to provide complete coverage differs by a constant multiplicative factor.

Satellite view angle accounts for the fact that a ground station cannot communicate with a satellite all the way down to the horizon due to horizon clutter, mountains, buildings, etc. Here we assume a view angle (measured from the zenith) $\alpha=85^\circ$; that is, a satellite is in view of a ground station if it is 5° or higher above the horizon. For view angle α and an orbital altitude (measured above the surface) of h , the number of degrees that a given satellite can be viewed from is:

$$D = 2 \alpha - 2 \sin^{-1}[\sin \alpha / (1+h/R)] \quad (1)$$

where R is the radius of the Earth. Complete, uninterrupted coverage of the Earth can be achieved using a constellation of polar (or near-polar) orbit satellites if there are

$$n_{\text{sat}} = 180 \sqrt{2} [1/\alpha - \sin^{-1}[\sin \alpha / (1+h/R)]] \quad (2)$$

satellites in each orbital plane, and

$$n_{\text{planes}} = 180 \sqrt{2} [1/\alpha - \sin^{-1}[\sin \alpha / (1+h/R)]] \quad (3)$$

orbital planes.

For an altitude of 780 km, this calculation shows that 11.24 satellites are required per orbital plane, and 5.7 orbital planes will be needed. (Clearly, for actual

systems integral numbers are required.) In comparison, the Iridium satellite system, with a proposed altitude of 780 kilometers, and an inclination of 86°, uses 11 satellites per orbital plane, and 6 orbital planes. The agreement between calculated and actual number of satellites is good.

If we neglect the fact that the number of satellites per orbital plane, and the number of orbital planes, must be an integer, the total number of satellites to provide complete coverage of the Earth's surface can be approximated as:

$$N = \pi^2 [1/\alpha - 360/\pi \sin^{-1}[\sin \alpha / (1+h/R)]]^2 \quad (4)$$

This is shown in figure 1 for the case of a satellite view angle of 85°. For example, for low Earth orbit (LEO) at an orbital altitude of 780 km, 66 satellites are required to provide complete global coverage. By changing to an intermediate orbit above 3000 km, on the other hand, three orbital planes with six satellites per plane are sufficient. This reduces the required number of satellites from 66 to 18.

In intermediate orbits, satellites encounter significant radiation due to trapped electrons and protons in the Earth's Van Allen belts. (In fact, at the altitudes of interest, the dominant radiation is from trapped protons). In Figure 2 the annual equivalent 1-MeV electron fluence from trapped protons (P_{max} , Voc) are shown for a silicon solar cell with infinite back shielding in polar orbit as a function of shield thickness and altitude [3,4]. High radiation levels will result in degradation of both the on-board electronics and of the spacecraft solar arrays. While the electronics can, in principle, be shielded from direct exposure, and radiation tolerance components can be chosen, the solar array must necessarily be exposed to the environment. The lifetime of satellites in the intermediate Earth orbits discussed is thus expected to be limited by the radiation damage of the solar arrays.

Figure 3 compares the total radiation fluence over the five-year nominal lifetime of the satellite for the orbits of interest, comparing 700 and 3200 km polar orbits with equatorial LEO and geosynchronous orbit. These fluences are calculated in terms of equivalent electron exposure seen by a 200 μm silicon solar cell with a 125 μm coverglass and a flexible substrate. In 3200 km orbit, the satellite encounters radiation levels nearly three orders of magnitude more than those encountered in the 700 km orbit.

Figure 4 shows the calculated loss of array power due to radiation damage in the 3200 km polar orbit. Details on the calculation procedure are discussed in reference [5]. For this graph, a front coverglass thickness of 125 μm (5 mils) was assumed. Silicon cells with a lightweight flexible array structure that provides 50 microns of backside shielding degrade to almost zero performance in the first month of operation. This is clearly not a usable array structure. A conventional rigid array, with effectively infinite backside shielding, decreases the degradation, but the silicon cell still loses power at an unacceptably high rate.

In contrast, InP solar cells have considerably higher radiation tolerance [6]. Using the same array structure and coverglass thickness as the silicon cell, an array using InP solar cells will lose only 20% of initial power during the first year of operation. Increasing the coverglass thickness to provide more

shielding will result in lower levels of degradation, and allow the array to provide acceptable power levels for the full five-year satellite lifetime, even in the high-radiation orbit.

While use of the higher orbits will incur higher launch costs per satellite, the decreased number of satellites more than compensates for the increased launch cost. Further, in most communication satellite systems the launch cost comprises typically less than a third of the total satellite cost; in some cases, considerably less than a third. (For example, for the Firesat LEO satellite analyzed by Wong [7], only 16% of the satellite cost (not including engineering and development) were the launch costs. By using advanced cells, the overall cost is decreased nearly proportionately to the decrease in number of satellites required.

CONCLUSIONS

Use of intermediate Earth orbit for next-generation communications satellites could reduce the number of satellites required by a factor of four. Calculations show that conventional silicon solar cells degrade too rapidly in the radiation environment to achieve the required 5 year lifetime in intermediate orbit. InP solar cells could allow the array to function for the full satellite lifetime. Similar conclusions were reached by Inmarsat. According to deSelding [8], the price of the Inmarsat-P worldwide telephone satellite constellation reduces from 3 billion dollars to 2 billion, and the number of satellites is reduced from 54 to 12-15, if intermediate orbit of 10,300 km is chosen instead of LEO. By using advanced solar cells, the functionality of advanced communication satellite systems could be substantially increased.

REFERENCES

- [1] "Study Claims LEO Market Can Support Four Systems," *Space News*, June 13-19 (1994).
- [2] G.A. Landis, S.G. Bailey and M. Piszczor, "Recent Advances in Solar Cell Technology," *33rd AIAA Aerospace Sciences Meeting and Exhibit*, Reno NV, 9-12 January 1995.
- [3] H.Y. Tada, J.R. Carter, Jr., B.E. Anspaugh, and R.G. Downing, *Solar Cell Radiation Handbook*, 3rd ed., JPL Publication 82-69, Nov. 1, 1982.
- [4] B.E. Anspaugh, *Solar Cell Radiation Handbook*, Addendum 1: 1982-1988.
- [5] S.G. Bailey, I. Weinberg, and D.J. Flood, "Advanced Power Systems for EOS", *Proceedings of the 26th Intersociety Energy Conversion Engineering Conference*, Vol. 2, 250-255, (1991).
- [6] I. Weinberg, "InP Solar Cells for Use in Space," *Solar Cells*, 29(2-3), 225-244 (1990).
- [7] R. Wong, "Cost Modeling," chapter 20, *Space Mission Analysis and Design*, 2nd ed., W.J. Larson and J.R. Wertz, eds., Microcosm, Torrance, CA, 737, (1992).
- [8] P. deSelding, "Inmarsat Drops LEO Concept," *Space News*, and "Inmarsat Takes First Step to Privatization," *Space News*, May 16-22, 1 (1994).

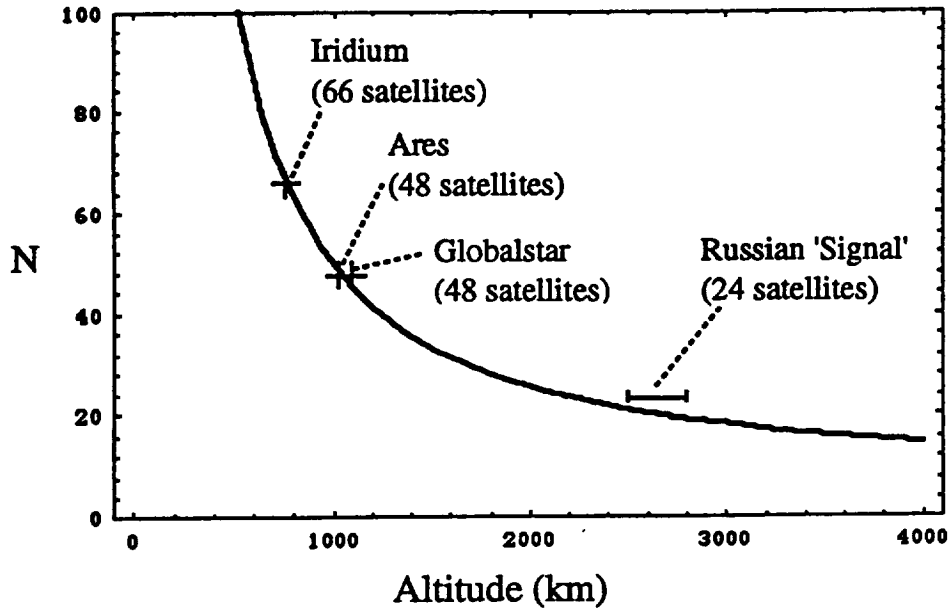


Figure 1. Number of satellites in circular polar (or near-polar) orbit required to provide global coverage as a function of altitude (assuming a horizon angle of 5°)

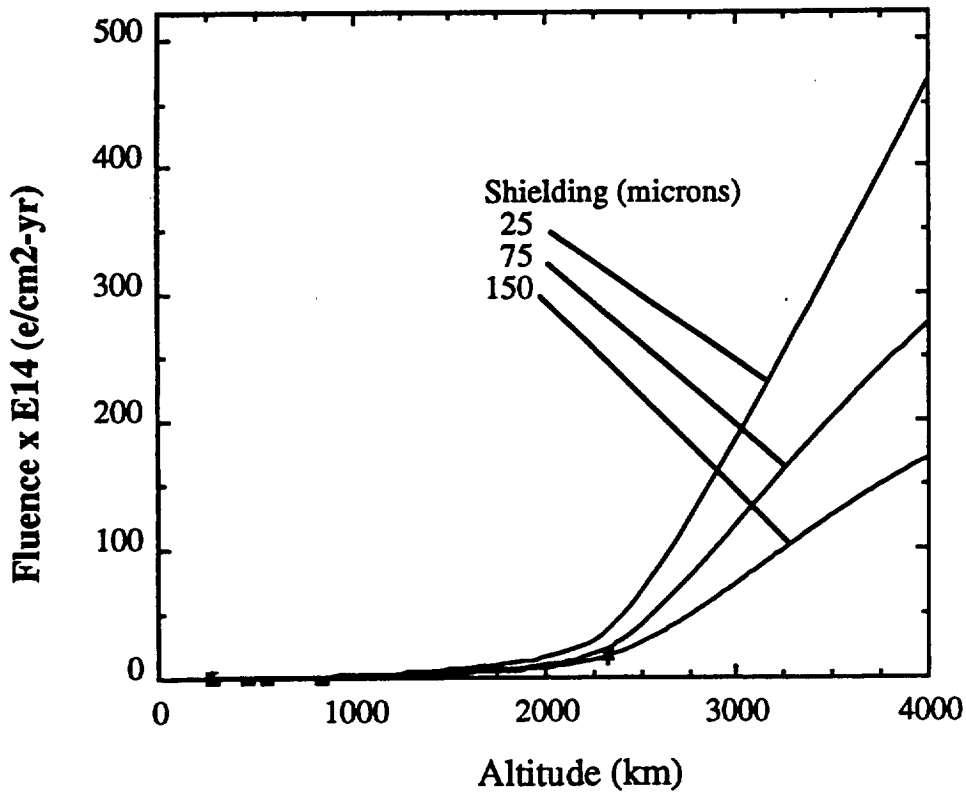


Figure 2. Annual Equivalent 1 MeV Electron Fluence from Trapped Protons at 100° Inclination

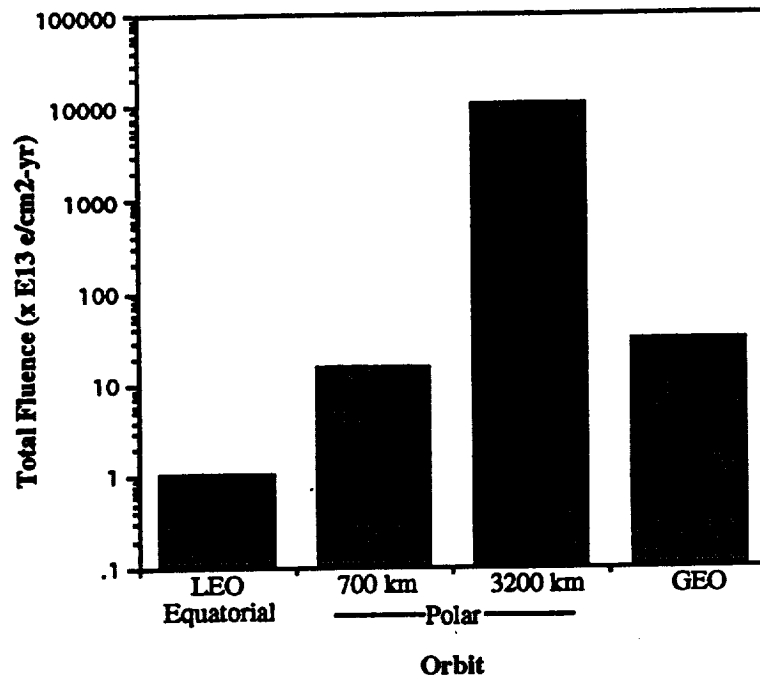


Figure 3. Radiation dose at the end of the five-year nominal lifetime as a function of orbit.

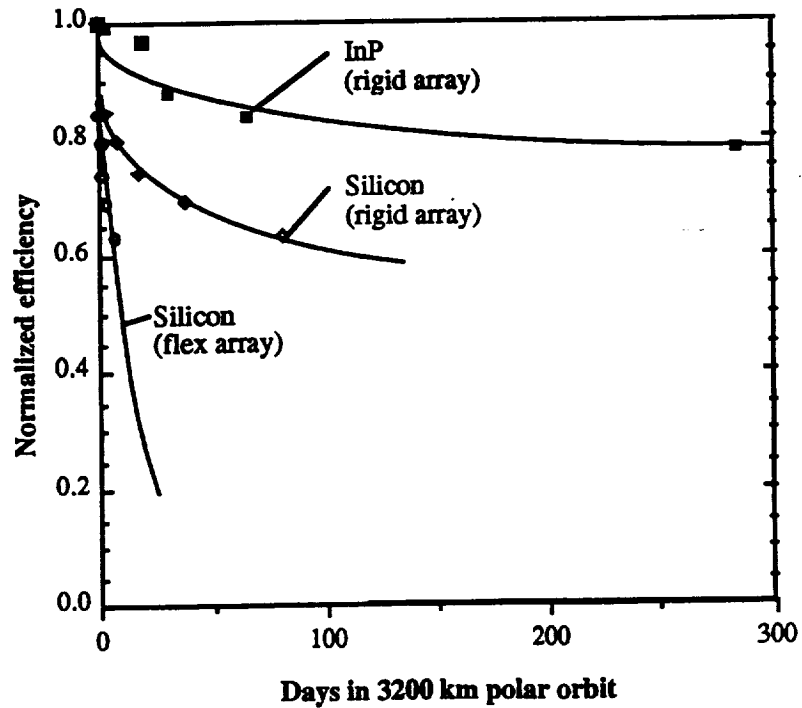


Figure 4. Decrease in efficiency for silicon and InP solar cells in 3200 km polar orbit.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE March 1995	3. REPORT TYPE AND DATES COVERED Technical Memorandum	
4. TITLE AND SUBTITLE Use of Advanced Solar Cells for Commercial Communication Satellites		5. FUNDING NUMBERS WU-233-01-0A	
6. AUTHOR(S) Sheila G. Bailey and Geoffrey A. Landis		8. PERFORMING ORGANIZATION REPORT NUMBER E-9515	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Lewis Research Center Cleveland, Ohio 44135-3191		10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TM-106879	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, D.C. 20546-0001		11. SUPPLEMENTARY NOTES Prepared for the First World Conference on Photovoltaic Energy Conversion cosponsored by the IEEE, PVSEC-JAPAN, and PVSEC-EUROPE, Waikoloa, Hawaii, December, 5-9, 1994. Sheila G. Bailey, NASA Lewis Research Center and Geoffrey A. Landis, NYMA, Inc., Engineering Services Division, 2001 Aerospace Parkway, Brook Park, Ohio 44142 (work funded by NASA contract NAS3-25266 with Sverdup Technology Inc.). Responsible person, Sheila G. Bailey, organization code 5410, (216) 433-2228.	
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Category 44 This publication is available from the NASA Center for Aerospace Information, (301) 621-0390.		12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The current generation of communications satellites are located primarily in geosynchronous Earth orbit (GEO). Over the next decade, however, a new generation of communications satellites will be built and launched, designed to provide a world-wide interconnection of portable telephones. For this mission, the satellites must be positioned in lower polar and near-polar orbits. To provide complete coverage, large numbers of satellites will be required. Because the required number of satellites decreases as the orbital altitude is increased, fewer satellites would be required if the orbit chosen were raised from low to intermediate orbit. However, in intermediate orbits, satellites encounter significant radiation due to trapped electrons and protons. Radiation tolerant solar cells may be necessary to make such satellites feasible. We analyze the amount of radiation encountered in low and intermediate polar orbits at altitudes of interest to next-generation communication satellites, calculate the expected degradation for silicon, GaAs, and InP solar cells, and show that the lifetimes can be significantly increased by use of advanced solar cells.			
14. SUBJECT TERMS Photovoltaics; Communications; Satellites		15. NUMBER OF PAGES 06	16. PRICE CODE A02
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT