

1N-34
34448
44P

NASA Contractor Report 194994
ICASE Report No. 94-86



ICASE

THE STABILITY OF TWO-PHASE FLOW OVER A SWEEP-WING

Adrian V. Coward
Philip Hall

(NASA-CR-194994) THE STABILITY OF
TWO-PHASE FLOW OVER A SWEEP-WING
Final Report (ICASE) 44 p

N95-18190

Unclas

G3/34 0034448

Contract NAS1-19480
October 1994

Institute for Computer Applications in Science and Engineering
NASA Langley Research Center
Hampton, VA 23681-0001



Operated by Universities Space Research Association

The Stability of Two-Phase Flow Over a Swept-Wing

Adrian V. Coward and Philip Hall*
Department of Mathematics
University of Manchester
Manchester M13 9PL, U.K.

Abstract

We use numerical and asymptotic techniques to study the stability of a two-phase air/water flow above a flat porous plate. This flow is a model of the boundary layer which forms on a yawed cylinder and can be used as a useful approximation to the air flow over swept wings during heavy rainfall. We show that the interface between the water and air layers can significantly destabilize the flow, leading to traveling wave disturbances which move along the attachment line. This instability occurs for lower Reynolds numbers than is the case in the absence of a water layer.

We also investigate the instability of inviscid stationary modes. We calculate the effective wavenumber and orientation of the stationary disturbance when the fluids have identical physical properties. Using perturbation methods we obtain corrections due to a small stratification in viscosity, thus quantifying the interfacial effects. Our analytical results are in agreement with the numerical solution which we obtain for arbitrary fluid properties.

*The second author's research was supported by the National Aeronautics and Space Administration under NASA Contract No. NAS1-19480 while the author was in residence at the Institute for Computer Applications in Science and Engineering (ICASE), M/S 132c, NASA Langley Research Center, Hampton, VA, 23681-0001. This work was also supported by the Science and Engineering Research Council.



1 Introduction

The laminar flow over an infinitely long cylinder can become unstable as the Reynolds number increases. When the axis of the cylinder is inclined at an angle relative to the free stream, the developed three-dimensional mean flow can be separated into two components, one lying in a plane normal to the axis, the other parallel to the generators of the cylinder. Small amplitude disturbances to the flow can take the form of Tollmien-Schlichting waves, crossflow vortices, or Taylor Görtler vortices (if there are regions of concave curvature).

The flow over a swept cylinder has been studied in detail, primarily because of its important application and relevance to the boundary layer which forms on the surface of swept-wing. Understanding the mechanisms of flow instability for this model, can lead to significant development of methods used in the reduction of laminar to turbulent flow transition.

The model we use in this paper, is a classical Heimenz stagnation point flow, together with a superposed non-zero component of velocity parallel to the axis. The equations governing the flow are written in cartesian coordinates (see Prandtl [24]). The velocity component parallel to the axis of the cylinder can be determined independently by decoupling the momentum equations. The relevance of this solution to the realistic flow which forms on a swept wing is discussed in section 3.2.

Using linear stability theory, Hall, Malik & Poll [12] calculated critical Reynolds numbers for an infinite swept attachment line boundary layer. They examined the effects of both suction and blowing at the boundary. Surface suction can be used as an effective laminar flow control since it thins the viscous boundary layer and leads to a reduction in the local Reynolds number. In addition, the vorticity distribution is modified so that a more stable flow is established. Hall *et al.* obtained numerical and asymptotic results which clearly illustrate that even a small amount of suction can significantly stabilize the flow. Their results are in excellent agreement with the experimental investigations of Gaster [8], Pfenninger & Bacon [21] and Poll [22],[23]. These authors investigated the stability of the attachment lines on swept wings and swept cylinders to small disturbances of naturally occurring frequencies.

In 1986, Hall & Malik [11] extended their linear stability results to include the non-linear regime. The weakly nonlinear stability of this flow was examined using a Stuart-Watson expansion procedure. The primary motivation was to explain why experimental observations all correspond to modes near the lower branch of the neutral curve. Hall & Malik showed that apart from a small region near the critical Reynolds number, finite amplitude solutions bifurcate from the upper branch when the Reynolds number is below the neutrally stable value elucidated from a linear stability analysis (subcritical). Equilibrium states associated with the upper branch are not therefore observed experimentally, since these solutions are unstable.

In addition these authors used numerical methods to integrate the time-dependent

Navier-stokes equations which govern the fully nonlinear problem. Using a Fourier-Chebyshev spectral method Hall & Malik found the existence of supercritical finite-amplitude states near the lower branch of the neutral curve.

Recently there has been much interest in the aerodynamic penalties associated with adverse weather conditions on aircraft flight. In a review of recent studies into the effects of heavy rain during take-off and landing, Dunham, Dunham & Bezos [6] showed that short duration, heavy precipitation can result in a premature loss of lift of 15 – 20% and an increase in drag coefficient of up to 20%.

The exact mechanisms which cause these significant flight characteristics are not clearly understood. One possible explanation is that the presence of a thin water layer on the wing surface leads to a loss in stability of the laminar air flow. The growth of small disturbances in either the water or air layers could then promote transition. In this paper, we consider the interfacial stability of an infinite swept attachment line boundary layer consisting of a water layer and air flow above. The interface which separates these two viscous fluids may be susceptible to instability of the form first discovered by Yih [28]. Yih showed that long wavelength disturbances to plane Couette and plane Poiseuille flow of two immiscible liquids of different viscosities and densities can lead to a mode of instability which is due entirely to the discontinuity in the fluid properties. The growth rate of the interfacial deflection approaches zero asymptotically as the viscosities of the two fluids become equal, hence this mode is not operational for a single fluid. The relative depths of the fluid layers is a crucial factor in characterizing the flow instability.

Since Yih's work, there have been numerous investigations of interfacial instability which have important applications in many situations. For example, Blennerhassett [2] showed that the interfacial instability of air flow over water can lead to the generation of finite amplitude waves. The effects of surface tension and gravity have been quantified in a variety of numerical and analytical studies which consider short, moderate and long wavelength perturbations to the basic state (see Hooper & Boyd [15], [16], Hooper [14] and Renardy [25]).

In this paper we quantify the effect of interfacial stability on the air flow over a swept wing during heavy rainfall. Using the model described above we obtain an exact solution of the Navier-Stokes equations which govern the viscous two-phase flow. The domain consists of two separate regions. In the upper region of the boundary layer we have a two-dimensional stagnation point air flow together with a superposed crossflow component (due to the angle of inclination to the free-stream). Below the air, is a layer of water which can enter or leave the boundary layer through a porous plate below.

In Section 2 we calculate the exact solution for the basic state. In Section 3 we investigate the linear temporal stability of the flow to disturbances when the Reynolds number is finite. Since the basic flow is an exact solution of the Navier-Stokes equations, we are able to calculate the critical Reynolds numbers for a disturbance of arbitrary wavelength. By varying the viscosity and density ratios of the two fluids, we determine the stabilizing/destabilizing effect of the interfacial mode. We find that for both wall

blowing and suction, the interface significantly destabilizes the flow. More precisely, we show that the flow is susceptible to traveling wave disturbances at lower Reynolds numbers than is the case for flow in the absence of a water layer.

The inviscid stability of a three-dimensional boundary layer was first comprehensively studied by Gregory, Stuart & Walker [9]. These authors used both experimental and theoretical techniques to develop an extensive understanding of the stability of the flow which forms on a rotating disk, and their findings have important consequences for the stability of general three-dimensional boundary layers.

The experimental work of Gregory *et al.* [9] was based on the china-clay evaporation technique. They observed a regularly spaced pattern of equiangular spiral vortices which remain stationary, relative to the rotating disk. The angle made between these vortices and the radius vector of the disk was found to be in excellent agreement with the inviscid theory developed by Stuart. The prediction for the number of vortices was not, however, in such close agreement with the experimental observations. This discrepancy was attributed to viscous effects, and was resolved later when Hall [10] used a self-consistent asymptotic theory to study the problem. Hall extended the inviscid analysis of Gregory *et al.* taking into account non-parallel flow effects. His results were consistent with those obtained by the parallel flow numerical investigation of Malik [19], although this approximation is not valid at finite Reynolds numbers. In this work, Malik obtained a neutral curve for these stationary disturbances, and he also found a second stationary mode of instability which had been discovered experimentally by Federov, Plavnik, Prokhorov & Zhukhovitskii [7].

In Section 4 we consider the inviscid stationary modes of instability of the flow described in Section 2. Using numerical methods we calculate the eigenvalues and eigenfunctions when the fluid properties are equated. We then compare these with our calculations for air flow over a water layer. In addition, we use asymptotic techniques for the case when the fluids have similar viscosities. This gives a useful method for quantifying the onset of the interfacial instability. We find that stationary modes are susceptible to interfacial effects due to a discontinuity in the shear stress at the unperturbed interface position. In Section 5 we draw some conclusions.

2 Formulation of the Basic State

We consider the three-dimensional flow of two viscous, incompressible fluids above an infinite, horizontal, porous flat plate. The two fluids are immiscible and occupy separate regions. The upper fluid velocity is denoted by U_1^* and the lower fluid velocity by U_2^* . We use cartesian coordinates, with the (x^*, z^*) axes lying in a plane parallel to the plate which is positioned at a vertical height $y^* = -d$. The porous plate allows us to model either the case of wall blowing, where there is a flux of fluid into the lower region, or wall suction where the normal velocity at the plate is in the $-y^*$ direction. The streamlines in the (x^*, y^*) plane extend to infinity, the volume of fluid in each layer is then assumed to be constant and the interface between the two fluids is located at a

height $y^* = \delta\eta^*(z^*, t^*)$ where η^* is an unknown function, and δ is constant.

The upper and lower fluids have viscosities μ_1, μ_2 and densities ρ_1 and ρ_2 respectively, so that the kinematic viscosities are $\nu_1 (= \mu_1/\rho_1)$ and $\nu_2 (= \mu_2/\rho_2)$. We define the fluid velocity and pressure to be

$$\mathbf{U}_{j=1,2}^* = [x^*U_j^*(y^*, z^*, t^*), V_j^*(y^*, z^*, t^*), W_j^*(y^*, z^*, t^*)], \quad (1)$$

$$P_{j=1,2}^* = P_j^*(y^*, z^*, t^*), \quad (2)$$

and the Navier-Stokes equations are

$$\frac{\partial U_j^*}{\partial t^*} + U_j^{*2} + V_j^* \frac{\partial U_j^*}{\partial y^*} + W_j^* \frac{\partial U_j^*}{\partial z^*} + \frac{1}{x^* \rho_j} \frac{\partial P_j^*}{\partial x^*} = \nu_j \nabla^2 U_j^*, \quad (3a)$$

$$\frac{\partial V_j^*}{\partial t^*} + V_j^* \frac{\partial V_j^*}{\partial y^*} + W_j^* \frac{\partial V_j^*}{\partial z^*} + \frac{\partial P_j^*}{\rho_j \partial y^*} = \nu_j \nabla^2 V_j^*, \quad (3b)$$

$$\frac{\partial W_j^*}{\partial t^*} + V_j^* \frac{\partial W_j^*}{\partial y^*} + W_j^* \frac{\partial W_j^*}{\partial z^*} + \frac{\partial P_j^*}{\rho_j \partial z^*} = \nu_j \nabla^2 W_j^*, \quad (3c)$$

$$U_j^* + \frac{\partial V_j^*}{\partial y^*} + \frac{\partial W_j^*}{\partial z^*} = 0. \quad (3d)$$

The Laplacian is defined as

$$\nabla^2(\cdot) \equiv \frac{\partial^2(\cdot)}{\partial y^{*2}} + \frac{\partial^2(\cdot)}{\partial z^{*2}},$$

and the subscript denotes the upper and lower fluids respectively. The form of the velocity and pressure fields (1) and (2) corresponds to an exact solution of the momentum equations (3a-d), hence it is not necessary to make the boundary layer approximation when deriving the basic flow, and in the subsequent analysis.

The tangential velocity of the lower fluid satisfies the no-slip boundary condition $(x^*U_2^*, W_2^*)(y^* = -d) = (0, 0)$. The velocity perpendicular to the plate is prescribed by $V_2^*(y^* = -d) = V_0$, where $V_0 > 0$ corresponds to blowing, and $V_0 < 0$ represents suction at the wall.

The conditions far from the plate are given by

$$U_1^* \rightarrow \frac{U_0}{l}, \quad W_1^* \rightarrow W_0, \quad \text{as } y \rightarrow \infty.$$

Define $\Delta = (\mu_1 l / U_0 \rho_1)^{\frac{1}{2}}$, l is a length-scale in the streamwise direction and the velocity-scale is W_0 , so that

$$\begin{aligned} (x^*, y^*, z^*) &= \Delta (X, Y, Z), \\ (x^*U^*, V^*, W^*) &= W_0 (XU, V, W). \end{aligned}$$

Time t^* , and pressure $P_{j=1,2}^*$ are made dimensionless by Δ/W_0 and $\rho_1 W_0^2$ respectively. We also define the following non-dimensional parameters

$$\begin{aligned} R_e &= \frac{W_0 \Delta \rho_1}{\mu_1}, & \kappa &= \frac{V_0 R_e}{W_0}, & D &= \frac{d}{\Delta}, \\ m &= \frac{\mu_2}{\mu_1}, & \rho &= \frac{\rho_2}{\rho_1}, & \nu &= \frac{\nu_2}{\nu_1}. \end{aligned}$$

R_e is the Reynolds number, κ is the dimensionless normal velocity at the wall, and D is the depth of the lower fluid, scaled with respect to the length Δ . The parameters m , ρ and ν are the viscosity, density and kinematic viscosity ratios respectively.

At the interface between the upper and lower fluid layers, both velocity and tangential stress are continuous. The normal stress exhibits a discontinuous jump due to the effect of surface tension σ . Using the notation

$$[(\cdot)_j]_1^2 \equiv (\cdot)_2 - (\cdot)_1,$$

we obtain the following conditions which are applied at the non-dimensional interface position $Y = \delta \tilde{\eta}$

$$\begin{aligned} [U_j]_1^2 &= 0, & [V_j]_1^2 &= 0, & [W_j]_1^2 &= 0, \\ \left[2\mu_j \delta \frac{\partial \tilde{\eta}}{\partial Z} \left(\frac{\partial V_j}{\partial Y} - \frac{\partial W_j}{\partial Z} \right) + \mu_j \left(1 - \left(\delta \frac{\partial \tilde{\eta}}{\partial Z} \right)^2 \right) \left(\frac{\partial W_j}{\partial Y} + \frac{\partial V_j}{\partial Z} \right) \right]_1^2 &= 0, \\ \left[\mu_j \frac{\partial U_j}{\partial Y} - \delta \mu_j \frac{\partial \tilde{\eta}}{\partial Z} \frac{\partial U_j}{\partial Z} \right]_1^2 &= 0, \\ \left[\mu_1 P_j \left(1 + \left(\delta \frac{\partial \tilde{\eta}}{\partial Z} \right)^2 \right) - \frac{2\mu_j}{R_e} \frac{\partial V_j}{\partial Y} + \frac{2\mu_j \delta}{R_e} \frac{\partial \tilde{\eta}}{\partial Z} \left(\frac{\partial W_j}{\partial Y} + \frac{\partial V_j}{\partial Z} \right) - \right. \\ &\quad \left. \frac{2\mu_j}{R_e} \frac{\partial W_j}{\partial Z} \left(\delta \frac{\partial \tilde{\eta}}{\partial Z} \right)^2 \right]_1^2 - \mu_1 J \delta \frac{\partial^2 \tilde{\eta}}{\partial Z^2} \left(1 + \left(\delta \frac{\partial \tilde{\eta}}{\partial Z} \right)^2 \right)^{-\frac{1}{2}} &= 0, \end{aligned}$$

where $J = \sigma/\rho_1 W_0^2 \Delta$ is the non-dimensional surface tension coefficient. In addition, we must satisfy the kinematic condition

$$\frac{D}{Dt} (Y - \delta \tilde{\eta}) = 0 \quad \Rightarrow \quad V_{j=1,2} = \delta \left(\frac{\partial \tilde{\eta}}{\partial t} + W_j \frac{\partial \tilde{\eta}}{\partial Z} \right), \quad \text{at } Y = \delta \tilde{\eta}. \quad (4)$$

Let us now regard the flow in each region as a small perturbation of the basic state, so that with $\delta \ll 1$,

$$(XU, V, W)_{j=1,2} = \left(\frac{X\bar{U}}{R_e}, \frac{\bar{V}}{R_e}, \bar{W} \right)_j (Y) + \delta (X\tilde{U}, \tilde{V}, \tilde{W})_j (Y, Z, t), \quad (5)$$

and the pressure is written in the form

$$P_{j=1,2} = -\frac{1}{2} \left(\frac{U_0 X \Delta}{l W_0} \right)^2 + \frac{\bar{P}_j}{R_c^2} + \delta \bar{P}_j.$$

Note that since $\delta \ll 1$, the unperturbed interface position is $Y = 0$. We substitute this flow into the Navier-Stokes equations (3a-d), and take the limit $\delta \rightarrow 0$ to yield the following system of equations which determine the basic state.

$$\bar{U}_1 + \bar{V}'_1 = 0, \quad (6a)$$

$$\bar{V}_1''' + (\bar{V}'_1)^2 - \bar{V}_1 \bar{V}_1'' - 1 = 0, \quad (6b)$$

$$\bar{W}_1'' - \bar{V}_1 \bar{W}'_1 = 0, \quad (6c)$$

$$\bar{U}_2 + \bar{V}'_2 = 0, \quad (7a)$$

$$\nu \bar{V}_2''' + (\bar{V}'_2)^2 - \bar{V}_2 \bar{V}_2'' - \rho^{-1} = 0, \quad (7b)$$

$$\nu \bar{W}_2'' - \bar{V}_2 \bar{W}'_2 = 0. \quad (7c)$$

The boundary and interface conditions become

$$\bar{U}_2(-D) = \bar{W}_2(-D) = 0, \quad \bar{V}_2(-D) = \kappa, \quad (8)$$

$$\bar{U}_1(\infty) = 1, \quad \bar{W}_1(\infty) = 1, \quad (9)$$

$$\bar{U}_2(0) = \bar{U}_1(0), \quad \bar{W}_2(0) = \bar{W}_1(0), \quad (10)$$

$$\bar{V}_2(0) = 0, \quad \bar{V}_1(0) = 0, \quad (11)$$

$$m \bar{U}'_2(0) = \bar{U}'_1(0), \quad m \bar{W}'_2(0) = \bar{W}'_1(0), \quad (12)$$

where $(\cdot)'$ denotes differentiation with respect to the normal coordinate Y .

Before finding a solution to the above equations, we firstly analyze the behavior of the basic flow as $Y \rightarrow \infty$. For large Y , the asymptotic form for \bar{V}_1 and \bar{W}_1 can be expressed as

$$\bar{V}_1 = -\xi + \Gamma_0 \chi, \quad \chi \ll 1, \quad (13a)$$

$$\bar{W}_1 = 1 - \lambda_0 \left[\frac{1}{\xi} + \Sigma \right] \exp\left(-\frac{\xi^2}{2}\right), \quad (13b)$$

$$\Sigma = -\frac{1}{\xi^3} + \frac{3}{\xi^5} - \frac{15}{\xi^7} + \dots + \frac{(-1)^n (2n-1)(2n-3)\dots 3.1}{\xi^{2n+1}} + \dots, \quad (13c)$$

where $\xi = Y + \tau$, $\chi = \chi(\xi)$ and τ, Γ_0 are constants (see Rosenhead, Chapters V and VIII [26]). After substitution into equations (6a-7c) we integrate with respect to Y to obtain the following asymptotic form for χ as $Y \rightarrow \infty$

$$\chi = \frac{1}{3} [\chi'' + \xi \chi'],$$

$$\chi' = \frac{1}{2} \left[\frac{1}{\xi} + \Sigma + \xi^2 \Sigma \right] \exp\left(-\frac{\xi^2}{2}\right),$$

$$\chi'' = \xi \Sigma \exp\left(-\frac{\xi^2}{2}\right).$$

Having derived expressions (13a-c) above, we obtain numerical values for the basic flow using a fourth order Runge-Kutta scheme to integrate equations (6a-7c) with respect to Y , from Y_∞ to $-D$, where Y_∞ is an arbitrarily large number. Initial values for τ and Γ_0 were chosen, and then improved in order to satisfy the no-slip conditions (8) at the wall, and the kinematic condition (11) to within a specified tolerance. For the case of a single fluid, ($m = 1 = \rho$) a step length of 1.0×10^{-5} gave excellent agreement with the results published in Rosenhead [26] (chapter V on page 232). To model the flow of air over water we obtain a solution of the system governing the basic state using the viscosity and density ratios shown in Table 1 (see Batchelor [1]). The basic flow profiles \bar{U} , \bar{V} and \bar{W} are illustrated in Figures 1(a) and 1(b) for blowing and suction respectively. Each figure shows the velocity components with depth of water $D = 0.5, 1, 2, 3$ and 4 .

Given a constant depth of water D , we calculate the corresponding blowing or suction κ at the porous plate, the results are illustrated in Figure 2(a). For the case $\kappa > 0$ (wall blowing), we see that the velocity at the plate increases almost linearly with depth of lower fluid D . With suction at the wall, the relationship is more involved.

Before we examine the flow stability for both cases, we firstly discuss the basic flow properties. The way in which a constant depth of lower fluid is maintained may not be immediately obvious, especially in the case of wall suction. This is made clear by an analysis of the streamlines. By integrating $X\bar{U}_1$ and $X\bar{U}_2$ with respect to the normal coordinate Y we obtain Figures 2(b) and 2(c) which show the streamlines at a particular location along the spanwise direction. We have chosen representative examples: $\kappa = 0.04$, $D = 2.0$; and $\kappa = -0.12$, $D = 1.0$. With a positive normal velocity at the plate, fluid enters the lower layer and moves towards a stagnation point at $X = 0 = Y$. The flow in the upper layer is directed towards the plate, in the $-Y$ direction. This is a classical Heimenz stagnation point boundary layer solution together with an imposed crossflow \bar{W} acting in the spanwise direction.

For the case of suction, two stagnation points occur. There is a region above the interface (positioned at $Y = 0$), where $\bar{V}_1 > 0$ and $\bar{U}_1 < 0$ as shown by the velocity profiles in Figures 1(a) and 1(b). The depth of this region increases with the suction, so that with a depth $D = 1.61$ and $\kappa = -0.1022$ (suction is a minimum here) the two stagnation points almost coincide. For $0 > Y > -D$ the flow is towards the porous plate where the tangential velocity satisfies the no-slip condition. At $Y = 0$ the kinematic condition (11) is imposed to prevent the transfer of fluid particles across the unperturbed interface (since the fluids are immiscible). The tangential velocity is continuous here although the gradient is discontinuous due to the viscosity ratio $m \neq 1$ (namely equation (12)).

The relationship between κ and D shown in Figure 2(a) can be analyzed as follows. For $\kappa \gg 1$ and $Y \sim O(1)$ equations (6a-7c) yield solutions

$$\begin{aligned}\bar{U}_2 &= \frac{Y + D}{\rho\kappa} + \dots, \\ \bar{V}_2 &= \kappa - \frac{(Y + D)^2}{2\rho\kappa} + \dots,\end{aligned}$$

$$\bar{W}_2 = 1 - \exp\left[\frac{\rho(Y+D)\kappa}{m}\right] \dots$$

Imposing the kinematic condition $\bar{V}_2(Y=0) = 0$ yields

$$D = (2\rho)^{\frac{1}{2}} \kappa \simeq 40.4\kappa,$$

which is in excellent agreement with the numerical values presented in Figure 2(a).

For wall suction, the limit $\kappa \rightarrow -\infty$ corresponds to the singularity in the depth D . As $\kappa \rightarrow -\infty$, we see that $D \ll 1$, and momentum conservation in the spanwise direction suggests the use of the scaled variable

$$\zeta = \frac{(Y+D)|\kappa|\rho}{m},$$

so that for $\zeta \sim O(1)$

$$\bar{V}_2 \sim \kappa - \frac{m^2 \zeta^2}{2\rho^3 \kappa^3} + \dots$$

We now investigate the stability of the basic flow calculated above. We consider two distinct cases of physical interest: in Section 3 we look at the temporal stability of the flow when the Reynolds number is finite; in Section 4 we investigate inviscid stationary modes at high Reynolds numbers.

3 Viscous Modes

The aim of this work is to quantify the effect of the interfacial viscosity and density stratification upon the stability of the basic flow when viscous effects are included. For a single fluid, linear and nonlinear stability analyses have shown that unstable disturbances propagate along the attachment line. The three-dimensional basic flow is independent of the spanwise coordinate Z (and is therefore an entirely parallel flow). Hence we employ periodic boundary conditions (in that direction) on the flow disturbances. Such methods cannot of course be used for flows which are spatially growing (non-parallel) such as the Blasius boundary layer which forms on a flat plate.

The flow described in the previous section is a first approximation to the boundary layer which forms on a swept wing, and is used to gain an understanding of the instability mechanisms which lead to transition from laminar to turbulent flow. To this end, we consider a convective instability in which disturbances propagate away from their source. For a discussion of absolute and convective instabilities the reader is referred to the review paper by Heurte & Monkewitz [13]. Following the work by Hall, Malik & Poll [12], we consider the temporal development of small amplitude perturbations having a normal mode expansion

$$(\tilde{\eta}, \tilde{P}_{j=1,2}) = (\eta, P_{j=1,2}) \exp(ik[Z - ct]), \quad (14a)$$

$$(\tilde{U}, \tilde{V}, \tilde{W})_{j=1,2} = (U, V, W)_j \exp(ik[Z - ct]). \quad (14b)$$

These perturbations are spatially periodic with wavelength $2\pi/k$ and with speed c .

The system of equations which govern the linearized stability problem are given by substituting equations (5 and 14a-b) into the Navier-Stokes equations (3a-d) and associated boundary/interface conditions and then discarding terms which are $o(\delta)$. We obtain

$$L_1^2(U_1) = 2\bar{U}_1 U_1 + \bar{U}'_1 V_1 + \bar{V}_1 U'_1, \quad (15a)$$

$$L_1^2(V_1) = R_e P'_1 + \bar{V}'_1 V_1 + \bar{V}_1 V'_1, \quad (15b)$$

$$L_1^2(W_1) = ikR_e P_1 + \bar{V}_1 W'_1 + R_e \bar{W}'_1 V_1, \quad (15c)$$

$$U_1 + V'_1 + ikW_1 = 0, \quad (15d)$$

$$L_2^2(U_2) = 2\bar{U}_2 U_2 + \bar{U}'_2 V_2 + \bar{V}_2 U'_2, \quad (15e)$$

$$L_2^2(V_2) = \frac{R_e P'_2}{\rho} + \bar{V}'_2 V_2 + \bar{V}_2 V'_2, \quad (15f)$$

$$L_2^2(W_2) = \frac{ikR_e P_2}{\rho} + \bar{V}_2 W'_2 + R_e \bar{W}'_2 V_2, \quad (15g)$$

$$U_2 + V'_2 + ikW_2 = 0, \quad (15h)$$

where

$$L_1^2(\cdot) \equiv (\cdot)'' - k^2(\cdot) - ikR_e(\bar{W}_1 - c)(\cdot),$$

$$L_2^2(\cdot) \equiv \nu(\cdot)'' - \nu k^2(\cdot) - ikR_e(\bar{W}_2 - c)(\cdot).$$

The velocity perturbation to the lower fluid satisfies the no-slip condition at the plate, and the conditions at the interface are obtained by expanding the velocity and stress components as Taylor expansions about the unperturbed interface position $Y = 0$.

$$\begin{aligned} U_2 + \eta \frac{\bar{U}'_2}{R_e} &= U_1 + \eta \frac{\bar{U}'_1}{R_e}, \\ V_2 + \eta \frac{\bar{V}'_2}{R_e} &= V_1 + \eta \frac{\bar{V}'_1}{R_e}, \\ W_2 + \eta \bar{W}'_2 &= W_1 + \eta \bar{W}'_1, \\ m \left(\frac{2ik\eta \bar{V}'_2}{R_e} + \bar{W}_2'' \eta + ikV_2 + W_2' \right) &= \frac{2ik\eta \bar{V}'_1}{R_e} + \bar{W}_1'' \eta + ikV_1 + W_1', \\ m \left(\frac{\eta \bar{U}_2''}{R_e} + U_2' \right) &= \frac{\eta \bar{U}_1''}{R_e} + U_1', \\ P_2 + \frac{\eta \bar{P}'_2}{R_e^2} - m \left(\frac{2\eta \bar{V}_2''}{R_e^2} + \frac{2V_2'}{R_e} \right) &= P_1 + \frac{\eta \bar{P}'_1}{R_e^2} - \frac{2\eta \bar{V}_1''}{R_e^2} - \frac{2V_1'}{R_e} \\ &\quad - k^2 \eta J. \end{aligned}$$

The kinematic condition (4) becomes

$$\eta = \frac{R_e V_1}{ikR_e(\bar{W}_1 - c) - \bar{V}'_1}. \quad (16)$$

The upper fluid velocity U_1 must match the undisturbed flow as we move far away from the plate, we therefore require the perturbed flow to decay exponentially as Y becomes large. Hall *et al.* [12] showed that by replacing the basic flow by its asymptotic dependence for $Y \gg 1$ (equation (13a-c)), the perturbed velocity in the upper fluid has the form

$$\left. \begin{aligned} U_1 &\sim W_1 \sim \exp(-Y^2/2), \\ V_1 &\sim \exp(-kY), \end{aligned} \right\} \text{ as } Y \rightarrow \infty.$$

Equations (15a-h) govern the stability of the lower fluid and are defined on the domain $-D \leq Y \leq \delta\eta$, whilst those for the upper fluid are defined for $\delta\eta \leq Y \leq \infty$. These equations in general require a numerical solution.

For a given Reynolds number R_e , and real wavenumber k , we obtain the corresponding complex eigenvalue c . The imaginary part, denoted c_i , determines kc_i , the linear temporal growth or decay of the perturbation to the basic state. When $c_i > 0$ the flow is said to be linearly unstable and for $c_i < 0$ it is linearly stable.

3.1 Numerical Solution

Solving the stability problem by means of a standard shooting method becomes prohibitively expensive as the Reynolds number increases. The rapidly varying nature of the eigenfunctions results in a loss of independence of orthogonal solutions due to the introduction of a 'parasitic' error at each integration step. High accuracy can only be guaranteed if the step-length is made vanishingly small. These difficulties were overcome by implementing a compact fourth order finite difference scheme of the form developed by Malik, Chuang & Hussaini [20]. This method was later used by Hall *et al.* [12] to investigate the attachment line stability of a single fluid, a detailed account of the implementation of this scheme is given by these authors. The method is applicable to a set of linear first order ordinary differential equations with an equal number of boundary conditions prescribed at each end of the domain. Our solution strategy is as follows, the equations describing the stability problem above have been formulated as two sixth order ordinary differential systems with coupled interface conditions. We define two column vectors

$$\psi_{j=1,2} = (\phi_{1j}, \phi_{2j}, \phi_{3j}, \phi_{4j}, \phi_{5j}, \phi_{6j})^T = (U_j, V_j, W_j, P_j, U'_j, W'_j)^T,$$

where, as before, the subscript $j = 1, 2$ denotes the upper and lower fluids respectively, and T denotes the transpose of the vector. The equations can now be formulated as twelve first order linear differential equations such that

$$\begin{aligned} \frac{d\phi_{lj}}{dY} &= \sum_{n=1}^6 (a_{ln})_j \phi_{nj}, & l = 1, 2, \dots, 6, \quad j = 1, 2, \\ \frac{d^2\phi_{lj}}{dY^2} &= \sum_{n=1}^6 (b_{ln})_j \phi_{nj}, & l = 1, 2, \dots, 6, \quad j = 1, 2, \end{aligned}$$

$$b_{ln} = \frac{da_{ln}}{dY} + \sum_{p=1}^6 a_{lp} a_{pn}.$$

Defining $f_2 = k^2 m \rho^{-1} + ik(\overline{W}_2 - c)R_e$, we find that the 6×6 matrix $(a_{ln})_2$ has the following non-zero elements

$$\begin{aligned} (a_{15})_2 &= 1, & (a_{21})_2 &= -1, & (a_{23})_2 &= -ik, \\ (a_{36})_2 &= 1, & (a_{41})_2 &= \rho \overline{V}_2 R_e^{-1}, & (a_{42})_2 &= -\rho R_e^{-1} (f_2 + \overline{V}'_2), \\ (a_{43})_2 &= ik \rho \overline{V}_2 R_e^{-1}, & (a_{45})_2 &= -m R_e^{-1}, & (a_{46})_2 &= -ik m R_e^{-1}, \\ (a_{51})_2 &= \rho m^{-1} (f_2 + 2\overline{U}_2), & (a_{52})_2 &= \rho m^{-1} \overline{U}'_2, & (a_{55})_2 &= \rho m^{-1} \overline{V}_2, \\ (a_{62})_2 &= \rho m^{-1} R_e \overline{W}'_2, & (a_{63})_2 &= \rho m^{-1} f_2, & (a_{64})_2 &= ik m^{-1} R_e, \\ (a_{66})_2 &= \rho m^{-1} \overline{V}_2. \end{aligned}$$

The corresponding matrix $(a_{ln})_1$ is obtained from the above by setting m and ρ to unity. The numerical method is then derived using the Euler-Maclaurin formulae

$$\psi_j^n = (\phi_1^n, \phi_2^n, \dots, \phi_6^n)_j^T = \psi_j(Y_n), \quad (17)$$

$$h_n = Y_n - Y_{n-1}, \quad (18)$$

$$\begin{aligned} \psi_j^n - \psi_j^{n-1} &= \frac{h_n}{2} \left(\frac{d\psi_j^n}{dY} + \frac{d\psi_j^{n-1}}{dY} \right) - \frac{h_n^2}{12} \left(\frac{d^2\psi_j^n}{dY^2} + \frac{d^2\psi_j^{n-1}}{dY^2} \right) \\ &+ O(h_n^5). \end{aligned} \quad (19)$$

The nodes are distributed so that in the upper fluid

$$\begin{aligned} g_1 &= \frac{Y_\infty + L_1}{Y_\infty}, \\ Y_n &= \frac{L_1(n-1)}{Ng_1 - (n-1)}, \quad n = 1, 2, \dots, N+1, \end{aligned}$$

where $N+1$ is the total number of nodes, Y_∞ is the edge of the boundary layer, and the scaling parameter chosen such that $\overline{W}_1(L_1/2) = 0.5$. Malik *et al.* [20] showed that such a choice of L_1 yielded maximum accuracy. Similarly in the lower fluid layer

$$\begin{aligned} g_2 &= \frac{D + L_2}{D}, \\ Y_n &= \frac{L_2(n-1)}{Mg_2 - (n-1)}, \quad n = 1, 2, \dots, M+1, \end{aligned}$$

such that $\overline{W}_2(L_2/2) = \kappa/2$.

For both the upper and lower fluids, equation (19) becomes

$$\begin{aligned} \phi_l^n - \phi_l^{n-1} - \frac{h_n}{2} \sum_{p=1}^6 a_{lp}^n \phi_p^n + \frac{h_n^2}{12} \sum_{p=1}^6 b_{lp}^n \phi_p^n - \frac{h_n}{2} \sum_{p=1}^6 a_{lp}^{n-1} \phi_p^{n-1} \\ - \frac{h_n^2}{12} \sum_{p=1}^6 b_{lp}^{n-1} \phi_p^{n-1} = 0, \quad n = 2, \dots, N+1, \quad l = 1, 2, \dots, 6, \end{aligned}$$

which may be written in block-tridiagonal form so that the solution across each fluid layer is obtained efficiently. To this end, we introduce independent inhomogeneous velocity components at the interface, and equation (16) gives the corresponding interfacial deformation η . We find a suitable linear combination of these three independent solutions, so that for a specified lower fluid depth D , Reynolds number R_e , and wavenumber k , the conditions of stress continuity at $Y = 0$ are satisfied, and the complex eigenvalue c is obtained. When we equate the densities and viscosities of the two fluids, the numerical scheme yields exactly the eigenvalues found by Hall *et al.* [12]. When the imaginary part of the eigenvalue c is zero, there is no temporal growth or decay of the disturbance to the basic state, and the flow is neutrally stable. We then iterate to obtain neutral disturbances characterized by $c_i = 0$. Figure 3 shows four neutral curves: an impermeable plate with $\kappa = 0$; wall blowing with $\kappa = 0.137$ and $\kappa = 0.4$; and with suction $\kappa = -0.1$. Inside the curves, c has a positive imaginary part and the perturbations (U_j, V_j, W_j, η) grow exponentially in time.

The eigenvectors given in Figures 4(a)-4(c) have been normalized so that the maximum magnitude of each velocity component is unity. Figure 4(a) shows both real and imaginary parts of the three velocity components when the fluid viscosities and densities are equal. It has been verified that these (and other) eigenvectors are the same as those published by Hall *et al.* [12]. In Figures 4(b,c) we clearly see the discontinuities in the velocity and shear stress at the unperturbed interface position $Y = 0$ which is due to the difference in viscosities and densities of the air and water layers. It is this discontinuity which plays an important role in altering the stability of the flow. The neutral curves for air flow over water are drawn in the (k, R_e) plane. Figures 5(a) and 5(b) correspond to cases of wall blowing and suction respectively. These results are discussed in the following section.

3.2 Discussion

Before we discuss the novel results of our numerical calculations we firstly comment on the relevance of the exact solution, to the actual flow which forms on swept wings and swept cylinders. The boundary layer flow over a yawed, infinitely long cylinder was investigated and by Sears [27], (and in the unpublished work of Schubart). Their work is discussed in Chapter VIII of Rosenhead [26]. Using cartesian coordinates, the velocity components are expanded in powers of x/l , where x is the distance measured along the surface perpendicular to the cylinder generators and l is an appropriate length-scale. Close to the leading edge of the cylinder, and for a sufficiently large radius of curvature, the effects of curvature can be assumed negligible. The leading order solution (higher powers of x/l are ignored) reduces identically to the flow which we have calculated in Section 2. The accuracy of this approximation depends, therefore, on the geometry of the cylinder or swept wing. Results using this model will be most relevant to wing sections which have a flat nose.

Since the basic flow is only a first approximation to the flow near the attachment

line, asymptotic methods based on a high Reynolds number assumption must be used to investigate the practical problem.

It is worth making a few comments about the dimensional quantities in this problem. The velocity components in each fluid are made dimensionless using the spanwise free stream speed W_0 . The length scale $\Delta = (\mu_1 l / U_0 \rho_1)^{1/2}$ is based on the streamwise velocity U_0 and length l . In a practical situation then, the density and viscosity of the water and air would be fixed parameters (given in Table 1), as would the normal velocity at the surface, V_0 . We have shown in the previous section, that with a given value of κ (the dimensionless parameter quantifying the amount of blowing or suction) we can calculate the corresponding nondimensional depth of water D . The actual height of the interface is therefore not a free parameter and is determined by the dimensional speeds U_0, V_0, W_0 so that Δ is known and hence the depth $d = D/\Delta$ can be deduced.

The results of our linear stability analysis are in excellent agreement with those of Hall *et al.* [12] when the fluid properties are matched across the interface (see Figures 3 and 4). For a given wavenumber k , we calculate the Reynolds number which gives neutral stability. In the absence of suction or blowing, our numerical scheme yields the critical values $(R_e)_c = 583.14$, $k_c = 0.2881$ in agreement with [12]. For $R_e < (R_e)_c$ disturbances are damped and decay to zero exponentially in time. At points inside the neutral curve, the boundary layer is susceptible to traveling wave instabilities which propagate along the attachment line.

An additional check on the numerical results is given by halving the step-size used in the finite difference calculations. Table 2 illustrates the accuracy of the scheme as the number of mesh points is doubled.

For a single fluid (corresponding to the case when the fluid properties are matched), suction and blowing have opposite effects on the flow stability. As $\kappa (> 0)$ is increased, the critical Reynolds number decreases, and the flow is linearly destabilized by a smaller crossflow velocity. See for example, the neutral curves in Figure 3 with $\kappa = 0.137$ and $\kappa = 0.4$, and the results given by Hall *et al.* [12]. Suction however, can be a useful laminar flow control. The stabilization induced by negative normal velocity at the surface increases the critical Reynolds number, as illustrated by the representative case $\kappa = -0.1$ in Figure 3. We have also calculated neutral stability results for other values of κ (namely $\kappa = -0.15, -0.2, -0.25$). In each of these cases the flow is stable over the range $0 < R_e < 1500$ illustrated in Figure 3. The asymptotic results of Hall *et al.* show that as $\kappa \rightarrow -\infty$, $(R_e)_c$ can be made arbitrarily large. This however, does not take into account the effects of nonlinearity. Hall & Malik [11] showed that solutions bifurcate subcritically from the upper branch of the neutral curve. The linearly stabilizing role of suction may therefore be destroyed by nonlinearity and transition may be enhanced by the unstable nonlinear modes.

Upon introducing a viscosity and density difference across the interface, the results of the linear stability analysis are significantly altered. For the flow of air over water (the fluid properties are given in Table 1), we have obtained results in the case of both blowing and suction at the wall. With a positive normal velocity at the porous plate,

we have chosen the representative cases: $\kappa = 0.027$, $\kappa = 0.04$, and $\kappa = 0.137$. These neutral curves are illustrated in Figure 5(a). To emphasize the interfacial effect, we have also included the curve (broken line) corresponding to the neutral stability of a single fluid (see Figure 3). These eigenvalues were calculated by following the results given by fluids with matched physical properties, and gradually introducing viscosity and density stratification across the interface. As m and ρ increase, the interfacial mode destabilizes the flow. For any given Reynolds number, the band of unstable wavelengths is significantly increased. The upper and lower branches of the neutral curve open out and the critical Reynolds number decreases. For example, with $\kappa = 0.137$ and $D = 6.0$, we obtain critical values $k_c = 0.499$ and $(R_e)_c = 97.81$, whereas for matched fluids the critical values corresponding to $\kappa = 0.137$ are $k_c = 0.309$ and $(R_e)_c = 315.12$.

With suction at the wall, the viscosity and density stratification across the interface also leads to destabilization and the flow is again unstable for a wider band of wavenumbers. In Figure 5(b) we show neutral curves for the cases $\kappa = -0.1026$ and $\kappa = -0.208$ which correspond to water depths $D = 1.0$ and $D = 0.5$ respectively (see Figure 2(a)). With a nondimensional water depth of 1.0, the flow is unstable even for small Reynolds numbers. Accurate numerical experiments yield critical values $(R_e)_c = 10.9887$, $k_c = 0.7946$. When the depth of the water layer is reduced (and consequently the suction parameter is increased) the critical Reynolds number increases along with the corresponding wavenumber. For example, with $D = 0.5$, we obtain $(R_e)_c = 82.0096$, $k_c = 1.4410$. It is clear then, that the usual stabilizing effect of suction at the plate, has been negated by the strongly destabilizing influence of the viscosity and density discontinuities at the interface.

A comparison between the theoretical and experimental results is difficult. As discussed earlier, in-flight calculations and wind tunnel experiments indicate that a water layer on the wing surface can have a detrimental effect on drag and lift. This is most likely due to the premature transition from laminar to turbulent flow. The interfacial traveling wave instability observed here is a possible contributing factor in this process. However, experimental investigations into the instability of superposed fluids have had limited success in quantifying the interfacial mode. Charles & Lilleleht [3] and Kao & Park [18] studied the plane Poiseuille flow of oil and water in a channel. They found instability at large Reynolds numbers which appears to arise in the water layer and causes the interface to become wavy. It is not clear that this instability is caused by the interfacial effects, it is more likely that the presence of unstable Tollmien-Schlichting waves in the less viscous fluid (water) are being observed at the interface. This mode is present at high Reynolds numbers in the absence of a second fluid and is perhaps the one observed experimentally because it has the largest growth rate. More successful experimental results have been obtained for two fluid flows in cylindrical geometries, where traveling waves are often observed at the interface. The books by Joseph and Renardy [17] give a good review of recent experimental and theoretical investigations.

The flow described here is a crude model of the actual flow of air over water on swept wings. To make qualitative comparisons between the theoretical calculations and

observable phenomenon would require a more sophisticated model in which nonlinear effects are taken into account. The methods adopted by Hall & Malik [11] could be applied to the two fluid problem in an analogous manner, although the nonlinear interfacial conditions would complicate the analysis. In addition, global methods could be used to calculate the complete set of eigenvalues, relating the interfacial effects with other modes of instability.

4 Inviscid Stationary Modes

We now investigate the stationary instability of two-phase flow of air above water over a swept wing, when the Reynolds number is large. As before, we regard the flow in each region as a small perturbation to the basic state. The normal coordinate must now be scaled on the Reynolds number, so that the fluid velocity and pressure are

$$(XU, V, W)_{j=1,2} = \left(X\bar{U}_j, R_e^{\frac{1}{2}}\bar{V}_j, \bar{W}_j \right) \left(Y R_e^{\frac{1}{2}} \right) + \delta \left(X\tilde{U}_j, \tilde{V}_j, \tilde{W}_j \right) (X, Y, Z), \quad (20)$$

$$P_{j=1,2} = -\frac{1}{2} \left(\frac{U_0 X \Delta R_e}{W_0} \right)^2 + \frac{\bar{P}_j}{R_e} + \delta \tilde{P}_j. \quad (21)$$

After substituting (20) and (21) into the non-dimensional Navier-Stokes equations and taking $\delta \rightarrow 0$, we recover the ordinary differential system (6a-7c) and boundary conditions (8-12) which determine the basic state. At next order the equations governing the linearized stability of the lower fluid layer are

$$\bar{U}_2 \frac{\partial (X^2 \tilde{U}_2)}{\partial X} + X \bar{V}_2 \frac{\partial \tilde{U}_2}{\partial Y} + X R_e^{\frac{1}{2}} \tilde{V}_2 \frac{\partial \bar{U}_2}{\partial Y} + X \bar{W}_2 \frac{\partial \tilde{U}_2}{\partial Z} + \frac{1}{\rho} \frac{\partial \tilde{P}_2}{\partial X} = \frac{\nu}{R_e} \nabla^2 (X \tilde{U}_2), \quad (22a)$$

$$X \bar{U}_2 \frac{\partial \tilde{V}_2}{\partial X} + \bar{V}_2 \frac{\partial \tilde{V}_2}{\partial Y} + \tilde{V}_2 \frac{\partial \bar{V}_2}{\partial Y} + \bar{W}_2 \frac{\partial \tilde{V}_2}{\partial Z} + \frac{R_e^{\frac{1}{2}}}{\rho} \frac{\partial \tilde{P}_2}{\partial Y} = \frac{\nu}{R_e} \nabla^2 \tilde{V}_2, \quad (22b)$$

$$X \bar{U}_2 \frac{\partial \tilde{W}_2}{\partial X} + \bar{V}_2 \frac{\partial \tilde{W}_2}{\partial Y} + R_e^{\frac{1}{2}} \tilde{V}_2 \frac{\partial \bar{W}_2}{\partial Y} + \bar{W}_2 \frac{\partial \tilde{W}_2}{\partial Z} + \frac{1}{\rho} \frac{\partial \tilde{P}_2}{\partial Z} = \frac{\nu}{R_e} \nabla^2 \tilde{W}_2, \quad (22c)$$

$$\tilde{U}_2 + \frac{\partial \tilde{U}_2}{\partial X} + R_e^{\frac{1}{2}} \frac{\partial \tilde{V}_2}{\partial Y} + \frac{\partial \tilde{W}_2}{\partial Z} = 0, \quad (22d)$$

where

$$\nabla^2 (\cdot) = \frac{\partial^2 (\cdot)}{\partial X^2} + R_e \frac{\partial (\cdot)}{\partial Y^2} + \frac{\partial^2 (\cdot)}{\partial Z^2}.$$

The corresponding equations for the upper layer are obtained by replacing ρ and ν by unity in the above equations.

Following the inviscid instability theory of Gregory *et al.* [9] we expect the perturbations to the velocity, pressure and interface to have the following modal expansions,

with wavelengths scaled on the boundary layer thickness.

$$(X\tilde{U}_j, \tilde{V}_j, \tilde{W}_j) = (XU_j, V_j, W_j)(Y) \exp\left(iR_e^{\frac{1}{2}} \left[\int^X \alpha dX + \beta Z \right]\right), \quad (23a)$$

$$(\tilde{\eta}, \tilde{P}_j) = (\eta, P_j)(Y) \exp\left(iR_e^{\frac{1}{2}} \left[\int^X \alpha dX + \beta Z \right]\right). \quad (23b)$$

In particular we consider a flow which is neutrally stable so that the wavenumbers α and β are real. As $R_e \rightarrow \infty$, an inviscid zone will develop with depth $O(R_e^{-1/2})$. This inviscid region is asymptotically matched onto a viscous wall layer so that the no-slip conditions can be satisfied at $Y = -D$. By balancing inertial and viscous terms in equations (22a-d), we see that this viscous layer has thickness $O(R_e^{-2/3})$. The inviscid perturbations U_j, V_j, W_j and P_j and wavenumbers α and β are then expanded in powers of $O(R_e^{-1/6})$

$$\begin{aligned} U_j &= U_{j0} + R_e^{-\frac{1}{6}} U_{j1} + \dots, \\ V_j &= V_{j0} + R_e^{-\frac{1}{6}} V_{j1} + \dots, \\ W_j &= W_{j0} + R_e^{-\frac{1}{6}} W_{j1} + \dots, \\ P_j &= P_{j0} + R_e^{-\frac{1}{6}} P_{j1} + \dots, \\ \alpha &= \alpha_0 + R_e^{-\frac{1}{6}} \alpha_1 + \dots, \\ \beta &= \beta_0 + R_e^{-\frac{1}{6}} \beta_1 + \dots. \end{aligned}$$

Substitution of the neutral disturbances (23a-b) into equations (22a-d) yields the following leading order system of equations which govern the inviscid stability of perturbations to the upper and lower fluids when the Reynolds number is asymptotically large.

$$iX\bar{U}_j U_{j0} + X V_{j0} \bar{U}'_j = -\frac{i\alpha_0 P_{j0}}{\rho}, \quad (24a)$$

$$i\bar{U}_j V_{j0} = -\frac{P'_{j0}}{\rho}, \quad (24b)$$

$$i\bar{U}_j W_{j0} + V_{j0} \bar{W}'_j = -\frac{i\beta_0 P_{j0}}{\rho}, \quad (24c)$$

$$i\alpha_0 X U_{j0} + V'_{j0} + i\beta_0 W_{j0} = 0, \quad (24d)$$

$$\alpha_0 X \bar{U}_{j0} + \beta_0 \bar{W}_{j0} = \bar{U}_{j0}. \quad (24e)$$

Eliminating U_{j0}, W_{j0} and P_{j0} from equations (24a-e) we see that V_{j0} satisfies Rayleigh's equation, (25a-f) in each layer.

$$\bar{U}_1 (V''_{10} - \gamma_0^2 V_{10}) = \bar{U}'_1 V_{10}, \quad Y \in [0, \infty), \quad (25a)$$

$$\bar{U}_2 (V_{20}'' - \gamma_0^2 V_{20}) = \bar{U}_2'' V_{20}, \quad Y \in [-D, 0], \quad (25b)$$

$$V_{10}(\infty) = 0, \quad (25c)$$

$$V_{20}(-D) = 0, \quad (25d)$$

$$V_{20}(0) = V_{10}(0), \quad (25e)$$

$$V_{20}'(0) = V_{10}'(0) + \frac{(1-m)V_{10}(0)\bar{U}_{10}'(0)}{m\bar{U}_{10}(0)}. \quad (25f)$$

Here \bar{U}_j is the 'equivalent' two-dimensional velocity profile, and $\gamma_0^2 = \alpha_0^2 + \beta_0^2$ is the 'effective' wavenumber. Note that the continuity of stresses at the interface are satisfied trivially in the limit as $R_e \rightarrow \infty$. The inviscid solution V_{20} is matched onto the viscous perturbation in the wall layer, and in view of the continuity equation (22d) this perturbation is $O(R_e^{-1/2})$, hence V_{20} satisfies the boundary condition (25d).

The point at which $\bar{U}_j = 0$ is denoted by $Y = Y_0$, and as Y approaches this value, U_0 and W_0 behave like $1/(Y - Y_0)$. By careful choice of α_0/β_0 , \bar{U}_j'' is also made to vanish as $Y \rightarrow Y_0$, so that V_0 has no such singularity, and a classical critical layer analysis is not necessary (see Hall [10]).

4.1 Asymptotic Solution for Similar Fluids

The above system may be solved numerically, to do this a suitable initial guess must be made for the eigenvalue γ_0 . To assist the location of this eigenvalue, we firstly consider the analogous problem where the two fluids have equal densities, and the viscosity ratio is close to unity, that is $m = 1 + \epsilon$, where $\epsilon \ll 1$. This case corresponds to the flow of two fluids with similar properties, this is a useful indication of the manner in which the interfacial effects can alter the stability of the flow.

The basic flow and wavenumbers are then expanded in an asymptotic series as

$$\begin{aligned} \alpha_0 &= \alpha_{00} + \epsilon\alpha_{01} + \dots, \\ \beta_0 &= \beta_{00} + \epsilon\beta_{01} + \dots, \\ \gamma_0 &= \gamma_{00} + \epsilon\gamma_{01} + \dots, \\ \gamma_{01} &= \frac{\alpha_{00}\alpha_{01} + \beta_{00}\beta_{01}}{\gamma_{00}}, \\ \bar{U}_j &= \bar{U}_{j0} + \epsilon\bar{U}_{j1} + \dots, \\ \bar{V}_j &= \bar{V}_{j0} + \epsilon\bar{V}_{j1} + \dots, \\ \bar{W}_j &= \bar{W}_{j0} + \epsilon\bar{W}_{j1} + \dots, \\ \bar{U}_j &= \bar{U}_{j0} + \epsilon\bar{U}_{j1} + \dots, \\ \bar{U}_{j0} &= \alpha_{00}X\bar{U}_{j0} + \beta_{00}\bar{W}_{j0}, \\ \bar{U}_{j1} &= \alpha_{00}X\bar{U}_{j1} + \beta_{00}\bar{W}_{j1} + \alpha_{01}X\bar{U}_{j0} + \beta_{01}\bar{W}_{j0}. \end{aligned}$$

The leading order basic flow in each layer $j = 1, 2$ satisfies

$$\begin{aligned}\bar{V}_{j0}''' &= \bar{V}_{j0}\bar{V}_{j0}'' - (\bar{V}_{j0}')^2 + 1, \\ \bar{W}_{j0}'' &= \bar{V}_{j0}\bar{W}_{j0}', \\ \bar{V}_{10}'(\infty) &= -1, \\ \bar{W}_{10}(\infty) &= 1, \\ \bar{V}_{20}(-D) &= \kappa, \\ \bar{V}_{20}'(-D) &= 0, \\ \bar{W}_{20}(-D) &= 0,\end{aligned}$$

with $\bar{V}_j, \bar{V}_j', \bar{V}_j'', \bar{W}_j$, and \bar{W}_j' , continuous at $Y = 0$.

At $O(\epsilon)$,

$$\begin{aligned}\bar{V}_{11}''' &= \bar{V}_{10}\bar{V}_{11}'' - 2\bar{V}_{10}'\bar{V}_{11}' + \bar{V}_{11}\bar{V}_{10}'' \\ \bar{V}_{21}''' &= \bar{V}_{20}\bar{V}_{21}'' - 2\bar{V}_{20}'\bar{V}_{21}' + \bar{V}_{21}\bar{V}_{20}'' - \bar{V}_{10}'' \\ \bar{W}_{11}'' &= \bar{V}_{10}\bar{W}_{11}' + \bar{V}_{11}\bar{W}_{10}', \\ \bar{W}_{21}'' &= \bar{V}_{20}\bar{W}_{21}' + \bar{V}_{11}\bar{W}_{10}' - \bar{W}_{20}'' \\ \bar{V}_{11}'(\infty) &= 0, \\ \bar{W}_{11}(\infty) &= 0, \\ \bar{V}_{21}'(-D) &= 0, \\ \bar{W}_{21}(-D) &= 0, \\ \bar{V}_{11}(0) &= 0 = \bar{V}_{21}(0), \\ \bar{V}_{11}'(0) &= \bar{V}_{21}'(0), \\ \bar{V}_{11}''(0) &= \bar{V}_{21}''(0) + \bar{V}_{20}''(0), \\ \bar{W}_{11}(0) &= \bar{W}_{21}(0), \\ \bar{W}_{11}'(0) &= \bar{W}_{21}'(0) + \bar{W}_{20}'(0),\end{aligned}$$

To solve the above equations numerically, we require the asymptotic form of the $O(\epsilon)$ correction to the basic flow as $Y \rightarrow \infty$. This is obtained in a manner similar to the derivation of equations (13a-c). We find that

$$\begin{aligned}\bar{V}_{11} &= \tau_1 + \Gamma_1\chi - \tau_1\Gamma_0\chi', \\ \bar{W}_{11} &= -\left(\lambda_1\left(\frac{1}{\xi} + \Sigma\right) + \tau_1\lambda_0\right)\exp\left(-\frac{\xi^2}{2}\right).\end{aligned}$$

Where τ_1, Γ_1 and λ_1 are constants to be found. The equations governing the basic state were then solved numerically and the results compared with the solution of equations (6a-7c), choosing a value of m close to unity. The results we obtained gave excellent agreement up to $O(\epsilon^2)$.

The solution of (25a-f) may be obtained by solving the adjoint set of equations (see Coddington and Levinson [4]). We recollect that if M is an ordinary differential operator over a region N , the adjoint problem is defined by

$$\int_N \Psi M(\Phi) dy = \int_N \Phi M^+(\Psi) dy = 0.$$

In our case the region $N = [-D, \infty)$, contains two sub-regions $[-D, 0]$ and $[0, \infty)$. This however, does not present a difficulty, following the work of Blennerhassett [2] we define a vector

$$\mathbf{Z} = \begin{cases} \mathbf{Z}_1 & 0 \leq Y < \infty, \\ \mathbf{Z}_2 & -D \leq Y \leq 0, \end{cases}$$

and a 2×2 real matrix $\underline{\mathbf{S}}$ such that

$$\underline{\mathbf{S}} = \begin{cases} \underline{\mathbf{S}}_1 & 0 \leq Y < \infty, \\ \underline{\mathbf{S}}_2 & -D \leq Y \leq 0. \end{cases}$$

For upper and lower fluids ($j = 1, 2$ respectively), \mathbf{Z}_j and $\underline{\mathbf{S}}_j$ are then chosen such that

$$\mathbf{Z}_j = \begin{pmatrix} V_{j0} \\ V'_{j0} - \frac{V_{j0} \overline{\overline{U}}'_j}{\overline{\overline{U}}_j} \end{pmatrix}, \quad \underline{\mathbf{S}}_j = \begin{pmatrix} \frac{\overline{\overline{U}}'_j}{\overline{\overline{U}}_j} & 1 \\ \gamma_{00}^2 & -\frac{\overline{\overline{U}}'_j}{\overline{\overline{U}}_j} \end{pmatrix},$$

Equations (25a-b) may then be written in vector form $\mathbf{Z}' = \underline{\mathbf{S}}\mathbf{Z}$, where V_{j0} satisfies no-slip at the boundaries and \mathbf{Z} is continuous across the interface. The adjoint problem is now defined by

$$\begin{aligned} \int_{-D}^{\infty} (\mathbf{Z}^+)^T [\mathbf{Z}' - \underline{\mathbf{S}}\mathbf{Z}] dY &= \left[(\mathbf{Z}^+)^T \mathbf{Z} \right]_{-D}^{\infty} \\ &- \int_{-D}^{\infty} \mathbf{Z}^T \left[(\mathbf{Z}^+)' + \underline{\mathbf{S}}^T \mathbf{Z}^+ \right] dY = 0. \end{aligned}$$

Writing $\underline{\mathbf{S}}^+ = -\underline{\mathbf{S}}^T$ the adjoint system becomes

$$(\mathbf{Z}^+)' = \underline{\mathbf{S}}^+ \mathbf{Z}^+,$$

where the adjoint function \mathbf{Z}^+ is also continuous across the interface. and V_{j0}^+ satisfies no-slip at the boundaries. The problem is self-adjoint.

We now perturb the viscosity ratio about $m = 1$, and write

$$\begin{aligned} V_{j0} &= V_{j00} + \epsilon V_{j01} + \dots, \\ \underline{\mathbf{S}}_j &= \underline{\mathbf{S}}_{j0} + \epsilon \underline{\mathbf{S}}_{j1} + \dots, \\ \mathbf{Z}_j &= \mathbf{Z}_{j0} + \epsilon \mathbf{Z}_{j1} + \dots. \end{aligned}$$

Substitution into the Rayleigh equations in each fluid layer yields

$$\begin{aligned} \mathbf{Z}_{j0} &= \begin{pmatrix} V_{j00} \\ V'_{j00} - \frac{V_{j00} \overline{U}'_{j0}}{\overline{U}_{j0}} \end{pmatrix}, \\ \mathbf{Z}_{j1} &= \begin{pmatrix} V_{j01} \\ V'_{j01} - \frac{V_{j01} \overline{U}'_{j0}}{\overline{U}_{j0}} + \frac{V_{j00} [\overline{U}'_{j0} \overline{U}_{j1} - \overline{U}_{j0} \overline{U}'_{j1}]}{\overline{U}_{j0}^2} \end{pmatrix}, \\ \underline{\mathbf{S}}_{j0} &= \begin{pmatrix} \frac{\overline{U}'_{j0}}{\overline{U}_{j0}} & 1 \\ \gamma_{00}^2 & -\frac{\overline{U}'_{j0}}{\overline{U}_{j0}} \end{pmatrix}, \\ \underline{\mathbf{S}}_{j1} &= \begin{pmatrix} \frac{\overline{U}'_{j1} \overline{U}_{j0} - \overline{U}'_{j0} \overline{U}_{j1}}{\overline{U}_{j0}^2} & 0 \\ 2\gamma_{00}\gamma_{10} & -\left[\frac{\overline{U}'_{j0} \overline{U}_{j1} - \overline{U}'_{j1} \overline{U}_{j0}}{\overline{U}_{j0}^2} \right] \end{pmatrix}, \end{aligned}$$

Neglecting terms of $O(\epsilon^2)$, it follows that the momentum equations are

$$O(1) : \quad \mathbf{Z}'_0 - \underline{\mathbf{S}}_0 \mathbf{Z}_0 = 0, \quad (26)$$

$$O(\epsilon) : \quad \mathbf{Z}'_1 - \underline{\mathbf{S}}_0 \mathbf{Z}_1 = \underline{\mathbf{S}}_1 \mathbf{Z}_0. \quad (27)$$

Vectors \mathbf{Z}_0 and \mathbf{Z}_1 remain continuous across the interface and V_{j00} and V_{j01} satisfy the no-slip conditions at $Y = -D$ and as $Y \rightarrow \infty$. For equation (27) to have a solution, the forcing term on the right hand side, must be orthogonal to the adjoint function, hence

$$\int_{-D}^0 (\mathbf{Z}_{20}^+) \underline{\mathbf{S}}_{21} \mathbf{Z}_{20} dY + \int_0^{\infty} (\mathbf{Z}_{10}^+) \underline{\mathbf{S}}_{11} \mathbf{Z}_{10} dY = 0.$$

After some manipulation we obtain

$$2\gamma_{00}\gamma_{01}I_0 = -\frac{V_{100}^2(0)\overline{\overline{U}}_{10}'(0)}{\overline{\overline{U}}_{10}(0)} - I_1 - I_2, \quad (28a)$$

$$I_0 = \int_{-D}^0 V_{200}^2 dY + \int_0^{\infty} V_{100}^2 dY, \quad (28b)$$

$$I_1 = \int_0^{\infty} \frac{V_{100}^2 [\overline{\overline{U}}_{11}'' \overline{\overline{U}}_{10} - \overline{\overline{U}}_{11} \overline{\overline{U}}_{10}'']}{\overline{\overline{U}}_{10}^2} dY, \quad (28c)$$

$$I_2 = \int_{-D}^0 \frac{V_{200}^2 [\overline{\overline{U}}_{21}'' \overline{\overline{U}}_{20} - \overline{\overline{U}}_{21} \overline{\overline{U}}_{20}'']}{\overline{\overline{U}}_{20}^2} dY. \quad (28d)$$

The integrands of I_1 and I_2 are regular since the singularity at $Y = Y_0$ is removable, for details see Coward [5]. We are now able to calculate γ_{01} , the $O(\epsilon)$ correction to the effective wavenumber, by finding a numerical solution to the leading order momentum equations (26) and the solvability condition (28a).

4.2 Discussion

The Rayleigh equations (25a-b) and associated boundary and interface conditions (25c-f) describe the inviscid stationary modes of the two phase flow with general viscosity ratio m and density ratio ρ . These equations were integrated using standard a finite difference method so that for given m and ρ the eigenvalue γ_0 was calculated to a high degree of accuracy.

Figure 6 illustrates the dependence of γ_0^2 upon the lower to upper fluid viscosity ratio for $0.8 \leq m \leq 24$. The eigenvalue is a strictly increasing function for $m > 0$. The effect of density stratification is more subtle, since it does not appear explicitly in equations (25a-f), but manifests itself through the calculation of the basic flow.

In the absence of a discontinuity in viscosity across the interface, the wavenumber of the inviscid stationary mode is

$$\gamma_0^2 = \gamma_{00}^2 = 1.4899.$$

Using the asymptotic methods for $m - 1 \ll 1$, we obtain the leading order correction to γ_0 due to a small viscosity difference across the interface. The solvability condition

(28a) represents two simultaneous equations to determine unknowns α_{01} and β_{01} (taking real and imaginary parts of (28a)). However, it is more useful to evaluate

$$\gamma_{01} = \frac{\alpha_{00}\alpha_{01} + \beta_{00}\beta_{01}}{\gamma_{00}}.$$

We find that

$$\begin{aligned}\gamma_0^2 &= \gamma_{00}^2 + 2\epsilon\gamma_{00}\gamma_{01} + O(\epsilon^2), \\ &= 1.4899 + 0.1726\epsilon + O(\epsilon^2).\end{aligned}$$

Figure 7 shows the value of γ_0^2 evaluated using the numerical scheme for m close to unity. The broken line represents the calculation of $\gamma_{00}^2 + 2(m-1)\gamma_{00}\gamma_{01}$ by the asymptotic methods described above.

The eigenvectors illustrated in Figures 8(a) and 8(b) have been normalized so that their maximum values are 1.0. Figure 8(a) shows \bar{V}_{10} and \bar{V}_{20} when the two fluids are identical. We notice that the maximum velocity perturbation is at $Y = 0.0839$. Figure 8(b) however, corresponds to the case $m = 5$. Although the velocity perturbation is still continuous, a discontinuity in the first derivative at the unperturbed interface position has developed due to the equation of tangential stress continuity. The maximum of \bar{V}_{10} now occurs much further away from the interface, at $Y = 1.341$.

The orientation of the disturbances relative to the streamwise axis is determined by the wave angle Φ such that

$$\begin{aligned}\frac{\alpha_0}{\beta_0} &= \frac{\alpha_{00}}{\beta_{00}} + \frac{\alpha_{01}\beta_{00} - \alpha_{00}\beta_{01}}{\beta_{00}^2}\epsilon + O(\epsilon^2), \\ &= 0.7514 + 37.88\epsilon + O(\epsilon^2), \\ &= \tan\left[\frac{\pi}{2} - \Phi\right].\end{aligned}$$

For matched fluid properties the effective wavenumber and wave angle given above correspond to the single fluid case. As viscosity stratification is introduced, we obtain the above corrections to these quantities and these in turn are in agreement with our numerical results for general viscosity and density ratios. These calculations are based on an infinite Reynolds number assumption. This work could be extended to include viscous effects in an analogous manner to the method used by Hall [10] for the flow over a rotating disk. Viscous effects enter at $O(R_\epsilon^{-1/16})$, the corresponding momentum equations must then be solved to determine $U_{j1}, V_{j1}, W_{j1}, \dots$, and the solutions matched onto the inviscid flow. The analysis is, however, made more difficult due to the complicated interfacial conditions which match the flow across the two regions.

5 Conclusions

In Sections 3 and 4 we have considered both two and three-dimensional disturbances to the flow of air over water. The exact solution of the Navier-Stokes equations described

in Section 2, is a crude model of the flow near the leading edge of a swept wing during heavy rainfall. We have shown that the interfacial forces have a significant effect on the stability of the attachment line flow. Viscous traveling waves are predicted at lower Reynolds numbers than is the case for air flow in the absence of a second fluid. The instability is due to the discontinuity in the viscosity and density across the interface between the two fluid regions and occurs with either blowing or suction at the plate.

At infinitely large Reynolds numbers, the interface also alters the neutral stability of stationary modes of the form considered by Gregory *et al.* [9]. The three-dimensional basic flow is written in terms of an 'equivalent' two-dimensional velocity profile which has an inflection point when the velocity is zero. Consequently the critical layer is passive and the ensuing calculations of the eigenvalues and eigenvectors for three-dimensional disturbances follow in a straight forward manner. Using both general numerical methods and asymptotic techniques for the flow of similar fluids we have obtained the corrections to the disturbance wavenumber and orientation due to interfacial effects.

References

- [1] Batchelor, G.K., (1967) An introduction to fluid dynamics. *Cambridge University Press, U.K.*
- [2] Blennerhassett, P.J. (1980) The generation of waves by wind. *Phil. Trans. Roy. Soc. A* **298** pp. 451-493.
- [3] Charles, M.E. & Lilleleht, L.U. (1965) An experimental investigation of stability and interfacial waves in co-current flow of two liquids. *J. Fluid Mech.* **22** pp. 217-224.
- [4] Coddington, E.A. & Levinson, N. (1955) Theory of ordinary differential equations. *McGraw-Hill, New York.*
- [5] Coward, A.V. (1994) The stability of two-phase flows. *Ph.D. Thesis, University of Manchester, U.K.*
- [6] Dunham, D. J., Dunham, R. E., Jr., & Bezos, G. M. (1991) A summary of NASA research on effects of heavy rain on airfoils. *AGARD Report 496.*
- [7] Federov, B.I., Plavnik, G.Z., Prokhorov, I.V. & Zhukhovitskii, L.G. (1976) Transitional flow conditions on a rotating disc. *J. Engng Phys.* **31** pp. 1448-1453.
- [8] Gaster, M. (1967) On the flow along swept leading edges. *The Aerodynamical Quarterly*, **18**, pp. 165-184

- [9] Gregory, N., Stuart, J.T. & Walker, W.S. (1953) On the stability of three-dimensional boundary layers with application to the flow due to a rotating disk. *Phil. Trans. A* **248** pp. 155-199.
- [10] Hall, P. (1986) An asymptotic investigation of the stationary modes of instability of the boundary layer on a rotating disc. *Proc. R. Soc. Lond. A* **406**, pp. 93-106.
- [11] Hall, P. & Malik, M. R. (1986) On the instability of a three dimensional attachment-line boundary layer; weakly nonlinear theory and a numerical approach. *J. Fluid Mech.* **163** pp. 257-282.
- [12] Hall, P., Malik, M. R., & Poll, D. I. A. (1984) On the stability of an infinite swept attachment line boundary layer. *Proc. R. Soc. Lond. A.* **395**, pp. 229-245.
- [13] Heurre, P. & Monkewitz, P.A. (1990) Local and global instabilities in spatially developing flows. *Annu. Rev. Fluid Mech.* **22** pp. 473-537.
- [14] Hooper, A. P. (1985) Long-wave instability at the interface between two viscous fluids: Thin layer effects. *Phys. Fluids*, **28**, pp.1613-1618.
- [15] Hooper, A. P. & Boyd, W. G. C. (1983) Shear-flow instability at the interface between two viscous fluids. *J. Fluid Mech.*, **128**, pp. 507-528.
- [16] Hooper, A. P. & Boyd, W. G. C. (1987) Shear-flow instability due to a wall and a viscosity discontinuity at the interface. *J. Fluid Mech.*, **179**, pp. 201-225.
- [17] Joseph, D.D. & Renardy, Y.Y. (1993) Fundamentals of two-fluid dynamics. Vol. 1 & 2, Springer-Verlag, New York.
- [18] Kao, T.W. & Park, C. (1972) Experimental investigations of the stability of channel flows. Part 2. Two-layered co-current flow in a rectangular region. *J. Fluid Mech.* **52** pp. 401-423.
- [19] Malik, M. (1986) The neutral curve for stationary disturbances in rotating-disk flow. *J. Fluid Mech.*, **164**, 275-287.
- [20] Malik, M. R., Chuang, S., & Hussaini, M. Y., (1982) Accurate numerical solution of compressible, linear stability equations. *Journal of Appl. Maths & Phys. (ZAMP)* **33**, pp. 189-201.
- [21] Pfenninger, W. & Bacon, J. W., (1969) Viscous drag reduction. *C. S. Wells (ed.)*, Plenum Press, pp. 85-105.
- [22] Poll, D. I. A., (1979) Transition in the infinite swept attachment line boundary layer. *The Aeronautical Quarterly*, **30**, pp. 607-628.

- [23] Poll, D. I. A., (1980) *IUTAM Symposium on laminar-turbulent transition*, Stuttgart, Springer-Verlag.
- [24] Prandtl, L. (1946) On boundary layers in three-dimensional flow. *Rep. Aero Res. Coun., Lond. No. 9828*.
- [25] Renardy, Y.Y. (1985) Instability at the interface between two shearing fluids in a channel. *Phys. Fluids* **28** pp. 3441-3443.
- [26] Rosenhead, L. (ed.), (1963) *Laminar Boundary Layers*. Oxford University Press.
- [27] Sears, W.R. (1948) The boundary layer of yawed cylinders. *J. Aero. Science* **15**, pp. 49-52.
- [28] Yih, C.S. (1967) Instability due to viscosity stratification. *J. Fluid Mech.* **27** pp. 337-352.

Figure captions

- Figure 1(a). Basic flow of air over water: velocity profiles with wall blowing and water depth $D = 0.5, 1.2, 3, 4$.
- Figure 1(b). Basic flow of air over water: velocity profiles with wall suction and water depth $D = 0.5, 1.2, 3, 4$.
- Figure 2(a). Basic flow of air over water: water depth D and corresponding blowing/suction κ .
- Figure 2(b). Basic flow of air over water: streamlines with wall blowing.
- Figure 2(c). Basic flow of air over water: streamlines with wall suction.
- Figure 3. Neutral curves with equal viscosities and densities: Impermeable plate $\kappa = 0$, blowing with $\kappa = 0.137$ and $\kappa = 0.4$, and suction with $\kappa = -0.1$.
- Figure 4(a). Neutral eigenfunctions U, V, W for a single fluid, $Re = 119$, $\kappa = 0.4$.
- Figure 4(b). Real part of neutral eigenfunctions U, V, W for air flow over water, $Re = 1580$, $\kappa = 0.04$.
- Figure 4(c). Imaginary part of neutral eigenfunctions U, V, W for air flow over water, $Re = 1580$, $\kappa = 0.04$.
- Figure 5(a). Neutral curves: solid line corresponds to the flow of air over water with increasing wall blowing; dotted line shows the neutral curve for a single fluid with no wall blowing.
- Figure 5(b). Neutral curves: the stability of air flow over water with suction at the wall.
- Figure 6. Eigenvalues γ_0 as a function of viscosity ratio m .
- Figure 7. Eigenvalue γ_0 for similar fluids: a comparison of asymptotic and numerical results when the viscosity ratio m is close to unity.
- Figure 8(a). Eigenfunction: Equal densities and viscosities.
- Figure 8(b). Eigenfunction: Equal densities, viscosity ratio $m = 5.0$.

Tables

	Density $g\ cm^{-3}$	Viscosity $g\ cm^{-1}s^{-1}$	Kinematic Viscosity cm^2s^{-1}
Air	1.225×10^{-3}	1.776×10^{-4}	1.450×10^{-1}
Water	9.991×10^{-1}	1.137×10^{-2}	1.138×10^{-2}
Water/Air	8.156×10^2	6.402×10^1	7.848×10^{-2}

Table 1. Physical properties of air and water.

N	k	$\Re\{kc\}$	κ
10	3.300581×10^{-1}	1.226919×10^{-1}	0.0
20	3.378719×10^{-1}	1.267951×10^{-1}	0.0
40	3.384238×10^{-1}	1.270776×10^{-1}	0.0
80	3.384613×10^{-1}	1.270965×10^{-1}	0.0
160	3.384638×10^{-1}	1.270977×10^{-1}	0.0
10	8.540221×10^{-2}	2.284554×10^{-2}	0.4
20	8.428938×10^{-2}	2.243776×10^{-2}	0.4
40	8.415787×10^{-2}	2.238444×10^{-2}	0.4
80	8.414404×10^{-2}	2.237832×10^{-2}	0.4
160	8.414255×10^{-2}	2.237762×10^{-2}	0.4
320	8.414239×10^{-2}	2.237753×10^{-2}	0.4

Table 2. Neutral eigenvalues with decreasing step-size: $m = 1$, $\rho = 1$ and $R_e = 800$.

Figure 4(a).






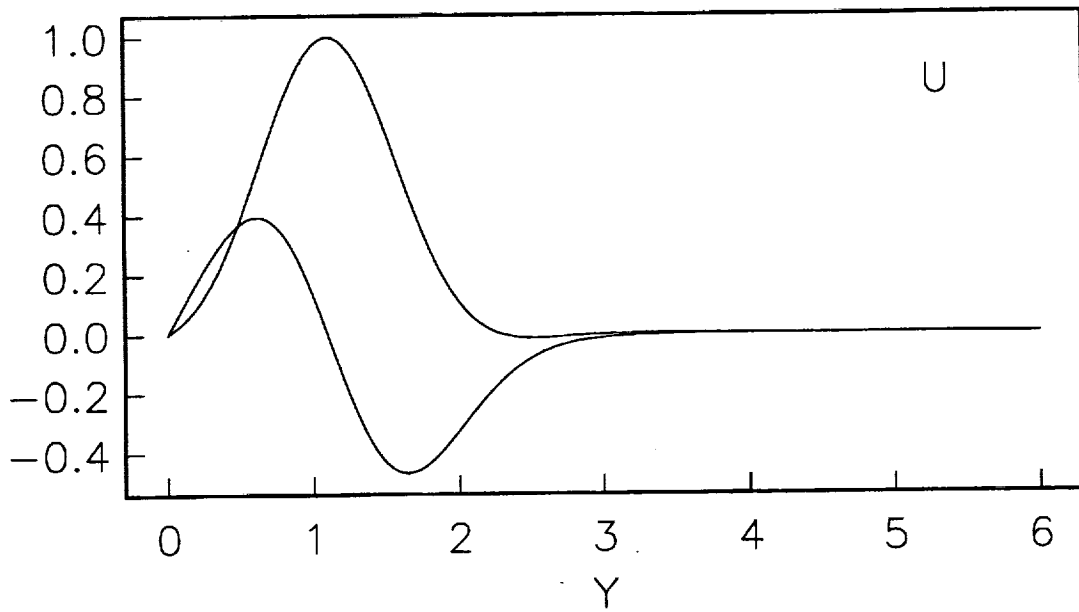


Figure 4(b).

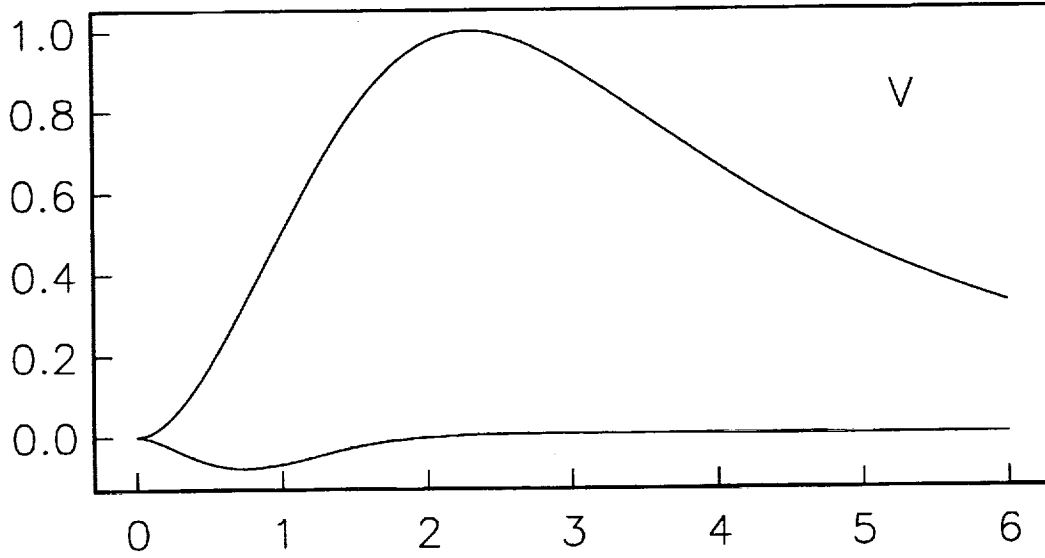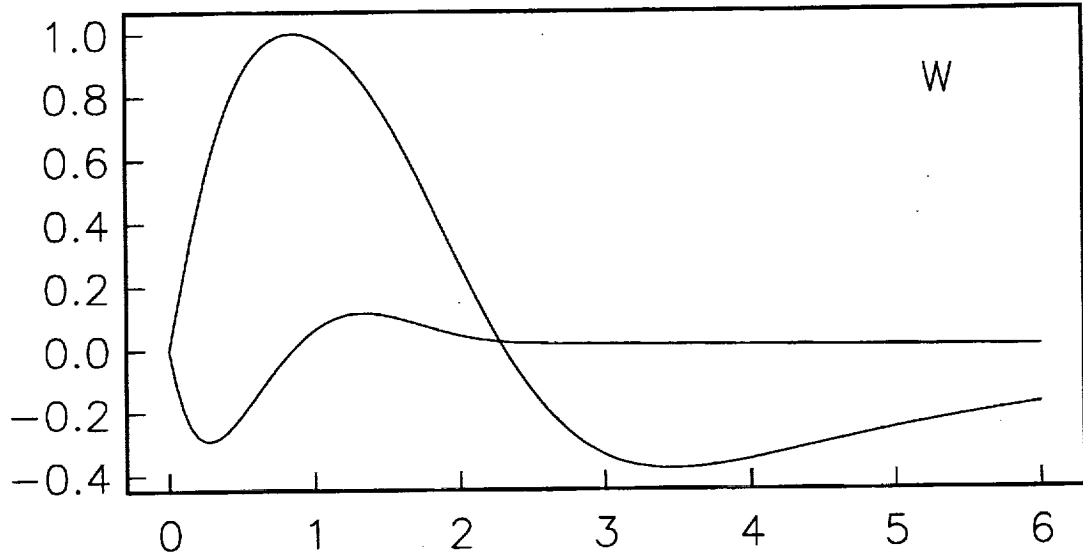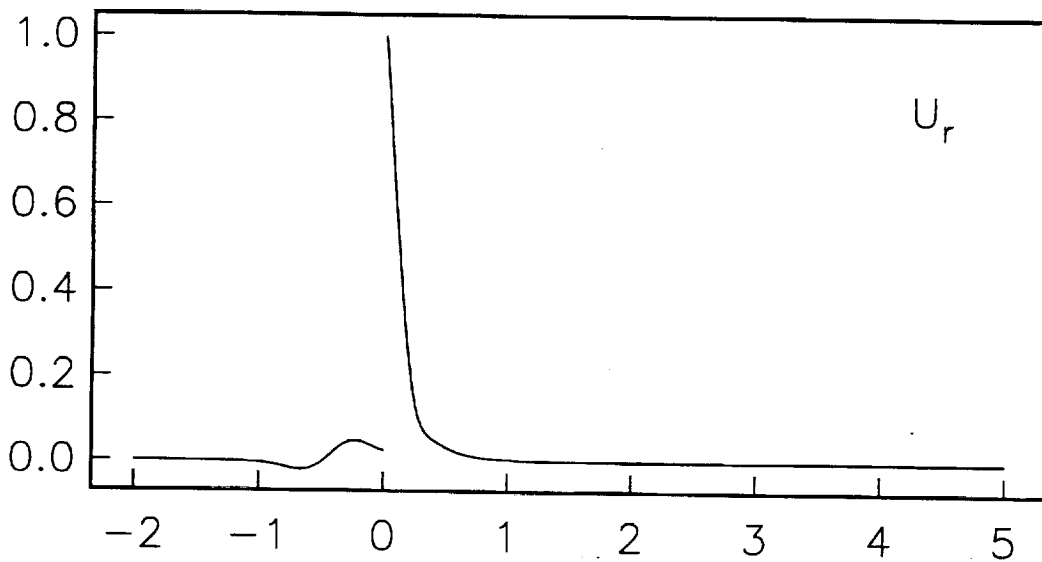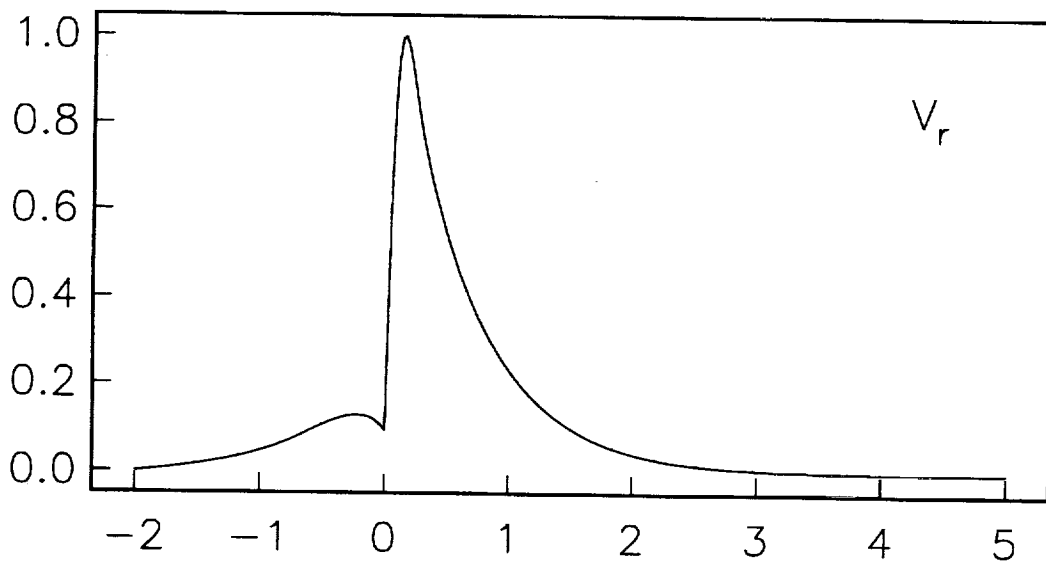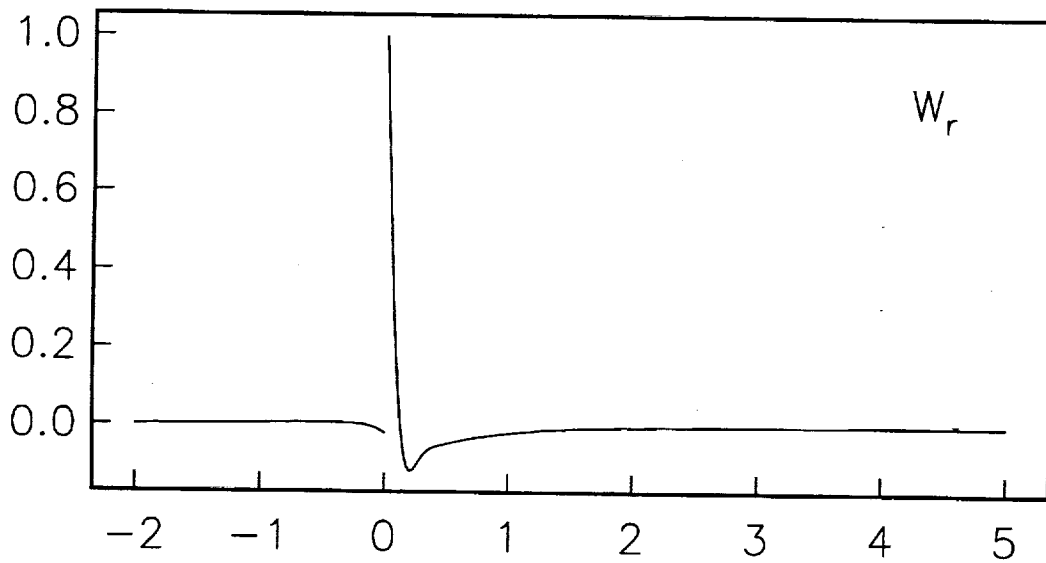

Y

Figure 4(c).

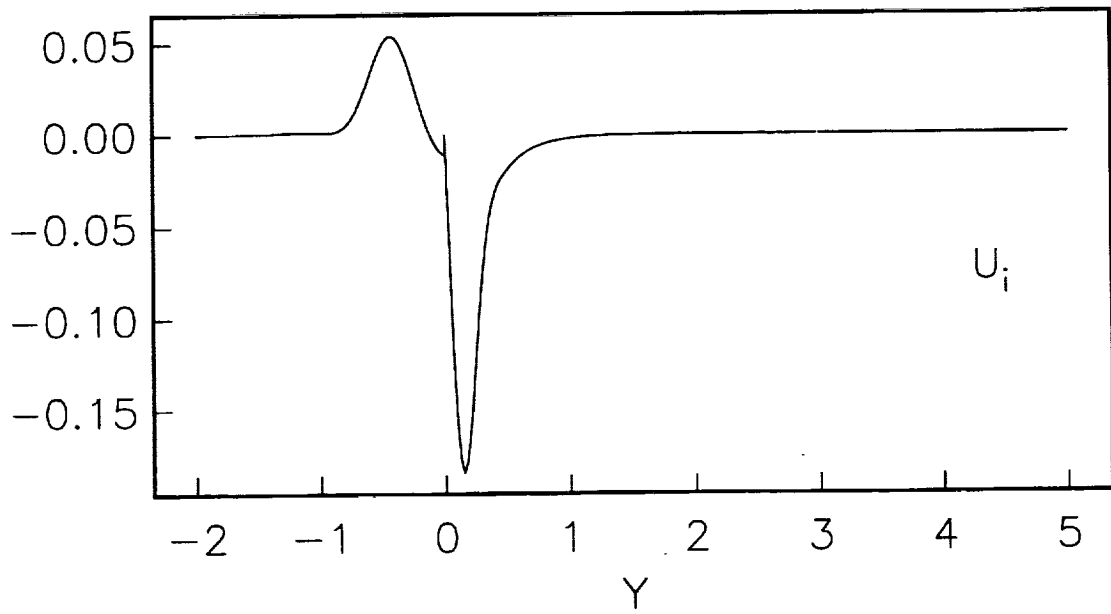
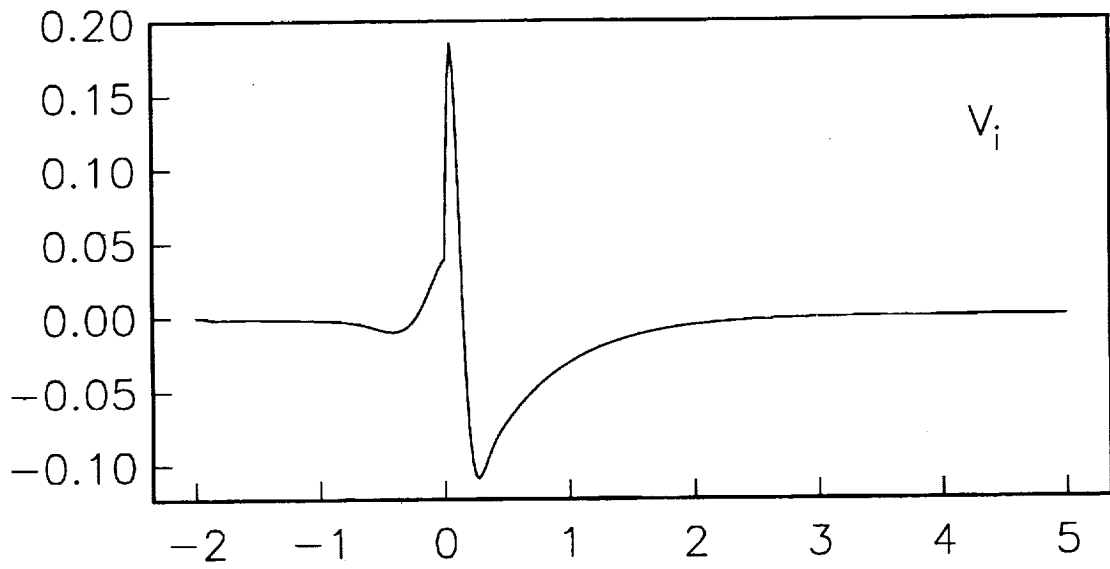
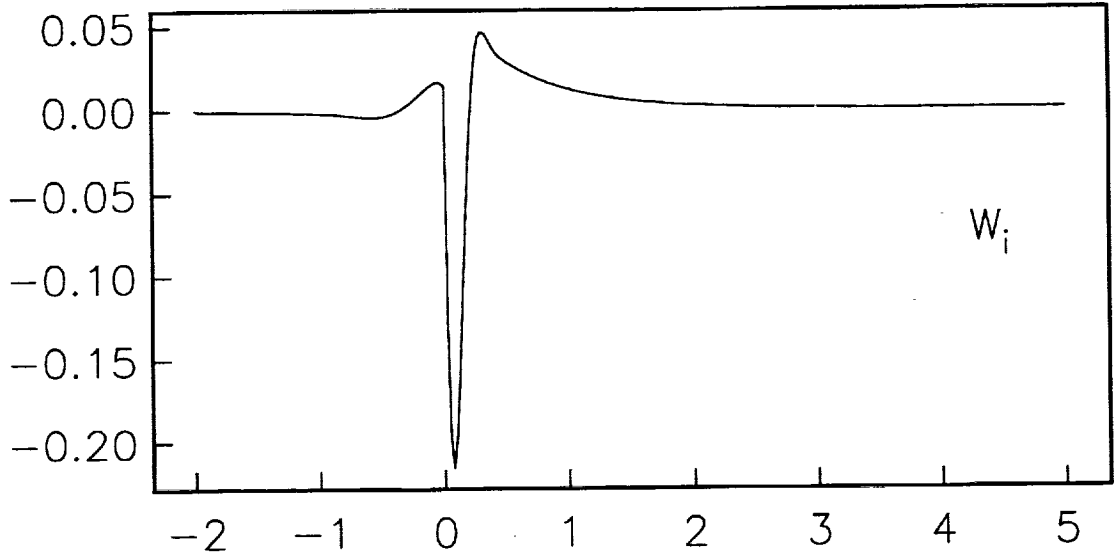


Figure 5a.

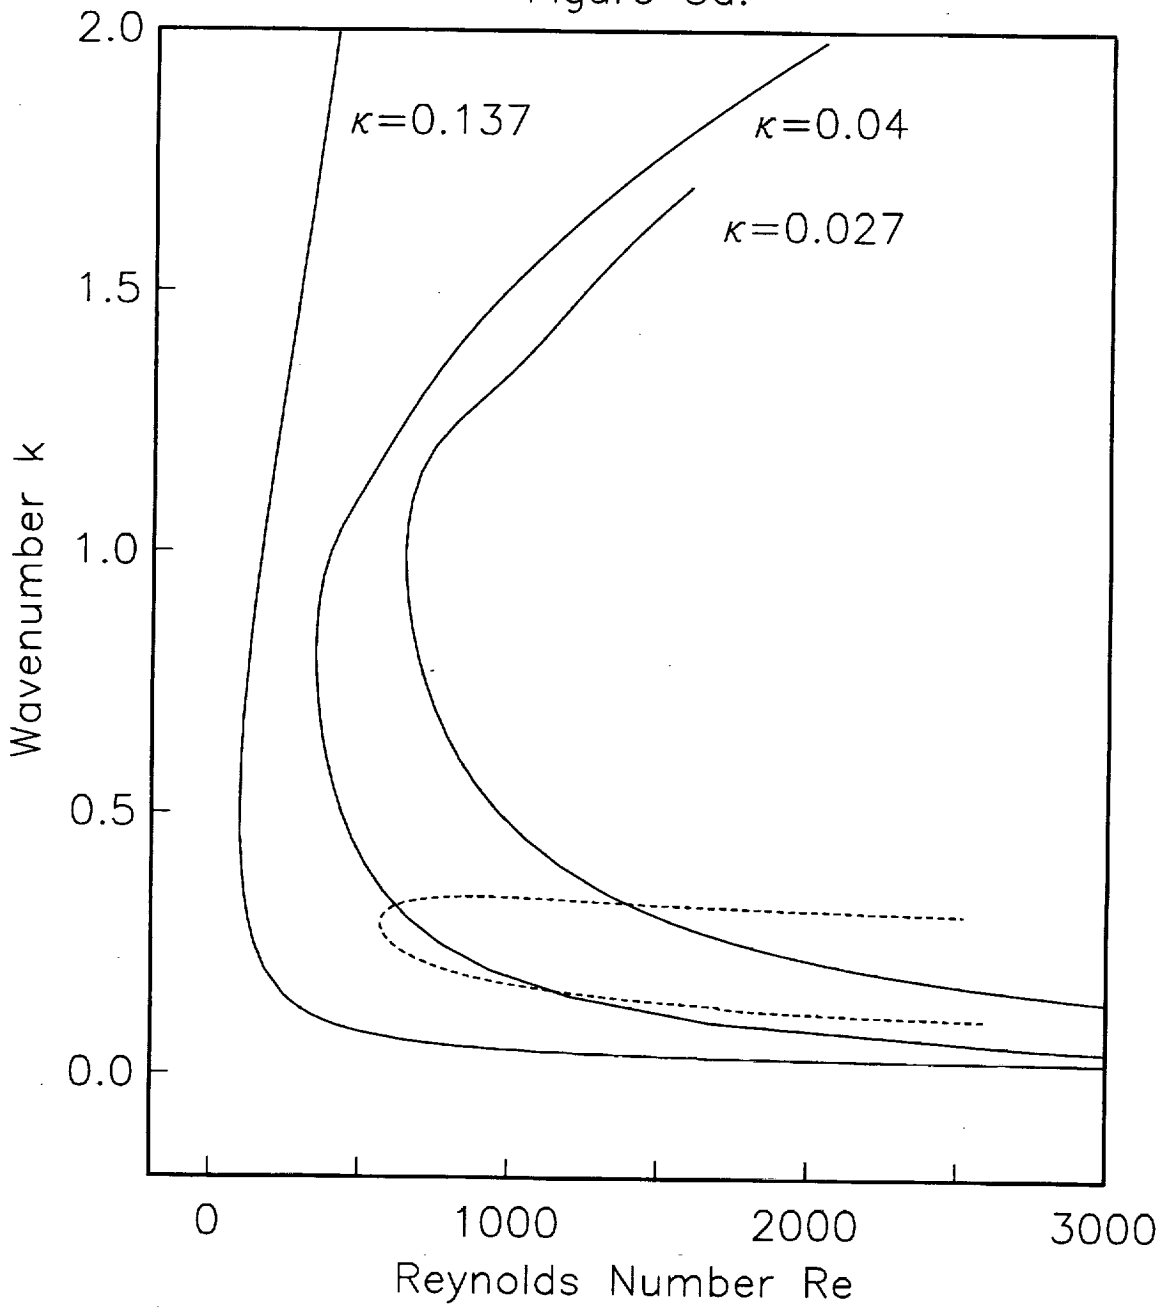


Figure 5b.

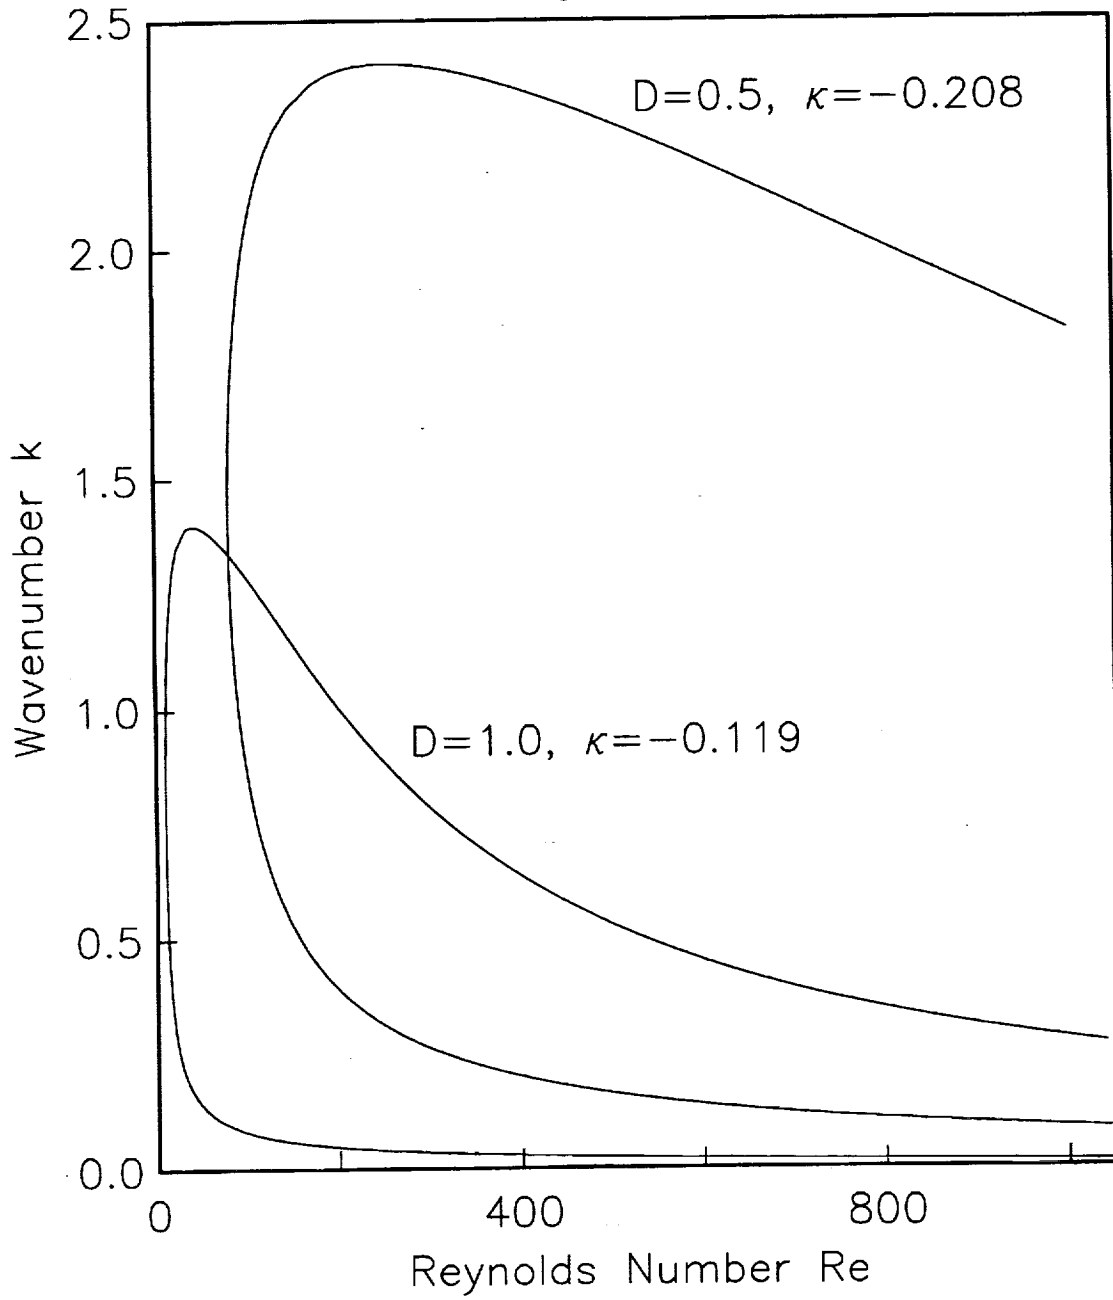


Figure 6.

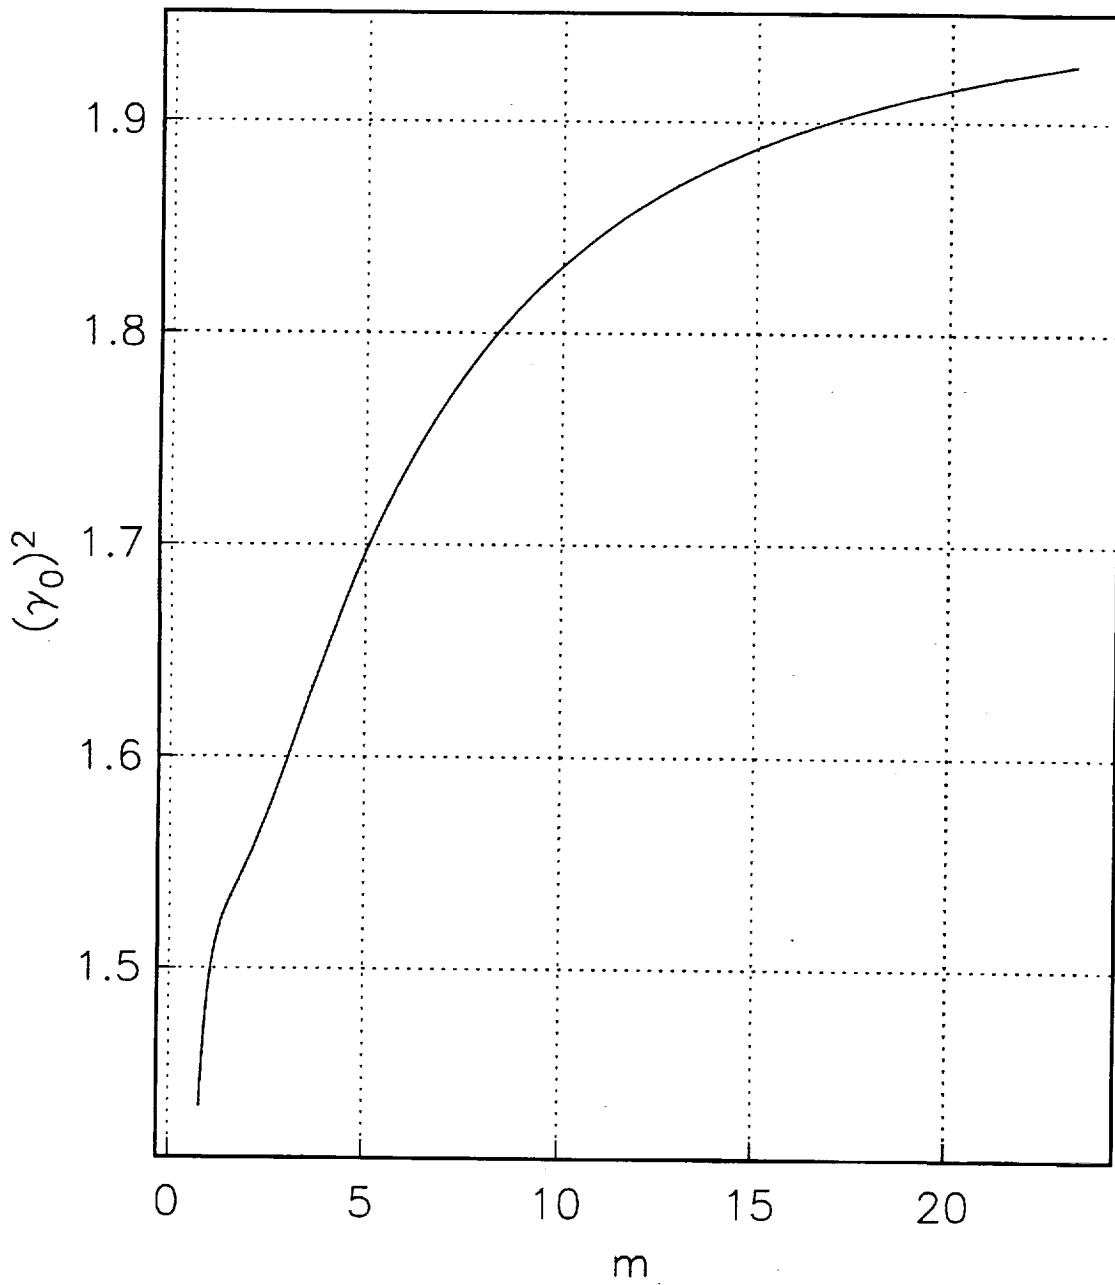


Figure 7.

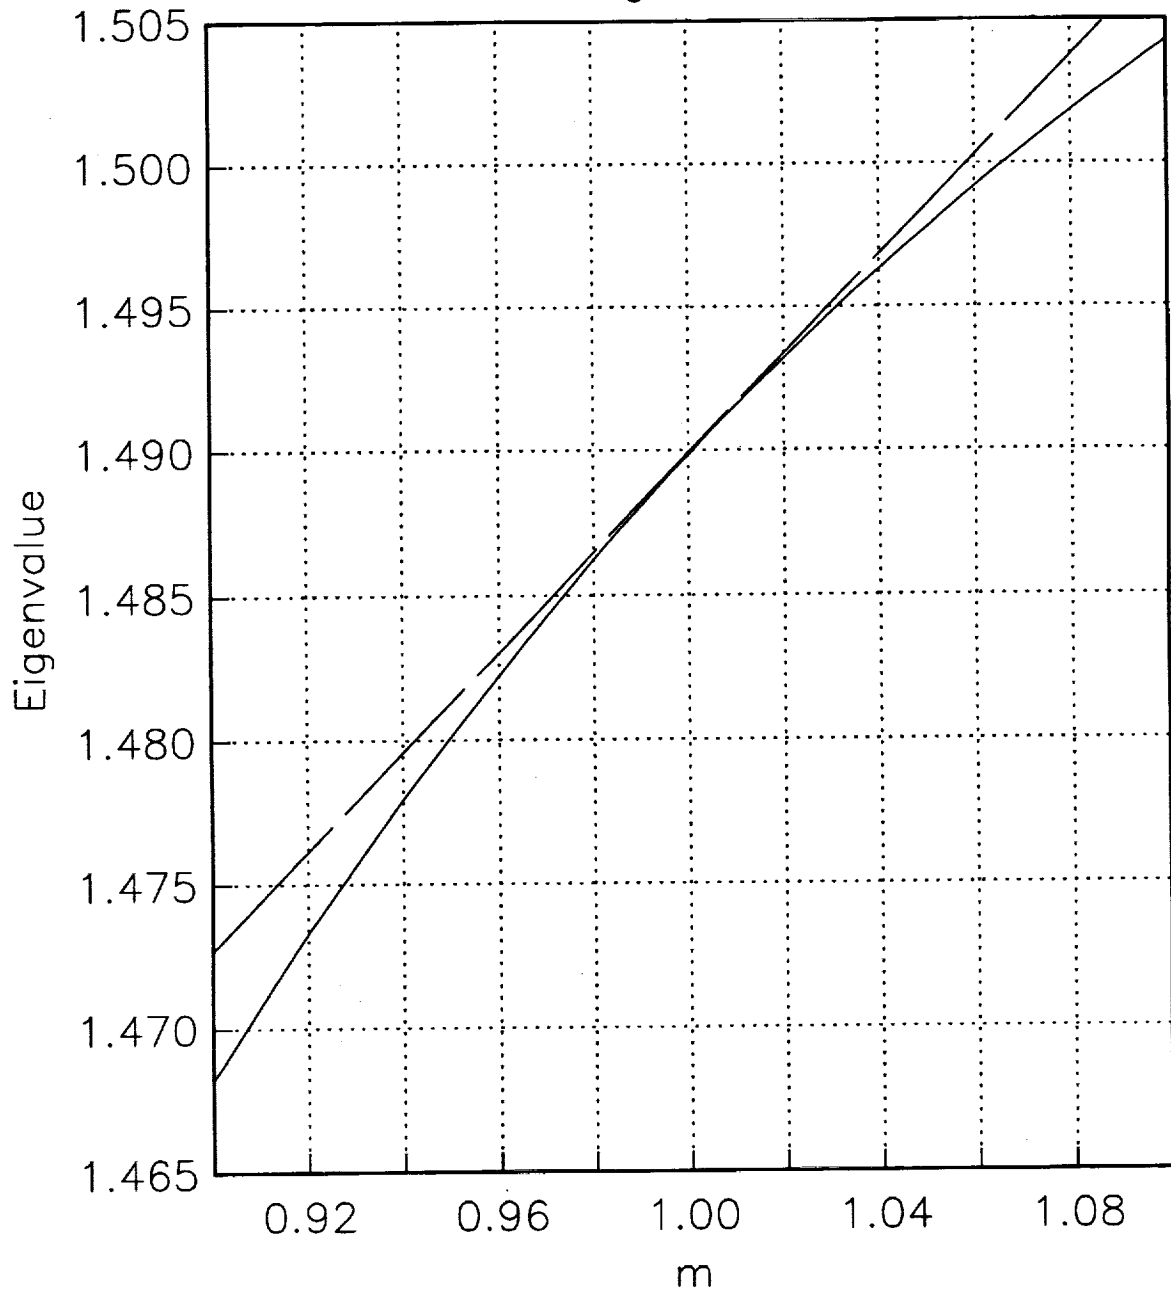


Figure 8(b).

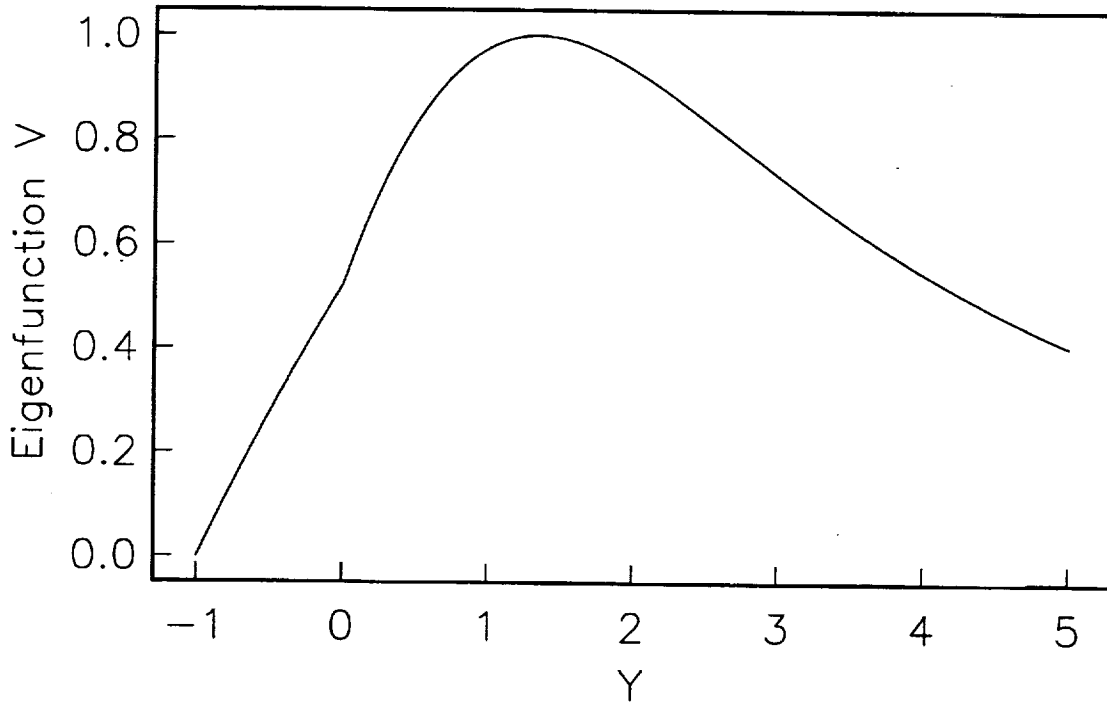


Figure 8(a).

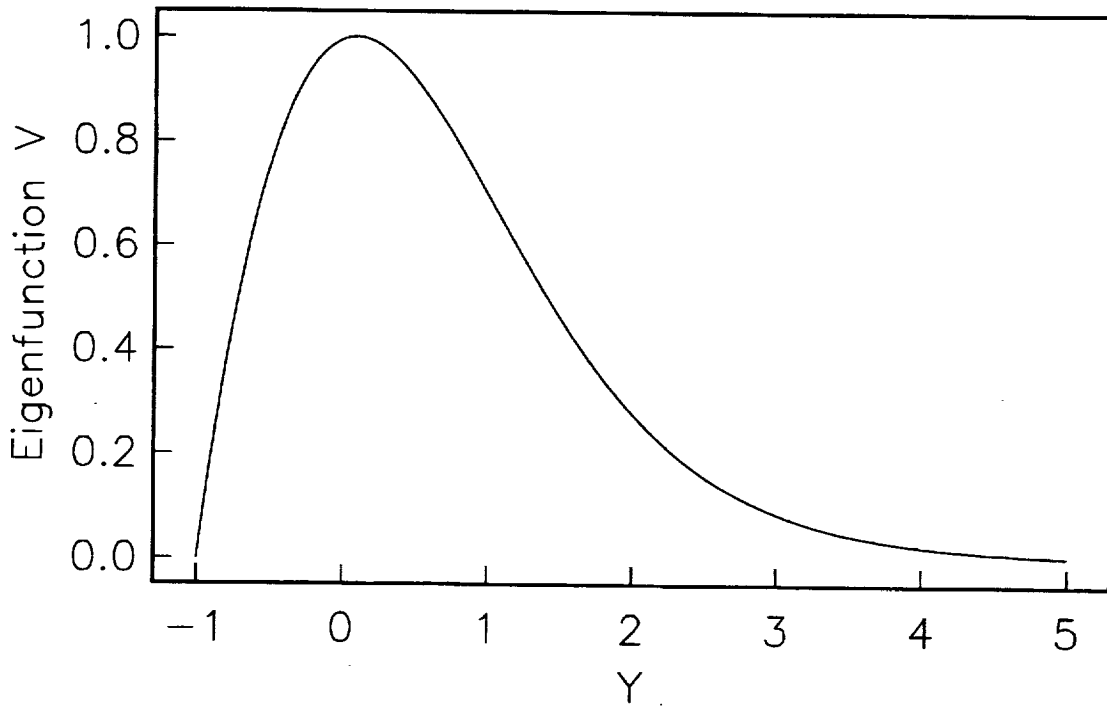


Figure 1(a).

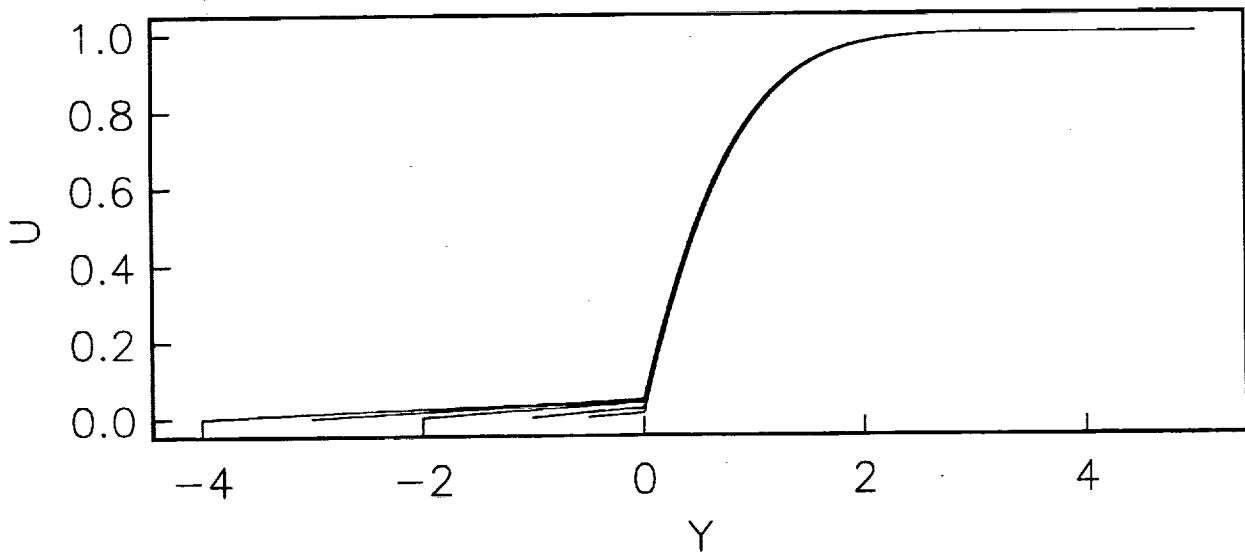
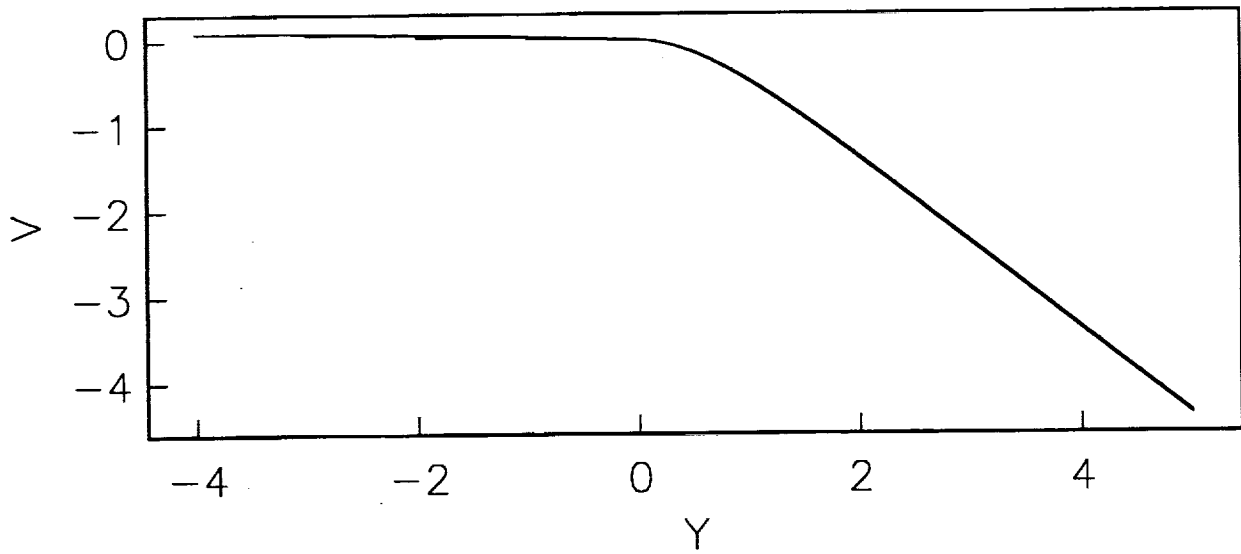
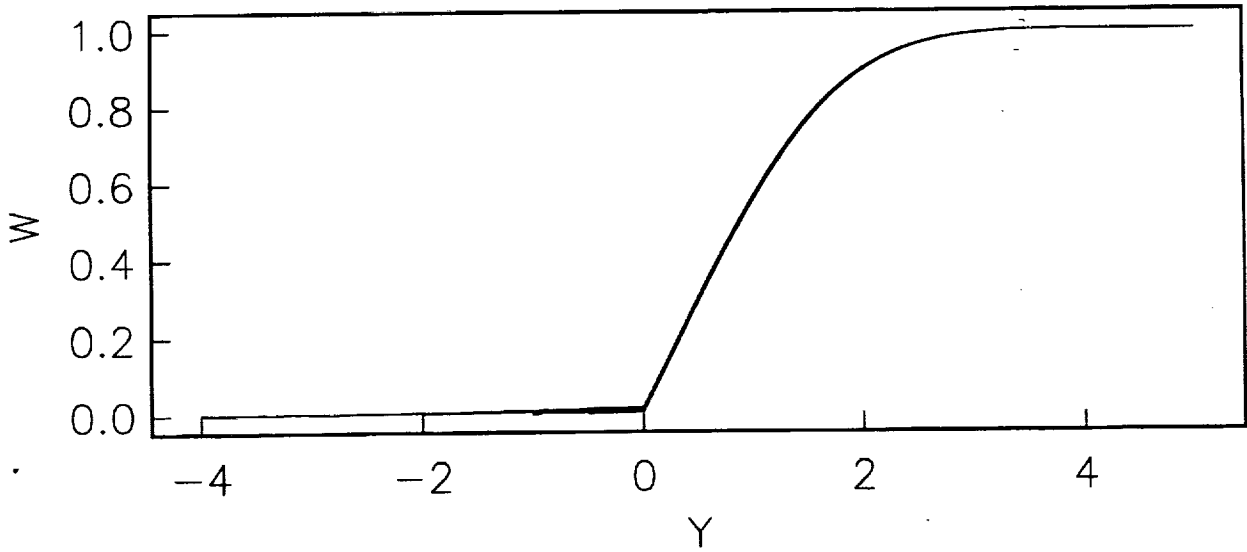


Figure 1(b).

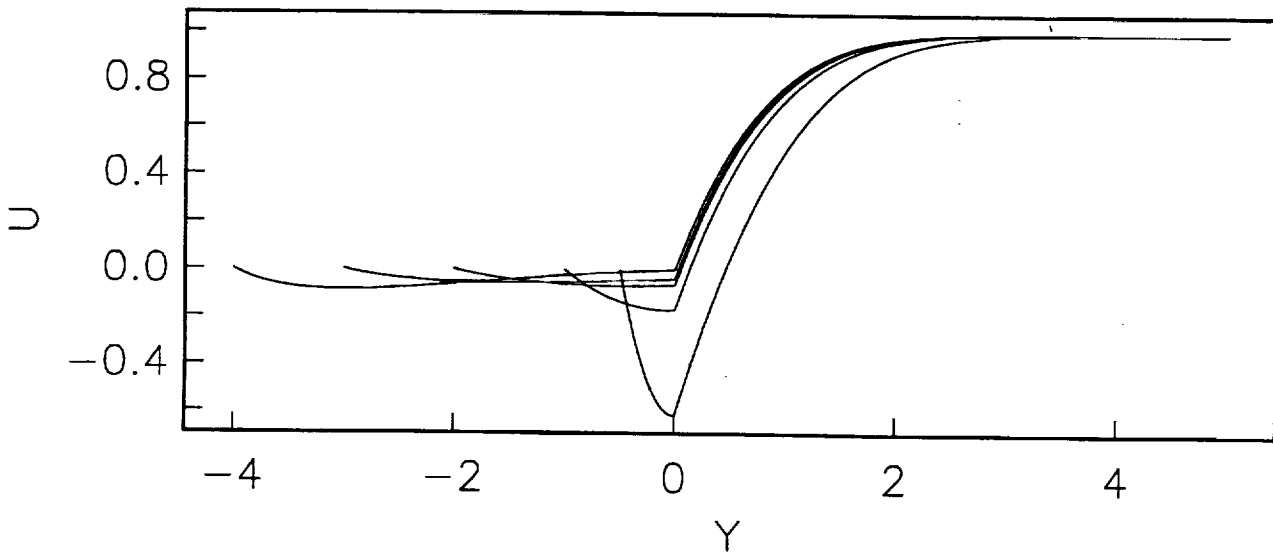
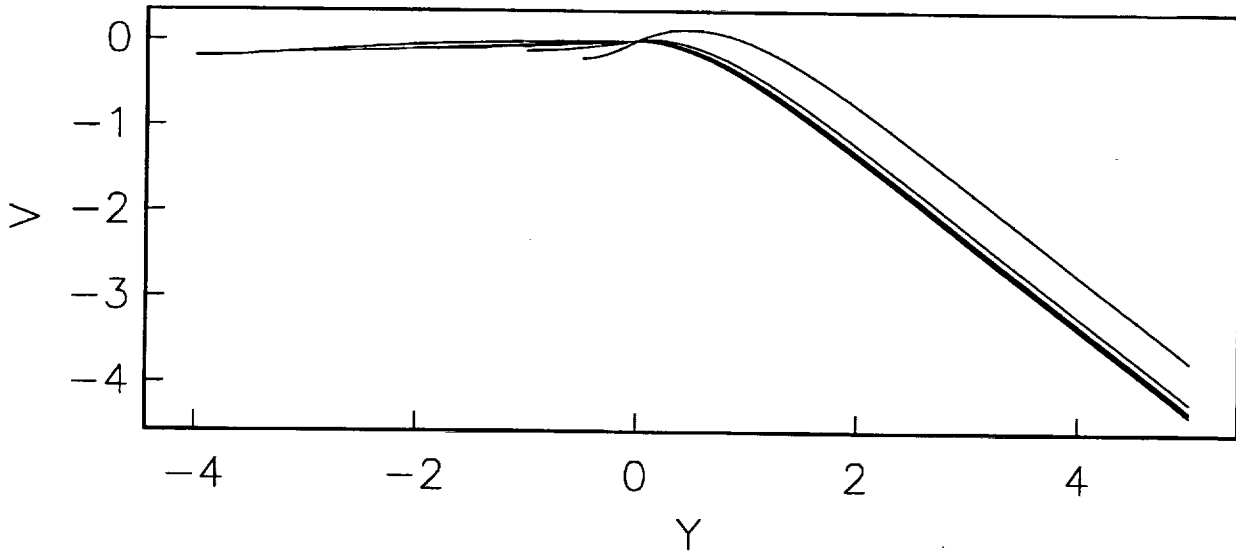
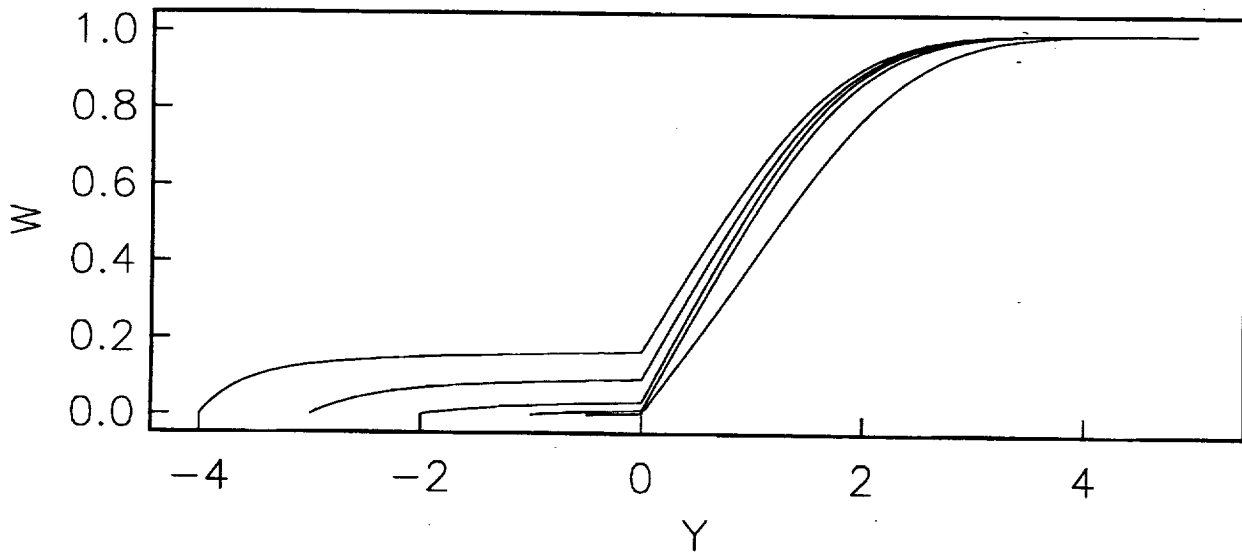


Figure 2(a).

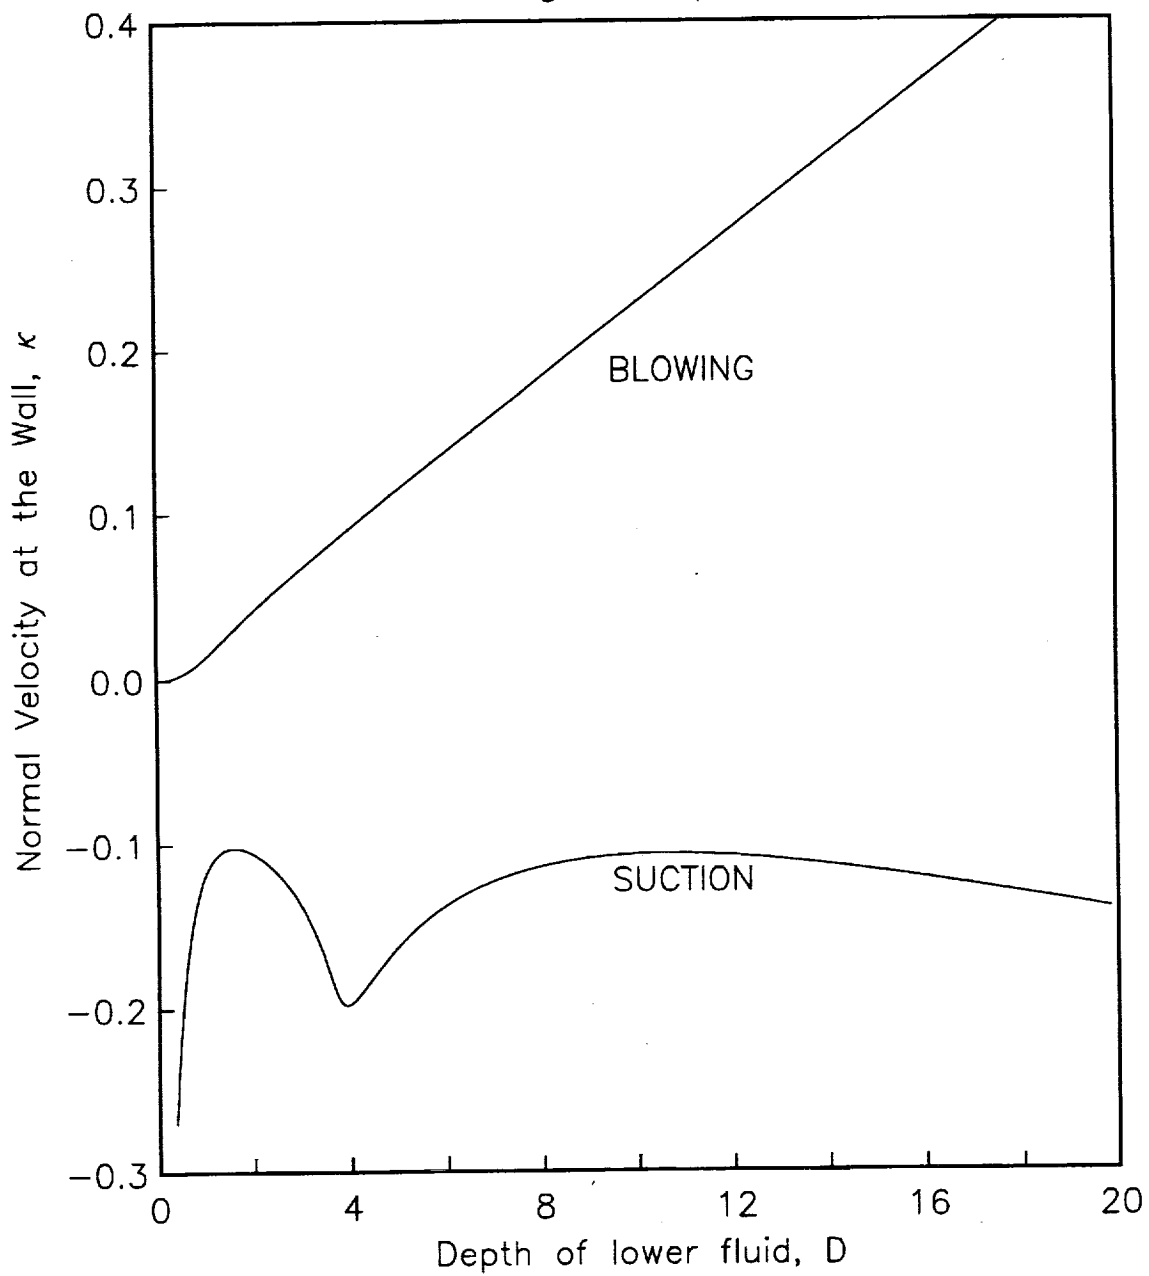


Figure 2(b)

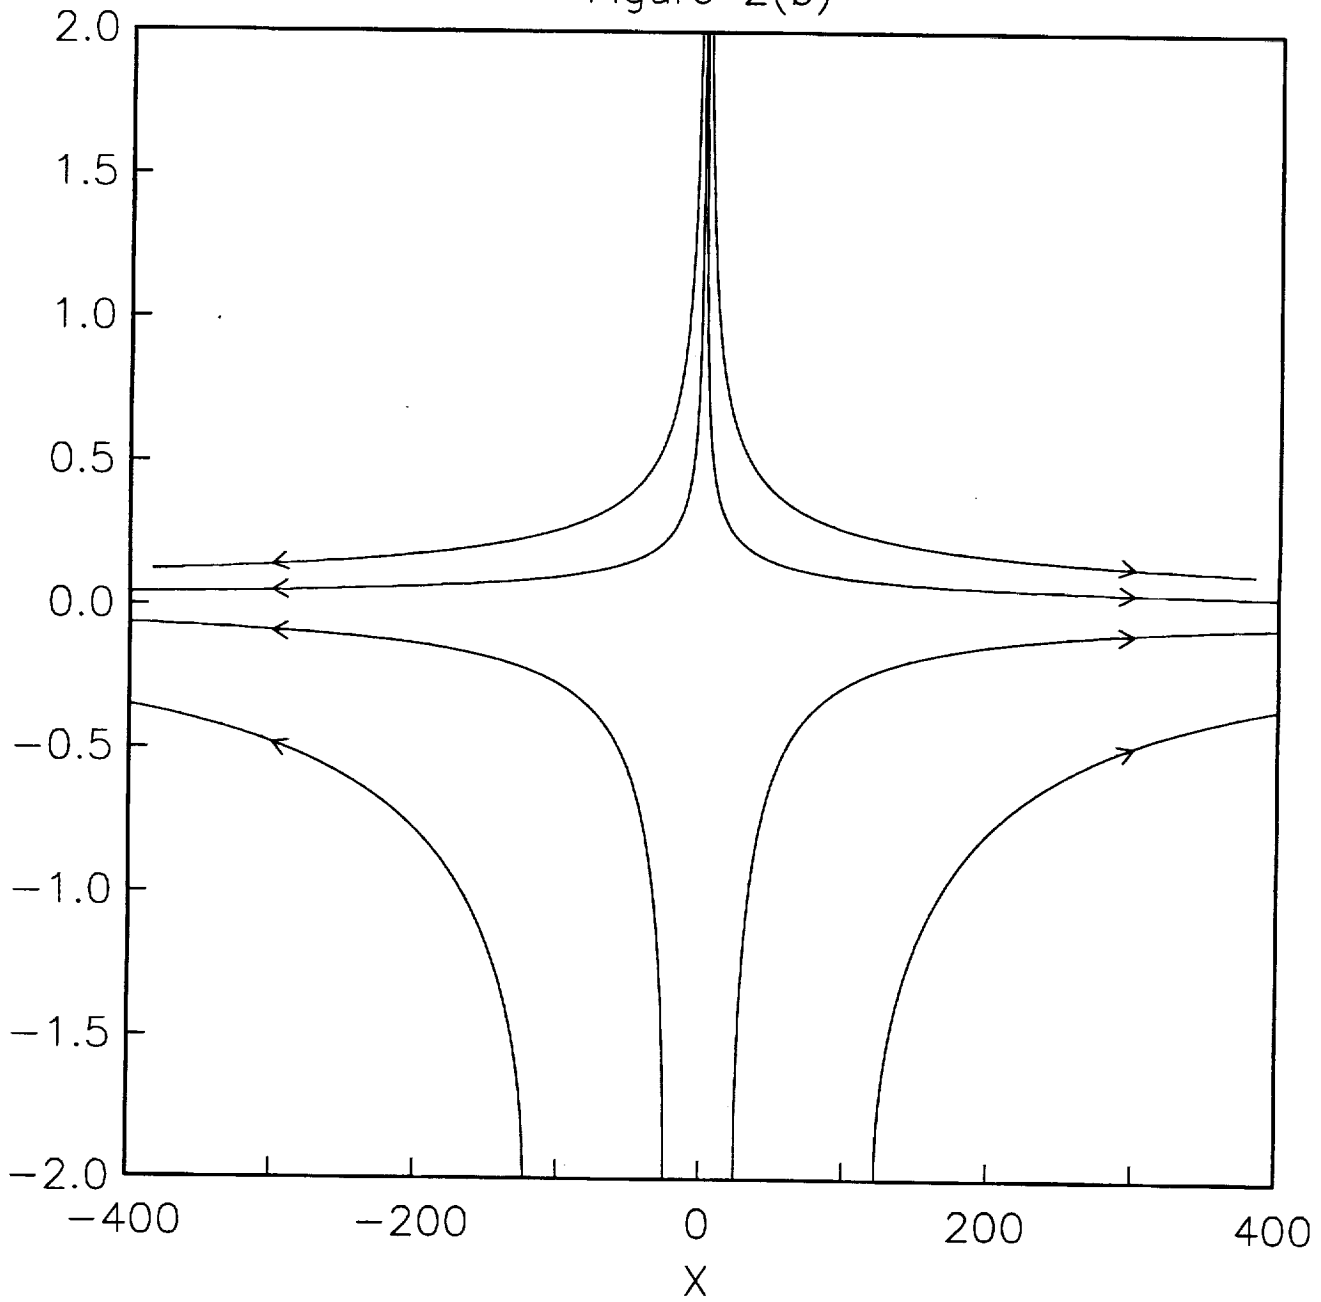


Figure 2(c)


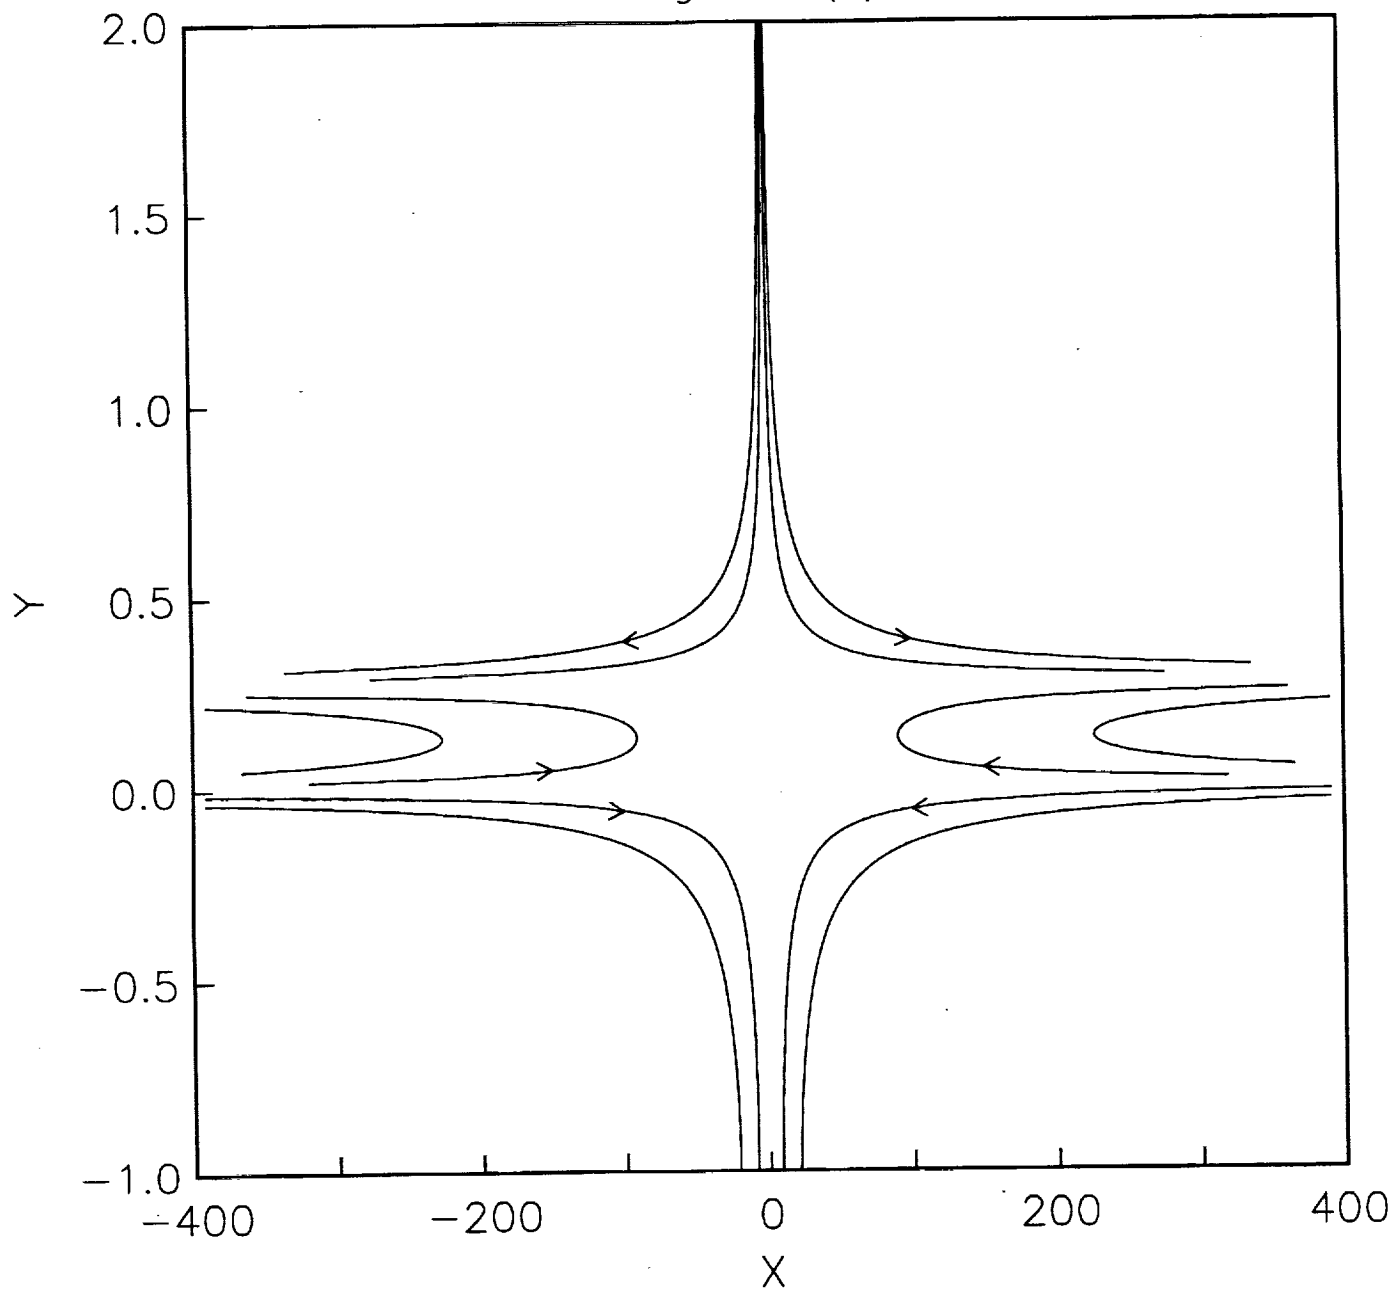


Figure 3.

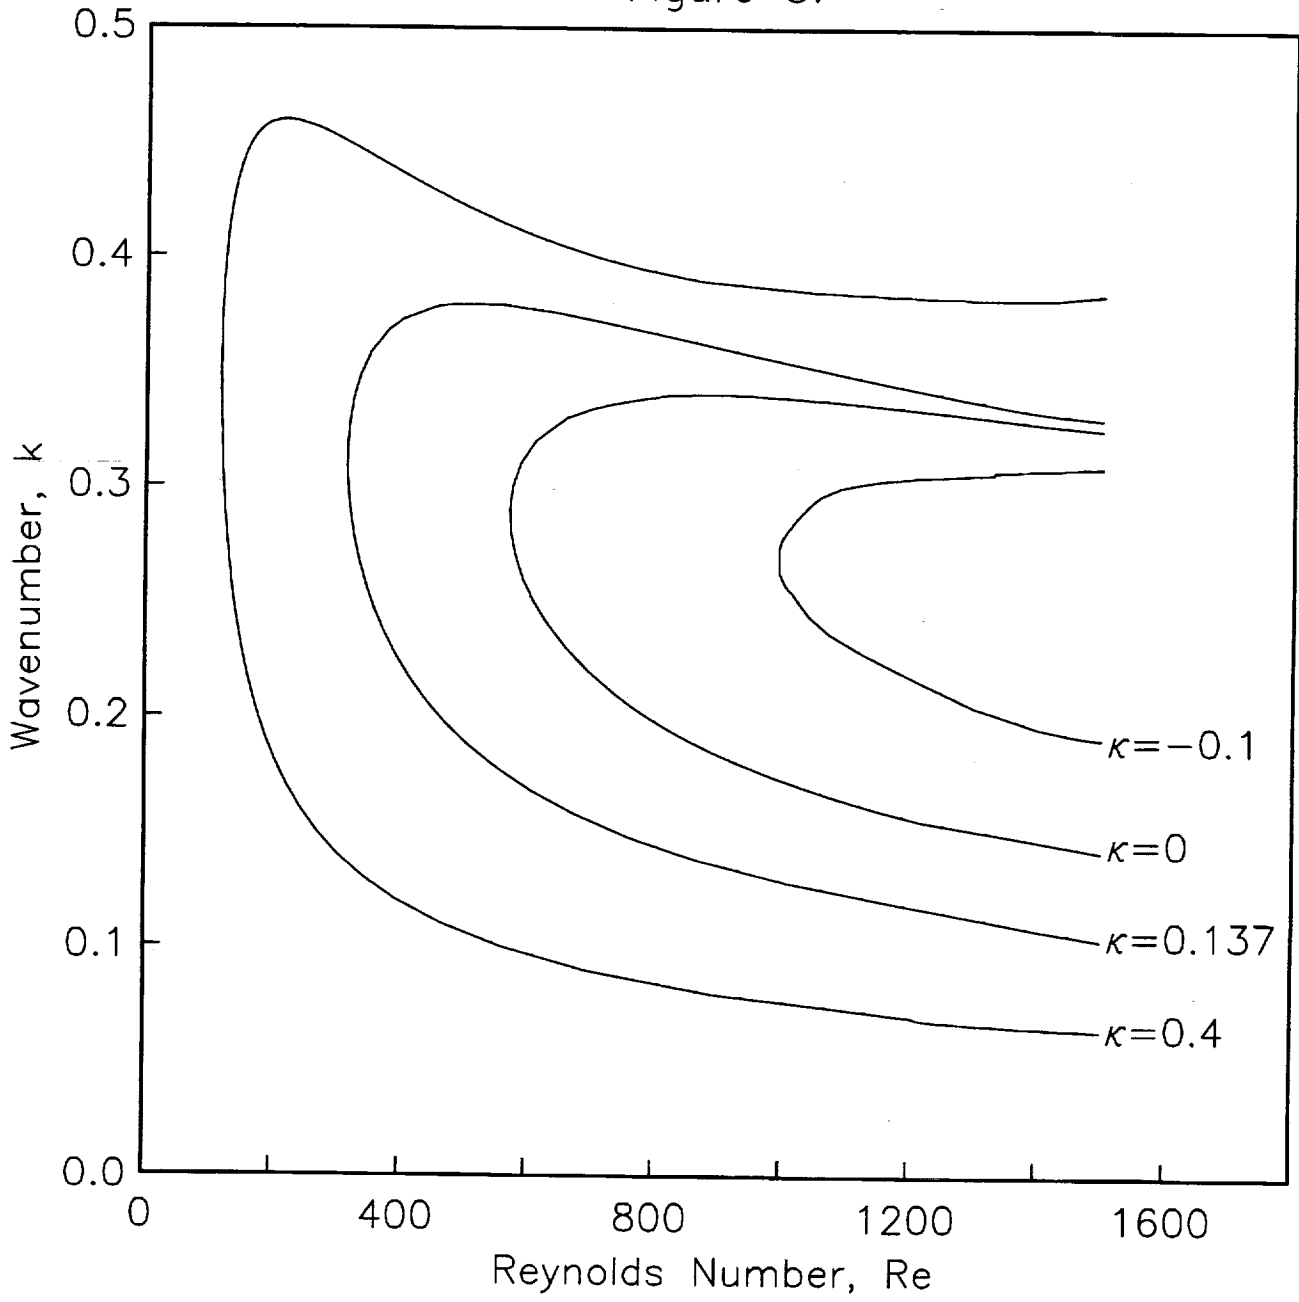

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE October 1994	3. REPORT TYPE AND DATES COVERED Contractor Report		
4. TITLE AND SUBTITLE THE STABILITY OF TWO-PHASE FLOW OVER A SWEEP- WING			5. FUNDING NUMBERS C NAS1-19480 WU 505-90-52-01	
6. AUTHOR(S) Adrian V. Coward Philip Hall				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Institute for Computer Applications in Science and Engineering Mail Stop 132C, NASA Langley Research Center Hampton, VA 23681-0001			8. PERFORMING ORGANIZATION REPORT NUMBER ICASE Report No. 94-86	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Langley Research Center Hampton, VA 23681-0001			10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA CR-194994 ICASE Report No. 94-86	
11. SUPPLEMENTARY NOTES Langley Technical Monitor: Michael F. Card Final Report Submitted to Journal of Fluid Mechanics				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified-Unlimited Subject Category 34			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) We use numerical and asymptotic techniques to study the stability of a two-phase air/water flow above a flat porous plate. This flow is a model of the boundary layer which forms on a yawed cylinder and can be used as a useful approximation to the air flow over swept wings during heavy rainfall. We show that the interface between the water and air layers can significantly destabilize the flow, leading to traveling wave disturbances which move along the attachment line. This instability occurs for lower Reynolds numbers than is the case in the absence of a water layer. We also investigate the instability of inviscid stationary modes. We calculate the effective wavenumber and orientation of the stationary disturbance when the fluids have identical physical properties. Using perturbation methods we obtain corrections due to a small stratification in viscosity, thus quantifying the interfacial effects. Our analytical results are in agreement with the numerical solution which we obtain for arbitrary fluid properties.				
14. SUBJECT TERMS two-phase, stability			15. NUMBER OF PAGES 43	
			16. PRICE CODE A03	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT	