

511-54

19248

N95-13214

06801
320727

18P

Evaluation of Candidate Millimeter Wave
Sensors for Synthetic Vision.

N. Alexander, J. Echard,
and B. Hudson,
Georgia Tech Research Institute

ABS: next page.

Evaluation of Candidate MMW Sensors for Synthetic Vision

Neal T. Alexander, Brian H. Hudson, and Jim D. Echard
Georgia Tech Research Institute
7220 Richardson Road
Smyrna, GA 30080

185 - ① + ②

①

The goal of the Synthetic Vision Technology Demonstration (SVTD) Program was to demonstrate, and document the capabilities of current technologies to achieve safe aircraft landing, take off, and ground operation in very low visibility conditions. As part of the technology evaluation process, the Georgia Tech Research Institute (GTRI) was a primary participant in two of the major thrusts of the program: (1) sensor evaluation in measured weather conditions on a tower overlooking an unused airfield and (2) flight testing of sensor and pilot performance via a prototype system installed in a test aircraft.

GTRI supported tower testing of six different millimeter wave (MMW) radar sensor configurations and two infrared (IR) sensors at an instrumented tower facility at Wright-Patterson AFB in the 1991-1992 time frame. Sensors tested included a Honeywell 35-GHz MMW imaging radar, a Norden 95-GHz MMW target detection and tracking radar, a Lear Astronics 94-GHz MMW imaging radar, a 3-5 micron Kodak IR imaging camera, and a 3-5 micron Mitsubishi IR camera. The tower tests were performed under varied meteorological conditions including clear, fog, rain, and snow. As tower-test contractor, GTRI provided engineering services, including test planning, equipment preparation, field-test support, sensor data analysis, sensor performance modeling, and technical documentation of test results.

Three of the sensors evaluated in the tower tests were subsequently utilized in the flight-test evaluation program, which was performed during 1992 using a functional prototype SV system mounted in a specially configured Gulfstream II aircraft. During these flight tests, the observed performance of the prototype SV system was documented in actual and simulated weather conditions. The prototype system evaluated under this program included both a MMW radar sensor and an IR imaging sensor to detect and image the runway and surrounding area, as well as both a HUD and a head-down display to present the images and flight symbology to the pilot. GTRI's primary role in the flight test program was to perform analysis of raw radar data frames (snapshots). The effort focused almost exclusively on data snapshots captured by the Honeywell MMW radar. GTRI also participated in experiment design and test planning, characterization of the radar sensors, radar modeling, radar calibration, and weather data analysis.

②

The presentation first briefly addresses the overall technology thrusts and goals of the program and provides a summary of MMW sensor tower-test and flight-test data collection efforts. Data analysis and calibration procedures for both the tower tests and flight tests are presented. The remainder of the presentation addresses the MMW sensor flight-test evaluation results, including the processing approach for determination of various performance metrics (e.g., contrast, sharpness, and variability). The variation of the very important contrast metric in adverse weather conditions is described. Design trade-off considerations for Synthetic Vision MMW sensors are presented, and the presentation concludes with recommendations for future research to address the remaining unresolved issues.

*Evaluation of Candidate MMW
Sensors for Synthetic Vision*

**Neal T. Alexander
Brian H. Hudson
Jim D. Echard**

**Synthetic Vision Technology Demonstration (SVTD)
Program**

**Georgia Tech Research Institute
Georgia Institute of Technology
Atlanta, Georgia 30332**

30 September 1993

GTRI SVTD Support Program (1)

◆ **Demonstrate capabilities of current technologies to achieve safe landing, take off, and ground operations in low-visibility conditions**

◆ **Major thrusts**

Sensor tower tests

Static Tests

Overlooking runway

Measured weather conditions

Flight testing

Sensor and pilot performance

Prototype system installed in aircraft

GTRI SVTD Support Program (2)

- ◆ **Tower tests: 1991-1992**
 - Radars: Honeywell 35 GHz pulsed**
 - Lear Astronics 94 GHz FMCW**
 - Norden 95 GHz pulsed**
 - IR: Two IR cameras**
 - Data Runs: 35 GHz (82), 95 GHz (174)**
 - Weather: Clear, rain, snow, fog**

- ◆ **Flight tests: 1992**
 - Radars: Honeywell 35 GHz pulsed**
 - Lear Astronics 94 GHz FMCW (limited)**
 - IR: Kodak 3-5 mm focal plane camera**
 - Approaches: 35 GHz (96), 94 GHz (11)**
 - Weather: Clear (46), fog (41), snow (8), rain (1)**

Data Analysis & Calibration (1)

- ◆ **Calibrate MMW Sensors**
 - Measure radar system gains and losses**
 - Inject RF signal to develop receiver transfer function**
 - Locate calibrated reflectors within runway scene**

- ◆ **Reduce Radar Sensor Data**
 - Convert raw data into equivalent received power**
 - Extract values from areas of interest within scene**


Data Analysis & Calibration (2)

- ◆ **Develop Sensor Figures of Merit**
Contrast, sharpness, and variability

- ◆ **Calculate Radar Phenomenology Values**
RCS for runway and bordering grass
Volumetric RCS and path attenuation for precipitation

Flight Test Data Analysis Methodology (1)


- ◆ Analyze discrete radar snapshots (full azimuth scan) at selected ranges

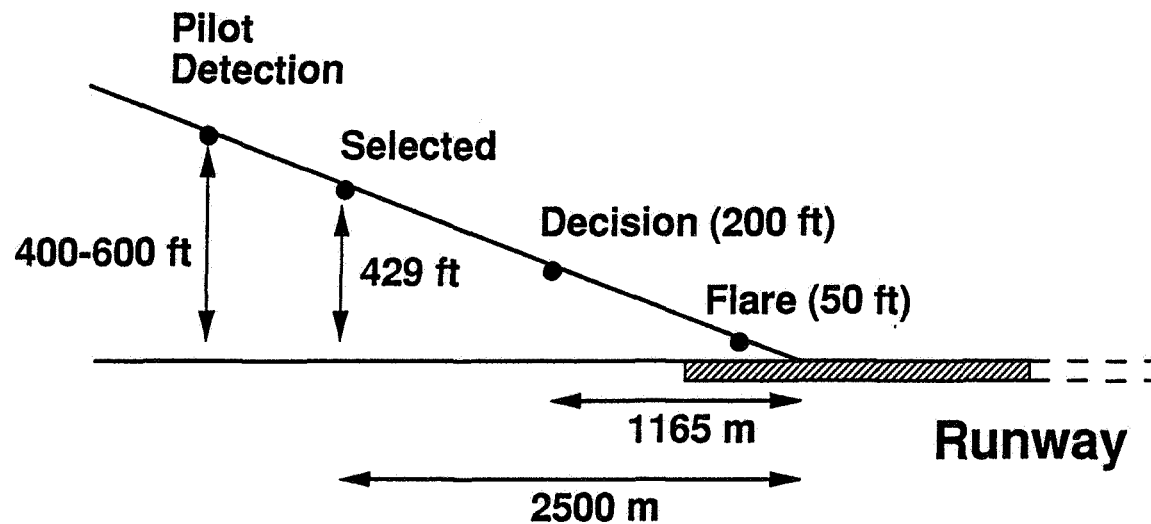


Flight Test Data Analysis Methodology (2)

- ◆ **Weather data**
 - Water drop size distributions**
 - Liquid water content (LWC) for fog**
 - Rainfall rate**
 - Equivalent rainfall rate for snow**
- ◆ **Airport ground truth**
 - Runway description**
 - Terrain description**
- ◆ **Radar calibration**
 - MMW Receiver calibration**
 - Radar reflectors at selected runways**

756

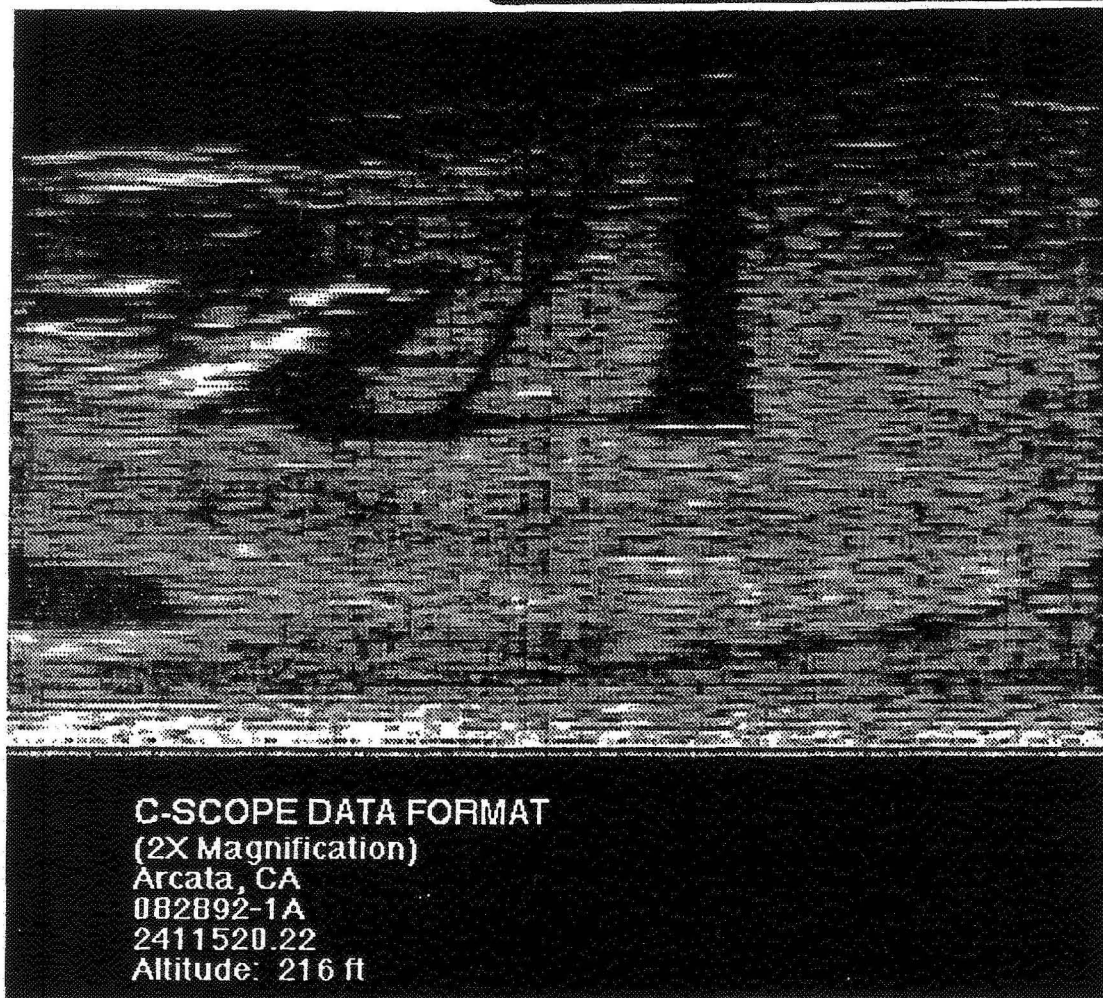


C-SCOPE DATA FORMAT
(2X Magnification)
Arcata, CA
082892-1A
2411520.22
Altitude: 216 ft

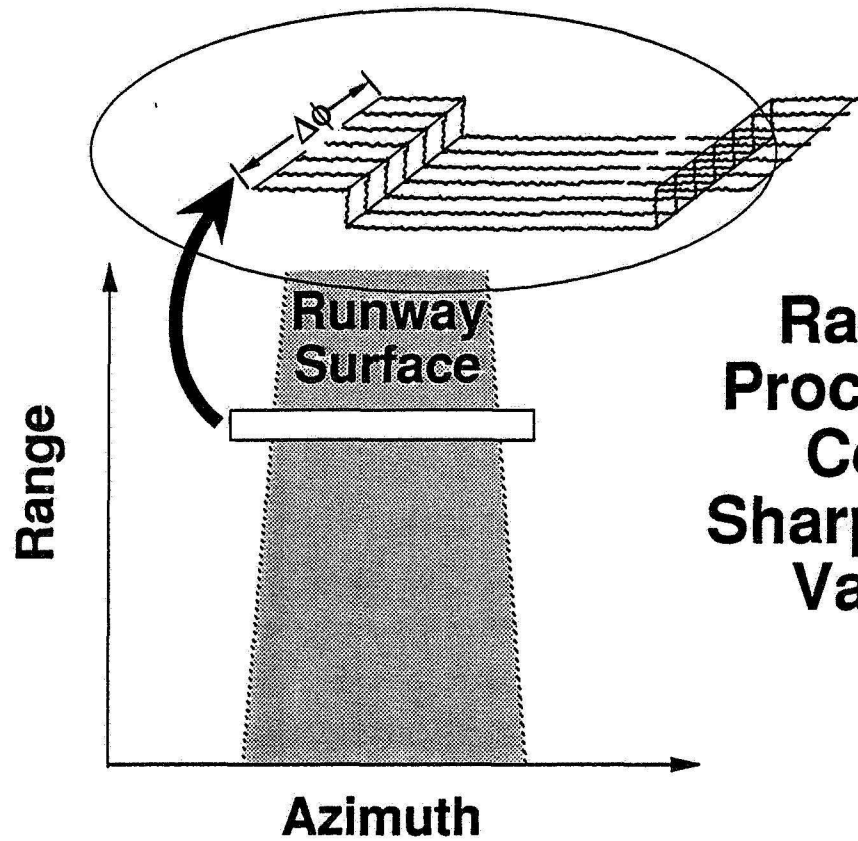


**Radar Data
Processing for
Contrast,
Sharpness, and
Variability**

Definitions of Contrast, Sharpness, and Signal-to-Variability Ratio

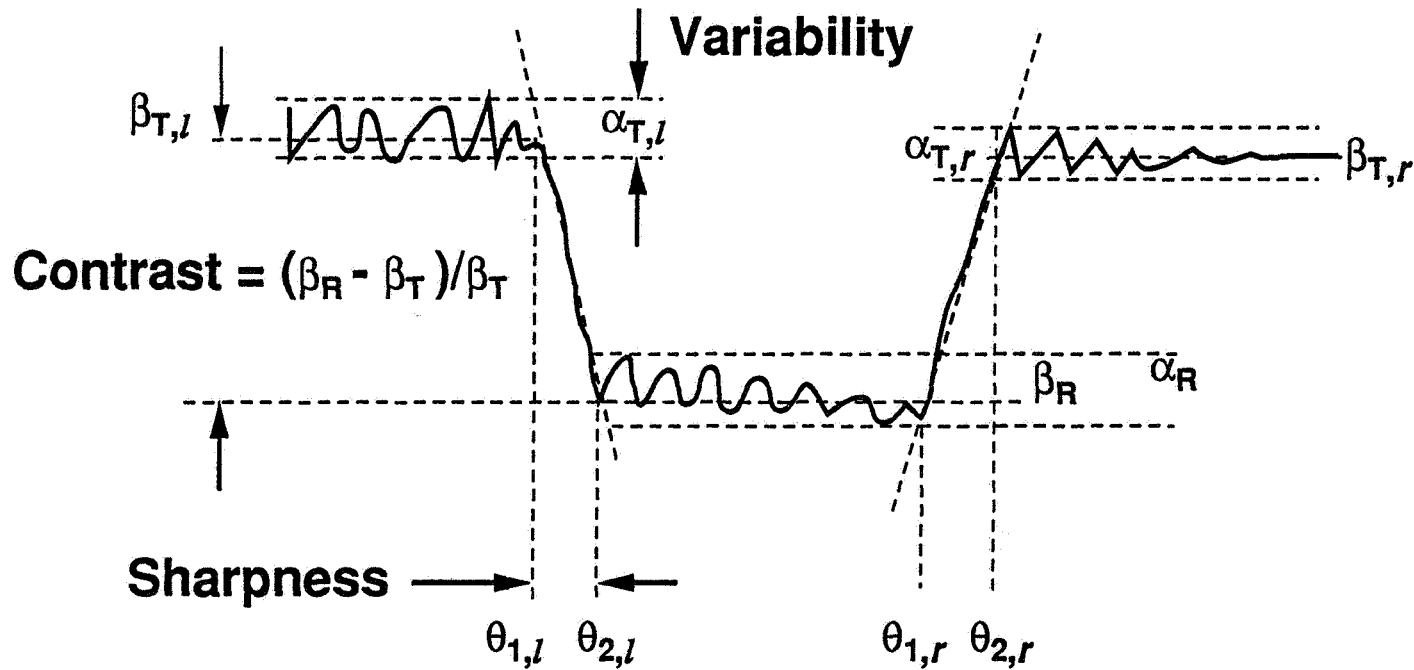


Contrast vs. ROI Range
Vandenburg: 081992-2

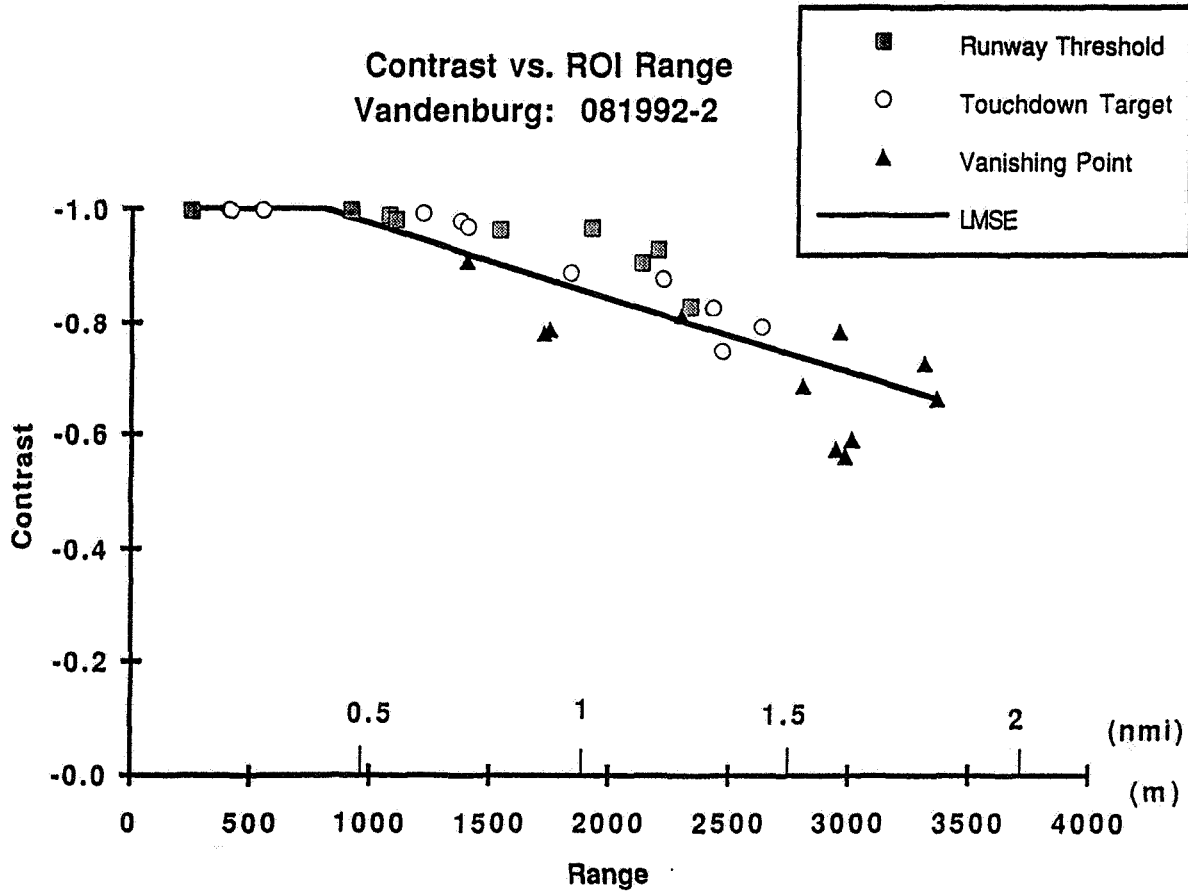

759

MMW Sensor Evaluation

Contrast vs. ROI Range
Clear Weather Approaches

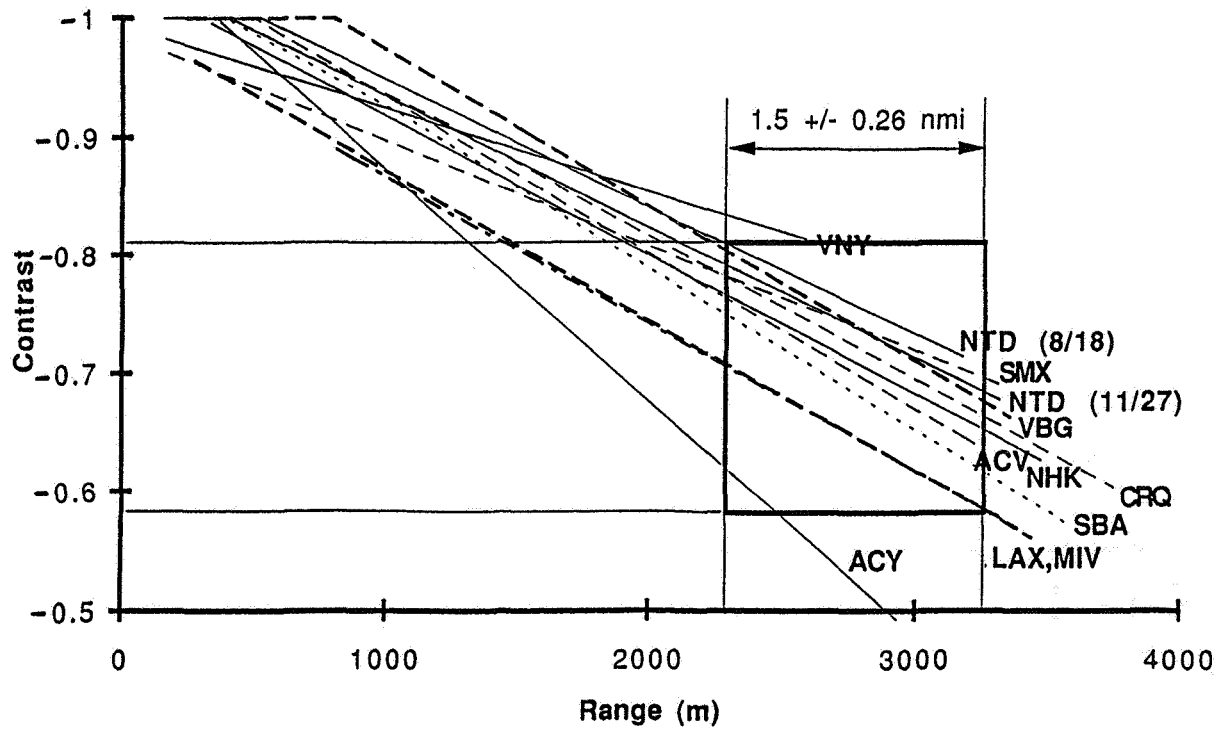

760

Weather Effects on Contrast (35 GHz)

- ◆ **Fog**
 - Excellent weather penetration (no effect)**
 - (Most delays due to fog)**
 - (Greatly reduced visual range)**
- ◆ **Rain**
 - Poor penetration for rain rates > 8 mm/hr**
 - Drop size distribution dependence**
 - (Visual range reduction in very heavy rains)**
- ◆ **Snow**
 - Falling snow not a problem**
 - Accumulated snow effect significant**
 - Runway must be cleared to improve contrast**

Design Tradeoff Issues (1)

- ◆ **MMW Band**
 - 95 GHz: higher az resolution for given aperture
 - 35 GHz: superior weather penetration

- ◆ **Azimuth and Range Resolution**
 - High res (0.3° az by 7 m range): sharper images
 - Low res (1° az by 20 m range): higher contrast

Design Tradeoff Issues (2)

- ◆ **Antenna Scan Rate**
 - High rate (10 Hz): reduced image update latency
 - Low rate (5 Hz): more dwell time for integration

- ◆ **Antenna Polarization**
 - Circular: reduced rain backscatter/better image
 - Linear: higher return from grass clutter

Future Research Needs

- ◆ **Use SVTD data to predict performance of future candidate MMW sensors**
- ◆ **Develop better models for performance of MMW sensors in weather**
- ◆ **Validate performance of future candidate MMW sensors based on the test and evaluation methodology established in the SVTD program**
- ◆ **Refine image quality metrics**
- ◆ **Examine techniques for image enhancement**