

N-37
19762
P-12

NASA
Technical Memorandum 106678

Army Research Laboratory
Memorandum Report ARL-TR-520

Analysis of the Effects of Surface Pitting and Wear on the Vibrations of a Gear Transmission System

F.K. Choy and V. Polyshchuk
The University of Akron
Akron, Ohio

J.J. Zakrajsek
Lewis Research Center
Cleveland, Ohio

R.F. Handschuh
Vehicle Propulsion Directorate
U.S. Army Research Laboratory
Lewis Research Center
Cleveland, Ohio

D.P. Townsend
Lewis Research Center
Cleveland, Ohio

Prepared for
AUSTRIB '94
sponsored by the Institution of Engineers, Australia
Perth, Western Australia, December 5-8, 1994

N95-12621
Unclas
G3/37 0019762
(NASA-TM-106678) ANALYSIS OF THE EFFECTS OF SURFACE PITTING AND WEAR ON THE VIBRATIONS OF A GEAR TRANSMISSION SYSTEM (NASA. Lewis Research Center) 10 p



National Aeronautics and Space Administration



Analysis of the Effects of Surface Pitting and Wear on the Vibrations of a Gear Transmission System

F. K. Choy*, V. Polyshchuk*, J.J. Zakrajsek†, R.F. Handschuh‡, and D.P. Townsend†

*The University of Akron, †National Aeronautics and Space Administration,

‡Vehicle Propulsion Directorate, U.S. Army Research Laboratory, Lewis Research Center

Abstract

A comprehensive procedure to simulate and analyze the vibrations in a gear transmission system with surface pitting, wear, and partial tooth fracture of the gear teeth is presented. An analytical model was developed where the effects of surface pitting and wear of the gear tooth were simulated by phase and magnitude changes in the gear mesh stiffness. Changes in the gear mesh stiffness were incorporated into each gear-shaft model during the global dynamic simulation of the system. The overall dynamics of the system were evaluated by solving for the transient dynamics of each shaft system simultaneously with the vibration of the gearbox structure. In order to reduce the number of degrees-of-freedom in the system, a modal synthesis procedure was used in the global transient dynamic analysis of the overall transmission system. An FFT procedure was used to transform the averaged time signal into the frequency domain for signature analysis. In addition, the Wigner-Ville distribution was also introduced to examine the gear vibration in the joint time-frequency domain for vibration pattern recognition. Experimental results obtained from a gear fatigue test rig at NASA Lewis Research Center were used to evalu-

1. Introduction

In the last two decades, problems arising from excessive wear and gear tooth surface pitting in gear transmission systems have been of increasing concern for a variety of gear users. At increased power and higher speeds, gear wear and fatigue failures are major concerns in aerospace applications. Although regular visual inspections and preventive maintenance can help to reduce the failure rate of gear systems, the cost and down time required make such programs inefficient and uneconomical.

Vibration signature analysis methodologies are being developed to non-intrusively examine the health and wear of gear transmission systems. Using spectral analysis, the amplitude of the frequency spectrum of the measured vibration signal is calculated and displayed in a continuous manner. However, the spectral analysis technique is difficult to apply in a highly complex system where the large number of spectral lines often makes it difficult to detect significant changes in the spectrum. Another methodology is the joint time-frequency approach which applies the Wigner-Ville distribution (WVD) [1-3] on the time vibration signal of the system. Unlike the regular Fourier transform process, the WVD provides an instantaneous frequency spectrum of the system at any instant throughout the sampling period (while FFT provides a averaged frequency spectrum of the total sampling period). The spectral density of the fundamental exciting frequency and its sidebands change as the shaft rotates through a complete revolution. Some success has been achieved in applying the WVD concept in the health monitoring of gear transmission systems [3-6]. However, a complete vibration signature database is needed for development of an effective pattern recognition scheme. In order to populate such databases, the development of an accurate analytical procedure to predict vibrations in gear systems due to wear and fatigue failure is necessary.

The objective of this paper is to develop a comprehensive procedure to simulate and analyze the vibration in a gear transmission system with effects of surface pitting and wear of the gear teeth under normal operating conditions. The effects of changes in magnitude and phase of the mesh stiffness at one particular tooth or a number of consecutive teeth were evaluated in order to simulate the effects of surface pitting and wear. The effects of these localized changes in the gear mesh were incorporated into each gear-rotor model for the dynamic simulation [7-9]. The dynamics of each gear-rotor system were coupled with each other through the gear mesh interacting forces. The coupling between the rotors and the casing structure were generated through the bearing support forces. The global vibrations of the system were evaluated by solving the transient dynamics of each rotor system simultaneously with the vibration of the casing. In order to minimize the computational effort, the number of degrees-of-freedom of the system were reduced by using a modal synthesis procedure [7,8]. Experimental vibration results obtained from a gear fatigue test rig at NASA Lewis Research Center [11] were used to verify the analytical procedure.

2. Solution Procedures

2.1 Dynamics of the Gear-Shaft Configuration and the Gearbox System

The dynamics of the i th individual gear-shaft system can be evaluated through the equations of motion for the vibrations of a individual rotor-bearing-gear system as shown in Figure 1[7,8], given in matrix form, as

$$[M] \{\ddot{W}_i\} + [K_s] \{W_i\} = \{F_{bi}(t)\} + \{F_{gi}(t)\} + \{F_{ui}(t)\} \quad (1)$$

where $[M]$ and $[K_s]$ are respectively the mass and shaft stiffness matrices of the rotor, $\{W_i\}$ is the general displacement

vector of the i th rotor in the its local coordinate system, and, $\{F_{bi}(t)\}$, $\{F_{gi}(t)\}$, and $\{F_{ui}(t)\}$ are respectively the force vectors acting on the i th rotor system due to bearing forces, gear mesh interactions, and mass-imbances.

The equations of motion of the gearbox with p rotor systems can be expressed as

$$[M_c]\{\ddot{W}_c\} + [K_c]\{W_c\} = \sum_{i=1}^p [T_{ci}]\{F_{bi}(t)\} \quad (2)$$

where $[T_{ci}]$ represents the coordinate transformation between the i th rotor and the gearbox.

2.2 Evaluation of Bearing Forces

The bearing forces $\{F_{bi}(t)\}$ for the i th rotor can be evaluated as

$$\{F_{bi}(t)\} = [C_{bi}]\left(\{\dot{W}_i\} - [T_{ic}]\{\dot{W}_{ci}\}\right) + [K_{bi}]\left(\{W_i\} - [T_{ic}]\{W_{ci}\}\right) \quad (3)$$

where $[C_{bi}]$ and $[K_{bi}]$ are respectively the damping and stiffness of the bearing, $[T_{ic}]$ is the coordinate transformation matrix for the gearbox with respect to the i th rotor, and W_{ci} are the casing displacements at the rotor locations.

2.3 Evaluation of Gear Forces

The gear forces generated from the gear mesh interaction [12] can be written as

$$\{F_{gi}(t)\} = \{F_{ri}(t)\} + \{F_{ti}(t)\} \quad (4)$$

where $\{F_{ri}(t)\}$ is the vector containing the gear forces and moments resulting from the relative rotation between the two mating gears and $\{F_{ti}(t)\}$ is the vector containing gear forces and moments due to the translational motion between the two gears.

2.4 Modal Synthesis Procedure

In order to calculate the transient and steady state dynamics of the system, the coupled rotor and casing equations of motion must be solved simultaneously. To minimize the computational effort, the modal transformation [7,8] procedure will be applied to reduce the degrees of freedom of the global equations of motion. Using m undamped mode shapes of the i th rotor system $[\phi_{i1}, \phi_{i2}, \phi_{i3}, \dots, \phi_{im}]$ and m_c undamped mode shapes of the gearbox $[\phi_{c1}, \phi_{c1}, \phi_{c3}, \dots, \phi_{cmc}]$, the rotor displacement for the i th rotor can be written as

$$\{W_i\} = \sum_{j=1}^m A_{ij} \{\phi_{ij}\} \quad (5)$$

and, similarly, the gearbox displacements as

$$\{W_c\} = [\phi_c] \{A_c\} \quad (6)$$

where $\{A_i\}$ and $\{A_c\}$ are the modal time functions of the i th rotor and the gearbox respectively. Using the expansion in equation (5), the equations of motion for the i th rotor in equation (1) can be written as

$$[M][\phi_c]\{\ddot{A}_i\} + [K_s][\phi_c]\{A_i\} = \{F_{bi}(t)\} + \{F_{gi}(t)\} + \{F_{ui}(t)\} \quad (7)$$

Premultiplying by $[\phi_i]^T$ and using the orthogonality conditions of the mode shapes [7], the i th rotor equations of motion can be written as

$$\{\ddot{A}_i\} + [\Lambda^2]\{A_i\} = \{\bar{F}_{bi}\} + \{\bar{F}_{gi}\} + \{\bar{F}_{ui}\} \quad (8)$$

where $[\Lambda^2]$ is the diagonal matrix of the squares of the natural frequencies of the system.

For the gearbox system, a similar transformation is carried out as equation (2) can be written as

$$\{\ddot{A}_c\} + [\Lambda_c^2]\{A_c\} = \{\bar{F}_{cb}\} \quad (9)$$

For a system of k rotors, equation (8) can be repeated k times and solved with the casing equation (9) simultaneously for the modal accelerations $\{A_i\}$ and $\{A_c\}$. A numerical integration scheme is used to integrate the accelerations to obtain velocities and displacements at each time step for transient calculations [7].

3. Signature Analysis of Vibration Signal

3.1 Frequency Domain Analysis

The frequency spectrum analysis is used by applying a discrete Fourier Transform on the average time signal $x(t)$ such that the spectral components are

$$X(k) = T \sum_{i=0}^{N-1} x(t) \exp\left(\frac{-j2\pi ik}{N}\right) \quad (10)$$

where $x(t)$ is the time averaged of the vibration signal $W(t)$ and T is the sampling interval. The frequency components are examined in the frequency domain and compared with those obtained at various stages of the fault development in the experimental gear test rig.

3.2 Joint Time-Frequency Analysis : The Wigner-Ville Distribution

To examine the vibration signal in a joint time-frequency domain, the Wigner-Ville method [1-3] is used in this study.

The Wigner-Ville distribution will provide an inter-domain relationship between time and frequency during the period of the time data window. The WVD (Wigner-Ville Distribution) can be written as:

$$WV(t, f) = \int_{-\infty}^{\infty} x\left(t + \frac{\tau}{2}\right) x^* \left(t - \frac{\tau}{2}\right) e^{-j2\pi f\tau} d\tau \quad (11)$$

where $WV(t, f)$ is the Wigner-Ville distribution in both the time domain t and the frequency domain f . To allow sampling at the Nyquist rate and eliminate the concentration of energy around the frequency origin due to the cross product between negative and positive frequency [1,2], the analytic signal was used in evaluating the WVD. The analytic signal $s(t)$ is defined as

$$S(t) = x(t) + jH[x(t)] \quad (12)$$

Where $H[x(t)]$ is the Hilbert transform of $x(t)$.

In order to avoid a repetition in the time domain WVD, a weighting function[4] is added to the time data before the evaluation process. Such process may decrease the resolution of the distribution, but it will eliminate the repetition of peaks in the time domain, and, thus the interpretation of the result will be substantially easier.

4. Description of Experimental Study

The experiment was performed on the spiral bevel gear fatigue test rig [11], as illustrated in Figure 2, at the NASA Lewis Research Center. The primary purpose of this rig is to study the effects of gear tooth design, gear materials, and lubricants on the fatigue strength of aircraft quality gears. Because spiral bevel gears are used extensively in helicopter transmissions to transfer power between non-parallel intersecting shafts, the use of this fatigue rig for diagnostic studies is practical. Vibration data from an accelerometer mounted on the pinion shaft bearing housing was captured by an analog to digital conversion board. The 12-tooth test pinion, and the 36-tooth gear have a 35 degree spiral angle, a 1 in. face with, a 90 degree shaft angle, and 22.5 degree pressure angle. The pinion transmits 720 hp at a nominal speed of 14,400 rpm. The test rig was stopped several times during the test for gear damage inspection. The test was concluded at 17.8 operational hours when a broken tooth was detected visually during one of the shutdowns.

Pictures of tooth damage on the pinion at various stages in the test are shown in Figure 3. At the first rig shut-down, at about 5.5 hours into the test, a small pit was observed on one of the teeth on the test pinion, as illustrated in Figure 3A. The test was stopped again at approximately 12 hours and the pitted area spread to cover approximately 75% of the face of the pinion tooth, as seen in Figure 3B. In addition, pitting started to appear on the adjacent teeth. Figure 3B shows the pinion at the end of the test, at 17.8 hours. It was found that one of the three heavily pitted pinion teeth had experienced a tooth breakage, losing one third of the tooth, as shown in the figure.

5. Discussions of Results

To study the effects of gear tooth pitting and wear on the dynamics of the rotor system, the numerical simulation procedure described above was used to model the vibrations of the pinion gear in the test rig. During the experimental study, vertical direction vibration signals from the pinion gear are time synchronously averaged for spectral analysis and analysis using the joint time-frequency distribution(WVD). In order to perform an accurate comparison, the averaged time signal from the vertical vibration of the pinion gear is also generated using the numerical model. During these simulations, approximate gear mesh stiffness models are developed to simulated the effects of wear and pitting of the pinion tooth on the dynamics of the system.

As it has been established, the changes due to gear tooth wear or failure can be represented by the amplitude and phase changes in vibration, which, in turn, can be represented by magnitude and phase changes in mesh stiffness[5,6]. To demonstrate the effects of mesh stiffness change on gear vibration, the variation of the mesh stiffness model used for this study is given in Fig 4. The "undamaged" configuration of the mesh stiffness is given by 0 degree phase change(Fig. 4A), and 0% amplitude reduction(Fig. 4B). During the wear and pitting process, two types of stiffness changes are examined, i.e., the phase changes, shown in Figure 4A, and the amplitude changes, shown in Figure 4B. Figures 5 and 6 show the time, frequency, and joint time-frequency analysis(WVD) of the pinion gear vibration signals with the approximated changes in gear mesh stiffness.

Figure 5 shows the effects of mesh stiffness phase changes in the WVD representation of the predicted vibration signal. As seen in Figure 5, a phase change in the mesh stiffness at the 6th tooth of the 12-teeth pinion resulted in a temporary increase of amplitude and phase of the pinion vibration time signal during the 6th tooth pass location. As the phase shift in the mesh stiffness increases, from 1.5 degrees to 4.5 degrees, the changes in amplitude and phase in the vibration signal become more pronounced. In the frequency spectra, this change in mesh stiffness will result in the increase of the amplitude in the sideband frequencies. However, as discussed earlier, although the frequency spectrum provides good indications of the existence of the non-synchronous components, it can not distinguish the time locations of their occurrences. The joint time-frequency analysis using WVD, shows the existence of various frequency components as the pinion rotates through a complete revolution of 360 degrees. Note that, in this case, the WVD shows a continuous excitation of the mesh frequency (12 x rotational speed) throughout the complete 360-degree revolution while subsynchronous components of 8 times, 4 times, and 1 times rotational speed are occurring at the 6th and 7th tooth pass locations.

Figure 6 shows the effects of reductions in mesh stiffness at the 6th gear location. With the reduction of mesh stiffness, a substantial change in the vibration at the 6th tooth pass location (150 - 180 degrees) is observed. Note that in the case of 50% stiffness reduction, the time vibration amplitude

at the 6th tooth pass location (at approximately the 180 degree location for the 12 teeth pinion) almost vanishes and a much larger amplitude at the 7th tooth pass location is generated. In addition, the vibration amplitudes of the 8th and 9th tooth pass locations are reduced. These reductions in vibration amplitudes at mesh frequency resulted in a much higher sub-synchronous components in the frequency spectrum as shown in Figure 6C. The WVD shows a distinct type of cross pattern at the intersection of the mesh frequency and the 6th tooth pass location with a continuous mesh frequency component throughout the complete pinion revolution.

Figure 7 shows the pinion gear vibration signature analysis of the experimental time signal acquired at A) 12 hours when one tooth is severely pitted (Figure 3B), and B) 17.8 hours, when three consecutive teeth are pitted and one has a tooth fracture (Figure 3C). To numerically simulate these phenomena, two gear mesh stiffness models, as shown in Figure 8A and 8B, which include a combination of phase shift and amplitude change, are introduced. Figure 8A represents the gear mesh stiffness for a heavily pitted tooth during a single tooth pass. The mesh stiffness is simulated by a 50% loss in stiffness at approximately the first 20% of the tooth contacting period. Figure 8B represent the mesh stiffness, for a three tooth pass period, consisting of one broken tooth with two heavily pitted teeth at the adjacent sides. Note that the stiffness of the middle (broken) tooth is simulated by a 50% loss of stiffness, while the other adjacent (pitted) teeth are simulated by the stiffness reduction similar to that of the single tooth case as shown in Fig. 8A. Additional frictional effects are also added into the model to simulate the roughness of the tooth surface due to pitting. The simulated vibration signature of the pinion gear is given in Figure 9. Comparing Figures 9A and 7a, for the single tooth damage case at 12 hours, one may notice the similarities between both the frequency spectra and the WVD display. Some of the unevenness in the experimental time signal is mainly due to the modulation of frequencies due to other excitations in the test rig which are not numerically modeled. For the tooth break-off case at 17.8 hours, Figures 7B and 9B, both the numerical and the experimental WVD display a large cross pattern at the 6th tooth pass location due to tooth break-off. However, some discrepancies have been detected between the experimental and the numerical time signal at the 4th and 5th tooth pass locations. The experimental time signal consists of some higher frequency, smaller amplitude vibration modulation, which are not being numerically simulated. This additional modulated signal resulted in the excitation of the 14 times rotational speed component, as shown in the frequency spectrum in Figure 7B, and, also, in turn, is responsible for the small differences created in the WVD.

6. Summary and Conclusions

A numerical procedure has been developed to simulate the dynamics of gear transmission systems with the effects of gear tooth damage due to wear and pitting. The work presented in this paper can be summarized as follows:

- 1) A modal synthesis methodology has been developed to simulate the dynamics of gear transmission systems. While the computational efforts has been greatly reduced by modal transformation, the numerical results generated maintain good accuracy.
- 2) Gear tooth damage due to wear and pitting can be simulated by amplitude and phase changes in the gear mesh stiffness model. The gear mesh model developed can easily be incorporated into the global transmission system for dynamic predictions.
- 3) Using the time averaging technique, frequency spectrum analysis, and the Wigner-Ville distribution, a signature analysis scheme can be developed to examine and characterize the vibration signal of the gear system.
- 4) A parametric study of the effects on the vibration signal due to various changes in the gear mesh stiffness model, simulating various degrees of pitting and wear damage, could provide a comprehensive database for gear fault detection and damage estimation research.

7. References:

1. Boashash, B. and Black, P.J. "An efficient Real-Time Implementation of the Wigner-Ville Distribution" *IEEE Trans. on Acoustics, Speech, and Signal Processing*, Vol. ASSP-35, No.11, November 1987.
2. Claasen, T.A.C.M., and Mecklenbra uker, W.F.G., "The Wigner Distribution- A tool for Time-Frequency Signal Analysis," Part I *Philip J. Res.* 35, 1980.
3. Shin, Y.S. and Jeon, J.J. "Pseudo Wigner-Ville Time-Frequency Distribution and its Application to Machinery Condition Monitoring", *J. of Shock and Vibration*, Vol. 1, Issue 1, 1993/1994, pp. 65.
4. Mcfadden, P.D., "Examination of a Technique for the Early Detection of Failure in Gears by Signal Processing of the Time Domain Average of the Meshing Vibration," *Mechanical System and Signal Processing*, (1987), 1(2), 173-183
5. Mcfadden, P.D. and Wang, W.J. "Time-Frequency Domain Analysis of Vibration Signal for Machinery Diagnostics(II) the Weighted Wigner-Ville Distribution", University of Oxford, Report No. OUEL 1891, 1991.
6. Forrester, B.D., "Analysis of Gear Vibration in the Time-Frequency Domain," *Proc. of the 44th Meeting of the Mechanical Failure Prevention Group.* Feb. 1990
7. Choy, F.K., Tu, Y.K., Savage, M., and Townsewnd, D.P., "Vibration Signature Analysis of Multistage Gear Transmission", *J. of the Franklin Institute*, Vol. 328, No.2/3, 1991.
8. Choy, F.K., Ruan, Y.F., Zakrajsek, J.J., Oswald, F.B., "Modal Simulation of Gearbox Vibration with Experimental Correlation" *ALAAJ. of Propulsion and Power*, Vol.9, No.2, March 1993.

9. Kahraman, A.; Ozguven, H.N.; Houser, D.R.; and Zakrajsek, J.J.; "Dynamic Analysis of Geared Rotors by Finite Element", NASA TM-102349, AVSCOM-TM-89-C-006, 1990.

10. Stewart, R.M., "Some Useful Data Analysis Techniques for Gearbox Diagnostics," Institute of Sound and Vibration Research, Paper MHM/R/10/77, 1977.

11. Zakrajsek, J.J., Handschuh, R.F., and Decker, H.J. "Application of Fault Detection Techniques to Spiral Bevel Gear Fatigue Data", NASA TM-106467, presented in the 48th Mechanical Failures Prevention Group Meeting, Wakefield, Massachusetts, April 19-21, 1994.

12. Choy, F.K.; Townsend, D.P.; and Oswald, F.B., "Dynamic Analysis of Multimesh-Gear Helicopter Transmissions", NASA TP-2789, 1988.

13. Boyd, L.S., and Pike, J.A., "Epicycle Gear Dynamics", AIAA Journal, Vol.27, No.5, May 1989.

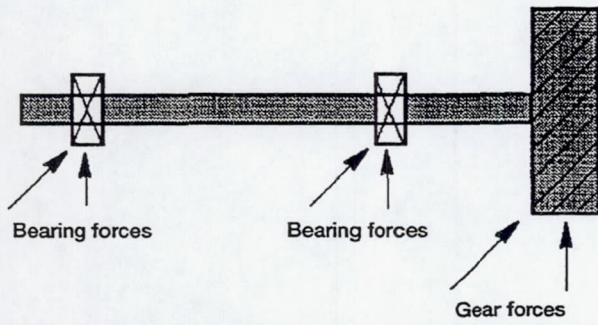


Figure 1.—Schematic of the rotor-gear bearing system.

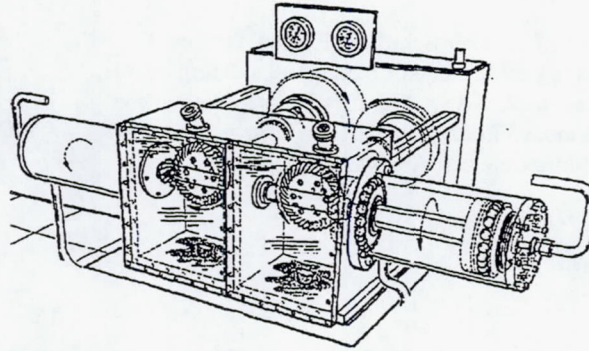


Figure 2.—Picture of the bevel gear test rig in NASA Lewis Research Center.

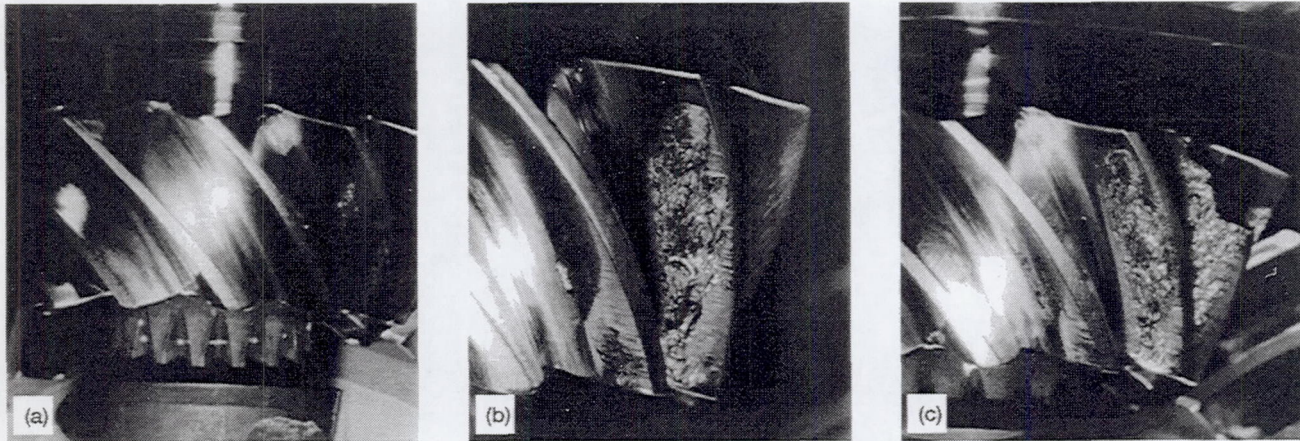


Figure 3.—Pictures of the damaged pinion teeth. (a) 5.5 hr. (b) 12 hr. (c) 17.8 hr.



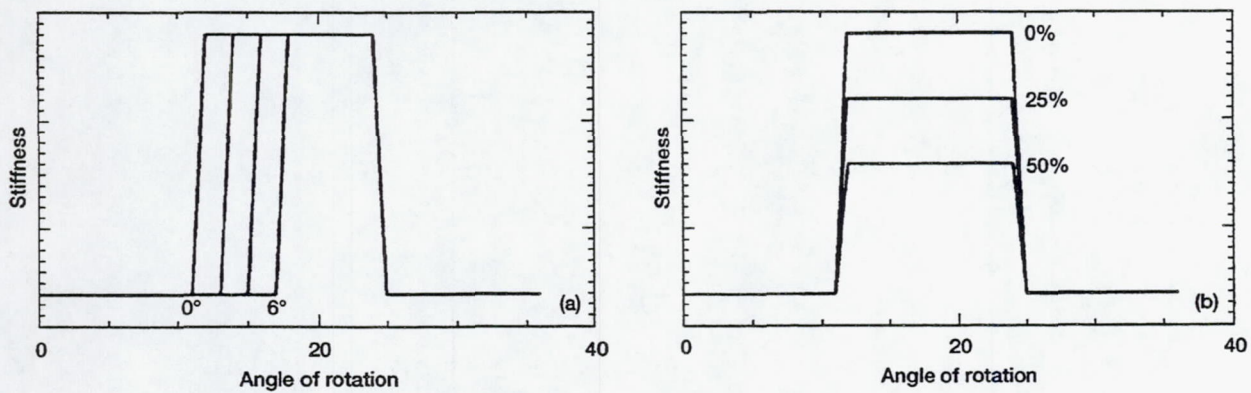



Figure 4.—Stiffness changes in the gear mesh model.

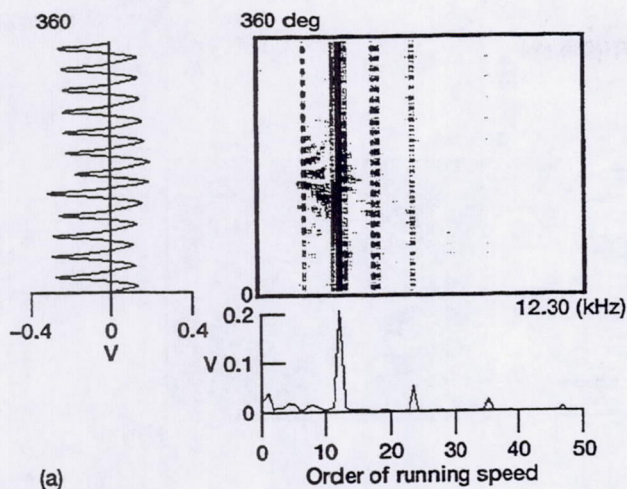


(a)

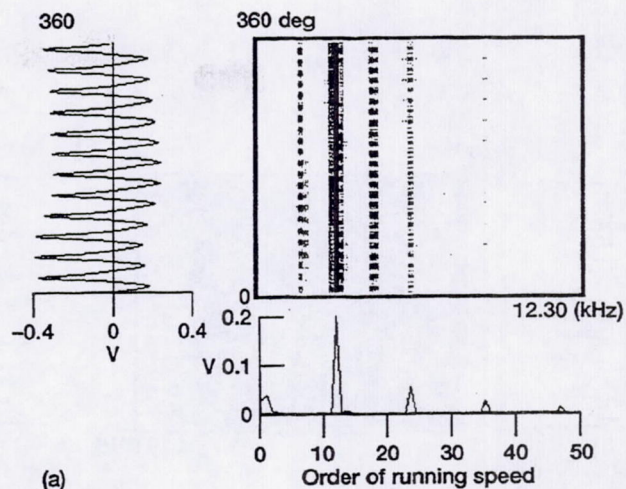


(a)

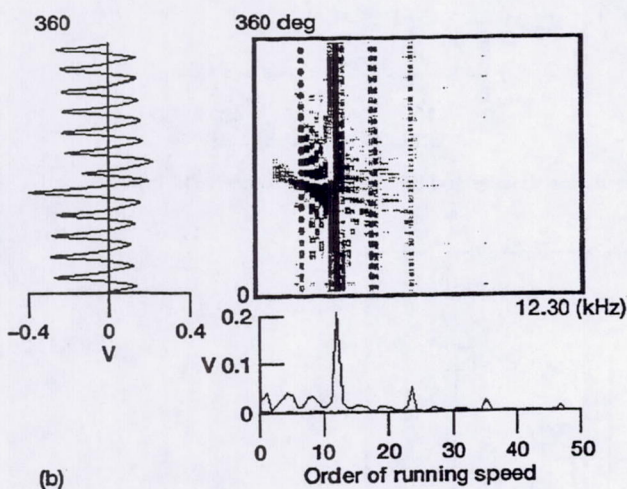

(b)

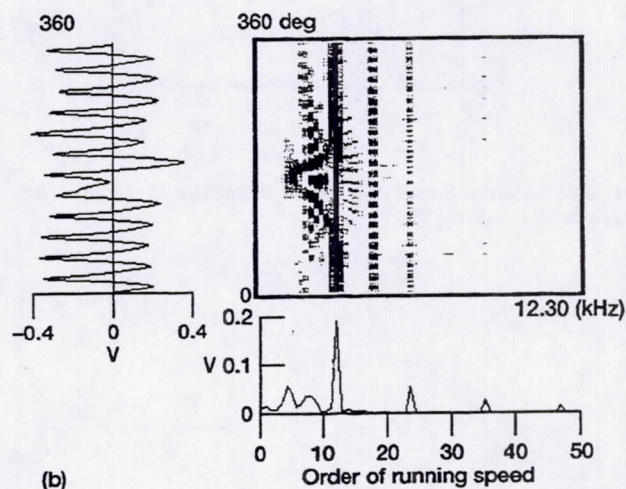


(b)

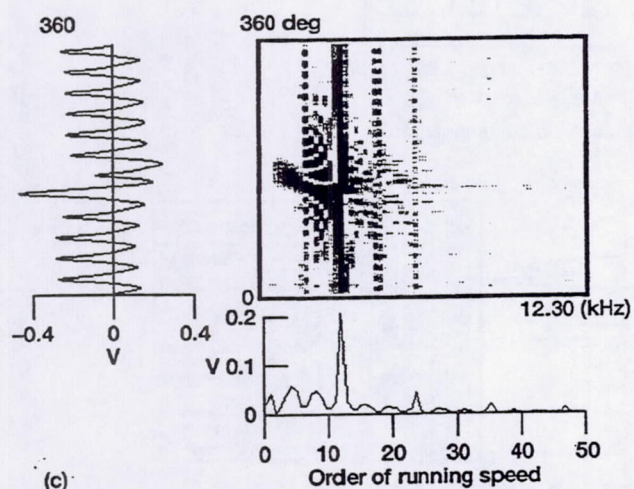

(c)

Figure 5.—Simulated pinion vibration signature due to phase change in the gear mesh stiffness. (a) 1.5°. (b) 3.0°. (c) 4.5°.

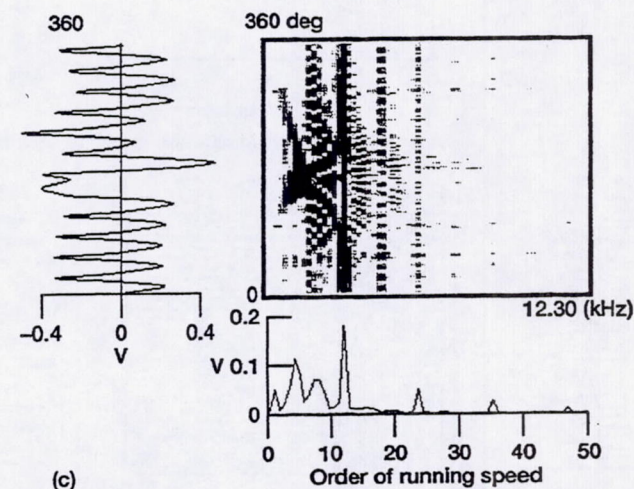

(c)

Figure 6.—Simulated pinion vibration signature due to amplitude change in the gear mesh stiffness. (a) 0% reduction. (b) 25% reduction. (c) 50% reduction.

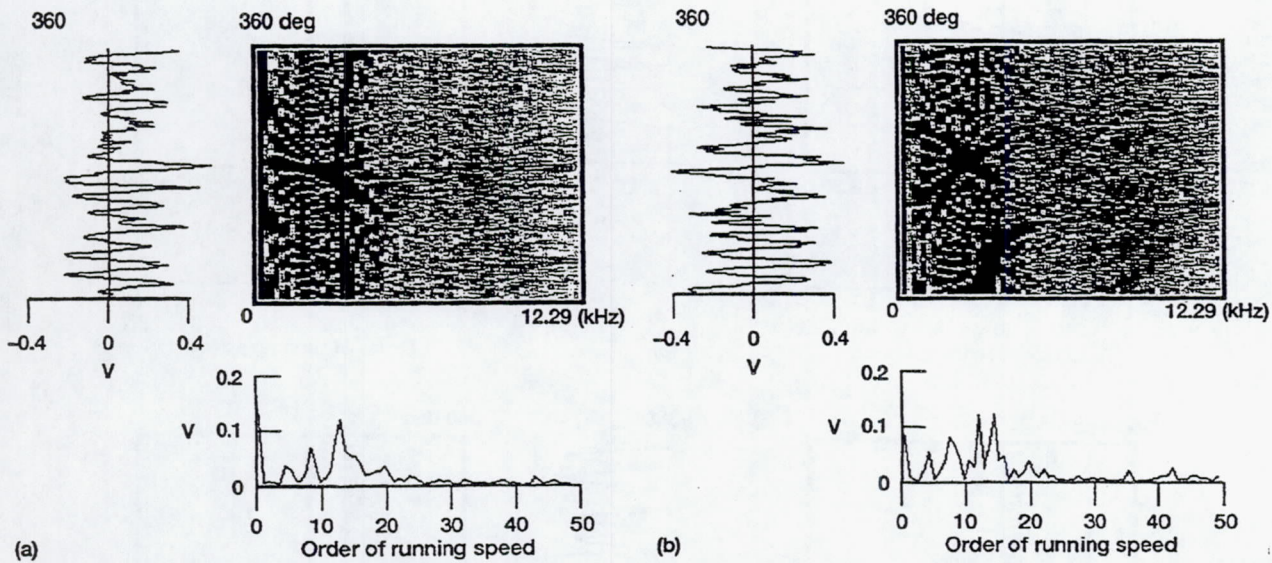


Figure 7.—Experimental pinion vibration signature due to damage on pinion teeth due to wear and pitting. (a) Single tooth, (12 hr). (b) Three teeth, (17.8 hr).

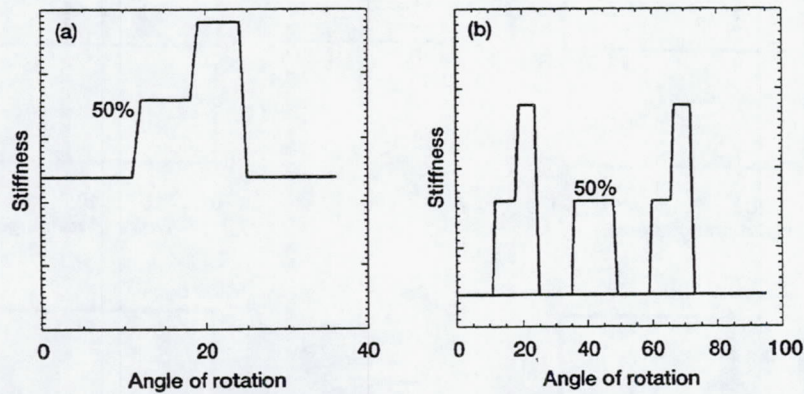


Figure 8.—Gear mesh stiffness model to simulate damages in pinion gear teeth.

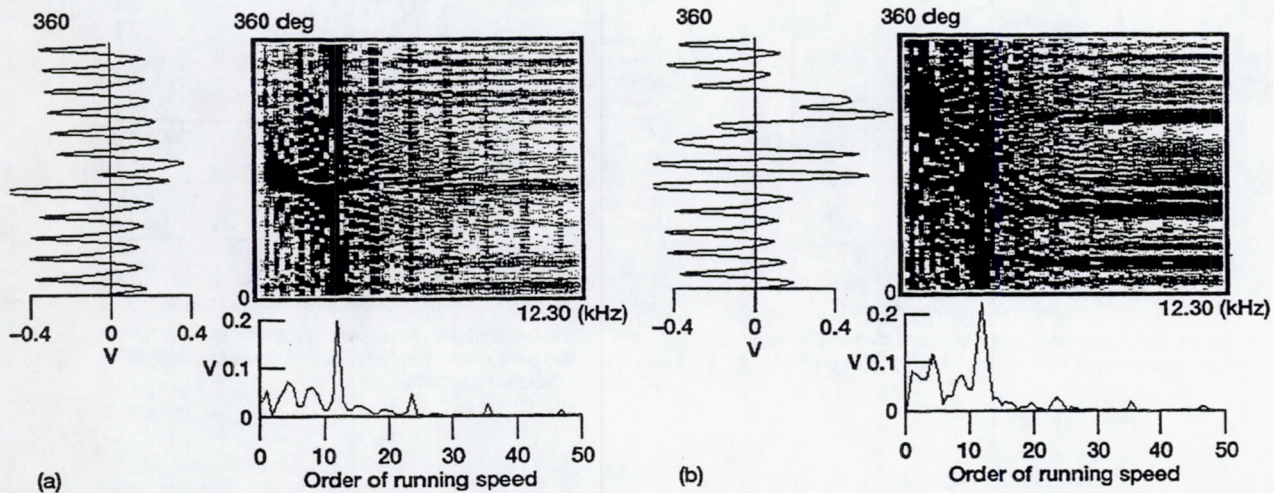


Figure 9.—Numerically simulated pinion vibration signature due to damage on pinion teeth due to wear and pitting. (a) Single tooth. (b) Three teeth.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE July 1994	3. REPORT TYPE AND DATES COVERED Technical Memorandum	
4. TITLE AND SUBTITLE Analysis of the Effects of Surface Pitting and Wear on the Vibrations of a Gear Transmission System		5. FUNDING NUMBERS WU-505-62-36 1L162211A47A	
6. AUTHOR(S) F.K. Choy, V. Polyshchuk, J.J. Zakrajsek, R.F. Handschuh, and D.P. Townsend			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) NASA Lewis Research Center Cleveland, Ohio 44135-3191 and Vehicle Propulsion Directorate U.S. Army Research Laboratory Cleveland, Ohio 44135-3191		8. PERFORMING ORGANIZATION REPORT NUMBER E-9014	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, D.C. 20546-0001 and U.S. Army Research Laboratory Adelphi, Maryland 20783-1145		10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TM-106678 ARL-TR-520	
11. SUPPLEMENTARY NOTES Prepared for AUSTRIE '94 sponsored by the Institution of Engineers, Australia, Perth, Western Australia, December 5-8, 1994. F.K. Choy and V. Polyshchuk, The University of Akron, Akron, Ohio 44325; J.J. Zakrajsek and D.P. Townsend, NASA Lewis Research Center; R.F. Handschuh, Vehicle Propulsion Directorate, U.S. Army Research Laboratory, NASA Lewis Research Center. Responsible person, J.J. Zakrajsek, organization code 2730, (216) 433-3968.			
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Category 37		12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) A comprehensive procedure to simulate and analyze the vibrations in a gear transmission system with surface pitting, wear, and partial tooth fracture of the gear teeth is presented. An analytical model was developed where the effects of surface pitting and wear of the gear tooth were simulated by phase and magnitude changes in the gear mesh stiffness. Changes in the gear mesh stiffness were incorporated into each gear-shaft model during the global dynamic simulation of the system. The overall dynamics of the system were evaluated by solving for the transient dynamics of each shaft system simultaneously with the vibration of the gearbox structure. In order to reduce the number of degrees-of-freedom in the system, a modal synthesis procedure was used in the global transient dynamic analysis of the overall transmission system. An FFT procedure was used to transform the averaged time signal into the frequency domain for signature analysis. In addition, the Wigner-Ville distribution was also introduced to examine the gear vibration in the joint time-frequency domain for vibration pattern recognition. Experimental results obtained from a gear fatigue test rig at NASA Lewis Research Center were used to evaluate the analytical model.			
14. SUBJECT TERMS Dynamic; Modeling; Gear; Fatigue; Diagnostics; Failure prediction		15. NUMBER OF PAGES 10	
		16. PRICE CODE A02	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT