


N94- 26286

Autonomous Rendezvous and Docking for Space Station Freedom

442573

James L. Garrison, Jr. and Stephen J. Katzberg
NASA Langley Research Center
Hampton, Virginia

**LANGLEY
RESEARCH
CENTER**

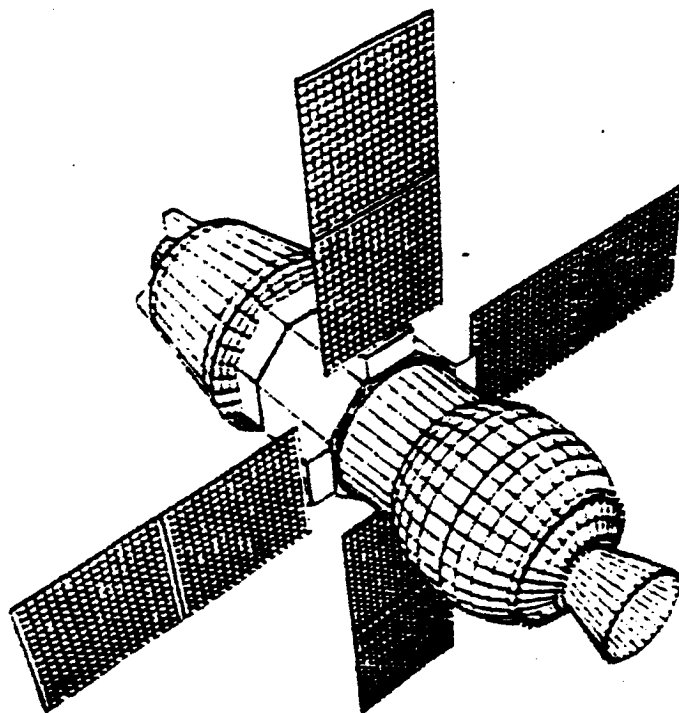

**PROPOSED
AR&D
INITIATIVE**

AUTONOMOUS RENDEZVOUS AND DOCKING STUDIES FOR SPACE STATION FREEDOM

*OVERVIEW OF WORK IN PROGRESS
AND PLANS FOR 1993*

March 17, 1993

James L. Garrison
Stephen J. Katzberg

NASA Langley Research Center

REQUIREMENTS FOR AR&D EXPERIENCE

Space Station:

"... reinitiate and complete efforts to develop operational scenarios and requirements for rendezvous, proximity operations, capture, and attached operations of transfer vehicles **other than the Space Shuttle.**"

(R. Kohrs memo - Nov. 30, 1992)

Earth Sciences:

"Communications continue in good working order... GOES-5 is **no longer controllable because of insufficient fuel.** On January 28, 1989 a revised transmission schedule was implemented."

(APT Information Note 89-1 - March 13, 1989)

Technology Validation:

"... the primary recommendation of the committee [is] that NASA establish a national space facility for the development of space automation and robotics, one element of which is a **telerobotic research platform in space.**"

(Annual Report of the Langley GN&C Technical Committee - September, 1992)

OPPORTUNITY FOR LOW COST AR&D FLIGHT EXPERIENCE

Langley researchers have proposed cooperation with the Space Automation and Robotics Center (SpARC) of the Environmental Research Institute of Michigan (ERIM) on their AR&D experiment planned as part of the COMET Program.

SpARC is a NASA Center for the Commercial Development of Space (CCDS).


COMET, the Commercial Experiment Transporter is an orbital system operated by the University of Tennessee Space Institute (UTSI) exclusively for use of the CCDS's.

SpARC will make use of the first two COMET Service Modules, following completion of on-orbit experiments, to attempt AR&D.

This series of two missions (4/93 and 11/94) are already funded Conestoga launches out of Wallops Is.

Langley was asked to provide simulations and analysis of the mission, recommend algorithm enhancements, and perform ground-based hardware testing and simulation, if appropriate.

COMET SPACECRAFT PERFORMANCE

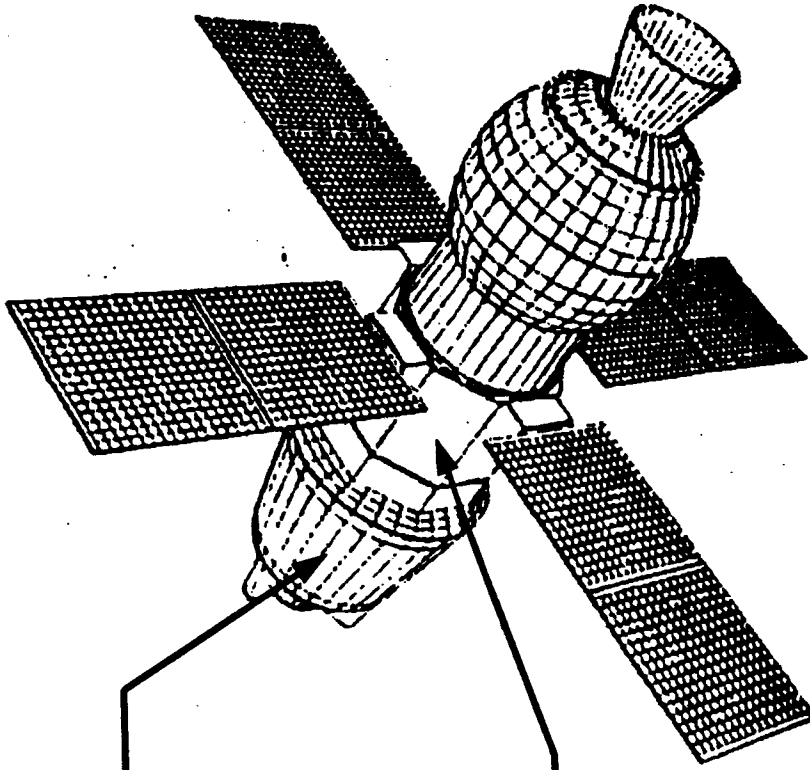


Recovery Module

Mission Duration: 30 days
Payload Mass: 300 lbm
Payload Volume: 10 cu. ft.

Service Module

Mission Duration: 130+ days
Payload Mass: 150 lbm
Payload Volume: 15 cu. ft.

AR&D MISSION PROFILE

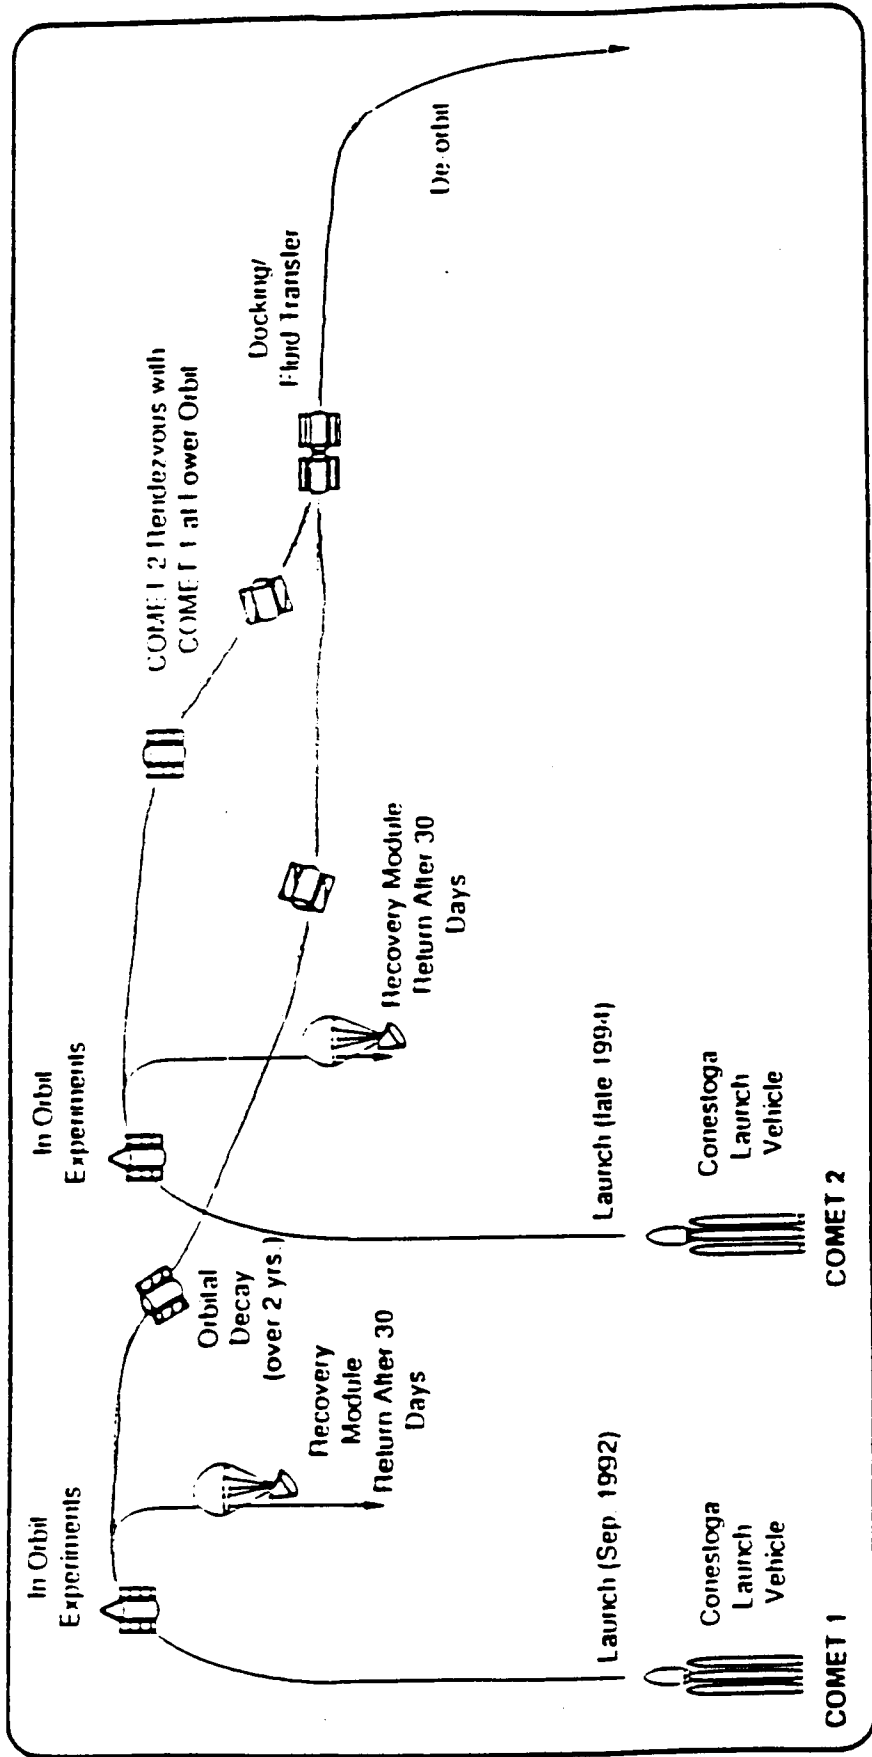

ANALYSIS IN SUPPORT OF THE COMET AR&D MISSION

Independent Assessment of R-bar VS V-bar Approach

Controllability of Loosely Coupled Configuration

Approach Trajectory Optimization and Simulation

Contact Dynamics - Impact on Attitude Control of Target

Definition of AR&D Standards

ANALYTICAL MODELS IDENTIFIED FOR THREE REGIMES OF MISSION

Approach Trajectory

Loosely Coupled Configuration

Contact Dynamics

MODEL FOR APPROACH/PROXIMITY OPS.

RCS Control of Pursuit Vehicle

Translational Control Only

Dynamics Described in the Target Vehicle's Reference Frame by the "Euler-Hill" Equations:

$$\ddot{x} - 2\omega \dot{z} = A_x$$

$$\ddot{y} + \omega \dot{y} = A_y$$

$$\ddot{z} + 2\omega \dot{x} - 2\omega \dot{z} = A_z$$

4 States in Dynamic Model: Relative (X, Y, Z) Position of Pursuit Vehicle with respect to the Target and Propellant Expenditure


Enhancements:

Sensor Noise

Visibility of Laser Ranging and Machine Vision

GPS Constellation Geometry

Model of GPS Receiver

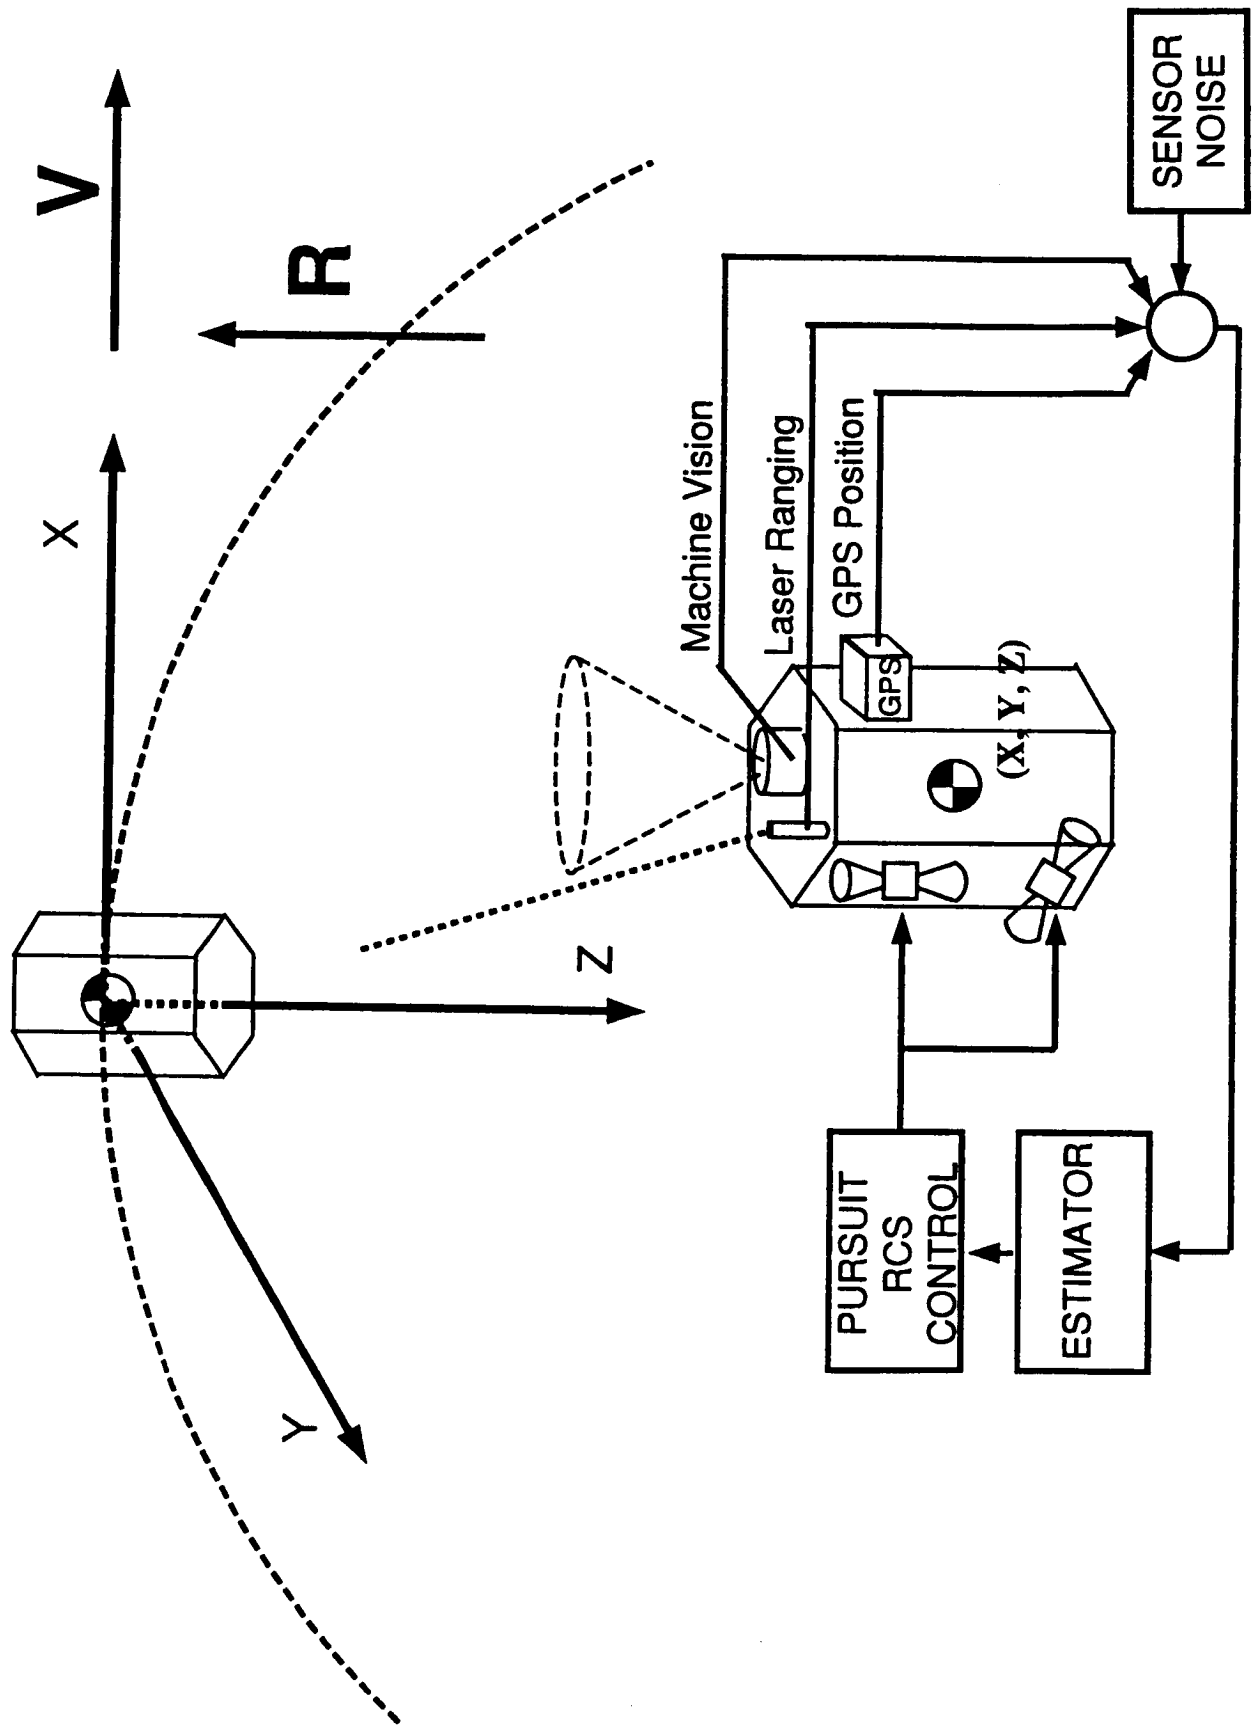

MODEL FOR LOOSELY COUPLED CONFIGURATION

Baseline COMET Attitude Controller on Target Vehicle

2 Sensors:

- Magnetometer
- Horizon Sensor

5 Actuators:

- 2 Reaction Wheels
- 3 Magnetic Torquers

Attitude Dynamics Only:


$$I \, d\omega/dt = -\omega \times I \omega + 3\omega^2 u \times I u + M_{\text{AERO}} + M_{\text{CONTROL}} + M_{\text{DOCK}}$$

6 States in Dynamic Model:

- 3 Attitude of Target Vehicle
- 1 Length of Retraction of Probe
- 2 Bending of Probe

Enhancements:

- Sensor Model: Horizon sensor visibility, Magnetic Field Model
- Sensor Noise
- External (Random) Disturbances

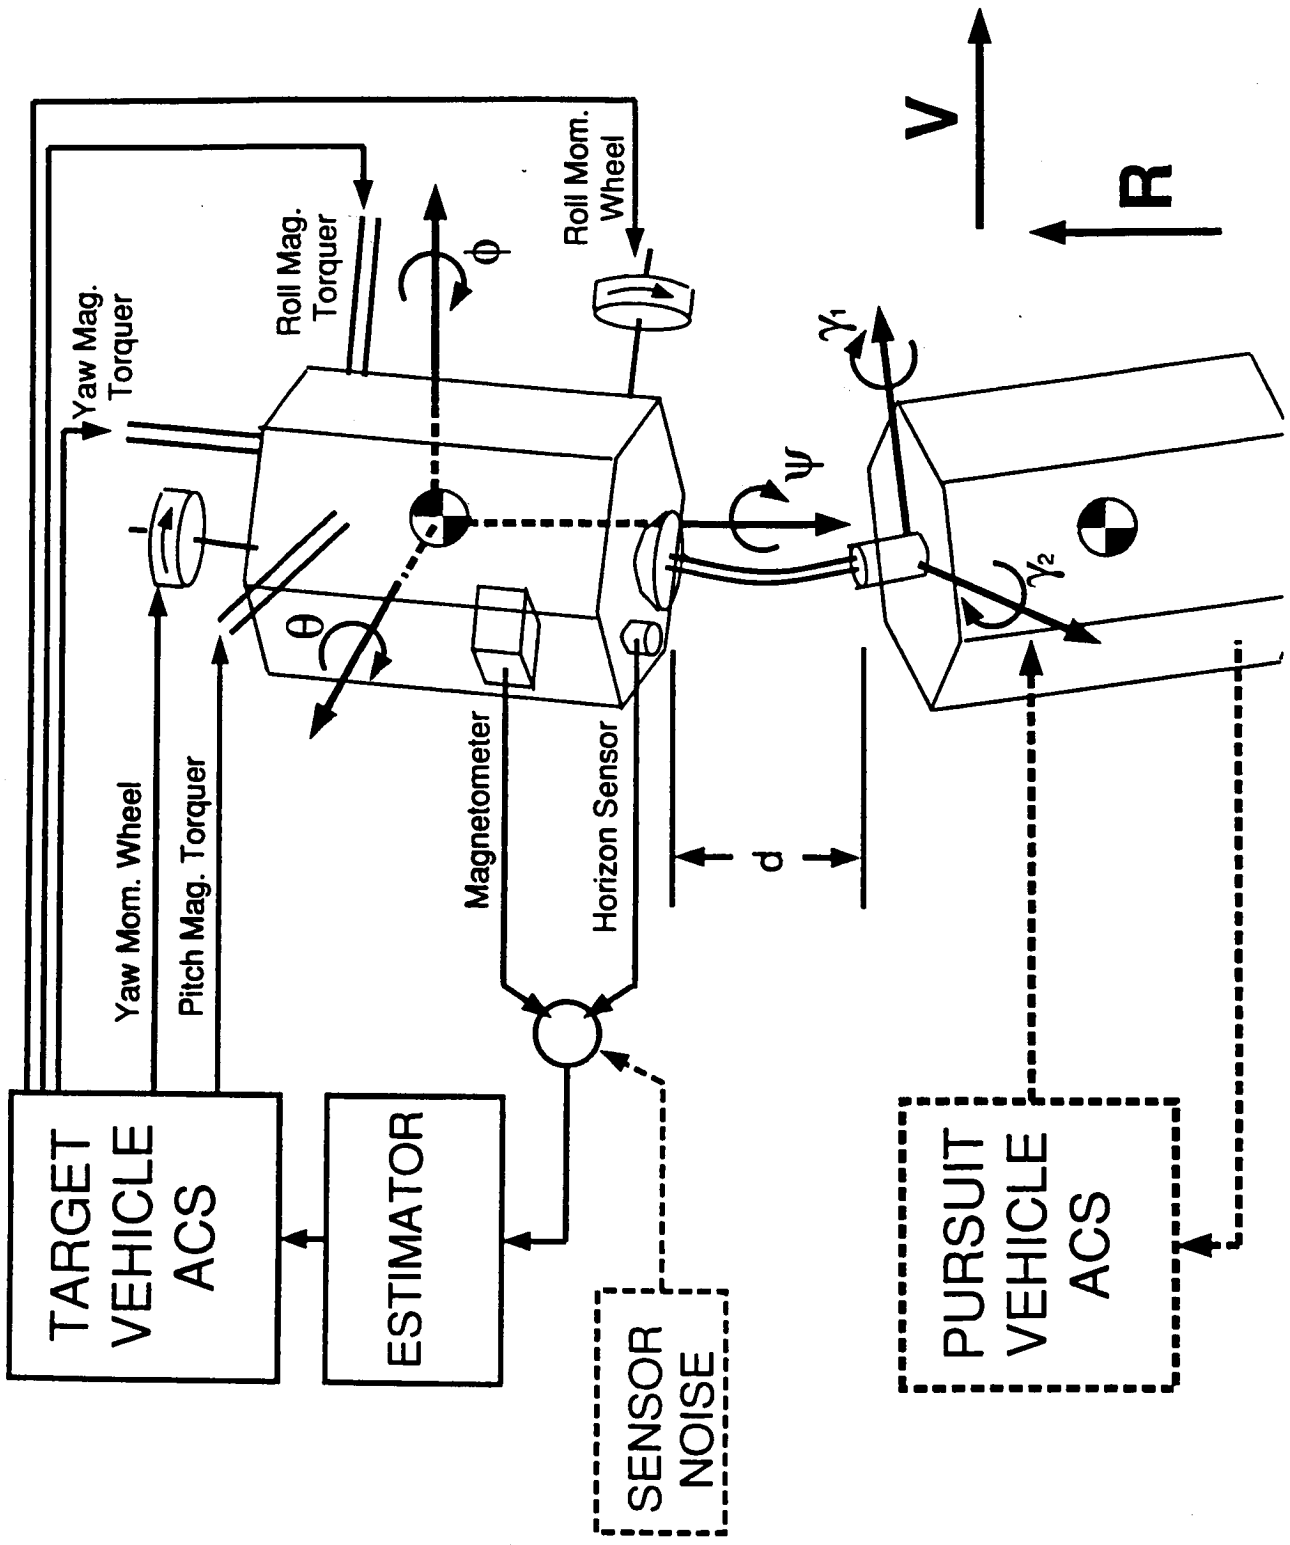

MODEL FOR CONTACT DYNAMICS

Attitude Control of Target Vehicle Alone

Same Spacecraft Model and ACS as for Coupled Control


Analytical Model for Contact Forces and Moments

Experimental Contact Force Estimates:

Air Bearing Vehicles Tested by SpARC

MSFC Mechanisms Laboratory

Full Simulation with Two Air Bearing Vehicles on MSFS Flat Floor

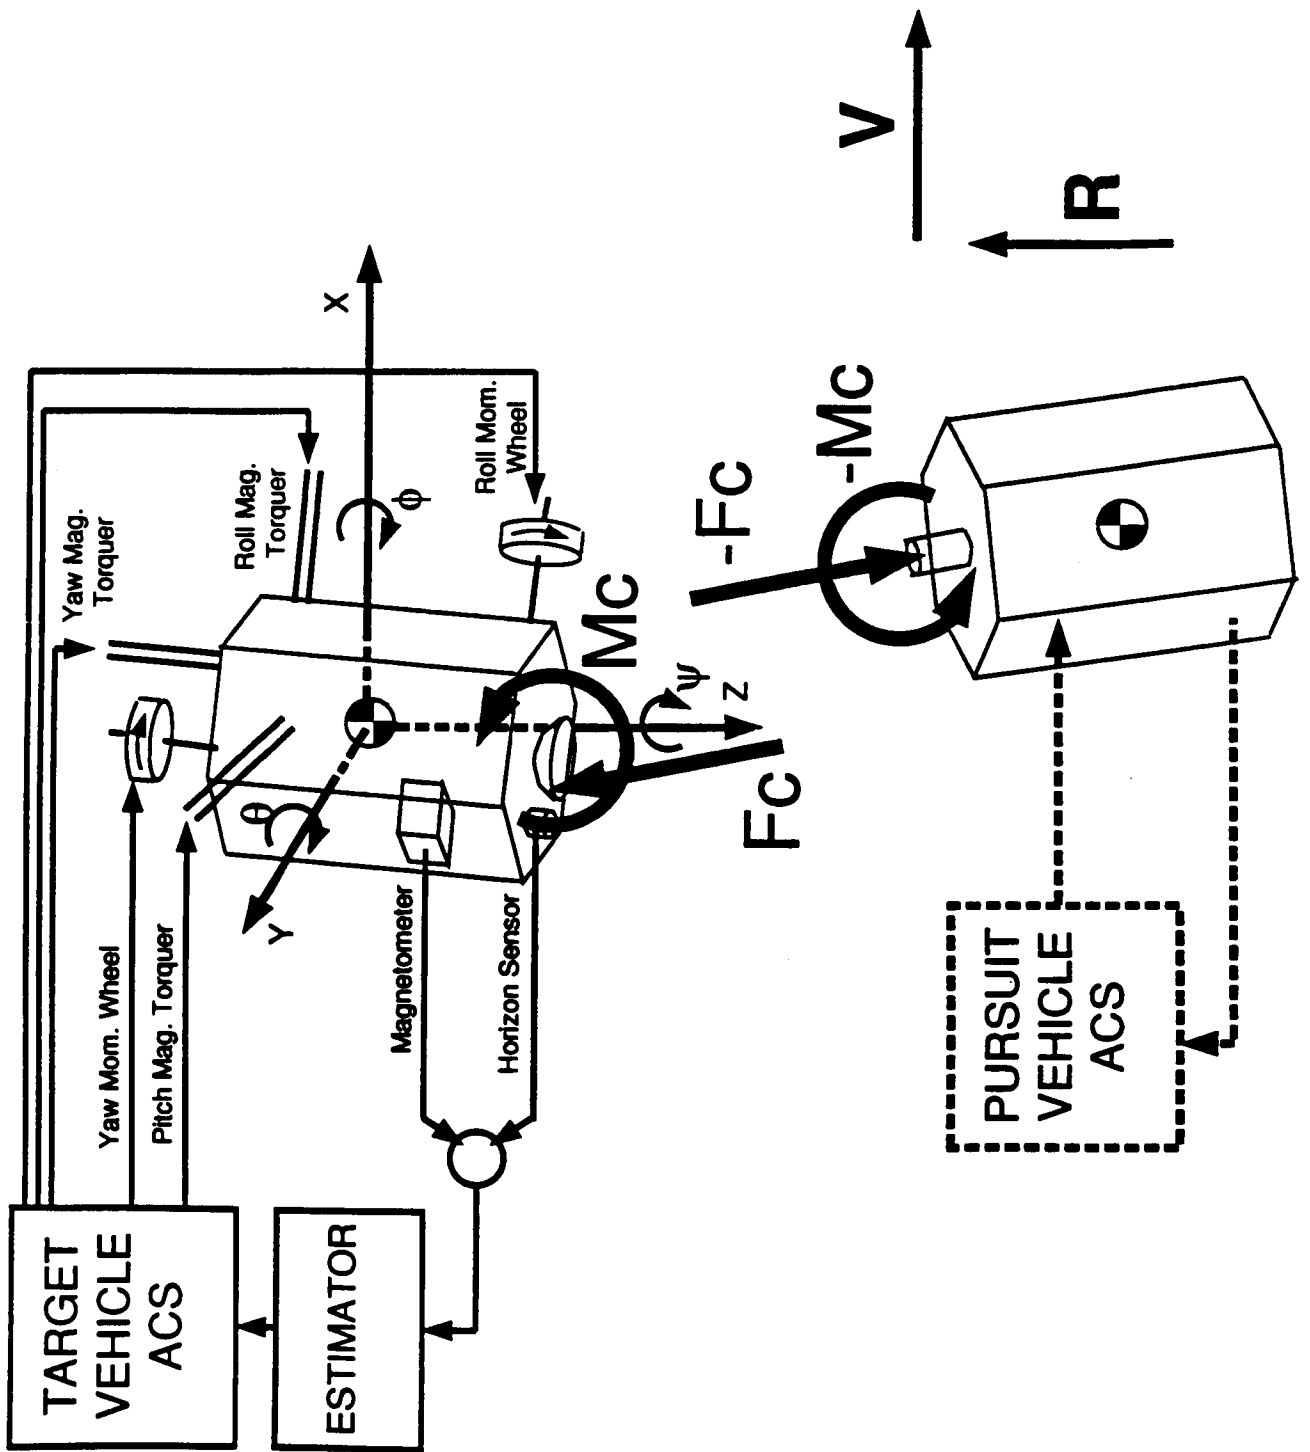

APPLICATION TO SPACE INFRASTRUCTURE

In-Space Demonstration of AR&D Technology

**Validation of Analytical (and Ground Based Hardware ?)
Models Against Actual Flight Data**

Feasibility Studies for Use of Small Logistics Carriers

**Definition of Uniform Standards and Common Interfaces
for AR&D (along with AIAA)**

CONCLUSIONS AND FUTURE PLANS

**Need for Autonomous Rendezvous and Docking Technology
Development Identified**

Analytical Support Available

Potential for Ground-Based Testing and Simulation at MSFC

**Opportunity for Flight Experience, Model Validation, and Data
Exchange through Participation in COMET ARD Mission**

REFERENCES

1. Montgomery, et. al., "Space Robotics - Recent Accomplishments and Opportunities for Future Research", NASA TM-107675, September, 1992.
2. APT Information Note 89-1, March 13, 1989.
3. Kohrs, Richard H., Letter to Deputy Director, Space Station Freedom Program and Operations, November 30, 1992.
4. Tobbe, P., and Naumann, C., "Automated Rendezvous and Capture at NASA / MSFC", Presented at the AIAA Space Programs and Technologies Conference, Huntsville, AL, March 24-27, 1992.
5. Bryan, T. C., Roe, F., and Coker, C., "Automated Rendezvous and Capture Development Infrastructure", Presented at the AIAA Space Programs and Technologies Conference, Huntsville, AL, March 24-27, 1992.
6. Commercial Experiment Transporter Customer's Operational Guide, Center for Space Transportation and Applied Research, March 23, 1992.
7. Apley, D., "Autonomous Rendezvous and Docking", presented to the Langley Research Center, November 10, 1992.
8. Kader, J. B., "Standards for Space Automation and Robotics", presented at the AIAA Space Programs and Technologies Conference, Huntsville, AL, March 24-27, 1992.
9. Leonard, C. L., and Bergmann, E. V., "A Survey of Rendezvous and Docking Issues and Developments", published in Advances in the Astronautical Sciences, Volume 69, April 24-27, 1989.
10. Govin, B., Lacombe, J. L., Fehse, W., "Guidance and Attitude Control During the Final Approach of an Autonomous Rendezvous Process", presented at the 34th Congress of the International Astronautical Federation, Budapest, Hungary, October 10-15, 1983.
11. Participating in Commercial Space Ventures, Office of Commercial Programs, May 1990.
12. Tchoryk, P., Apley, D. J., Jr., Conrad, D. J., and Dobbs, M. E., "Autonomous Rendezvous and Docking - A Commercial Approach to On-Orbit Technology Validation", Presented at the Autonomous Rendezvous and Capture Review, Williamsburg, VA, November 21, 1991.