

DEC 23 1946

ARR Dec. 1942

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

# WARTIME REPORT

ORIGINALLY ISSUED

December 1942 as  
Advance Restricted Report

AN INVESTIGATION OF AIRCRAFT HEATERS

VII - THERMAL RADIATION FROM ATHERMANOUS EXHAUST GASES

By R. C. Martinelli, E. H. Morrin, and L. M. K. Boelter  
University of California

# NACA

WASHINGTON

NACA LIBRARY  
LANGLEY MEMORIAL AERONAUTICAL  
LABORATORY  
Langley Field, Va.

NACA WARTIME REPORTS are reprints of papers originally issued to provide rapid distribution of advance research results to an authorized group requiring them for the war effort. They were previously held under a security status but are now unclassified. Some of these reports were not technically edited. All have been reproduced without change in order to expedite general distribution.

100

100

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

ADVANCE RESTRICTED REPORT

AN INVESTIGATION OF AIRCRAFT HEATERS

VII - THERMAL RADIATION FROM ATHERMANOUS\* EXHAUST GASES

By R. C. Martinelli, E. H. Morrin, and L. M. K. Boelter

SUMMARY

Equations and necessary data for the calculation of the gaseous radiation from water vapor and carbon dioxide in an exhaust gas heat exchanger are presented. A typical calculation is included.

INTRODUCTION

In exhaust gases which contain appreciable quantities of carbon dioxide and water vapor, the thermal radiation from these constituents of the gas to the surroundings is not always negligible.

Hottel and Egbert have compiled the latest data which are useful for the calculation of this radiant fraction. Under conditions normally found in airplane heat exchangers, the most recent corrections proposed by these authors (references 2 and 3) do not greatly change their former suggestions (reference 1).

In this report the emission and absorption of radiant energy is calculated for water vapor and carbon dioxide, and a correction is made to account for the overlapping emission and absorption frequencies of these two gases.

Other constituents of exhaust gases, such as carbon particles, ozone, carbon monoxide, and organic compounds, also emit and absorb energy, but usually their concentrations are small and little is known about their effects. The radiation related to the luminosity of the gases, however, can be calculated. Diatomic non-polar molecules, such as O<sub>2</sub>, H<sub>2</sub>, and N<sub>2</sub>, do not emit or absorb radiant energy at wavelengths important to radiant heat transfer

\*Capable of emitting and absorbing radiant energy.

## SYMBOLS

- $a_g$  over-all absorptance factor of gas
- $C_{CO_2}$  correction factor for effect of total pressure on  $CO_2$  radiation evaluated from figure 2
- $C_{H_2O}$  correction factor for effect of total pressure on  $H_2O$  radiation evaluated from figure 4
- $K$  correction factor due to presence of both  $CO_2$  and  $H_2O$  evaluated from figure 5
- $L$  mean beam length which is equal to 0.9 times the diameter for infinite cylinder radiating to walls
- $P_{CO_2}$  partial pressure of  $CO_2$  atmospheres
- $P_{H_2O}$  partial pressure of  $H_2O$  atmospheres
- $\left(\frac{q}{A}\right)_{H_2O+CO_2}$  radiant energy interchange due to athermanous gas radiation, Btu/hr ft<sup>2</sup>
- $^{\circ}R$  Rankine =  $^{\circ}F + 460$
- $T_g$  absolute temperature of gas,  $^{\circ}R$
- $T_s$  absolute temperature of surroundings,  $^{\circ}R$
- $\epsilon(CO_2, T_g, P_{CO_2} L)$  emissivity of  $CO_2$  evaluated from figure 1 at  $T_g$  and  $P_{CO_2} L$
- $\epsilon\left(CO_2, T_s, P_{CO_2} L \frac{T_s}{T_g}\right)$  emissivity of  $CO_2$  evaluated from figure 1 at  $T_s$  and  $P_{CO_2} L \frac{T_s}{T_g}$
- $\epsilon(H_2O, T_g, P_{H_2O} L)$  emissivity of  $H_2O$  evaluated from figure 3 at  $T_g$  and  $P_{H_2O} L$

$\epsilon \left( \text{H}_2\text{O}, T_g, P_{\text{H}_2\text{O}} L \frac{T_g}{T_s} \right)$  emissivity of  $\text{H}_2\text{O}$  evaluated from figure 3 at  $T_g$  and  $P_{\text{H}_2\text{O}} L \frac{T_g}{T_s}$

$\epsilon_g$  over-all emissivity factor of gas

$\epsilon_s$  emissivity of surrounding surface

#### DISCUSSION

To illustrate the use of the charts and equations for the calculation of the radiant energy interchange between gases containing water vapor and carbon dioxide and the surrounding surface, the following example is worked out:

Exhaust gas  $T_g = 1300^\circ \text{F}$ ,  $T_g = 1760^\circ \text{R}$

Exhaust pipe or heater walls,  $t_s = 900^\circ \text{F}$ ,  $T_s = 1360^\circ \text{R}$

I.D. of exhaust pipe = 0.5 ft (6 in.)

Total pressure = 0.5 atm\*

Volume percent  $\text{H}_2\text{O}$  vapor = 15 percent = 0.075 atm

Volume percent  $\text{CO}_2$  = 15 percent = 0.075 atm

The radiant energy interchange may be calculated from:

$$\left( \frac{q}{A} \right)_{\text{H}_2\text{O} + \text{CO}_2} = 0.1723 \epsilon_g \left[ \epsilon_s \left( \frac{T_g}{100} \right)^4 - a_s \left( \frac{T_s}{100} \right)^4 \right] \quad (1)$$

where

$$\epsilon_g = \left[ c_{\text{CO}_2} \epsilon(\text{CO}_2, T_g, P_{\text{CO}_2} L) + c_{\text{H}_2\text{O}} \epsilon(\text{H}_2\text{O}, T_g, P_{\text{H}_2\text{O}} L)^{-K} \right] \quad (2)$$

and

$$a_s = \left[ c_{\text{CO}_2} \epsilon \left( \text{CO}_2, T_s, P_{\text{CO}_2} L \frac{T_s}{T_g} \right) \left( \frac{T_s}{T_g} \right)^{0.65} + c_{\text{H}_2\text{O}} \epsilon \left( \text{H}_2\text{O}, T_s, P_{\text{H}_2\text{O}} L \frac{T_s}{T_g} \right) \left( \frac{T_s}{T_g} \right)^{0.45} - K \right] \quad (3)$$

\*Example is evaluated for altitude at which total pressure is 0.5 atm.

Determining numerical magnitudes

$$L = 0.9 \times 0.5 \text{ ft} = 0.45 \text{ ft}$$

$$P_{\text{CO}_2} L = P_{\text{H}_2\text{O}} L = 0.075 \times 0.45 = 0.0338 \text{ ft atm}$$

$$P_{\text{CO}_2} L \frac{T_{\text{S}}}{T_{\text{G}}} = P_{\text{H}_2\text{O}} \times L \frac{T_{\text{S}}}{T_{\text{G}}} = 0.075 \times 0.45 \times \frac{1360}{1760} = 0.0261$$

$$\epsilon_{\text{S}} = 0.79 \text{ (average value for oxidized steel)}$$

$$\epsilon(\text{CO}_2, T_{\text{G}}, P_{\text{CO}_2} L) = 0.052 \text{ (from fig. 1)}$$

$$\epsilon\left(\text{CO}_2, T_{\text{S}}, P_{\text{CO}_2} L \frac{T_{\text{S}}}{T_{\text{G}}}\right) = 0.047 \text{ (from fig. 1)}$$

$$\epsilon(\text{H}_2\text{O}, T_{\text{G}}, P_{\text{H}_2\text{O}} L) = 0.028 \text{ (from fig. 3)}$$

$$\epsilon\left(\text{H}_2\text{O}, T_{\text{S}}, P_{\text{H}_2\text{O}} L \frac{T_{\text{S}}}{T_{\text{G}}}\right) = 0.030 \text{ (from fig. 3)}$$

$$C_{\text{CO}_2} = 0.78 \text{ (from fig. 2) (for total pressure} \\ = 0.5 \text{ atm)}$$

$$C_{\text{H}_2\text{O}} = 0.88 \text{ (from fig. 4) (for total pressure} \\ = 0.5 \text{ atm)}$$

$$K = 0.00 \text{ (from fig. 5)}$$

Therefore, from equations (5) and (3):

$$\epsilon_{\text{G}} = 0.78 \times 0.052 + 0.88 \times 0.028 - 0.00 = 0.0651$$

$$a_{\text{G}} = \left[ 0.78 \times 0.047 \times \left(\frac{1760}{1360}\right)^{0.35} + 0.88 \times 0.030 \times \left(\frac{1760}{1360}\right)^{0.45} - 0.00 \right] \\ = [0.0433 + 0.0296 - 0.00] = 0.0729$$

Then from equation (1)

$$\begin{aligned} \left(\frac{q}{A}\right)_{\text{CO}_2 + \text{H}_2\text{O}} &= 0.1728 \times 0.79 \left[ 0.0651 \left(\frac{1760}{100}\right)^4 - 0.0729 \left(\frac{1360}{100}\right)^4 \right] \\ &= 0.137 [3250 - 2500] = 0.137 \times 3750 \\ &= 512 \text{ Btu/hr ft}^2 \end{aligned}$$

If this radiant energy interchange took place in an exhaust heater which was 0.5 foot in diameter and 3 feet in length, then

$$\begin{aligned} q(\text{CO}_2 + \text{H}_2\text{O}) &= 512 (\pi \times 0.5 \text{ ft} \times 3 \text{ ft}) \\ &= 2410 \text{ Btu/hr} \end{aligned}$$

If the thermal output were 50,000 Btu/hr total exchange, then the fraction due to athermanous gas radiation would be 4.8 percent of the total.

In the experiments conducted in the University of California Mechanical Engineering Laboratory on straight and finned double tube heat exchangers (references 4 and 5), the athermanous gas radiation was less than 1 percent of the total transfer, because of the low concentrations of  $\text{CO}_2$  and  $\text{H}_2\text{O}$  vapor.

#### CONCLUSIONS

The radiant interchange taking place in an exhaust gas heat exchanger due to the emission and absorption characteristics of water vapor and carbon dioxide may be calculated, employing gaseous radiation data of Hottel. There are not sufficient data to account accurately for the radiant energy interchange from other gases, such as carbon monoxide and hydrocarbons.

University of California,  
Berkeley, Calif.

## REFERENCES

1. Hottel, H. C., and Egbert, R. B.: Radiation from Furnace Gases. Trans., A.S.M.E., May 1941, p. 297.
2. McAdams, W. H.: Heat Transmission. McGraw-Hill Book Co., Inc., New York, N. Y., 1942, pp. 64, 73.
3. Hottel, H. C., and Egbert, R. B.: Radiant Heat Transmission from Water Vapor. Trans., Am. Inst. of Chem. Eng., vol. 38, no. 3, June 25, 1942, p. 531.
4. Martinelli, R. C., Weinberg, E. B., Morrin, E. H., and Boelter, L. M. K.: An Investigation of Aircraft Heaters. III - Measured and Predicted Performance of Double Tube Heat Exchangers. NACA ARR, Oct. 1942.
5. Martinelli, R. C., Weinberg, E. B., Morrin, E. H., and Boelter, L. M. K.: An Investigation of Aircraft Heaters. IV - Measured and Predicted Performance of Longitudinally Finned Tubes. NACA ARR, Oct. 1942.

NOTE: The figures of this report have been reproduced from "Radiant Heat Transmission from Water Vapor," by H. C. Hottel and R. B. Egbert, appearing in vol. 38, no. 3 of the Transactions of the American Institute of Chemical Engineers, with the permission of the authors. The ordinates of figures 2, 4, and 5 have been changed as indicated below:


Fig. 2, ordinate is renamed  $C_{CO_2}$

Fig. 4, ordinate is renamed  $C_{H_2O}$

Fig. 5, ordinate is renamed K

The coordinates of figures 1 and 3 remain unchanged.



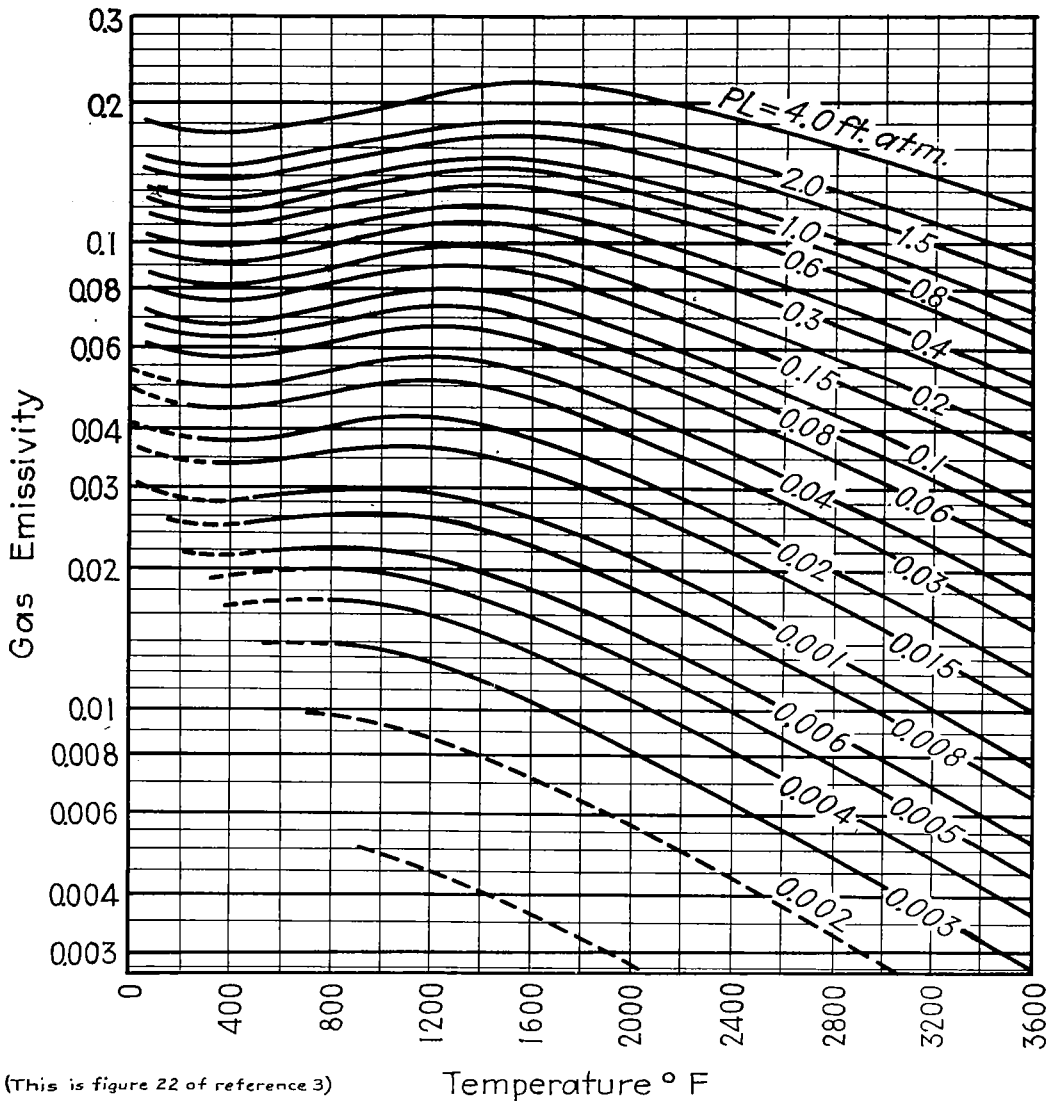

(This is figure 22 of reference 3)

Figure 1.- Working plot of carbon dioxide radiation.

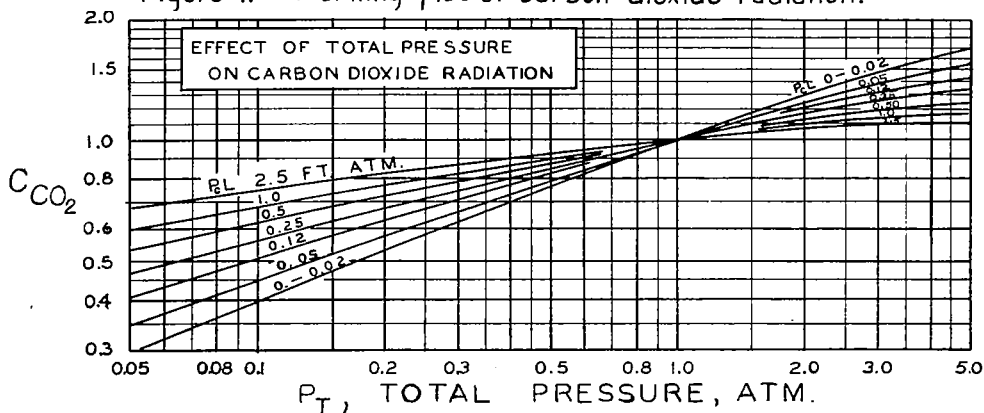


Figure 2.- Correction for effect of total pressure on carbon dioxide radiation.

(This is figure 21 of reference 3. Ordinate scale renamed)



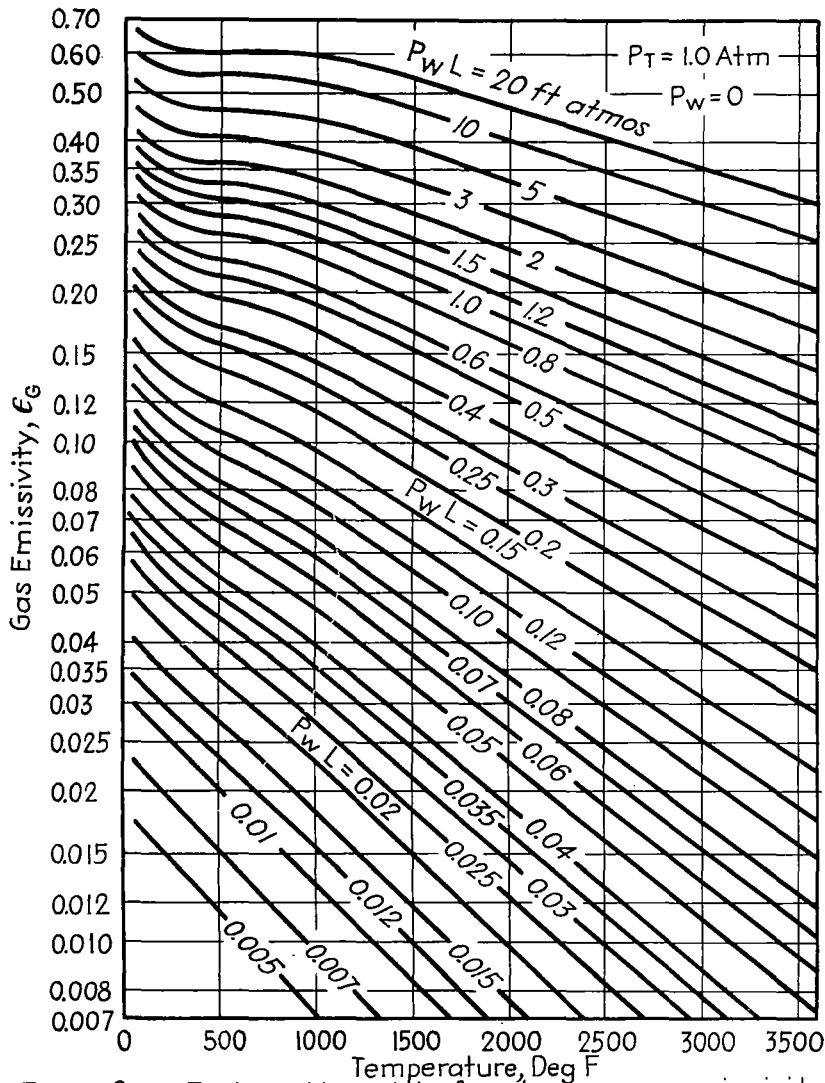


Figure 3.- Final working plot of water vapor emissivity, for  $P_w = 0$ . (This is figure 18 of reference 3)

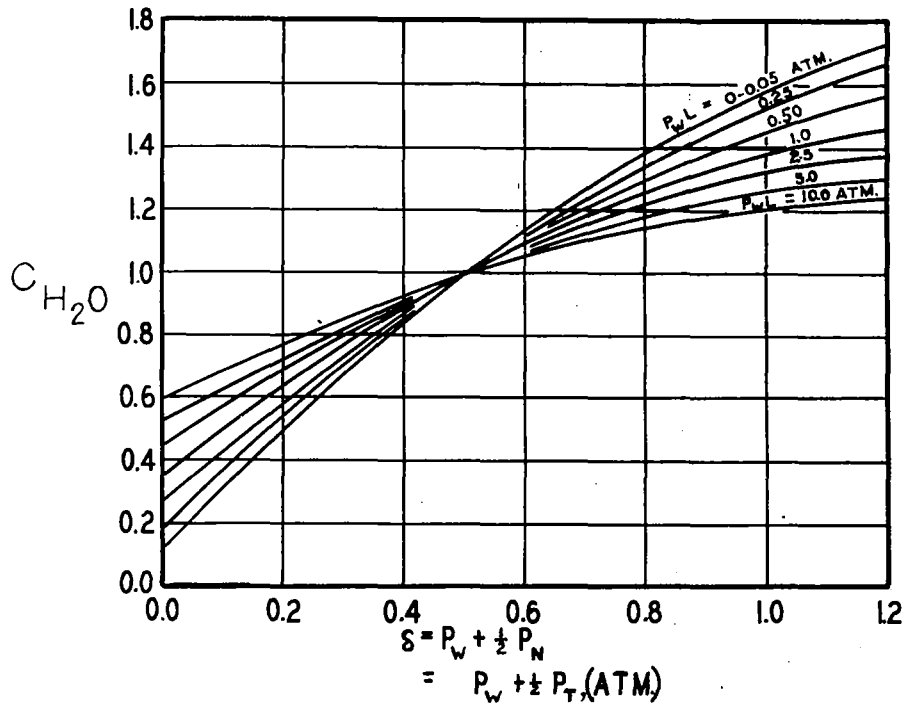


Figure 4.- Correction for effect of total pressure and partial pressure on water vapor radiation.

(This is figure 20 of reference 3. Ordinate scale renamed)




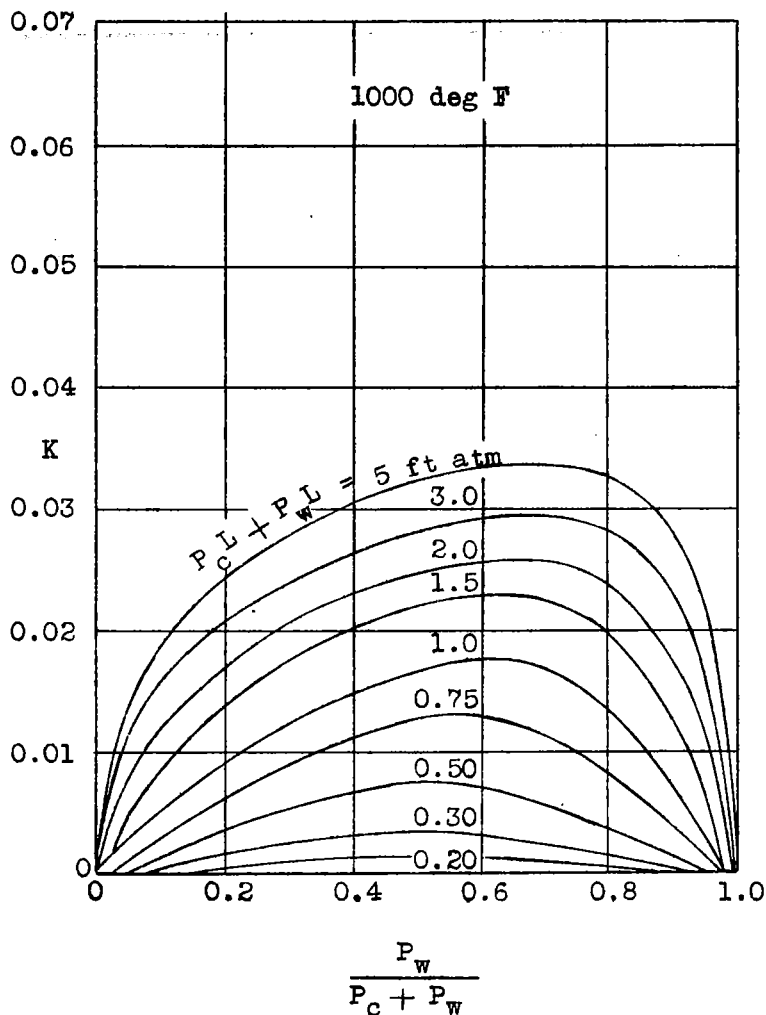


Figure 5.- Correction for superimposed radiation from mixtures of carbon dioxide and water vapor.

Ordinate scale renamed.

This figure taken from figure 19 reference 3.



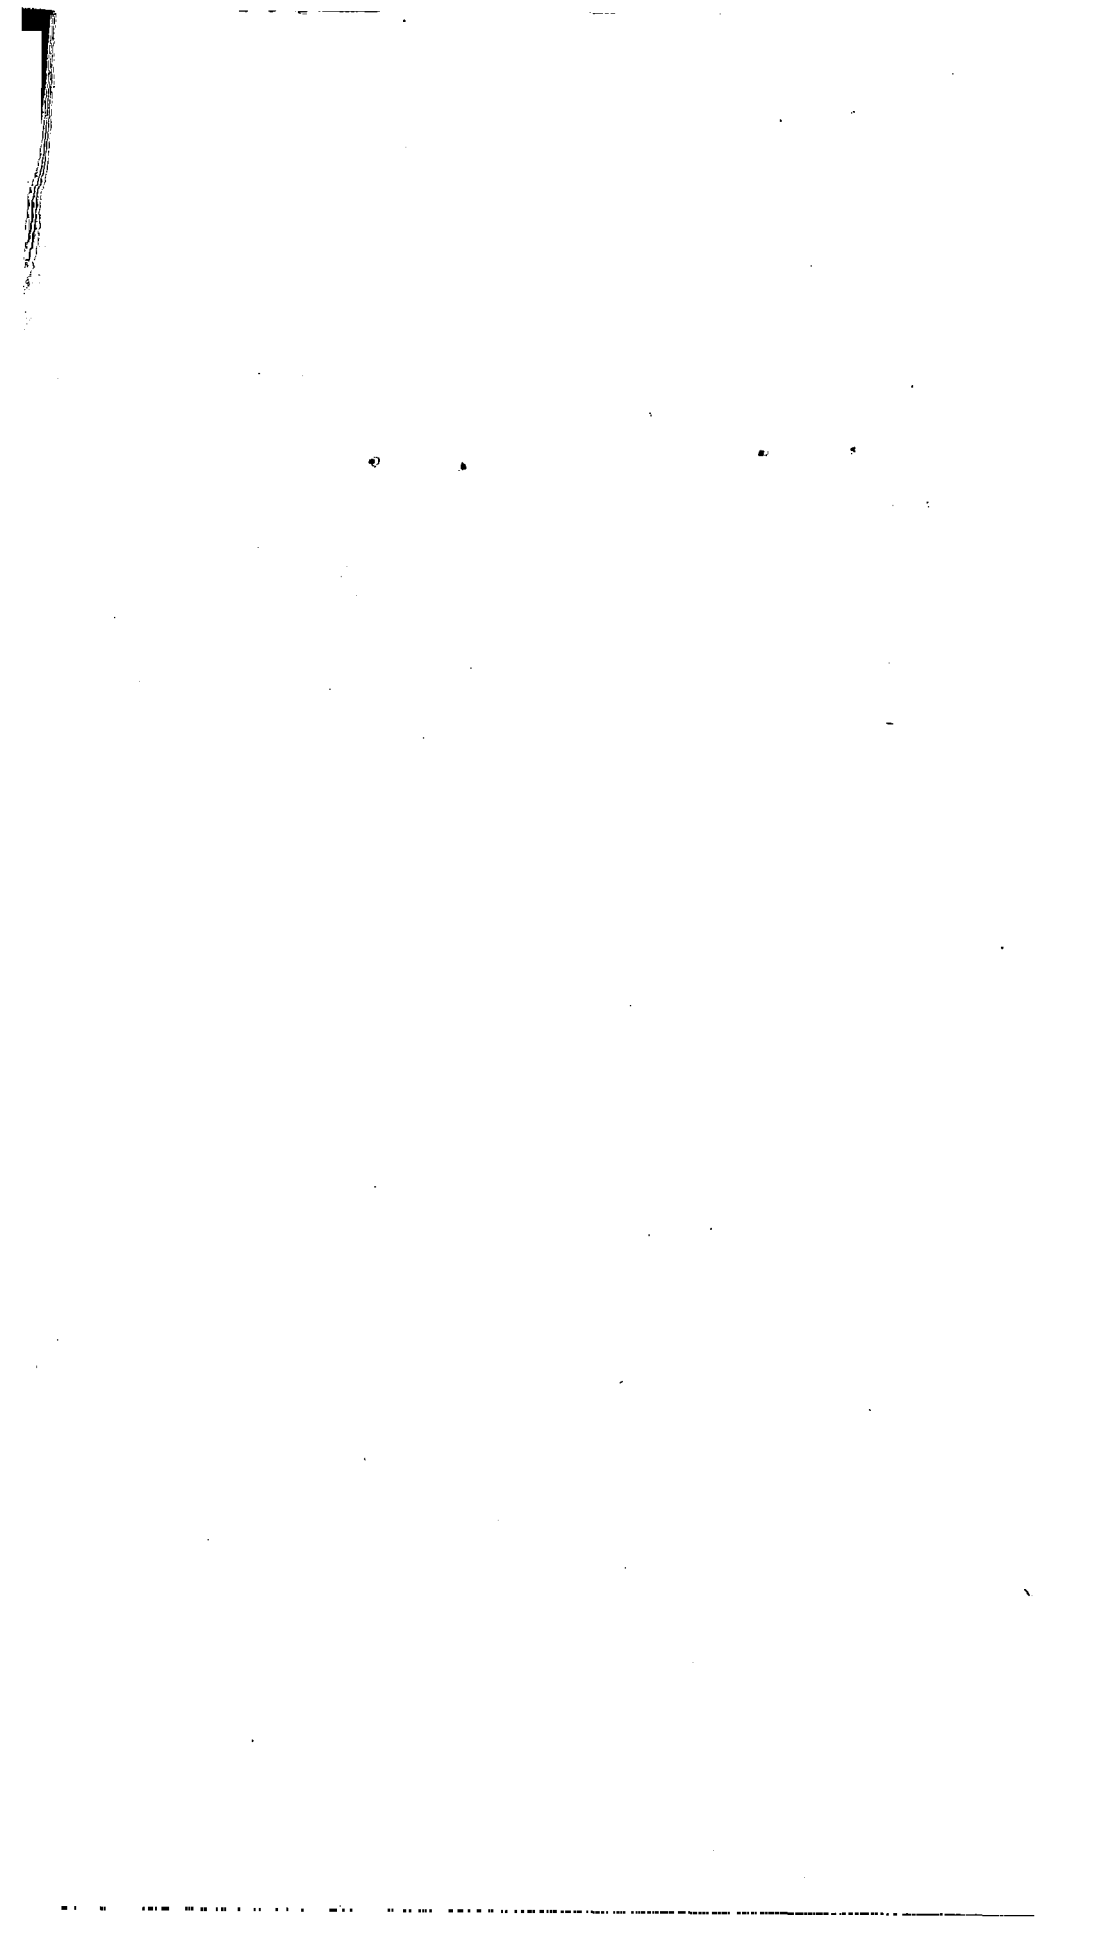

LANGLEY RESEARCH CENTER



3 1176 01354 4458