

FILE COPY  
NO. 2-W

N 62 65787

MR August 1944

CASE FILE  
COPY

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

# WARTIME REPORT

ORIGINALLY ISSUED  
August 1944 as  
Memorandum Report

WIND-TUNNEL TESTS OF THE  $\frac{1}{8}$ -SCALE POWERED

MODEL OF THE CURTISS XB7C-2 AIRPLANE


II - PRELIMINARY INVESTIGATION OF

LATERAL STABILITY AND CONTROL

By Arthur R. Wallace

Langley Memorial Aeronautical Laboratory  
Langley Field, Va.

**FILE COPY**  
To be returned to  
the files of the National  
Advisory Committee  
for Aeronautics  
Washington, D. C.

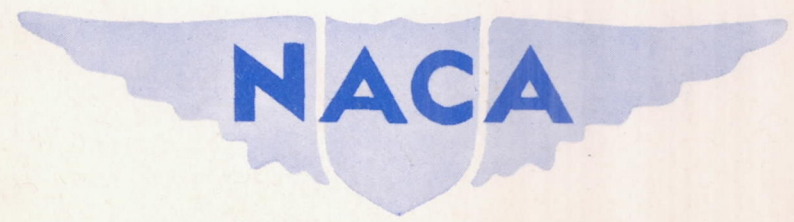

WASHINGTON

NACA WARTIME REPORTS are reprints of papers originally issued to provide rapid distribution of advance research results to an authorized group requiring them for the war effort. They were previously held under a security status but are now unclassified. Some of these reports were not technically edited. All have been reproduced without change in order to expedite general distribution.

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

MEMORANDUM REPORT

for the

Bureau of Aeronautics, Navy Department  
WIND-TUNNEL TESTS OF THE  $\frac{1}{8}$ -SCALE POWERED  
MODEL OF THE CURTISS XBTC-2 AIRPLANE  
II - PRELIMINARY INVESTIGATION OF  
LATERAL STABILITY AND CONTROL

By Arthur R. Wallace

INTRODUCTION

At the request of the Bureau of Aeronautics, tests were made of the  $\frac{1}{8}$ -scale model of the Curtiss XBTC-2 airplane in the LMAL 7- by 10-foot tunnel. The results of a preliminary investigation of longitudinal stability and control are given in part I (reference 1).

When lateral-stability tests of the original model were made, it was found: First, that a rudder-force reversal was evident; and, second, that a large reduction in effective dihedral was shown when flaps were lowered and take-off power applied. In an attempt to remove the rudder-force reversal, various dorsal fins and a modified vertical tail were tested. In an attempt to reduce the change in effective dihedral with flap deflection and power, the following modifications were tested: the outboard flaps skewed from their original position (effectively swept back), wing tips which could be made to turn up when the flaps were lowered, and three modifications to the wing plan form.

The present report also includes some estimates of flying qualities which were computed from the data herein.

A new model is to be built and tested which will incorporate modifications as judged best from the present tests.

## MODEL

The original model was supplied by the Columbus division of the Curtiss-Wright Corporation. It was equipped with a six-blade, dual-rotating propeller which was not to scale, its diameter being 1.813 feet as compared to the scale value of 1.771 feet. The model was not checked for accuracy but was found to be faired and finished in a satisfactory manner. The original model is shown in figure 1. Cowl flaps were made at LMAL as shown on figure 2. Some details of the aileron are shown in figure 3. The various modifications were constructed by the Navy, the Curtiss-Wright Corporation, or the LMAL. They are as follows:

<u>Modifications</u>	<u>Figure No.</u>
Swept-back outer wing panel	4
Rectangular outer wing panel	5
Rectangular wing	6
Upturned wing tips	7
Skewed flap positions	8
Canopy opening	9
Dorsal fins	10
Revised vertical tail	11

For all wings tested, the dihedral of the center panel was  $0^{\circ}$  and of the outer panel  $10^{\circ}$ , measured at the leading edge of the chord line.

The swept-back outer wing panel was formed by pivoting the original outer wing panel about a line so that the total wing area and incidence remained about constant. The wing sections of the outer panels were thus at an angle to the air stream for this condition.

The rectangular outboard wing panel is rectangular from the break outward giving a larger total area. The rectangular wing was formed by the rectangular outer

panel of figure 5 and a rectangular center section (figure 6). The rectangular wing has approximately the same area as the original wing.

The upturned wing tips replaced the original wing tips. The wing area and aspect ratio were increased; the modification was made in this manner to avoid cutting the aileron.

The sweep or skew of the outboard flap was changed by pivoting about the outboard fitting (fig. 8). Since the original flap fittings were used, the gap between the flap and the wing and the flap angles changed when the flap was skewed. The gaps obtained with the original fittings were quite large for the skewed positions, and it was felt that the lift would be reduced. Consequently, the gap was made smaller and most of the tests were run with the small gap.

The canopy opening, although not quite like that of the airplane, is believed to simulate the airplane aerodynamically.

The revised vertical tail had the same plan form and section as the original vertical tail. The rudder hinge line was moved back 0.86 inch on the model and the overhanging balance reduced to a minimum.

The power plant consisted of an induction motor, a dual-rotation gearbox, and the dual-rotating propeller.

## TEST AND RESULTS

Test conditions.- The tests were made in the LMAL 7- by 10-foot tunnel at dynamic pressures of 9.21 pounds per square foot for power-on tests in the landing configuration and 16.37 pounds per square foot for all other tests, corresponding to airspeeds of about 60 and 80 miles per hour. The test Reynolds numbers were about 560,000 and 746,000 based on the wing mean aerodynamic chord of 12.26 inches. Because of the turbulence factor of 1.6 for the tunnel, effective Reynolds numbers were about 896,000 and 1,192,000.

Coefficients and symbols.— The results of the tests are presented in standard NACA coefficients of forces and moments. Rolling-, yawing-, and pitching-moment coefficients are given about the center-of-gravity location shown in figure 1 (22 percent of the mean aerodynamic chord of the original wing). The data are referred to a system of axes in which the Z axis is in the plane of symmetry and perpendicular to the relative wing; the X axis is in the plane of symmetry and perpendicular to the Z axis, and the Y axis is perpendicular to the plane of symmetry (fig. 12).

The coefficients and symbols are defined as follows:

$C_L$	lift coefficient ( $Z/qS$ )
$C_{DR}$	resultant-drag coefficient ( $X/qS$ )
$C_Y$	lateral-force coefficient ( $Y/qS$ )
$C_L$	rolling-moment coefficient ( $L/qSb$ )
$C_{L_p}$	damping in roll $\frac{\partial C_L}{\partial (pb/2V)}$
$C_m$	pitching-moment coefficient ( $M/qSc$ )
$C_n$	yawing-moment coefficient ( $N/qSb$ )
$C_h$	hinge-moment coefficient ( $H/qbc^2$ )
$T_c'$	effective thrust coefficient ( $T/qS$ )
$V/nD$	propeller advance-diameter ratio

where the quantities are defined below and in figure 12.

$\left. \begin{array}{l} X \\ Y \\ Z \end{array} \right\}$  forces along axes

$\left. \begin{array}{l} L \\ M \\ N \end{array} \right\}$  moments about axes

H hinge moment of a control surface

- T effective thrust
- q dynamic pressure ( $\frac{1}{2}\rho V^2$ )
- S wing area (6.34 square feet on model except for original center panel with rectangular outer panels which is 7.26 square feet and for the original wing with upturned wing tip which is 6.46 square feet. The coefficients for the upturned wing-tip modification, however, are based on 6.34 square feet.)
- c wing mean aerodynamic chord (12.26 inches on model. This value of c is used as a basis for  $C_m$  for all wings even though original center panel with rectangular outer panel has larger actual mean aerodynamic chord.)
- $\bar{c}$  root mean square chord of a control surface back of hinge line
- b wing span (6.25 feet on model. This value of b is used as a basis for  $C_n$  and  $C_l$  for all wings even though original wing with upturned wing tips has a span of 6.5 feet.)
- b with subscripts, span of control surface
- V air velocity
- D propeller diameter (1.813 feet on model)
- n revolutions per second
- and
- t time, seconds
- $\rho$  mass density of air
- $\alpha$  angle of attack of thrust line, degrees
- $\psi$  angle of yaw, degrees
- $\beta$  angle of sideslip, degrees;  $\beta = -\psi$  in this report
- $\phi$  angle of roll, degrees, measured from horizontal; positive when right wing is low

- r yawing velocity, degrees per second; positive when the nose is moving to the right
- p rolling velocity  $\partial\phi/\partial t$ , radians per second (except as noted); positive when the airplane is rotating clockwise when viewed from the rear
- $i_w$  angle of wing incidence with respect to thrust line, degrees; positive when the trailing edge is down
- $i_t$  angle of stabilizer with respect to thrust line, degrees; positive when trailing edge is down
- $\delta$  control-surface deflection, degrees
- $\beta_P$  front-propeller-blade angle at 0.75 radius
- $\beta_R$  rear-propeller-blade angle at 0.75 radius
- $\Gamma_e$  effective dihedral angle, degrees ( $C_{L\psi}$  divided by 0.0002, a good approximation but not strictly accurate for all plan forms)

## Subscripts:

- a aileron ( $a_r$ ,  $a_l$  right and left aileron)
- e elevator
- r rudder
- f flap
- $\psi$  denotes partial derivatives of a coefficient with respect to angle of yaw (example:  $C_L = \frac{\partial C_L}{\partial \psi}$ )
- i inboard
- o outboard

Corrections.- All data have been corrected for tares caused by the model support strut. Jet-boundary corrections have been applied to the angles of attack, the drag coefficients, and the tail-on pitching-moment coefficients. The corrections were computed as follows:

$$\Delta\alpha = 57.3\delta_w \frac{S}{C} C_L \text{ (degrees)}$$

$$\Delta C_D = \delta_w \frac{S}{C} C_L^2$$

$$\Delta C_m = -57.3 \left( \frac{\delta_T}{\sqrt{q_t/q}} - \delta_w \right) \frac{S}{C} \frac{\partial C_m}{\partial i_t} C_L$$

where

$\delta_w$  jet-boundary correction factor at the wing

$\delta_T$  total jet-boundary correction at the tail

$S$  model wing area (6.34 sq ft)

$C$  tunnel cross-sectional area (69.59 sq ft)

$\frac{\partial C_m}{\partial i_t}$  change in pitching-moment coefficient per degree  
change in stabilizer setting as determined in  
tests

$q_t/q$  ratio of effective dynamic pressure over the horizontal tail to free-stream dynamic pressure

All jet-boundary corrections were added to the test data.

Test procedure.- Propeller calibrations were made by measuring the resultant drag of the clean model at  $0^\circ$  angle of attack for a series of propeller speeds. Thrust coefficients were determined from the relation

$$T_c' = C_D - C_{D_R}$$

where  $C_D$  is the drag coefficient of the model with propeller removed, and  $C_{D_R}$  is the resultant drag coefficient with propeller operating. The results of the calibration are presented in figure 13.

The thrust coefficient available at any lift coefficient is given on figure 14. These data were supplied by the Curtiss-Wright Corporation. Since constant power is



simulated, only one point on the curve will be for level flight for a given model configuration. Lower values of  $T_c'$  will be for the airplane descending and higher values will be for the airplane climbing. With the original center section and rectangular outer panels, the wing area was increased and the coefficients were based on the actual wing area. Since the relation between  $T_c'$  and  $C_L$  depends on the wing area and wing loading, certain assumptions about airplane weight had to be made. One possibility is to assume that the wing loading remained constant with the corresponding increase in airplane gross weight. Another possibility is that the airplane weight would remain constant with the corresponding reduction in wing loading. The case of constant airplane weight is called "power A" while the case of constant airplane wing loading is called "power B." The engine power is identical for the two cases.

Most of the results of this report are presented in two types of plots: first, the aerodynamic coefficients are plotted against yaw, and second, the lateral-stability derivatives are plotted against lift coefficient. Power-on yaw tests were made at a constant angle of attack and propeller speed. Since lift coefficient varies with yaw, the variation of  $T_c'$  versus  $C_L$  given on figure 14 is strictly followed only at zero yaw. Lateral-stability derivatives were obtained from pitch tests at  $-5^\circ$  and  $5^\circ$  yaw by assuming a straight-line variation between those points. Propeller speed for these tests was varied to follow  $T_c'$  versus  $C_L$  given on figure 14 in the same manner as for the pitch tests at zero yaw given in reference 1. The large-symbol points on the plots of lateral-stability derivatives were obtained by measuring slopes from the yaw tests. The large-symbol points are considered more accurate than the small-symbol points at the specific lift coefficient.

In the text and on the figures, the model configuration is given as "cruising" or "landing." These conditions except as noted are described as follows:

(a) Cruising configuration:

- All flaps retracted
- Landing gear retracted
- Cowl flaps closed
- Slats retracted

## (a) Cruising configuration (continued):

Propeller blade angles  $\beta_F = 30\frac{1}{2}^\circ$ ,  $\beta_R = 29\frac{1}{2}^\circ$ ,

for the original wing, and  $\beta_F = 23\frac{1}{2}^\circ$ ,

$\beta_R = 22\frac{1}{2}^\circ$  for all other wing plan forms.

(This change in blade angle was found to have a negligible effect, reference 1.)

## (b) Landing configuration:

Inboard flaps,  $\delta_{f_i} = 50^\circ$

Outboard flaps,  $\delta_{f_o} = 50^\circ$

Landing gear extended

Cowl flaps,  $25^\circ$

Outboard slat extended (the 13-inch portion shown on fig. 1)

Propeller blade angles  $\beta_F = 23\frac{1}{2}^\circ$ ,  $\beta_R = 22\frac{1}{2}^\circ$

When not stated, the wing used will be the original wing. Since the original and revised vertical tail have identical plan forms and sections, the vertical tail is not always stated. When not given, the original dorsal fin was used. Stabilizer settings are given in the following table:

Wing	Cruising configuration (deg)	Landing configuration (deg)
Original	1.0	1.0
Swept-back	-2.9	-2.0
Rectangular outer panels	-1.2	-1.7
Rectangular	-3.2	-2.3

No attempt was made to have the same stabilizer setting because stabilizer settings were set for the longitudinal-stability tests. The differences in stabilizer setting is not believed to affect the lateral-stability characteristics, because of the system of axes used in presenting the data.

Computation of aileron and rudder control forces.-  
Aileron control forces were computed from the following formula:

$$F_a = \frac{142.4 (C_{h_{al}} - C_{h_{ar}})}{C_L}$$

which is based on the following information supplied by the Curtiss-Wright Corporation:

Wing loading, W/S = 39.4 pounds per square foot  
Total aileron movement, 30°  
Total stick movement, 41.7°  
Stick length, 29 inches to center of hand grip

The wing-tip helix angle was computed as follows:

$$\frac{pb}{2V} = 0.8 \frac{C_L}{C_{L_p}}$$

where  $p$  is the rolling velocity in radians per second;  $C_{L_p}$  is the damping in roll (0.408) obtained from reference 2. The factor of 0.8 is an arbitrary value which approximates the reduction in rolling velocity due primarily to adverse yaw at low speeds and wing twist at high speeds determined from a number of flight tests of conventional airplanes. For the tests a wire 0.007 inch in diameter was fixed at 10 percent of the wing chord on the upper surface in an attempt to simulate full-scale transition conditions more closely.

Rudder-pedal forces were computed from the following formula:

$$F_r = K \frac{C_{h_r}}{C_L}$$

where  $K = 2324$  for the original tail and  $K = 1193$  for the revised tail which is based on the following information supplied by the Curtiss-Wright Corporation:

Wing loading, W/S = 39.4 pounds per square foot  
Total rudder movement, 60°  
Total pedal movement, 30.64°  
Radius of pedal about center of rotation,  
12 inches

A refinement was made in the calculations for the revised vertical tail by including a correction for strain-gage deflection. Calibration of this deflection gave a

value of  $\frac{\Delta\delta_r}{C_{h_r}} = -7.32$  for the windmilling condition

( $q = 16.37$ ) and a  $\frac{\Delta\delta_r}{C_{h_r}} = -4.12$  for the take-off power

condition ( $q = 9.21$ ). The result was subtracted from the nominal rudder angle to get the corrected rudder angle. The maximum correction was about  $3^\circ$ . This correction has been made to plots of  $\delta_r$  against  $\psi$  or  $C_n$  but not to the data giving  $C_n$  against  $\psi$  because the correction would vary with  $\psi$  for the latter case. The strain gage for the aileron and original tail was much more rigid so that deflection was negligible.

## DISCUSSION

Effect of wing plan form and power. (a) Small angles of yaw.- Figure 15 compares  $C_{Y_\psi}$ ,  $C_{n_\psi}$ , and  $C_{l_\psi}$  of various wing plan forms for the range of power and flap conditions. The variation of  $C_{n_\psi}$  and  $C_{Y_\psi}$  is much greater with flight conditions than with wing plan form.  $C_{n_\psi}$  varies from a maximum of about  $-0.0040$  for the landing configuration with take-off power to a minimum of  $-0.0005$  for the cruising configuration with propeller windmilling.  $C_{Y_\psi}$  varies from about  $0.040$  for the landing configuration with take-off power to about  $0.008$  for the cruising configuration with propeller windmilling.  $C_{l_\psi}$  varies considerably with both plan form and power. The variation is illustrated in table I. Effective dihedral is  $8\frac{1}{2}^\circ$  to  $11\frac{1}{2}^\circ$  ( $C_{l_\psi} = 0.0002$  is equivalent to  $1^\circ$  effective dihedral) in the cruising or dive condition. These values may be too large for desirable flying qualities. The original wing loses effective dihedral with increase in lift coefficient and flap deflection whereas the other wing plan forms gain in effective dihedral. All the wings lose effective

dihedral when power is applied. Since the effective dihedral in any given flight condition may be changed by changing the geometric dihedral, the relative merit of the various plan forms can probably best be judged by the bottom line of the table. This line gives the change in effective dihedral from the dive or cruising condition to the most adverse condition, landing configuration with a take-off power at a high  $C_L$ . A small or zero change in effective dihedral is desirable. The least change occurs with the rectangular wing,  $-6\frac{1}{2}^\circ$ , and the greatest change occurs with the original wing,  $-21\frac{1}{2}^\circ$ , with the swept-back and rectangular outer panels lying in between  $-9\frac{1}{2}^\circ$ ,  $-10^\circ$ . The effective dihedral of the model with the swept-back outer panels decreases sharply near maximum lift (fig. 15(a)). This fact indicates that the leading wing tip is probably stalling first. There is a large variation in stalling characteristics of the different wing plan forms, but this subject has been discussed in reference 1.

The increment in the lateral-stability derivatives caused by power have been isolated on figure 16 by subtracting the windmilling values of figures 15(a) and 15(c) from the power-on values of figures 15(b) and 15(d). The subtraction for figure 16(a) was performed with values taken at the same angle of attack while the subtraction for figure 16(b) was performed with values taken at the same lift coefficient. Since the results on figure 16 represent fairly small differences of large values, most of the scatter between various wing plan forms may be considered to be experimental error.

The increase in  $C_{Y_\psi}$  with power can be primarily explained as follows: A yawed propeller produces a considerable side force. The magnitude of this side force increases markedly with  $T_c'$ , and hence with  $C_L$  for the power-on condition. The lateral force produced by the vertical tail increases with  $T_c'$  because of the greater dynamic pressure ratio in the slipstream as  $T_c'$  is increased. The lateral force of the fuselage probably also increases with  $T_c'$  as a result of being in the slipstream. Opposed to the increase in  $C_{Y_\psi}$  with  $T_c'$

is the fact that sidewash resulting from propeller operation decreases the angle of attack of the vertical tail and fuselage.

Directional stability also increases with  $C_L$  when power is on. This fact indicates that the increased vertical-tail load due to the slipstream times its moment arm about the center of gravity produces the largest yawing moments. The increase of the propeller side force times its moment arm and the change in fuselage moment are the lesser effects.

The variation in  $C_{L\psi}$  with plan form and flap deflection is illustrated in reference 3. The reason for the loss in effective dihedral with increase in  $T_c'$  can be primarily explained as follows: When an airplane is yawed, the slipstream tends to follow the relative wind lying somewhere between the longitudinal axis and the wind axis. The trailing side of the wing receives more slipstream than the leading side, thus causing a greater increase in lift on the trailing side than on the leading side. This effect is destabilizing since it is opposite to the rolling moment produced by positive dihedral.

The increase in  $C_L$  due to the propeller force and the slipstream over the wing is shown in figure 16(a). The value of  $\Delta C_{L\psi}$  on figure 16 varies considerably with change of wing. Since the rectangular wing has the least area in the slipstream, reduction in effective dihedral due to power may be expected to be smallest for this case which is borne out to a large extent by the results. As all the other wings had the same center section, the difference shown between them is largely unexplained. Some of the difference may be attributed to the difference in span-load distribution across the center section with the various outboard panels.

(b) Large angles of yaw.- In addition to giving slopes shown by the large symbols in previous figures, figures 17 and 18 show the effect of large angles of yaw on the aerodynamic characteristics. Characteristics of the model in yaw with tail off are shown in figure 19 and 20. Where the power effect is small (the wind-milling condition and the low lift-coefficient condition with take-off power)  $C_{Y\psi}$  and  $C_{N\psi}$  with tail on continue

to large angles of yaw with little change.  $C_{L\psi}$  reduces markedly at large angles of yaw. Since  $C_L$  never reverses sign at large angles of yaw, the change in slope is believed to be of little importance. Displacement of the  $C_m$  curves, one from another, is caused chiefly by the different stabilizer settings and wing mean aerodynamic chord positions.  $C_{D_R}$  decreases with angle of yaw as a result of the system of axis used. While  $C_{D_R}$  along the axis used reduces with yaw,  $C_{D_R}$  along the wind axis actually increases with yaw as would be expected.  $C_L$  does not change much with yaw. When the power effect is large (take-off power at a high  $C_L$ ), the same trends are shown except as follows: With tail on  $C_{n\psi}$  decreases considerably with yaw in the cruising configuration (fig. 17(d)) and changes sharply for the landing configuration, becoming quite highly positive beyond  $-20^\circ$  of yaw (fig. 18(b)). This sharp change in  $C_{n\psi}$  probably occurs when the tail leaves the slipstream. With tail off and power on,  $C_{n\psi}$  is highly positive (fig. 20(b)) but becomes highly negative at small yaw angles when the tail is added (fig. 18(b)) indicating a large effect of the tail when in the slipstream. When the tail leaves the slipstream, its effectiveness decreases considerably so that the high positive  $C_{n\psi}$  of the tail-off curve predominates.

(Although believed to have only a small effect on the results, the following information is given for completeness. On figures 17 and 18 the original dorsal fin was used with the original wing and dorsal  $D_I$  was used for all other plan forms. On figures 17, 18, 19, and 20 the leading-edge slot was open to the fold line for the original wing, but only the outboard portion (13 inches on model) was open for the other plan forms.)

Effect of upturned wing tips.— The variation of the lateral-stability derivatives with  $C_L$  is shown on figure 21. The dates (7-30-43 and 9-27-43) are the dates of testing. There are only slight changes in  $C_{Y\psi}$  and  $C_{n\psi}$  with take-off power due to the upturned wing tips; however, the upturned wing tips cause a considerably less stable  $C_{n\psi}$  with windmilling power. Although there

is poor agreement between  $C_{L\psi}$  obtained from pitch tests made at  $\pm 5^\circ$  yaw and yaw tests (indicated by the large symbols), the increment in effective dihedral caused by the upturned wing tips for propeller windmilling is about  $2.6^\circ$  effective dihedral. For take-off power, however, even the increment is in poor agreement. The curves compared on figure 21 were obtained from data taken about 2 months apart with several model changes being made in the meantime; therefore, the data indicated by the large diamond and square of the same date are considered much more accurate. These points were obtained from figure 22 and indicate an increase of about  $3\frac{1}{2}^\circ$  in effective dihedral due to upturned wing tips with take-off power. It may be concluded that, for the landing configuration, the upturned wing tips may be expected to increase the effective dihedral about  $2\frac{1}{2}^\circ$  for the windmilling condition ( $C_L \approx 1.6$ ) and about  $3\frac{1}{2}^\circ$  to  $5^\circ$  for the take-off power condition ( $C_L \approx 2.7$ ).

Effect of outboard flap modification.- The effect of skewing the outboard flap and removing the outboard flap is shown in figures 23, 24, and 25. As a convenience in testing, some of the tests were made with the tail and some without.

Table II has been prepared to correlate and summarize the effective dihedral results. The values of  $\Gamma_e$  are obtained from slopes measured from figures 23 and 24. The values of  $\Gamma_e$  with the asterisk (\*) were obtained by adding or subtracting the contribution of the tail which was found by comparing figures 18 and 20 to be about  $1^\circ$  of  $\Gamma_e$  for the windmilling condition and  $4^\circ$  of  $\Gamma_e$  for the take-off power conditions at the angles of attack corresponding to the yaw tests. Skewing the flap from the original position of  $-14.5^\circ$  to  $0.7^\circ$  gives a considerable improvement in effective dihedral while further skew to  $11.3^\circ$  gave no further improvement. Removing the flap entirely gave the most improvement; however, these modifications reduce  $C_{L_{max}}$  as reported in reference 1. Figure 25 shows that skewing the outboard flap reduces the variation of effective dihedral with  $C_L$  similar to effect of sweeping the outboard wing panel back as previously discussed. Adding the tail to the case of  $\Lambda_{T_0} = 0.7$  with take-off power would raise the



curve about  $1/4^\circ$  effective dihedral at the higher lift coefficients. Figure 23 shows that there is no measurable effect of changing the flap gap. Opening the slats increased the effective dihedral about  $3.4^\circ$  (fig. 24 and table II).

Effect of canopy opening.- Opening the canopy is shown to have no measurable effect on the variation of  $C_n$  with  $\psi$  between  $\pm 10^\circ$   $\psi$  (fig. 26). The difference in  $C_n$  at  $\pm 15^\circ$  is not believed to indicate any dangerous tendency.

Aileron control.- The results of the tests of the left aileron are shown in figure 27. A transition wire 0.007 inch in diameter was placed on the upper surface of the wing at the 10-percent-chord station in an attempt to duplicate full-scale transition conditions more closely. The variation of wing-tip helix angle  $pb/2V$  with stick force was computed for figure 28(a) for both ailerons. The results are reduced by multiplying by 0.8 to approximate the reduction in  $pb/2V$  due primarily to adverse yaw and wing twist as previously mentioned. To check the validity of the 0.8 factor-at a low speed with flaps down where adverse yaw is greatest, a theoretical time history of the motion following an abrupt full aileron deflection ( $\pm 15^\circ$ ) was computed using a refinement of the step-by-step computation given in reference 4. The refinement was to use the slopes at the angle of sideslip under consideration instead of a single value of slope measured at zero sideslip. The results of the computation are given in figure 28(b). The model with the swept-back outer wing panels was chosen for the computation, because of the closer simulation of the airplane. The speed chosen was 94.4 miles per hour which is 120 percent of the minimum speed. The maximum  $pb/2V$  at about 1 second is 0.082. To obtain 0.082,  $C_l/C_{l_p}$  would have to be multiplied by

0.86 instead of the usual factor of 0.8. The average  $pb/2V$  for a  $90^\circ$  bank, where sideslip reaches a maximum, is only 0.067. To obtain 0.067,  $C_l/C_{l_p}$  would have to be multiplied by 0.70 instead of 0.8. As the speed increases this factor for a  $90^\circ$  bank would increase until at high speed the factor would be reduced by wing twist.

The Navy requirement F-8 and F-9 of reference 5 states in brief that a  $pb/2V$  of 0.08 is required at

any speed between 140 percent of stalling speed and 80 percent of maximum speed with a control force not exceeding 30 pounds. As shown, the average effectiveness is too low at 140 percent of minimum speed, although the maximum rate of roll meets the requirement (fig. 28(b)), in the landing configuration and the control force is too high at 80 percent of maximum speed. The ailerons meet the requirement at the cruising speed of 220 miles per hour.

Rudder-free characteristics.- Preliminary tests showed that a reversal of yawing moment would occur, and hence a reversal of rudder force, for the cruising configuration with take-off power at a high  $\alpha$  (fig. 29(a)) and for the landing configuration with windmilling or take-off power (figs. 29(b) and 29(c)). While the reversal occurs earlier for the windmilling condition, it was more severe for the take-off power condition. Most of the dorsal fins were therefore tested in the landing configuration with take-off power. The addition of the dorsal fins delays the reversal of yawing moments about as follows: original dorsal,  $3^\circ$ ; dorsal  $D_1$ ,  $9^\circ$ ; dorsal  $D_2$ ,  $14\frac{1}{2}^\circ$ . These values can be obtained from figure 29(c) by the proper addition and subtraction.

It was thought that a revised vertical tail of the same plan form and area having a smaller chord rudder might prove better because when the tail stalls a smaller portion of the area would be deflected so that a greater restoring moment in yaw would result. Because of the dual-rotating propeller, the directional control supplied by a smaller chord rudder should be sufficient. For the windmilling condition, the revised vertical tail alone eliminated the reversal of yawing moments (fig. 29(b)). For the landing configuration with take-off power, the revised vertical tail delays the reversal of yawing moments about  $5\frac{1}{2}^\circ$  beyond that for the original tail when results with the same dorsal fin are compared (fig. 29(c)).

Rudder tests.- The test data of the original tail are shown in figure 30 and the revised tail in figures 31, 32, and 33. Certain flying qualities computed from these figures are presented on figures 34, 35, 36, and 37. The rudder-free figure (fig. 29(b)) was also used to help determine where rudder-force reversal occurred on the original tail for figure 35.

The take-off power rudder calculations were made for a  $C_L = 1.74$ , although the take-off power rudder test data were taken at a  $C_L = 2.77$  (fig. 33).  $T_c'$  was therefore higher for the test than it would be for the flight conditions computed. The calculations were made in this manner so that a better comparison could be made with the windmilling condition at 1.2 times the power-off minimum speed. For the take-off power results on figures 35 and 37, an interpolation was made between the windmilling condition (fig. 32) and the take-off power condition given on figure 33 for the  $T_c'$  difference.

In the cruising configuration, the revised tail could hold  $11\frac{1}{2}^\circ$  of sideslip; however, at high speed this value of sideslip would be reduced considerably because of high pedal forces (fig. 34). In the landing configuration, the revised tail can hold  $10^\circ$  of sideslip for windmilling power and  $12^\circ$  for take-off power at 94.4 miles per hour, which is about 1.2 times the minimum speed. For a maximum pedal force of 180 pounds as specified in reference 5, only  $8\frac{1}{2}^\circ$  of sideslip could be held with take-off power. The original tail holds  $24^\circ$  of sideslip or 2.4 times the value for the revised tail; however, a rudder-force reversal occurs at  $16^\circ$  sideslip which violates requirement E-3 of reference 5. The revised tail could be improved by increasing the overhanging balance. The original tail could be improved by increasing the dorsal-fin size and possibly reducing the deflection range.

Since there are no asymmetric yawing moments to trim with the dual-rotating propeller, the most severe requirement for the rudder is probably for neutralizing the adverse yaw of the ailerons. Rudder control for spin recovery may be the most severe rudder requirement. Spin-recovery tests are to be made in the NACA spin tunnel. The maximum adverse yaw of the ailerons was determined by adding the test  $C_n$  for the ailerons as given on figure 27 to the  $C_n$  due to rolling computed from the method given in reference 6. These estimates were placed on figures 36 and 37. Either vertical tail can easily neutralize the aileron adverse yawing moment.

## CONCLUSIONS

The following conclusions may be drawn as to the lateral stability and control of the XBTC-2 airplane.

1. Wing plan form had a pronounced effect on the variation of effective dihedral with lift coefficient and flap deflection. Wing plan form had little effect on directional stability or lateral force.

2. The application of power, particularly at high lift coefficients, decreased the effective dihedral but increased the directional stability and lateral force.

3. With the upturned wing tips for the windmilling condition ( $C_L \approx 1.6$ ), the effective dihedral was increased about  $2\frac{1}{2}^\circ$ , and with take-off power ( $C_L \approx 2.7$ ), about  $3\frac{1}{2}^\circ$  to  $5^\circ$ .

4. For the landing configuration, giving sweepback to the outboard flap or removing the outboard flap reduced the change in effective dihedral with lift coefficient but reduced the maximum lift coefficient obtainable.

5. Aileron effectiveness was marginal for the landing configuration and aileron control force was too high at high speed.

6. The rudder-force reversal was improved considerably by increasing the dorsal-fin size and also by reducing the rudder chord while maintaining the same vertical-tail area.

7. Aileron yawing moments, the only asymmetric yawing moments occurring in normal flight with a dual-rotating propeller, were easily neutralized by the rudder.

8. Rudder control for spin recovery may be the most severe rudder requirement. It is recommended that the narrow-chord rudder be checked for spin recovery as well as the larger rudder.

Langley Memorial Aeronautical Laboratory  
National Advisory Committee for Aeronautics  
Langley Field, Va., August 18, 1944

## REFERENCES

1. Weil, Joseph, and Wells, Evalyn G.: Wind-Tunnel Tests of the 1/8-Scale Powered Model of the Curtiss XBTC-2 Airplane. I - Preliminary Investigation of Longitudinal Stability. NACA MR, June 1, 1944.
2. Swanson, Robert S., and Toll, Thomas A.: Estimation of Stick Forces from Wind-Tunnel Aileron Data. NACA ARR No. 3J29, 1943.
3. Betz, A.: Applied Airfoil Theory. Unsymmetrical and Non-Steady Types of Motion. Vol. IV of Aerodynamic Theory, div. J, ch. IV, sec. 4, W. F. Durand, ed., Julius Springer (Berlin), 1935, pp. 102-107.
4. Weick, Fred E., and Jones, Robert T.: The Effect of Lateral Controls in Producing Motion of an Airplane as Computed from Wind-Tunnel Data. NACA Rep. No. 570, 1936.
5. Anon.: Specification for Stability and Control Characteristics of Airplanes. SR-119, Bur. Aero., Oct. 1, 1942.
6. Pearson, Henry A., and Jones, Robert T.: Theoretical Stability and Control Characteristics of Wings with Various Amounts of Taper and Twist. NACA Rep. No. 635, 1938.

TABLE I.- EFFECT OF WING PLAN FORM ON EFFECTIVE DIHEDRAL

Flight condition		Original (deg)	Swept back (deg)	Rectangular outer panels (deg)	Rectangular (deg)
1	Cruising configuration windmilling or power on, low $C_L$	$8\frac{1}{2}$	$9\frac{1}{2}$	10	$11\frac{1}{2}$
2	Landing configuration windmilling, high $C_L$	4	12	$14\frac{1}{2}$	17
3	Landing configuration take-off power, high $C_L$	-13	0	0	5
4	3 - 1	$-21\frac{1}{2}$	$-9\frac{1}{2}$	-10	$-6\frac{1}{2}$

NOTE: Table made from large symbols on figure 15.

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

TABLE II.- EFFECT OF OUTBOARD FLAP MODIFICATION  
ON EFFECTIVE DIHEDRAL

[Original plan form, landing configuration]

Outboard flap condition	Power	$C_L$	$\alpha$ (deg)	$\Gamma_e$ tail on (deg)	$\Gamma_e$ tail off (deg)
$\Lambda_{f_o} = -14.5^\circ$ (original)	Windmilling	1.67	9.2	4	3 <sup>a</sup>
$\Lambda_{f_o} = 0.7^\circ$ (both gaps)	----do----	1.53	9.2	8.3 <sup>a</sup>	7.3
$\Lambda_{f_o} = 11.3^\circ$	----do----	1.41	9.1	8.3 <sup>a</sup>	7.3
Flap up	----do----	1.26	8.9	11.5 <sup>a</sup>	10.5
$\Lambda_{f_o} = -14.5^\circ$ (original)	Take-off	2.85	10.6	-13	-17 <sup>a</sup>
$\Lambda_{f_o} = 0.7^\circ$ (small gaps)	----do----	2.57	10.4	-6 <sup>a</sup>	-10
Flap up	----do----	2.20	10.5	-4.6	-8.6 <sup>a</sup>
Flap up (L.E. slot closed)	----do----	2.22	10.5	-8.0	-12.0 <sup>a</sup>

<sup>a</sup>Estimated from average effects of tail on  $\Gamma_e$ .

NOTE: For the cruising configuration with tail on at a low  $C_L$ ,  $\Gamma_e = 8.5^\circ$ , power on or windmilling.

OUTLINE OF FIGURES ON  $\frac{1}{8}$ -SCALE MODEL OF XBTC-2 AIRPLANE

Fig. No.

A. Model

Original model (complete) . . . . .	1
Cowl flaps . . . . .	2
Aileron details . . . . .	3
Outer wing panels swept back . . . . .	4
Rectangular outer wing panels . . . . .	5
Rectangular wing . . . . .	6
Wing with upturned tips . . . . .	7
Wing with skewed flaps . . . . .	8
Canopy opening . . . . .	9
Dorsal fins . . . . .	10
Original and revised vertical tails . . . . .	11

B. System of axes . . . . . 12

C. Power operation

Propeller calibration . . . . .	13
$T_c'$ versus $C_L$ . . . . .	14

D. Effect of wing plan form

Lateral-stability derivatives, $C_{L\psi}$ , $C_{n\psi}$ , $C_{Y\psi}$ . . . . .	15
Effect of power on $C_{L\psi}$ , $C_{n\psi}$ , $C_{Y\psi}$ . . . . .	16
Yaw tests:	
Cruising configuration, tail on . . . . .	17
Landing configuration, tail on . . . . .	18
Cruising configuration, tail off . . . . .	19
Landing configuration, tail off . . . . .	20

E. Effect of upturned wing tips

Lateral-stability derivatives . . . . .	21
Yaw test . . . . .	22


F. Effect of outboard flap modifications

Yaw test (skewed flaps) . . . . .	23
Yaw test (flap and slat modifications) . . . . .	24
Effective dihedral . . . . .	25




OUTLINE OF FIGURES - Continued

	<u>Fig. No.</u>
G. <u>Effect of canopy opening in yaw</u> . . . . .	26
H. <u>Aileron control</u>	
Aileron deflection . . . . .	27
Aileron flying qualities . . . . .	28
I. <u>Rudder control</u>	
Rudder free (yaw tests) . . . . .	29
Rudder deflection (yaw tests):	
Original vertical tail . . . . .	30
Revised vertical tail:	
Cruising configuration windmilling . . . . .	31
Landing configuration windmilling . . . . .	32
Landing configuration take-off power . . . . .	33
Rudder flying qualities	
In sideslip:	
Cruising configuration . . . . .	34
Landing configuration . . . . .	35
Neutralizing aileron $C_n$ :	
Cruising configuration . . . . .	36
Landing configuration . . . . .	37

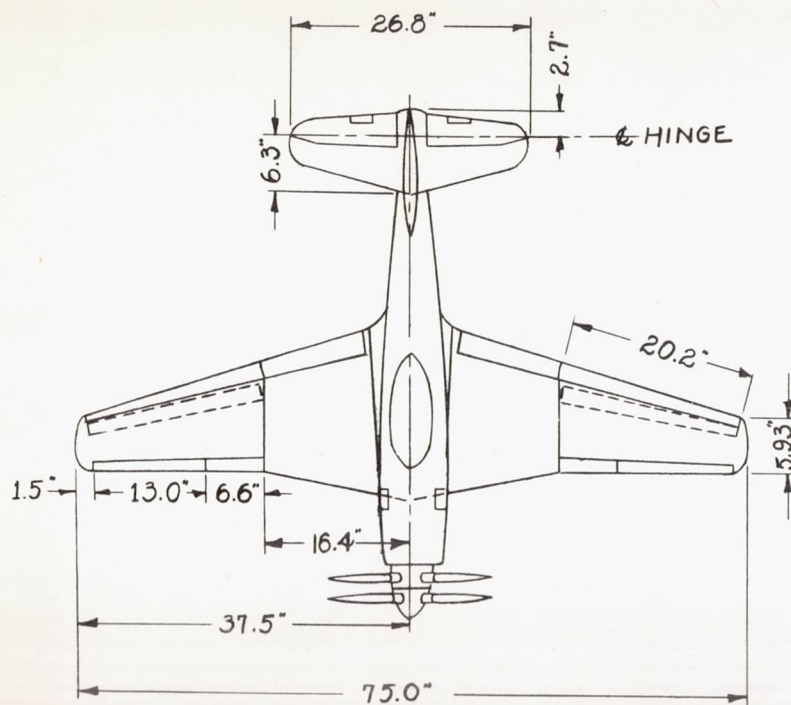

ROOT SECTION NACA 23014.7 (Approx)  $i_w = 1.5^\circ$   
 BREAK SECTION NACA 23016  $i_w = 1.5^\circ$   
 THEO. TIP SECTION NACA 23008  $i_w = -0.8^\circ$   
 WING AREA 6.34 SQ. FT, MAC 12.26 IN.

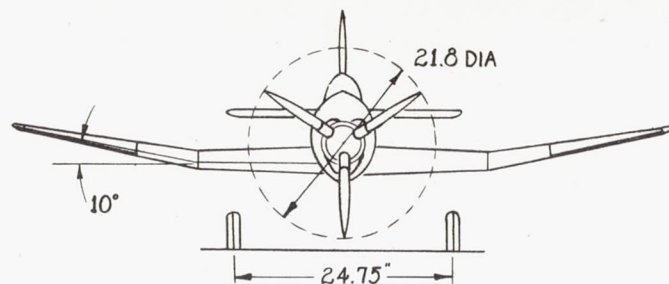

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

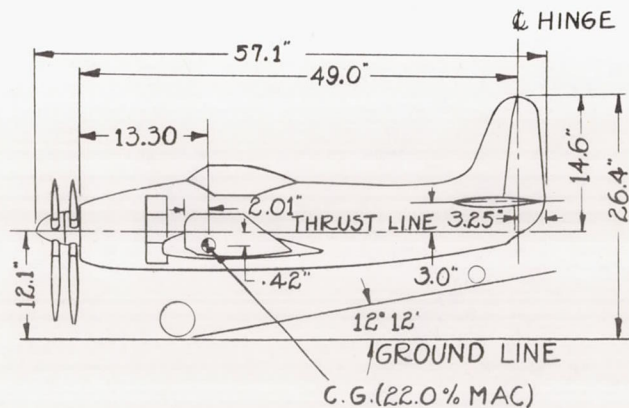


FIGURE 1(a).-THREE-VIEW DRAWING OF  $1/8$ -SCALE MODEL OF THE CURTISS XBTC-2 AIRPLANE.  
(ORIGINAL MODEL)


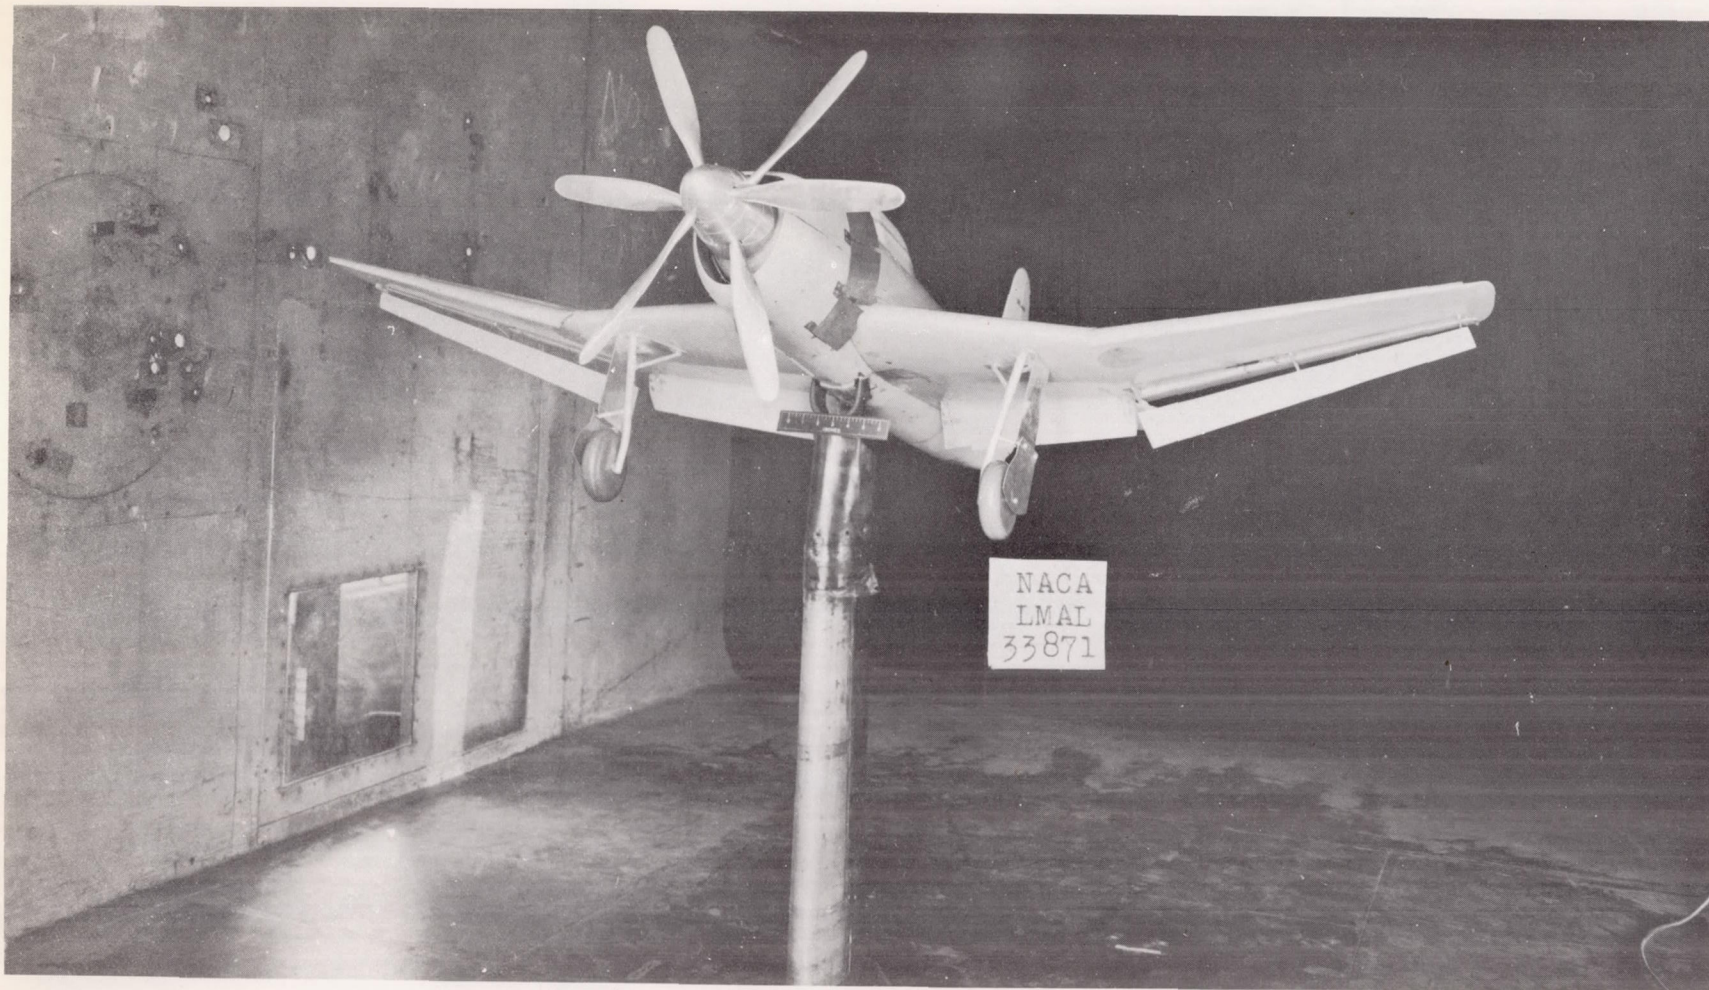


Figure 1(b).- The  $\frac{1}{8}$ -scale model of the XBTC-2 airplane in the LMAL 7- by 10-foot tunnel. Landing configuration.

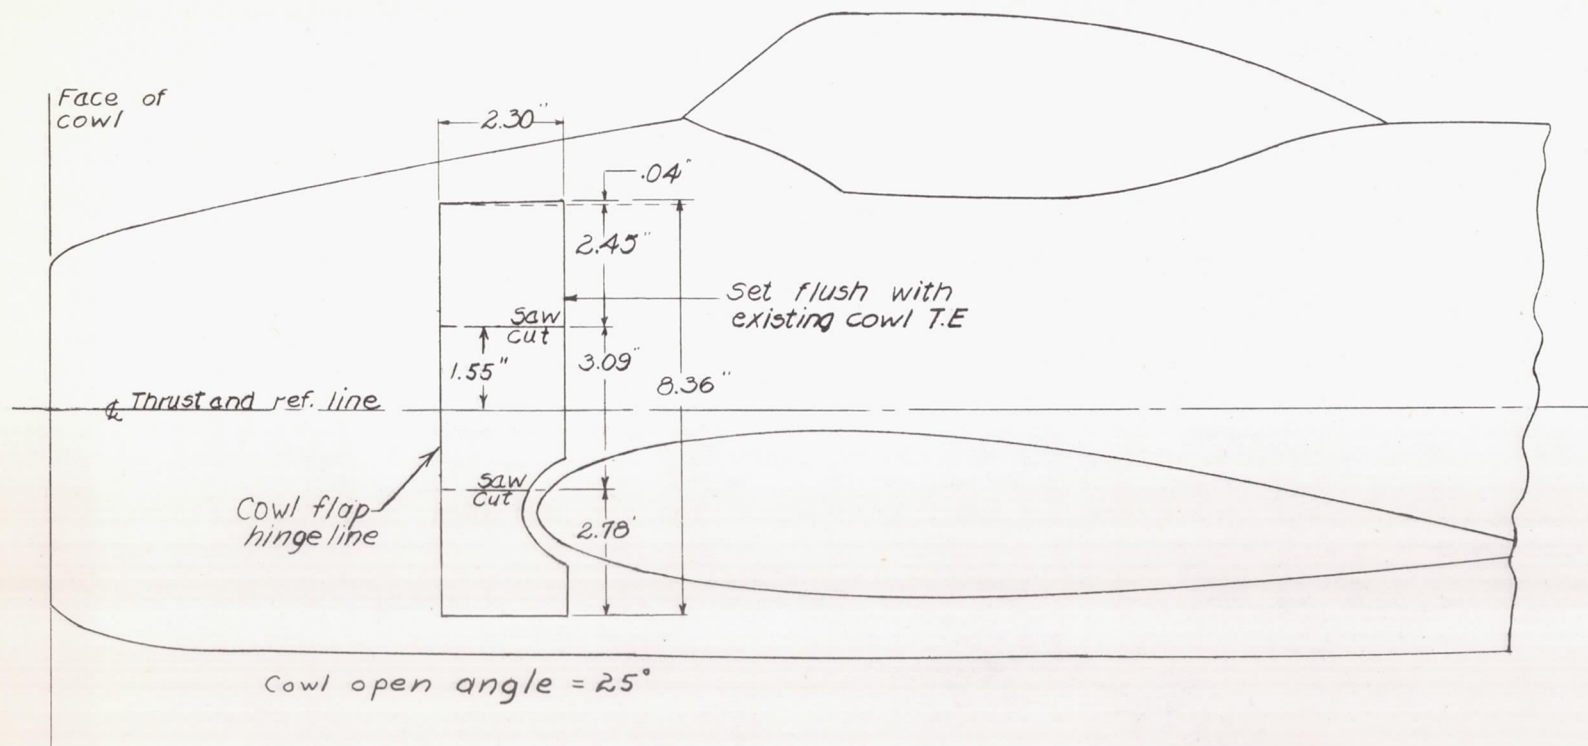

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

Figure 2 .- Side view of  $\frac{1}{8}$ -scale model of XBTC-2 airplane showing cowl flap details.



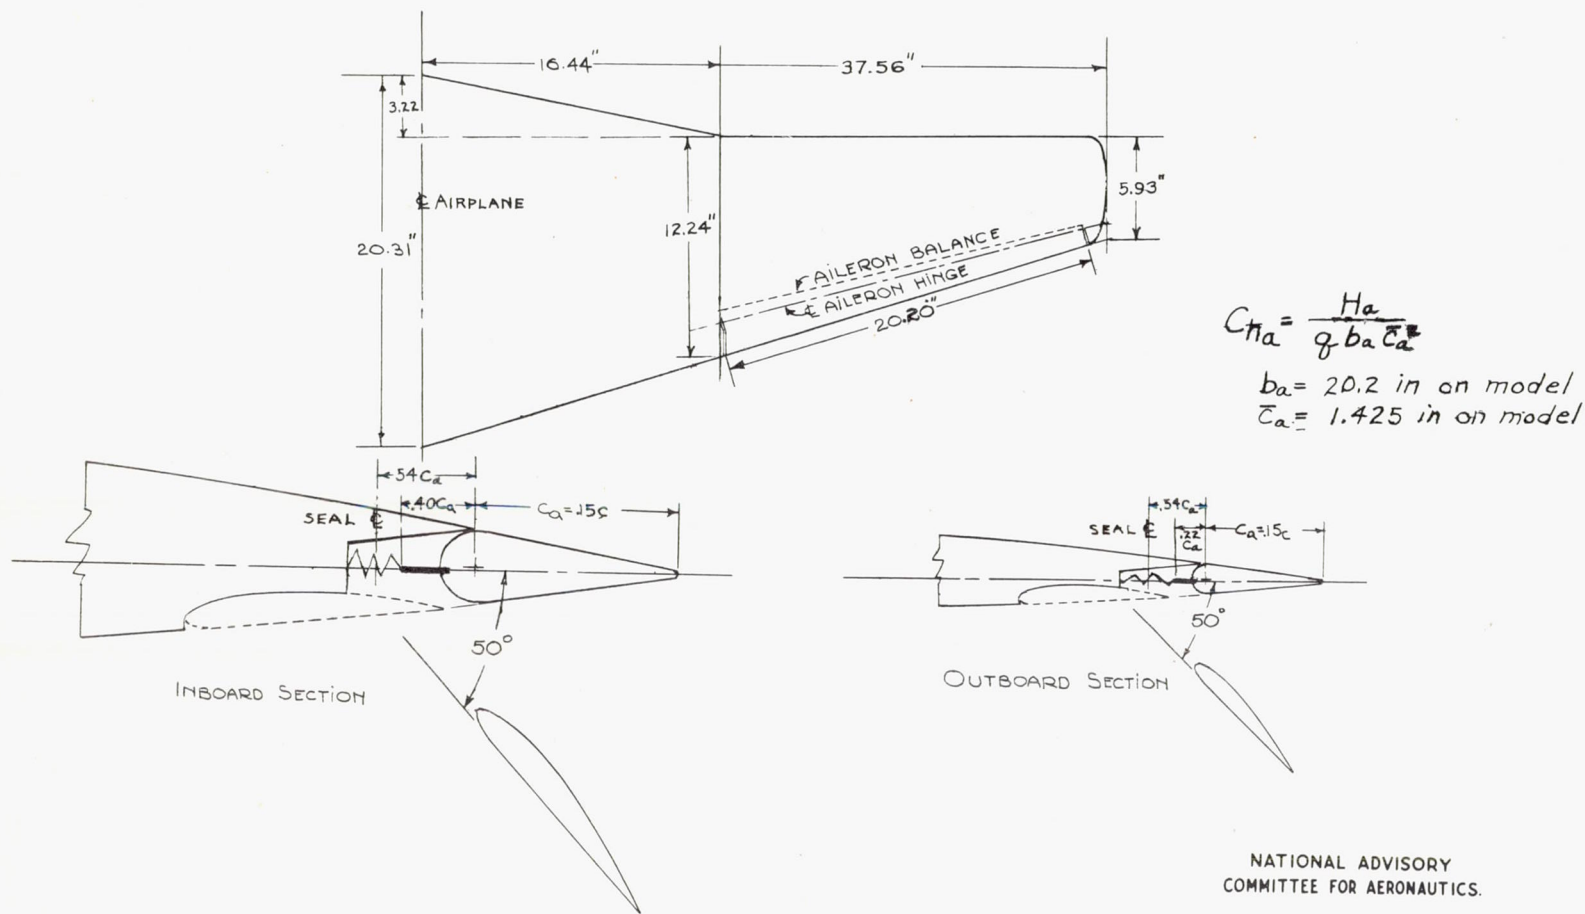


Figure 3.-Diagram showing aileron of XBTC-2 model tested with flaps neutral and flaps extended.

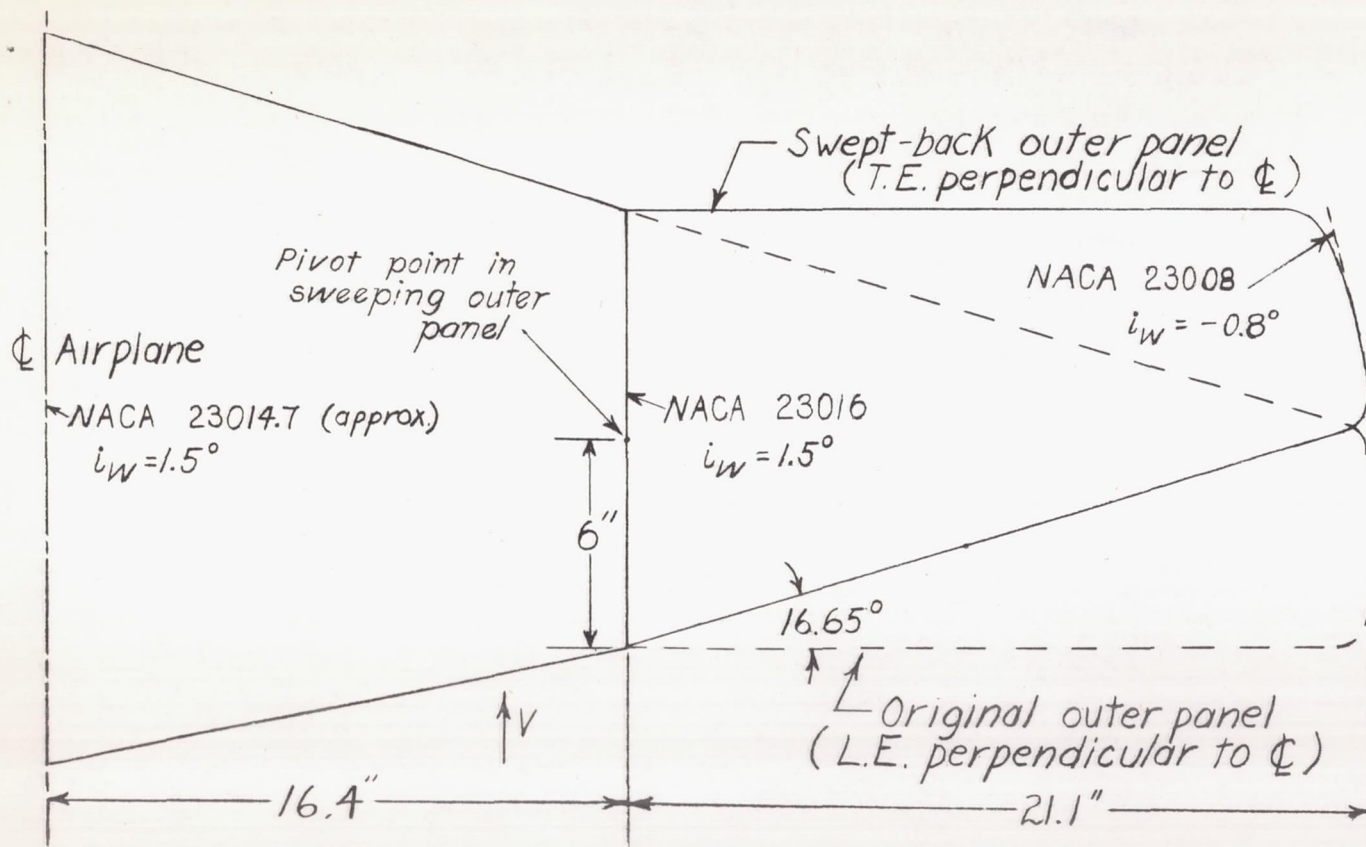

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

Figure 4.-Left wing panel of 1/8-scale model of XBTC-2 airplane showing swept-back outer panel modification.

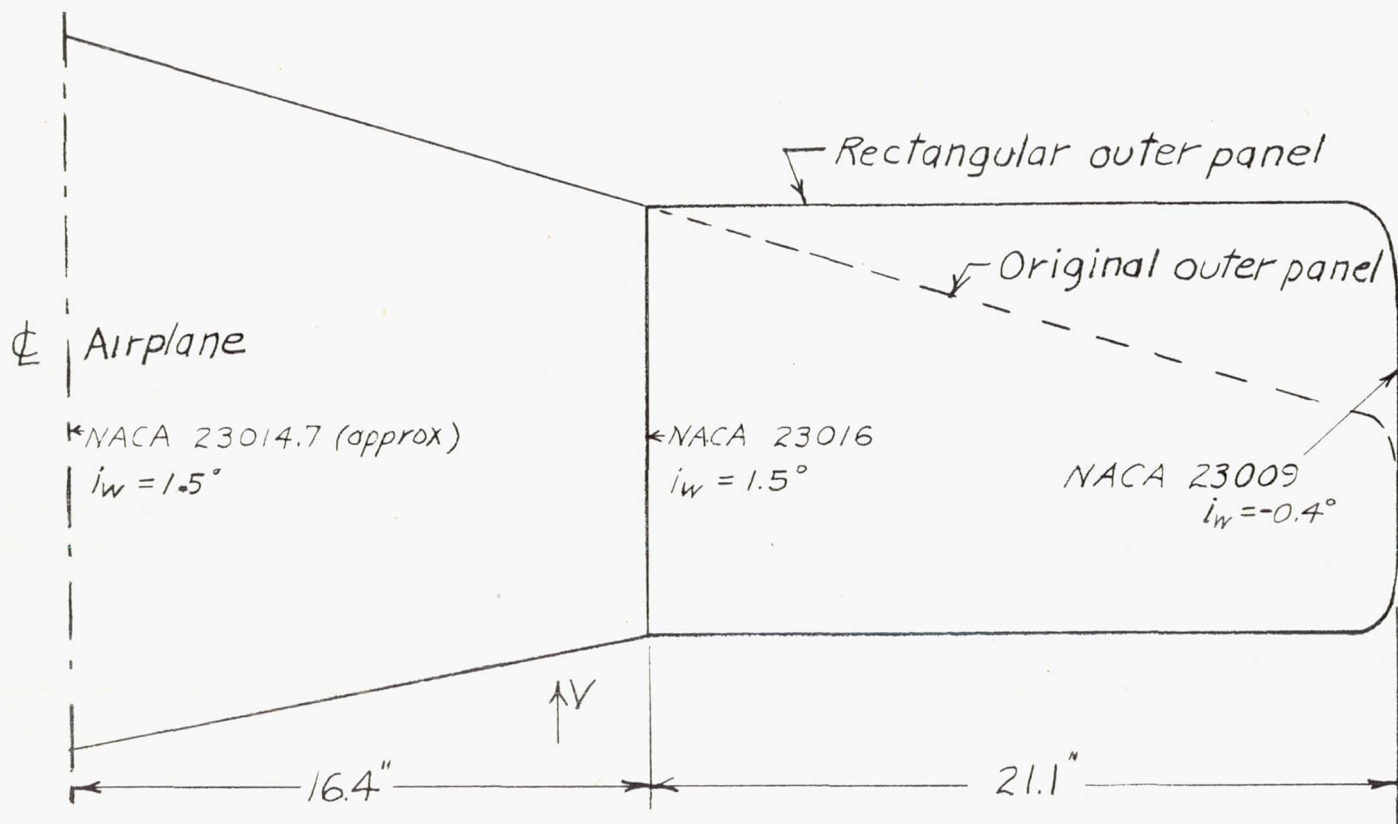

Total original wing area 6.34 sq ft  
 Total wing area (Rect. outer panels) 7.26 sq ft

NATIONAL ADVISORY  
 COMMITTEE FOR AERONAUTICS

Figure 5(a)-Left wing panel of  $1/8$ -scale model of XBTC-2 airplane showing rectangular outer panel modification.


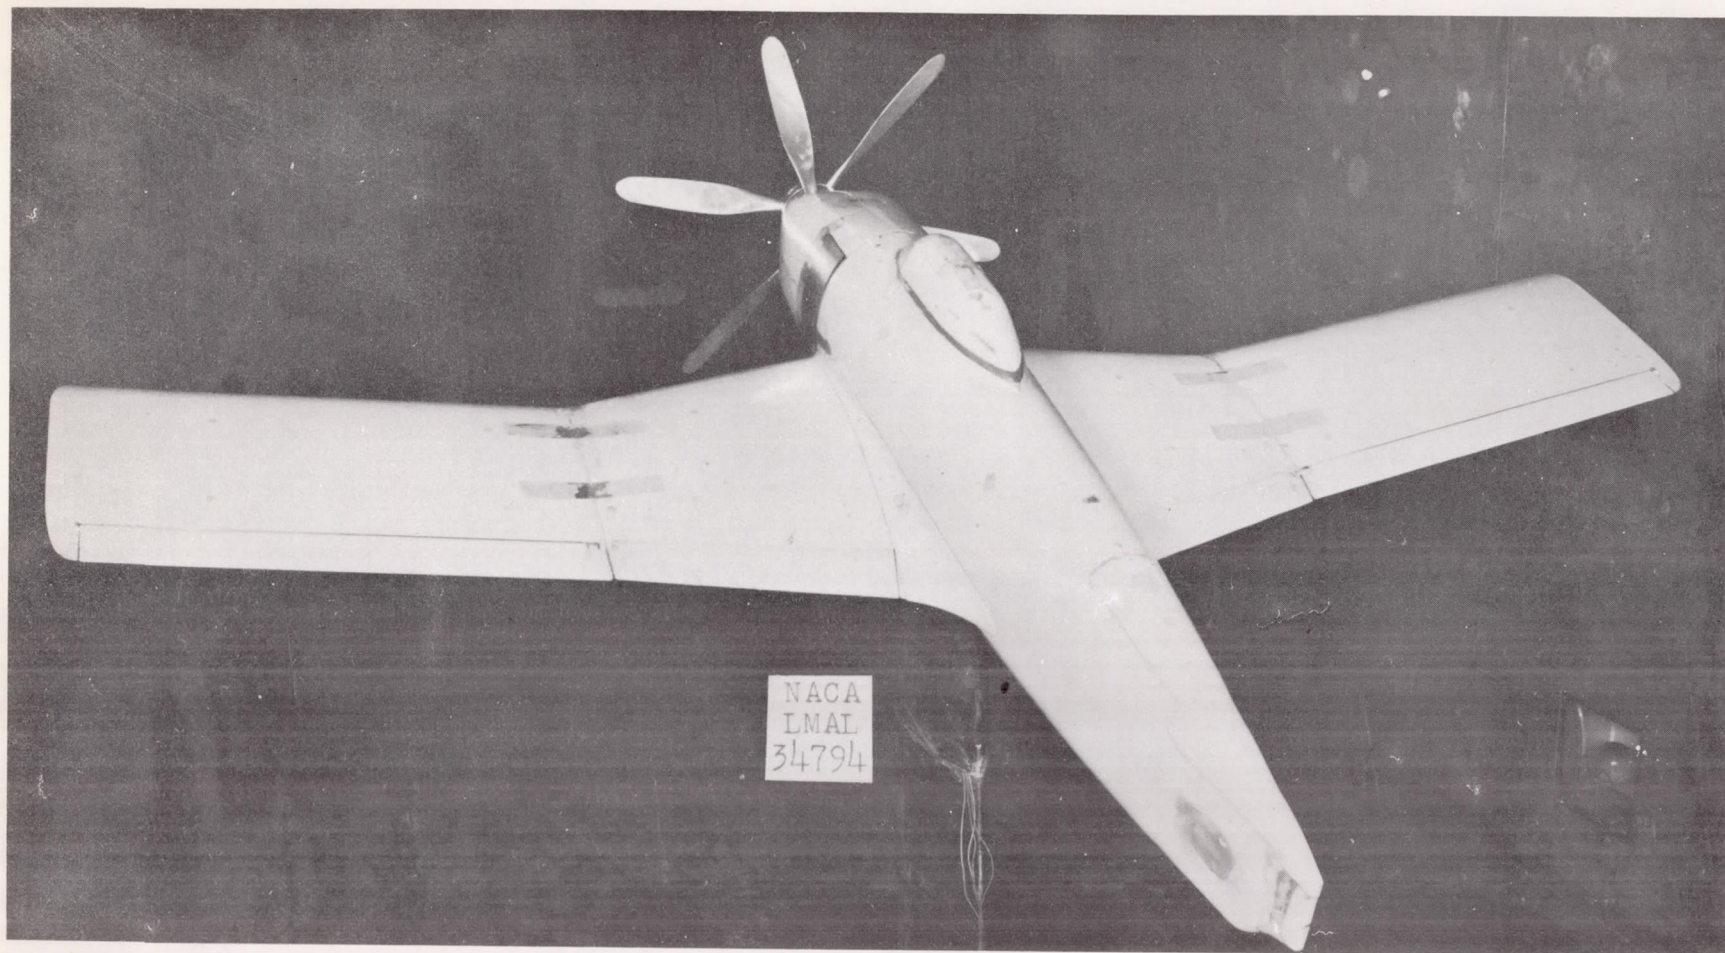


Figure 5(b).- The  $\frac{1}{8}$ -scale model of the XBTC-2 airplane with rectangular outer wing panels. Cruising configuration. Tail off.




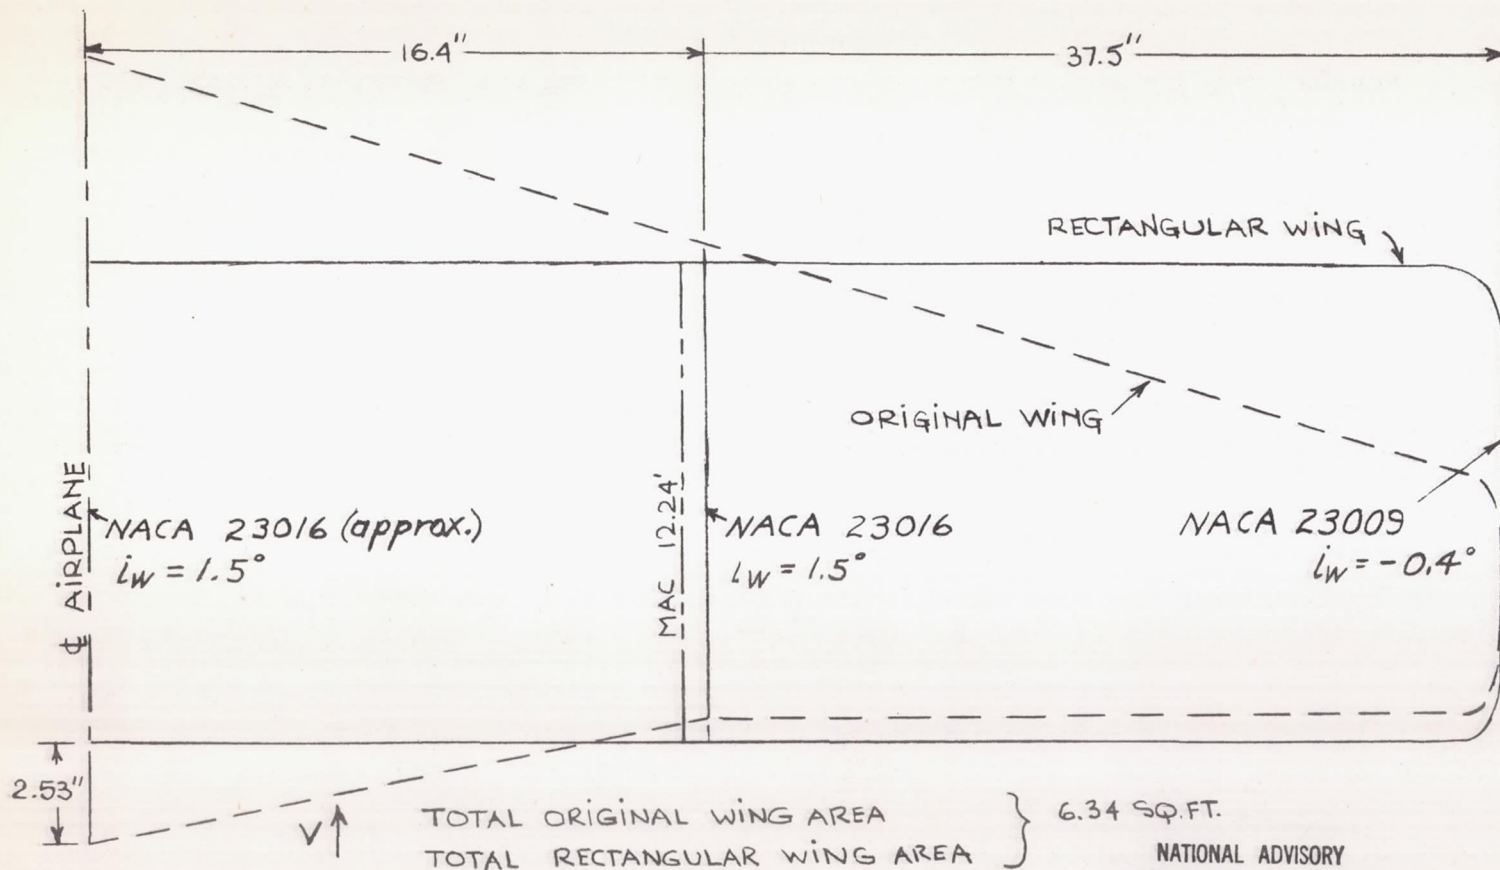

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS


NOTE - FORE AND AFT LOCATION AND LENGTH OF M.A.C. SAME FOR BOTH WINGS

Figure 6a - Left wing panel of  $1/8$ -scale model of XBTC-2 airplane with rectangular planform.

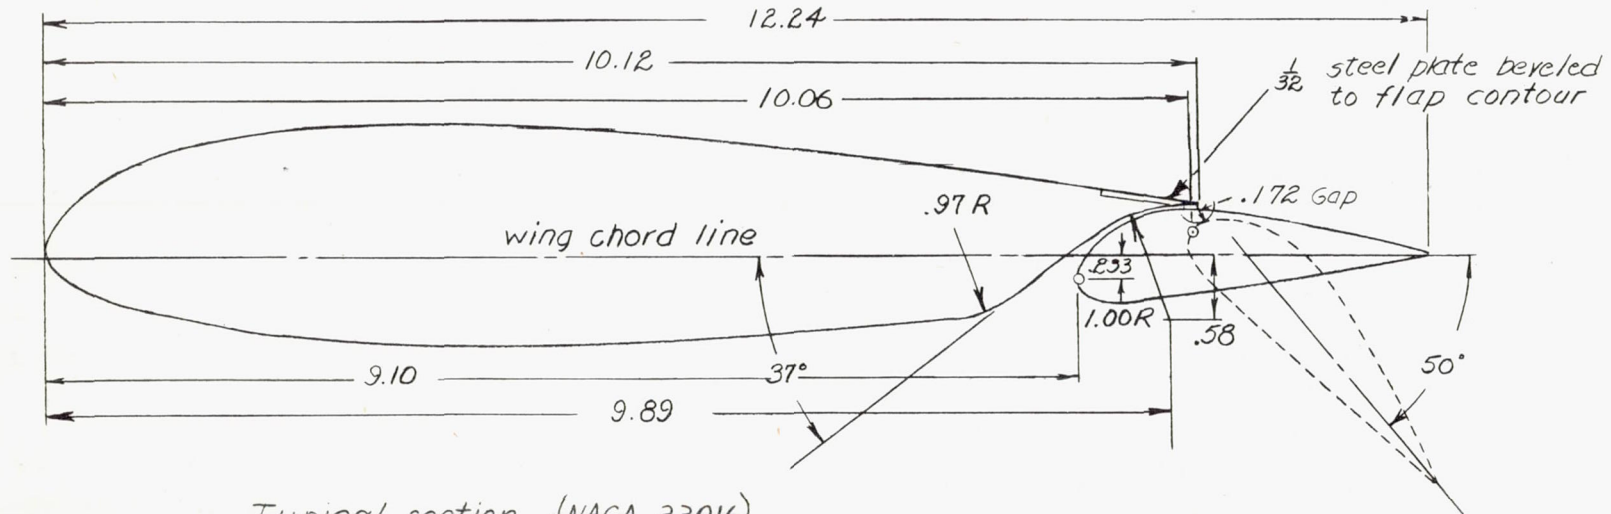

Typical section (NACA 23016)

Flap nose section



$x$	.049	.094	.167	.244	.323	.480	.636	.693	.793	.949	1.105	1.261
$y_u$	-.073	-.014	.081	.154	.212	.300	.359	—	.401	.417	.409	.388
$y_l$	.360	.387	.409	.421	.421	—	—	.376	—	—	—	—

All dimensions in inches

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

Figure 6(b)- Details of slotted flap for 1/8-scale model of the XBTC-2 airplane. Rectangular wing.

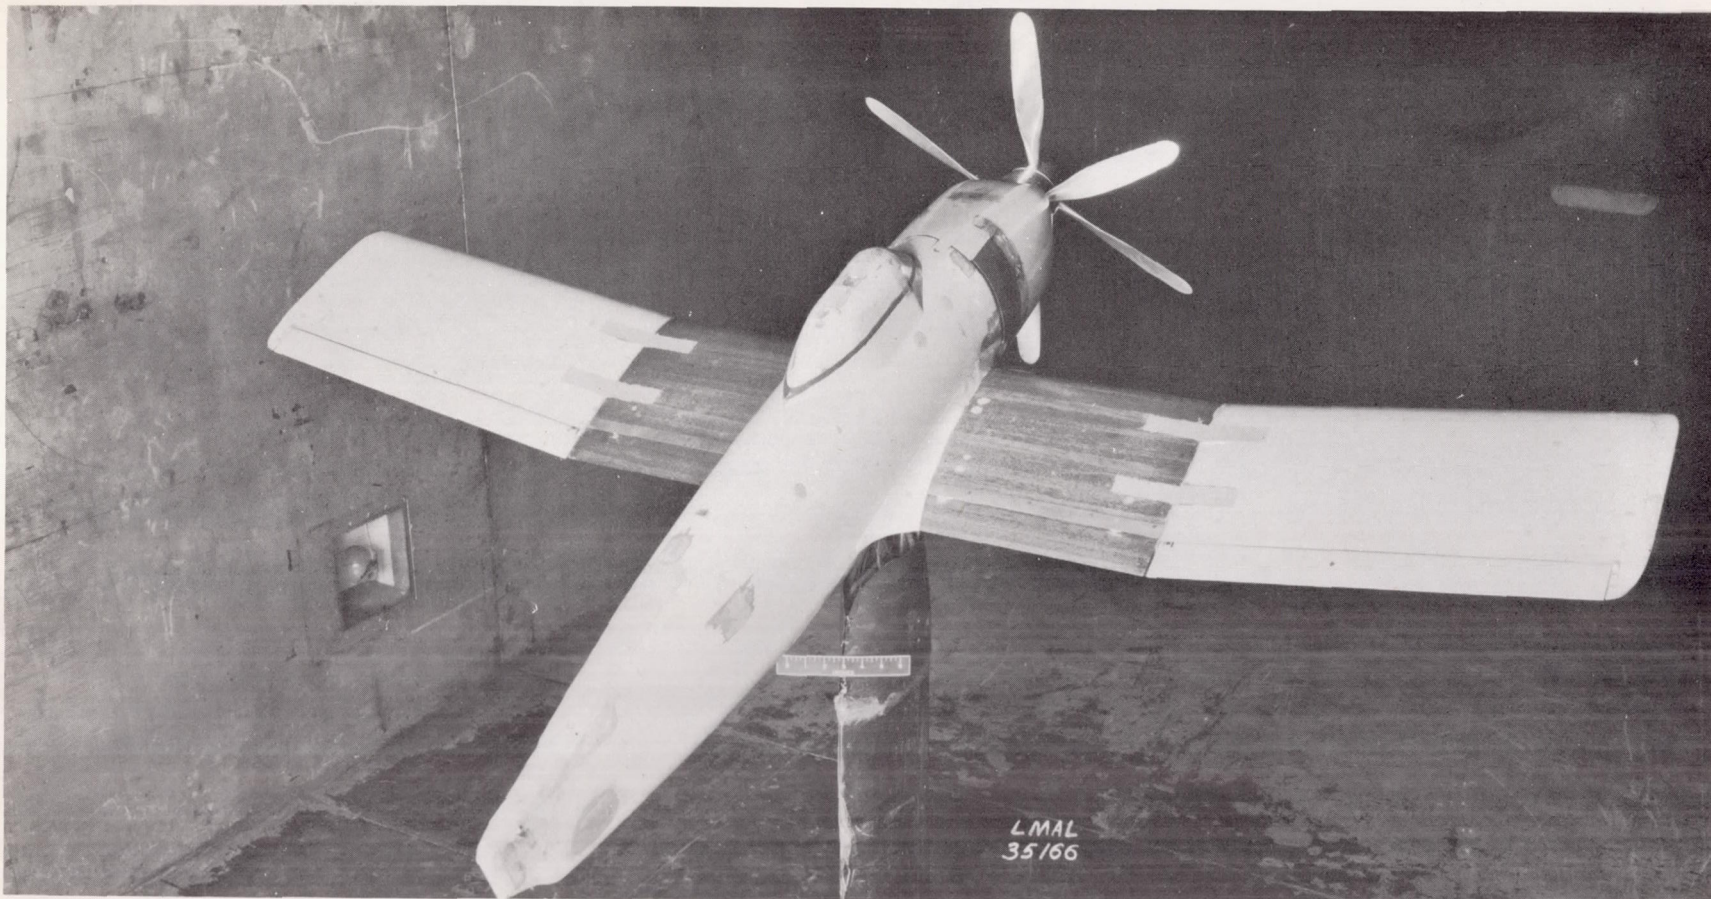


Figure 6(c).- The  $\frac{1}{8}$ -scale model of the XBTC-2 airplane with rectangular wing. Cruising configuration. Take-off.

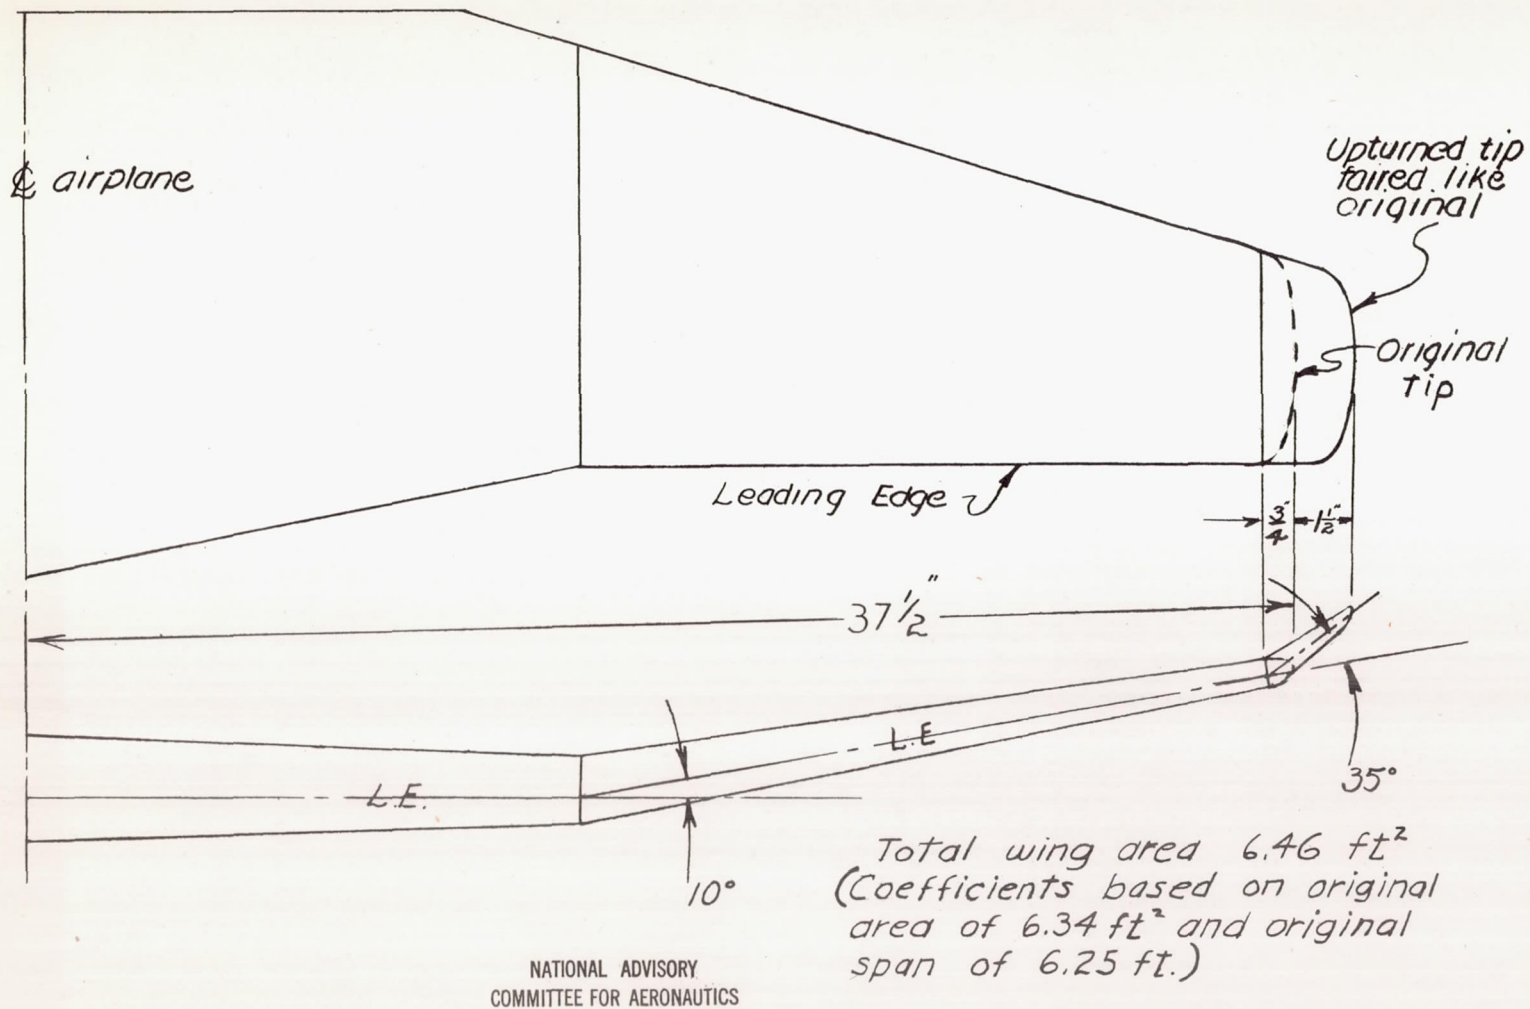


Figure 7(a)-Left wing panel of  $\frac{1}{8}$ -scale model of XBTC-2 airplane showing upturned wing tip.



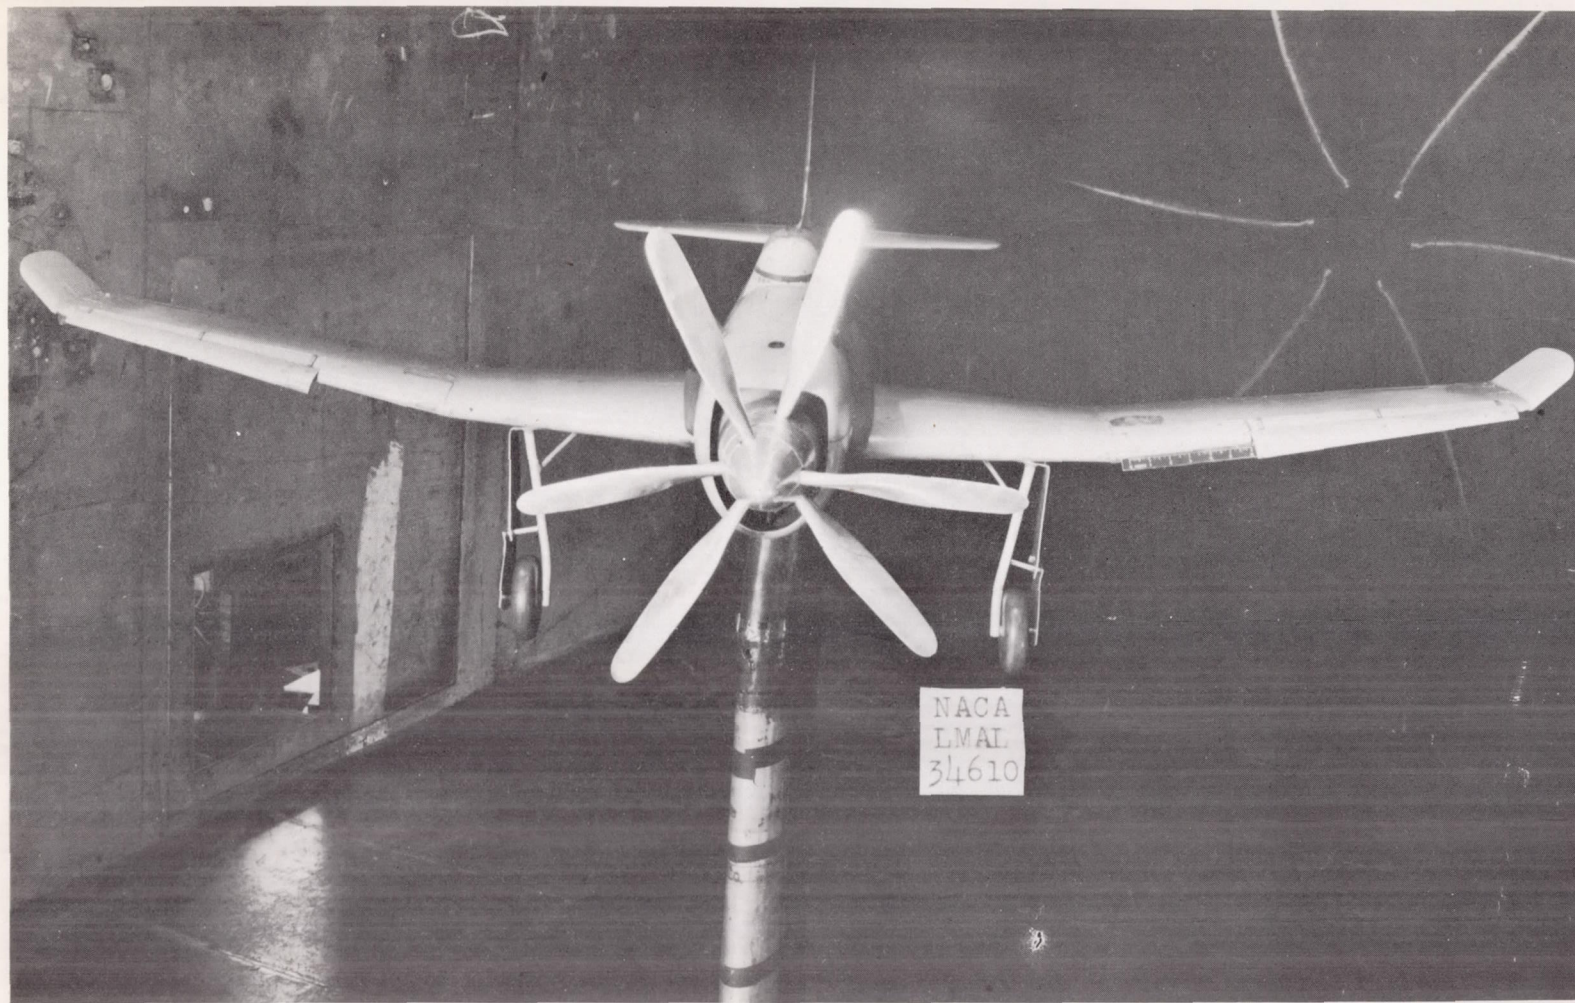


Figure 7(b).- The  $\frac{1}{8}$ -scale model of the XBTC-2 airplane with upturned wing tips.  
Landing configuration.

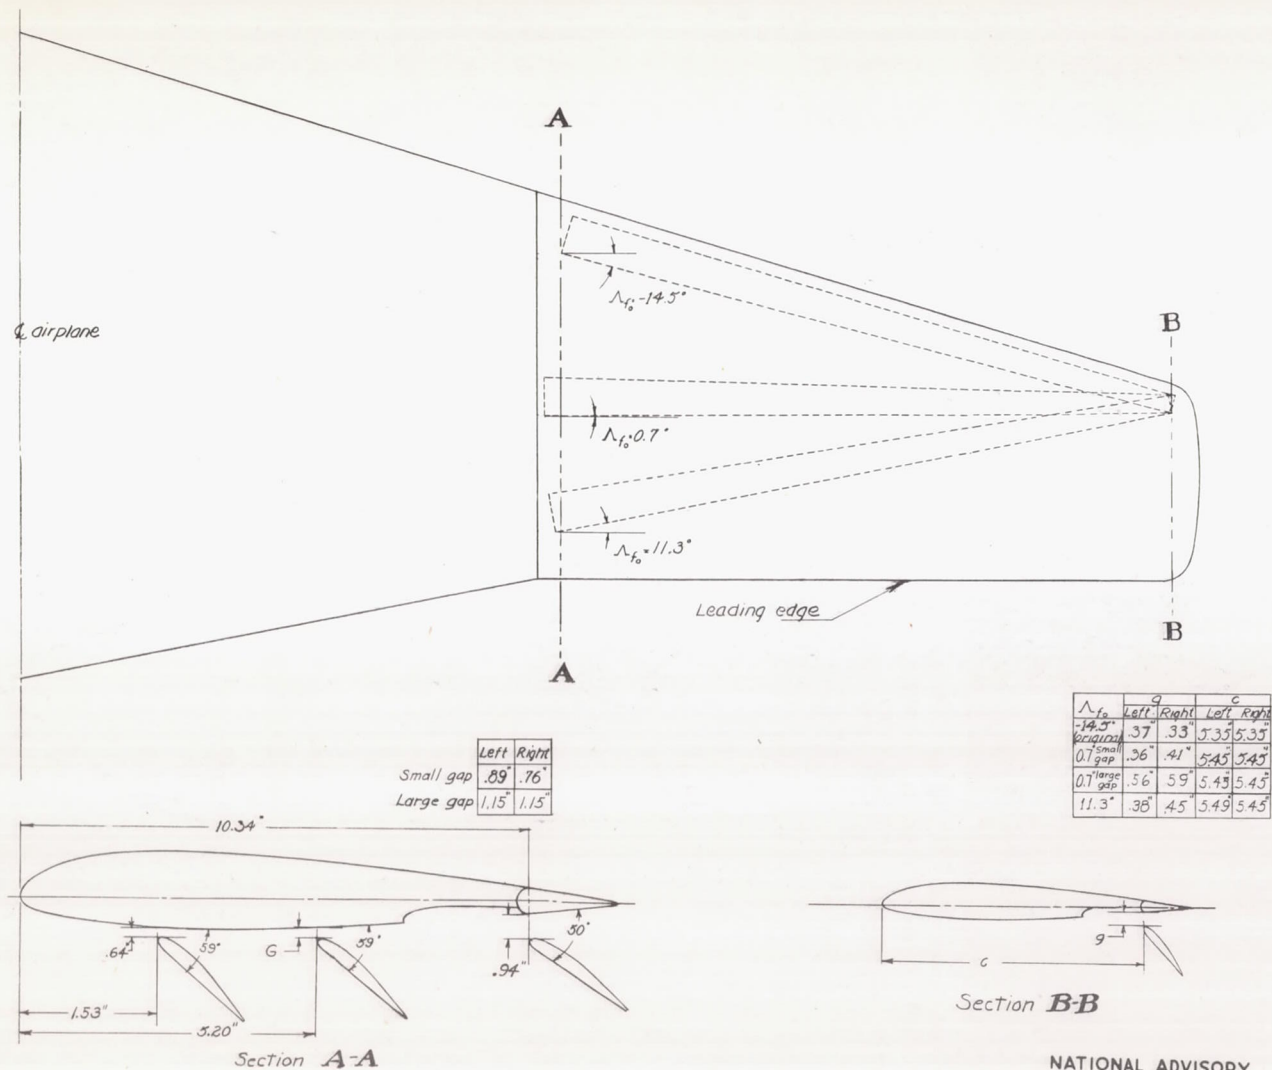

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS.

Figure 8.-Left wing panel of 1/8 scale model of XB7C-2 airplane showing outboard flap positions tested.

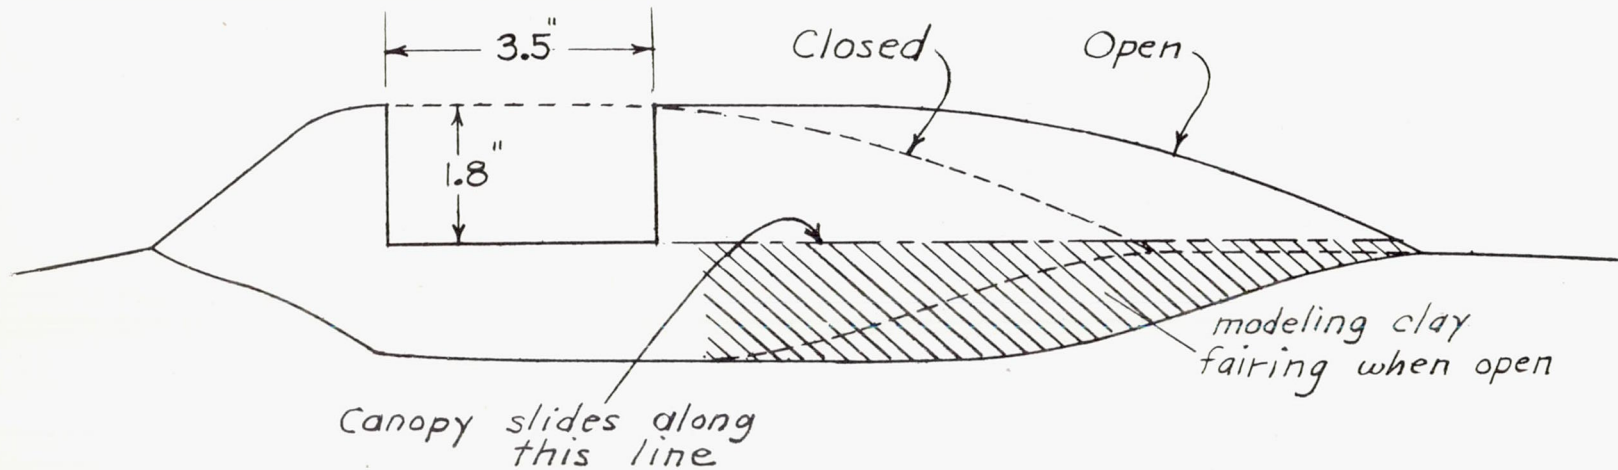

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

Figure 9. - Drawing showing canopy opening on  
 $\frac{1}{8}$ -scale model of XBTC-2 airplane.

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS.

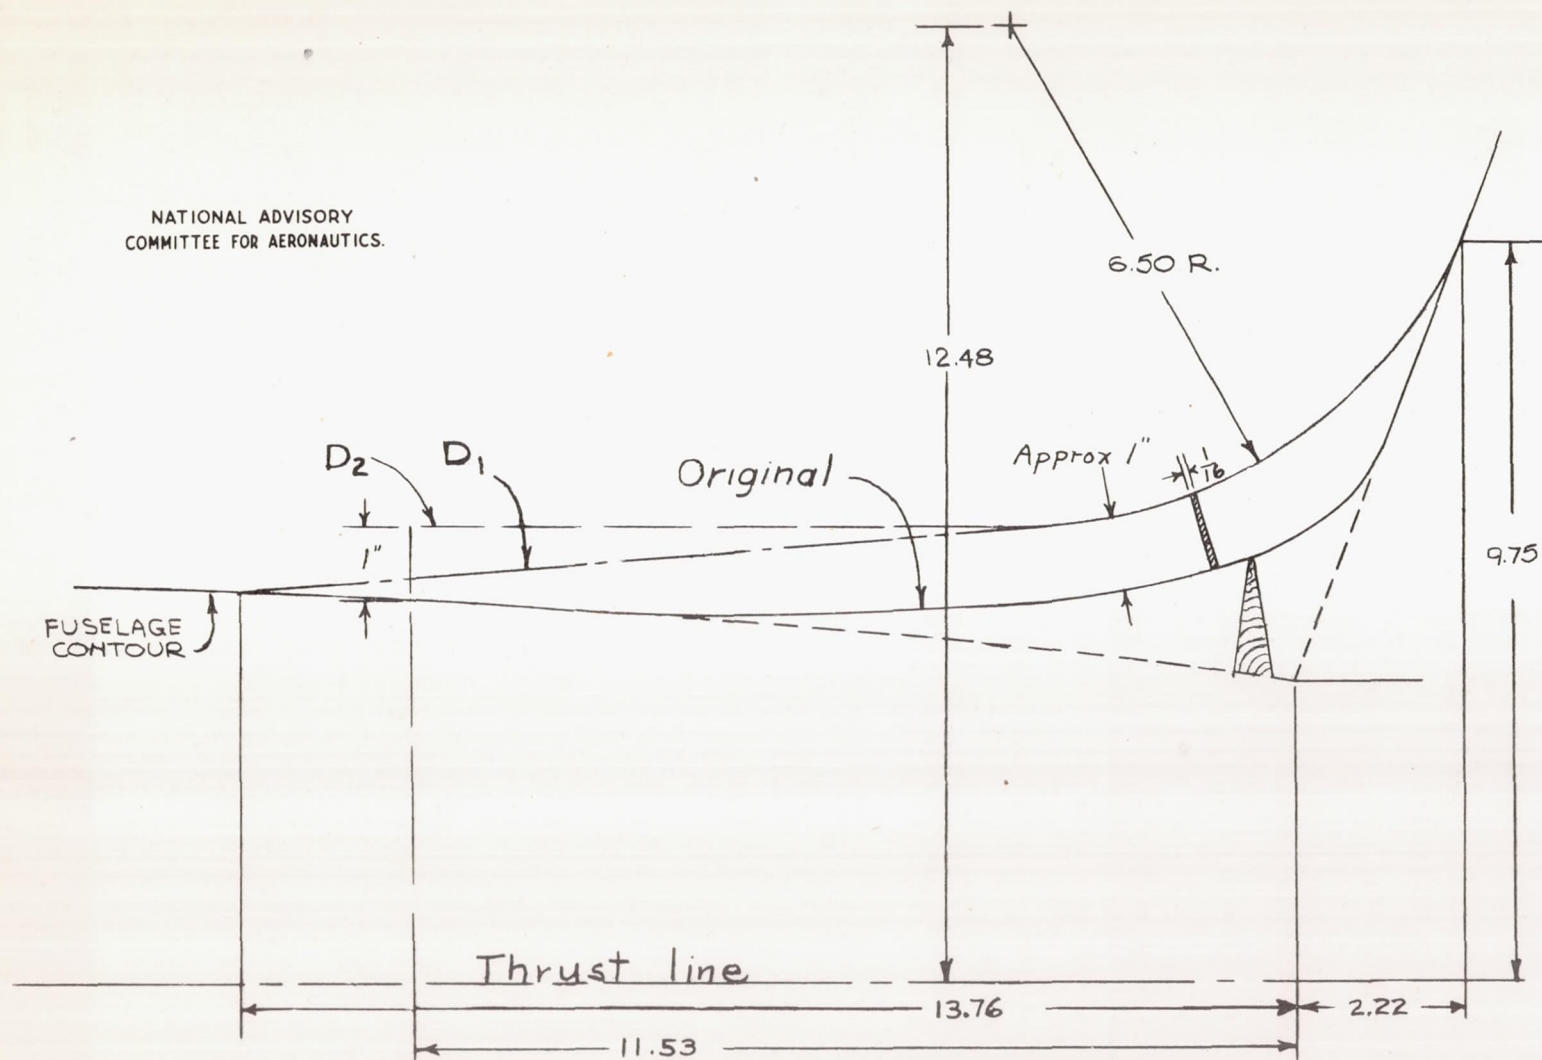


Figure 10- Dorsal fins tested on the 1/8-scale model XBTC-2 airplane.



	Original Tail	Revised Tail
Total area	.606 ft. <sup>2</sup>	.606 ft. <sup>2</sup>
Aspect ratio	2.45	2.45
Rudder area	.269 ft. <sup>2</sup>	.182 ft. <sup>2</sup>
Balance area	.071 ft. <sup>2</sup>	Minimum
RMS chord	.221 ft.	.160 ft.
Rudder span	1.208 ft.	1.192 ft.

Both Airfoil Sections  
NACA 0009-64 modified  
aft of rudder beam.

$$C_{hr} = \frac{Hr}{\rho b_r \bar{c}_r^2}$$

$b_r$ , rudder span  
 $\bar{c}_r$ , rudder RMS chord

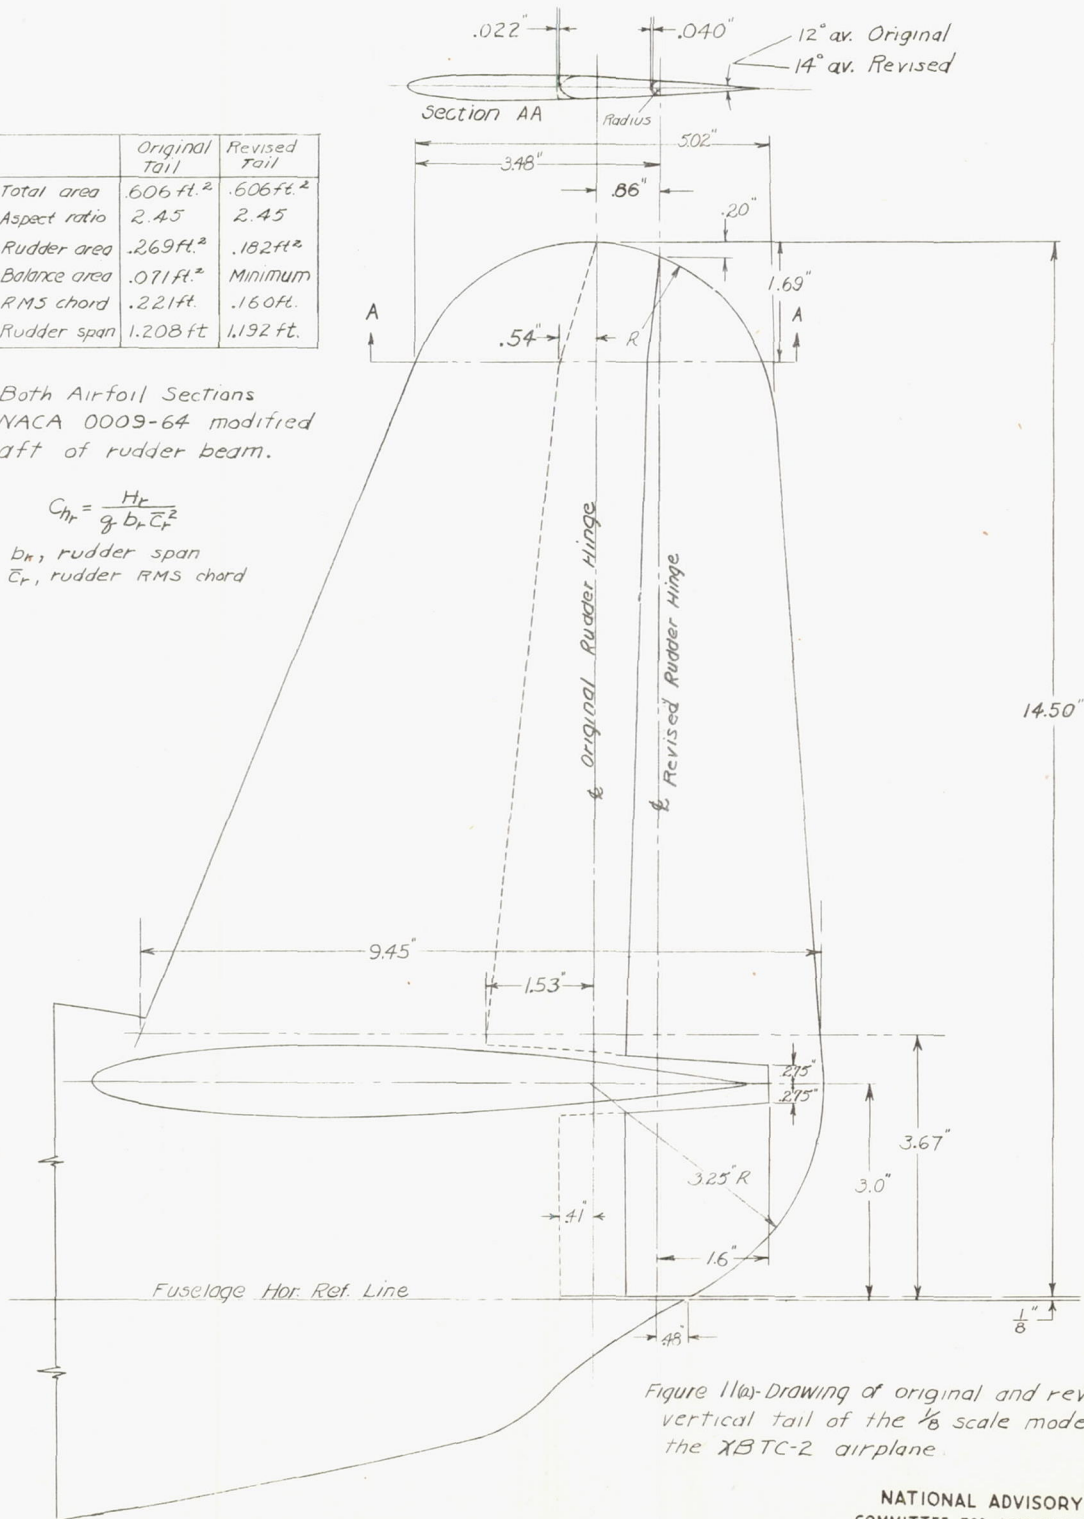


Figure 11(a)-Drawing of original and revised vertical tail of the  $\frac{1}{8}$  scale model of the XBTC-2 airplane.


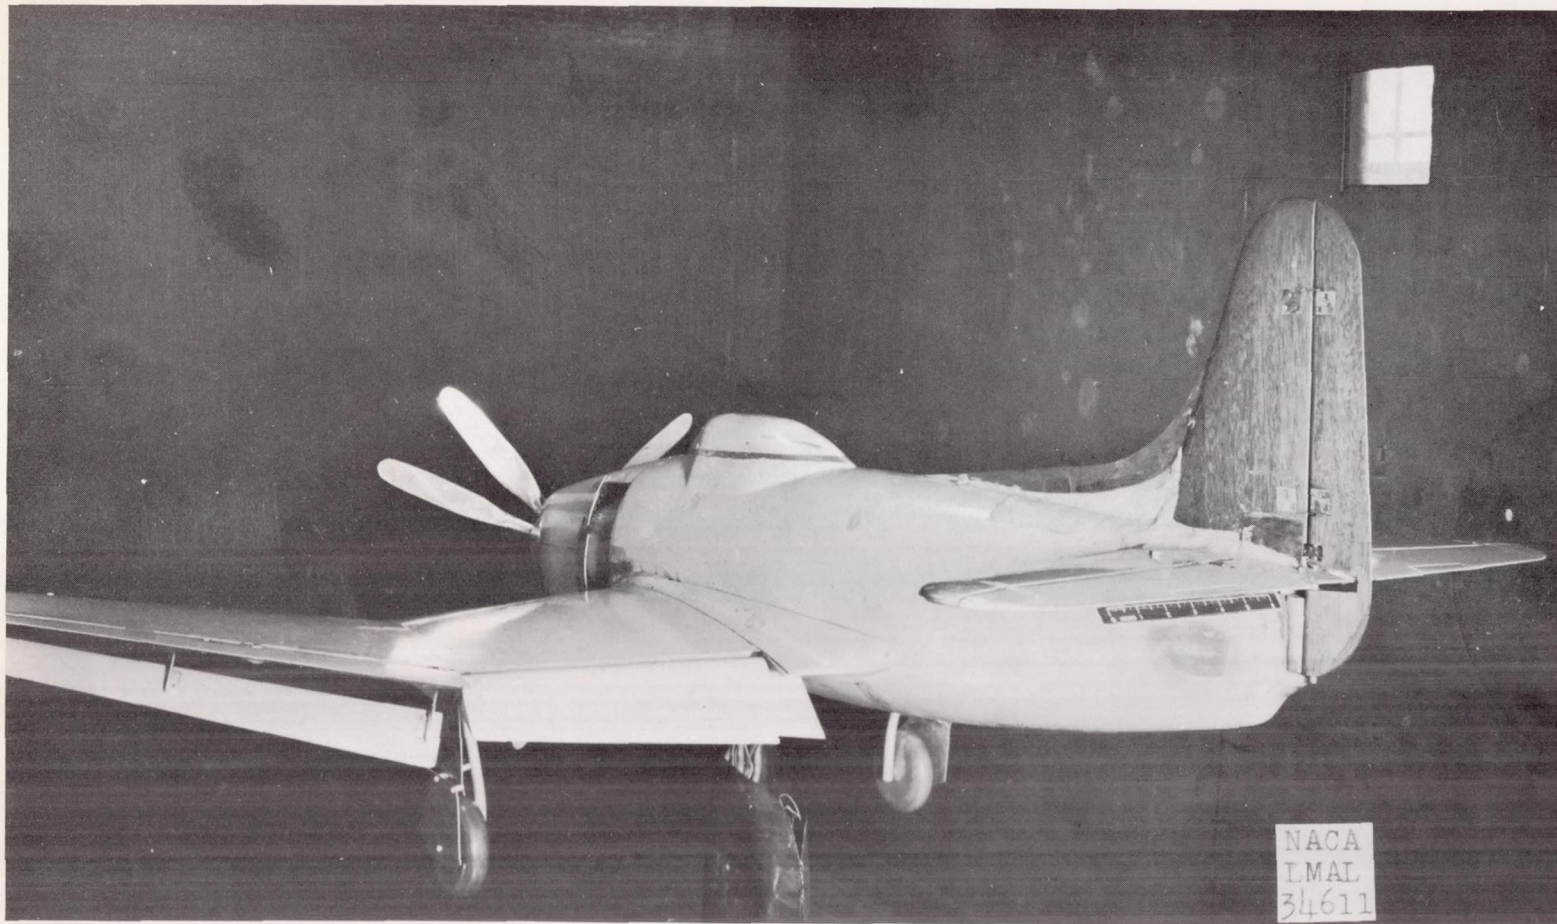


Figure 11(b).- The  $\frac{1}{8}$ -scale model of the XBTC-2 airplane with the revised vertical tail and dorsal fin,  $D_1$ . Landing configuration.

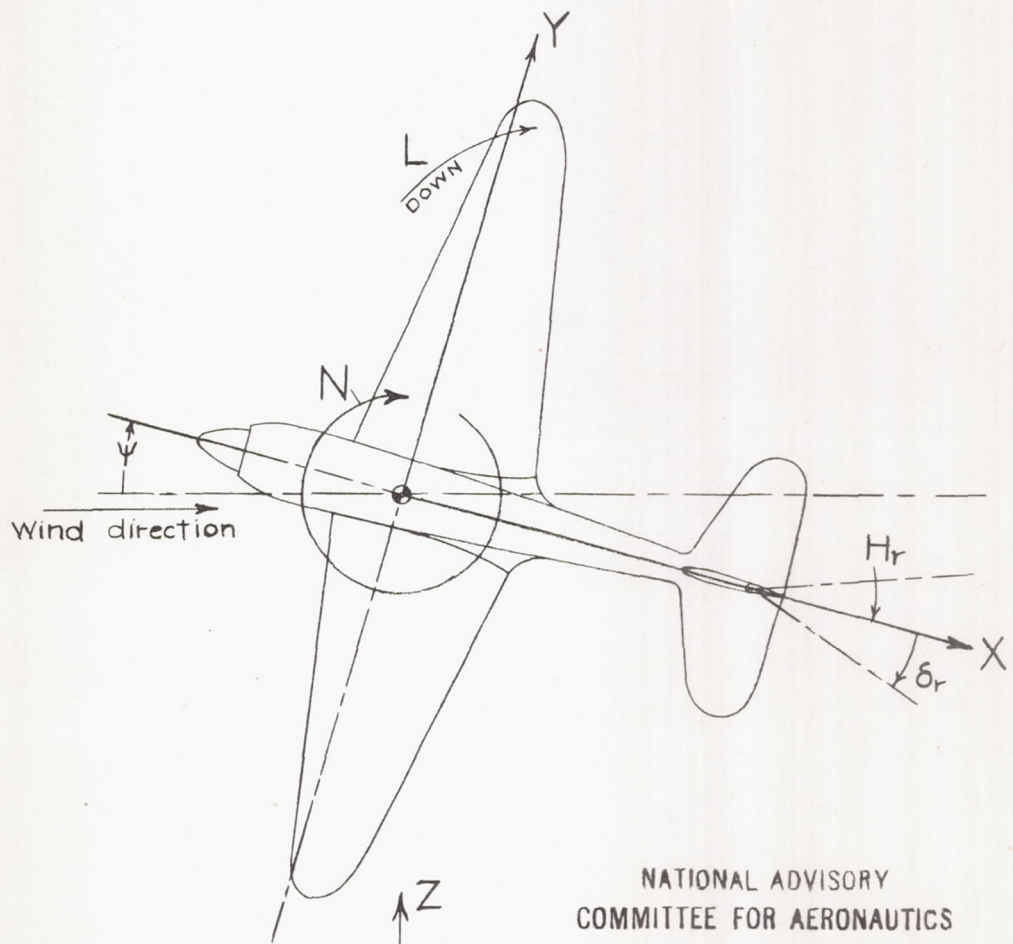

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

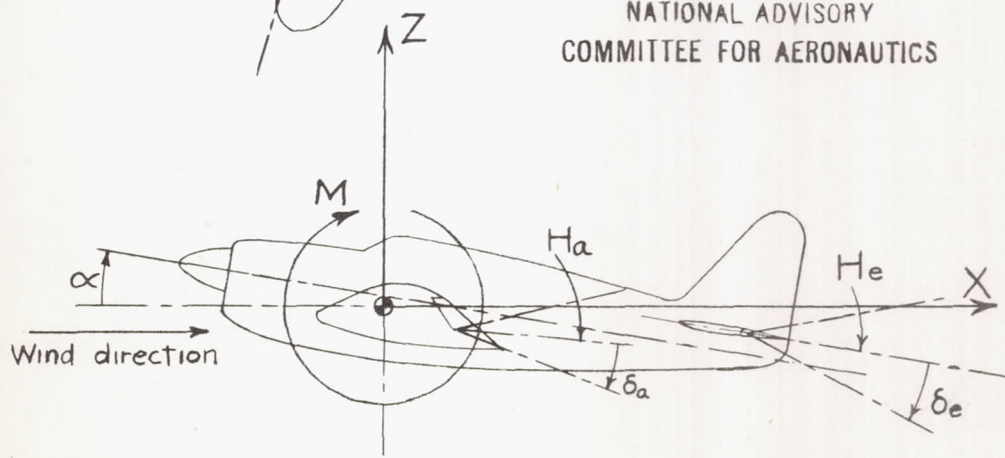


Figure 12.-Notation of the system of axes and the control-surface hinge moments and deflections. (Arrows indicate positive values.)

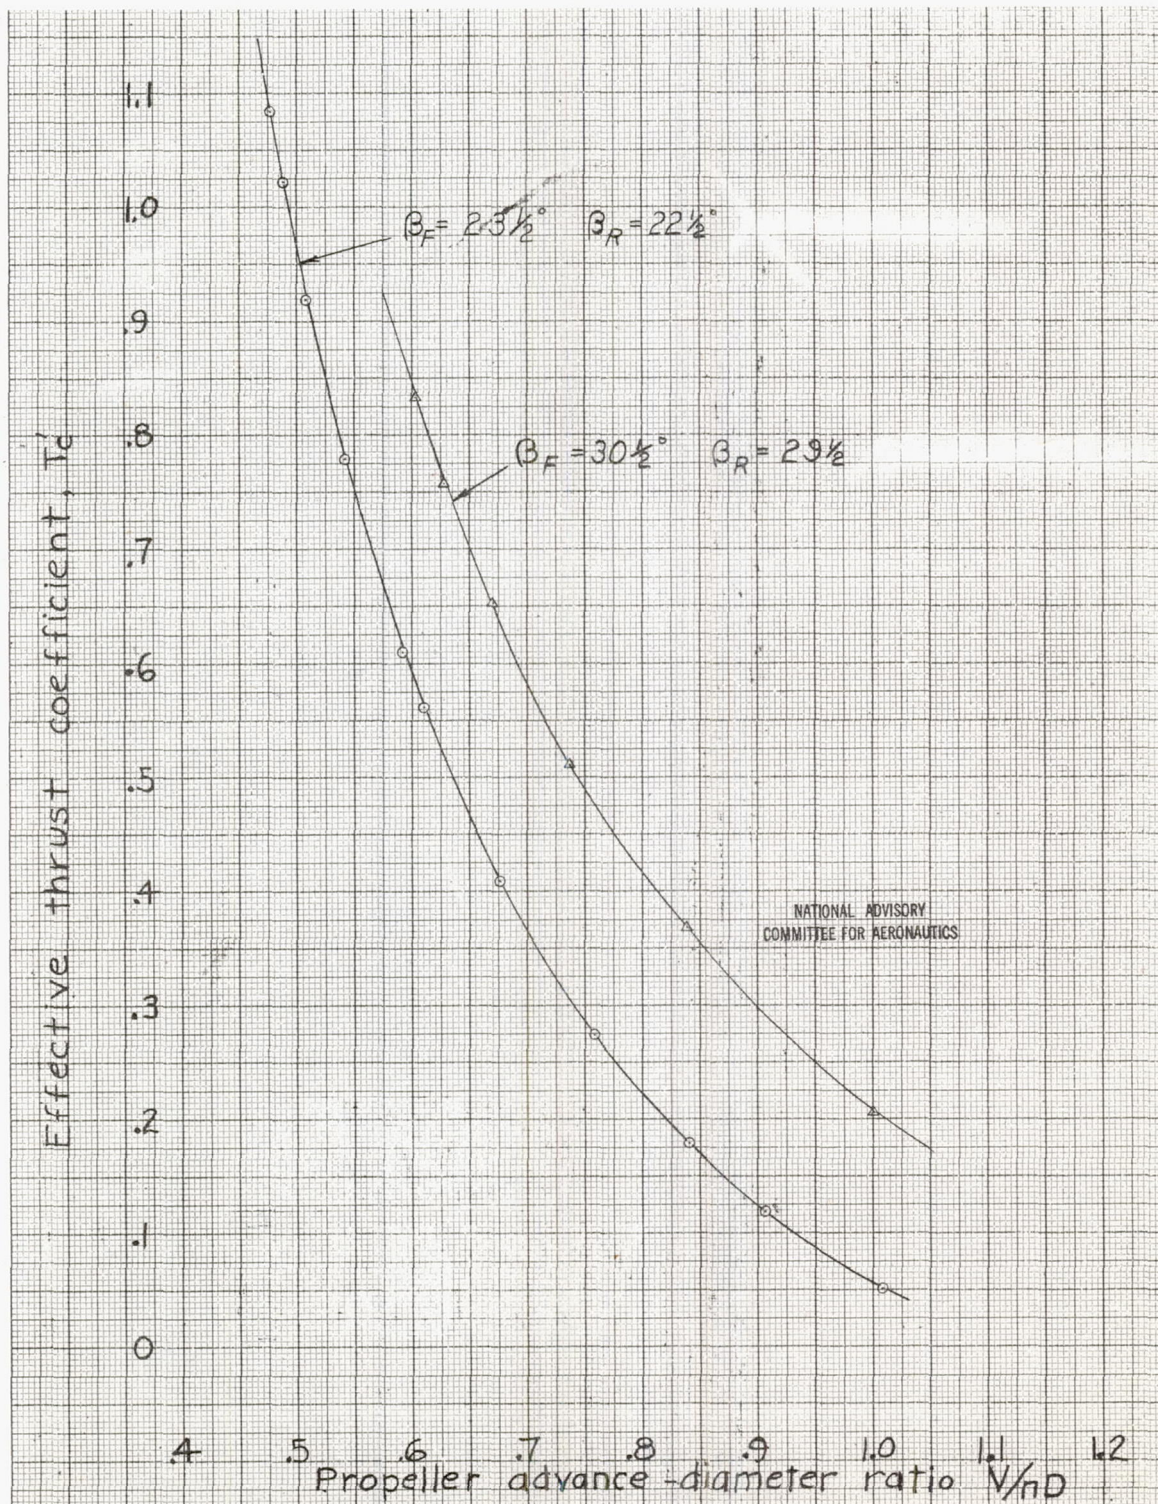


Figure 13.- Propeller calibration of the  $\frac{1}{8}$ -scale model of the XBTC-2 airplane. Cruising configuration,  $\alpha = 0^\circ$ .


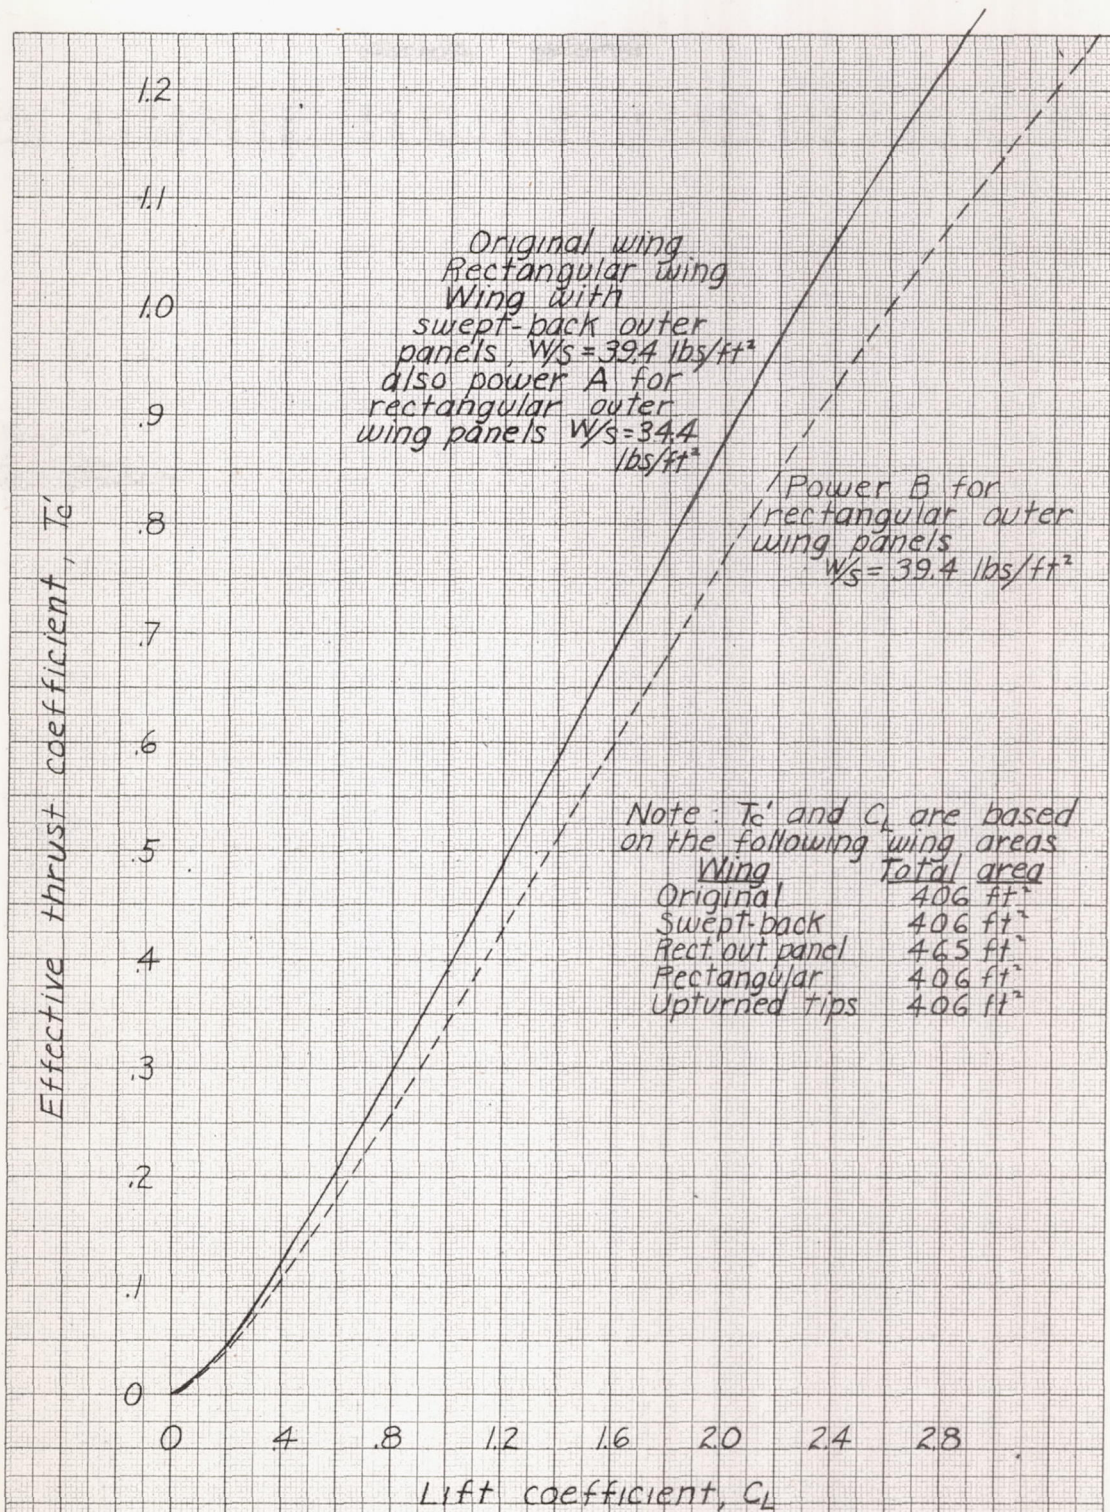



Figure 14.- Variation of effective thrust coefficient with lift coefficient for the XBTC-2 airplane with constant power and a constant speed propeller. Take-off power, 3000 hp at 2700 rpm at sea level. Gear ratio 0.39.

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

02

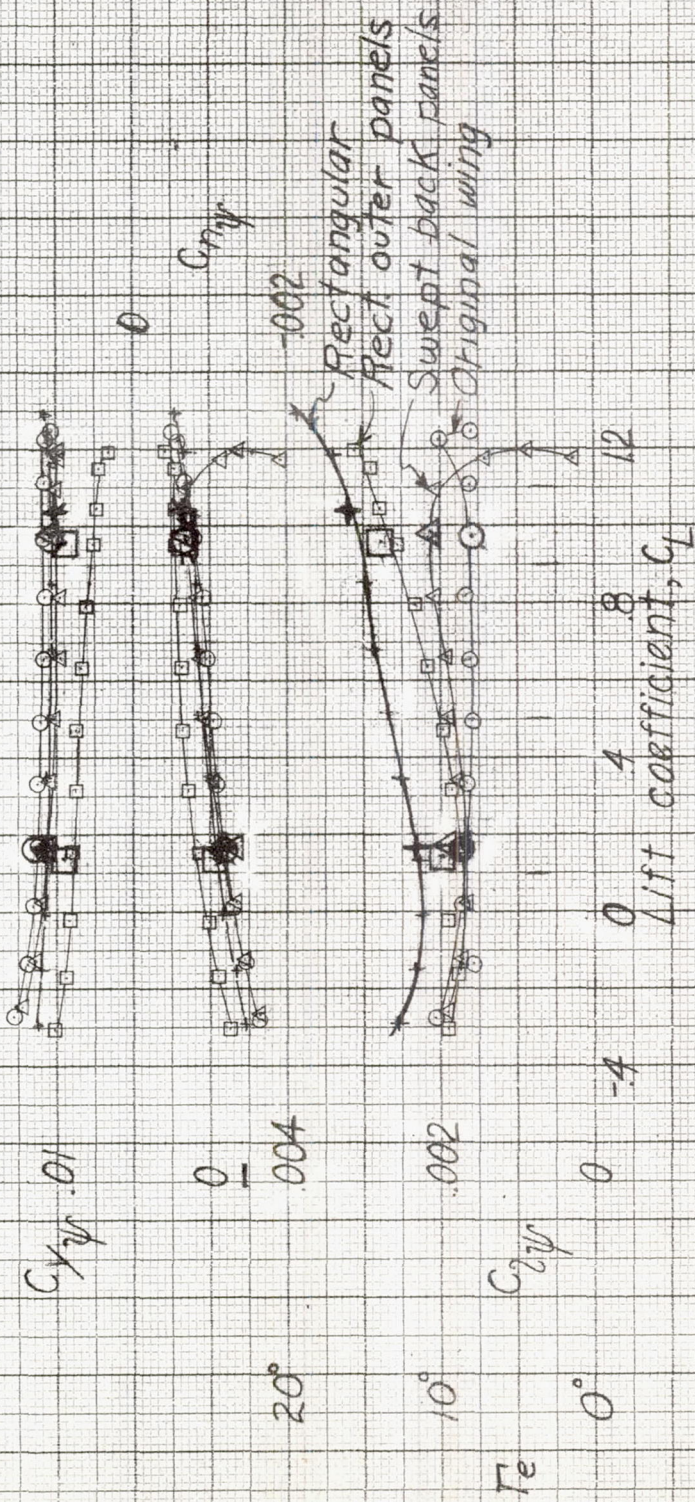


(a) Cruising configuration, Propeller windmilling.  
Figure 15. Effect of wing plan form on the variation of  $C_y$ ,  $C_{yp}$  and  $C_L$  of the  $1/8$ -scale model of the XB7C-2 airplane.

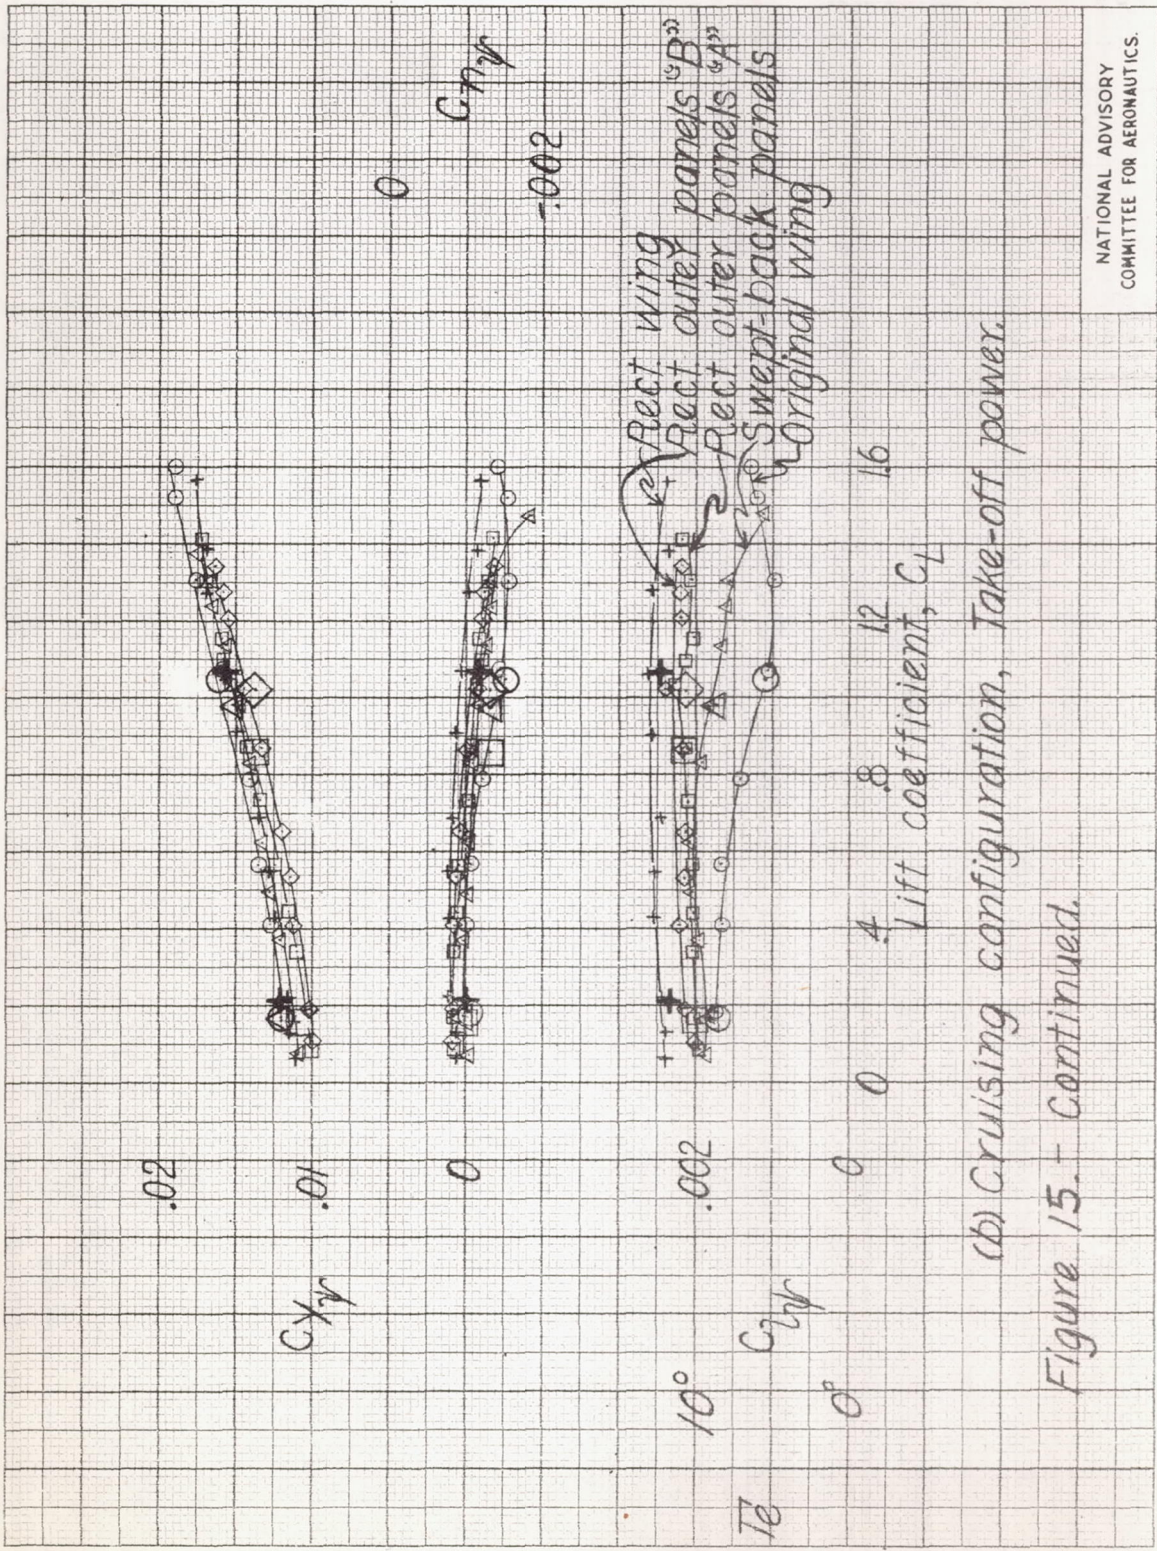

(b) Cruising configuration, Take-off power.


Figure 15. - Continued.

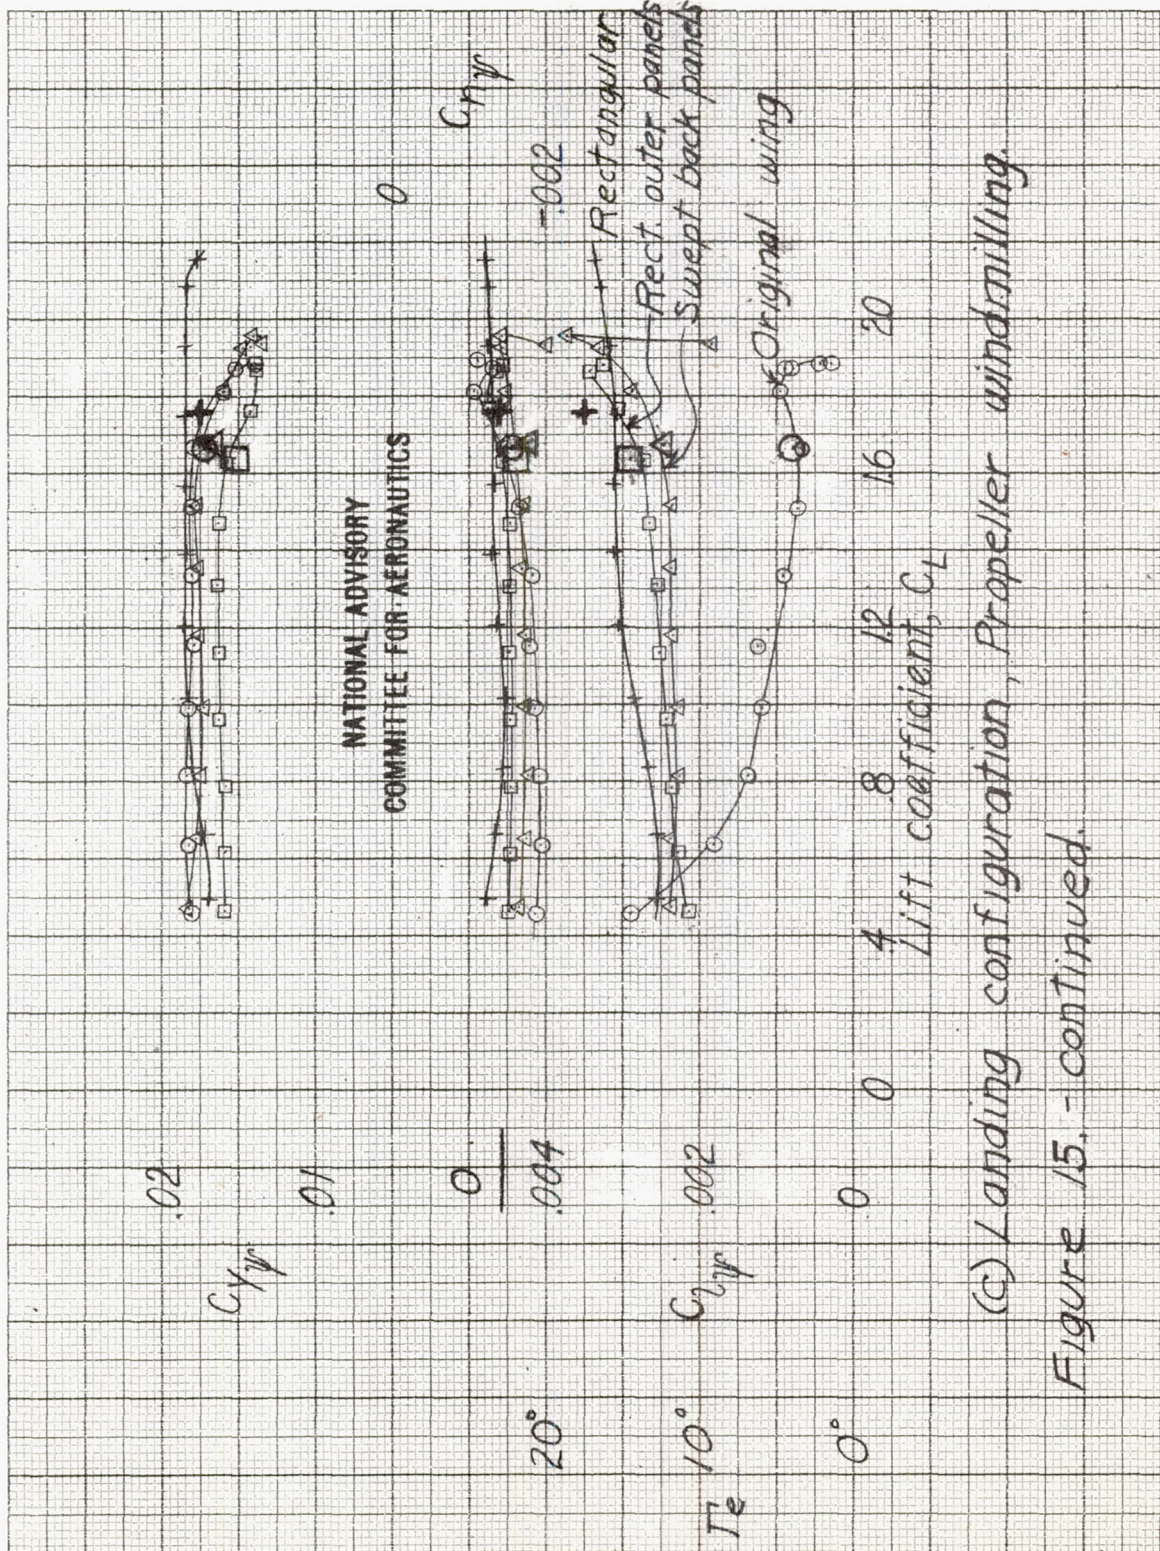


(c) Landing configuration, Propeller windmilling.  
Figure 15. - continued.



L-787

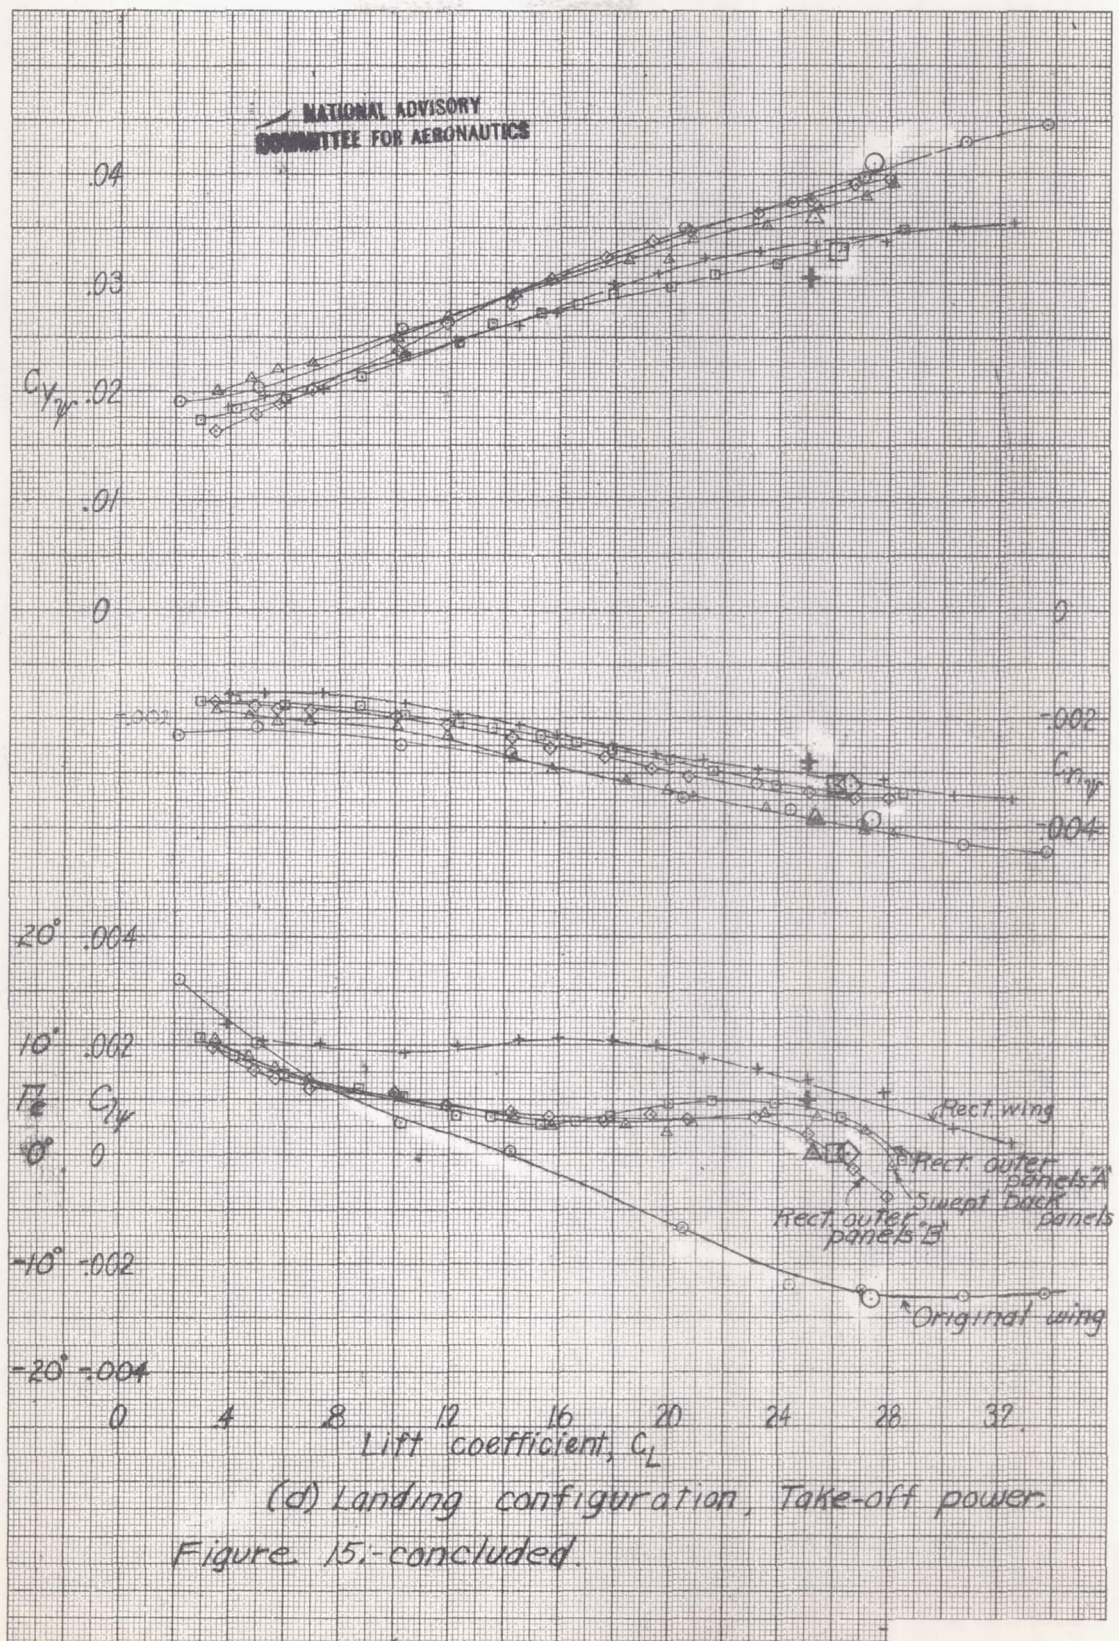


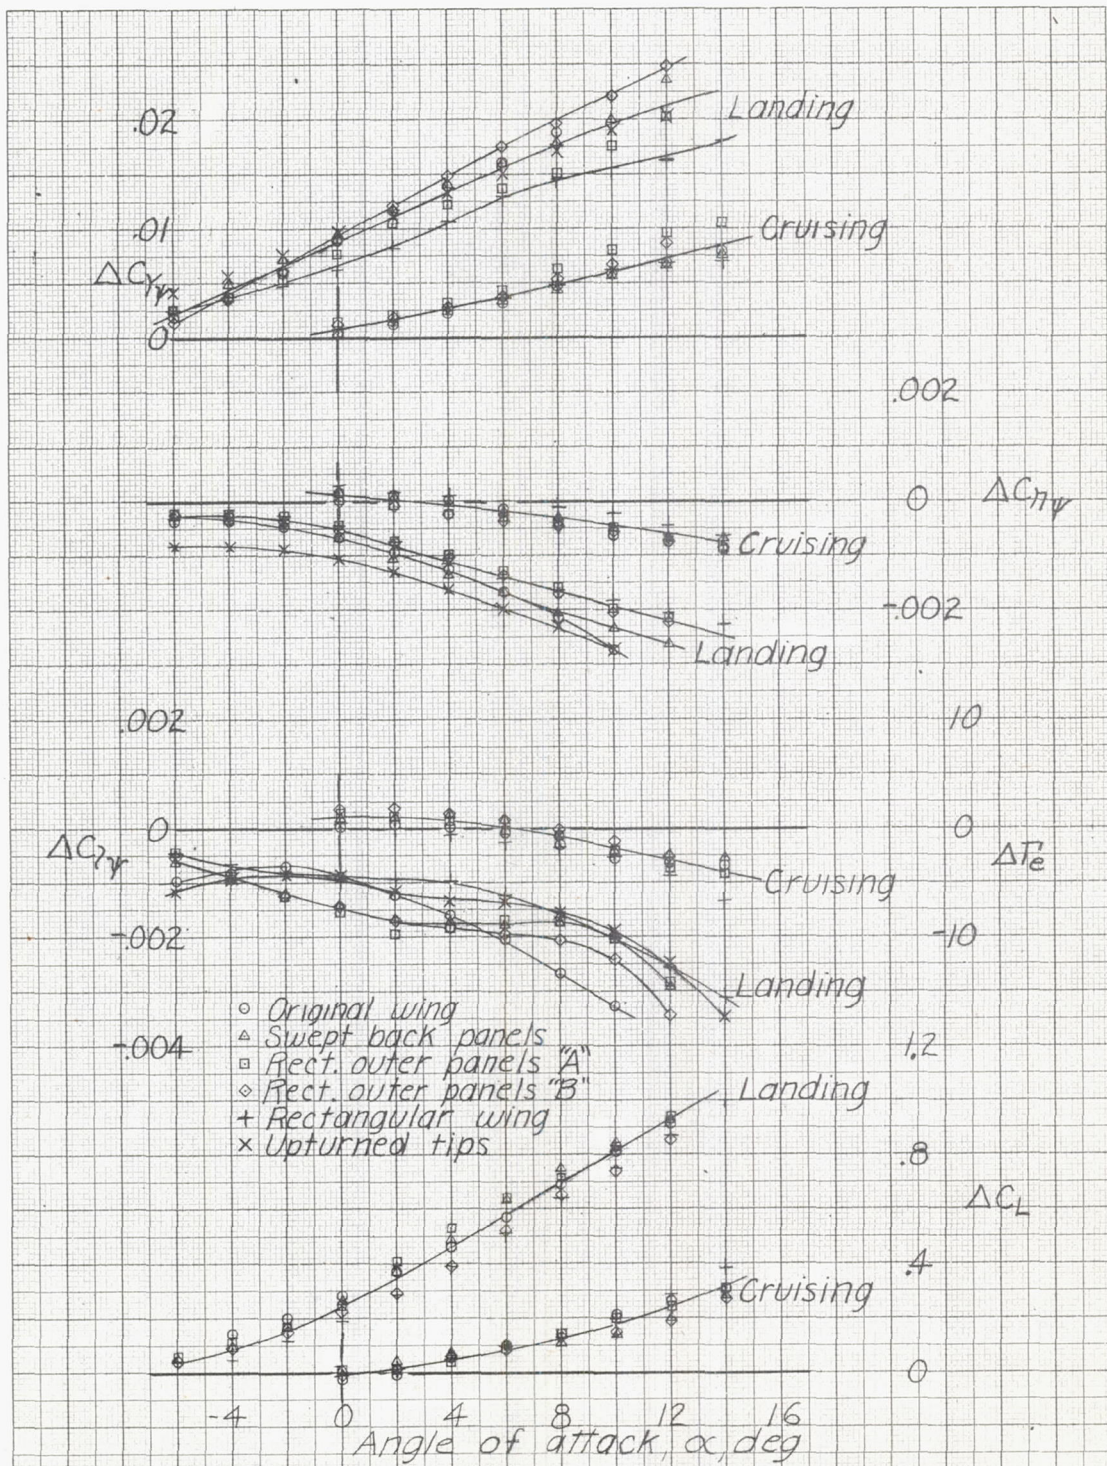

(a) Increments for same  $\alpha$ .


Figure 16.-Increments of  $C_{Yx}$ ,  $C_{Yy}$ ,  $C_{Zy}$ , and  $C_L$  due to take-off power for the  $1/10$ -scale model of the XBTC-2 airplane.

L-787

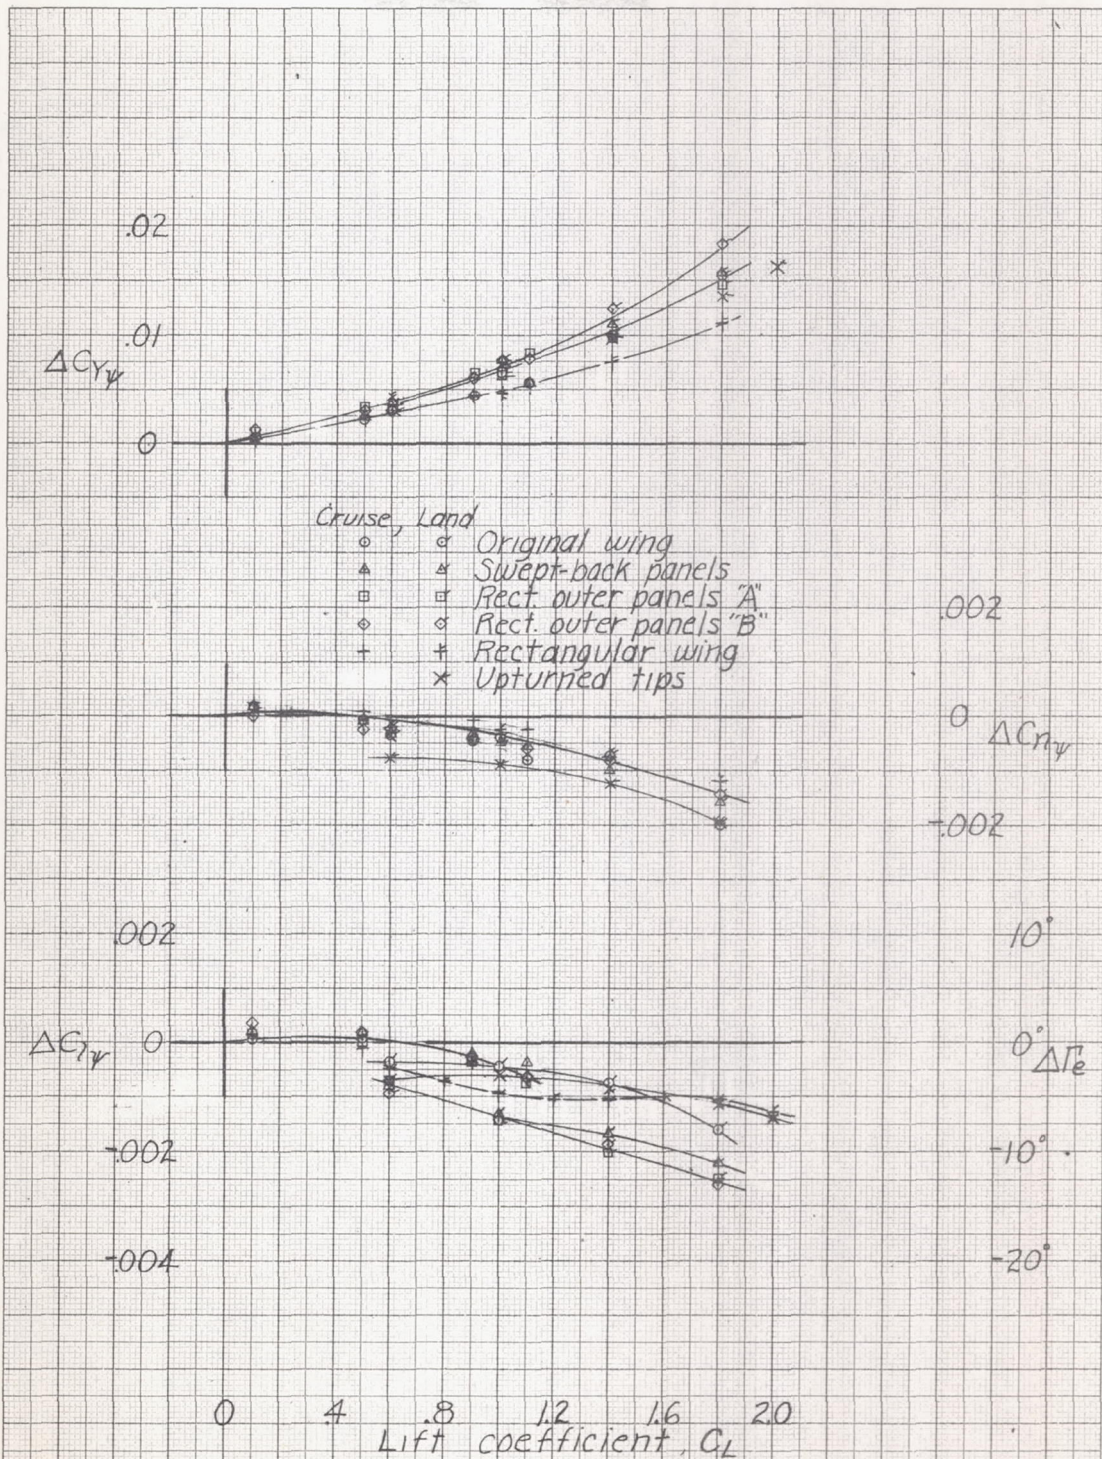


(b) Increments for same  $C_L$ .

Figure 16.- Concluded.

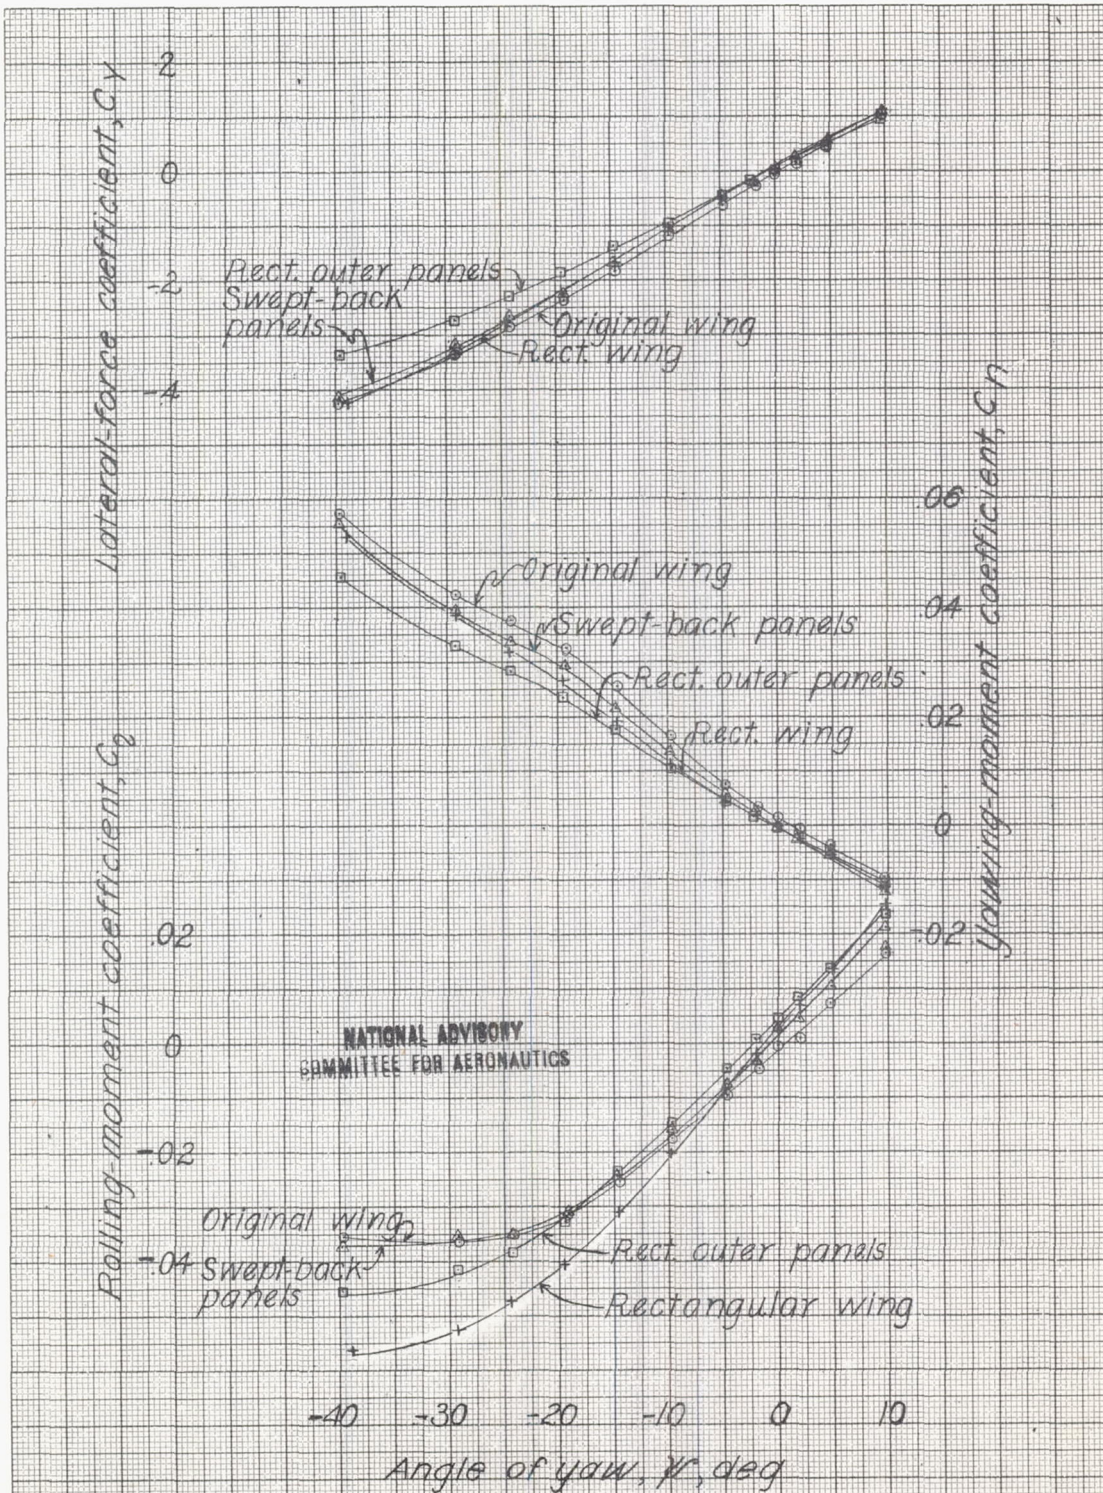

(a) Propeller windmilling,  $\alpha \approx 0.2^\circ$ .  
 Figure 17.-Effect of wing plan form on the aerodynamic characteristics in yaw of the  $1/8$ -scale model of the XB7C-2 airplane. Cruising configuration.

L-787

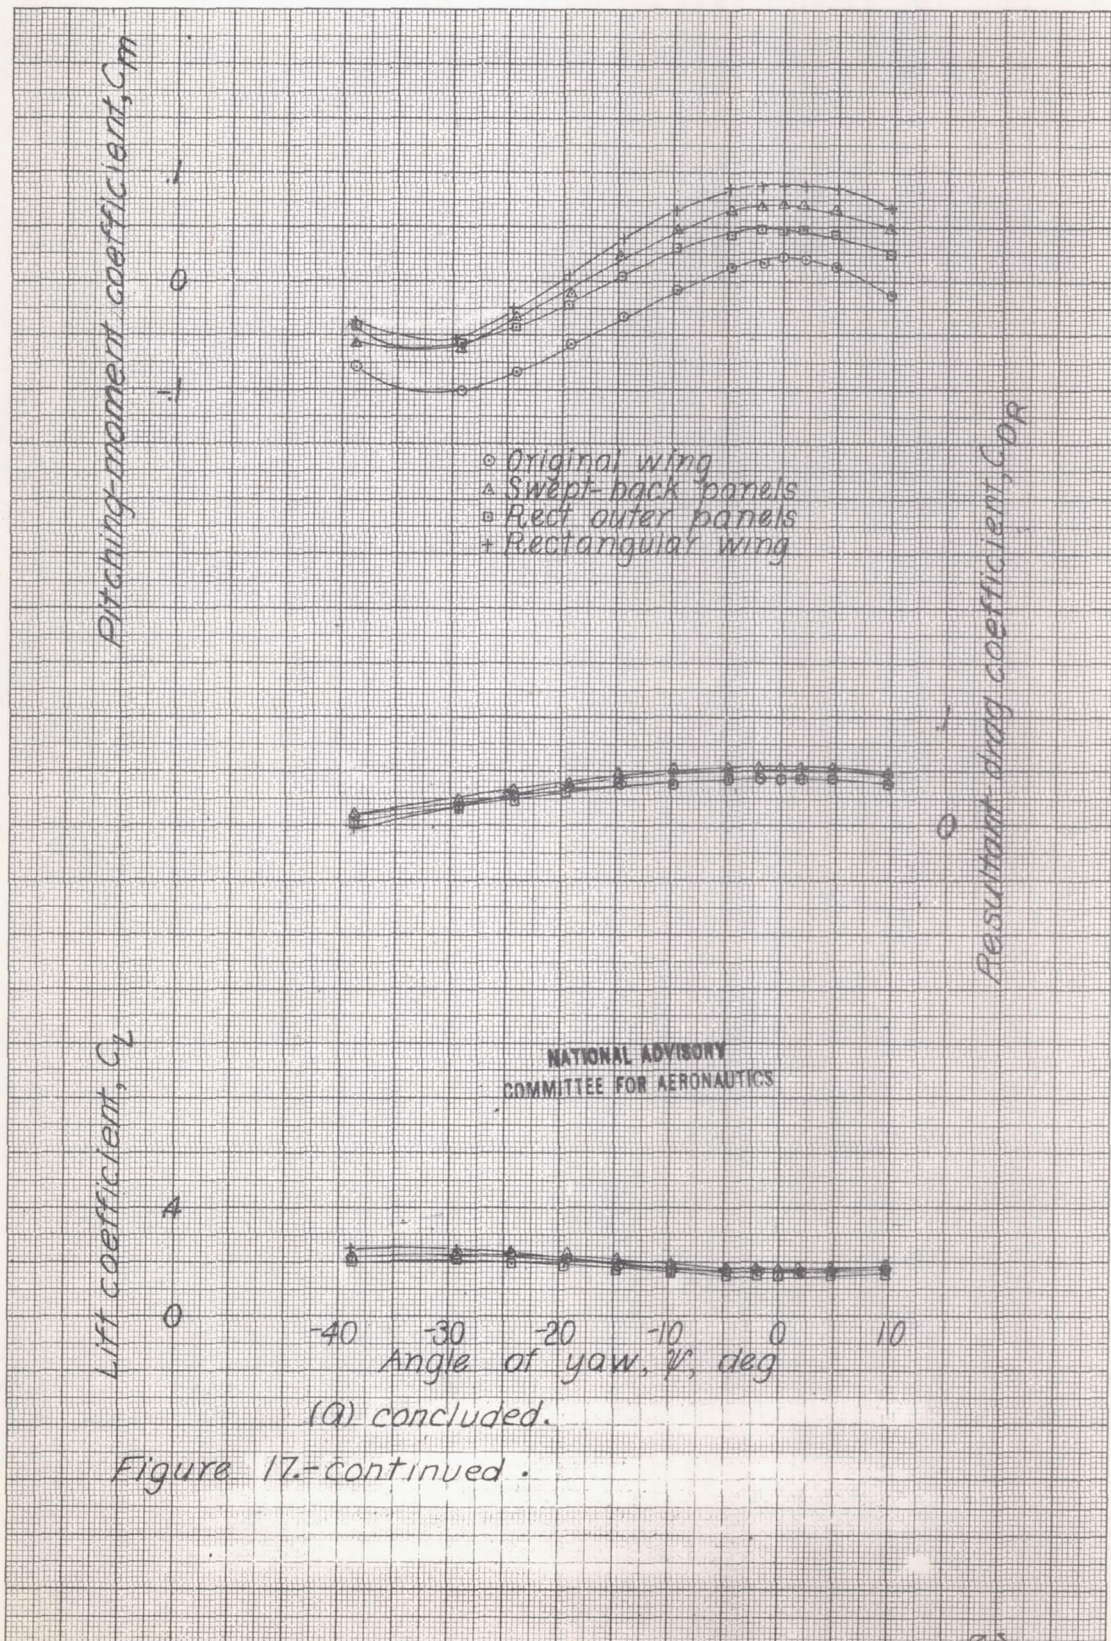

(a) concluded.

Figure 17.-continued.


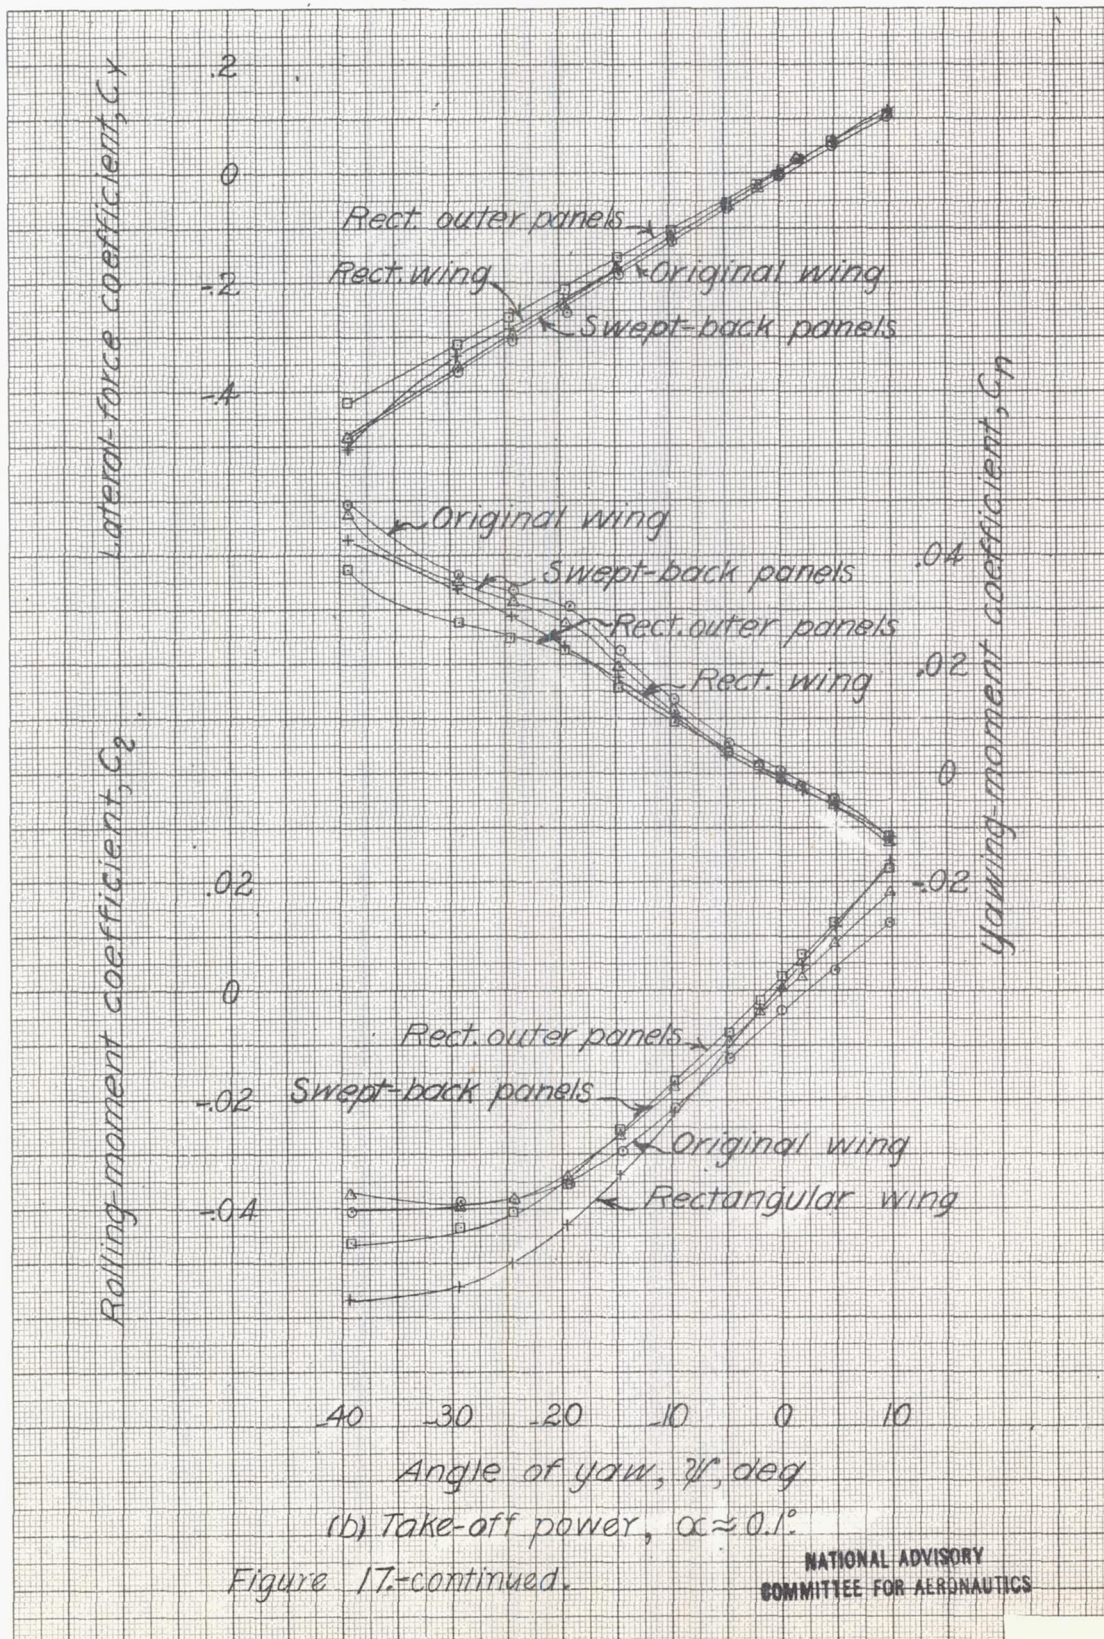



Figure 17.-continued.

L-787

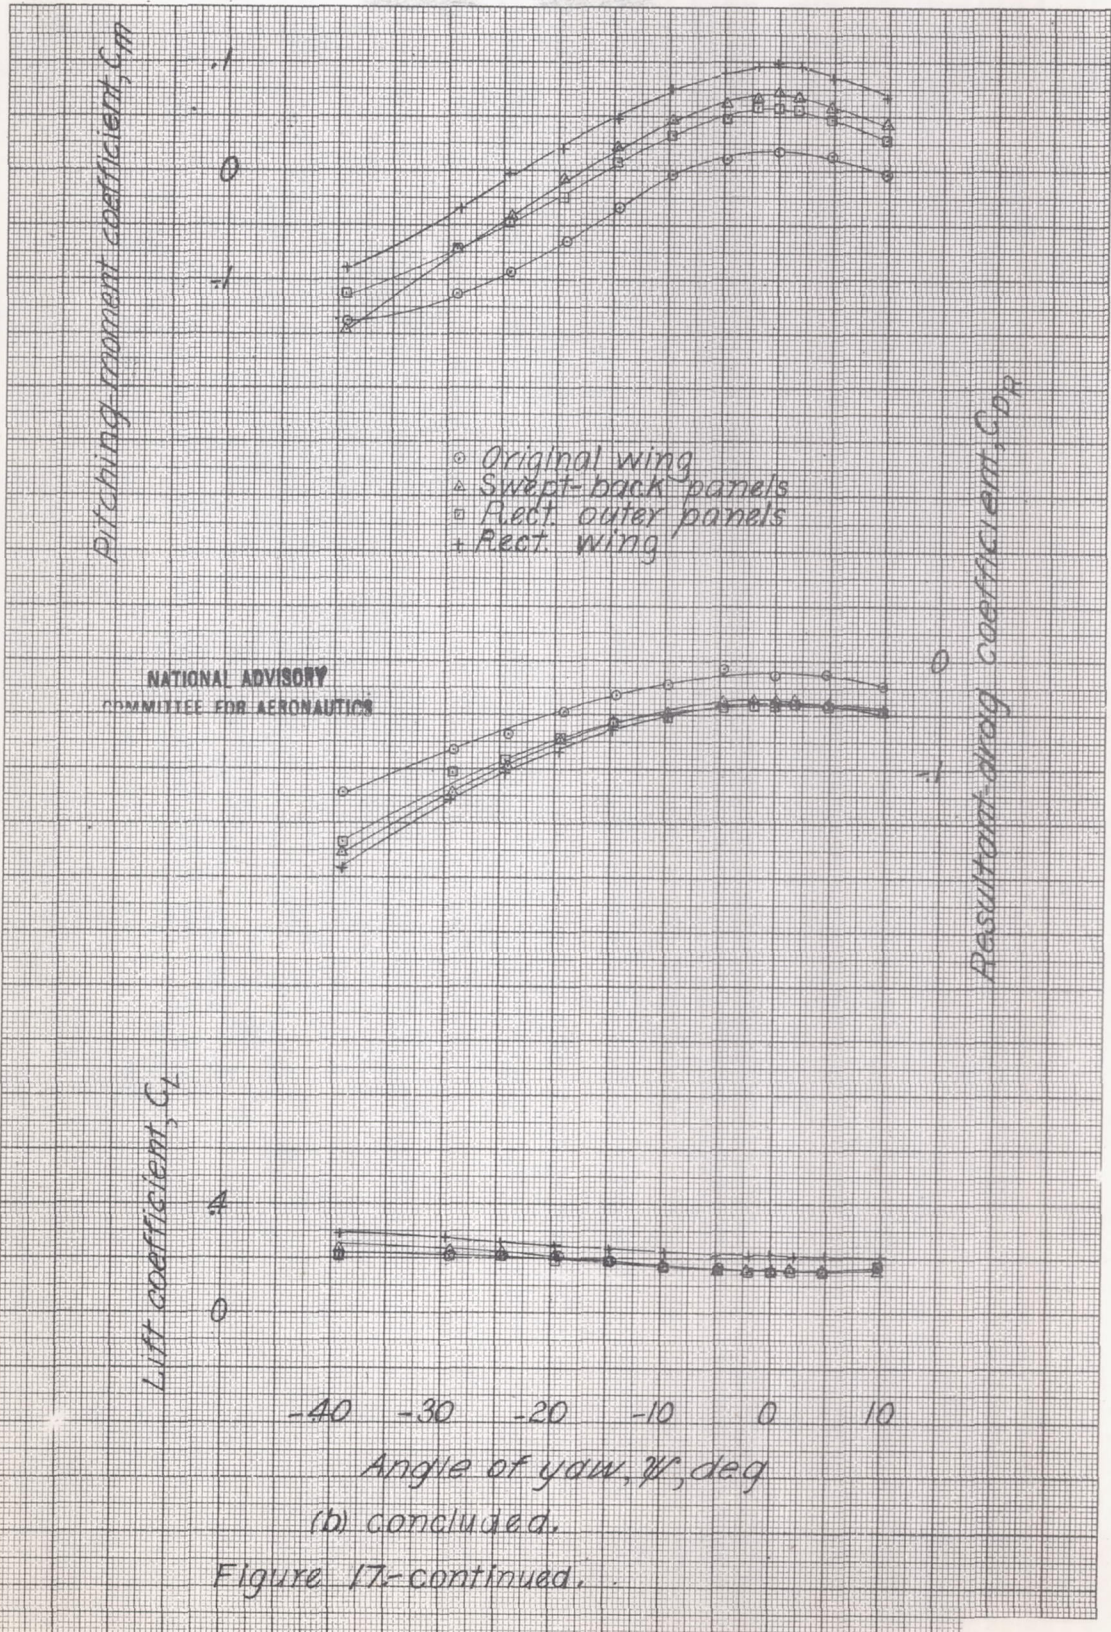


(b) concluded.

Figure 17-continued.

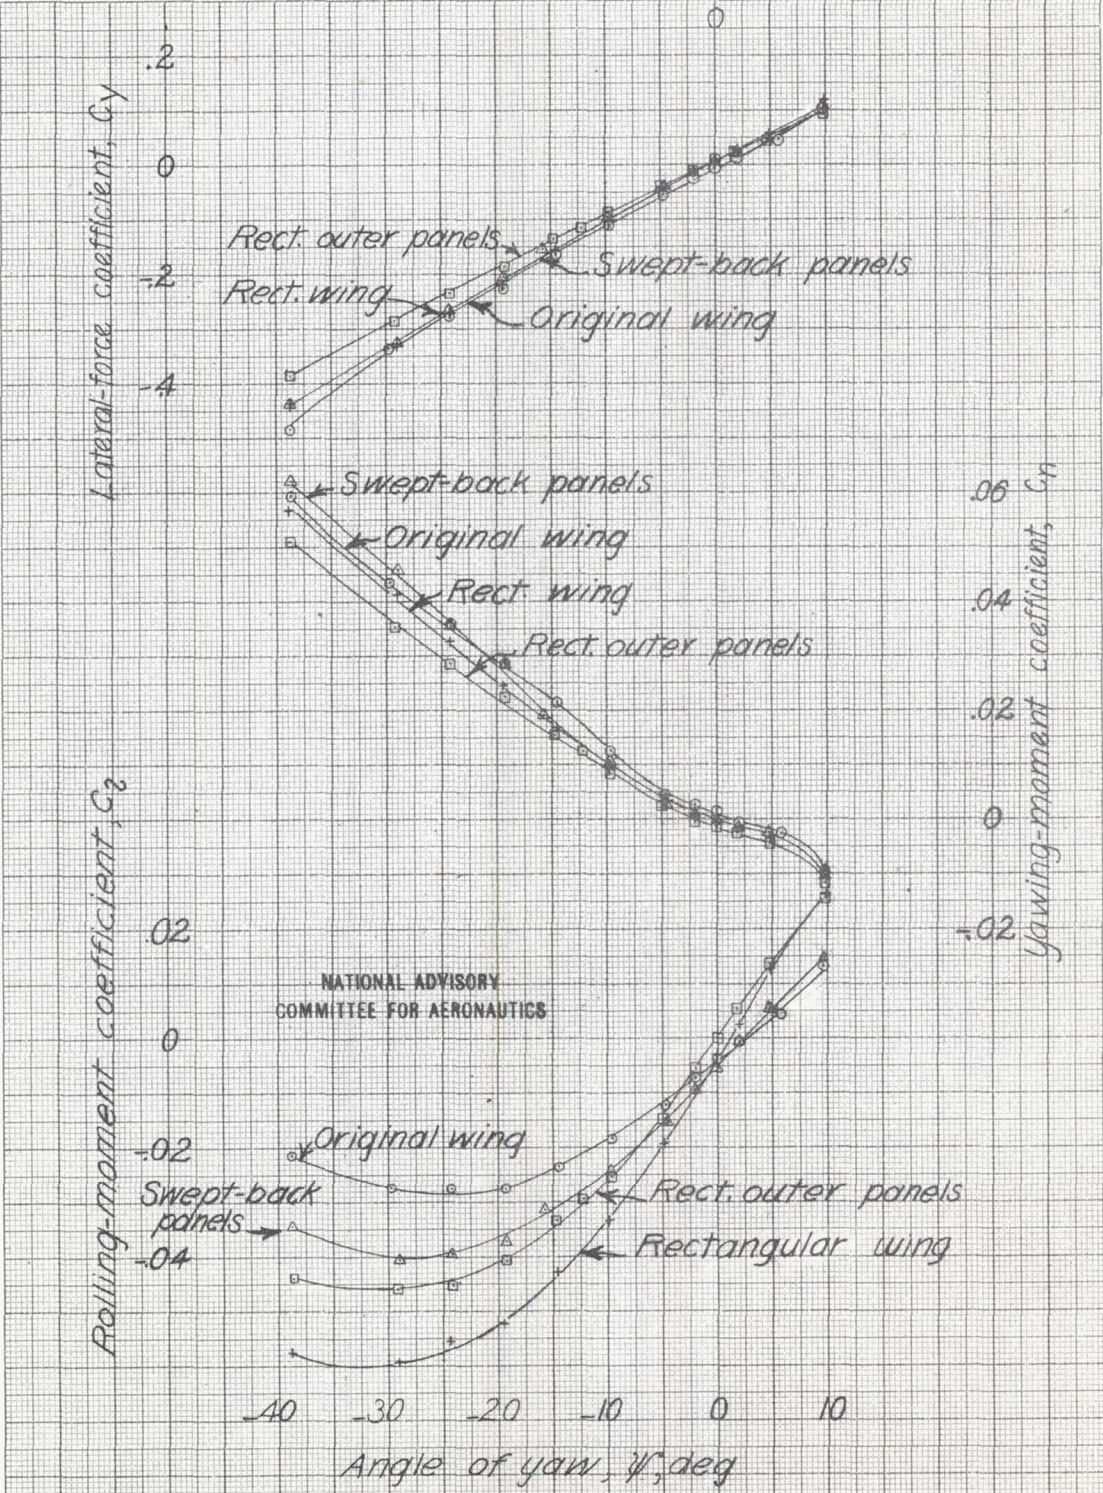


(c) Propeller windmilling,  $\alpha \approx 10.7^\circ$   
 Figure 17 - Continued.



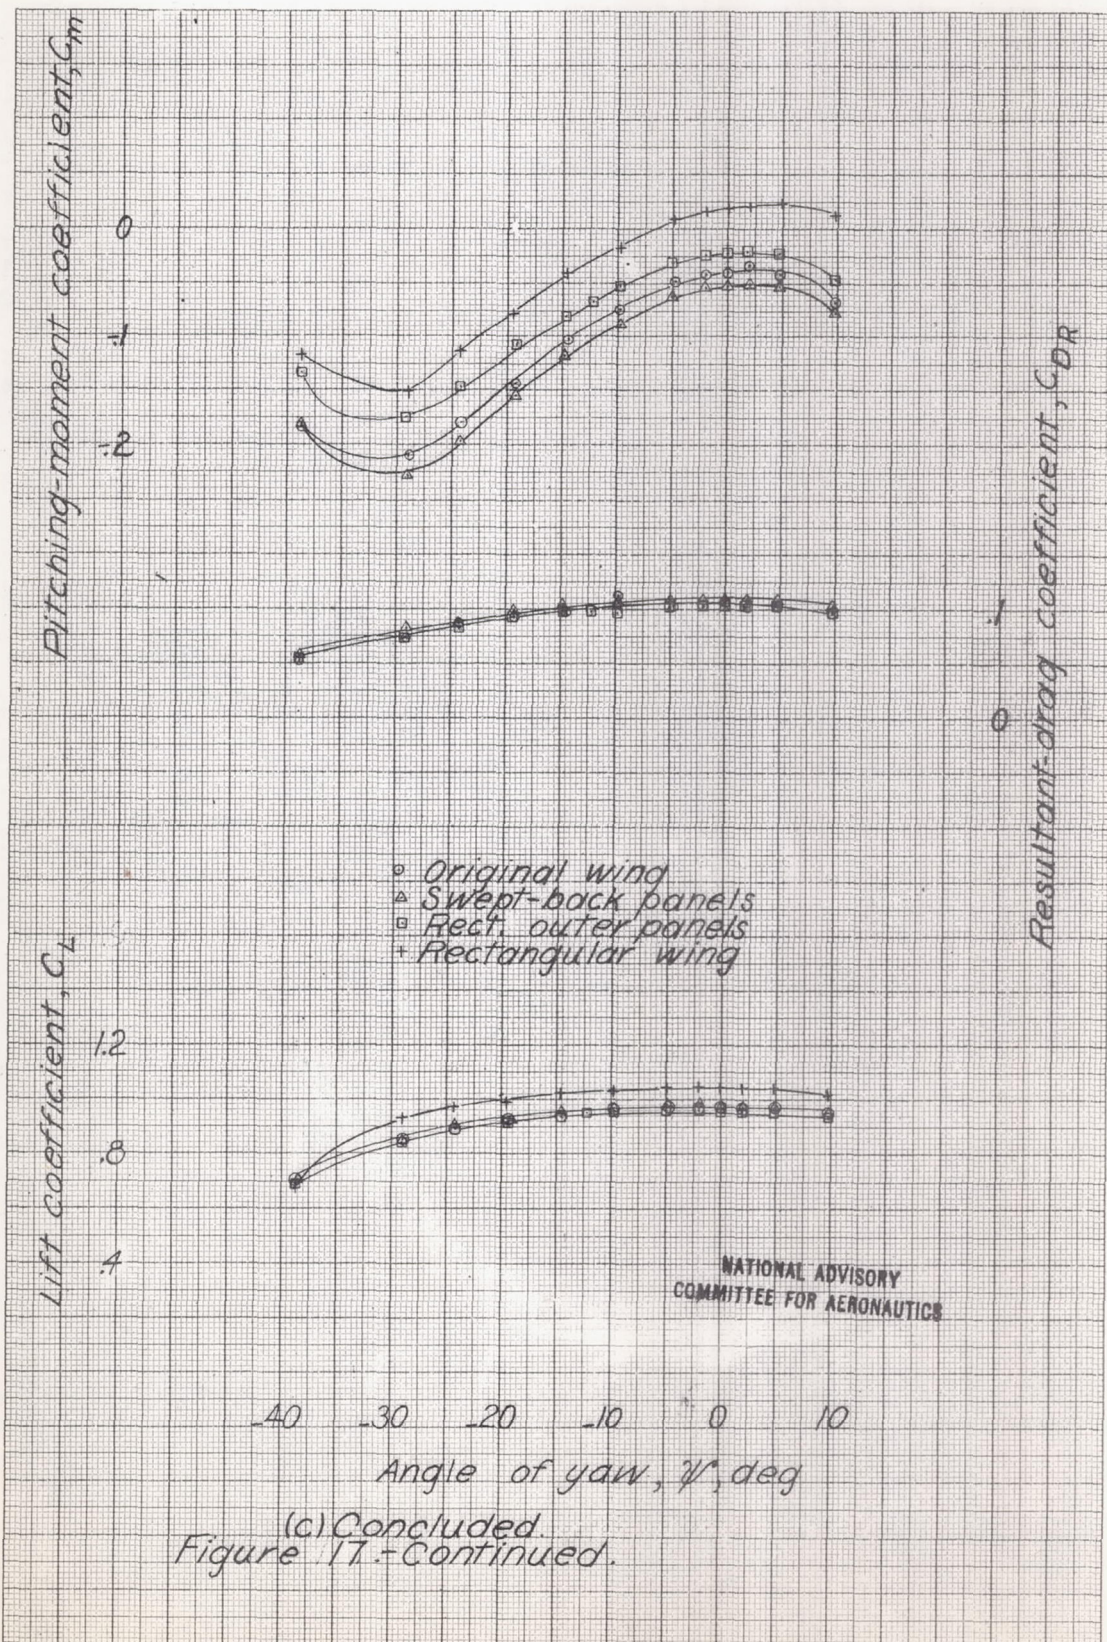


(c) Concluded.  
Figure 17.-Continued.

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

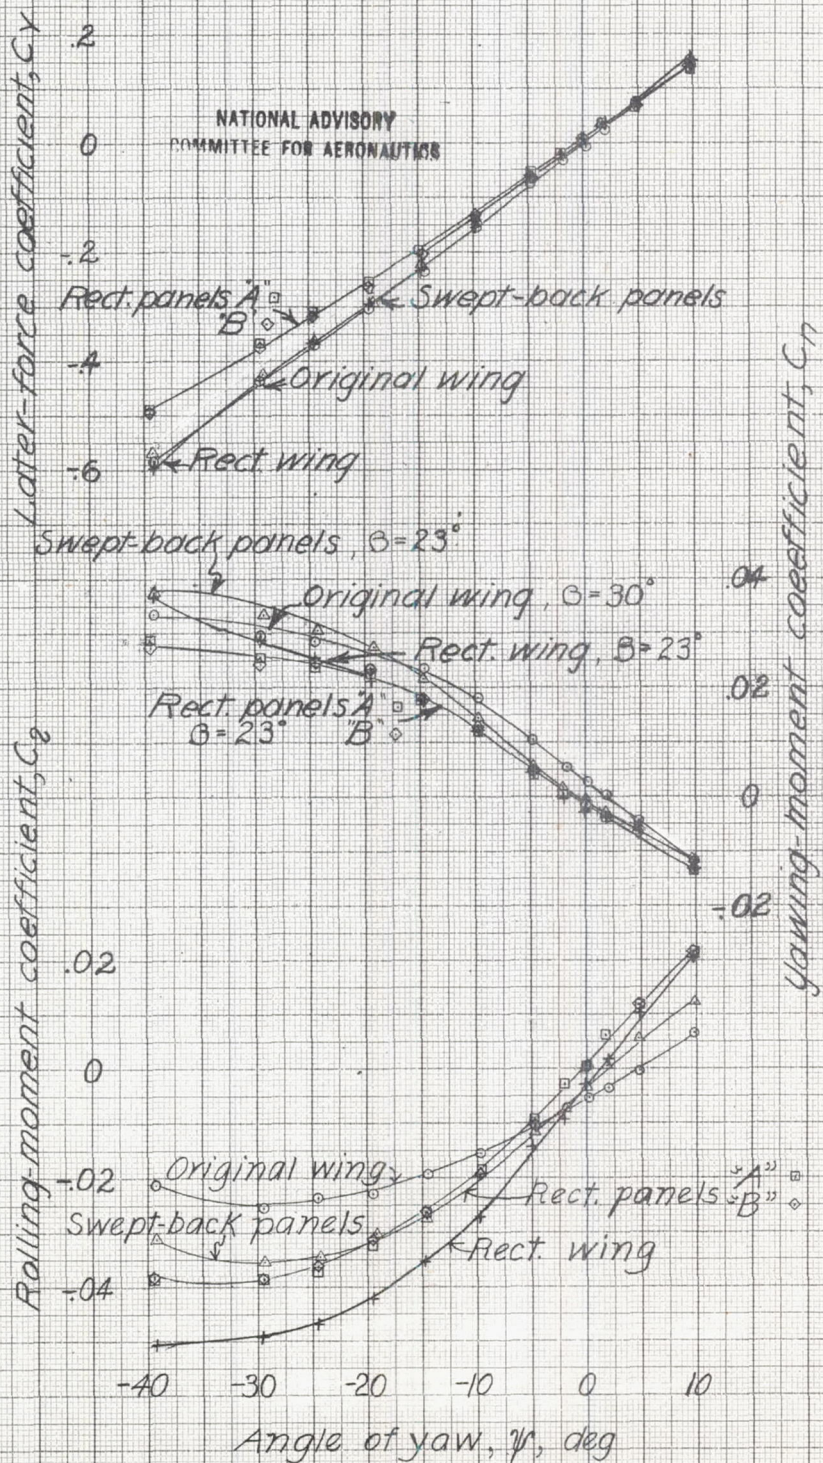

(d) Take-off power,  $\alpha \approx 9^\circ$ .

Figure 17.- continued.

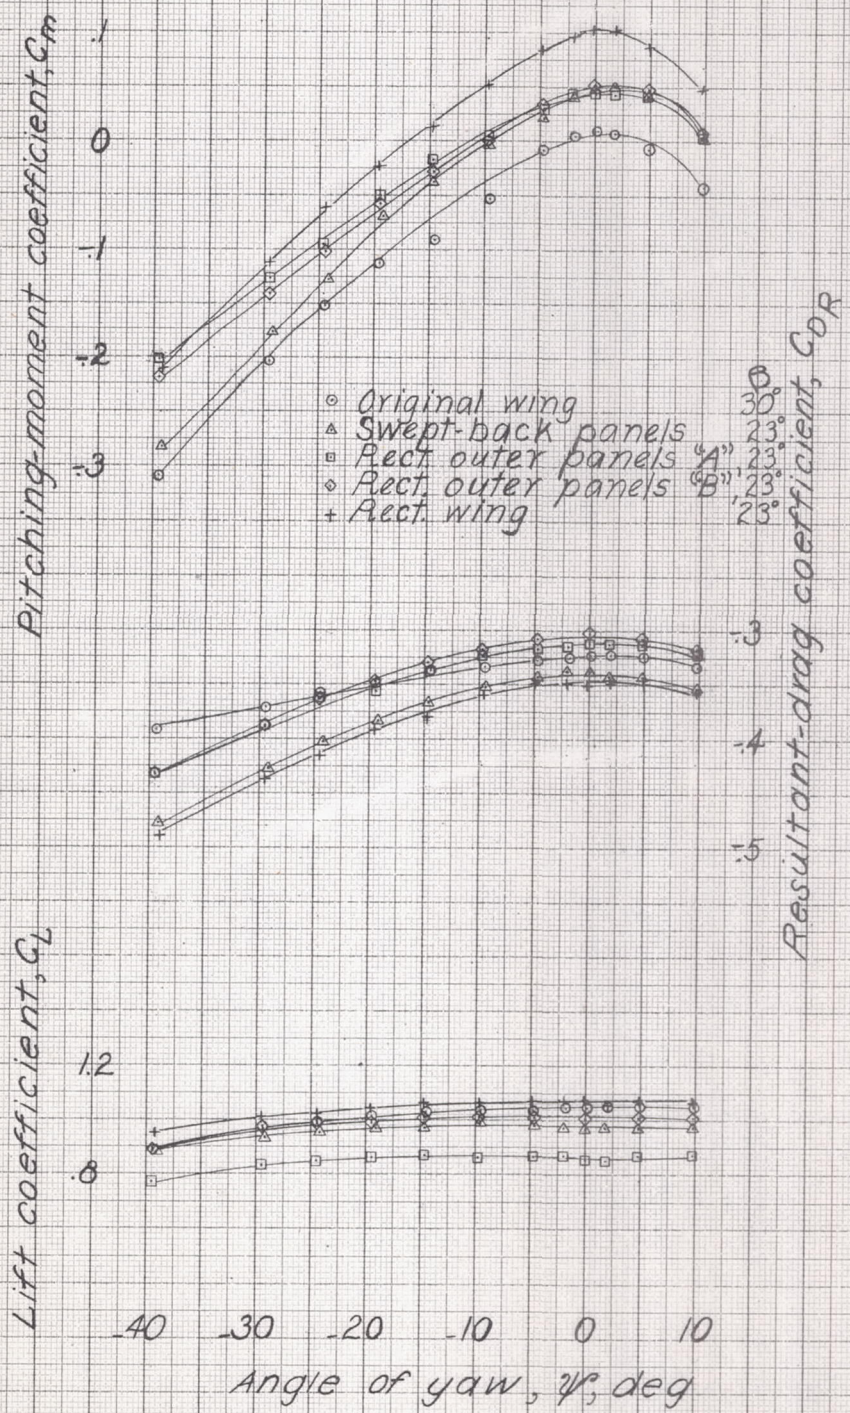

(d) Concluded.

Figure 17.-Concluded.


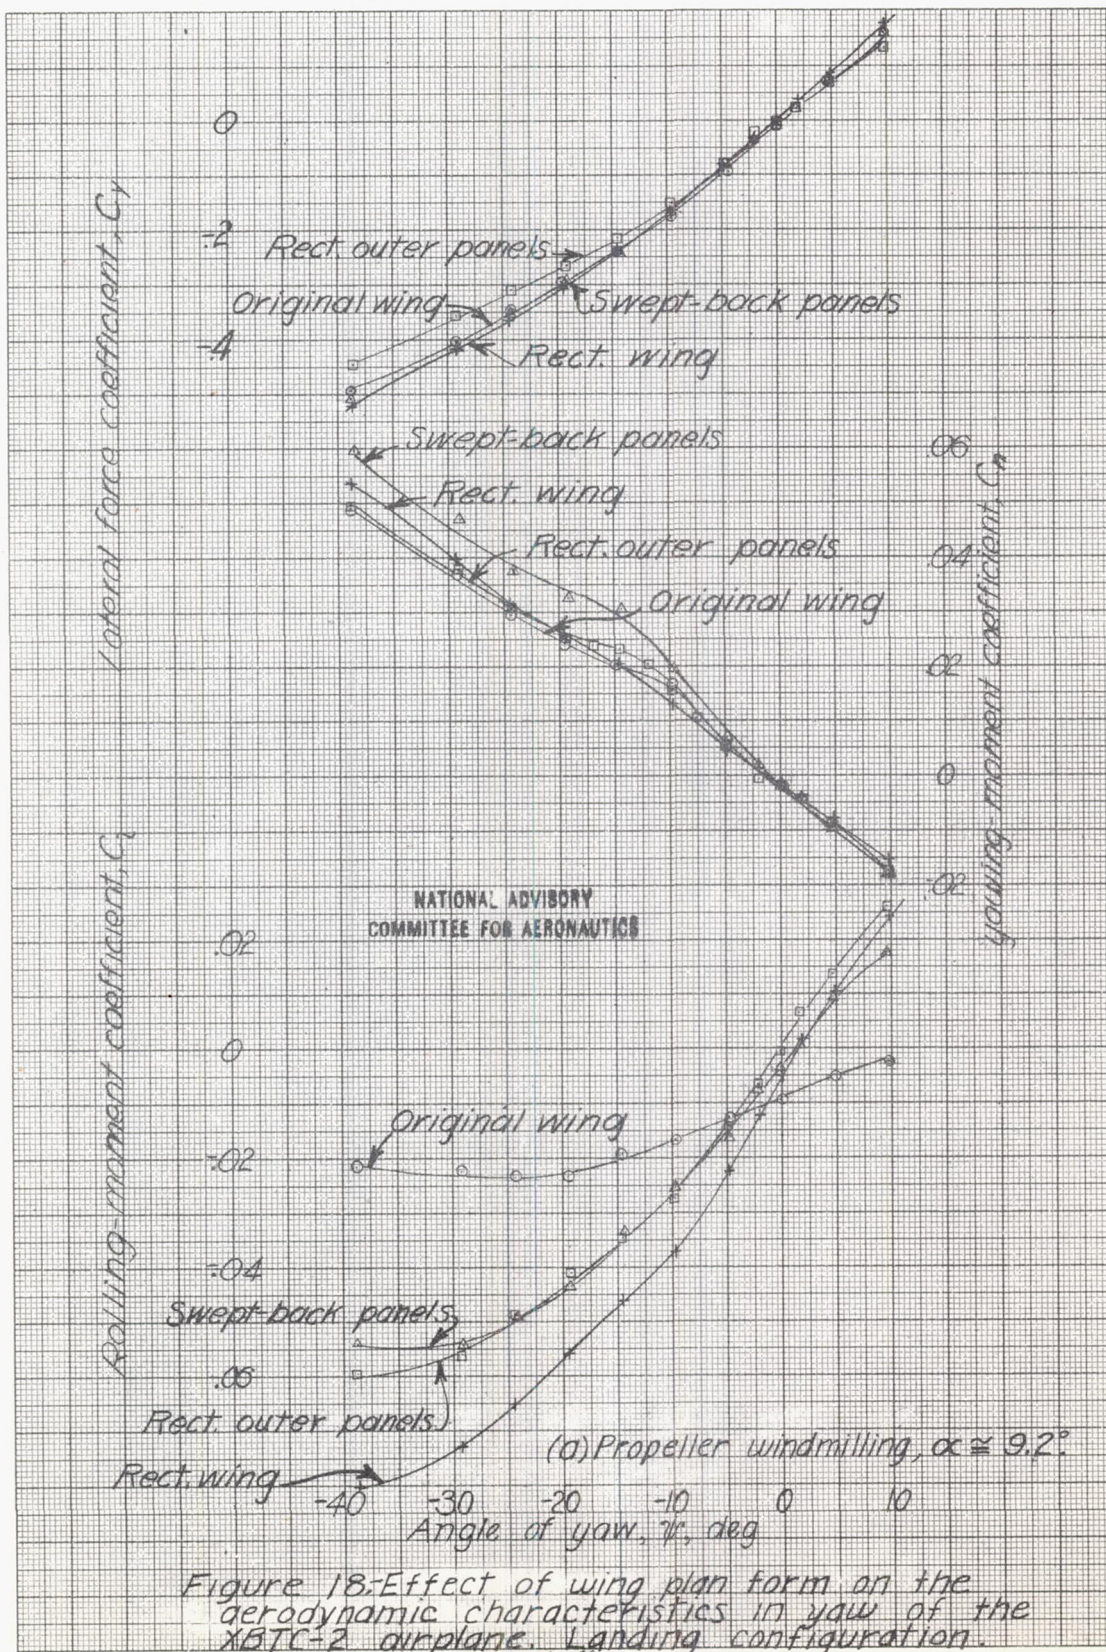



Figure 18: Effect of wing plan form on the aerodynamic characteristics in yaw of the XBTC-2 airplane. Landing configuration.

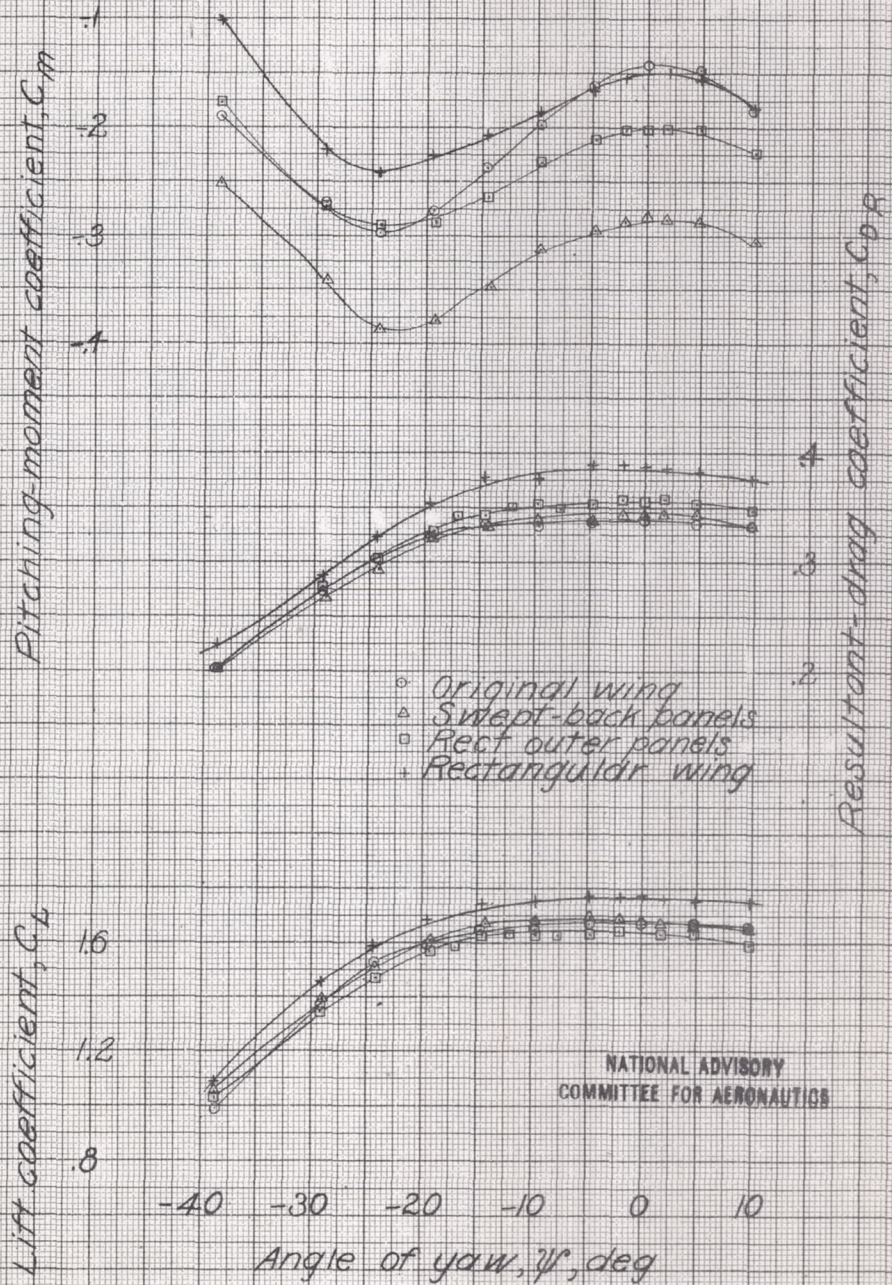


NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

(a) Concluded.


Figure 18. continued.

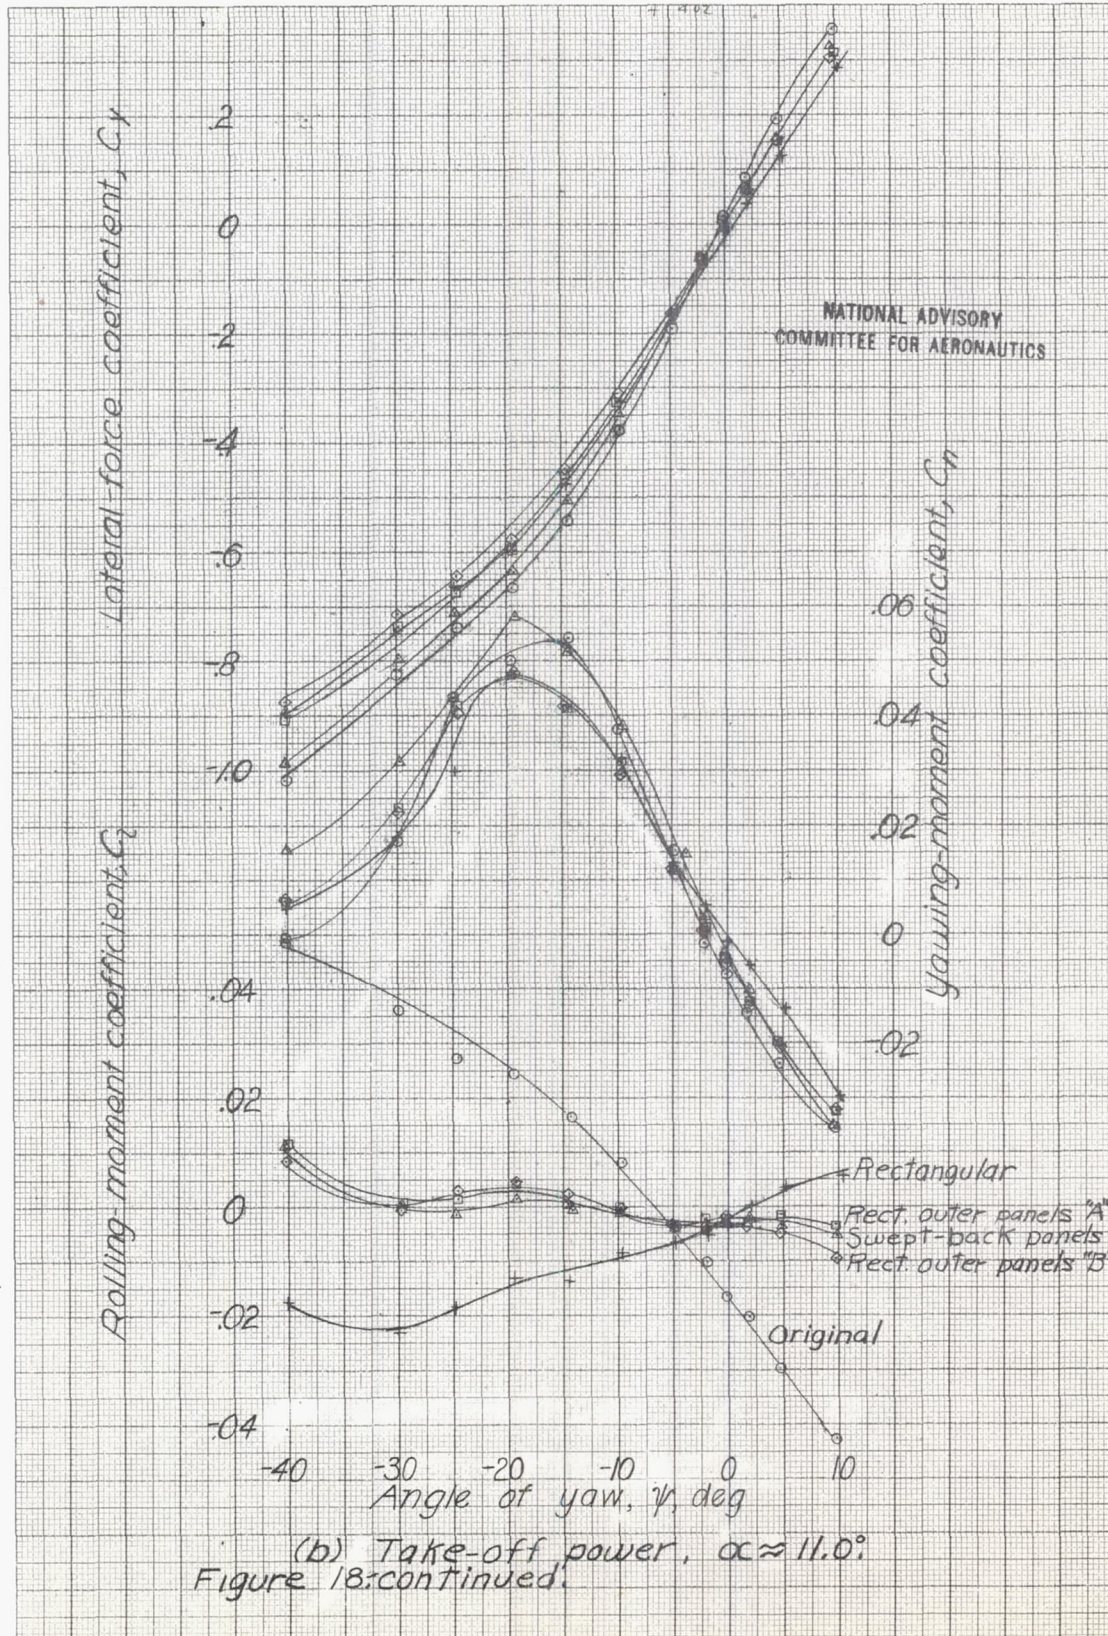

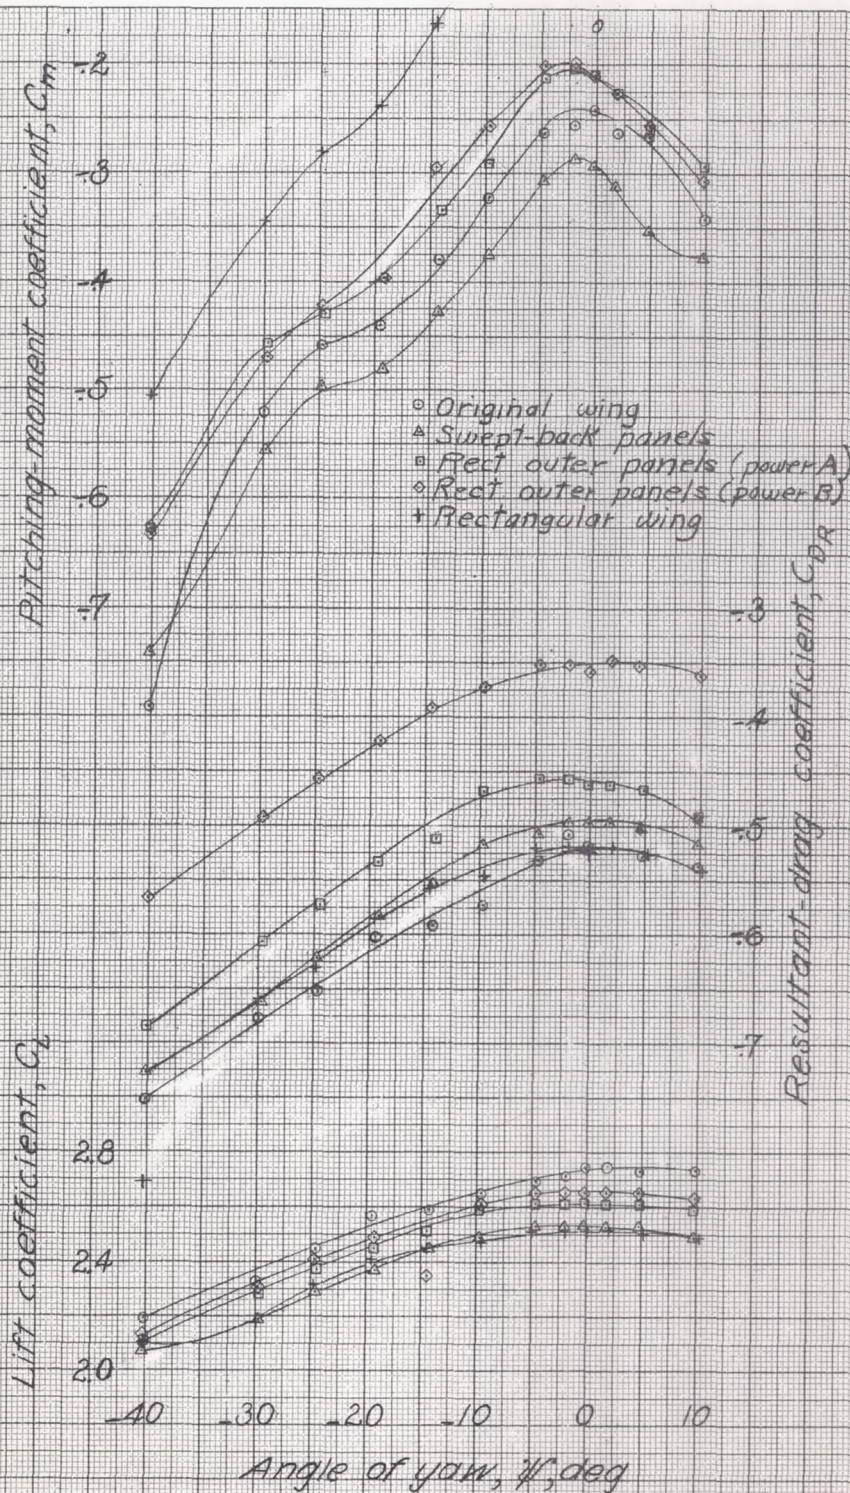

(b) concluded.


Figure 18:concluded.

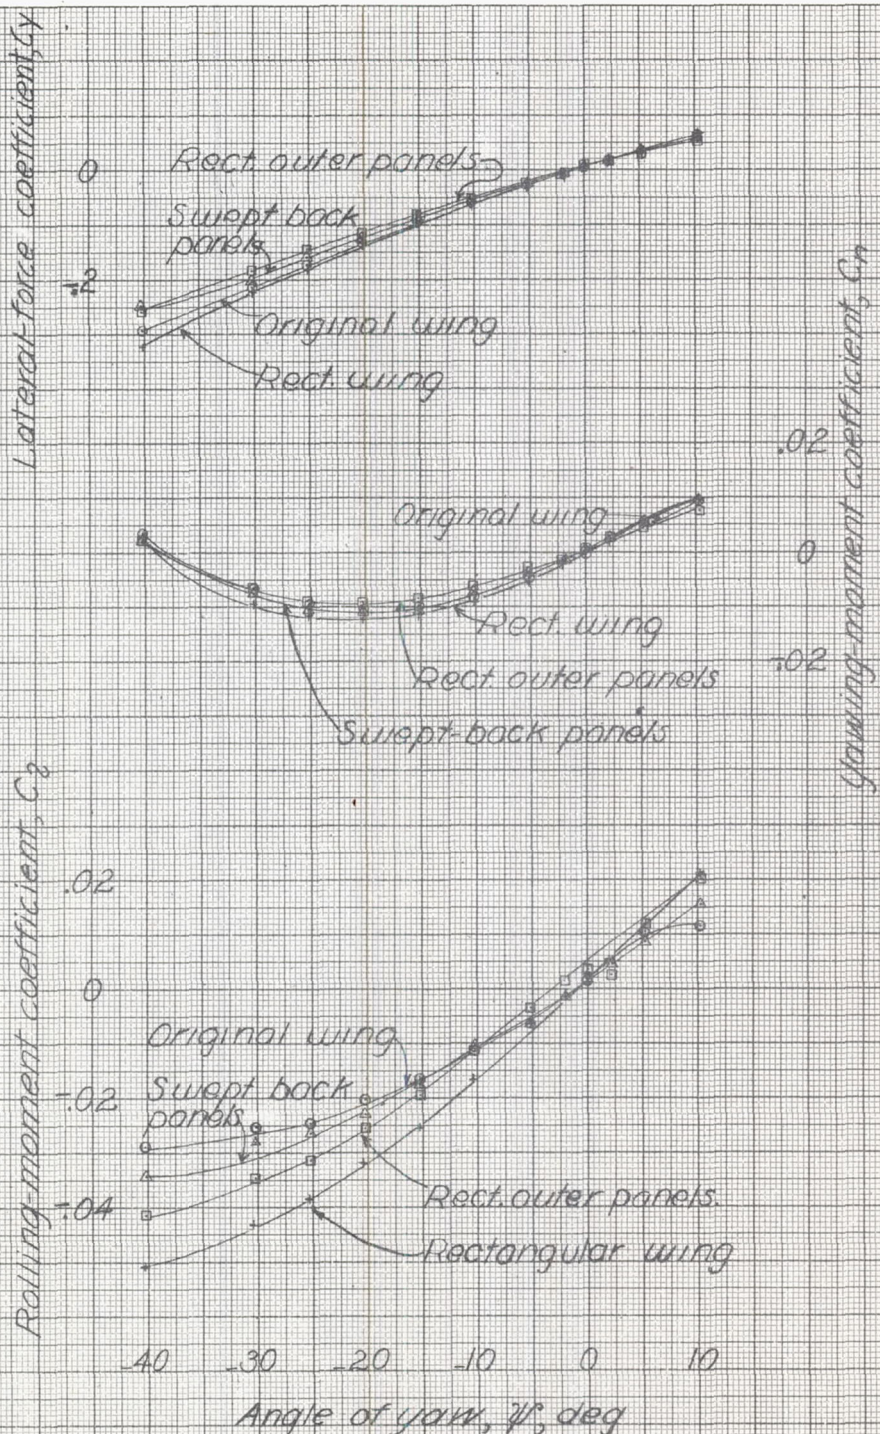

(a) Propeller windmilling,  $\alpha \approx 0.2^\circ$ .


Figure 19.-Effect of wing plan form on the aerodynamic characteristics in yaw of the  $1/8$ -scale model of the XBTC-2 airplane. Cruising configuration; Tail off.



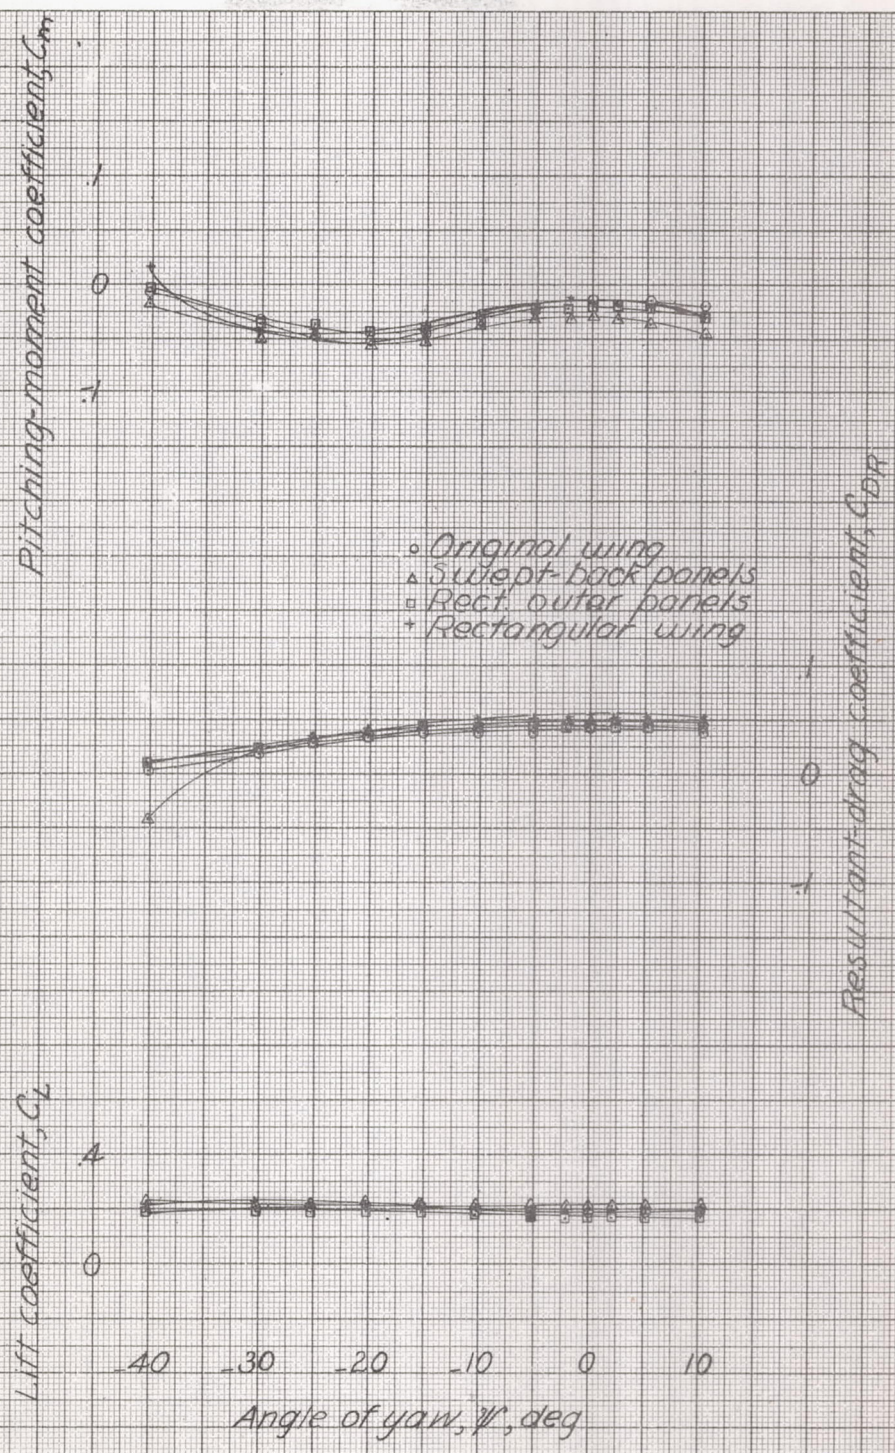


(c) Concluded.

Figure 19.- continued

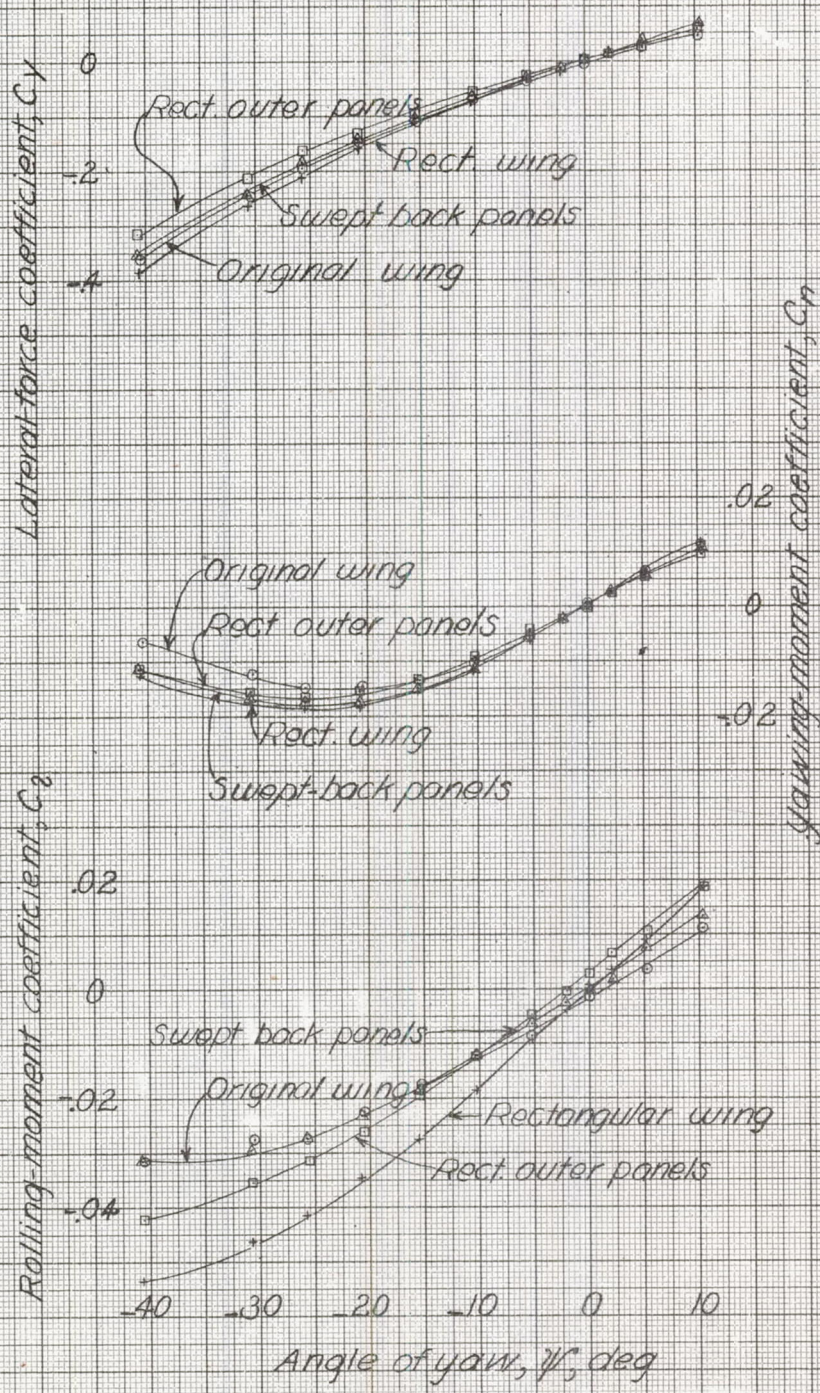


(b) Take-off power,  $\alpha \approx 0.2^\circ$ .

Figure 19-continued.

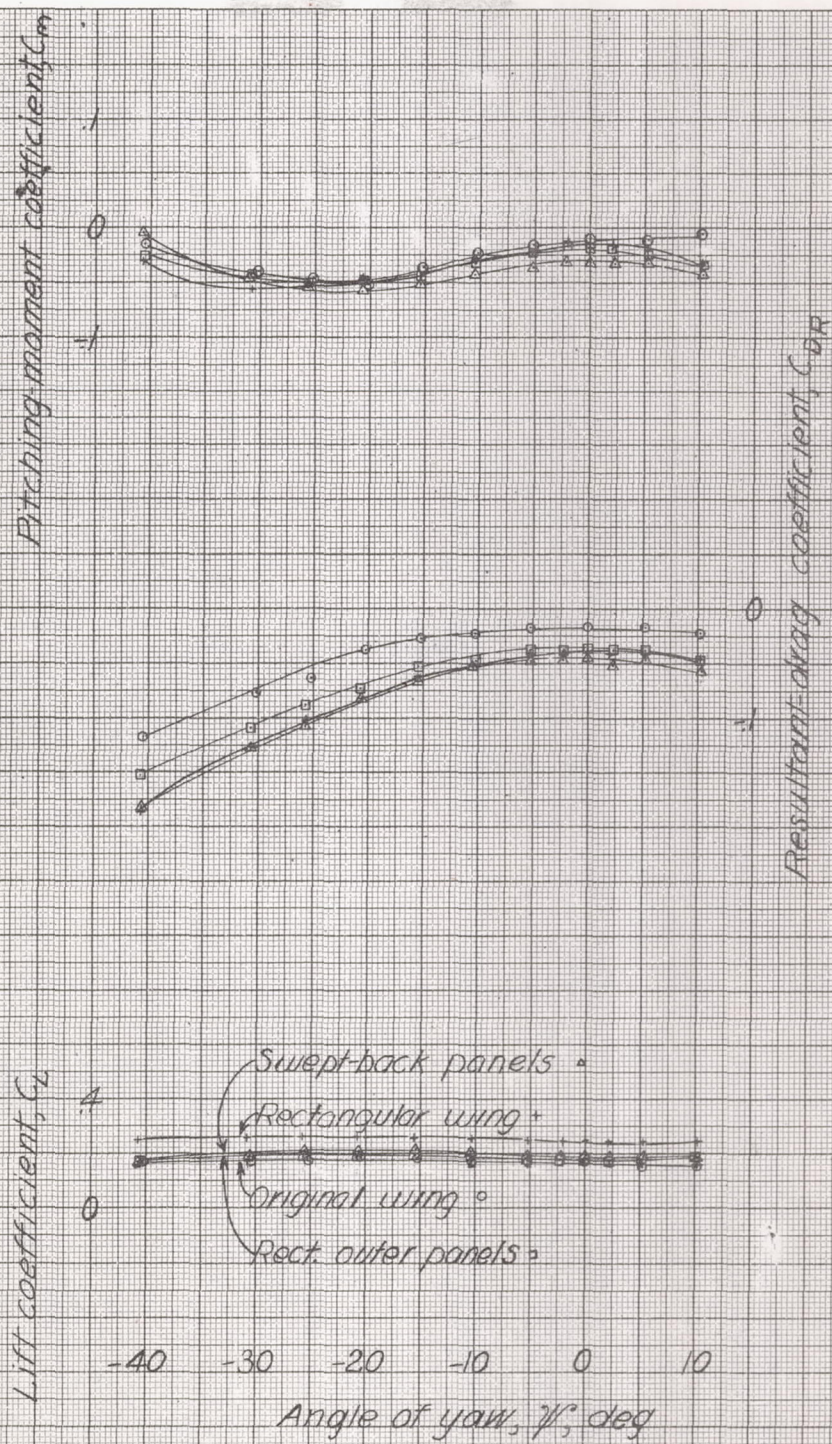

(1) Concluded.

Figure 19.-continued.

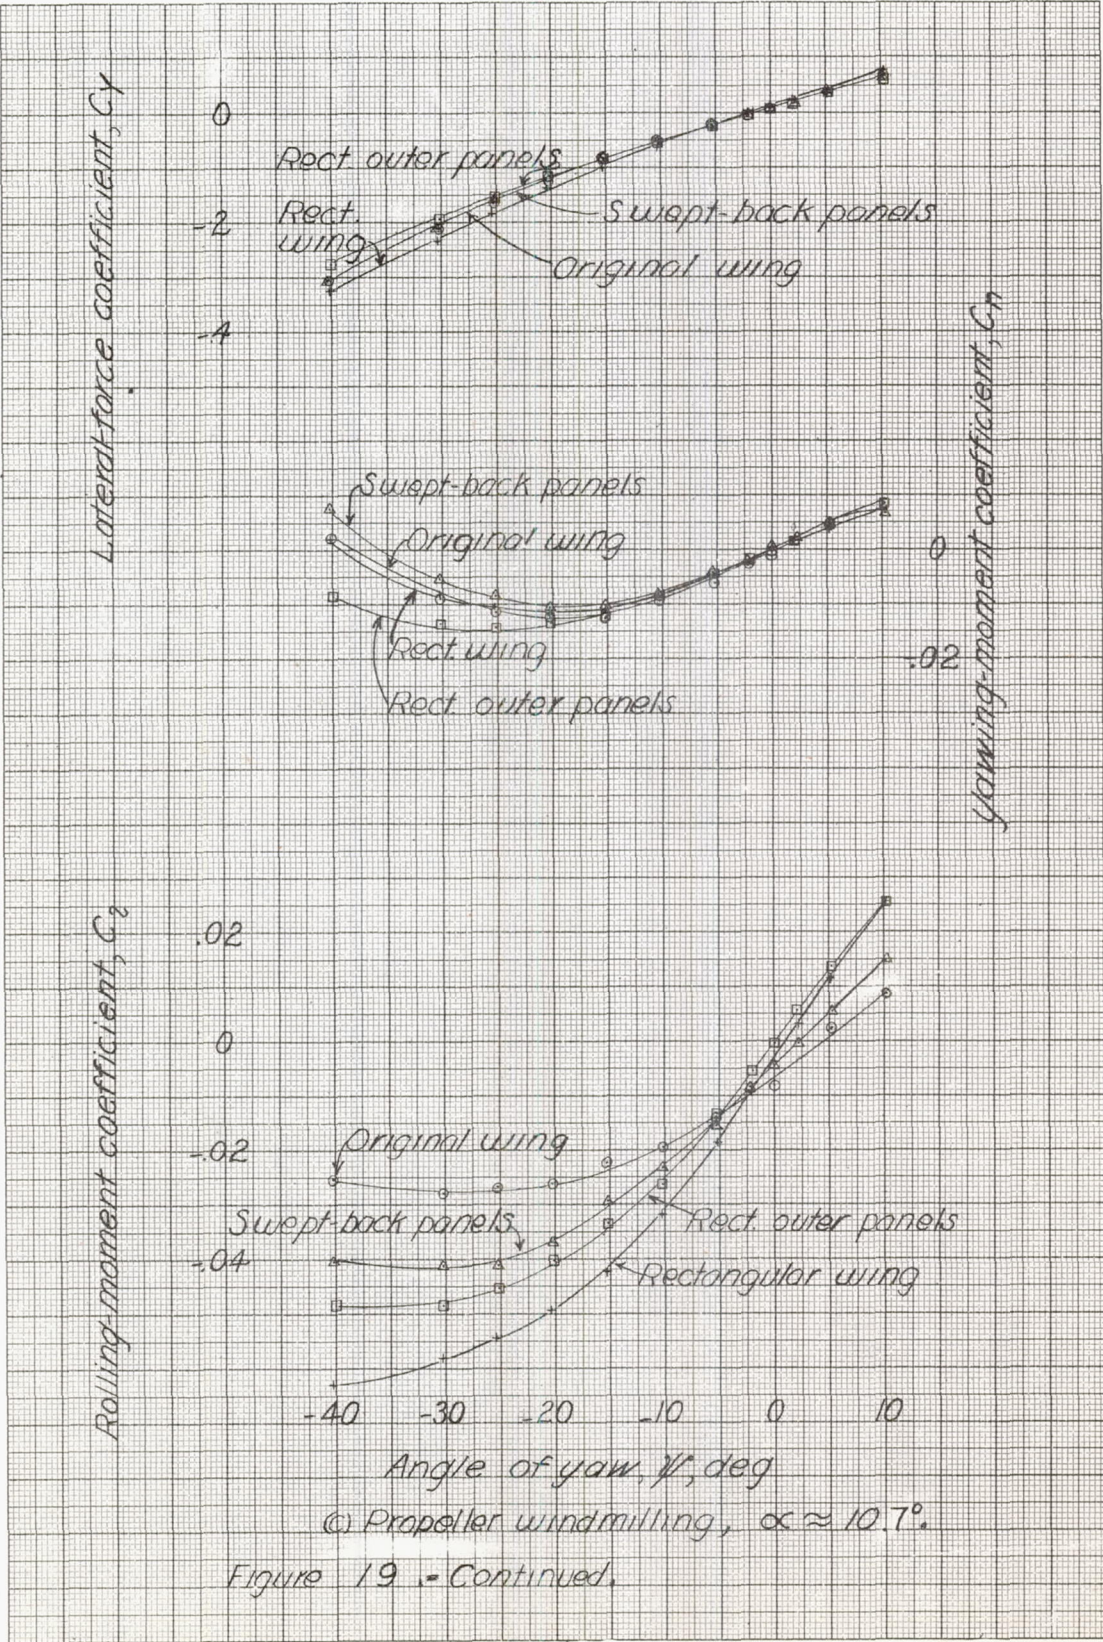

(c) Propeller windmilling,  $\alpha \approx 10.7^\circ$ .

Figure 19 - Continued.

Pitching-moment coefficient,  $C_m$

Lift coefficient,  $C_L$


Resultant-drag coefficient,  $C_D$


-40 -30 -20 -10 0 10

Angle of yaw,  $\psi$ , deg

- Original wing
- △ Swept-back panels
- Rect. outer panels
- + Rectangular wing


Figure 19.- continued.

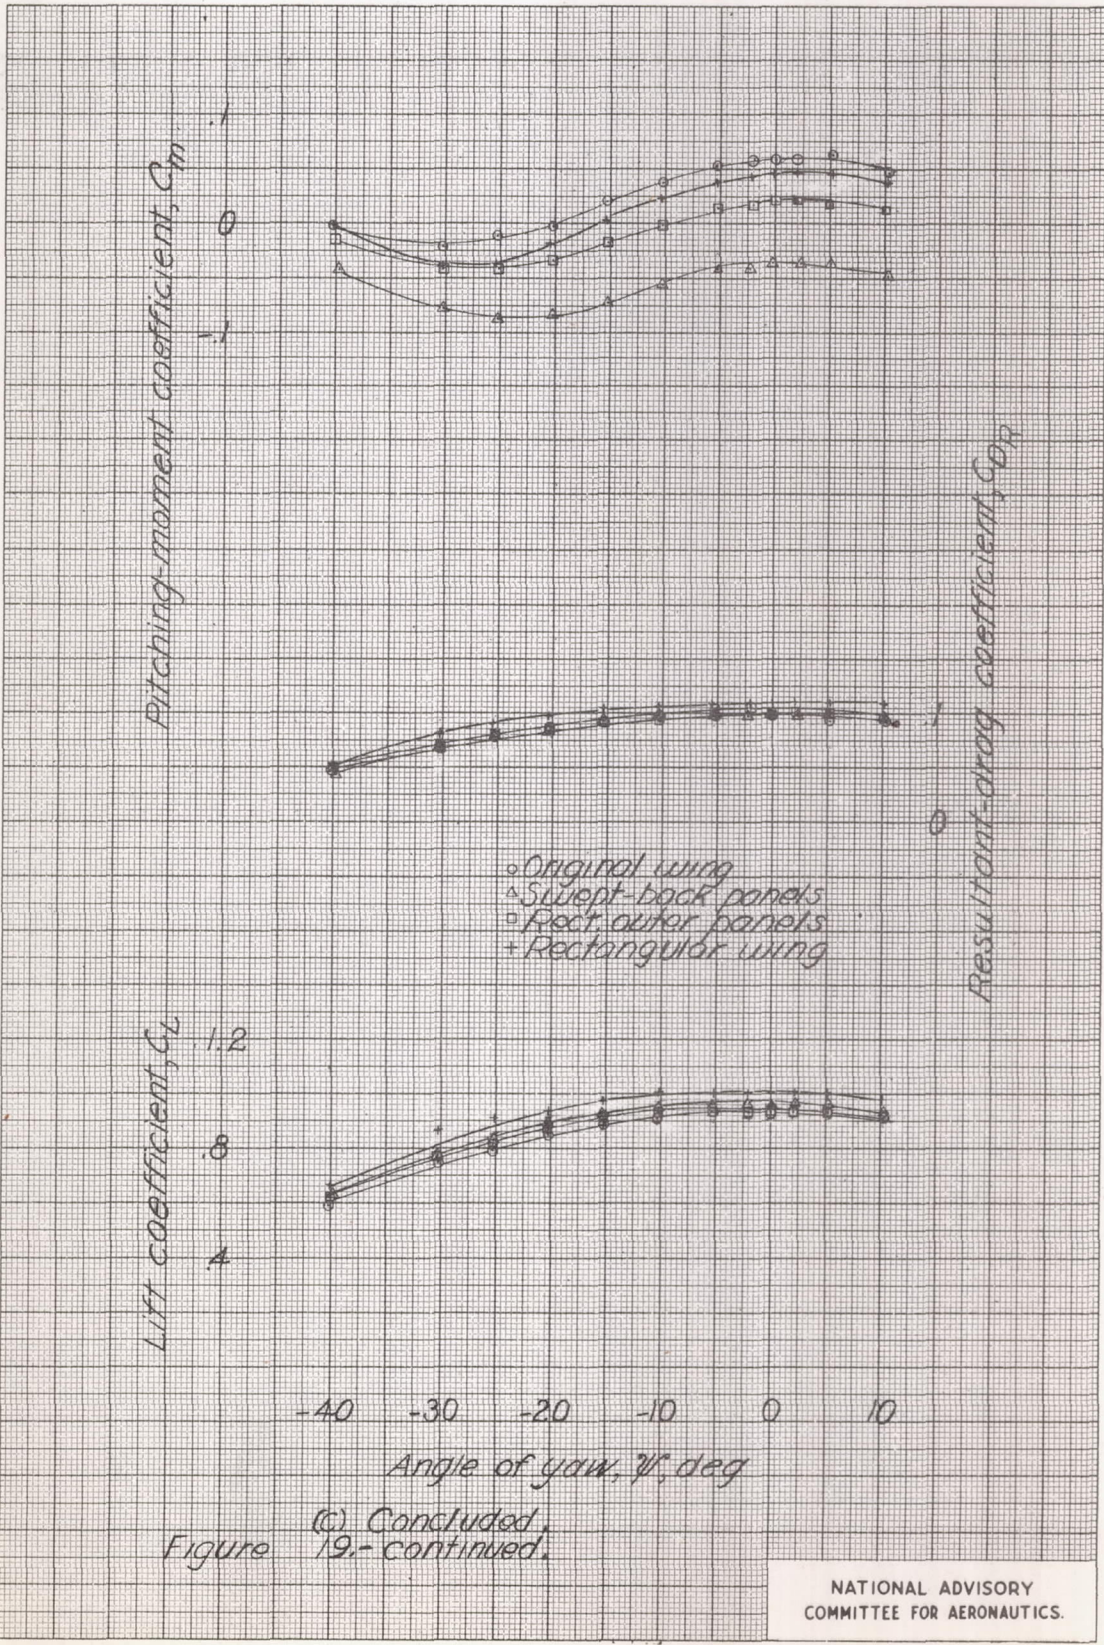

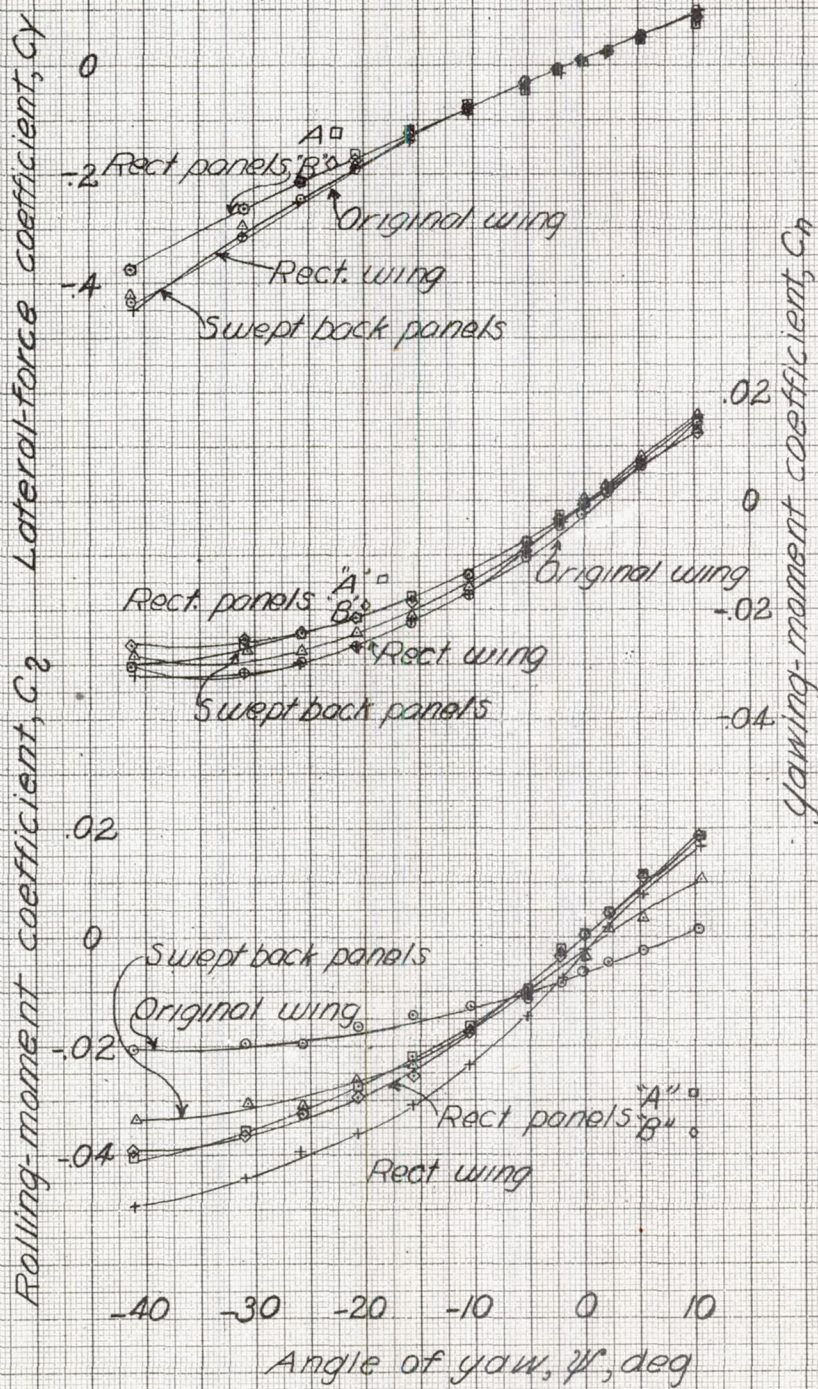


(d) Take-off power,  $\alpha \approx 9.0^\circ$

Figure 19.-continued.

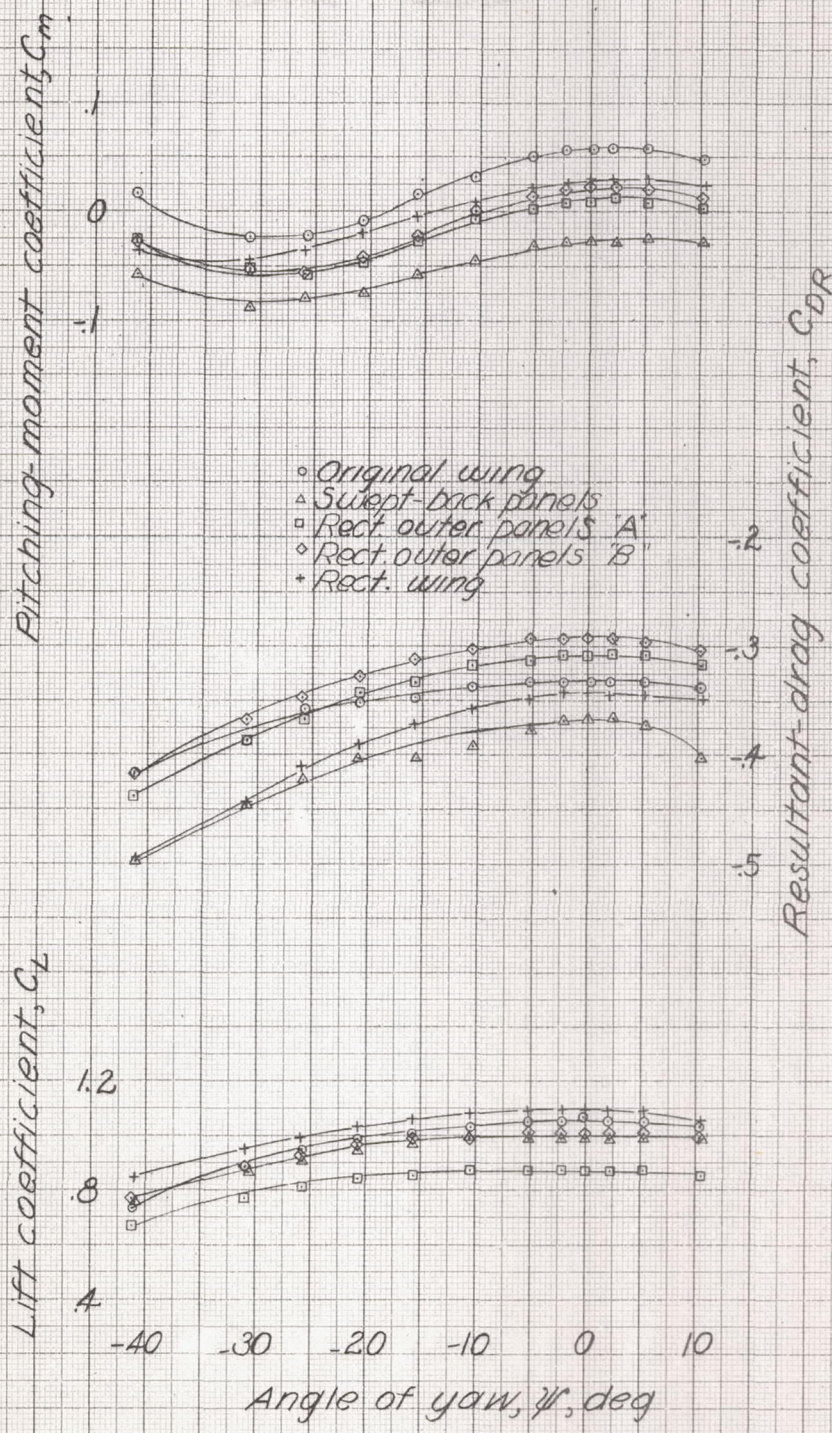

(d) Concluded.

Figure 19.- concluded.

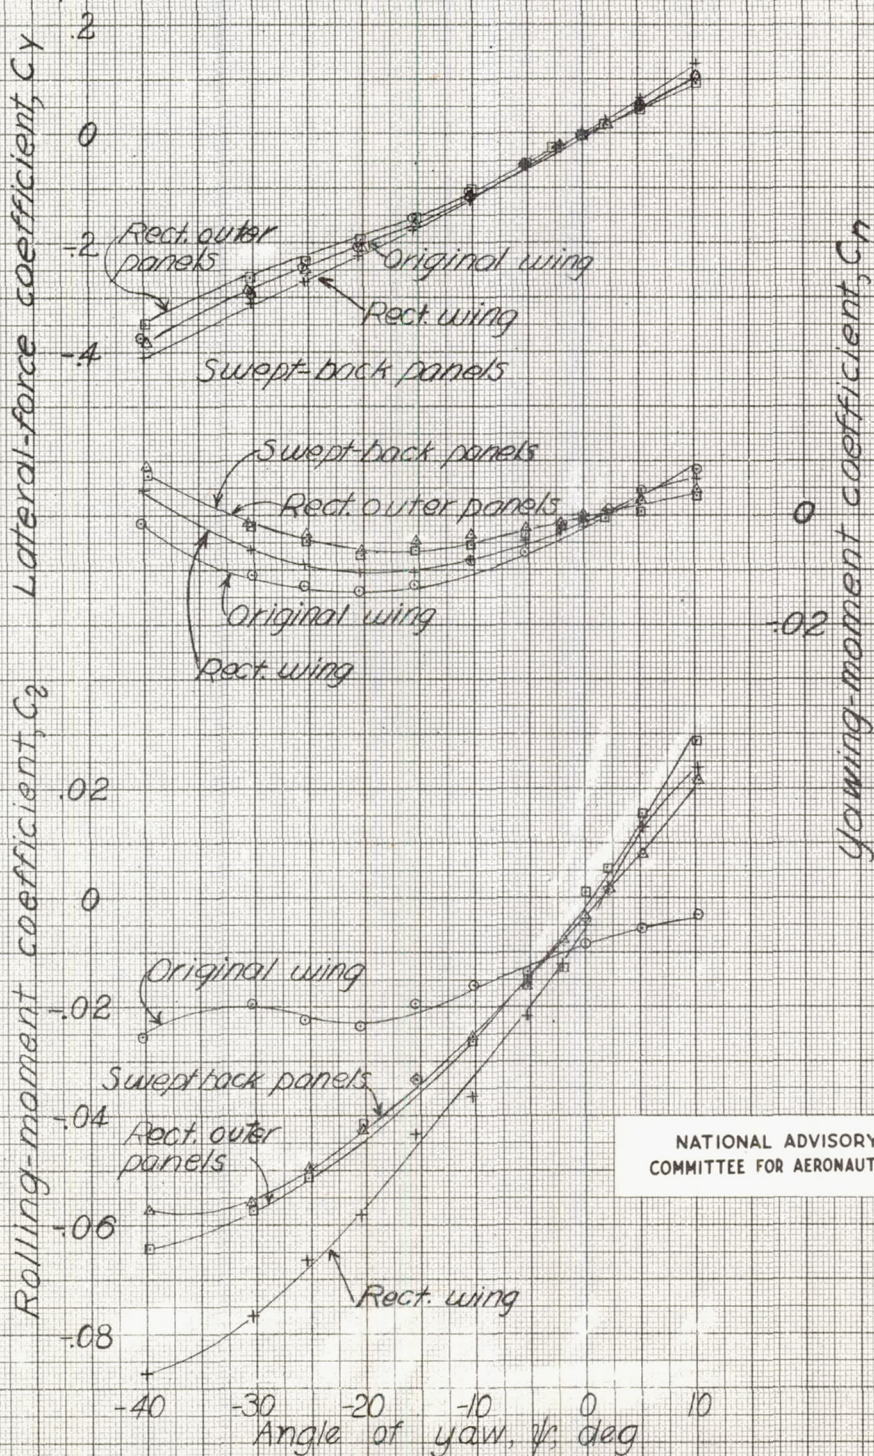


NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS.

(a) Propeller windmilling,  $\alpha \approx 9.2^\circ$ .


Figure 20.- Effect of wing plan form on the aerodynamic characteristics in yaw of the XB7C-2 airplane. Landing configuration; Tail off.



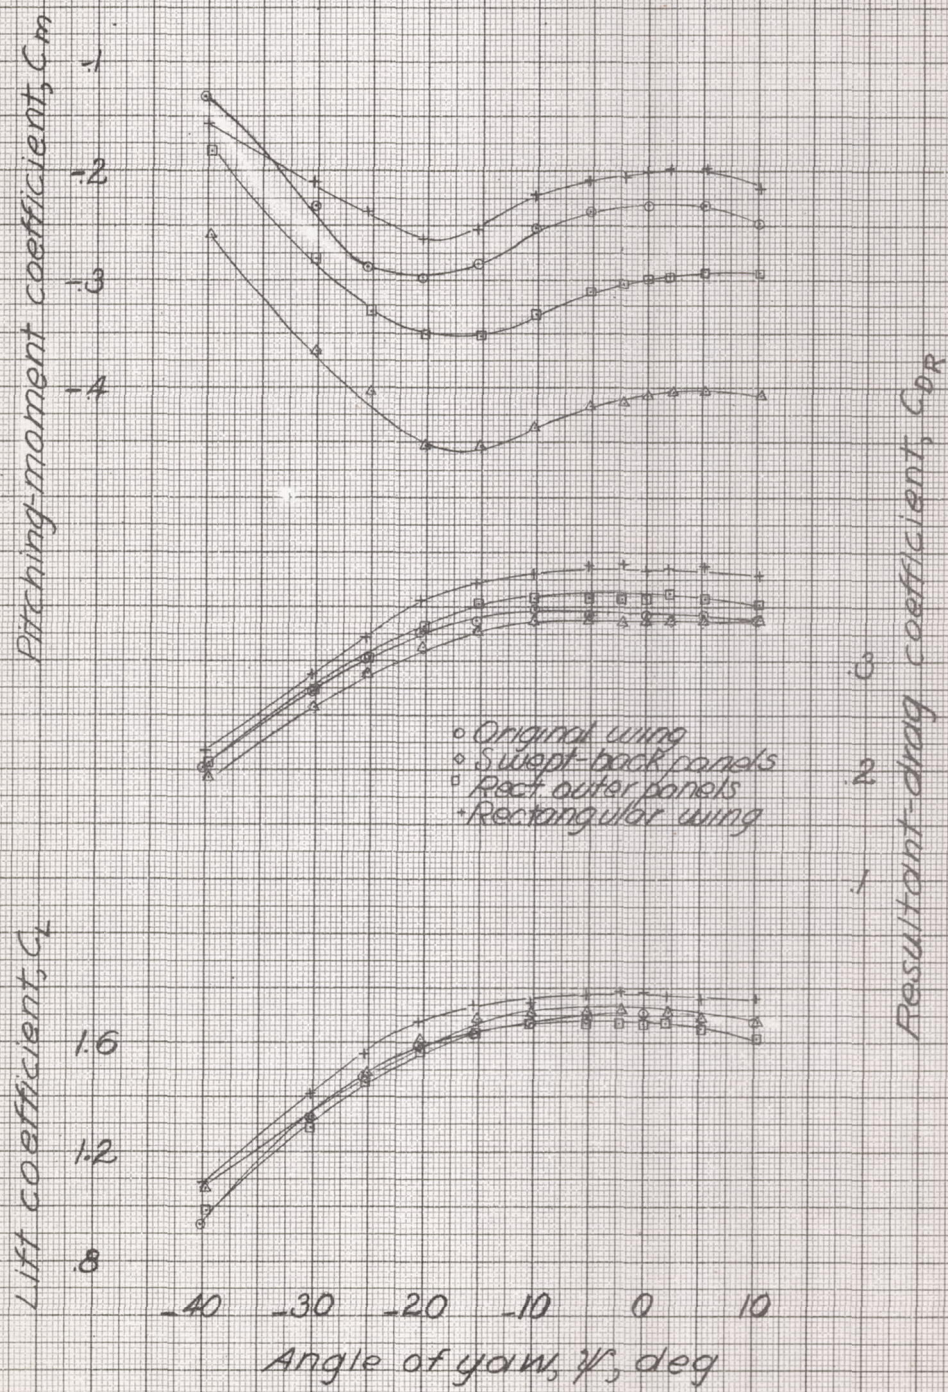


(a) Concluded.

Figure 20.- continued.

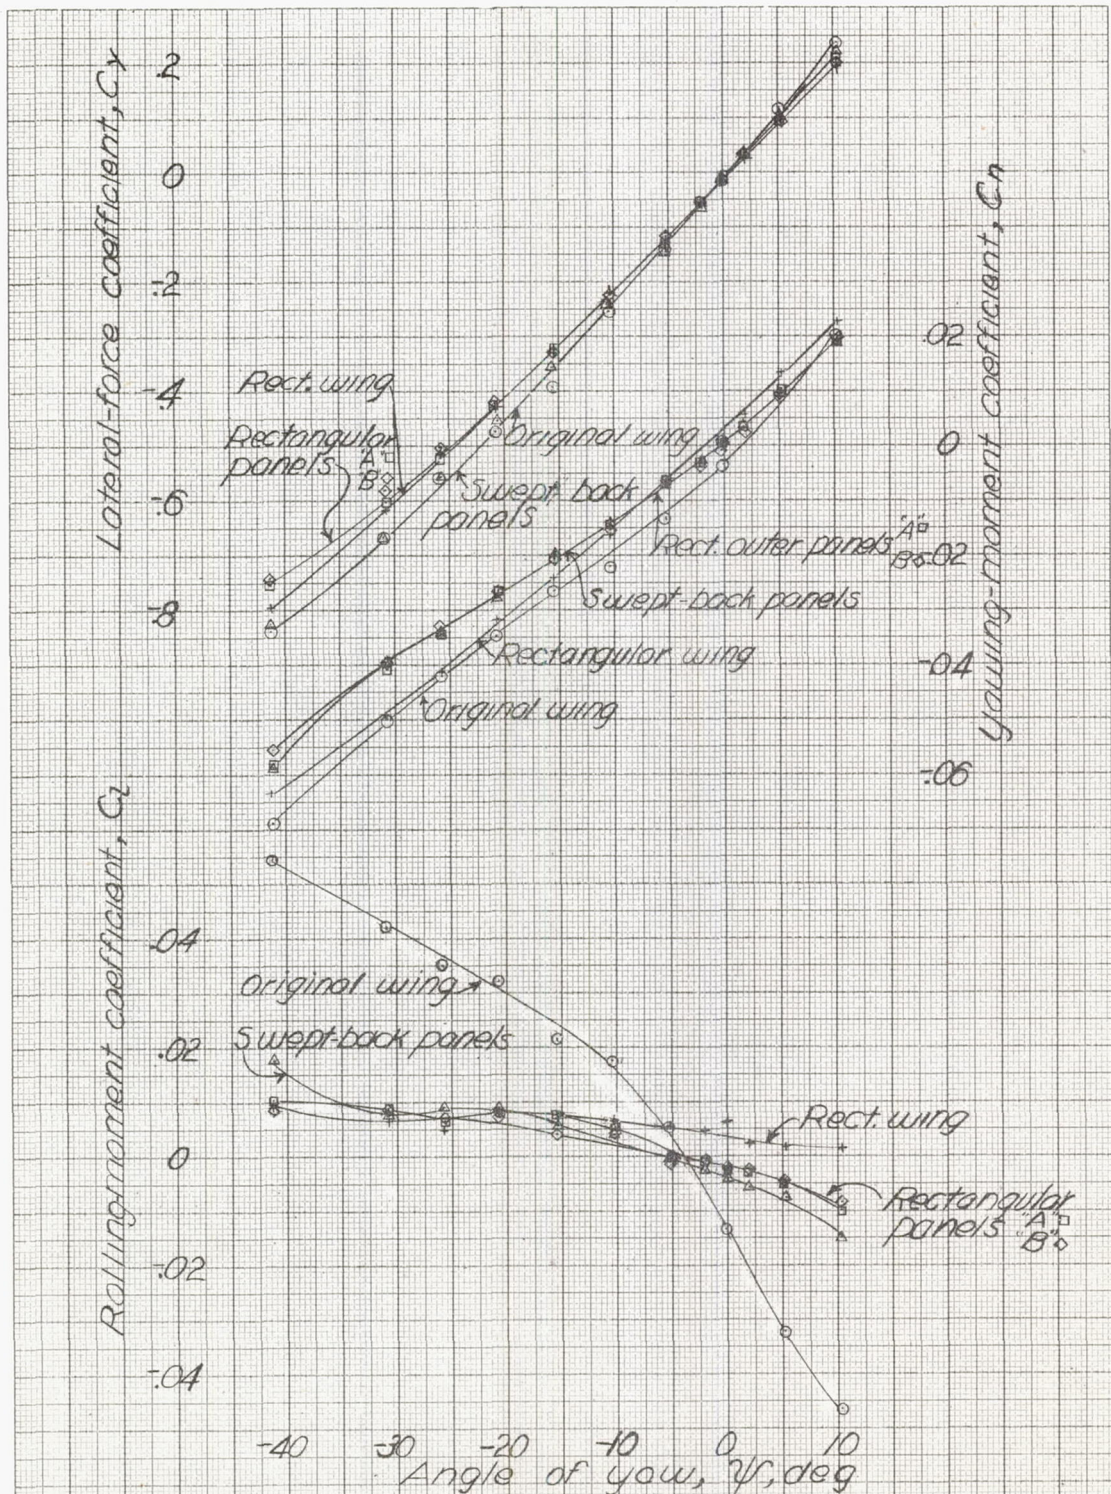

(b) Take-off power,  $\alpha \approx 10.6$ .  
 Figure 20.- continued.

L-787

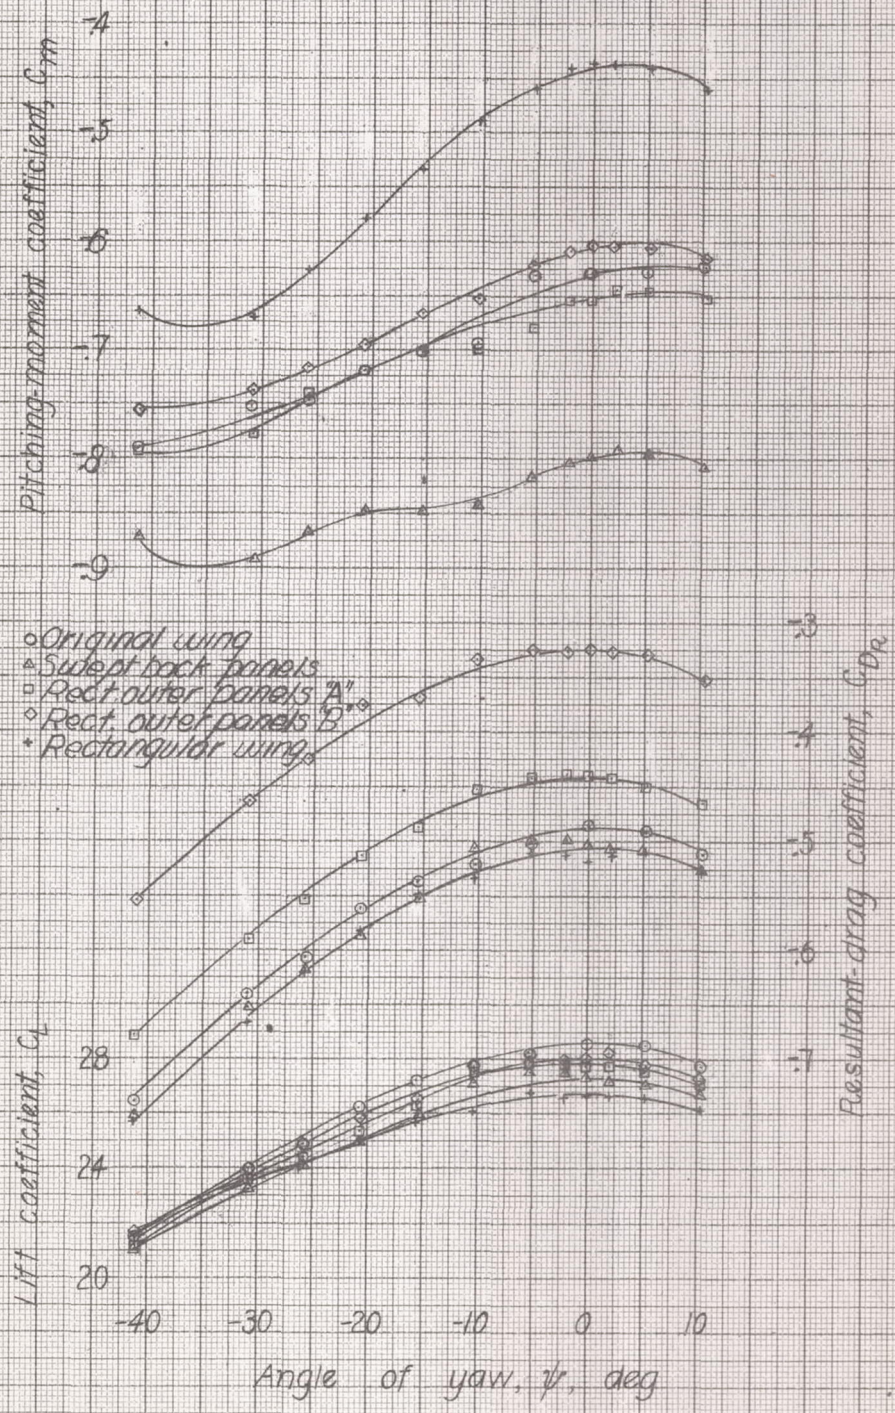

(b) Concluded.

Figure 20.- concluded.

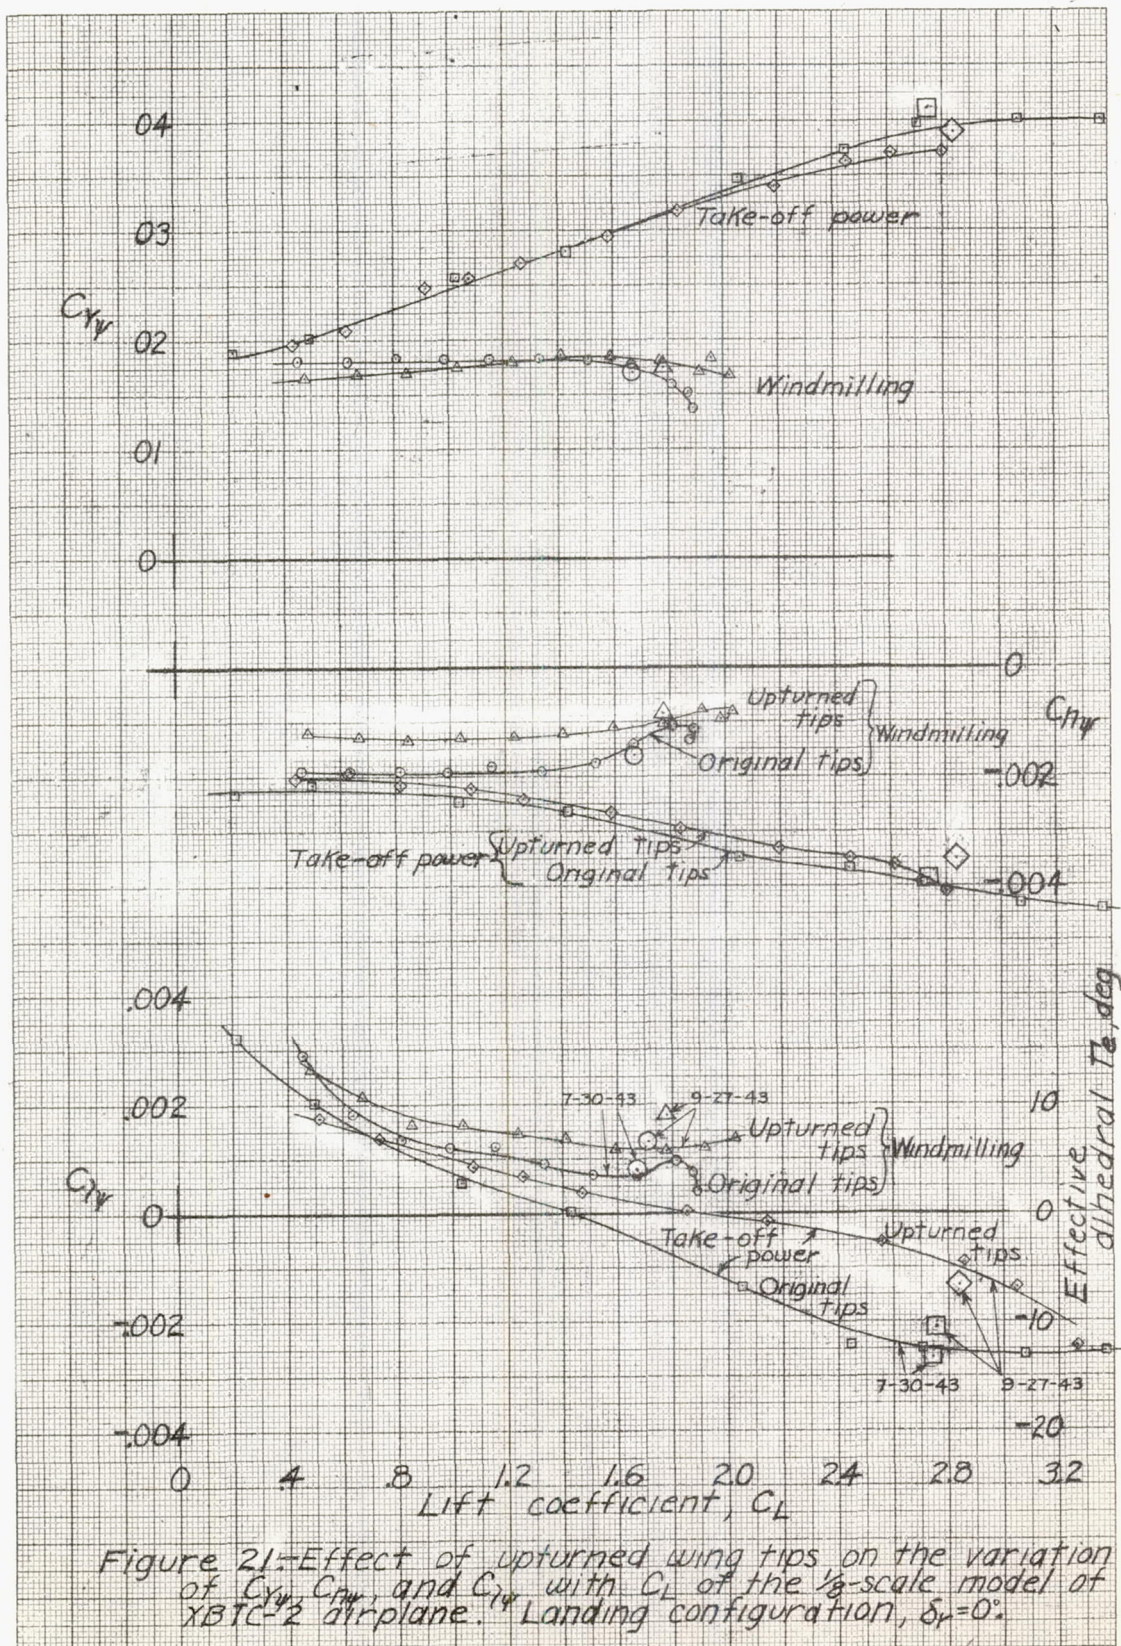


Figure 21.-Effect of upturned wing tips on the variation of  $C_{xy}$ ,  $C_{ny}$ , and  $C_{iz}$  with  $C_L$  of the  $1/8$ -scale model of XB7C-2 airplane. Landing configuration,  $\delta_r = 0^\circ$ .

L8L-7

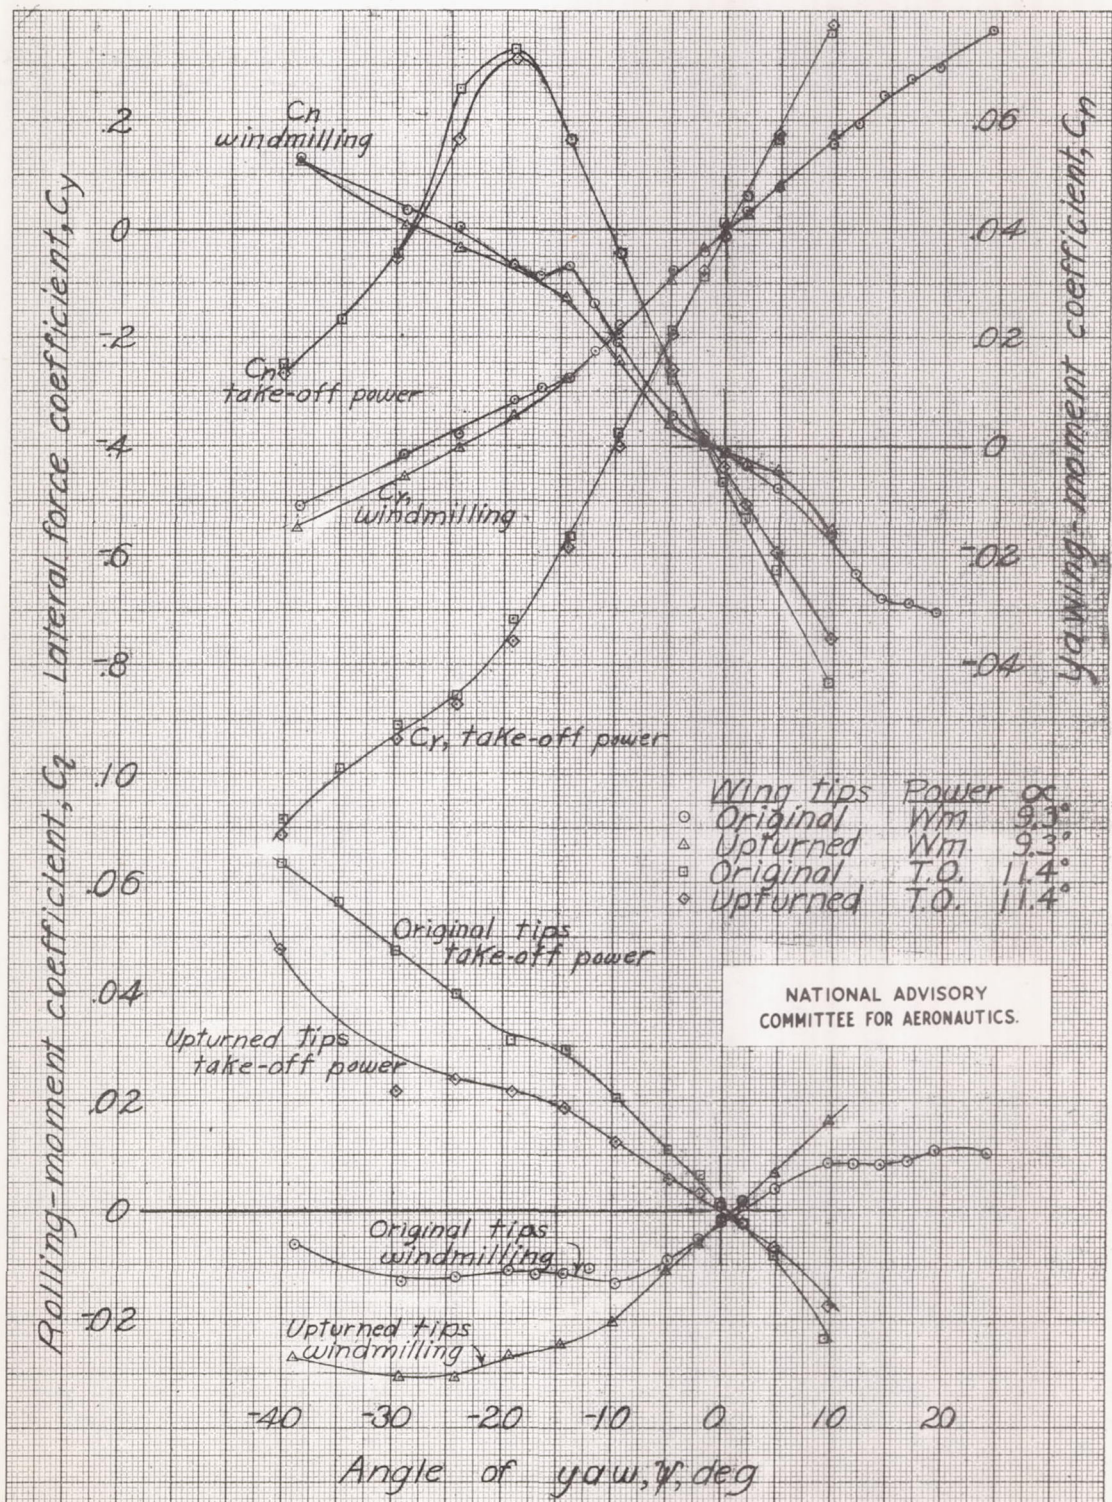


Figure 22. Effect of upturned wing tips on the aerodynamic characteristics in yaw of the 1/8-scale model of the XB7C-2 airplane. Landing configuration,  $\delta_r = 0^\circ$ . Dorsal  $D_1$ .



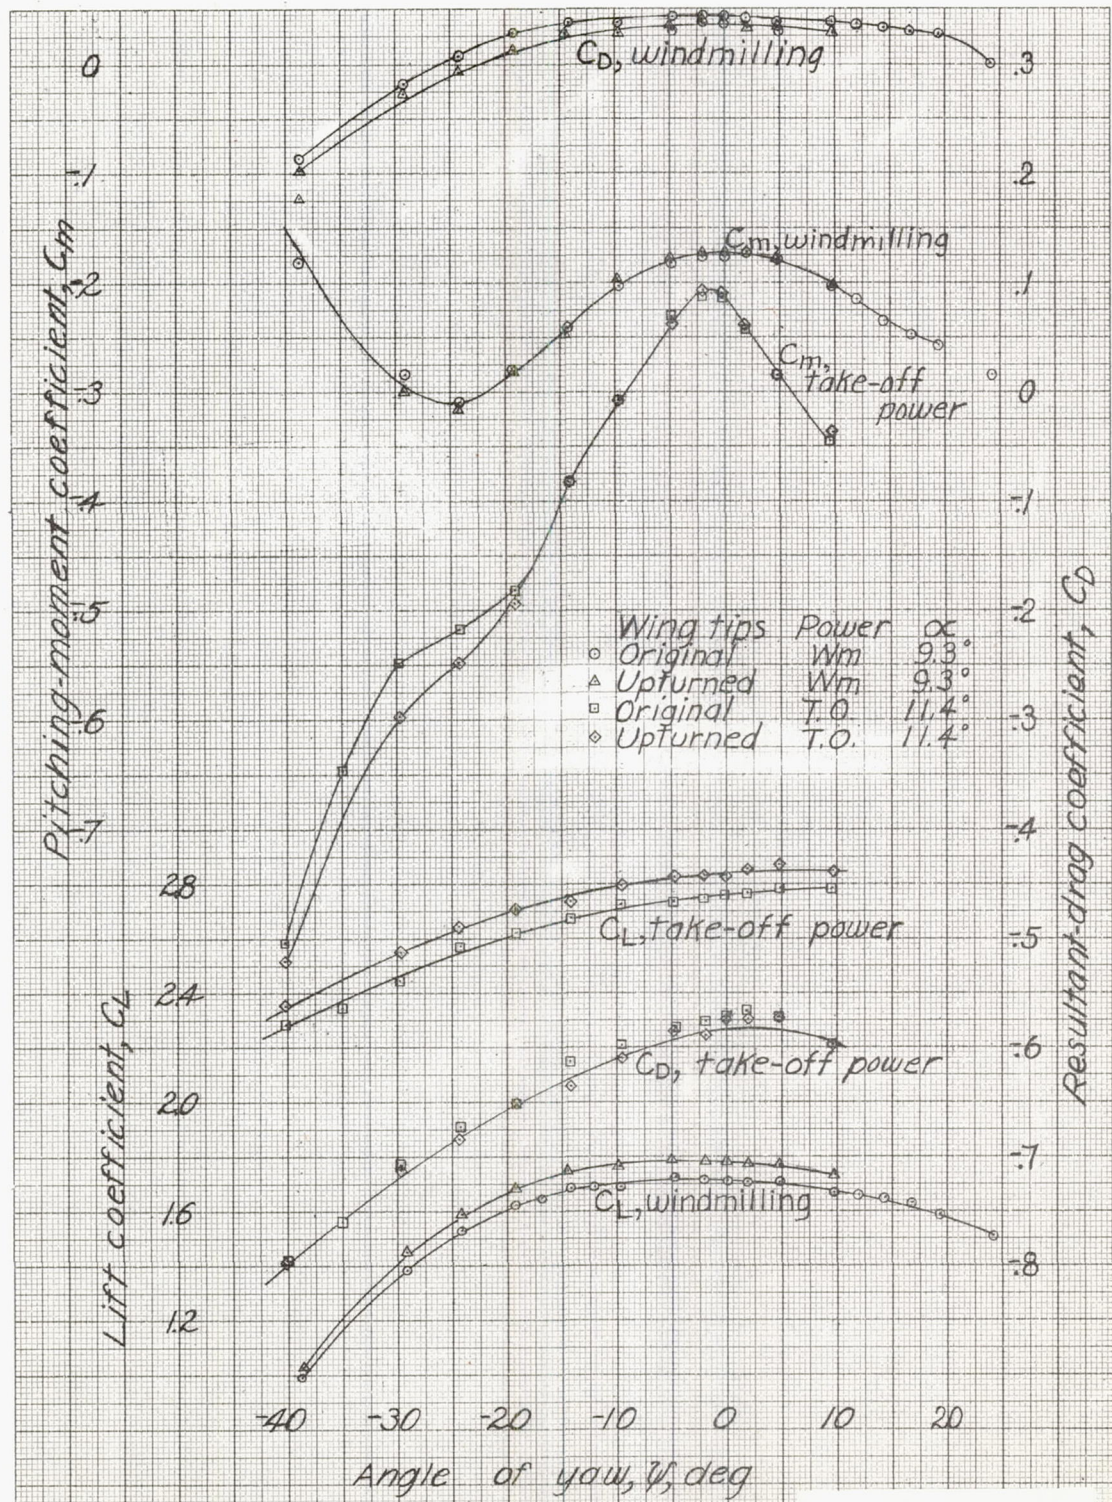



Figure 22.-Concluded.

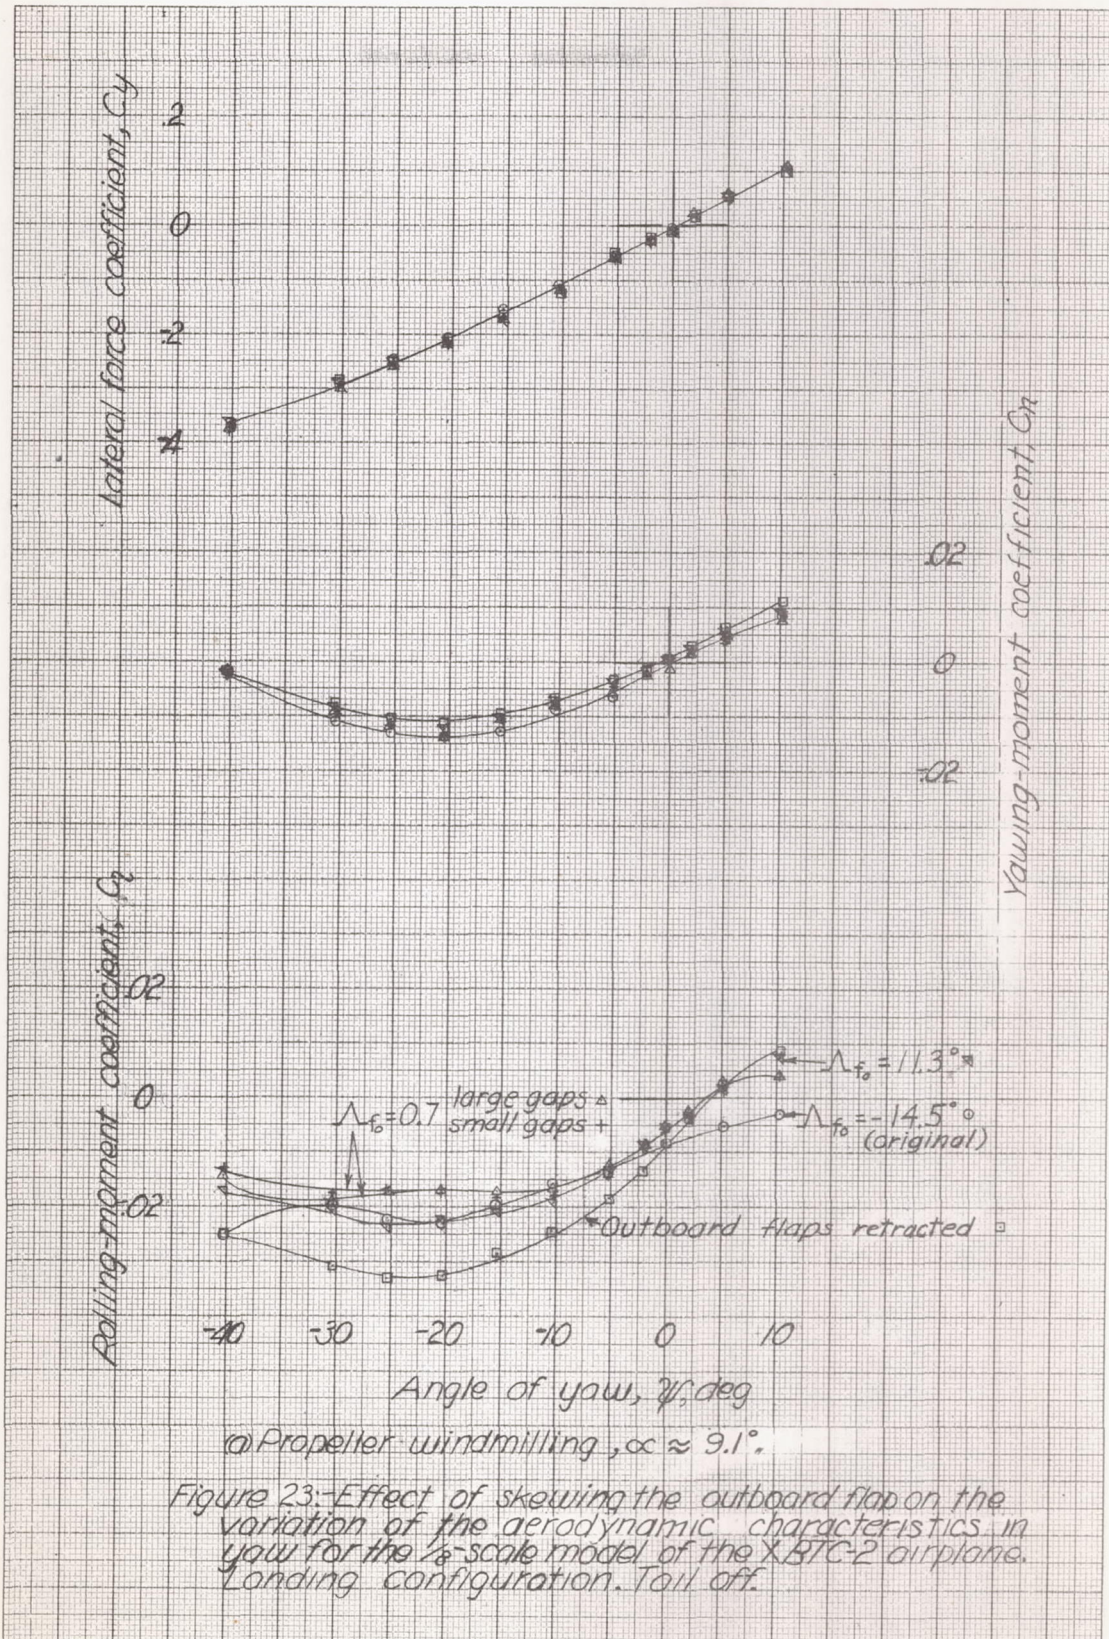


Pitching-moment coefficient,  $C_m$

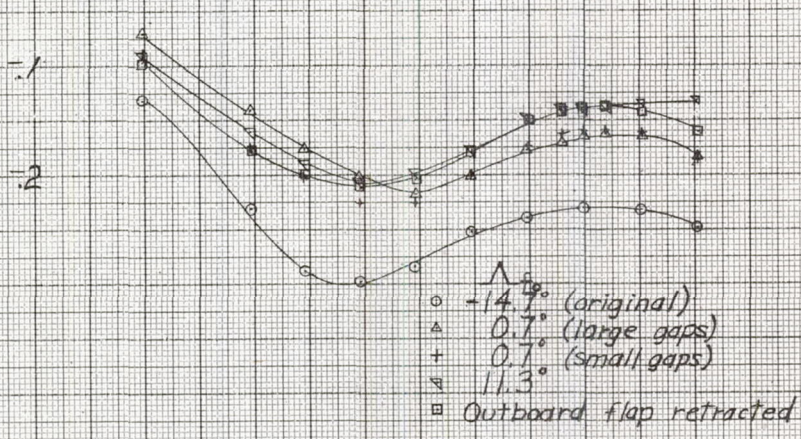

Resultant drag coefficient,  $C_{D_R}$

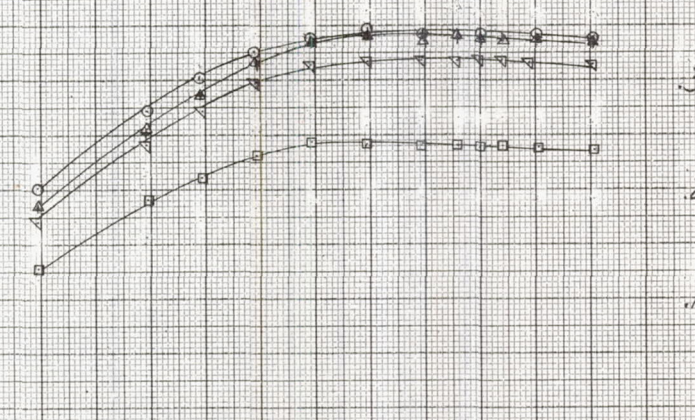

Lift coefficient,  $C_L$

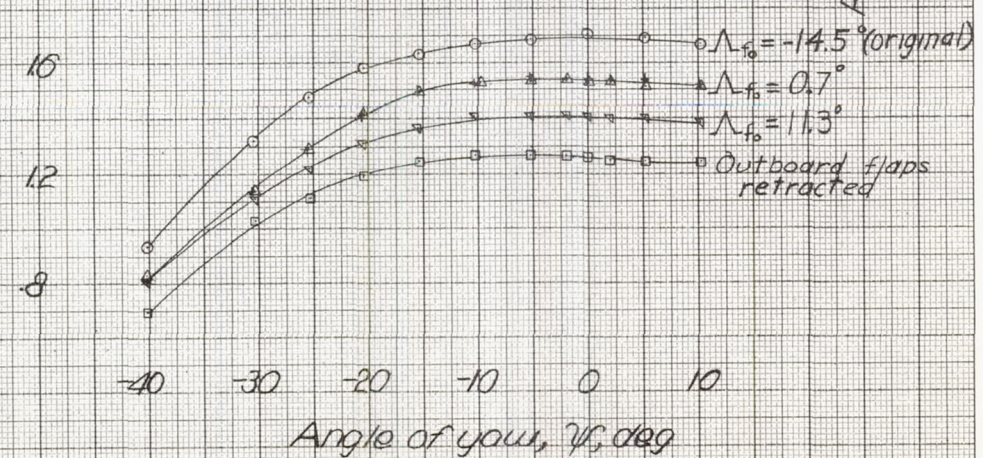


Angle of yaw,  $\psi$ , deg

(a) Concluded.


Figure 23-Continued.



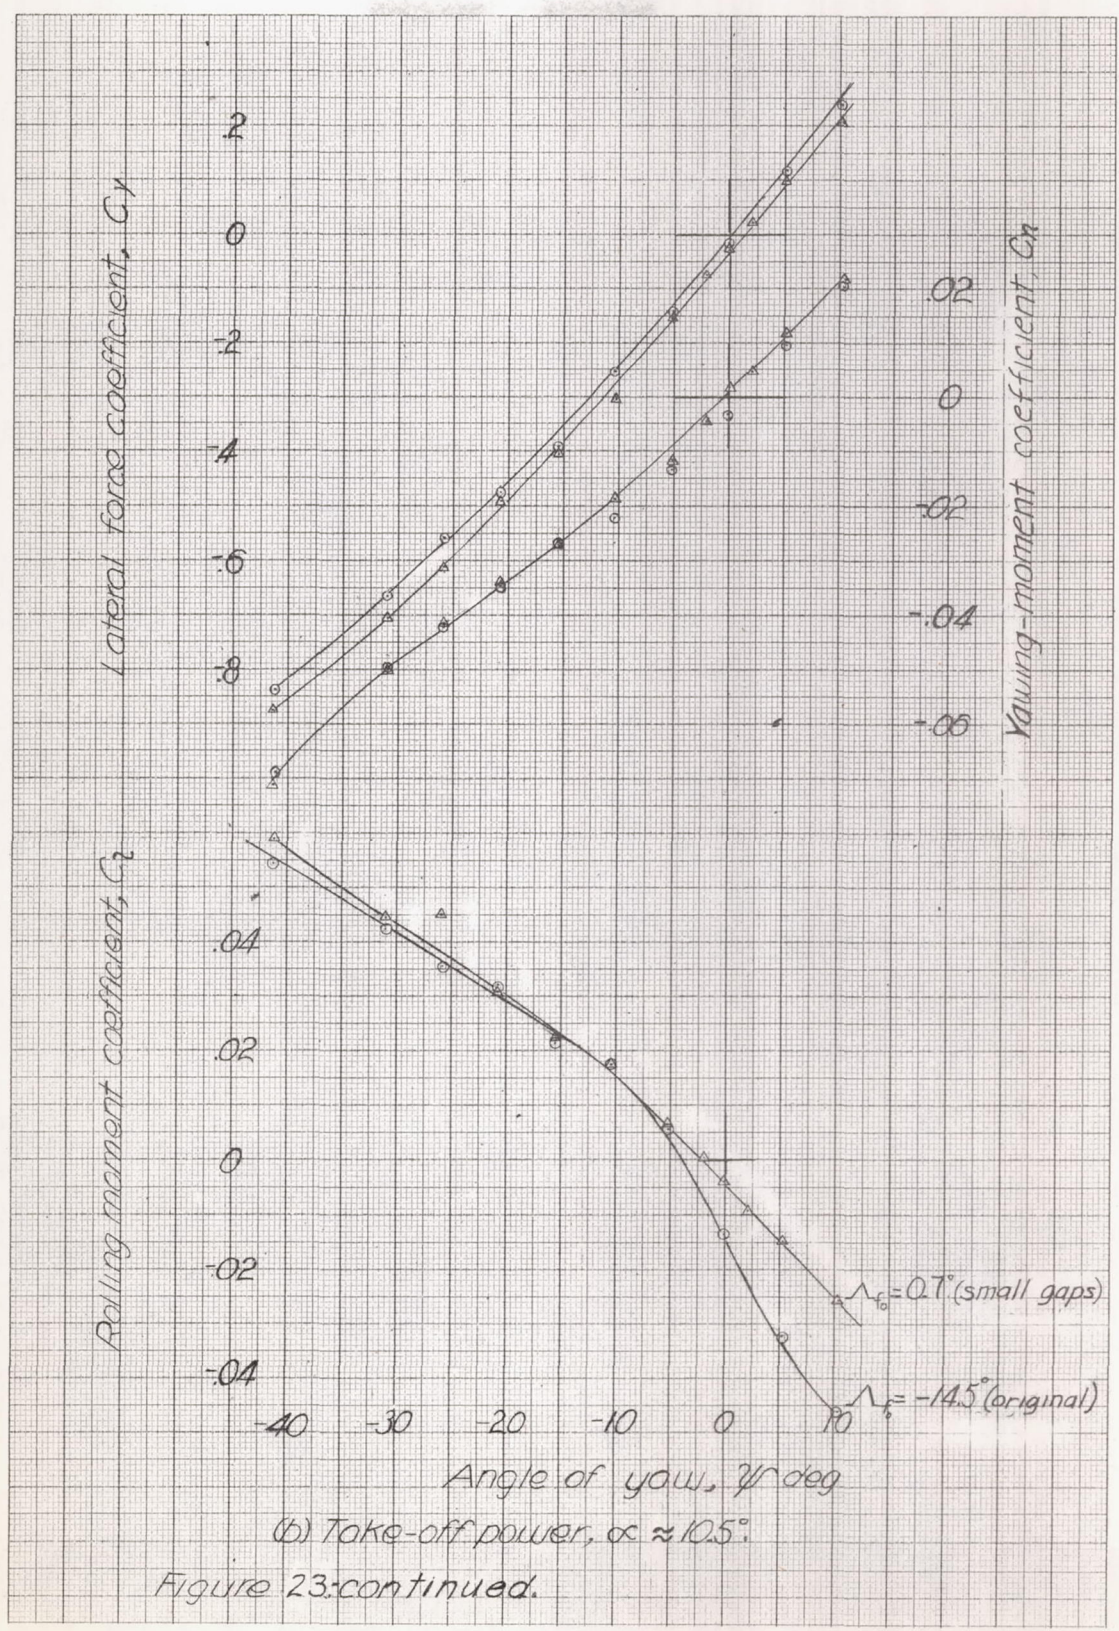

(b) Take-off power,  $\alpha \approx 10.5^\circ$ .

Figure 23: continued.

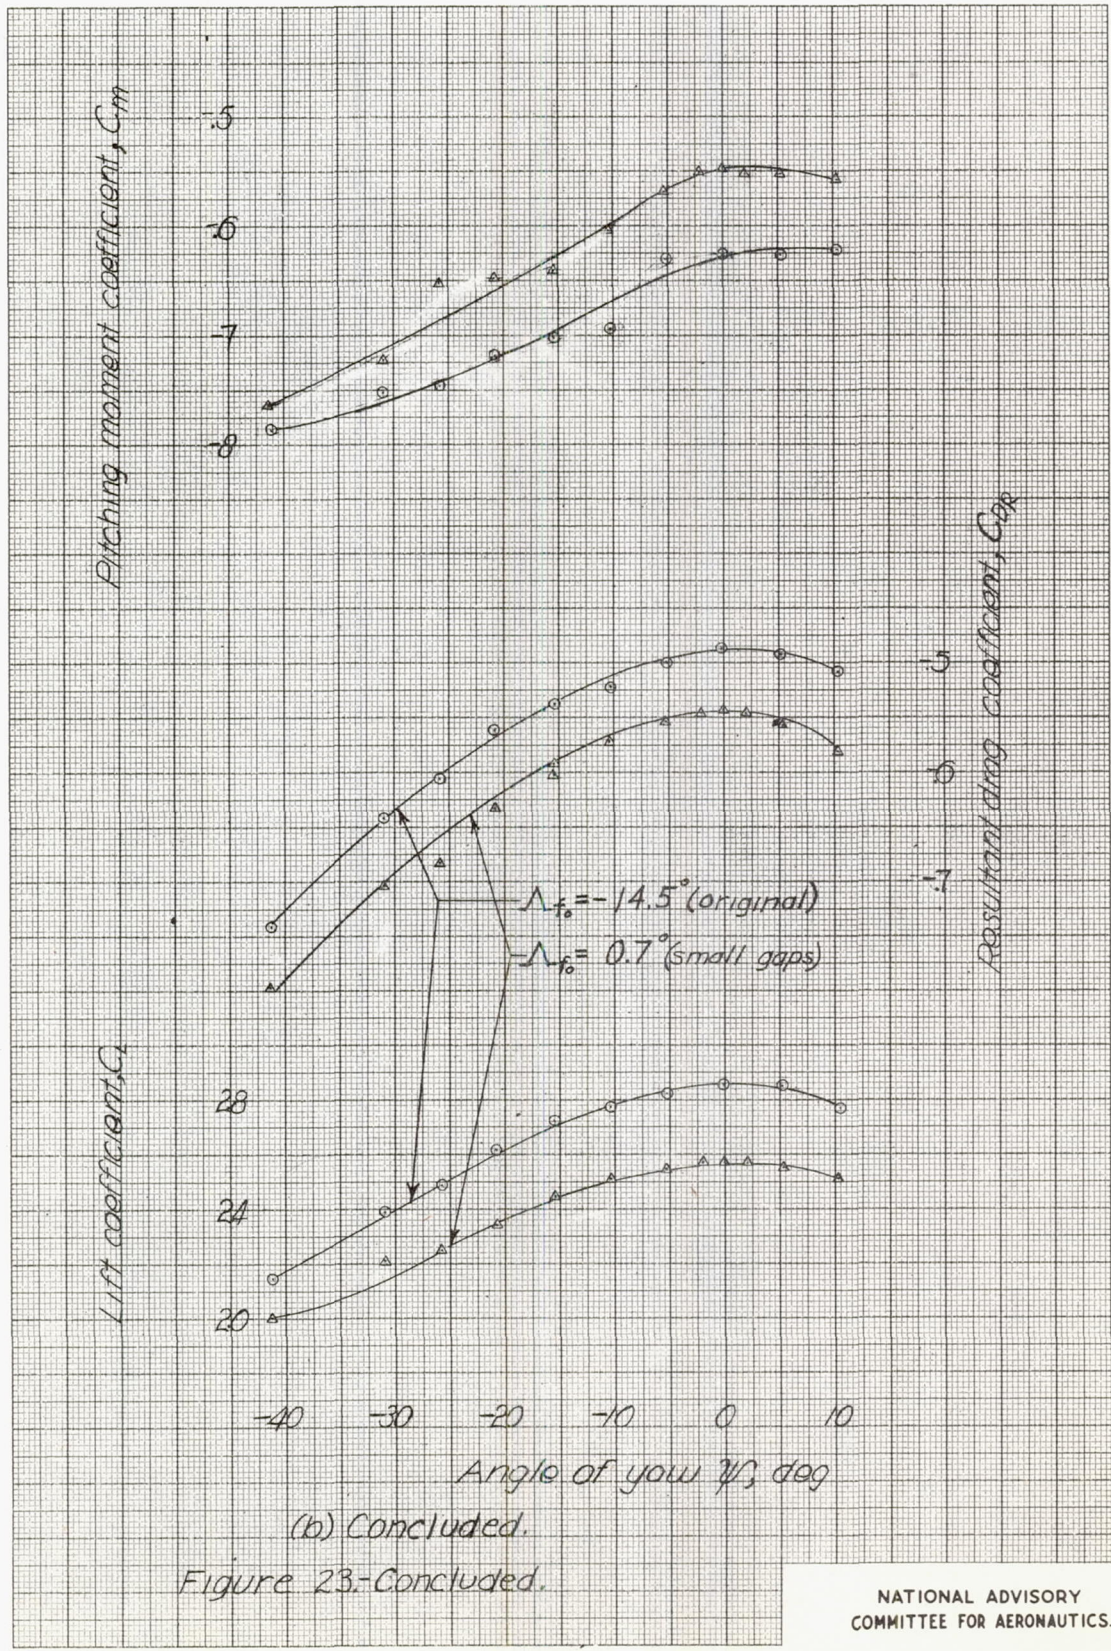

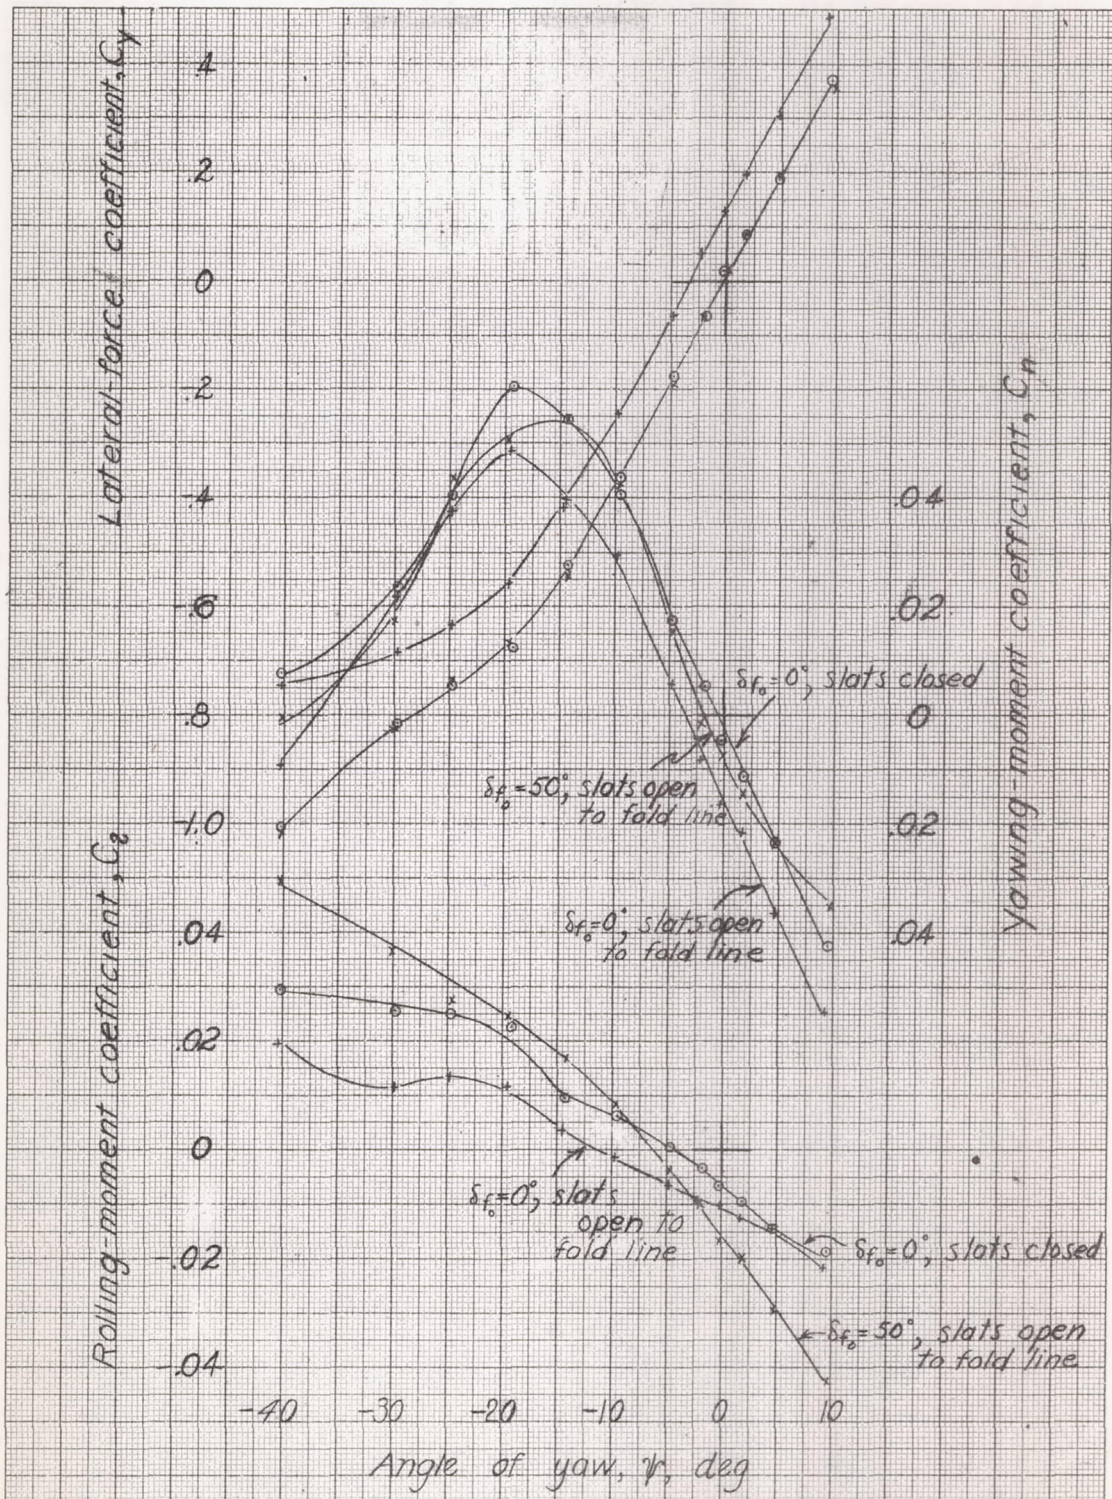


Figure 24—Effect of outboard flap and slats on the aerodynamic characteristics in yaw of the 1/8-scale model of the XB7C-2 airplane. Landing configuration. Take-off power.  $\alpha = 10.5^\circ$ .

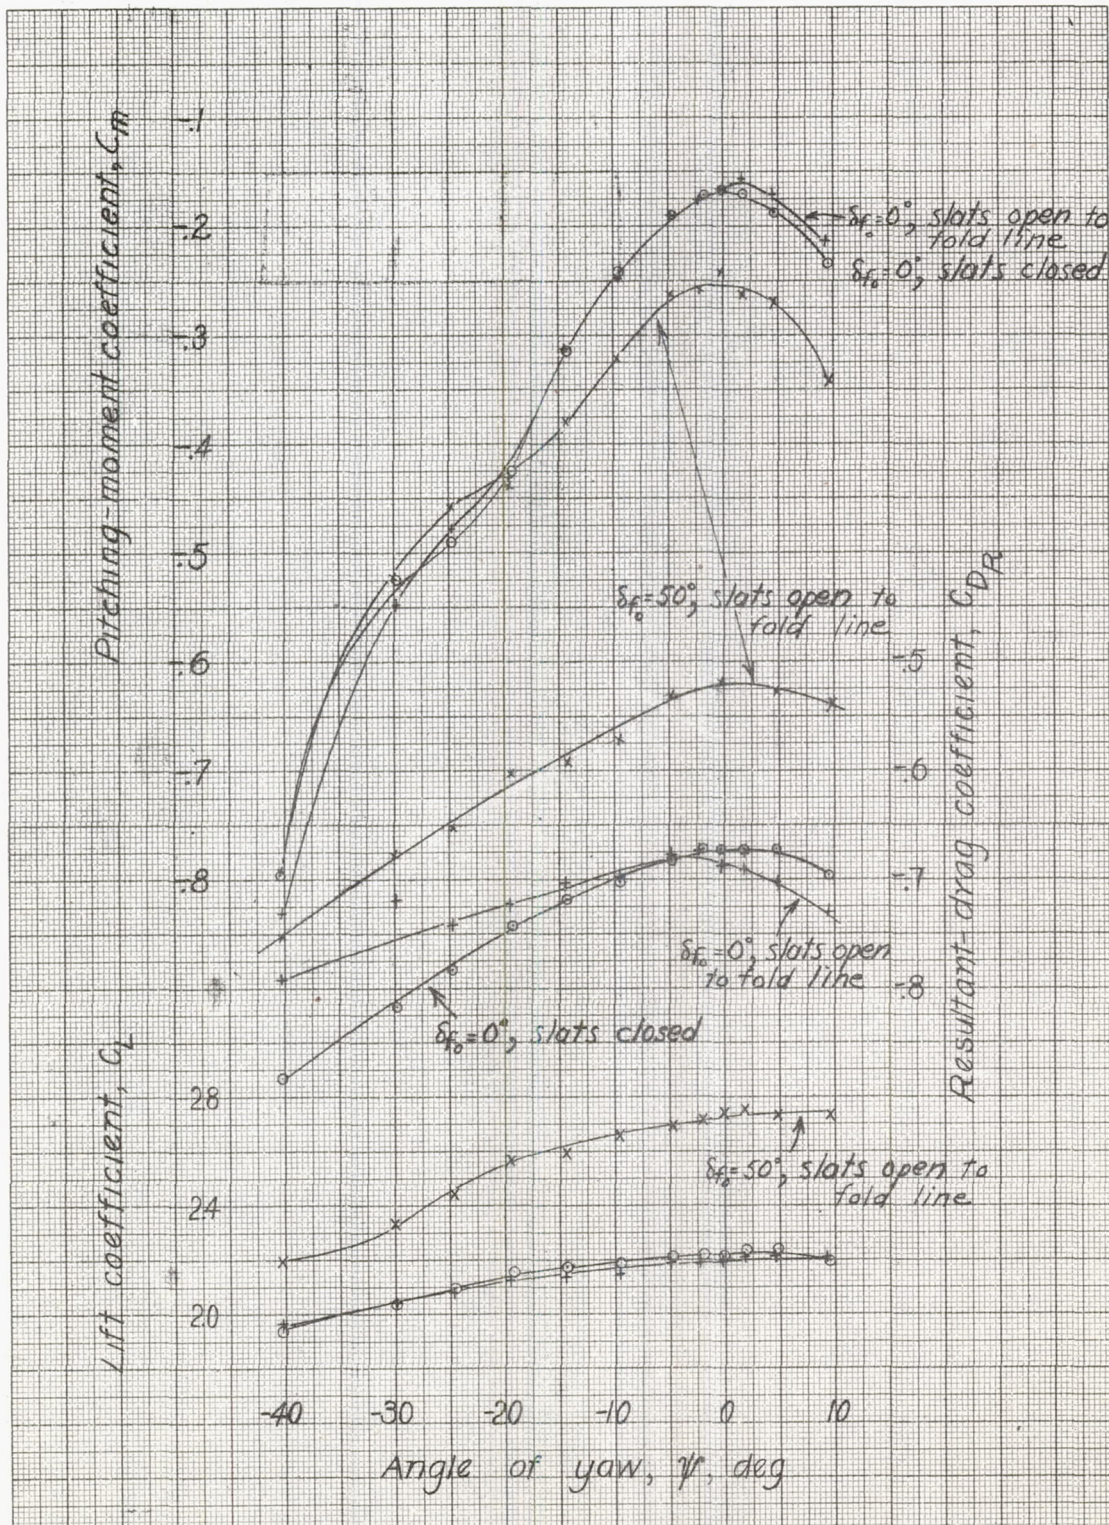


Figure 24-concluded.

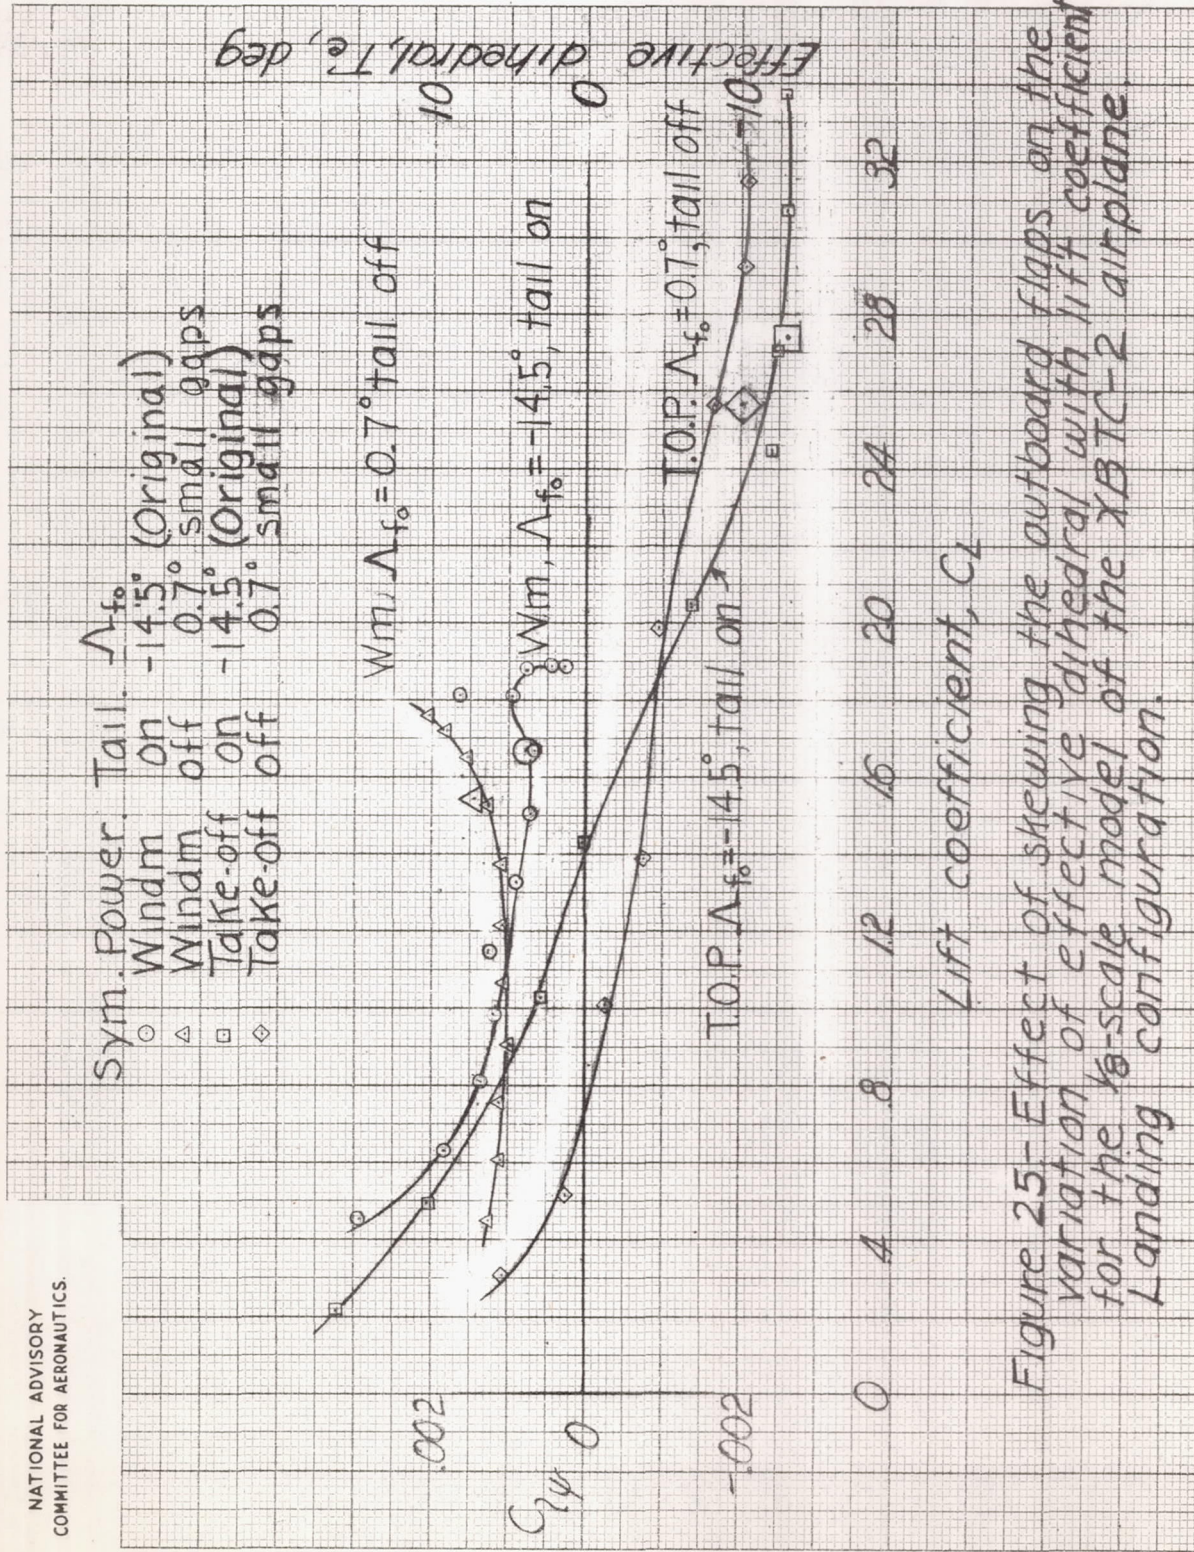


Figure 25- Effect of shewing the outboard flaps on the variation of effective dihedral with lift coefficient for the 1/8-scale model of the XB7C-2 airplane. Landing configuration.



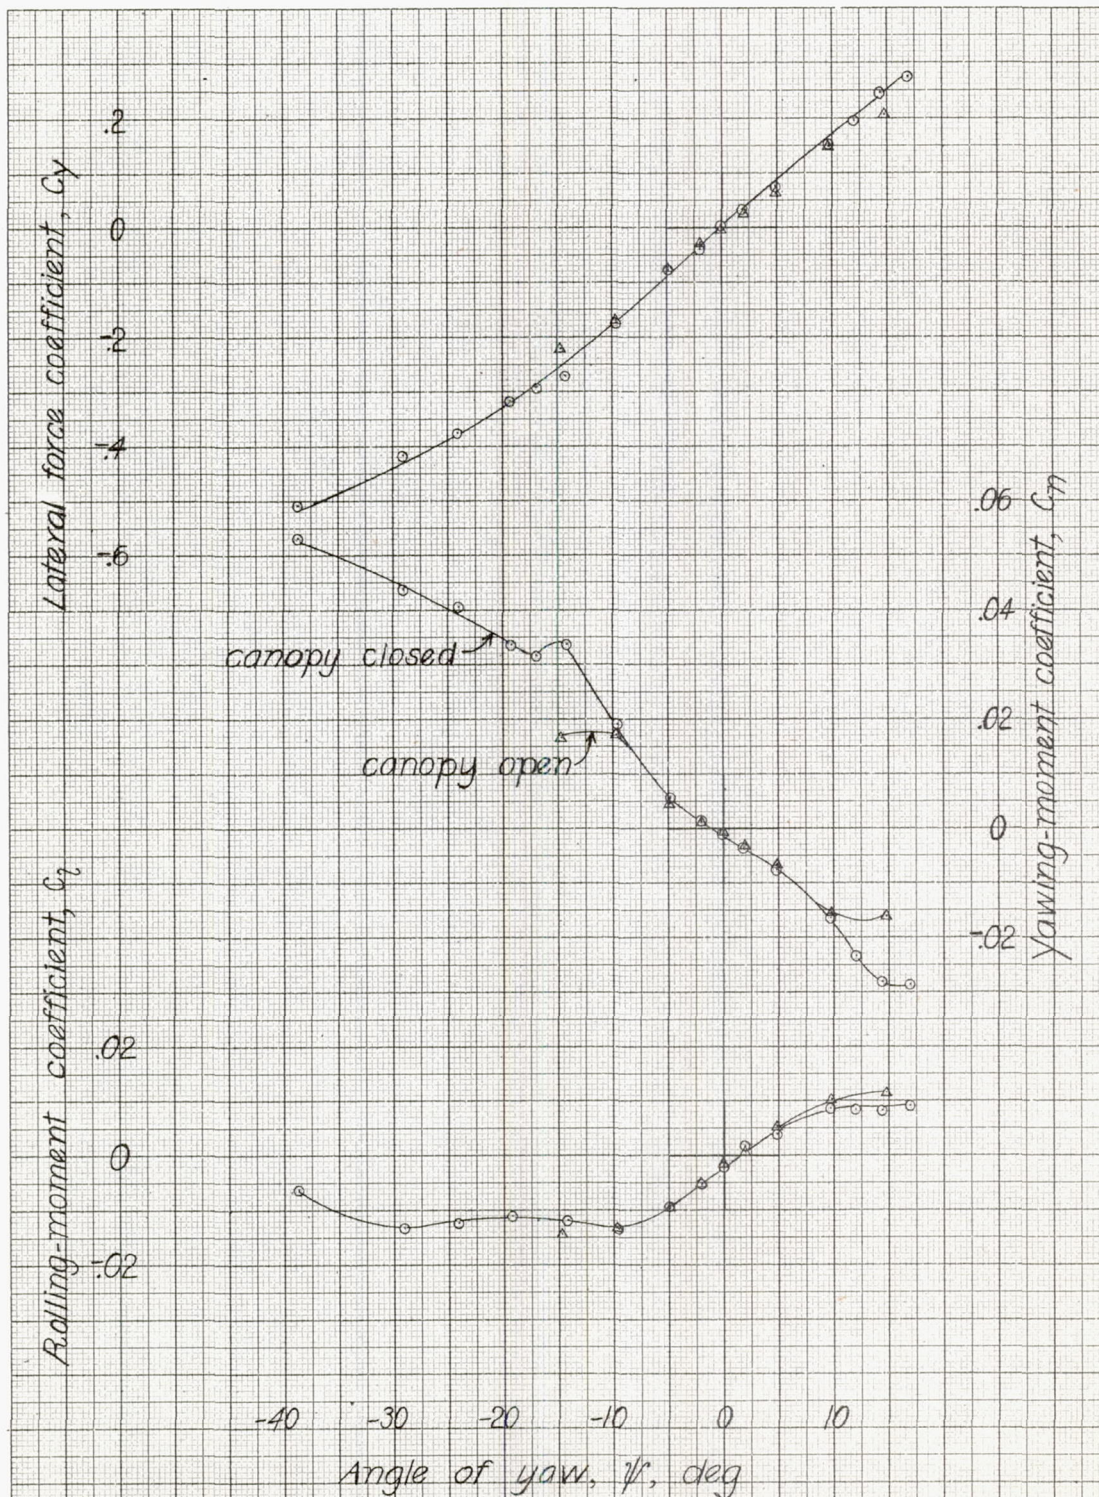


Figure 26.- Effect of canopy opening on the aerodynamic characteristics in yaw of the 1/8-scale model of the XBTC-2 airplane landing configuration. Propeller windmilling.  $\delta_r = 0$ .  $\alpha \approx 9.3^\circ$ .  $C_k \approx 1.7$  at  $\psi = 0^\circ$ .

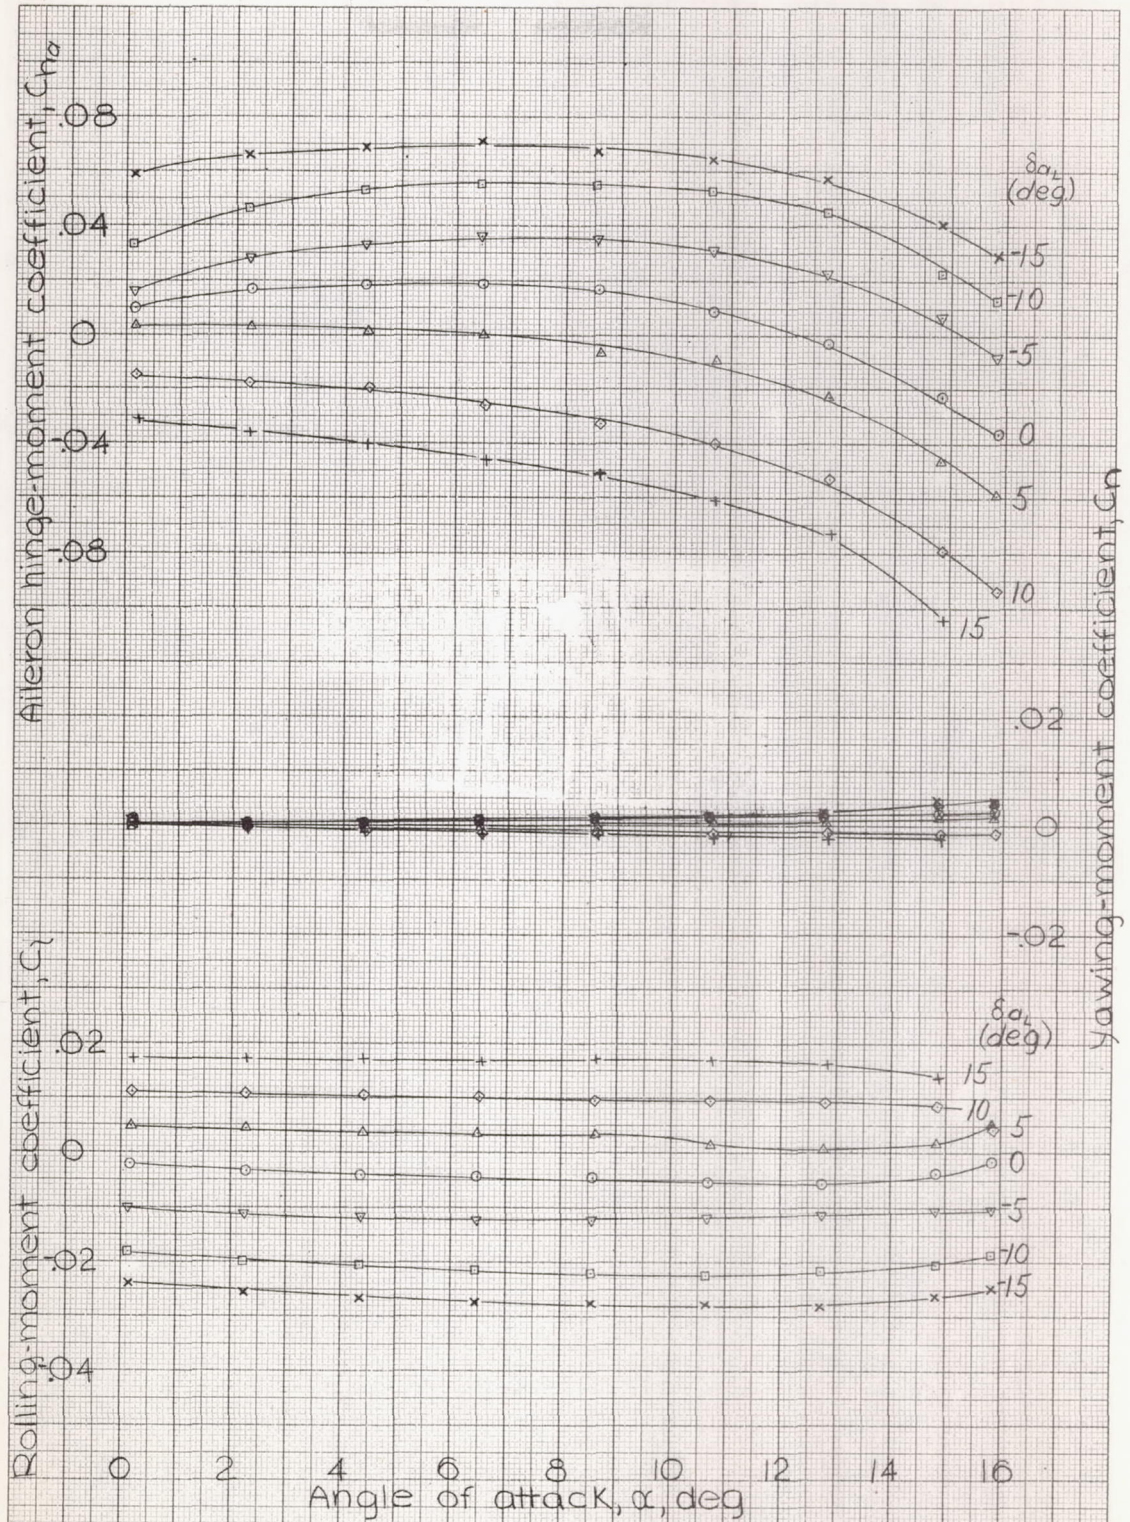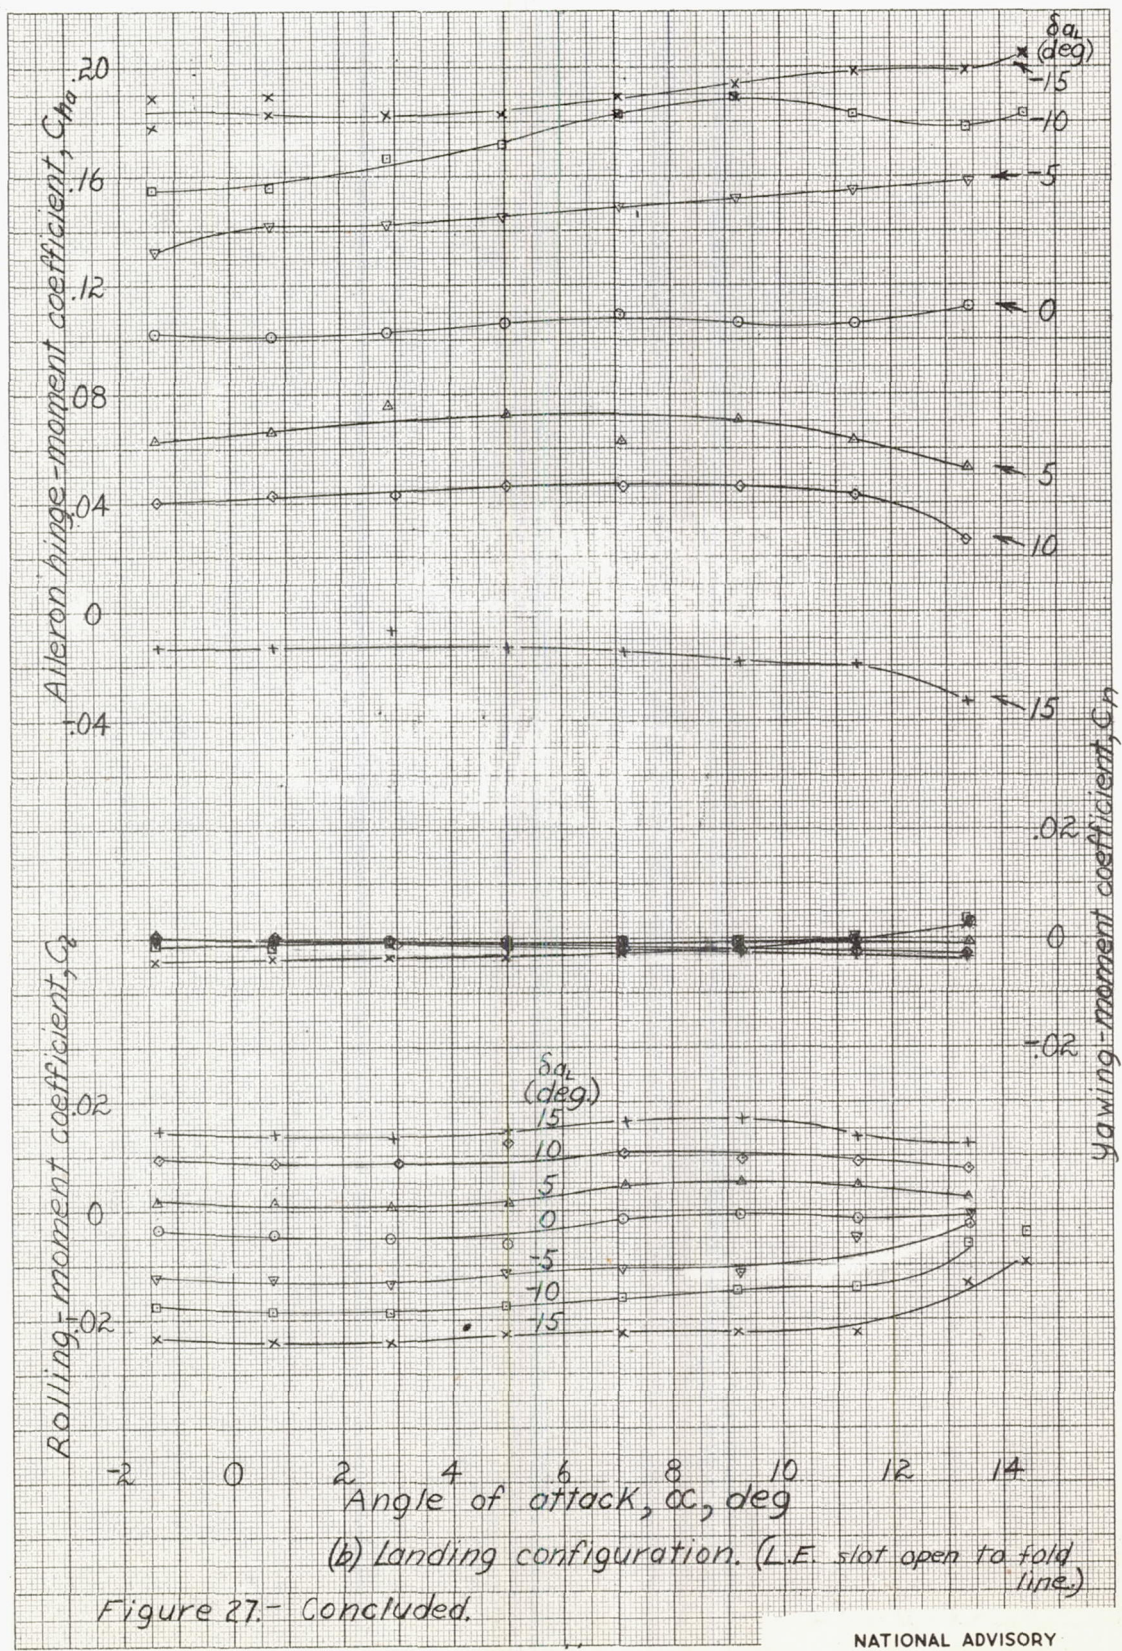

(a) Cruising configuration.  
 Figure 27: Aileron characteristics of the 1/3-scale model of the XB7C-2 airplane. Transition fixed at  $10 C_w$ . Original wing.





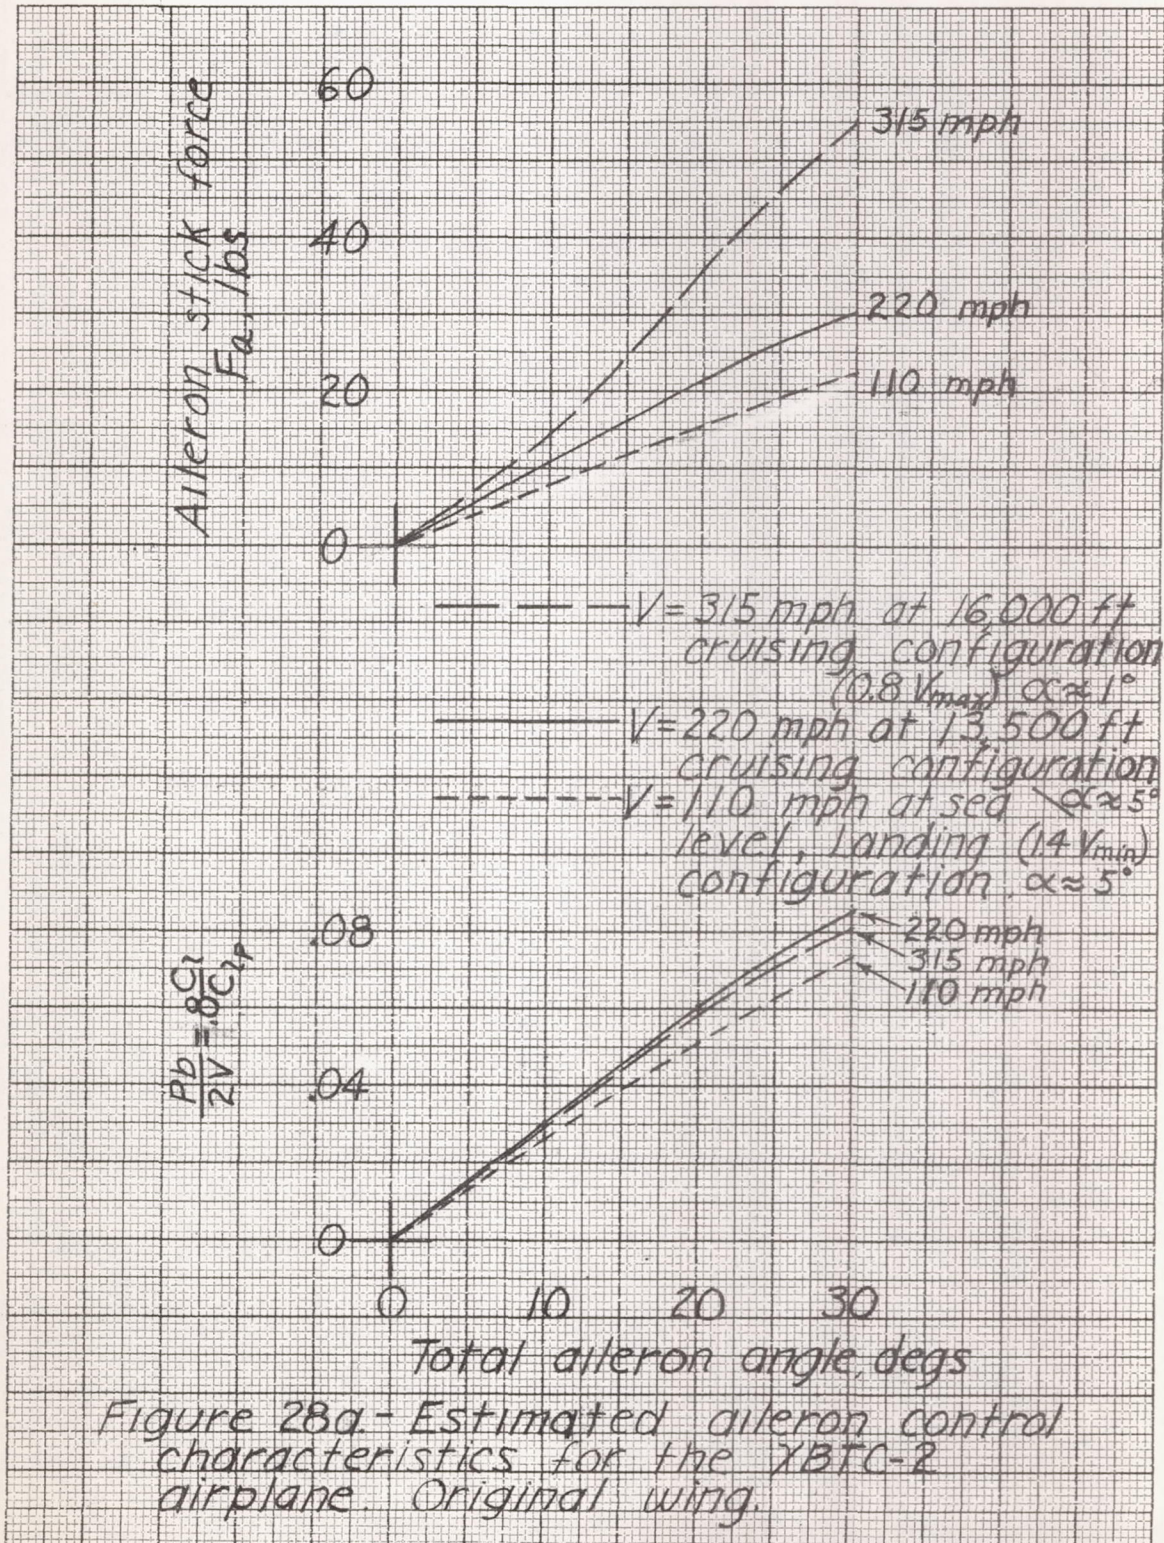


Figure 28a - Estimated aileron control characteristics for the XBTC-2 airplane. Original wing.


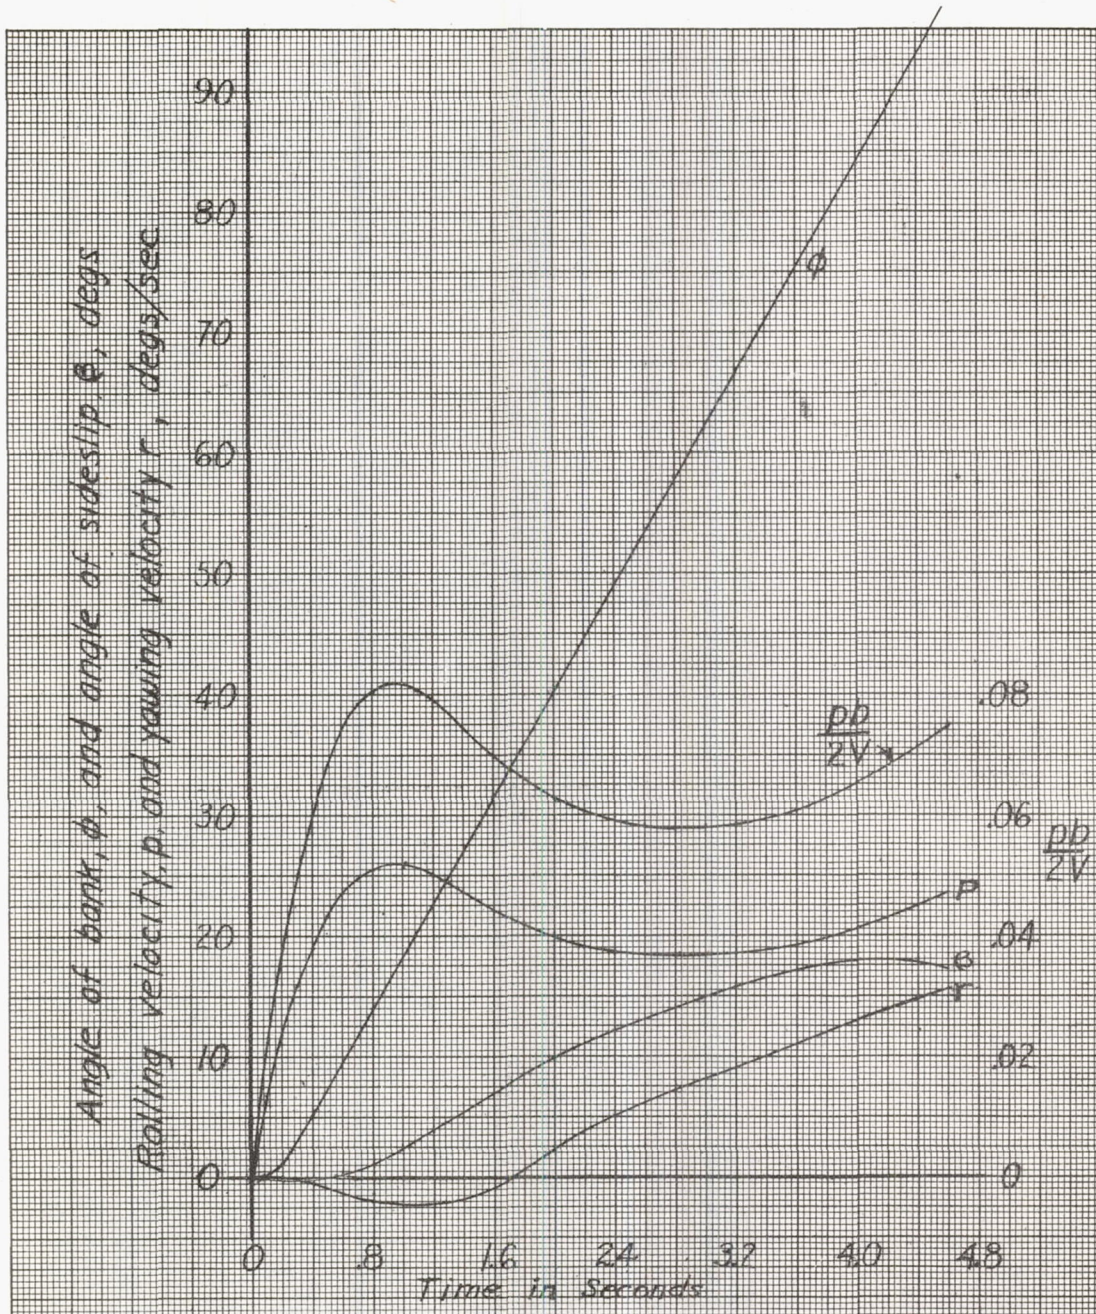


Figure 28b-Theoretical time history of the rolling, sideslipping, and yawing motions of the XB1C-2 airplane as a consequence of an abrupt full-right aileron deflection.  $V=94.4$  mph at sea level. Landing configuration. Swept-back outer panels Propeller windmilling  $\delta_f=0^\circ$ .

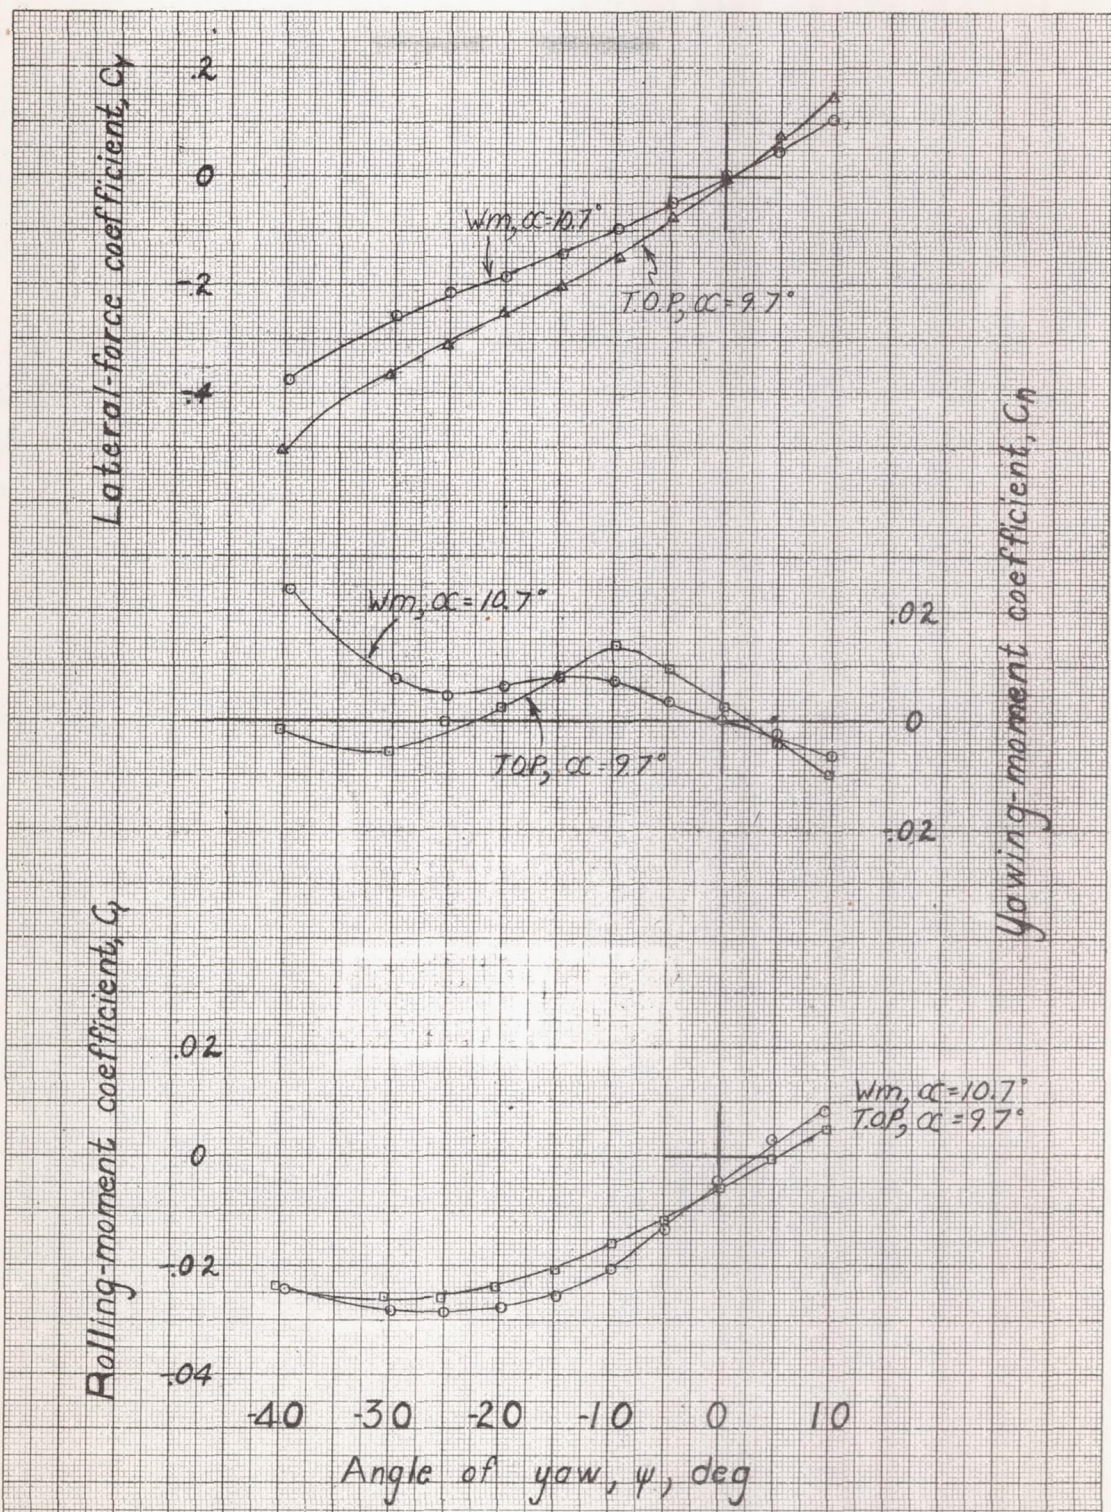

(a) Cruising configuration, Original tail and dorsal.

Figure 29.-Effect of free rudder on the aerodynamic characteristics in yaw of the 1/8-scale model of the XB7C-2 airplane. Rudder stops  $\pm 30^\circ$ .




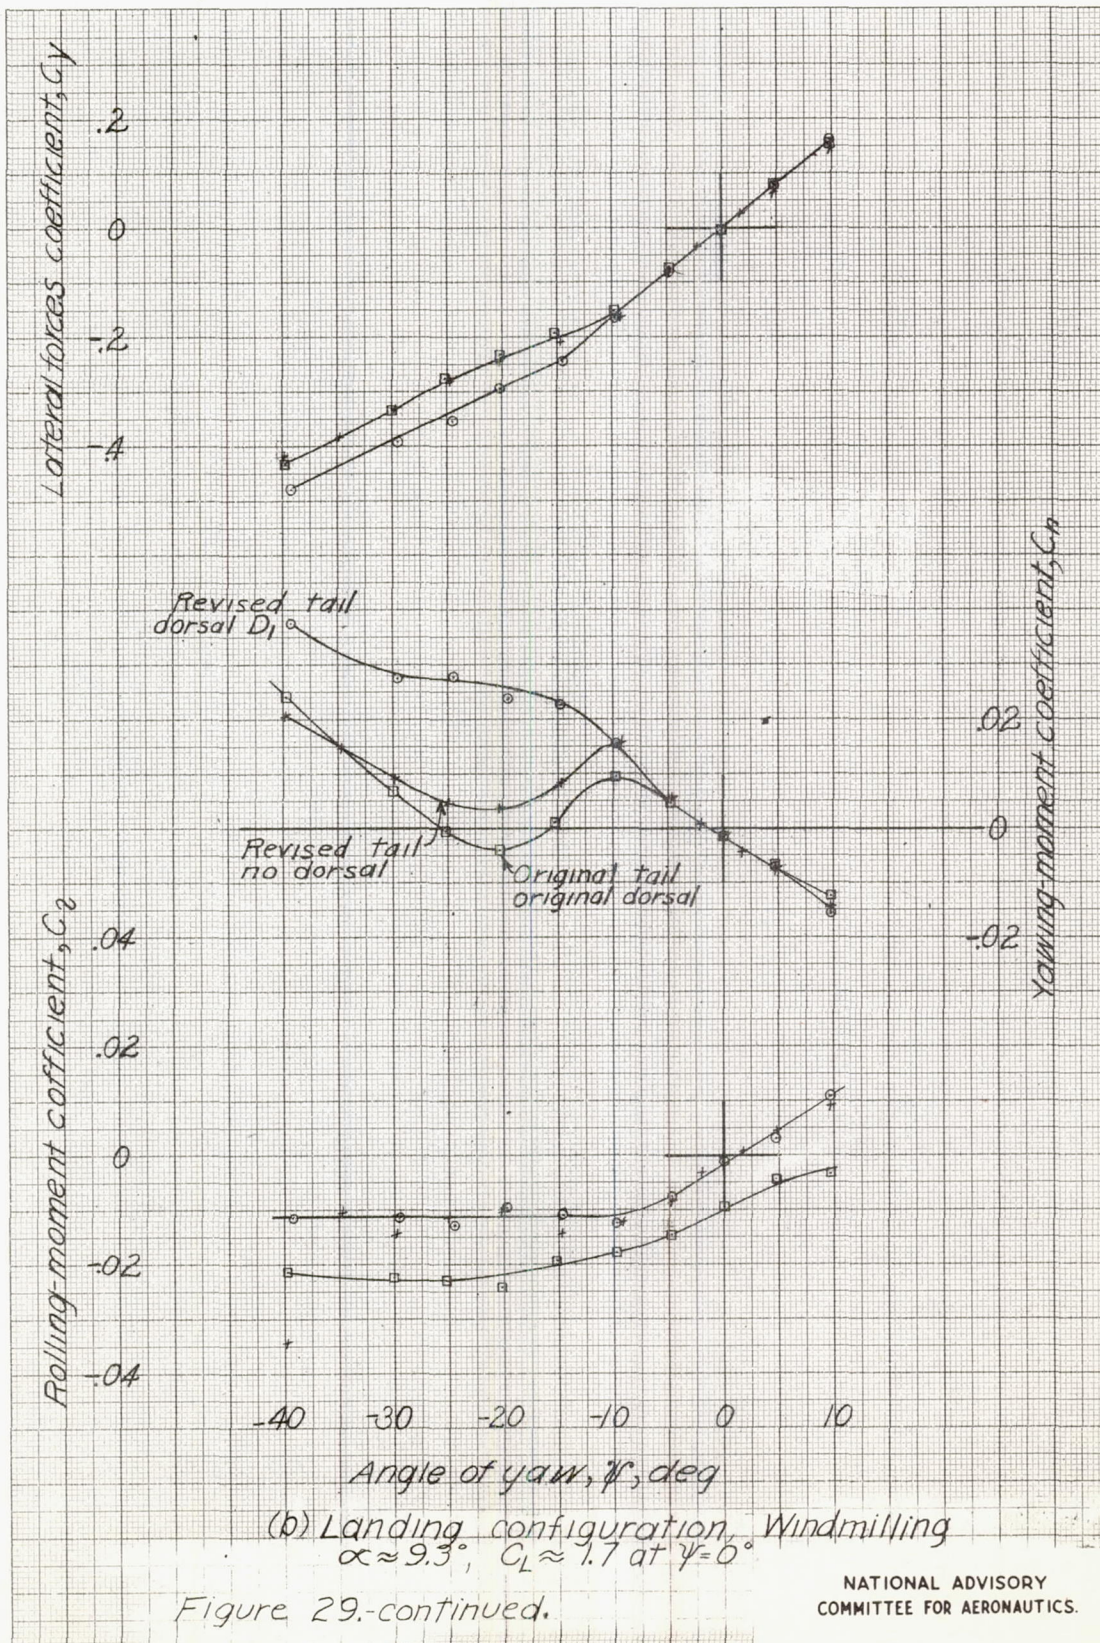


Figure 29.-continued.

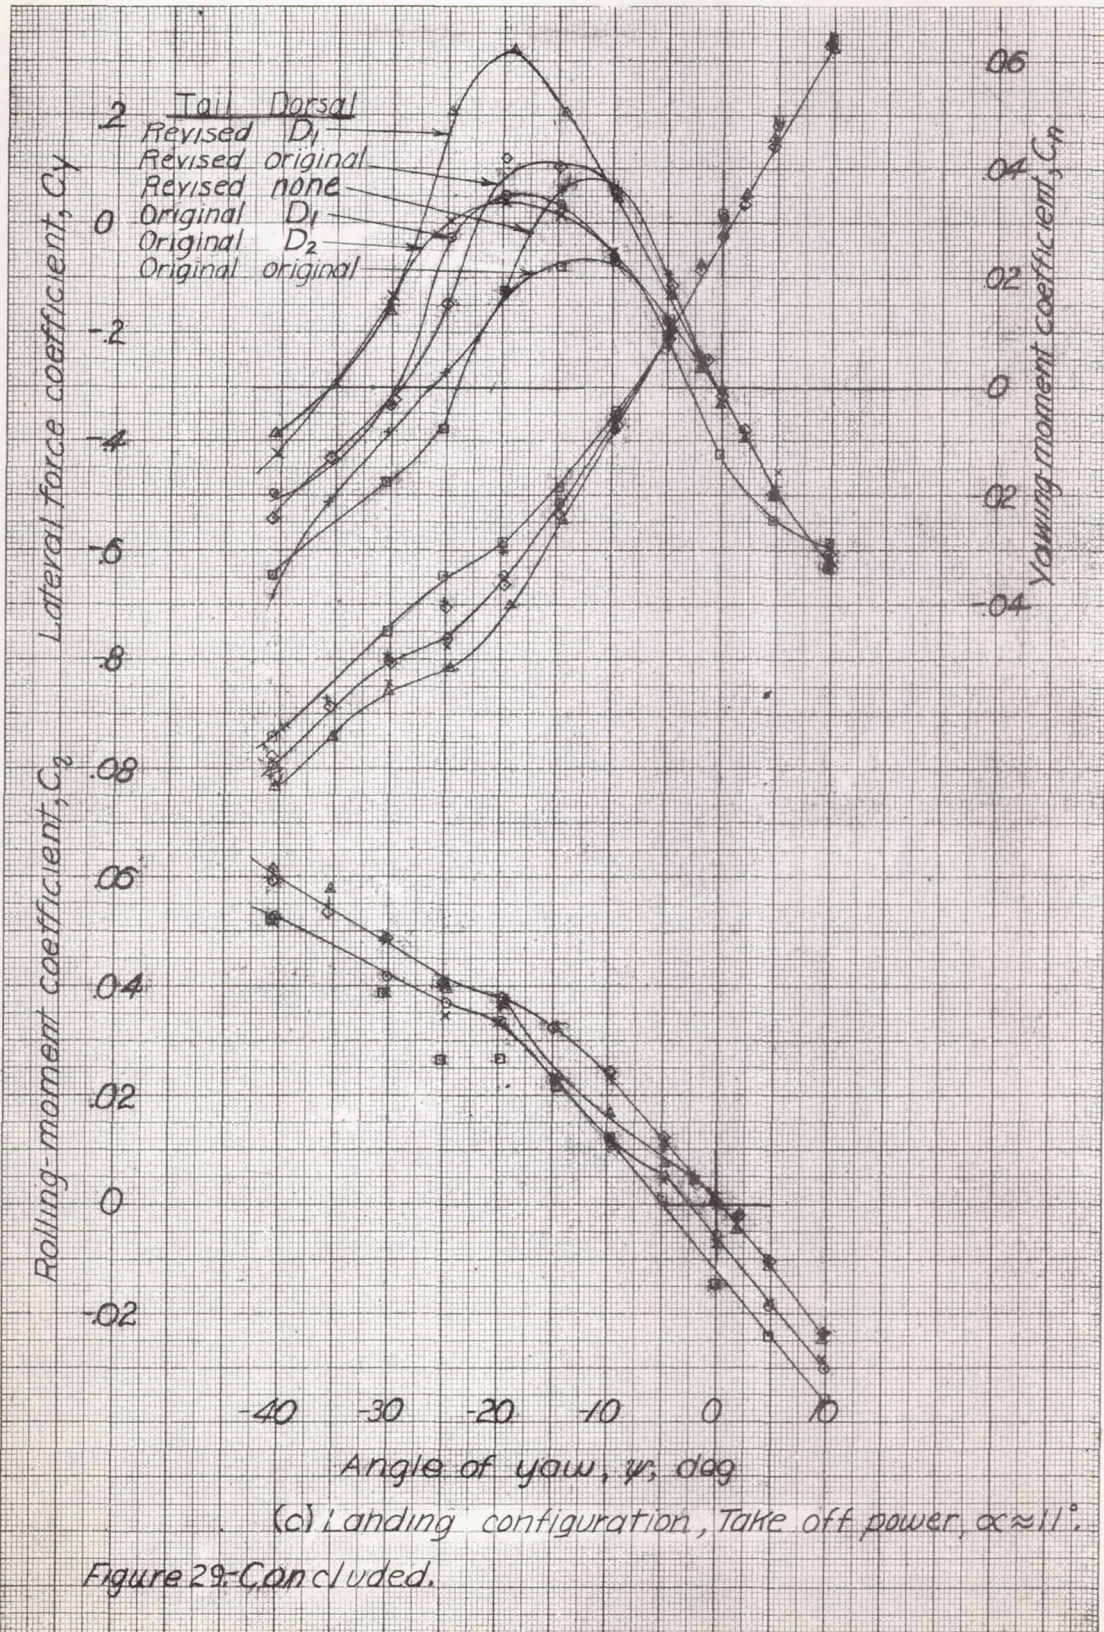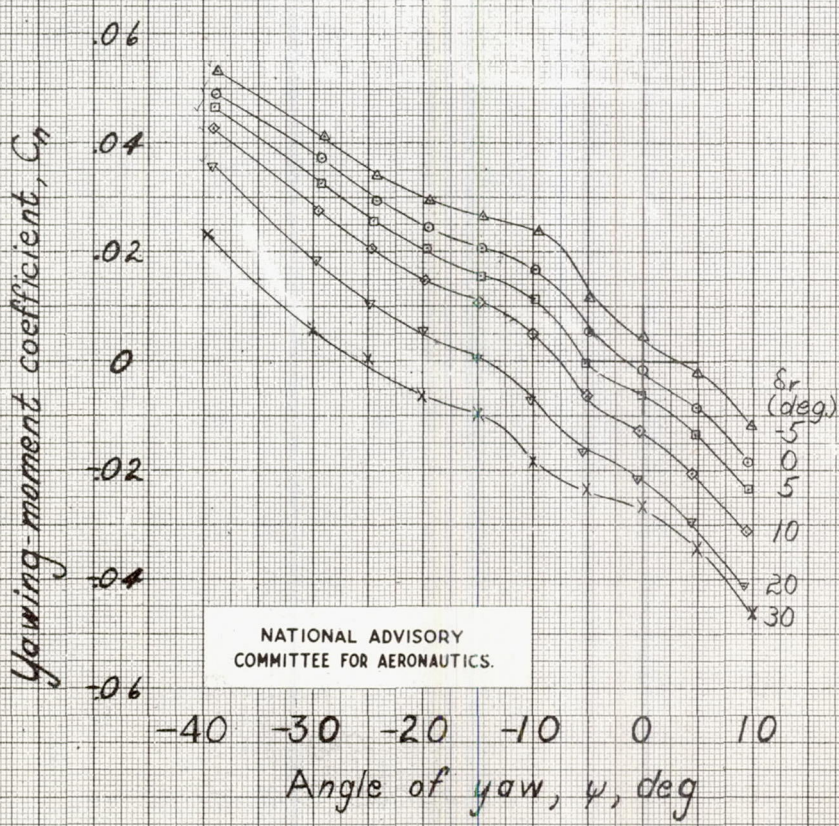

(c) Landing configuration, Take off power,  $\alpha \approx 11^\circ$ .

Figure 29- Concluded.

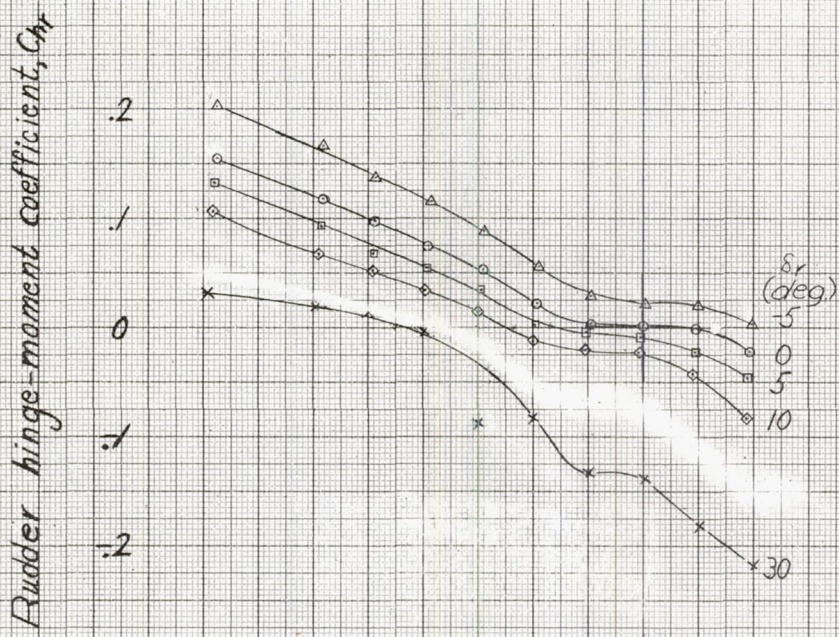

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS.

$C_L \approx 1.66$  at  $\psi = 0^\circ$

Figure 30- Effect of rudder deflection on the aerodynamic characteristics in yaw of the 1/8-scale model of the XBTC-2 airplane. Windmilling, landing configuration. Original vertical tail.  $\alpha \approx 9.2$ . Original dorsal.

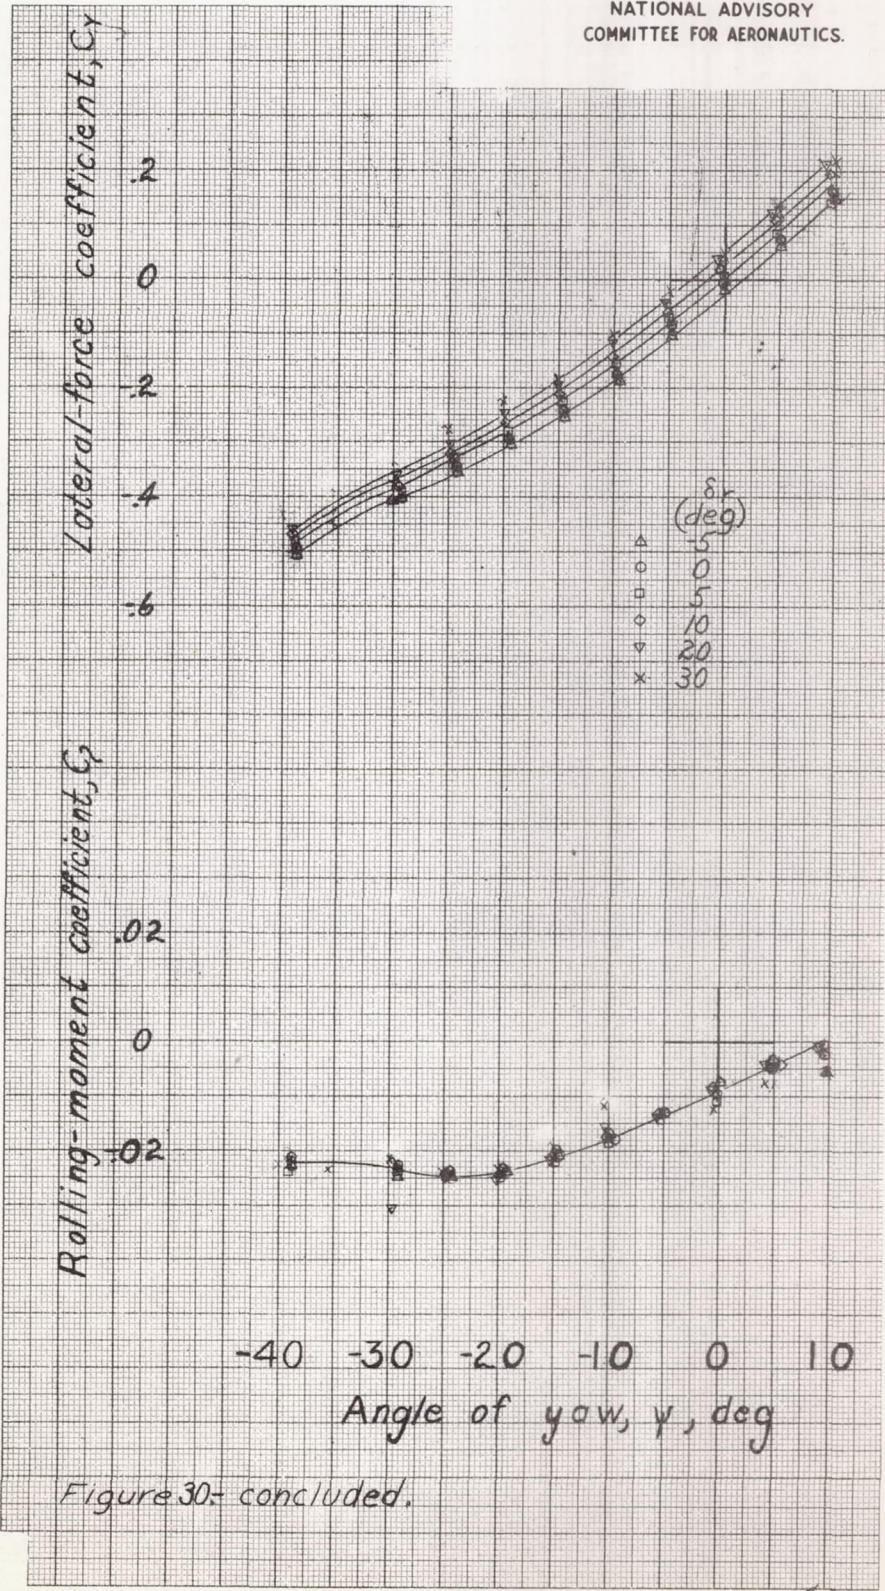


Figure 30- concluded.

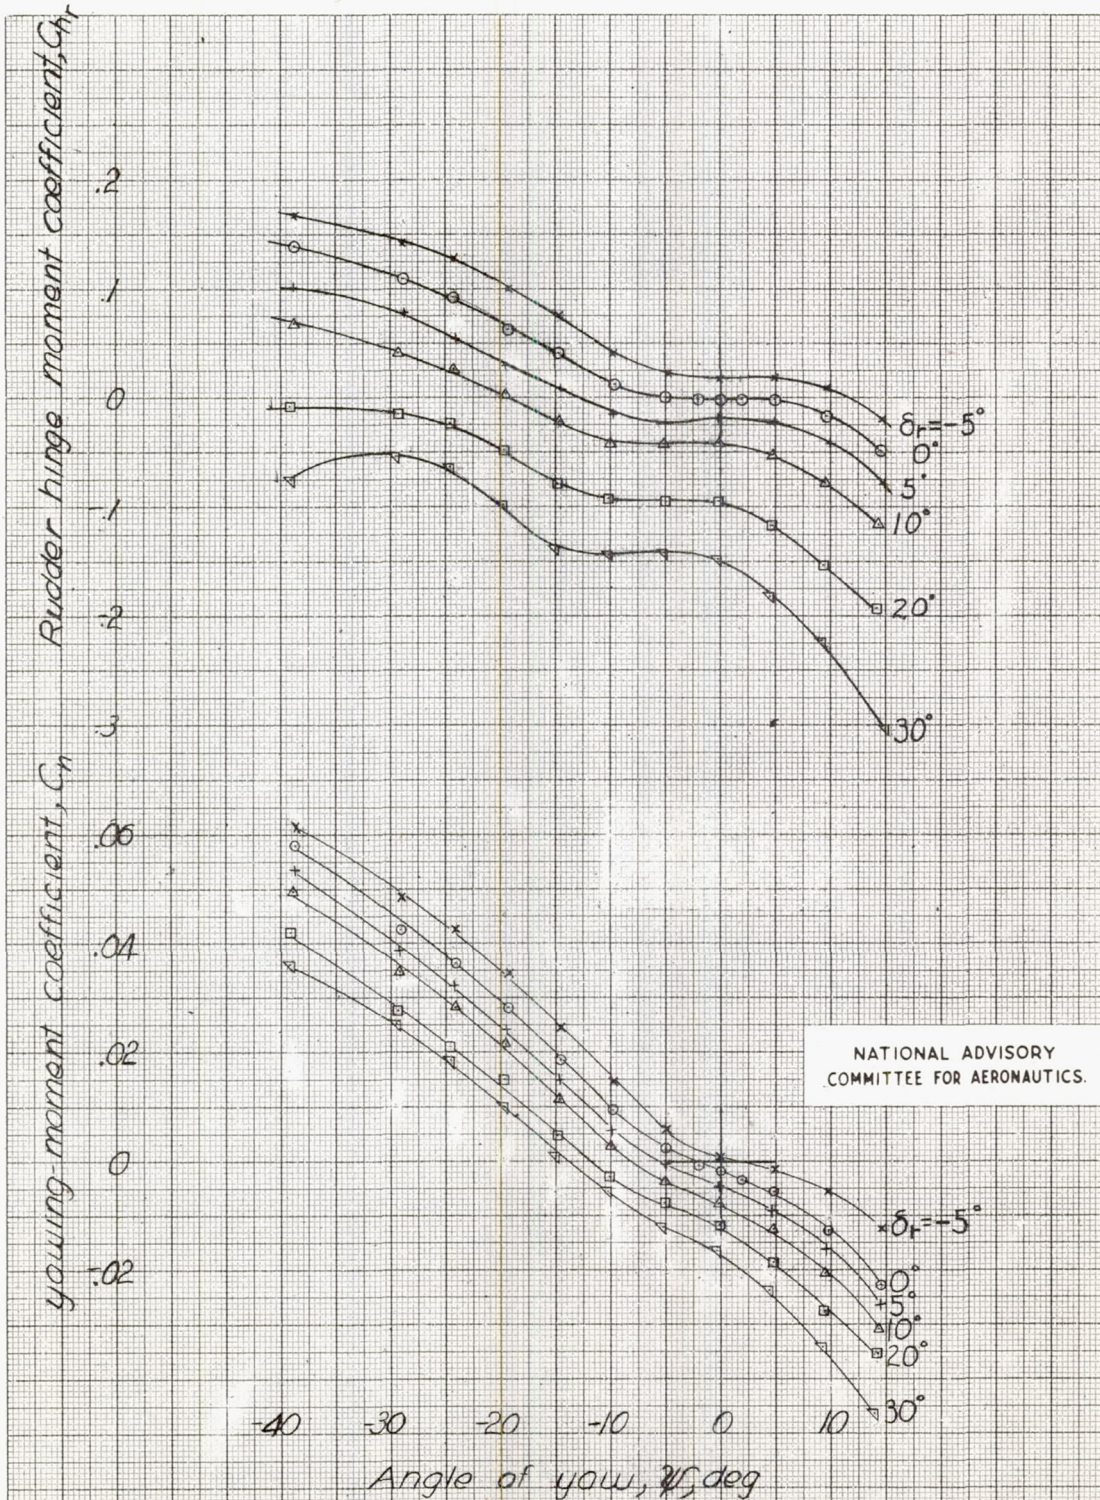


Figure 31. Effect of rudder deflection on the aerodynamic characteristics in yaw of the  $\frac{1}{8}$ -scale model of the XB7C-2 airplane with the revised vertical tail  $\alpha \approx 6.5$  Cruising configuration. Propeller windmilling. Dorsal D.  $C_L \approx 0.66$  at  $\psi = 0^\circ$



NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS.


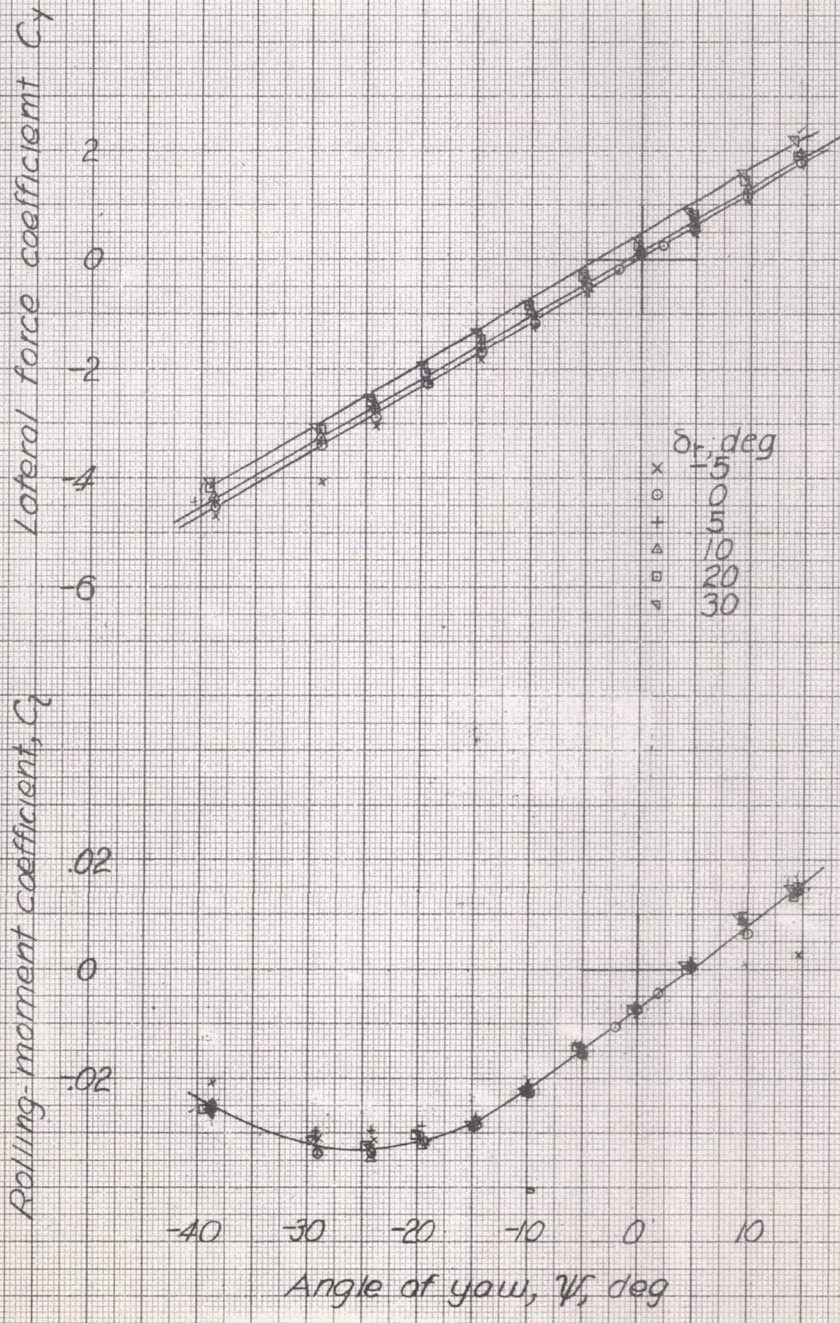


Figure 31.- Concluded.

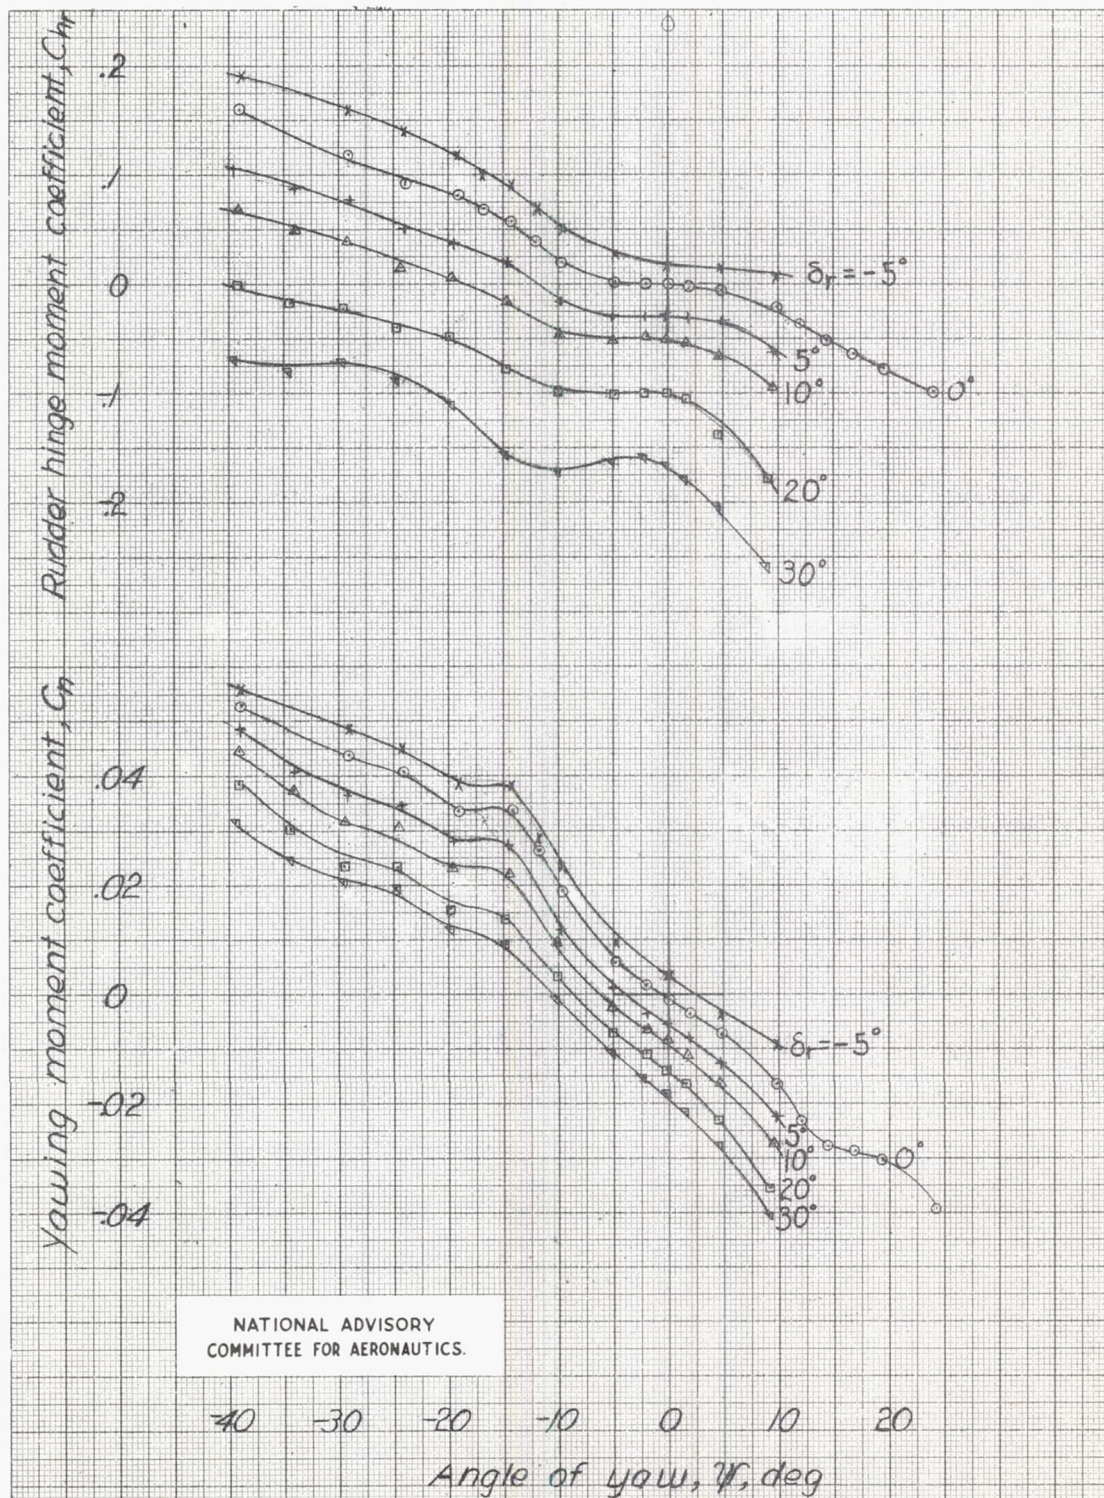

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS.

$C_L \approx 1.71$  at  $\psi = 0^\circ$   
 Figure 32.- Effect of rudder deflection on the aerodynamic characteristics in yaw of the  $\frac{1}{8}$ -scale model of the XB7C-2 airplane with the revised vertical tail.  $\alpha \approx 9.3^\circ$  Landing configuration. Propeller windmilling. Dorsal  $D_r$ .

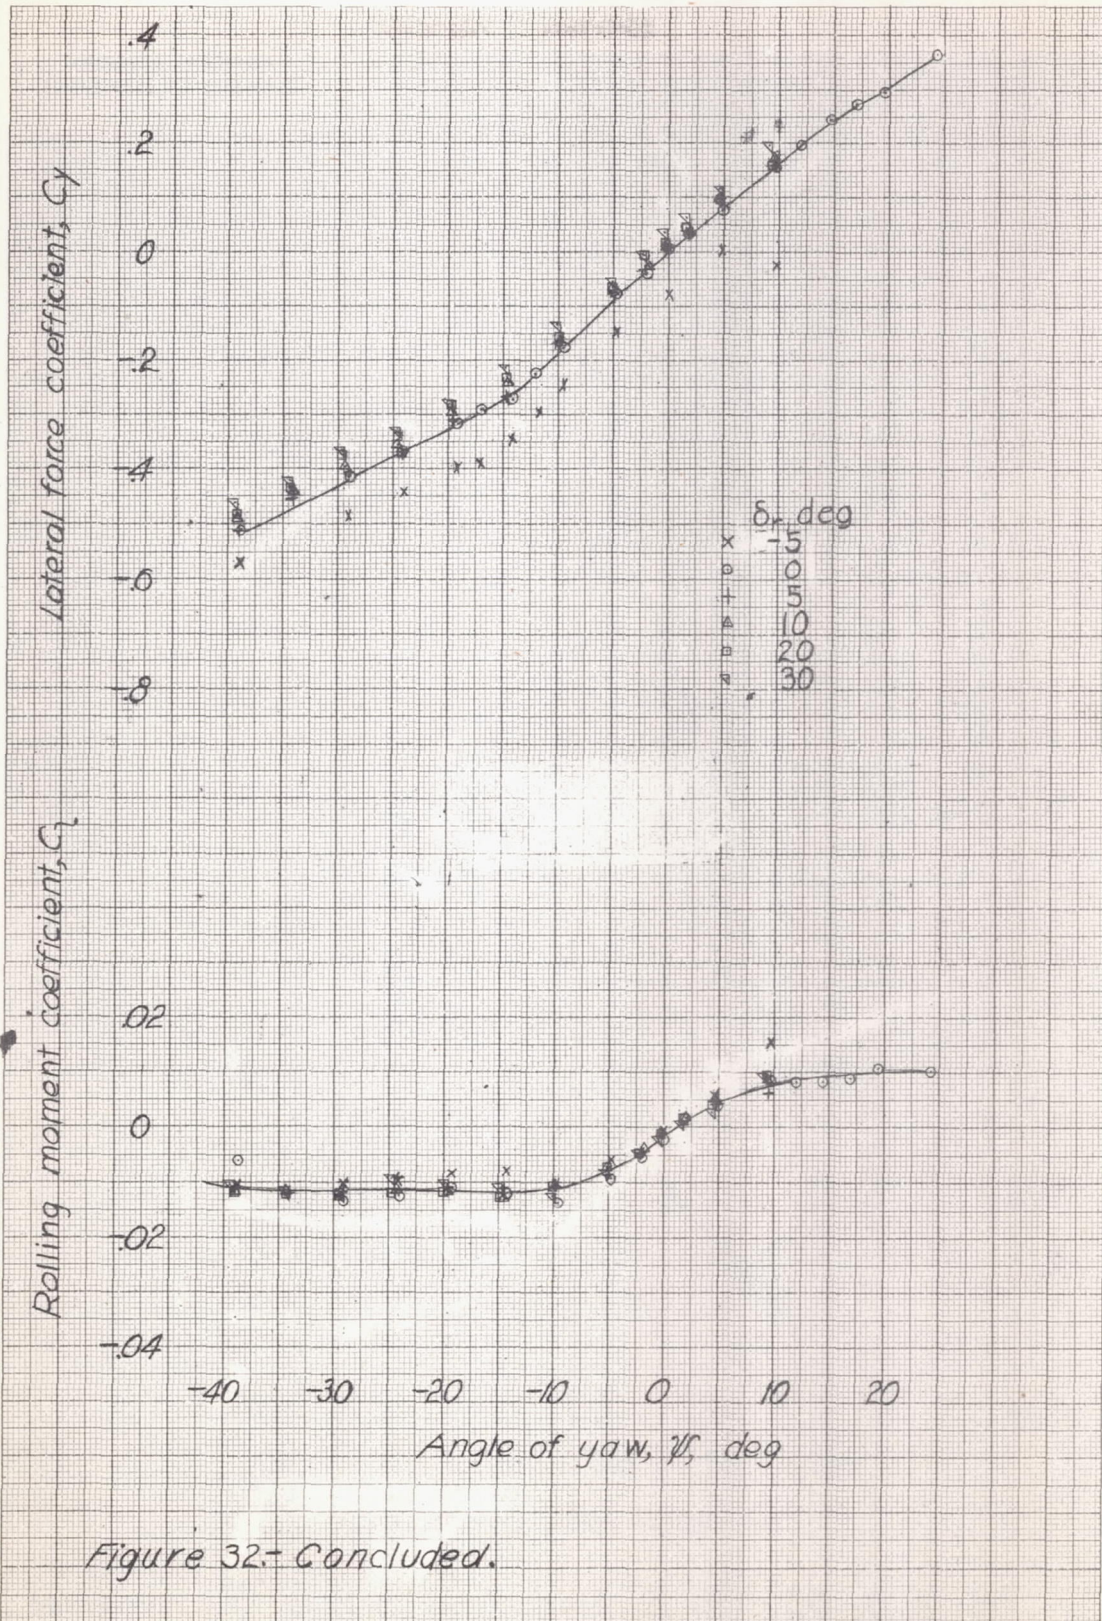


Figure 32.- Concluded.

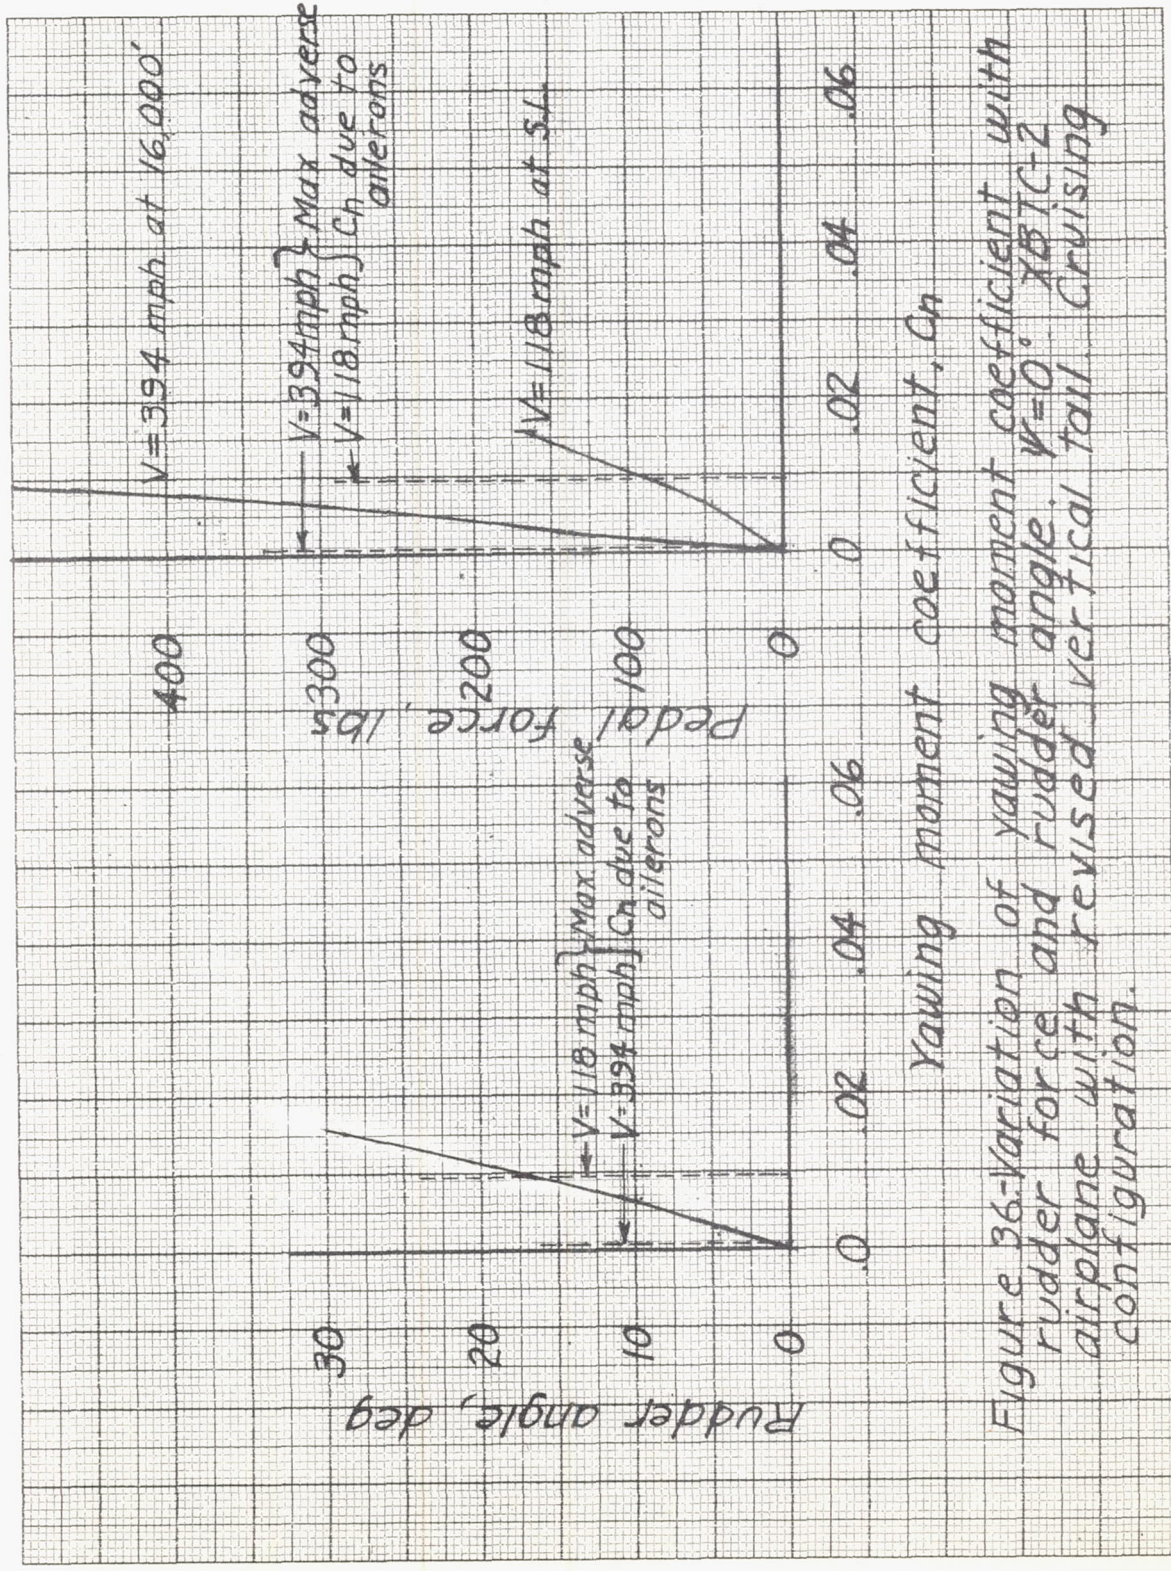


Figure 36: Variation of yawing moment coefficient with rudder force and rudder angle.  $V=0$ . XB7C-2 airplane with revised vertical tail configuration.

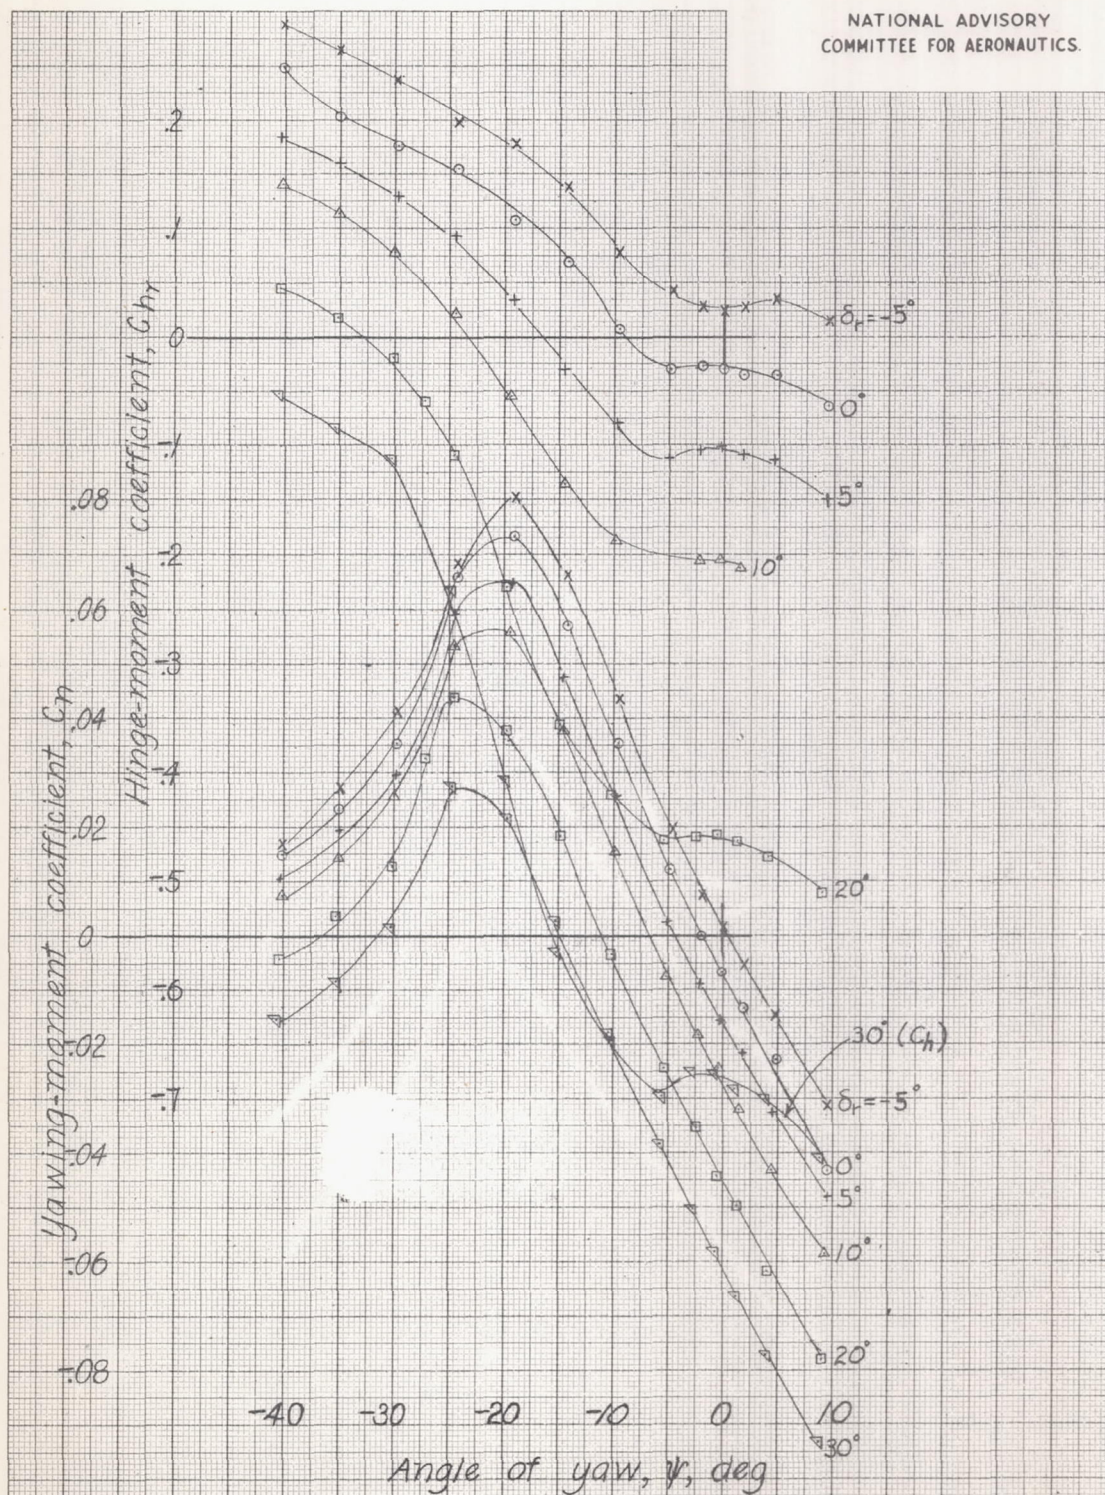


Figure 33.-Effect of rudder deflection on the aerodynamic characteristics in yaw of the  $\frac{1}{3}$ -scale model of the XBTC-2 airplane with the revised vertical tail, as well as Landing configuration. Take-off power. Dorsal  $D_1$ .  $C_L \approx 2.77$  at  $\psi = 0^\circ$


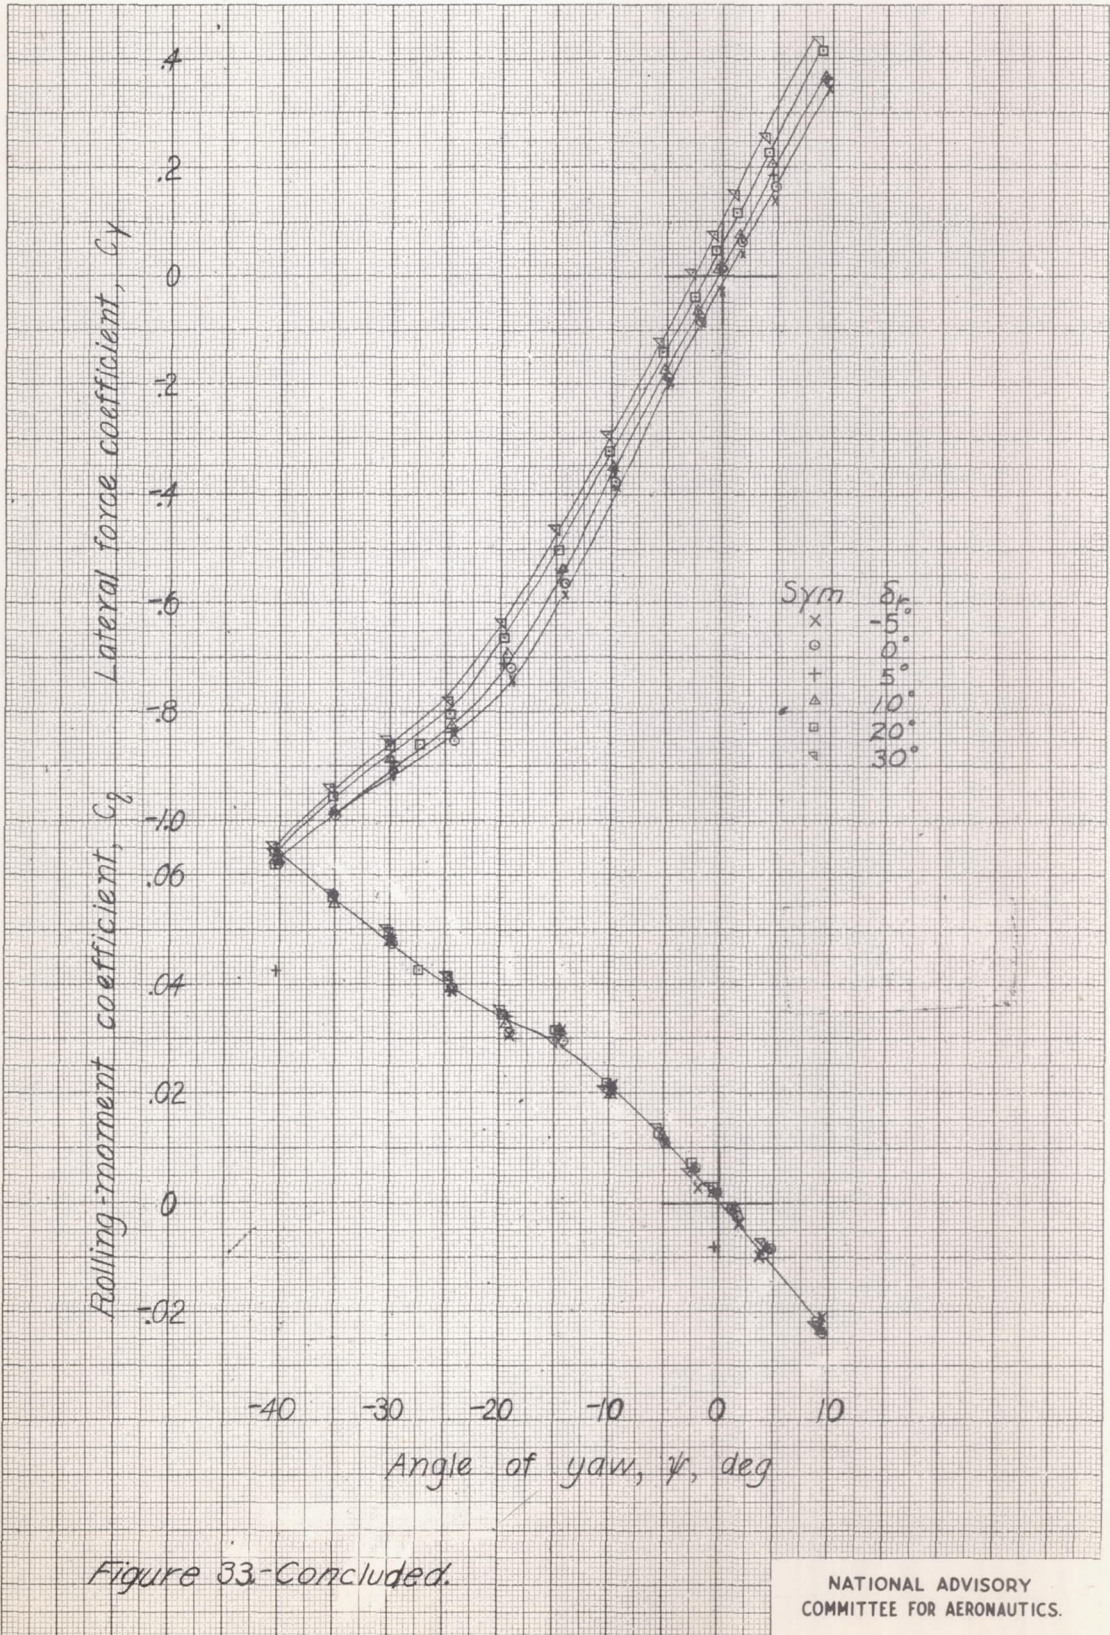


Figure 33-Concluded.

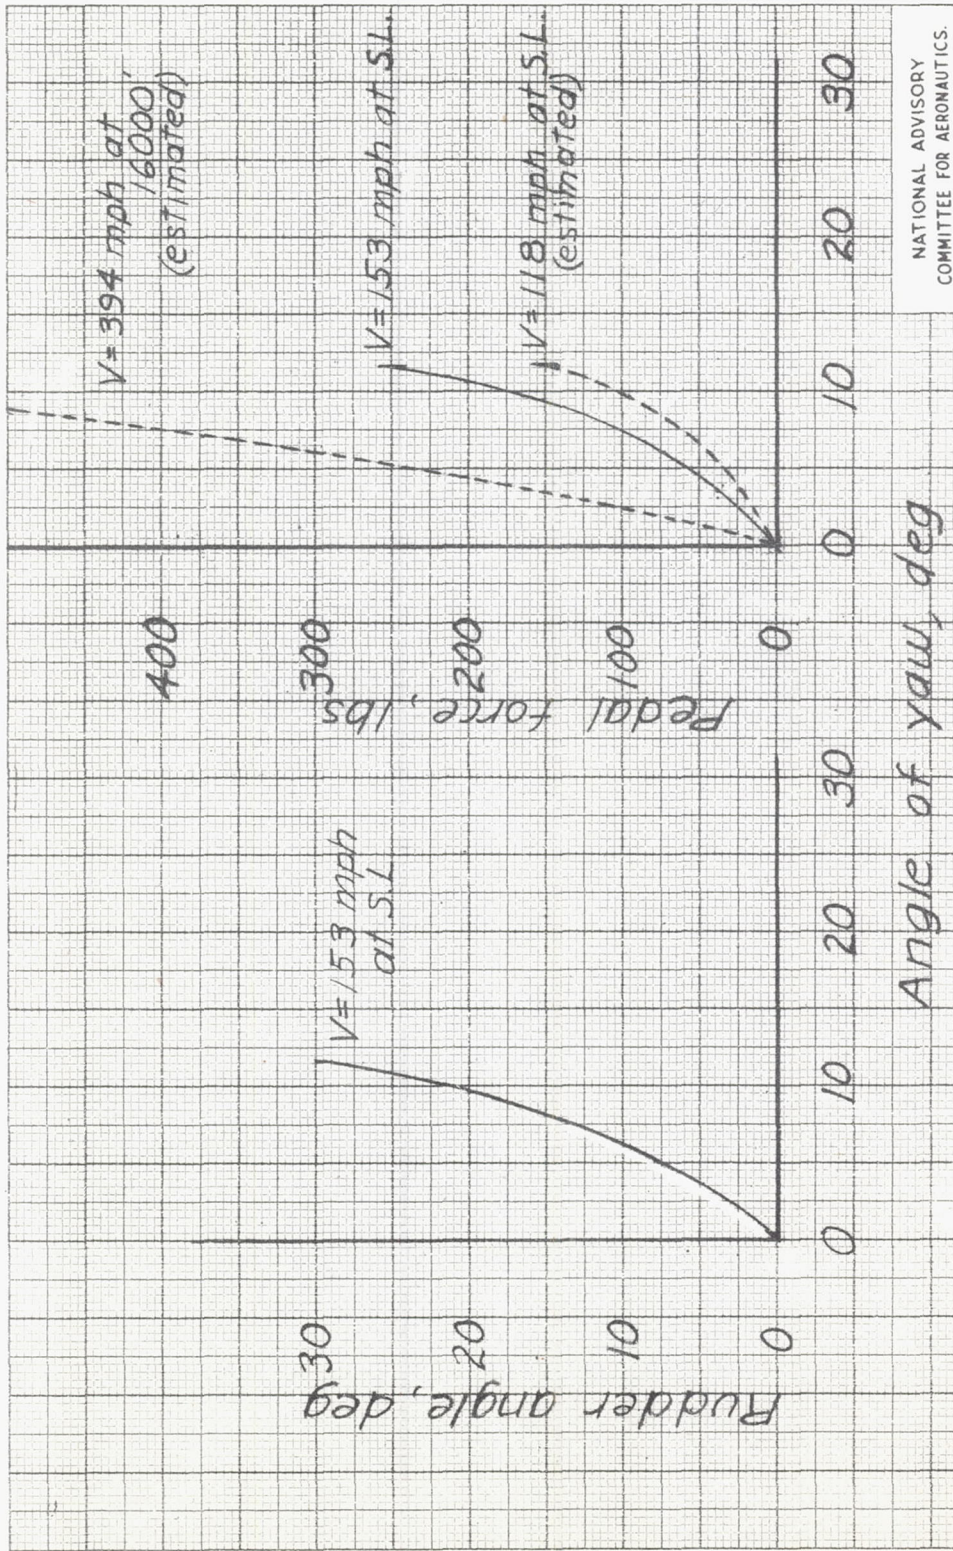

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS.

Figure 34-Variation of rudder force and rudder deflection for trim with angle of yaw. XB7C-2 airplane with revised vertical tail. Cruising configuration. Dorsal Di Windmilling.

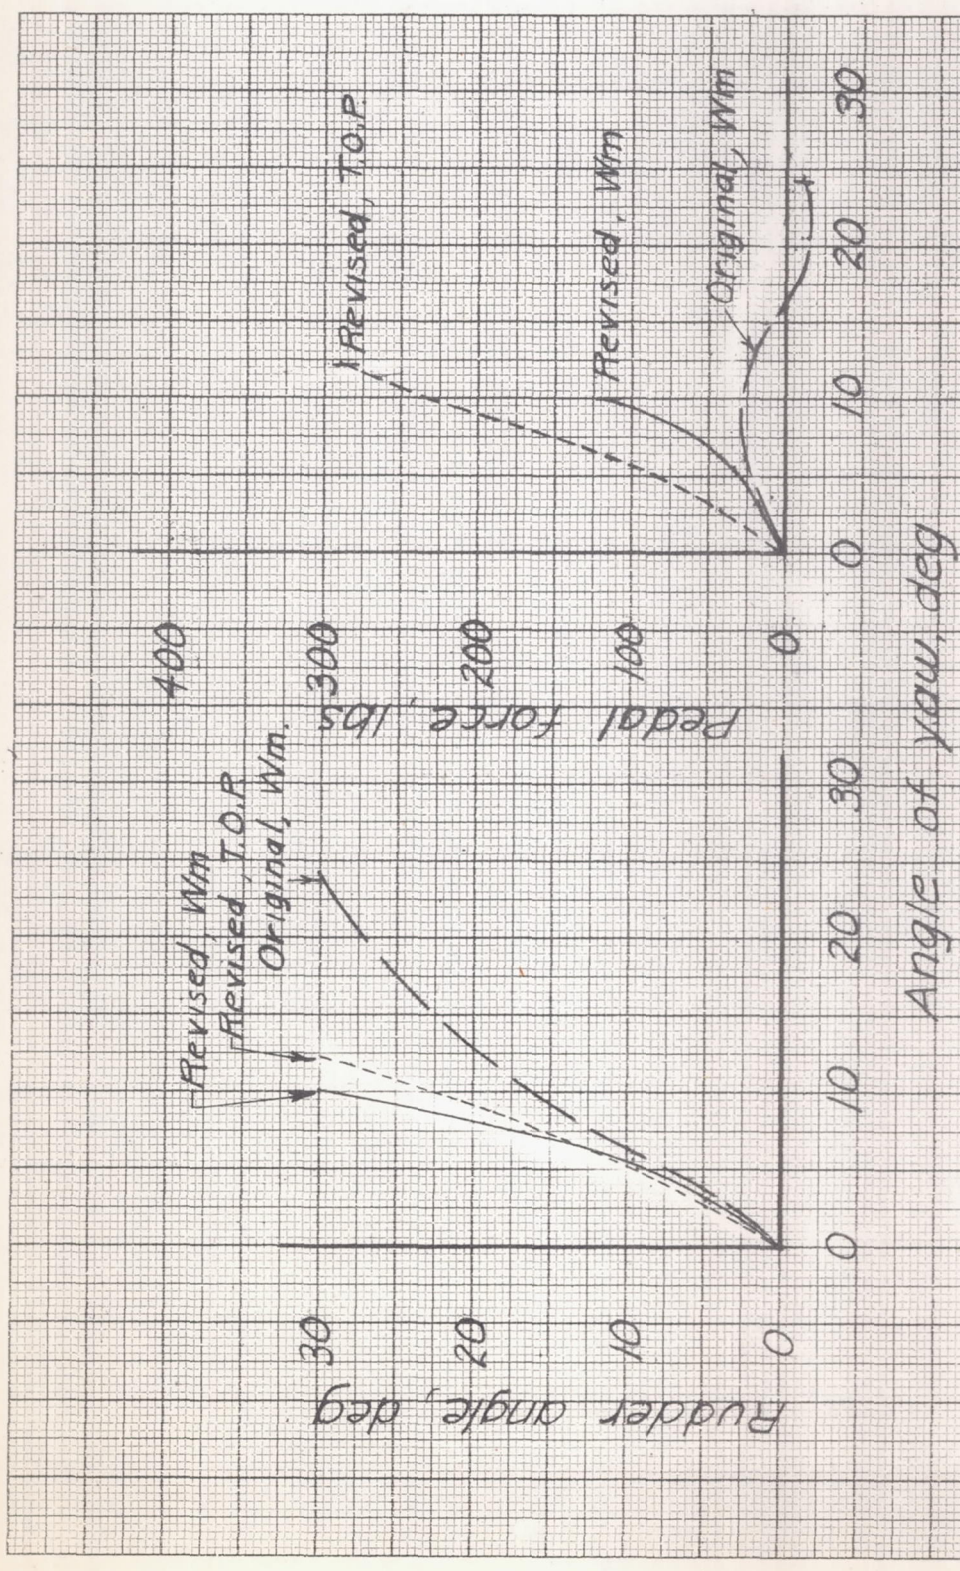


Figure 35.-Variation of rudder force and rudder deflection for trim with angle of yaw. XBTC-2 airplane with original and revised vertical tails. Landing configuration.  $C_L = 1.74$ .  $V = 94.4$  mph. Original dorsal with original tail, dorsal  $D_1$  with revised tail.




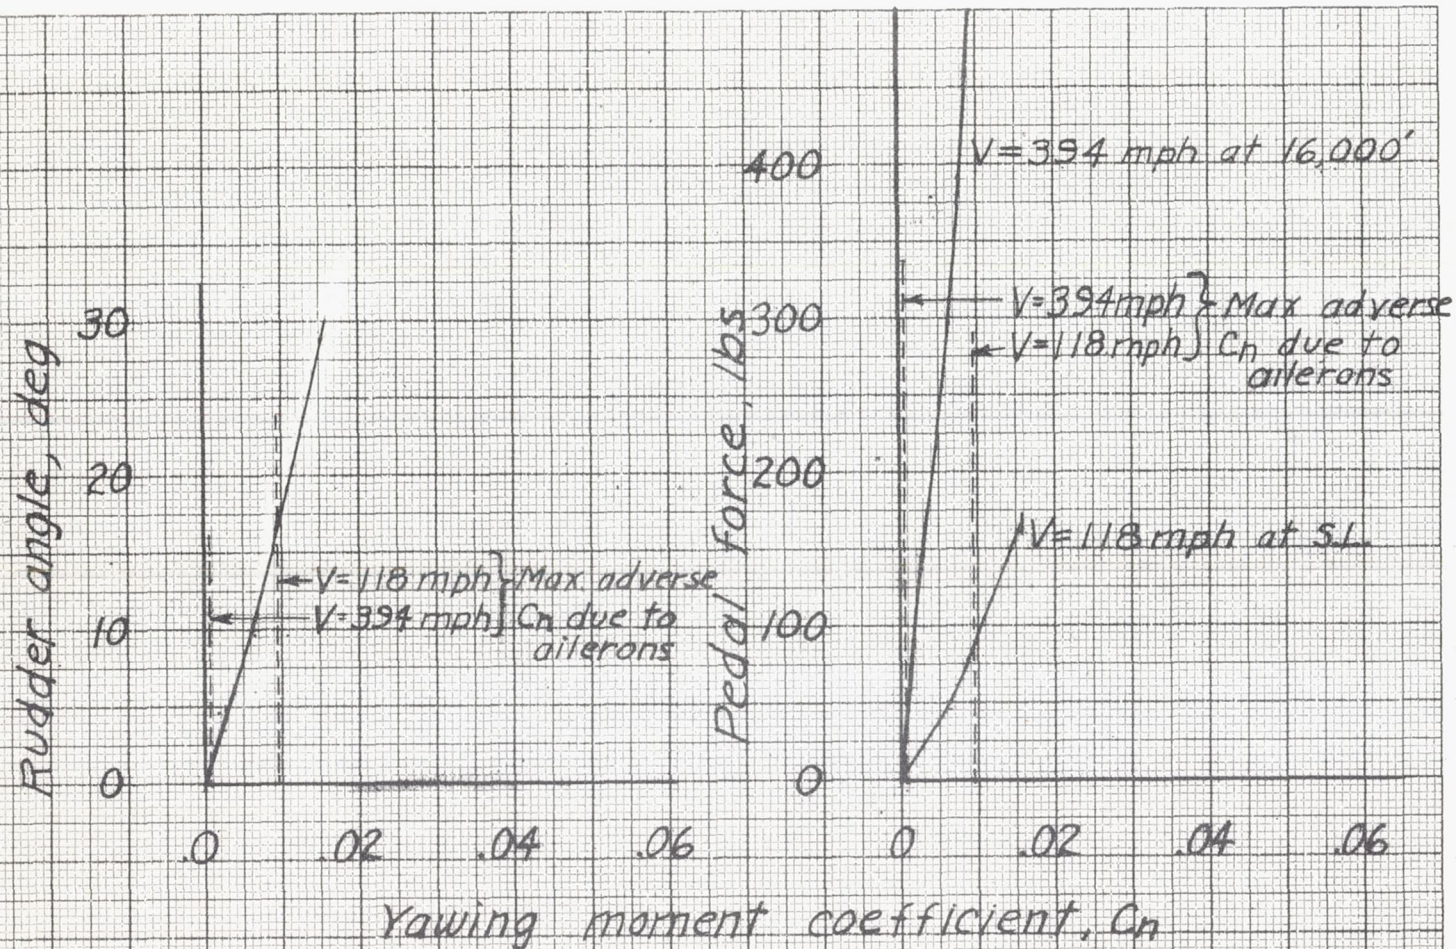


Figure 36-Variation of yawing moment coefficient with rudder force and rudder angle.  $\psi=0^\circ$  XBTC-2 airplane with revised vertical tail. Cruising configuration.

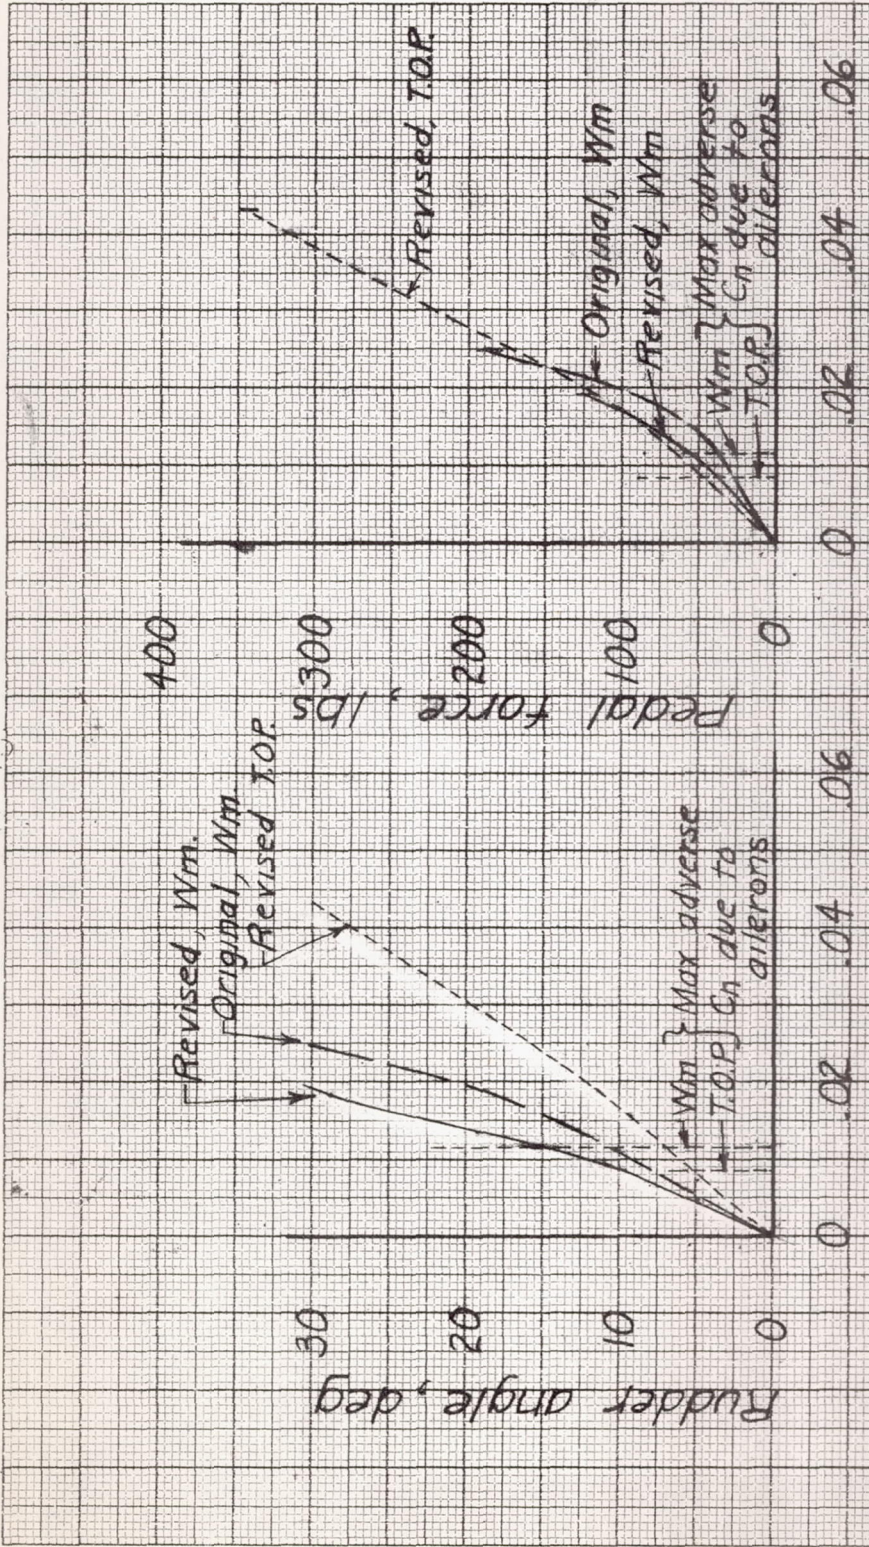

NATIONAL ADVISORY  
COMMITTEE FOR AERONAUTICS

Yawing-moment coefficient,  $C_n$

Figure 37-Variation of yawing-moment coefficient with rudder force and rudder angle.  $\psi=0^\circ$ . XB7C-2 airplanes with original and revised vertical tails. Landing configuration.  $C_L=1.74$ ,  $V=94.4$  mph.