

## REPORT 1004

A LIFT-CANCELLATION TECHNIQUE IN LINEARIZED  
SUPERSONIC-WING THEORY<sup>1</sup>

By HAROLD MIRELS

## SUMMARY

A lift-cancellation technique is presented for determining load distributions on thin wings at supersonic speeds. The loading on a wing having a prescribed plan form is expressed as the loading of a known related wing (such as a two-dimensional or a triangular wing) minus the loading of an appropriate cancellation wing.

A general expression is derived for the load distribution over a cancellation wing. The expression is valid when the plan-form edge (on the cancellation wing) separating a region of zero upwash from a region of known loading is everywhere subsonically inclined to the free stream. The boundary conditions can be satisfied for both subsonic leading and subsonic trailing plan-form edges on the prescribed wing.

The lift-cancellation technique can be used to find the loading on a large variety of wings. Applications to swept wings having curvilinear plan forms and to wings having reentrant side edges are indicated.

## INTRODUCTION

The method of lift cancellation for obtaining the lift distribution on thin wings at supersonic speeds was first suggested in reference 1. The lift distribution on a given wing is determined by canceling excess lift, through the use of a "cancellation wing," on a related plan form having a known loading. This approach has been applied by several authors (for example, references 2 to 4). The expressions provided in reference 1 are applicable for wings that can be generated by the superposition of conical fields.

A procedure is presented in reference 5 for determining lift on a more general class of plan forms than can be handled by conical superposition. The method utilizes a surface distribution of doublets and an inversion by means of Abel's integral equation and is equivalent to a lift cancellation.

This report, prepared at the NACA Lewis laboratory, retains certain features of reference 5 (that is, the use of a surface distribution of doublets and an inversion by means of Abel's integral equation), whereas other features are simplified and generalized. The simplification consists in eliminating steps in the procedure for obtaining lift distributions. The generalization consists in determining a solution that can be made to satisfy the boundary conditions for either a subsonic leading edge or a subsonic trailing edge (Kutta condition). The method of reference 5 yields only the Kutta

solution. The lift-cancellation technique developed herein is illustrated by several examples.

In a concurrent investigation (reference 6), source distributions and integral-equation formulations are applied to obtain the loading on a special series of cancellation wings. Reference 7 employs some of these cancellation wings for the determination of lift and moments on swept wings.

## THEORY

The usual assumptions of an inviscid fluid and small perturbations are made. The velocity field consists of the free-stream velocity  $U$  (taken in the positive  $x$ -direction) plus the perturbation velocities  $u$ ,  $v$ , and  $w$ . The wing boundary conditions are specified in the  $z=0$  plane.

The local lift coefficient  $\Delta C_p$  may be expressed in terms of  $\Delta u$ ; that is,

$$\Delta C_p = \frac{p_B - p_T}{q} = \frac{2(u_T - u_B)}{U} = \frac{2\Delta u}{U} \quad (1)$$

(All symbols used in this report are defined in appendix A.) Inasmuch as the local lift coefficient is directly proportional to  $\Delta u$ ,  $\Delta u$  will be referred to as "lift" in later developments.

## LIFT-CANCELLATION METHOD

The lift distribution on a given wing is to be determined by canceling excess lift on a related wing with a known loading. The method is illustrated in figure 1. The wing for which the lift distribution is desired is shown in figure 1 (a). The solution can be expressed as the two-dimensional wing (fig. 1 (b)) minus a cancellation wing (fig. 1 (c)). The loading in region I of the cancellation wing equals the loading in the corresponding region of the two-dimensional wing and the upwash  $w$  in region II of the cancellation wing is zero. The two-dimensional wing minus the cancellation wing satisfies the boundary conditions for the flow about the given wing and is the desired solution.




The fundamental problem in the lift-cancellation method is then to determine the lift in region II of a cancellation wing subject to the condition  $w=0$  in this region and with the assumption of a known loading in region I. Solution of this problem is presented in the following sections.

## DERIVATION OF LIFT-CANCELLATION EQUATIONS

The lift distribution in region II will be expressed in terms of quantities in region I.

<sup>1</sup>Supersedes NACA TN 2145, "Lift-Cancellation Technique in Linearized Supersonic-Wing Theory" by Harold Mirels, 1950.

Consider the cancellation wing shown in figure 2. The portion of the leading edge to the left of the origin coincides with a Mach line. The portion of the leading edge to the right (designated  $r=r_1(s)$ ) is shown as a supersonic edge, although no restrictions as to a subsonic or supersonic edge are imposed. (A plan-form edge is subsonic or supersonic depending on whether the component of the free stream normal to the edge is subsonic or supersonic.) The line designated  $r=r_2(s)$  separates region I and region II and is

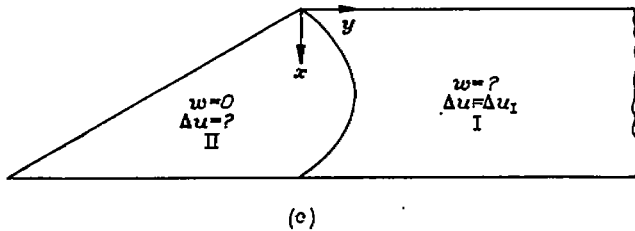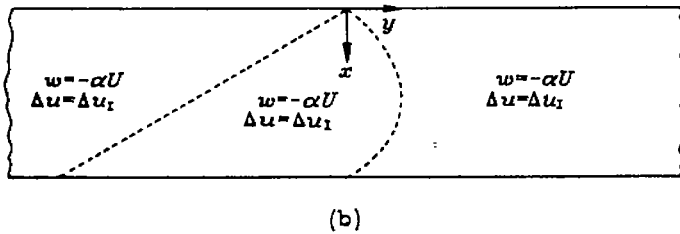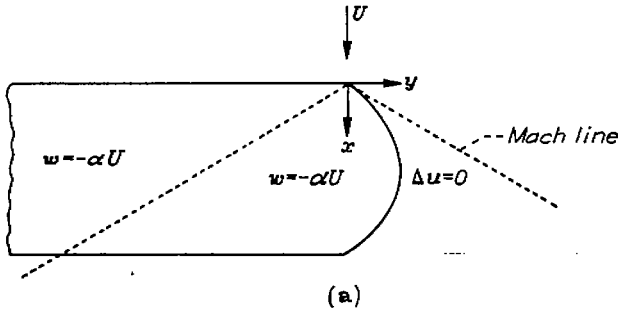

(a) Given wing.  
(b) Two-dimensional wing.  
(c) Cancellation wing.

FIGURE 1.—Superposition to obtain lift on given wing by canceling lift on two-dimensional wing. (Given wing equals two-dimensional wing minus cancellation wing.)

assumed to be subsonically inclined to the free stream at all points. This line corresponds to a plan-form edge of the wing for which the lift distribution is desired.

General solution for  $\Delta\varphi$  on cancellation wing.—The upwash field in the  $z=0$  plane (associated with an arbitrary distribution of vorticity  $\Delta u$  and  $\Delta v$ ) may be written, from reference 8,

$$w = \frac{\beta^2}{2\pi} \int \int_{\tau} \frac{[(y-y_0)\Delta v + (x-x_0)\Delta u] dx_0 dy_0}{[(x-x_0)^2 - \beta^2(y-y_0)^2]^{3/2}} \quad (2)$$

The symbol  $\int$  designates the finite part of an infinite integral, as defined in reference 9. Application of the finite-part

concept to linearized supersonic-wing theory and the evaluation of the finite part of an infinite integral are discussed in references 8 and 10. For the present, it will suffice to state the fundamental definition of the finite part of an integral with a 3/2-power singularity, namely,

$$\int_a^x \frac{f(x_0) dx_0}{(x-x_0)^{3/2}} = \int_a^x \frac{[f(x_0) - f(x)] dx_0}{(x-x_0)^{3/2}} - \frac{2f(x)}{(x-a)^{1/2}} \quad (3)$$

By a transformation to the Mach coordinates of reference 11,

$$\left. \begin{aligned} x &= \frac{\beta}{M} (s+r) & r &= \frac{M}{2\beta} (x-\beta y) \\ y &= \frac{1}{M} (s-r) & s &= \frac{M}{2\beta} (x+\beta y) \\ \text{elemental area} &= \frac{2\beta}{M^2} dr ds \end{aligned} \right\} \quad (4)$$

equation (2) becomes

$$w = \frac{M}{8\pi} \int \int_{\tau} \frac{\left[ (s-s_0) \frac{\partial \Delta\varphi}{\partial s_0} + (r-r_0) \frac{\partial \Delta\varphi}{\partial r_0} \right] dr_0 ds_0}{[(r-r_0)(s-s_0)]^{3/2}} \quad (5)$$

Upon substitution of the limits of integration, as indicated in figure 2,

$$w = \frac{M}{8\pi} \left\{ \int_0^s \frac{ds_0}{(s-s_0)^{3/2}} \int_{r_1(s_0)}^r \frac{\frac{\partial \Delta\varphi}{\partial r_0} dr_0}{(r-r_0)^{1/2}} + \int_0^s \frac{ds_0}{(s-s_0)^{1/2}} \int_{r_1(s_0)}^r \frac{\frac{\partial \Delta\varphi}{\partial s_0} dr_0}{(r-r_0)^{3/2}} \right\} \quad (6)$$

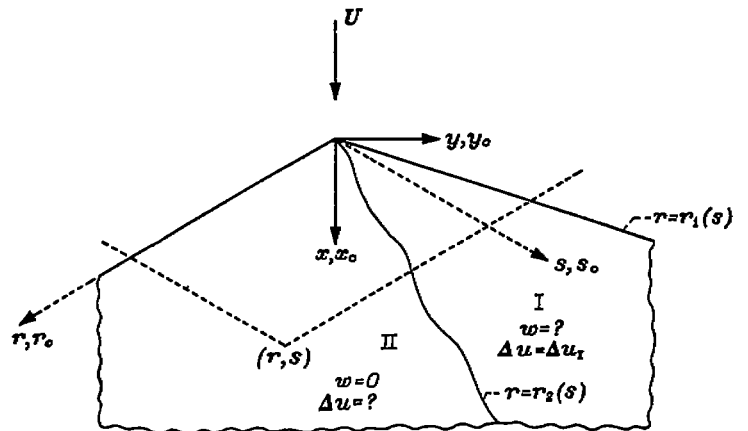


FIGURE 2.—Typical cancellation wing.

Integrating by parts, noting that  $\Delta\varphi=0$  at  $r_0=r_1(s_0)$ , and recalling the definition of the finite part (equation (3)) yield

$$\int_{r_1(s_0)}^r \frac{\frac{\partial \Delta\varphi}{\partial r_0} dr_0}{(r-r_0)^{1/2}} \equiv \lim_{r \rightarrow r} \left\{ \frac{\Delta\varphi}{(r-r_0)^{1/2}} \right]_{r_1(s_0)}^{r_0} - \frac{1}{2} \int_{r_1(s_0)}^{r_0} \frac{\Delta\varphi dr_0}{(r-r_0)^{3/2}} \right\} \\ \equiv -\frac{1}{2} \int_{r_1(s_0)}^r \frac{\Delta\varphi dr_0}{(r-r_0)^{3/2}} \quad (7)$$

Thus,

$$\int_0^s \frac{ds_0}{(s-s_0)^{3/2}} \int_{r_1(s_0)}^r \frac{\partial \Delta \varphi}{\partial r_0} \frac{dr_0}{(r-r_0)^{1/2}} = -\frac{1}{2} \int_0^s \frac{ds_0}{(s-s_0)^{3/2}} \int_{r_1(s_0)}^r \frac{\Delta \varphi dr_0}{(r-r_0)^{3/2}} \quad (8)$$

Similarly, reversing the order of integration (with appropriate changes in limits of integration), integrating by parts, and then returning to the original order of integration establish the identity

$$\int_0^s \frac{ds_0}{(s-s_0)^{1/2}} \int_{r_1(s_0)}^r \frac{\partial \Delta \varphi}{\partial s_0} \frac{dr_0}{(r-r_0)^{3/2}} = -\frac{1}{2} \int_0^s \frac{ds_0}{(s-s_0)^{3/2}} \int_{r_1(s_0)}^r \frac{\Delta \varphi dr_0}{(r-r_0)^{3/2}} \quad (9)$$

The right side of equations (8) and (9) are identical. Equation (6) can now be written as

$$w = -\frac{M}{8\pi} \int_0^s \frac{ds_0}{(s-s_0)^{3/2}} \int_{r_1(s_0)}^r \frac{\Delta \varphi dr_0}{(r-r_0)^{3/2}} \quad (10)$$

For points in region II,  $w=0$  and equation (10) becomes

$$0 = \int_0^s \frac{ds_0}{(s-s_0)^{3/2}} \int_{r_1(s_0)}^r \frac{\Delta \varphi dr_0}{(r-r_0)^{3/2}} \quad (11a)$$

or

$$0 = \int_0^s \frac{G(r, s_0) ds_0}{(s-s_0)^{3/2}} \quad (11b)$$

where

$$G(r, s_0) = \int_{r_1(s_0)}^r \frac{\Delta \varphi dr_0}{(r-r_0)^{3/2}} \quad (12)$$

Equation (11b) is an integral equation for the unknown function  $G(r, s_0)$ . The solution (appendix B) is

$$G(r, s_0) = 0 \quad (13)$$

Thus,

$$\int_{r_1(s_0)}^r \frac{\Delta \varphi dr_0}{(r-r_0)^{3/2}} = \int_{r_1(s_0)}^{r_2(s_0)} \frac{\Delta \varphi_I dr_0}{(r-r_0)^{3/2}} + \int_{r_2(s_0)}^r \frac{\Delta \varphi_{II} dr_0}{(r-r_0)^{3/2}} = 0$$

or



$$\int_{r_2(s_0)}^r \frac{\Delta \varphi_{II} dr_0}{(r-r_0)^{3/2}} = - \int_{r_1(s_0)}^{r_2(s_0)} \frac{\Delta \varphi_I dr_0}{(r-r_0)^{3/2}} \quad (14)$$

The right side of equation (14) will be considered known. Equation (14) is then an integral equation for  $\Delta \varphi_{II}$ . The solution (appendix B) is

$$\Delta \varphi_{II} = \frac{\sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{\Delta \varphi_I dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} \quad (15)$$

Equation (15) indicates that the doublet strength in region II, namely  $\Delta \varphi_{II}$ , can be obtained by a line integration along  $s_0=s$  in region I. The geometric interpretation of the various terms in equation (15) is shown in figure 3 (a).

It can be shown, by expanding  $\Delta \varphi_I$  about  $r_0=r_2(s)$ , that equation (15) yields a continuous solution ( $\Delta \varphi_{II}=\Delta \varphi_I$ ) at  $r=r_2(s)$ . (A discontinuity in  $\Delta \varphi$  implies a lifting line (reference 12) and is unrealistic.)

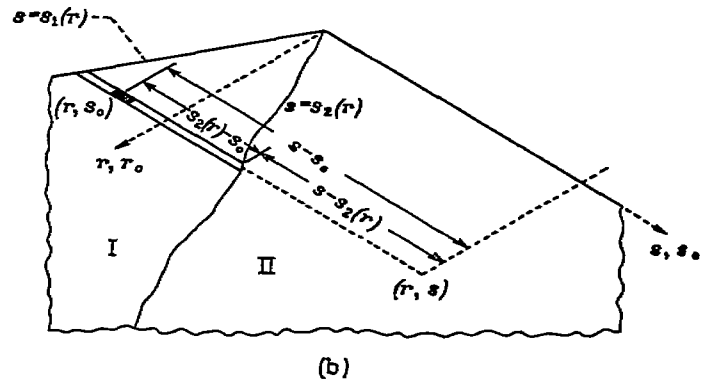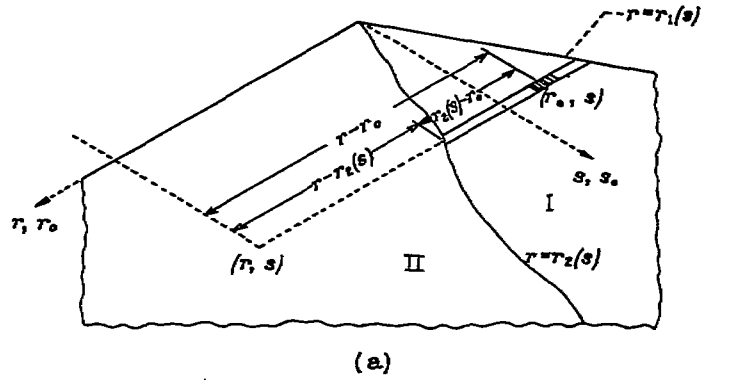

(a) Region I intersected by right forward Mach line from  $(r, s)$ .  
(b) Region I intersected by left forward Mach line from  $(r, s)$ .

FIGURE 3.—Geometric interpretation of terms in equations (17a) and (17b).

General solution for load distribution on cancellation wing.—The load distribution in region II can be expressed as

$$\begin{aligned} \Delta u_{II} &= \frac{\partial \Delta \varphi_{II}}{\partial x} = \frac{\partial \Delta \varphi_{II}}{\partial r} \frac{\partial r}{\partial x} + \frac{\partial \Delta \varphi_{II}}{\partial s} \frac{\partial s}{\partial x} \\ &= \frac{M}{2\beta} \left( \frac{\partial}{\partial r} + \frac{\partial}{\partial s} \right) \Delta \varphi_{II} \end{aligned}$$

or, from equation (15),

$$\frac{2\beta}{M} \Delta u_{II} = \left( \frac{\partial}{\partial r} + \frac{\partial}{\partial s} \right) \left[ \frac{\sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{\Delta \varphi_I dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} \right] \quad (16)$$

Differentiation yields (see appendix C)

$$\begin{aligned} \Delta u_{II} &= \frac{\sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{\Delta u_I dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} \\ &\quad + \frac{1}{2\beta\pi} \frac{dr_2(s)}{ds} \int_{r_1(s)}^{r_2(s)} \frac{(\beta \Delta u_I - \Delta v_I) dr_0}{\sqrt{r_2(s)-r_0}} \quad (17a) \end{aligned}$$



Equation (17a) is the desired expression for the lift distribution in region II in terms of quantities in region I.

Consider  $\Delta u_{II}$  to consist of two components,  $\Delta u_{II}'$  and  $\Delta u_{II}''$ , where  $\Delta u_{II}'$  and  $\Delta u_{II}''$  are the first and second terms on the right side of equation (17a), respectively. Investigation of the integrals indicates that at  $r=r_2(s)$ ,  $\Delta u_{II}'=\Delta u_I$ ; whereas  $\Delta u_{II}''$ , in general, has a half-order singularity.

When region II is to the right of region I (fig. 3 (b)), the integration for  $\Delta u_{II}$  is conducted along the line  $r_0=r$  and may be written as

$$\Delta u_{II} = \frac{\sqrt{s-s_2(r)}}{\pi} \int_{s_1(r)}^{s_2(r)} \frac{\Delta u_I ds_0}{(s-s_0)\sqrt{s_2(r)-s_0}} - \frac{1}{2\beta\pi\sqrt{s-s_2(r)}} \int_{s_1(r)}^{s_2(r)} \frac{(\beta\Delta u_I + \Delta v_I) ds_0}{\sqrt{s_2(r)-s_0}} \quad (17b)$$

Discussion of equations (17a) and (17b).—In the paragraph preceding equation (2), the line  $r=r_2(s)$  was described as subsonically inclined at all points to the free stream. This condition is necessary so that the inner integral in equation (11a) (that is,  $G(r,s_0)$ ) can be equated to zero for all points in region II. If this restriction on  $r=r_2(s)$  is not satisfied, the development beyond equation (11a) becomes

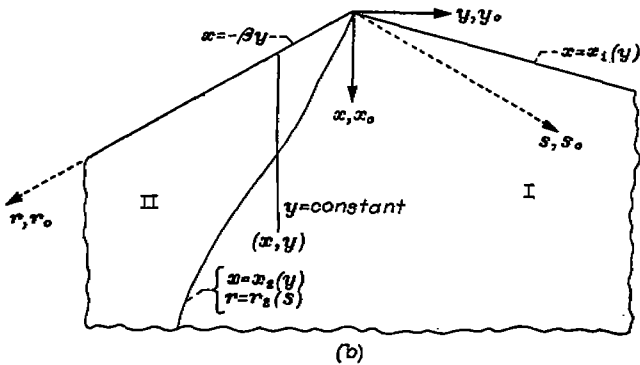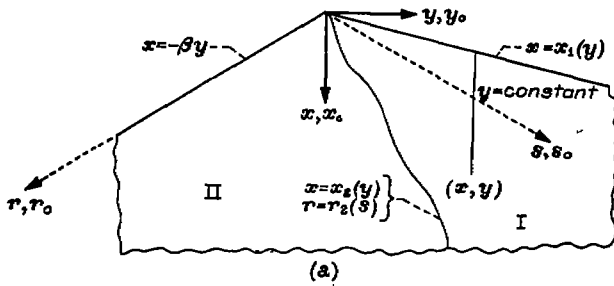

(a) Region I upstream of region II (along  $r=r_2(s)$ ).  
(b) Region II upstream of region I (along  $r=r_2(s)$ ).

FIGURE 4.—Possible relations between regions I and II in regard to determination of  $\Delta v_I$ .

invalid. The derivation of cancellation equations when  $r=r_2(s)$  is supersonic was not undertaken because such problems can be solved more simply by other methods.

In regard to the boundary conditions, it has been assumed that  $\Delta u_I$  is specified. Equations (17a) and (17b), however, indicate that a knowledge of  $\Delta v_I$  is also required in order to obtain a solution for  $\Delta u_{II}$ . With regard to the determination of  $\Delta v_I$ , two possibilities exist, as illustrated in figure 4. In the first case (fig. 4(a)), region I is upstream of region II (along the line  $r=r_2(s)$ ) and  $\Delta v_I$  is uniquely defined by the specified  $\Delta u_I$  according to the relation

$$\Delta v_I = \frac{\partial}{\partial y} \int_{x_1(y)}^x \Delta u_I dx_0 \quad (18a)$$

The integration is conducted along lines of constant  $y$ . In the second case (fig. 4(b)), region II is upstream of region I (along the line  $r=r_2(s)$ ) and the expression for  $\Delta v_I$  in region I (for  $y \leq 0$ ) is

$$\Delta v_I = \frac{\partial}{\partial y} \left[ \int_{-\beta y}^{x_2(y)} \Delta u_{II} dx_0 + \int_{x_2(y)}^x \Delta u_I dx_0 \right] \quad (18b)$$

Equation (18b) indicates that a knowledge of  $\Delta u_{II}$  is required in order to find  $\Delta v_I$ . But  $\Delta v_I$  must be known (equation (17a)) before  $\Delta u_{II}$  can be found. Thus, the solution for  $\Delta u_{II}$  from a specified  $\Delta u_I$  is not unique for the configuration of figure 4(b) and an additional boundary condition must be imposed. The line  $r=r_2(s)$ , however, corresponds to a plan-form edge of the airfoil whose load distribution is desired. The situation indicated in figure 4(b) occurs when  $r=r_2(s)$  corresponds to a subsonic trailing edge. The additional condition to be imposed is therefore the Kutta condition. In terms of the cancellation wing, this condition requires that the perturbation velocities be continuous in crossing  $r=r_2(s)$ .

Solution for  $\Delta u_{II}$  satisfying Kutta condition at  $r=r_2(s)$ .—It will now be shown that when the Kutta condition is imposed at  $r=r_2(s)$ , the appropriate  $\Delta v_I$  distribution is such as to make the second integral in equation (17a) identically zero; that is,

$$\int_{r_1(s)}^{r_2(s)} \frac{\beta\Delta u_I - \Delta v_I}{[r_2(s)-r_0]^{1/2}} dr_0 = 0$$

or, inasmuch as  $\beta\Delta u_I - \Delta v_I = M \frac{\partial \Delta \varphi_I}{\partial r_0}$ ,

$$\int_{r_1(s)}^{r_2(s)} \frac{\partial \Delta \varphi_I}{\partial r_0} \frac{dr_0}{[r_2(s)-r_0]^{1/2}} = 0$$

This concept and its proof follow from a suggestion of H. S. Ribner of the NACA Lewis laboratory.

Thus, from equations (7), (12), and (13),

$$\int_{r_1(s)}^r \frac{\partial \Delta \varphi}{\partial r_0} \frac{dr_0}{(r-r_0)^{1/2}} = 0 \quad (19)$$

for all points  $(r,s)$  in region II. Therefore,

$$\int_{r_1(s)}^{r_2(s)} \frac{\partial \Delta \varphi_I}{\partial r_0} \frac{dr_0}{(r-r_0)^{1/2}} = - \int_{r_2(s)}^r \frac{\partial \Delta \varphi_{II}}{\partial r_0} \frac{dr_0}{(r-r_0)^{1/2}} \quad (20)$$

When the limit as  $r$  approaches  $r_2(s)$  is taken, equation (20) becomes

$$\int_{r_1(s)}^{r_2(s)} \frac{\partial \Delta \varphi_I}{\partial r_0} \frac{dr_0}{[r_2(s)-r_0]^{1/2}} = \lim_{r \rightarrow r_2(s)} \left[ - \int_{r_2(s)}^r \frac{\partial \Delta \varphi_{II}}{\partial r_0} \frac{dr_0}{(r-r_0)^{1/2}} \right] \quad (21)$$

However,  $\partial\Delta\varphi_I/\partial r_o$  must be continuous in the vicinity of  $r_2(s)$ . (The perturbation velocities on the basic wing can be discontinuous only along Mach lines or along plan-form edges. Inasmuch as  $r=r_2(s)$  is neither of these cases, all derivatives of  $\Delta\varphi_I$  must be continuous in the vicinity of  $r=r_2(s)$ .) When the Kutta condition is imposed,  $\partial\Delta\varphi_{II}/\partial r_o$  is therefore also continuous (and bounded) in the neighborhood of  $r=r_2(s)$ . Then with the use of a mean value for  $\partial\Delta\varphi_{II}/\partial r_o$ ,

$$\lim_{r \rightarrow r_2(s)} \left[ \int_{r_2(s)}^r \frac{\frac{\partial\Delta\varphi_{II}}{\partial r_o} dr_o}{(r-r_o)^{1/2}} \right] = \lim_{r \rightarrow r_2(s)} \left[ \left( \frac{\partial\Delta\varphi_{II}}{\partial r_o} \right)_{(r_2(s) < r_o < r)} \int_{r_2(s)}^r \frac{dr_o}{(r-r_o)^{1/2}} \right] = 0 \quad (22)$$

Therefore,

$$\int_{r_1(s)}^{r_2(s)} \frac{\frac{\partial\Delta\varphi_I}{\partial r_o} dr_o}{[r_2(s)-r_o]^{1/2}} = 0 \quad (23)$$

which was to be proved.

The solution for  $\Delta u_{II}$  that satisfies the Kutta condition at  $r=r_2(s)$  is then, from equations (17a) and (23),

$$\Delta u_{II} = \frac{\sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{\Delta u_I dr_o}{(r-r_o)\sqrt{r_2(s)-r_o}} \quad (24a)$$

for the wing of figure 3 (a). Similarly,

$$\Delta u_{II} = \frac{\sqrt{s-s_2(r)}}{\pi} \int_{s_1(r)}^{s_2(r)} \frac{\Delta u_I ds_o}{(s-s_o)\sqrt{s_2(r)-s_o}} \quad (24b)$$

for the wing of figure 3 (b).

An alternative derivation of equations (24a) and (24b) (appendix D) indicates that only solutions satisfying the Kutta condition will result from the integral equation formulation of reference 5.

Sidewash in region II.—An expression for  $\Delta v_{II}$  can be obtained by differentiating equation (15) with respect to  $y$ . The result is

$$\Delta v_{II} = \frac{\sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{\Delta v_I dr_o}{(r-r_o)\sqrt{r_2(s)-r_o}} + \frac{1 + \frac{dr_2(s)}{ds}}{2\pi\sqrt{r-r_2(s)}} \int_{r_1(s)}^{r_2(s)} \frac{\beta\Delta u_I - \Delta v_I}{\sqrt{r_2(s)-r_o}} dr_o$$

Similarly, for region II to the right of region I,

$$\Delta v_{II} = \frac{\sqrt{s-s_2(r)}}{\pi} \int_{s_1(r)}^{s_2(r)} \frac{\Delta v_I ds_o}{(s-s_o)\sqrt{s_2(r)-s_o}} + \frac{1 + \frac{ds_2(r)}{ds}}{2\pi\sqrt{s-s_2(r)}} \int_{s_1(r)}^{s_2(r)} \frac{\beta\Delta u_I + \Delta v_I}{\sqrt{s_2(r)-s_o}} ds_o$$

When the Kutta condition applies, these equations become, respectively,

$$\Delta v_{II} = \frac{\sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{\Delta v_I dr_o}{(r-r_o)\sqrt{r_2(s)-r_o}}$$

and

$$\Delta v_{II} = \frac{\sqrt{s-s_2(r)}}{\pi} \int_{s_1(r)}^{s_2(r)} \frac{\Delta v_I ds_o}{(s-s_o)\sqrt{s_2(r)-s_o}}$$

It should be noted that when  $r=r_2(s)$  corresponds to a subsonic trailing edge,  $\Delta v_I$ , as well as  $\Delta r_{II}$ , is not generally known. The preceding expressions are therefore primarily useful for those problems where  $r=r_2(s)$  corresponds to a subsonic leading edge.

### APPLICATIONS

The loading in region II of a cancellation wing is given by the line integrals of equation (17a) or (17b). When the Kutta condition is imposed at a subsonic trailing edge, the expressions reduce to equations (24a) and (24b). These equations can be used to find the load distribution on a large variety of wings. Wings with curvilinear plan forms or arbitrary camber are examples. In each case, however, the solution for the related wing must be known.

The equations are applied in several illustrative examples. Only the solution associated with the cancellation wing is considered. The complete solution consists of the loading of the related wing minus the loading of the cancellation wing.

### LEADING-EDGE AND SIDE-EDGE CANCELLATIONS

In leading-edge and side-edge cancellations, the lift to be canceled is upstream or to the side of the plan form for which the loading is desired (figs. 5 and 6).

Tip region of swept wing.—The loading in the region influenced by the side edge ( $\Pi_a$  and  $\Pi_b$  of fig. 5) of a swept wing having a subsonic leading and a supersonic trailing edge can be obtained by canceling excess lift on a triangular wing. The Kutta condition is applied across the portion of  $r=r_2(s)$  influencing region  $\Pi_b$ . The lift to be canceled in region I is (reference 13, equation (23))

$$\Delta u_I = \frac{H\theta^2 x}{\sqrt{\theta^2 x^2 - \beta^2 y^2}} = \frac{H\theta^2(s+r)}{\sqrt{\theta^2(s+r)^2 - (s-r)^2}} \quad (25)$$

where  $H$  and  $\theta$  are constants defined in appendix A. The doublet distribution in region  $I_a$ , again from reference 13, is

$$\Delta\varphi_{I_a} = H\sqrt{\theta^2 x^2 - \beta^2 y^2} = \frac{\beta H}{M} \sqrt{\theta^2(s+r)^2 - (s-r)^2}$$

from which

$$\Delta v_{I_a} = \frac{\partial\Delta\varphi_{I_a}}{\partial y} = \frac{-H\beta^2 y}{\sqrt{\theta^2 x^2 - \beta^2 y^2}} = \frac{-H\beta(s-r)}{\sqrt{\theta^2(s+r)^2 - (s-r)^2}} \quad (26)$$

The sidewash distribution in region  $I_b$  (that is,  $\Delta v_{I_b}$ ) could be found by an integration of the type indicated in equation (18b). A knowledge of  $\Delta v_{I_a}$ , however, is unnecessary in

the present problem because the Kutta condition is applied for region II<sub>b</sub>.

The loading in region II<sub>a</sub> is obtained by substituting equations (25) and (26), with  $r$  replaced by  $r_0$ , into equation (17a), which yields

$$\Delta u_{II_a} = \frac{H\theta^2 \sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{(s+r_0)dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}\sqrt{\theta^2(s+r_0)^2-(s-r_0)^2}}$$

$$\frac{H}{2\pi\sqrt{r-r_2(s)}} \int_{r_1(s)}^{r_2(s)} \frac{[\theta^2(s+r_0)+(s-r_0)]dr_0}{\sqrt{r_2(s)-r_0}\sqrt{\theta^2(s+r_0)^2-(s-r_0)^2}} \quad (27)$$

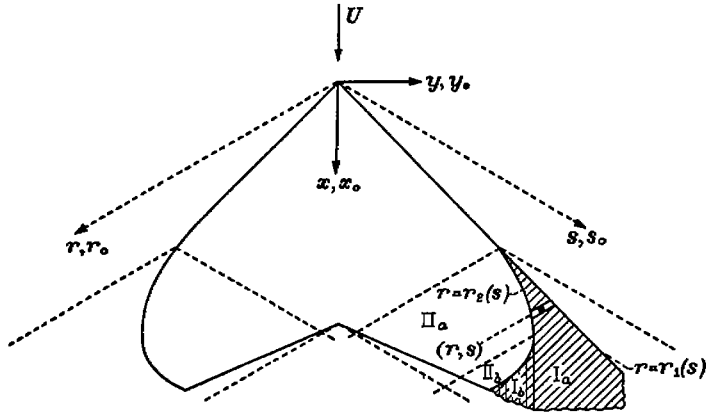


FIGURE 5.—Cancellation for obtaining loading in tip region of swept wing having supersonic trailing edges.

For region II<sub>b</sub>, the Kutta condition applies and

$$\Delta u_{II_b} = \frac{H\theta^2 \sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{(s+r_0)dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}\sqrt{\theta^2(s+r_0)^2-(s-r_0)^2}} \quad (28)$$

Equations (27) and (28) reduce to elliptic integrals of the first, second, and third kinds upon transforming the variable of integration from  $r_0$  to  $\omega_0$  according to the relation

$$r_0 = \frac{1}{1+\theta} [(1-\theta)s + a_2\omega_0^2] \quad (29)$$

where

$$a_2 = (1+\theta)r_2(s) - (1-\theta)s$$

Equations (27) and (28) may then be written

$$\Delta u_{II_a} = \frac{H\theta^2 \sqrt{r-r_2(s)}}{\pi\sqrt{s\theta}} \left\{ \frac{(s+r)(1+\theta)}{a} \left[ \Pi\left(\frac{\pi}{2}, n, k\right) - \Pi(\phi, n, k) \right] - \left[ F\left(\frac{\pi}{2}, k\right) - F(\phi, k) \right] \right\} - \frac{H\sqrt{s\theta} \left[ 1 - \frac{dr_2(s)}{ds} \right]}{\pi\sqrt{r-r_2(s)}} \left\{ 2 \left[ E\left(\frac{\pi}{2}, k\right) - E(\phi, k) \right] - \left[ F\left(\frac{\pi}{2}, k\right) - F(\phi, k) \right] \right\} \quad (30)$$

and

$$\Delta u_{II_b} = \frac{H\theta^2 \sqrt{r-r_2(s)}}{\pi\sqrt{s\theta}} \left\{ \frac{(s+r)(1+\theta)}{a} \left[ \Pi\left(\frac{\pi}{2}, n, k\right) - \Pi(\phi, n, k) \right] - \left[ F\left(\frac{\pi}{2}, k\right) - F(\phi, k) \right] \right\} \quad (31)$$

where

$$k = \sqrt{\frac{1-\theta}{4s\theta}} a_2 \quad a = (1+\theta)r - (1-\theta)s$$

$$\phi = \sin^{-1} \sqrt{\frac{a_1}{a_2}} \quad a_1 = (1+\theta)r_1(s) - (1-\theta)s$$

$$n = -\frac{a_2}{a} \quad a_2 = (1+\theta)r_2(s) - (1-\theta)s$$

**Reentrant side edge.**—A plan form has a reentrant edge if a line of constant  $y$  intersects the plan form at more than two points.

The load distribution in the region influenced by the reentrant side edge is to be determined for the wing (unshaded region) of figure 6. The side edge is first, for simplicity, the straight line  $r=K_2s$ , which is a subsonic trailing edge across which the Kutta condition is applied. The side edge then alternately becomes a subsonic leading and a subsonic trailing edge. The load distribution in region I is simply the Ackeret value  $\Delta u_I = \frac{2\alpha U}{\beta}$ , and  $\Delta v_I = 0$ . Regions II<sub>a</sub>, II<sub>b</sub>, and II<sub>c</sub> are considered separately.

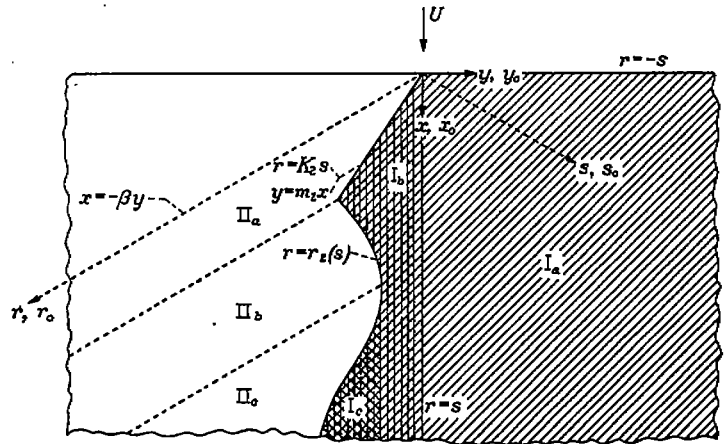


FIGURE 6.—Cancellation for obtaining loading in region influenced by reentrant side edge.

**Region II<sub>a</sub>:**

From equation (24a) with  $\Delta u_I = \frac{2\alpha U}{\beta}$ ,

$$\Delta u_{II_a} = \frac{\sqrt{r-K_2s}}{\pi} \int_{-s}^{K_2s} \frac{2\alpha U dr_0}{\beta(r-r_0)\sqrt{K_2s-r_0}}$$

$$= \frac{4\alpha U}{\beta\pi} \tan^{-1} \sqrt{\frac{(K_2+1)s}{r-K_2s}} \quad (32a)$$

or, in  $x, y$  coordinates

$$\Delta u_{II_a} = \frac{4\alpha U}{\beta\pi} \tan^{-1} \sqrt{\frac{x+\beta y}{\beta(m_2x-y)}} \quad (32b)$$

**Region II<sub>b</sub>:**

A knowledge of  $\Delta v_{I_b}$  is required. From equation (18b),

$$\Delta v_{I_b} = \frac{\partial}{\partial y} \left[ \frac{4\alpha U}{\beta\pi} \int_{-\beta y}^{y/m_2} \tan^{-1} \sqrt{\frac{x_0+\beta y}{\beta(m_2x_0-y)}} dx_0 + \frac{2\alpha U}{\beta} \int_{y/m_2}^x dx_0 \right]$$

$$= \frac{2\alpha U}{\sqrt{|\beta m_2|}} = 2\alpha U \sqrt{\frac{K_2+1}{K_2-1}} \quad (33)$$

The load distribution in region II, is then, recalling that  $\Delta v_{Iz} = 0$ ,

$$\begin{aligned} \Delta u_{II} &= \frac{\sqrt{r-r_2(s)}}{\pi} \int_{-s}^{r_2(s)} \frac{2\alpha U dr_o}{\beta(r-r_o)\sqrt{r_2(s)-r_o}} \\ &= \frac{\left[1 - \frac{dr_2(s)}{ds}\right]}{2\beta\pi\sqrt{r-r_2(s)}} \left[ \int_{-s}^s \frac{2\alpha U dr_o}{\sqrt{r_2(s)-r_o}} + \int_s^{r_2(s)} \left(2\alpha U - 2\alpha U \sqrt{\frac{K_2+1}{K_2-1}}\right) \frac{dr_o}{\sqrt{r_2(s)-r_o}} \right] \\ &= \frac{2\alpha U}{\beta\pi} \left( 2 \tan^{-1} \sqrt{\frac{r_2(s)+s}{r-r_2(s)}} - \frac{\left[1 - \frac{dr_2(s)}{ds}\right]}{\sqrt{r-r_2(s)}} \left\{ \sqrt{r_2(s)+s} - \sqrt{\frac{K_2+1}{K_2-1}} [r_2(s)-s] \right\} \right) \end{aligned} \quad (34)$$

Region II<sub>c</sub>:

Because the Kutta condition is applied,

$$\Delta u_{II_c} = \frac{4\alpha U}{\beta\pi} \tan^{-1} \sqrt{\frac{r_2(s)+s}{r-r_2(s)}} \quad (35)$$

TRAILING-EDGE CANCELLATION

The calculation of lift distributions on swept wings having subsonic trailing edges requires cancellation wings of the type shown in figure 7. These wings cancel that part of the lift of the basic triangular wing that is downstream of the trailing edge of the swept wing (references 3, 4, 6, and 7). The lift is specified in region I. The lift in regions II and III is to be determined subject to the conditions that  $w=0$  and that the Kutta condition applies at  $r=r_1(s)$  and  $r=r_2(s)$ .

The wing of figure 7 (a) differs from the previously discussed cases in that two unknown regions (II and III) are continuously interacting. A special treatment is required in order to obtain the loading in regions II and III. (See, for example, reference 6.) Approximate solutions can be obtained, however, using equations (24a) and (24b). For example, if the load at  $(r,s)$  in region II is desired, first assume that  $\Delta u_{III}$  is known. Then,

$$\Delta u_{II} = \frac{\sqrt{r-r_2(s)}}{\pi} \left[ \int_{\frac{M_c}{2\beta}}^{r_1(s)} \frac{\Delta u_{III} dr_o}{(r-r_o)\sqrt{r_2(s)-r_o}} + \int_{r_1(s)}^{r_2(s)} \frac{\Delta u_I dr_o}{(r-r_o)\sqrt{r_2(s)-r_o}} \right] \quad (36)$$

An expression for  $\Delta u_{III}$  is, by integration along lines of constant  $r_o$  (fig. 7 (a)),

$$\Delta u_{III} = \frac{\sqrt{s-s_1(r_o)}}{\pi} \left[ \int_{\frac{M_c}{2\beta}}^{s_2(r_o)} \frac{\Delta u_{II} ds_o}{(s-s_o)\sqrt{s_1(r_o)-s_o}} + \int_{s_2(r_o)}^{s_1(r_o)} \frac{\Delta u_I ds_o}{(s-s_o)\sqrt{s_1(r_o)-s_o}} \right]$$

An approximate expression for  $\Delta u_{III}$  is then

$$\Delta u_{III} \approx \frac{\sqrt{s-s_1(r_o)}}{\pi} \int_{s_2(r_o)}^{s_1(r_o)} \frac{\Delta u_I ds_o}{(s-s_o)\sqrt{s_1(r_o)-s_o}} \quad (37)$$

Equation (36), which may now be written in terms of  $\Delta u_I$  by substituting equation (37) for  $\Delta u_{III}$ , becomes

$$\Delta u_{II} \approx \frac{\sqrt{r-r_2(s)}}{\pi} \left\{ \int_{\frac{M_c}{2\beta}}^{r_1(s)} \frac{dr_o}{(r-r_o)\sqrt{r_2(s)-r_o}} \left[ \frac{\sqrt{s-s_1(r_o)}}{\pi} \int_{s_2(r_o)}^{s_1(r_o)} \frac{\Delta u_I ds_o}{(s-s_o)\sqrt{s_1(r_o)-s_o}} \right] + \int_{r_1(s)}^{r_2(s)} \frac{\Delta u_I dr_o}{(r-r_o)\sqrt{r_2(s)-r_o}} \right\} \quad (38)$$

The first term on the right side of equation (38) approximates the contribution of region III to the loading in region II. This term, as indicated in reference 6, is negligible for the commonly encountered  $\Delta u_I$  distributions (corresponding to steady lift, roll, or pitch) and  $\frac{\beta dy_1(x)}{dx} > 0.5$ . For those cases, equation (38) simplifies to

$$\Delta u_{II} \approx \frac{\sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{\Delta u_I dr_o}{(r-r_o)\sqrt{r_2(s)-r_o}} \quad (39)$$

The Kutta condition at  $r=r_2(s)$  is satisfied by both equations

(38) and (39). Equation (39) can be reduced to elliptic integrals in canonical form by the substitution indicated in equation (29). The elliptic integrals may be avoided by expanding  $\Delta u_I$  in a Taylor's series about  $r_o=r_2(s)$ . Equation (39) can then be readily integrated, term by term, to yield a very good approximation for  $\Delta u_{II}$  in terms of algebraic and trigonometric functions.

When region I has a partly supersonic leading edge (fig. 7 (b)), it is possible to write exact expressions for the linearized load distribution in regions II and III. For example, the load at point  $(r,s)$  of figure 7 (b) is


$$\Delta u_{II} = \frac{\sqrt{r-r_2(s)}}{\pi} \left\{ \int_c^{r_1(s)} \frac{dr_o}{(r-r_o)\sqrt{r_2(s)-r_o}} \left[ \frac{\sqrt{s-s_1(r_o)}}{\pi} \int_{s_2(r_o)}^{s_1(r_o)} \frac{\Delta u_I ds_o}{(s-s_o)\sqrt{s_1(r_o)-s_o}} \right] + \int_{r_1(s)}^{r_2(s)} \frac{\Delta u_I dr_o}{(r-r_o)\sqrt{r_2(s)-r_o}} \right\} \quad (40)$$

which reduces to equation (39) when the contribution of region III is neglected.


From the development of reference 6 it may be concluded that equation (39) is sufficiently accurate for most problems involving trailing-edge cancellations. The evaluation of equation (39) is generally simplified by the expansion of  $\Delta u_T$  in a Taylor's series about  $r_o = r_2(s)$ .

is handled as previously described. These computations are very tedious when lift is induced upstream of a subsonic leading edge (for example, region I' of fig. 8), inasmuch as a knowledge of the sidewash ( $\Delta v_T$ ), as well as of the lift distribution ( $\Delta u_T$ ), is needed in order to continue the cancellation process. Numerical methods are generally required.

Successive cancellations are discussed more extensively in references 3 and 4.

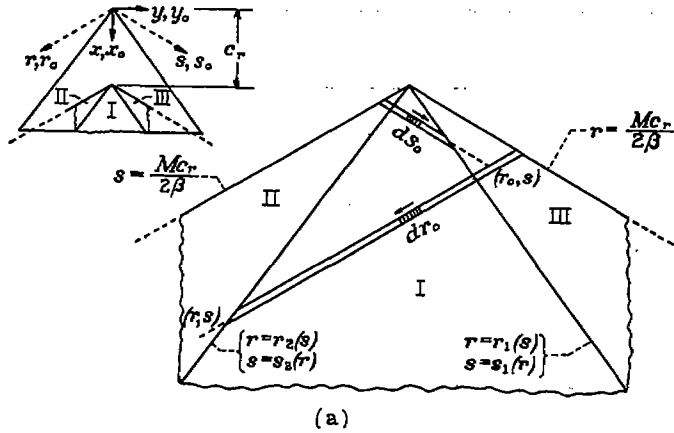

(a)

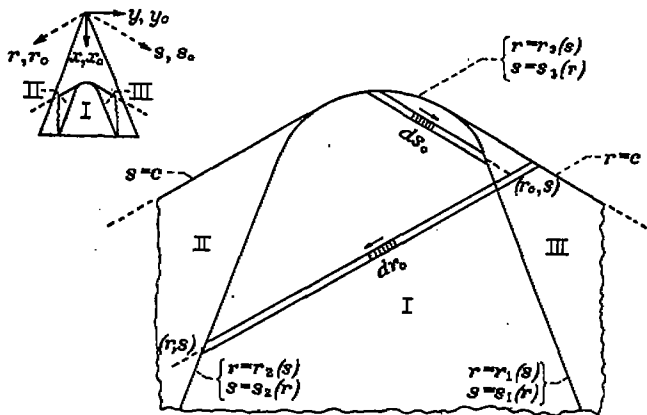

(b)

(a) Regions II and III continuously interacting.  
(b) Regions II and III not continuously interacting.

FIGURE 7.—Typical cancellation wings for canceling lift downstream of subsonic trailing edge of swept wings.

SUCCESSIVE CANCELLATIONS

A cancellation wing may induce lift that itself must be canceled in order to satisfy boundary conditions completely. Thus, in figure 8, the cancellation of lift in region I induces lift in region I'. The cancellation of lift in region I' induces lift in region I'', and so forth. Each of these cancellations

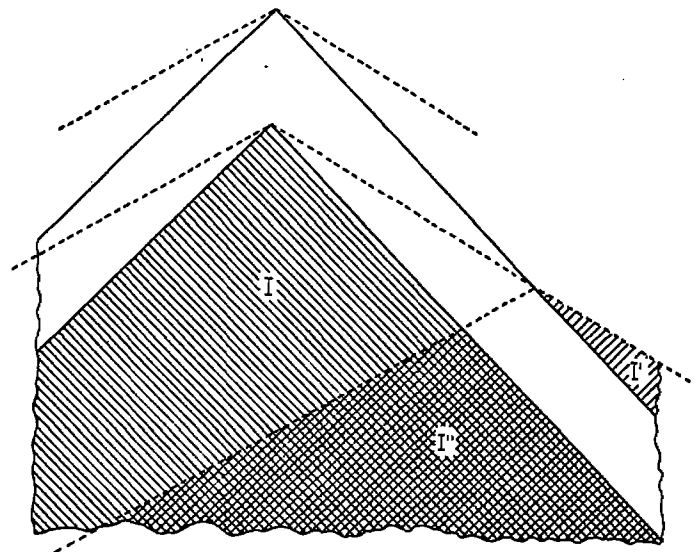


FIGURE 8.—Successive cancellations.

SUMMARY OF ANALYSIS AND APPLICATIONS

A general expression was determined for the lift distribution over a cancellation wing. The expression is valid when the plan-form boundary (on cancellation wing) separating the region of zero upwash from the region for which the lift is specified is everywhere subsonically inclined to the free stream. This expression permits the determination of lift distributions on a large variety of wings. The boundary conditions for either the flow about a subsonic leading edge or a subsonic trailing edge can be satisfied.

The lift-cancellation technique was illustrated for swept wings having curvilinear plan forms. Leading-edge, side-edge, and trailing-edge cancellations were considered. In addition, the loading in a region influenced by a reentrant side edge was found.

LEWIS FLIGHT PROPULSION LABORATORY,  
NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS,  
CLEVELAND, OHIO, January 16, 1950.



APPENDIX A

SYMBOLS

The following symbols are used in this report:

$a$	$=$	$(1 + \theta)r - (1 - \theta)s$
$a_1$	$=$	$(1 + \theta)r_1(s) - (1 - \theta)s$
$a_2$	$=$	$(1 + \theta)r_2(s) - (1 - \theta)s$
$\Delta C_l$		local lift coefficient, $\frac{p_B - p_T}{q}$
$c$		constant
$c_r$		root chord of swept wing
$E(\phi, k)$		elliptic integral of second kind, $E(\phi, k) = \int_0^{\sin \phi} \frac{\sqrt{1 - k^2 \omega_o^2}}{\sqrt{1 - \omega_o^2}} d\omega_o$
$F(\phi, k)$		elliptic integral of first kind, $F(\phi, k) = \int_0^{\sin \phi} \frac{d\omega_o}{\sqrt{(1 - \omega_o^2)(1 - k^2 \omega_o^2)}}$
$G(r, s_o)$		function of $r$ and $s_o$ defined by equation (12)
$H$	$=$	$\frac{2\alpha U}{\beta E\left(\frac{\pi}{2}, \sqrt{1 - \theta^2}\right)}$
$K$		slope of plan-form edge in $r, s$ coordinates, $dr/ds$
$k$		modulus of elliptic integrals
$M$		Mach number
$m$		slope of plan-form edge in $x, y$ coordinates, $dy/dx$
$n$		parameter of elliptic integral of third kind
$p$		local static pressure
$q$	$=$	$\frac{1}{2} \rho U^2$
$r, r_o$	}	Mach coordinate system (equation (4))
$s, s_o$		
$U$		free-stream velocity
$u, v, w$		perturbation velocities in $x, y, z$ -directions, respectively
$\Delta u$	$=$	$u_T - u_B$ (proportional to local lift)
$\Delta v$	$=$	$v_T - v_B$
$x, x_o$	}	Cartesian coordinate system
$y, y_o$		
$z, z_o$		

$\alpha$		angle of attack
$\beta$	$=$	$\sqrt{M^2 - 1}$
$\delta$		semivertex angle of triangular wing
$\theta$	$=$	$\beta \tan \delta$
$\Pi(\phi, n, k)$		elliptic integral of third kind, $\int_0^{\sin \phi} \frac{d\omega_o}{(1 + n\omega_o^2)\sqrt{(1 - k^2 \omega_o^2)(1 - \omega_o^2)}}$
$\rho$		density
$\tau$		area of integration
$\phi$		amplitude of elliptic integrals
$\varphi$		perturbation velocity potential
$\Delta \varphi$		doublet strength, $\varphi_T - \varphi_B$
$\omega_o$		integration variable
Regions:		
I		region on cancellation wing for which loading is specified
$I_a, I_b, \dots$		subdivisions of region I
II		region on cancellation wing for which $w=0$
$II_a, II_b, \dots$		subdivisions of region II
III		additional region on cancellation wing for which $w=0$
Special designations:		
$r=r_1(s)$		$r$ as function of $s$ along plan-form boundary 1
$s=s_1(r)$		$s$ as function of $r$ along plan-form boundary 1
$y=y_1(x)$		$y$ as function of $x$ along plan-form boundary 1
$x=x_1(y)$		$x$ as function of $y$ along plan-form boundary 1
$r=r_2(s)$		$r$ as function of $s$ along plan-form boundary 2
$s=s_2(r)$		$s$ as function of $r$ along plan-form boundary 2 and so forth.
Subscripts:		
1, 2, 3		refers to plan-form boundaries 1, 2, and 3, respectively
I, II		refers to regions I and II, respectively
$B$		bottom surface of $z=0$ plane
$T$		top surface of $z=0$ plane
$o$		variable of integration

APPENDIX B

SOLUTION OF INTEGRAL EQUATIONS

Consider the following integral equation (in the notation of the appendix in reference 5), where the function  $f(x)$  is assumed known and the function  $u(\xi)$  is to be determined:

$$f(x) = \int_a^x \frac{u(\xi) d\xi}{(x - \xi)^{3/2}} = \int_a^x \frac{[u(\xi) - u(x)] d\xi}{(x - \xi)^{3/2}} - \frac{2u(x)}{(x - a)^{1/2}} \quad (B1)$$

After an integration by parts, equation (B1) may be written

$$-\frac{f(x)}{2} - \frac{u(a)}{(x - a)^{1/2}} = \int_a^x \frac{u'(\xi) d\xi}{(x - \xi)^{1/2}} \quad (B2)$$

Equation (B2) is now an integral equation of the Abel type. The continuous solution for  $u(\xi)$  is (reference 14)

$$u(z) = -\frac{1}{2\pi} \int_a^z \frac{f(x) dx}{(z - x)^{1/2}} \quad (B3)$$

evaluated at  $z = \xi$ . This result is presented in reference 5.

Equation (11b) corresponds to equation (B1) with  $u(\xi) = G(r, s_o)$  and  $f(x) = 0$ . The solution for  $G(r, s_o)$ , according to equation (B3), is then

$$G(r, s_o) = 0 \quad (13)$$

Equation (14) corresponds to equation (B1) with

$$\xi = r_o \quad a = r_2(s_o)$$

$$x = r \quad f(x) = -\int_{r_1(s_o)}^{r_2(s_o)} \frac{\Delta \varphi_I dr_o}{(r - r_o)^{3/2}}$$

$$u(\xi) = \Delta \varphi_{II}$$

The solution for  $\Delta\varphi_{II}$  according to equation (B3) is then

$$\Delta\varphi_{II} = \frac{1}{2\pi} \int_{r_2(s_0)}^z \frac{dr}{\sqrt{z-r}} \int_{r_1(s_0)}^{r_2(s_0)} \frac{\Delta\varphi_I dr_0}{(r-r_0)^{3/2}} \quad (B4)$$

Reversing the order of integration and integrating yield

$$\Delta\varphi_{II} = \frac{\sqrt{z-r_2(s_0)}}{\pi} \int_{r_1(s_0)}^{r_2(s_0)} \frac{\Delta\varphi_I dr_0}{(z-r_0)\sqrt{r_2(s_0)-r_0}} \quad (B5)$$

Equation (B5), evaluated at  $z=r$  and  $s_0=s$ , yields

$$\Delta\varphi_{II} = \frac{\sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{\Delta\varphi_I dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} \quad (15)$$

The derivation of equation (15) is similar to that for equation (16) of reference 5.

## APPENDIX C

### DIFFERENTIATION TO OBTAIN $\Delta u_{II}$

The differentiation indicated in equation (16)

$$\frac{2\beta}{M} \Delta u_{II} = \left( \frac{\partial}{\partial r} + \frac{\partial}{\partial s} \right) \left[ \frac{\sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{\Delta\varphi_I dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} \right] \quad (16)$$

is to be conducted.

First,

$$\begin{aligned} \frac{2\beta}{M} \Delta u_{II} = & \frac{1 - \frac{dr_2(s)}{ds}}{2\pi\sqrt{r-r_2(s)}} \int_{r_1(s)}^{r_2(s)} \frac{\Delta\varphi_I dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} + \\ & \frac{\sqrt{r-r_2(s)}}{\pi} \left( \frac{\partial}{\partial r} + \frac{\partial}{\partial s} \right) \int_{r_1(s)}^{r_2(s)} \frac{\Delta\varphi_I dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} \end{aligned} \quad (C1)$$

Inasmuch as  $\Delta\varphi_I$  is a function of  $r_0$  and  $s$ ,

$$\frac{\partial}{\partial r} \int_{r_1(s)}^{r_2(s)} \frac{\Delta\varphi_I dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} = - \int_{r_1(s)}^{r_2(s)} \frac{\Delta\varphi_I dr_0}{(r-r_0)^2\sqrt{r_2(s)-r_0}} \quad (C2a)$$

and

$$\begin{aligned} \frac{\partial}{\partial s} \int_{r_1(s)}^{r_2(s)} \frac{\Delta\varphi_I dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} = & \int_{r_1(s)}^{r_2(s)} \frac{\left( \frac{\partial \Delta\varphi_I}{\partial s} \right) dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} + \\ \lim_{r \rightarrow r_2(s)} \left\{ -\frac{1}{2} \frac{dr_2(s)}{ds} \int_{r_1(s)}^{r_0} \frac{\Delta\varphi_I dr_0}{(r-r_0)[r_2(s)-r_0]^{3/2}} + \right. \\ \left. \frac{[(\Delta\varphi_I)_{r_0=r_2(s)}]}{(r-r_0)\sqrt{r_2(s)-r_0}} \frac{dr_2(s)}{ds} \right\} - & \frac{[(\Delta\varphi_I)_{r_0=r_1(s)}]}{[r-r_1(s)]\sqrt{r_2(s)-r_1(s)}} \frac{dr_1(s)}{ds} \end{aligned} \quad (C2b)$$

However,  $[(\Delta\varphi_I)_{r_0=r_1(s)}] = 0$  and, by integration by parts,

$$\begin{aligned} \int_{r_1(s)}^{r_2(s)} \frac{\Delta\varphi_I dr_0}{(r-r_0)[r_2(s)-r_0]^{3/2}} = & -2 \int_{r_1(s)}^{r_2(s)} \frac{\left[ \frac{\partial \Delta\varphi_I}{\partial r_0} + \frac{\Delta\varphi_I}{(r-r_0)} \right] dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} + \\ & \lim_{r \rightarrow r_2(s)} \left\{ \frac{2\Delta\varphi_I}{(r-r_0)\sqrt{r_2(s)-r_0}} \right\}_{r_1(s)} \end{aligned}$$

so that equation (C2b) can be written as

$$\begin{aligned} \frac{\partial}{\partial s} \int_{r_1(s)}^{r_2(s)} \frac{\Delta\varphi_I dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} = & \int_{r_1(s)}^{r_2(s)} \frac{\frac{\partial \Delta\varphi_I}{\partial s} dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} + \\ \frac{dr_2(s)}{ds} \int_{r_1(s)}^{r_2(s)} \frac{\left[ \frac{\partial \Delta\varphi_I}{\partial r_0} + \frac{\Delta\varphi_I}{(r-r_0)} \right] dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} \end{aligned} \quad (C3)$$

Equations (C2a) and (C3) are substituted into equation (C1) and the integrals containing  $\Delta\varphi_I$  are integrated by parts, reducing equation (C1) to

$$\begin{aligned} \Delta u_{II} = & \frac{\sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{\Delta u_I dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} - \\ & \frac{1 - \frac{dr_2(s)}{ds}}{2\beta\pi\sqrt{r-r_2(s)}} \int_{r_1(s)}^{r_2(s)} \frac{(\beta\Delta u_I - \Delta v_I) dr_0}{\sqrt{r_2(s)-r_0}} \end{aligned} \quad (17a)$$

## APPENDIX D

### ALTERNATIVE DERIVATION OF SOLUTION SATISFYING KUTTA CONDITION AT $r=r_2(s)$

The integral equation formulation in terms of  $\Delta\varphi$  (equation (14)) resulted in a solution that was continuous in  $\Delta\varphi$  (equation (15)) but discontinuous, in general, in the derivative  $\frac{\partial \Delta\varphi}{\partial x} = \Delta u$  (equation (17a)) at  $r=r_2(s)$ . In order to obtain

a solution continuous in  $\Delta u$ , an integral equation may be formulated that is similar to equation (14) but in terms of  $\Delta u$  rather than  $\Delta\varphi$ . The inversion shown in appendix B should result in a solution that is continuous in  $\Delta u$  but discontinuous in the derivatives of  $\Delta u$  at  $r=r_2(s)$ .

Consider equation (10) for the  $w$  distribution in the  $z=0$  plane. This equation will be differentiated with respect to  $x$  using a technique introduced in reference 15 (equations (1) to (3) therein). The expression for  $w$  at any point  $(r,s)$  is, from equation (10),

$$w = -\frac{M}{8\pi} \int \int_r \frac{\Delta\varphi dr_0 ds_0}{(s-s_0)^{3/2}(r-r_0)^{3/2}} \quad (D1)$$

where  $\tau$  is the area abc in figure 9 (a). The wing is moved upstream a distance  $dx$  (fig. 9 (b)), keeping the coordinate system fixed in space. The expression for the upwash at  $(r,s)$  now becomes

$$w + \frac{\partial w}{\partial x} dx = -\frac{M}{8\pi} \left[ \iint_{\tau} \frac{\left( \Delta\phi + \frac{\partial \Delta\phi}{\partial x_0} dx \right) dr ds_0}{(s-s_0)^{3/2}(r-r_0)^{3/2}} + \iint_{\Delta\tau} \frac{\Delta\phi dr_0 ds_0}{(s-s_0)^{3/2}(r-r_0)^{3/2}} \right] \quad (D2)$$

The second term on the right side of equation (D2) is zero because  $\Delta\phi=0$  along the leading edge. Subtraction of equation (D1) from equation (D2) then yields

$$\frac{\partial w}{\partial x} = -\frac{M}{8\pi} \iint_{\tau} \frac{\Delta u dr_0 ds_0}{(s-s_0)^{3/2}(r-r_0)^{3/2}} \quad (D3)$$

For points in region II of a cancellation wing,  $\frac{\partial w}{\partial x}=0$ . Thus, for the wing of figure 3 (a),

$$0 = \left[ \int_0^s \frac{ds_0}{(s-s_0)^{3/2}} \int_{r_1(s_0)}^r \frac{\Delta u dr_0}{(r-r_0)^{3/2}} \right] \quad (D4)$$

This equation is the same as equation (11a) except that  $\Delta u$  replaces  $\Delta\phi$ . The inversion by Abel's integral equation for  $\Delta u_{II}$  in terms of  $\Delta u_I$  then gives (from equation (15))

$$\Delta u_{II} = \frac{\sqrt{r-r_2(s)}}{\pi} \int_{r_1(s)}^{r_2(s)} \frac{\Delta u_I dr_0}{(r-r_0)\sqrt{r_2(s)-r_0}} \quad (24a)$$

Inasmuch as the integral equations of reference 5 are formulated in terms of  $\Delta u$  and are inverted by means of Abel's integral equation, only solutions satisfying the Kutta condition will result therein.

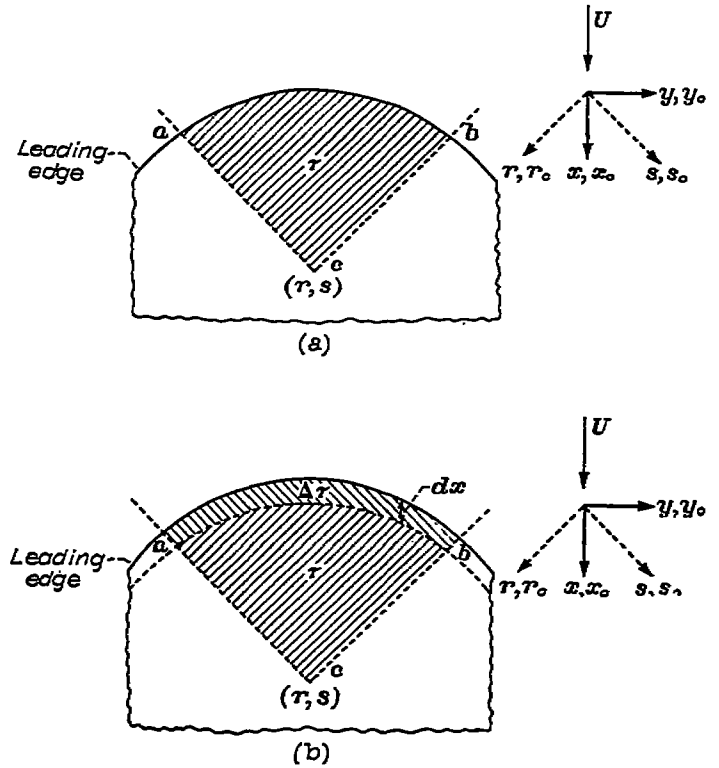


FIGURE 9.—Areas of integration relating to equations (D1) and (D2).

REFERENCES

- Lagerstrom, P. A.: Linearized Supersonic Theory of Conical Wings—(Corrected Copy). NACA TN 1685, 1950.
- Coleman, T. F.: Supersonic Lift Solutions Obtained by Extending the Simple Linearized Conical Flow Theory. Rep. No. CM-440, North American Aviation, Inc., Feb. 20, 1948. (Bumblebee Proj. Contract NOrd 9784.)
- Cohen, Doris: The Theoretical Lift of Flat Swept-Back Wings at Supersonic Speeds. NACA TN 1555, 1948.
- Cohen, Doris: Theoretical Loading at Supersonic Speeds of Flat Swept-Back Wings with Interacting Trailing and Leading Edges. NACA TN 1991, 1949.
- Goodman, Theodore R.: The Lift Distribution on Conical and Nonconical Flow Regions of Thin Finite Wings in a Supersonic Stream. Jour. Aero. Sci., vol. 16, no. 6, June 1949, pp. 365-374.
- Ribner, Herbert S.: Some Conical and Quasi-Conical Flows in Linearized Supersonic-Wing Theory. NACA TN 2147, 1950.
- Ribner, Herbert S.: On the Effect of Subsonic Trailing Edges on Damping in Roll and Pitch of Thin Sweptback Wings in a Supersonic Stream. NACA TN 2146, 1950.
- Robinson, A.: On Source and Vortex Distributions in the Linearized Theory of Steady Supersonic Flow. Rep. No. 9, College Aero. (Cranfield), Oct. 1947.
- Hadamard, Jacques: Lectures on Cauchy's Problem in Linear Partial Differential Equations. Oxford Univ. Press (London), 1923, pp. 133-135.
- Heaslet, Max. A., and Lomax, Harvard: The Use of Source-Sink and Doublet Distributions Extended to the Solution of Boundary Value Problems in Supersonic Flow. NACA Rep. 900, 1948. (Formerly NACA TN 1515.)
- Evvard, John C.: Use of Source Distributions for Evaluating Theoretical Aerodynamics of Thin Finite Wings at Supersonic Speeds. NACA Rep. 951, 1950.
- Mirels, Harold, and Haefeli, Rudolph C.: Line-Vortex Theory for Calculation of Supersonic Downwash. NACA Rep. 983, 1950. (Formerly NACA TN 1925.)
- Lomax, Harvard, Sluder, Loma, and Heaslet, Max. A.: The Calculation of Downwash behind Supersonic Wings with an Application to Triangular Plan Forms. NACA Rep. 957, 1950. (Formerly NACA TNs 1620 and 1803.)
- Whittaker, E. T., and Watson, G. N.: Modern Analysis. The MacMillan Co. (New York), 1943, p. 229.
- Evvard, John C.: Theoretical Distribution of Lift on Thin Wings at Supersonic Speeds (An Extension). NACA TN 1585, 1948.