


CONFIDENTIAL

Copy  
RM E53I28

NACA RM E53I28

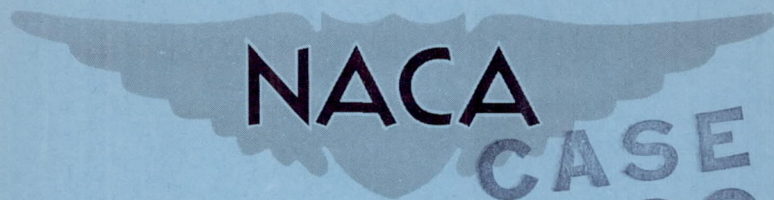

CASE FILE  
COPY

# RESEARCH MEMORANDUM

EXPERIMENTAL DETERMINATION OF GAS MOTION ACCOMPANYING  
SCREECHING COMBUSTION IN A 6-INCH SIMULATED AFTERBURNER

By Perry L. Blackshear, Warren D. Rayle, and Leonard K. Towler

Lewis Flight Propulsion Laboratory  
Cleveland, Ohio

CLASSIFICATION CHANGED TO UNCLASSIFIED  
AUTHORITY: PUBLICATION ANNOUNCEMENT NO. 1  
EFFECTIVE DATE: SEPTEMBER 17, 1958  
MIL

CLASSIFIED DOCUMENT


This material contains information affecting the National Defense of the United States within the meaning of the espionage laws, Title 18, U.S.C., Secs. 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

## NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WASHINGTON  
December 4, 1953

CONFIDENTIAL



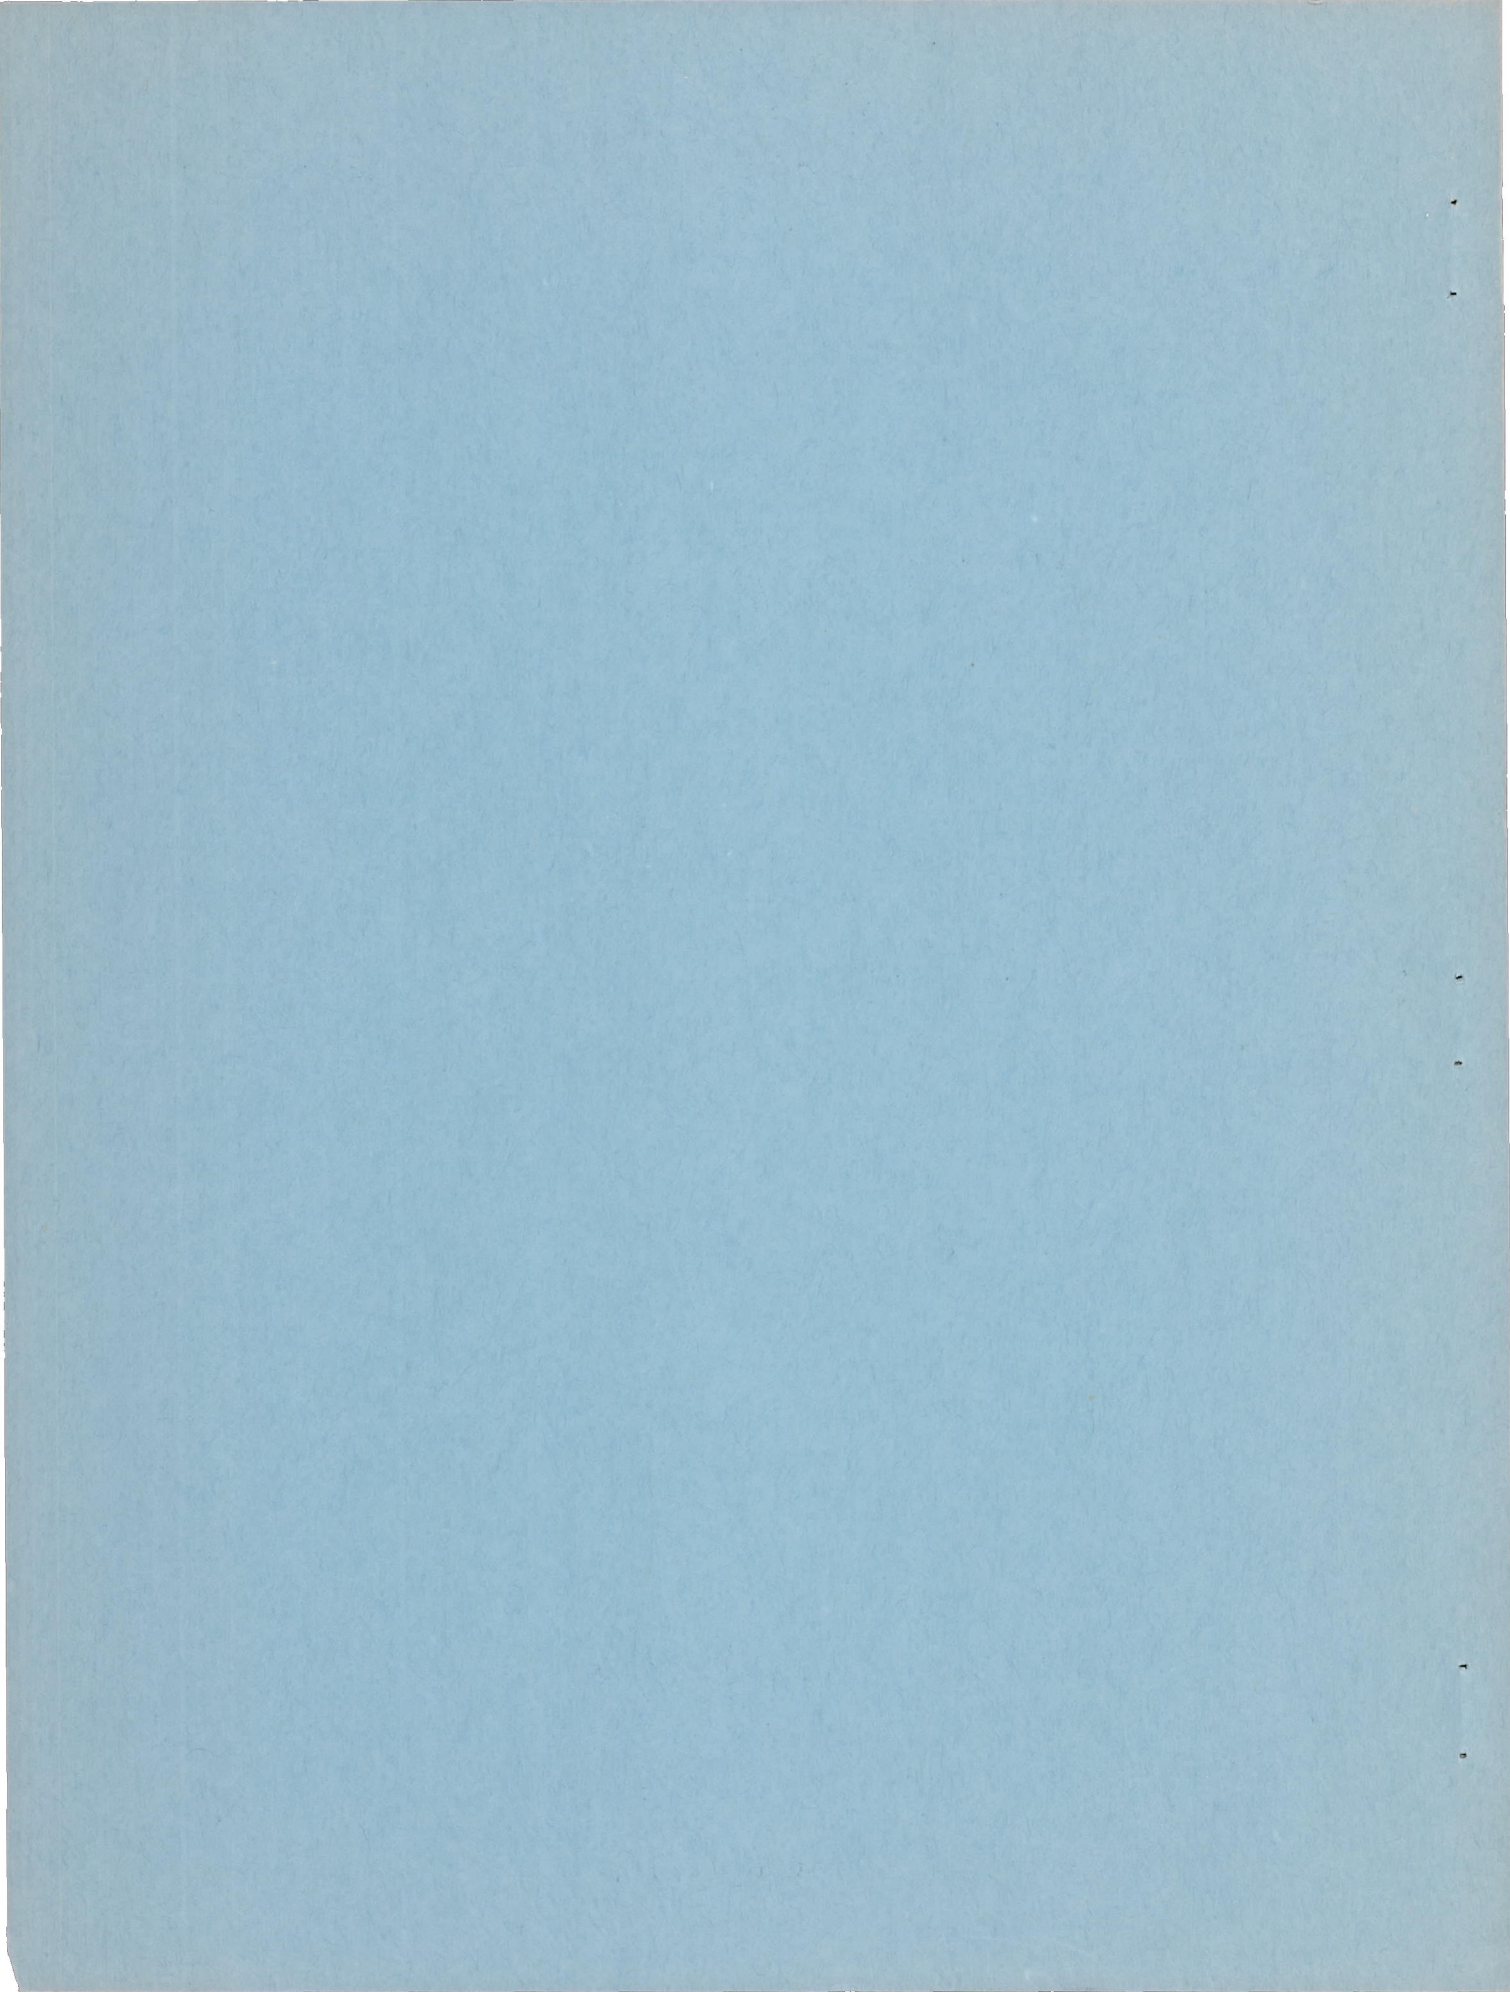

## NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUMEXPERIMENTAL DETERMINATION OF GAS MOTION ACCOMPANYING SCREECHING  
COMBUSTION IN A 6-INCH SIMULATED AFTERBURNER

By Perry L. Blackshear, Warren D. Rayle, and Leonard K. Tower

## SUMMARY

As part of a general research program on screeching combustion at the NACA Lewis laboratory, an investigation was conducted to develop screech instrumentation and study the mechanism of screech in a 6-inch-diameter simulated afterburner.

Probe microphones were developed which can be utilized to measure the frequency, relative amplitude, and relative phasing of the pressure oscillations at various positions within a screeching combustor. In calibrating these microphones to determine absolute values of pressure amplitude, a new theory was proposed to account for the nonlinear attenuation of high-amplitude sound in tubes.

The acoustic oscillations accompanying screech in the 6-inch afterburner were shown to consist of the first transverse (sloshing) mode in the hot gases downstream of the flame holder. Transverse oscillations can also account for the screech frequencies reported in the literature on full-scale afterburners and ram jets; in the larger combustors, however, higher modes of oscillation become prevalent. It is suggested that the acoustic oscillations responsible for the destructive effects of screech are maintained by a periodic variation in the combustion rate. Several techniques are suggested for the control or elimination of screech.

## INTRODUCTION

The trend toward higher flight speeds for military aircraft creates the need for jet engines of increased thrust. The trend in afterburner and ram-jet combustor development has therefore been towards combustors which operate at higher pressures, higher combustion temperatures, and higher velocities. With the development of these high-output combustors, the phenomenon known as screech has been widely encountered throughout the aircraft industry. Screech derives its name from the high-pitched, audible sound which accompanies the phenomenon. Other manifestations of screech are high-frequency pressure oscillation in the combustor and an



increased rate of heat transfer which has resulted in rapid deterioration or failure of combustor shell, flame holder, and other combustor parts. In most instances, therefore, screech is undesirable and is to be avoided. It is essential that an understanding of the screech phenomenon be obtained and that a method of controlling or eliminating screech be devised.

Screech has been encountered in afterburners (refs. 1 to 3), in ram jets (ref. 4), and in rocket engines (ref. 5); some detailed studies of the phenomenon have been made (refs. 4 and 5). Several different theories have been evolved in an attempt to explain the screech phenomenon. These theories have assumed the screech mechanism to be dependent upon combustion kinetics, aerodynamics, acoustic vibrations, or some combination of these phenomena. Under combustion kinetics, consideration has been given to phenomena similar to the knock experienced in reciprocating engines. Under aerodynamic phenomena, consideration has been given to vortex formation in the wake of flame holders, to vortex interaction, and to boundary-layer effects. Under acoustic phenomena, consideration has been given to axial, radial, and transverse modes of oscillation. The various theories relating to the screech mechanism and the data to support them are, in many cases, conflicting; additional studies seem to be required.

The investigation reported herein is part of a general program to investigate screech at the NACA Lewis laboratory and had a three-fold objective as follows: (1) to develop suitable instrumentation for studying screech in an operating combustor; (2) to make the measurements of screech necessary to assess the screech mechanism; and (3) to suggest methods for controlling or eliminating screech.

This investigation was conducted with a 6-inch-diameter direct-connect combustor. The combustor configuration and operating conditions simulated a turbojet afterburner. The instrumentation which was developed and evaluated for studying screech included a probe microphone capable of measuring the pressure fluctuations at any point within the combustor. This permitted a detailed study of the spatial distribution of amplitudes, frequencies, and relative phases. Ionization gaps were utilized to indicate the position of the flame front in the vicinity of the flame holder. In order to calibrate the probe microphone, an experimental and theoretical investigation was made of the attenuation of large-amplitude sound in tubes.

From surveys of the screech amplitude distribution, frequency, and relative phasing, the oscillatory motion of the gases in the combustor was deduced by comparing the experimental results with phenomena predicted from theoretical consideration of various modes of acoustic oscillation. A limited study was made of the effect on screech amplitude and frequency of such system variables as combustor pressure, air flow



rate, fuel-air ratio, flame-holder type, and flame-holder position. From the understanding of screech obtained in this investigation, several techniques were suggested for controlling or eliminating screech in afterburners and ram jets.

## APPARATUS

### Installation

A diagram of the combustor installation is shown in figure 1. The inlet and outlet ducts were connected to the laboratory air supply and exhaust systems. Air flow rates and combustor pressures were regulated by a remote-controlled valve upstream of the combustor and by a variable-area combustor exhaust nozzle. A tubular production-model turbojet combustor was installed in the duct upstream of the research combustor to provide conditions in the inlet stream which simulate conditions at the inlet of a turbojet afterburner.

### Research Combustor

The research combustor (fig. 2) had an inside diameter of 6 inches and a length (measured from the position of the flame holder to the position of the exhaust nozzle) which could be varied from 34 inches to  $45\frac{3}{4}$  inches by traversing the flame holder. The flame holder was traversed axially by means of a wire cable and a winch. The combustor having the variable-area exhaust nozzle and the water-jacketed combustor shell shown in figure 2 was used for only a part of the investigation reported herein; during the early phases of this investigation, the combustor had a fixed-area exhaust nozzle and an air-cooled outer shell. Fuel, JP-4 or gasoline, was supplied to the combustor through an air-atomizing spray bar located 100 inches upstream of the exhaust nozzle at the position indicated in figure 2. The air-atomizing spray bar is shown in figure 3. A total of four flame holders was investigated; these included single diametric V-type flame holders of two different sizes ( $1\frac{1}{2}$  and  $2\frac{1}{4}$  in. wide) and  $60^\circ$  single-cone flame holders of two different sizes (area blockage, 30 and 46 percent).

### General Instrumentation

Air flow was metered by a concentric-hole, sharp-edged orifice installed according to A.S.M.E. specifications. Fuel flow was metered by a calibrated rotameter. Combustor-inlet pressure was measured by four wall static taps as indicated in figure 1. Combustor-inlet



temperature was measured by chromel-alumel thermocouples connected to a self-balancing recording potentiometer. A thrust target was employed to measure the momentum of the exhaust. This was later replaced by a water quench spray, followed by a thermocouple array. The rise in enthalpy across the system then indicated the thermal efficiency.

### Special Instrumentation

Microphone probe development. - An instrument was required which could be used to measure the frequency and amplitude of the pressure oscillations accompanying screech and which could be used to determine the pressure distribution of any standing wave system in the combustor. To determine the pressure distribution, two basic techniques were apparent: (1) move the sensing element to various positions in the combustor, or (2) utilize a movable probe to pick up the pressure signal at various locations and transmit this signal to the sensing element located outside the combustor. There exist water-cooled pressure pickups that can withstand limited exposure to flame when mounted on the combustor wall. The life of these pickups is in constant jeopardy with designs employed so far and to adapt these pickups to immersion in the hot gas stream would hardly seem feasible.

Probe microphones for measuring the frequency and relative amplitude of screech in an operating combustor were designed, fabricated, and subjected to preliminary evaluation by measuring screech in the 6-inch-diameter simulated afterburner. The instruments showing the greatest promise were then selected for more detailed calibration and additional studies of screech. The necessary calibration consisted of a measurement of the attenuation of pressure waves between the open end of the probe and the microphone.

Description of instruments. - The probe microphone is shown in figure 4. A water-cooled probe which could be traversed diametrically through the combustor was connected to a 50-foot coil of 1/4-inch copper tubing which behaved acoustically as an infinite tube in that it produced negligible reflection of pressure pulses entering the tube. The sensing element, a microphone, was connected to this "infinite" tube by a short 1/32-inch-diameter lead at a point near the combustor. To prevent combustion gases containing soot and moisture from entering the probe during normal operation, a small flow of clean, dry air was maintained through the "infinite" tube into the combustor. The air purge was not adequate to keep the tube completely clean, since rapid changes in combustor operating conditions caused pressure surges which sometimes carried combustion gases into the tube. To avoid changes in the tube attenuation constants resulting from soot deposited from these combustion gases, it was deemed necessary to use a tube of reasonably large diameter (3/16-in. inside diameter).



Special probes were fabricated to check the reliability of the phase measurements obtained with the standard probe microphone. These "phase" probes were intended primarily to produce reliable phase measurements; the reliability of their amplitude readings was assumed to be small. A diagram of such a probe is shown in figure 5. The distance from the end of the probe to the microphone was minimized to avoid variations in internal phase lag. The bore of the tube was kept small to enable viscous damping to minimize the effect of reflected waves. An ample supply of cooling water was passed through the jacket of the probes, keeping the gas within the small tube at a temperature above the dew point of the combustion products.

Readings obtained with the phase probes confirmed the validity of the phase measurements made with the standard probe microphone. The phase measurements are therefore presented under RESULTS AND DISCUSSION without qualification as to the instrument employed.

Calibration. - In order to calibrate the special screech instruments for frequency and amplitude response, the apparatus shown in figure 6 was utilized. The apparatus for generating small-amplitude pressure waves (fig. 6(a)) consisted of a resonance chamber driven by a piston speaker. The apparatus for large-amplitude pressure waves (fig. 6(b)) consisted of a similar resonance chamber driven by a high-pressure air jet which was admitted intermittently by a rotating "chopper" disk. The readings of the research instruments were compared with the readings of a reference microphone which had been previously calibrated with a known steady-state variation in pressure. From these data the attenuation coefficient for the probe microphone was computed.

A theoretical analysis was made of the damping of high-amplitude pressure waves, and the resulting theoretical equations were utilized to correlate the experimental data on attenuation of high-amplitude waves. Theoretical considerations were also utilized to correct for the change in amplitude accompanying the transmission of a pressure wave across a temperature interface such as that existing between the hot gases in the combustor and the cold purge air flowing through the probe microphone.

#### Attenuation of Small-Amplitude Sound in Tubes

The attenuation and distortion of periodic pressure waves in tubes must be considered in designing and calibrating the probe microphone. The apparatus shown in figure 6(a) was utilized to measure attenuation constants for small-amplitude pressure waves and for various probe lengths. The so called Kirchoff attenuation constant  $\alpha_k$  for 1/4-inch tubes was computed from the relation



$$\alpha_k = \frac{\ln \frac{p_1}{p_2}}{x_2 - x_1} \quad (1)$$

where the symbols have the meanings listed in appendix A. The experimental values obtained from equation (1) were approximately 15 percent greater than the theoretical Kirchoff value; the data are presented in figure 7.

#### Attenuation of High-Amplitude Sound in Tubes

Screech oscillations having a peak-to-peak pressure amplitude as great as 20 inches of mercury have been encountered (ref. 4). For such pressure oscillations the magnitude of the attenuation coefficient is reported to be dependent on the amplitude (refs. 6 to 8). Since these references do not agree on the shape of the attenuation-against-amplitude curve, the data contained in the references were not considered adequate for computing the damping of high-frequency, high-amplitude waves in the 1/4-inch tube. An experimental and theoretical investigation of the damping of high-frequency, high-amplitude pressure waves in small tubes was therefore undertaken as part of this investigation.

Theoretical. - A derivation of equations describing various factors affecting the behavior of high-amplitude sound in tubes is given in appendix B. The factors can be briefly summarized as follows:

The sound pressure in the entrance of the probe is related to that of the source by the equation

$$p_r - p_e = \frac{5}{14} p_e^2 \quad (2)$$

It is well known (ref. 9) that high-amplitude sound waves propagating in free air tend to develop a saw-tooth wave form; that is, the waves generate higher harmonics. The amplitude below which the  $n^{\text{th}}$  harmonic of a wave of frequency  $f$  will not grow is

$$p_{\max} \approx \frac{0.292 \cos^m(n-1)}{f(n+1)} \quad (3)$$

where

0.292 depends on  $\gamma = 1.4$

$\alpha$  damping constant for fundamental component

$m$  exponent of  $f$  in  $\alpha$  ( $\alpha = \alpha' f^m$ )



In free air  $m = 2$  and  $\alpha$  is rather small for the frequencies of primary interest. For viscous damping in tubes,  $m$  is  $1/2$  and if  $\alpha$  is defined as  $\alpha'\sqrt{f}$ , equation (3) becomes

$$p_{\max} \approx 0.292 \alpha' \sqrt{\frac{n}{f}} \frac{(n-1)}{(n+1)} \quad (4)$$

For the case where this value is exceeded for the first several harmonics, the length of propagation for a sound wave to become saw-toothed is

$$x^* \approx \ln \left( \frac{p_{e,\max}}{p_{e,\max} - 0.292 \lambda \alpha_k} \right)^{\frac{1}{\alpha_k}} \quad (5)$$

If the amplitude-dependent attenuation coefficient is defined as

$$-\frac{\frac{dp_{\max}}{dx}}{p_{\max}} = \alpha_p \quad (6)$$

this constant can be expressed as

$$\alpha_p = \frac{12f}{c} \left[ \left( 1 + p_{\max} \right)^{\frac{1}{7}} - 1 \right] \quad (7)$$

(again for  $\gamma = 1.4$ ).

A plot of equation (7) is presented in figure 8. Values of the amplitude-dependent damping coefficient  $\alpha_p$  were combined with the experimental values of the Kirchoff damping coefficient  $\alpha_k$  and the resulting expression for the combined damping effects was integrated to obtain the curves shown in figure 9. Values of  $p_{\max}$  are shown plotted as a function of tube length  $x$  for three frequencies. Figure 9 indicates that even for high amplitudes the Kirchoff damping has a rather large effect in determining the over-all attenuation.

Therefore, the factors affecting a high-amplitude wave as it enters and propagates in the tube are as follows: First the amplitude is reduced on entering the tube according to equation (2). If the wave form is sinusoidal, it will become saw-toothed after propagating a distance given by equation (5), during which time it is attenuated by Kirchoff damping, equation (1). Once the wave becomes saw-toothed, it is attenuated according to the integrated equation shown in figure 9. Consideration of these factors yields the theoretical curves shown in figure 10.



Experimental. - Figure 11 shows the wave form recorded at 1080 cycles per second for various tube lengths in the probe microphone using the apparatus of figure 6(b). From these wave forms and from simultaneous voltmeter readings, the mean-to-peak amplitudes were determined.

Figure 12 presents a comparison of the pressure amplitude indicated by the probe microphone with that indicated by the calibrated reference microphone, for frequencies of 1080, 2400, and 3000 cycles per second. Also presented in figure 12 are the theoretical values of figure 10. Values of  $\alpha_p$  obtained from the curves of figure 12 are compared in figure 13 with the theoretical values from figure 8. Also shown in figure 13 are values of  $\alpha_p$  obtained from references 6 and 8.

Discussion. - From the foregoing results it is seen that probe microphones used in measuring high-amplitude, high-frequency sound become less sensitive as the probe length is increased and as the wavelength decreases. Fortunately, observed screech frequencies tend to decrease as combustor diameter is increased (refs. 1 to 5). The resulting design principle is fairly obvious; for maximum sensitivity of the probe microphone the distance from the end of the probe to the microphone should be kept small. It is possible to obtain a reasonably accurate picture of the wave form by the use of a probe microphone only if the wave travels less than a distance  $x^*$  as defined in equation (5).

The agreement between the observed and computed nonlinear attenuation coefficient is surprisingly good. If calibration facilities are not available these values may be used for computing the amplitude-dependent attenuation until some more refined method becomes available.

References 6 to 8 postulate turbulence as the cause of the nonlinear attenuation of high-amplitude sound in tubes. Figure 13 shows the theoretical nonlinear damping coefficients derived in appendix B to be in reasonable agreement with both the experimental values of references 6 to 8, which were obtained in large tubes, and the experimental values obtained in this investigation with 1/4-inch tubes. Consequently, it appears that  $\alpha_p$  is independent of tube size and hence is not a direct function of Reynolds number. The theory presented in appendix B is therefore believed to afford a better explanation of the observed nonlinear attenuation.

#### Effect of Temperature Discontinuity on Probe Microphone Reading

All the foregoing effects have been for an assumed constant mean temperature. When the gas temperature within the probe differs from the temperature in the combustor, a reflection will take place where the sound wave enters the tube. Assuming that particle displacement and sound pressure are equal on either side of this interface, the ratio of



the transmitted wave to the incident wave amplitudes can be computed as a function of the temperature ratio of the gas on either side of this interface. This ratio is given in the following equation:

$$\frac{P_{tr}}{P_{inc}} = \frac{2}{1 + \sqrt{\frac{T_{tr}}{T_{inc}}}} \quad (8)$$

### Flame Detection

Ionization gaps were used to detect the local motions of the flame during screech and give an indication of particle motion in a combustor. The ionization gaps used are shown in figure 14. The use of these gaps coupled with a surface-mounted pressure pickup provided an instantaneous picture of the relation between the local pressure and the flame-front position near a flame holder.

Several variations of photocell probes were made and tried. The results were not satisfactory. A periodic variation in the luminosity of the flame zone downstream of the flame holder was obtained with the photocell probe sketched in figure 15. This probe consisted of a small periscope purged with clean, dry air flowing through the periscope into the combustor. The photocell recorded an integrated value of the light emitted within a narrow cone between the periscope and the wall. The photocell probe produced a periodic signal during screech and therefore shows promise; it has not been used sufficiently, however, to warrant its recommendation. The ionization gaps, on the other hand, which were simpler to construct and to operate, have given very interesting data and are recommended for further screech investigations.

### PROCEDURE

The relative screech amplitude at various positions across the diameter of the 6-inch afterburner was measured at different distances downstream of the flame holder. The distance between the flame holder and the probe microphone was varied by changing the axial position of the flame holder. The pressure amplitude at the wall of the combustor was measured at 18 points along the length of the combustor by leaving the flame holder fixed and moving the microphone to the various positions of measurement. During the process of making these surveys of relative screech amplitude, the frequency spectrum of the sound was also recorded at various positions in the combustor.

The relative phasing of the pressure signal at different positions in the combustor was determined with two microphone pickups. Phase measurements were made between a reference pressure signal and the pressure signal obtained in vertical diammetric surveys at three distances downstream of the flame holder ( $3/4$ , 4, and  $7\frac{1}{2}$  in.).

relations were also measured at 18 points along the length of the combustor. With two ionization gaps located  $180^\circ$  apart,  $3/4$  inch downstream of the flame holder, and extending  $3/4$  inch from the burner walls, oscillations of the flame were detected. Simultaneous measurements with the ionization gaps and a microphone pickup were used to determine the relative phasing between the flame position and the pressure in the combustor.

The peak-to-peak pressure amplitude was measured at various pressures and air flow rates in the 6-inch afterburner. At each of several air flow rates the combustor pressure was progressively lowered to determine the limiting pressure below which screech was not encountered. Measurements of screech amplitude and frequency were made at various fuel-air ratios in the combustor; these data were obtained with the fixed-area exhaust nozzle, however, and changes in fuel-air ratio were accompanied by variations in combustor-inlet velocity and combustor pressure.

## RESULTS AND DISCUSSION

### Screech Mechanism

Amplitude distribution. - The relative screech amplitude at various positions across the combustor diameter is shown in figure 16 for surveys made at different distances downstream of the flame holder. The data of figure 16 were obtained by traversing the flame holder axially along the length of the combustor. At certain locations of the flame holder in the combustor, the longitudinal mode of oscillation would sometimes appear, and the indicated unfiltered amplitude of screech would rise. Figure 17 shows an oscilloscope trace of a combined intense low-frequency note with screech and a phase relation of the two frequencies obtained with appropriate band-pass filters. There is an apparent modulation of the screech amplitude by the low-frequency note. For most positions of the flame holder the 3300-cycle screech constituted the dominant oscillation. For other positions of the flame holder, however, the low-frequency 490-cycle oscillation was dominant as indicated in figure 16. Figure 18 shows typical spectra of sound recorded at the combustor wall for both the low- and the high-frequency oscillation.

In all surveys shown in figure 16 where the 3300-cycle oscillation was dominant, the amplitude exhibits a pronounced dip near the center of the duct. This is the amplitude pattern to be expected with a transverse mode of oscillation as shown in figure 19. Such a pattern could not result from radial or longitudinal oscillations.



Figure 20 shows a comparison of a sound spectrum at the combustor wall with a spectrum at the center of the duct for conditions producing the amplitude dip at the center. It is seen that only the high-frequency part of the spectrum (3300 cps) is attenuated at the center. It is concluded therefore that the frequency associated with the transverse mode is about 3300 cycles per second. The data shown in figures 16, 17, 18, and 20 are raw data taken with 3 feet of transmission line piping the signal to the microphone and subject to the corrections previously discussed.

For two positions of the flame holder, the amplitude at the wall was measured at 18 points along the length of the combustor with a single microphone moved from point to point to obtain the data shown in figure 21. These data show a peak in the screech amplitude about 5 inches downstream of the flame holder. This peak lies in the region where the maximum heat-release rate might be expected.

The circumferential distribution of sound at a plane  $1\frac{1}{2}$  inches downstream of a V-gutter flame holder is shown on figure 22. These data were gathered in three successive tests, the flame holder being rotated  $45^\circ$  between tests. The filtered screech signal is plotted against position relative to the gutter. A strong maximum is apparent at locations perpendicular to the gutter, thus indicating that the gutter orientation controls the direction of the transverse oscillation. Also plotted is the higher-frequency content of the signal; this, too, is minimum behind the gutter, but does not demonstrate so marked a peak as the screech fundamental. This may be interpreted as suggesting a nonsinusoidal driving force which acts over a relatively large portion of the cross section.

The data presented in figures 16, 21, and 22 are considered conclusive evidence that the screech oscillation studied comprised a standing transverse wave. The circumferential and radial distribution follows the general shape demanded by such a wave; the longitudinal survey may also be so interpreted. The amplitude peak shown on figure 21 does not indicate the presence of a standing longitudinal wave; rather it signifies the location from which the transverse oscillation is driven. If a combined longitudinal and transverse mode existed, the frequency would be

$$f = \frac{c}{2} \sqrt{\left(\frac{n_z}{l}\right)^2 + \left(\frac{2\beta}{d}\right)^2} \quad (9)$$

where  $n_z/l$  is the reciprocal of the half wavelength of the longitudinal oscillations and  $d$  is the burner diameter (ref. 10). If this longitudinal component is to have an appreciable effect on the indicated frequencies, the half wavelength would have to be of the order of a diameter. With a half wavelength of this magnitude, multiple pressure nodes



would occur in the 38-inch length surveyed. Since multiple nodes are not evidenced in figure 21, there exist no longitudinal components which can appreciably affect the frequency. The screech frequency can therefore be expressed by the relation

$$f = \frac{c\beta}{d} \quad (10)$$

The values of  $\beta$  (ref. 10) for the first two pure transverse modes of oscillation are 0.568 and 0.972.

Frequency. - The observed screech frequency of approximately 3300 cycles per second can be produced by the first pure transverse mode of oscillation ( $\beta = 0.568$ ) if the speed of sound is 2920 feet per second, or by the second transverse mode ( $\beta = 0.972$ ) if the speed of sound is 1710 feet per second. These values for the speed of sound correspond to average temperatures of 3850° and 1250° R, respectively. The higher of these temperatures approaches the theoretical flame temperature; the lower approaches the temperature of the inlet air. Consideration of screech frequency therefore indicates that the oscillation could consist of the first transverse mode in the hot gas or the second transverse mode in the inlet stream. For transverse modes of oscillation, the pressure will be out of phase on the opposite sides of the combustor for odd modes and in phase on opposite sides of the combustor for even modes of oscillation, along any diameter except an antinodal diameter. Phase measurements should therefore make it possible to determine whether the first or the second transverse mode of oscillation occurs.

Phase measurements. - By means of the special phase probes, vertical diametric surveys of pressure amplitude were made at three distances downstream of the flame holder ( $3/4$ , 4, and  $7\frac{1}{2}$  in.) to obtain the data shown in figures 23 and 24. A typical oscilloscope trace is shown in figure 23. The phase of the pressure signal relative to the signal obtained  $3/4$  inch downstream of the flame holder at the top wall of the combustor is indicated in figure 24. The 180° phase shift across a diameter indicates that the first transverse mode rather than the second mode of oscillation persisted in the combustor. The data of figures 23 and 24 indicate that there is also a phase shift along the length of the combustor. The relative phase of the pressure signal along the top of the combustor is shown in figure 21. These data also indicate the existence of a pronounced phase shift in the vicinity of the flame holder, signifying that in this region the waves have longitudinal components. The absence of a phase shift in the hot gases downstream of the flame holder indicates the existence of pure transverse oscillation in this region.

Circumferential phase relationships were sought. The results were not conclusive and could be interpreted as evidence either of standing or traveling transverse oscillation according to the desire of the



interpreter. This may be attributed to the large separation ( $90^\circ$ ) of the instrumentation positions, to the nonsinusoidal nature of the wave, or to a phase lag between the driving force and the oscillation.

With two ionization gaps located  $180^\circ$  apart,  $3/4$  inch downstream of the flame holder, and extending  $3/4$  inch from the burner walls, the signals shown in figure 25(a) were obtained. The flame striking the ionization gaps was  $180^\circ$  out of phase on opposite sides of the combustor. At positions farther downstream a random component was superimposed on the periodic component, making the signal difficult to interpret.

Simultaneous measurements of pressure and flame-produced ionization at a station  $3/4$  inch downstream of the flame holder (fig. 25(b)) showed that the outward flame-front motion is in phase with the pressure at this station. On the basis of these phase measurements, a time sequence of events in the screech cycle can be constructed as shown in figure 26. The relation between the pressure and the flame-front displacement is precisely that which would accompany a transverse oscillation.

#### Effect of System Variables on Screech

Pressure. - The effect of pressure on screech amplitude is shown in figure 27. The peak-to-peak pressure amplitude showed a general increase with increase in combustor pressure. These measurements were made with a flush-mounted microphone located upstream of the flame holder and therefore do not represent the maximum values of amplitudes (see fig. 21). The air flow rate is noted for each data point in figure 27. At an air flow rate of 1.5 pounds per second, the pressure limit for screech was 20 inches of mercury. Detailed measurements were not made of variations in frequency with pressure; sufficient observation was made, however, to ascertain that no marked change in frequency occurred as pressure was varied.

Gas flow rate. - The combustor screeched throughout most of its operating range as shown in figure 28. Screech was encountered at progressively lower pressures as gas flow rate was decreased. During screech the combustion efficiency was 90 to 100 percent; the efficiency dropped abruptly by approximately 35 percent when screech ceased.

The limited data of figure 27 showed no consistent variation of screech amplitude with variation in flow rate. No effect of flow rate on screech frequency was noted for the limited range investigated; these data are presented in table I. These tests were conducted with a fixed-area exhaust nozzle, however, and the maximum variation in combustor-inlet velocity was about 20 percent.

Fuel-air ratio. - The effect on screech of variations in fuel-air ratio is shown by the data of table I. The fixed-area nozzle was used



to obtain these data; this did not permit changes in fuel-air ratio without simultaneous variations in combustor-inlet velocity and combustor pressure. Only qualitative trends can therefore be noted. Fuel-air ratio exhibited no pronounced effect on screech amplitude. The effect of fuel-air ratio on screech frequency was as follows: Maximum frequency of 3500 cycles per second was obtained at an equivalence ratio of 1.14. Screech frequency decreased as fuel-air ratio was decreased below this value. The frequency was 3350 cycles per second at an equivalence ratio of 0.934 and 2800 cycles per second near the lean blow-out limit. When the fuel throttle valve was abruptly closed, combustion persisted for one to two seconds after the valve was closed. During this time the screech frequency continuously declined to a value much lower than 2800 cycles per second.

Flame-holder type. - Two single diametric V-type flame holders and two 60° single-cone flame holders were investigated. With the V-type flame holders, an aperiodic roughness was obtained which was superimposed on the high-frequency screech. The larger V-type flame holder burned out after 20 minutes of operation. The flame holders giving greater area blockage permitted a wider fuel-air ratio range of operation. All the flame holders investigated screeched throughout most of their operating range of fuel-air ratio.

Flame-holder position. - No appreciable change in screech frequency or amplitude was noticed when the flame-holder position was altered to produce combustor lengths from 34 inches to 45 inches. At one position of the flame holder, however, (giving a combustor length of 42 in.) a longitudinal mode of oscillation having a frequency of approximately 470 cycles per second appeared. This longitudinal oscillation did not replace the screech but merely accompanied and modulated it as shown in figure 17.

Combustor diameter. - Screech frequencies reported in the literature (refs. 3 and 4) for various full-scale afterburners can also be explained by assuming transverse oscillation in the combustors. Figure 29 shows a plot of screech frequency as a function of combustor diameter obtained from the relation  $f = c\beta/d$  for the lower values of  $\beta$ . It is based on the range of frequencies associated with the first transverse mode identified in the 6-inch combustor. The band widths result from variations in combustion-chamber sound speed implied by this range of frequencies. The experimental points from references 3 and 4 are included in figure 29. Most of the points lie within the range of frequencies theoretically possible with transverse oscillations. For the larger combustors higher modes appear prevalent.

In reference 4 it was noted that an increase in frequency occurred when a centerbody downstream of the flame holder was removed. A transverse mode would allow such an effect whereas a radial mode would not.



The theoretical frequency with the centerbody used in reference 4 and the observed frequencies are also given in figure 29.

#### Speculation Regarding Screech Mechanism

3070

The data thus far indicate that the gas in the burner does, in fact, execute a transverse oscillation during screech. Little has been said, however, of the means whereby the oscillation is maintained. Some source of energy is obviously required. Two sources of energy are available in the combustor: (1) the kinetic energy in the flowing gas stream; and (2) the chemical energy released during the combustion process. Of these two sources, the chemical energy is far greater. In order for this energy to be made available to overcome damping and maintain the oscillations at a high amplitude, it is necessary for it to be involved in some time-varying work cycle. The criterion proposed by Rayleigh (ref. 11) is that the heat input should occur at locations where the pressure varies and at a time when the pressure is near its maximum. For a case where the oscillations are driven by the kinetic energy of the flowing stream, the heat release may play a part in intermittently storing and releasing this kinetic energy in such a manner that the oscillation is maintained (ref. 12). In either event, it is obvious that the oscillation may be driven only when the heat release undergoes a variation with time. This may be brought about in many ways.

A coupling between the chemical reaction and the acoustic oscillations could result from the effect of pressure and temperature on the chemical kinetics. The rate of energy release per unit volume in high-speed combustion equipment has been shown to increase with increase in pressure and temperature (refs. 13 and 14). A relation of this sort can be used to predict the variation in heat release rate resulting from an adiabatic compression of the burning gases. A similar result obtains if the combustion zone is assumed to comprise many laminar flames again subjected to adiabatic compression. Both approaches indicate an amount of energy available for driving the oscillation that is proportional to the mean local heat-release rate and to the square of the dimensionless perturbation pressure.

Such an approximation was applied to the experimental burner reported herein. At typical conditions, perturbation pressure of 0.5, the available energy was found to be about 3 percent of the total energy in the fuel supplied.

The oscillation is damped, its energy removed, in at least four ways: (1) sound propagation upstream, (2) mass transport downstream, (3) absorption and scattering at the outer wall, and (4) nonlinear damping of the waves in the manner discussed in appendix B.

Damping of types (1), (2), and (3) is dependent on amplitude squared. Type (4) damping is a function of amplitude cubed. The rate of energy loss due to (1) and (2) for the experimental burner was estimated to be from one third to one half the rate at which energy would be supplied. Damping of type (3) becomes of comparable magnitude only when the walls are made highly dissipative. The nonlinear attenuation, type (4), is significant only when the amplitude is large.

The foregoing crude picture enables the following predictions to be made as to the variation of screech tendency with operational parameters. The dimensionless amplitude  $p$  would be an index of the difference between the driving power and the "linear" damping terms (1), (2), and (3); hence it would serve as an index of screech tendency. This tendency will increase with increases in mass flow, inlet temperature, flame-holder blockage, and mean heat-release rate. The tendency will increase with pressure only if the local heat-release rate per pound per second also rises. If the dimensionless amplitude  $p$  is constant, the amplitude  $P - P_{av}$  will increase linearly with pressure. These general predictions seem to be in agreement with the experimental findings.

The previously given concept of damping and driving assumes the heat release to be in phase with the pressure. If this is not true, the driving force would be reduced. Also neglected were the possible roles of flame wrinkling and detonation. A flame-front disturbance, possibly caused by the scattering of waves at the flame holder, certainly exists as evidenced by the excellent schlieren photographs of reference 4 and by the data shown on figure 25. The resultant time-varying heat release may well be an important constituent of the driving force.

It is quite possible that in the environment of the screeching combustor, the heat-release rate may at times more nearly approach that of detonation rather than that associated with steady conflagration. This again could alter the energy driving the oscillation.

Neither of the last-mentioned factors, however, would alter drastically the trends predicted by the use of the simplified picture.

#### Suggested Techniques for Elimination or Control of Screech

The tendency of a burner towards screech can be modified in two ways, as follows: (1) by altering the damping potential of the combustor, and (2) by altering the driving potential of the combustion process.

One technique for altering the damping potential of a chamber is to increase the sound absorption at the walls. A conservative estimate



of this absorption can be obtained by inserting the damping constant for completely absorptive walls into an available relationship derived for walls with small absorption. Such an estimate yields a rate of energy dissipation about equal to the rate at which energy is lost up and downstream. Actually, the wall absorption calculations assume the continued existence of a standing wave within the chamber. This assumption becomes unjustifiable as the walls become completely dissipative. Obviously, if there were no walls the standing-wave picture would no longer apply.

A second possibility is to increase the amount of energy lost upstream. This increase is achieved by reducing the flame-holder blockage. If the total flame-holder area must be retained, the flame holders may be staggered to increase the open area.

A third technique for altering the damping potential of a combustor is to effect changes in the interference of pressure waves reflected from various surfaces in the combustor. This effect may be achieved in various ways: (1) by the use of a corrugated liner, (2) by the use of an array of fuel injectors producing alternate rich and lean layers circumferentially near the combustor wall, (3) by distorting the combustor walls so as to vary either the shape or the size along the length of the combustor, and (4) by subdividing the combustor into a number of smaller chambers whose resonant frequencies do not coincide. A combination of the foregoing techniques, if carried to the ultimate, could result in an anechoic chamber.

Control of screech by modifying the driving potential does not offer a specific course of action because the driving mechanism is not yet fully understood. A few general design principles which might prove effective can, however, be mentioned. The region of maximum pressure excursion for the transverse mode is at the wall. If the reacting mixture can be kept away from this region, the part of driving due to the pressure effect can be minimized. This can be achieved in at least two ways: (1) by maintaining a fuel-free layer near the wall, and (2) by maintaining a stable pilot region at the wall, so that the pressure-sensitive region is occupied by exhaust products.

The design of the flame holder can also affect the driving potential of a combustor. The scattering of the longitudinal component of the wave by the flame holder and the resultant flame wrinkling will increase with flame-holder width. The flame wrinkling due to the transverse component of the oscillation will be independent of flame-holder width but will be a function of the other flame-holder dimensions as well as the flame-holder position; in general, the flame wrinkling resulting from the action of a transverse component will be proportional to the velocity component of this oscillation normal to the flame-holder edge.

The driving potential is also affected by the composition of the combustible mixture. The driving potential will be lowest for fuel-air mixtures having reactivities relatively insensitive to changes in temperature and pressure. This suggests the use of solid fuels or chemical additives which would decrease the rate of response of the reactants to variations in temperature and pressure. Reference 3 reports the use of tetraethyl lead as a fuel additive in a screeching combustor and reports no noticeable change in screech tendency. Reference 3 does not suggest this test to be conclusive regarding the effect of chemical additives, however.

There are certain beneficial aspects of screech. One of these is the increased combustion efficiency accompanying screech. Another is the possible gain in the over-all heat cycle for a given thermal efficiency. This can occur because most of the heat is released at a higher level of pressure with screech. It is uncertain how much of this excess energy is available above that required to overcome damping of the oscillation. To retain the beneficial aspects of screech while minimizing the destructive effects would demand a thorough and quantitative evaluation of the control techniques previously outlined.

#### SUMMARY OF RESULTS

The results of an investigation to develop instrumentation and study screech in a 6-inch-diameter simulated afterburner can be summarized as follows:

1. Probe microphones were developed which can be utilized to measure the frequency, relative amplitude, and phase relations of pressure oscillations at various positions within a screeching combustor.

2. Calibration data were obtained which make it possible to determine the absolute value of pressure amplitude from probe microphone readings. In obtaining these calibration data, a new theory was proposed to account for the nonlinear attenuation of high-amplitude sound in tubes.

3. From measurements of pressure amplitude distribution, frequency, and relative phasing during screeching operation of a 6-inch-diameter simulated afterburner, the acoustic oscillations accompanying screech were found to consist of the first transverse (sloshing) mode in the hot gases downstream of the flame holder. Transverse oscillations could also account for the screech frequencies reported in the literature on full-scale afterburners and ram jets; in the large combustors, however, higher modes of oscillation become prevalent.



4. The small-scale afterburner investigated screeched throughout most of its operating range. Screech was absent only at conditions approaching flame blow-out; screech disappeared just prior to blow-out as pressure was decreased or as air flow was increased.

Lewis Flight Propulsion Laboratory  
National Advisory Committee for Aeronautics  
Cleveland, Ohio, October 1, 1953

01070

CT-3 back

## APPENDIX A

## SYMBOLS

The following symbols are used in this report:

a	mean sound velocity relative to the gas, ft/sec
c	local sound velocity relative to the gas, ft/sec
d	combustor diameter, ft
f	frequency, $\text{sec}^{-1}$
n	integer denoting particular harmonic
P	local pressure, lb/sq in. abs
$P_{av}$	mean pressure, lb/sq in. abs
p	perturbation pressure, $(P/P_{av} - 1)$
$t^*$	time required for a wave to become saw-toothed, sec
u	local gas velocity relative to fixed coordinates, ft/sec
V	propagation velocity of saw-tooth shock front relative to fixed coordinates, ft/sec
v	wave propagation velocity, relative to fixed coordinates, ft/sec
x	distance, ft
$x^*$	distance required for a wave to become saw-toothed, ft
$\alpha$	damping coefficient, $\text{ft}^{-1}$
$\alpha_e$	effective over-all damping coefficient, $\alpha_e = \alpha_k + \alpha_p$ , $\text{ft}^{-1}$
$\alpha_k$	viscous damping coefficient, $\text{ft}^{-1}$
$\alpha_p$	saw-tooth damping coefficient, $\text{ft}^{-1}$
$\alpha'$	damping coefficient for wave of unit frequency, $\alpha' = \alpha/f^m$ , $\text{ft}^{-1}$
$\beta$	a constant
$\lambda$	wavelength, $c/f$ , ft



## Subscripts:

max conditions obtained at wave maximum pressure  
min conditions obtained at wave minimum pressure  
n integer denoting particular harmonic  
e conditions obtained at probe entrance  
r conditions obtained at sound source

## APPENDIX B

## DISTORTION AND DIMINUTION OF SOUND WAVES OF FINITE

## AMPLITUDE IN TUBES

It has been established (ref. 9) that finite-amplitude sound waves tend toward a saw-tooth wave form as they propagate. A portion of a single saw-tooth wave has been examined in reference 15. There it was shown that up to pressure ratios of  $2\frac{1}{2}$ , the sound speed computed by the isentropic relation

$$\frac{c}{a} = (1 + p)^{\frac{1}{7}} \quad (B1)$$

differs by less than 1 percent from that determined from the Rankine-Hugoniot relation

$$\frac{c}{a} = \left[ \frac{(1 + p)(7 + p)}{1 + 6(1 + p)} \right]^{\frac{1}{2}} \quad (B2)$$

(when  $\gamma = 1.4$ ). Also the Riemann invariant

$$Q \equiv 5c - u = \text{constant} \quad (B3)$$

was found to vary less than 1 percent for shocks up to  $P/P_{av} = 2.5$  (i.e.,  $p = 1.5$ ).

Since  $Q$  is constant for rarefaction waves and approximately constant for shock waves, equations (B1) and (B3) define the relation between  $u$ ,  $c$ , and  $p$ .

From the foregoing considerations, a number of useful relations can be derived for the propagation of sound in tubes.

End effect. - At high sound levels, the variation in static pressure at the entrance of the tube will not be equal to the pressure variation in the medium from which the impulse is taken. This results from the assumptions that: (1) wave energy is conserved, and (2) the incident sound has no particle velocity component in the direction of the tube. With these assumptions the energy equation reads

$$u_e^2 + 5c_e^2 = 5c_r^2 \quad (B4)$$



Within the tube, the speed of sound and the particle velocity are related by the equation

$$5c_e - u_e = 5a \quad (B3)$$

The speed of sound may be related to sound pressure by

$$\frac{c}{a} = (1 + p)^{\frac{1}{7}} \approx 1 + \frac{p}{7} \quad (B1)$$

Combining equations (B1), (B3), and (B4) yields the following expression relating the sound pressure in the probe entrance with that in the source:

$$p_r - p_e \approx \frac{5}{14} p_e^2 \quad (2)$$

Transition to saw tooth. - A harmonic distortion of finite sound waves results from the variation in sound speed between the compressed and the rarefied portions of the wave as indicated by equation (B1). Thus any finite wave, regardless of its initial form, will approach more and more closely the saw-toothed shape as time passes; that is, the leading portion of the wave will become a shock wave while the rarefaction will become more and more gradual. The rate at which this transition occurs will, of course, depend on the magnitude of the wave.

If a train of sine waves be engendered in an initially stationary medium, the waves will become saw tooth in form in a time

$$t^* = \frac{\lambda}{4(v_{\max} - a)} \quad (B5)$$

Since

$$v_{\max} = c_{\max} + u_{\max} \quad (B6)$$

equations (B1), (B3), (B5), and (B6) may be combined to give

$$t^* = \frac{7\lambda}{24ap_{\max}} \quad (B7)$$

The distance the wave travels during transition is then

$$x^* = \frac{7\lambda}{24p_{\max}} \quad (B8)$$

These relations should apply to waves propagating in ideal gases. If the waves be confined in a tube, the factor of viscous damping must be considered. The ideal saw-tooth wave may be represented by the Fourier expansion

$$p = \frac{2p_{\max}}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^{n+1}}{n} \sin 2\pi fn \left( \frac{x}{c} - t \right) \quad (\text{B9})$$

Since the viscous damping increases with increasing frequency, a physical wave may more truly be represented by terminating the series with the  $n^{\text{th}}$  harmonic. The finite series will then exhibit a pressure maximum at a point

$$x' = \frac{\lambda}{2} \frac{n}{n+1} \quad (\text{B10})$$

if  $ft$  in equation (B9) is set equal to an integer.

If the damping of the  $n^{\text{th}}$  harmonic of a wave of frequency  $f$  follows the relation

$$p_n = p_n e^{-\alpha' f^m n^m x} \quad (\text{B11})$$

the rate of decay of  $p_n$  with distance is

$$\frac{dp_n}{dx} = -p_n \alpha' f^m n^m \quad (\text{B12})$$

Assuming a uniform rate of growth of this harmonic, equations (B8) and (B10) yield

$$\frac{dp_n}{dx} = \frac{p_n p_{\max}}{7\lambda \frac{n-1}{24} \frac{n+1}}{n+1} \quad (\text{B13})$$

The value of  $p_{\max}$  below which  $p_n$  will no longer grow is found by equating the sum of equations (B12) and (B13) to zero, yielding

$$p_{\max} \approx 0.292 \alpha n^m \frac{n-1}{n+1} \frac{c}{f} \quad (3)$$

In free air  $m = 2$  and  $\alpha$  is small for the frequencies of interest. In fairly small tubes,  $m$  is  $1/2$ ; when  $\alpha = \alpha' \sqrt{f}$ , equation (3) becomes

$$p_{\max} = 0.292 \frac{\alpha \alpha'}{\sqrt{f}} \sqrt{n} \frac{n-1}{n+1} \quad (4)$$



If the viscous (Kirchoff) damping coefficient is applied to the wave during the transition from sine to saw tooth by the relation

$$p_{\max} = p_{\max,e} e^{-\alpha_k x} \quad (B14)$$

the transition time and distance can be recalculated by the use of

$$at_n^* + \frac{\Delta}{4} \frac{n-1}{n+1} = \int_0^{t_n^*} v_{\max} dt \quad (B15)$$

This becomes, by equations (B1), (B3), (B6), (B14), and (B15)

$$t_n^* = \frac{1}{\alpha_k a} \ln \frac{24 p_{\max,e} a^{(n+1)}}{-7\lambda \alpha_k (n-1) + 24 p_{\max,e}^{(n+1)}} \quad (B16)$$

or

$$x_n^* = at_n^* = \frac{1}{\alpha_k} \ln \frac{24 p_{\max,e}^{(n+1)}}{24 p_{\max,e}^{(n+1)} - 7\lambda \alpha_k (n-1)} \quad (B17)$$

or for large  $n$

$$x^* = \frac{1}{\alpha_k} \ln \frac{p_{\max,e}}{p_{\max,e} - 0.292\lambda \alpha_k} \quad (5)$$

Nonlinear attenuation. - If the original pressure wave is of sufficient amplitude to generate a large number of harmonics, a nonlinear attenuation results. This occurs as a result of the overriding of the shock front by the following rarefaction impulse. In considering this attenuation it is assumed that the wave will remain approximately saw tooth in form and that the mean pressure will be found halfway between the maximum and the minimum pressures. The Rankine-Hugoniot equation (ref. 5)

$$\frac{u_{\max} - u_{\min}}{c_{\min}} = \frac{5}{6} \left( \frac{V - u_{\min}}{c_{\min}} - \frac{c_{\min}}{V - u_{\min}} \right) \quad (B18)$$

may be written in quadratic form and solved as follows:

$$V = 0.6 u_{\max} + 0.4 u_{\min} + \sqrt{0.36(u_{\max} - u_{\min})^2 + c_{\min}^2} \quad (B19)$$

Equations (B1) and (B3) may be combined to give

$$u = 5a \left[ (1 + p)^{\frac{1}{7}} - 1 \right] \approx 5a \left( \frac{p}{7} - \frac{3}{49} p^2 \right) \quad (\text{B20})$$

which, with equation (B19) and the assumption of equal pressure and rarefaction magnitudes, gives

$$\frac{v}{a} \approx \frac{p_{\max}}{7} \left( 1 - \frac{15}{7} p_{\max} \right) + \sqrt{1 - \frac{2}{7} p_{\max} + \frac{31}{49} p_{\max}^2} \approx 1 \quad (\text{B21})$$

Thus it is seen that little error should be introduced by assuming that the propagation velocity of the shock front is equal to the speed of sound in the undisturbed medium.

The rate at which the saw-tooth wave diminishes due to the over-riding of the rarefaction upon the shock front can be expressed in terms of a nonlinear damping coefficient  $\alpha_p$ , defined as

$$\alpha_p = - \frac{1}{p_{\max}} \frac{dp_{\max}}{dx} = - \frac{1}{ap_{\max}} \frac{dp_{\max}}{dt} \quad (6)$$

The equivalent expression, in terms of peak and average wave velocities, is

$$\alpha_p = \frac{2}{a\lambda} (v_{\max} - a) \quad (\text{B21})$$

which may be combined with equations (B1), (B3), and (B6) to give

$$\alpha_p = \frac{12f}{a} \left[ (1 + p_{\max})^{\frac{1}{7}} - 1 \right] \quad (7)$$

This nonlinear damping is assumed to be accompanied by viscous damping; the effective damping coefficient for saw-tooth waves in a tube is taken as the sum of the two effects:

$$\alpha_e = \alpha_p + \alpha_k = \frac{12f}{a} (1 + p_{\max})^{\frac{1}{7}} + \alpha_k - \frac{12f}{a} \quad (\text{B22})$$

The variation of peak pressure with distance can then be obtained by integration, again using the binomial expansion of  $(1 + p_{\max})^{1/7}$  and discarding terms of higher order than  $p_{\max}^2$ . This yields the expression



$$\alpha_e = \frac{-dp_{\max}}{p_{\max} dx} \approx \frac{12}{7} \frac{f}{a} \left( p_{\max} - \frac{3}{7} p_{\max}^2 \right) + \alpha_k \tag{B23}$$

from which

$$\int \frac{dp_{\max}}{p_{\max} \left[ \frac{12f}{7a} \left( p_{\max} - \frac{3}{7} p_{\max}^2 \right) + \alpha_k \right]} = - \int dx \tag{B24}$$

or

$$e^{-2\alpha_k x} = \left[ \frac{C_0 p_{\max}^2}{\frac{12f}{7a} \left( p_{\max} - \frac{3}{7} p_{\max}^2 \right) + \alpha_k} \frac{\left( 1 - \frac{6}{7} p_{\max} + \sqrt{1 + \frac{a\alpha_k}{f}} \right) \sqrt{1 + \frac{a\alpha_k}{f}}}{\left( 1 - \frac{6}{7} p_{\max} - \sqrt{1 + \frac{a\alpha_k}{f}} \right)} \right] \tag{B25}$$

where  $C_0$  is the constant of integration. For a given frequency and tube size, this equation may be plotted as in figure 9.

To summarize, there are three regions with distinct characteristics through which the sound wave travels in a probe-type microphone; the entrance, the transition region, and the saw-tooth region. Considering these regions separately, curves may be drawn for a given diameter probe which will represent the internal sound level as a function of source level and tube length. The sound level at the tube entrance is less than that of the source by the amount indicated from equation (2). During the transition (the length of this region is determined from eq. (5)), the linear (Kirchoff) damping coefficient applies (eq. (B14)). When the transition is complete, the damping coefficient of equation (B23) must be used. Such a set of curves is shown in figure 10.

3070  
CT-4 back

## REFERENCES

1. Conrad, E. William, and Campbell, Carl E.: Altitude Wind Tunnel Investigation of High-Temperature Afterburners. NACA RM E51L07, 1952.
2. Conrad, E. William, and Campbell, Carl E.: Altitude Investigation of Several Afterburner Configurations for the J40-WE-8 Turbojet Engine. NACA RM E52L10, 1953.
3. Conrad, E. William, Schulze, Frederick W., and Usow, Carl H.: Effect of Diffuser Design, Diffuser-Exit Velocity Profile, and Fuel Distribution on Altitude Performance of Several Afterburner Configurations. NACA RM E53A30, 1953.
4. Bragdon, Thomas A., Lewis, George D., and King, Charles H.: Interim Report on Experimental Investigation of High Frequency Oscillations in Ramjet Combustion Chambers. M.I.T. Meteor Rep. UAC-53, Res. Dept., United Aircraft Corp., Oct. 1951. (BuOrd Contract NOrd 9845.)
5. Smith, R. P., and Sprenger, D. F.: Combustion Instability in Solid-Propellant Rockets. Fourth Symposium (International) on Combustion, The Williams & Wilkins Co., 1953, pp. 893-906.
6. Lehmann, K. O.: Die Dämpfungsverluste bei starken Schallschwingungen in Rohren. Annalen der Physik, Folge 5, Bd. 21, Dec. 1934, pp. 533-552.
7. Binder, R. C.: The Damping of Large Amplitude Vibrations of a Fluid in a Pipe. Jour. Acous. Soc. Am., vol. 15, no. 1, July 1943, pp. 41-43.
8. Richardson, E. G.: The Damping of Sound Waves of Large Amplitude in Tubes. Proc. Math. and Phys. Soc. of Egypt, vol. 3, no. 3, 1947.
9. Fay, R. D.: Plane Sound Waves of Finite Amplitude. Jour. Acous. Soc. Am., Oct. 1931, pp. 222-241.
10. Morse, Philip M.: Vibration and Sound. McGraw-Hill Book Co., Inc., 1936.
11. Rayleigh: Theory of Sound. Vol. II. Dover Pub., 1945.
12. Blackshear, Perry L., Jr.: Driving Standing Waves by Heat Addition. NACA TN 2772, 1952.



13. Childs, J. Howard, McCafferty, Richard J., and Surine, Oakley W.:  
Effect of Combustor Inlet Conditions on Performance of an Annular  
Turbojet Combustor. NACA Rep. 881, 1947. (Supersedes NACA TN  
1357.)
14. Childs, J. Howard: Preliminary Correlation of Efficiency of Air-  
craft Gas-Turbine Combustors for Different Operating Conditions.  
NACA RM E50F15, 1950.
15. Chandrasekhar, S.: On the Decay of Plane Shock Waves. Rep. No.  
423, Ballistic Res. Labs., Aberdeen Proving Ground (Maryland),  
1953.

TABLE I. - OBSERVED FREQUENCIES FOR SIMULTANEOUS VARIATIONS  
OF MASS FLOW, EQUIVALENCE RATIO, AND BURNER PRESSURE

[Inlet-gas temperature, 1660° R]

Frequency, cps	Mass flow, lb/sec	Equivalence ratio	Mean pressure, $P_{av}$ , lb/sq in.	Inlet velocity, ft/sec
3350	2.005	0.9339	19.78	310.9
3500	2.080	1.104	20.78	307.1
3500	2.080	1.146	20.78	307.1
3400	1.990	.9968	20.28	301.0
3400	2.452	1.007	22.28	337.6
3400	2.787	.9964	24.28	352.1
3400	3.166	.9881	26.28	369.6
3350	3.474	.9595	28.28	376.8

3070



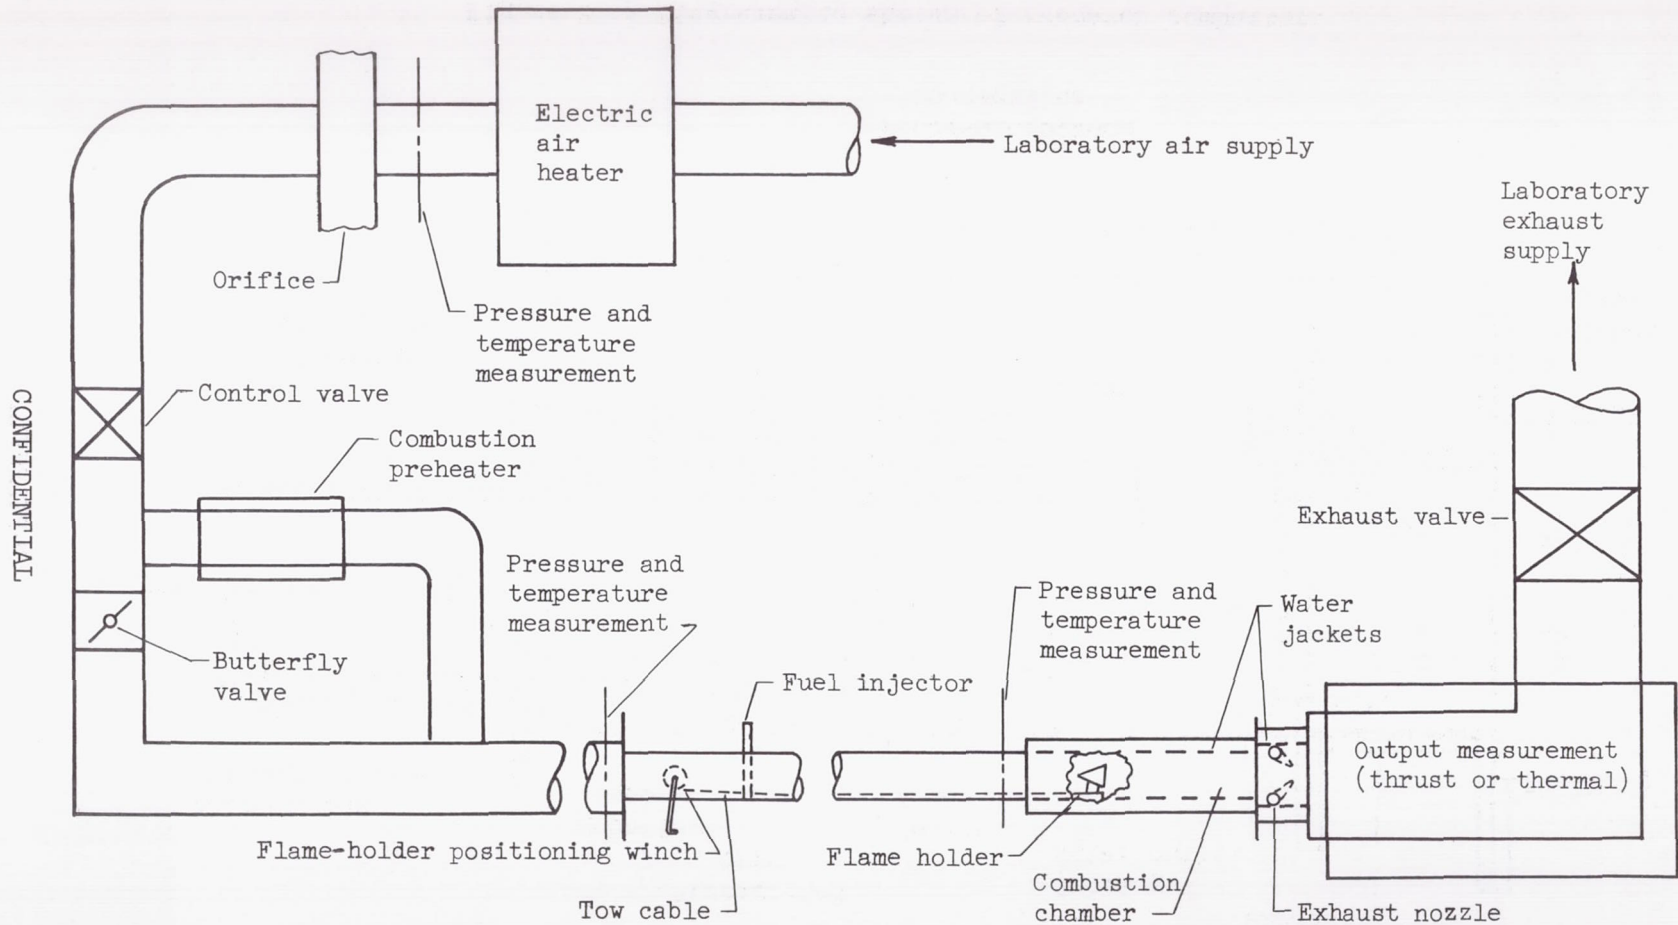


Figure 1. - Diagrammatic sketch of 6-inch afterburner installation.

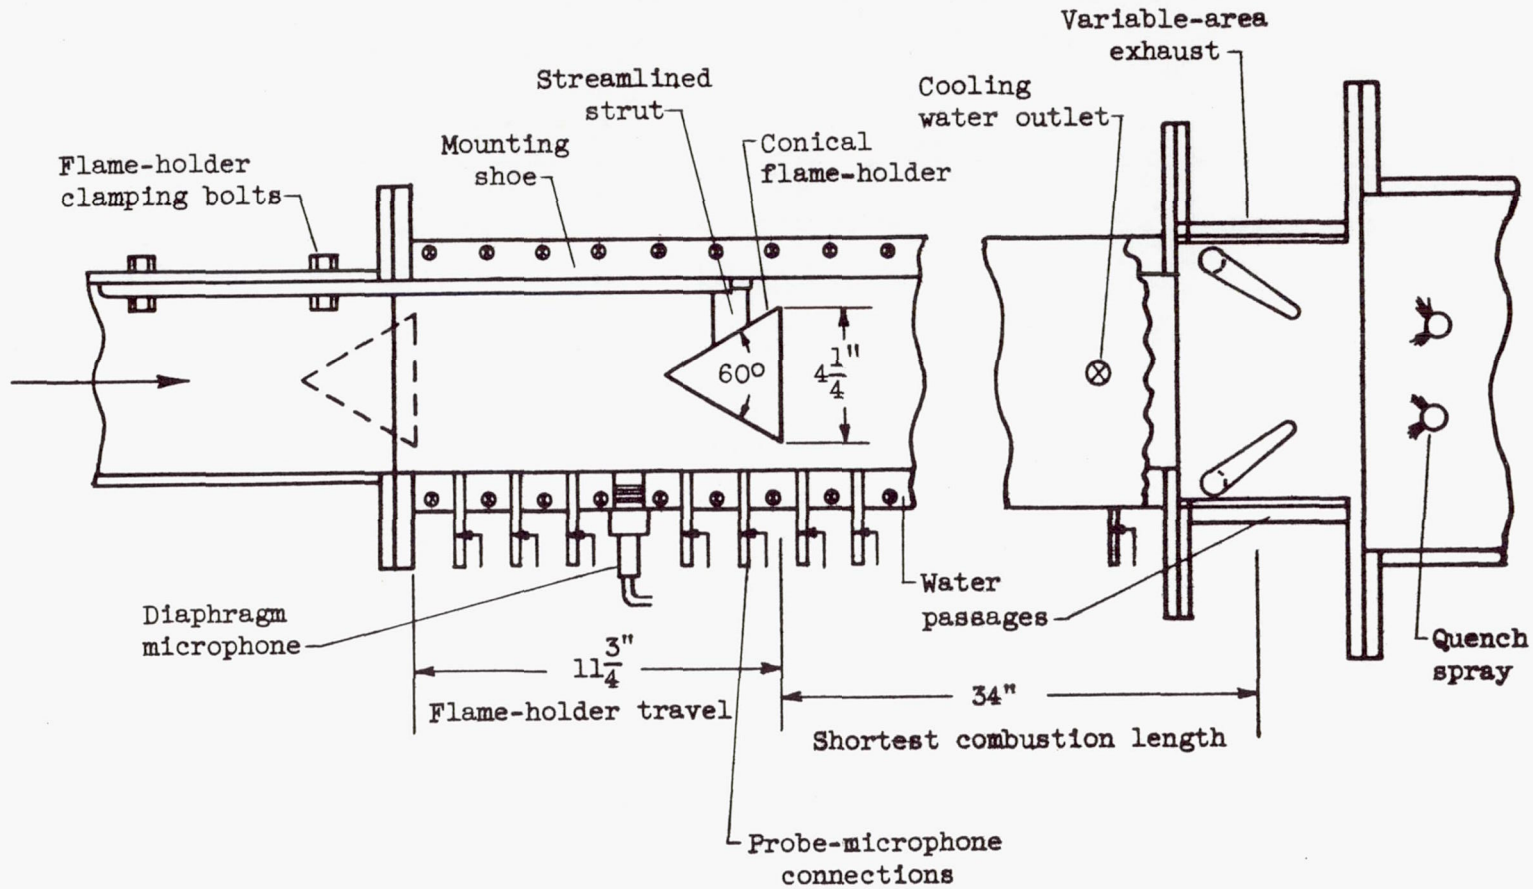


Figure 2. - Diagrammatic sketch of research combustor.



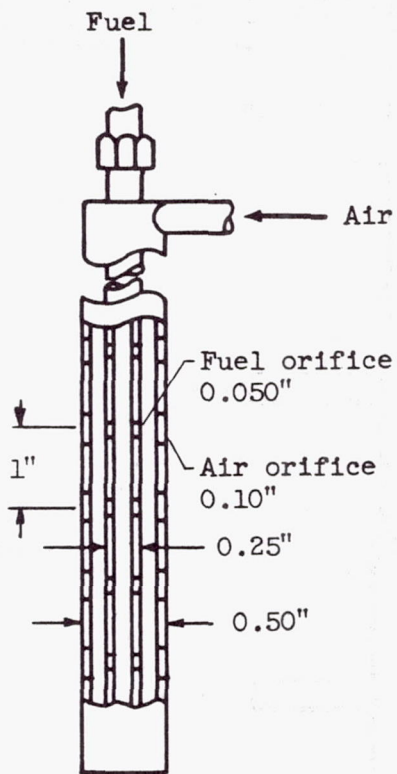


Figure 3. - Diagrammatic sketch of air-atomizing spray bar.

3070  
CT-5

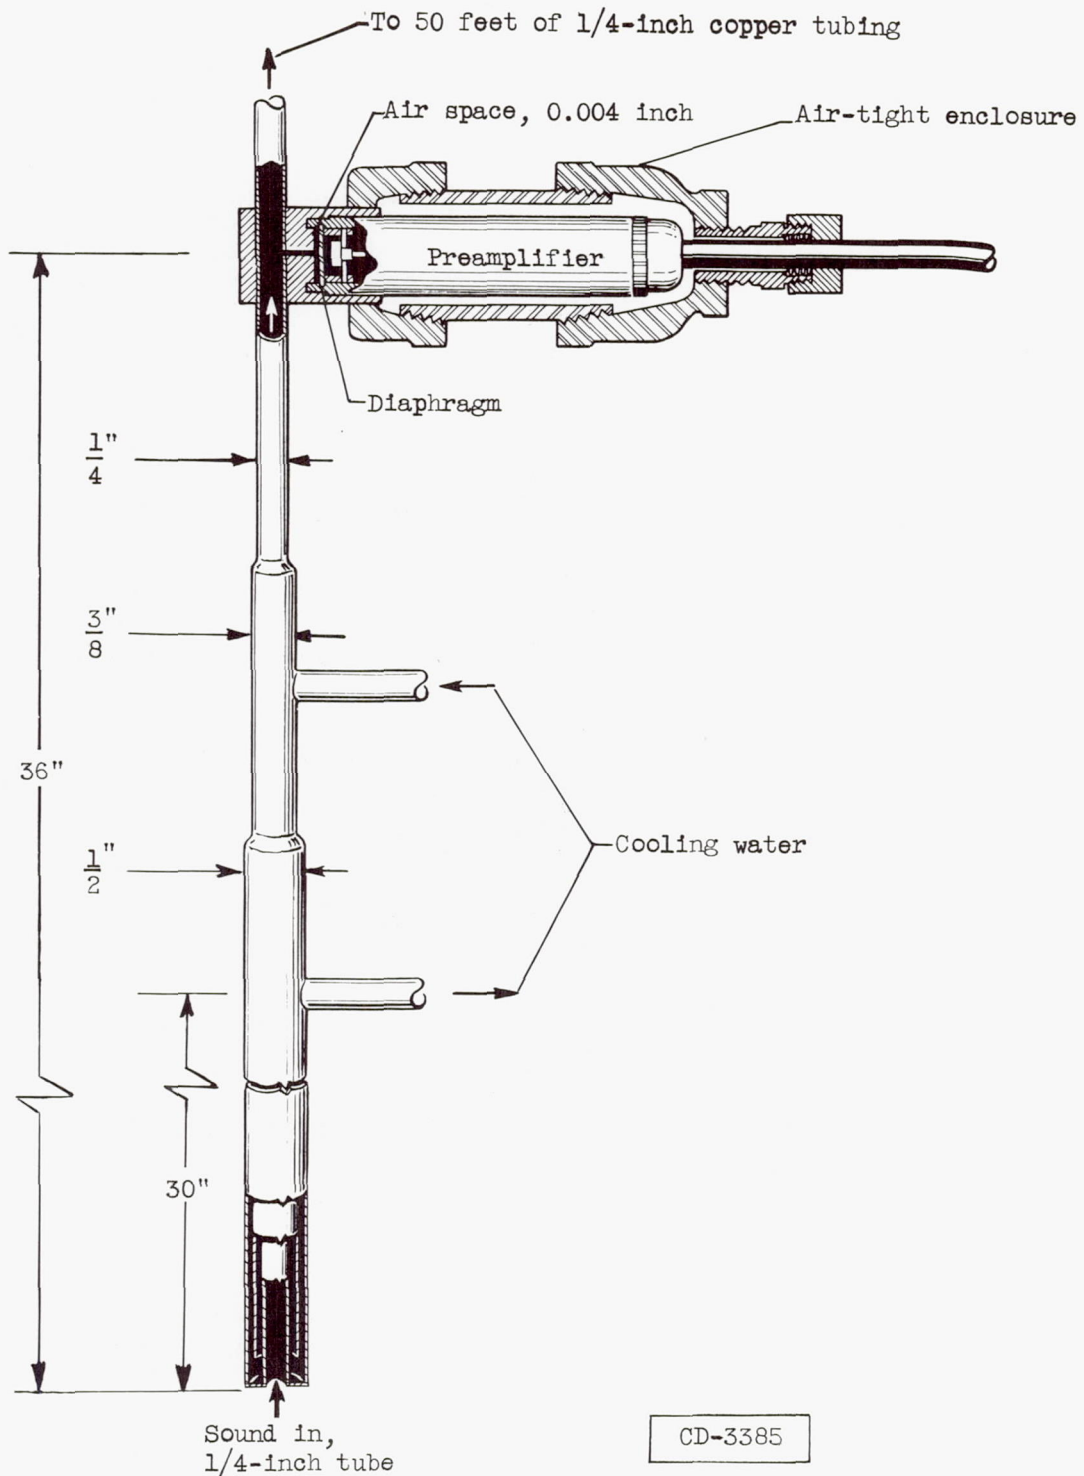


Figure 4. - Sketch of "infinite" probe (not scaled).

3070




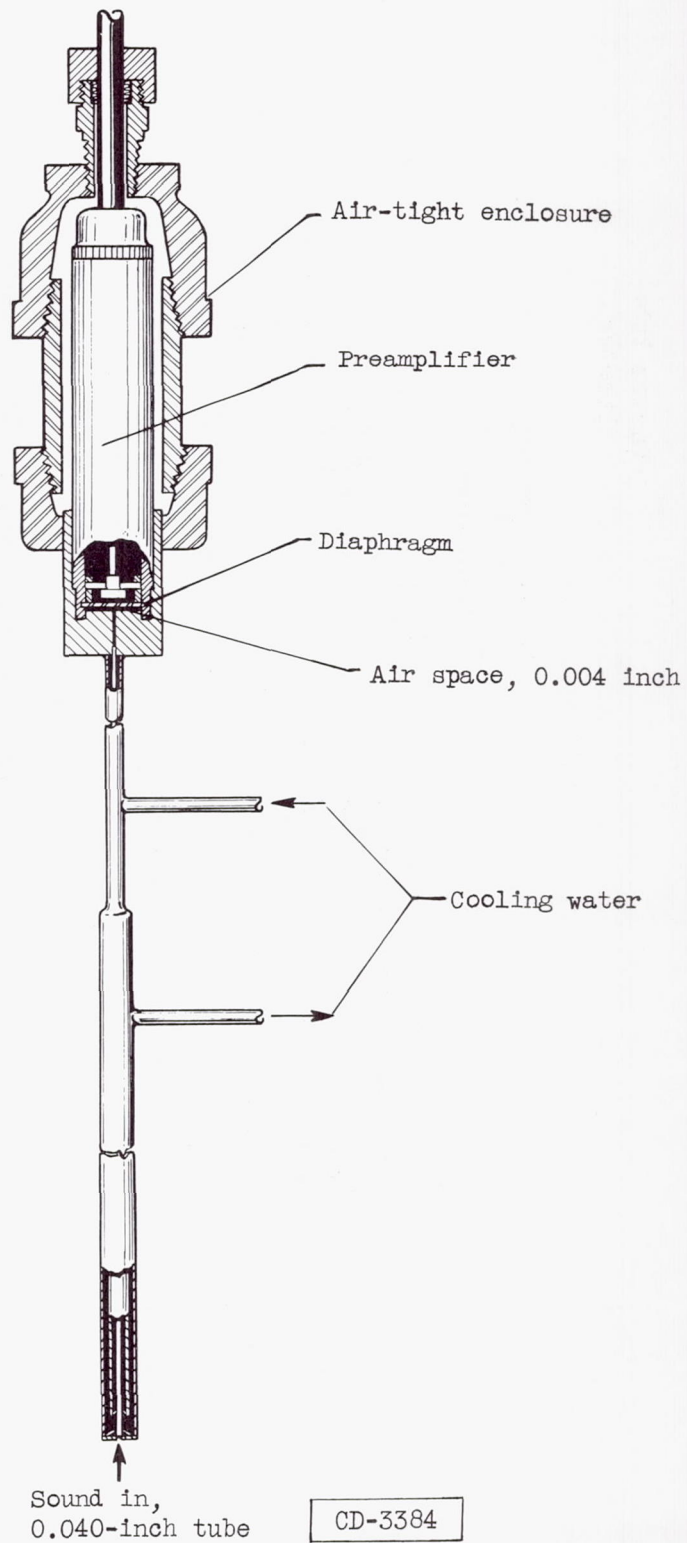


Figure 5. - Sketch of "phase" probe (not scaled).

3070  
CT-5 back

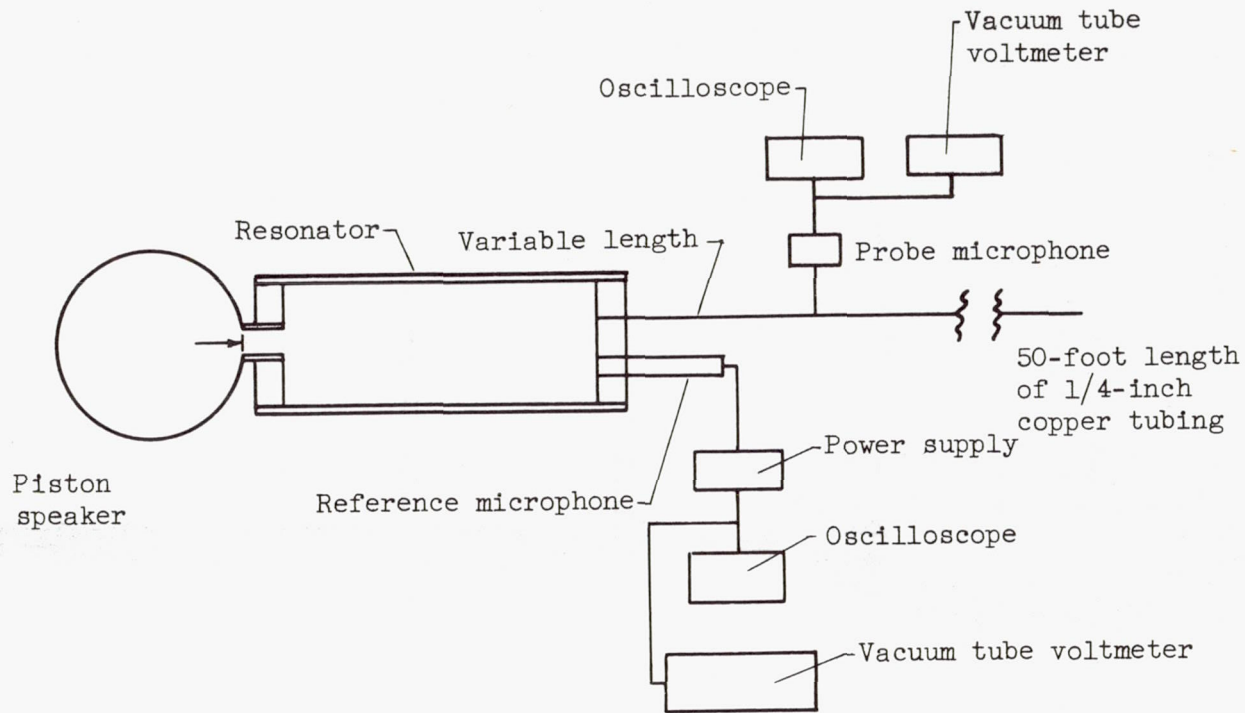


(a) Resonator for infinitesimals.

Figure 6. - Apparatus for measuring attenuation constants.



3070

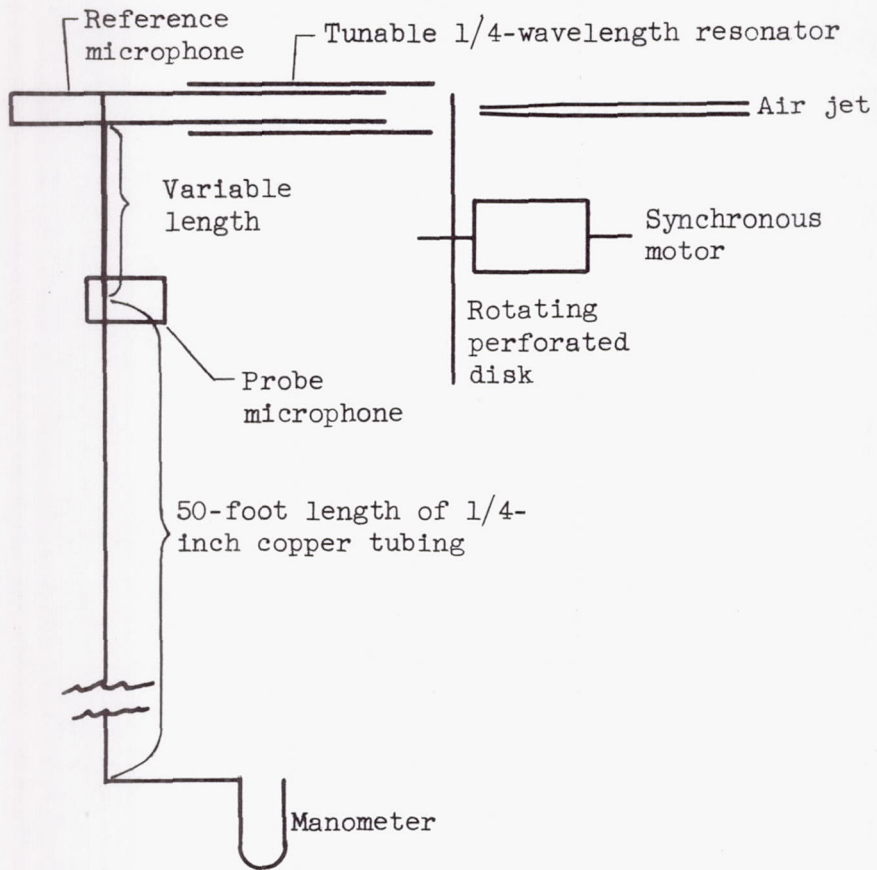

(b) Resonator for high amplitudes.

Figure 6. - Concluded. Apparatus for measuring attenuation constants.

CONFIDENTIAL

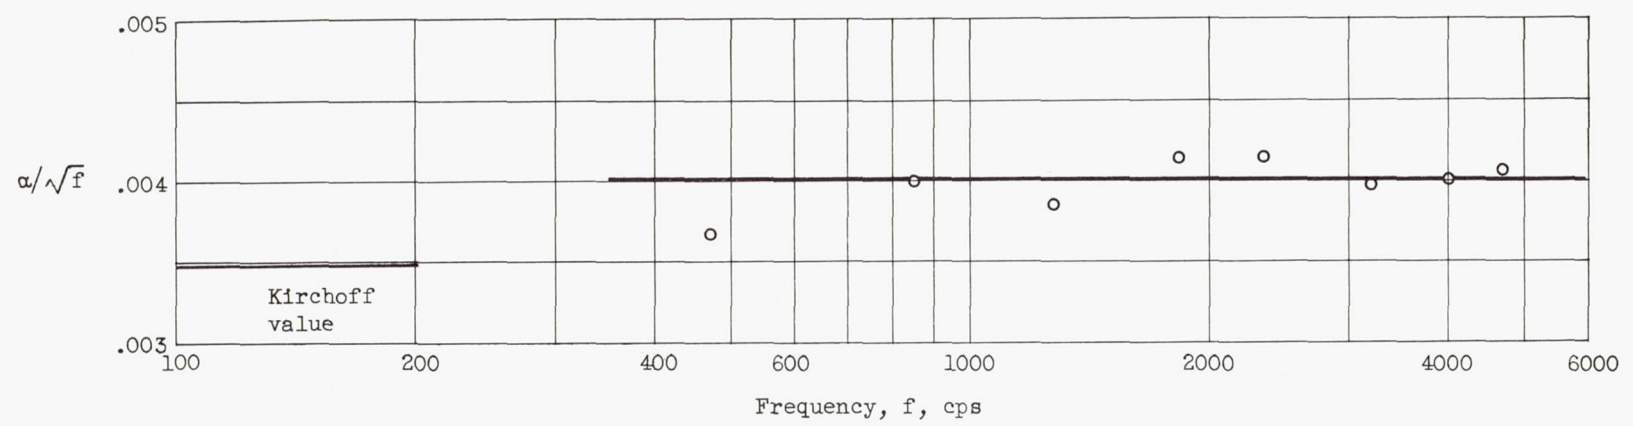


Figure 7. - Attenuation constant  $\alpha$  for 1/4-inch-outside-diameter, 1/16-inch-wall copper tubing for low-amplitude sounds.



CONFIDENTIAL

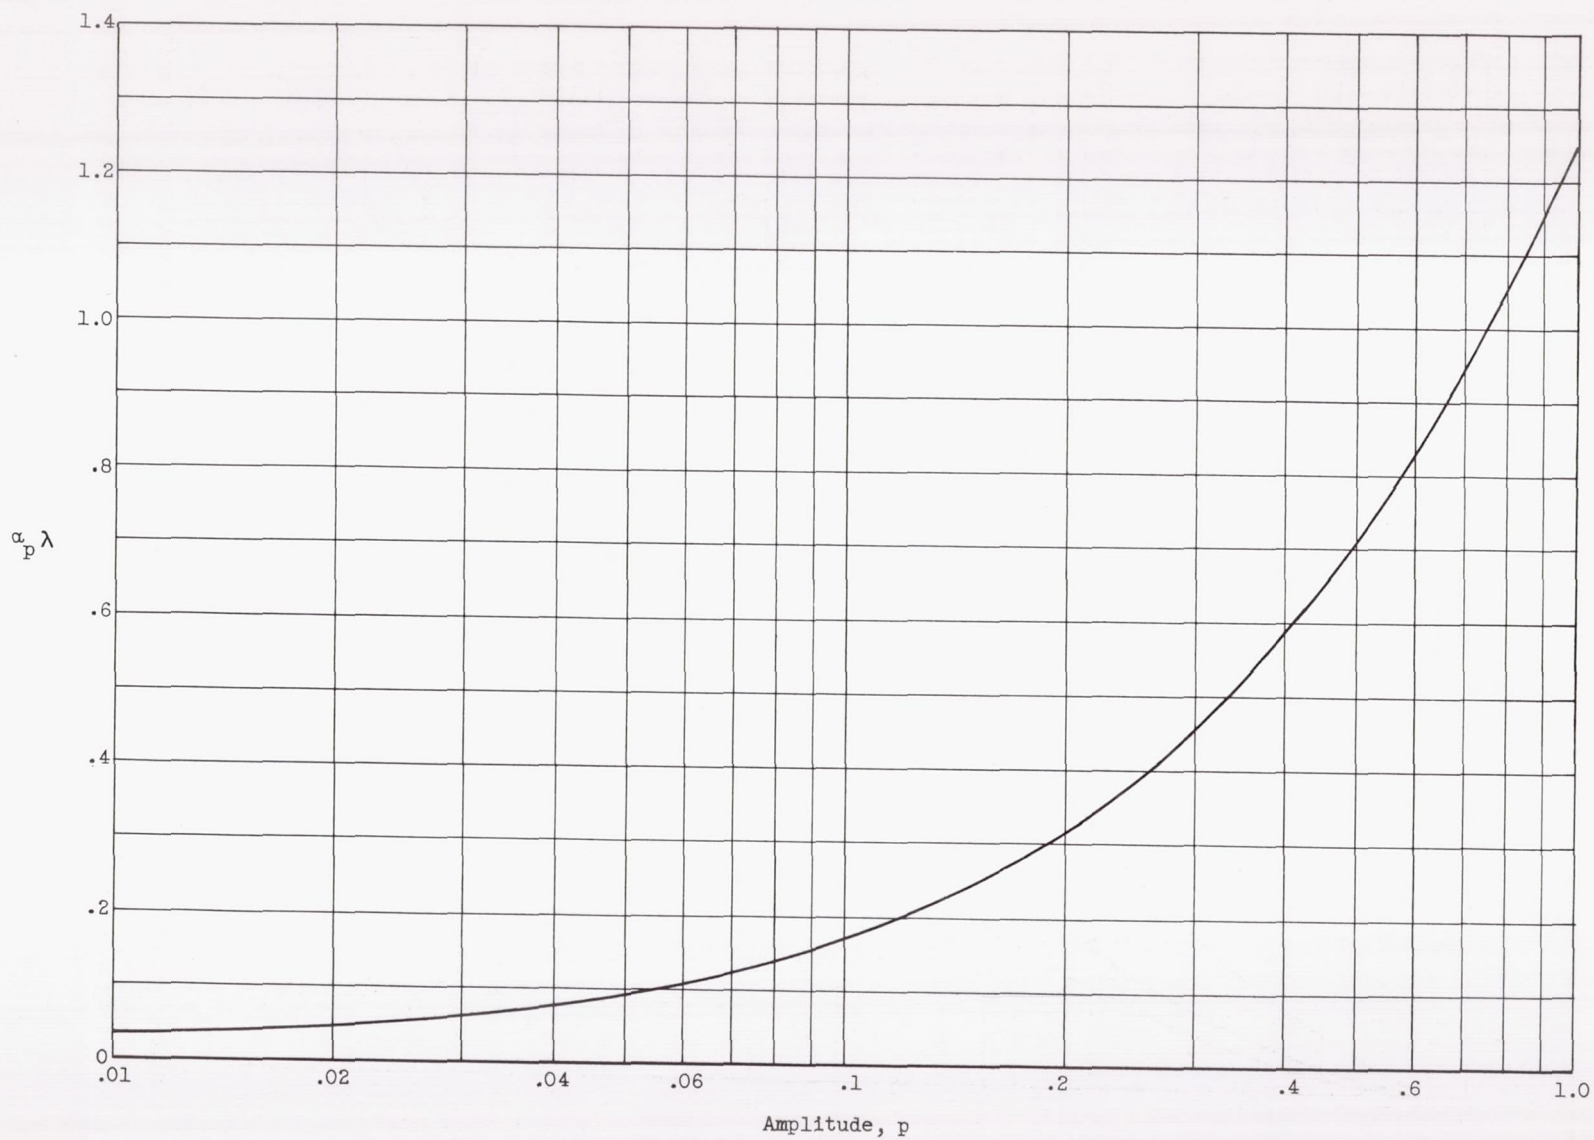


Figure 8. - Amplitude-dependent saw-tooth damping attenuation coefficient.

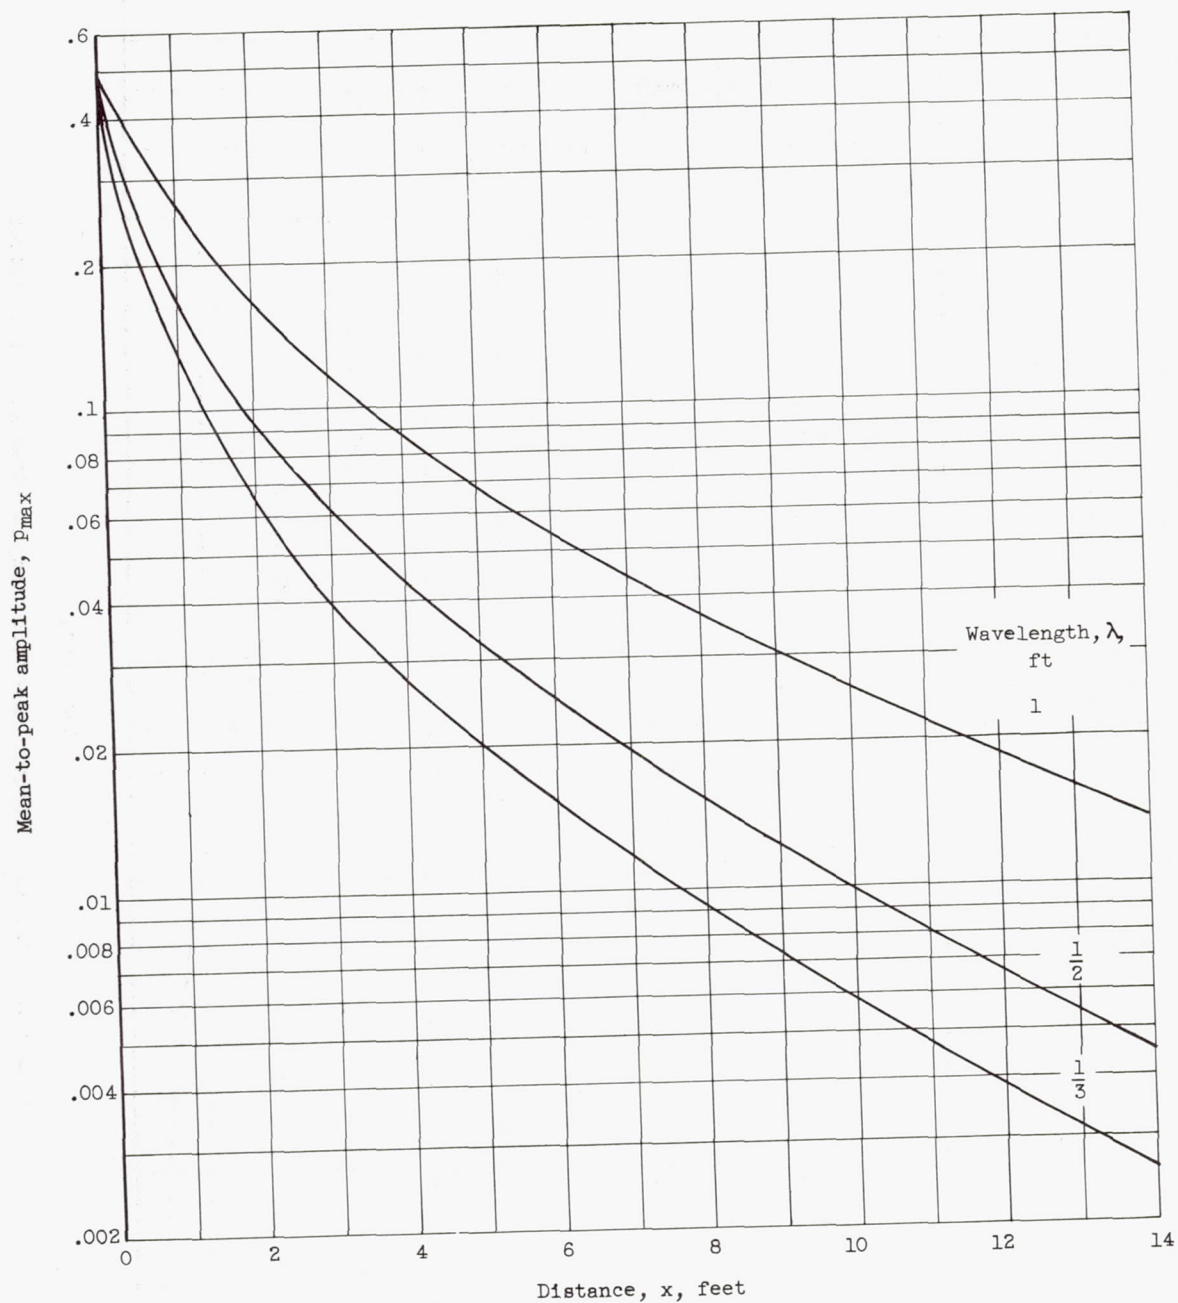


Figure 9. - Integrated theoretical attenuation curve for nonlinear and Kirchoff damping

with  $\alpha_k = \frac{0.126}{\sqrt{\lambda}}$ .




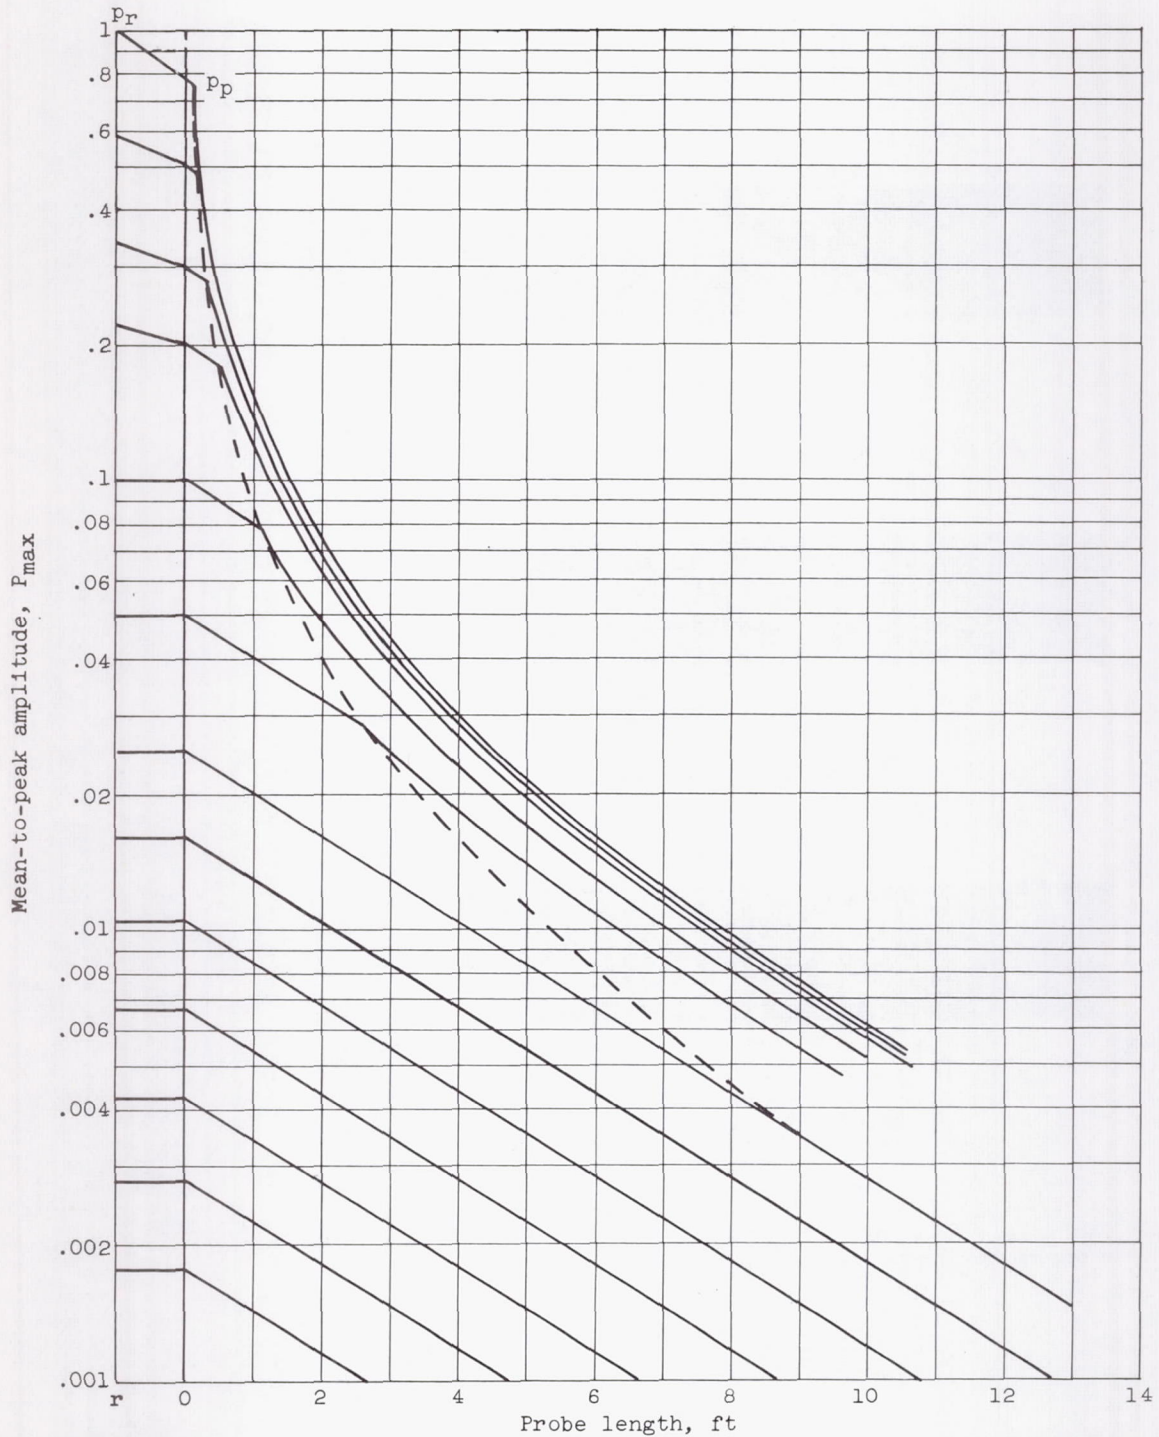


Figure 10. - Probe against reference amplitude incorporating end effects, length to become saw-toothed, and saw-tooth damping for 1/4-inch-outside-diameter, 1/32-inch-wall tubing. Frequency,  $f$ , 3000 cycles per second.

CT-6  
3070

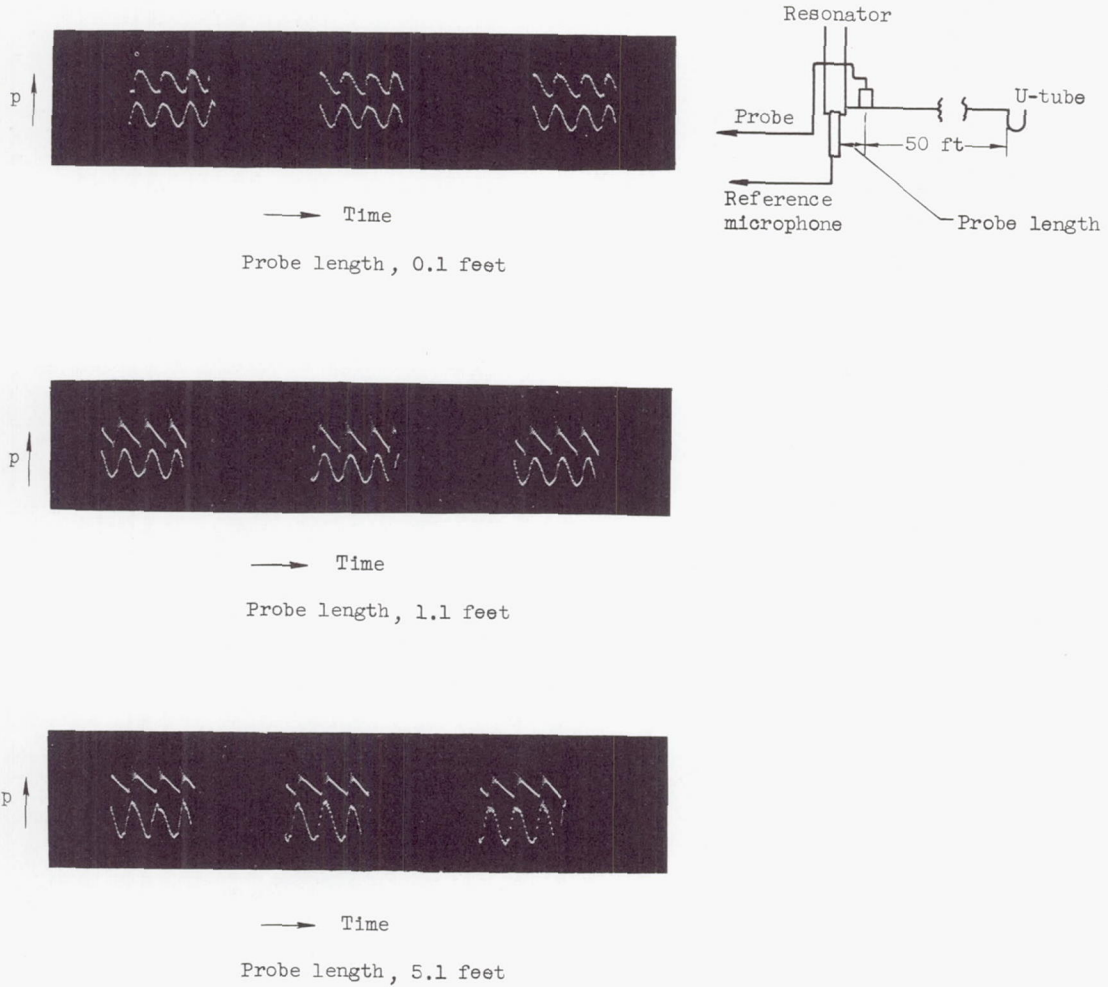


C-33786

Figure 11. - Wave form of "infinite" probe microphone and reference microphone for 1080 cycles per second; pressure, p, 0.40 atmosphere.




CT-6 back 3070

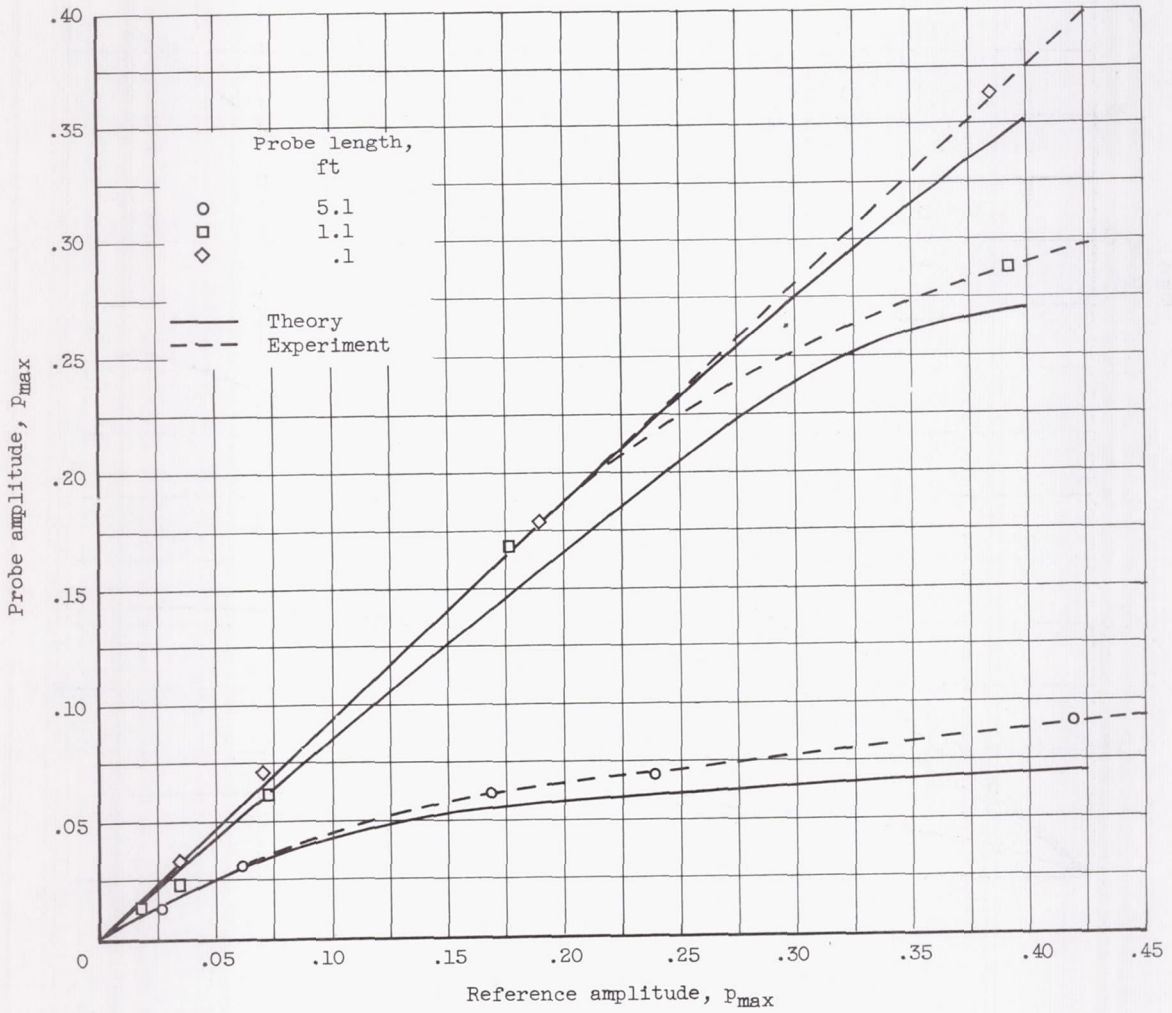

(a) Frequency, 1080 cycles per second.

Figure 12. - Probe microphone calibration.

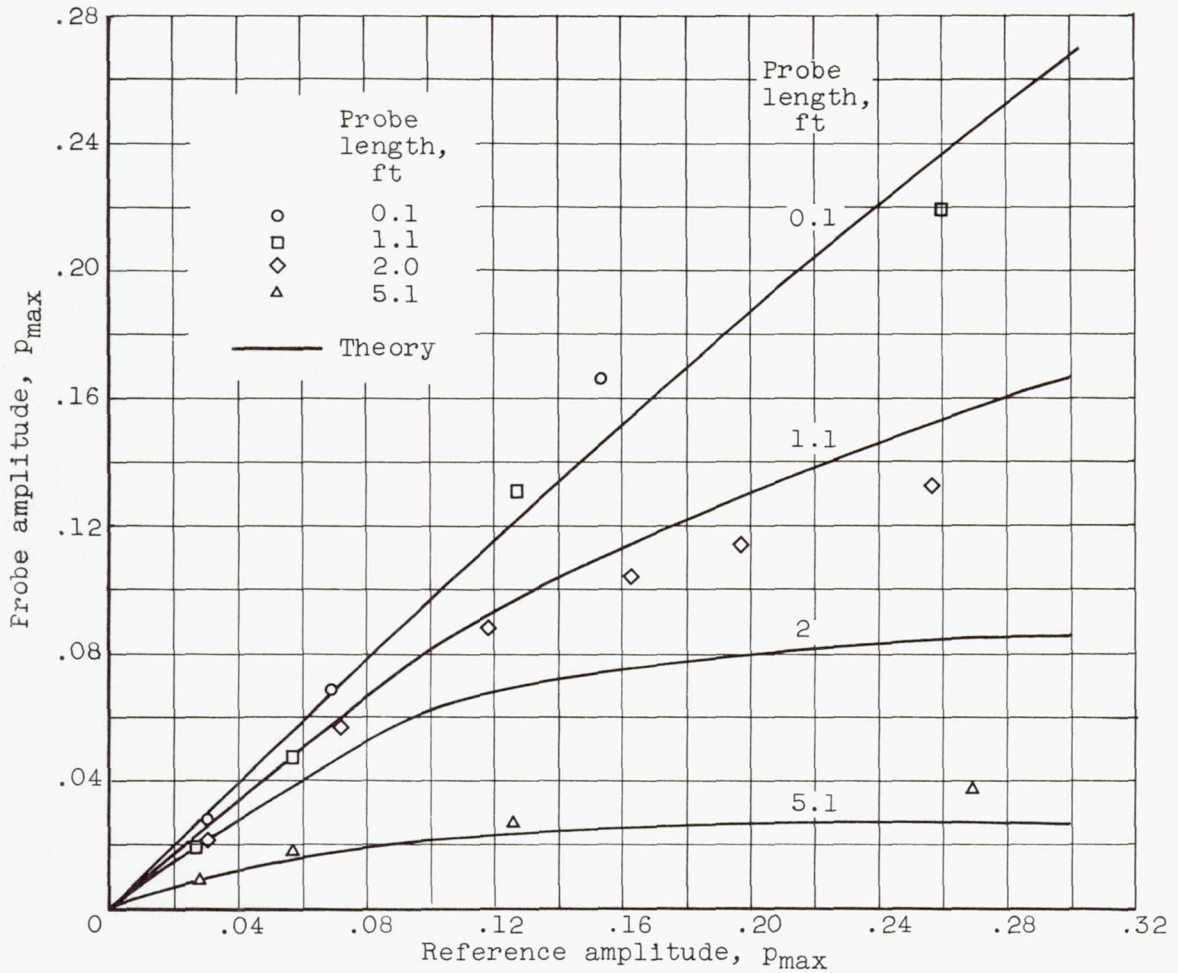


(b) Frequency, 2400 cycles per second.

Figure 12. - Continued. Probe microphone calibration.

3070



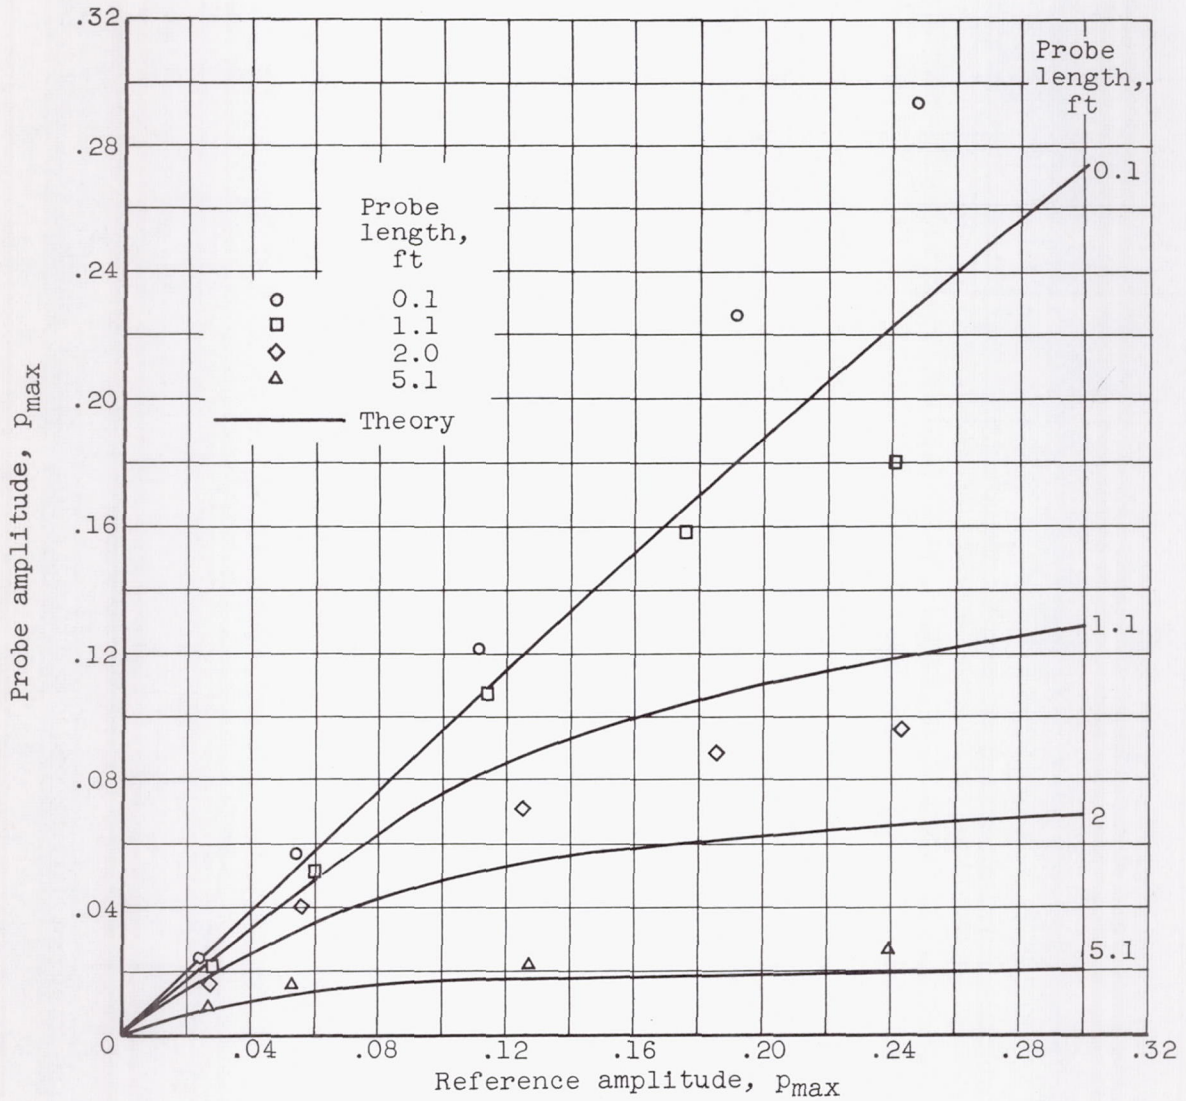

(c) Frequency, 3000 cycles per second.

Figure 12. - Concluded. Probe microphone calibration.



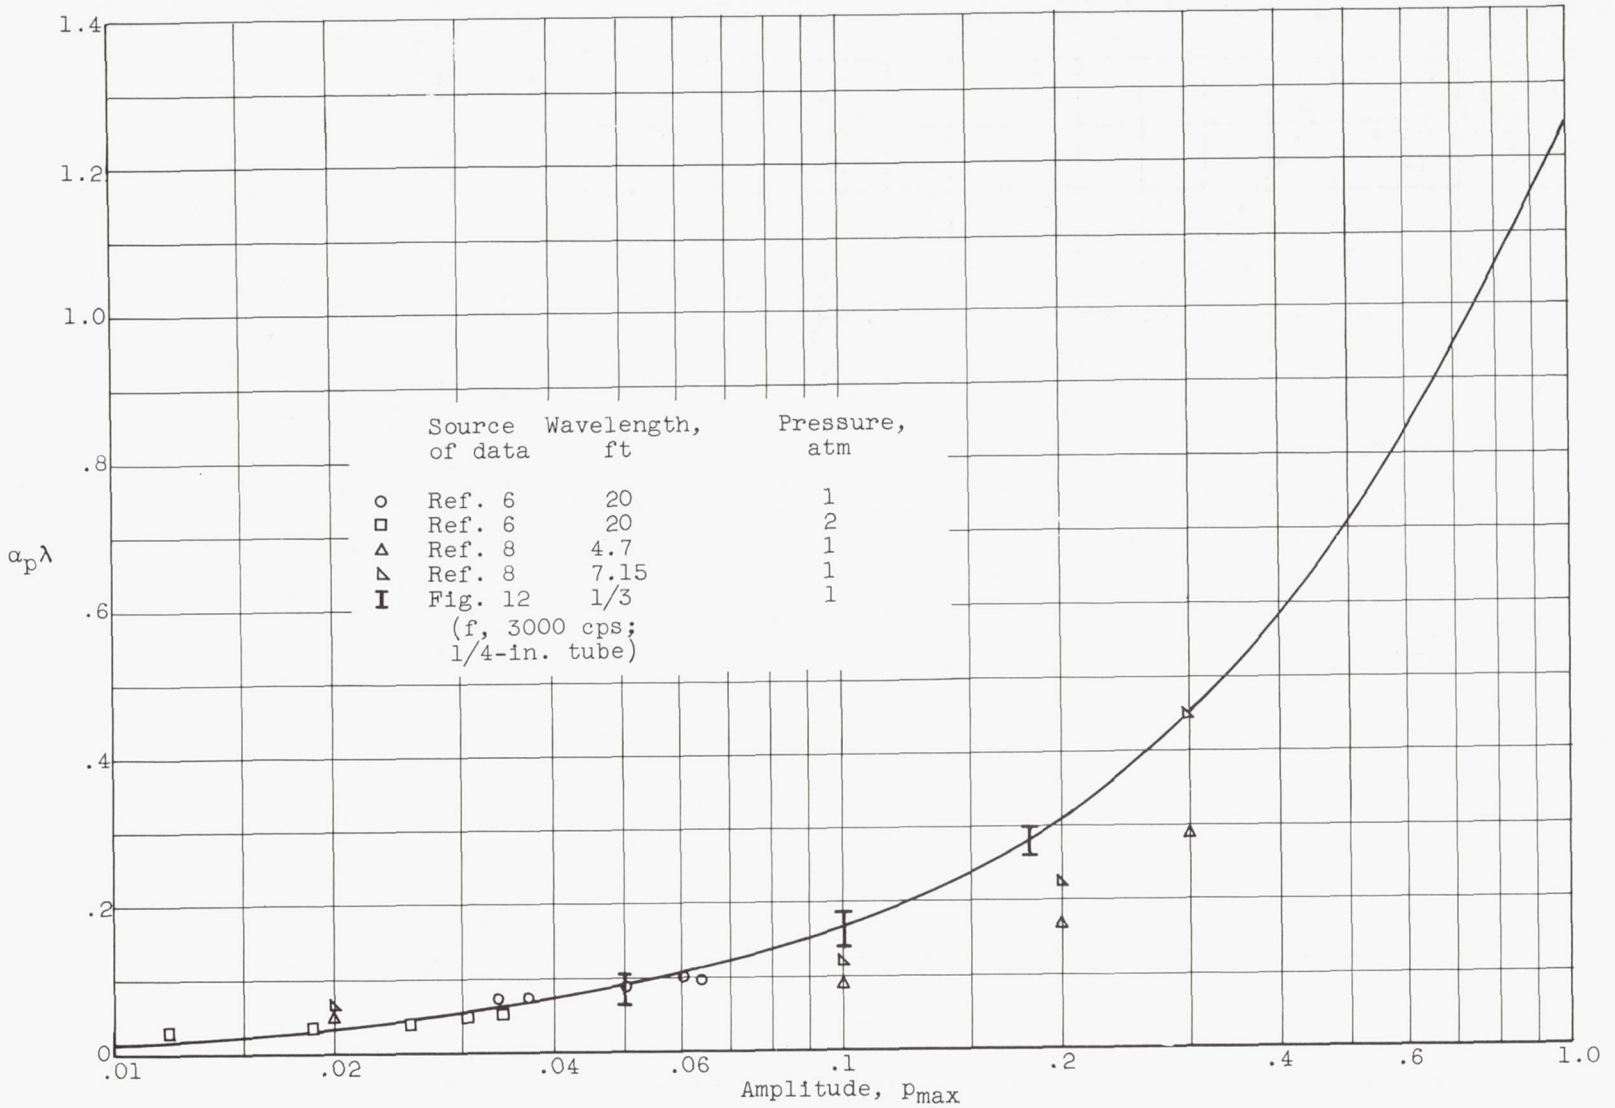


Figure 13. - Amplitude-dependent damping coefficient  $\alpha_p = \alpha - \alpha_k$  for saw-tooth waves versus amplitude.



CONFIDENTIAL

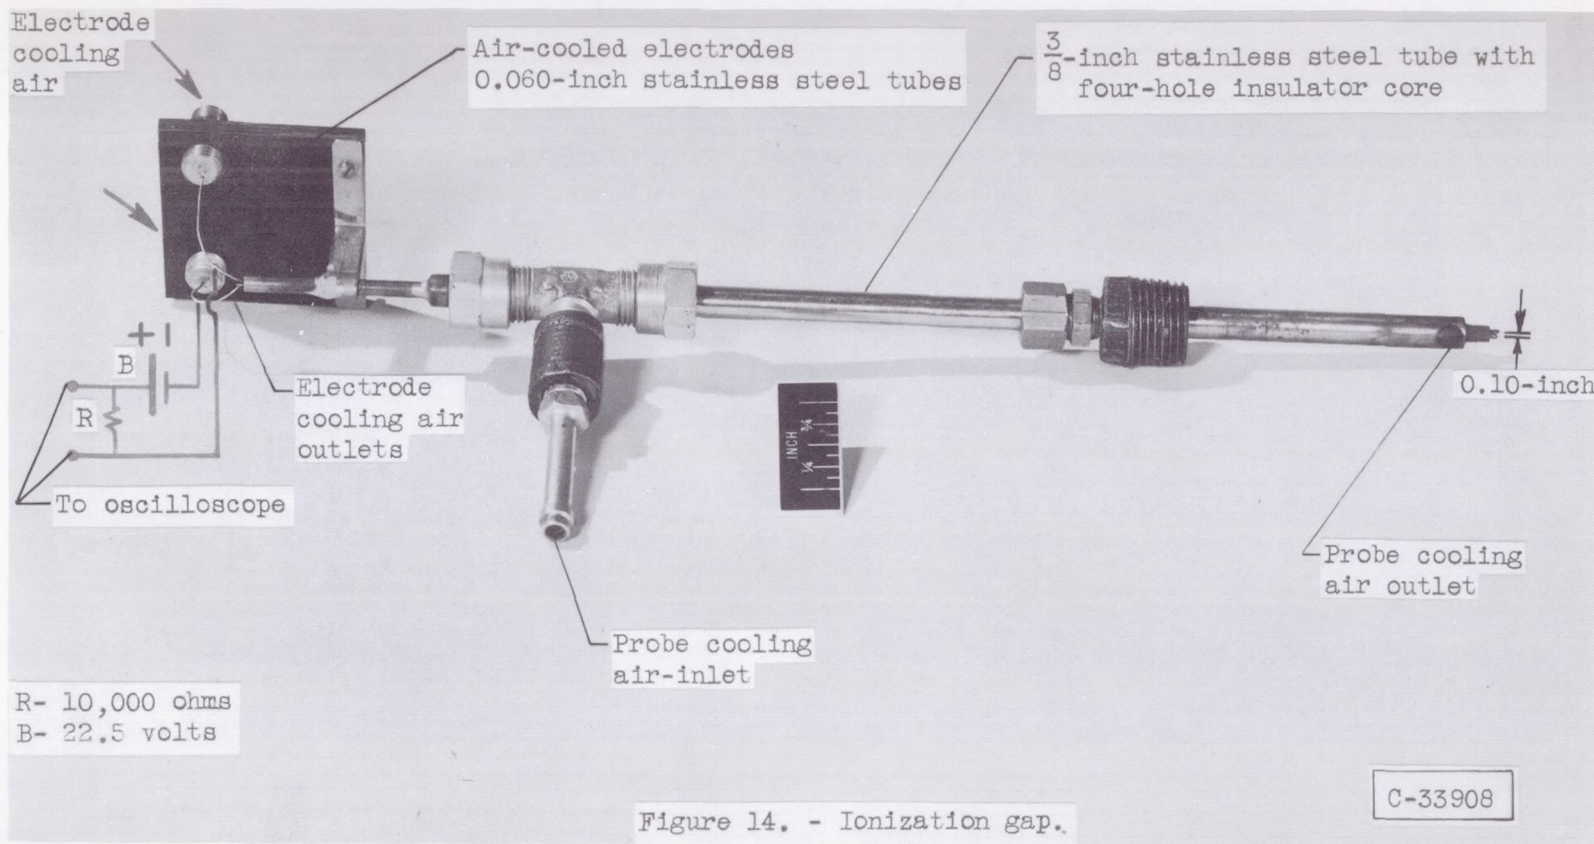

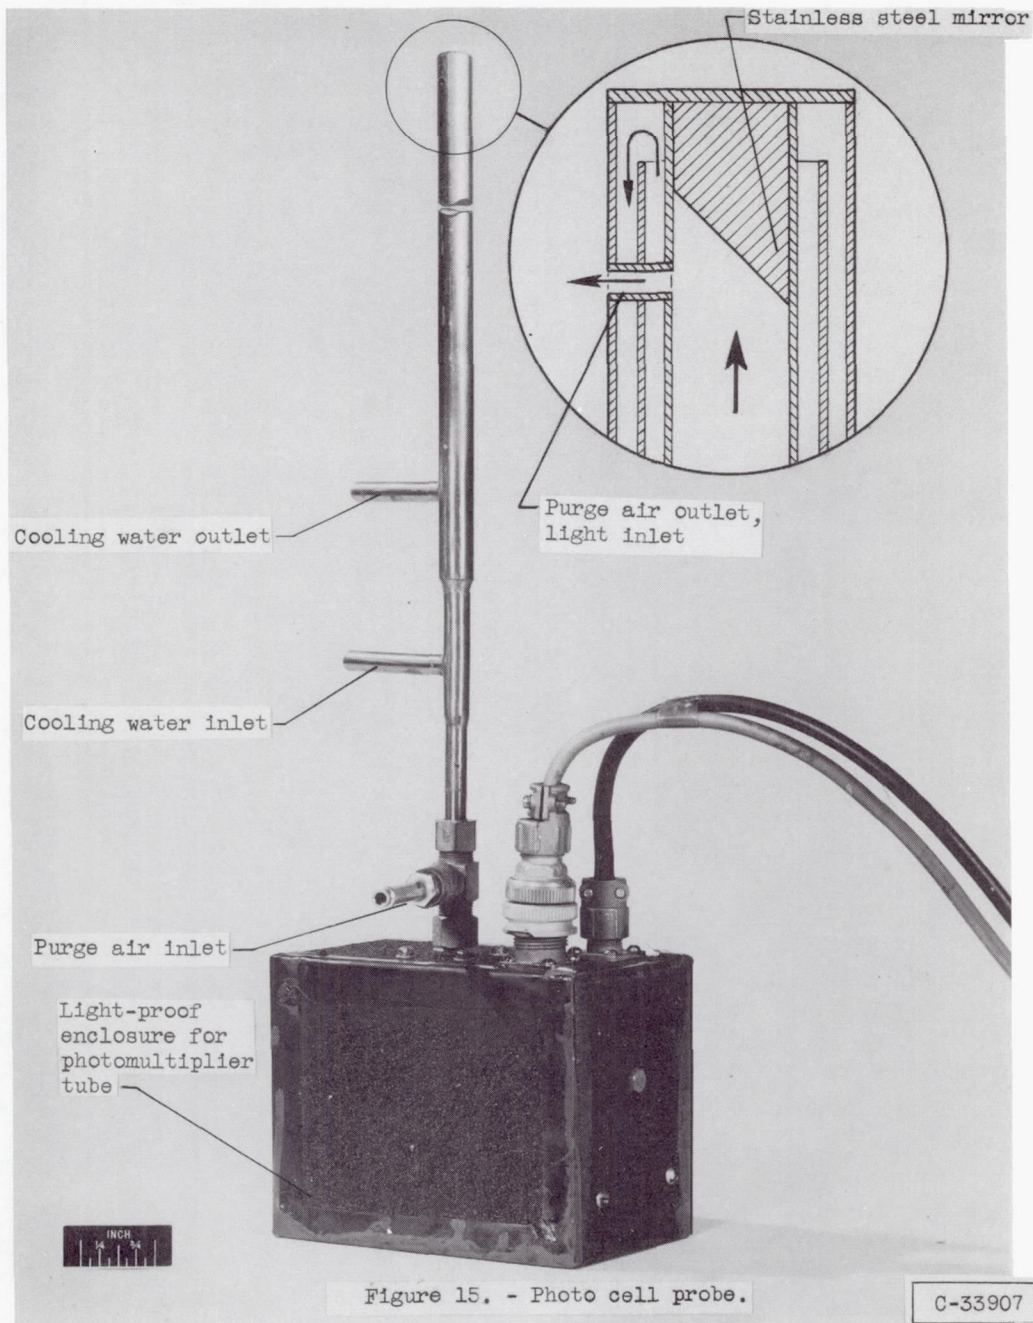

3070



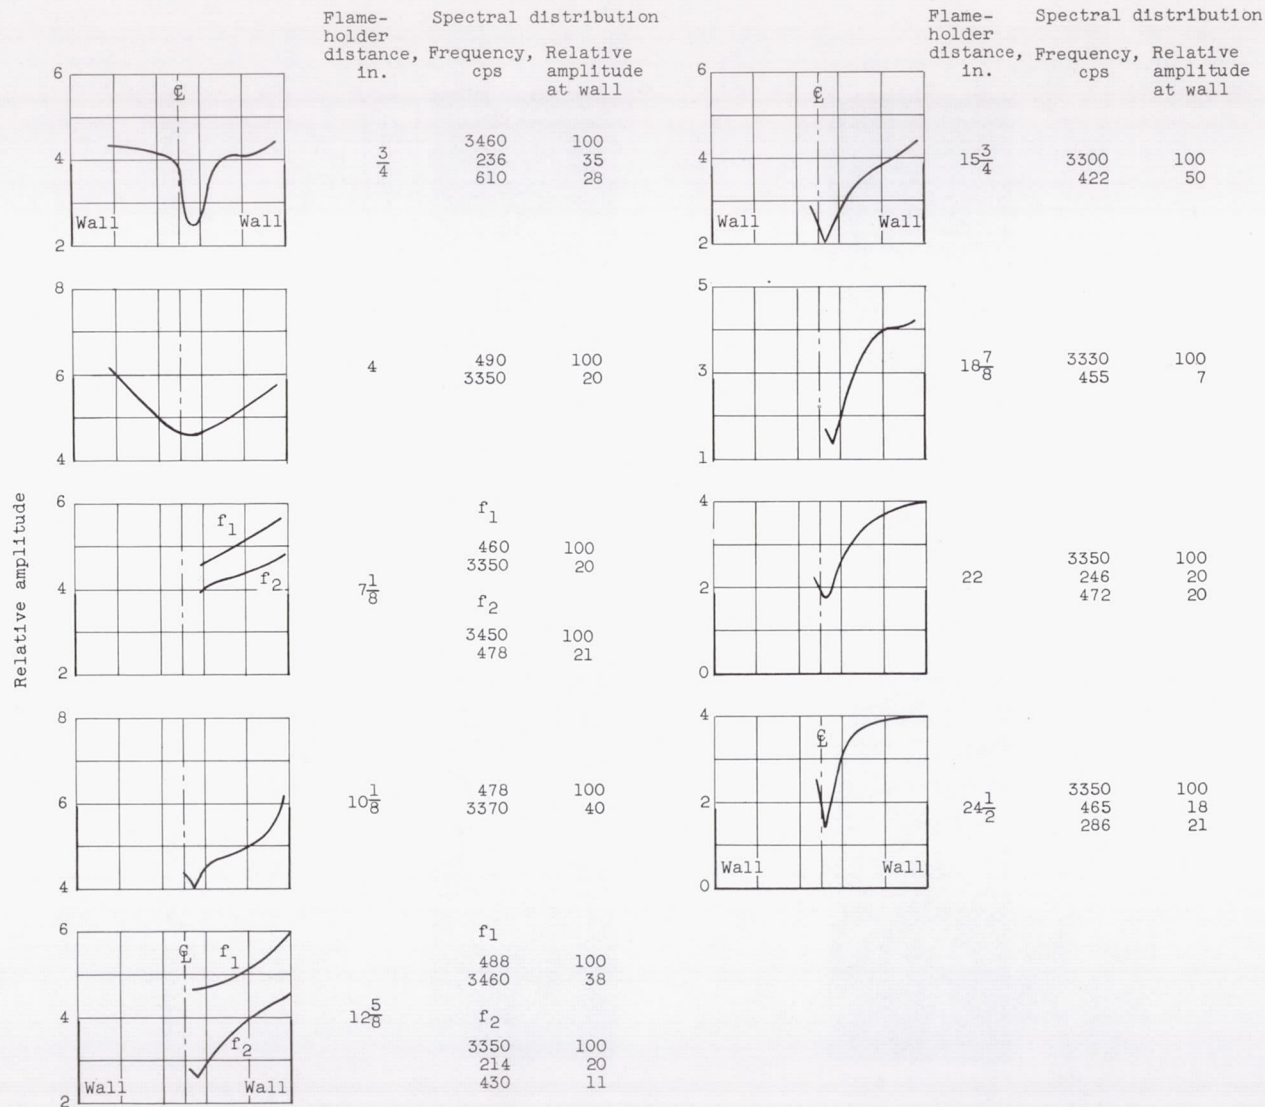


Figure 16. - Amplitude profiles across combustor for seven flame-holder positions.

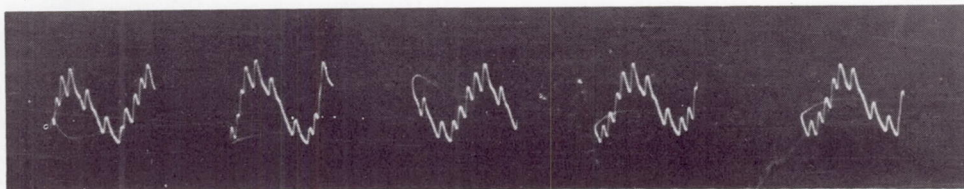

(a) Screech plus longitudinal resonance.

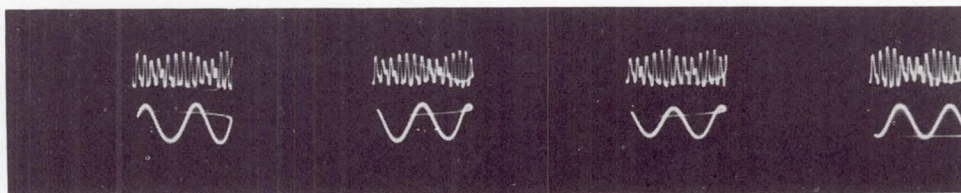


C-33787

(b) Simultaneous trace of filtered major components in figure 17 (a) showing modulation of screech by low-frequency note.

Figure 17. - Wave forms of screech and longitudinal resonance.




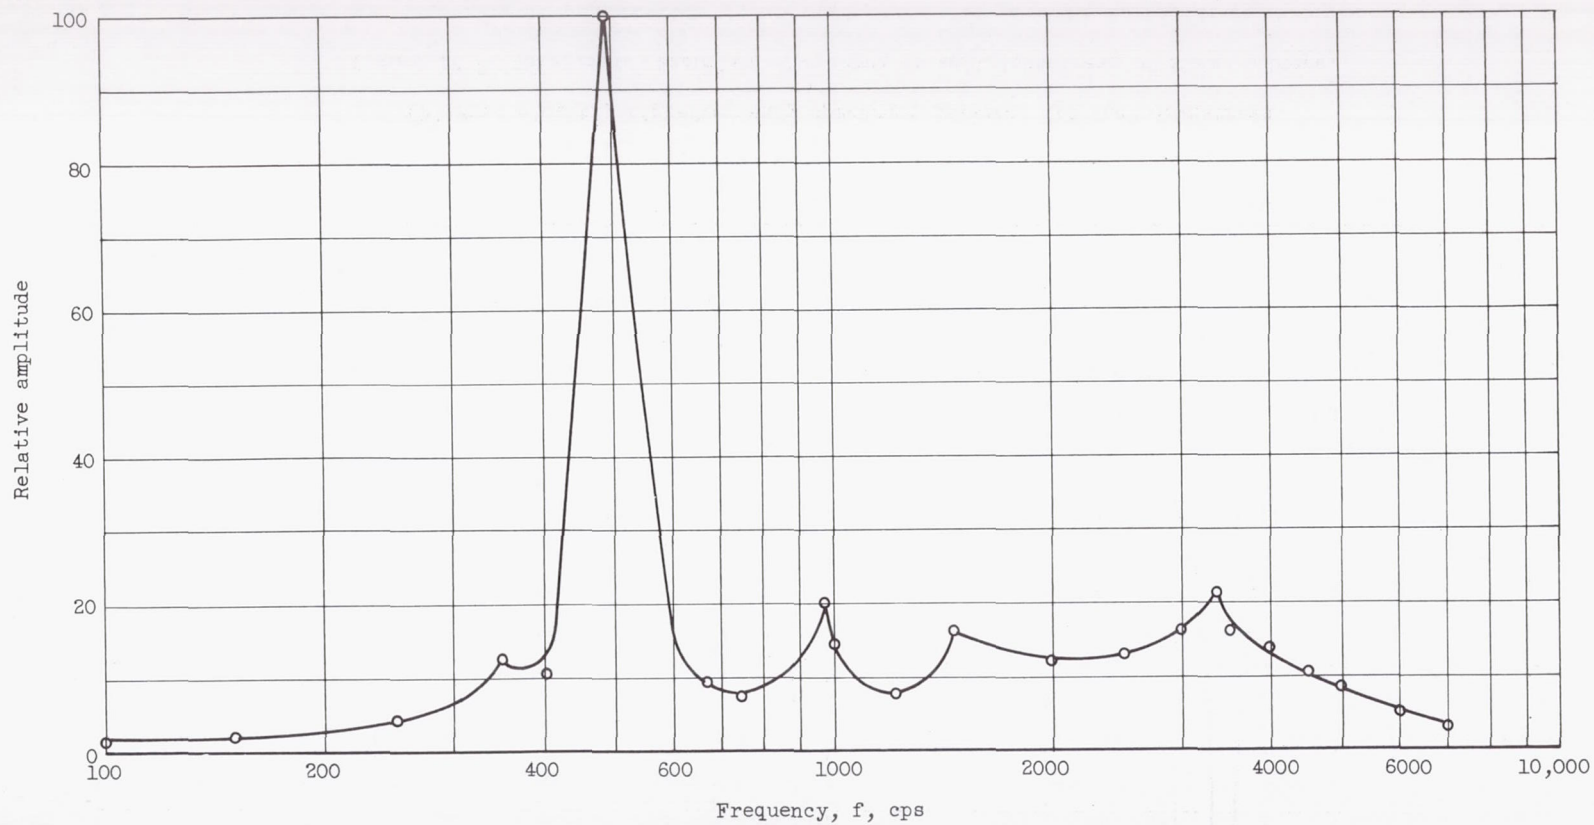

(a) Predominantly low-frequency spectrum; measured 4 inches downstream.


Figure 18. - Examples of spectra at wall downstream of flame holders.

CONFIDENTIAL

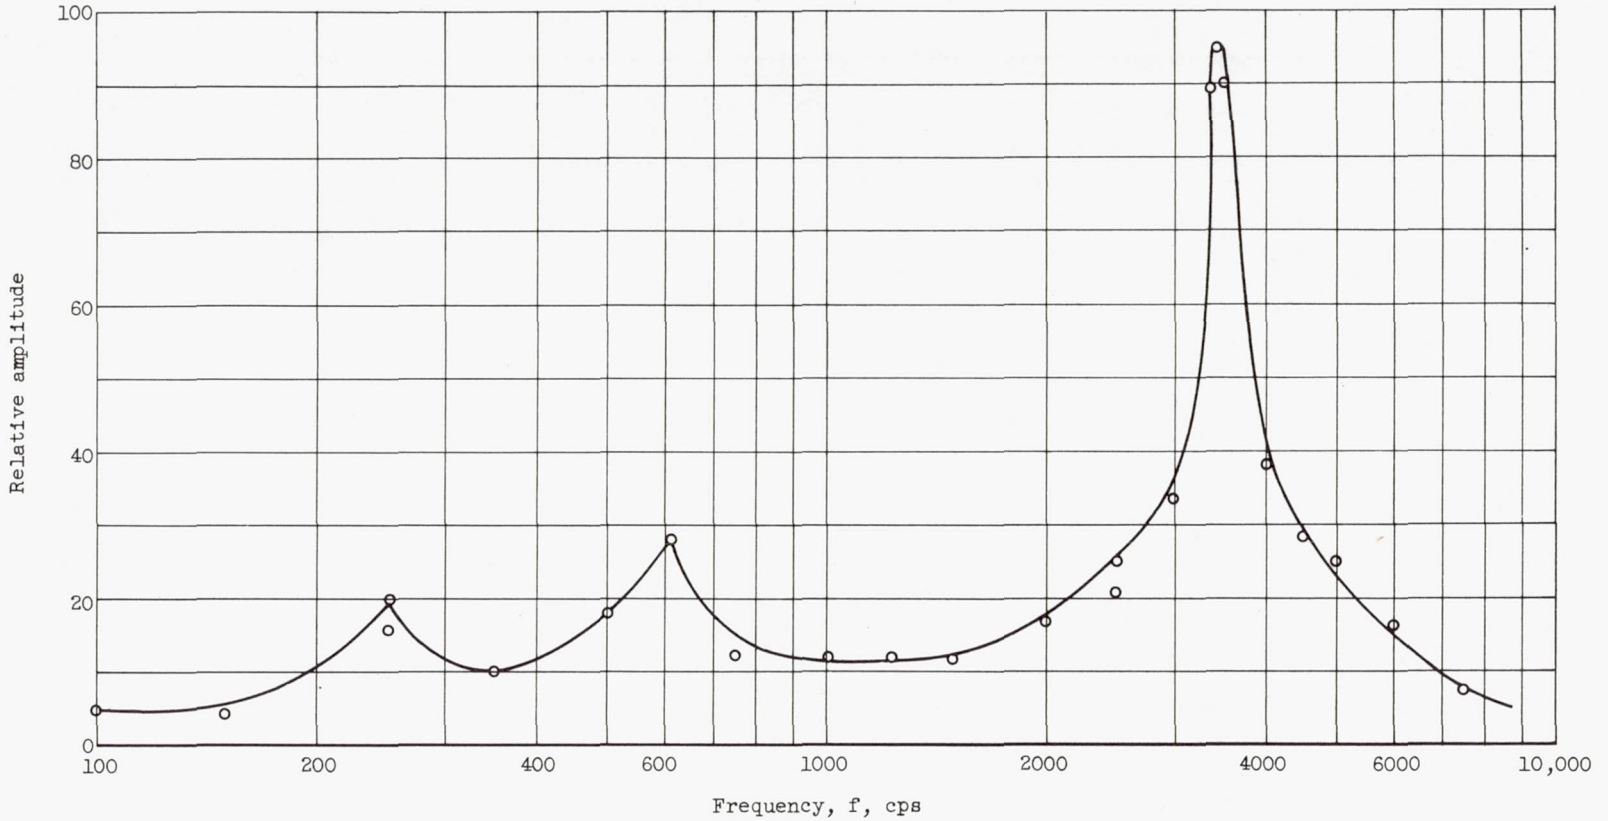


(b) Predominantly high-frequency spectrum; measured  $3/4$  inch downstream.


Figure 18. - Concluded. Examples of spectra at wall downstream of flame holders.

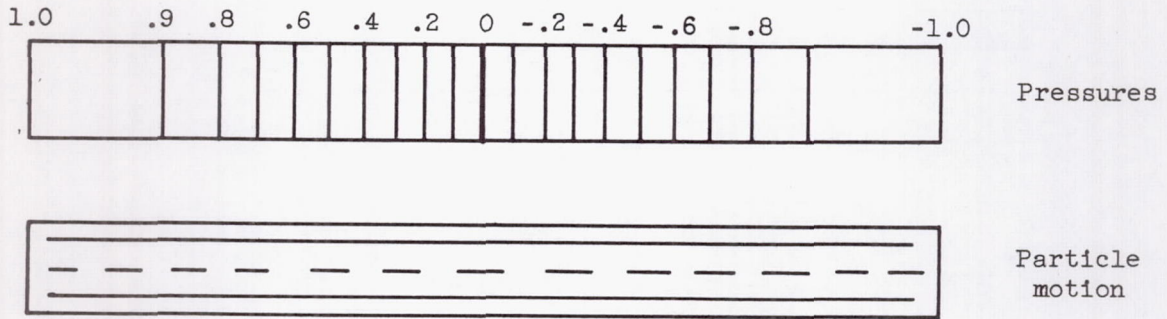

(a) First longitudinal mode.

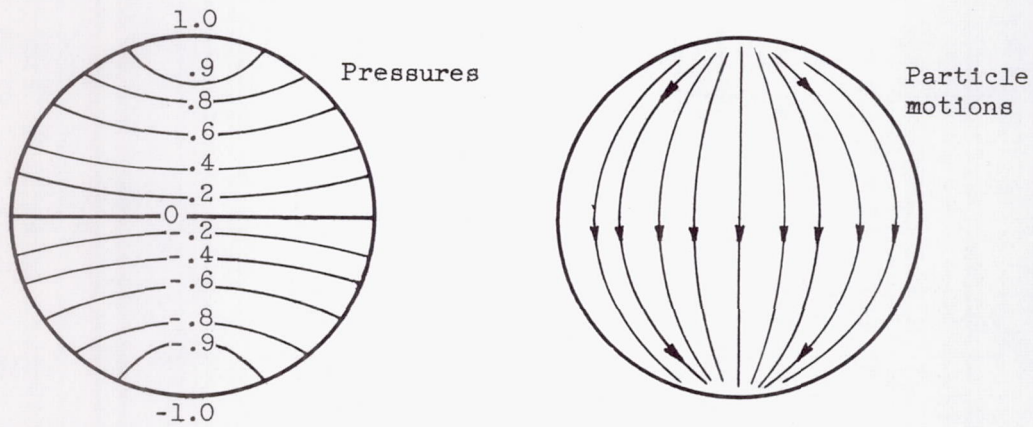

(b) First transverse mode.

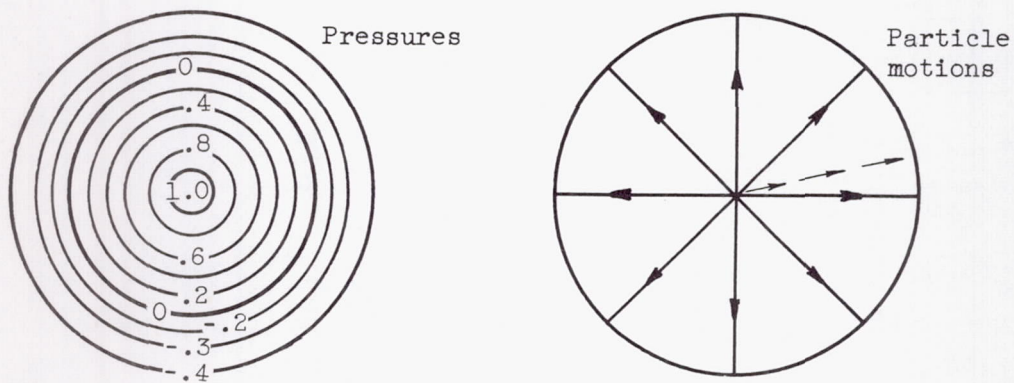

(c) First radial mode.

Figure 19. - Pressure contours and particle motions for fundamental modes of cylindrical duct.



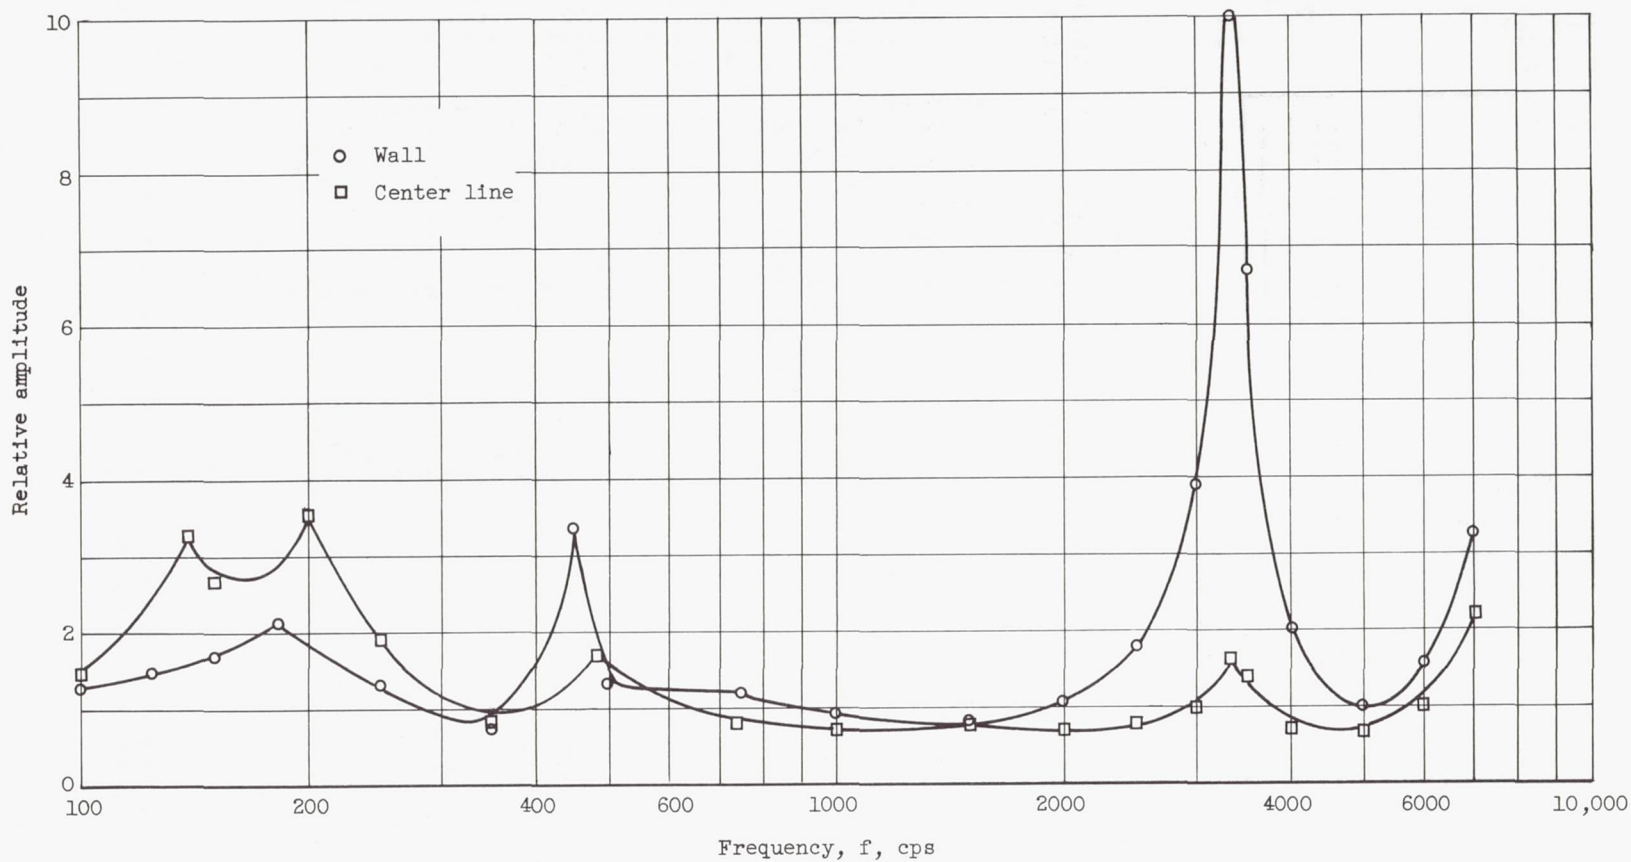


Figure 20. - Comparison of sound spectra at combustor wall and at center line  $24\frac{1}{2}$  inches downstream of flame holder.


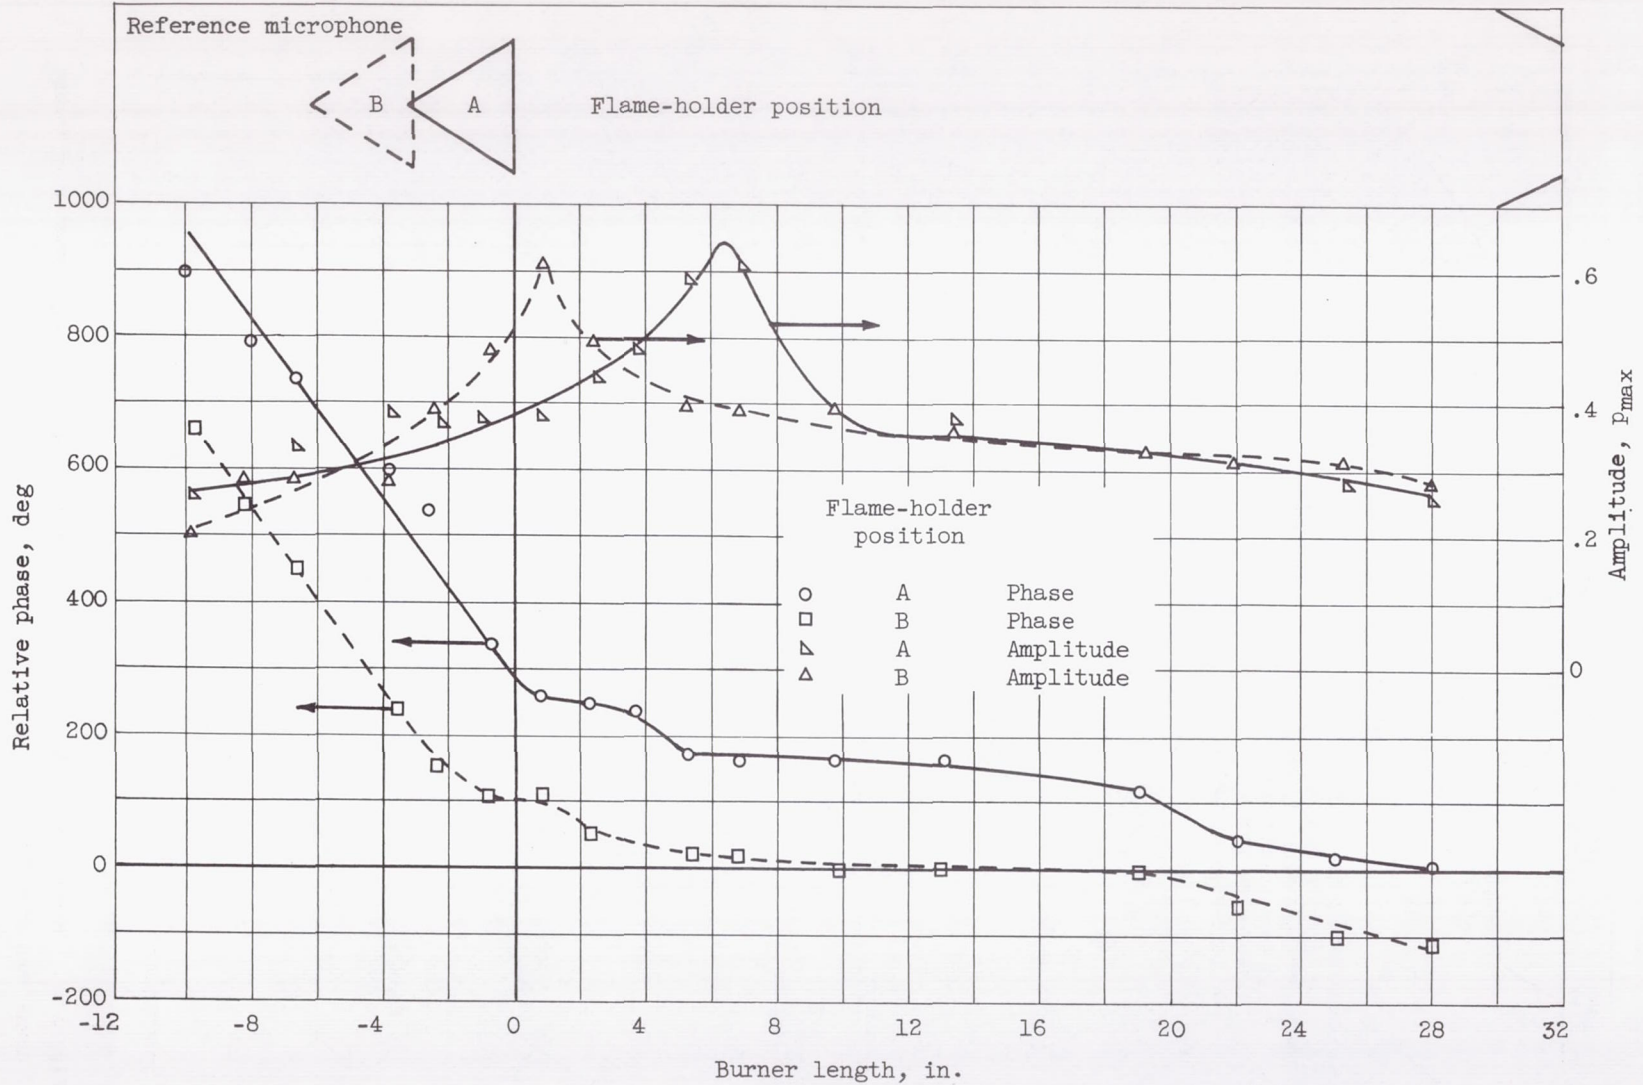


Figure 21. - Amplitude and phase distributions for two flame-holder positions.



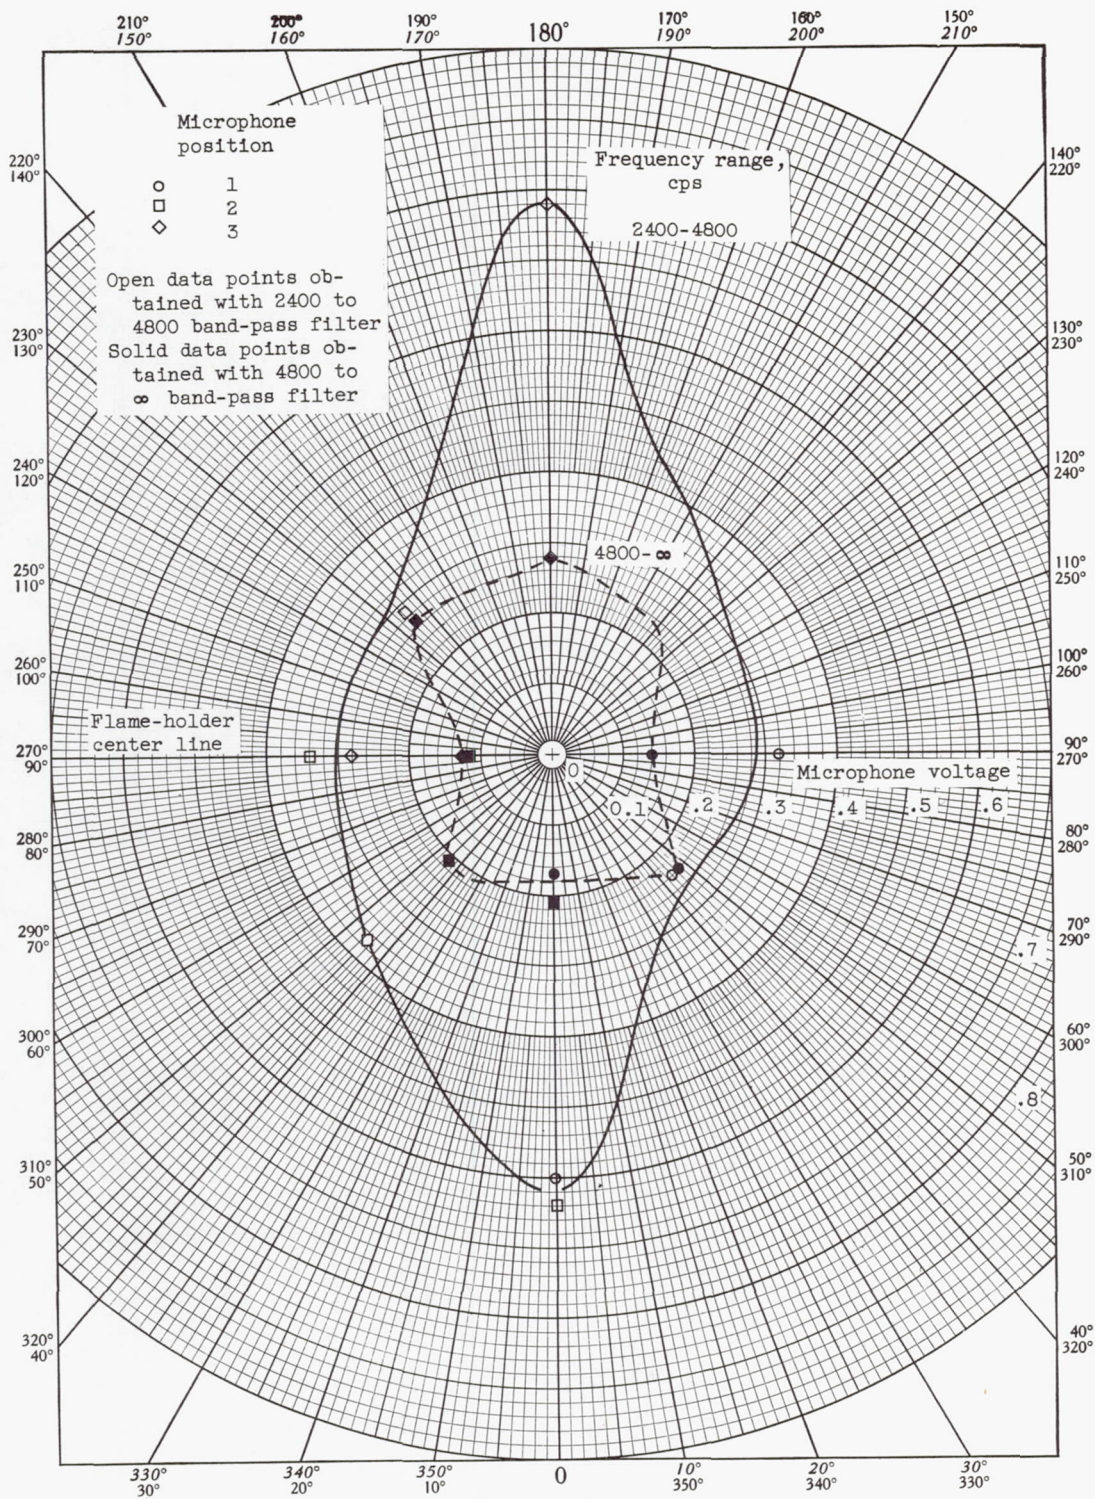


3070

Figure 22. - Microphone voltages about circumference of screeching combustor  $\frac{1}{2}$  inches downstream of V-gutter.



CT-8  
3070

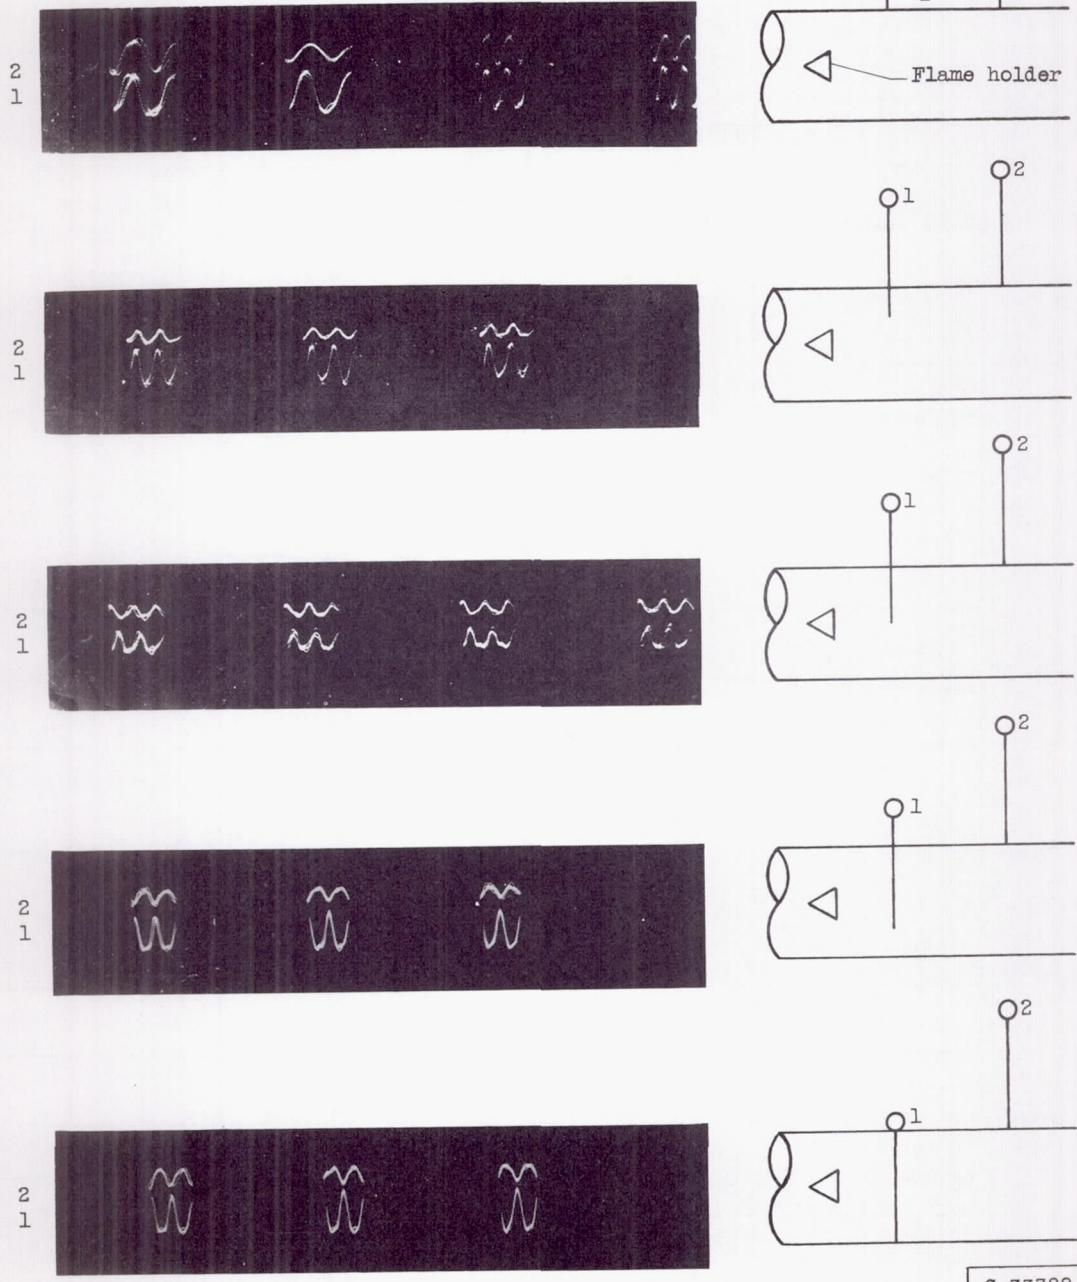

C-33788

Figure 23. - Pressure signal from two phase probe microphones showing phase shift along a diameter.


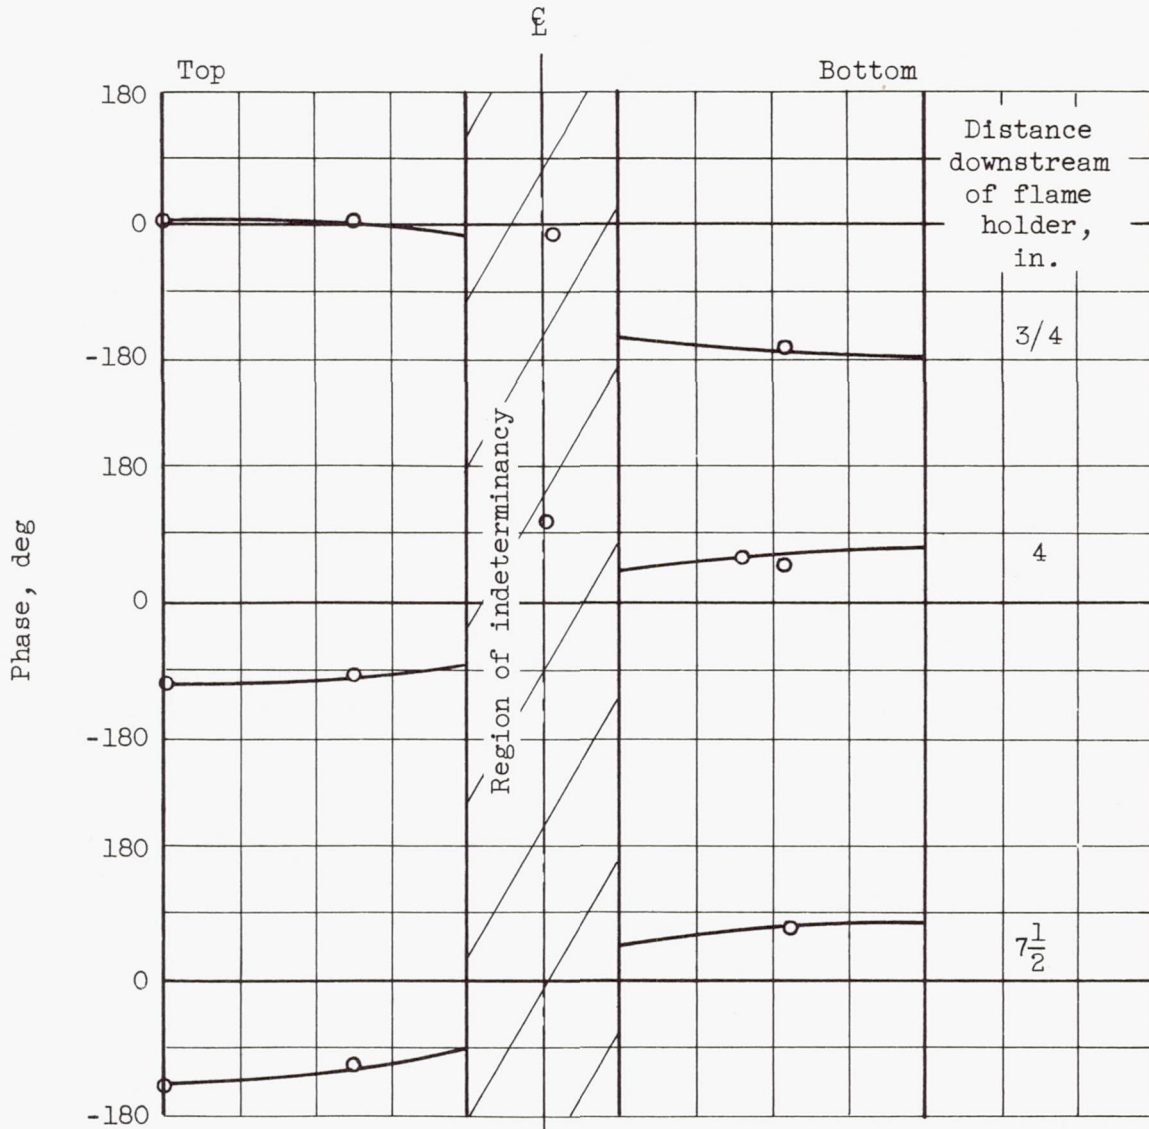


Figure 24. - Phase of pressure signal relative to signal at top of combustor 3/4 inch downstream of flame holder for three flame-holder positions.


3070  
CT-8 back



1 Ionization ↑  
2 Ionization ↓



(a) Ionization traces at top and bottom of combustor 3/4 inch from wall.

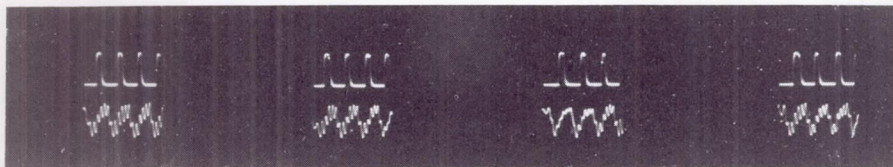

1 Ionization ↑  
3 Pressure ↓



C-33789

(b) Ionization and pressure traces at top and 60° from top of combustor.

Figure 25. - Ionization and pressure traces 3/4 inch downstream of flame holder.



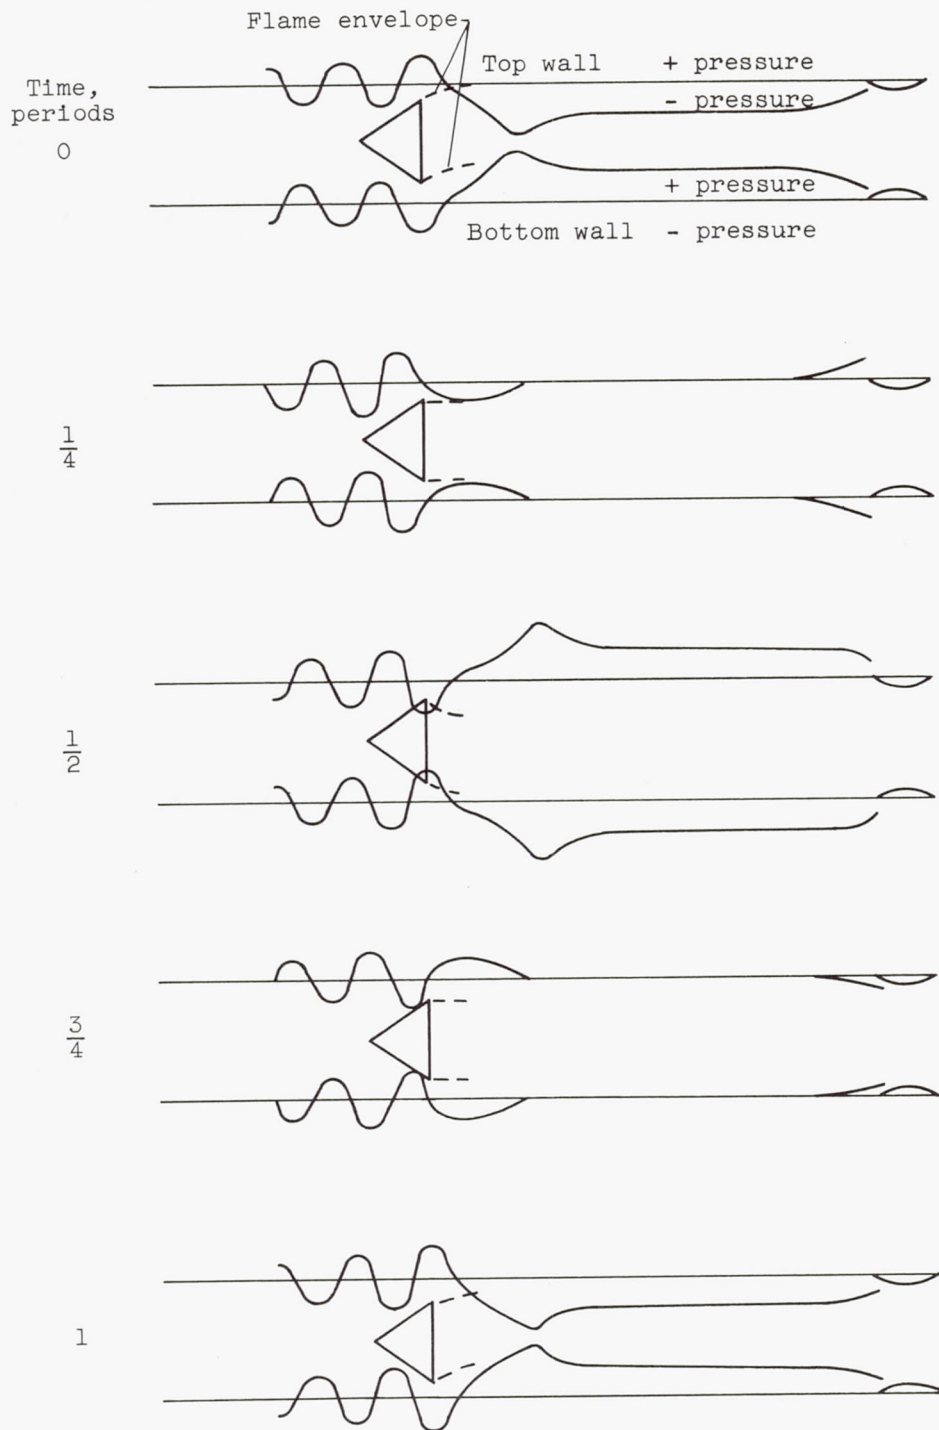


Figure 26. - Reconstruction of pressure and flame-displacement sequence.

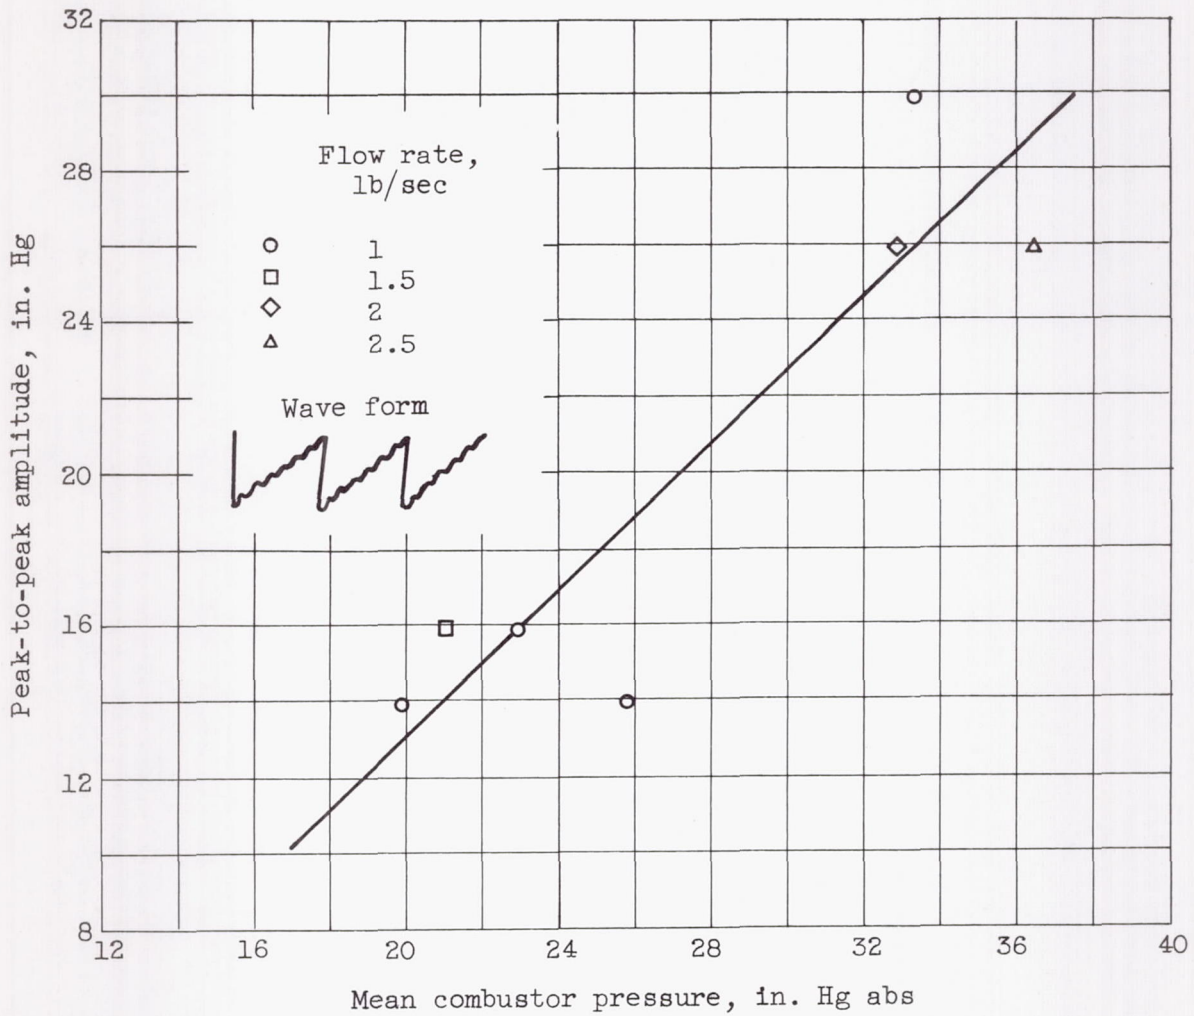


Figure 27. - Peak-to-peak screech amplitudes measured  $5\frac{1}{4}$  inches upstream of flame holder for four different flow rates.

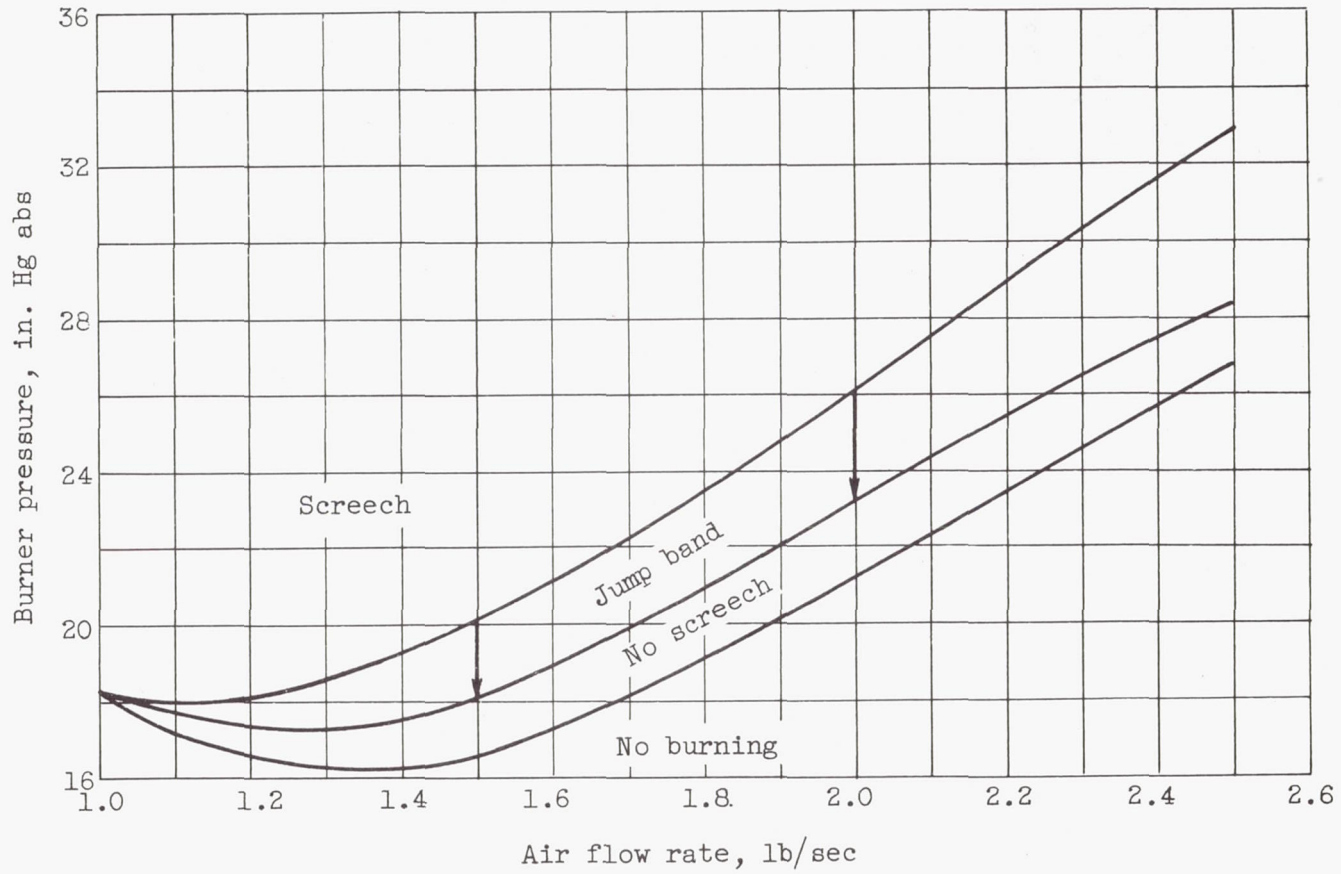


Figure 28. - Lower pressure limits for screech and burning. Equivalence ratio, 1.





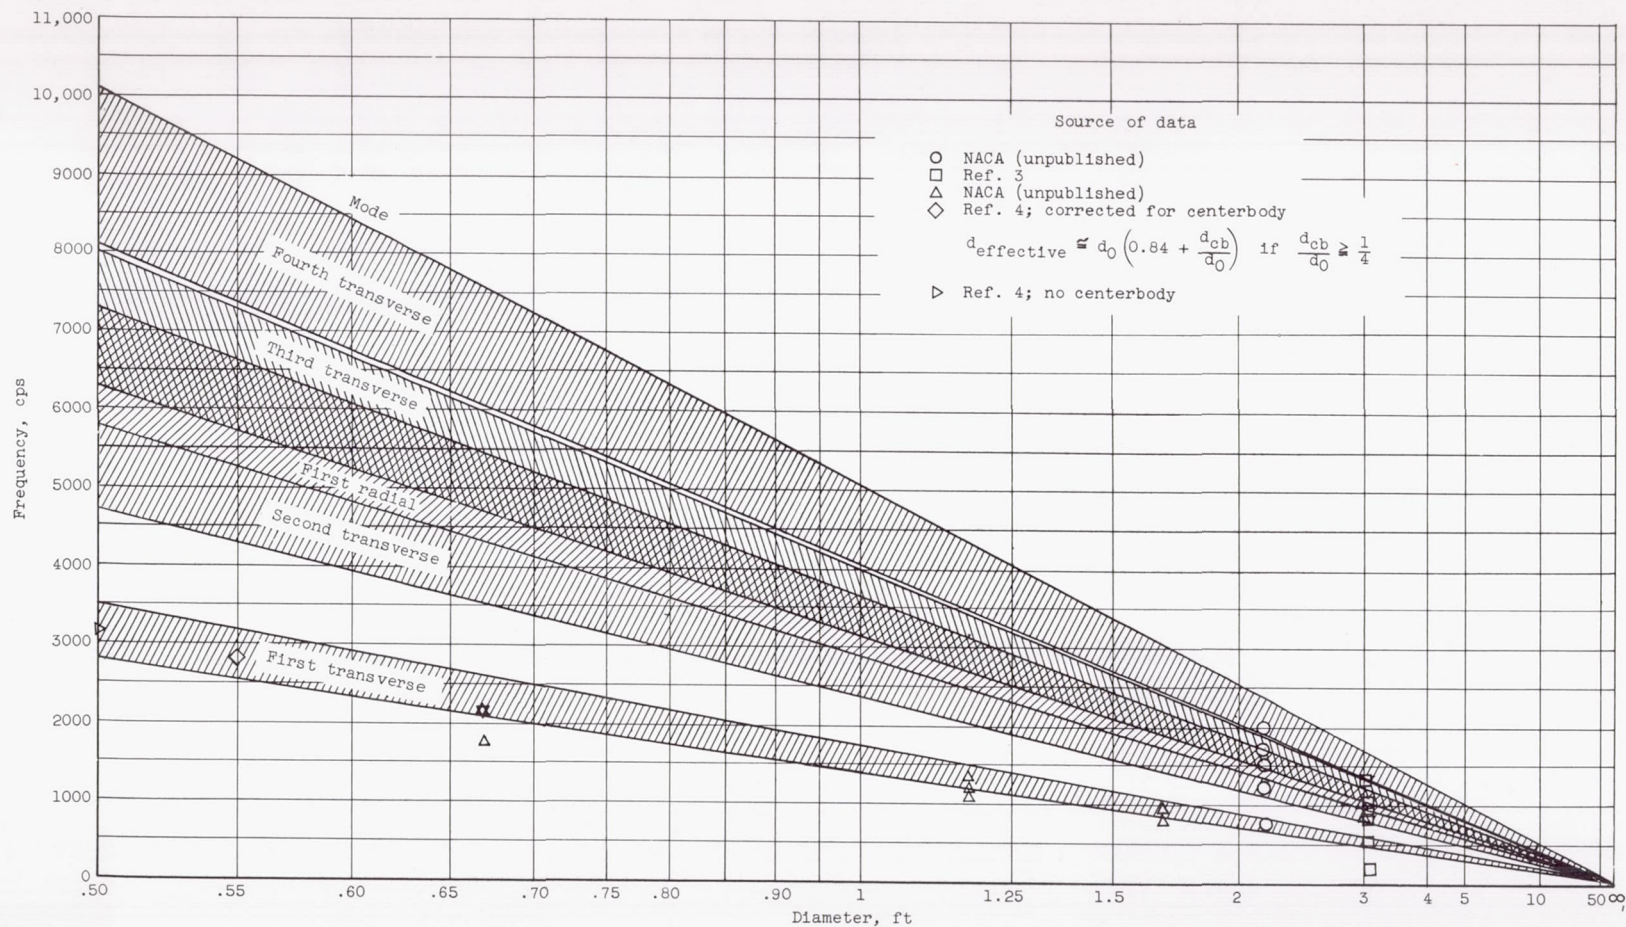


Figure 29. - Frequency as function of combustor diameter, based on data for 6-inch combustor.



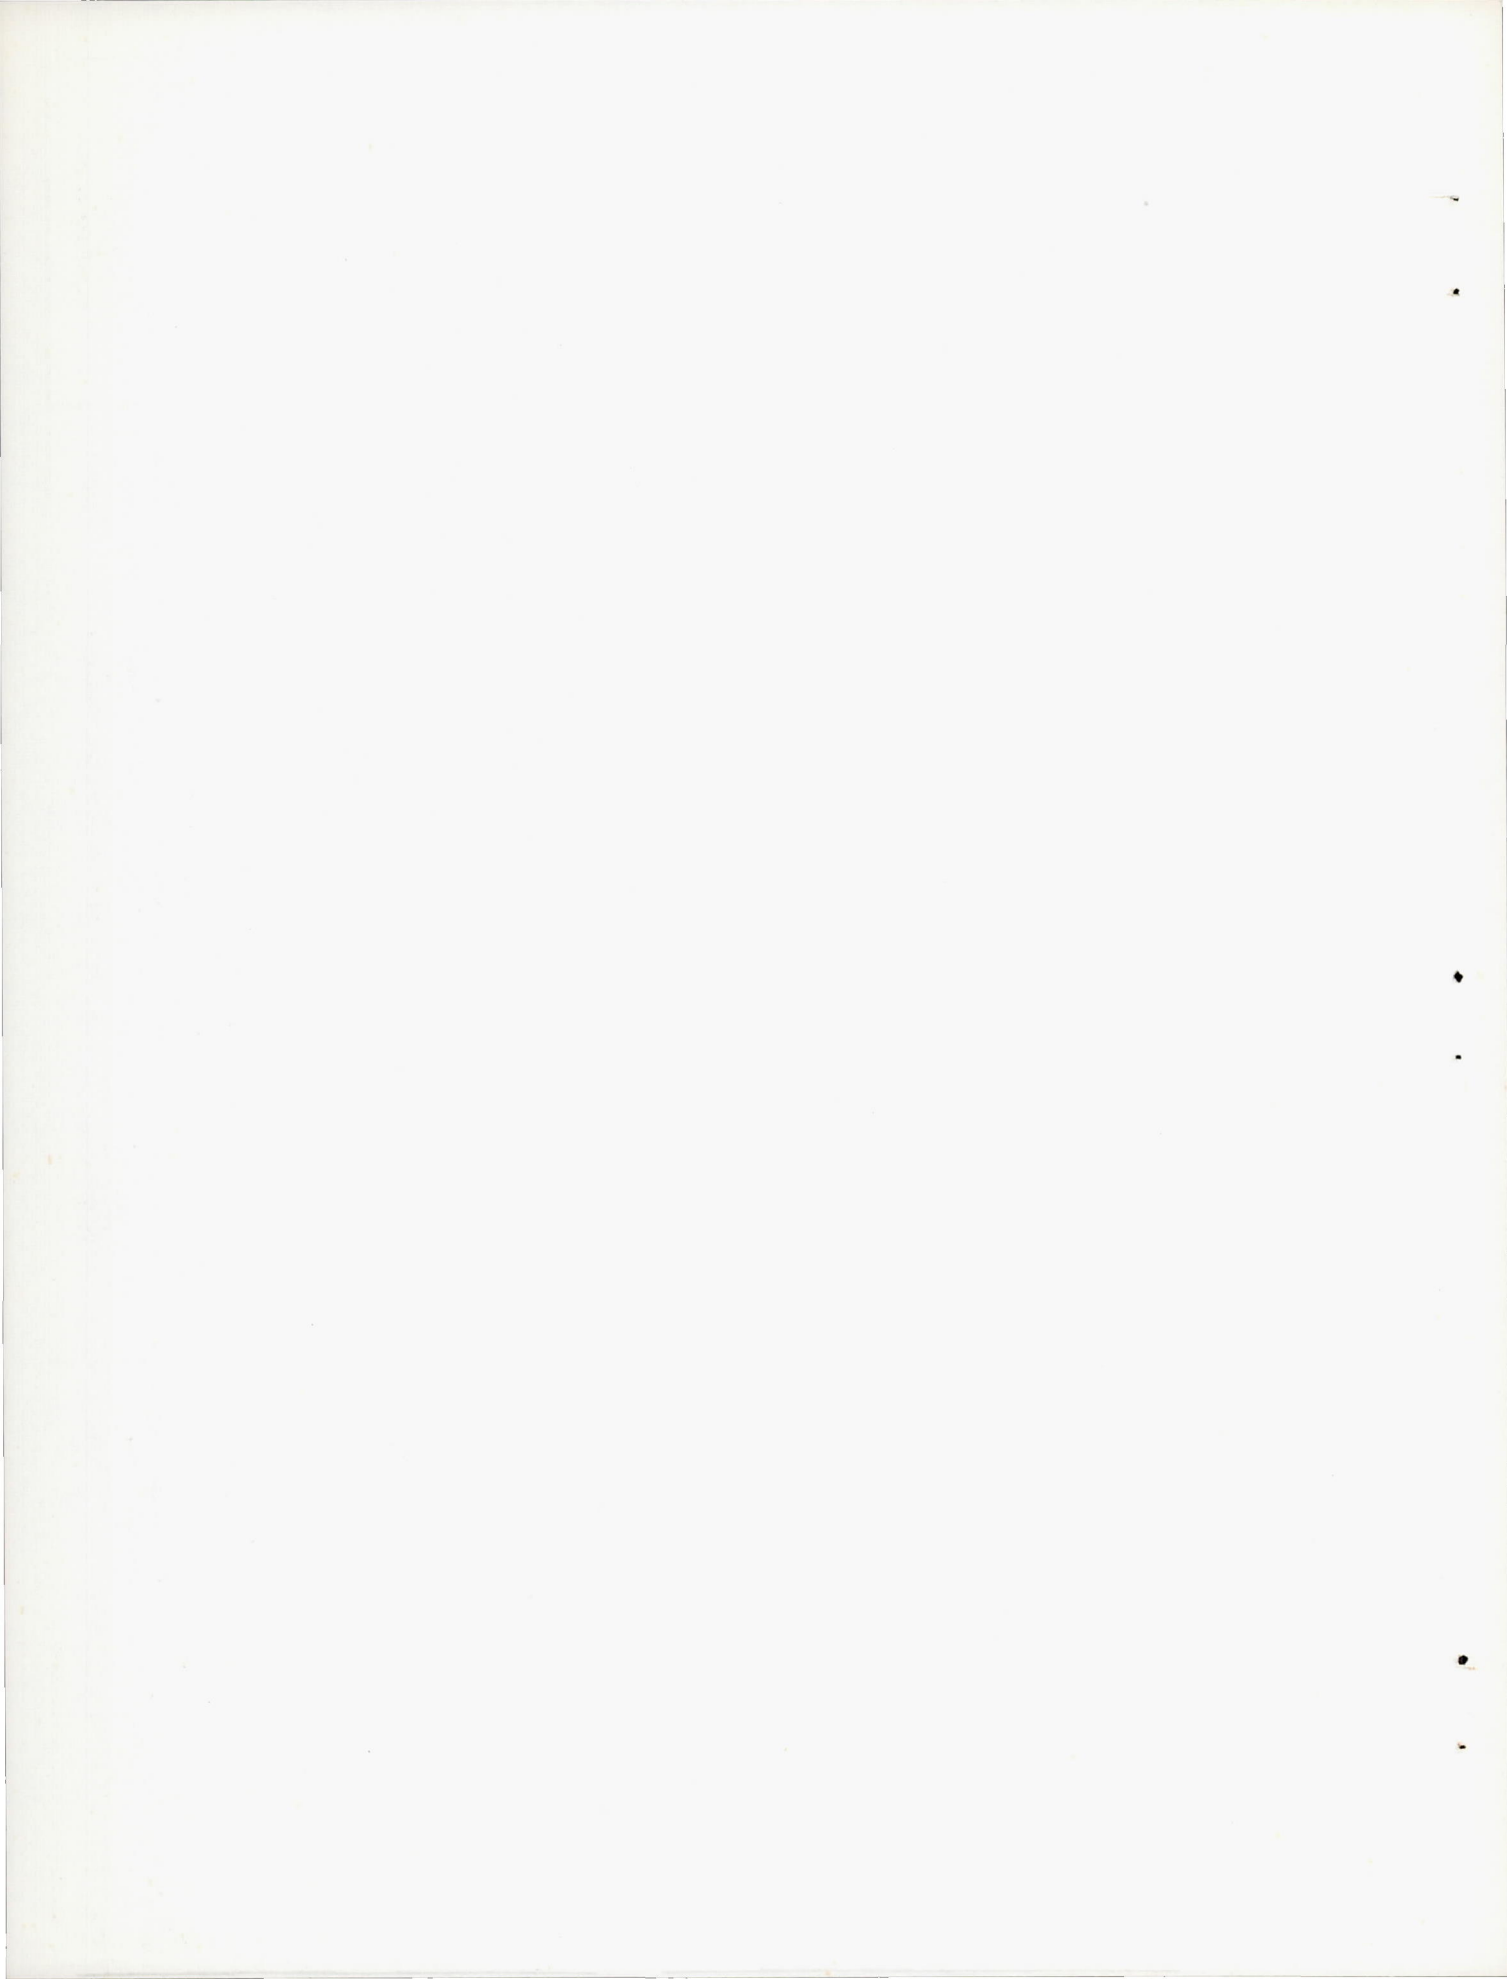

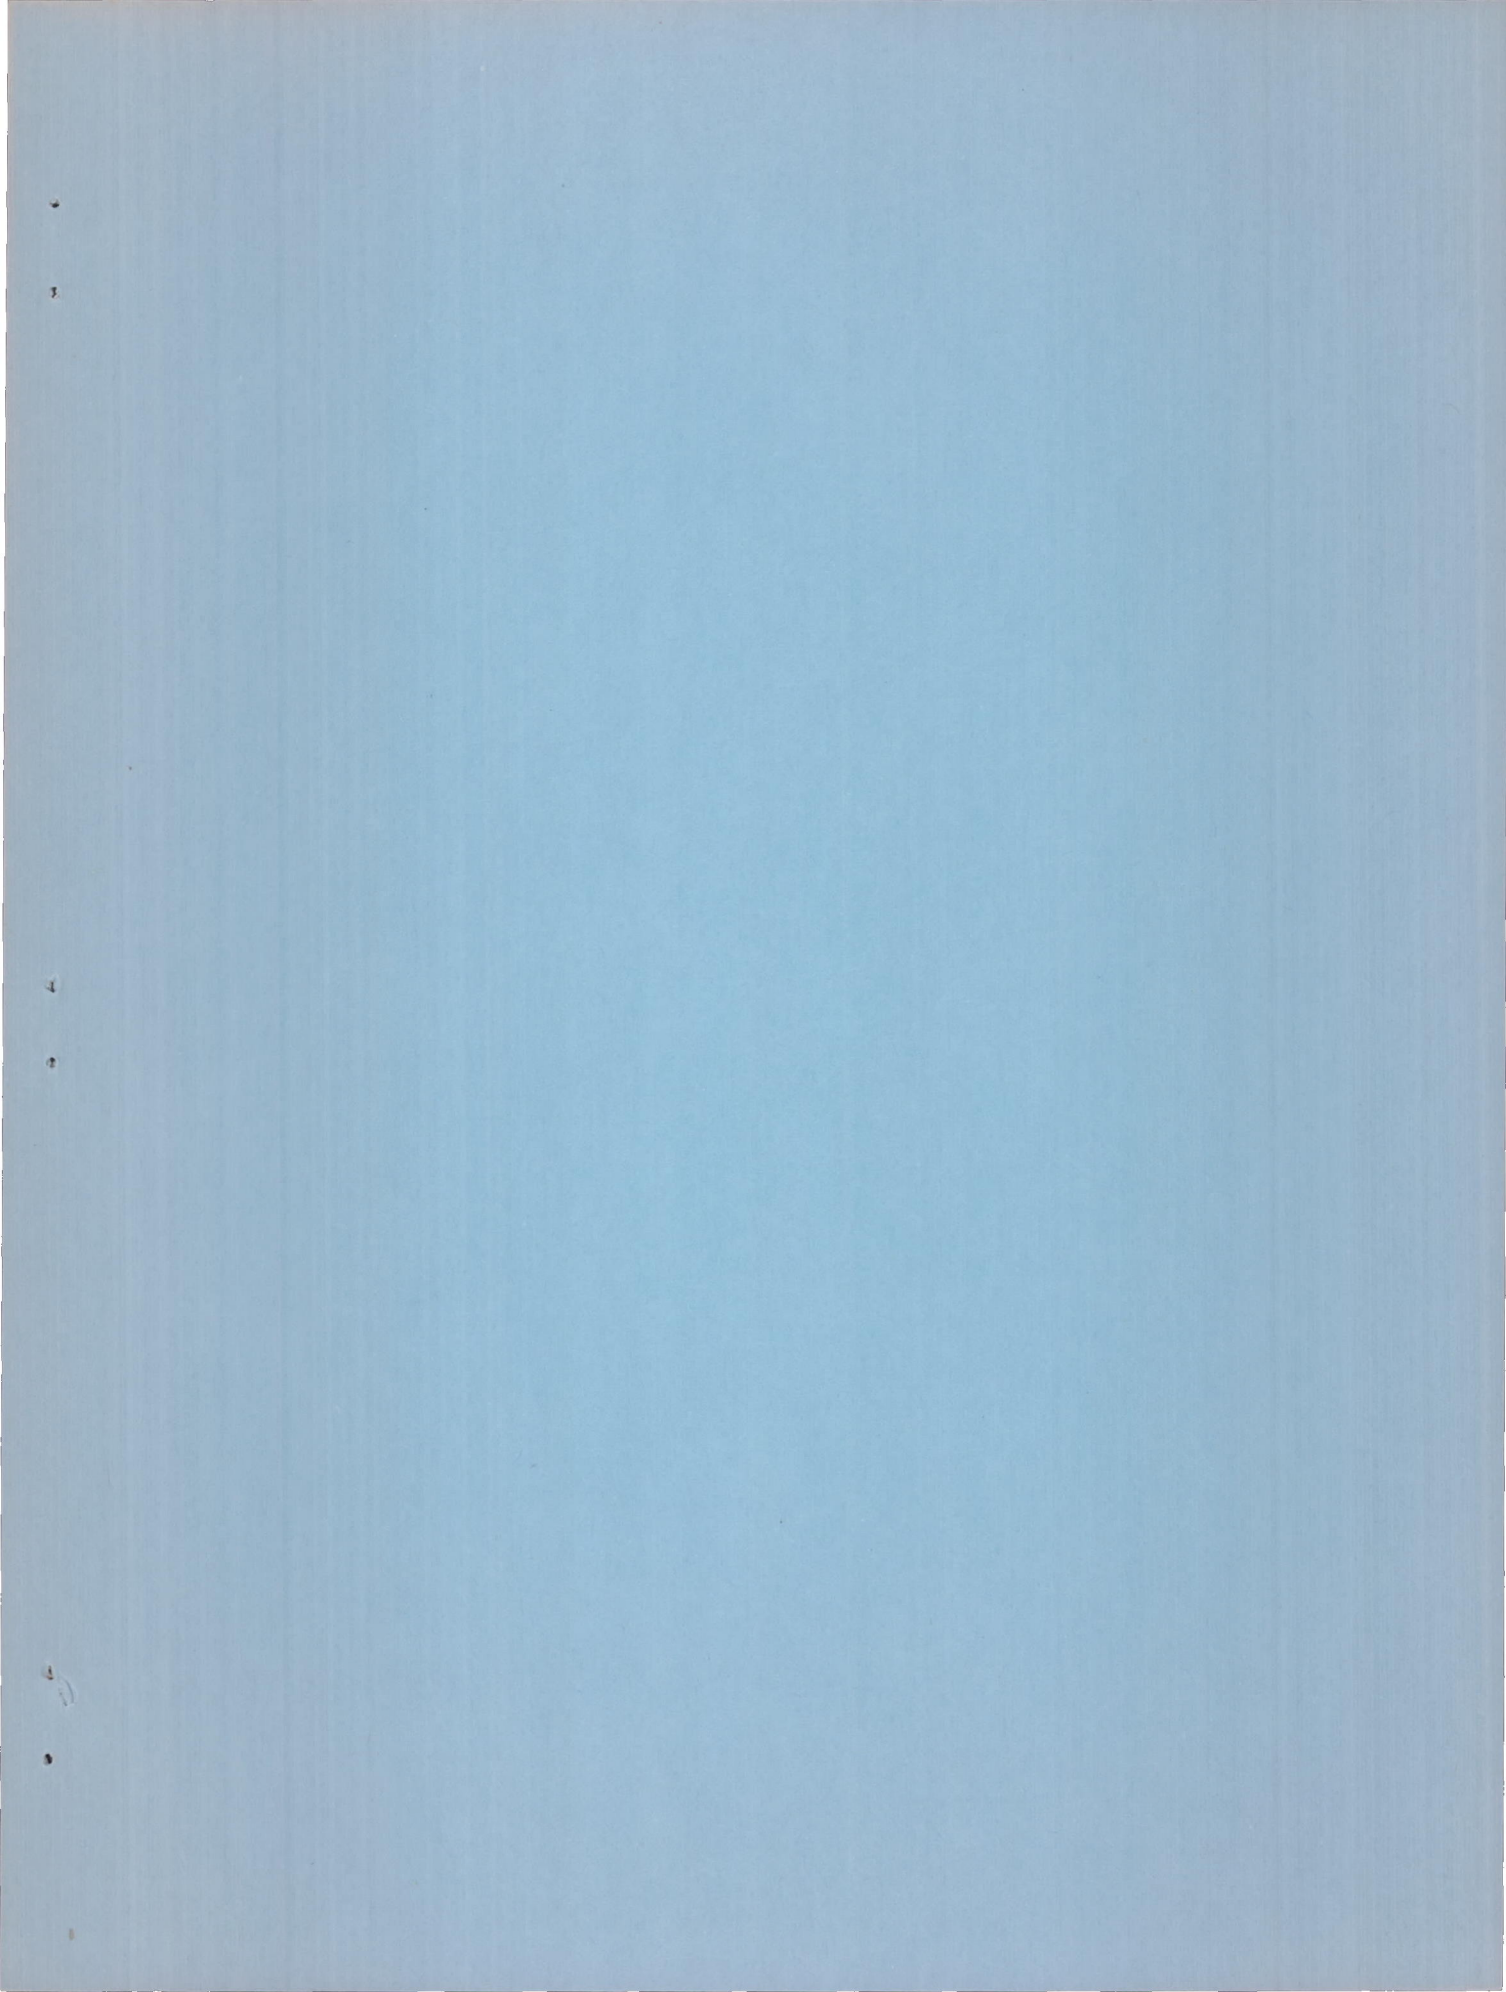

SECURITY INFORMATION  
CONFIDENTIAL

CONFIDENTIAL