

# CASE FILE COPY

NACA TN 2981

## NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

TECHNICAL NOTE 2981

THE HIGH-SPEED PLANING CHARACTERISTICS OF A RECTANGULAR  
FLAT PLATE OVER A WIDE RANGE OF TRIM  
AND WETTED LENGTH

By Irving Weinstein and Walter J. Kapryan

Langley Aeronautical Laboratory  
Langley Field, Va.

JUL 27 1953

PROPERTY FAIRCHILD  
ENGINEERING LIBRARY



Washington

July 1953

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

TECHNICAL NOTE 2981

THE HIGH-SPEED PLANING CHARACTERISTICS OF A RECTANGULAR  
FLAT PLATE OVER A WIDE RANGE OF TRIM  
AND WETTED LENGTH

By Irving Weinstein and Walter J. Kapryan

SUMMARY

In order to extend the range of available planing data, the principal high-speed planing characteristics for a prismatic surface having an angle of dead rise of  $0^\circ$  (flat bottom) have been determined over a wide range of planing variables. Wetted length, resistance, center-of-pressure location, and draft were determined at speed coefficients ranging up to 25.0, beam loadings up to 87.3, and trims up to  $30^\circ$ . Mean wetted lengths up to 7.0 beams were obtained wherever possible. The data indicate that the important planing characteristics are independent of speed and load for a given trim and are dependent primarily upon lift coefficient. The ratio of center-of-pressure location forward of the trailing edge to the wetted length is a constant equal to 0.71 up to  $9^\circ$  of trim. This ratio decreases with a further increase in trim angle.

INTRODUCTION

The National Advisory Committee for Aeronautics has undertaken an experimental investigation of the high-speed planing characteristics of a series of related prismatic surfaces. The principal purpose of this investigation is to extend the available data to high speeds, high trims, and long wetted lengths. The results of tests of surfaces having angles of dead rise of  $20^\circ$  and  $40^\circ$  are presented in references 1 to 3.

The present paper presents the results obtained with a prismatic surface having an angle of dead rise of  $0^\circ$  (flat bottom). The principal planing characteristics were determined for speed coefficients up to 25.0, beam loadings up to 87.3, wetted lengths up to 7.0 beams, and trims up to  $30^\circ$ . The characteristics determined were wetted length, resistance, center-of-pressure location, and draft for suitable combinations of speed, load, and trim.

## SYMBOLS

b	beam of planing surface, ft
d	draft at trailing edge (measured vertically from undisturbed water level), ft
F	friction, parallel to planing surface, lb
g	acceleration due to gravity, 32.2 ft/sec <sup>2</sup>
$l_m$	mean wetted length, ft
$l_p$	center-of-pressure location (measured forward of trailing edge), $\frac{M}{\Delta \cos \tau + R \sin \tau}$ , ft
M	trimming moment about trailing edge of model, ft-lb
$\Delta$	vertical load, lb
R	horizontal resistance, lb
$Re$	Reynolds number, $V_m l_m / \nu$
S	principal wetted area (bounded by trailing edge, chines, and heavy spray line), sq ft
V	horizontal velocity, fps
$V_m$	mean velocity over planing surface, $\sqrt{v^2 \left( 1 - \frac{C_{Lb}}{\frac{l_m}{b} \cos \tau} \right)}$
w	specific weight of water, lb/cu ft
$C_\Delta$	load coefficient or beam loading, $\Delta / w b^3$
$C_f$	skin-friction coefficient, $\frac{F}{\frac{\rho}{2} S V_m^2} = \frac{\cos \beta \cos^2 \tau}{\frac{l_m}{b} \cos \tau - C_{Lb}} (C_{Db} - C_{Lb} \tan \tau)$

$C_R$	resistance coefficient, $R/wb^3$
$C_V$	speed coefficient or Froude number, $V/\sqrt{gb}$
$C_{Lb}$	lift coefficient based on square of beam, $\frac{\Delta}{\frac{\rho}{2}V^2b^2} = 2 \frac{C_{\Delta}}{C_V^2}$
$C_{Db}$	drag coefficient based on square of beam, $\frac{R}{\frac{\rho}{2}V^2b^2}$
$C_{Ls}$	lift coefficient based on principal wetted area, $\frac{\Delta}{\frac{\rho}{2}V^2S} = \frac{C_{Lb}}{l_m/b}$
$C_{Ds}$	drag coefficient based on principal wetted area, $\frac{R}{\frac{\rho}{2}V^2S} = \frac{C_{Db}}{l_m/b}$
$\beta$	angle of dead rise, deg
$\rho$	mass density of water, slugs/cu ft
$\tau$	trim (angle between planing bottom and horizontal), deg
$\nu$	kinematic viscosity, $ft^2/sec$

#### DESCRIPTION OF MODEL

The model used for this investigation had an angle of dead rise of  $0^\circ$ , a beam of 4 inches, and a length of 36 inches and was constructed of brass. A sketch and cross section of the model with its pertinent dimensions are shown in figure 1. The tolerances and the finish of the model were the same as those described in reference 1.

#### APPARATUS AND PROCEDURES

Langley tank no. 1, the apparatus for towing the model, and instrumentation for measuring the lift, drag, and trimming moment are described

in reference 4. A diagram of the model and towing gear is presented in figure 2. The test procedures were similar to those described in references 1 and 2.

The wetted areas were determined from underwater photographs in the manner described in reference 1. Where photographs were not available, visual readings of the wetted length were used to determine the wetted areas. A typical underwater photograph is shown as figure 3. The wetted length  $l_m$  was measured from the trailing edge of the model to the intersection of the heavy spray line with the planing bottom. Because of a slight curvature of the heavy spray line, the wetted length at the center line was approximately 0.3 inch greater than that at the chine. An arithmetic mean value of this line, therefore, was used. This mean value corresponds closely to the value of the wetted length at one-quarter beam inboard of the chine, which was the point at which the wetted length was observed during the flat-plate investigation reported in reference 5.

Draft measurements were obtained by the method described in reference 2, where a vertically oscillating prod was used to measure changes in the water level. These changes were applied as corrections to visual draft readings. The prod was located slightly forward and to the side of the model (in the approximate location of the water-level indicator shown in fig. 7 of ref. 1). As mentioned in reference 1, a careful survey of the water surface indicated no appreciable gradient in height in the vicinity of the test area.

The aerodynamic forces on the model and towing gate were held to a minimum by the use of the windscreen described in reference 1. The residual windage tare for resistance amounted to only 0.3 pound at a speed of 82 feet per second. The proper tare was deducted from the drag measurements to obtain the hydrodynamic resistances. The tares for load and moment were found to be negligible. The quantities measured are believed to be accurate within the following limits:

Load, lb . . . . .	±0.15
Resistance, lb . . . . .	±0.15
Trimming moment, ft-lb . . . . .	±0.50
Wetted length, in. . . . .	±0.25
Draft, in. . . . .	±0.05
Trim, deg . . . . .	±0.10
Speed, fps . . . . .	±0.20

## RESULTS AND DISCUSSION

Presentation and discussion of data.- The experimental data obtained in Langley tank no. 1 are presented in tables I and II in the form of

conventional nondimensional coefficients of the load, resistance, speed, wetted length, draft, and center of pressure. The lift and drag coefficients are presented in terms of both the square of the beam ( $C_{L_b}$  and  $C_{D_b}$ ) and the principal wetted area ( $C_{L_S}$  and  $C_{D_S}$ ). Data where the mean-wetted-length—beam ratios are less than 0.5 should be used with caution since the accuracy of measurement of such small wetted areas becomes marginal. The data presented in table II were obtained in the low-speed nonplaning range and are discussed more fully later in this report.

Plots of the data are presented in figures 4 to 13. The variation of mean-wetted-length—beam ratio  $l_m/b$  with the lift coefficient  $C_{L_b}$  is shown in figure 4. When plotted against  $C_{L_b}$ , the experimental data generally fall along a single curve for each trim. These trends are the same as those found for the surfaces having dead rise (refs. 1 to 3). In figure 5, the nondimensional center-of-pressure location  $l_p/b$  is plotted against  $C_{L_b}$ . Figure 6 shows that, for practical purposes, the ratio  $l_p/l_m$  is constant for each trim and varies from 0.71 at 2° trim to 0.59 at 30° trim. The variation of draft  $d/b$  with lift coefficient  $C_{L_b}$  is shown in figure 7.

A comparison of the measured draft with that computed from the wetted length is presented in figure 8 where the measured draft is plotted against  $\frac{l}{b} \sin \tau$ . The wetted length  $l$  used in this figure is measured from the trailing edge of the model to the intersection of the heavy spray line midway between the chines and therefore corresponds to the keel wetted length  $l_k$  of references 1 to 3. The purpose of these plots, as discussed in references 1 and 2, is to establish whether a pile-up of water occurred at the intersection of the planing plate with the free-water surface. At the higher trims, the measured draft was less than that computed from the wetted length and indicated a piling up of water under the planing surface. (See fig. 9(a).) Similar pile-up, but to a lesser degree, was noted for the surfaces with dead rise (refs. 1 to 3). At low trims, however, the measured draft was more than that predicted from measurements of the wetted length. This result is contrary to expectations and should be viewed with caution. Evidence of this phenomenon is also presented in reference 6, where the results of a photographic study of piled-up water conducted with a series of V-shaped wedges having different angles of dead rise were reported. These surfaces were dropped vertically into a tank of water, and the shape of the free-water surface was photographed by means of a high-speed motion-picture camera. According to section 4.1 of reference 6, the free-water surface to the side of the model is slightly depressed during the impact

of a wedge having the low angle of dead rise of  $10^\circ$ . The possibility exists that during steady-state planing a similar depression of the water surface occurs and that at low trims it is of greater magnitude than the pile-up at the intersection of the model with the free-water surface. (See fig. 9(b).) Reference 7, in its discussion of the planing process, also suggests the possibility of such a depression.

The preceding discussion applies to conditions where this effect could be due to air compression in the restricted area near the intersection of the planing surface with the water. Inasmuch as the present tests were made with a windscreen, one would expect this effect to be minimized. The screen, however, was 1 inch above the water and might have permitted sufficient air flow for this "air compression" to occur.

The resistance data are presented in figure 10 as a plot of drag coefficient  $C_{D_b}$  against lift coefficient  $C_{L_b}$ . The solid lines faired through the data represent the total drag whereas the dashed lines, defined by  $C_{L_b} \tan \tau$ , represent the induced drag. The difference between the solid and dashed lines represents the friction drag. At low trims the friction drag is a larger portion of the total drag than at the higher trims. At high trims, the induced drag exceeds the total drag and indicates an apparent negative friction force. At these high trims the volume of forward spray is large and appears to have high forward velocity with respect to the model. The relative velocity of the model in the region of forward spray therefore is effectively reversed so that the friction drag due to this spray acts in a direction opposite to that of the drag in the principal wetted area and thereby reduces the total drag.

In practice, this forward flow of water would be expected to be reduced by the air flow around the model. In order to observe this effect, a few runs were made with the windscreen removed. The volume of water thrown forward, the apparent velocity of this spray, and the area wetted by this spray were all reduced. For these conditions, the induced drag more nearly approximated the total drag. For practical application in the range covered by the present test, therefore, the friction forces may be considered negligible at the high trims as was found for the surfaces having dead rise (refs. 1 to 3). Removal of the windscreen, however, did not eliminate the apparent negative friction force; therefore, the assumption of negligible friction forces results in slightly conservative drag estimates. For the dead-rise surfaces, the loose spray had no appreciable forward motion and removal of the windscreen had no measurable effect on the friction force.

Data from tests of a  $2\frac{1}{2}$ -inch-beam flat plate, obtained without the presence of a windscreen in Langley tank no. 2, also show that, at high

trims (above  $12^\circ$ ), the total drag is slightly lower than the induced drag, as do the tabulated data of reference 8 for conditions above  $12^\circ$  of trim.

The variation of friction coefficient with Reynolds number is presented in figure 11 for trims of  $2^\circ$ ,  $4^\circ$ ,  $6^\circ$ , and  $9^\circ$  at which the friction drag represented a significant proportion of the total drag. Most of the coefficients for the lighter loads and lower Reynolds numbers (below  $1 \times 10^6$ ) were erratic because of the marginal accuracy. All conditions, therefore, where the precision of measurement changed the coefficient by more than 20 percent were deleted from this plot. The friction coefficients were calculated directly from the tabular data. The grouping of the data along the Schoenherr turbulent-flow line indicates that, at low trims and high Reynolds numbers, the friction drag can be calculated with reasonable accuracy by use of the Schoenherr equation (ref. 9). This condition is also true for surfaces having positive angles of dead rise (refs. 1 to 3).

As reported in references 1 to 3, some of the light-load, low-speed conditions at the lower trims did not fit the curves for which  $C_{L_b}$  is the governing parameter. Accordingly, in a manner similar to that described in reference 1, an attempt was made to determine the limitation of the plots against  $C_{L_b}$ . Wetted lengths, therefore, were measured at low speeds into the speed and load region where  $C_{L_b}$  is no longer the governing parameter. These data are presented in figure 12 as a plot of  $l_m/b$  against  $C_{L_b}$ . These data are seen to depart from the curves of the collapsed data of figure 4 in a systematic pattern with load as parameter. The points at which these curves depart from the collapsed curves establish a minimum load for pure planing. Figure 13 presents a plot of these minimum load values for pure planing and was determined on the basis of 20-percent buoyancy since most of the affected data fell in this buoyancy range. The actual points of departure from the collapsed curves in figure 12 are included in figure 13 and are seen to be in good agreement with the curves based on 20-percent buoyancy and presented in figure 13. Therefore, the few conditions encountered during the remainder of this test for which buoyancy equaled at least 20 percent of the load have been deleted from table I and from the curves.

Comparison with other flat-plate data.—The flat-plate data of other experimenters are compared with those of the present paper in figure 14. Curves are presented defining the variation of  $C_{L_b}$  with trim at mean-wetted-length—beam ratios of 1 and 3 for the data obtained at the Stevens Institute of Technology (S.I.T.) and by Sambraus (refs. 10 and 8, respectively). A substantial amount of flat-plate data is also presented by Shoemaker, Locke, and Sottorf in references 11, 12, and 5,



respectively. Their data, however, do not cover the beam loading and Froude number range of the present test and therefore are not compared in figure 14. The curves representing the S.I.T. formula which do appear in figure 14, however, are partially derived from these data.

Reference 10 presents the results of an analysis of most of the available flat-plate planing data in the form of an empirical formula for computing lift. According to this analysis, the effects of buoyancy are negligible above a speed coefficient of approximately 12.5. The lift curves in figure 14, representing the S.I.T. analysis, therefore, were derived on the basis of a speed coefficient of 12.5. The calculated lift coefficients are less than those obtained in the present investigation. This difference may be due to the fact that the bulk of the data used in deriving the empirical formula were obtained at speed coefficients lower than 7.0.

The data of Sambraus (ref. 8) were obtained at speed coefficients up to 13.0 and at these higher speed coefficients the results are in good agreement with those of the present investigation.

#### CONCLUDING REMARKS

The results obtained from an experimental investigation of a planing surface having an angle of dead rise of  $0^\circ$  indicate that, during high-speed steady-state planing, the important planing characteristics for a given trim depend primarily on lift coefficient. For engineering purposes, the ratio of center-of-pressure location forward of the trailing edge to the mean wetted length can be considered a constant equal to 0.71 at trims up to  $9^\circ$ . This ratio decreases with a further increase in trim angle. The friction drag can be considered negligible at the trims tested above  $12^\circ$  so that, for these trims, as in the case with surfaces having positive angles of dead rise, the total hydrodynamic drag, for engineering purposes, can be considered equal to the induced drag of the surface.

Langley Aeronautical Laboratory,  
National Advisory Committee for Aeronautics,  
Langley Field, Va., May 29, 1953.

## REFERENCES

1. Kapryan, Walter J., and Weinstein, Irving: The Planing Characteristics of a Surface Having a Basic Angle of Dead Rise of  $20^\circ$  and Horizontal Chine Flare. NACA TN 2804, 1952.
2. Blanchard, Ulysse J.: The Planing Characteristics of a Surface Having a Basic Angle of Dead Rise of  $40^\circ$  and Horizontal Chine Flare. NACA TN 2842, 1952.
3. Chambliss, Derrill B., and Boyd, George M., Jr.: The Planing Characteristics of Two V-Shaped Prismatic Surfaces Having Angles of Dead Rise of  $20^\circ$  and  $40^\circ$ . NACA TN 2876, 1953.
4. Truscott, Starr: The Enlarged N.A.C.A. Tank, and Some of Its Work. NACA TM 918, 1939.
5. Sottorf, W.: Experiments With Planing Surfaces. NACA TM 661, 1932.
6. Bisplinghoff, R. L., and Doherty, C. S.: A Two-Dimensional Study of the Impact of Wedges on a Water Surface. Contract No. NOa(s)-9921, Dept. Aero. Eng., M.I.T., Mar. 20, 1950.
7. Sedov, L. I.: Planing on a Water Surface. R.T.P. Trans. No. 2506, British Ministry of Aircraft Production (from Tech. Vosdushnogo Flota, No. 4-5, 1940).
8. Sambraus, A.: Planing-Surface Tests at Large Froude Numbers - Airfoil Comparison. NACA TM 848, 1938.
9. Davidson, Kenneth S. M.: Resistance and Powering. Detailed Considerations - Skin Friction. Vol. II of Principles of Naval Architecture, ch. II, pt. 2, sec. 7, Henry E. Rossell and Lawrence B. Chapman, eds., Soc. Naval Arch. and Marine Eng., 1939, pp. 76-83.
10. Korvin-Kroukovsky, B. V., Savitsky, Daniel, and Lehman, William F.: Wetted Area and Center of Pressure of Planing Surfaces. Preprint No. 244, S.M.F. Fund Paper, Inst. Aero. Sci. (Rep. No. 360, Project No. NR062-012, Office Naval Res., Exp. Towing Tank, Stevens Inst. Tech., Aug. 1949.)
11. Shoemaker, James M.: Tank Tests of Flat and V-Bottom Planing Surfaces. NACA TN 509, 1934.
12. Locke, F. W. S., Jr.: Tests of a Flat Bottom Planing Surface To Determine the Inception of Planing. NAVAER DR Rep. 1096, Bur. Aero., Dec. 1948.

TABLE I

EXPERIMENTAL PLANING DATA OBTAINED FOR A RECTANGULAR FLAT PLATE

LANGLEY TANK MODEL 282

Average kinematic viscosity =  $14.75 \times 10^{-6}$  ft<sup>2</sup>/sec; specific weight of tank water = 63.4 lb/cu ft

Trim, $\tau$ , deg	$C_{\Delta}$	$C_V$	$C_R$	$\frac{l_m}{b}$	$\frac{l_p}{b}$	$\frac{d}{b}$	$C_{L_b}$	$C_{D_b}$	$C_{L_S}$	$C_{D_S}$
2	0.85	6.10	0.21	2.17	1.72	0.125	0.0456	0.0113	0.021	0.0052
2	.85	6.16	.31	1.80	1.11	---	.0447	.0163	.025	.0090
2	.85	9.06	.14	.67	.55	.075	.0207	.0034	.031	.0051
2	.85	9.15	.20	.55	.06	---	.0203	.0048	.037	.0087
2	2.13	9.70	.60	2.37	1.97	---	.0453	.0127	.019	.0054
2	2.13	14.55	.26	.87	---	.048	.0201	.0024	.023	.0028
2	2.13	18.51	.32	.40	.13	.045	.0125	.0019	.031	.0047
2	2.13	21.44	.41	.30	---	.055	.0093	.0018	.031	.0060
2 <sup>a</sup>	4.26	12.20	1.47	4.79	4.01	---	.0572	.0198	.012	.0041
2 <sup>a</sup>	4.26	13.37	1.05	2.54	2.15	---	.0476	.0118	.019	.0046
2	4.26	13.66	1.20	3.00	2.30	---	.0456	.0129	.015	.0043
2	4.26	13.72	1.04	3.00	1.48	.122	.0453	.0110	.015	.0037
2	4.26	20.53	.52	.62	.40	---	.0202	.0025	.033	.0040
2	4.26	20.74	.64	.68	.62	---	.0198	.0030	.029	.0044
2	4.26	24.61	.63	.45	.43	---	.0141	.0021	.031	.0047
2	6.39	12.78	2.45	8.27	5.37	---	.0782	.0300	.009	.0036
2 <sup>a</sup>	6.39	13.37	2.56	7.79	5.78	---	.0714	.0286	.009	.0037
2	6.39	16.99	1.68	3.00	2.23	.130	.0443	.0116	.015	.0039
2	6.39	20.04	1.10	1.17	.93	.058	.0318	.0055	.027	.0047
2	6.39	22.88	1.01	.87	.39	.060	.0244	.0039	.028	.0045
2	6.39	24.92	.94	.70	.46	.038	.0206	.0030	.029	.0043
2	10.65	18.54	3.71	6.50	4.61	.225	.0620	.0216	.010	.0033
2	10.65	21.87	2.71	3.00	2.29	.145	.0446	.0113	.015	.0038
2	10.65	25.01	1.80	1.57	.99	.075	.0340	.0057	.022	.0036
2	19.17	23.39	7.02	8.12	6.30	.338	.0701	.0257	.009	.0032
2	19.17	25.01	6.54	6.50	4.96	.338	.0613	.0209	.009	.0032
+	.85	4.58	.13	1.37	.37	.112	.0810	.0124	.059	.0090
+	.85	4.70	.18	1.30	.31	---	.0769	.0163	.059	.0125
+	.85	6.10	.14	.50	.15	---	.0456	.0075	.091	.0150
+	.85	6.10	.10	.48	.25	.060	.0456	.0054	.095	.0112
+	.85	9.12	.14	.25	.13	.042	.0204	.0034	.082	.0136
+	.85	9.15	.16	.25	---	---	.0203	.0038	.081	.0152
+	2.13	7.17	.32	1.52	1.05	.130	.0830	.0125	.055	.0082
+	2.13	7.23	.38	1.67	1.32	---	.0815	.0146	.049	.0087
+	2.13	9.64	.34	.50	.42	---	.0458	.0073	.092	.0146
+	2.13	9.64	.28	.42	.38	.062	.0458	.0060	.109	.0143
+	2.13	14.40	.24	.25	---	.075	.0205	.0023	.082	.0092
+	4.26	8.35	.91	4.66	3.62	---	.1222	.0260	.026	.0056
+	4.26	10.33	.63	1.91	1.68	---	.0800	.0118	.042	.0062
+	4.26	10.37	.60	1.37	1.19	.115	.0790	.0112	.058	.0082
+	4.26	13.57	.51	.50	---	.055	.0462	.0055	.092	.0110
+	4.26	13.68	.48	.54	---	---	.0456	.0052	.084	.0096
+	6.39	10.06	1.36	4.57	3.23	---	.1251	.0266	.027	.0058
+	6.39	10.09	1.30	4.91	3.66	---	.1254	.0256	.026	.0052
+	6.39	10.97	1.21	3.66	2.95	---	.1060	.0200	.029	.0055
+	6.39	12.81	.96	1.45	1.18	.125	.0778	.0117	.054	.0081
+	6.39	12.86	.93	1.66	1.54	---	.0774	.0112	.049	.0067
+	6.39	16.99	.78	.38	---	.050	.0443	.0054	.117	.0142
+	6.39	19.98	.73	.35	---	.020	.0320	.0037	.091	.0106
+	10.65	12.00	2.35	7.16	4.09	---	.1478	.0326	.021	.0045
+	10.65	13.48	2.08	4.54	3.45	---	.1172	.0228	.026	.0050
+	10.65	16.23	1.54	1.52	1.23	.112	.0810	.0117	.053	.0077
+	10.65	16.26	1.49	1.50	1.21	.138	.0807	.0113	.054	.0075
+	10.65	16.37	1.61	1.64	1.46	---	.0794	.0120	.048	.0073
+	10.65	21.66	1.26	.62	.39	.068	.0455	.0054	.073	.0087
+	10.65	24.86	1.36	.38	---	.050	.0345	.0044	.091	.0116
+	19.17	15.46	4.32	8.54	---	---	.1606	.0362	.019	.0042
+	19.17	17.51	3.72	4.82	3.57	.388	.1250	.0243	.026	.0050
+	19.17	17.57	3.91	5.54	4.15	---	.1242	.0254	.022	.0046
+	19.17	18.13	3.73	4.66	3.58	---	.1166	.0226	.025	.0048
+	19.17	21.87	2.79	1.45	1.20	.120	.0803	.0117	.055	.0081
+	19.17	24.92	2.36	.85	.66	.075	.0618	.0076	.073	.0089
+	27.69	20.95	5.23	4.63	3.51	.388	.1260	.0238	.027	.0051
+	27.69	24.80	4.20	2.20	1.71	.212	.0900	.0137	.041	.0062
+	36.21	22.97	7.09	5.14	3.70	---	.1374	.0268	.027	.0052
+	36.21	24.77	6.59	4.07	3.07	.362	.1182	.0215	.029	.0053

<sup>a</sup>Conditions for which average kinematic viscosity =  $14.2 \times 10^{-6}$  ft<sup>2</sup>/sec



TABLE I - Continued

EXPERIMENTAL PLANING DATA OBTAINED FOR A RECTANGULAR FLAT PLATE

LANGLEY TANK MODEL 282

Trim, $\tau$ , deg	$C_D$	$C_V$	$C_R$	$\frac{l_m}{b}$	$\frac{l_p}{b}$	$\frac{d}{b}$	$C_{L_b}$	$C_{D_b}$	$C_{L_s}$	$C_{D_s}$
6	0.85	4.58	0.15	0.60	---	---	0.0811	0.0143	0.135	0.0238
6	.85	6.13	.13	.30	0.28	---	.0452	.0069	.151	.0230
6	.85	9.15	.16	.18	---	---	.0203	.0038	.113	.0211
6	2.13	5.83	.28	1.35	.85	0.160	.1254	.0165	.093	.0122
6	2.13	7.17	.29	.60	---	.082	.0829	.0113	.138	.0189
6	2.13	7.26	.29	.60	.57	---	.0807	.0110	.135	.0184
6	2.13	9.67	.29	.30	---	---	.0456	.0062	.152	.0207
6	2.13	9.67	.26	.30	---	---	.0456	.0056	.152	.0187
6	2.13	14.49	.36	.18	---	.072	.0203	.0034	.113	.0189
6 <sup>a</sup>	6.39	8.39	1.13	3.66	2.78	---	.1816	.0322	.050	.0088
6	6.39	8.39	1.08	3.02	2.46	---	.1816	.0307	.060	.0102
6	6.39	10.00	.96	1.32	1.25	---	.1278	.0192	.097	.0146
6	6.39	12.69	.86	.55	---	---	.0794	.0107	.143	.0195
6	6.39	16.68	.87	.30	---	---	.0459	.0063	.153	.0210
6	6.39	19.89	.72	.22	.20	.020	.0323	.0036	.147	.0164
6	10.65	9.36	1.97	5.30	3.70	---	.2430	.0450	.046	.0085
6 <sup>a</sup>	10.65	10.72	1.83	3.79	2.77	---	.1850	.0318	.049	.0084
6	10.65	10.83	1.78	3.05	2.23	---	.1816	.0303	.059	.0099
6	10.65	12.96	1.60	1.32	1.20	---	.1270	.0191	.096	.0145
6 <sup>a</sup>	10.65	16.27	1.39	.66	.12	---	.0804	.0104	.122	.0158
6	10.65	16.32	1.47	.55	.47	---	.0800	.0110	.145	.0200
6	10.65	24.77	1.44	.25	.24	---	.0347	.0047	.139	.0188
6	19.17	12.41	3.60	5.62	4.02	---	.2490	.0468	.044	.0083
6 <sup>a</sup>	19.17	12.57	3.59	6.29	4.42	---	.2428	.0454	.039	.0072
6	19.17	14.55	3.32	3.32	2.57	.392	.1816	.0314	.055	.0095
6 <sup>a</sup>	19.17	17.37	2.79	1.66	1.26	---	.1268	.0184	.076	.0111
6	19.17	17.60	2.80	1.42	1.12	---	.1240	.0181	.087	.0127
6	19.17	21.90	2.56	.65	.49	---	.0800	.0107	.123	.0165
6	19.17	24.92	2.59	.38	---	---	.0619	.0084	.163	.0220
6 <sup>a</sup>	27.69	14.13	5.26	7.79	5.32	---	.2778	.0528	.036	.0068
6	27.69	15.01	5.12	5.75	4.00	---	.2456	.0454	.043	.0079
6 <sup>a</sup>	27.69	15.04	5.17	6.29	4.47	---	.2450	.0456	.039	.0073
6	27.69	17.60	4.52	3.00	2.31	---	.1790	.0292	.060	.0097
6 <sup>a</sup>	27.69	17.71	---	3.41	---	---	.1766	---	.052	---
6	27.69	20.86	4.06	1.52	1.16	---	.1274	.0187	.084	.0123
6	27.69	25.10	3.79	.67	.59	---	.0879	.0120	.131	.0179
6 <sup>a</sup>	36.21	16.27	6.80	7.66	5.31	---	.2734	.0514	.036	.0067
6	36.21	17.08	6.64	5.62	3.98	---	.2485	.0456	.044	.0081
6 <sup>a</sup>	36.21	17.18	6.69	6.29	4.76	---	.2456	.0454	.039	.0072
6	36.21	19.86	6.02	3.35	2.47	---	.1840	.0306	.055	.0091
6	36.21	24.10	5.56	1.42	1.15	.232	.1247	.0191	.088	.0134
6	36.21	24.46	5.39	1.40	1.06	---	.1212	.0181	.086	.0128
6 <sup>a</sup>	53.25	19.90	9.65	7.29	5.09	---	.2690	.0488	.037	.0067
6	53.25	20.74	9.80	5.57	4.01	.668	.2475	.0456	.044	.0081
6	53.25	24.16	8.87	3.22	2.50	---	.1825	.0304	.057	.0094
6	70.29	24.46	12.58	5.20	3.80	.638	.2350	.0421	.045	.0080
9 <sup>a</sup>	6.39	6.77	1.27	3.04	2.04	---	.2786	.0554	.092	.0182
9 <sup>a</sup>	6.39	6.90	1.23	2.79	1.90	---	.2680	.0516	.096	.0185
9 <sup>a</sup>	6.39	9.18	1.08	.91	.81	---	.1516	.0256	.167	.0281
9 <sup>a</sup>	10.65	7.75	2.09	4.54	3.05	---	.3544	.0694	.078	.0153
9 <sup>a</sup>	10.65	8.72	2.06	3.10	2.12	---	.2800	.0542	.090	.0175
9 <sup>a</sup>	10.65	11.83	1.86	.91	.71	---	.1522	.0266	.167	.0292
9 <sup>a</sup>	19.17	9.06	3.96	7.04	4.43	---	.4650	.0964	.066	.0137
9 <sup>a</sup>	19.17	9.51	3.78	5.91	3.97	---	.4240	.0836	.072	.0142
9 <sup>a</sup>	19.17	9.98	3.91	5.41	3.64	---	.3852	.0786	.071	.0145
9 <sup>a</sup>	19.17	11.80	3.64	3.04	2.09	---	.2760	.0522	.091	.0172
9 <sup>a</sup>	19.17	15.70	3.21	.91	.64	---	.1556	.0260	.171	.0286
9 <sup>a</sup>	27.69	10.82	5.67	7.16	4.68	---	.4724	.0966	.066	.0135
9 <sup>a</sup>	27.69	11.98	5.49	5.41	3.73	---	.3860	.0764	.071	.0141
9 <sup>a</sup>	27.69	14.10	5.30	3.10	2.21	---	.2786	.0534	.090	.0172
9 <sup>a</sup>	36.21	12.30	7.45	7.29	4.79	---	.4786	.0986	.066	.0135
9 <sup>a</sup>	36.21	13.78	7.26	5.41	3.71	---	.3812	.0764	.070	.0141
9 <sup>a</sup>	36.21	15.40	6.99	3.66	2.58	---	.3060	.0590	.084	.0161
9 <sup>a</sup>	36.21	18.28	6.44	1.86	1.34	---	.2170	.0386	.117	.0207

<sup>a</sup>Conditions for which average kinematic viscosity =  $14.2 \times 10^{-6}$  ft<sup>2</sup>/sec



TABLE I - Continued

EXPERIMENTAL PLANING DATA OBTAINED FOR A RECTANGULAR FLAT PLATE  
LANGLEY TANK MODEL 282

Trim, $\tau$ , deg	$C_{\Delta}$	$C_V$	$C_R$	$\frac{l}{b}$	$\frac{l_p}{b}$	$\frac{d}{b}$	$C_{L_b}$	$C_{D_b}$	$C_{L_s}$	$C_{D_s}$
12	0.85	4.54	0.18	0.28	---	---	0.0825	0.0175	0.295	0.0624
12	.85	6.01	.22	.15	---	---	.0471	.0122	.314	.0813
12	.85	8.69	.23	.10	---	---	.0225	.0061	.225	.0610
12	.85	18.30	.49	---	0.56	---	.0051	.0029	---	---
12	2.13	4.15	.51	1.25	.70	---	.2472	.0592	.197	.0474
12	2.13	4.82	.43	.80	.09	0.122	.1835	.0370	.229	.0461
12	2.13	4.82	.49	.75	.26	---	.1835	.0422	.245	.0563
12	2.13	7.26	.45	.28	---	---	.0808	.0171	.289	.0611
12	2.13	9.64	.47	.15	---	---	.0459	.0101	.306	.0673
12	4.26	10.22	.86	.28	---	.042	.0816	.0165	.292	.0589
12	4.26	13.66	.79	.15	---	.028	.0457	.0085	.305	.0567
12	6.39	5.61	1.48	2.70	1.76	---	.4050	.0940	.150	.0348
12	6.39	7.17	1.41	1.22	.86	---	.2480	.0547	.203	.0447
12	6.39	10.13	1.32	.42	.22	---	.1246	.0257	.297	.0612
12	6.39	12.75	1.29	.20	---	---	.0786	.0159	.393	.0795
12	6.39	16.96	1.18	.12	---	---	.0445	.0082	.371	.0683
12	6.39	20.04	1.27	.10	.08	---	.0318	.0063	.318	.0630
12	6.39	24.98	1.47	.08	---	---	.0205	.0047	.256	.0588
12	10.65	7.29	2.48	2.97	1.96	.608	.4010	.0935	.134	.0315
12	10.65	9.30	2.30	1.12	.76	---	.2463	.0532	.220	.0475
12	10.65	10.80	2.25	.77	.46	---	.1827	.0385	.236	.0500
12 <sup>a</sup>	10.65	12.22	2.17	.54	.42	---	.1426	.0290	.264	.0537
12	10.65	12.26	2.19	.53	.35	---	.1418	.0291	.268	.0549
12	10.65	13.79	2.16	.40	.23	---	.1121	.0227	.280	.0568
12	10.65	16.23	1.99	.25	---	---	.0809	.0151	.324	.0604
12	10.65	21.59	2.04	.15	---	---	.0457	.0087	.305	.0580
12	10.65	24.95	2.18	.12	---	---	.0342	.0070	.285	.0583
12	19.17	8.75	4.46	4.22	2.91	.850	.5010	.1165	.119	.0276
12	19.17	9.67	4.37	3.00	2.06	---	.4100	.0935	.137	.0312
12 <sup>a</sup>	19.17	12.20	4.17	1.41	1.06	---	.2576	.0560	.183	.0397
12	19.17	12.38	4.12	1.22	.86	---	.2500	.0538	.204	.0441
12	19.17	12.50	4.20	1.25	.86	.180	.2450	.0538	.195	.0430
12	19.17	17.32	3.70	.40	.26	---	.1270	.0247	.318	.0618
12	19.17	21.59	3.54	.28	.23	---	.0823	.0152	.294	.0542
12	19.17	24.98	3.84	.31	---	---	.0615	.0123	.198	.0397
12	19.17	25.16	3.69	.20	---	---	.0605	.0116	.302	.0580
12	27.69	10.52	6.53	4.07	2.87	.785	.5010	.1181	.122	.0288
12	27.69	11.74	6.44	2.92	2.02	.532	.4015	.0933	.138	.0320
12 <sup>a</sup>	27.69	12.22	6.39	2.66	1.88	---	.3712	.0856	.140	.0322
12	27.69	14.95	5.81	1.20	.88	---	.2477	.0520	.206	.0433
12	27.69	17.54	5.61	.70	.48	---	.1802	.0365	.257	.0521
12	27.69	21.14	5.48	.45	.25	---	.1240	.0245	.276	.0543
12	27.69	25.25	5.41	.30	.13	---	.0870	.0170	.291	.0567
12	36.21	12.02	8.50	4.25	2.86	---	.5010	.1178	.118	.0276
12	36.21	13.36	8.22	2.97	2.10	---	.4060	.0923	.136	.0311
12	36.21	14.94	8.00	2.05	1.44	---	.3250	.0717	.157	.0350
12	36.21	20.07	7.28	.75	.48	---	.1800	.0361	.240	.0481
12	36.21	24.40	7.17	.48	.25	---	.1218	.0241	.254	.0502
12	53.25	14.55	12.48	4.20	2.93	.838	.5030	.1180	.120	.0281
12	53.25	16.13	12.03	3.07	2.11	.582	.4095	.0925	.132	.0299
12	53.25	16.23	12.05	3.00	2.05	---	.4050	.0917	.134	.0306
12	53.25	16.78	12.46	2.62	1.83	.518	.3786	.0886	.143	.0338
12	53.25	20.89	11.34	1.17	.86	---	.2440	.0520	.209	.0444
12	53.25	24.40	11.00	.75	.46	---	.1790	.0370	.238	.0493
12	70.29	16.78	16.79	4.05	2.79	---	.4993	.1193	.123	.0293
12	70.29	21.01	15.47	2.07	1.41	---	.3187	.0701	.154	.0339
12	70.29	24.49	14.81	1.15	.82	---	.2344	.0493	.204	.0429
12	87.33	18.67	20.60	4.12	2.87	---	.5011	.1182	.121	.0286
12	87.33	20.74	19.86	2.97	2.11	---	.4060	.0923	.136	.0310
12	87.33	21.01	19.75	2.90	2.04	.590	.3957	.0896	.136	.0309
12	87.33	23.27	19.44	2.00	1.46	---	.3226	.0716	.161	.0358
12	87.33	24.28	19.17	1.80	1.26	.375	.2963	.0650	.164	.0360

<sup>a</sup>Conditions for which average kinematic viscosity =  $14.2 \times 10^{-6}$  ft<sup>2</sup>/sec

NACA

TABLE I - Continued

EXPERIMENTAL PLANING DATA OBTAINED FOR A RECTANGULAR FLAT PLATE

LANGLEY TANK MODEL 282

Trim, $\tau$ , deg	$C_D$	$C_V$	$C_R$	$\frac{l_m}{b}$	$\frac{l_p}{b}$	$\frac{d}{b}$	$C_{Lb}$	$C_{Db}$	$C_{Ls}$	$C_{Ds}$
18	0.85	4.58	0.26	0.18	---	---	0.0810	0.0248	0.450	0.1378
18	.85	4.61	.30	.18	---	---	.0800	.0282	.444	.1567
18	.85	6.10	.27	.10	---	---	.0456	.0146	.456	.1460
18	2.13	3.29	.74	1.50	1.16	---	.3937	.1368	.262	.0912
18	2.13	4.18	.74	.68	.49	---	.2438	.0847	.360	.1246
18	2.13	4.82	.69	.45	.40	---	.1833	.0593	.406	.1317
18	2.13	7.20	.70	.18	---	---	.0822	.0268	.457	.1489
18	2.13	9.67	.60	.10	---	---	.0456	.0128	.456	.1280
18	6.39	5.67	2.00	1.40	.82	---	.3975	.1244	.284	.0888
18	6.39	7.20	1.95	.68	.39	---	.2465	.0752	.362	.1106
18	6.39	10.13	1.86	.28	.11	---	.1245	.0364	.444	.1300
18	6.39	10.13	1.88	.20	.09	0.045	.1245	.0368	.622	.1840
18	6.39	12.69	1.84	.18	.06	---	.0794	.0227	.441	.1261
18	10.65	8.02	3.36	1.08	.65	---	.3312	.1046	.308	.0968
18	10.65	8.75	3.34	.80	.51	.192	.2782	.0873	.348	.1091
18	10.65	9.09	3.33	.72	.48	.120	.2578	.0806	.357	.1119
18	10.65	9.30	3.25	.68	.38	---	.2463	.0752	.363	.1106
18	10.65	10.74	3.25	.40	.24	---	.1847	.0564	.462	.1410
18	10.65	10.83	3.22	.42	.23	---	.1816	.0550	.432	.1310
18	10.65	15.49	3.00	.26	.13	---	.0888	.0250	.342	.0962
18	19.17	9.06	6.15	1.75	1.18	---	.4671	.1499	.267	.0857
18	19.17	9.70	6.09	1.37	.95	---	.4075	.1294	.297	.0944
18	19.17	10.98	5.92	.92	.57	.218	.3180	.0982	.346	.1067
18	19.17	12.44	5.87	.65	.39	---	.2478	.0760	.381	.1169
18	19.17	12.50	5.90	.60	.39	.098	.2454	.0757	.409	.1262
18	19.17	17.23	5.68	.28	.10	---	.1291	.0384	.461	.1371
18	19.17	21.75	5.61	.18	.15	.012	.0810	.0237	.450	.1317
18	19.17	25.10	5.16	.12	---	---	.0609	.0164	.508	.1367
18	27.69	15.01	8.55	.58	.38	---	.2458	.0757	.424	.1305
18	27.69	17.63	8.10	.40	.15	.072	.1782	.0521	.446	.1302
18	27.69	21.01	7.94	.28	.06	.075	.1255	.0362	.448	.1293
18	27.69	21.26	8.02	.25	.13	.028	.1225	.0356	.490	.1424
18	27.69	25.50	8.10	.18	.14	---	.0852	.0250	.473	.1389
18	36.21	11.90	11.72	2.02	1.35	---	.5114	.1655	.253	.0819
18	36.21	12.99	11.66	1.55	.99	---	.4292	.1385	.276	.0894
18	36.21	14.91	11.48	.95	.64	---	.3258	.1033	.343	.1087
18	36.21	19.82	10.82	.44	.25	.032	.1845	.0551	.419	.1252
18	36.21	24.43	10.52	.28	.16	---	.1213	.0352	.433	.1257
18	53.25	14.61	17.32	1.88	1.30	---	.4989	.1623	.265	.0863
18	53.25	14.70	17.28	1.98	1.37	.488	.4928	.1602	.249	.0808
18	53.25	15.65	17.18	1.50	1.03	---	.4348	.1403	.290	.0935
18	53.25	16.20	16.54	1.47	.91	.315	.4058	.1260	.276	.0857
18	53.25	16.31	16.91	1.35	.92	---	.4003	.1271	.296	.0941
18	53.25	20.83	16.18	.60	.38	.090	.2454	.0746	.409	.1243
18	53.25	24.40	15.88	.35	.24	.032	.1787	.0535	.511	.1529
18	70.29	16.78	21.51	1.87	1.18	---	.410	.1528	.266	.0817
18	70.29	16.80	22.53	2.02	1.29	.498	.4981	.1596	.247	.0790
18	70.29	21.01	21.89	1.02	.60	---	.3185	.0992	.312	.0973
18	70.29	24.61	21.19	.58	.33	.122	.2321	.0705	.400	.1207
18	87.33	18.64	28.05	2.02	1.35	.502	.5027	.1615	.249	.0800
18	87.33	20.98	27.54	1.38	.87	.325	.3968	.1251	.287	.0906
18	87.33	23.18	27.33	.90	.60	.210	.3251	.1017	.361	.1130
24	2.13	4.21	.98	.52	.33	---	.2404	.1106	.462	.1217
24	2.13	4.85	.94	.38	.26	---	.1811	.0800	.476	.1205
24	2.13	7.32	.92	.12	---	---	.0795	.0343	.662	.2858
24	6.39	5.73	2.79	.90	.67	---	.3893	.1700	.433	.1889
24	6.39	7.11	2.79	.50	.34	---	.2528	.1104	.506	.2208
24	6.39	10.10	2.65	.25	.20	---	.1253	.0520	.501	.2080
24	10.65	7.29	4.51	.94	.57	.238	.4008	.1697	.427	.1805
24	10.65	9.36	4.41	.48	.26	---	.2431	.1007	.506	.2098
24	10.65	10.80	4.34	.38	.16	---	.1826	.0744	.480	.1958
24	10.65	13.02	4.25	.24	.07	.038	.1256	.0501	.523	.2088
24	19.17	8.69	8.34	1.30	.83	---	.5077	.2210	.391	.1700
24	19.17	9.61	8.31	.95	.58	---	.4152	.1800	.437	.1895
24	19.17	9.76	8.10	1.00	.49	.242	.4025	.1700	.402	.1698
24	19.17	12.41	8.07	.55	.23	---	.2489	.1046	.453	.1902
24	19.17	12.47	7.91	.49	.19	.090	.2466	.1017	.503	.2076
24	19.17	17.35	7.86	.22	.07	---	.1274	.0522	.579	.2373
24	27.69	11.65	11.73	.94	.55	.232	.4086	.1730	.434	.1840

TABLE I - Concluded

EXPERIMENTAL PLANING DATA OBTAINED FOR A RECTANGULAR FLAT PLATE

LANGLEY TANK MODEL 282

Trim, $\tau$ , deg	$C_{\Delta}$	$C_V$	$C_R$	$\frac{l_m}{b}$	$\frac{l_p}{b}$	$\frac{d}{b}$	$C_{L_b}$	$C_{D_b}$	$C_{L_S}$	$C_{D_S}$
24	27.69	15.01	11.66	0.50	0.24	---	0.2458	0.1036	0.492	0.2072
24	27.69	17.45	11.53	.32	.15	---	.1819	.0755	.568	.2359
24	27.69	21.11	11.35	.22	.07	---	.1243	.0510	.565	.2318
24	36.21	11.90	15.82	1.22	.83	---	.5114	.2234	.419	.1831
24	36.21	13.42	15.68	.95	.58	---	.4021	.1741	.423	.1833
24	36.21	14.88	15.38	.70	.40	---	.3271	.1390	.467	.1986
24	36.21	20.04	14.95	.32	.16	---	.1803	.0746	.563	.2331
24	53.25	14.49	23.16	1.27	.83	---	.5072	.2206	.399	.1737
24	53.25	16.16	22.77	1.00	.60	---	.4078	.1744	.408	.1744
24	53.25	18.39	22.43	.65	.33	0.185	.3150	.1326	.484	.2041
24	53.25	20.77	22.31	.55	.22	---	.2469	.1033	.448	.1877
24	53.25	20.86	22.28	.45	.26	---	.2447	.1024	.544	.2276
24	53.25	24.34	22.24	.38	.17	---	.1800	.0751	.473	.1977
24	53.25	24.40	21.71	.32	.15	---	.1787	.0727	.558	.2272
24	70.29	16.59	30.94	1.17	.84	---	.5108	.2248	.437	.1921
24	70.29	20.92	30.25	.70	.46	---	.3212	.1382	.459	.1974
24	70.29	24.61	29.68	.44	.27	---	.2321	.0980	.527	.2227
24	87.33	18.54	38.01	1.22	.85	---	.5081	.2212	.416	.1813
24	87.33	20.62	37.78	.98	.63	---	.4108	.1777	.419	.1813
24	87.33	23.33	37.50	.70	.41	---	.3209	.1378	.458	.1969
24	87.33	24.95	37.22	.55	.37	---	.2806	.1196	.510	.2175
30	6.39	5.58	3.55	.75	.42	---	.4104	.2280	.547	.3040
30	6.39	8.08	3.41	.30	.12	---	.1955	.1046	.652	.3487
30	6.39	10.13	3.35	.18	---	---	.1245	.0653	.692	.3628
30	6.39	12.78	3.20	.11	---	---	.0782	.0392	.711	.3564
30	10.65	9.33	5.76	.38	.16	---	.2447	.1323	.644	.3482
30	10.65	10.89	5.65	.27	.10	---	.1796	.0953	.665	.3530
30	10.65	16.41	5.56	.11	---	---	.0791	.0413	.719	.3754
30	19.17	8.72	10.70	.98	.57	---	.5042	.2814	.514	.2871
30	19.17	9.57	10.73	.70	.43	---	.4100	.2295	.586	.3279
30	19.17	12.41	10.36	.40	.18	---	.2489	.1345	.622	.3362
30	19.17	17.63	10.08	.16	.13	---	.1234	.0650	.771	.4062
30	19.17	21.72	10.34	.11	.06	---	.0813	.0440	.739	.4000
30	27.69	14.91	14.85	.40	.15	---	.2491	.1336	.623	.3340
30	27.69	17.45	14.83	.27	.12	---	.1819	.0973	.674	.3604
30	27.69	20.86	14.49	.16	.02	---	.1273	.0666	.796	.4162
30	27.69	24.98	15.17	.12	.06	---	.0888	.0487	.740	.4058
30	36.21	11.99	20.06	.98	.58	---	.5038	.2791	.514	.2848
30	36.21	13.24	20.09	.73	.45	---	.4131	.2292	.566	.3140
30	36.21	14.98	19.84	.54	.31	---	.3227	.1766	.598	.3270
30	36.21	20.10	19.23	.31	.09	---	.1792	.0952	.578	.3071
30	53.25	14.49	29.79	.98	.63	---	.5072	.2837	.518	.2895

TABLE II

SUPPLEMENTARY EXPERIMENTAL DATA OBTAINED AT LOW SPEEDS FOR LANGLEY TANK MODEL 282

Average kinematic viscosity =  $14.2 \times 10^{-6}$  ft<sup>2</sup>/sec; specific weight of tank water = 63.4 lb/cu ft

Trim, $\tau$ , deg	$C_{\Delta}$	$C_V$	$C_R$	$\frac{l_m}{b}$	$\frac{l_D}{b}$	$C_{L_b}$	$C_{D_b}$	$C_{L_S}$	$C_{D_S}$
4	4.26	6.35	0.92	8.29	4.82	0.2116	0.0456	0.026	0.0055
4	4.26	6.65	1.00	7.91	4.88	.1926	.0452	.024	.0057
4	4.26	6.80	.92	7.54	4.81	.1844	.0398	.024	.0053
4	4.26	6.99	.96	7.04	4.65	.1744	.0392	.025	.0056
4	4.26	7.44	1.00	6.54	4.49	.1542	.0362	.024	.0055
4	6.39	8.35	1.44	8.41	5.44	.1830	.0412	.022	.0049
4	6.39	8.79	1.44	7.54	5.05	.1652	.0372	.022	.0049
4	6.39	9.00	1.44	7.04	4.78	.1576	.0356	.022	.0051
4	10.65	11.37	2.44	8.41	5.85	.1644	.0378	.020	.0045
6	6.39	5.58	1.11	8.29	4.36	.4100	.0714	.049	.0086
6	6.39	5.98	1.15	7.79	4.38	.3572	.0644	.046	.0083
6	6.39	6.46	1.14	7.29	4.36	.3060	.0546	.042	.0075
6	6.39	6.92	1.23	6.29	3.76	.2666	.0514	.042	.0082
6	6.39	7.29	1.18	5.91	3.87	.2404	.0444	.041	.0075
6	10.65	7.86	2.02	8.66	5.77	.3446	.0652	.040	.0075
6	10.65	8.26	2.02	8.04	5.37	.3120	.0592	.039	.0074
6	10.65	8.45	2.01	7.66	4.89	.2984	.0564	.039	.0074
6	10.65	8.88	2.02	7.04	4.81	.2700	.0512	.038	.0073
6	10.65	9.21	1.97	6.29	4.17	.2512	.0464	.040	.0074
6	19.17	11.34	3.73	8.41	5.56	.2980	.0580	.035	.0069
9	6.39	4.60	1.13	6.29	3.52	.6020	.1064	.096	.0169
9	6.39	4.60	1.09	6.16	3.36	.6020	.1028	.098	.0167
9	6.39	4.88	1.17	5.91	3.40	.5360	.0982	.091	.0166
9	6.39	4.92	1.28	6.16	3.46	.5280	.1056	.086	.0171
9	6.39	4.97	1.28	6.16	3.46	.5170	.1036	.084	.0168
9	6.39	5.31	1.17	5.16	3.14	.4530	.0830	.088	.0161
9	6.39	5.34	1.17	5.11	3.14	.4480	.0820	.087	.0160
9	6.39	5.92	1.25	4.41	2.91	.3640	.0712	.082	.0162
9	10.65	6.16	2.06	7.29	4.22	.5600	.1084	.077	.0149
9	10.65	6.40	2.01	6.79	4.05	.5192	.0980	.076	.0144
9	10.65	6.77	2.20	6.41	4.03	.4640	.0960	.072	.0150
9	10.65	7.10	2.09	5.54	3.60	.4230	.0830	.076	.0150
9	10.65	7.38	2.24	5.29	3.49	.3920	.0824	.074	.0156





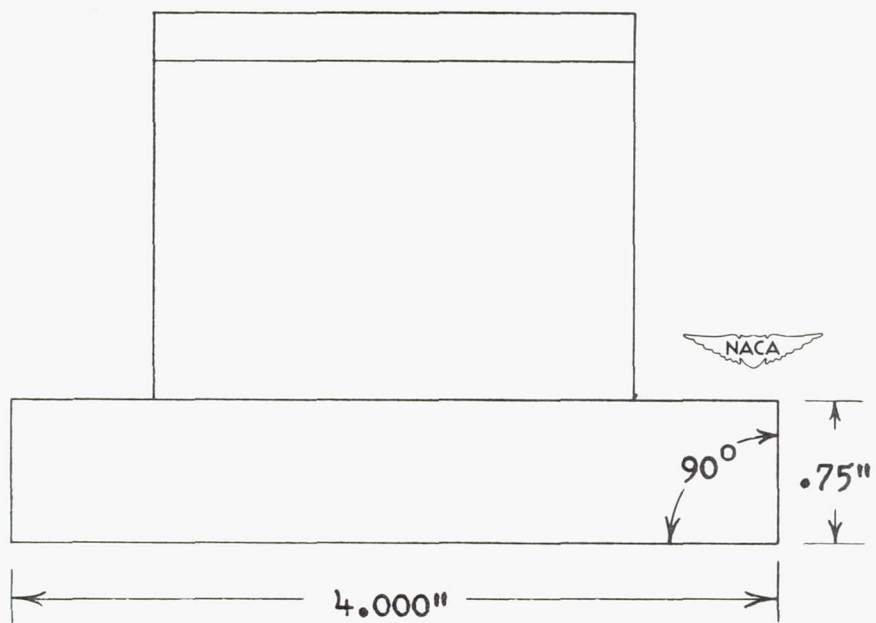
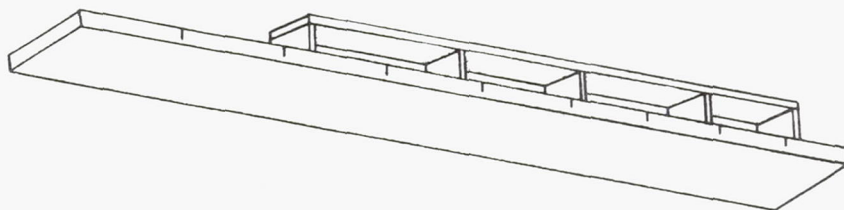


Figure 1.- Sketch and cross section of flat-plate model.

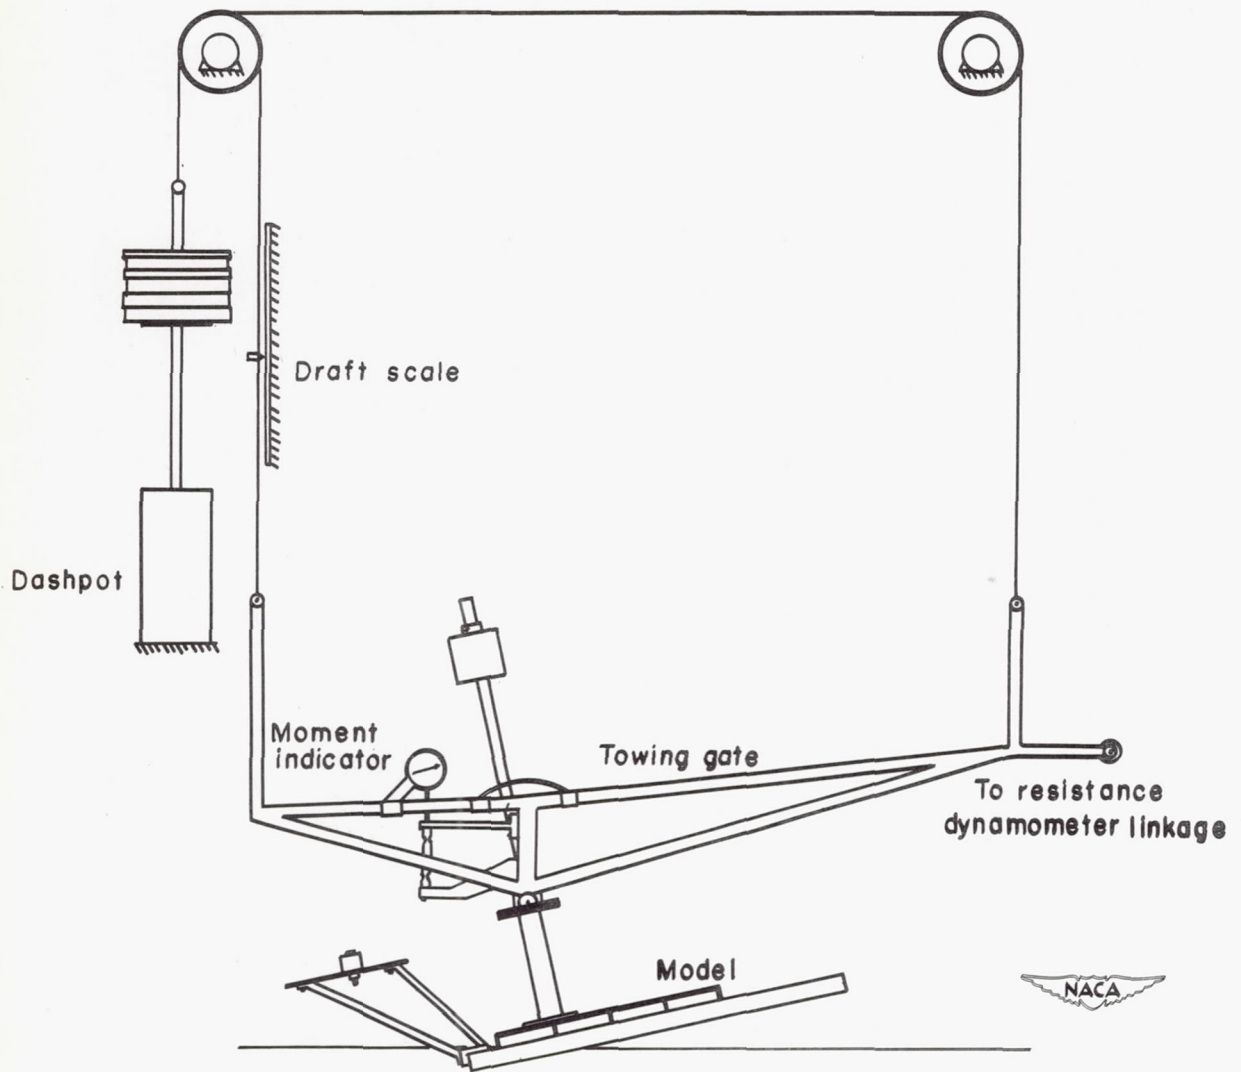


Figure 2.- Setup of model and towing gear.

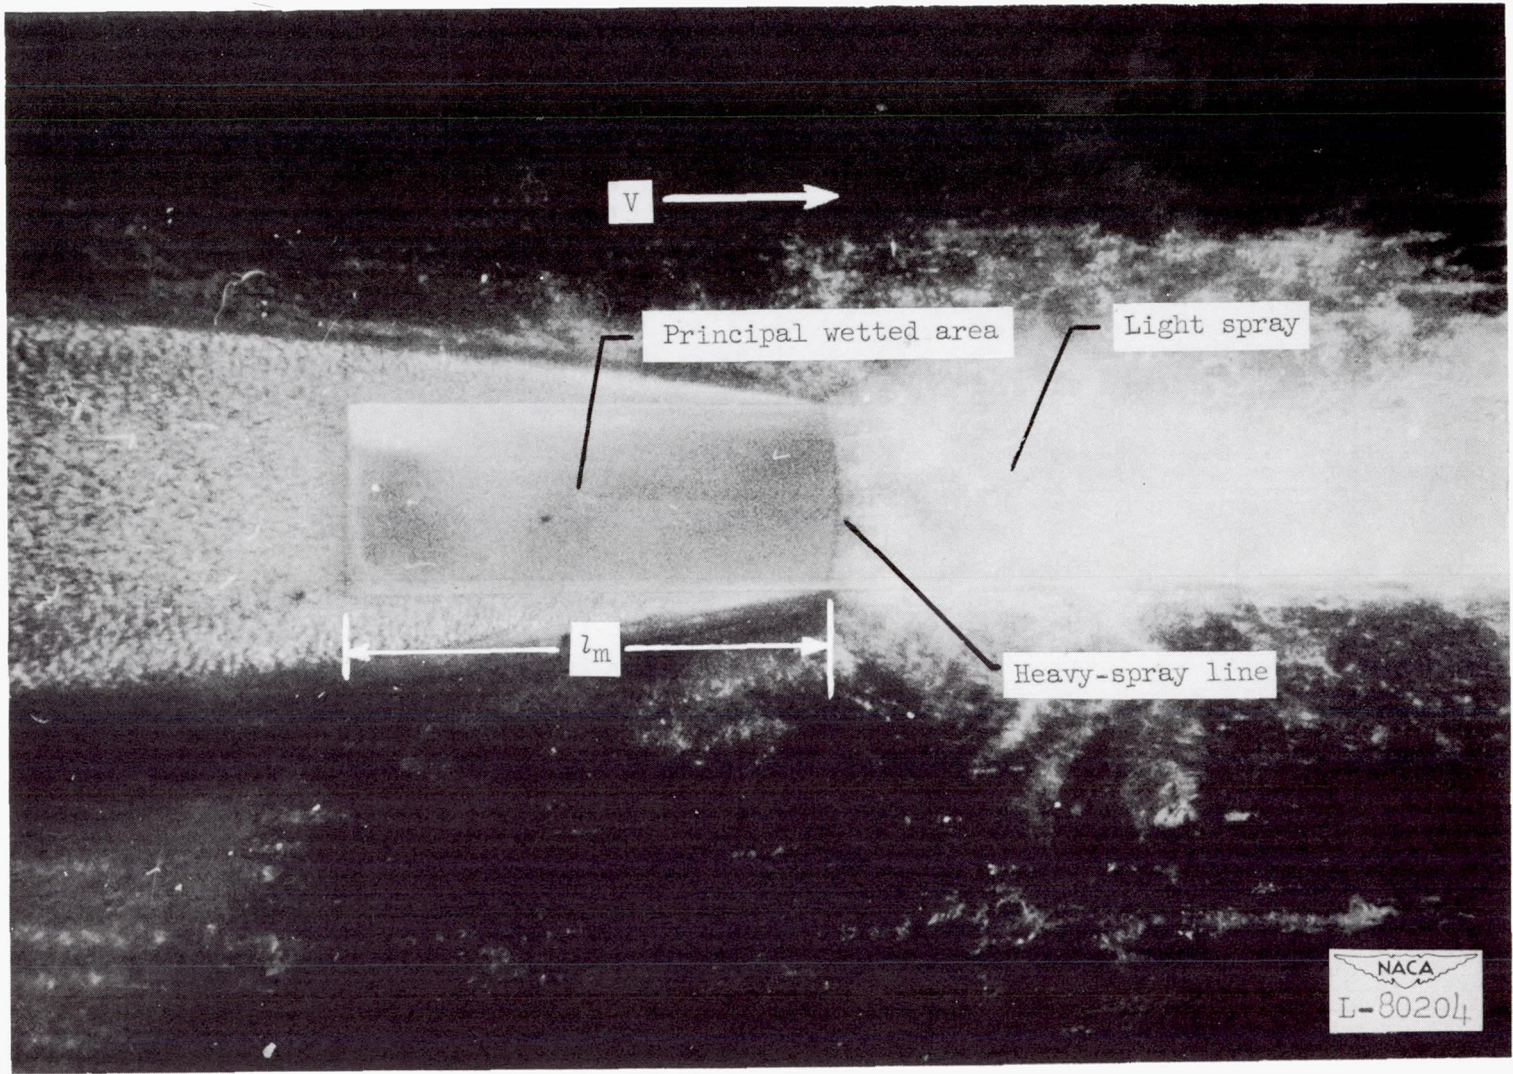


Figure 3.- Typical underwater photograph.

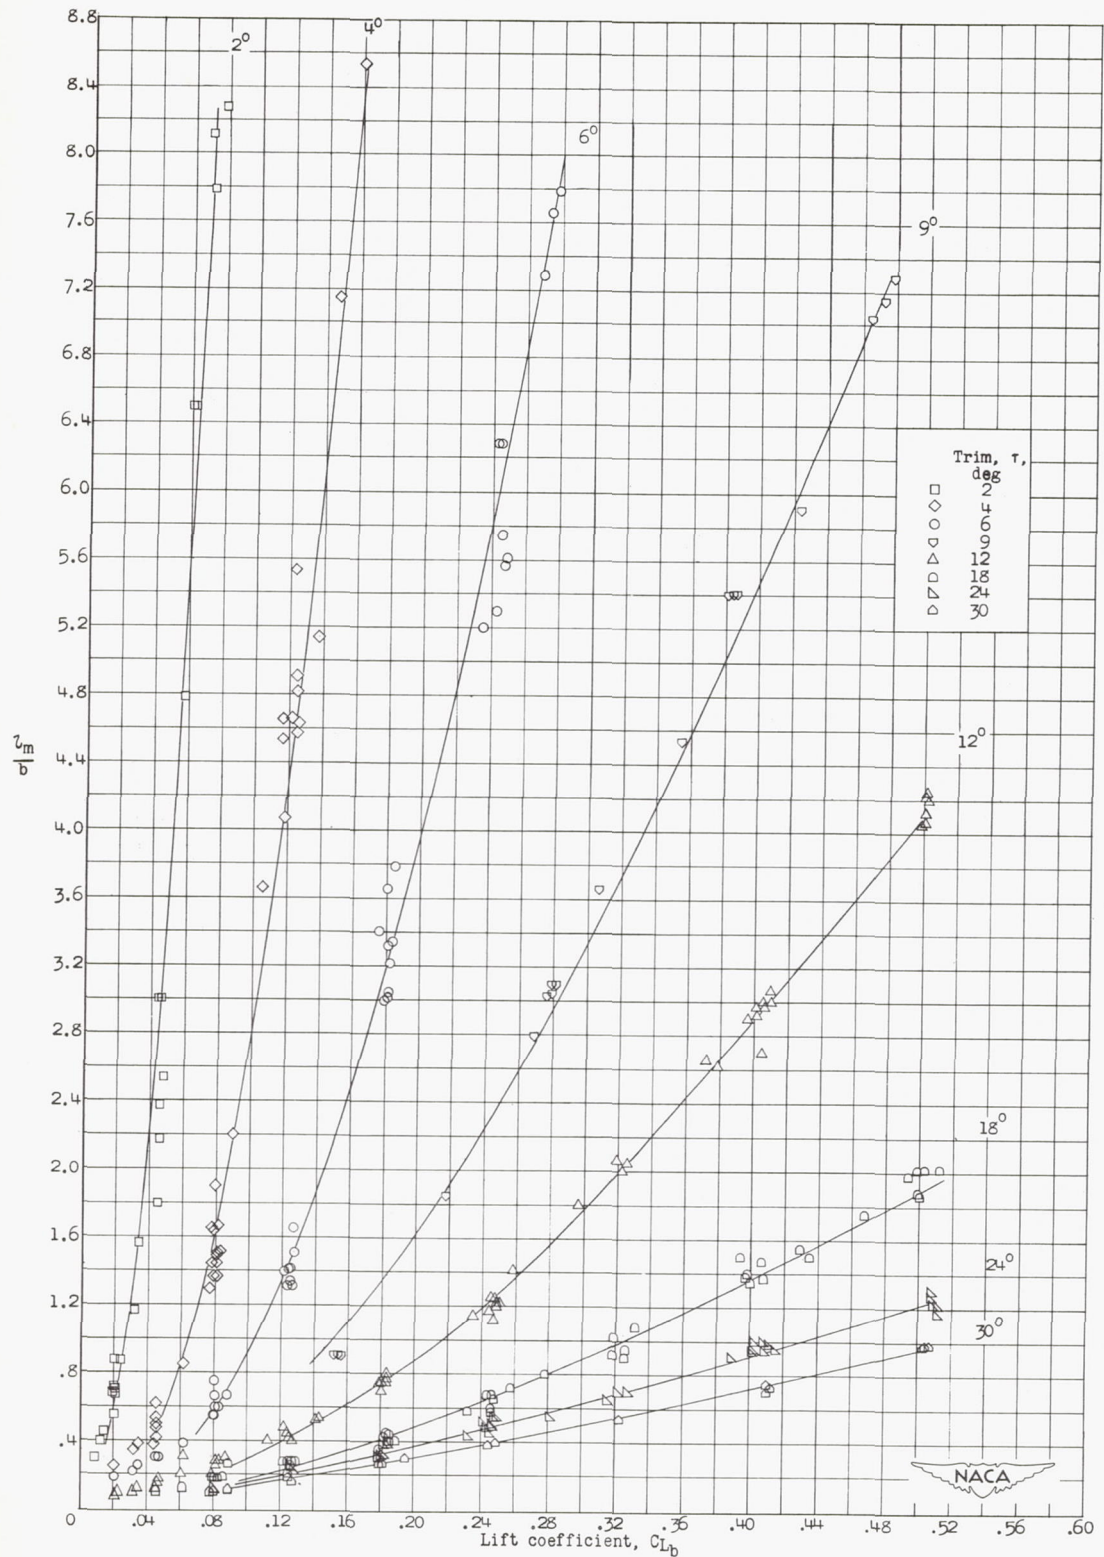


Figure 4.- Variation of mean-wetted-length-beam ratio with lift coefficient.

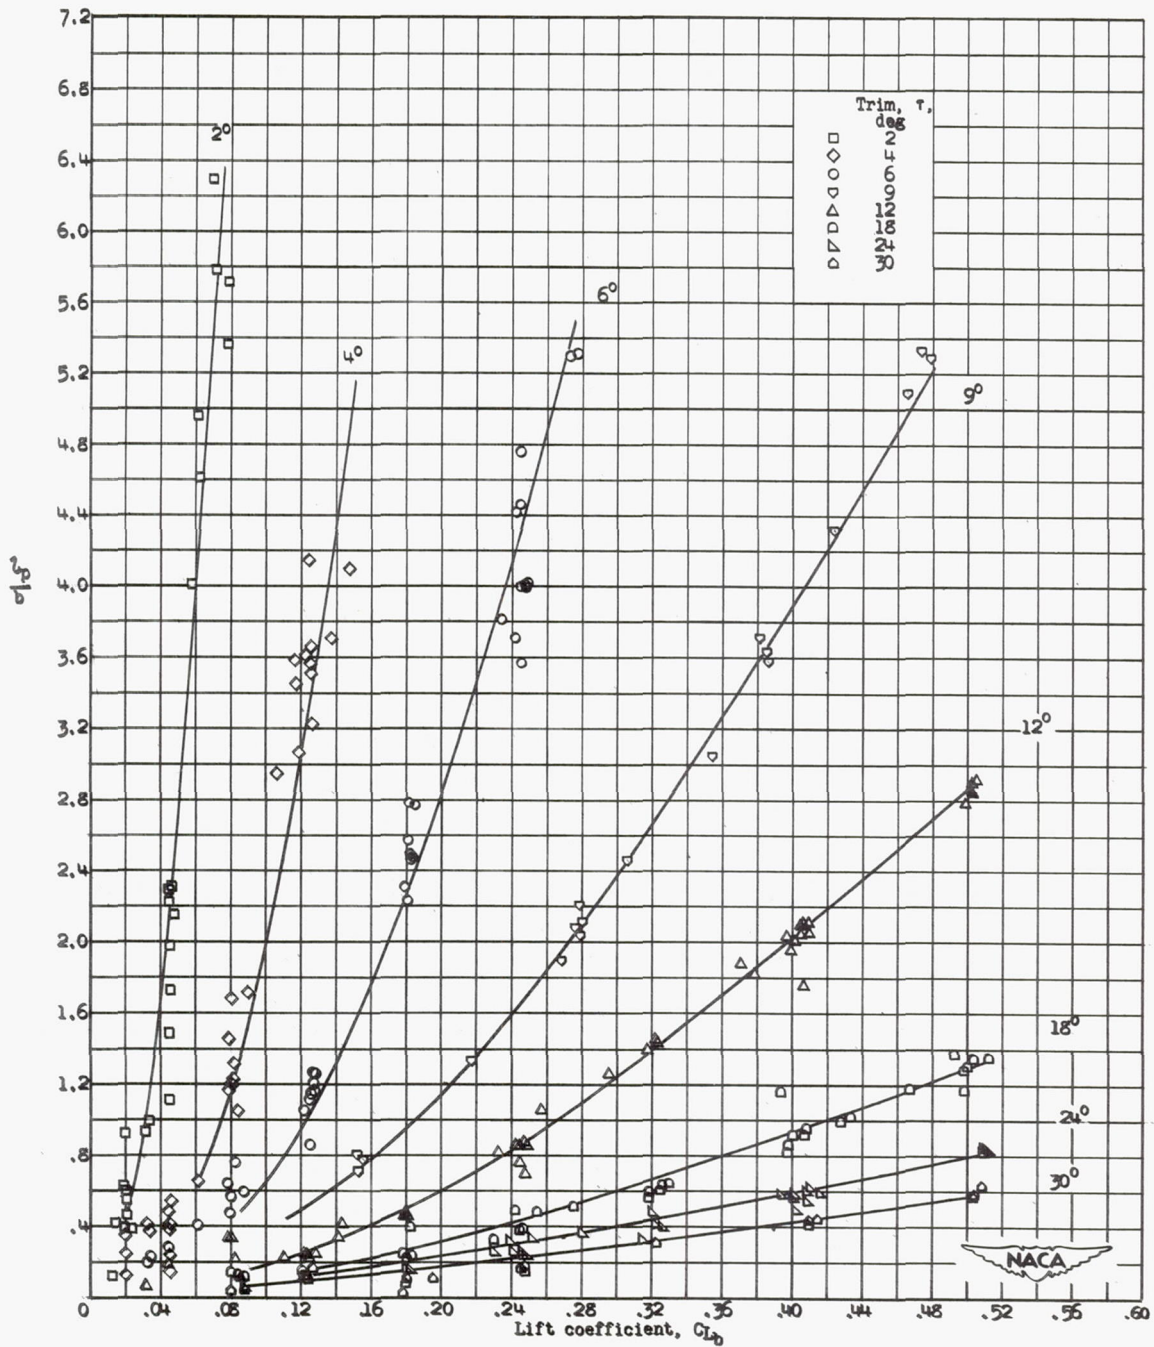


Figure 5.- Variation of nondimensional center-of-pressure location with lift coefficient.

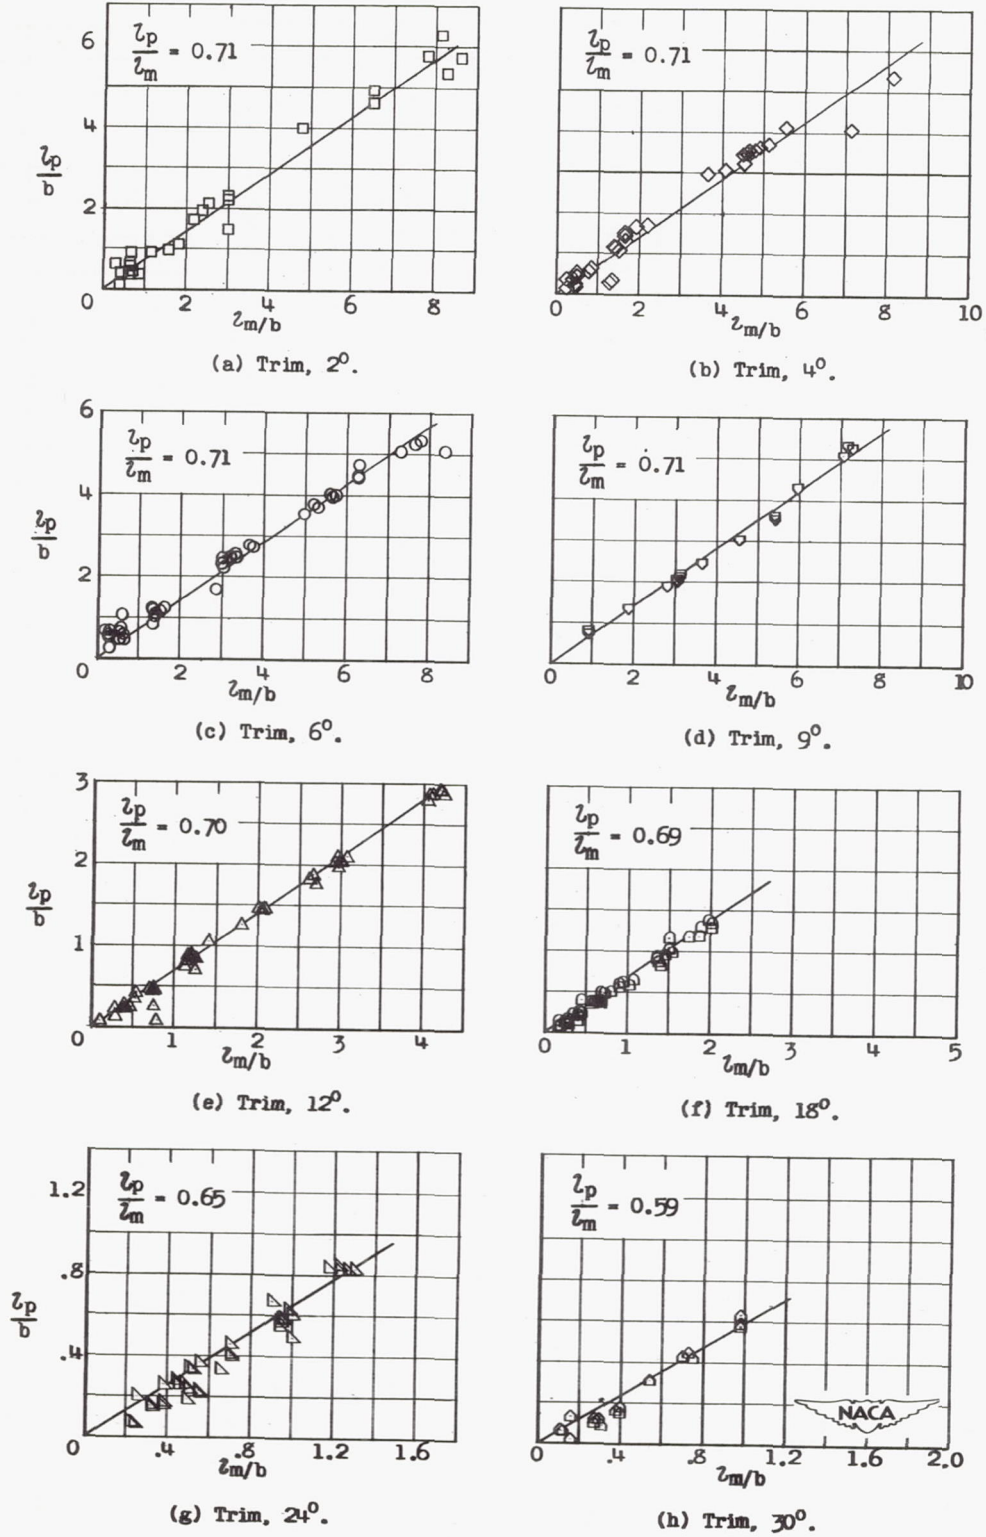


Figure 6.- Variation of center-of-pressure ratio with mean-wetted-length-beam ratio.

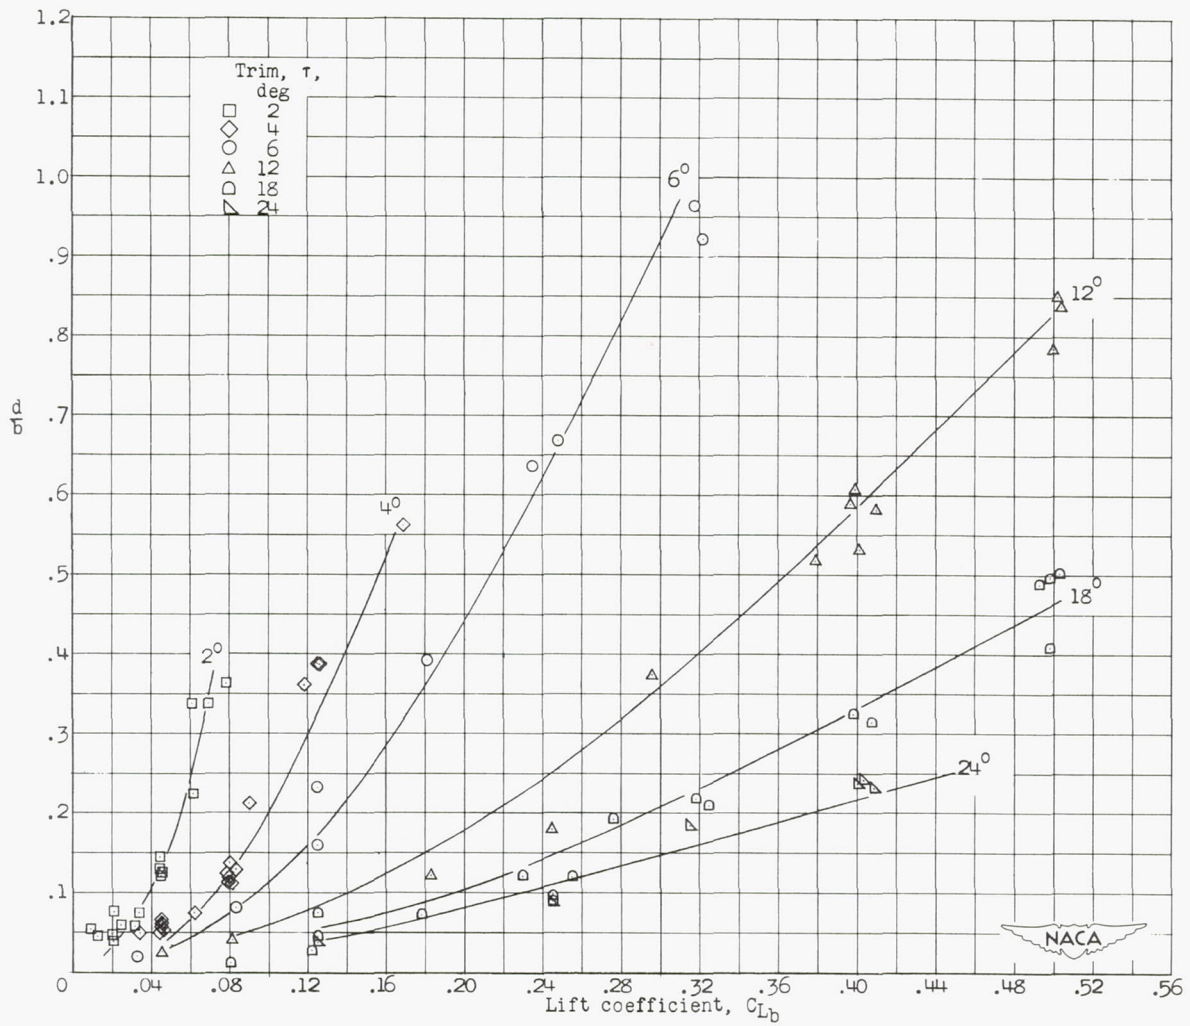


Figure 7.- Variation of draft with lift coefficient.



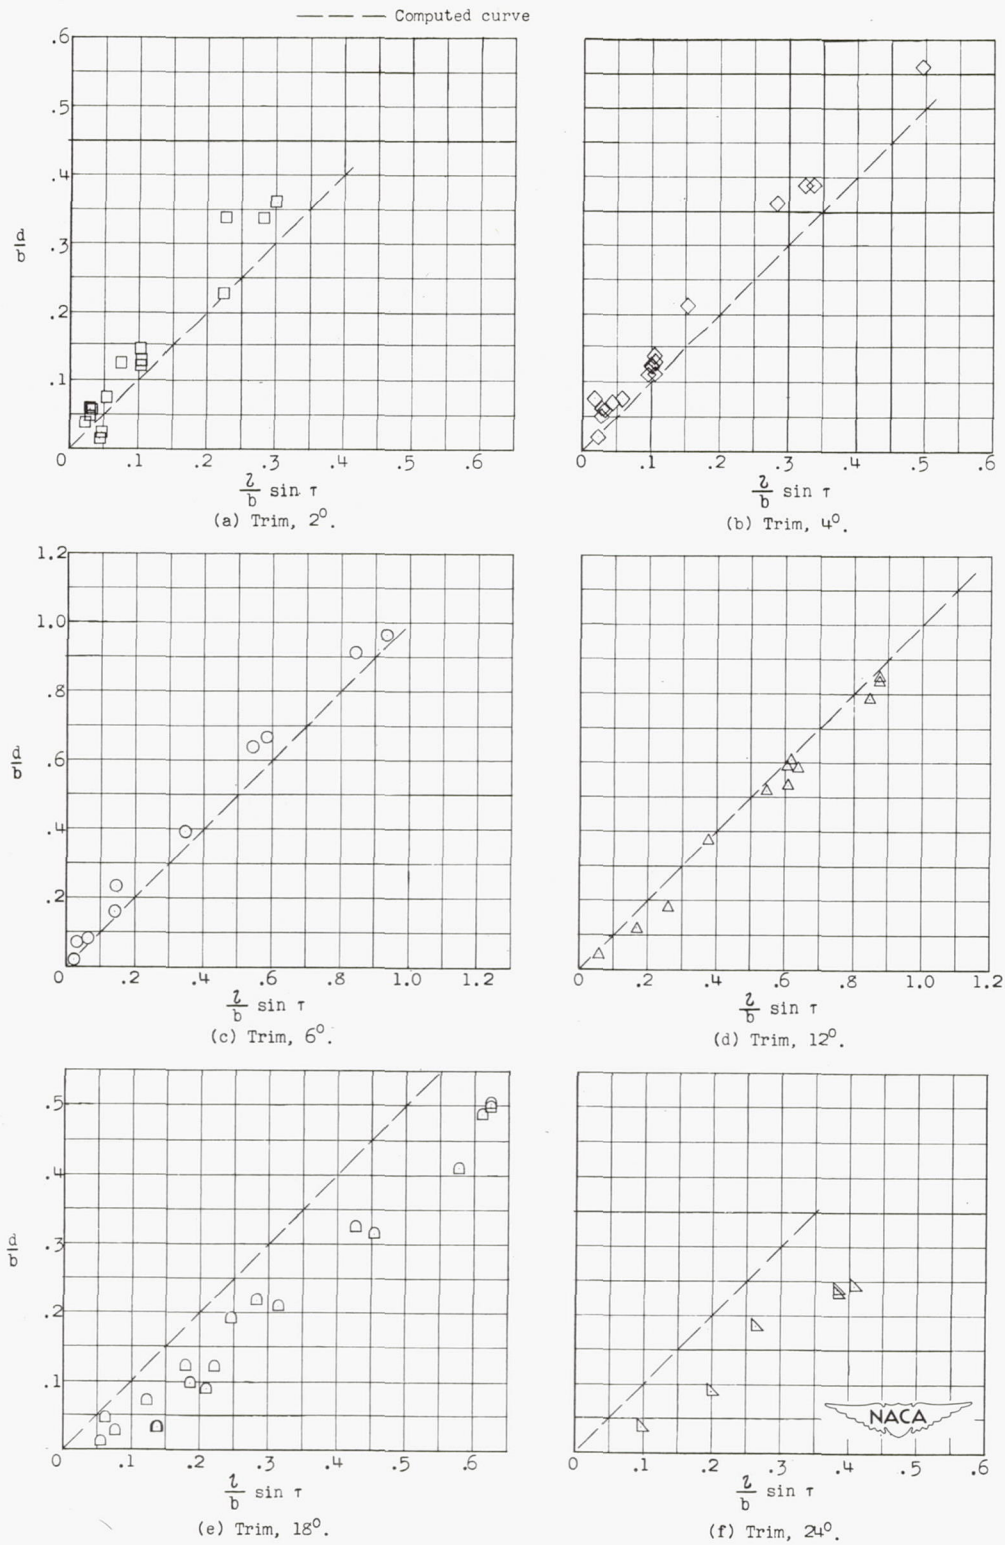


Figure 8.- Comparison of experimental draft data with computed curve.



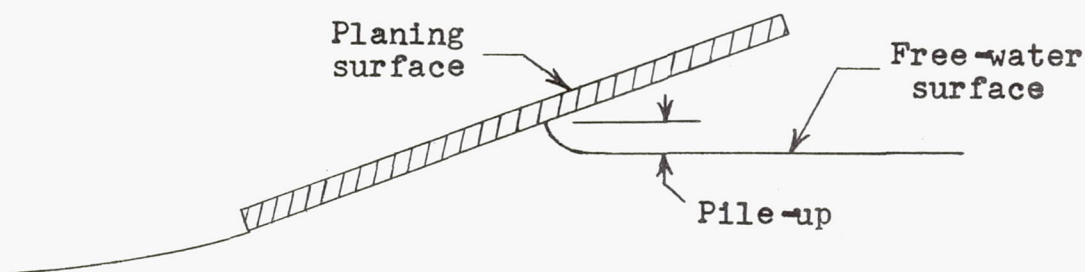


(a) Flow pattern at moderate and high trims.

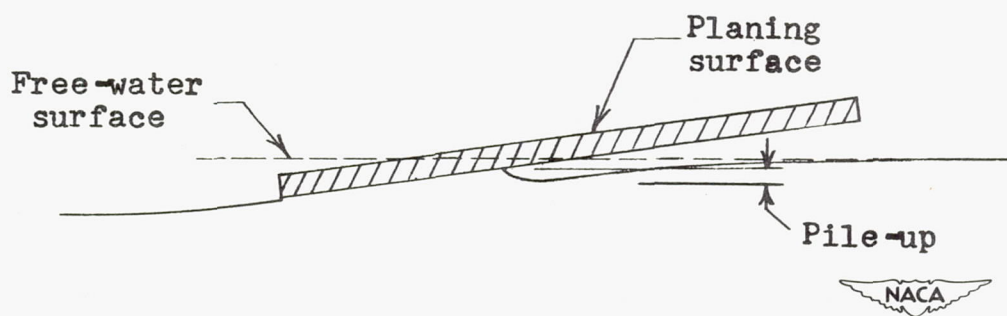


(b) Flow pattern at low trims.

Figure 9.- Sketches showing flow pattern at intersection of model with the water surface.

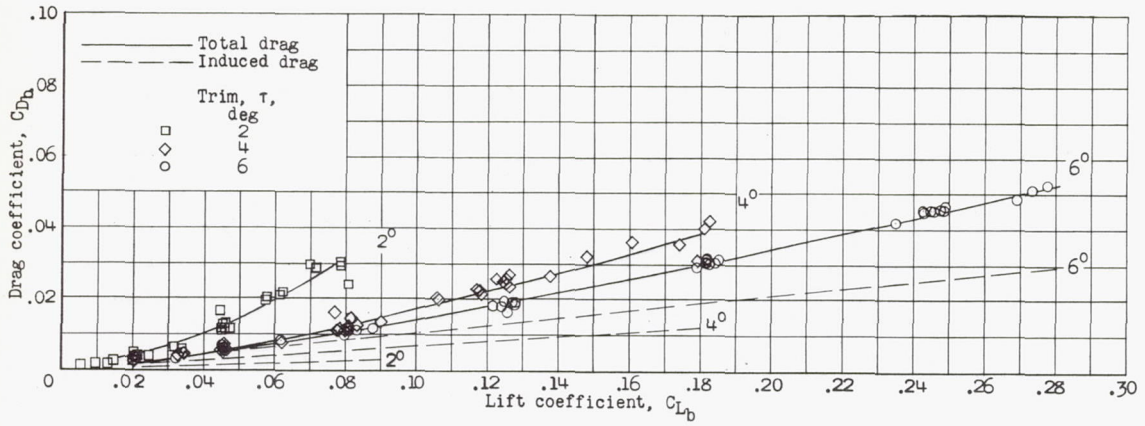

(a) Trim: 2°, 4°, and 6°.

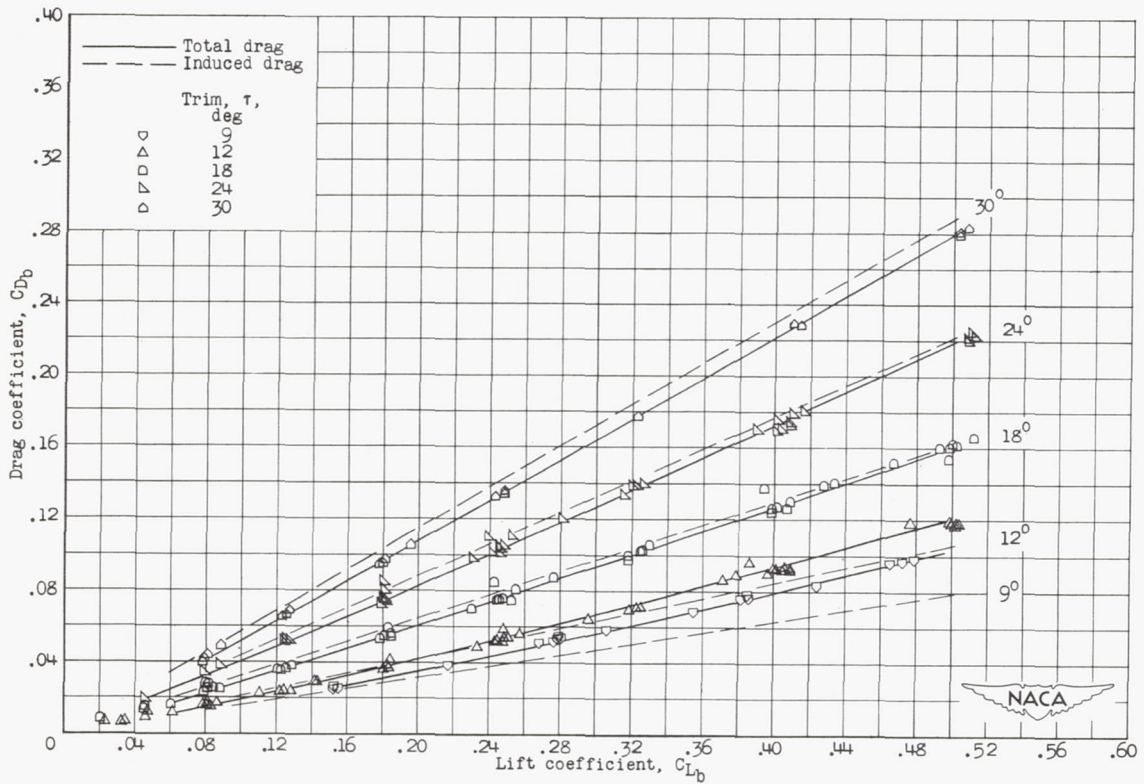

(b) Trim: 9°, 12°, 18°, 24°, and 30°.

Figure 10.- Variation of drag coefficient with lift coefficient.

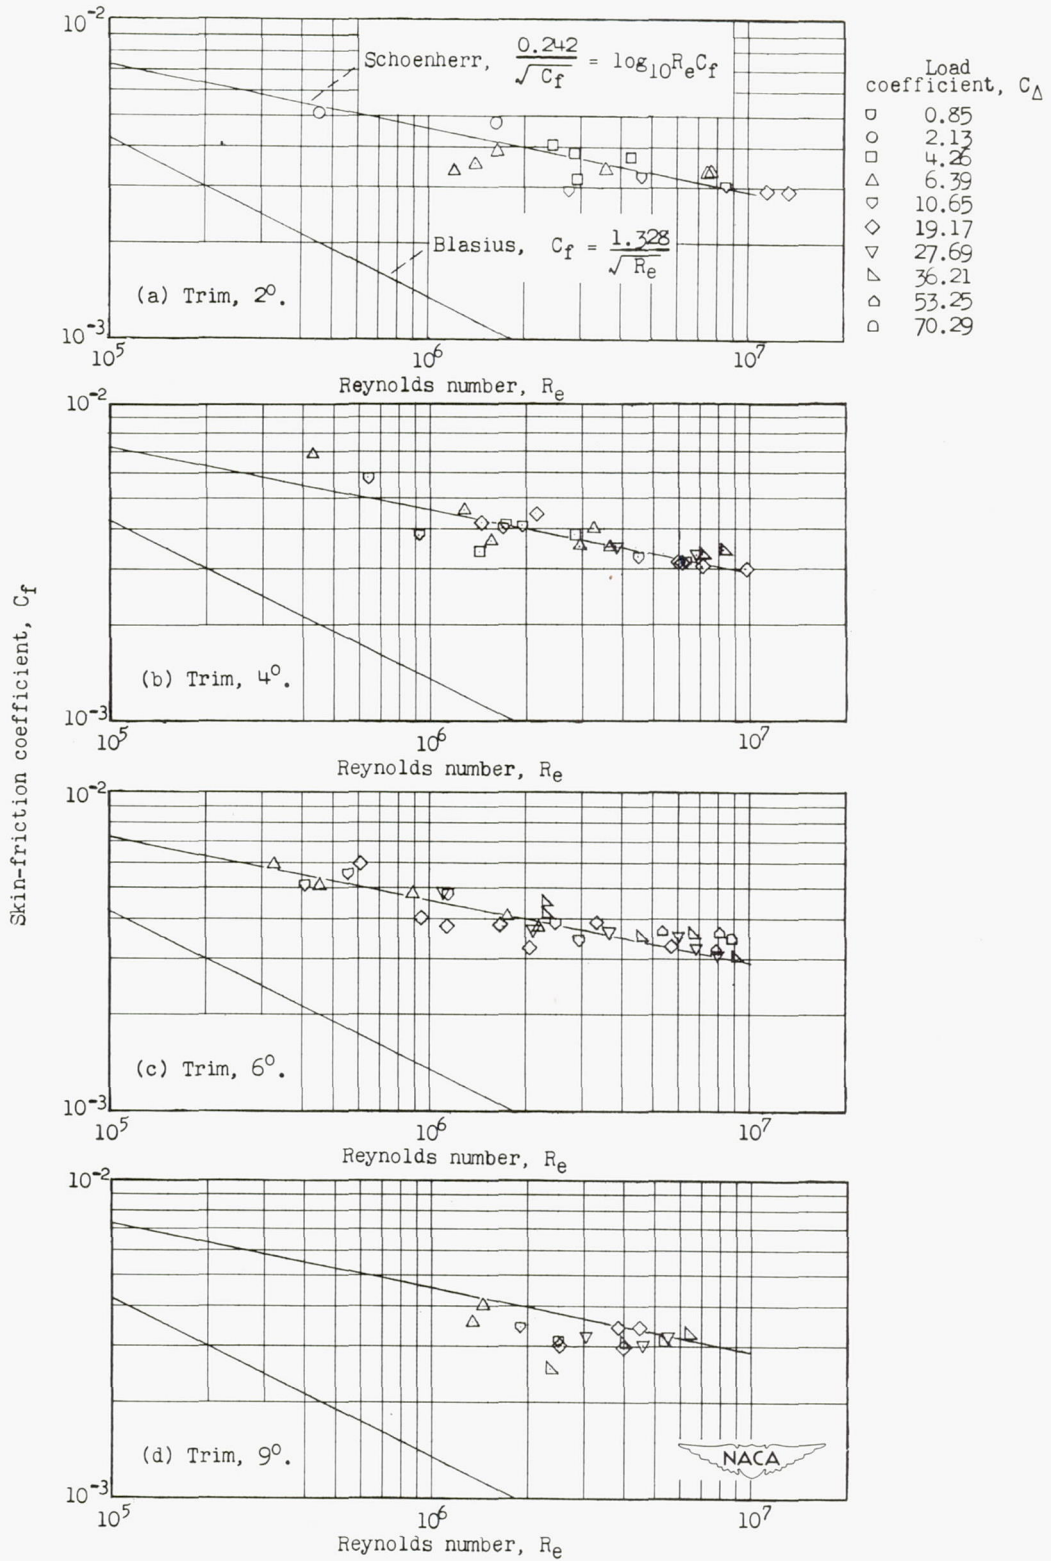


Figure 11.- Variation of skin-friction coefficient with Reynolds number.

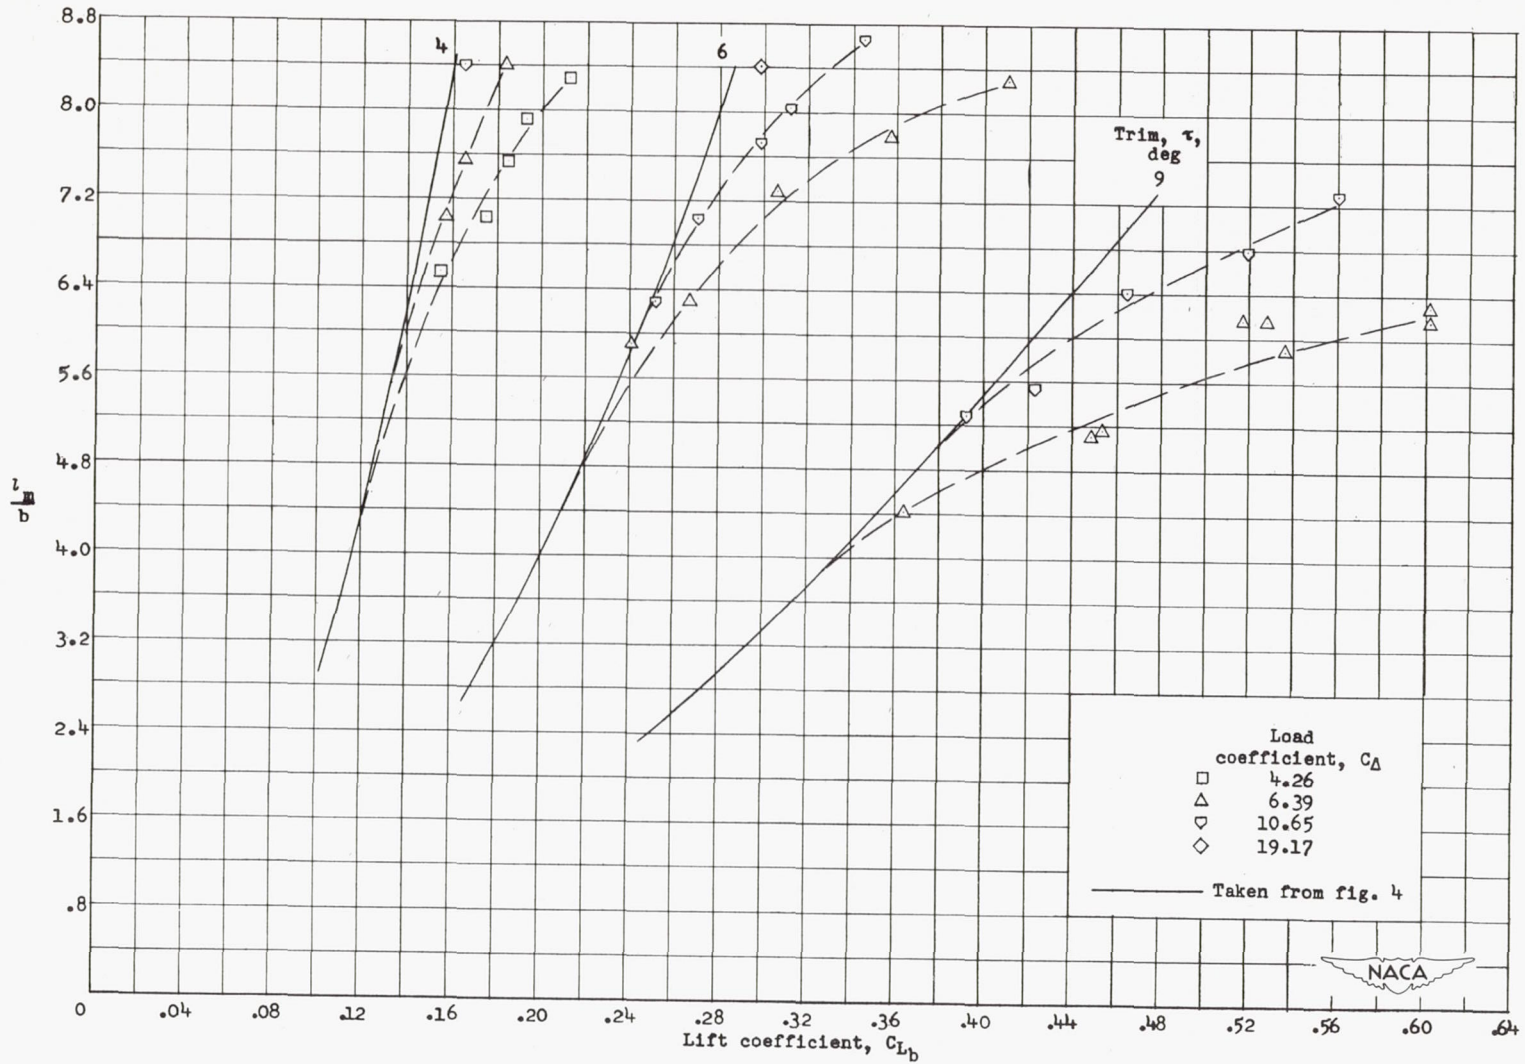


Figure 12.- Variation of mean-wetted-length-beam ratio with lift coefficient at low speeds.

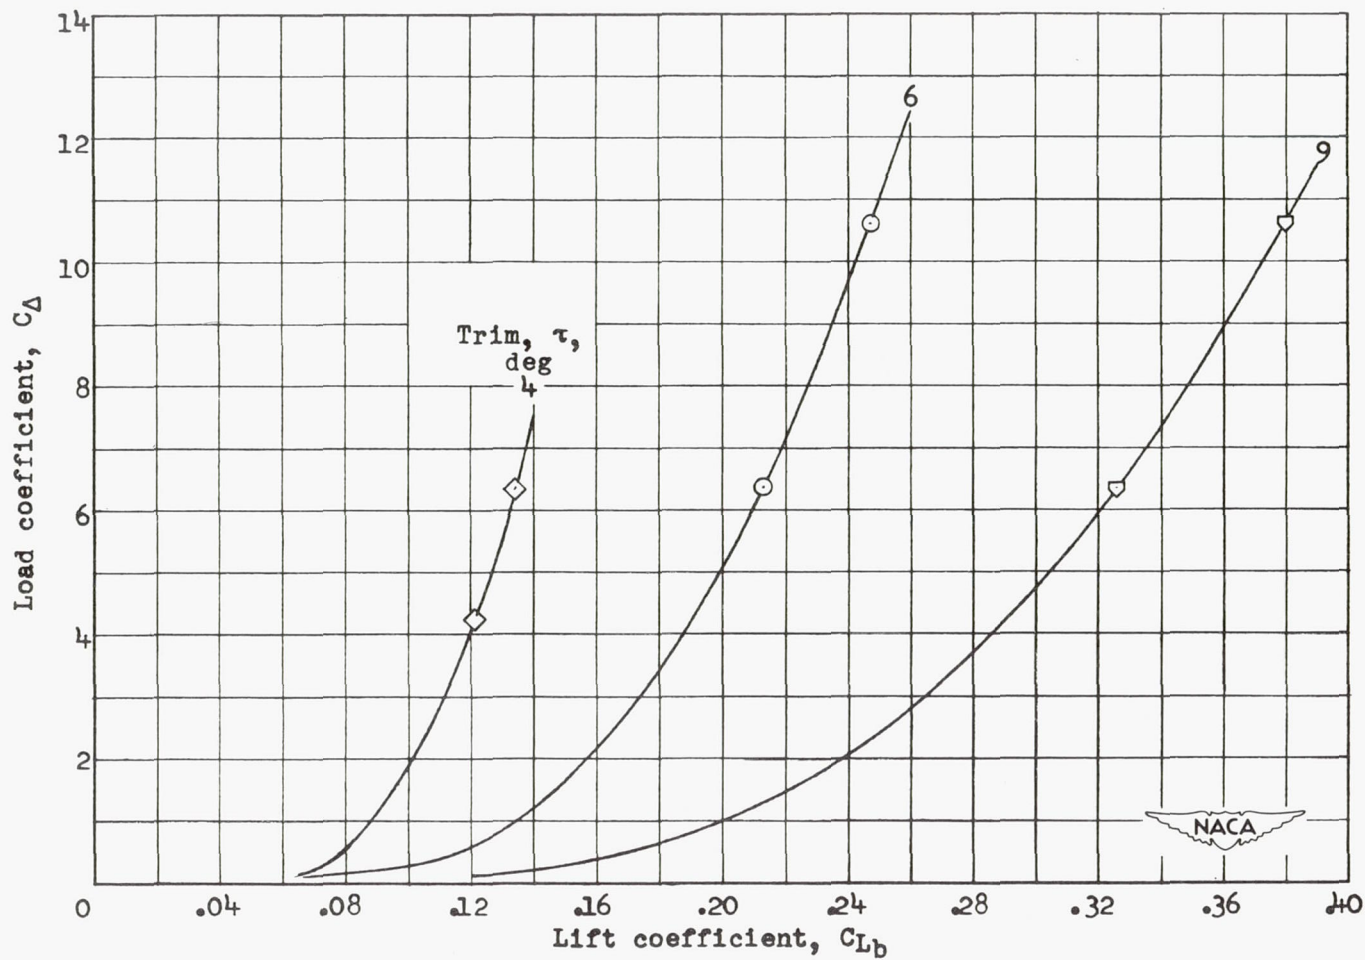


Figure 13.- Variation of minimum load coefficient for pure planing, based on 20-percent-buoyancy and test data.

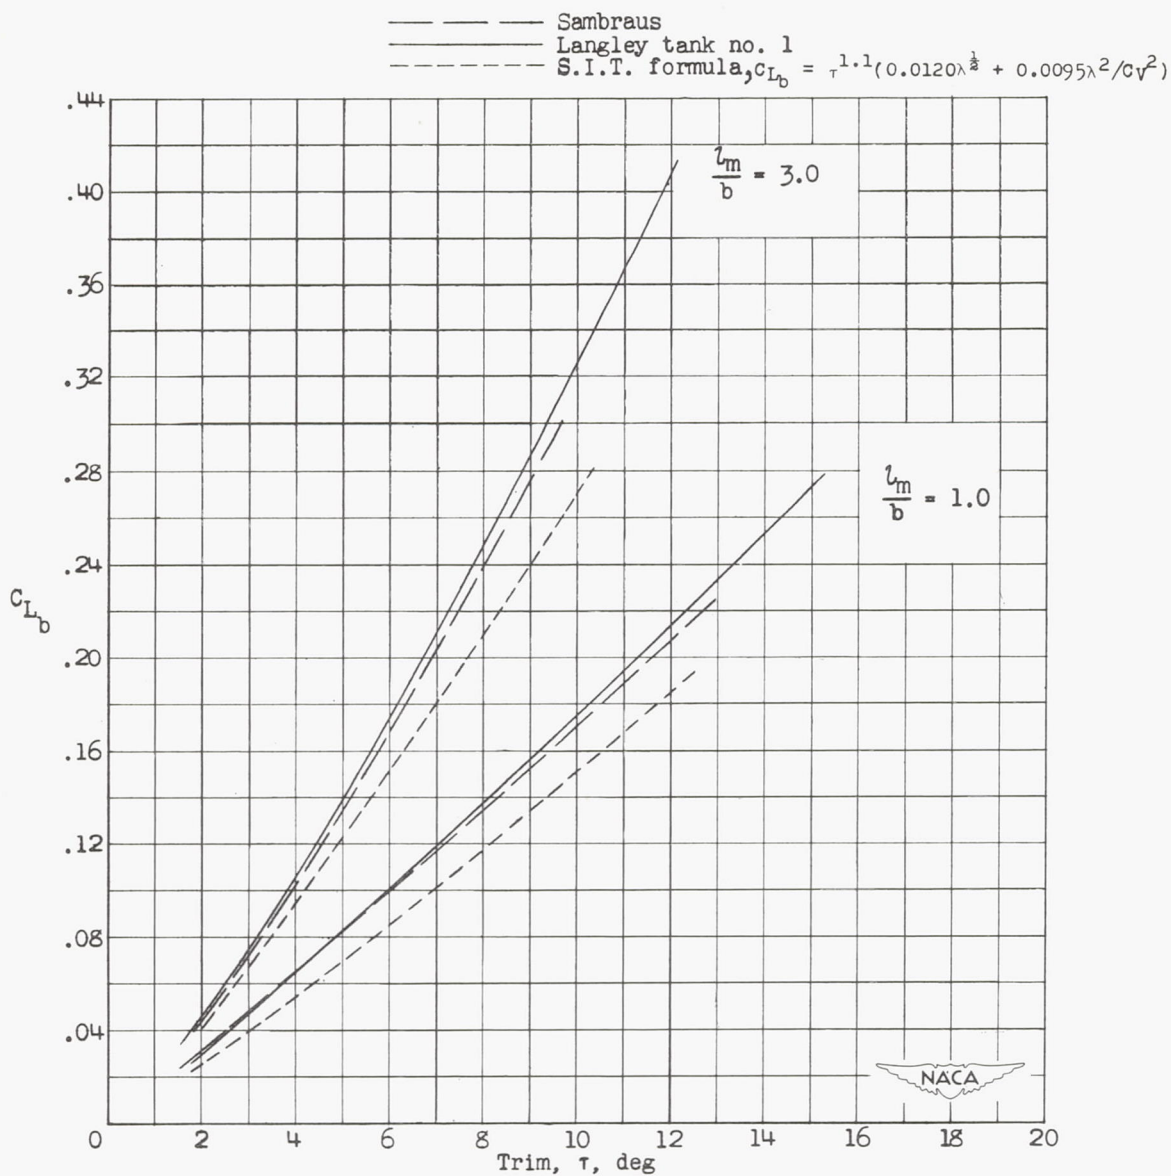


Figure 14.- Variation of lift coefficient with trim; comparison with data of other experimenters.