

NAG5-637
IN-15-CR

78293
SwRI Project No. 15-1518
March 25, 1992

P.142

A Final Report for

The Cyclotron Energization Through Auroral Wave Experiments (CENTAUR 2B)

Submitted to:

National Aeronautics and Space Administration
Goddard/Wallops Flight Facility
Industry Assistance and Procurement Analysis Office
Code 200.3
Wallops Island, VA 23337

Submitted by:

Dr. J. D. Winningham
Southwest Research Institute
San Antonio, Texas

(NASA-CR-190137) THE CYCLOTRON ENERGIZATION
THROUGH AURORAL WAVE EXPERIMENTS (CENTAUR
2B) Final Report (Southwest Research Inst.)
142 p

N92-20537

CSCL 22B

Unclass

G3/15 0078293



SOUTHWEST RESEARCH INSTITUTE
Instrumentation and Space Research Division
6220 Culebra Road, San Antonio, Texas 78238
(512) 684-5111 • FAX (512) 647-4325

SwRI Project No. 15-1518

March 25, 1992

A Final Report for

The Cyclotron Energization Through Auroral Wave Experiments (CENTAUR 2B)

Submitted to:

National Aeronautics and Space Administration
Goddard/Wallops Flight Facility
Wallops Island, VA 23337

Submitted by:

J.D. Winningham
Southwest Research Institute
San Antonio, Texas

APPROVED:

James L. Burch
James L. Burch, Vice President
Instrumentation and Space Research Division



SOUTHWEST RESEARCH INSTITUTE
Instrumentation and Space Research Division
6220 Culebra Road, San Antonio, Texas 78238
(512) 684-5111 • FAX (512) 647-4325

INTRODUCTION

The CENTAUR 2B mission, a dual payload program, is in many aspects the same as the previous missions from Cape Perry and Norway in 1985. The principal investigator is Dr. David Winningham of Southwest Research Institute (SwRI). It is planned that these payloads will be launched from Andoya, Norway, November of 1989 from the Universal II launcher. The payloads are identical, but will be launched at different azimuths as far north and as far west as possible. The 17-inch diameter payloads will house a total of nine different instruments, a horizon sensor, an attitude control system, a three-link telemetry section, and a forward eject nose-cone with a lateral eject ogive system. Payload weight is approximately 450 pounds with an overall length of 130 inches.

Particle experiments include the angular resolving energy analyzer (AREA), the fast ion mass spectrometer (FIMS), the spectrographic particle imager (SPI), and finally, the differential ion flux probe (DIFP). SwRI is responsible for the scientific payload, which includes the power supplies, the power supply interfacing, the manipulating of the data from the instruments to format it for the telemetry system, all mechanical structure and restraint mechanisms, and the payload subskin. SwRI is also responsible for the AREA, FIMS and the SPI scientific instruments.

PROJECT STATUS

A project design review was held January 31, 1989 at Wallops Space Flight Center and was attended by Wallops personnel as well as SwRI personnel. A copy of the design review notes is included as the Appendix.

A brief synopsis of the status of the CENTAUR payloads can be found in the following lists.

1. All power supplies (low, voltage, high voltage and switching) have been built, tested and integrated.
2. The power interface and data interface electronics have been built and tested. They are in the process of being integrated with the PCM system at this time.
3. The GSE, the software for automated checkout during integration, and the special purpose interface board for the PC are complete and checked out.
4. The cable harness for each of the payloads has been built and rung out.
5. Eighty percent of the miscellaneous brackets and mechanical parts of the payloads have been machined.
6. The magnesium for the deckplates and the struts has been received. One set of struts and deckplates has been machined, weight reduced, chem filmed, and assembled.

As stated previously, Southwest Research is also responsible for three of the instruments on the CENTAUR payloads. The status of the AREA instrument is:

1. The electronics boards needed for one payload have been built and tested. The boards for the second payload will be identical and thus will use the same layout and simply need to be reproduced.
2. The mechanical parts have been designed and are ready to be machined.
3. The micro-channel plates for both payloads have been received by MSSL, and are ready to be assembled with the analyzer here at SwRI.
4. The intra-instrument cabling and the connector interface box has been built and tested for each of the payloads.

The status of the FIMS instrument is:

1. The electronics boards needed for both payloads are 90% complete. The testing and integration of these boards is the main task remaining.
2. The flight software has been written. It is now being implemented and debugged.
3. The mechanical parts for both payloads are complete. The only mechanical task remaining is final assembly.
4. The power supplies, low voltage, high voltage and switching, are 80% complete. Final testing is anticipated to take 4 weeks.
5. Calibration of the flight instrument is scheduled to take 4 weeks.

The status of the SPI instrument is:


1. The instrument has been fully modeled using computer ray tracings and simulations.
2. The mechanical layout of the instrument is approximately 80% complete.

CENTAUR Budget Status

The CENTAUR program was initially funded as a three-year grant. At this time, SwRI has received funds for the first two years of the grant for the period of performance of December 1, 1986 through December 1, 1988. No funds have been received for the third year of funding. As of March 1989, since no funds had been received and because the program had gone approximately \$226,000 negative, a stop-work order was put on the program by SwRI. Work was continued into the third year in good faith, expecting to be funded by Wallops for the rest of the grant as initially outlined. As stated previously, during this time period a project-wide

design review was held at WSFC on January 31, 1989, a full two months after the second year period of performance and funding ended. The fact that the design review was held after the second year funding cycle was complete inferred that third year funding would be received. As of this date, none of that funding has been received, and SwRI has written-off the loss.

At this time, the CENTAUR payload, as well as the CENTAUR instruments are in storage in the Instrumentation and Space Research Building and Southwest Research Institute, awaiting further funding for completion of the program.

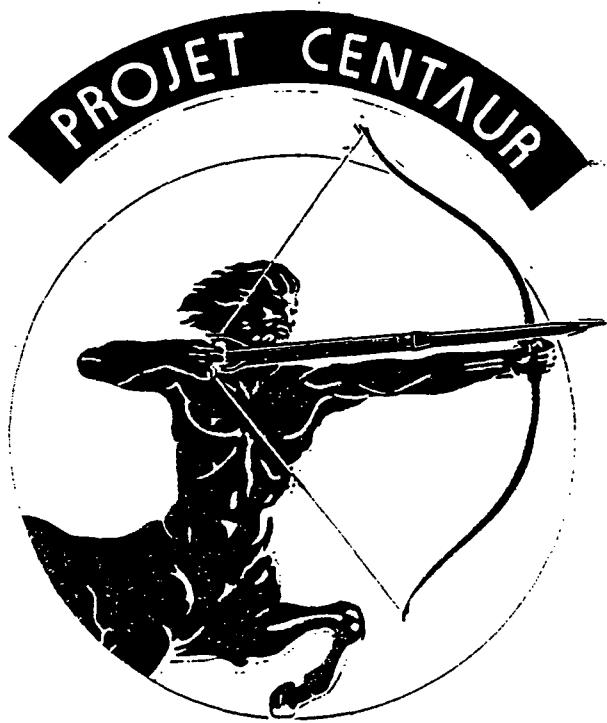

II_{B,C}

DESIGN REVIEW
FOR
35.011 UE & 35.026 UE

January 31, 1989

PROJECT TEAM 35.011 UE & 35.026 UE

Southwest Research Institute:

Dr. David Winningham Principal Investigator
John Sherrer
Roy Welch
Alton Blevins
Nick Eaker

Wallops:

John van Overeem	NASA/WFF/841.3	Project Manager
Marvin Alstatt	NASA/WFF/CSC	Flight Analysis
Bob Hickman	NASA/WFF/CSC	Mechanical Systems
Jim Diehl	NASA/WFF/CSC	Instrumentation
Mike Smolinski	NASA/WFF/CSC	Electrical Systems
Dick Matthews	NASA/WFF/CSC	Magnetic ACS
Dave Lang	NASA/WFF/CSC	Magnetic ACS

January 11, 1989

TO: Review Panel Members
FROM: 841.0/Head, Sounding Rocket Projects Branch
SUBJECT: Design Review for Black Brant X 35.011 CE and 35.026 CE
(Winningham/SwRI/Norway/November 1989)

A Design Review for 35.011 CE and 35.026 CE is scheduled for January 31, 1989, in the third floor conference room of Building E-108 at 0900 hours.

A panel comprised of the following persons is appointed to perform this review:

Bob Patterson - Chairman
W. W. West
Hartwell Taylor
Jim Hardin
Wayne Gunter
Thang Quach

The presentation agenda and personnel assignments for this review are given in the enclosed memorandum.

The Review Chairman shall conduct the proceedings, establish action items as required, and document the review proceedings and corrective measures initiated or taken.

L. Warren Durkin

Enclosure: 1

CONCUR:

Larry J. Early 1/11/89
Larry J. Early, Chief Date
Projects Division

James W. Gray 1/12/89
James W. Gray, Chief Date
Engineering Division

cc: w/o enclosure
J. W. Gray/820.0
W. H. Parker/821.0
Z. B. Barfield/821.1
J. C. Bowman/821.2
W. D. Ward/821.3
T. J. Savage/822.0
W. W. West/822.3
D. F. Melvin/822.4
R. A. Burns/823.0

F. R. Sawyer/824.0
G. G. Morris/824.0
J. L. Parks/824.1
R. T. Duffy/830.0
C. F. Milliner/830.0
J. R. Duke/833.0
E. B. Jackson/834.0
R. H. Pless/840.0
G. D. Paterson/841.0
D. F. Detwiler/841.1
C. W. Ballance/841.2
F. M. Boykin/841.3
S. M. Onions/CSC
J. Smolinski/CSC
M. Altstatt/CSC
Project Team
Review Panel Members
SRPB Files w/enclosure

January 4, 1989

TO: 841.0/Head, Sounding Rocket Projects Branch
FROM: 841.3/Attitude Control and Guidance Section
SUBJECT: Request for Design Review - 35.011 CE and 35.026 CE

It is requested that a Design Review for the subject payloads, be scheduled for January 31, 1989 at 0900 hours in an appropriate conference room.

The Project Team is prepared to present the following agenda:

Introduction
Science, Success Criteria
Experiment Mechanical
Experiment TM-Electrical
Flight Analysis
Mechanical Systems
Instrumentation
Electrical Systems
Magnetic ACS

John van Overeem
Dr. David Waddingham, SWRI
John Scherrer, SWRI
Roy Welsh, SWRI
Marvin Alstatt
Jay Scott
Jim Diehl
Mike Smolinski
Dick Matthews


John van Overeem

INTRODUCTION

JOHN VAN OVEREEM

JANUARY 31, 1989

DESIGN REVIEW
35.011 UE AND 35.026 UE

INTRODUCTION

Centaur II-B mission is in many aspects the same as the previous missions from Cape Parry and Norway '85. The Principal Investigator is Mr. David Winningham of Southwest Research Institute.

It is planned that these payloads be flown from Andoya, Norway November 1989 from the Universal-2 launcher. The payloads are identical but will be launched at different azimuth as far North and as far West as possible. The 17-inch payloads will house a total of nine instruments and a Horizon Sensor, a Magnetic Control System, a Telemetry Section with 3 TM links, FDM and a forward eject nose cone with a L.E.O. System. Payload weight is approximately 450 lbs. with a length of 130 inches.

TABLE 1
INSTRUMENTS

<u>INSTRUMENT NAME</u>	<u>ACRONYM</u>	<u>AGENCY</u>	<u>EXPERIMENTER</u>
AC ELECTRIC FIELD	ACEF	DSRI	DR. E. UNGSTRUP
AC MAGNETOMETER	ACM	DSRI	DR. E. UNGSTRUP
AC LANGMUIR FIELD	ACLP	UIO	DR. G. HOLMGREN
DC MAGNETOMETER	DCM	DSRI	DR. F. PRIMDAHL
DC VECTOR ELECTRIC FIELD	VEF	RIT	DR. C.G. FALTHAMMER DR. L. BLOCK DR. G. MARKLUND
FAST ION MASS SPECTROMETER	FIMS	SwRI	DR. J.L. BURCH
ANGLE RESOLVING ENERGY ANALYZER	AREA	MSSL	DR. A.D. JOHNSTONE
SPECTROGRAPHIC PARTICLE IMAGER	SPI	SwRI MSSL	DR. J.D. WINNINGHAM DR. A.D. JOHNSTONE
DIFFERENTIAL ION FLUX PROBE	DIFFP	MSFC	DR. N. STONE

AGENCY

DANISH SPACE RESEARCH INSTITUTE (DSRI)
DENMARK

ROYAL INSTITUTE OF TECHNOLOGY (RIT)
STOCKHOLM

SOUTHWEST RESEARCH INSTITUTE (SwRI)
SAN ANTONIO, TX 78284

UPPSALA IONOSPHERIC OBSERVATORY (UIO)
UPPSALA, SWEDEN



MULLARD SPACE SCIENCE LABORATORY (MSSL)
HOLMBURY, ST. MARY, ENGLAND

MARSHALL SPACE FLIGHT CENTER (MSFC)
HUNTSVILLE, AL 35812

EXPERIMENT

MECHANICAL: JOHN SCHERRER

MECHANICAL DESIGN

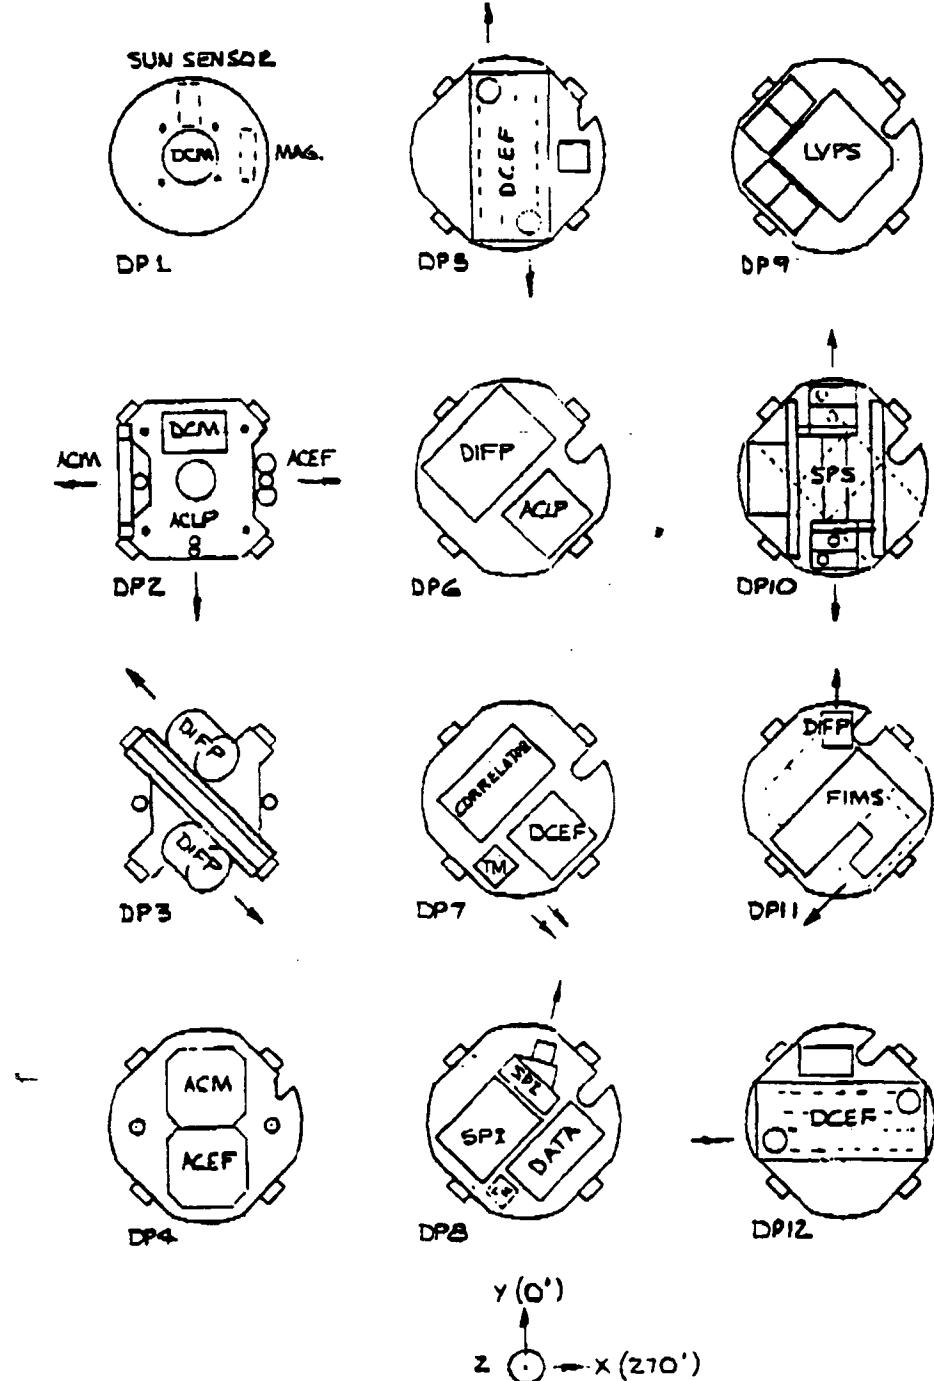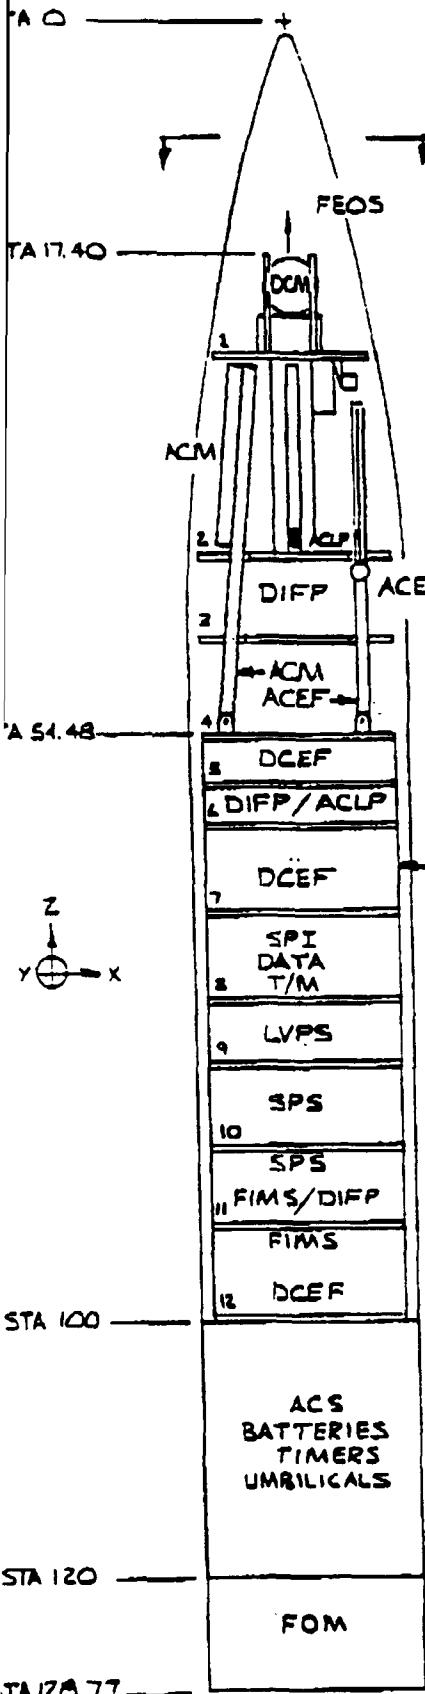

Weight

Weight: The previous Centaur Payload of very similar design had a weight of 418 lbs. Centaur IIB & C will increase in weight by an estimated 21 lbs. This is due to:

Experiment Section:

- additional PCM stack
- additional power supply complexity
- additional cabling for PCM

ACS/Telemetry Section:

- additional telemetry components
- additional skin length for S-band antenna
- separate joint for ACS can
- battery pack for ACS can
- additional wiring

Weight Reducing

- Weight reduce struts
- Weight reduce electronics boxes
- Minimize staking and potting compounds
- Pay special attention to joint with Nika motor

C.G.

The C.G. of the previous payload was 43-3/4" up from the top of the ACS can. With the additional "skin" length for the S-band antenna, the C.G. will probably be ~ 2" lower. The C.G. will be measured during integration.

M.I.

The M.I. of the previous payload along the roll axis with no booms extended was $1.918 \text{ slug}\cdot\text{ft}^2$. With booms extended, the M.I. was $4.7 \text{ slug}\cdot\text{ft}^2$. On Centaur IIB & C, the SPS instrument which deployed 12" radially, will be replaced by the AREA instrument which only deploys 3". This change should reduce the MI slightly.

STRUCTURE

- Twelve 3/8 thick deckplates. Plates extensively weight reduced.
- Four weight reduced aluminum gussets attaching DP1 and DP2.
- Four 1/2 x 1-1/2 magnesium struts attaching DP2 through DP12. Struts extensively weight reduced.
- DP1 through DP11 electrically isolated from 3 struts.
- Subskin between DP4 and DP12. Subskin electrically isolated from three struts and deckplates DP4 through DP11.
- Four posts on top of DP1 for FEOS ejection spring rest (500 pound force).
- O-ring around P1 to support top of payload with FEOS.
- Four payload attach brackets (attached to DP12 and struts) at bottom of payload.
- 1/16 x 1/2 electrically conductive rulon strips attached to struts for FEOS glide from DP12 to DP1.
- Two similar Centaur payloads vibrated to BBV protoflight qual. levels (19.1 GRMS) and launched with BBX in 1981. Primary structural difference was the struts were aluminum.
- Another similar payload vibrated to vehicle level two (BBX) levels (12.7 GRMS) and launched with BBX in 1985.

NOSECONE

- Nosecone for 35.010 was a Bristol Aerospace Limited 680-04028 FEOS modified to allow ejection spring rest at station 17.40.

INTERFACE WITH ACS CAN

- Payload attach bracket 15-7616-227 will conform to requirements of WFF drawing D-35-13477 as modified by Bob Hickman via telecon on 5-23-84. These brackets were successfully used on the previous Centaur payload.
- Station 100 deckplate machined at 90° and 270° to clear cutter housings as defined on WFF sketch received 5-21-84.

DEPLOYABLES

- DCM sensor deployed forward on spring driven telescoping mast. Sensor released by cutting cable with bellows squib operated guillotine then mast released with trigger operated by redundant bellows squibs.
- ACEF sensors deployed radially on drop-down mast by centrifugal force and positioned on spring-operated swing-out arms. Mast released simultaneously with ACEF and ACLP masts then sensor released by a cable cut by a Holex 2800.
- ACLP sensor deployed radially on two-section hinged mast by centrifugal force. Mast released simultaneously with ACEF and ACM masts.
- VEF sensors deployed radially on telescoping masts with spring start and centrifugal force. Sensors are released by cutting cable with Holex 2800 guillotine then masts are released with trigger operated by redundant bellows squibs.
- DIFP sensors deployed radially on three-section slides by centrifugal force. Slides are released by cutting cable with Holex 2800 guillotine. Starter springs will be used.
- Area sensors deployed radially on single-section slides with spring start and centrifugal force. Slides are released by cutting restraint cable with Holex 2800 guillotine.

- CLEANLINESS CONTROL
 - Payload Handled with white gloves.
 - Payload maintained in an anti-static bag during non-working periods.
 - Payload (including ACS) fabricated with non-magnetic materials where possible.
 - Low outgassing material should be used where possible.
 - Payload purged with zero-grade dry nitrogen.

Choice of Restraint Mechanisms

- After much debate, it has been decided by SwRI to continue to use cable restraints. Reasons for this include:
 1. Cable restraint mechanisms are reliable and have flown on countless missions.
 2. Cable restraint mechanisms are simple and thus inexpensive.
 3. Most importantly, the use of a cable restraint mechanism is the most light weight form of restraint possible.

Methods to Ensure Reliability of Restraint Mechanisms

1. The nylon coating on the stainless steel cable will be removed to assure a good metal-to-metal crimp.
2. Two crimps will be used in all locations for redundancy.
3. When possible, the restraint cable complete with crimps, will be assembled on a work bench using a jig rather than in place on the payload. This will ensure more repeatability and higher reliability.
4. When possible, the restraint cables will be pull tested to at least 2 times the calculated maximum load.

FLIGHT ANALYSIS

MARVIN ALSTATTE

JANUARY 31, 1989

**PERFORMANCE AND ANALYSIS
DESIGN REVIEW
FOR
BLACK BRANT X 35.011 UE**

**MARVIN C. ALTSTATT
AEROSPACE ENGINEER**

JANUARY 31, 1989

ABSTRACT

This report presents the results of a preflight mission analysis on the following flight:

Name of Mission: Black Brant X 35.011 UE

Location of Launch Site: Andoya, Norway

Launcher: Universal II, 40 ft. rail travel

Proposed Date of Launch: December 1, 1989

Principal Scientific Investigator: Dr. David Winningham, SWRI

Payload Manager: Mr. John van Overeem

Purpose of Mission: Ion acceleration studies.

Estimated Payload Weight: 439 Lbs

Predicted Apogee for Flight: 724.2 Km

Predicted Ballistic Impact Range for Flight: 768.1 Km

Minimum Rigid Static Margin for Flight and Time of Occurrence: 4.8 cal or
83.0 in at
0.0 sec

Aerodynamic Heating Index: 1.68×10^8 ft-lb/ft²

Apogee-Altitude 2 σ Dispersion: 50.2 Km

2 σ Low Apogee Altitude: 674 Km

Impact-Range 2 σ Dispersion: 266.3 Km

The comprehensive success criteria is 400 Km horizontal travel above 500 Km altitude. This is met by the nominal trajectory. The minimum success criteria is 200 Km above 500 Km altitude which is met by the 2 σ deviation from the nominal trajectory. ←

SECTION 2 - LAUNCH VEHICLE DESCRIPTION

2.1 VEHICLE CONFIGURATION

Payload Configuration: Figure 2-1


Launch Configuration: Figure 2-2

2.2 PHYSICAL PROPERTIES

Payload/Vehicle Physical Properties: Table 2-1

STATION
(in. TNT)

0.00 —

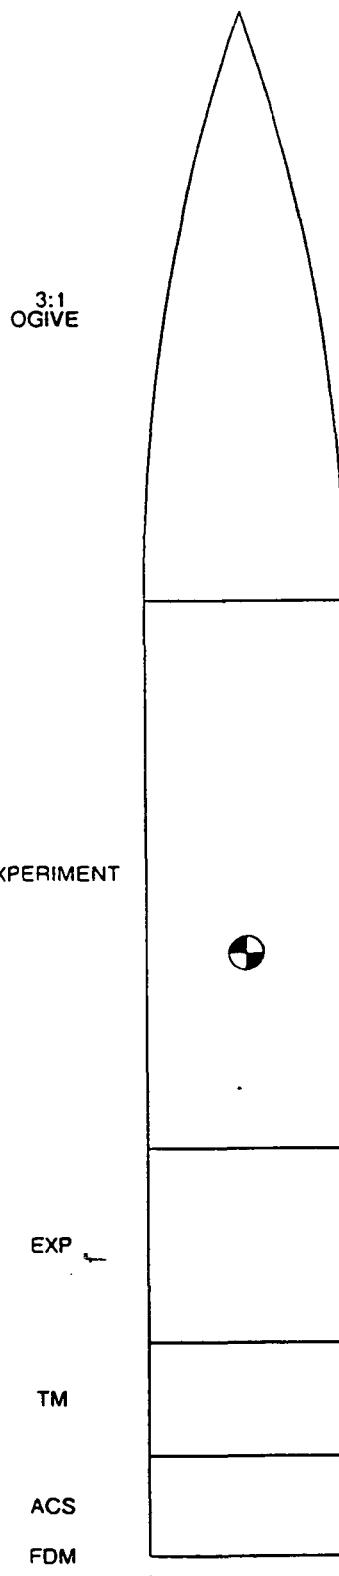

PAYOUT GRAVIMETRICS

Weight	-	439.00	lb.
Length	-	135.77	in.
CG	-	82.77	in. TNT
IX	-	3.00	slug-ft ²
IY	-	120.00	slug-ft ²

<u>JOINT TYPE</u>	<u>COMPLIANCE</u> (rad/in-lb.)	<u>SLOP</u> (rad.)	
—	N/A	0.00	0.00

—	V-BAND	9.00×10^{-9}	0.00
---	--------	-----------------------	------

—	RADAX	9.00×10^{-9}	0.00
---	-------	-----------------------	------

—	V-BAND	9.00×10^{-9}	0.00
---	--------	-----------------------	------

—	V-BAND	9.00×10^{-9}	0.00
---	--------	-----------------------	------

Figure 2-1. Black Brant X 35.011 UE
Payload Configuration

VEHICLE STATION

(in. NEP) (in. TNT)

606.88 0.00 —

555.10 51.78 —

506.88 100.00 —
496.88 110.00 —

476.88 130.00 —
467.88 139.00 —

412.72 194.16 —
392.23 214.65 —
385.38 221.50 —
376.48 230.40 —

212.12 394.76 —

168.16 438.72 —
155.00 451.88 —
147.60 459.28 —

29.27 577.61 —

0.00 606.88 —

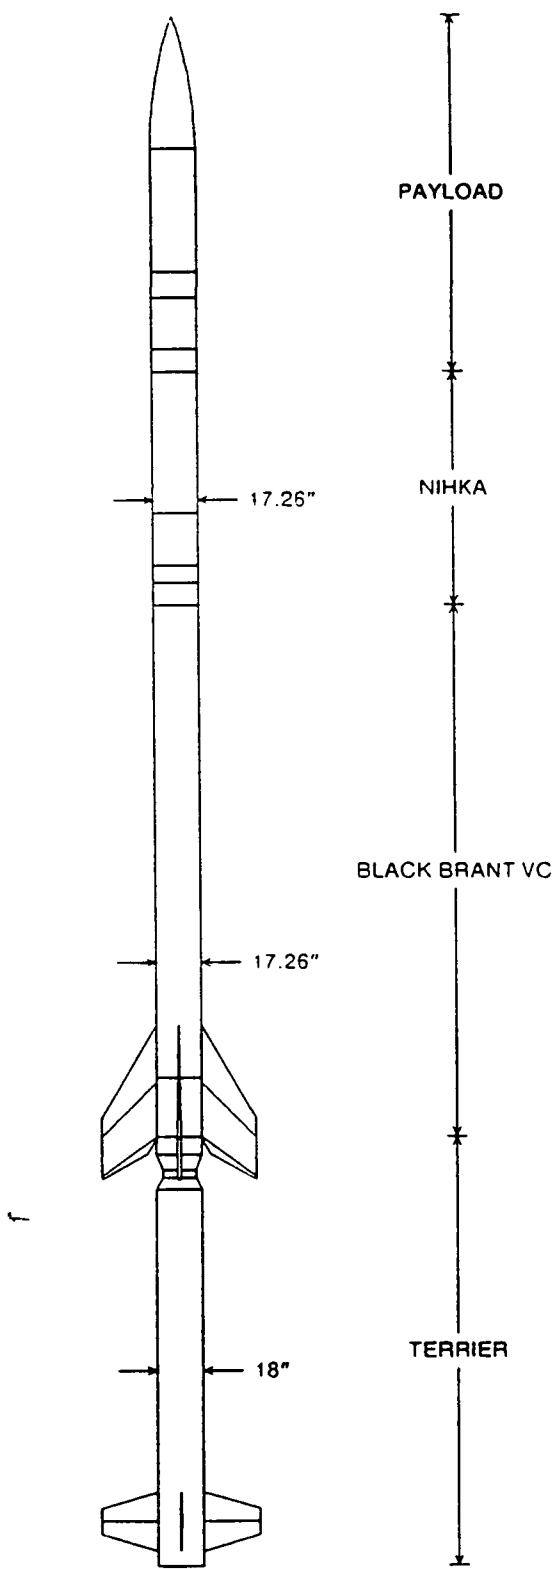


Figure 2-2. Black Brant X 35.011 UE
Launch Configuration

Table 2-1. Black Brant X 35.011 UE
Physical Properties

*** PHYSICAL PROPERTIES PROGRAM - Rev 1.0 *** 01/25/89 12.713

***** PHYSICAL PROPERTIES SUMMARY ***** BLACK BRANT X *****

BBX 35.011

PAYOUT WEIGHT = 439.00 lb.
LENGTH = 135.77 in.
CG = 53.00 in. from p/1 base
IY = 120.00 slug-ft²
IX = 3.00 slug-ft²

PHYSICAL PROPERTIES - LAUNCH CONFIGURATION
total length = 603.65 inches

TIME (sec)	TOT. WT. (lb.)	CG (in nep)	CG (ft nep)	CG (in nose)	CG (ft nose)	IYX (s1-ft ²)
0.00	6113.11	258.38	21.53	345.27	28.77	28669.94
1.00	5844.70	266.34	22.20	337.31	28.11	26789.65
2.00	5576.29	275.14	22.93	328.51	27.38	24697.74
3.00	5307.88	284.83	23.74	318.82	26.57	22420.00
4.00	5039.47	295.57	24.63	308.08	25.67	19876.70
4.40	4932.02	300.23	25.02	303.42	25.29	18780.80
						64.86

PHYSICAL PROPERTIES - SECOND STAGE
total length = 435.49 inches

TIME (sec)	TOT. WT. (lb.)	CG (in nep)	CG (ft nep)	CG (in nose)	CG (ft nose)	IYX (s1-ft ²)
12.00	4174.66	171.45	14.29	264.04	22.00	9325.44
14.00	4025.26	173.40	14.45	262.09	21.84	9145.05
16.00	3877.66	175.52	14.63	259.97	21.66	8944.43
18.00	3727.16	177.74	14.81	257.75	21.48	8758.03
20.00	3576.16	180.28	15.02	255.21	21.27	8549.25
22.00	3423.66	183.02	15.25	252.47	21.04	8317.75
24.00	3267.76	186.19	15.52	249.30	20.77	8035.30
26.00	3111.76	189.60	15.80	245.89	20.49	7842.62
28.00	2958.56	193.30	16.11	242.19	20.18	7568.51
30.00	2809.86	197.18	16.43	238.31	19.86	7333.70
32.00	2664.16	201.63	16.80	233.86	19.49	6995.14
34.00	2519.86	206.27	17.19	229.22	19.10	6706.70
36.00	2377.16	211.79	17.65	223.70	18.64	6356.10
38.00	2236.56	217.33	18.11	213.16	18.18	6026.25
40.00	2102.76	224.06	18.67	211.43	17.62	5618.96
42.00	1994.96	228.58	19.05	206.91	17.24	5393.84
44.00	1933.36	233.14	19.43	202.35	16.86	5118.26
45.00	1929.76	233.65	19.47	201.84	16.82	5062.91
						24.54

PHYSICAL PROPERTIES - THIRD STAGE
total length = 211.42 inches

TIME	TOT. WT.	CG	CG	CG	IYX

(sec)	(lb.)	(in nep)	(ft nep)	(in nose)	(ft nose)	(s1-ft^2)	(s1-ft^2)
82.00	1338.80	73.06	6.09	138.36	11.53	624.20	11.20
86.00	1201.16	75.73	6.31	135.69	11.31	596.69	10.92
90.00	1033.88	80.17	6.68	131.25	10.94	555.49	10.19
94.00	862.06	86.59	7.22	124.83	10.46	508.03	8.90
98.00	687.52	96.77	8.06	114.65	9.55	415.05	6.82
99.80	630.18	101.09	8.42	110.33	9.19	380.45	5.31

THIS REFLECTS BBVC, NIHKA II, AND INTERSTAGE WEIGHTS PER B.A.L. LETTER
DATED 21 FEB 1986. INTERSTAGE LENGTH PER WFF MEASUREMENTS. 5-14-87/MSS

f

SECTION 3 - VEHICLE PERFORMANCE

3.1 PERFORMANCE ANALYSIS RESULTS

Source: GEM 5-D

Launch Parameters: Payload Weight: 439 Lbs
After Nose Cone Separation: 386 Lbs
Launch Angles: 84° OE, 327° AZ
Launcher: Universal II, 40 ft rail travel
Launcher Latitude: 69.294186 Longitude: 16.020680

3.1.1 Nominal Trajectory

Nominal Events Sequence at Key Points of Flight: Table 3-1

Nominal Vehicle Performance: Figures 3-1 through 3-9

Apogee Altitude: 724.2 Km

Time at Apogee Altitude: 485 Sec

Ballistic Impact Range: 768.1 Km

Time at Ballistic Impact: 910 Sec

3.1.2 Aerodynamic Heating Index

Aerodynamic Heating Index: 1.68×10^8 ft-lb/ft²

3.1.3 Drag Separation Analysis

Drag Separation Analysis: Table 3-2

Source: DRGSEP - Drag Separation Analysis Program

3.1.4 Experimenter's Success Criteria

The comprehensive success criteria is 400 Km horizontal travel above 500 Km altitude. This is met by the nominal trajectory. The minimum success criteria is 200 Km above 500 Km altitude which is met by the 2σ deviation from the nominal trajectory.

**Table 3-1. Black Brant X 35.011 IIE
Nominal Sequence of Events**

439 1b. p/l, 84° OF, 327° AZ, Norway

<u>Event</u>	<u>Time (Sec)</u>	<u>Altitude (Km)</u>	<u>Range (Km)</u>	<u>Velocity (Mps)</u>	<u>Mach No.</u>	<u>O (Psf)</u>	<u>F1.E1. (Deg)</u>
Liftoff	0.00	0.0	0.0	0.3	.0	0.0	90.00
Terrier Burnout	4.40	0.8	0.1	402.0	1.2	1904.1	83.01
BBVC Ignition	12.00	3.5	0.5	297.8	.9	802.2	81.33
BBVC Burnout	44.42	33.6	6.9	1721.5	5.6	328.2	76.70
Nose Cone Eject	69.00	71.7	16.5	1485.8	5.1	1.6	74.64
Nose Cone Sidekick	71.50	75.3	17.5	1462.7	5.2	.9	74.40
BBVC-Nihka Separation	78.00	84.2	20.0	1402.7	5.2	.2	73.72
Nihka Ignition	82.00	89.5	21.6	1366.0	5.1	.1	73.28
Nihka Burnout	100.14	128.1	33.6	3351.1	12.4	.0	72.14
DCEF Cable Release	103.00	137.2	36.4	3325.4	12.3	.0	72.02
DCEF Cal.	104.00	140.3	37.5	3316.5	12.3	.0	71.98
Despin	105.00	143.5	38.5	3307.5	12.3	.0	71.93
Payload Separation	110.00	159.1	43.5	3263.0	12.1	.0	71.72
DCEF Boom Deploy	113.00	168.3	46.5	3236.4	12.0	.0	71.58
Experiment Backup Pwr On, DIFP ON	113.00	168.3	46.5	3236.4	12.0	.0	71.58
S/P Release	116.00	177.5	49.5	3209.9	11.9	.0	71.45
DCM Strap Release	116.00	177.5	49.5	3209.9	11.9	.0	71.45
ACLP Cal., Scan	117.00	180.6	50.5	3201.0	11.9	.0	71.40
DCM Spring Release	119.00	186.6	52.4	3183.4	11.8	.0	71.31

Table 3-1.
(Continued)

<u>Event</u>	<u>Time (Sec)</u>	<u>Altitude (Km)</u>	<u>Range (Km)</u>	<u>Velocity (Mps)</u>	<u>Mach No.</u>	<u>Q (Psf)</u>	<u>F1.E1. (Deg)</u>
Experiment HV On, SPS & DIFP Deploy	120.00	189.7	53.4	3174.6	11.8	.0	71.27
ACLP, ACEF, ACM Boom Deploy	120.00	189.7	53.4	3174.6	11.8	.0	71.27
ACEF & ACM Antenna Deploy	124.00	201.6	57.4	3139.6	11.7	.0	71.08
ACS #1 On	127.00	210.5	60.4	3113.5	11.6	.0	70.93
ACS #1 Off	177.00	346.4	108.8	2691.0	10.0	.0	68.18
Apogee	485.08	724.2	383.0	956.9	3.6	.0	0.00
ACS #2 On	514.30	720.9	408.1	984.1	3.7	.0	-13.43
ACS #2 Off	563.00	700.4	450.2	1137.2	4.2	.0	-32.48
3rd Stage Ballistic Impact	909.00	1.4	770.4	-	-	-	-73.73

BLACK BRANT X 35°01'11" UE 17 JAN 89
PLOT FOR VARIATION IN WEIGHT AND ELEVATION
APOGEE ALTITUDE VS. IMPACT RANGE (17 JAN 89)

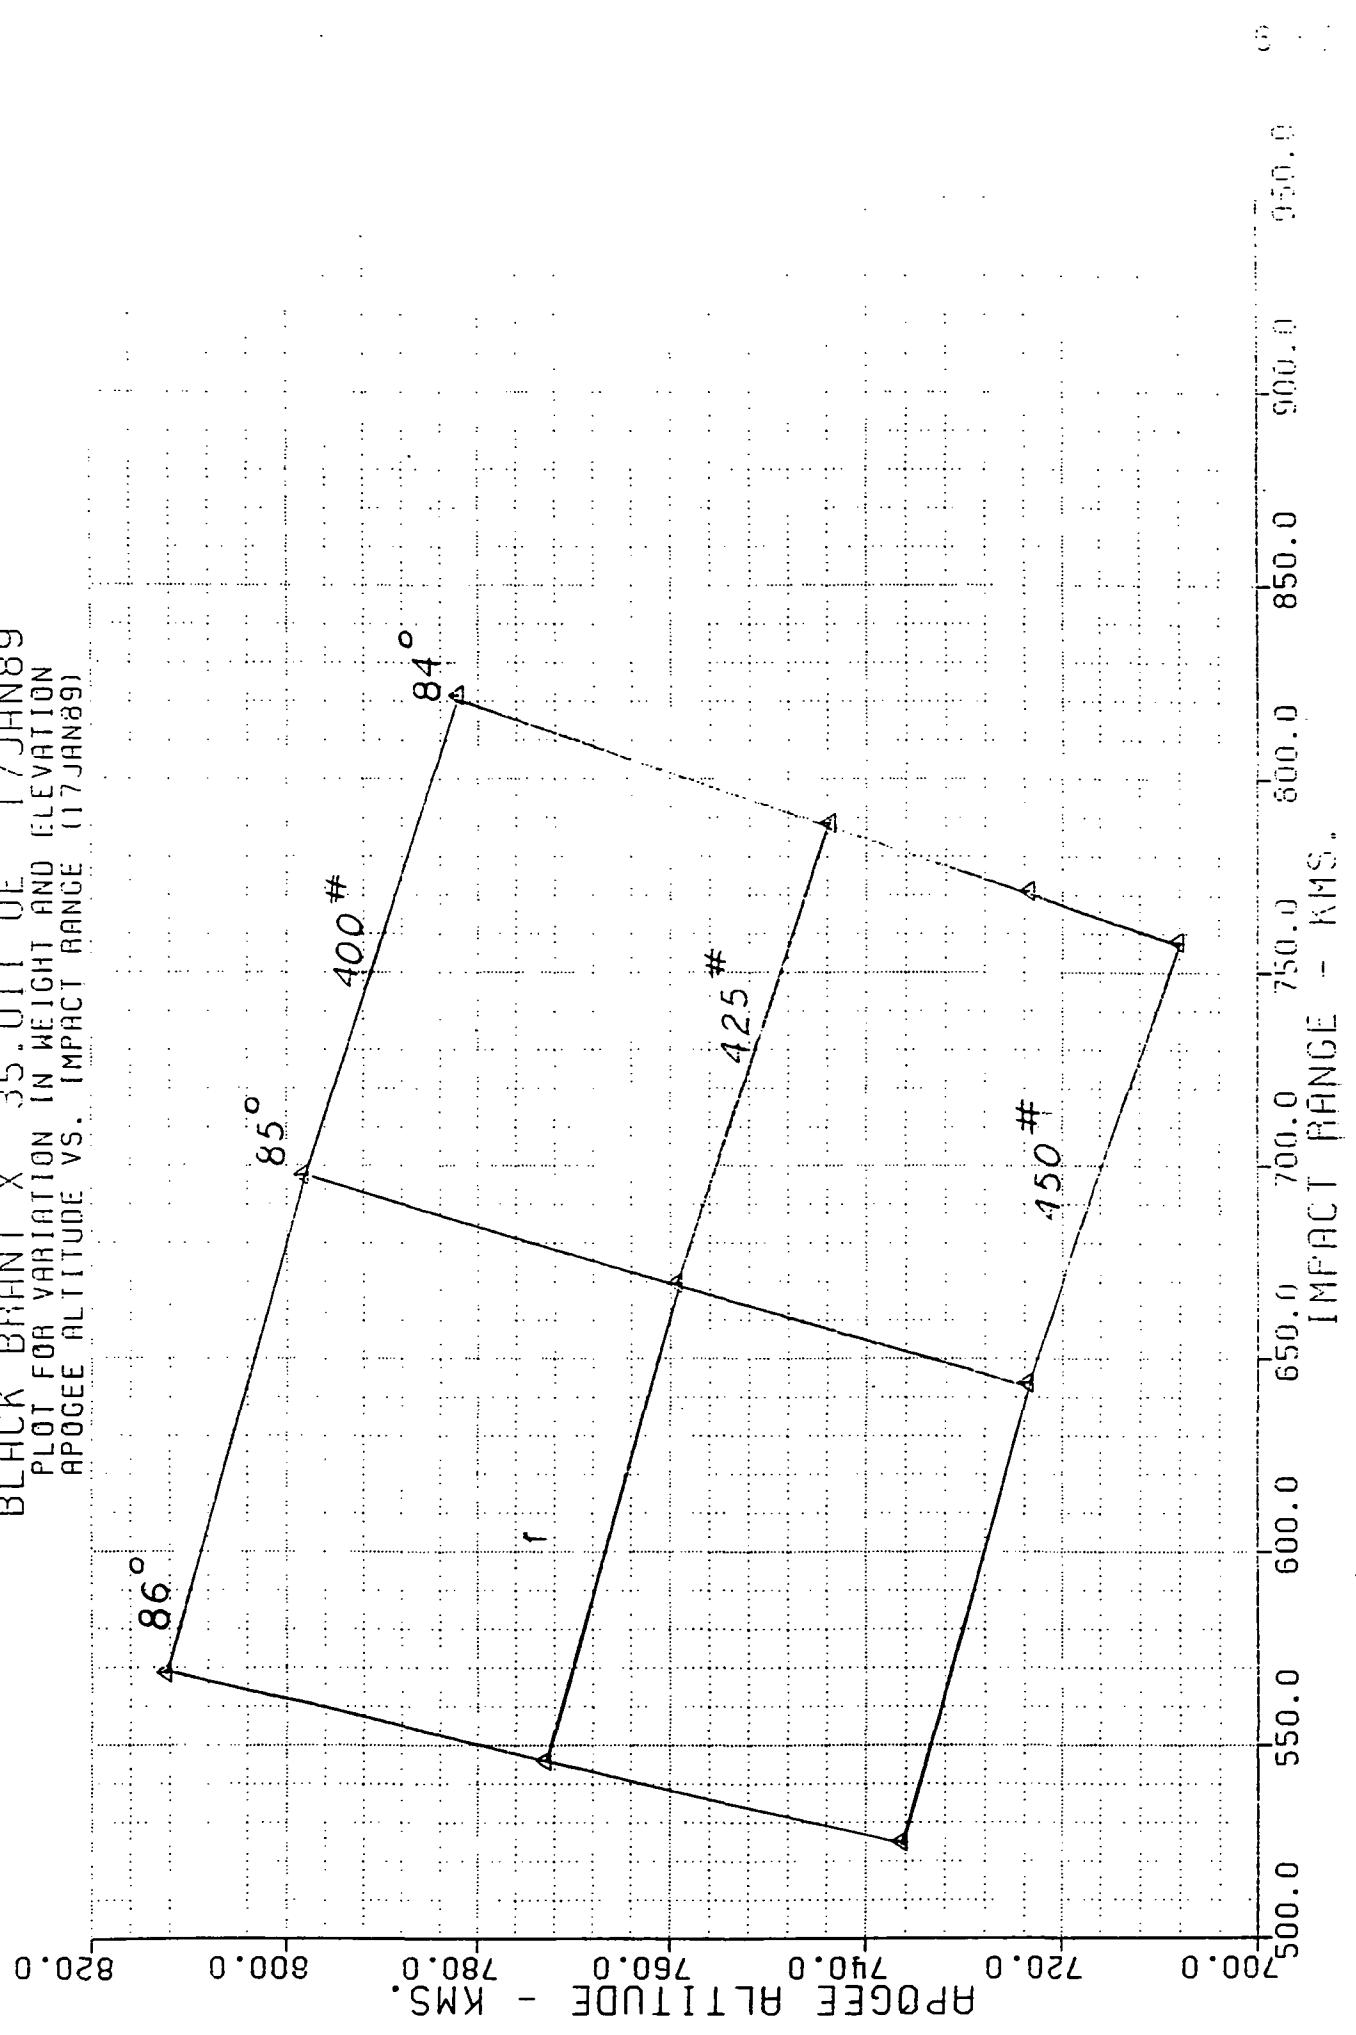


Figure 3-1. Apogee Altitude vs.
Impact Range

BLACK BRANT X 35.011 17 JAN 89
439.0 "P/L 84° 0E 327° AZ ANDØYA
ALTITUDE VS TIME

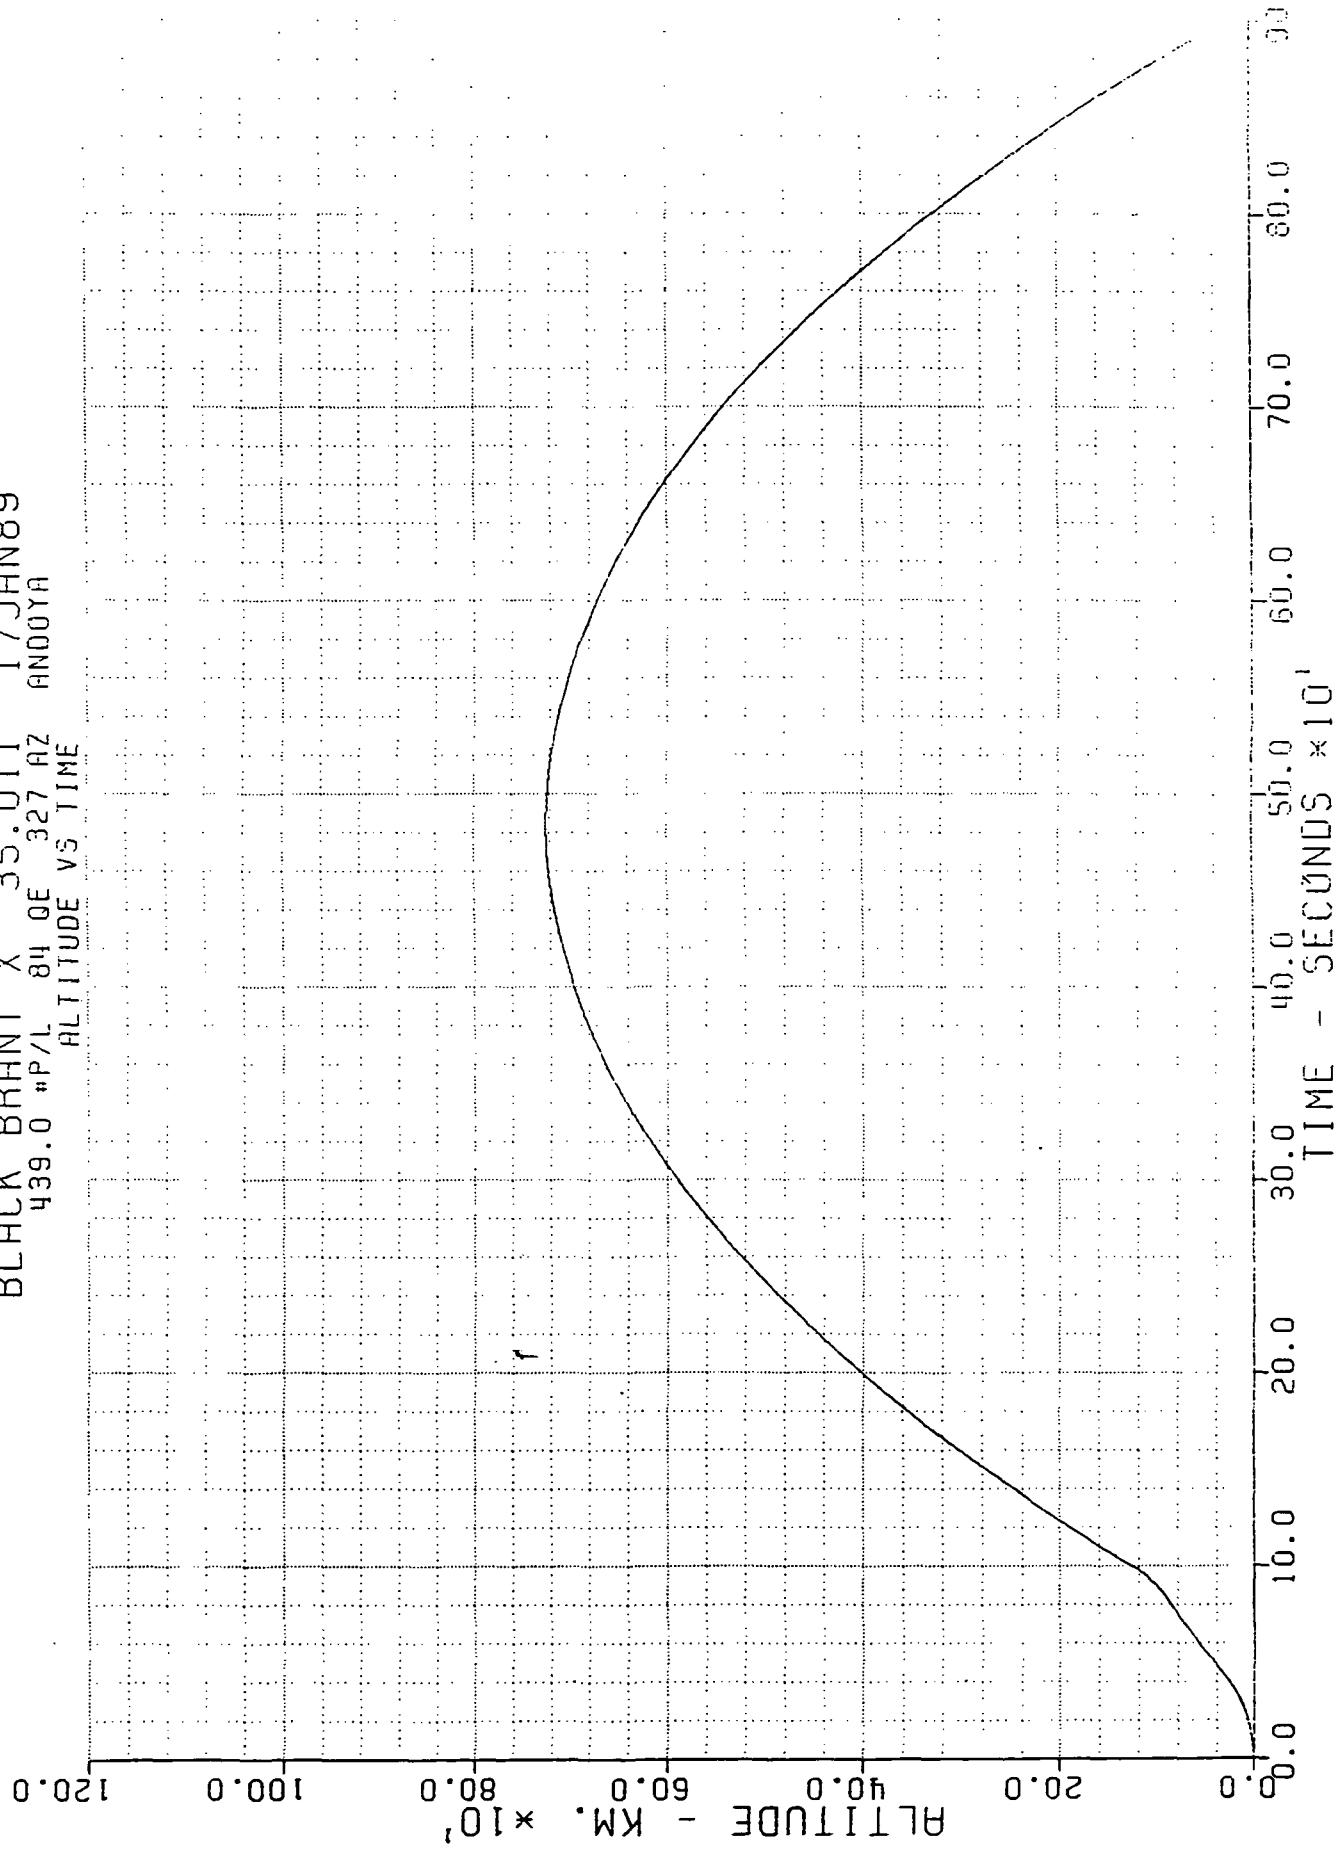


Figure 3-2. Altitude vs. Time

BLACK BRANT X 35.011 17 JAN 89
439.0 *P/L 84 0E 327 AZ ANDORA
ALTITUDE VS RANGE

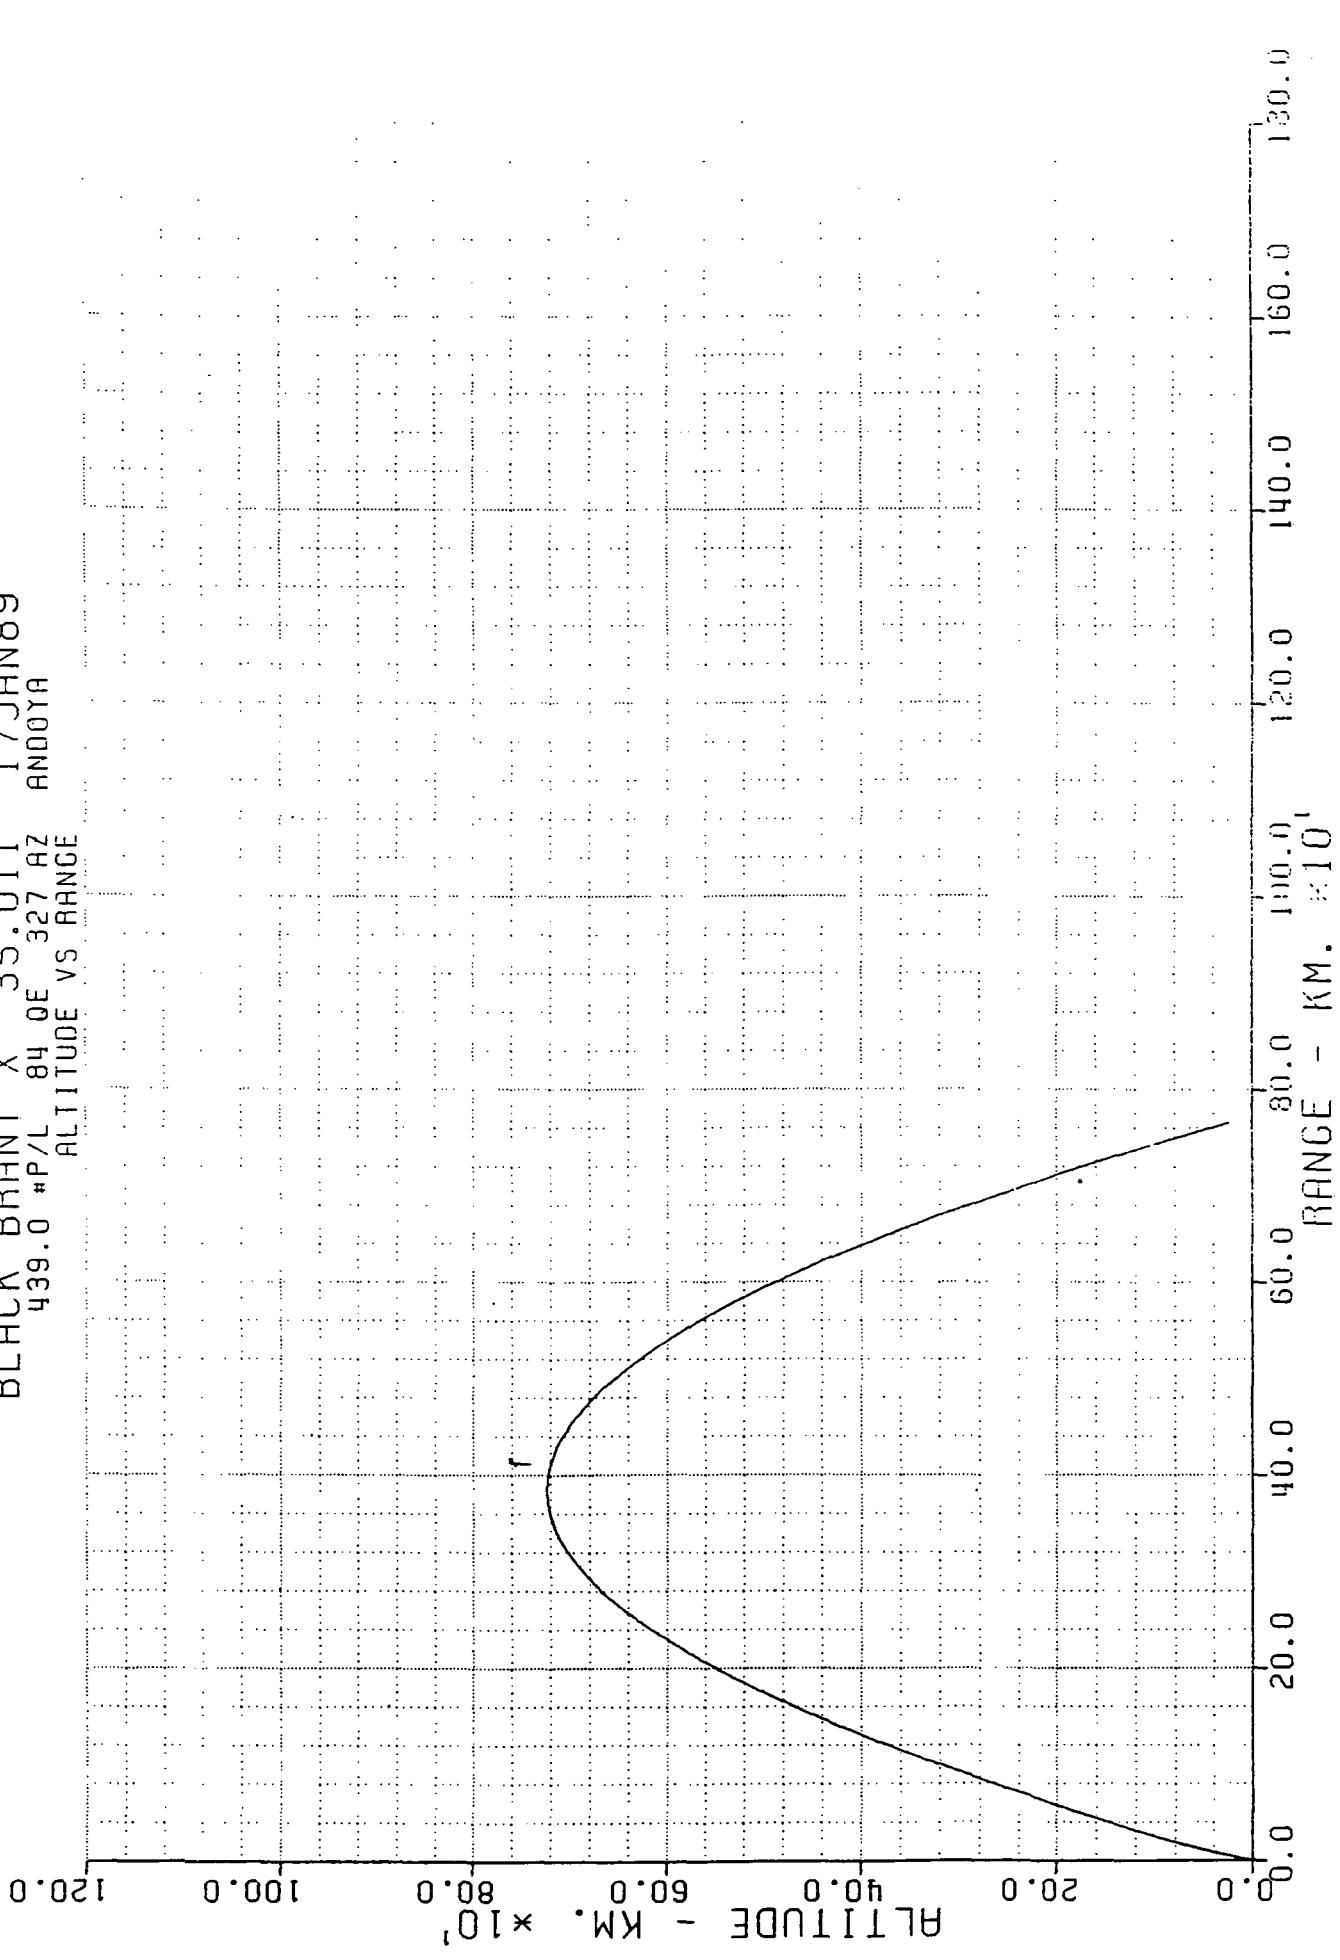


Figure 3-3. Altitude vs. Range

BLACK BIRANT X 35.011 17 JUN 89
439.0 "P/L RANGE VS TIME
84 0E 327 AZ AND 0A

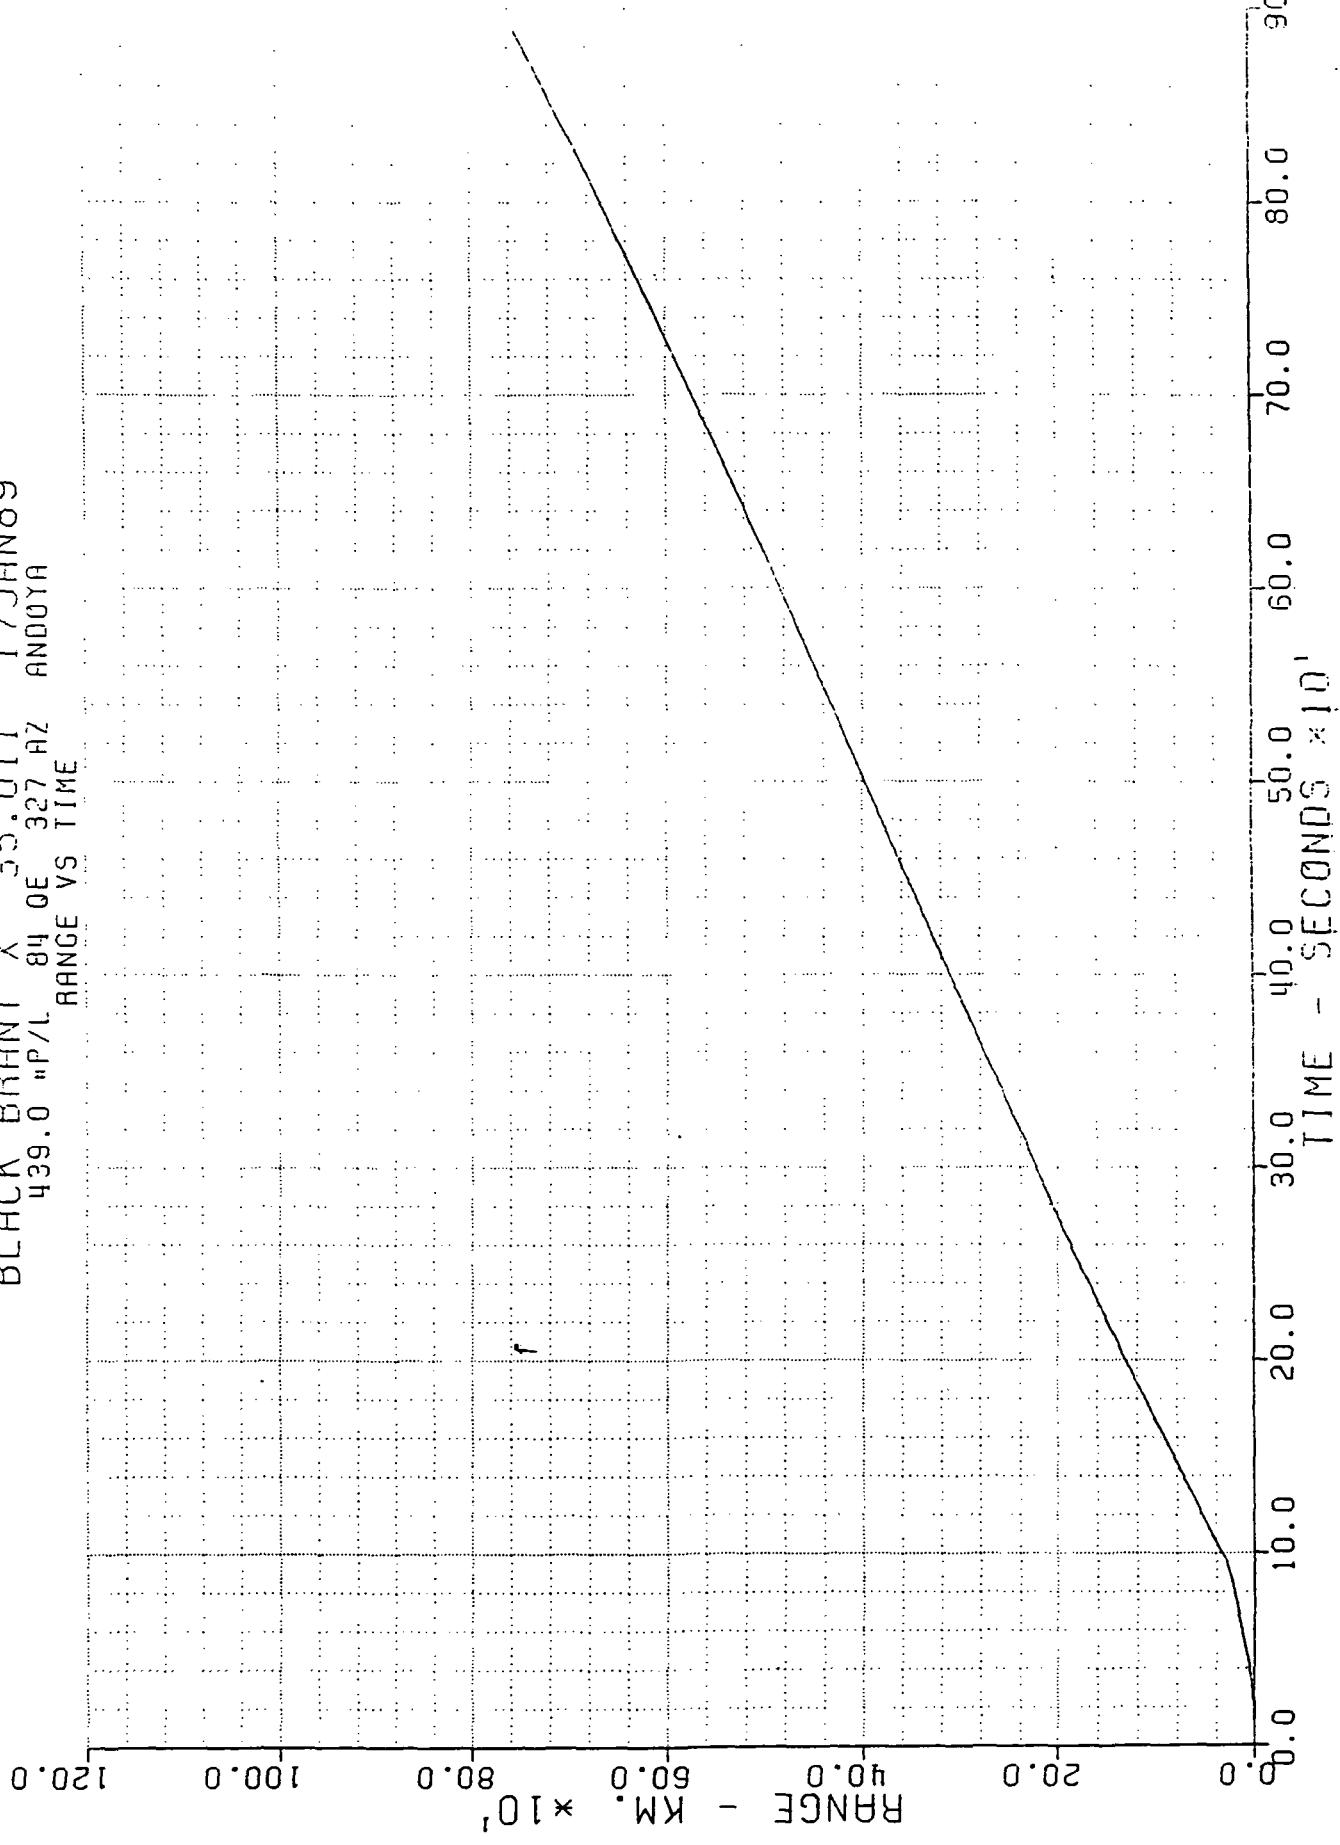


Figure 3-4. Range vs. Time

BLACK BRANT X 35.011 17 JAN 89
439.0 "P/L 84 QE 327 AZ AND 01A
DYNAMIC PRESSURE VS TIME

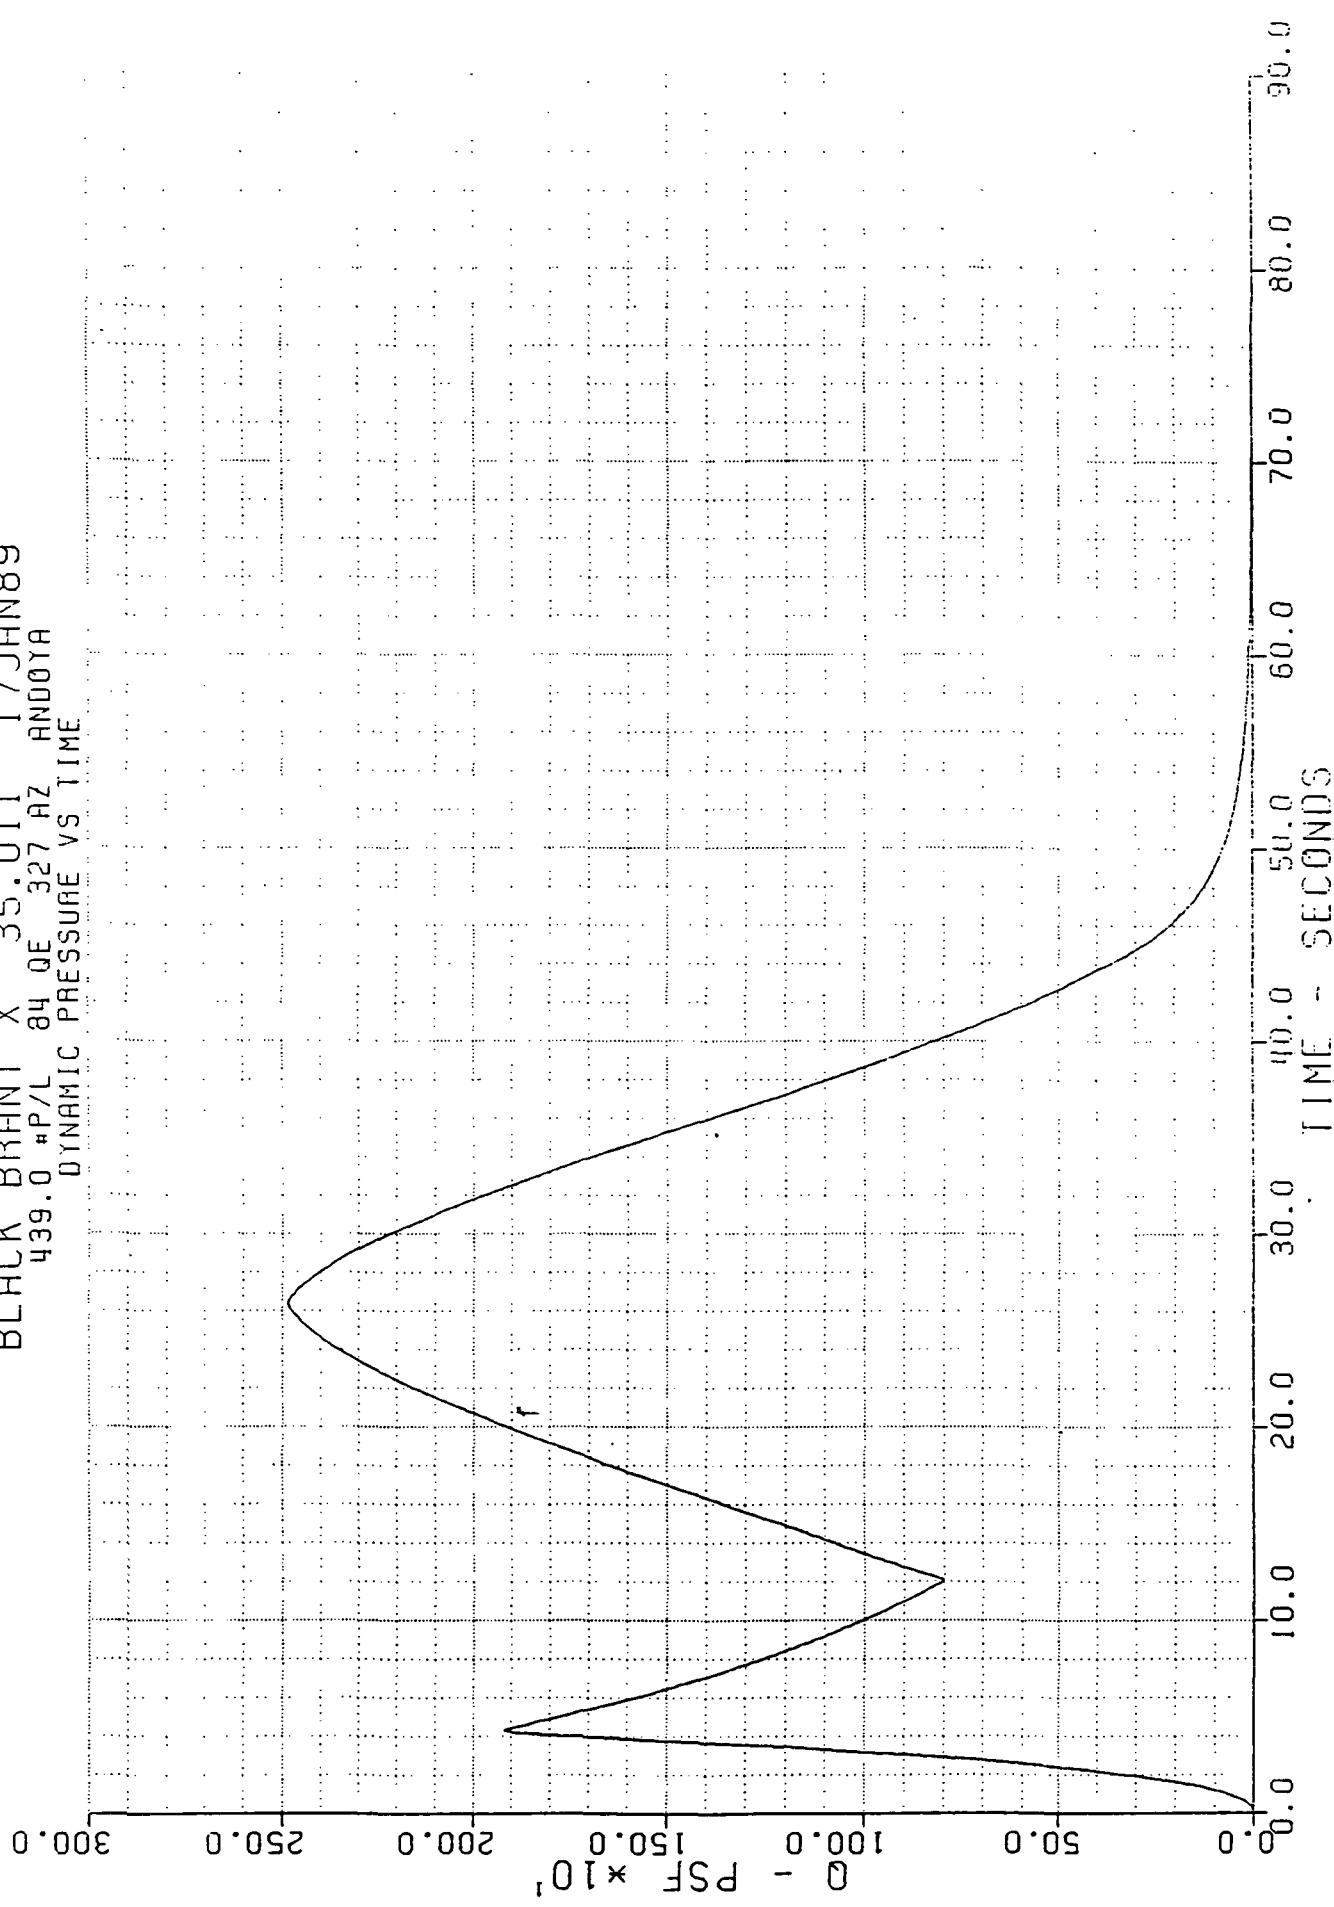


Figure 3-5. Dynamic Pressure vs. Time

BLACK BRANT X 35.011 17 JAN 89
439.0 *P/L 84 QE 327 A2 AND0YA
MACH NUMBER VS TIME

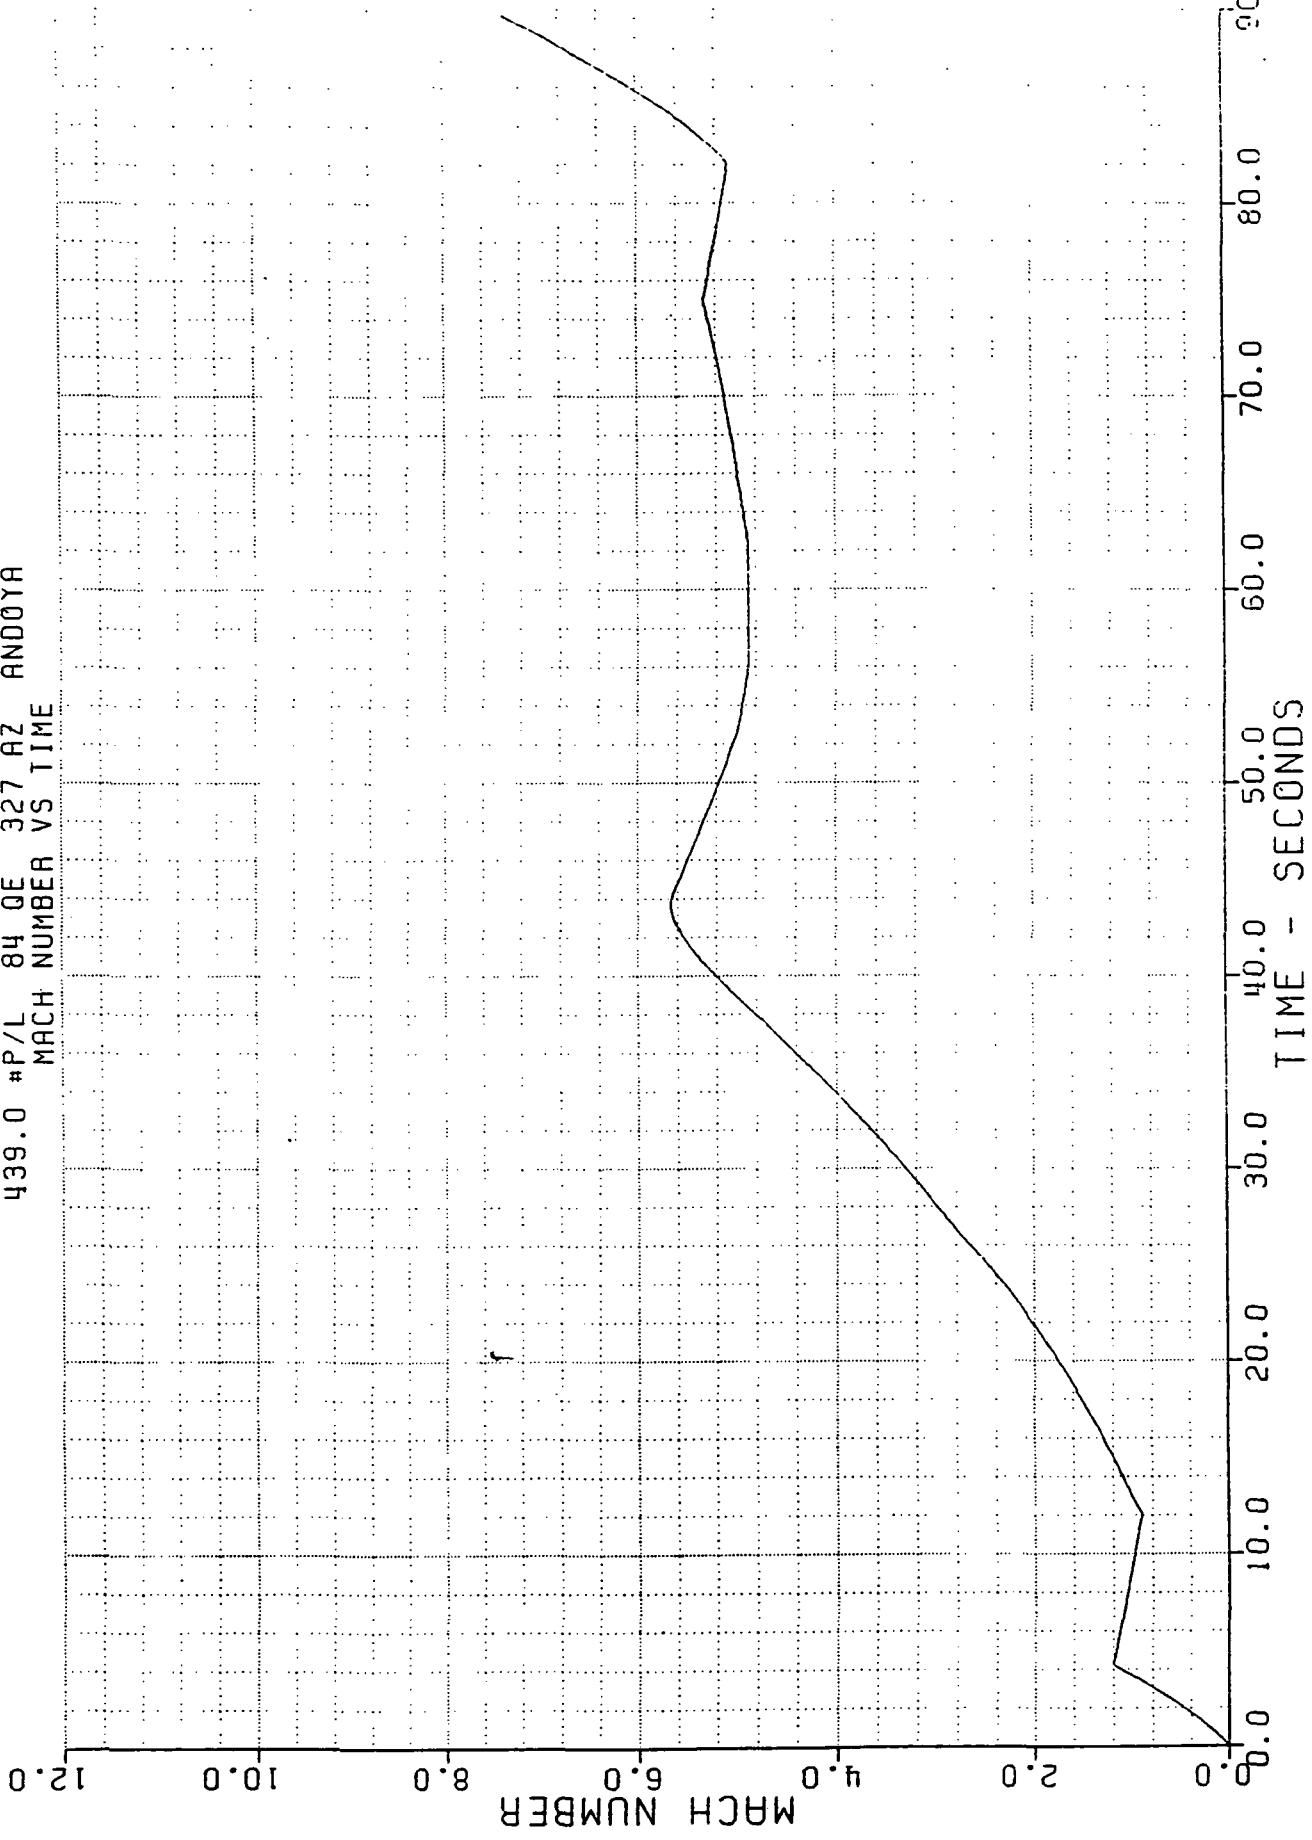


Figure 3-6. Mach Number vs. Time

BLACK BRANT X 35.011 17 JAN 89
439.8 "P/L 84 0E 327 82 ANDØYA



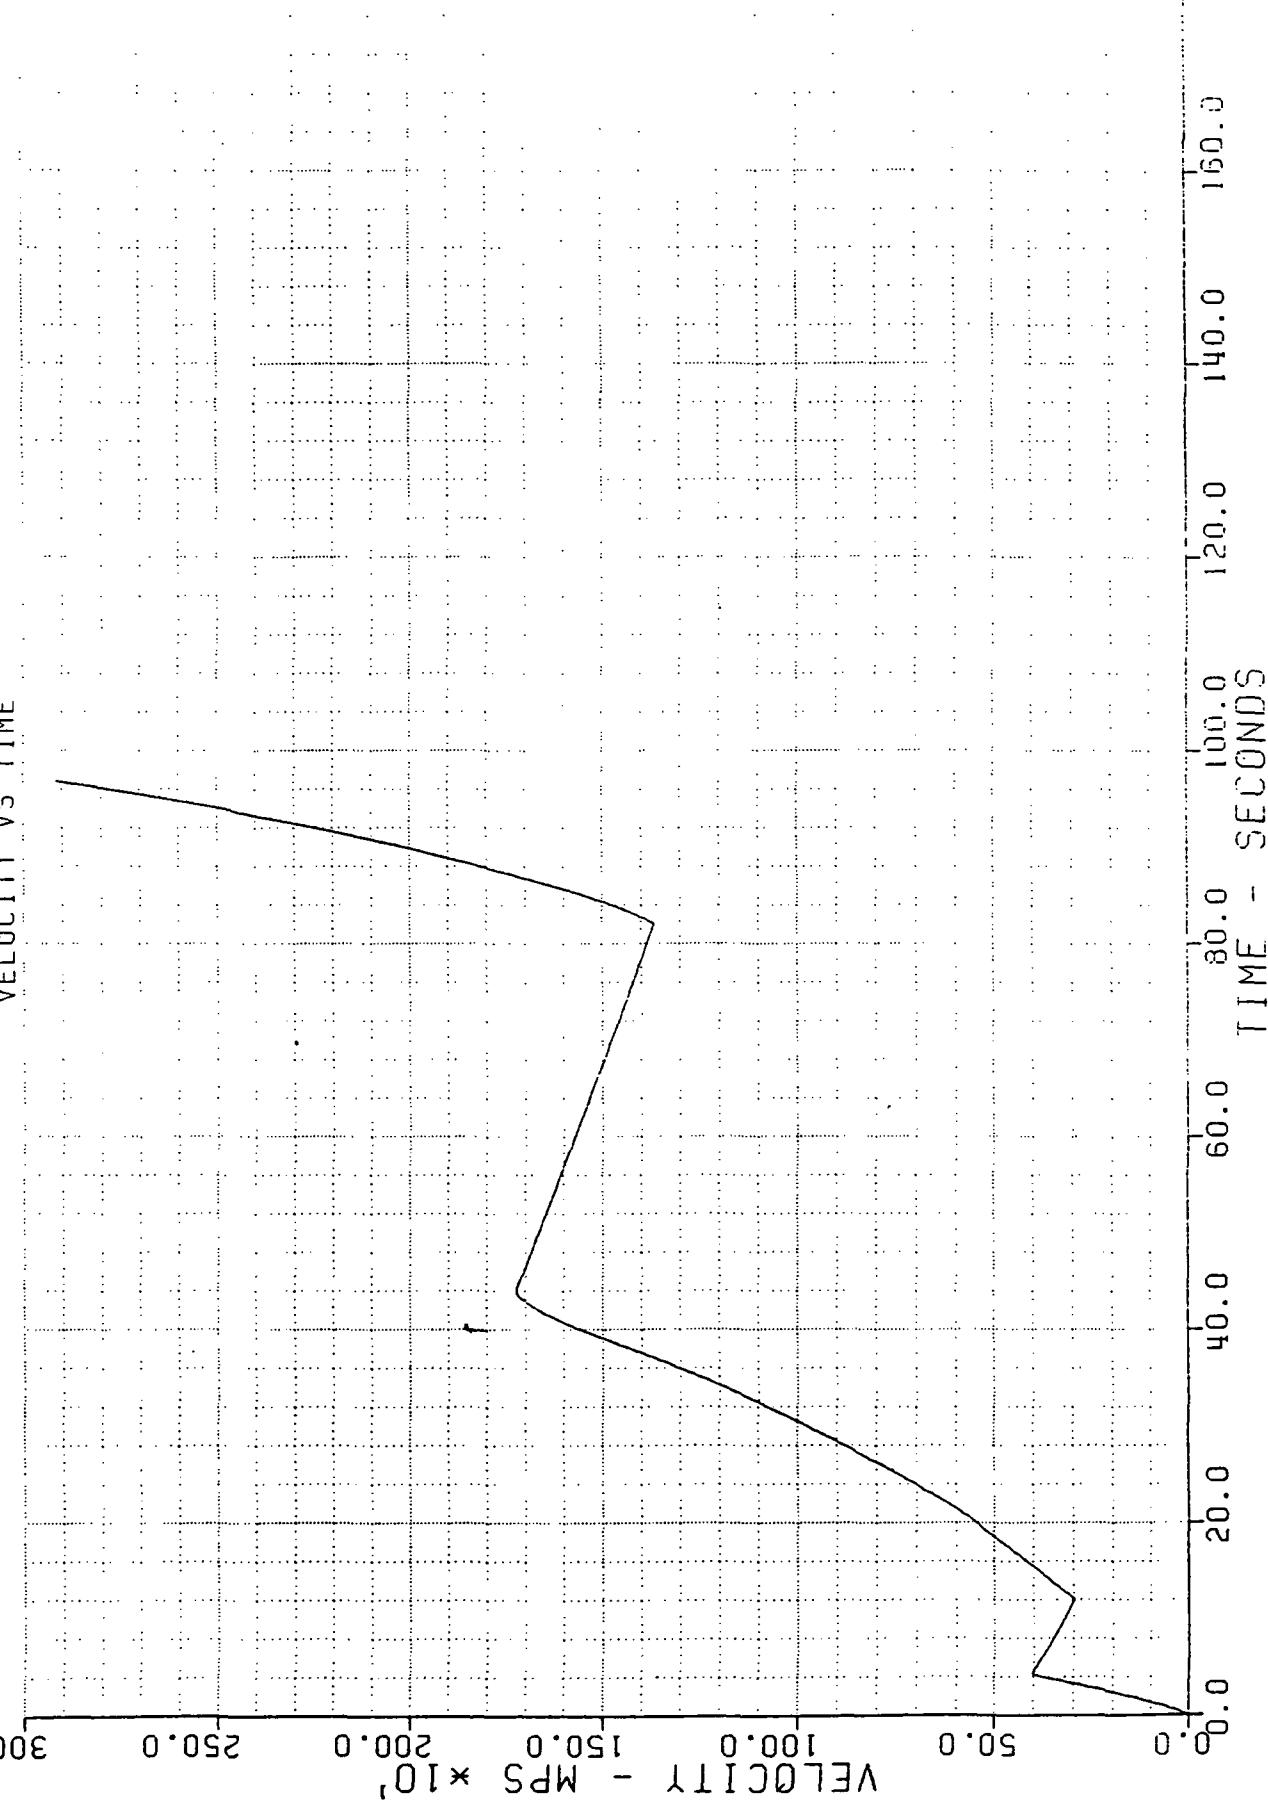


Figure 3-7. Velocity vs. Time


BLACK BRANT X 35.026 17 JAN 89
439.0 *P/L 84 0E 283 AZ
ANDØYA
ALTITUDE VS RANGE

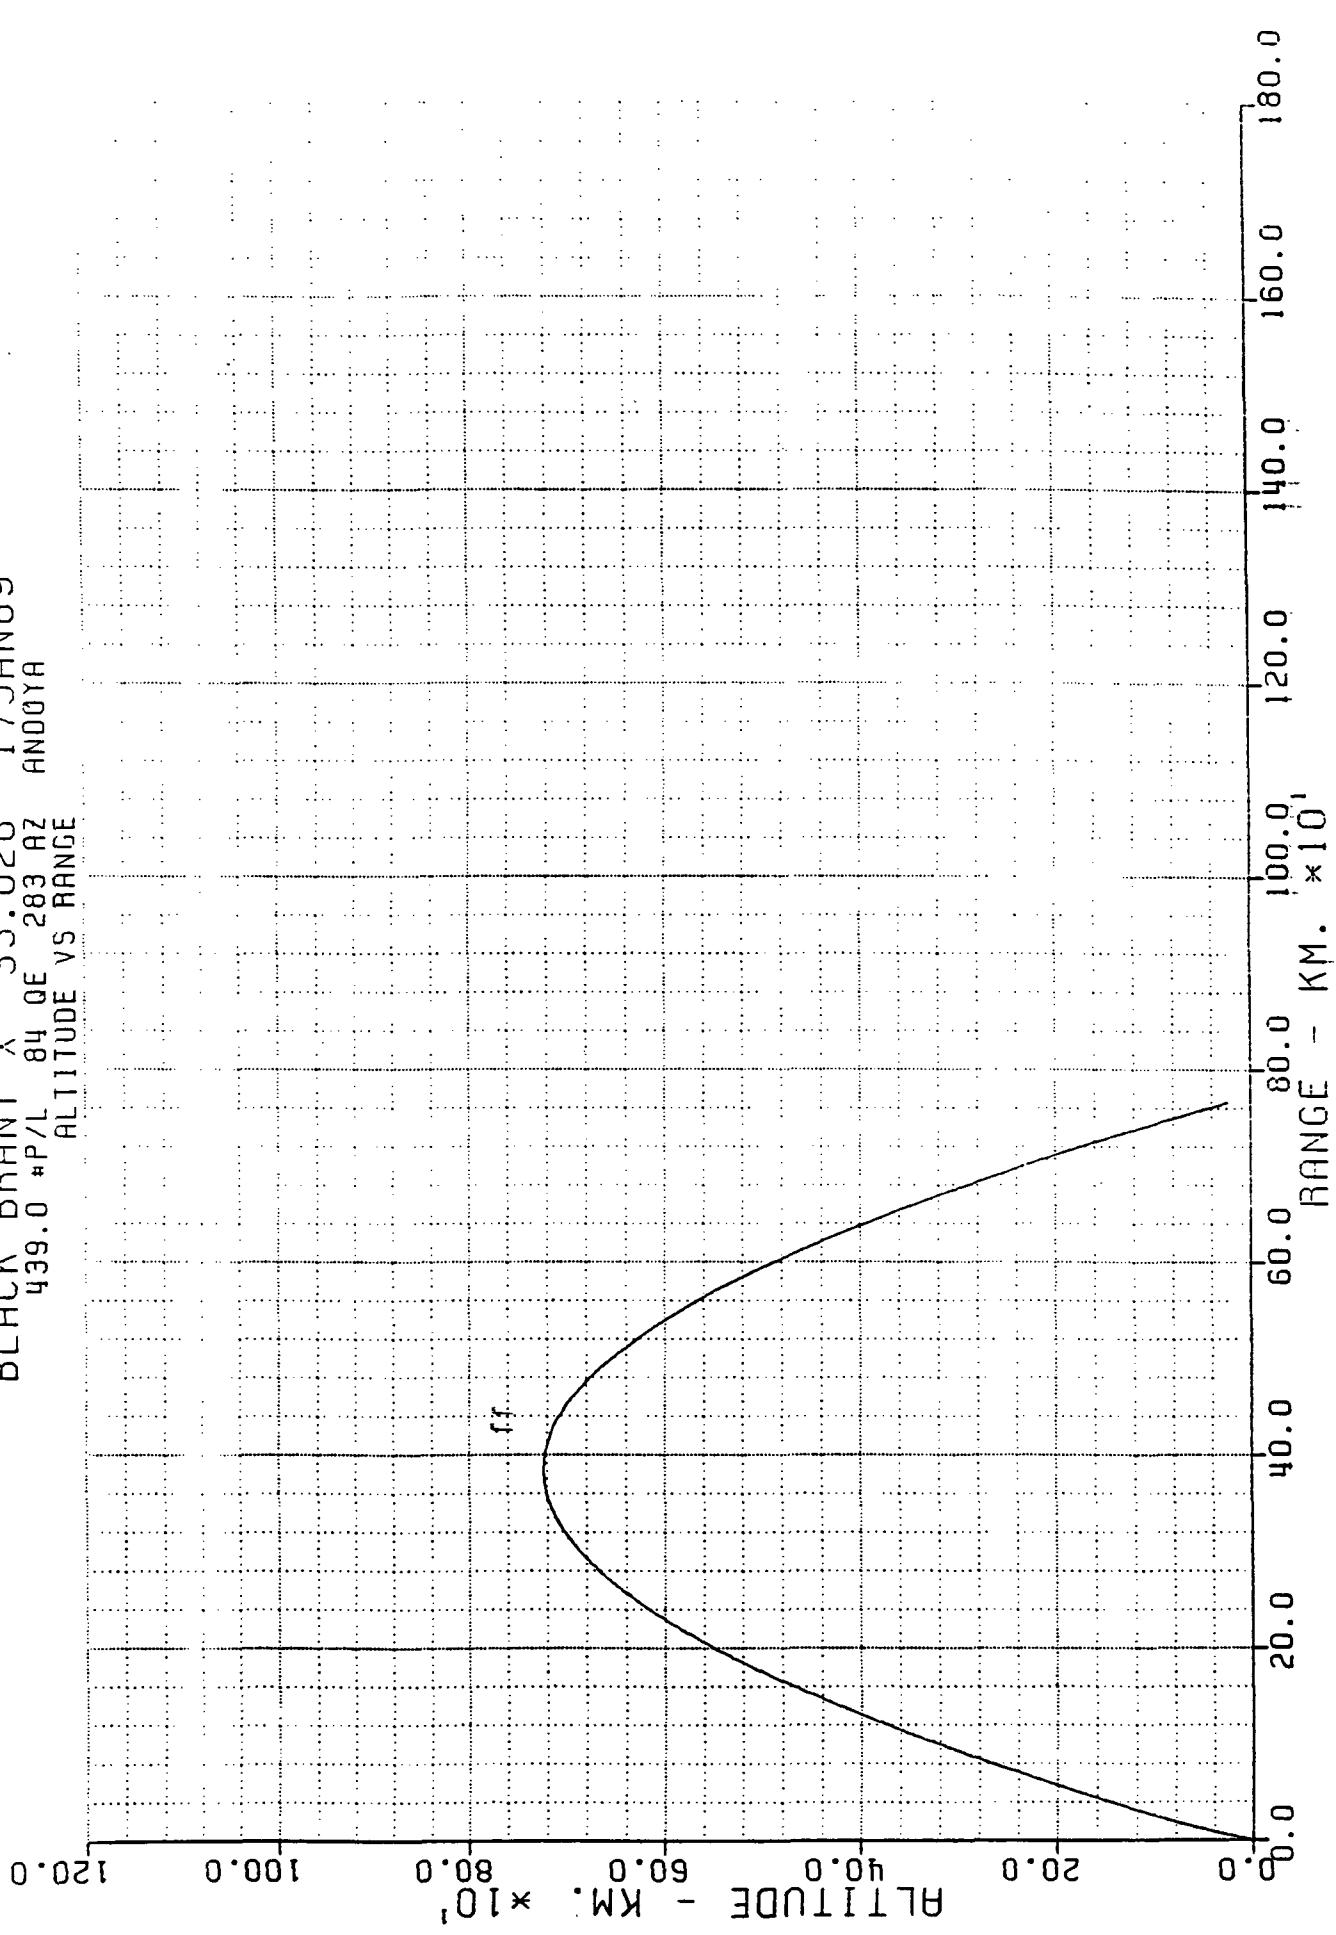


BLACK BRANT X 35.026 17 JAN 89
439.0 "P/L 84 DEG 283 AZ AND 01A
RANGE VS TIME

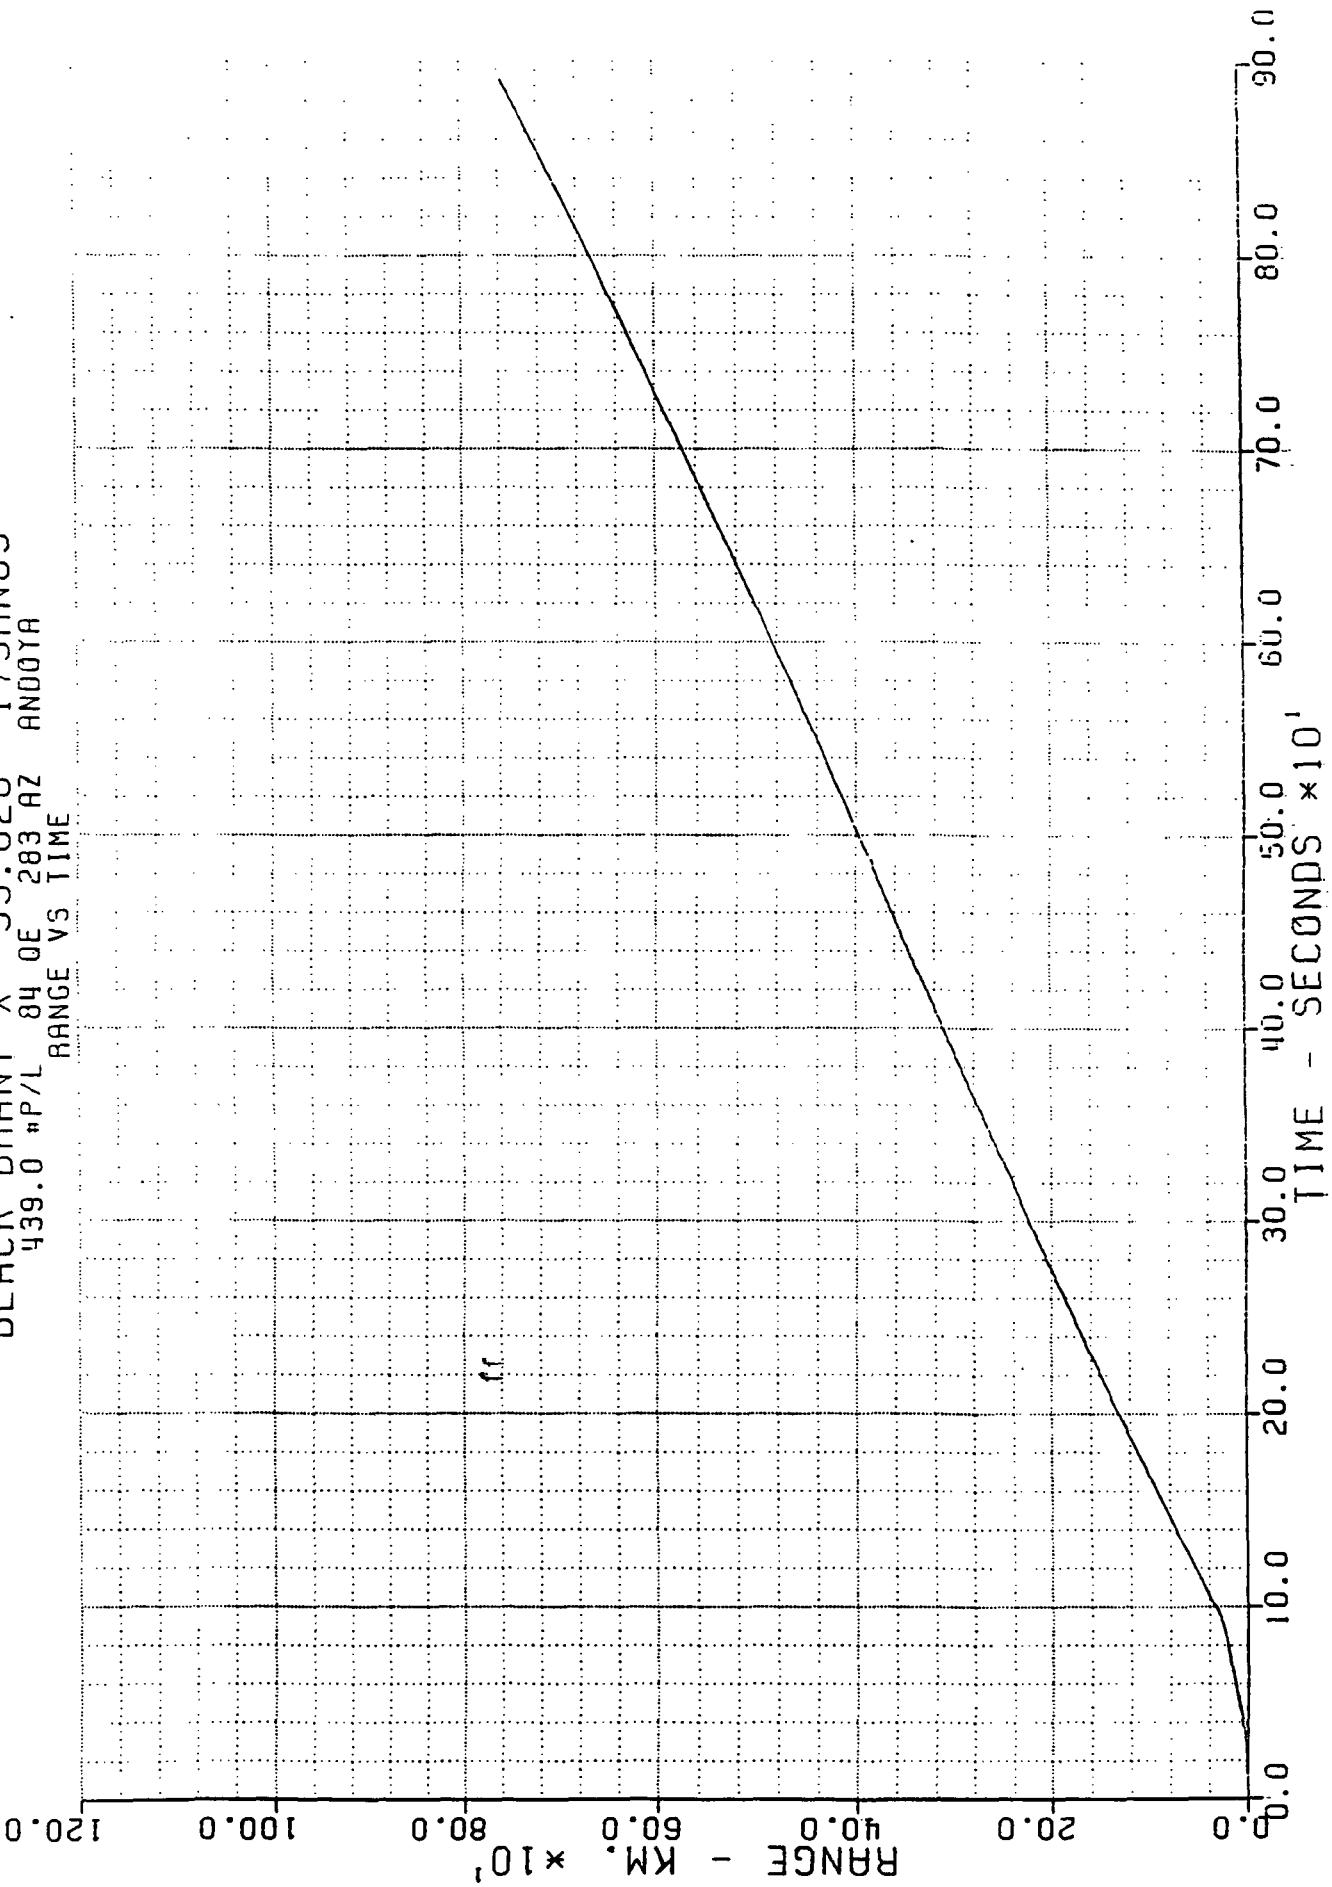

BLACK BRANT X 35.026 17 JAN 89
439.0 "P/L 84 DEG AZ ANDOYA
DYNAMIC PRESSURE VS TIME

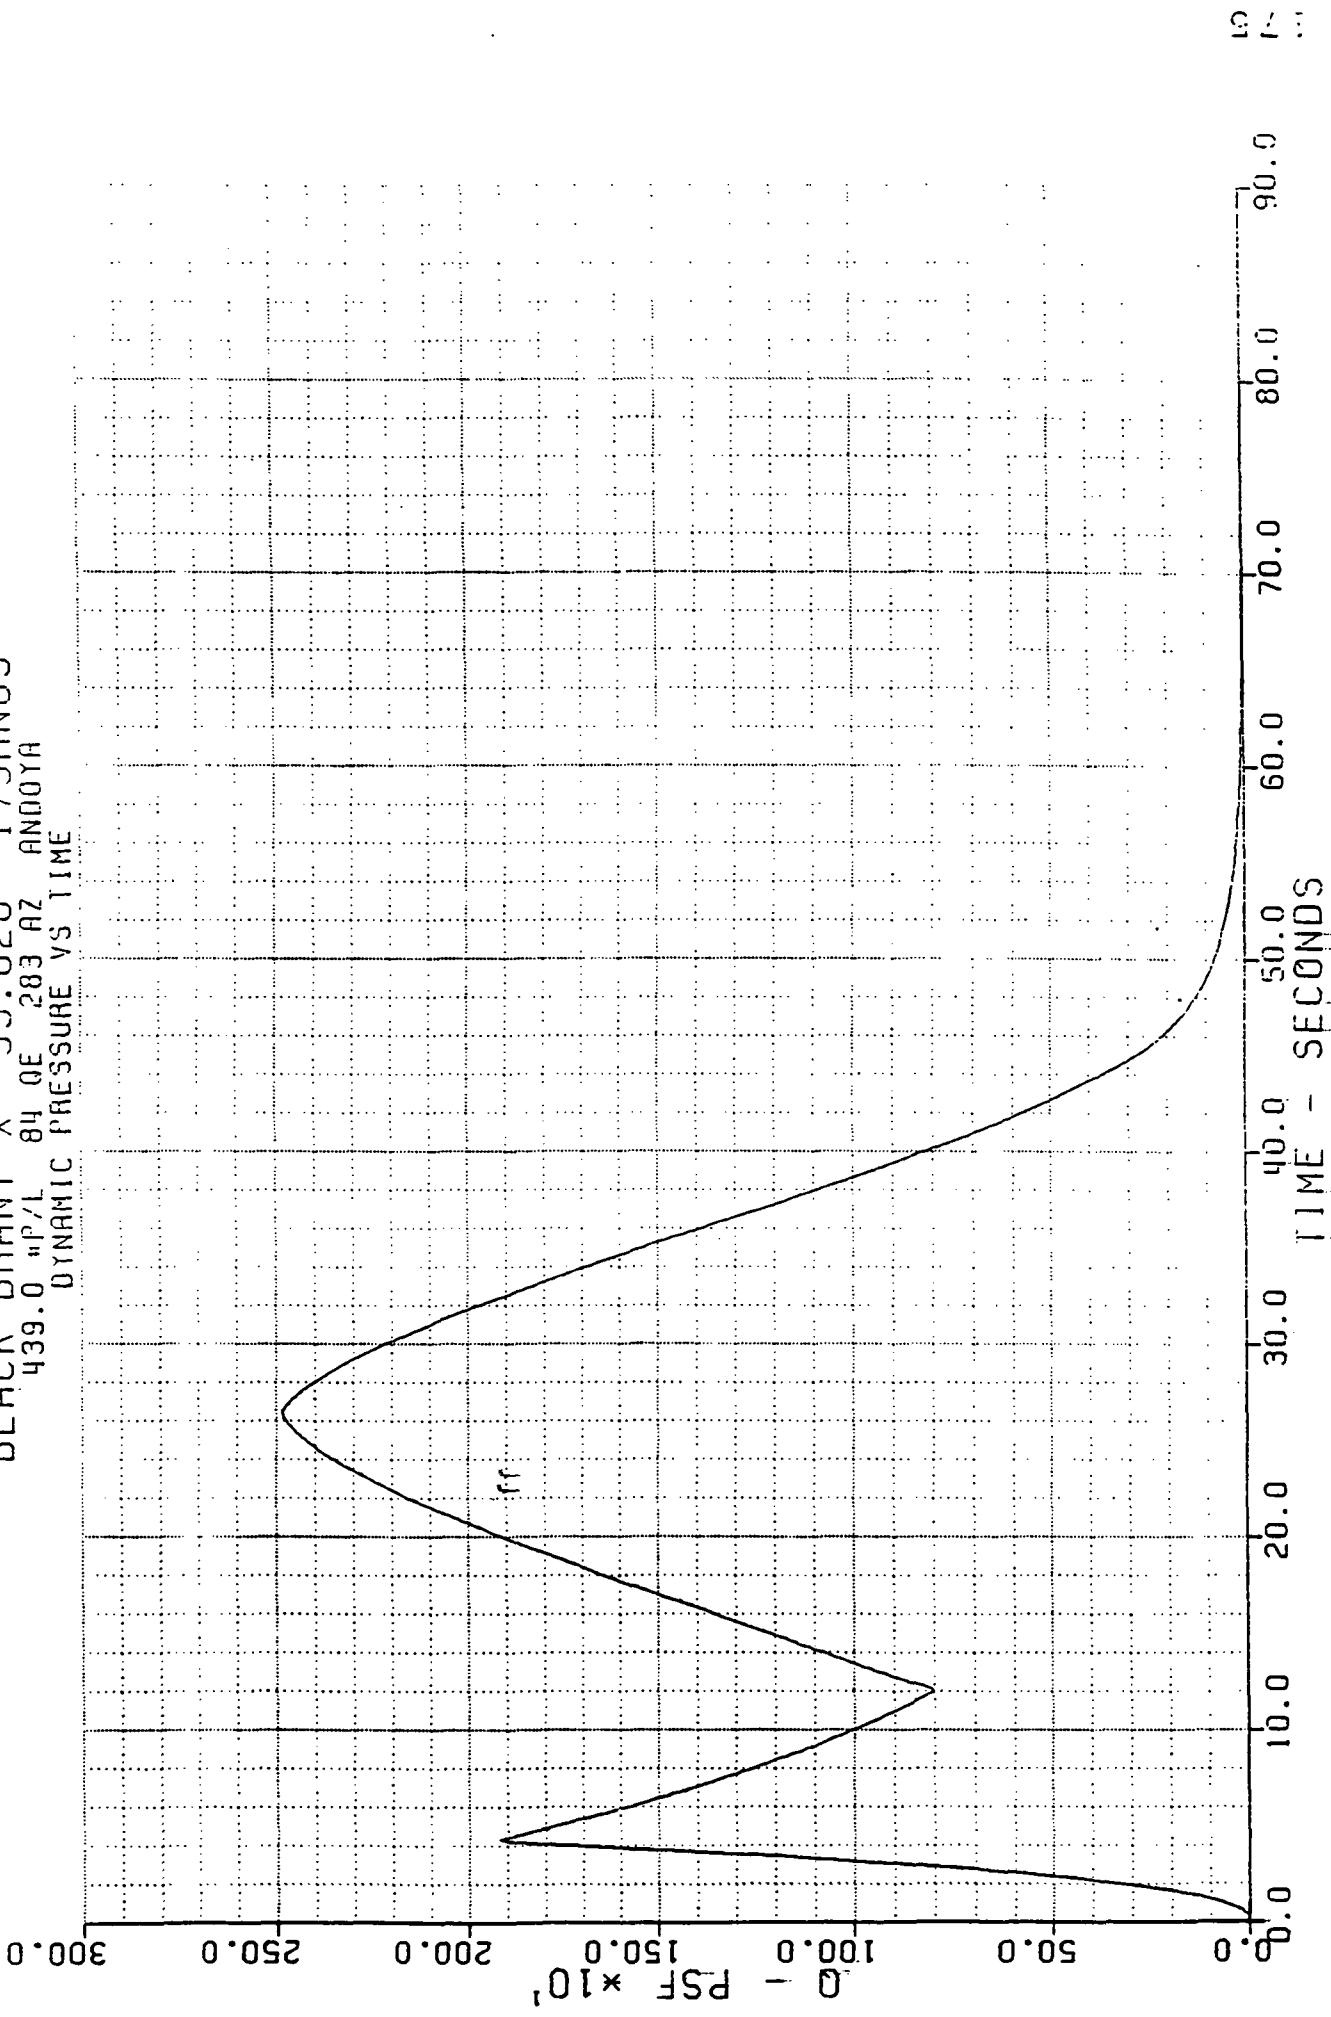


BLACK BRANT X 35.026 17 JAN 89
439.0 "P/L 84 DEG 283 AZ ANG 010
MACH NUMBER VS TIME

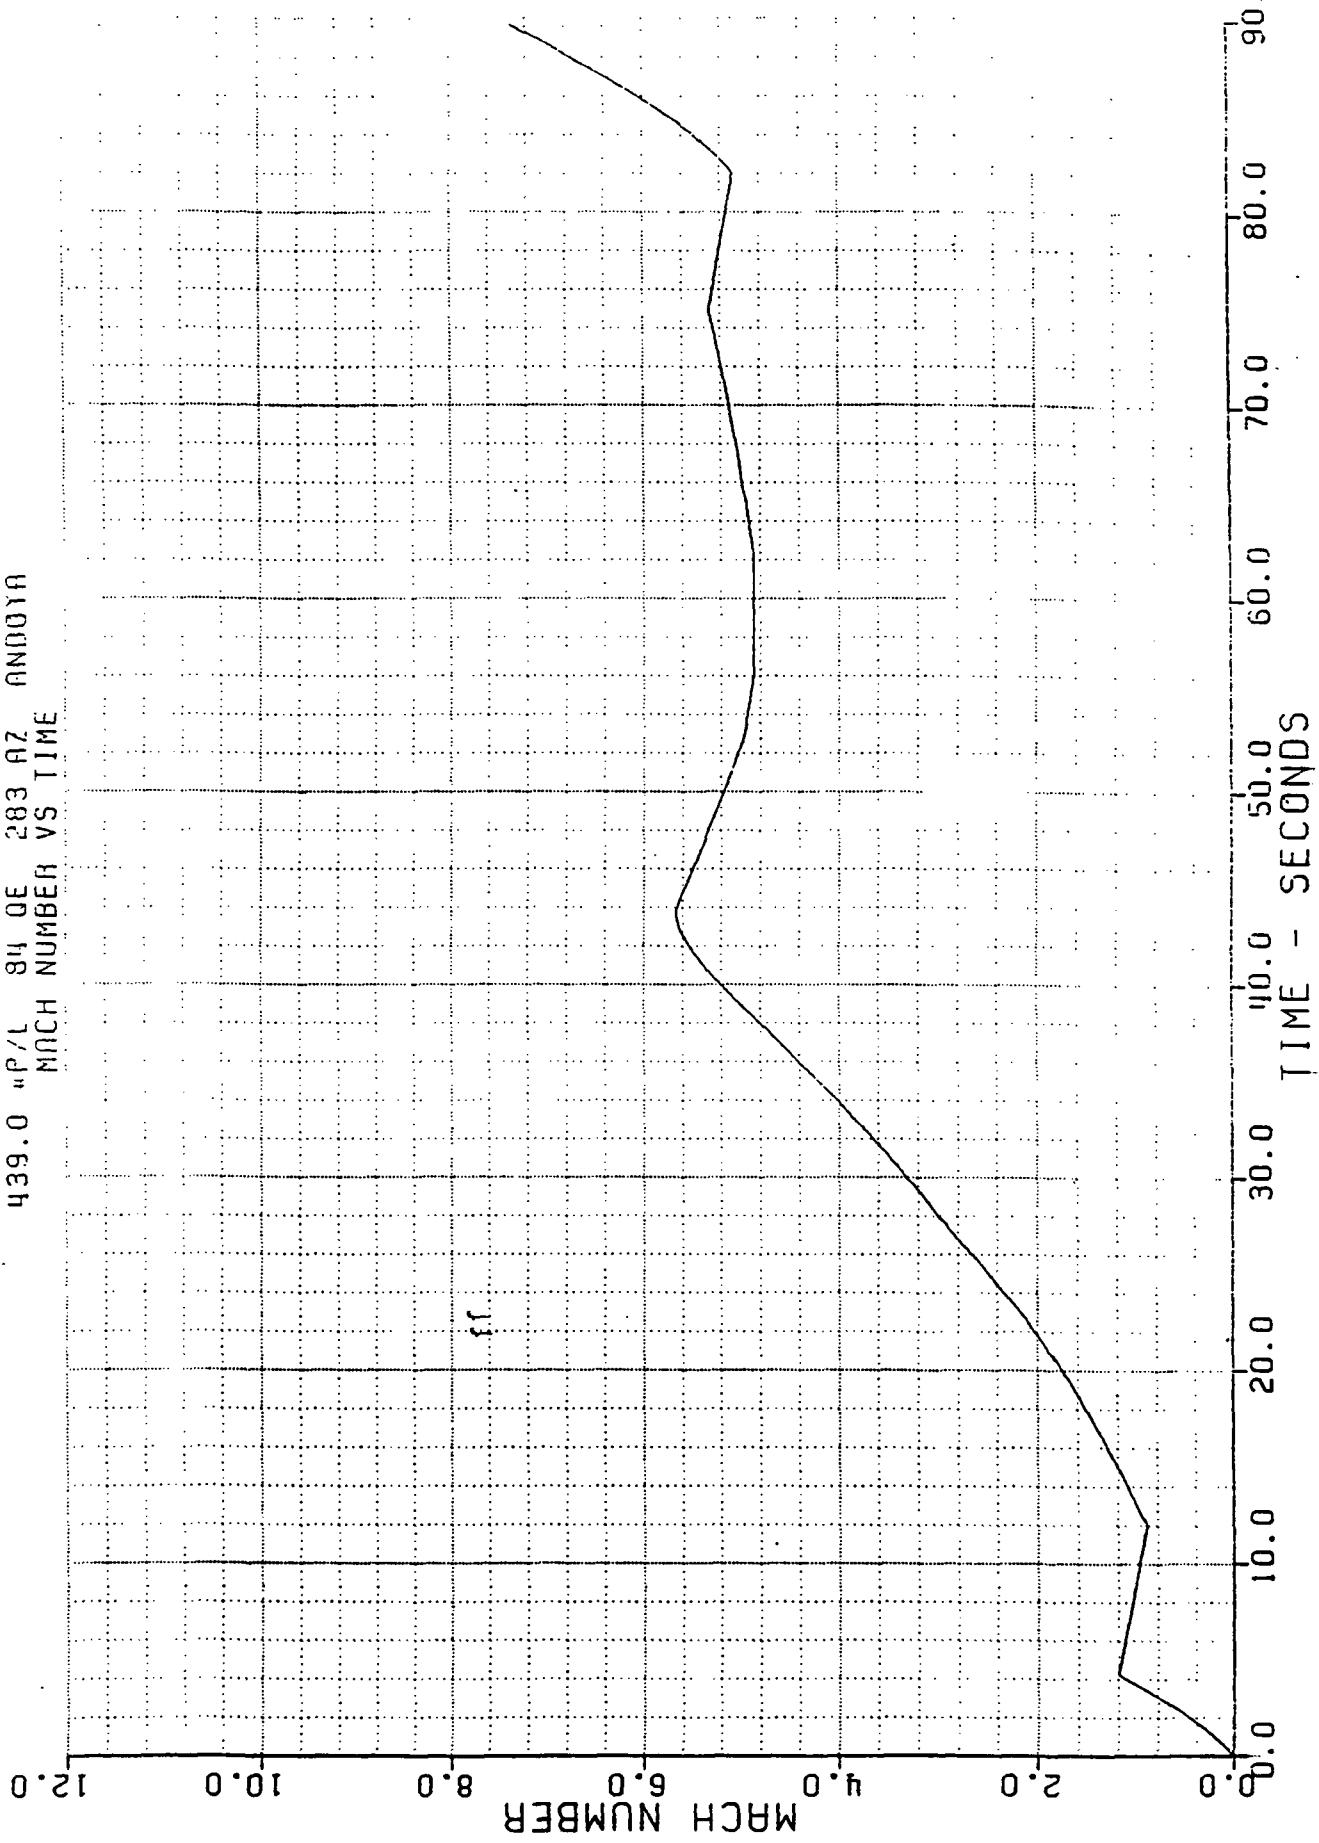


BLACK BRANT X 35.026 17 JAN 89
439.0 "P/L 84 0E 283 AZ ANDYA


VELOCITY VS TIME

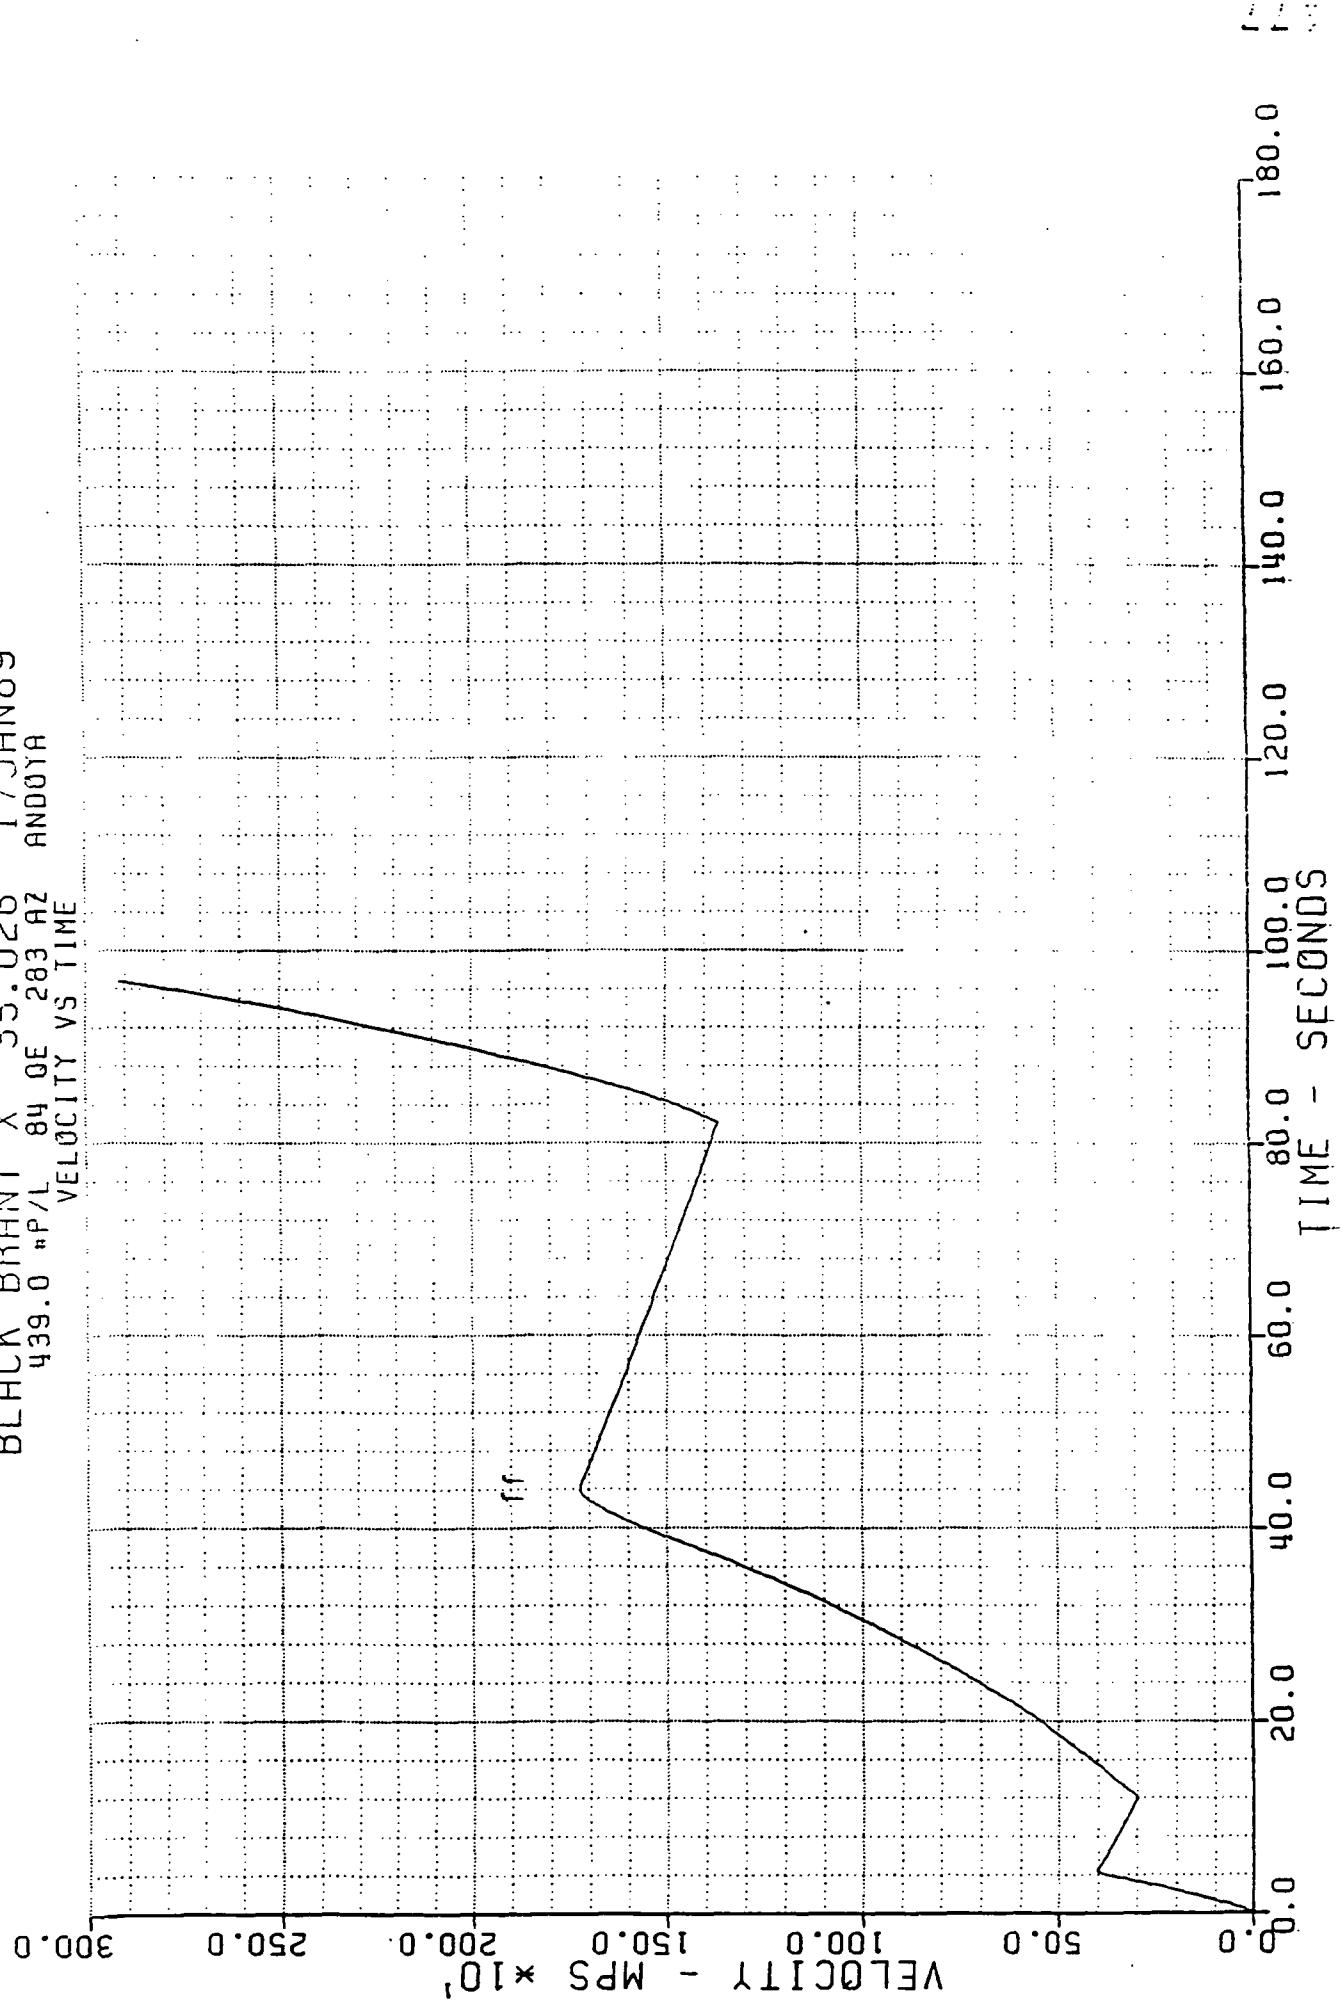

BLACK BRANT X 35.026 17 JAN 89
439.0 "P/L 84 QE 283 AZ ANDOYA
ACCELERATION VS TIME

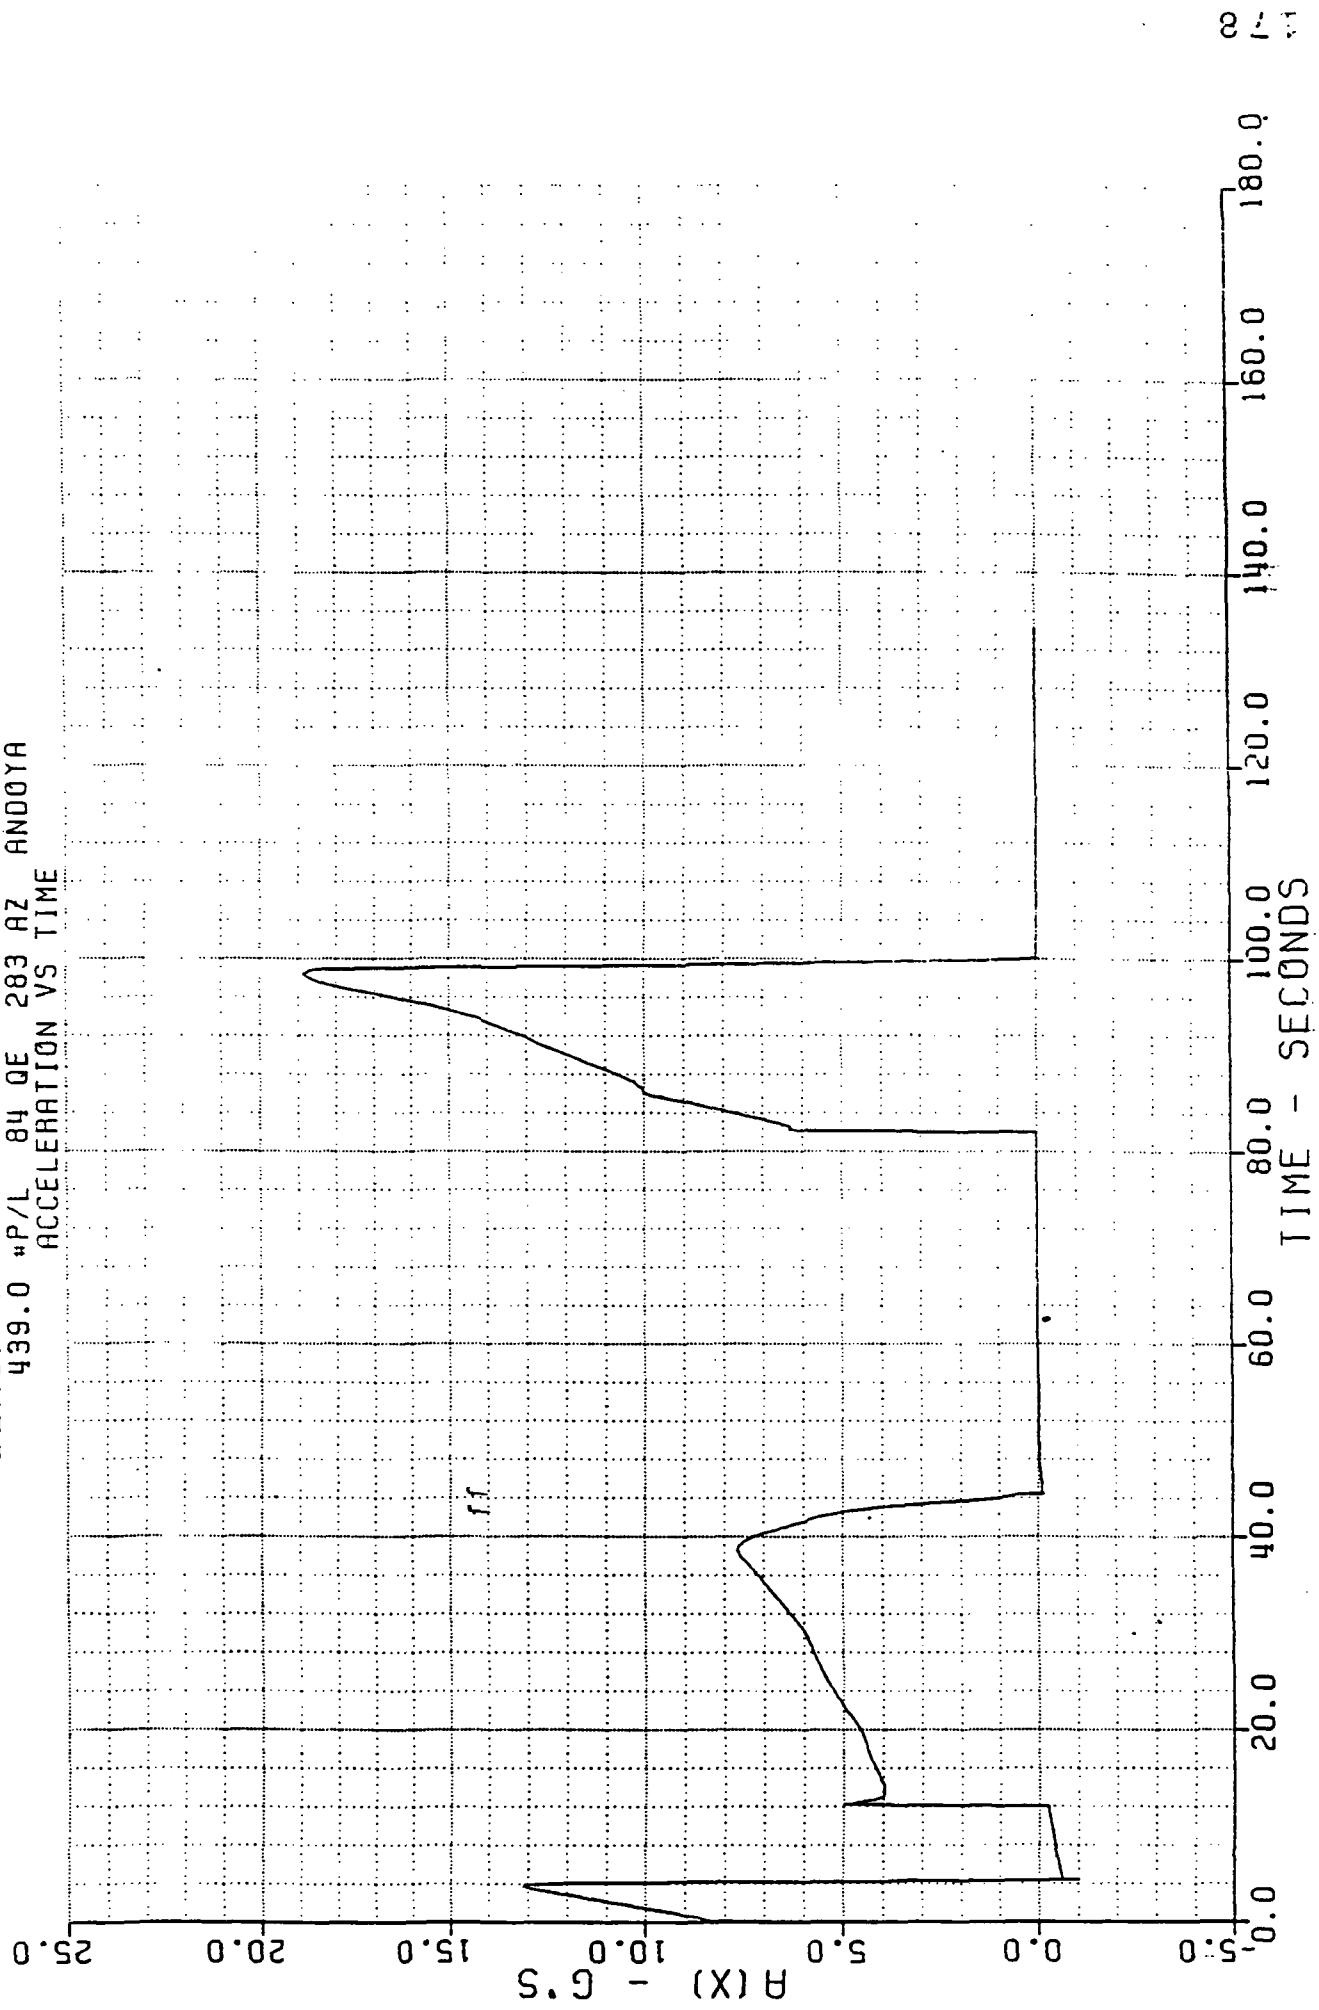

BLACK BRANT X 35.026 17 JAN 89
439.0 "P/L 84 0E 283 AZ ANDOYA
FLIGHT PATH ANGLE VS TIME

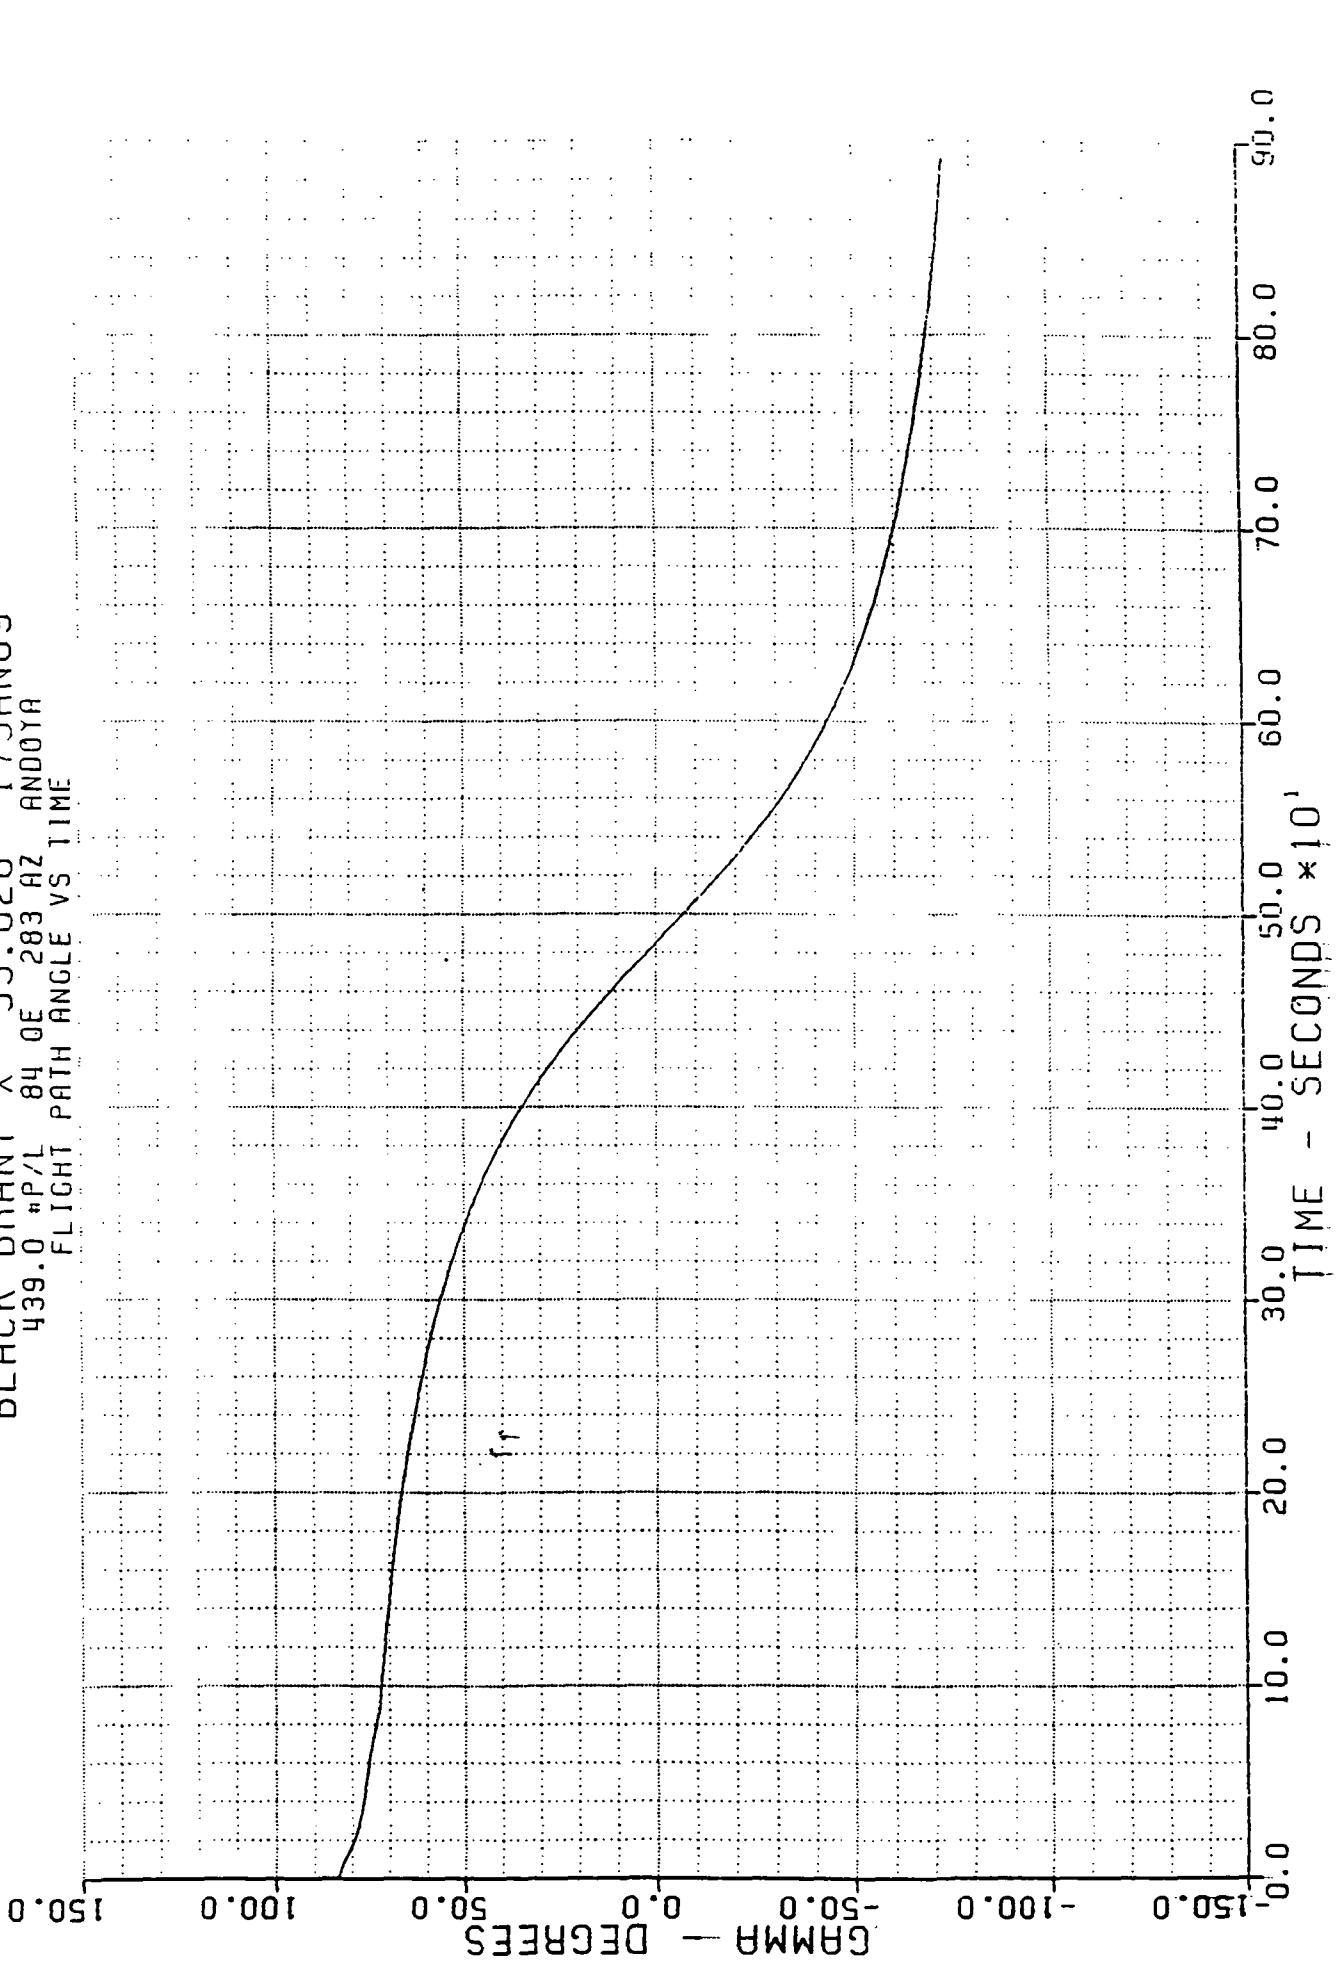

Drag Separation Analysis, Version 1.0

Vehicle I.d.: 35.011 12JAN88

Staging Event: TERRIER / BBVC SEPARATION

Time = 4.400

Altitude = 2787.000 ft. Velocity = 1319.000 fps.
Q = 1904.207 psf. Mach No. = 1.193

Total Vehicle Thrusting Cd = 1.744. Sref = 1.625
Sustainer Coasting Cd = .813. Sref = 1.625

Total Vehicle Weight = 4932.000 lb.
Sustainer Weight = 4175.000 lb.

Booster Acceleration = -3.80 g's
Sustainer Acceleration = -.60 g's

Separation Criterion = 3.00 g's
Delta Acceleration = 3.20 g's

SECTION 4 - STABILITY AND DYNAMICS

4.1 STABILITY ANALYSIS

4.1.1 Rigid Body Stability

Source: GEM

Xcg and Xcp vs. Time (launch configuration): Figure 4-1

Minimum Rigid Static Margin (launch configuration): 4.8 Cal @ 0 Sec
83 In
14% of vehicle length

Xcg and Xcp vs. Time (second stage): Figure 4-2

Minimum Rigid Static Margin (second stage): 5.3 Cal @ 38 Sec
92 In
21% of vehicle length

First and Second Stage Static Margin vs. Time: Figure 4-3

4.1.2 Flexible Body Stability

A flexible body analysis will be conducted prior to the Mission Readiness Review.

4.2 DYNAMIC ANALYSIS

4.2.1 Pitch-Frequency/Roll-Rate History

Pitch-Frequency/Roll-Rate History: Figure 4-4

Dynamic Pressure/Angle of Attack: Figure 4-5

Aerodynamic Load Indicator: Figure 4-6

Offsets, Misalignments, Eccentricities: Table 4-1


First Stage Fin-Cant Setting: 90 Min

Second Stage Fin-Cant Setting: 21.5 Min

Roll Rate First Stage Burnout: 2.5 Cps

Roll Rate Second Stage Burnout: 3.5 Cps

BLACK BRANT X 35.026 UE 17 JAN 89
439.00 # P/L 84.0 DE 283 AZ
1ST STG XCP & XCG VS TIME

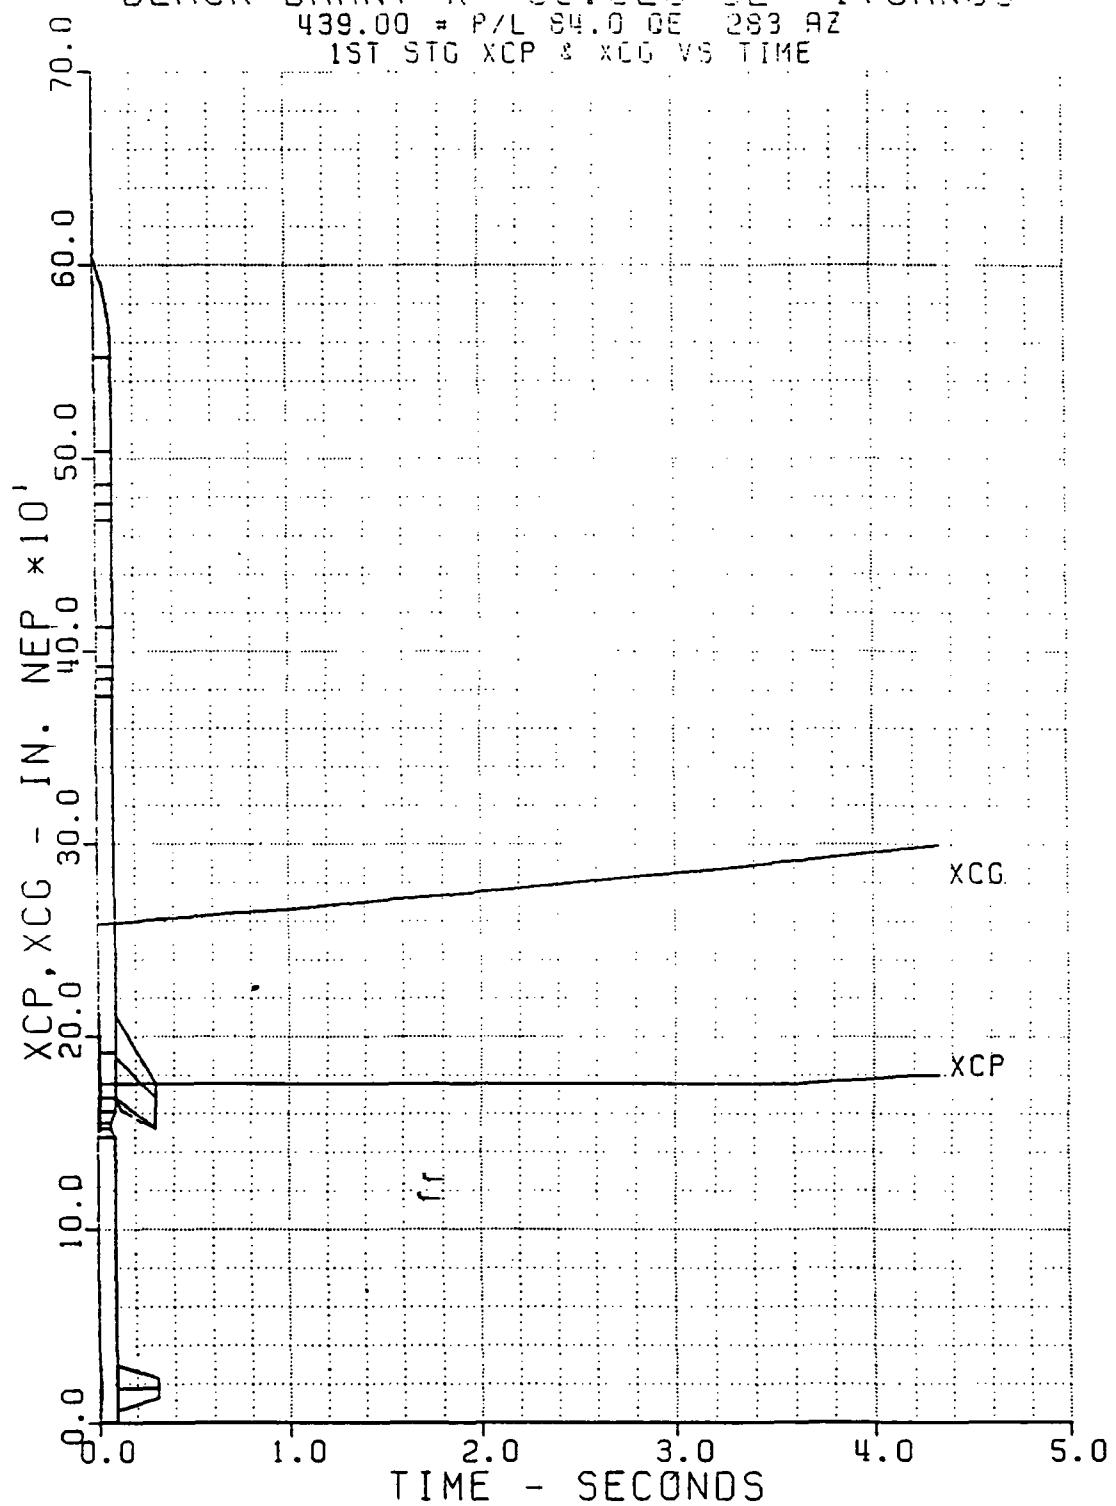

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS
OF POOR QUALITY

BLACK BRANT X 35.011 17 JAN 89
439.0 "P/L 84 QE 327 AZ ANDORIA

ACCELERATION VS TIME

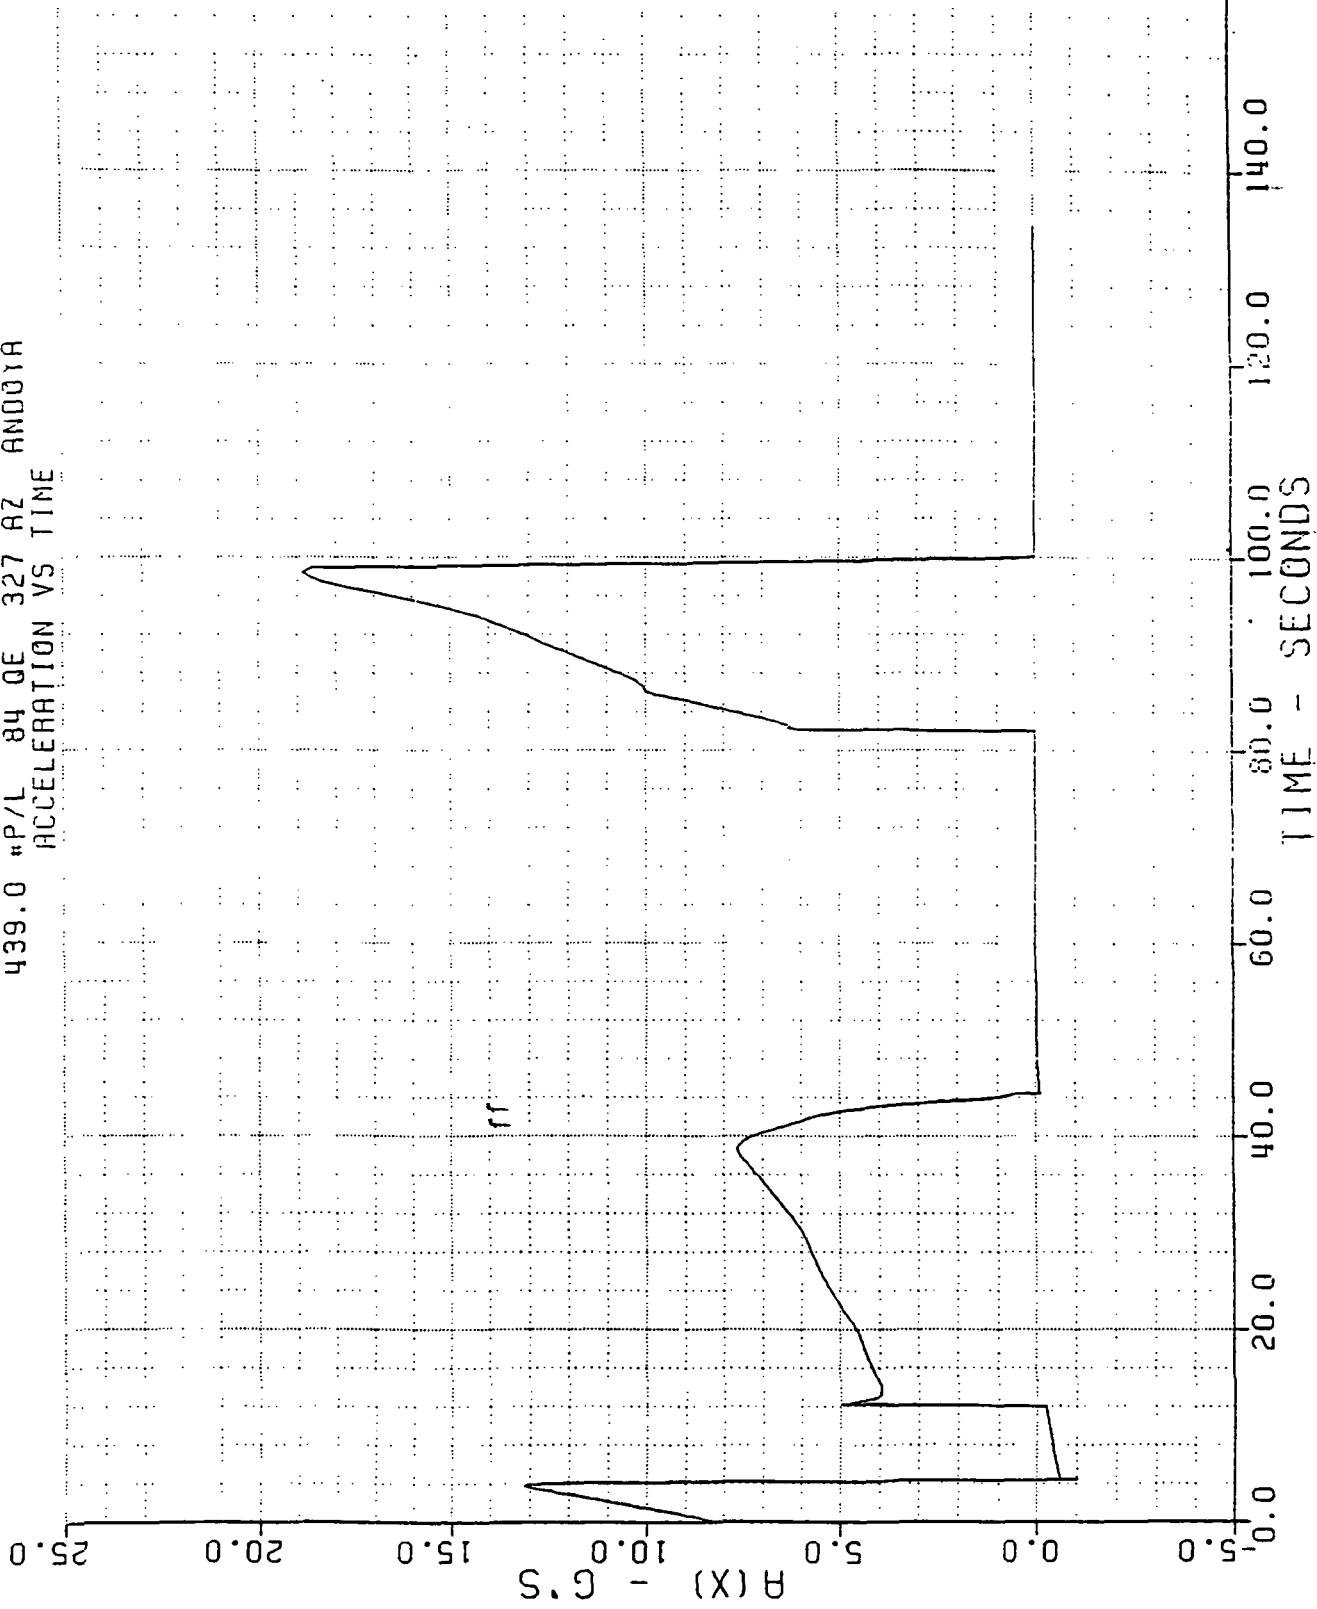


Figure 3-8. Acceleration vs. Time

BLACK BRANT X 35.011 17 JAN 89
439.0 "P/L 84 QE 327 A2 ANDORA
FLIGHT PATH ANGLE VS TIME

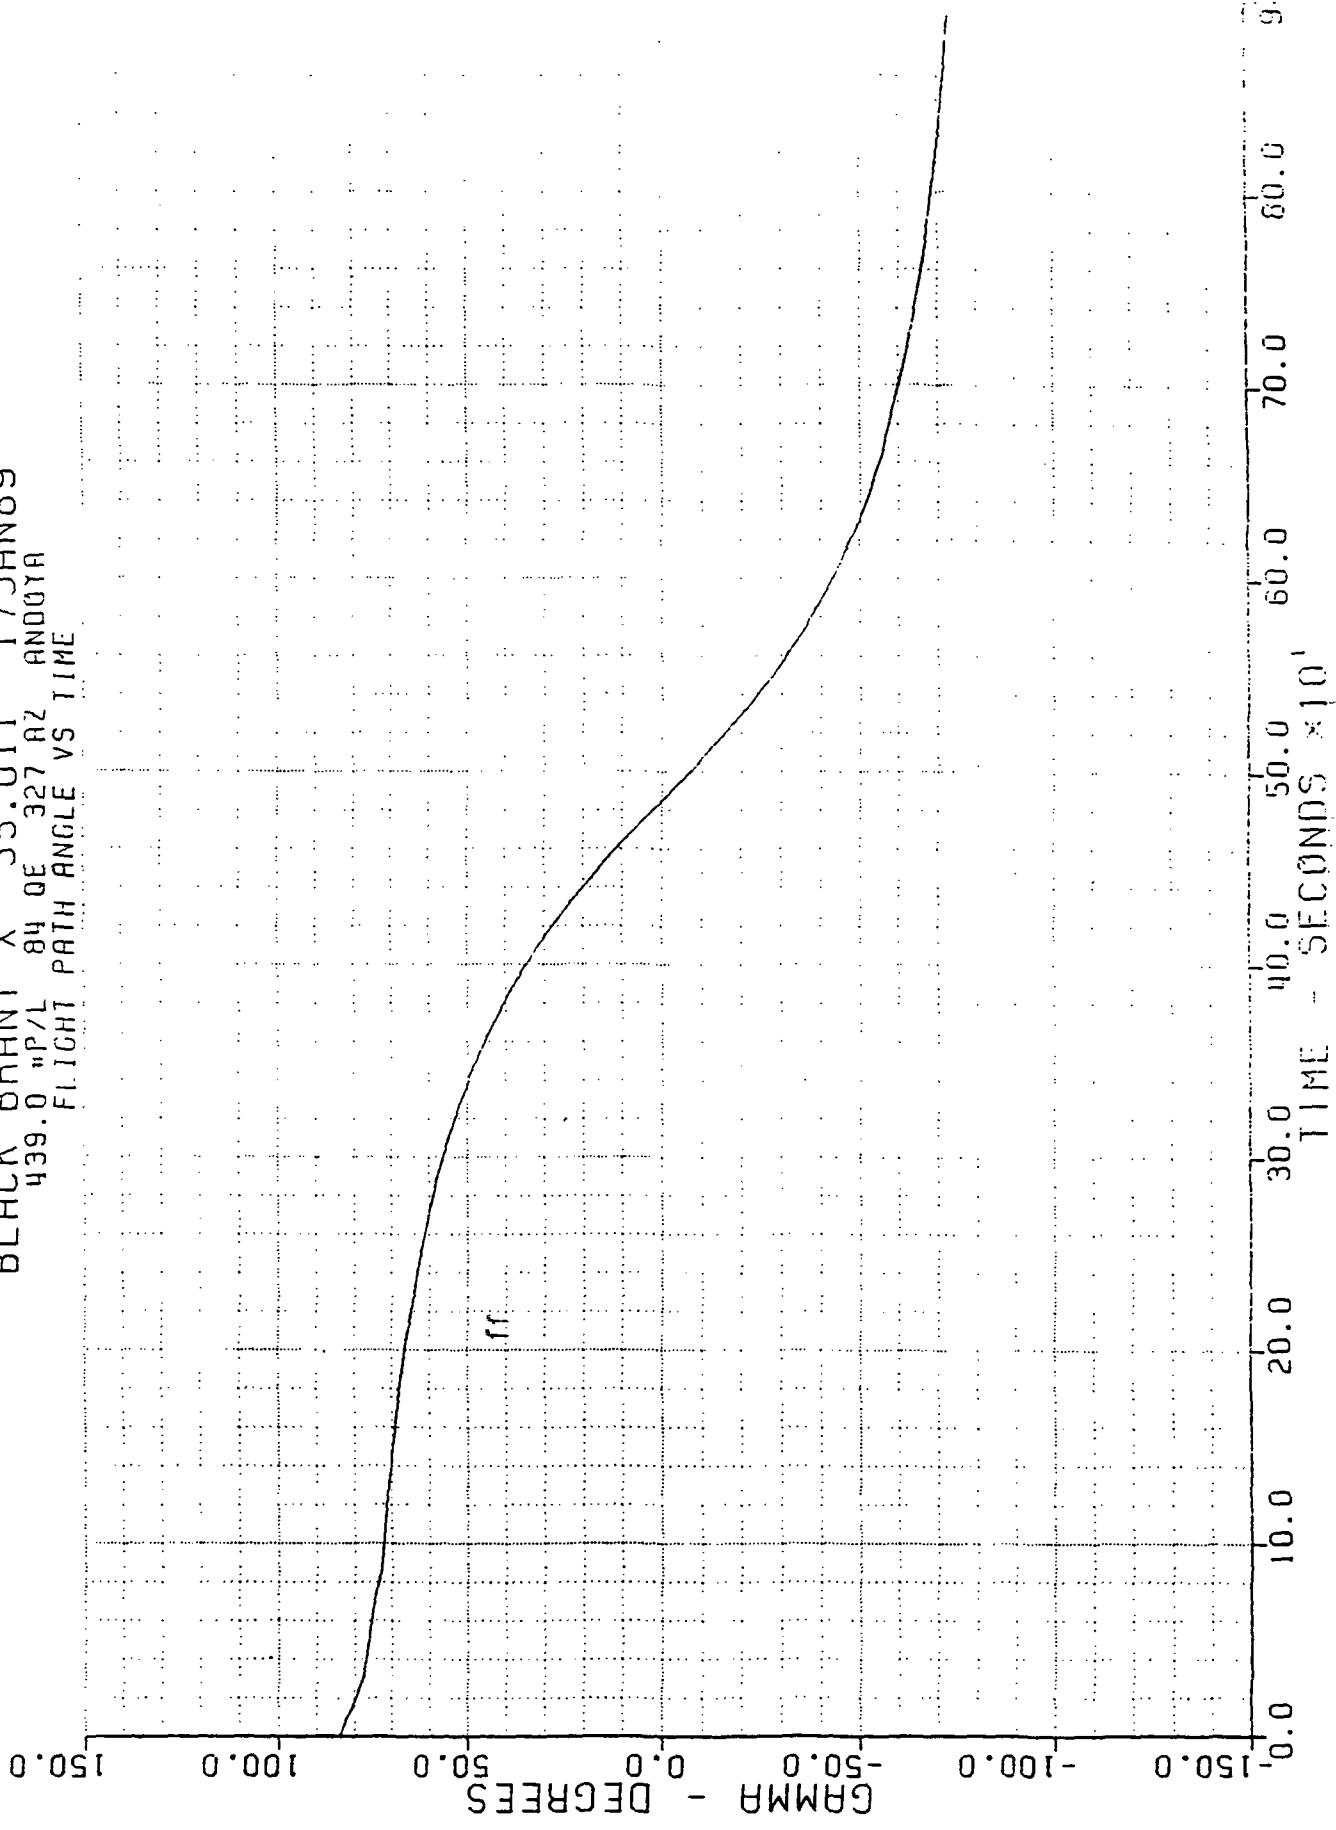


Figure 3-9. Flight Path Angle vs. Time

Table 3-2. Drag Separation Analysis

```
*****  
*Drag Separation Analysis. Version 1.0*  
*****  
Vehicle f.d.: 35.011 12JAN88  
  
Staging Event: TERRIER / BBVC SEPARATION  
-----  
Time = 4.400  
-----  
Altitude = 2787.000 ft. Velocity = 1319.000 fps.  
Q = 1904.207 psf. Mach No. = 1.193  
Total Vehicle Thrusting Cd = 1.744. Sref = 1.625  
Sustainer Coasting Cd = .813. Sref = 1.625  
Total Vehicle Weight = 4932.000 lb.  
Sustainer Weight = 4175.000 lb.  
Booster Acceleration = -3.80 g's  
Sustainer Acceleration = -.60 g's  
Separation Criterion = 3.00 g's  
Delta Acceleration = 3.20 g's
```

SECTION 4 - STABILITY AND DYNAMICS

4.1 STABILITY ANALYSIS

4.1.1 Rigid Body Stability

Source: GEM

Xcg and Xcp vs. Time (launch configuration): Figure 4-1

Minimum Rigid Static Margin (launch configuration): 4.8 Cal @ 0 Sec
83 In
14% of vehicle length

Xcg and Xcp vs. Time (second stage): Figure 4-2

Minimum Rigid Static Margin (second stage): 5.3 Cal @ 38 Sec
92 In
21% of vehicle length

First and Second Stage Static Margin vs. Time: Figure 4-3

4.1.2 Flexible Body Stability

A flexible body analysis will be conducted prior to the Mission Readiness Review.

4.2 DYNAMIC ANALYSIS

4.2.1 Pitch-Frequency/Roll-Rate History

Pitch-Frequency/Roll-Rate History: Figure 4-4

Dynamic Pressure/Angle of Attack: Figure 4-5

Aerodynamic Load Indicator: Figure 4-6

Offsets, Misalignments, Eccentricities: Table 4-1

First Stage Fin-Cant Setting: 90 Min

Second Stage Fin-Cant Setting: 21.5 Min

Roll Rate First Stage Burnout: 2.5 Cps

Roll Rate Second Stage Burnout: 3.5 Cps

BLACK BRANT X 35.011 UE 17.04.89
439.00 # P/L 84.0 DE 327 Hz
1ST STG XCP & XCG VS TIME

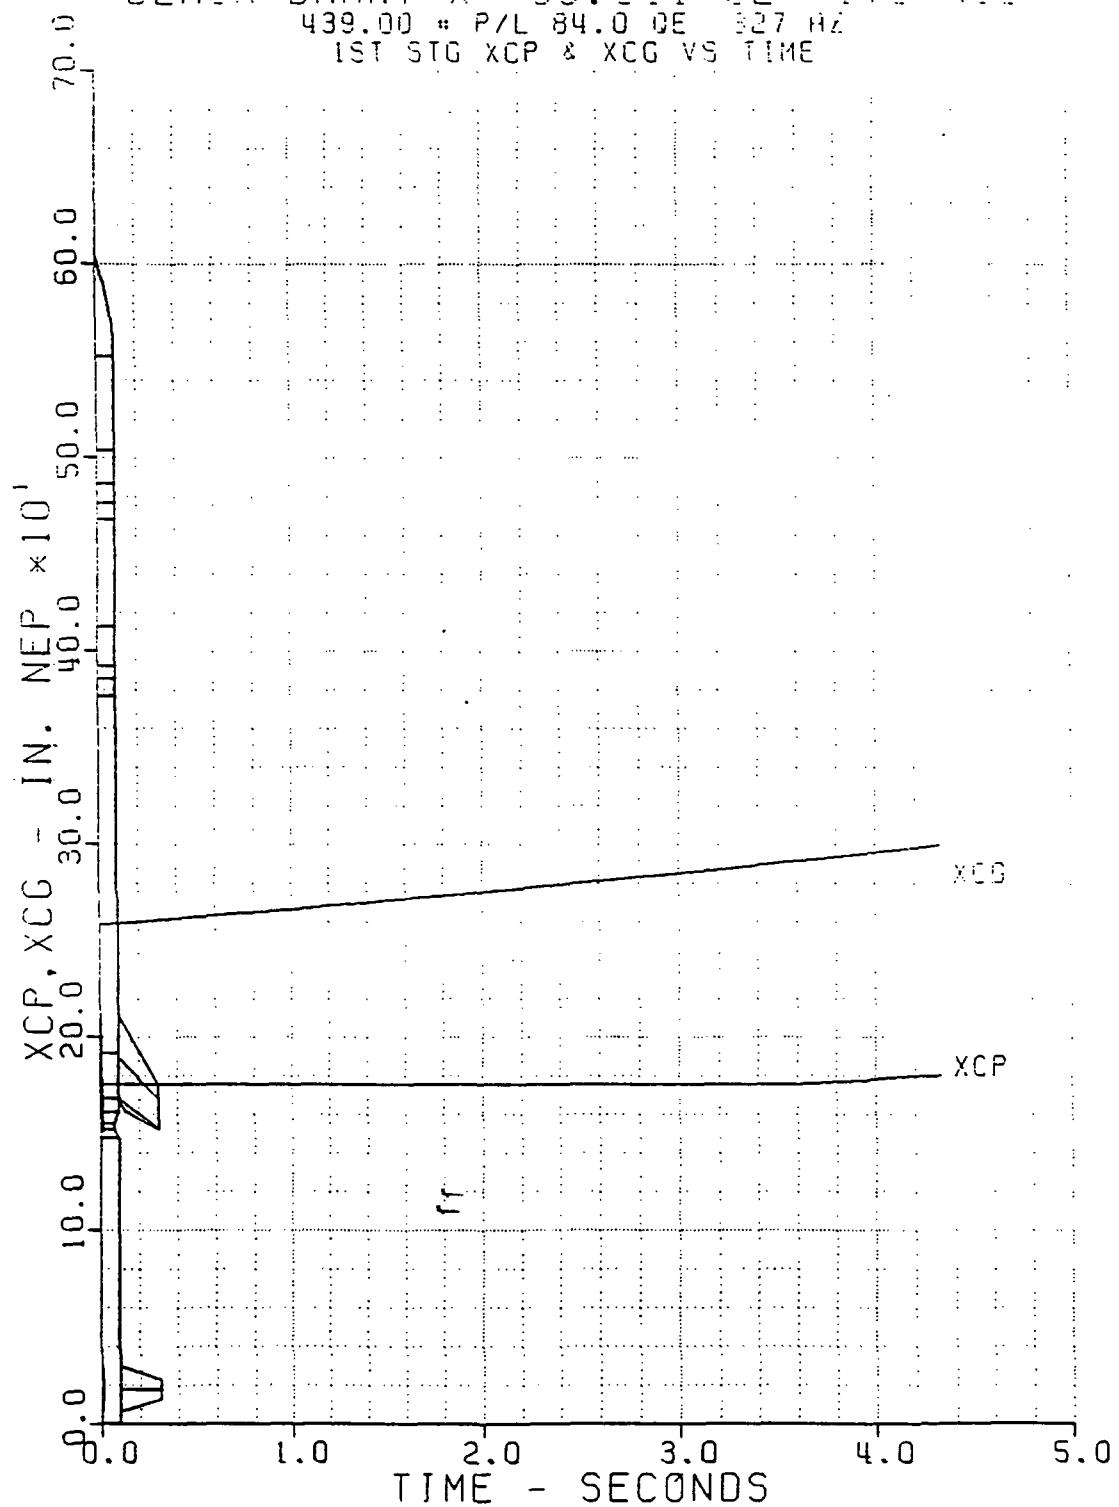


Figure 4-1. First Stage Xcp and Xcg vs. Time

ORIGINAL PAGE IS
OF POOR QUALITY

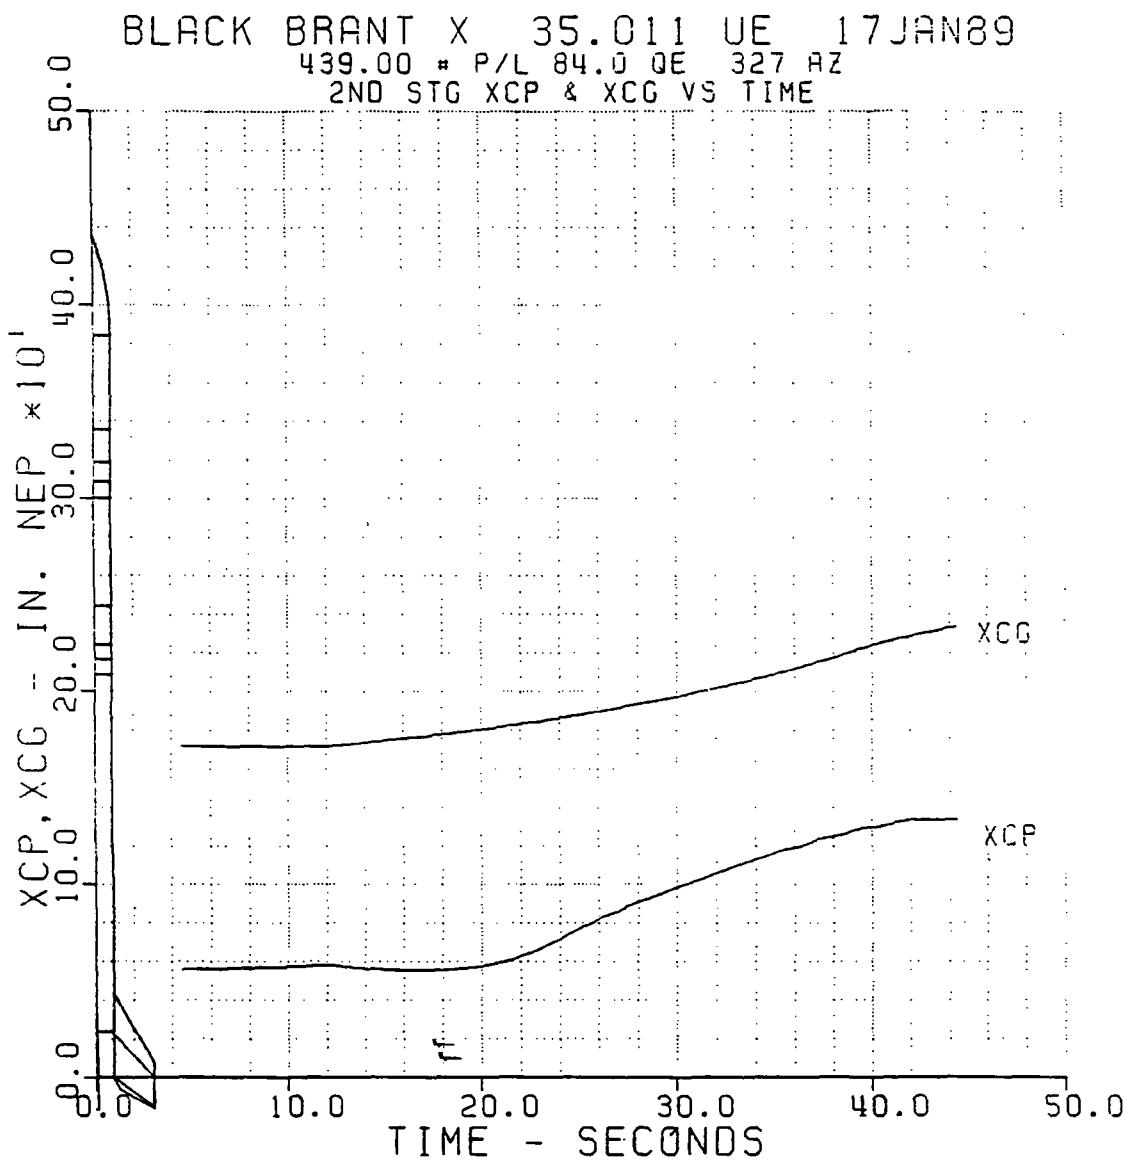


Figure 4-2. Second Stage Xcp and Xcg vs. Time

ORIGINAL PAGE IS
OF POOR QUALITY

BLACK BRANT X 35.011 UE 17 JAN 89
439.00 # P/L 84.0 08 327 08
STATIC MARGIN VS TIME

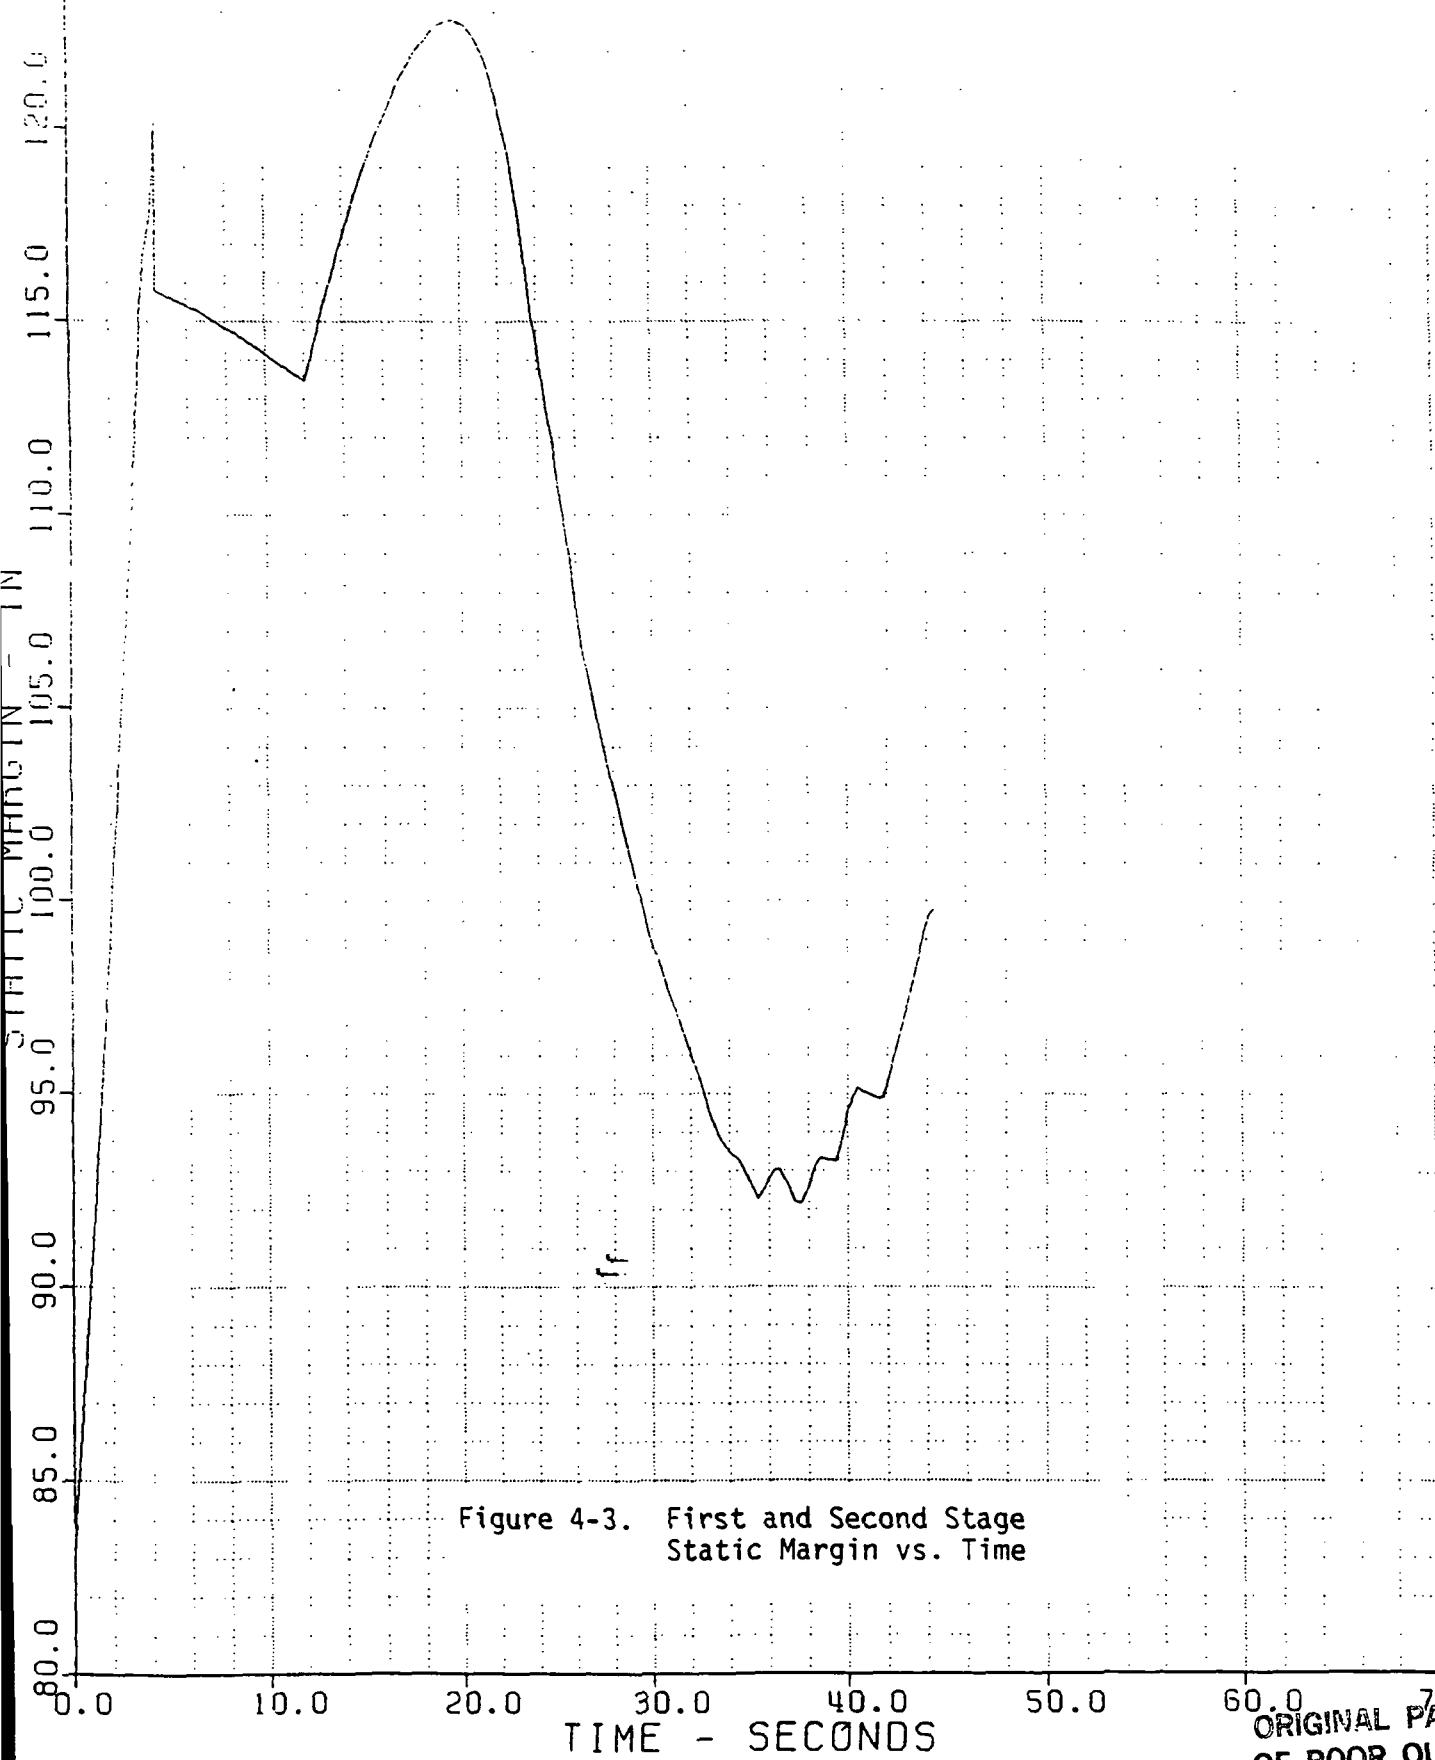


Figure 4-3. First and Second Stage
Static Margin vs. Time

ORIGINAL PAGE IS
OF POOR QUALITY

BLACK BRAUN X 35.011 17 JUN 89
439.0 P/L 84.0 DE NOR NOMINAL 90. XX MIN FIN CANT
ROLL RATE, PITCH FREQUENCY VS TIME

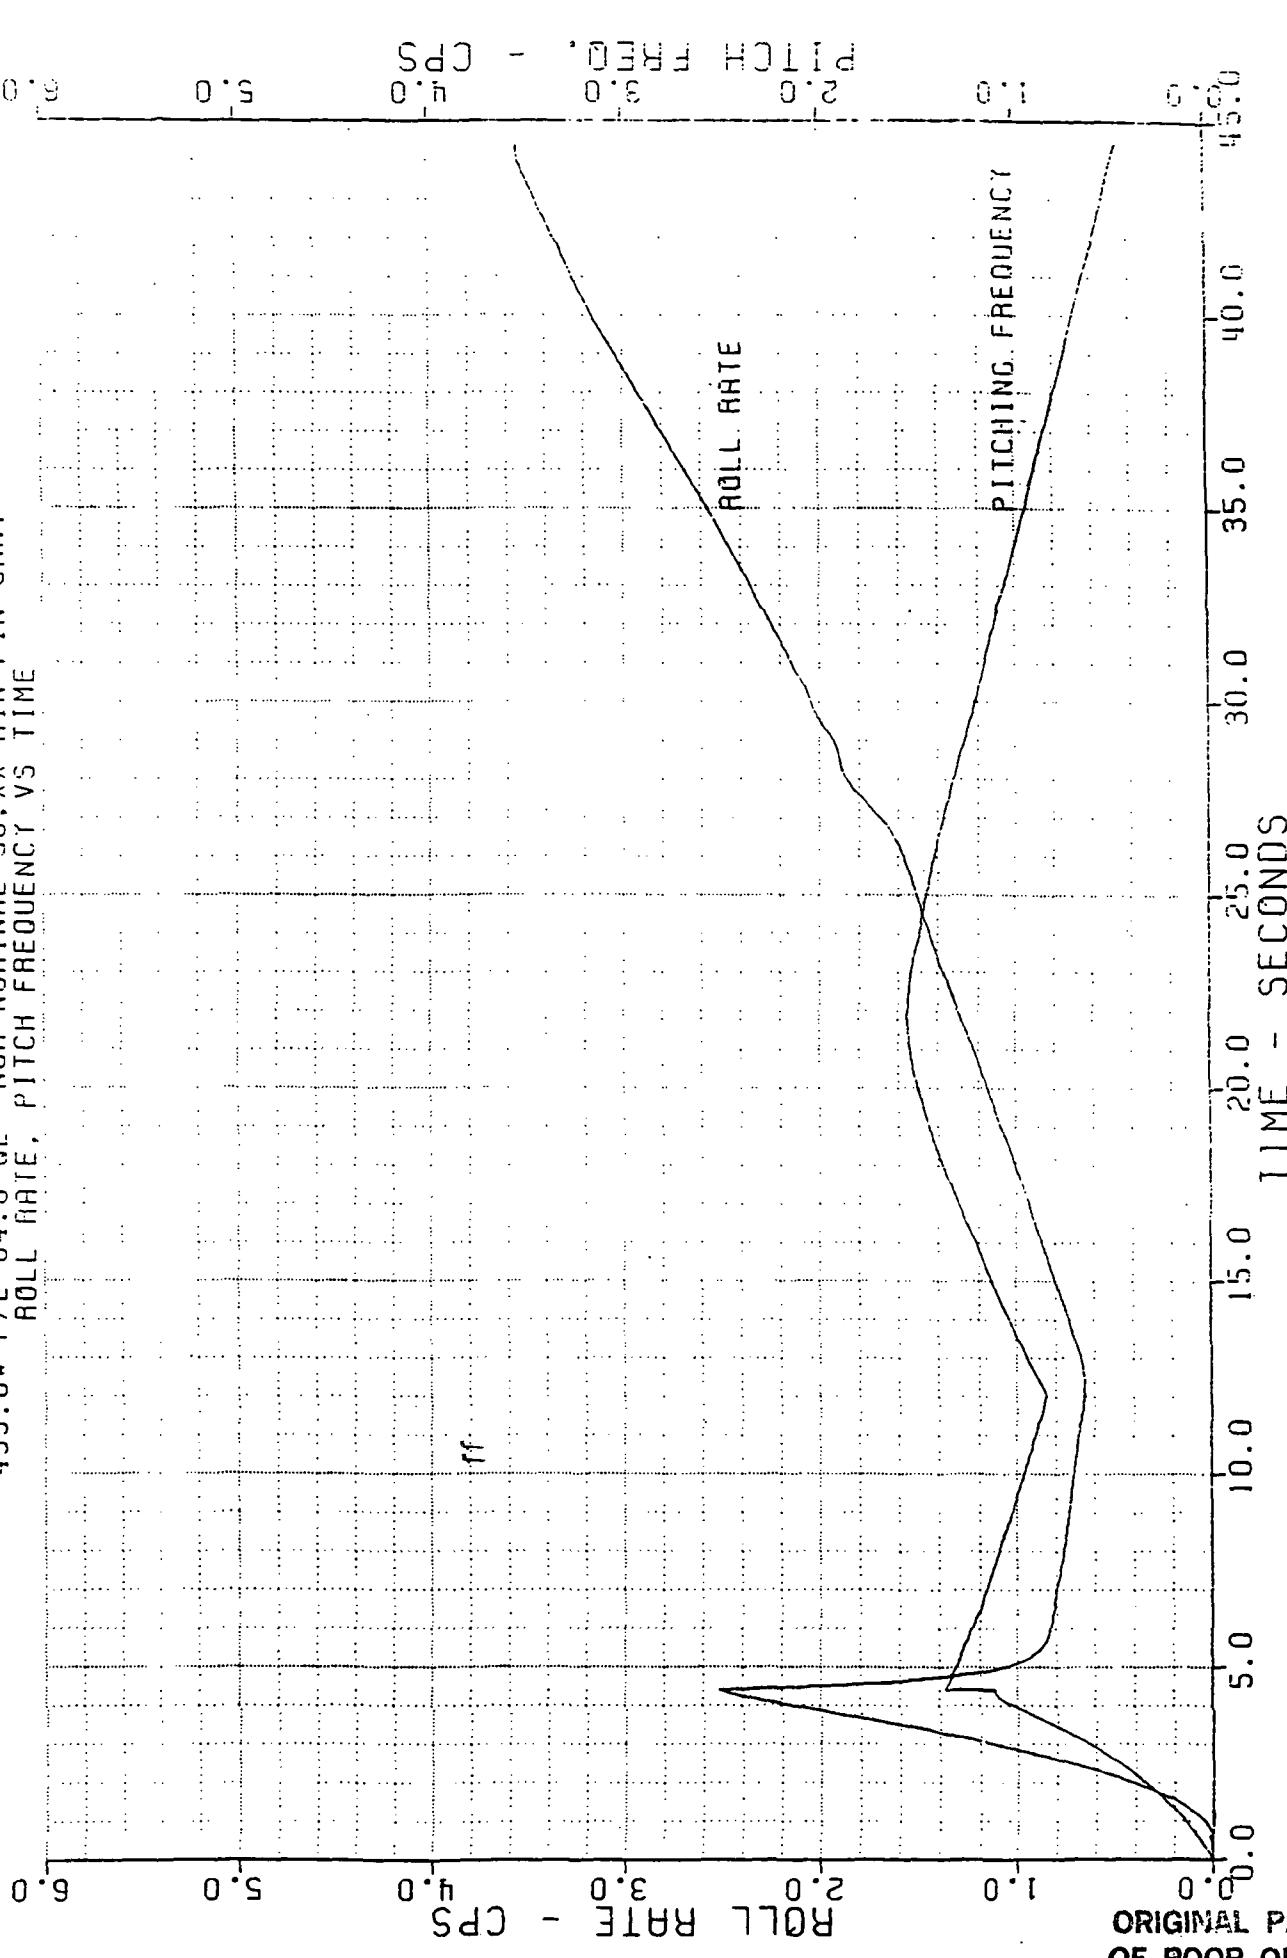


Figure 4-4. Roll Rate/Pitch Frequency vs. Time

ORIGINAL PAGE IS
OF POOR QUALITY

BLACK BRANT X 35.011 17 JAN 89
439.0# P/L 84.0 QF NUR NOMINAL 90, XX MIN FIN CANT
0+DELTA

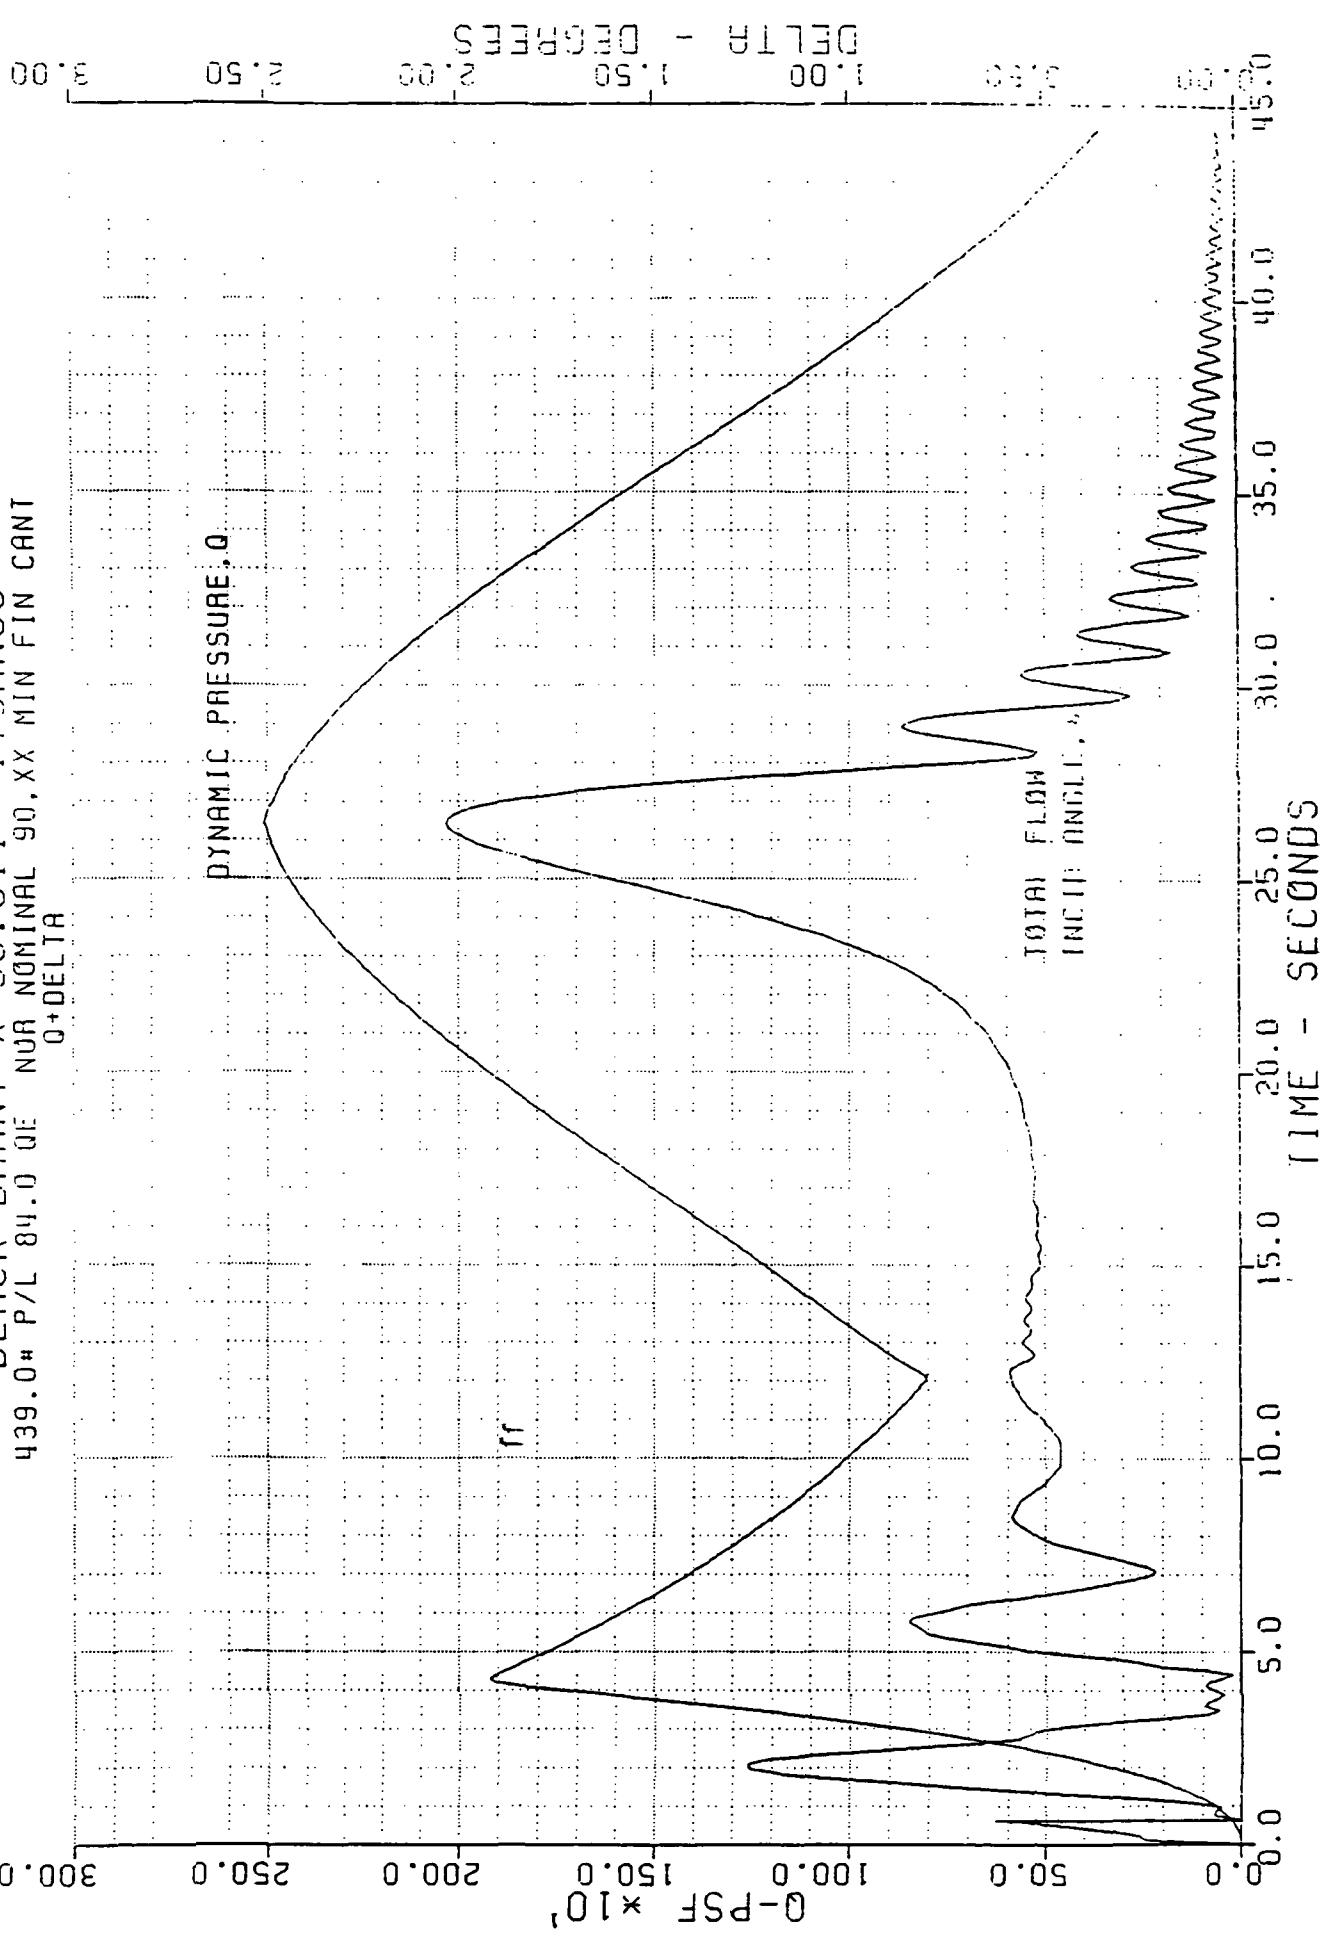


Figure 4-5. Dynamic Pressure, Delta
vs. Time

ORIGINAL PAGE IS
OF POOR QUALITY

439.0* P/L 84.0 DE NOR NOMINAL 90.00 MIN FIN CANT
BLACK GRANT X 35.011 17 JAN 89
Q*DELTA

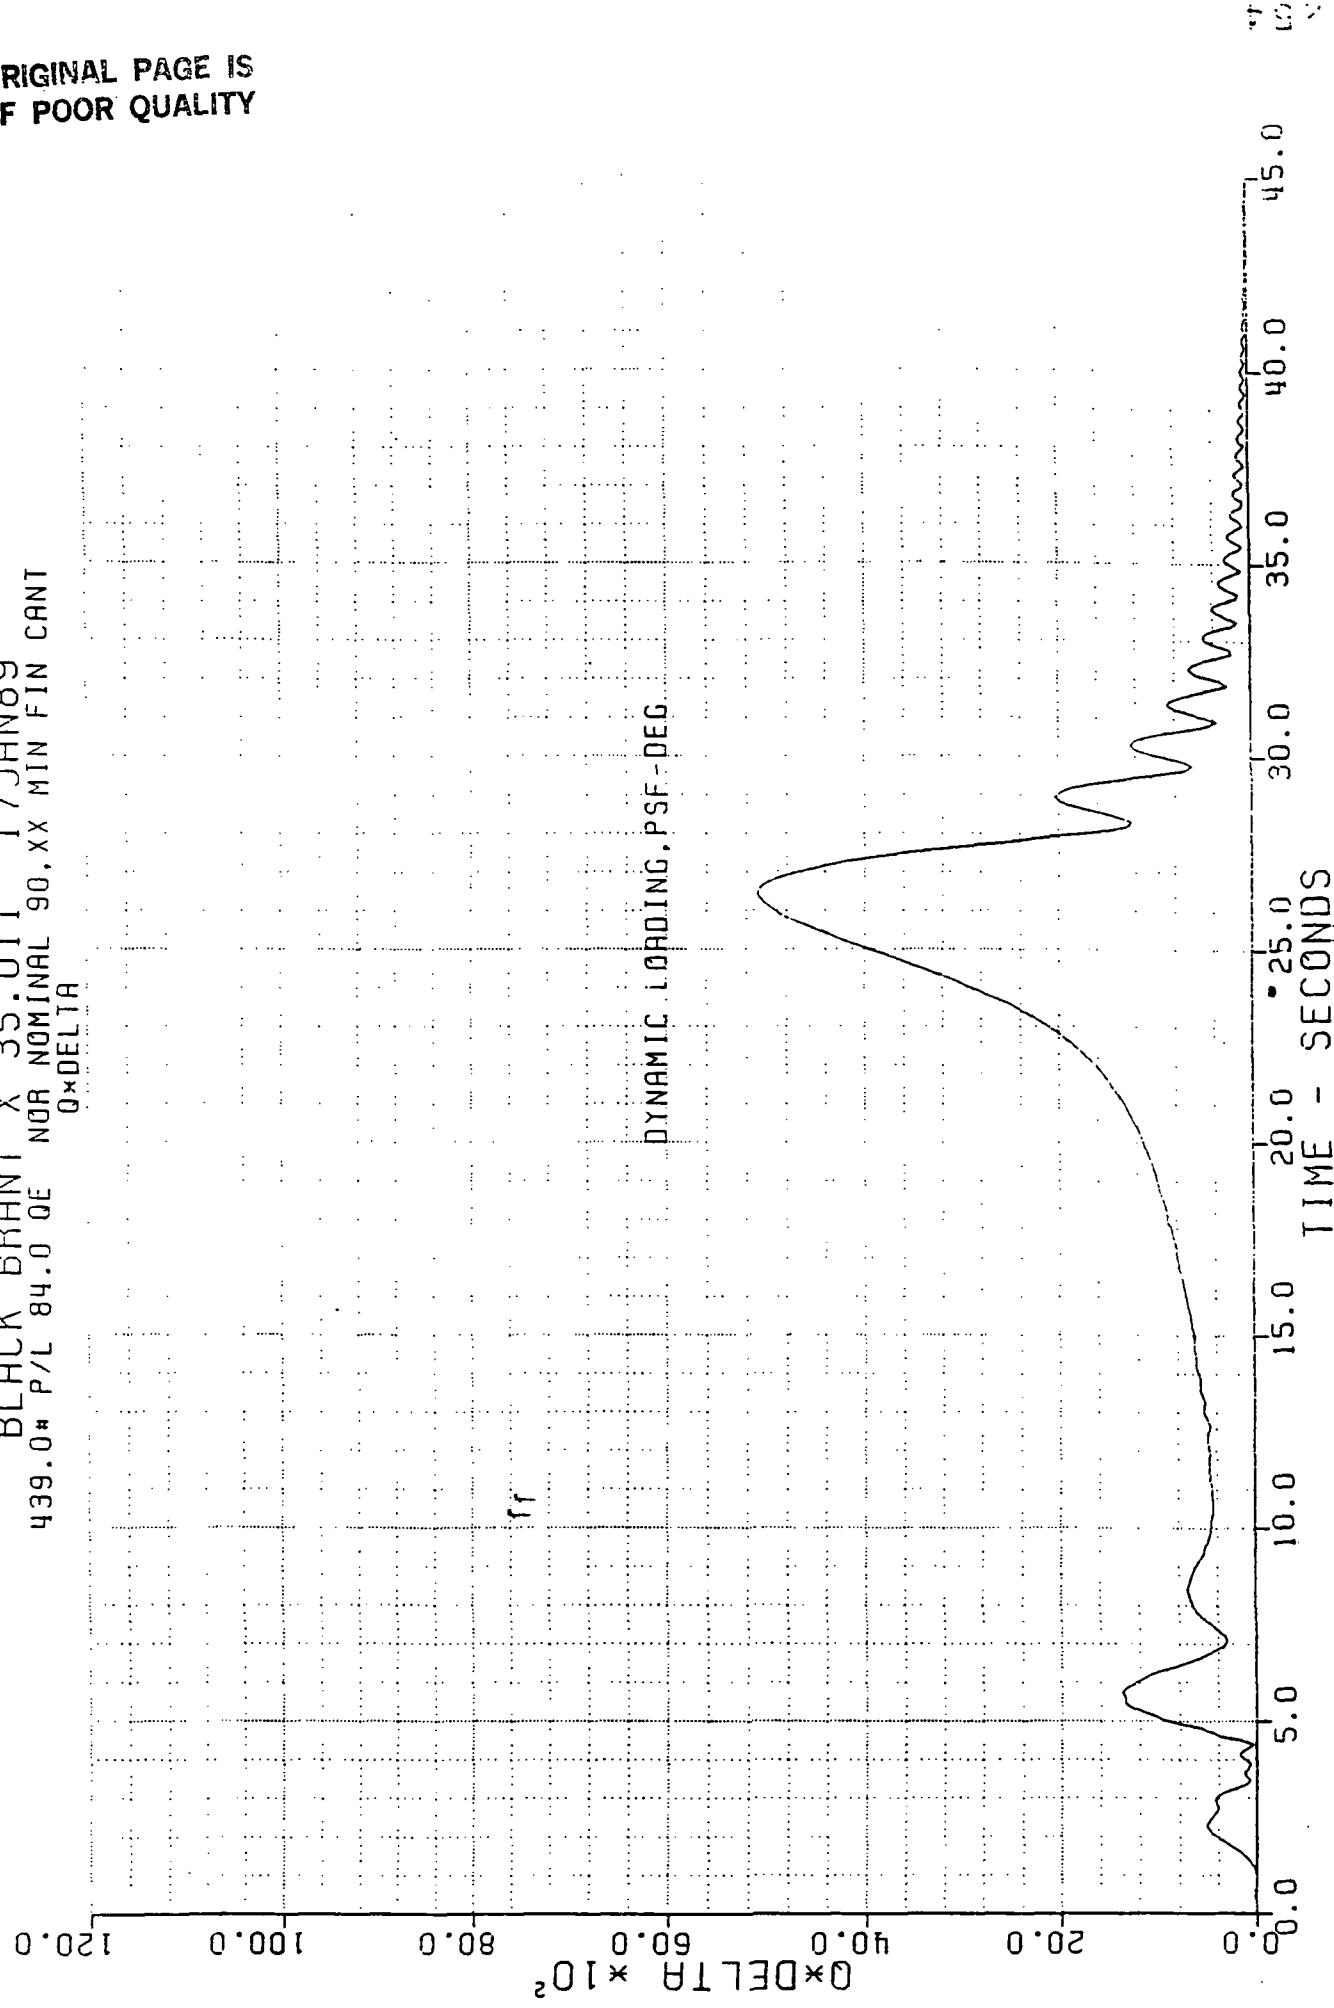


Figure 4-6. Dynamic Pressure Times
Delta vs. Time

**Table 4-1. Black Brant X 35.011 UE
Misalignments, Offsets,
and Eccentricities**

LAUNCH CONFIGURATION

Thrust Misalignment:	.2°
CG Offset in Z Axis:	+.23 in
Thrust Offset in Y Axis:	-.23 in
Thrust Offset in Z Axis:	+.23 in
Tail Misalignment:	.2°

SECOND STAGE

Thrust Misalignment:	.2°
CG Offset in Z Axis:	+.23 in
Thrust Offset in Y Axis:	-.23 in
Thrust Offset in Z Axis:	+.23 in
Tail Misalignment:	.2°

Pitch/Roll Crossing Occurs at: 24.5 Sec

Pitch/Roll Crossing Frequency: 1.5 Cps

4.2.2 Despin Analysis

Source: Wallops Flight Facility Despin Program

Physical Properties/Roll-Rate Parameters: Table 4-2

Resulting Despin Weights Required (each): 119.8 grams/wt

**Table 4-2. Black Brant X 35.011 UF
Despin of Payload, Physical
Properties and Roll-Rate
Parameters**

Initial Roll Rate:	4.0 cps
I _{xx} of Payload and Motor Minus Nose Cone:	4.91 sl-ft ²
Final Roll Rate:	2.04 cps
Cable Density:	0.029 lb/ft
Cable Length:	7.91 ft (1.75 wrap)
Wrap Radius:	0.713 ft
Required Despin Weight:	.2641 lb/wt (119.8 gms/wt)

I_{xx} Booms Stowed = 2.3 sl-ft²

I_{xx} Booms Deployed = 4.7 sl-ft²

Booms despin payload to 1 cps nominally.

Initial Roll Rate = 5 = Final = 1.25 cps

Initial Roll Rate = 3 = Final = 0.75 cps

SECTION 6 - DISPERSION ESTIMATES

6.1 THEORETICAL DISPERSION

Source: "Theoretical Dispersion Study of First, Second, and Third Stages of the Black Brant X Unguided Sounding Rocket Vehicle", Carole Flores and James Andrews, NASA/GSFC/WFF.

Nominal Apogee Altitude: 724.2 Km

2σ Apogee Altitude Dispersion (about the nominal): 52.6 Km

2σ Low Apogee Altitude: 671.6 Km

Altitude vs. Time for 2σ Low Flight: Figure 6-1

2σ Impact Range Dispersion: 299.8 Km

6.2 DATA BASE DISPERSION

Source: Data Base

Nominal Apogee Altitude: 724.2 Km

Apogee Altitude Mean Displacement: -5.8 Km

Apogee Altitude 2σ Dispersion (about the mean): 50.2 Km

2σ Low Apogee Altitude: 674 Km

Altitude vs. Time for 2σ Low Flight: Figure 6-1

Cross Range Mean Displacement: 51.2 Km

Cross Range 2σ Dispersion (about the mean): 277.0 Km

Down Range Mean Displacement: -27.4 Km

Down Range 2σ Dispersion (about the mean): 283.1 Km

Dispersion Summary for 35.XXX Vehicle Family: Appendix A

BLACK BRANT X 35.011 24 JAN 89
TWO SIGMA LOW TRAJECTORY -
ALTITUDE VS TIME

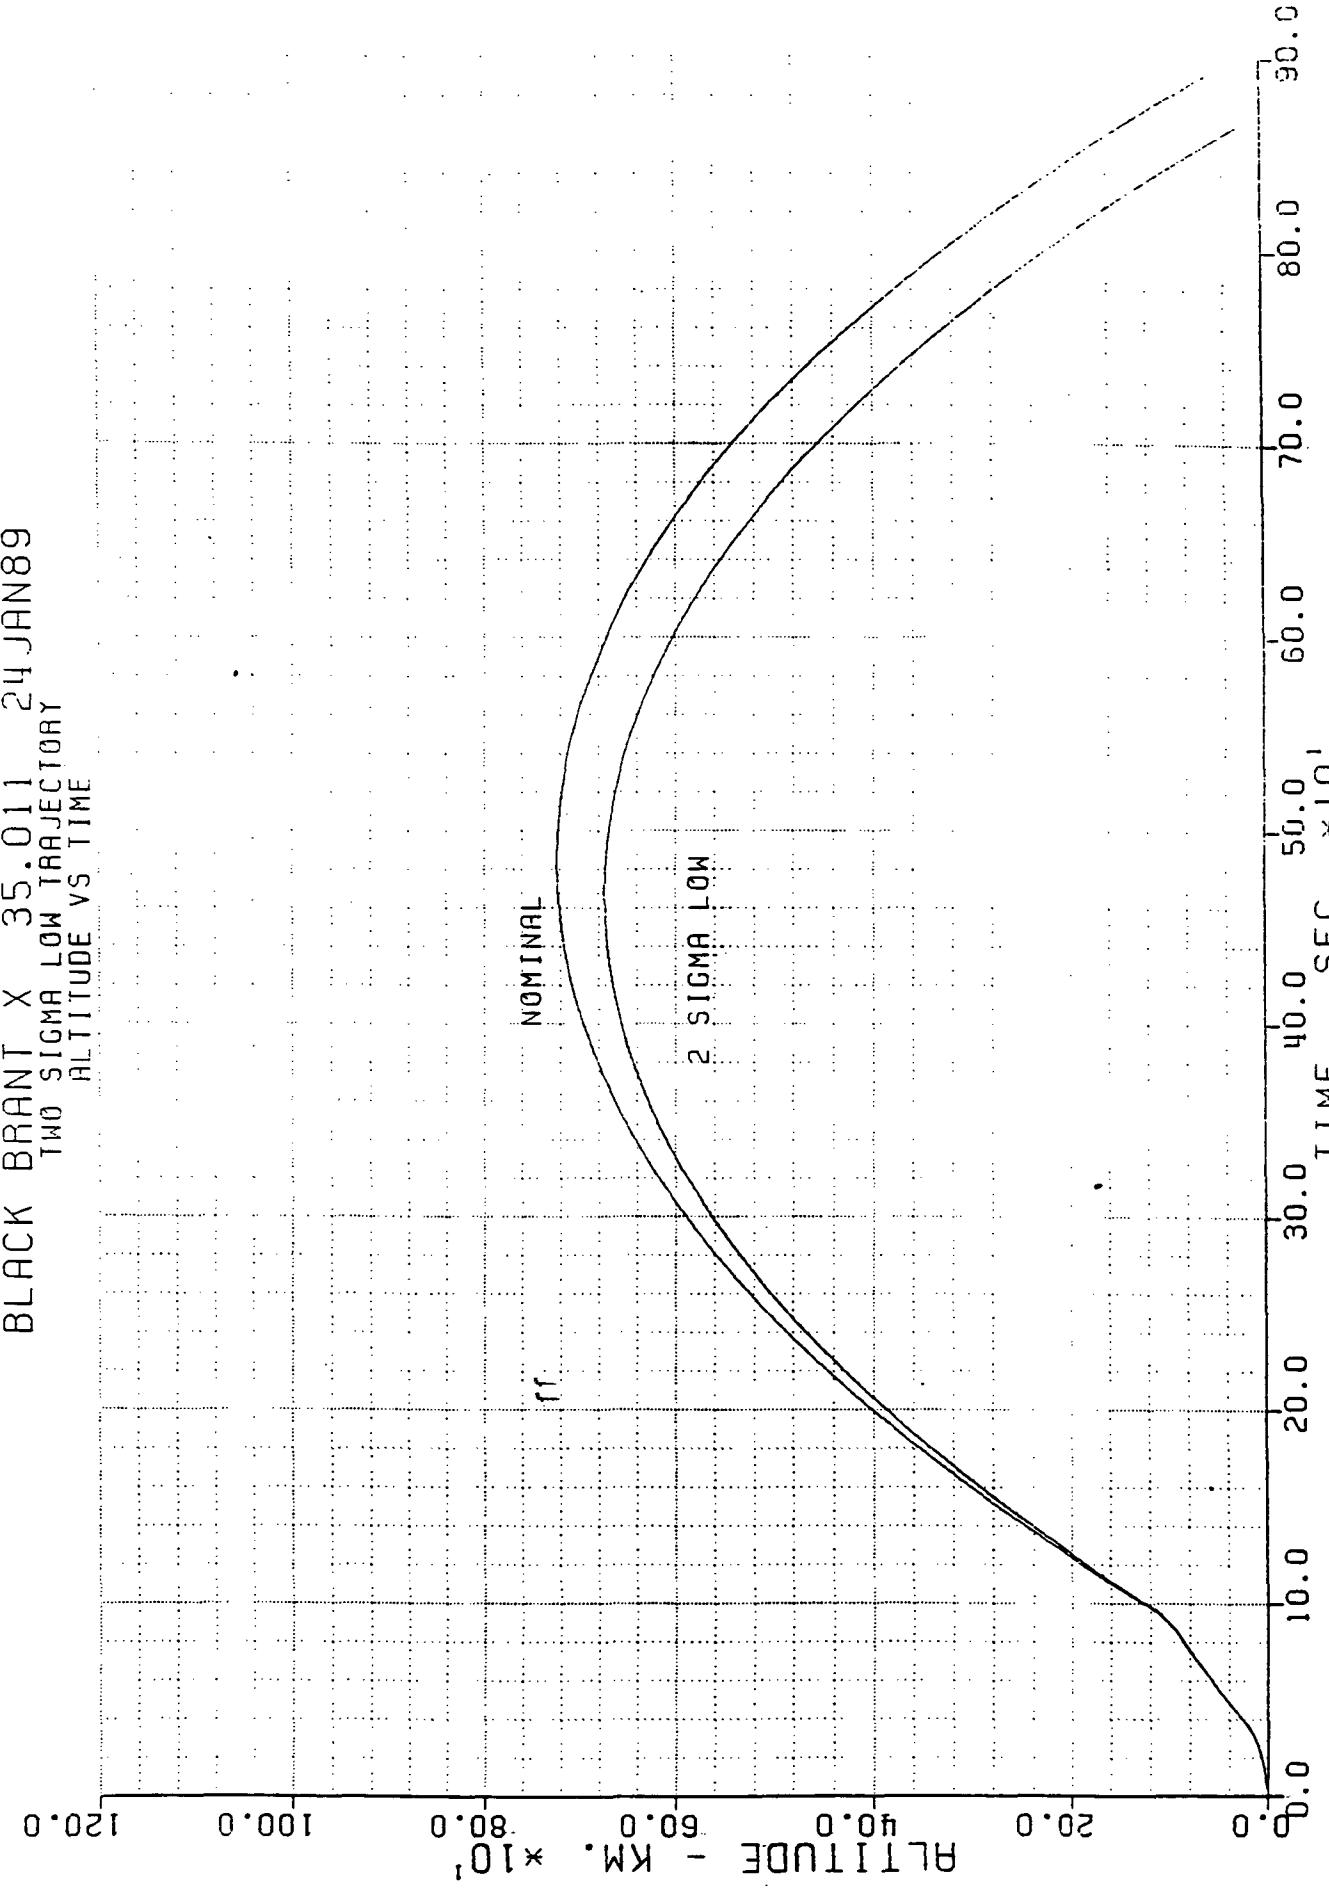


Figure 6-1. Two Sigma Low Trajectory -
Altitude vs. Time

APPENDIX A
DISPERSION DATA

fr

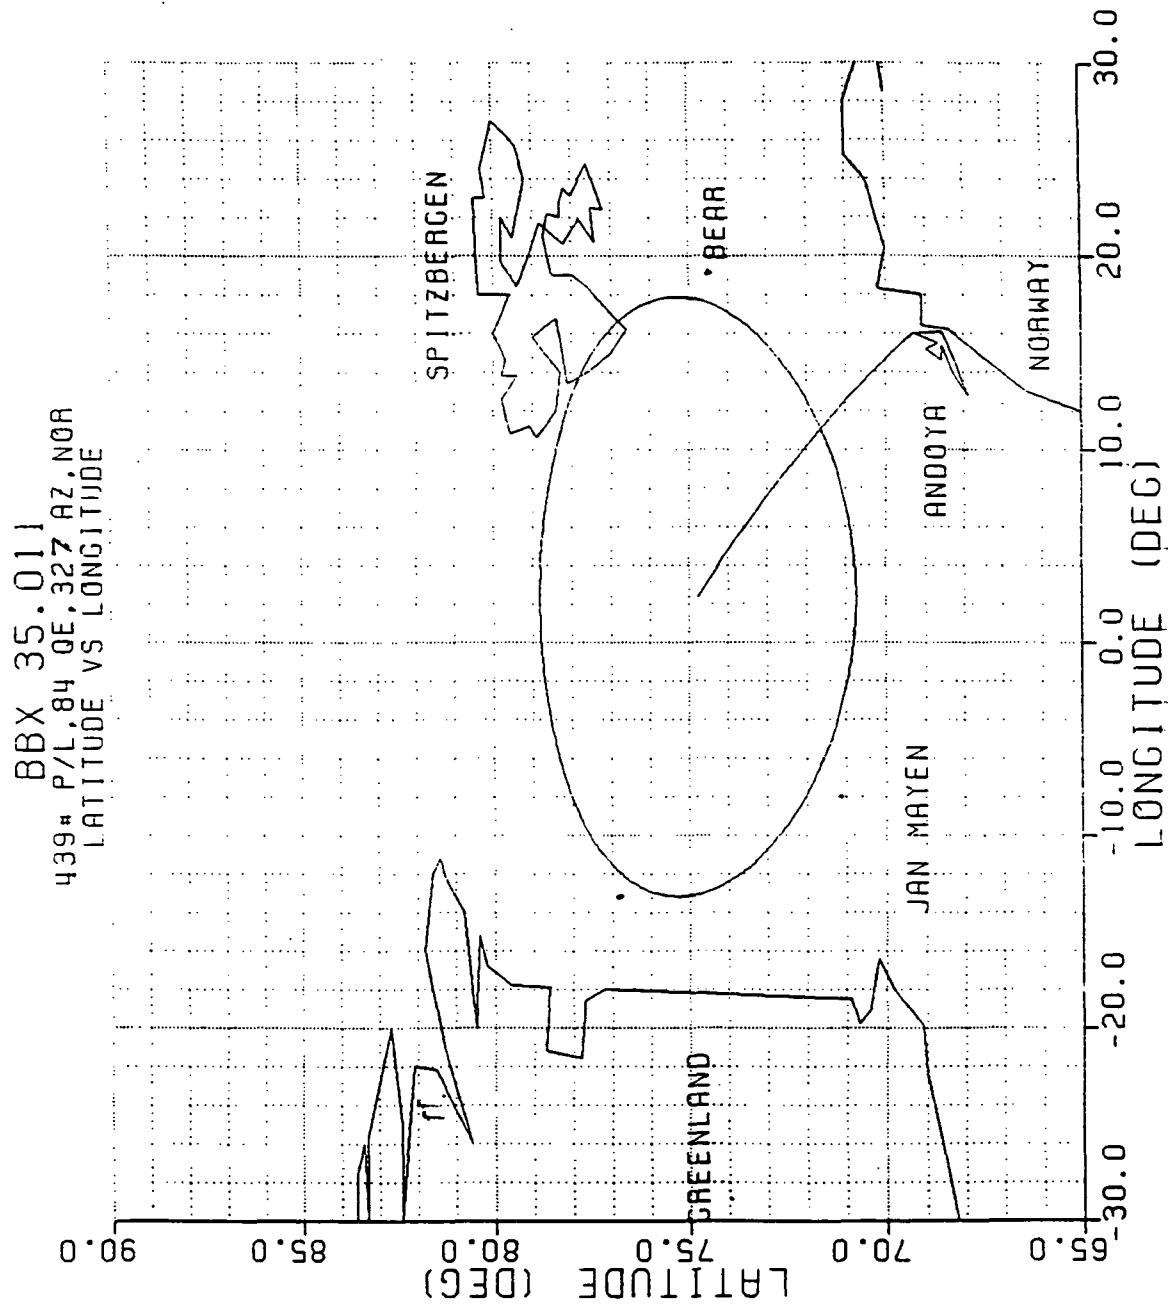


Figure A-1. Latitude vs. Longitude

Table A-1. Historical Dispersion Data
for Similar Vehicles

***** P R E D I C T E D *****							***** F L I G H T *****			
VEHICLE NUMBER	P/L WGT. (LBS)	LAUNCH DATE	LAUNCH SITE	QE (DEG)	APOGEE ALTITUDE (KM)	IMPACT RANGE (KM)	IMPACT ALTITUDE (KM)	DOWN RG MISS (KM)	CROSS RG MISS (KM)	COMMENTS
<i>ff</i>										
35.013	398.00	04/22/86	W1	81.0	679.50	1091.2	689.40	1067.0	-27.55	-83.59
35.014	767.00	05/13/86	W1	85.7	425.63	371.71	403.20	425.00	49.206	-64.41
35.015	293.00	04/01/86	FB	83.5	960.50	962.80	913.40	1204.5	192.32	333.81
35.016	293.00	04/13/86	FB	83.5	960.50	962.80	963.78	812.88	-152.6	44.360
35.017	289.25	01/19/88	FB	82.9	923.15	1061.4	927.50	1080.4	2.080	190.52
35.023	260.00	03/04/88	FB	83.1	1074.3	1190.1	1107.4	823.20	-371.5	105.96

* - DENOTES VEHICLES THAT WERE NOT INCLUDED IN THE IMPACT DISPERSION

** - DENOTES VEHICLES THAT WERE NOT INCLUDED IN THE APOGEE DISPERSION

*** - DENOTES VEHICLES THAT WERE NOT INCLUDED IN APOGEE OR IMPACT DISPERSIONS

N/R - DENOTES DATA NOT RECEIVED FROM MISSION ANALYST

N/A - DENOTES DATA NOT AVAILABLE (SEE COMMENTS)

PERFORMANCE AND ANALYSIS
DESIGN REVIEW
FOR
BLACK BRANT X 35.026 UE

1
MARVIN C. ALTSTATT
AEROSPACE ENGINEER

JANUARY 31, 1989

ABSTRACT

This report presents the results of a preflight mission analysis on the following flight:

Name of Mission: Black Brant X 35.026 HE

Location of Launch Site: Andoya, Norway

Launcher: Universal II, 40 ft. rail travel

Proposed Date of Launch: December 1, 1989

Principal Scientific Investigator: Dr. David Wintingham, SWRI

Payload Manager: Mr. John van Overeem

Purpose of Mission: Ion acceleration studies.

Estimated Payload Weight: 439 Lbs

Predicted Apogee for Flight: 721.7 Km

Predicted Ballistic Impact Range for Flight: 782.1 Km

Minimum Rigid Static Margin for Flight and Time of Occurrence: 4.8 cal or
83 in at
0 sec

Aerodynamic Heating Index: 1.68×10^8 ft-lb/ft²

Apogee-Altitude 2σ Dispersion: 50.0 Km

2σ Low Apogee Altitude: 671.7 Km

Impact-Range 2σ Dispersion: 265.4 Km

The comprehensive success criteria is 400 Km horizontal travel above 500 Km altitude. This is met by the nominal trajectory. The minimum success criteria is 200 Km above 500 Km altitude which is met by the 2σ deviation from the nominal trajectory. \Leftarrow

SECTION 2 - LAUNCH VEHICLE DESCRIPTION

2.1 VEHICLE CONFIGURATION


Payload Configuration: Figure 2-1

Launch Configuration: Figure 2-2

2.2 PHYSICAL PROPERTIES

Payload/Vehicle Physical Properties: Table 2-1

STATION
(in. TNT)

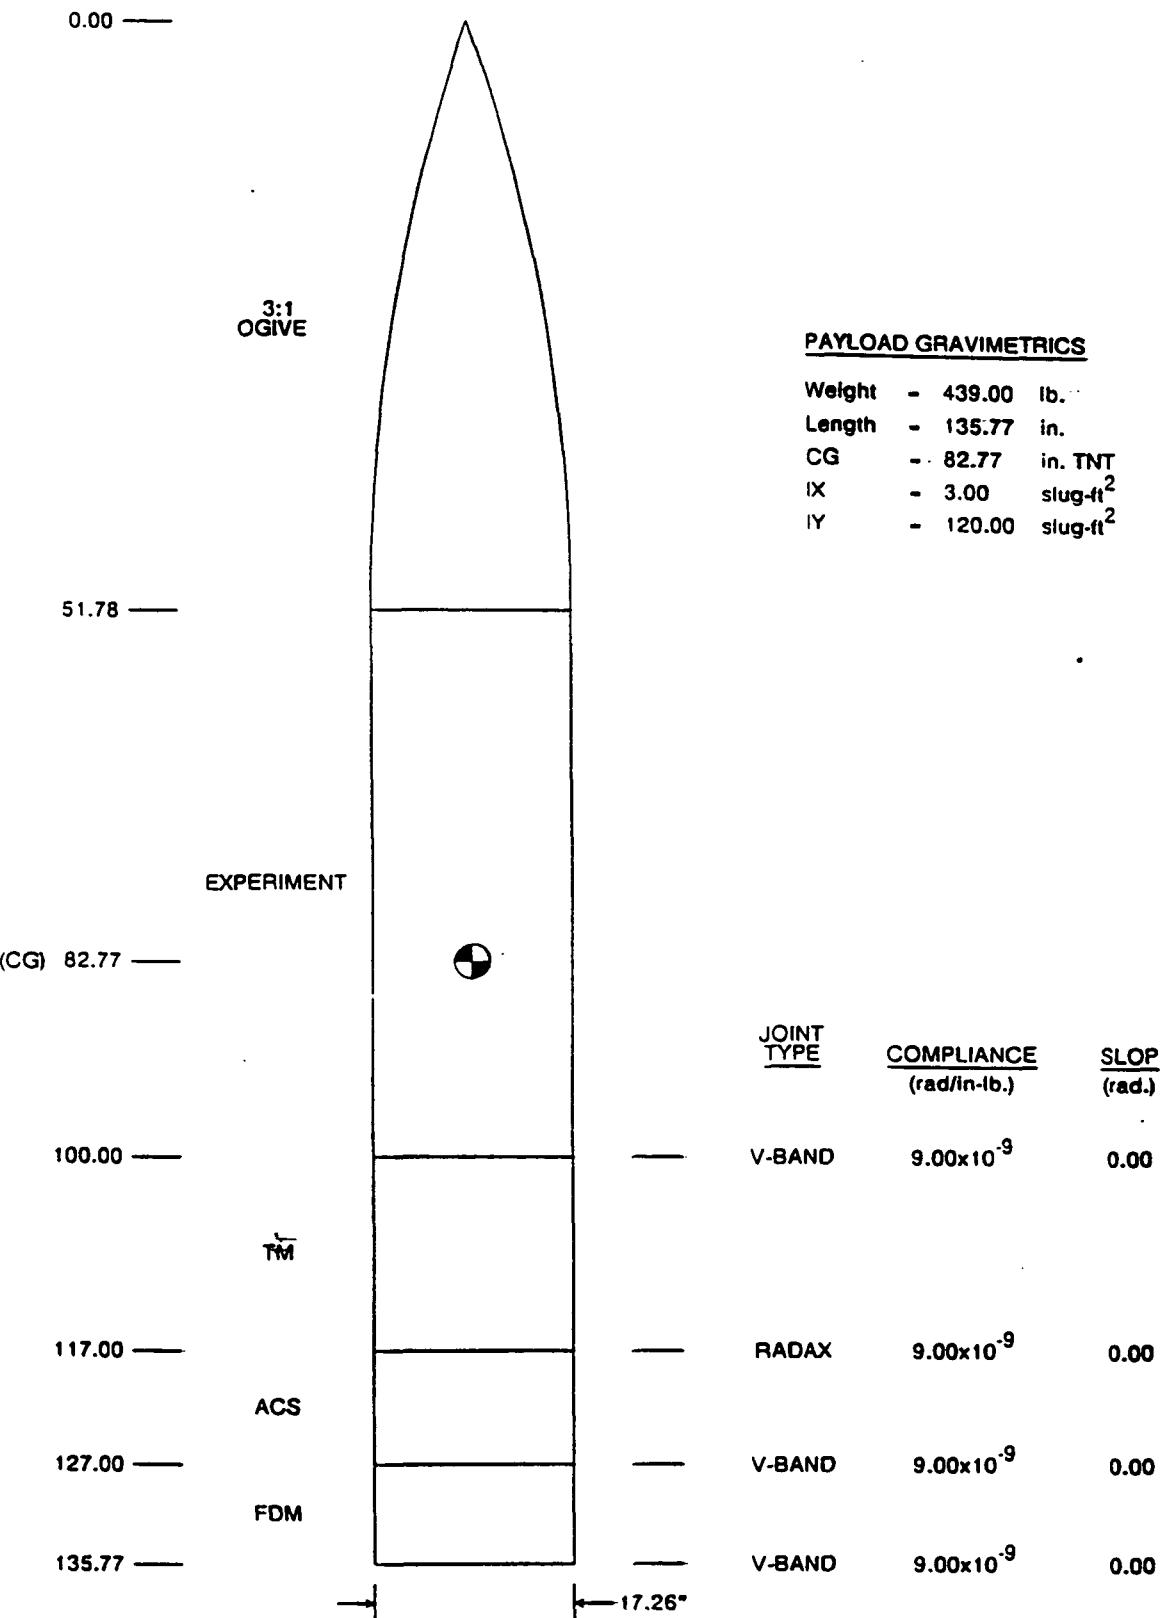

BLACK BRANT X 35.026 UE WINNINGHAM

Payload Configuration

VEHICLE STATION

(in. NEP) (in. TNT)

603.65 0.00 —

551.87 51.78 —

503.65 100.00 —

486.65 117.00 —

476.65 127.00 —

467.88 135.77 —

412.72 190.93 —

392.23 211.42 —

385.38 218.27 —

376.48 227.17 —

212.12 391.53 —


168.16 435.49 —

155.00 448.65 —

147.60 456.05 —

29.27 574.38 —

0.00 603.65 —

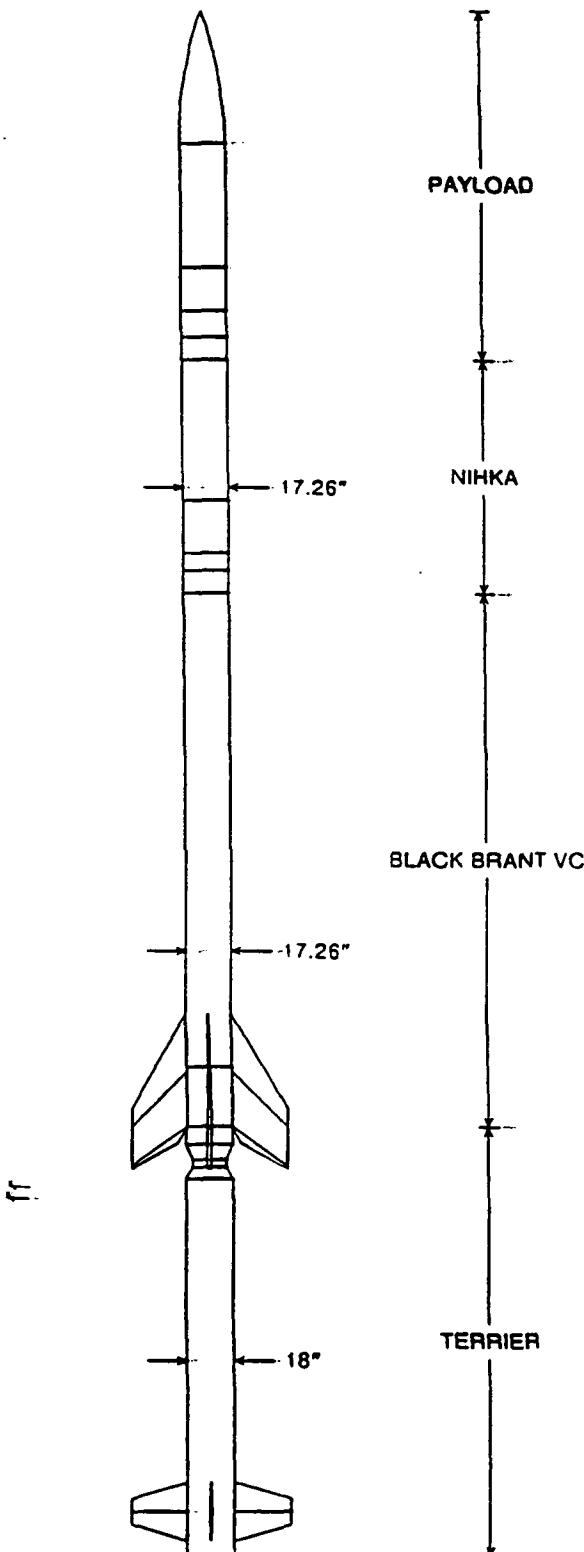

BBX 35.026 UE 9JAN89

Launch Configuration

***** PHYSICAL PROPERTIES SUMMARY BLACK BRANT X

BBX 35.026

PAYOUT WEIGHT = 439.00 lb.
 LENGTH = 135.77 in.
 CG = 53.00 in. from P/I base
 IY = 120.00 slug-ft²
 IX = 3.00 slug-ft²

PHYSICAL PROPERTIES - LAUNCH CONFIGURATION
 total length = 683.65 inches

TIME (sec)	TOT. WT. (lb.)	CG (in nep)	CG (ft nep)	CG (in nose)	CG (ft nose)	IYY (s1-ft^2)	IXX (s1-ft^2)
.00	6113.11	268.38	21.53	345.27	28.77	23669.94	73.85
1.00	5844.70	266.34	22.20	337.31	28.11	26789.65	71.81
2.00	5576.29	275.14	22.93	328.51	27.38	24697.74	69.76
3.00	5307.88	284.83	23.74	310.82	26.57	22420.00	67.72
4.00	5039.47	295.57	24.63	308.08	25.67	19876.70	65.68
4.40	4932.02	300.23	25.02	303.42	25.29	18780.80	64.86

PHYSICAL PROPERTIES - SECOND STAGE
 total length = 435.49 inches

TIME (sec)	TOT. WT. (lb.)	CG (in nep)	CG (ft nep)	CG (in nose)	CG (ft nose)	IYY (s1-ft^2)	IXX (s1-ft^2)
12.00	4174.66	171.45	14.29	264.04	22.00	9325.44	44.15
14.00	4025.26	173.40	14.45	262.09	21.84	9145.05	43.71
16.00	3877.66	175.52	14.63	259.97	21.66	8944.43	43.27
18.00	3727.16	177.74	14.81	257.75	21.48	8758.03	42.55
20.00	3576.16	180.28	15.02	255.21	21.27	8549.25	41.84
22.00	3423.66	183.02	15.25	252.47	21.04	8317.75	40.83
24.00	3267.76	186.19	15.52	249.30	20.77	8095.30	39.83
26.00	3111.76	189.60	15.80	245.89	20.49	7842.62	38.53
28.00	2958.56	193.35	16.11	242.19	20.18	7568.51	37.24
30.00	2809.86	197.18	16.43	238.31	19.86	7333.70	35.74
32.00	2664.16	201.63	16.80	233.86	19.49	6995.14	34.24
34.00	2519.86	206.27	17.19	229.22	19.10	6706.70	32.53
36.00	2377.16	211.79	17.65	223.76	18.64	6356.10	30.83
38.00	2236.56	217.33	18.11	218.16	18.18	6026.25	28.97
40.00	2102.76	224.06	18.67	211.43	17.62	5618.98	27.11
42.00	1994.96	228.56	19.05	206.91	17.24	5393.84	25.85
44.00	1933.36	233.14	19.43	202.35	16.86	5118.28	24.59
45.00	1929.76	233.65	19.47	201.84	16.82	5062.91	24.54

PHYSICAL PROPERTIES - THIRD STAGE
 total length = 211.42 inches

TIME	TOT. WT.	CG	CG	IYY	CG

(sec)	(lb.)	(in nep)	(ft. nep)	(in nose)	(ft. nose)	(s1-ft^2)	(s1-ft^2)
82.00	1338.88	73.86	6.09	138.36	11.53	624.28	11.28
86.00	1281.16	75.73	6.31	135.69	11.31	596.69	10.92
90.00	1033.88	88.17	6.68	131.25	10.94	555.49	10.19
94.00	862.86	86.59	7.22	124.83	10.48	500.03	8.98
98.00	687.52	96.77	8.06	114.65	9.55	415.05	6.82
99.80	638.10	101.99	8.42	110.33	9.19	388.45	5.31

THIS REFLECTS BBVC, NIHKA II, AND INTERSTAGE WEIGHTS PER B.A.L. LETTER
 DATED 21 FEB 1986. INTERSTAGE LENGTH PER WFF MEASUREMENTS. 5-14-87/MSS

ff

SECTION 3 - VEHICLE PERFORMANCE

3.1 PERFORMANCE ANALYSIS RESULTS

Source: GEM 5-D

Launch Parameters: Payload Weight: 439 Lbs
After Nose Cone Separation: 386 Lbs
Launch Angles: 84° OE, 283° AZ
Launcher: Universal II, 40 ft. rail travel
Launcher Latitude: 69.294186 Longitude: 16.020680

3.1.1 Nominal Trajectory

Nominal Events Sequence at Key Points of Flight: Table 3-1

Nominal Vehicle Performance: Figures 3-1 through 3-9

Apogee Altitude: 721.7 Km

Time at Apogee Altitude: 484 Sec

Ballistic Impact Range: 782.1 Km

Time at Ballistic Impact: 907 Sec

3.1.2 Aerodynamic Heating Index

Aerodynamic Heating Index: 1.68×10^8 ft-lb/ft²

3.1.3 Drag Separation Analysis

Drag Separation Analysis: Table 3-2

Source: DRGSEP - Drag Separation Analysis Program

3.1.4 Experimenter's Success Criteria

The comprehensive success criteria is 400 Km horizontal travel above 500 Km altitude. This is met by the nominal trajectory. The minimum success criteria is 200 Km above 500 Km altitude which is met by the 2σ deviation from the nominal trajectory.

Table 3-1. Black Brant X 35.026 UE
Nominal Sequence of Events


439 lb. p/l, 84° QE, 283° AZ, Norway

<u>Event</u>	<u>Time (Sec)</u>	<u>Altitude (Km)</u>	<u>Range (Km)</u>	<u>Velocity (Mps)</u>	<u>Mach No.</u>	<u>P (Psf)</u>	<u>F1.E1. (Deg)</u>
Liftoff	0.00	0.0	0.0	0.3	.0	0.0	90.00
Terrier Burnout	4.40	0.8	0.1	402.0	1.2	1904.1	83.01
BBVC Ignition	12.00	3.5	0.5	297.8	.9	802.2	81.31
BBVC Burnout	44.42	33.5	6.9	1721.5	5.6	328.5	76.62
Nose Cone Eject	69.00	71.7	16.6	1485.9	5.1	1.6	74.52
Nose Cone Sidekick	71.50	75.2	17.6	1462.8	5.2	.9	74.27
BBVC-Nihka Separation	78.00	84.2	20.2	1402.9	5.2	.2	73.59
Nihka Ignition	82.00	89.5	21.7	1366.2	5.1	.1	73.14
Nihka Burnout	100.14	128.0	33.8	3351.5	12.4	.0	71.97
DCEF Cable Release	103.00	137.1	36.7	3325.8	12.3	.0	71.84
DCEF Cal.	104.00	140.2	37.7	3316.9	12.3	.0	71.80
Despin	105.00	143.4	38.7	3307.9	12.3	.0	71.75
Payload Separation	110.00	159.0	43.8	3263.5	12.1	.0	71.53
DCEF Boom Deploy	113.00	168.2	46.8	3236.9	12.0	.0	71.39
Experiment Backup Pwr On, DIFP ON	113.00	168.2	46.8	3236.9	12.0	.0	71.39
S/P Release	116.00	177.4	49.9	3210.4	11.9	.0	71.25
DCM Strap Release	116.00	177.4	49.9	3210.4	11.9	.0	71.25
ACLP Cal., Scan	117.00	180.5	50.9	3201.5	11.9	.0	71.20
DCM Spring Release	119.00	186.5	52.9	3184.0	11.8	.0	71.11


Table 3-1.
(Continued)

<u>Event</u>	<u>Time (Sec)</u>	<u>Altitude (Km)</u>	<u>Range (Km)</u>	<u>Velocity (Mps)</u>	<u>Mach No.</u>	<u>Q (Psf)</u>	<u>F1.E1. (Deg)</u>
Experiment HV On, SPS & DIFP Deploy	120.00	189.6	53.9	3175.2	11.8	.0	71.06
ACLP, ACEF, ACM Boom Deploy	120.00	189.6	53.9	3175.2	11.8	.0	71.06
ACEF & ACM Antenna Deploy	124.00	201.5	57.9	3140.2	11.7	.0	70.86
ACS #1 On	127.00	210.3	60.9	3114.1	11.6	.0	70.71
ACS #1 Off	177.00	346.0	109.9	2692.3	10.0	.0	67.86
Apogee	483.78	721.7	388.5	979.2	3.6	.0	0.00
ACS #2 On	514.30	718.0	415.4	1008.4	3.7	.0	-13.73
ACS #2 Off	563.00	697.0	458.4	1162.2	4.3	.0	-32.39
3rd Stage Ballistic Impact	907.00	0.2	782.1	--	--	--	-73.66

«

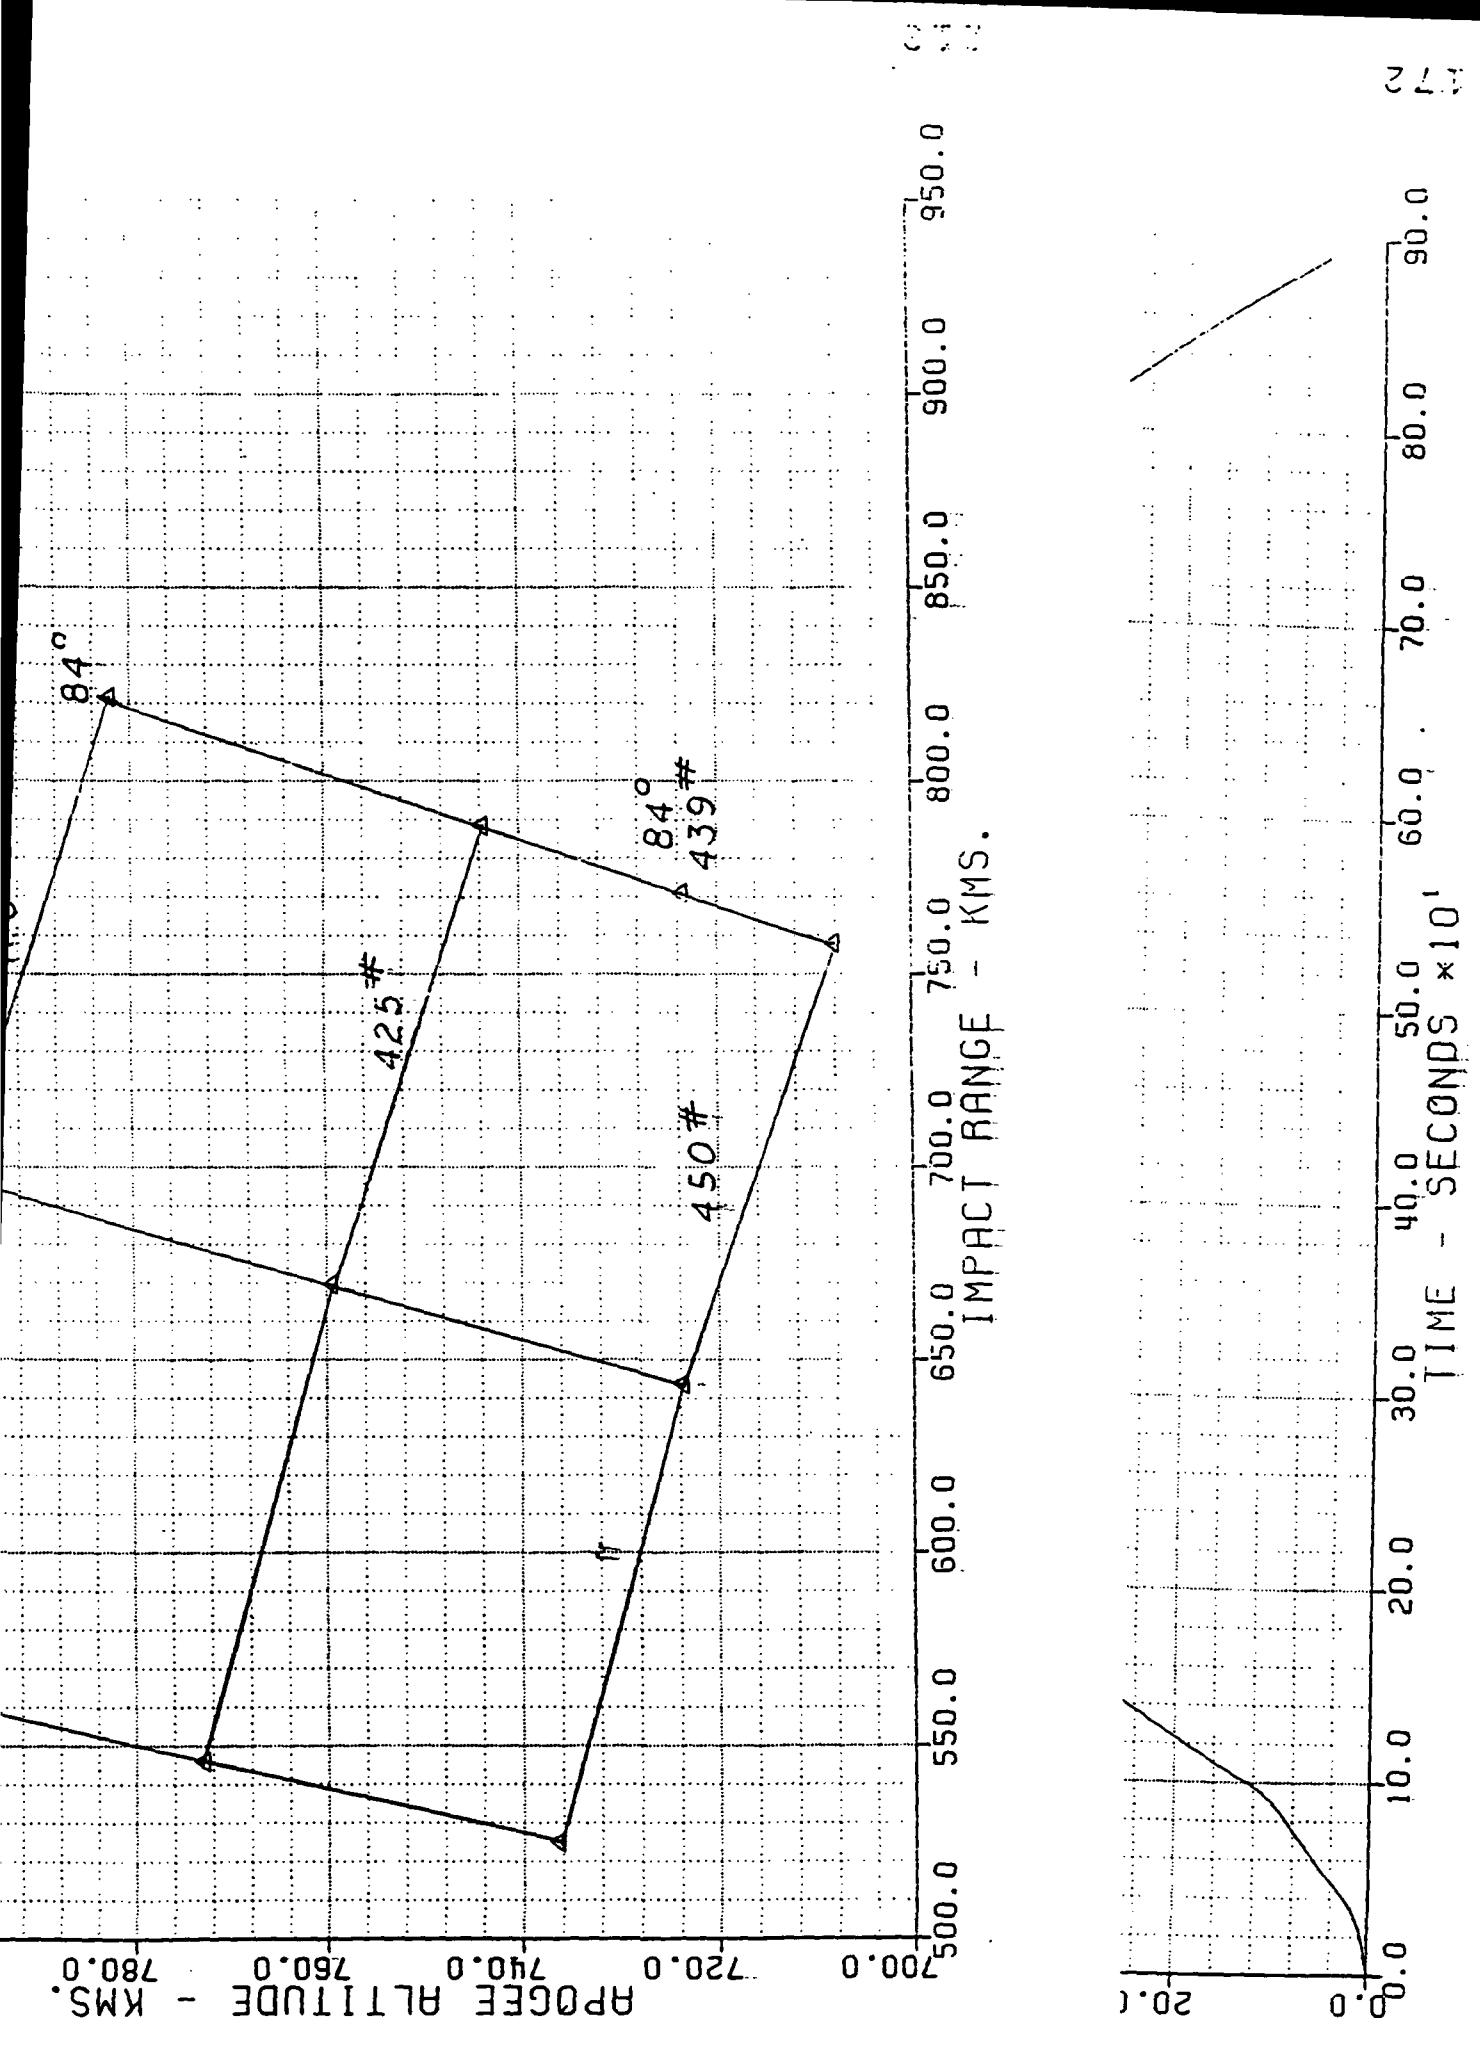

BLACK BRANT X 35.026
439.0 °P/L 84° OE 283° AZ ANDOYA
ALTITUDE VS TIME





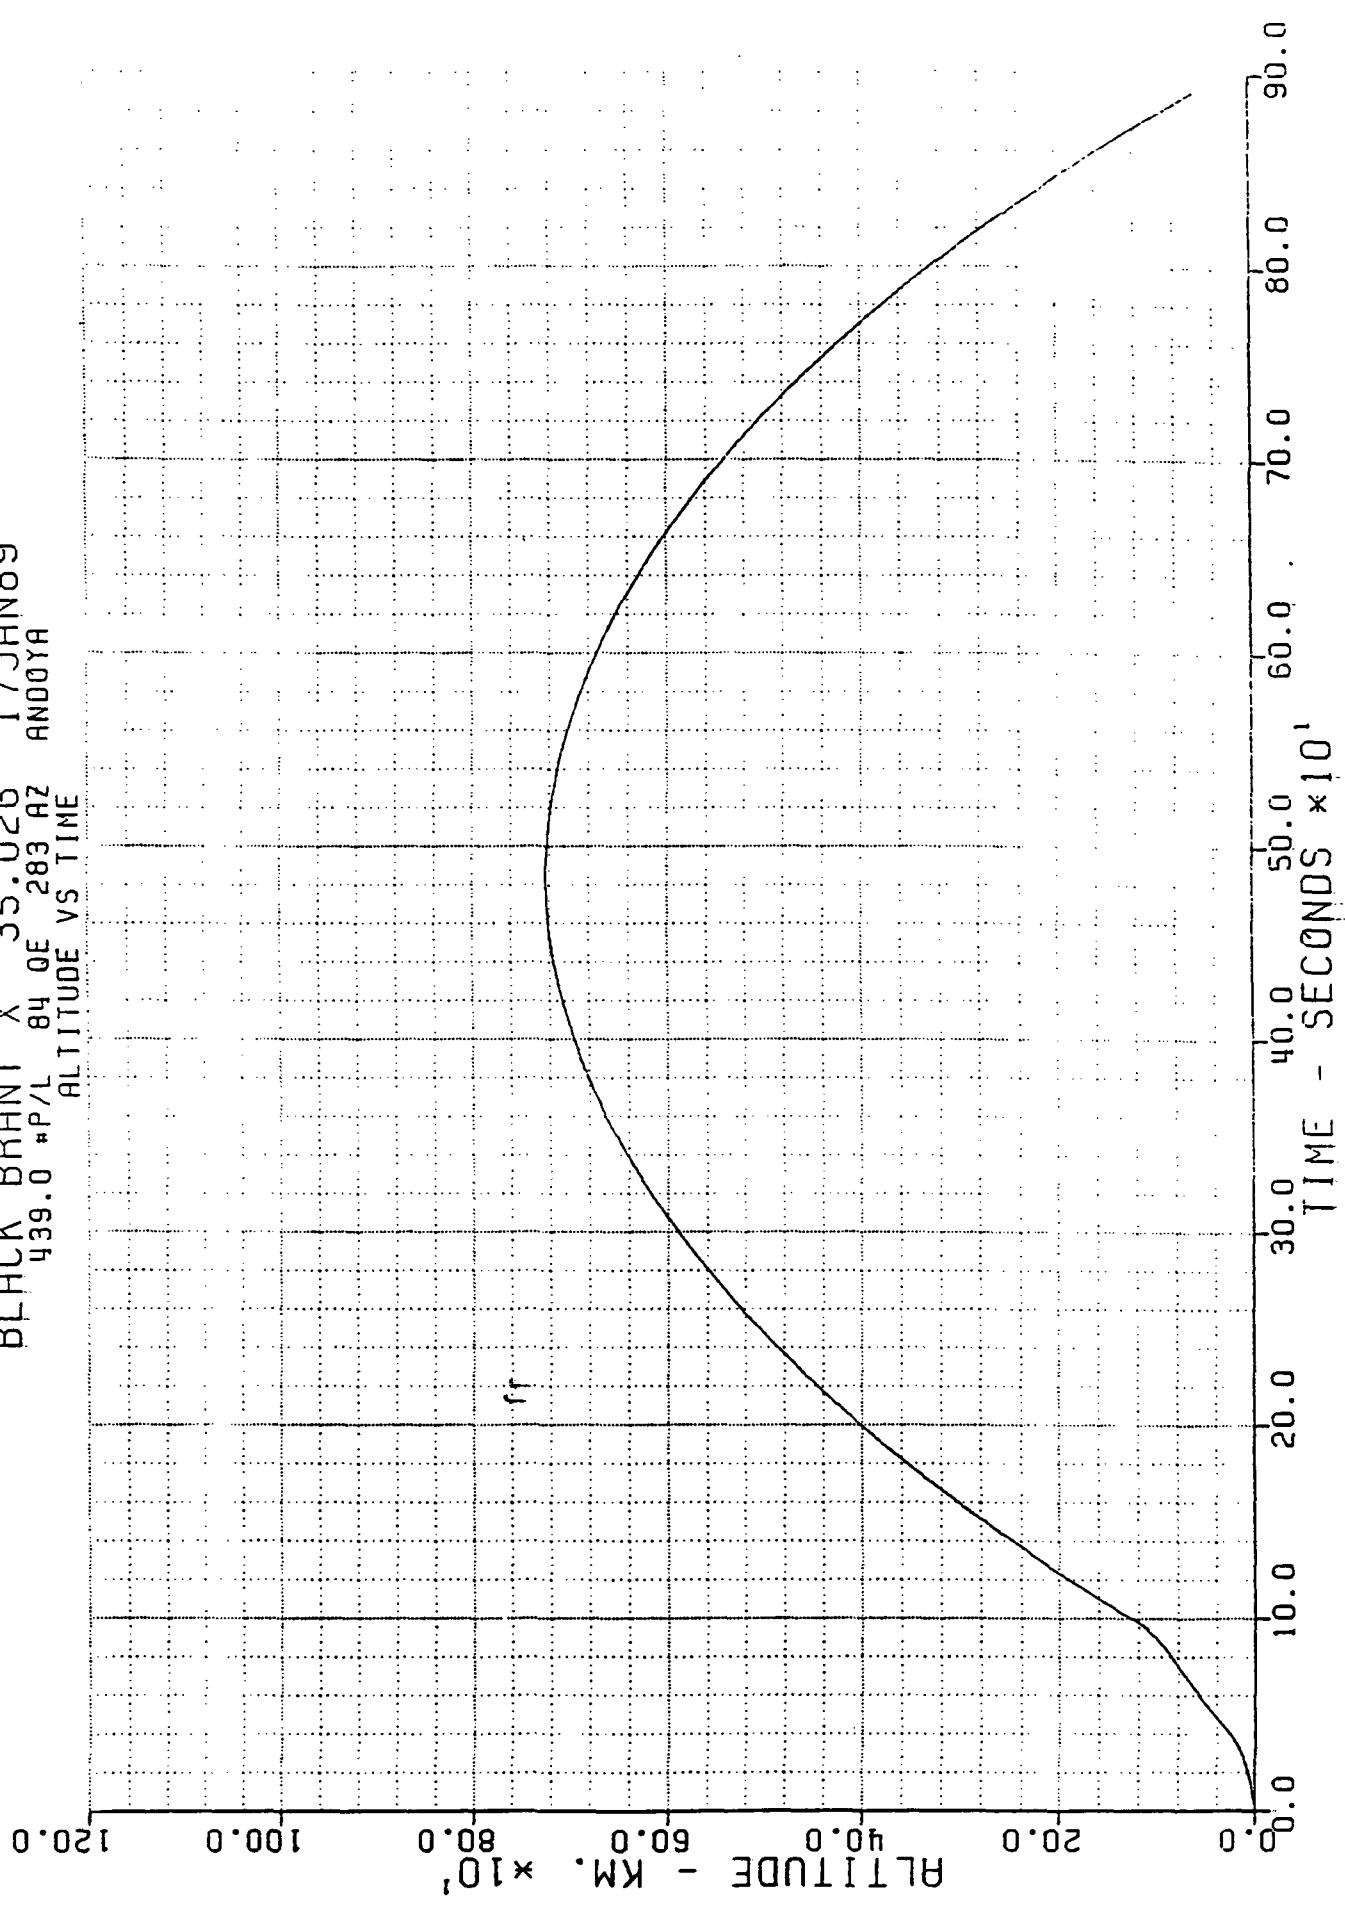



E502

E501

E502

22 → P308-13 DM MON
22 → P210 DM MON
22 → P210 DM MON

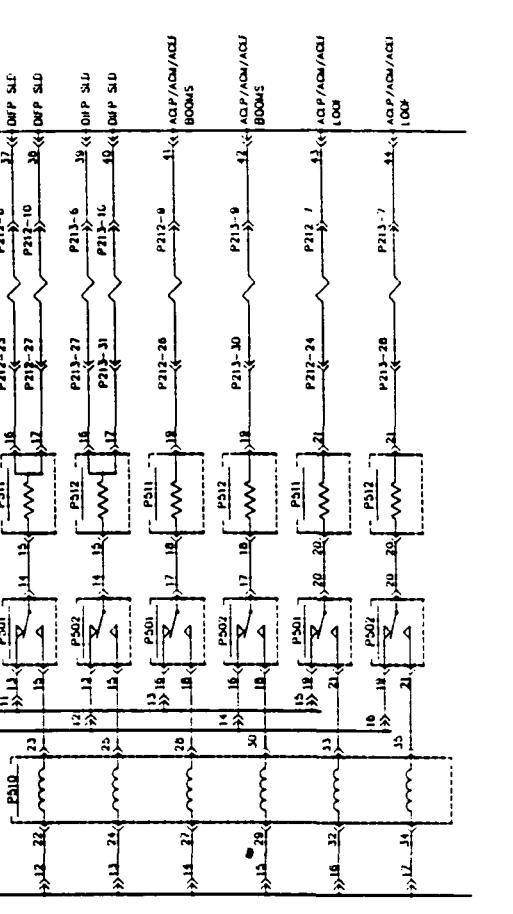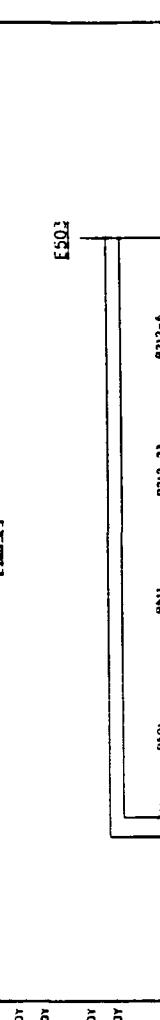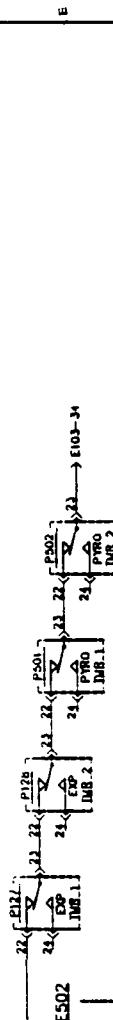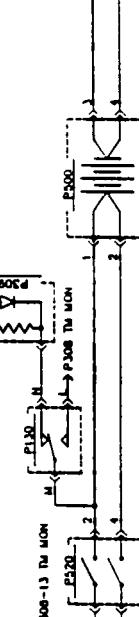

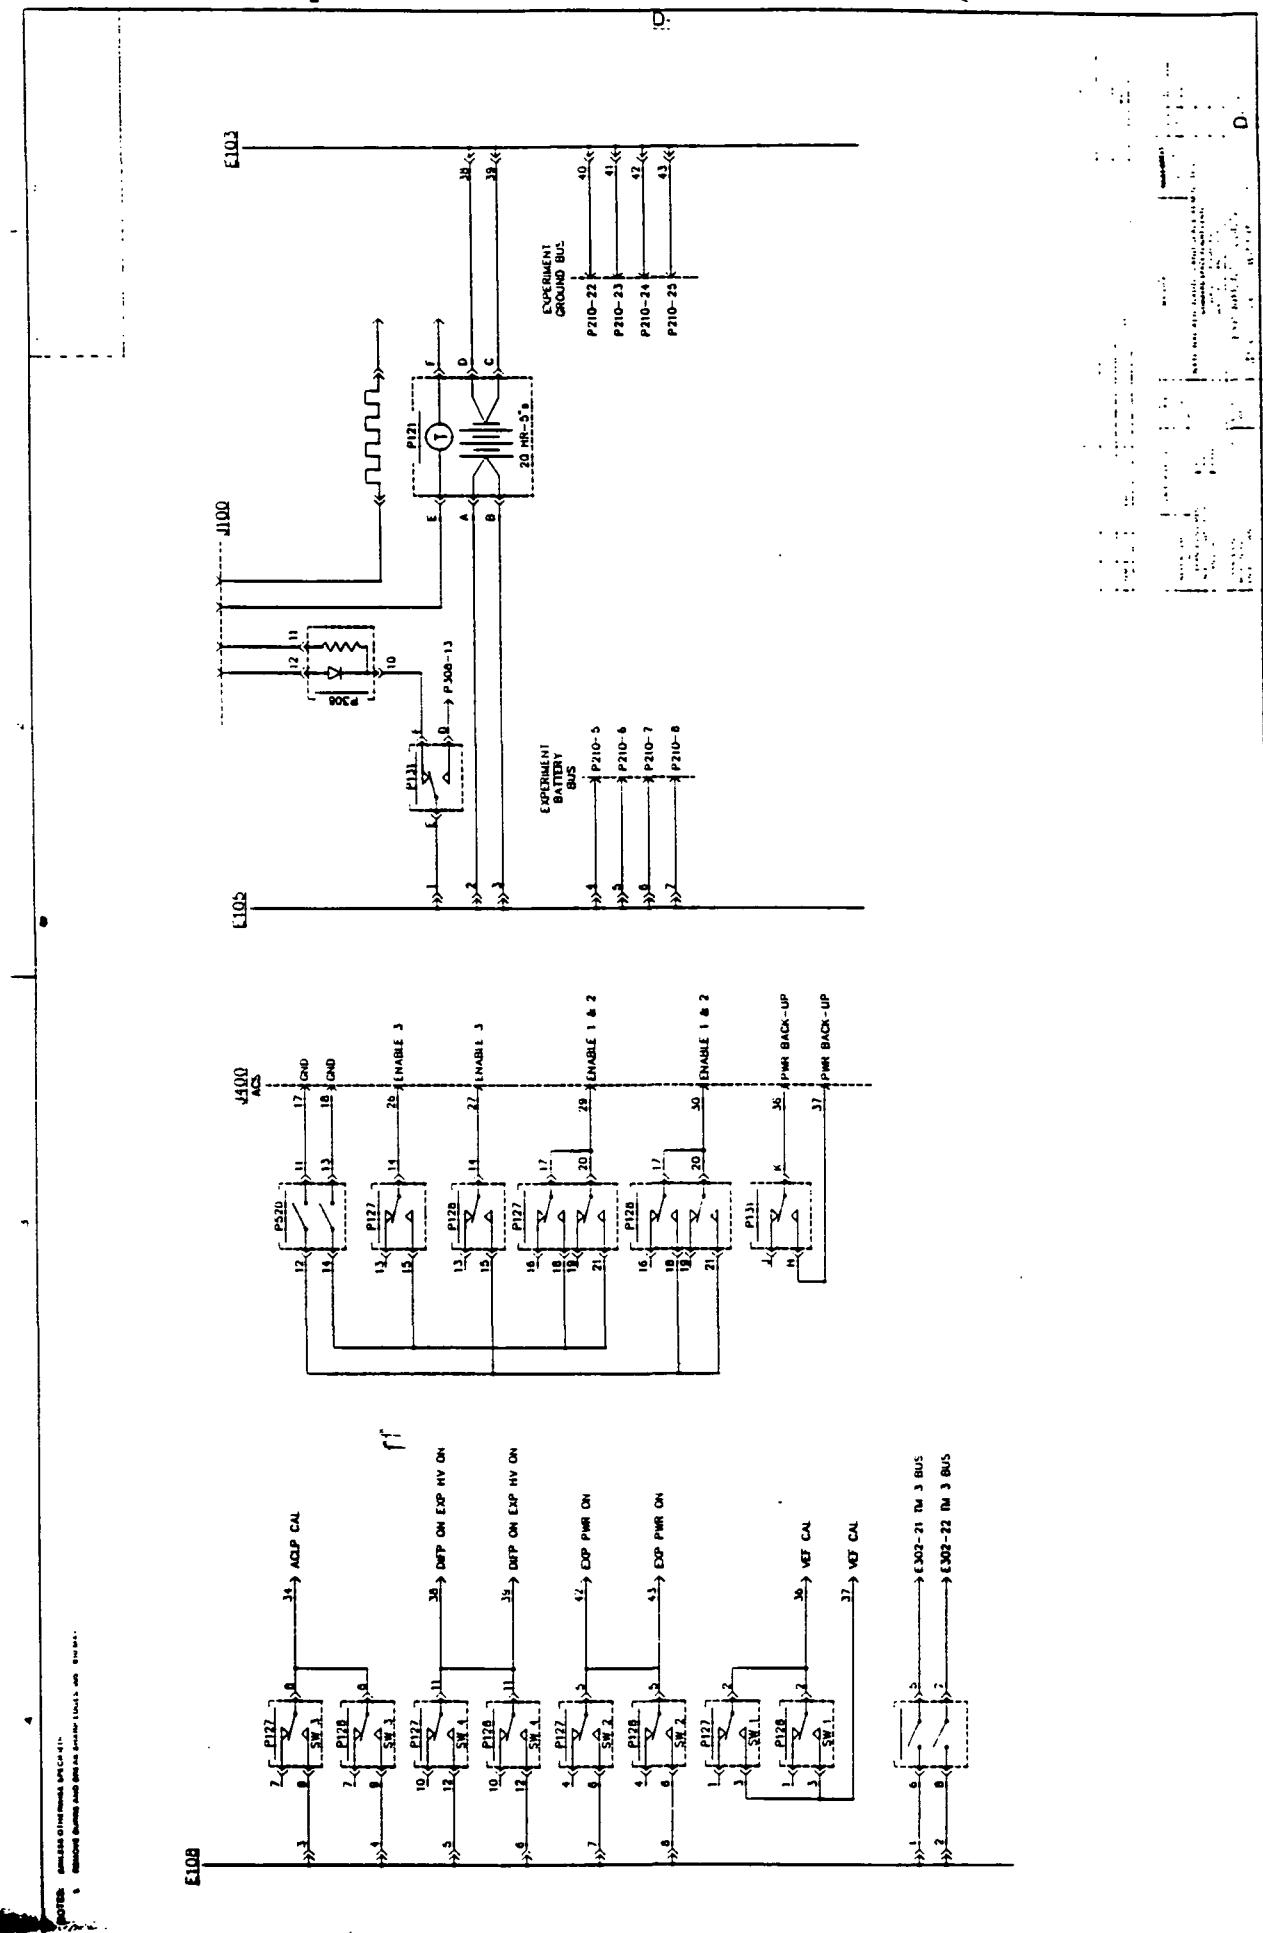

MAGNETIC CONTROL SYSTEM

DICK MATTHEWS

JANUARY 31, 1989

COMPUTER SCIENCES CORPORATION

APPLIED TECHNOLOGY DIVISION

ROUTE 175 AT ROUND 24, COLD SPRING ISLAND, VIRGINIA 23337

504-424-5671

January 12, 1989

TO: Design Review Chairman
FROM: Richard P. Matthews, CSC/ACGS
SUBJECT: Design Review 35.011/Winningham

Two magnetic ACS systems are to be flown from Norway in November of 1989. Each system is to align the vehicle with the negative magnetic field line. That is, to point the nose of the vehicle toward the South Magnetic Pole along the field line. The maneuvers are to be done early in flight - there will be boom deployments during maneuvering. There will be fixed time intervals for the maneuvers provided by the TM timer, instead of a deadband controller. There will be an initial pitch maneuver and an update near apogee. There will be only the initial roll maneuver. The telemetry timer will provide the timing for the maneuvers.

The ACS package consists of a pneumatics and an electronic section and is self contained. The pneumatics section consists of a high pressure gas vessel (nitrogen gas is to be used), and the required solenoid valves, nozzles, pressure regulator, and monitoring transducers. The electronics system, which provides driving signals to the solenoid valves, consists of a battery power system, a three axis magnetometer, a single axis rate gyro, and associated electronic cards.

The magnetometer and rate gyro provide servo input signals. The electronic servo system "precesses" the spinning vehicle to the desired attitude by properly timed and phased gas jets. The timing and phasing have been determined and will be verified by "operational" air bearing tests.

Sensor orientation can be seen in Figure I. The electronic system block diagram is Figure II.


Richard P. Matthews, AGCS

PRELIMINARY

35.011 Winningham Gas Budget

Given:

1. Worse case cone (ha) expected at ACS turnon of 10 degrees
2. Maximum misalignment to field angle of 30 degrees
3. Roll dispersion of .75 to 1.25 RPS
4. Tank pressure of 4060psia and regulator pressure set to give valve inlet pressure of 300psia. Orifice to be .056 in.
5. In the beginning control configuration;

$$\text{Pitch Moment of Inertia} = 76 \text{ Slug-ft}^2$$

$$\text{Roll Moment of Inertia} = 4.8 \text{ Slug-ft}^2$$

$$\text{Ratio} = 76/4.8 = 15.8$$

$$\text{Pitch Moment Arm} = 3.5 \text{ ft}$$

$$\text{Mass} = \frac{4060 \text{ lbf/IN}^2 \times 140 \text{ IN}^3 \times \text{ft}}{1.05 \times 55.15 \text{ ft-lbf/lbm}^{-0}\text{R} \times 560 ^0\text{R} \times 12 \text{ in}} = 1.46 \text{ lbm}$$

$$\text{At 300psia Mass} = (300 \times 140)/(55.15 \times 560 \times 12) = 0.11 \text{ lbm}$$

$$\text{Impulse available} = (1.46 - 0.11)65 = 87.8 \text{ lbf-sec}$$

Assuming that a Pitch transverse acceleration of $2.8^0/\text{sec}^2$ is confirmed by air bearing runs

Thrust required is

$$\text{Lbf} = 76 \text{ Slug-Ft}^2 / 3.5 \text{ Ft} \times 2.8^0/\text{sec}^2 \times 3.1416 / 180 \text{ deg}$$

$$\text{Thrust} = 1.1 \text{ lbf}$$

Assuming a 26.8 second pointing maneuver, again confirmed by air bearing runs

Impulse required is then $1.1 \text{ lbf} \times 20 \text{ sec}$ valves = 22 lbf-sec for the pitch maneuver.

Assuming an initial roll rate of 1.25 RPS and a roll CCW thrust of 3.14 lbf.

$$\text{Accel} = (3.14 \times .75/4.7) \times 180/3.1416 = 28.7 \text{ deg/sec}^2$$

$$\text{Time} = (450 - 360)/28.7 = 3.1 \text{ sec}$$

Allowing a factor of two for roll valve cycling

$$\text{Impulse} = 3.14 \times 3.1 \times 2 = 19.5 \text{ lbf-sec}$$

Total impulse required equals

$$22 + 19.5 = 41.5 \text{ lbf-sec}$$

Safety margin for flight is then

$$(87.8/41.5) - 1 = 1.12 \text{ or } 112 \text{ percent.}$$

Schematics are attached.

ELECTRONIC COMPONENTS

Delvelco 3-Axis Magnetometer Model #9200C

Wallop's Rate Gyro Package using a Honeywell GN90C1 Rate Gyro

Electronic Control Cards of Wallop's Manufacture

Battery Pack of Wallop's Manuf., 24 Af cells at 0.8 Ampere Hours

Power Switching Relay, Potter Brumfield TL17-0624

ENVIRONMENTAL TESTING


All spares will be tested for function.

All spare electronic components will be vibrated to "spares" levels and retested for function and calibration.

Flight components will be vibrated with the payload and be retested for function and calibration.

Function testing will included bench testing where applicable and air bearing tests.

~~Planning~~ 88.011

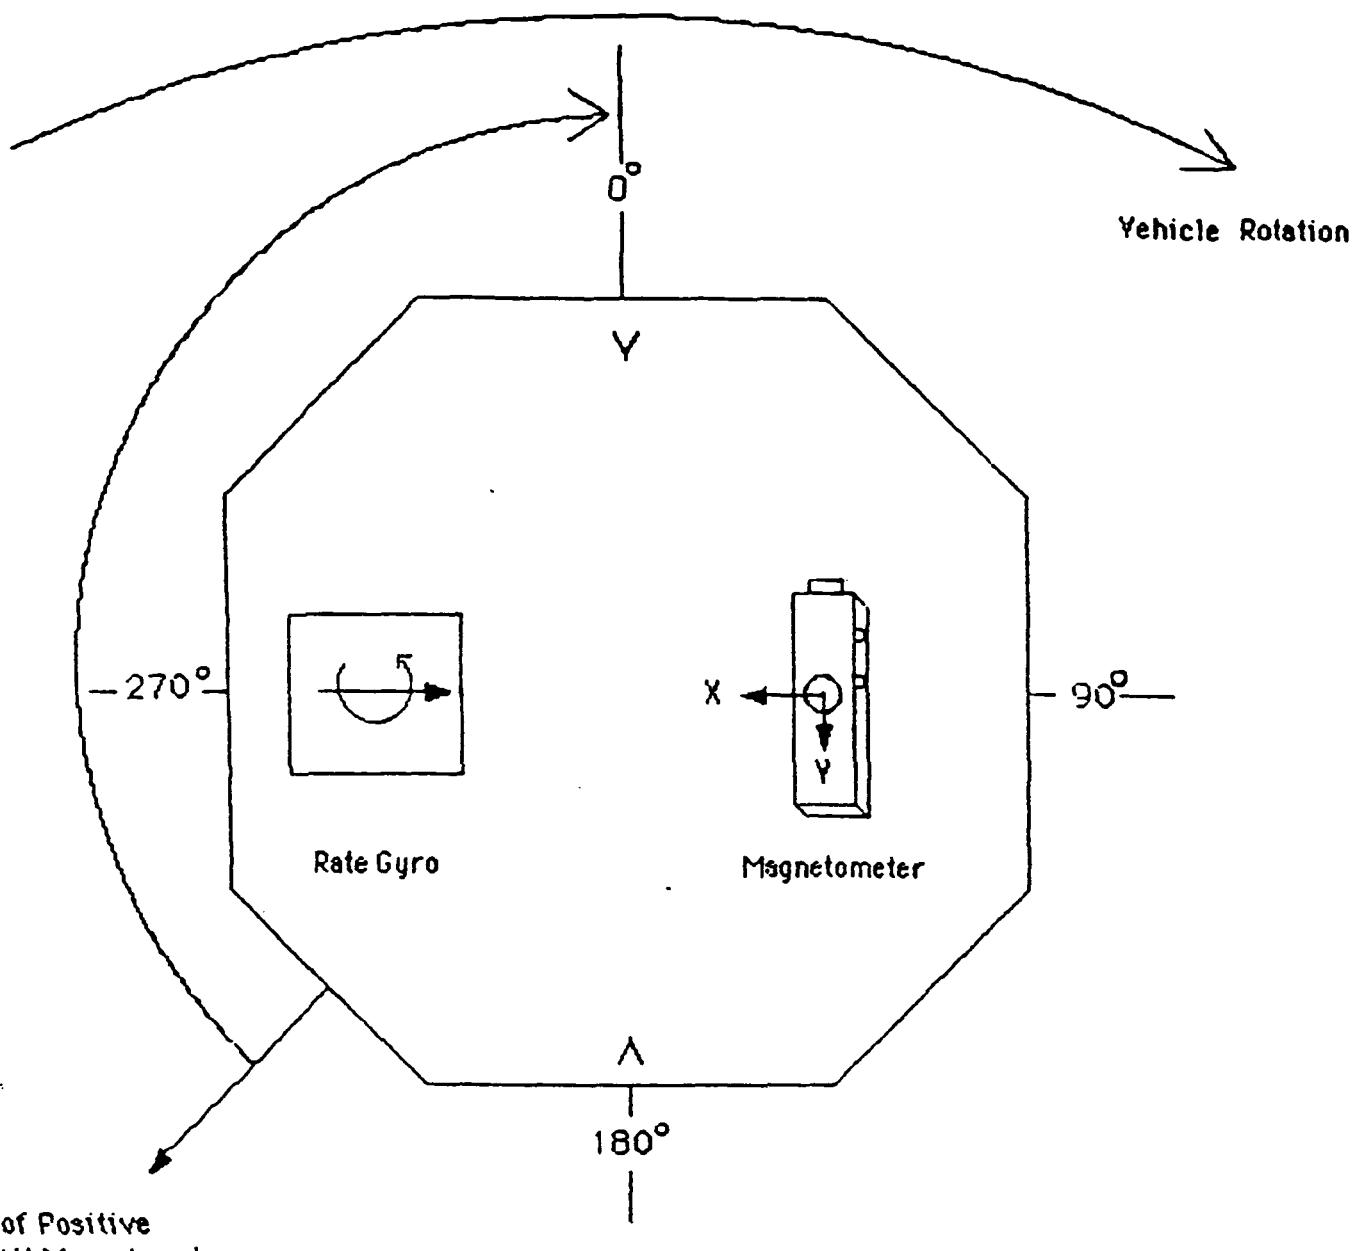

Aft Looking Forward

The motor is separated, CG is forward of the ACS. To push the payload toward the $-B$ vector, we want to push the ACS Can towards the $+B$ vector. This is accomplished by firing a nozzle when it is 135 degrees past the direction we want to go.

FIGURE 1

Wimborne 35.011


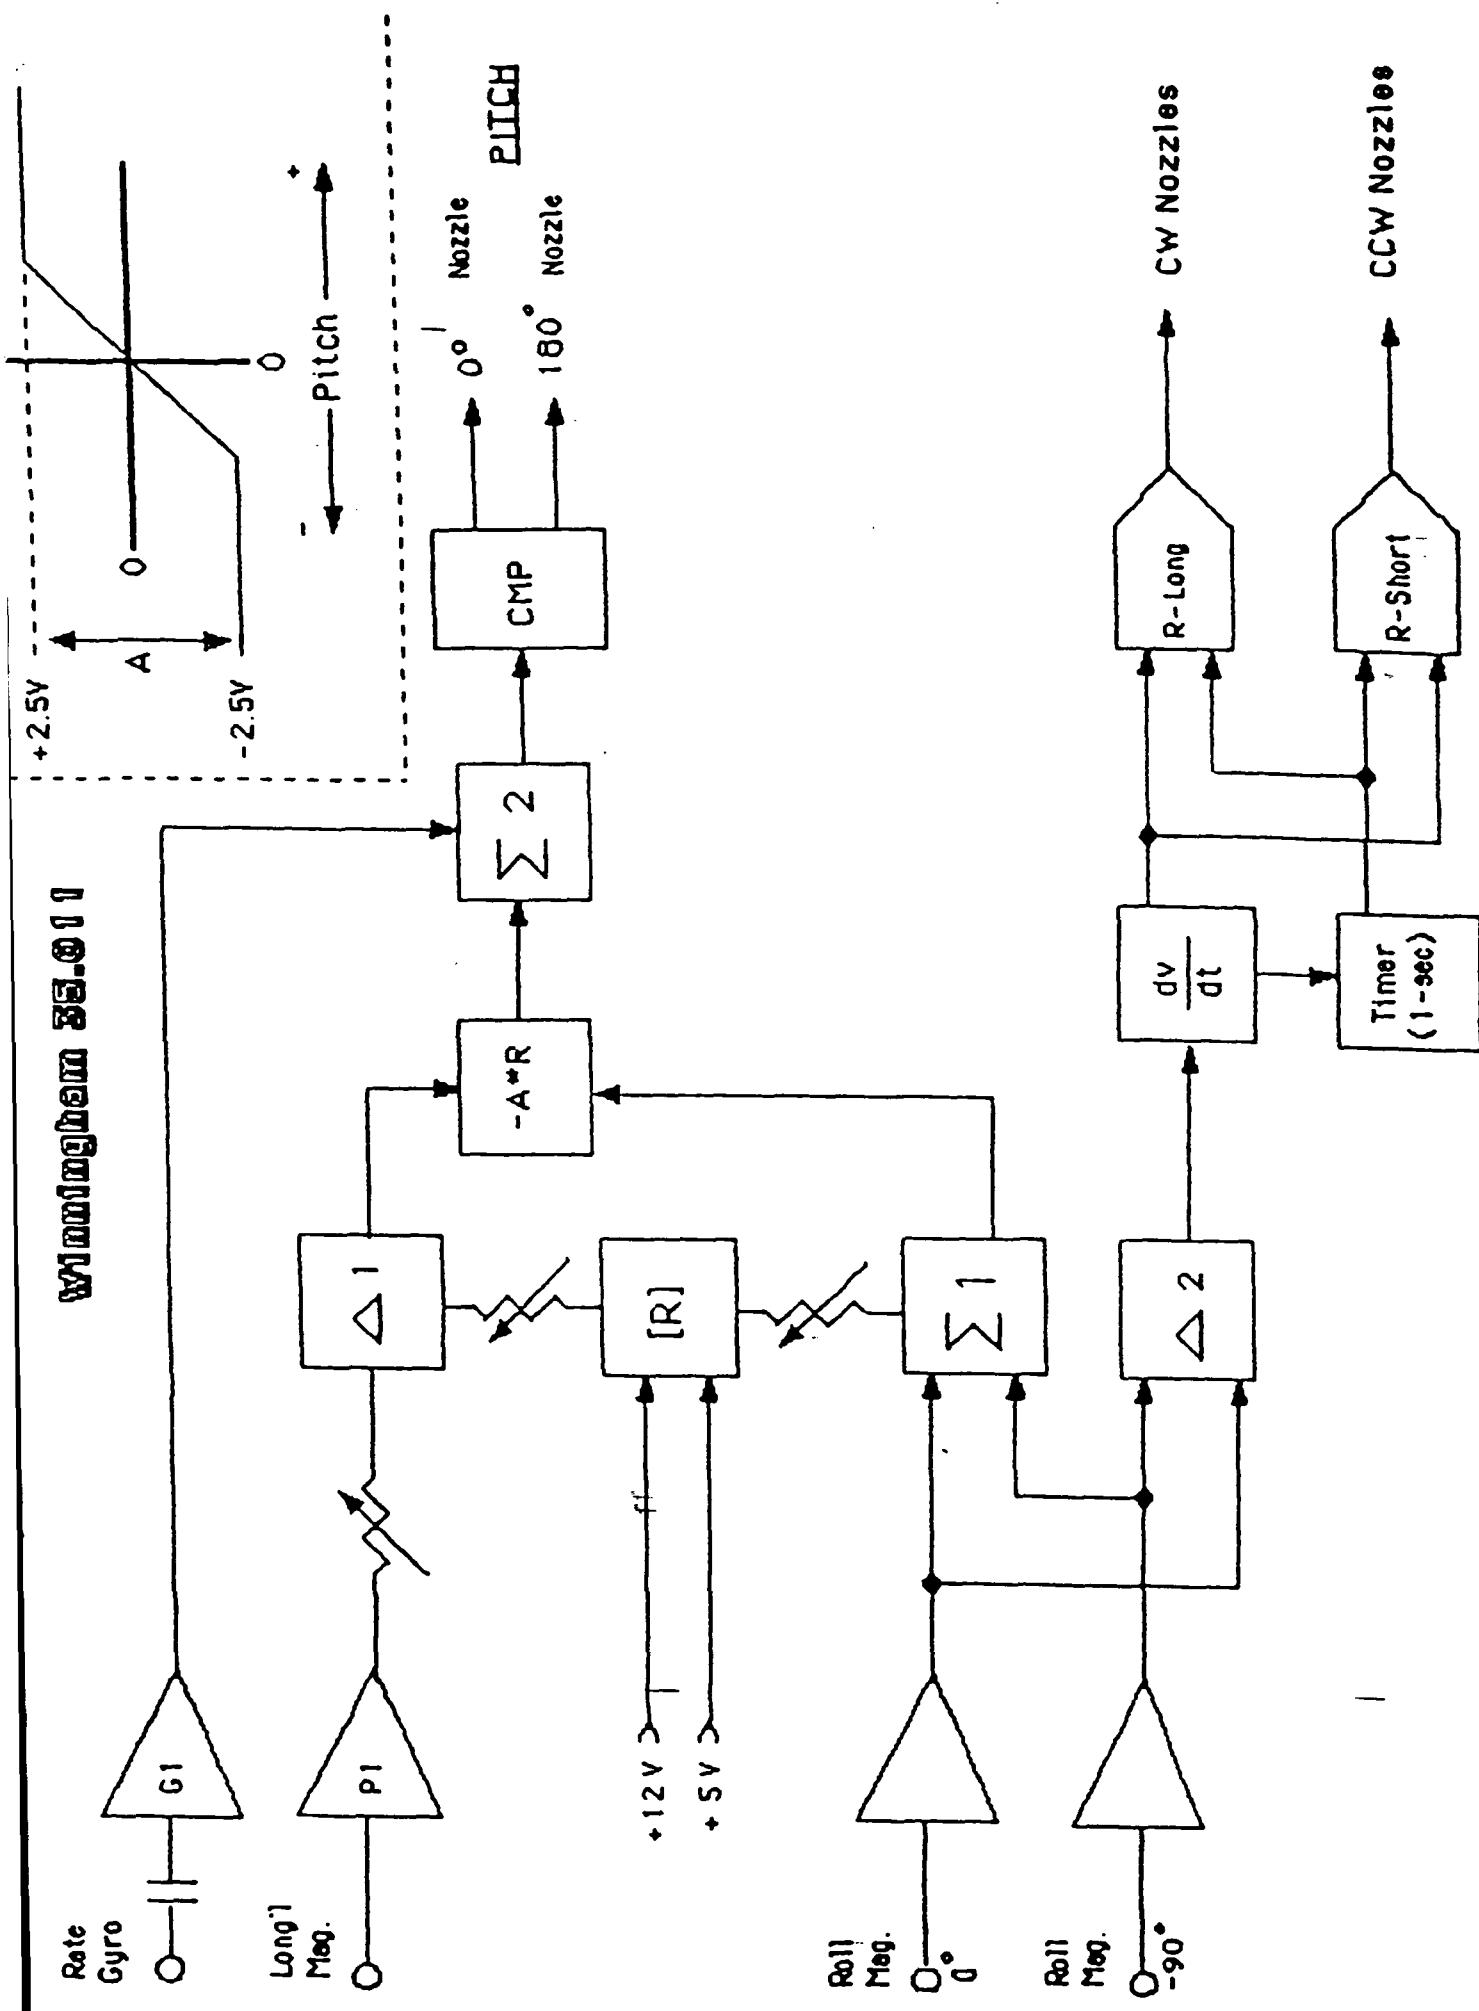


FIGURE 2

NOTES: UNLESS OTHERWISE SPECIFIED

1. REMOVE BURNS AND BREAK ON BOTH SIDES & GND MAX.

ACS-TM INTERFACE

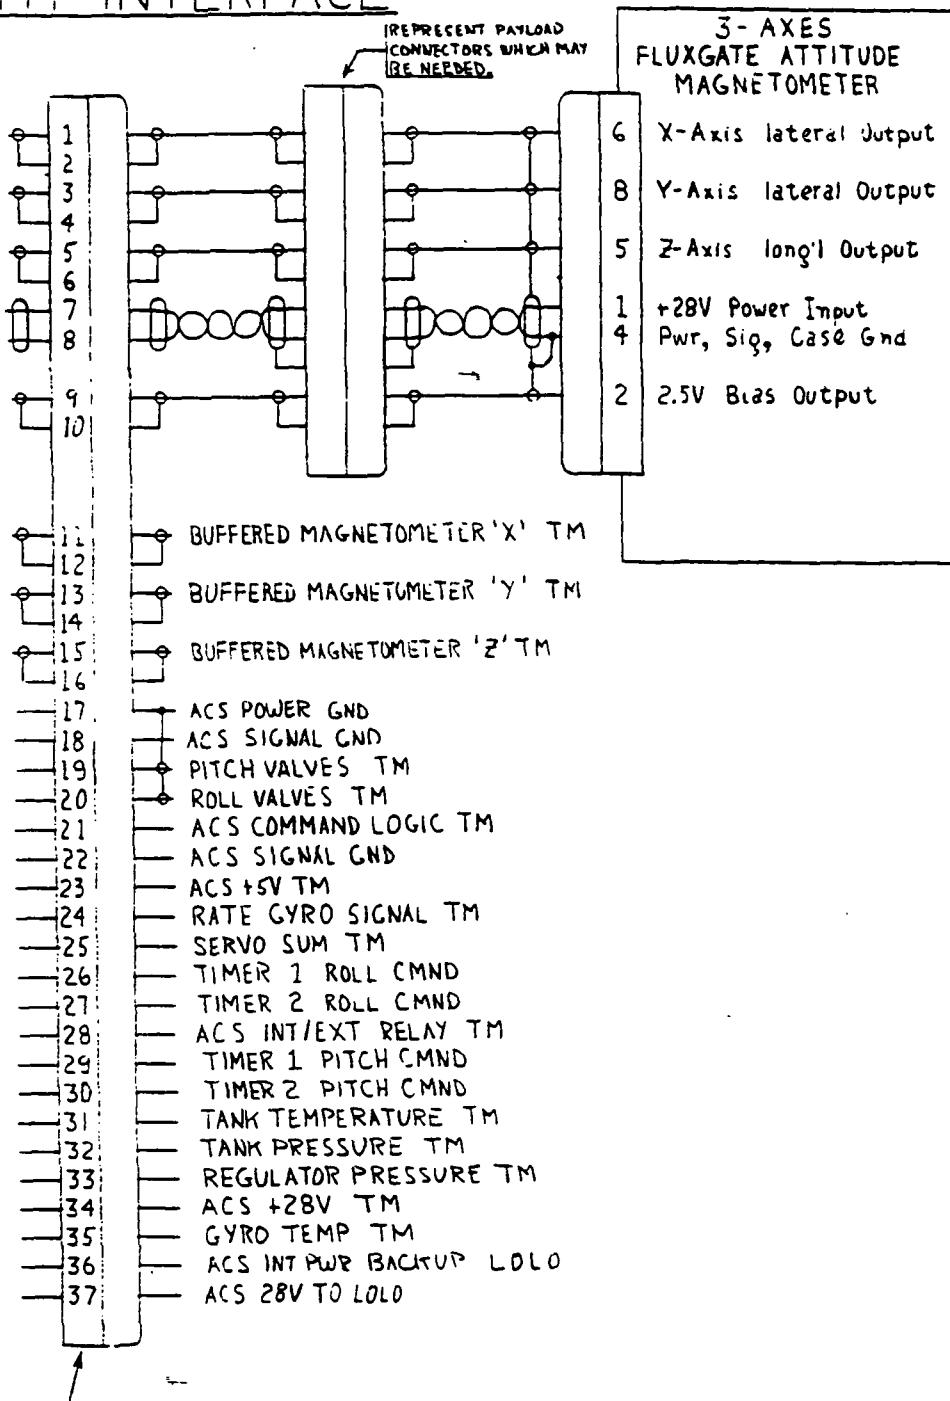

NOTES:

1. THE SHIELDS ON THE VALVE TM MONITORS ARE PRIMARY FOR PAYLOAD PROTECTION.
2. THE LOLO IS USUALLY A LIFT-OFF LANYARD SWITCH WHICH CLOSES PIN 36 TO PIN 37.


LINE	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37
A	ADD THE F28V SHOT ON DIN 3																																

ITEM	UNIT OR PRODUCT	SCALE	MATERIAL	HEAT TREAT	IN.	RPM	11111
NEXT ASSEMBLY							
TOLERANCE ON DIMENSIONS	± .005		NATIONAL AERONAUTICS AND SPACE ADMINISTRATION				
UNLESS BROWN OTHERWISE	± .005		SPACELAB DESIGNATION SYSTEM				
ANGULAR	± 1°		SPACELAB PAYLOAD FACILITY				
WALLCAMP BLIND, VENTILATION	± .005		WALLCAMP BLIND, VENTILATION				
SURFACE FINISH IN	✓	100	µin. IN. DIA.				
NOTES							
REF. PMS	REF. WEIGHT						
MAGNETIC ACS-TM INTERFACE	C-ACS-GEN-0072						


CENTAUR II B & C SCHEDULE OF EVENTS
(PLANNED NOMINAL TIME)

	<u>SECONDS AFTER LIFT OFF</u>
A. FEOS DEP	73
1. VEF CAL. (24 SEC. HIGH OR CLOSED)	104
B. DESPIN	107
C. PAYLAOD DEP.	111
2. VEF CABLE RELEASE	113
3. VEF BOOMS DEPLOY, POWER ON PULSE, DCM STRAP RELEASE, ACLP CAL. (ACLP CAL. MUST HAVE A DURATION OF 8 SEC. OR LONGER)	115
4. DCM BOOM DEPLOY, AREA DEPLOY	120
5. DIFF DEPLOY, DIFF ON, SPI, SIMS & AREA HIGH VOLTAGE ON (24 SECONDS)	121
6. ACLP, ACM & ACLP BOOMS DEPLOY	124
7. ACEF, ACM & ACLP (2ND ANTENNA) DEPLOY	127
D. ACS ENABLE	130
E. ACS DISABLE	180
F. 2ND ACS ENABLE	APOGEE
G. 2ND ACS DISABLE	50 SEC LATER
H. IMPACT	

BLACK BRPNT X 35.026 UE 17JAN89
439.00 * P/L 84.0 DE 283 AZ
2ND STG XCP & XCG VS TIME

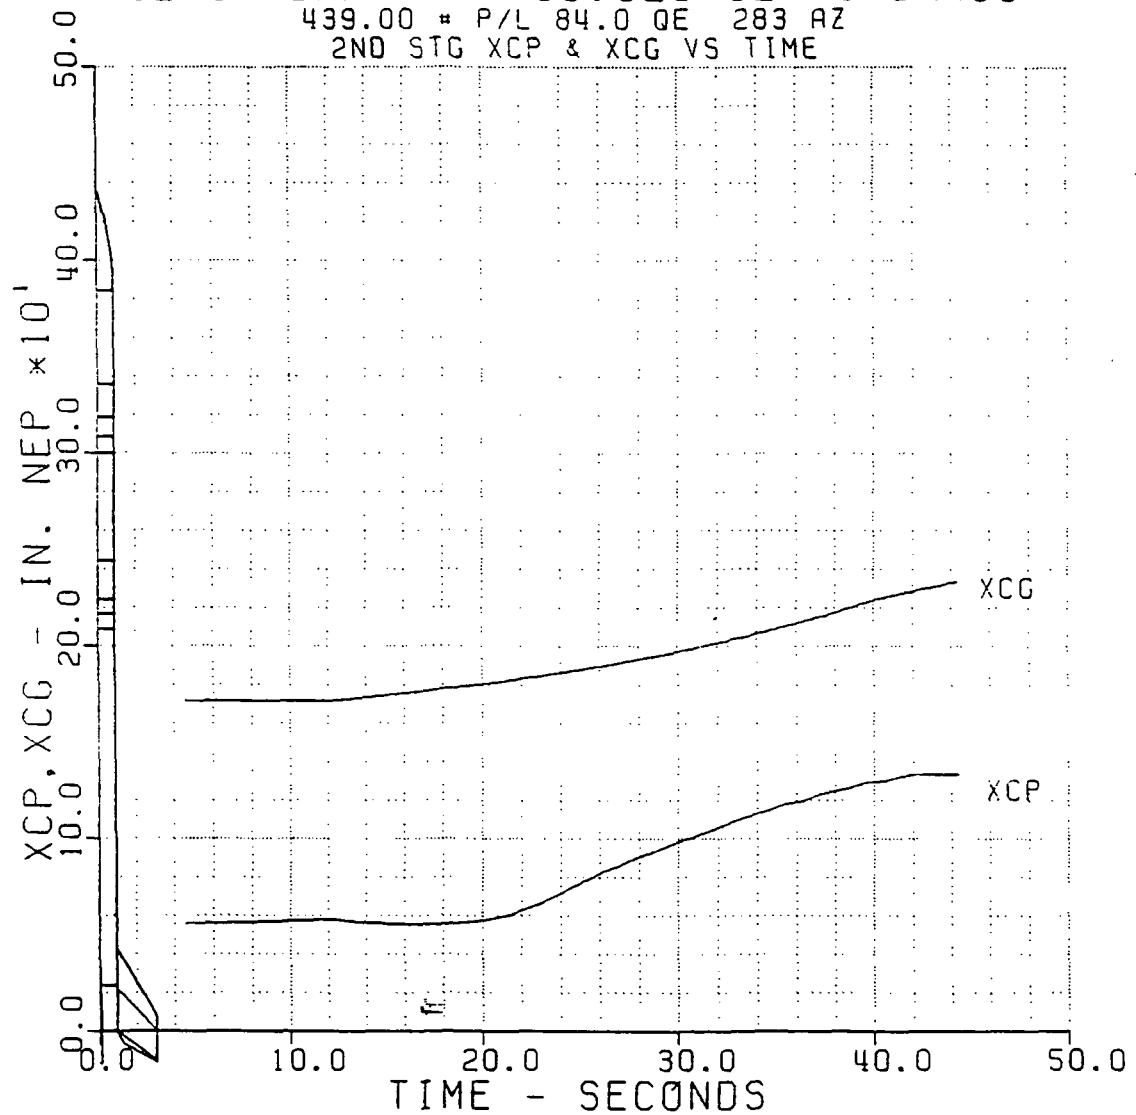


BLACK GRANT X 35.020 UE 17 JUN 86
439.00 = P/L 84.000 283 RZ
STATIC MARGIN VS TIME

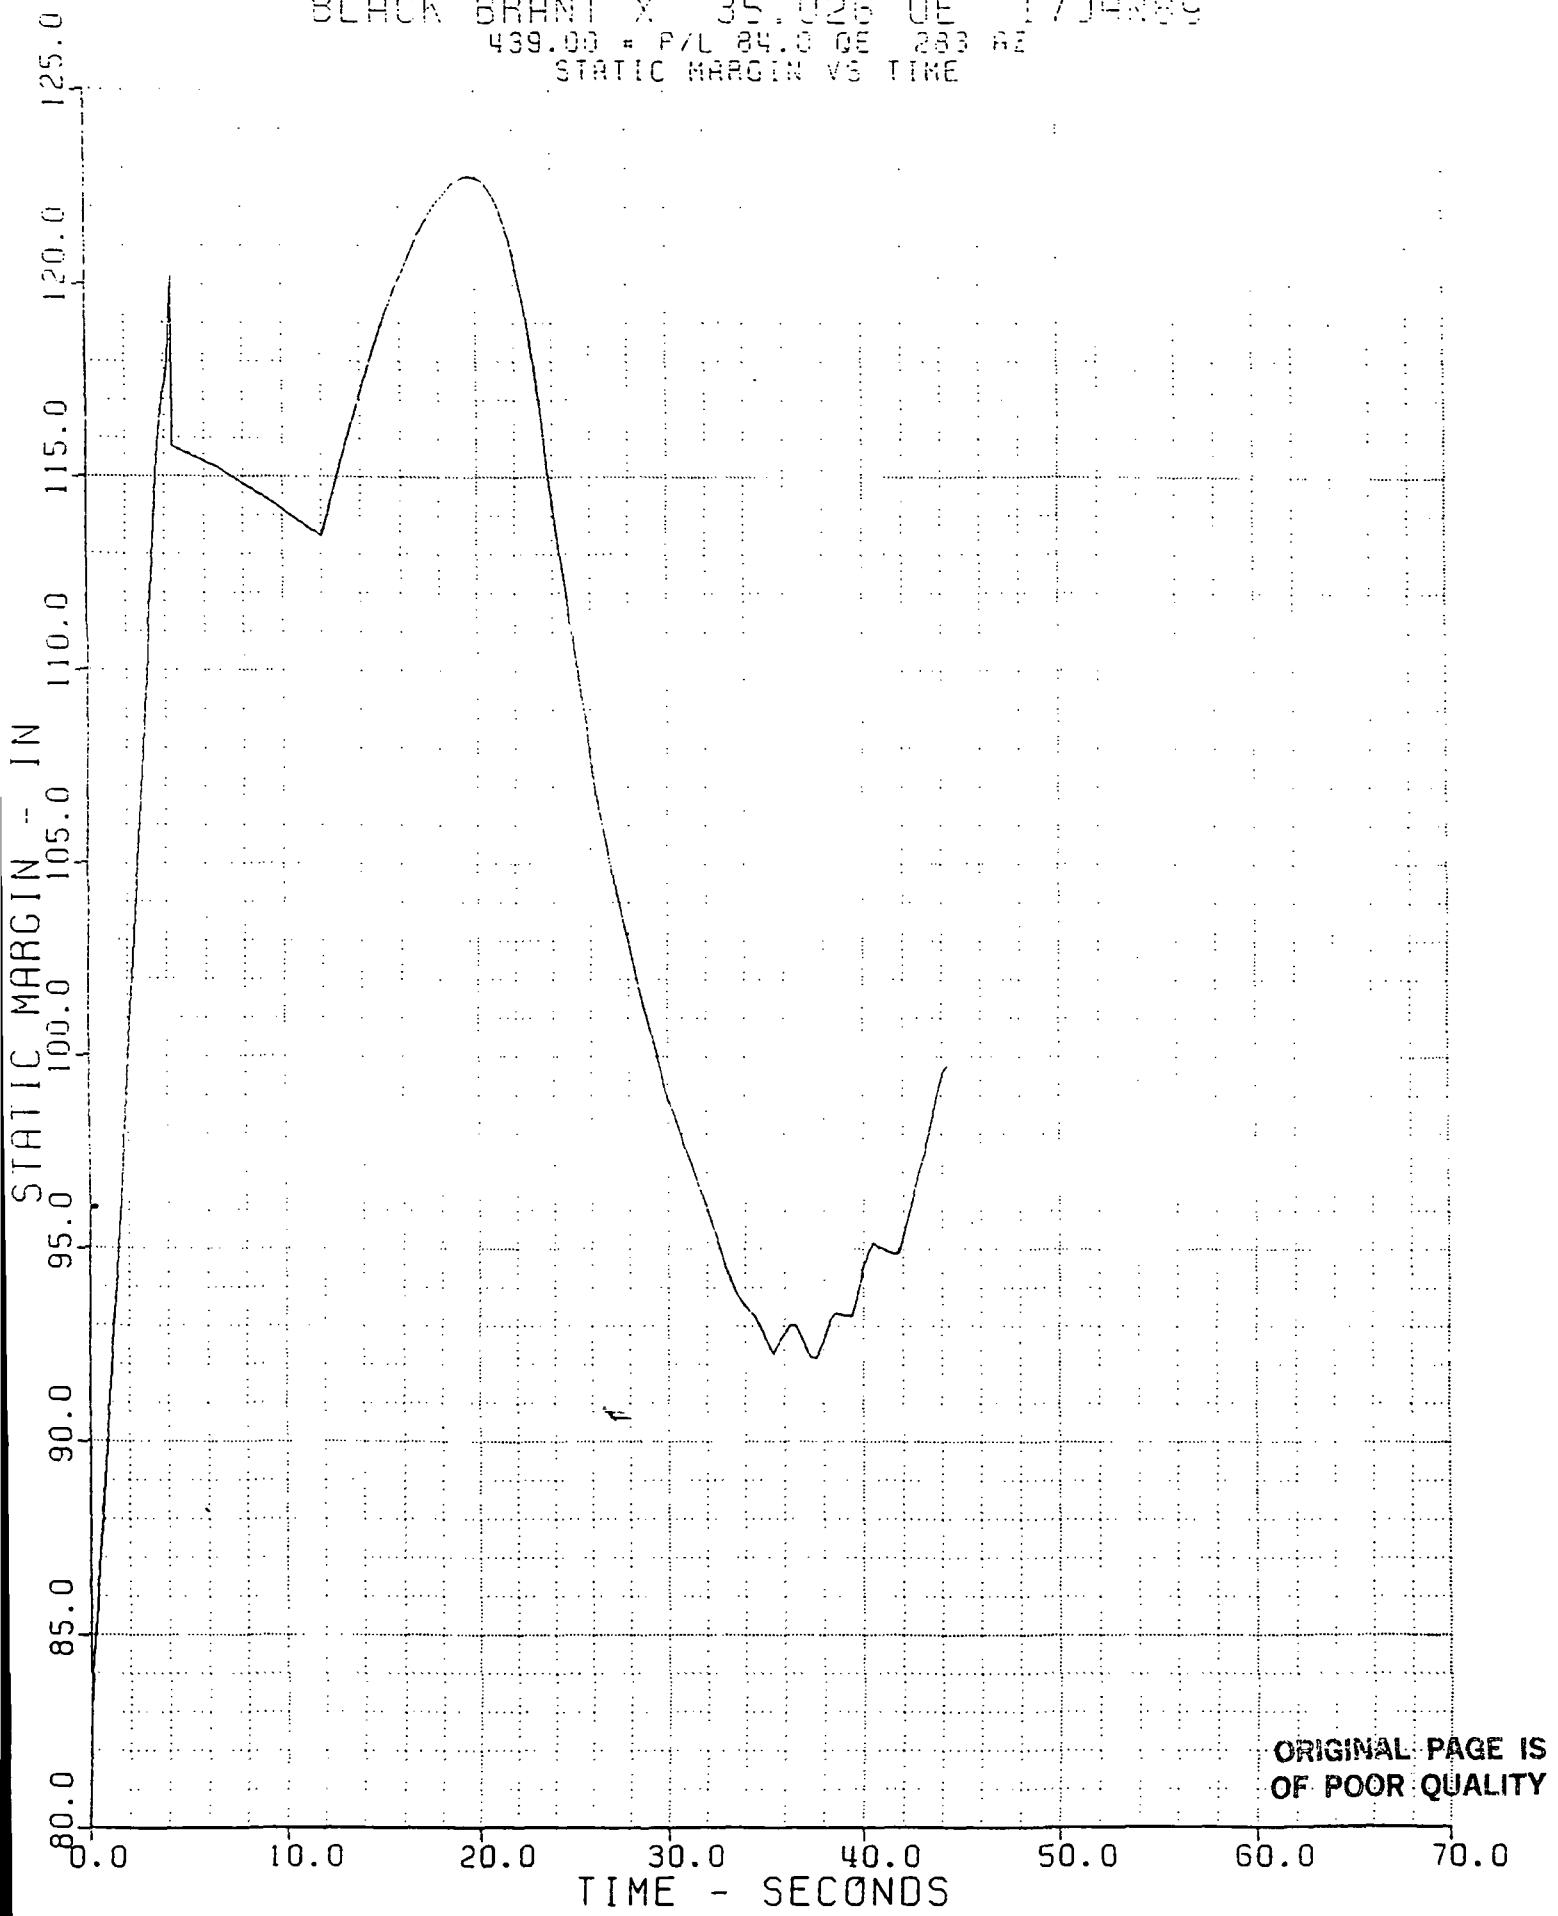


439.0" P/L 84.0 QE NOR NOMINAL 90.0 X MIN FIN CANT
ROLL RATE. PITCH FREQUENCY VS TIME

ORIGINAL PAGE IS
OF POOR QUALITY

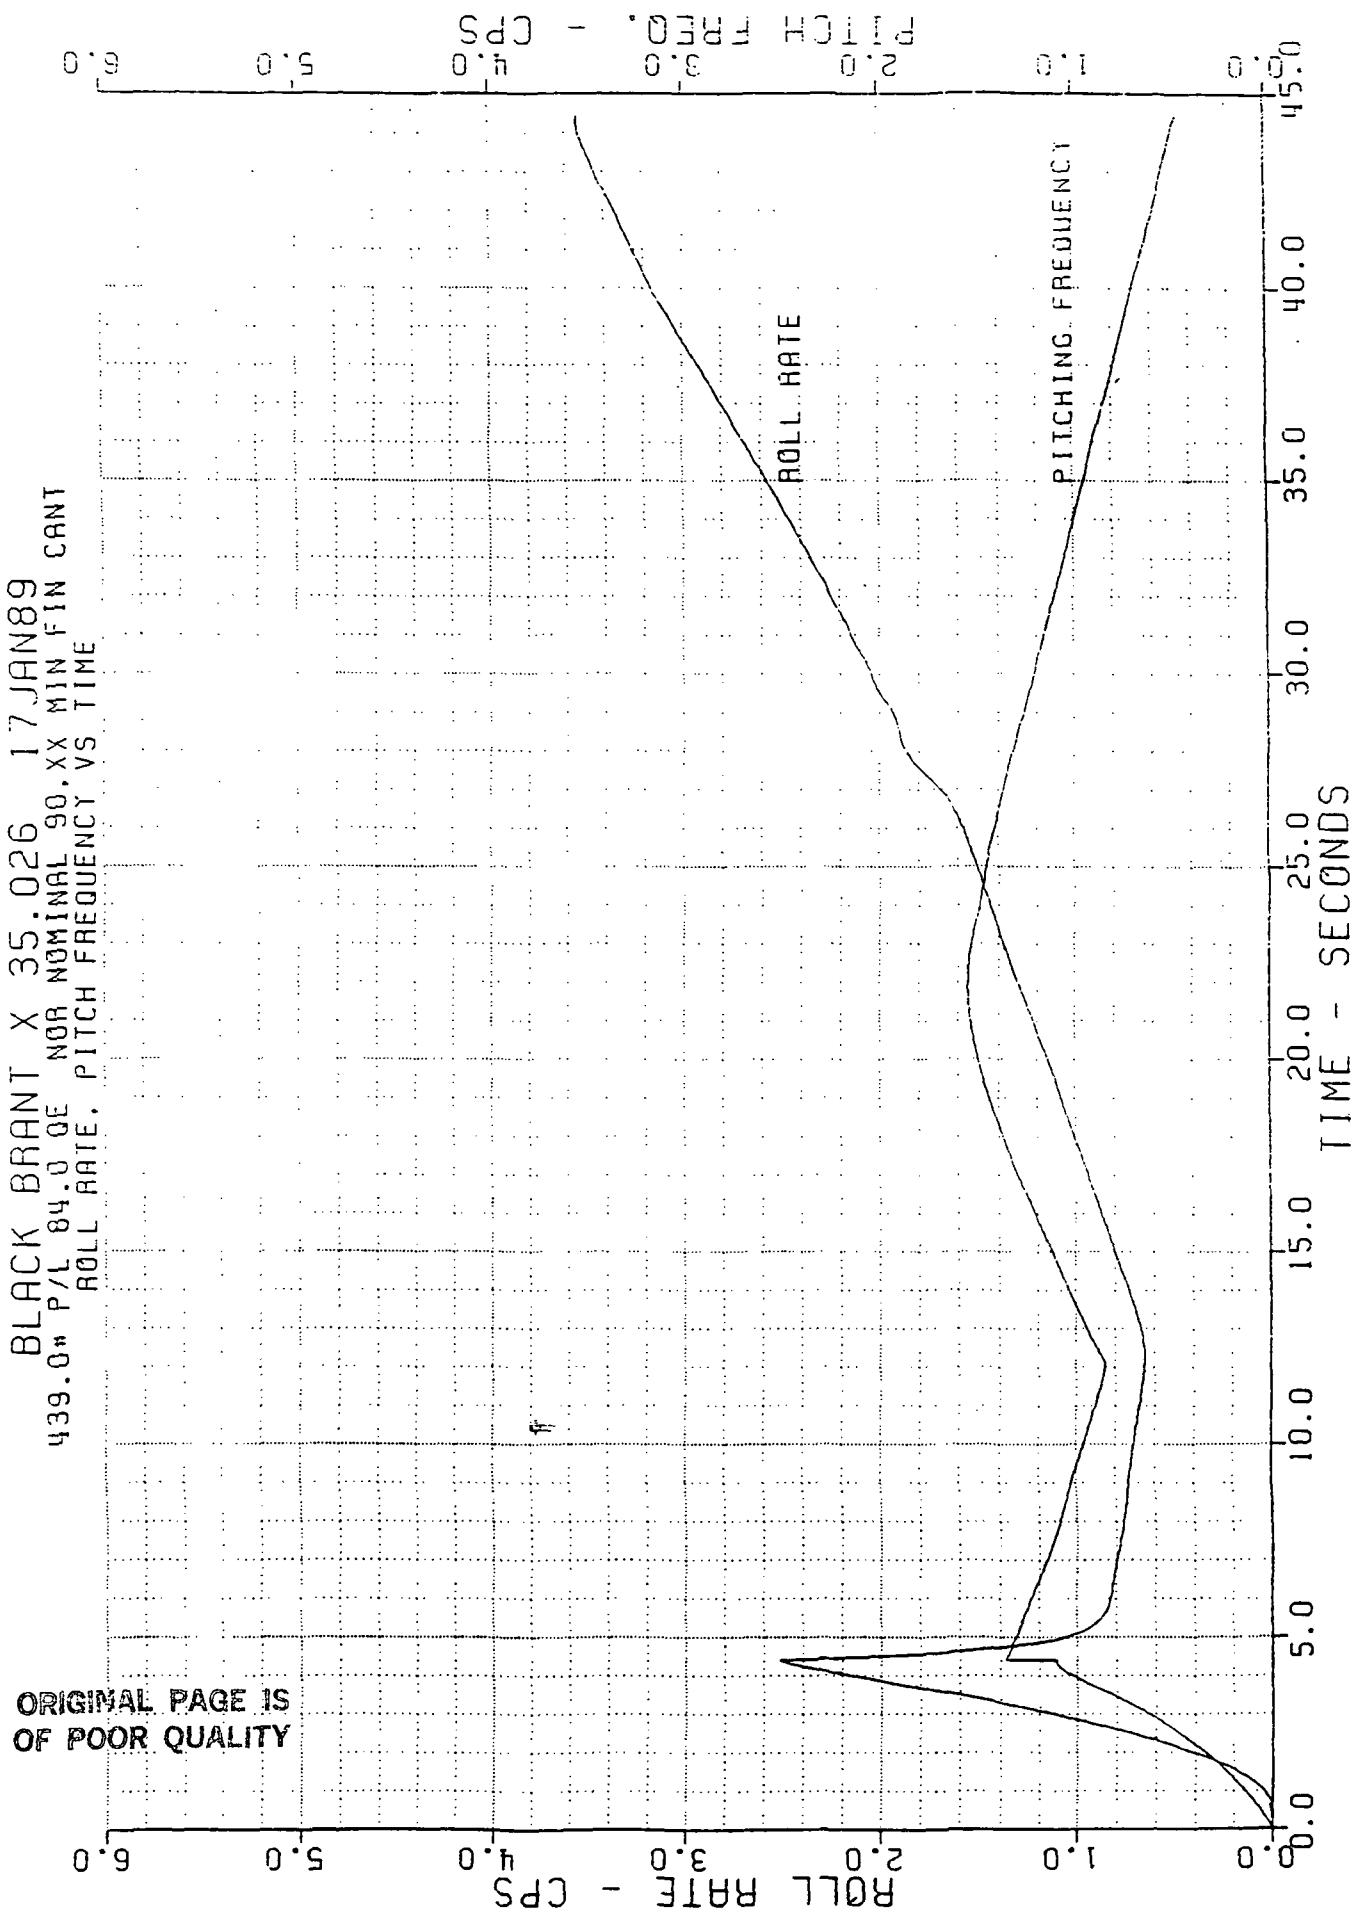


BLACK BRANT X 35.026 17 JAN 89
439.0# P/L 84.0 Q/E NOR NOMINAL 90, xx MIN FIN CANT
0+DELTA

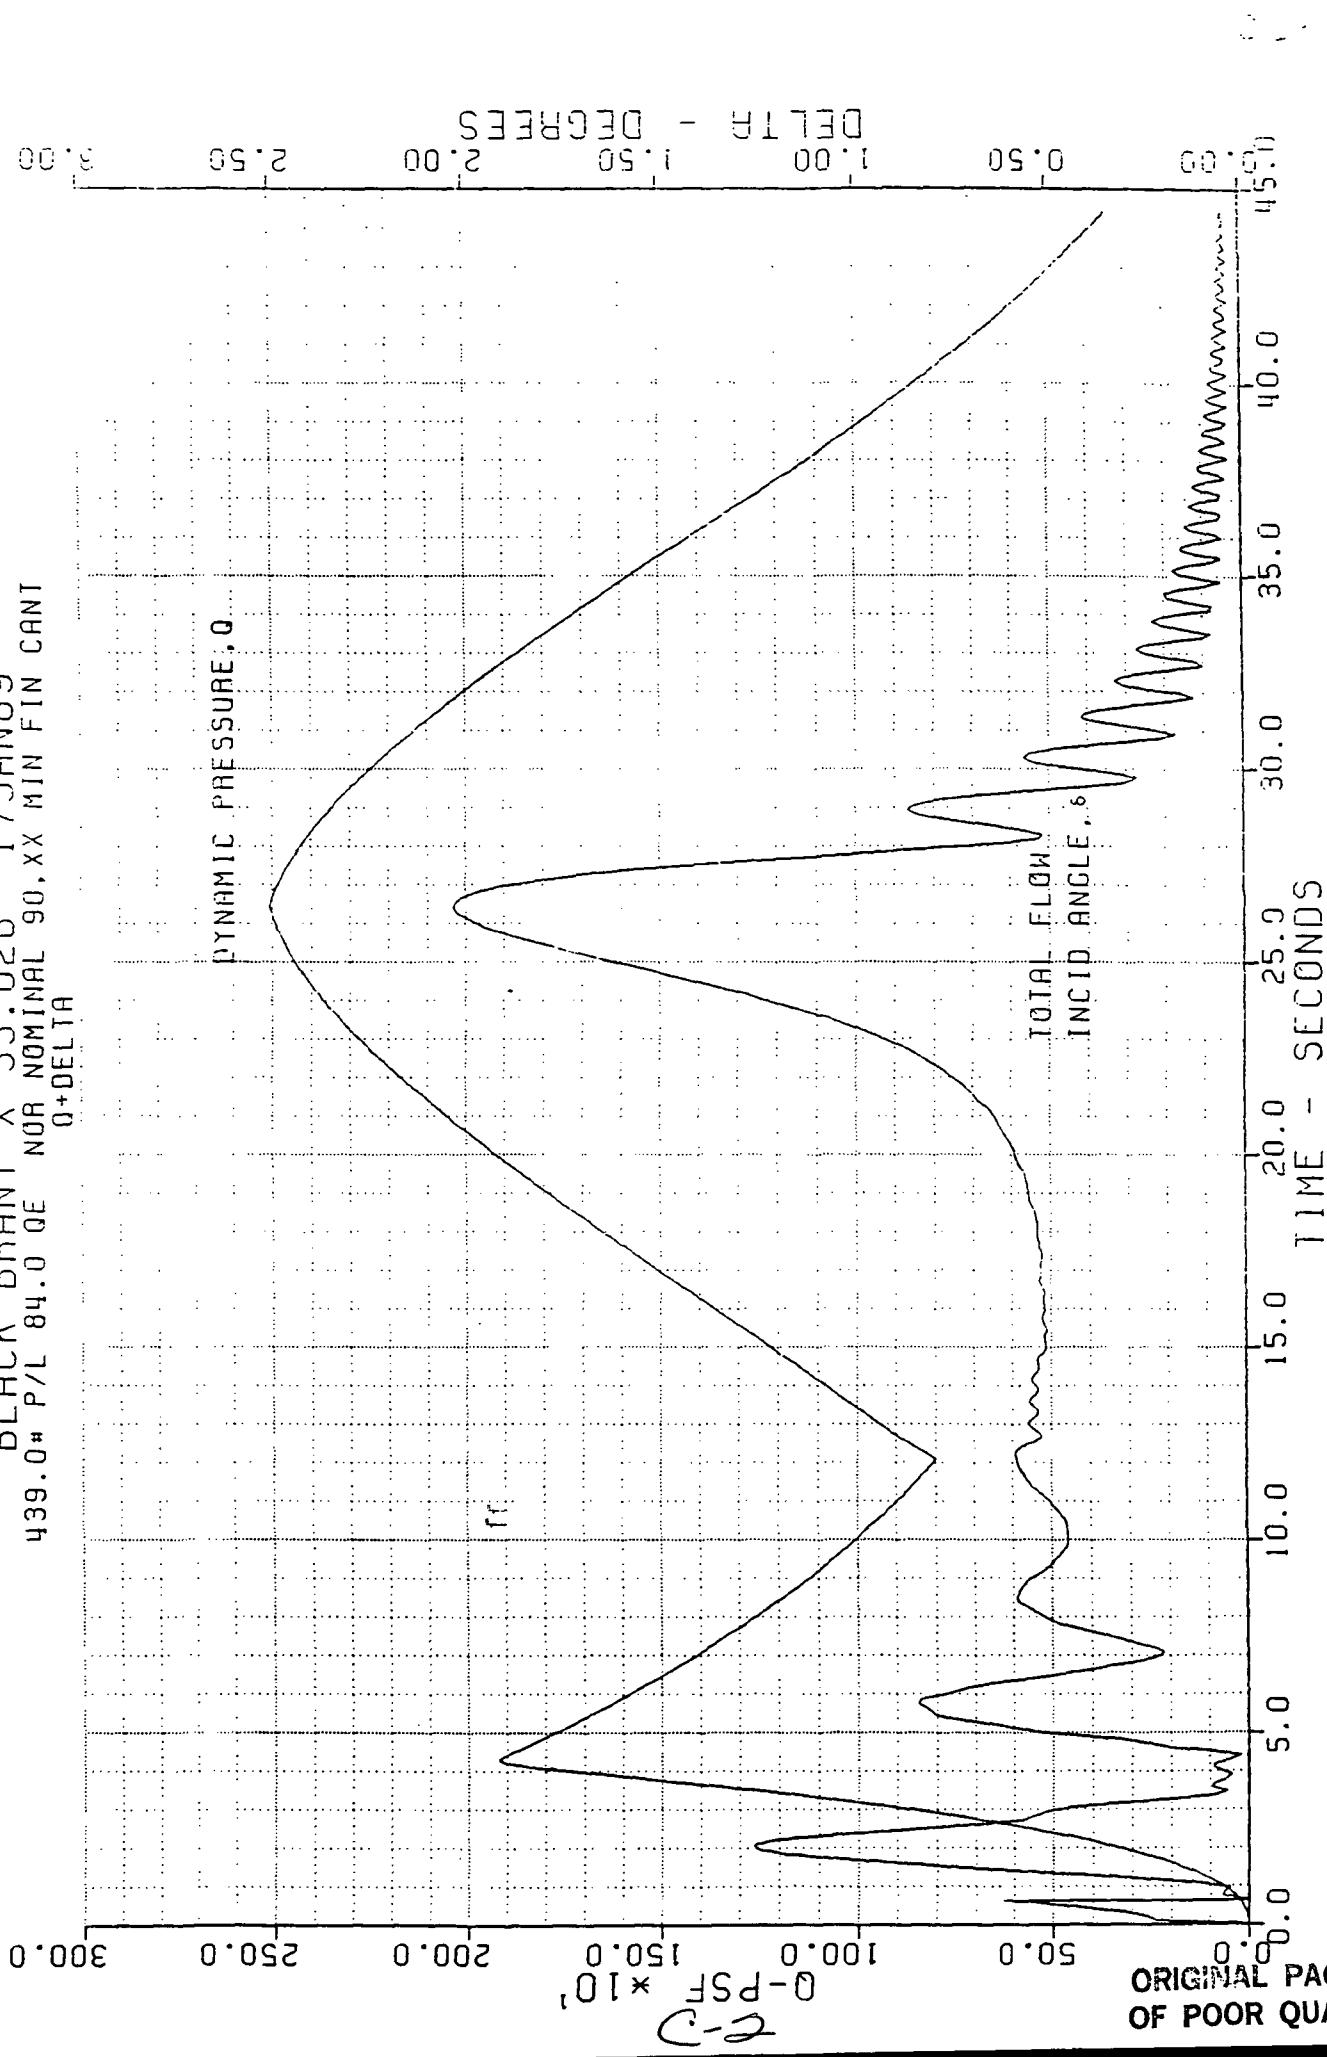

ORIGINAL PAGE IS
OF POOR QUALITY

BLACK BRANT X 35.026 17 JAN 89
439.0 P/L 84.0 QF NOR NOMINAL 90.00 MIN FIN CANT
Q*DELTA

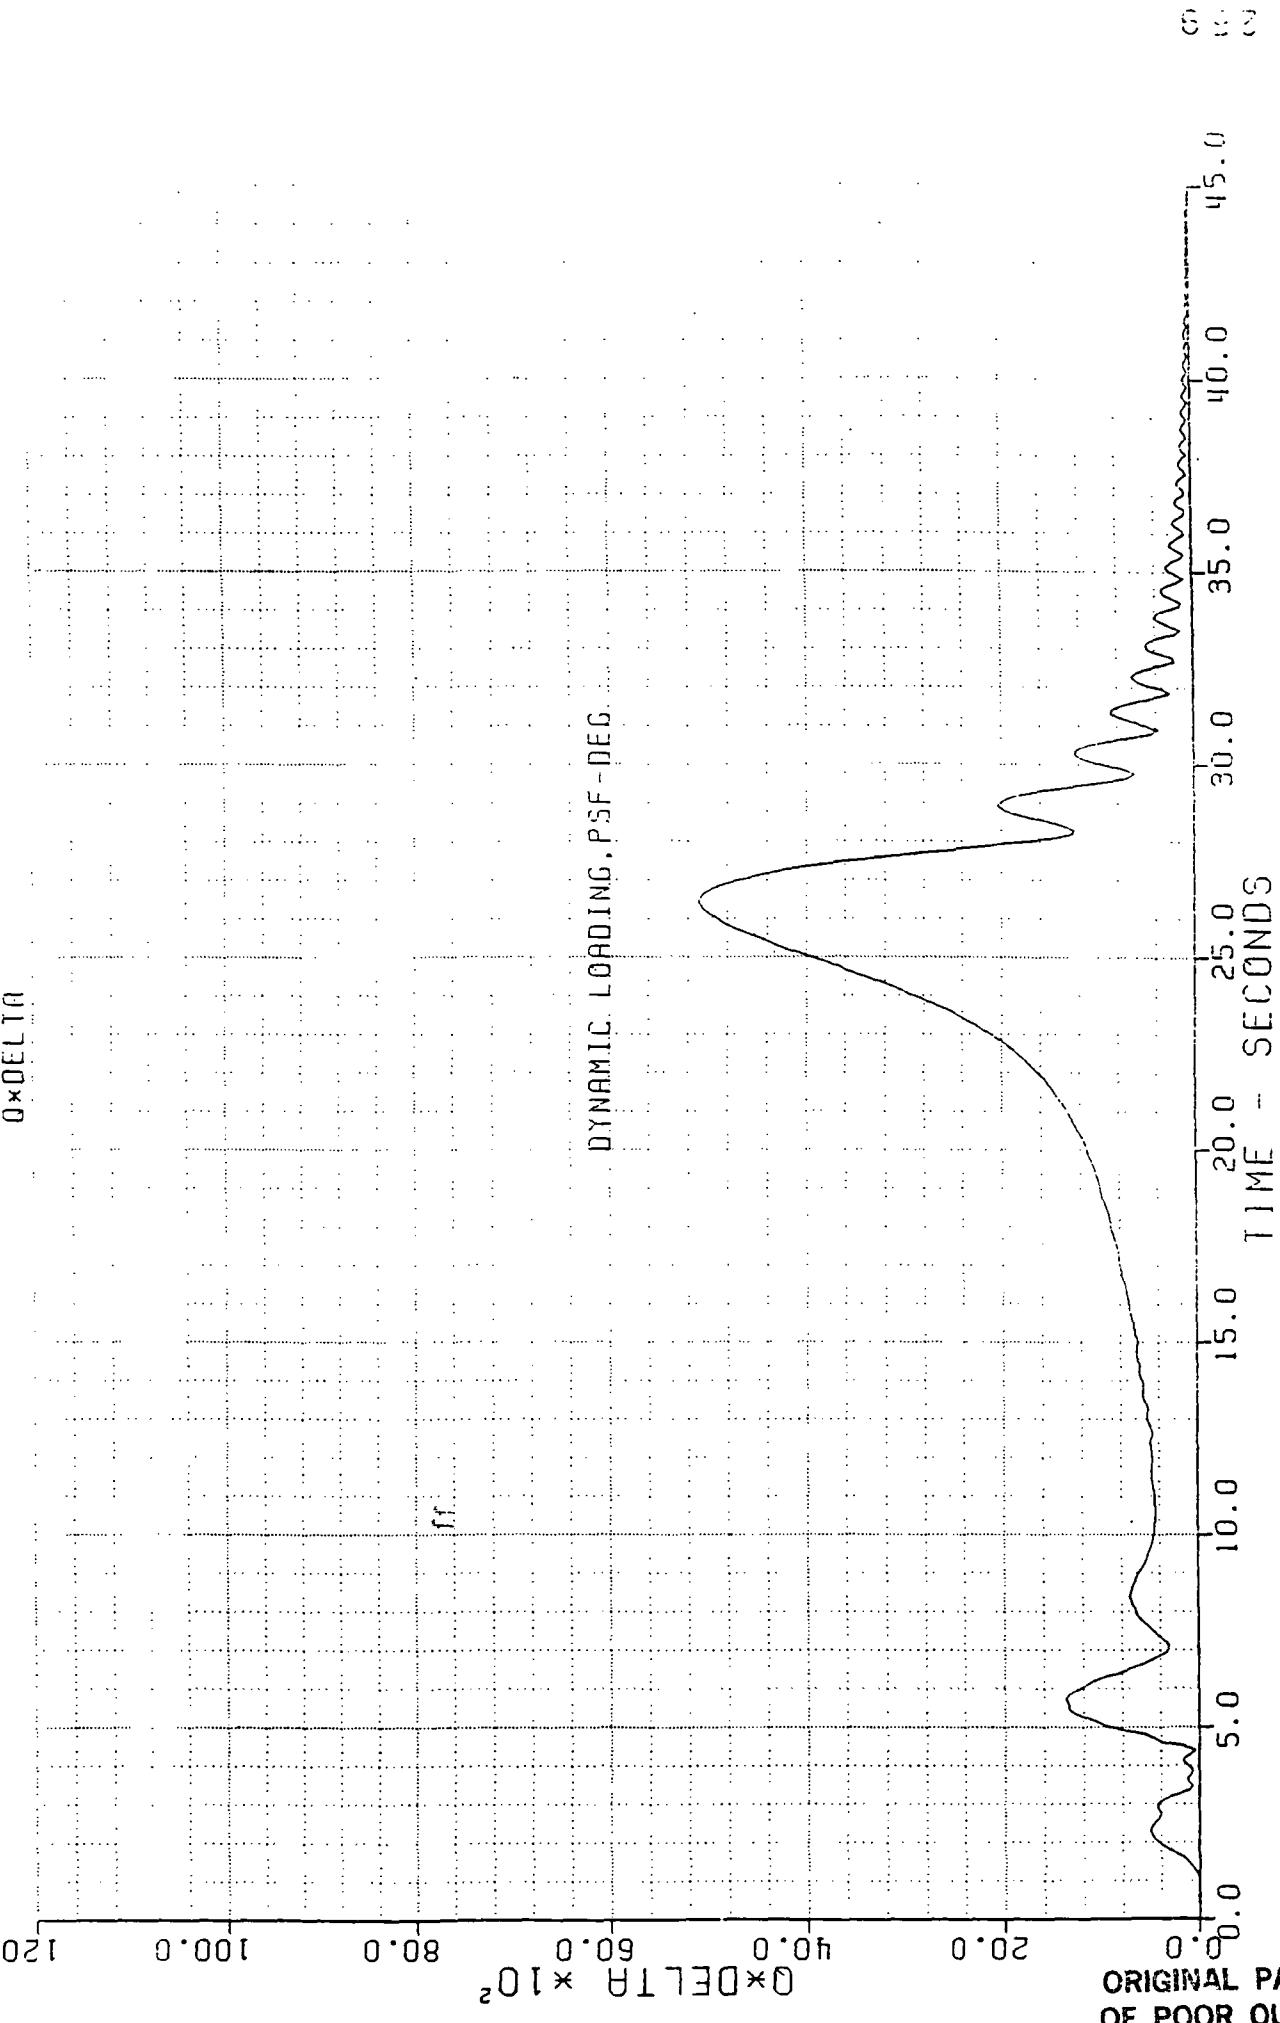

**Table 4-1. Black Brant X 35.026 UE
Misalignments, Offsets,
and Eccentricities**

LAUNCH CONFIGURATION

Thrust Misalignment:	.2°
CG Offset in Z Axis:	+.23 in
Thrust Offset in Y Axis:	-.23 in
Thrust Offset in Z Axis:	+.23 in
Tail Misalignment:	.2°

SECOND STAGE

Thrust Misalignment:	.2°
CG Offset in Z Axis:	+.23 in
Thrust Offset in Y Axis:	-.23 in
Thrust Offset in Z Axis:	+.23 in
Tail Misalignment:	.2°

Pitch/Roll Crossing Occurs at: 24.5 Sec

Pitch/Roll Crossing Frequency: 1.5 Cps

4.2.2 Despin Analysis

Source: Wallops Flight Facility Despin Program

Physical Properties/Roll-Rate Parameters: Table 4-2

Resulting Despin Weights Required (each): 119.8 grams/wt

**Table 4-2. Black Brant X 35.026 UE
Despin of Payload, Physical
Properties and Roll-Rate
Parameters**

Initial Roll Rate:	4.0 cps
I _{xx} of Payload and Motor Minus Nose Cone:	4.91 sl-ft ²
Final Roll Rate:	2.04 cps
Cable Density:	0.029 lb/ft
Cable Length:	7.91 ft (1.75 wrap)
Wrap Radius:	0.713 ft
Required Despin Weight:	.2641 lb/wt (119.8 gms/wt)

I_{xx} Booms Stowed = 2.3 sl-ft²

I_{xx} Booms Deployed = 4.7 sl-ft²

Booms despin payload to 1 cps nominally.

Initial Roll Rate = 5 = Final = 1.25 cps

Initial Roll Rate = 3 = Final = 0.75 cps

SECTION 6 - DISPERSION ESTIMATES

DISPERSION

Dispersion Study of First, Second, and Third Stages of
Brant X Unguided Sounding Rocket Vehicle", Carole Flores
Andrews, NASA/GSFC/WFF.

Mean: 721.7 Km

Dispersion (about the nominal): 52.4 Km

SD: 669.3 Km

2 σ Low Flight: Figure 6-1

Dispersion: 298.8 Km

DISPERSION

Mean: 721.7 Km

Displacement: -5.8 Km

Dispersion (about the mean): 50.0 Km

SD: 671.7 Km

2 σ Low Flight: Figure 6-1

Displacement: 51.2 Km


Dispersion (about the mean): 276 Km

Displacement: -27.4 Km

Dispersion (about the mean): 282.1 Km

35.XXX Vehicle Family: Appendix A


ff

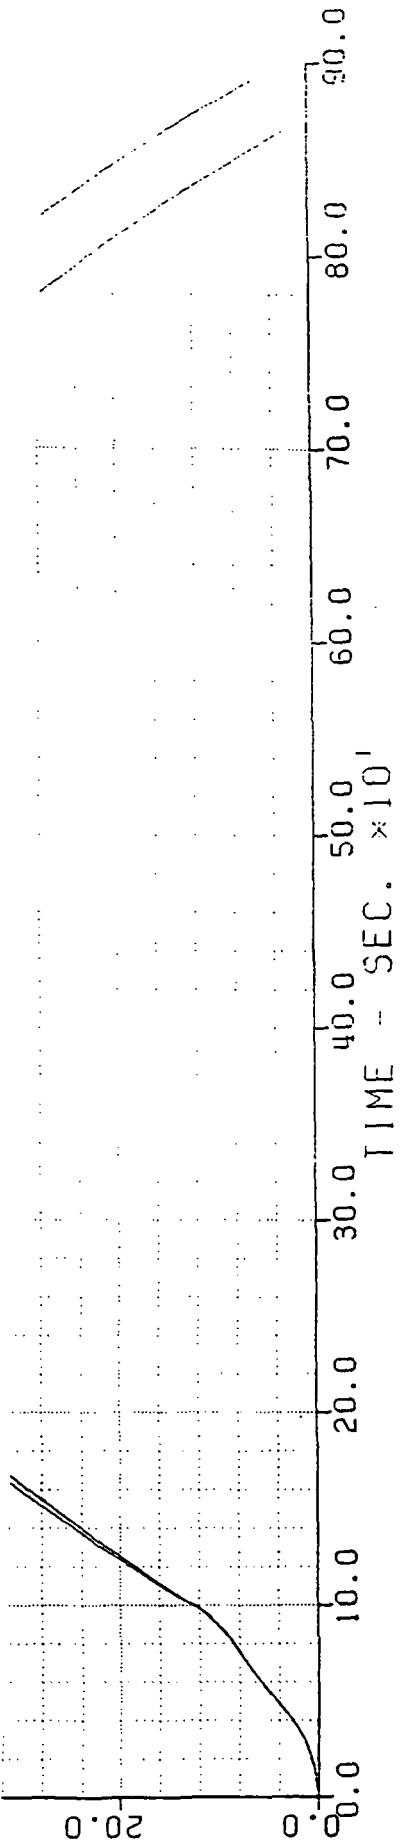

ORIGINAL PAGE IS
OF POOR QUALITY

APPENDIX A
DISPERSION DATA

ff

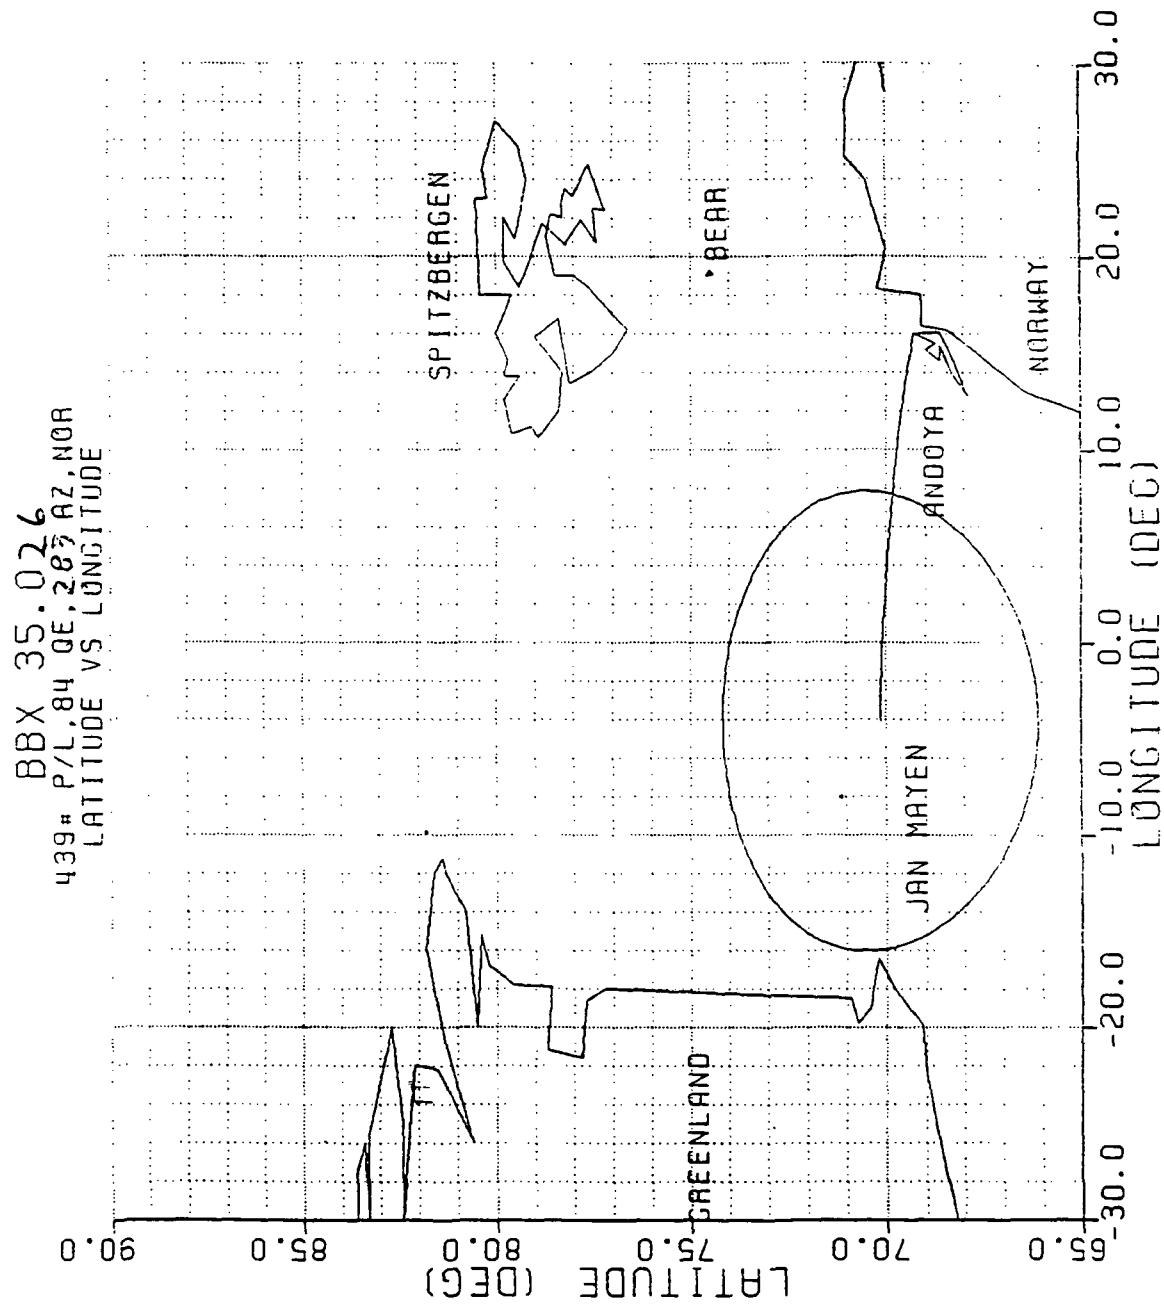

January 23, 1989

1

or 35.011 UE (Winningham)

nted so that a horizon
ed to the B vector and
ry of this crossing (see
angle of the sensor, the
altitude related horizon
critical in the present case
s, and the large difference,
izon depression angles

e between these altitude
is to be angled aft of the
sion angles. An angle of

ch window for his mid-
problem for the horizon
luded to avoid exposing the
shows that, in addition to
aperture of the sensor
ion. Since ± 5 degrees as a
ervative figure was provided
lusions are shown in the

Event

window opens

10° sensor band edge

5° sensor band edge

5° sensor band edge

10° sensor band edge

window

or from direct sunlight, it
:02 UT be excluded from the

based on preliminary
while at apogee was
:ory. However, since the
ie zenith angle of the B

- * - DENOTES VEHICLES THAT WERE NOT INCLUDED IN THE IMPACT DISPERSION
- * - DENOTES VEHICLES THAT WERE NOT INCLUDED IN THE APOGEE DISPERSION
- ** - DENOTES VEHICLES THAT WERE NOT INCLUDED IN APOGEE OR IMPACT DISPERSIONS
- *** - DENOTES DATA NOT RECEIVED FROM MISSION ANALYST
- N/R - DENOTES DATA NOT AVAILABLE (SEE COMMENTS)
- N/A - DENOTES DATA NOT AVAILABLE

ff

ORIGINAL PAGE IS
OF POOR QUALITY


vector and since this angle is relatively insensitive to expected trajectory changes, these results should be considered final.

Robert Patterson
Bob Patterson

Enclosure: 1

cc: R. A. Burns/823.0
L. W. Gurkin/841.0
D. F. Detwiler/841.1
M. Altstatt/CSC
J. Diehl/CSC
B. Hickman/CSC

- DATA:
- 35.011 UE LAUNCHED NOR MID NOV '89 439±PL 84°QE/320°AZ
8 MIN AFTER LAUNCH, PL AT APOGEE 723.6 KM ALT, 71.3479°LAT 10.44667°λ
 - B VECTOR FROM WALLOPS MAGVEC PROGRAM FOR APOGEE POSITION
200 KM ALT, EC -78.559°, AZ 354.664, MAG 0.479 GAUSS
723.6 KM ALT, EC -78.622°, AZ 352.369, MAG 0.391 GAUSS
 - HORIZON DEPRESSION ANGLE AT ALTITUDE
200 KM ALT, 14.16° BELOW S.L. HOR
723.6 KM ALT, 26.09° BELOW S.L. HOR

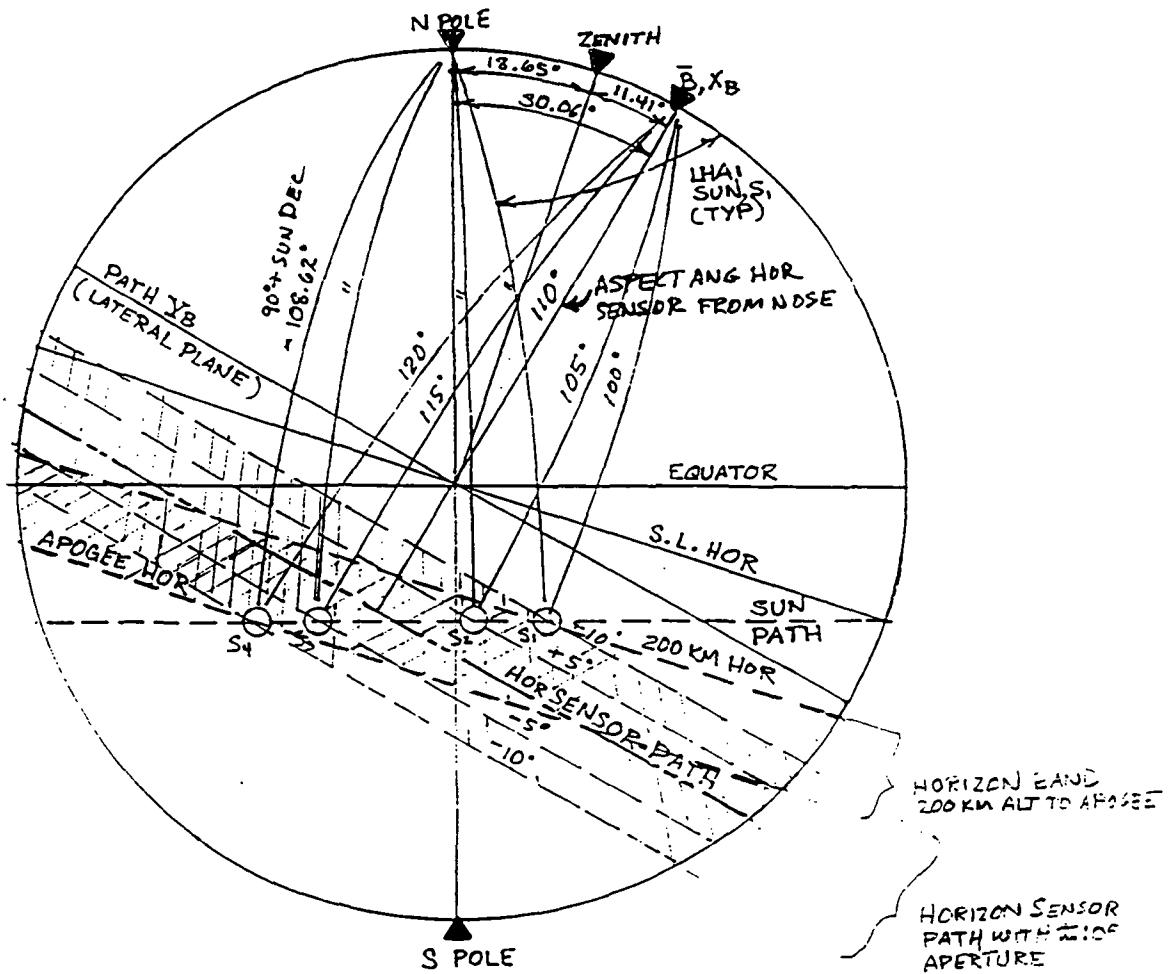

CELESTIAL SPHERE SHOWING ASPECT
ANGLES BETWEEN HOR SENSOR AND SUN
35.011 UE

SAMPLE CALCULATION FOR SUN POSITION S₁ WHERE SUN CROSSES HORIZON SENSOR +10° BAND EDGE

$$LHA_1 = \cos^{-1} \left[\frac{\cos 100^\circ - \cos 108.62^\circ \cos 30.06^\circ}{\sin 108.62^\circ \sin 30.06^\circ} \right] = 77.495^\circ \text{ OR } 5^h 10^m$$

SINCE FOR LONGITUDE OF 10.44667 EAST, RELATION BETWEEN UT AND LHA IS $UT = LHA + 11^\circ 15'$, WE HAVE UT OF 16:26. ALLOW 8 MIN FLIGHT TIME TO APOGEE THEN SUN WOULD BE AT SENSOR +10 BAND EDGE IF VEHICLE WAS LAUNCHED AT 16:20 UT

MECHANICAL SYSTEMS

BOB HICKMAN

JANUARY 31, 1989

**MECHANICAL SYSTEMS HANDOUT
FOR DESIGN REVIEW OF 35.011 & 35.026**

The 35.011 and 35.026 payloads will be flown from Norway in the winter campaign of 1989-90 and will be a continuation of the Centaur I program flown from Cape Parry in December 1981 and the failed Centaur II campaign launched from Norway in January 1986. The experimenter is Dr. Waddingham from Southwest Research. No recovery is planned. The following information is supplied in the format of Enclosure 1:

1. SYSTEM STATUS

The design of all WFF supplied systems is complete with the exception of the TM section. The nose cone and ignition sections will be ordered soon.

2. WFF PROVIDED MECHANICAL SYSTEMS

Wallop will supply the following mechanical systems and hardware:

- a. A standard magnetic ACS section with aft pullaway connector cover. The 2 TRADAT antennas will be located on this section.
- b. A TM skin section containing 2 component decks plus two 61 pin umbys, 2 S-band antennas, TRADAT antennas (2), timer access door, and a Bristol style V-band joint on both ends with a WFF design separation cutting mechanism for the forward joint. The experiment section will fasten to the front of this skin with eight (8) 1/4-28 socket head shoulder screws.

Wallop will supply, from Bristol, a modified FEOS nose cone with LEO system and a standard ignition and separation housing.

The experiment section to be enclosed in the ejectable nose cone is supplied by and will be discussed by Southwest Research.

A drawing list for this project is supplied as Enclosure 2.

3. ASSEMBLY DRAWINGS AND PHYSICAL PROPERTIES

See WFF Dwg. D-35-16922

4. SEPARATION DEVICES

The only Wallop supplied separation design is the V-band cutter mechanism for the nose cone release system. The V-band is a standard Bristol design with two halves held together by four #6 screws. These four screws are severed by two blades

90° and 270° on the payload. The cutting of the
achieved by the use of one 6104 Holey cartridge in
the two cutter housings (B-GEN-13481). The cutter
are a threaded design developed by Wallops but very
the Bristol and Sandia cutters. This cutter design
successfully on 29.091, 35.006, 31.041, 31.036,
d 35.010. It should be noted that for this flight,
e for 35.010, the thread on the cutter housing has
ed from 1/2-13 to 1/2-20 thread to allow a larger
a at the weakest part of the cutter.

.n.
:otal
'sec.
:c.
sec.

ration devices in the payload included the standard
t X separation system and the despun system, both in
r housing; and the nose cone deployment (spring)
o supplied as standard Black Brant hardware. The
ation springs will push off from the ACS component
h will house the separating ignition connector and
rap" cover.

./in.
/sec.
.//sec.
.//sec.

YSIS

al joints on this payload are standard 17.26 in. dia.
sign V-band joints which have flown successfully many
should be noted that the shear lip diameter for the
I.D. joint has been increased by .027 in. to allow
ance in the front end (See WFF Dwg. D-35-16938).
also done on the 35.006 and 35.009 Mozer BBX payloads
successfully and the failed 35.010 Centaur I

h the payload

SYSTEMS

new design Wallops supplied system for this payload is
tion. This section is composed of two telemetry and
deck plates. The two deck plates contain the
as presented in Enclosure 3. The two decks are
together by four 3/4 in. square stand offs. The
k is fastened radially through the skin by eight (8)
shoulder bolts. The skin section is 17 in. long and
.100 in. thick. The skin contains cutouts for a
ss door, lift off switches, two (2) 61 pin umbra
Also mounted to the skin section are the 2 S-band
d antennas, and the deployment gun mounting blocks.

ns
(non-

mechanical systems, i.e., nose cone and igniter
ction, are standard Bristol systems and each will
is own separation system. Using information supplied
, the following separation velocities have been
:

ORIGINAL PAGE IS
OF POOR QUALITY

A-

Dwg. NO.	Rev.	Name
A-30-11077		Rally Brk't.
A-GEN-11168		2 Timer Brk't.
A-GEN-12748-6		Connector Brk't. (6-25 pin)
A-2P-12935		G-siwtch Dpor
A-35-134		V-band Cutter Mount Block
B-31-12977	B	Deployment Bund Blade
B-GEN-13481	D	V-band cutter Gun Threaded
D-35-16922		Physical Properties P/l. Only
B-GEN-14018		Pnewmatic Connector Adapter
C-GEN-10363		Monitor Box
C-34-113294-3	A	Nicad 'AA' (Pyro) Battery Box
Sh. 1 & 2		Accelerometer Brk't.
C-GEN-13529		ACS Component Plate
C-GEN-14588	E	BB Test Fixture
D-27-11798	C	V-band Assy.
D-38-12471-1		37 Pin Umbry Brk't.
D-GEN-13935		61 Pin Umbry Brk't. 17.26 Dia P/l.
D-GEN-14029		Winningham FEOS N/C Mods
D-35-14051		Lanyard Switch
D-GEN-14125		TM Section
D-35-16938		TM Deck #1
D-35-16939		TM Deck #2
D-35-16940		

DATE	LET.	REVISION		BY	Wickman
		UNIT OR PROJECT	SCALE		
MATERIAL				HEAT TREAT	
UNIT ASSEMBLY	35.026 & 35.011			DR.	
				DES.	
TOLERANCE ON DIMENSIONS UNLESS SHOWN OTHERWISE	{ FRACTIONAL DIMENSIONS $\pm .010$ DECIMAL DIMENSIONS $\pm .005$		NATIONAL AERONAUTICS AND SPACE ADMINISTRATION	CHK.	
ANGULAR \pm			WALLOPS FLIGHT CENTER	GL.	
SURFACE FINISH IN MICROINCHES RMS	{		WALLOPS ISLAND, VIRGINIA 23337	AP.	
UNLESS SHOWN OTHERWISE					
			DRAWING LIST		
			WINNINGHAM		

A-

DRAWING LIST

WINNINGHAM

INSTRUMENTATION

JIM DIEHL

JANUARY 31, 1989

ff

January 10, 1989

MEMORANDUM

TO: John Van Overeem, Payload Manager
FROM: James K. Diehl, Instrumentation Engineer
SUBJECT: Instrumentation System Design for Payloads 31.011 & 35.026
Winningham/SwRI



Introduction

Payloads 35.011 & 35.026 are to be launched from Andenes, Norway in December 1989. The instrumentation system on each payload will telemeter scientific data from nine onboard experiments. Also included will be ACS data, vehicle performance data and housekeeping data. Both payloads will be aligned to the magnetic field by a magnetic ACS. Both payloads are identical in design, and similar to payload 35.010.

Telemetry System Description

The telemetry system contains three downlink S-Band systems, one being an FM/FM link @ 2251.5 MHz and the others are two PCM/FM links @ 2265.5 MHz & 2279.5 MHz. The FM/FM link contains IRIG channels 8 through 17, F, H, J, & L. Both the PCM/FM links will operate at 800 Kbits/Sec (B10-L). Both PCM encoders will be located in the experiment section of the payload, due to the large volume of interfacing harness. A TRADAT ranging system is used for trajectory data. The following are some of the parameters of these systems.

TM #1 FM/FM

Carrier Frequency	2251.5 MHz
Carrier Deviation	+750 KHz
I.F. Bandwidth	3.3 MHz
Video Bandwidth	750 KHz
RF Safety Factor	7.3 dB

TM #2 PCM/FM

Carrier Frequency	2265.6 MHz
Carrier Deviation	+800 KHz
I.F. Bandwidth	3.3 MHz
Video Bandwidth	2 MHz
RF Safety Factor	5.3 dB

TM #3 PCM/FM

Carrier Frequency	2279.5 MHz
Carrier Deviation from PCM	+800 KHz
Carrier Deviation from TRADAT	+200 KHz

Combined Carrier Deviation	+860 KHz
I.F. Bandwidth	3.3 MHz
Video Bandwidth	2 MHz
RF Safety Factor	4.3 dB

TRADAT

Uplink Carrier Frequency	550 MHz
Uplink Carrier Deviation	+40 KHz
Tradat Modulation	3.906 Kbit BI0-L
Uplink Transmitter Power	200 Watts Min.
RF Uplink Safety Factor	7.9 dB

Trajectory data will be obtained from TRADAT which will be combined with PCM using a TRADAT/PCM video combiner. The amplifiers in the standard combiner design, will have to be upgraded for the combiner to operate properly at 800 Kbit.

Acceleration data will be measured in three axis using Setra accelerometers. The thrust axis accelerometer will be conditioned to a +40G, -10G range. Both lateral accelerometers will be conditioned to a +5G range.

Attitude data will be obtained from two sources; one a three axis magnetometer for magnetic aspect angle, and two a horizon sensor for horizon crossing aspect angle. Together these two attitude sources will give absolute attitude data. The horizon sensor data will be telemetered in both analog and digital form. The digital horizon sensor data will include high resolution "time event" data defining sky/earth and earth/sky horizon crossings. Magnetometer calibrations are planned at Greenbelt, Maryland.

Housekeeping data will consist of the usual squib current, bus voltage, bus current, transmitter temperatures, and other miscellaneous monitors.

Two Wallops wraparound S-Band antennas will be used. TM links #1 and #3 will be diplexed to one antenna and TM link #2 will be transmitted via the other antenna. The Tradat uplink will be received with a pair of PSL stub antennas, which will be mounted on the ACS skin.

The following is a list of attachments:

1. FM Measurement List
2. FM Pre-Emphasis Analysis
3. PCM #1 Measurement List
4. PCM #2 Measurement List
5. PCM Formats
6. PCM Stacking Arrangements
7. RF Downlink Analysis
8. RF Uplink Analysis
9. Instrumentation Components List

James K. Diehl

35.011 & 35.026
SWRI/Winningham

FM Measurement List TM #1

<u>IRIG Chan</u>	<u>Center Freq. (KHz)</u>	<u>Data Description</u>	<u>Nom. Freq. Resp. (Hz)</u>	<u>Actual Filter Used (Hz)</u>	<u>Mod Index</u>
L	560	ACM/ACEF BB1	16,800	16,800	5
J	300	ACM/ACEF BB2	9,000	16,800	2.7
H	165	ACLP LIAC 2	4,950	12,395	2
F	93	ACLP LIAC 1	2,790	6,970	2
17	52.5	Horiz Sen Analog	790	790	5
16	40	Thrust Accel. +40G, -10G	600	600	5
15	30	X-Axis Accel. $\pm 5G$	450	450	5
14	22	Y-Axis Accel. $\pm 5G$	330	330	5
13	14.5	3rd Stage Mtr Press	220	220	5
12	10.5	2nd Stage Mtr Press	160	160	5
11	7.35	Mag X Roll #1	110	110	5
10	5.4	Mag Y Roll #2	81	81	5
9	3.9	Mag Z Pitch	59	59	5
8	3.0	Tradat Receiver AGC	45	45	5

35.011 & 35.026
SWRI/Winnipeg

FM Pre-Emphasis Schedule

<u>IRIG Chan</u>	<u>Center Freq</u>	<u>Actual Filter Used</u>	<u>Mod Index</u>	$\frac{F_n \sqrt{B_n}}{F_1 \sqrt{B_1}} / MI_n$	<u>RF Dev</u>	<u>DB Ref Level</u>	<u>Xmitt Dev Ratio</u>	<u>S/N Ratio @ Disc. Output @ Apogee</u>
L	560 KHz	16,800 Hz	5.0	3606.7	234.5	0 dB	.427	47.6 dB
J	300	16,800	2.679	3606.7	234.5	0	.798	47.6
H	165	12,395	2.0	2282.0	148.4	-4.0	.918	47.6
F	93	6,970	2.0	964.5	62.7	-11.4	.688	47.6
17	52.5	790	5.0	73.3	7	-30.5	.133	50.7
16	40	600	5.0	48.7	7		.175	54.3
15	30	450	5.0	31.6	7		.233	
14	22	330	5.0	19.8	7		.318	
13	14.5	220	5.0	10.7	7		.482	
12	10.5	160	5.0	6.6	7		.667	
11	7.35	110	5.0	3.8	7		.952	
10	5.4	81	5.0	2.4	7			
9	3.9	59	5.0	1.49	7			
8	3.0	45	5.0	1.0	7	-30.5		
				10,459.9	750 KHz			

I.F. Bandwidth = 3.3 MHz

Carrier Deviation = ±750 KHz

 $S_f = 7.3 \text{ dB} + 12 \text{ dB} = 19.3 \text{ dB}$ Carrier S/N @ Apogee

35.011 & 35.026
SWRI/Winningham

PCM #1 Measurement List TM #2

<u>Format Label</u>	<u>Data Description</u>	<u>WD</u>	<u>WD INT</u>	<u>Time Slot FM</u>	<u>FM INT</u>	<u>Sample Rate (SPS)</u>
S1-1	DCM X-Comp MSB	4	32	0	0	2500
S1-2	DCM X-Comp LSB	5	32	0	0	2500
S2-1	DCM Y-Comp MSB	6	32	0	0	2500
S2-2	DCM Y-Comp LSB	7	32	0	0	2500
S3-1	DCM Z-Comp MSB	8	32	0	0	2500
S3-2	DCM Z-Comp LSB	9	32	0	0	2500
S4-1	Correlator 1	27	0	0	0	2500
S4-2	Correlator 2	28	0	0	0	1250
S4-3	Correlator 3	29	0	0	0	1250
S4-4	Correlator 4	30	0	0	0	1250
S5-1	Area		0	0	0	1250
S5-2	Area		0	0	0	1250
S5-3	Area		0	0	0	1250
S5-4	Area		0	0	0	1250
S5-5	Area		0	0	0	1250
S5-6	Area		0	0	0	1250
S5-7	Area		0	0	0	1250
S5-8	Area		0	0	0	1250
S5-9	Area		0	0	0	1250
S5-10	Area		0	0	0	1250
S5-11	Area		0	0	0	1250
S5-12	Area		0	0	0	1250
S6-1	SPI		0	0	0	1250
S6-2	SPI		0	0	0	1250
S6-3	SPI		0	0	0	1250
S6-4	SPI		0	0	0	1250
S6-5	SPI		0	0	0	1250
S6-6	SPI		0	0	0	1250
S6-7	SPI		0	0	0	1250
S6-8	SPI		0	0	0	1250
S6-9	SPI		0	0	0	1250
S6-10	SPI		0	0	0	1250
S6-11	SPI		0	0	0	1250
S6-12	SPI		0	0	0	1250
S6-13	SPI		0	0	0	1250
S6-14	SPI		0	0	0	1250
S6-15	SPI		0	0	0	1250
S6-16	SPI		0	0	0	1250
S6-17	SPI		0	0	0	1250
S6-18	SPI		0	0	0	1250
S6-19	SPI		0	0	0	1250
S6-20	SPI		0	0	0	1250
S7	Major Frame Count LSB	2	0	5	16	78
S8	Major Frame Count MSB	2	0	6	16	78

35.011 & 35.026
SWRI/Winningham

PCM #1 Measurement List (cont.) TM #2

<u>Format Label</u>	<u>Data Description</u>	<u>WD</u>	<u>WD INT</u>	<u>Time Slot FM</u>	<u>FM INT</u>	<u>Sample Rate (SPS)</u>
T1A	Horizon Sensor Reg 1 LSB	2	0	1	32	39
T1B	Horizon Sensor Reg 1 MSB	3	0	1	32	39
T2A	Horizon Sensor Reg 2 LSB Alt	2	0	15	32	39
T2B	Horizon Sensor Reg 2 MSB Alt	3	0	15	32	39
T3A	Horizon Sensor Reg 3 LSB Alt	2	0	31	32	39
T3B	Horizon Sensor Reg 3 MSB Alt	3	0	31	32	39
P1	(Bit) Parallel Dig Mon A	2	0	2	16	78
	1 ACEF 18V					
	2 ACM 18V					
	3 Data 5V					
	4 Data 15V					
	5 5V Reg					
	6 SPI 15V					
	7 SPI 5V					
	8 Area 5V					
	9 DCM 18V					
	10 DCM 8V					
P2	(Bit) Parallel Dig Mon B	2	0	3	16	78
	1 ACM BB1 Mux					
	2 ACM BB2 Mux					
	3 Lift Off Mon					
	4 DCM Boom Deploy					
	5 Area HVPS					
	6 Area PPS					
	7 SPI HVPS					
	8 SPI 5/200V					
	9 ACM Boom Release					
	10 ACM Boom Deploy					
P3	(Bit) Parallel Dig Mon C	2	0	4	16	78
	1 ACEF Boom Release					
	2 ACEF Boom Deploy					
	3 ACEF ESA Pos					
	4 ACEF ESB Pos					
	5 ACM Loop Release					
	6 ACM Loop Deploy					
	7 Area +Y Release					
	8 Area +Y Deploy					
	9 Area -Y Release					
	10 Area -Y Deploy					

35.011 & 35.026
SWRI/Winningham

PCM #1 Measurement List (cont.) TM #2

<u>Format Label</u>	<u>Data Description</u>	<u>WD</u>	<u>WD INT</u>	<u>Time Slot FM</u>	<u>FM INT</u>	<u>Sample Rate (SPS)</u>
A1	(D) ACM B/E	10	0	2	4	312
A2	(D) ACM Log 'B	11	0	2	4	312
A3	(D) ACM Log 'E	12	0	2	4	312
A4	(D) ACM Log ES	10	0	3	4	312
A5	(D) ACM Log EL	11	0	3	4	312
A6	(D) ACM Log B	12	0	3	4	312
A7	(D) ACEF ELF V1-V2	31	0	0	0	1250
A8	(D) ACEF ELF V3-V1	32	0	0	0	1250
A9	(D) ACEF ELF V4-V3	33	0	0	0	1250
A10	(D) ACEF ELF ES	34	0	0	0	1250
A11	(D) ACEF ELF V2-V4	35	0	0	0	1250
A12	Area PPS Cur Mon	3	0	2	8	156
A13	Area PPS +V Mon	3	0	3	8	156
A14	Area PPS -HV Mon	3	0	4	8	156
A15	Area PPS -V Mon	3	0	5	8	156
A16	Area HVPS Cur Mon	3	0	6	16	78
A17	Area HVPS +V Mon	3	0	7	16	78
A18	Area HVPS -V Mon	3	0	8	16	78
A19	Area HVU 28V Mon	10	0	4	8	156
A20	Area HVU 28V Cur Mon	11	0	4	8	156
A21	SPI +5V Mon	3	0	9	16	78
A22	SPI +15V Mon	3	0	14	16	78
A23	SPI 200V Mon	3	0	16	16	78
A24	SPI -200V Mon	2	0	14	16	78
A25	SPI 2200V Mon	2	0	16	16	78
A26	Thermistor Data I/F	2	0	7	16	78
A27	Thermistor Power Supply	2	0	8	16	78
A28	Thermistor Fwd Deck	2	0	12	16	78
A29	Thermistor Aft Deck	2	0	13	16	78
A30	Exp Battery Mon	2	0	9	16	78
A31	Exp +5V Reg Mon	2	0	10	16	78
A32	0-5V Auto Calibrator	2	0	11	16	78
A33	Mag Roll X-Axis (270)	10	0	1	4	312
A34	Mag Roll Y-Axis (180)	11	0	1	4	312
A35	Mag Pitch Z-Axis	12	0	1	4	312
A36	Horizon Sensor Pre-Amp	13	0	1	2	625
A37	Horizon Sensor Analog	13	0	2	2	625
A38	Experiment Spare	12	0	4	8	156
A39	Experiment Spare	10	0	8	8	156
A40	Experiment Spare	11	0	8	8	156
A41	Experiment Spare	12	0	8	8	156
A42	Experiment Spare	2	0	17	32	39
A43	Experiment Spare	3	0	17	32	39
A50	Thrust Accel. +40G, -10G	14	0	1	2	625
A51	X-Axis Accel +5G	14	0	2	4	312
A52	Y-Axis Accel <u>+5G</u>	14	0	4	4	312

35.011 & 35.026
SWRI/Winningham

PCM #2 Measurement List TM #3

<u>Format Label</u>	<u>Data Description</u>	<u>WD</u>	<u>WD INT</u>	<u>Time Slot FM</u>	<u>FM INT</u>	<u>Sample Rate (SPS)</u>
S1-1	VEF V12	3	16	0	0	5000
S1-2	VEF V34	4	16	0	0	5000
S1-3	VEF V13	5	16	0	0	5000
S1-4	VEF V24	6	16	0	0	5000
S1-5	VEF Ext	7	16	0	0	5000
S2-1	VEF V12f	9	16	0	0	5000
S2-2	VEF V34f	10	16	0	0	5000
S2-3	VEF V13	11	16	0	0	5000
S2-4	VEF V24	12	16	0	0	5000
S2-5	VEF Ext	13	16	0	0	5000
S3	VEF Housekeeping	15	0	0	0	1250
S4	FIMS B Data (Muxed)	56	0	0	0	1250
S5	FIMS B EA PPS STEPS	33	0	0	0	1250
S6	FIMS B MA PPS STEPS	34	0	0	0	1250
S7	Major Frame Count LSB	46	0	5	16	78
S8	Major Frame Count MSB	46	0	6	16	78
T1A	Horizon Sensor Reg 1 LSB	46	0	1	32	39
T1B	Horizon Sensor Reg 1 MSB	47	0	1	32	39
T2A	Horizon Sensor Reg 2 LSB Alt	46	0	15	32	39
T2B	Horizon Sensor Reg 2 MSB Alt	47	0	15	32	39
T3A	Horizon Sensor Reg 2 LSB Alt	46	0	31	32	39
T3B	Horizon Sensor Reg 3 MSB Alt	47	0	31	32	39
P1	(Bit) Parallel Dig Mon A	24	0	0	0	1250
	1 DIFP Head 3 Mode					
	2 DIFP Mode					
	3 DIFP Gain					
	4 DIFP Head 3 Gain					
	5 DIFP Head 1/2					
	6					
	7					
	8 ACLP 18V A					
	9 ACLP 18V B					
	10 ACLP Sweep					

35.011 & 35.026
SWRI/Winningham

PCM #2 Measurement List (cont.) TM #3

<u>Format Label</u>	<u>Data Description</u>	<u>WD</u>	<u>WD INT</u>	<u>Time Slot FM</u>	<u>FM INT</u>	<u>Sample Rate (SPS)</u>
P2	(Bit) Parallel Dig Mon B	46	0	3	16	78
	1 VEF 8V					
	2 VEF 24V					
	3 Data 5V					
	4 Data 15V					
	5 5V Reg					
	6					
	7 Attitude Sensor					
	8 FIMS 5V					
	9 FIMS 15V					
	10 DIFP 28V					
P3	(Bit) Parallel Dig Mon C	46	0	4	16	78
	1 FIMS HVPS					
	2 FIMS PPS					
	3 DIFP +X Release					
	4 DIFP +X Deploy					
	5 DIFP -X Release					
	6 DIFP -X Deploy					
	7 ACLP Boom Release					
	8 ACLP Boom Deploy					
	9 VEF Lift Off Mon					
	10					

35.011 & 35.026
SWRI/Winningham

PCM #2 Measurement List (cont.) TM #3


<u>Format Label</u>	<u>Data Description</u>	<u>Time Slot</u>				<u>Sample Rate (SPS)</u>
		<u>WD</u>	<u>WD INT</u>	<u>FM</u>	<u>FM INT</u>	
A1	VEF Boom Fwd +Y Pos	47	0	17	32	39
A2	VEF Boom Fwd -Y Pos	47	0	18	32	39
A3	VEF Boom Aft +X Pos	47	0	19	32	39
A4	VEF Boom Aft -X Pos	47	0	21	32	39
A5	DIFF Temp Mon	30	0	4	4	312
A6	DIFF Input I Mon	31	0	4	4	312
A7	(D) DIFF Data Defl Rtd	16	32	0	0	2500
A8	(D) DIFF Data Current	17	32	0	0	2500
A9	(D) DIFF Data Head 3 Cur	18	32	0	0	2500
A10	FIMS Mass PPS+	47	0	2	32	39
A11	FIMS Mass PPS-	47	0	3	32	39
A12	FIMS Energy PPS+	47	0	5	32	39
A13	FIMS Energy PPS-I	47	0	6	32	39
A14	FIMS Bias H.V. 1	47	0	7	32	39
A15	FIMS Bias H.V. 2	47	0	9	32	39
A16	FIMS -5V Mon	47	0	10	32	39
A17	FIMS +15V Mon	47	0	11	32	39
A18	FIMS -15V Mon	47	0	13	32	39
A19	FIMS +28V Mon	47	0	14	32	39
A20	ACLP LIDC1	14	0	0	0	1250
A21	Exp Spare	46	0	2	32	39
A22	Exp Spare	46	0	12	32	39
A23	Exp Spare	46	0	13	32	39
A24	Exp Spare	46	0	14	32	39
A25	Exp Spare	46	0	16	32	39
A26	Thermistor Data I/F	46	0	7	16	78
A27	Thermistor Power Supply	46	0	8	16	78
A28	Thermistor Fwd Deck	46	0	17	32	39
A29	Thermistor Aft Deck	46	0	18	32	39
A30	Exp Battery Mon	46	0	9	16	78
A31	Exp +5V Reg Mon	46	0	10	16	78
A32	0-5V Auto Calibrator	46	0	11	16	78
A33	Mag Roll X-Axis (270)	30	0	1	4	312
A34	Mag Roll Y-Axis (180)	30	0	2	4	312
A35	Mag Pitch Z-Axis	30	0	3	4	312
A36	Horizon Sensor Pre-Amp	8	0	1	2	625
A37	Horizon Sensor Analog	8	0	2	2	625
A38	ACS Servo Sum	31	0	1	4	312
A39	ACS Rate Gyro	31	0	2	4	312
A40	ACS Pitch Valves	31	0	3	4	312
A41	ACS Roll Valves	47	0	4	4	312
A42	ACS Tank Pressure	47	0	22	32	39
A43	ACS Reg Pressure	47	0	23	32	39
A44	ACS Gyro Temp	47	0	25	32	39
A45	ACS Tank Temp	47	0	26	32	39
A46	ACS Cmd Logic	47	0	27	32	39

35.011 & 35.026
SWRI/Winningham

PCM #2 Measurement List (cont.) TM #3

<u>Format Label</u>	<u>Data Description</u>	<u>WD</u>	<u>WD INT</u>	<u>Time Slot</u>		<u>Sample Rate (SPS)</u>
		<u>WD</u>	<u>WD INT</u>	<u>FM</u>	<u>FM INT</u>	
A47	ACS +28V Buss V	47	0	29	32	39
A48	ACS +5V Buss V	47	0	30	32	39
A49	ACS Relay Mon	46	0	28	32	39
A50	Thrust Accel +40G, -10G	2	0	0	0	1250
A51	X-Axis Accel +5G	40	0	1	2	625
A52	Y-Axis Accel +5G	40	0	2	2	625
A53	TM #1 +28V Buss V	32	0	1	32	39
A54	TM #2 +28V Buss V	32	0	2	32	39
A55	TM #3 +28V Buss V	32	0	3	32	39
A56	Exp +28V Batt V/Lanyard Sw #2	32	0	4	32	39
A57	TM #1 +28V Buss Current	32	0	5	32	39
A58	TM #2 +28V Buss Current	32	0	6	32	39
A59	TM #3 +28V Buss Current	32	0	7	32	39
A60	Exp +28V Batt Current	32	0	8	32	39
A61	Pyro Pwr Buss V	32	0	9	32	39
A62	TM +5V Buss V	32	0	10	32	39
A63	TM #1 Transmitter Temp	32	0	11	32	39
A64	TM #2 Transmitter Temp	32	0	12	32	39
A65	TM #3 Transmitter Temp	32	0	13	32	39
A66	Nose Cone Breakwire	32	0	14	32	39
A67	TM Systems Relay Mon	32	0	15	32	39
A68	2nd Stage Motor Press	32	0	16	32	39
A69	3rd Stage Motor Press	32	0	17	32	39
A70	2nd Stage SCM #1	32	0	18	32	39
A71	2nd Stage SCM #2	32	0	19	32	39
A72	3rd Stage SCM #1	32	0	20	32	39
A73	3rd Stage SCM #2	32	0	21	32	39
A74	Nose Cone Eject SCM	32	0	22	32	39
A75	VEF Sphere Release SCM	32	0	23	32	39
A76	DCM Sphere/VEF Boom Deploy SCM	32	0	24	32	39
A77	DCM Mast/Area/SPI Deploy SCM	32	0	25	32	39
A78	DIFP Slide Deploy SCM	32	0	26	32	39
A79	ACLP/ACM/ACEF Booms Deploy SCM	32	0	27	32	39
A80	ACLP/ACM/ACEF Loop Deploy SCM	32	0	28	32	39
A81	Exp Pwr B/U Cmd Mon	32	0	29	32	39
A82	ACLP Cal Cmd Mon	32	0	30	32	39
A83	Exps HV Cmd Mon	32	0	31	32	39
A84	Lanyard Switch #1 Mon	32	0	32	32	39
A85	Spare	46	0	29	32	39
A86	Spare	46	0	30	32	39
A87	Tradtat Receiver AGC	46	0	32	32	39

35.011 & 35.026
SwRI/Winningham
PCM Stacks #1 & #2
Stacking Arrangement

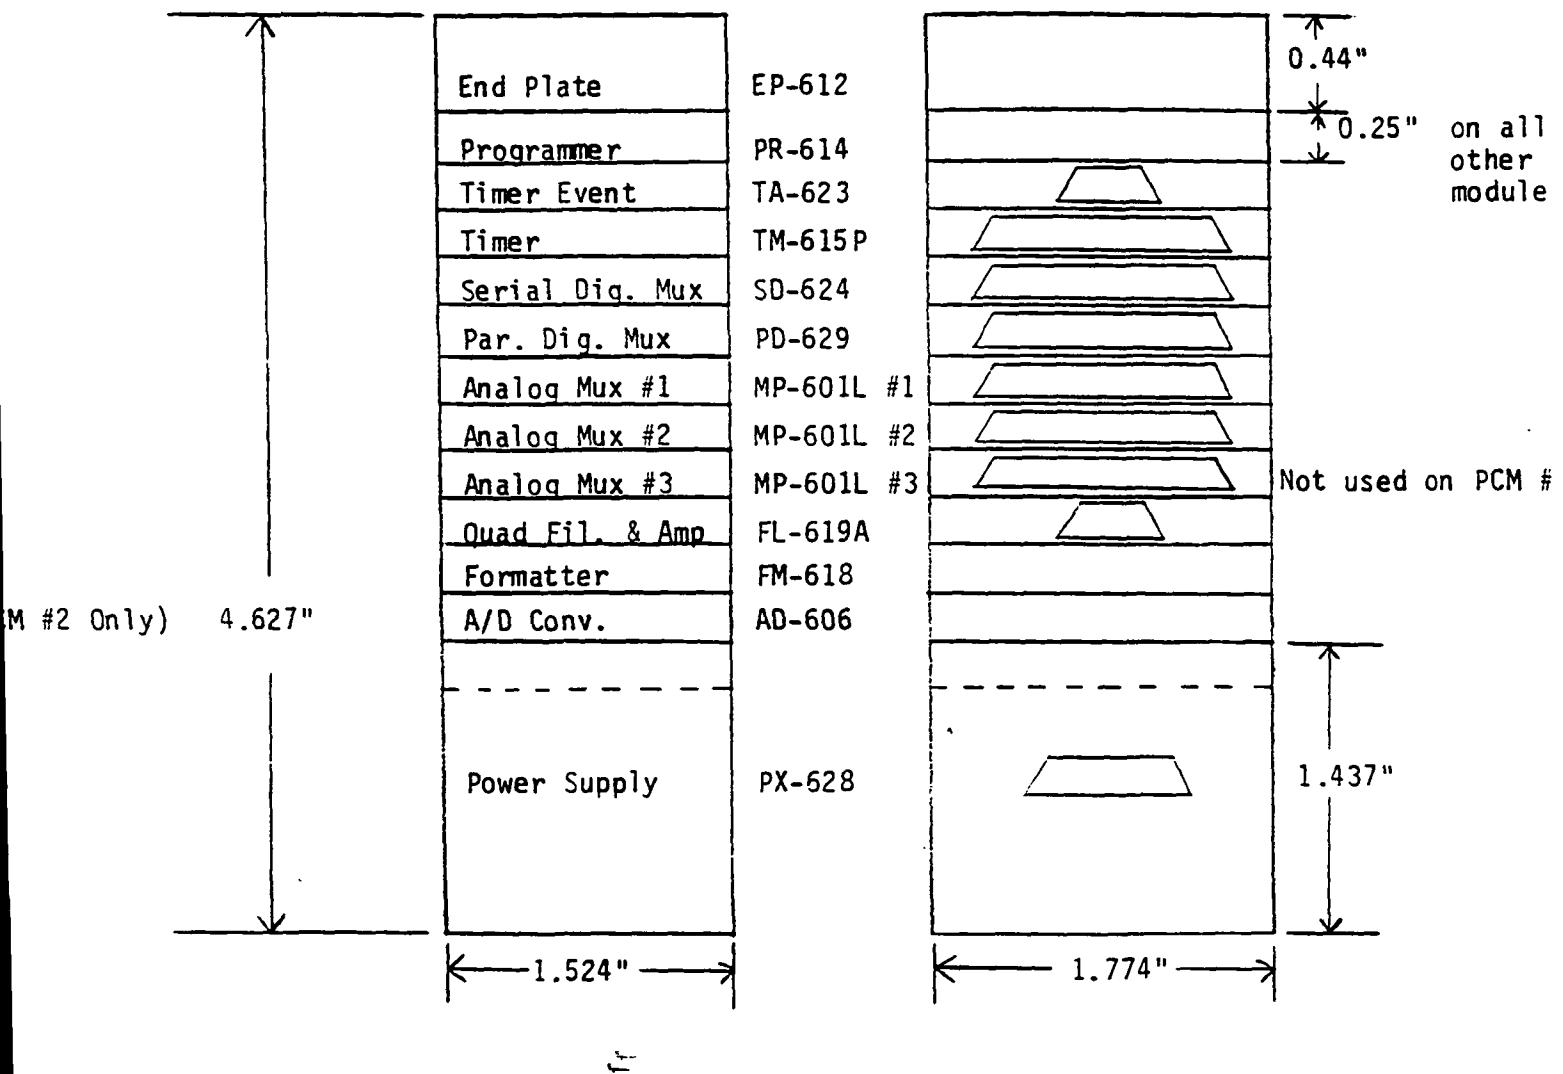

PCM #1 will have 1 less module so total length for PCM #1 will be 4.377".

35.011 & 35.026
SWRI/Winnigham

RF Downlink Analysis

$$S_f = P_t + G_t + G_r - S/N - B_f - P_L - D_f$$

S_f = Safety Factor (dB's)

P_t = 8 Watts (Min) = 9 dBw (Transmitter Power)

G_t = -6 dB ≈ S-Band Wraparound Antenna Gain

G_r = 43.2 dB for 20' Dish @ 2265.5 MHz = 40.2 dB @ 50% Efficiency
-3 dB for Polarization Mismatch (Linear to Circular) = 37.2 dB

S/N = 15 dB for PCM/FM @ 1×10^{-6} BER

= 12 dB for FM/FM

$B_f = 10 \log_{10} K T_s B$ $K = 1.38 \times 10^{-23}$ joules/°K

$B = 3.3$ MHz IF Bandwidth

$B_f = -138.2$ dB $T_s = 331^\circ\text{K}$ @ 15 dB/°K G/T
Measured $T_s \approx 191^\circ\text{K}$ @ 16.8 dB/°K

P/L = Path Loss = $20 \log_{10} [(4\pi FR)/C]$

F = 2265.5 MHz

R = 800 Km Max Slant Range

C = 2.997925×10^8 Meters/Sec

P_L = 157.6 dB

D_f = 0.5 dB for loss between antenna and pre-amp on conical scan converter
+1.0 dB for diplexer insertion loss = 1.5 dB

S_f = 9 dB + (-6 dB) + 37.2 dB - 15 dB - (-138.2 dB) - 157.6 dB - 1.5 dB =
4.3 dB

S_f = +4.3 dB for TM #3 (PCM #2 800 Kbit Diplexed)

S_f = 9 dB + (-6 dB) + 37.2 dB - 15 dB - (-138.2 dB) - 157.6 dB - 0.5 dB =
5.3 dB

S_f = +5.3 dB for TM #2 (PCM #1 800 Kbit)

S_f = 9 dB + (-6 dB) + 37.2 dB - 12 dB - (-138.2 dB) - 157.6 dB - 1.5 dB =
7.3 dB

S_f = +7.3 dB for TM #1 (FM/FM Diplexed)

35.011 & 35.026
SWRI/Winningham

RF Up-Link Analysis
for TRADAT

$S_f = P_t + G_t + G_r - S/N - B_f - P_L$
 $S_f = \text{Safety Factor (dB's)}$
 $P_t = \text{Power Transmitted} = 25 \text{ Watts} = 14 \text{ dBw or } 200 \text{ Watts} = 23 \text{ dBw}$
 $G_t = \text{Transmitting Antenna Gain for Helix} = 9 \text{ dB} - 3 \text{ dB}$
 $\quad (\text{Polarization Mismatch}) = 6 \text{ dB}$
 $G_r = \text{Payload Receiving Antenna Gain} = -9 \text{ dB for PSL Stubs on 17" Dia. Skin}$
 $S/N = 13 \text{ dB for (Tradat)} = 1 \times 10^{-5} \text{ BER}$
 $B_f = 10 \log_{10} K T_s B \quad K = 1.38 \times 10^{-23} \text{ joules/}^\circ\text{K}$
 $\quad \quad \quad B = 150 \text{ KHz I.F. Bandwidth}$
 $T_s = (N_f - 1) \times 290^\circ\text{K}$
 $N.F. = \text{Noise Figure} = 7 \text{ dB Max}$
 $N_f = \text{Noise Factor}$
 $N.F. = 10 \log_{10} N_f$
 $N_f = 5.012$
 $T_s = 1163^\circ\text{K}$
 $B_f = -146.2 \text{ dB} = \text{Noise Pwr Bandwidth}$
 $P_L = \text{Path Loss} = 20 \log_{10} [(4 \pi F R)/C]$
 $F = 550 \text{ MHz}$
 $R = 800 \text{ Km Max Slant Range}$
 $C = 2.997925 \times 10^8$
 $P_L = 145.3 \text{ dB}$
 $S_f = 14 \text{ dB} + 6 \text{ dB} + (-9 \text{ dB}) - 13 \text{ dB} - (-146.2 \text{ dB}) - 145.3 \text{ dB} = -1.1 \text{ dB}$
 $S_f = -1.1 \text{ dB for 25 Watt Transmitter}$
 $S_f = 23 \text{ dB} + 6 \text{ dB} + (-9 \text{ dB}) - 13 \text{ dB} - (-146.2 \text{ dB}) - 145.3 \text{ dB} = +7.9 \text{ dB}$
 $S_f = +7.9 \text{ dB for 200 Watt Transmitter}$

35.011 & 35.026
SWRI/Winningham

Instrumentation Components List

<u>Item</u>	<u>Mfg</u>	<u>Model No.</u>	<u>Component Description</u>	<u>Comments</u>	<u>Current</u>
1	Vector	T105S	8W Xmitter 2251.5 MHz	750 KHz Resp.	2.2 A
2	Vector	T105S	8W Xmitter 2265.5 MHz	1.2 MHz Resp	2.2A
3	Vector	T105S	8W Xmitter 2279.5 MHz	1.2 MHz Resp	2.2A
4	Bayshore	TDS-203	RF Diplexer	Two way	--
5	Quanta	R104P	Tradat Range Receiver	550 MHz	60 mA
6	WFF	--	PCM/Tradat Combiner	800 Kbit	20 mA
7	Setra	141A	Accelerometer	Thrust	--
8	WFF	--	Accel. Sig. Conditioner	+40G, -10G	15 mA
9	Setra	141A	Accelerometer	X-Axis	--
10	WFF	--	Accel. Sig. Conditioner	+5G	15 mA
11	Setra	141A	Accelerometer	Y-Axis	--
12	WFF	--	Accel. Sig. Conditioner	+5G	15 mA
13	F.W. Bell	1020	Current Sensor	TM #1 Buss	--
14	F.W. Bell	1020	Current Sensor	TM #2 Buss	--
15	WFF	--	Curr. Sensor Sig. Cond.	0-5 Amp	75 mA
16	F.W. Bell	1020	Current Sensor	TM #3 Buss	--
17	F.W. Bell	1020	Current Sensor	Exp Batt.	--
18	WFF	--	Curr. Sensor Sig. Cond.	0-5A,0-10A	75 mA
19	ARC	AHS-1	Horizon Sensor	in Exp Sect	
20	Tempo	93068	FM Calibrator	fly w/o Pwr	--
21	Vector	MMM-655-16	VCO Mount	16 position	--
22	Vector	MMA-12	Mixer Amplifier	>750 KHz Resp.	10 mA
23	Vector	MMO-11	VCO (560 KHz) +15%	IRIG L	10 mA
24	Vector	MMO-11	VCO (300 KHz) +15%	IRIG J	10 mA
25	Vector	MMO-11	VCO (165 KHz) +15%	IRIG H	10 mA
26	Vector	MMO-11	VCO (93 KHz) +15%	IRIG F	10 mA
27	Vector	MMO-11	VCO (52.5 KHz) +7.5%	IRIG 17	10 mA
28	Vector	MMO-11	VCO (40 KHz) +7.5%	IRIG 16	10 mA
29	Vector	MMO-11	VCO (30 KHz) +7.5%	IRIG 15	10 mA
30	Vector	MMO-11	VCO (22 KHz) +7.5%	IRIG 14	10 mA
31	Vector	MMO-11	VCO (14.5 KHz) +7.5%	IRIG 13	10 mA
32	Vector	MMO-11	VCO (10.5 KHz) +7.5%	IRIG 12	10 mA
33	Vector	MMO-11	VCO (7.35 KHz) +7.5%	IRIG 11	10 mA
34	Vector	MMO-11	VCO (5.4 KHz) +7.5%	IRIG 10	10 mA
35	Vector	MMO-11	VCO (3.9 KHz) +7.5%	IRIG 9	10 mA
36	Vector	MMO-11	VCO (3.0 KHz) +7.5%	IRIG 8	10 mA
37	WFF	17" Dia.	S-Band Antenna	TM 1 & 3	--
38	WFF	17" Dia.	S-Band Antenna	TM 2	--
39	PSL	23.024	Tradat Rec. Antennas	2/payload	--
40	WFF	--	TM Monitor Box		
41	WFF	--	Elec. Monitor Box		
42	WFF	--	Pyro Monitor Box		--
43	Fenwall	Isocurve	Xmitter Thermistors	3 per P/L	15K ohm
44	Vector	MMP-600	Micro PCM Encoder #1	800 Kbit	500 mA
45	Vector	MMP-600	Micro PCM Encoder #2	800 Kbit	500 mA

ELECTRICAL SYSTEMS

MIKE SMOLINSKI

JANUARY 31, 1989

January 18, 1989

MEMORANDUM

TO: Payload Manager 35.011 & 35.026
FROM: Electrical Systems Engineer, Mike Smolinski
SUBJECT: Design Review Input

Changes Since Last Flight

1. Removed scan motor battery and control circuits.
2. Added power control circuits for TM Link #3.
3. Changed pyro circuits to accommodate mission requirements.

Power Requirements

<u>System</u>	<u>Current (Amps)</u>	<u>Batt. Type (Silver Cells)</u>	<u>Capacity (Minutes)</u>
TM 1, TM 2, TM 3	7.5A	HR5DC-6	>60
Experiment	7.0A	HR5DC-6	>60

Pyro System

The pyro functions will be fired from 24 "Af" Ni-cads with Raymond timers. Pyro inhibit will be accomplished with 50K altitude switches.

Power Back-Up

All systems will be backed up with Lanyard lift-off switches. These switches will also remove all voltage potential from the umbilical pins.

Timer Functions

Experiment Timers

VEF Cal
Expt Pwr Back-up
ACLP Cal
DIFP On Expt HV On
ACS Roll
ACS Pitch 2
ACS Pitch 1
Reset Monitor

Pyro Timers


N/C Deploy
VEF SPH Fwd/Aft
DCM SPH, VEF Booms
DCM SPH, Area SP1
DIFP SLD
ACLP/ACM/ACEF Booms
ACLP/ACM/ACEF Loop
Reset Monitor

Associated Drawings


Wiring Diagram	A-35.011
TM Power Schematic	D-35.011 Sheet 1
Expt Power Schematic	D-35.011 Sheet 2
Pyro Control Schematic	D-35.011 Sheet 3






Mike Smolinski

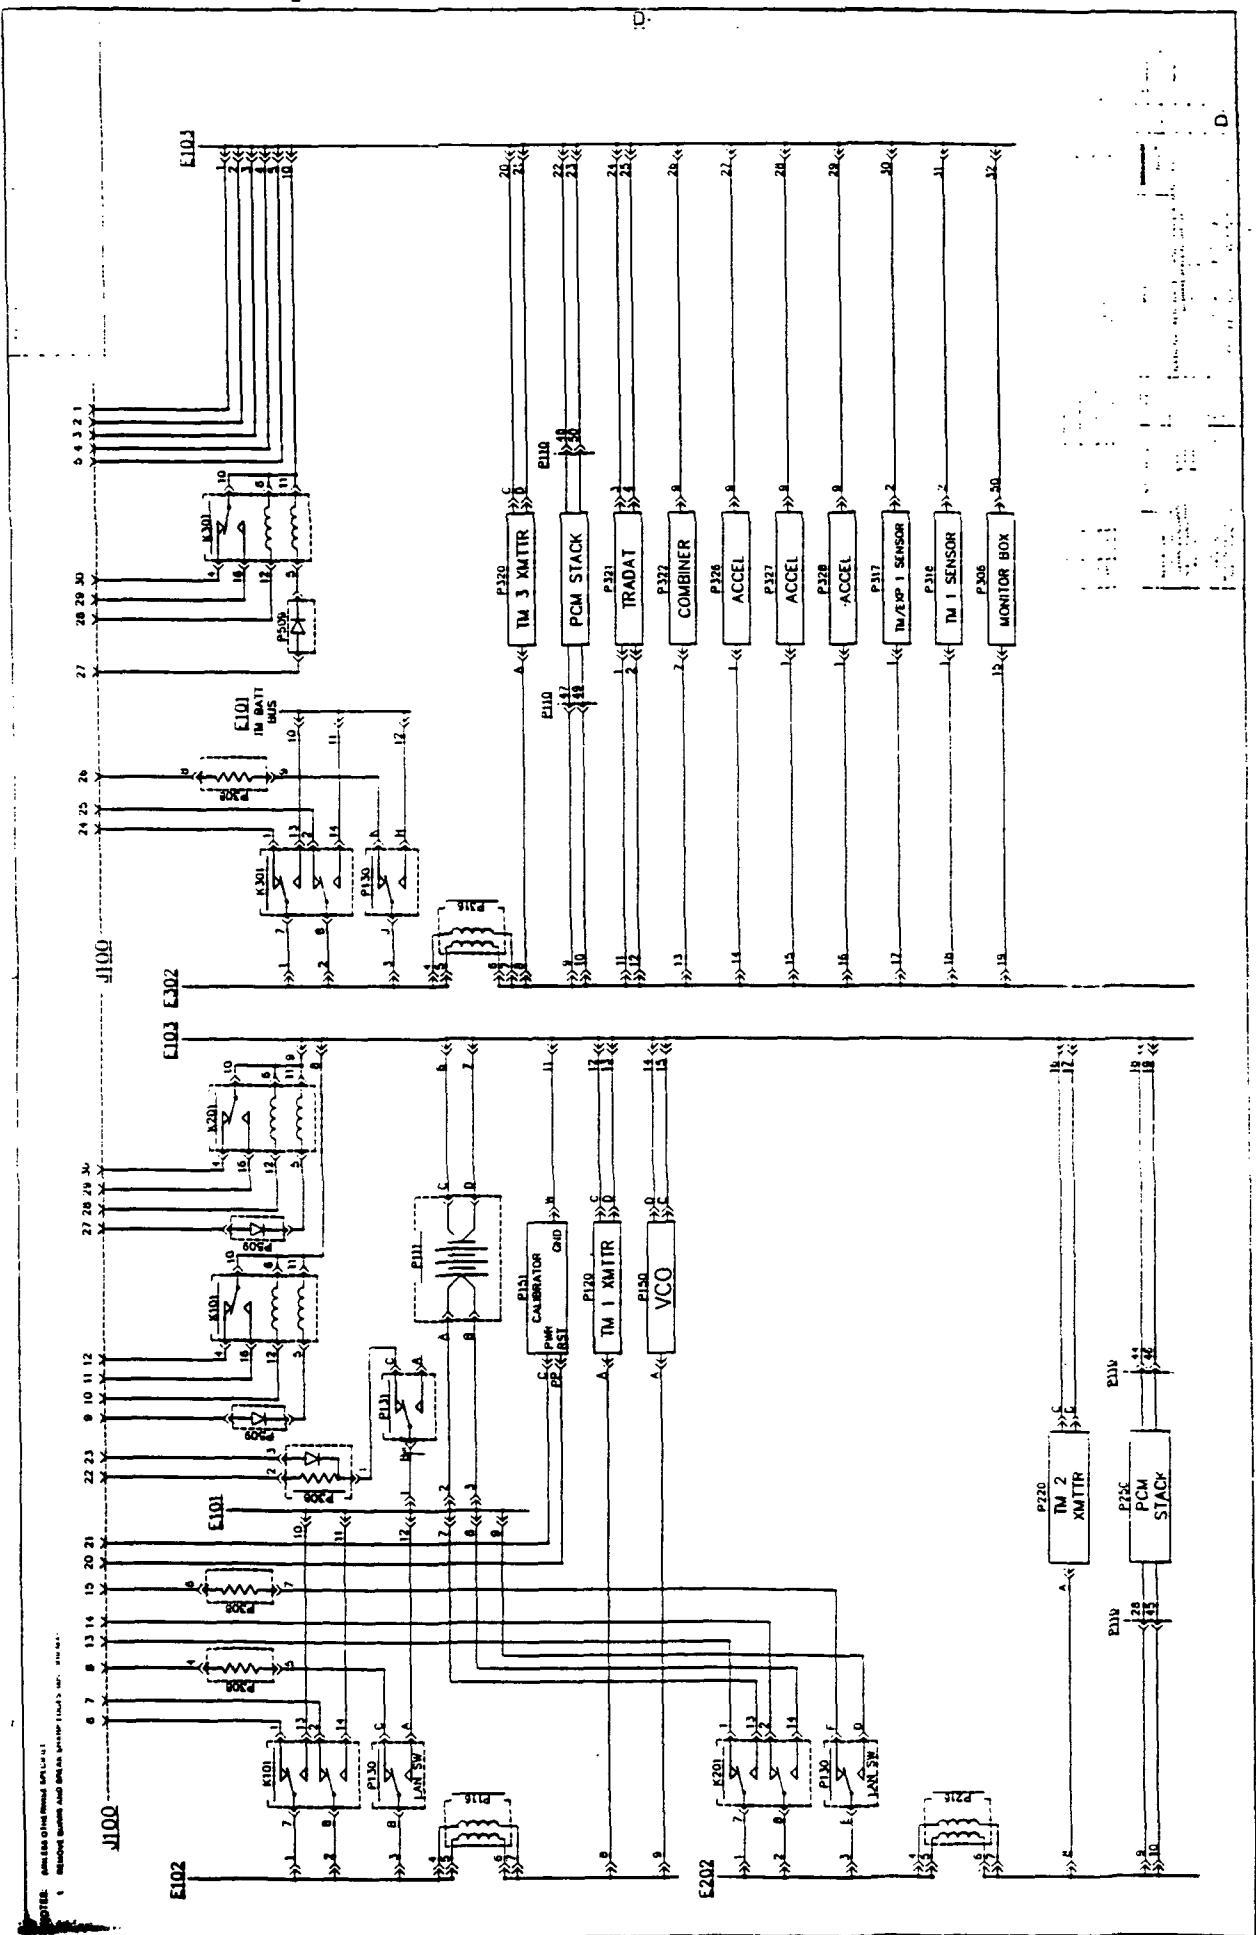

PRECEDING PAGE BLANK NOT FILMED

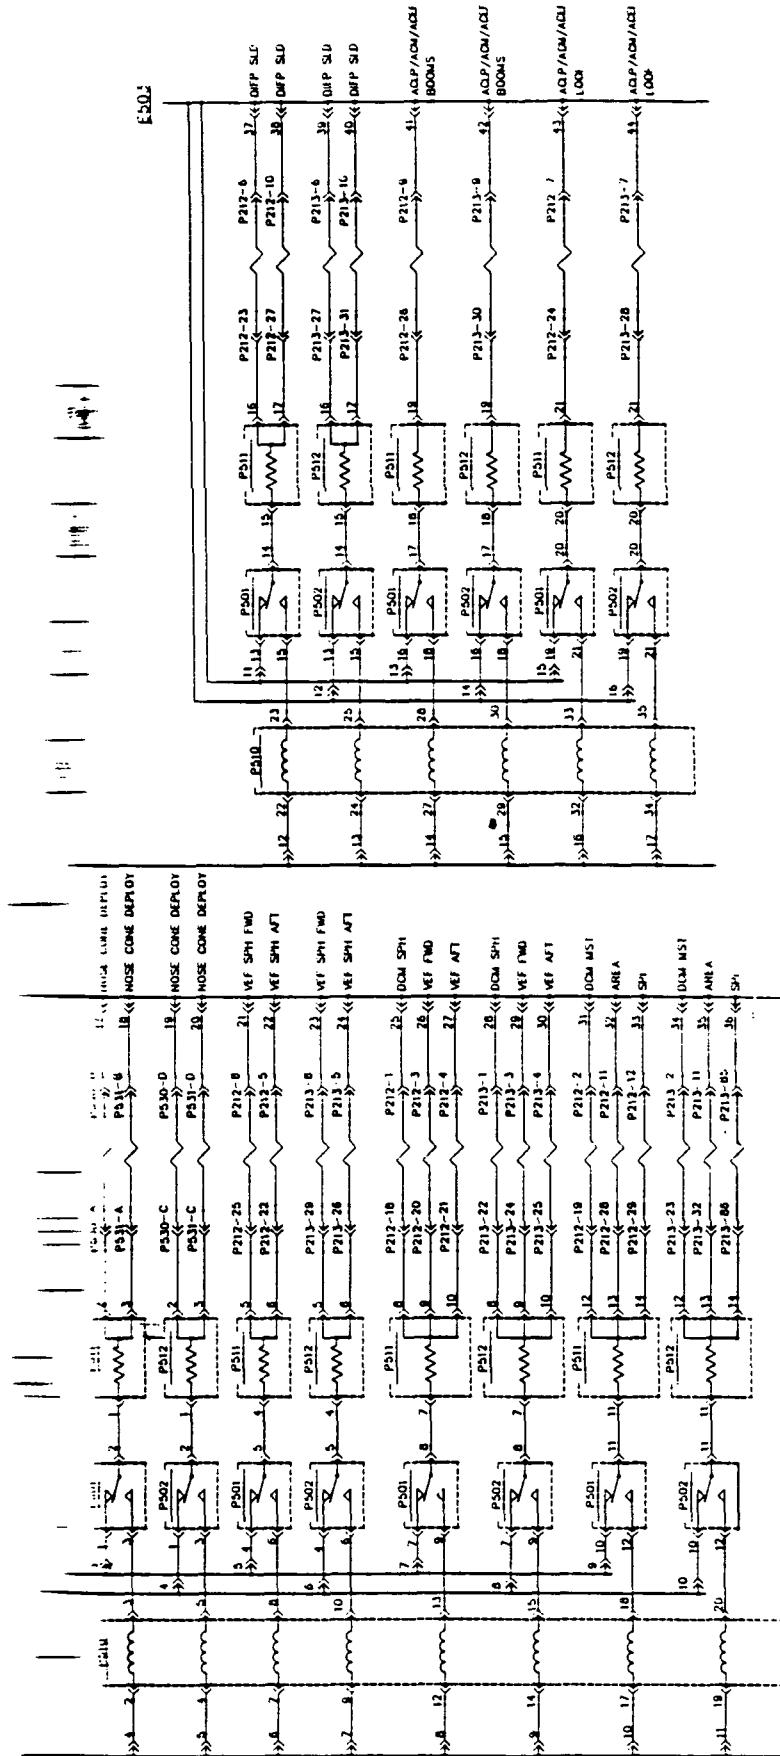

~~ORIGINAL PAGE IS
OF POOR QUALITY~~

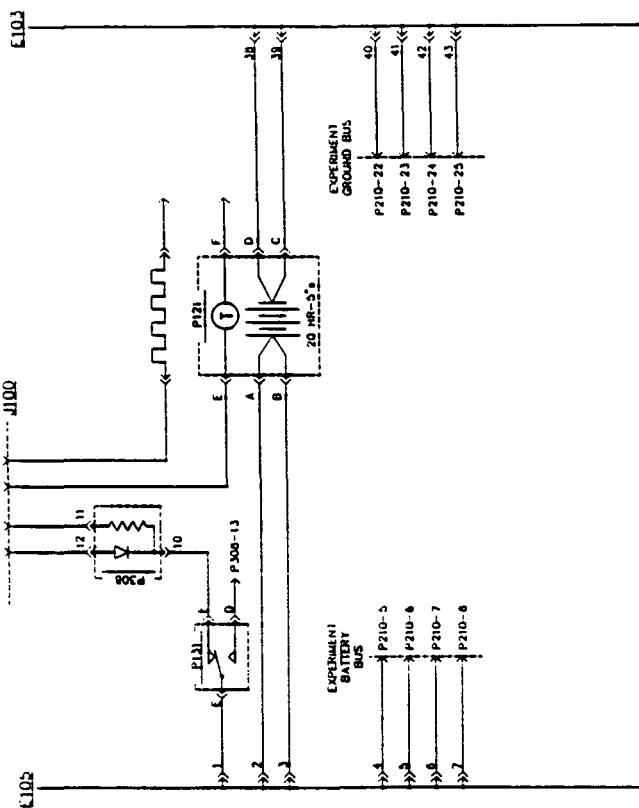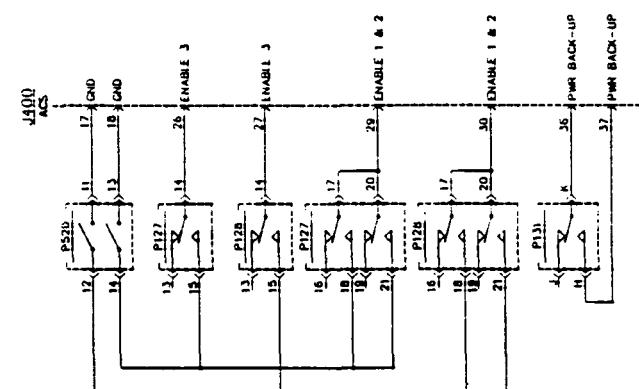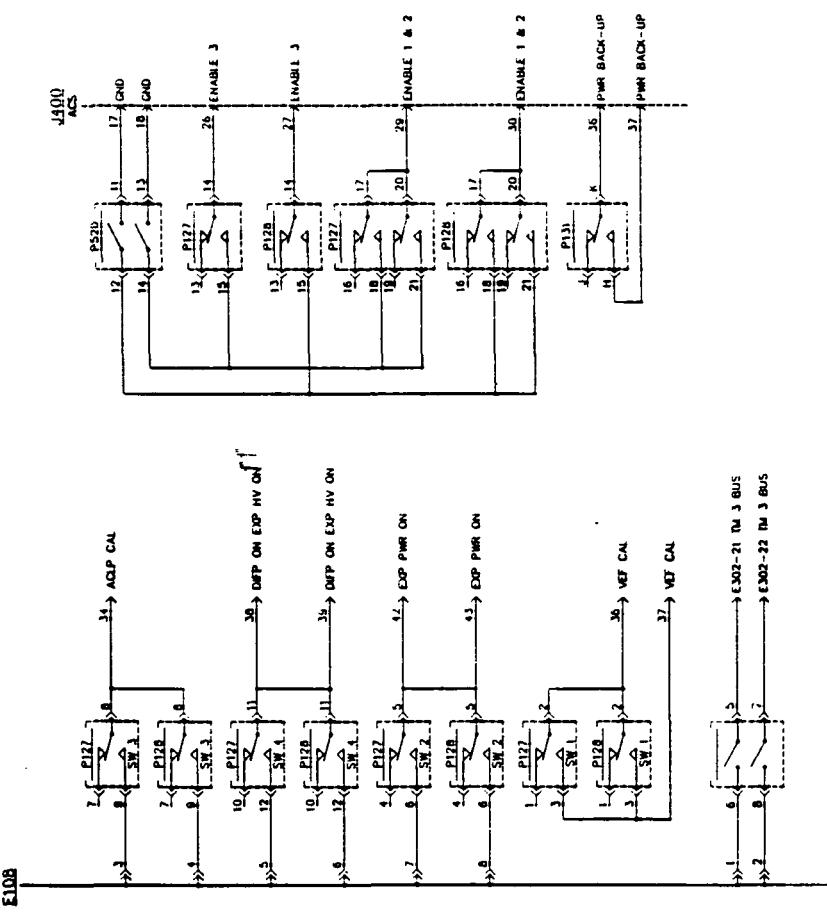

THE STATE OF NEW YORK AND THE CITY OF NEW YORK
RECEIVED FROM THE STATE OF NEW YORK AND THE CITY OF NEW YORK
DUE DATE

ORIGINAL PAGE IS
OF POOR QUALITY

MAGNETIC CONTROL SYSTEM

DICK MATTHEWS

JANUARY 31, 1989

f-

COMPUTER SCIENCES CORPORATION

APPLIED TECHNOLOGY DIVISION

804-424-5671

ROUTE 175 AT ROUTE 248, MALOPS ISLAND, VIRGINIA 23337

January 12, 1989

TO: Design Review Chairman
FROM: Richard P. Matthews, CSC/ACGS
SUBJECT: Design Review 35.011/Winningham

Two magnetic ACS systems are to be flown from Norway in November of 1989. Each system is to align the vehicle with the negative magnetic field line. That is, to point the nose of the vehicle toward the South Magnetic Pole along the field line. The maneuvers are to be done early in flight - there will be boom deployments during maneuvering. There will be fixed time intervals for the maneuvers provided by the TM timer, instead of a deadband controller. There will be an initial pitch maneuver and an update near apogee. There will be only the initial roll maneuver. The telemetry timer will provide the timing for the maneuvers.

The ACS package consists of a pneumatics and an electronic section and is self contained. The pneumatics section consists of a high pressure gas vessel (nitrogen gas is to be used), and the required solenoid valves, nozzles, pressure regulator, and monitoring transducers. The electronics system, which provides driving signals to the solenoid valves, consists of a battery power system, a three axis magnetometer, a single axis rate gyro, and associated electronic cards.

The magnetometer and rate gyro provide servo input signals. The electronic servo system "precesses" the spinning vehicle to the desired attitude by properly timed and phased gas jets. The timing and phasing have been determined and will be verified by "operational" air bearing tests.

Sensor orientation can be seen in Figure I. The electronic system block diagram is Figure II.


Richard P. Matthews, AGCS

PRELIMINARY

35.011 Winningham Gas Budget

Given:

1. Worse case cone (ha) expected at ACS turnon of 10 degrees
2. Maximum misalignment to field angle of 30 degrees
3. Roll dispersion of .75 to 1.25 RPS
4. Tank pressure of 4060psia and regulator pressure set to give valve inlet pressure of 300psia. Orifice to be .056 in.
5. In the beginning control configuration;

$$\text{Pitch Moment of Inertia} = 76 \text{ Slug}\cdot\text{ft}^2$$

$$\text{Roll Moment of Inertia} = 4.8 \text{ Slug}\cdot\text{ft}^2$$

$$\text{Ratio} = 76/4.8 = 15.8$$

$$\text{Pitch Moment Arm} = 3.5 \text{ ft}$$

$$\text{Mass} = \frac{4060 \text{ lbf}/\text{IN}^2 \times 140 \text{ IN}^3 \times \text{ft}}{1.05 \times 55.15 \text{ ft-lbf/lbm}^{-0.5} \times 560^{-0.5} \text{R} \times 12 \text{ in}} = 1.46 \text{ lbm}$$

$$\text{At 300psia Mass} = (300 \times 140)/(55.15 \times 560 \times 12) = 0.11 \text{ lbm}$$

$$\text{Impulse available} = (1.46 - 0.11)65 = 87.8 \text{ lbf}\cdot\text{sec}$$

Assuming that a Pitch transverse acceleration of $2.8^0/\text{sec}^2$ is confirmed by air bearing runs

Thrust required is

$$\text{Lbf} = 76 \text{Slug}\cdot\text{Ft}^2 / 3.5 \text{Ft} \times 2.8^0/\text{sec}^2 \times 3.1416/180 \text{ deg}$$

$$\text{Thrust} = 1.1 \text{ lbf}$$

Assuming a 26.8 second pointing maneuver, again confirmed by air bearing runs

Impulse required is then $1.1 \text{lbf} \times 20 \text{ sec}$ valves = 22 lbf-sec for the pitch maneuver.

Assuming an initial roll rate of 1.25 RPS and a roll CCW thrust of 3.14 lbf,

$$\text{Accel} = (3.14 \times .75/4.7) \times 180/3.1416 = 28.7 \text{ deg/sec}^2$$

$$\text{Time} = (450 - 360)/28.7 = 3.1 \text{ sec}$$

Allowing a factor of two for roll valve cycling

$$\text{Impulse} = 3.14 \times 3.1 \times 2 = 19.5 \text{ lbf-sec}$$

Total impulse required equals

$$22 + 19.5 = 41.5 \text{ lbf-sec}$$

Safety margin for flight is then

$$(87.8/41.5) - 1 = 1.12 \text{ or } 112 \text{ percent.}$$

Schematics are attached.

ELECTRONIC COMPONENTS

Delvelco 3-Axis Magnetometer Model #9200C

Wallops Rate Gyro Package using a Honeywell GN90C1 Rate Gyro

Electronic Control Cards of Wallops Manufacture

Battery Pack of Wallops Manuf, 24 Af cells at 0.8 Ampere Hours

Power Switching Relay, Potter Brumfield TL17-0624

ENVIRONMENTAL TESTING


All spares will be tested for function.

All spare electronic components will be vibrated to "spares" levels and retested for function and calibration.

Flight components will be vibrated with the payload and be retested for function and calibration.

Function testing will included bench testing where applicable and air bearing tests.

Diagram 25.011

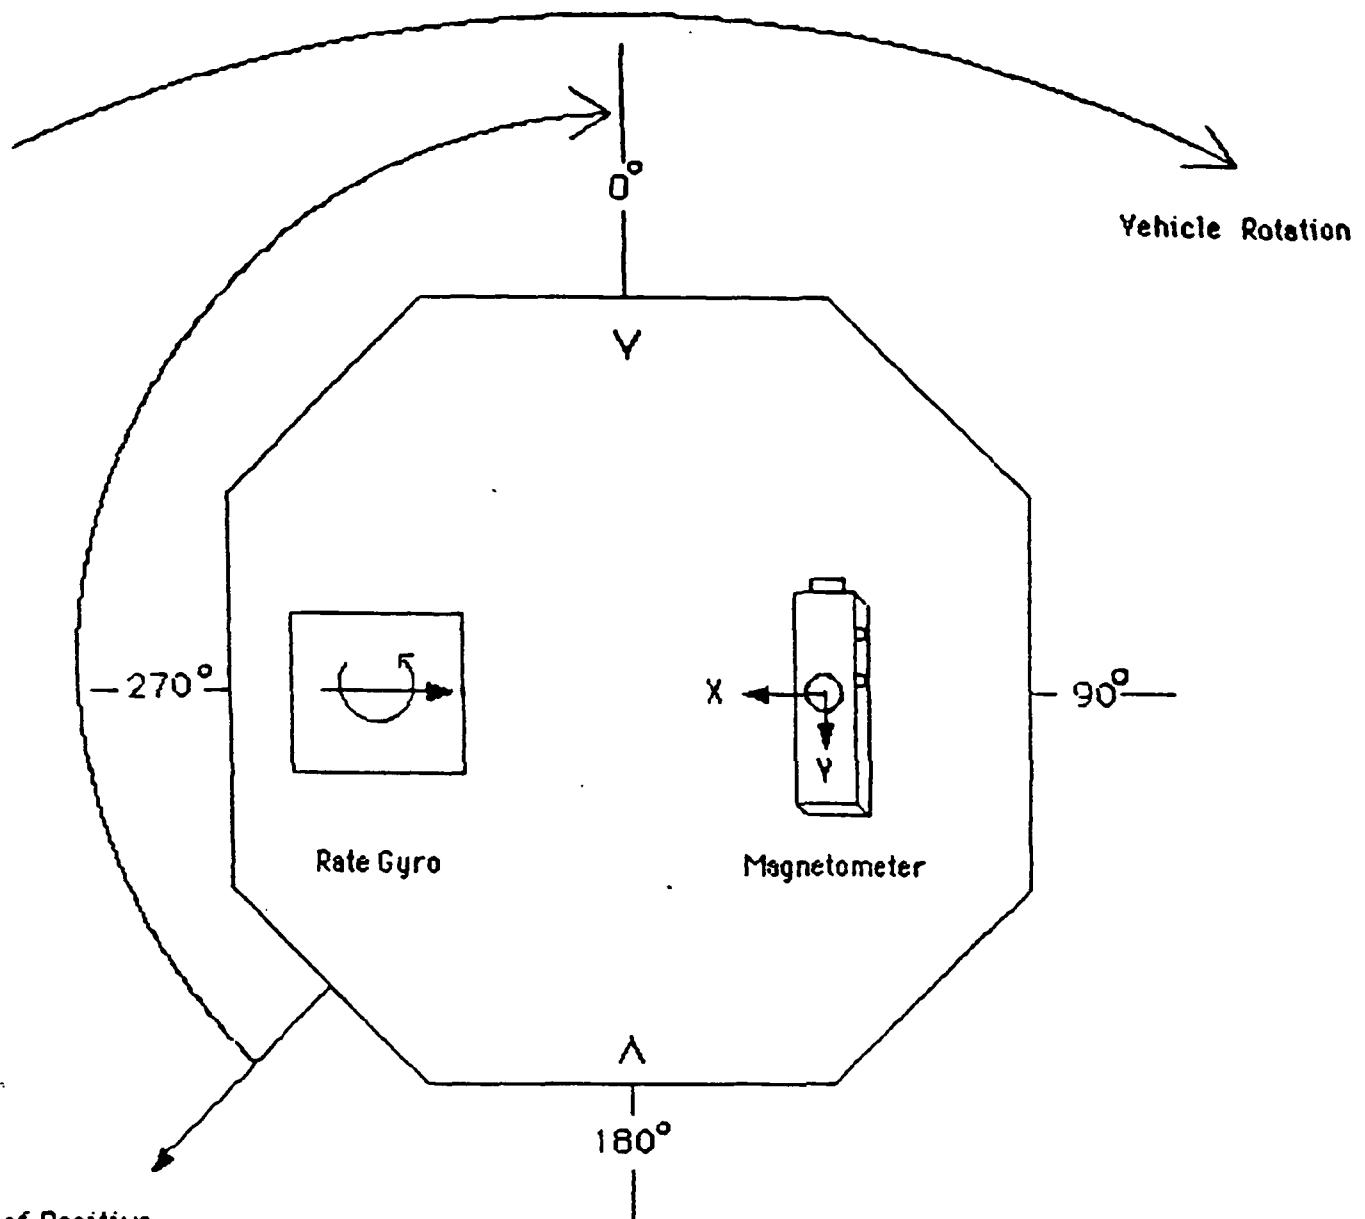

Aft Looking Forward

The motor is separated, CG is forward of the ACS. To push the payload toward the $-B$ vector, we want to push the ACS Can towards the $+B$ vector. This is accomplished by firing a nozzle when it is 135 degrees past the direction we want to go.

FIGURE 1

Wing Configuration 35.000


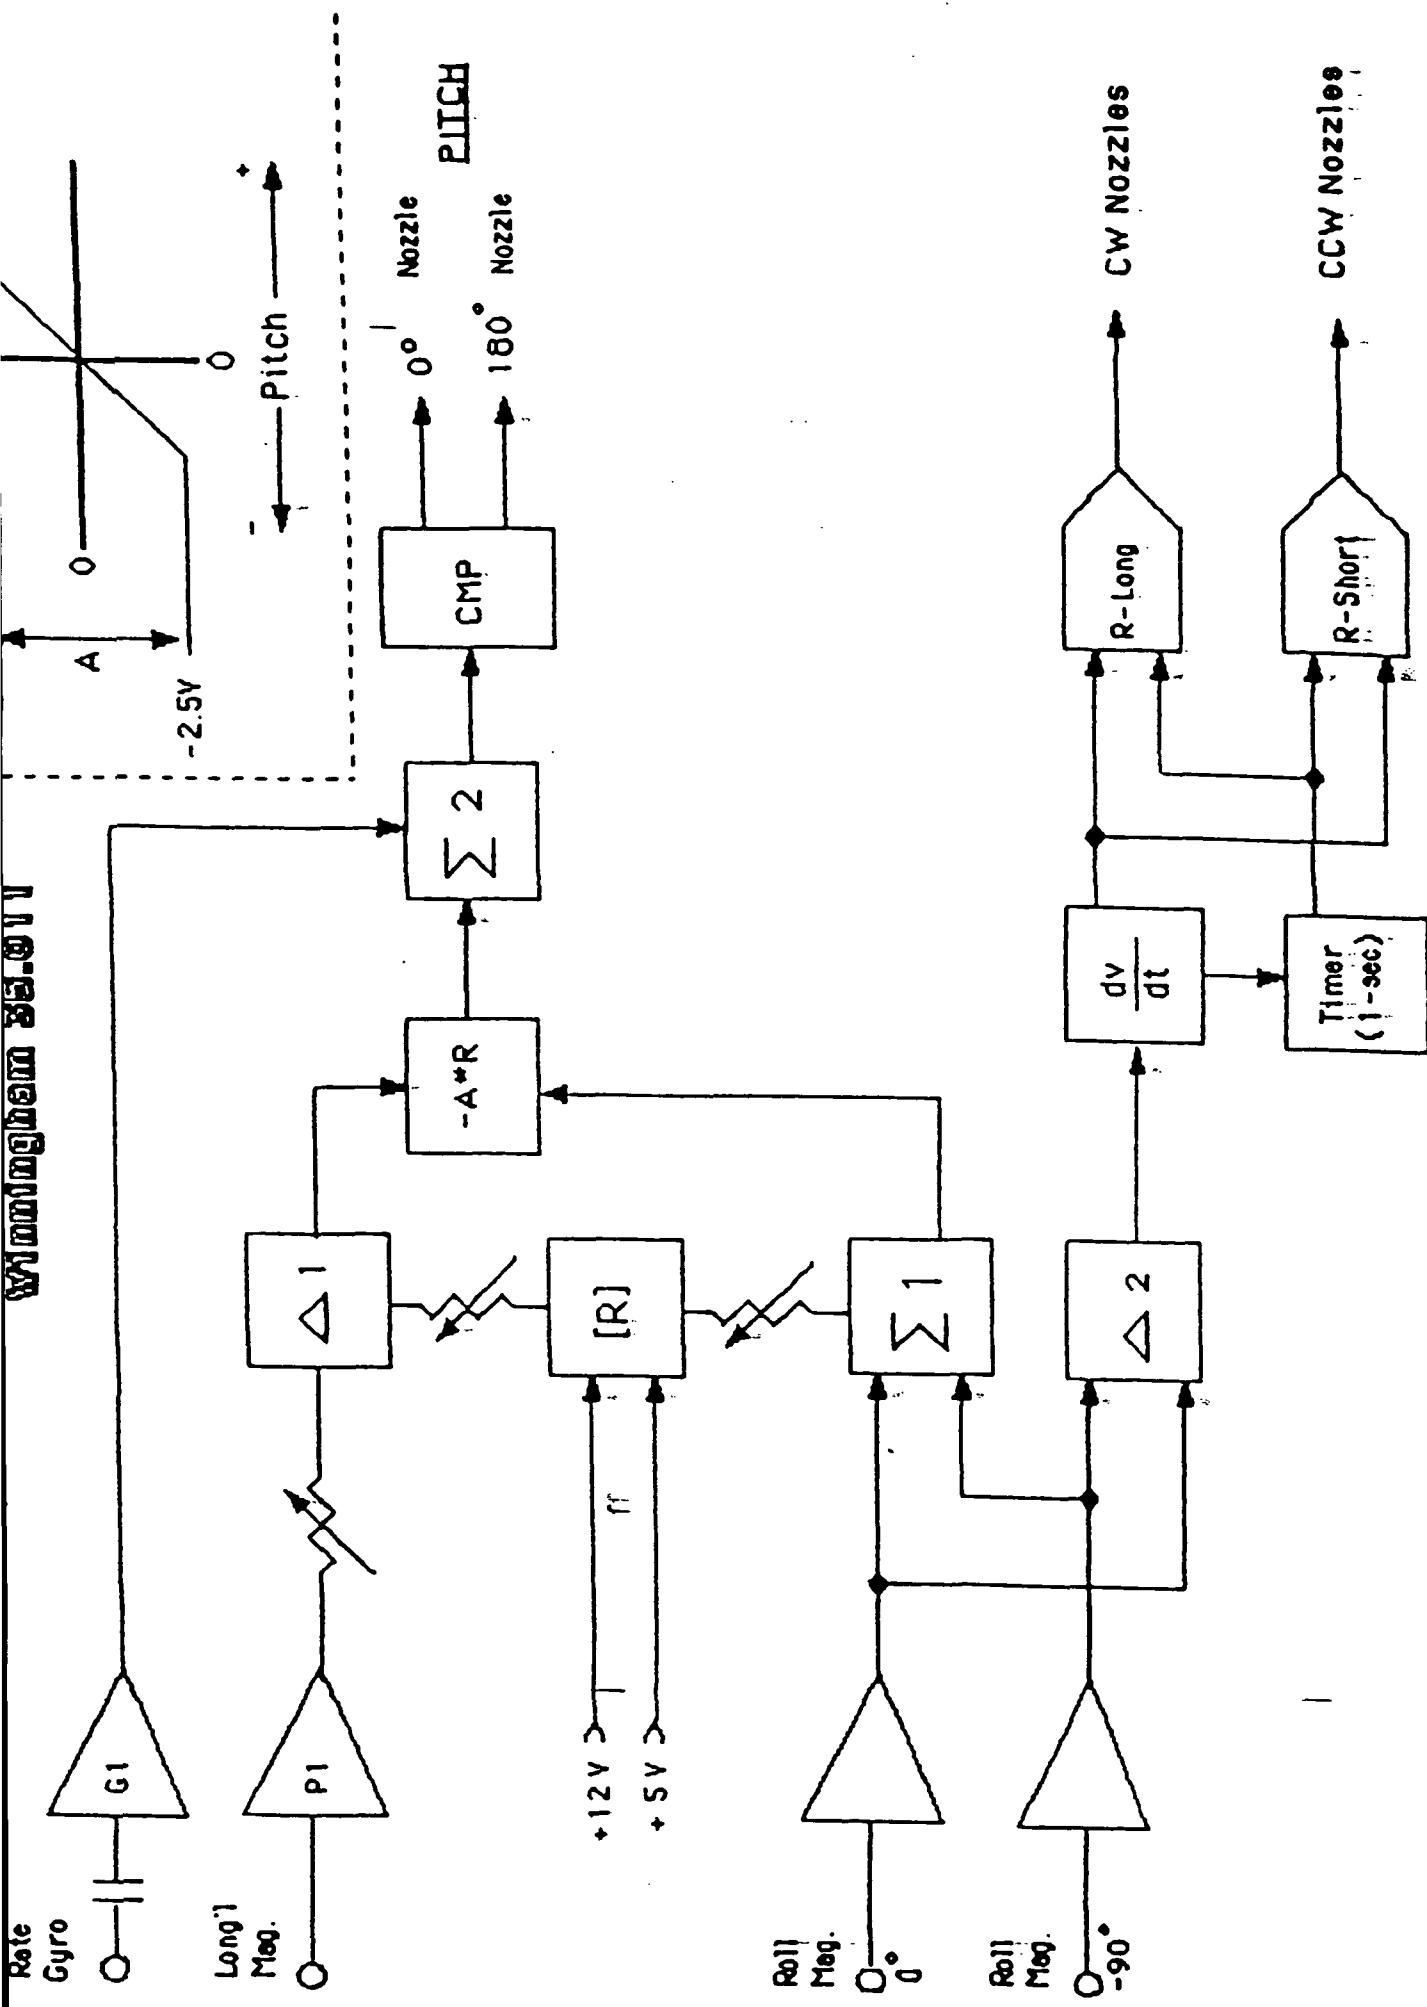


FIGURE 2

ACS-TM INTERFACE

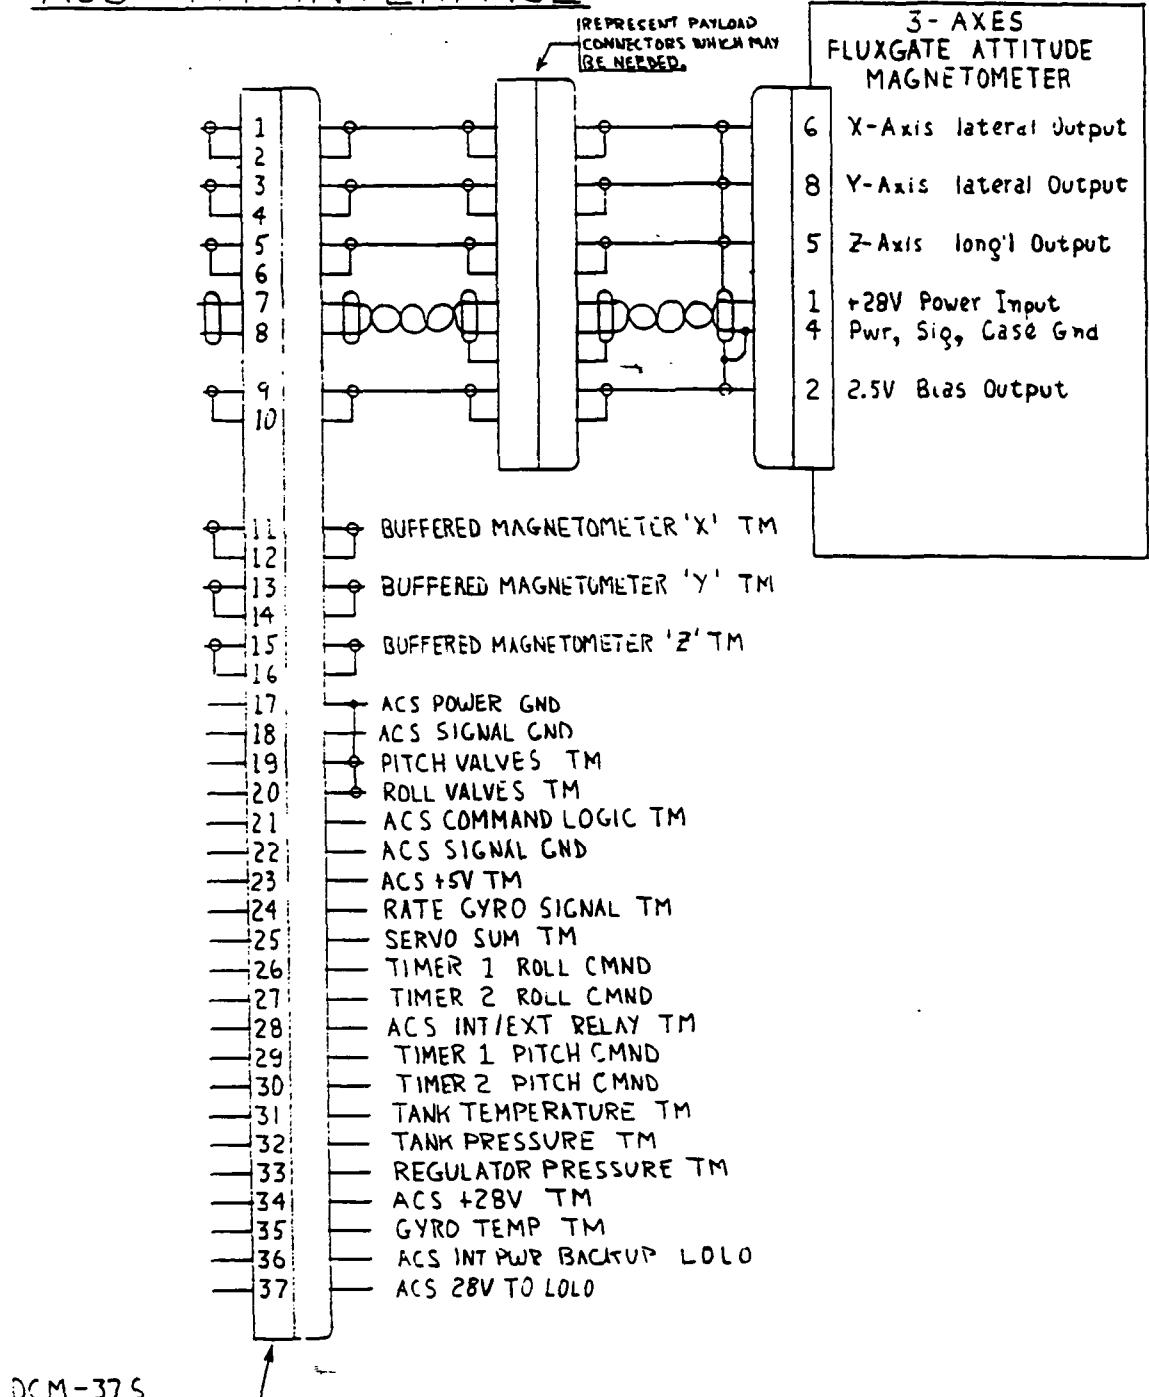

ITEM OR PROJECT	SCALE	MATERIAL	HEAT TREAT	DR.	RPM	1212H
UNIT OR ASSEMBLY				DR.	RPM	1212H
TO EXIST ON DIMENSIONS UNLESS SHOWN OTHERWISE UNLESS SHOWN OTHERWISE ANGULAR •	A.E. E.E. A.S. A.M.	NATIONAL AERONAUTICS AND SPACE ADMINISTRATION BUREAU OF THE NAVY WILLIAMS FIGHTER PLANE WILLIAMS FIGHTER PLANE				
SURFACE FINISH NOT SPECIFIED UNLESS SHOWN OTHERWISE	✓					
REF. NO.	REF. NO.					
MAGNETIC ACS-TM INTERFACE						
C-MCS-GEN-0072						

NOTES:

1. THE SHIELDS ON THE VALVE TM MONITORS ARE PRIMARILY FOR PAYLOAD PROTECTION.
2. THE LOLO IS USUALLY A LIFT-OFF LANYARD SWITCH WHICH CLOSES PIN 36 TO PIN 37.

ORIGINAL PAGE IS
OF POOR QUALITY

CENTAUR II B & C SCHEDULE OF EVENTS
(PLANNED NOMINAL TIME)

	<u>SECONDS AFTER LIFT OFF</u>
A. FEOS DEP	73
1. VEF CAL. (24 SEC. HIGH OR CLOSED)	104
B. DESPIN	107
C. PAYLAOD DEP.	111
2. VEF CABLE RELEASE	113
3. VEF BOOMS DEPLOY, POWER ON PULSE, DCM STRAP RELEASE, ACLP CAL. (ACLP CAL. MUST HAVE A DURATION OF 8 SEC. OR LONGER)	115
4. DCM BOOM DEPLOY, AREA DEPLOY	120
5. DIFP DEPLOY, DIFP ON, SPI, SIMS & AREA HIGH VOLTAGE ON (24 SECONDS)	121
6. ACLP, ACM & ACLP BOOMS DEPLOY	124
7. ACEF, ACM & ACLP (2ND ANTENNA) DEPLOY	127
D. ACS ENABLE	130
E. ACS DISABLE	180
F. 2ND ACS ENABLE	APOGEE
G. 2ND ACS DISABLE	50 SEC LATER
H. IMPACT	