

The Astronaut Science Advisor: Ground Testing During SLS-1

Michael M. Compton


Artificial Intelligence Research Branch

NASA Ames Research Center

Space Station Evolution Symposium

August 7, 1991

Mail Stop 244-17
Moffett Field, CA 94035-1000
(415) 604-6776
compton@ptolemy.arc.nasa.gov



NOV 23 1991

N92-21794122

53-63

393

PRECEDING PAGE BLANK NOT FILMED

592 INTERNATIONAL

Motivation

Time and resource constraints severely limit flexibility during space experimentation:

- PI is physically distant from experiment.
- Communication is often of insufficient bandwidth or not timely enough.
- Experiments are numerous and varied.
- Space Station environment is likely to exacerbate the situation.



ASA Overview

- **Objective:**

To improve the scientific return of experiments performed in space.

- **Approach:**

Use expert systems technology to encode the domain and experiment knowledge commanded by the Principal Investigator and make it available to the astronaut experimenters.



Functions of the ASA

- Capture, reduce, and archive experimental data
- Monitor data quality and help diagnose problems with equipment when experimental data is erratic or poor
- Identify and permit investigation of "interesting" data
- Suggest protocol changes that would result in better utilization of remaining time



Project Team

- **Ames Research Center**

- Silvano Colombano
- Michael Compton
- Richard Frainier
- Irving Statler

- **Johnson Space Center**



- Jurine Adolf
- Tina Holden

- **M.I.T.**

- Prof. Laurence R. Young (*experiment PI*)
- Nicolas Groleau
- Peter Szolovits




System Architecture

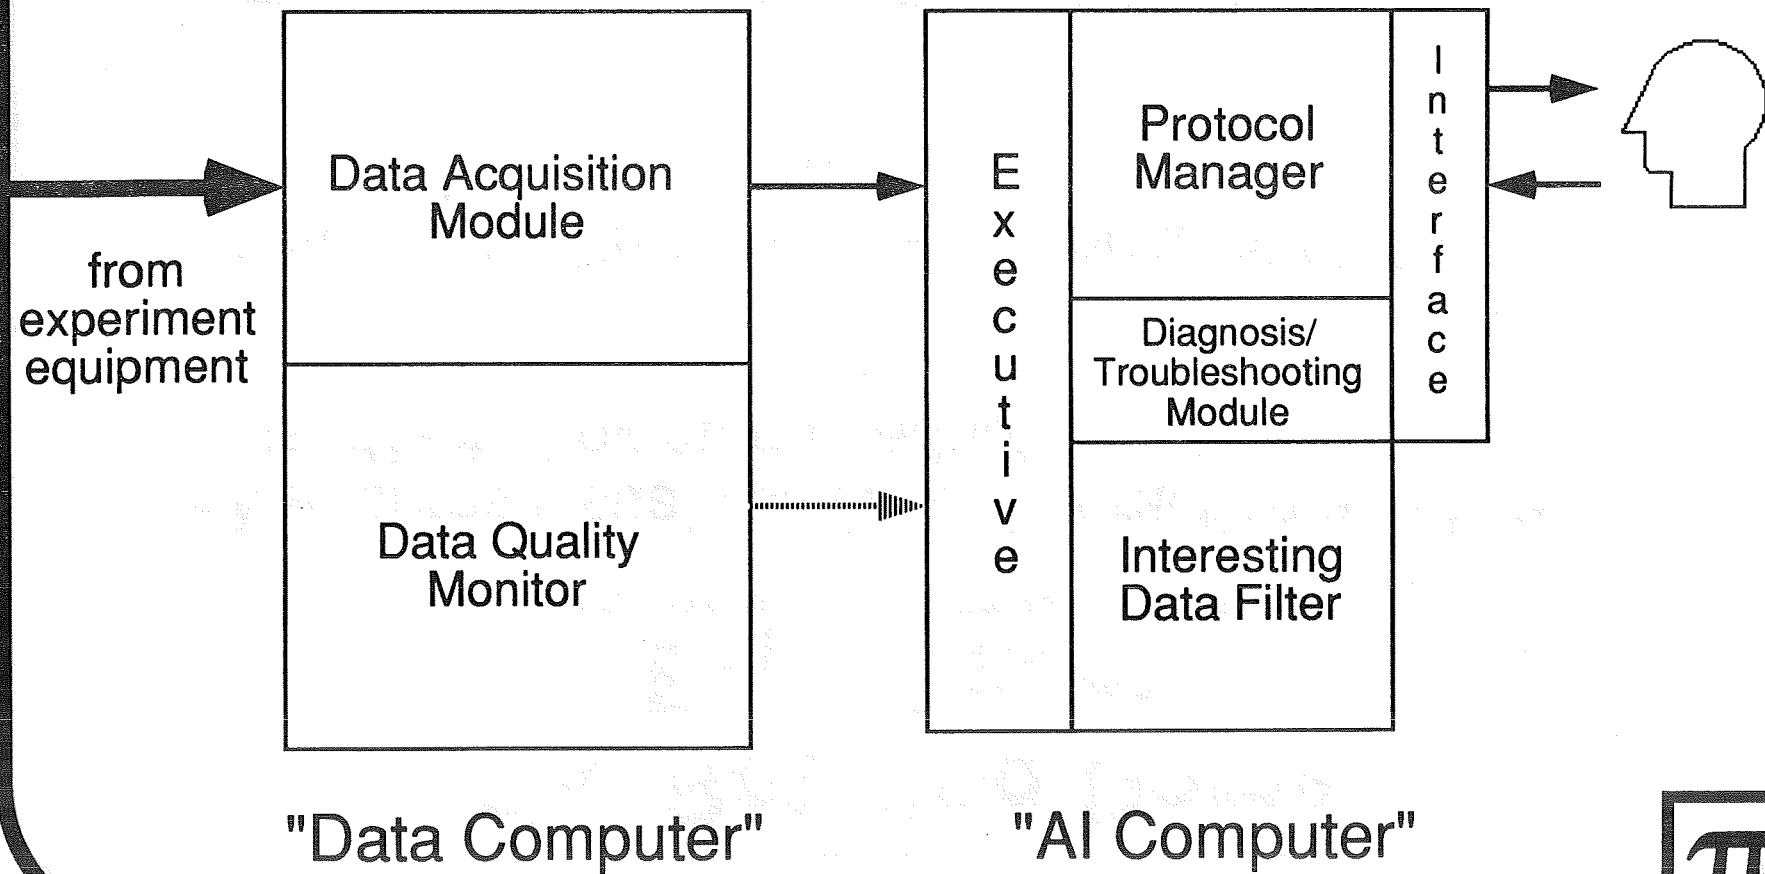


The Rotating Dome Experiment

- Measures visual/vestibular interaction and how it is affected by human adaptation to microgravity
- Devised by Professor Larry Young of MIT's Man-Vehicle Laboratory
- Flown on two previous Spacelab missions (including SLS-1 in June, 1991)
- Scheduled for flight aboard SLS-2 (in May, 1993)




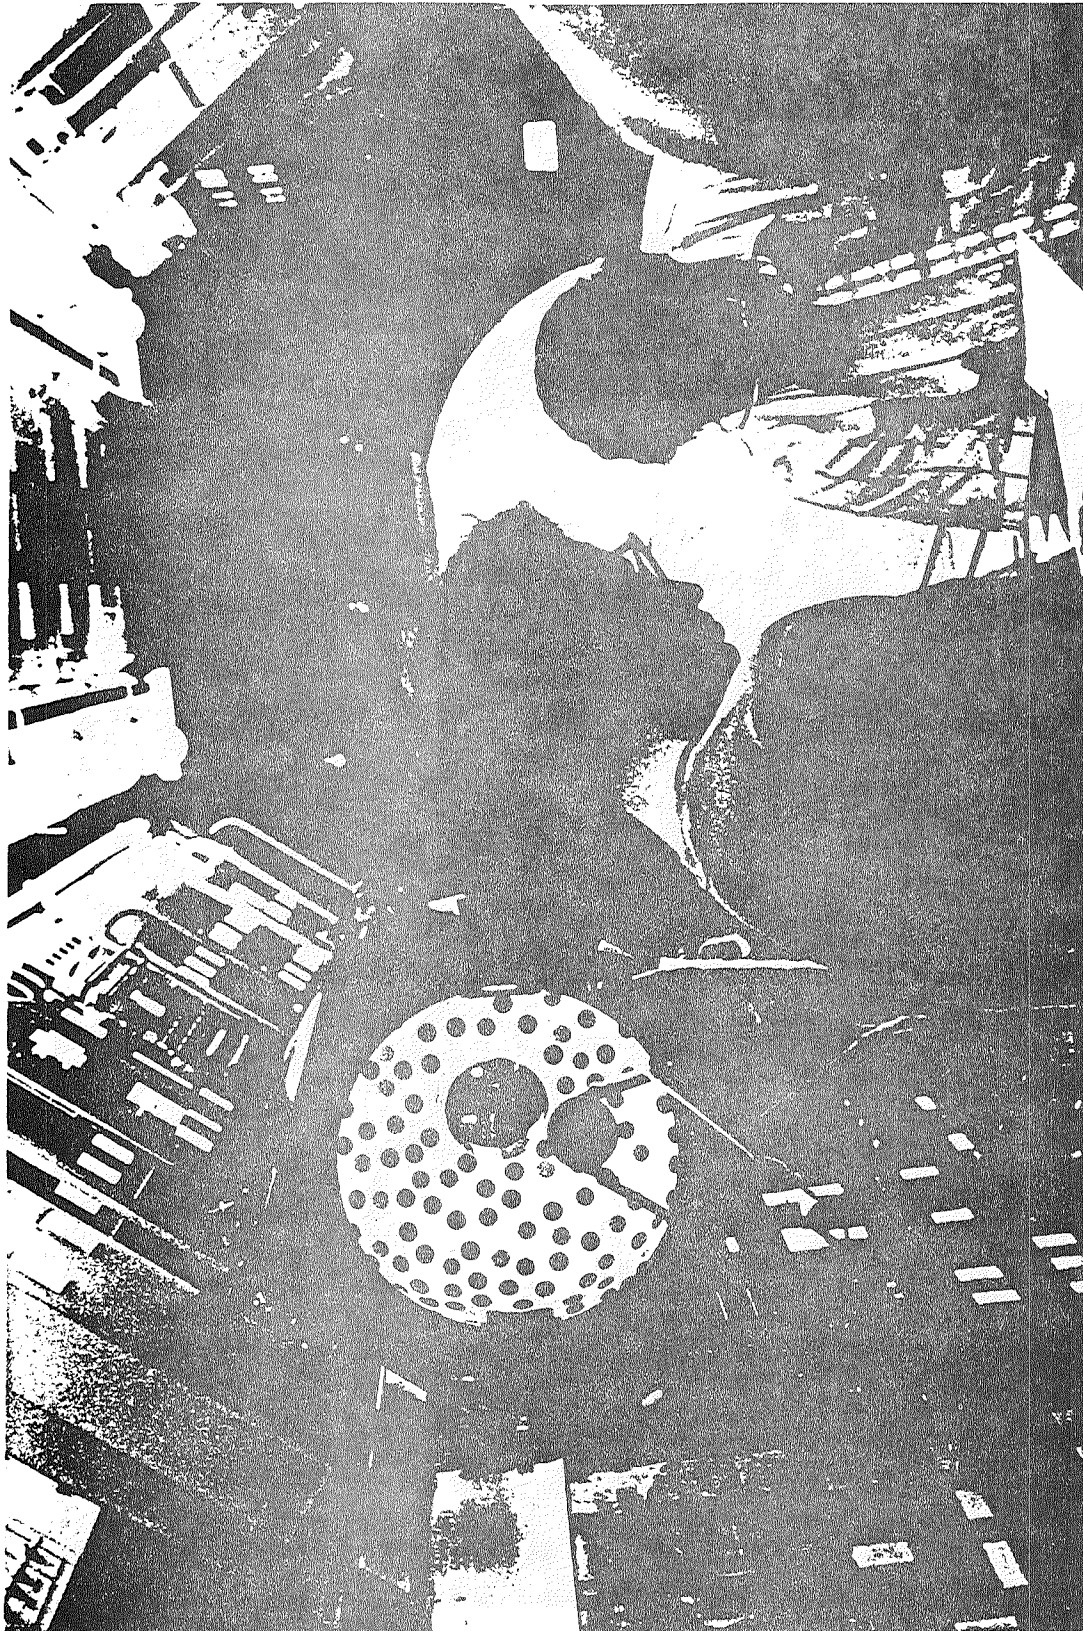

NAVY 400 43


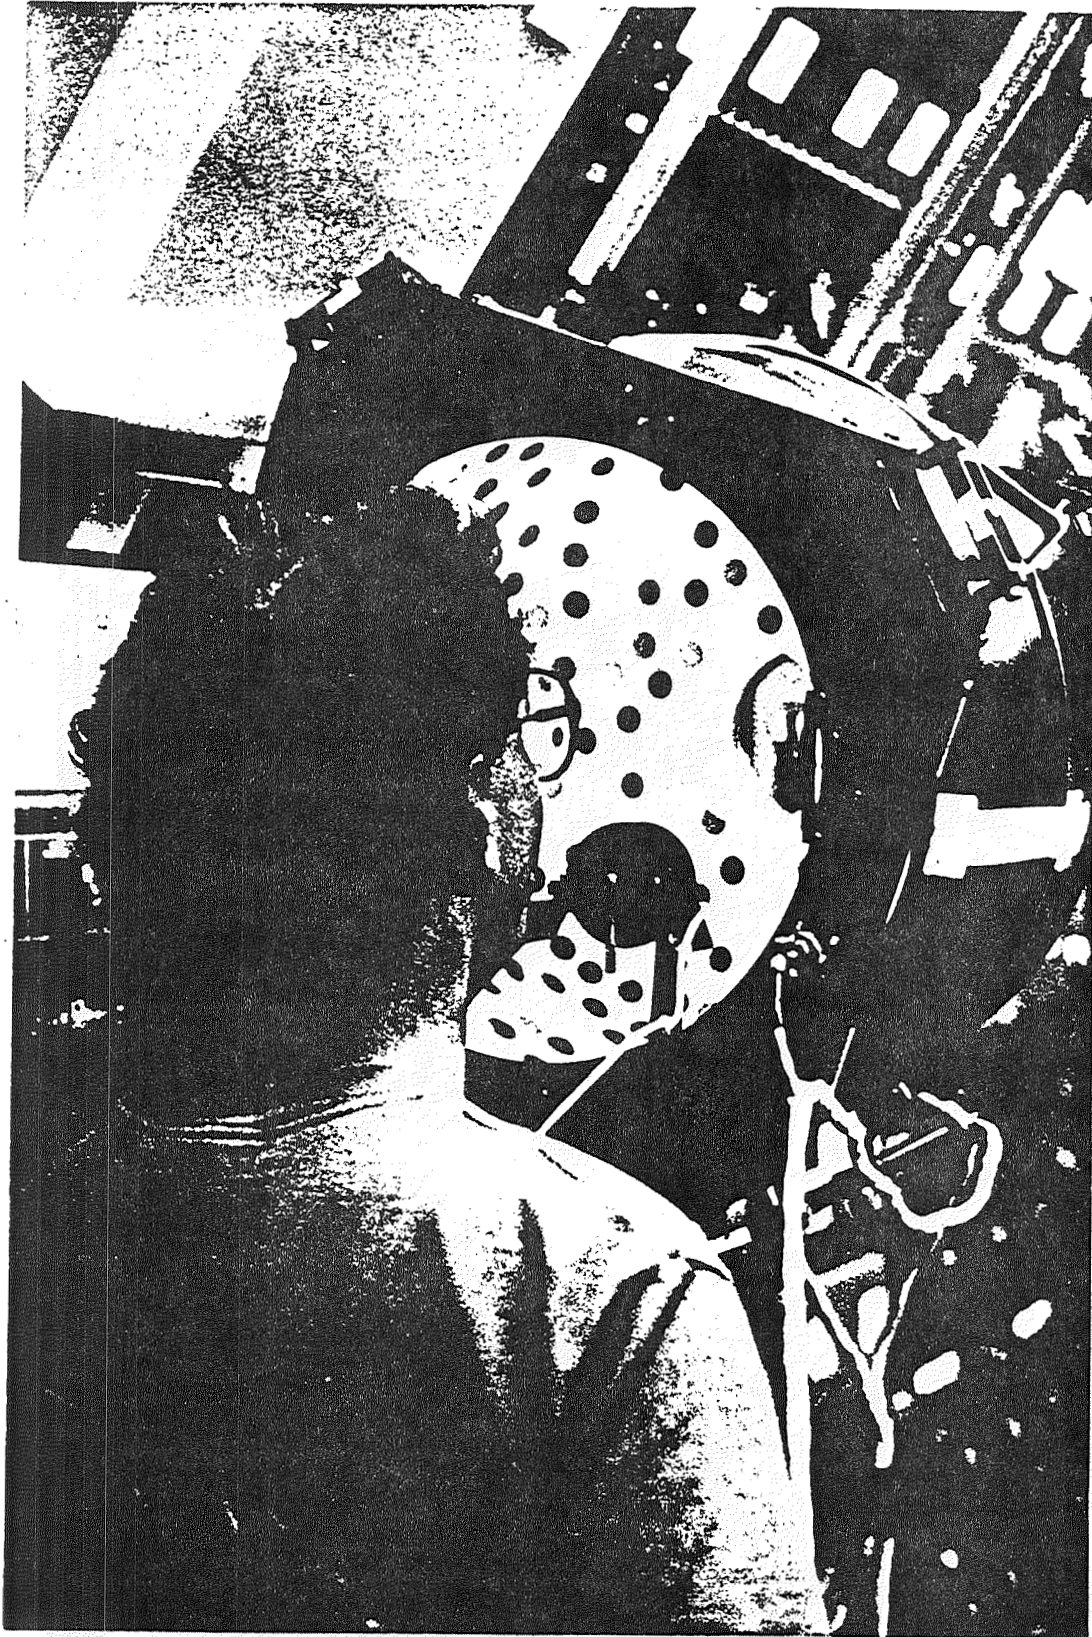


ORIGINAL PAGE IS
OF POOR QUALITY

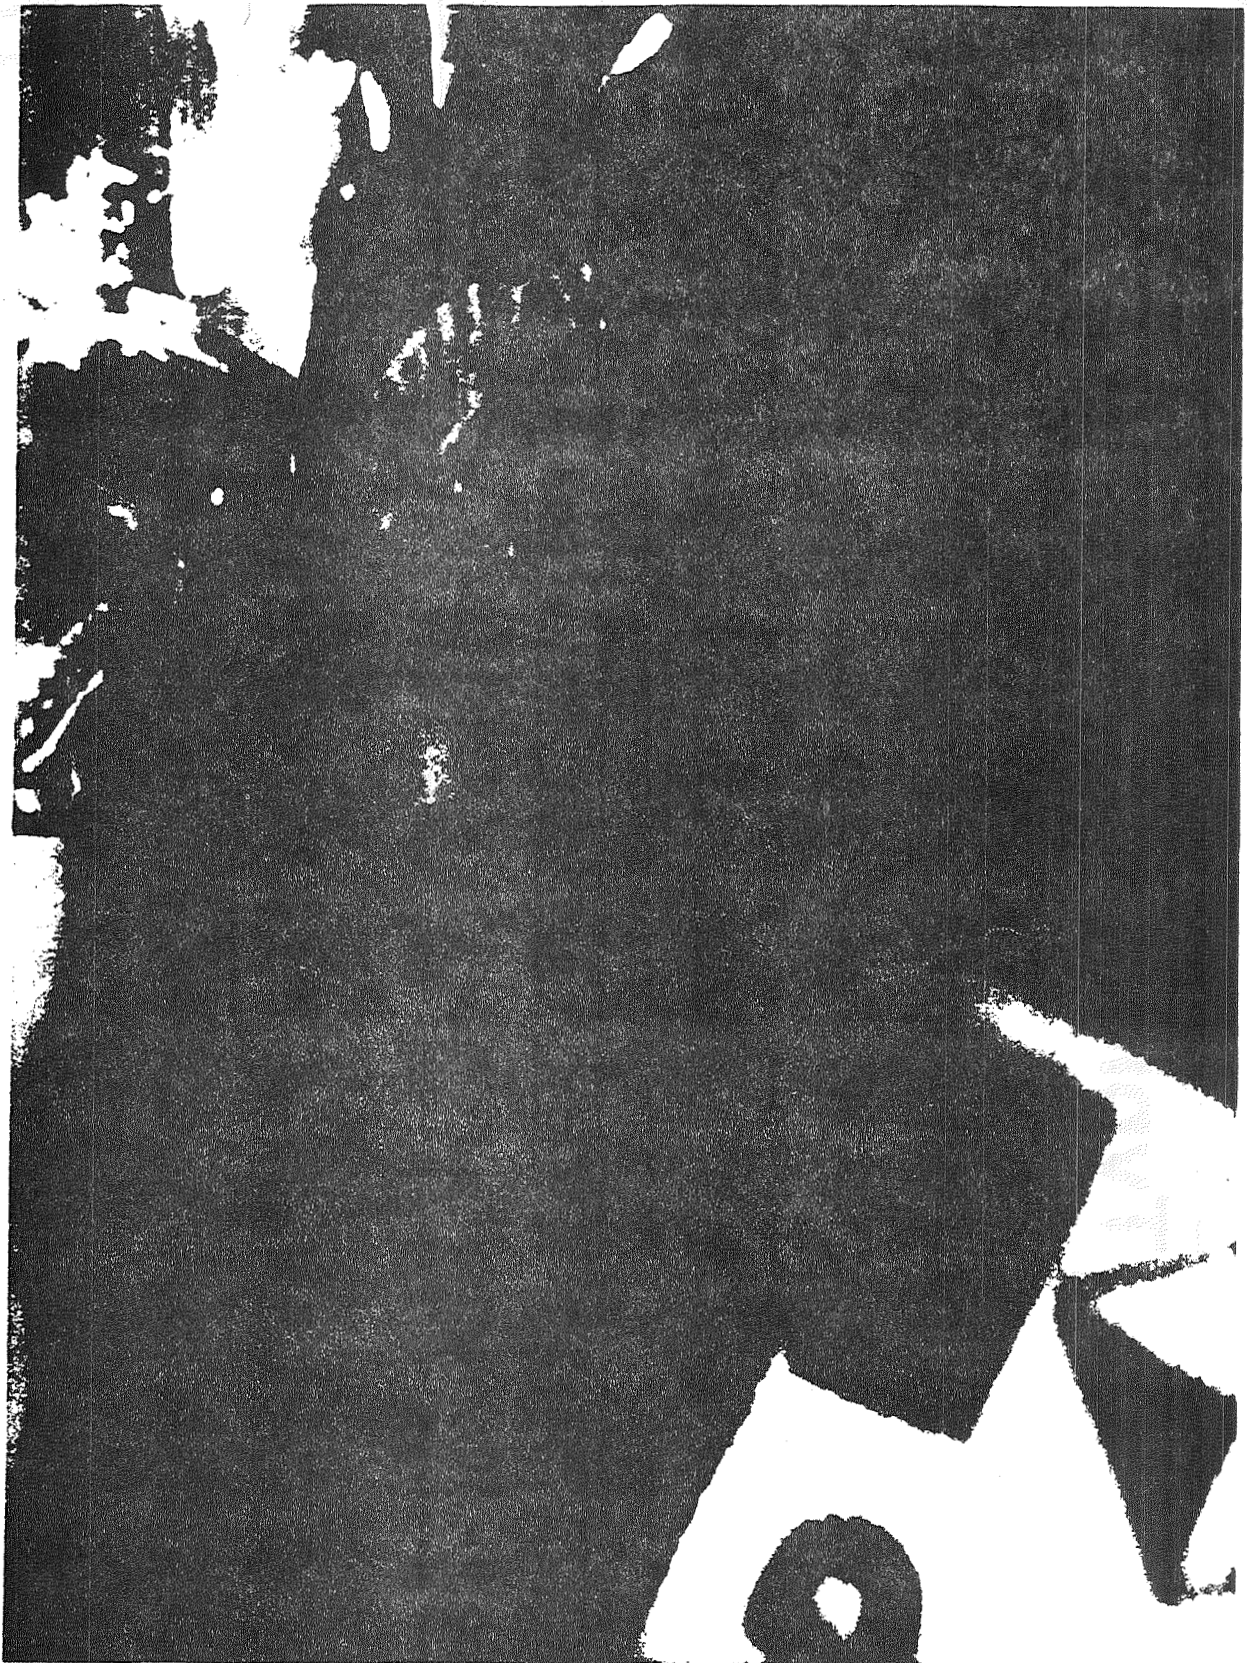

ORIGINAL PAGE IS
OF POOR QUALITY


Typical Experiment Session

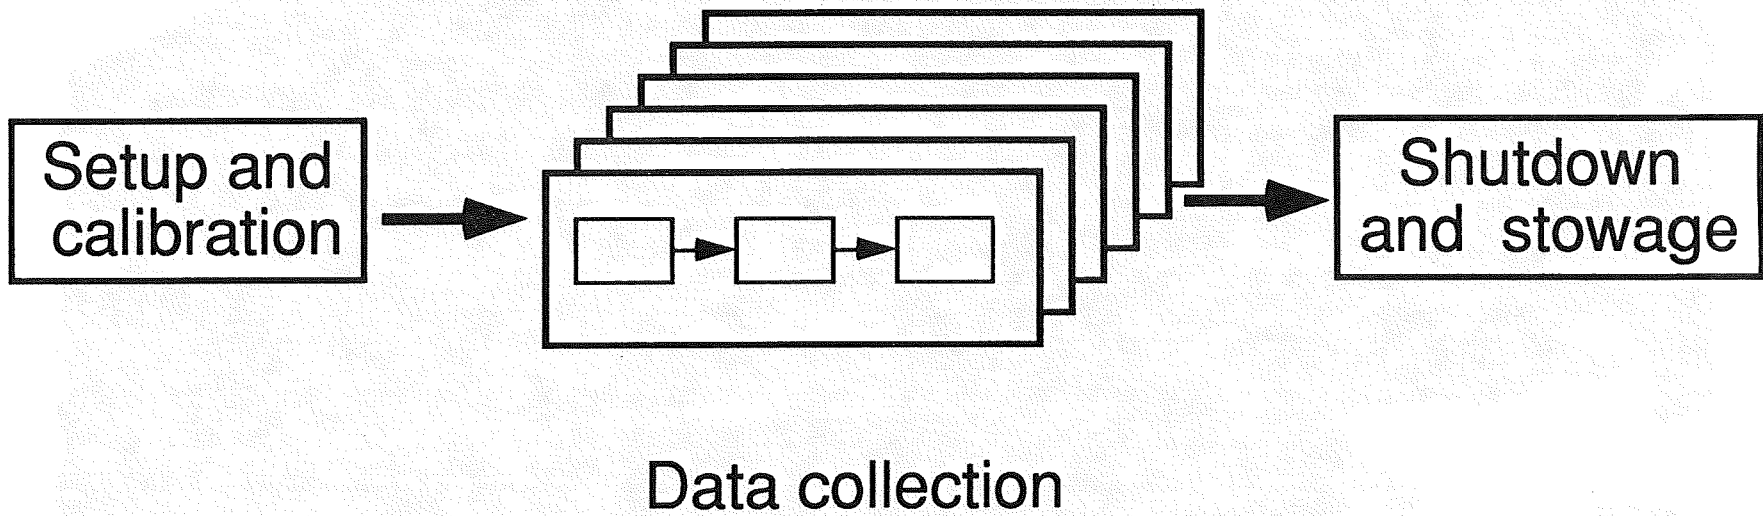

Hypothetical ASA Scenario

- The dome experiment, with two subjects, is running slightly behind schedule.
- Subject 1 had exhibited "interesting data" on the previous day.
- Subject 2 had exhibited erratic data during the previous session that same day.

How should the protocol be refined to maximize the scientific return of this session?



The "Proposed" Protocol

Options

minutes behind minutes ahead

15 10 5 0 5 10 15


? HELP

Notes

EXIT

	Current Protocol		Proposed Protocol
✓	6 run 3 MS2 free-flt 1	↑	6 run 3 MS2 free-flt 1
⇨	7 run 3 MS2 nck-twst 1		7 run 3 MS2 nck-twst 1
	-- att-bung 3 MS2 bungee .		7.1 run 3 MS2 free-flt 1 in
	8 run 3 MS2 bungee 1		-- att-bung 3 MS2 bungee .
	-- exit 1 . bungee .		8 run 3 MS2 bungee 1
	-- adj-bung 2 . bungee .		-- exit 1 . bungee .
	-- enter 3 PS1 bungee .		-- det-bung 2 . none .
	9 run 3 PS1 bungee 1		-- enter 2 PS1 none . out
	-- det-bung 2 PS1 none .	↓	10 run 3 PS1 free-flt 1

MET 03/14:07:00
GMT 15:21



Diagnosis and Troubleshooting Example


- During setup for a new subject, one of the signals that convey neck muscle activity "goes flat".
- Without the ASA, the problem might go unnoticed until PIs on the ground recognize the problem, notify the astronauts (and perhaps convey a troubleshooting procedure).
- With the ASA, the system would immediately notice the bad signal and invoke the diagnosis and troubleshooting module and help the astronauts correct the problem (or recommend that the experiment proceed without that signal).




Support of SLS-1 Mission

- **Pre-flight baseline data collection:**
 - system used to collect and analyze data from Rotating Dome experiment in the Baseline Data Collection Facility at JSC on L-150, L-75, L-45, L-30, and L-15 sessions
- **Ground support during flight experiment:**
 - system used in the Science Monitoring Area at JSC to collect and analyze in-flight data from the Dome experiment downlinked from Spacelab
- **Post-flight data collection:**
 - system used at Dryden to collect and analyze data from the Dome experiment on R+0, R+1, R+2, R+4, R+7, and R+10 sessions



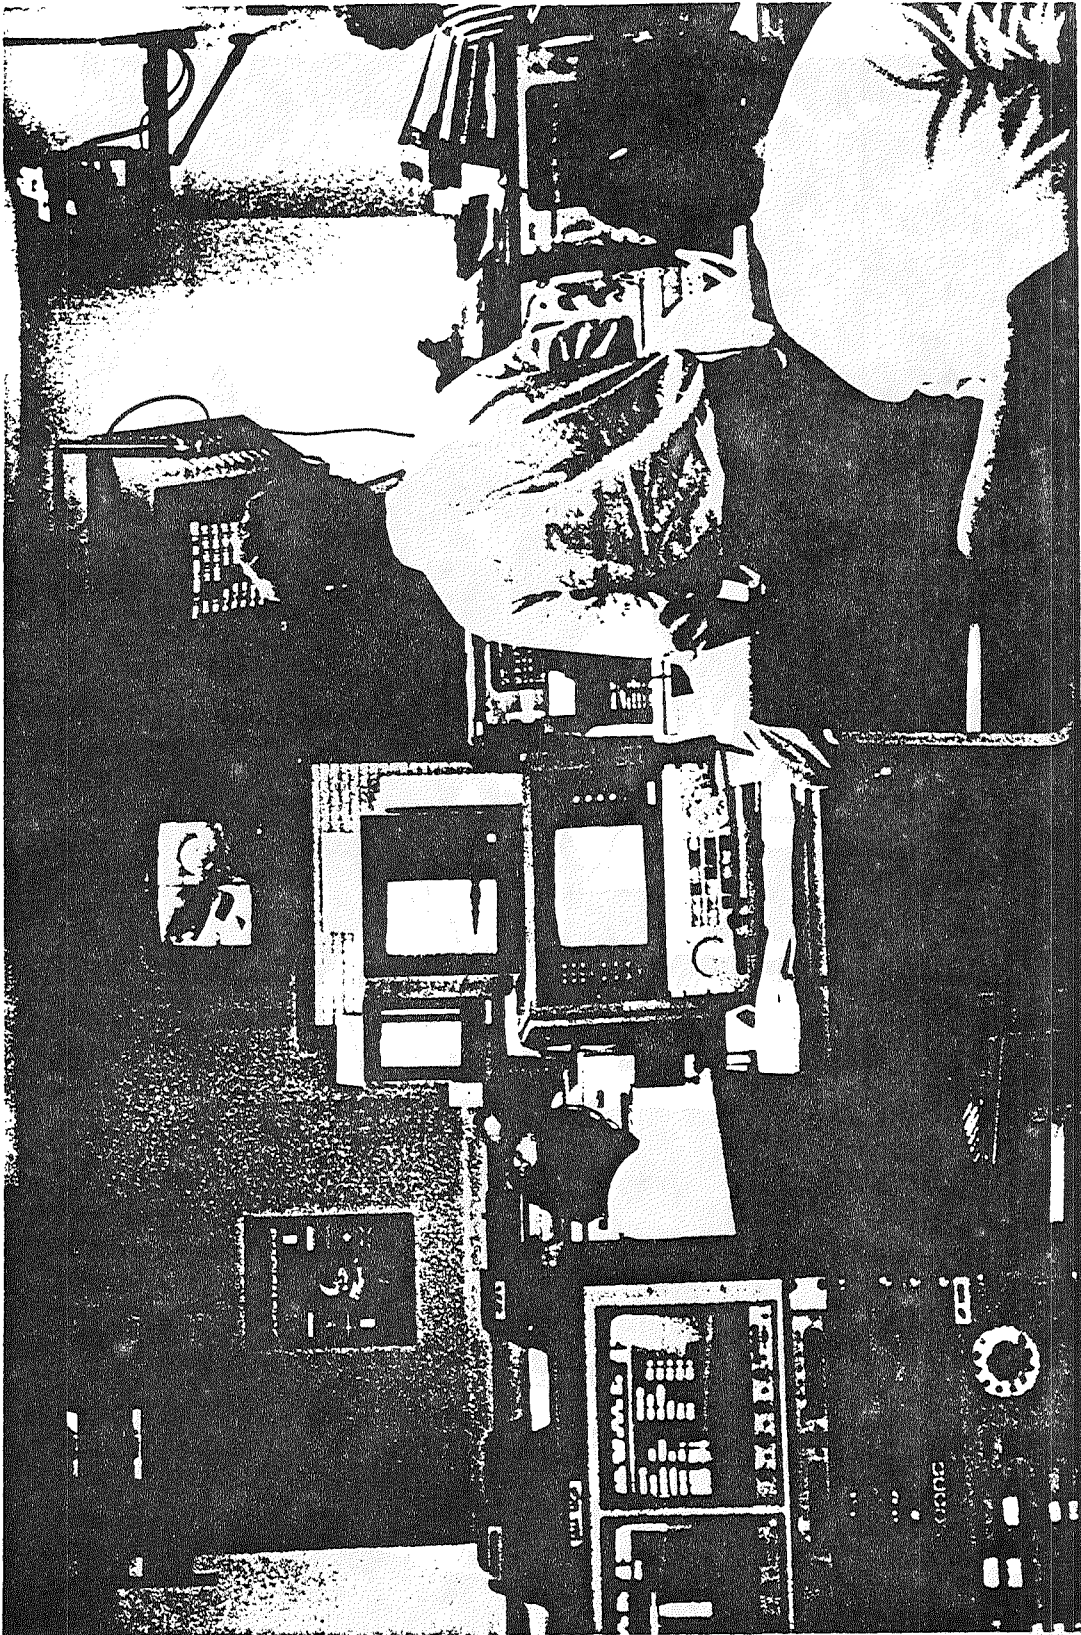

ORIGINAL PAGE IS
OF POOR QUALITY

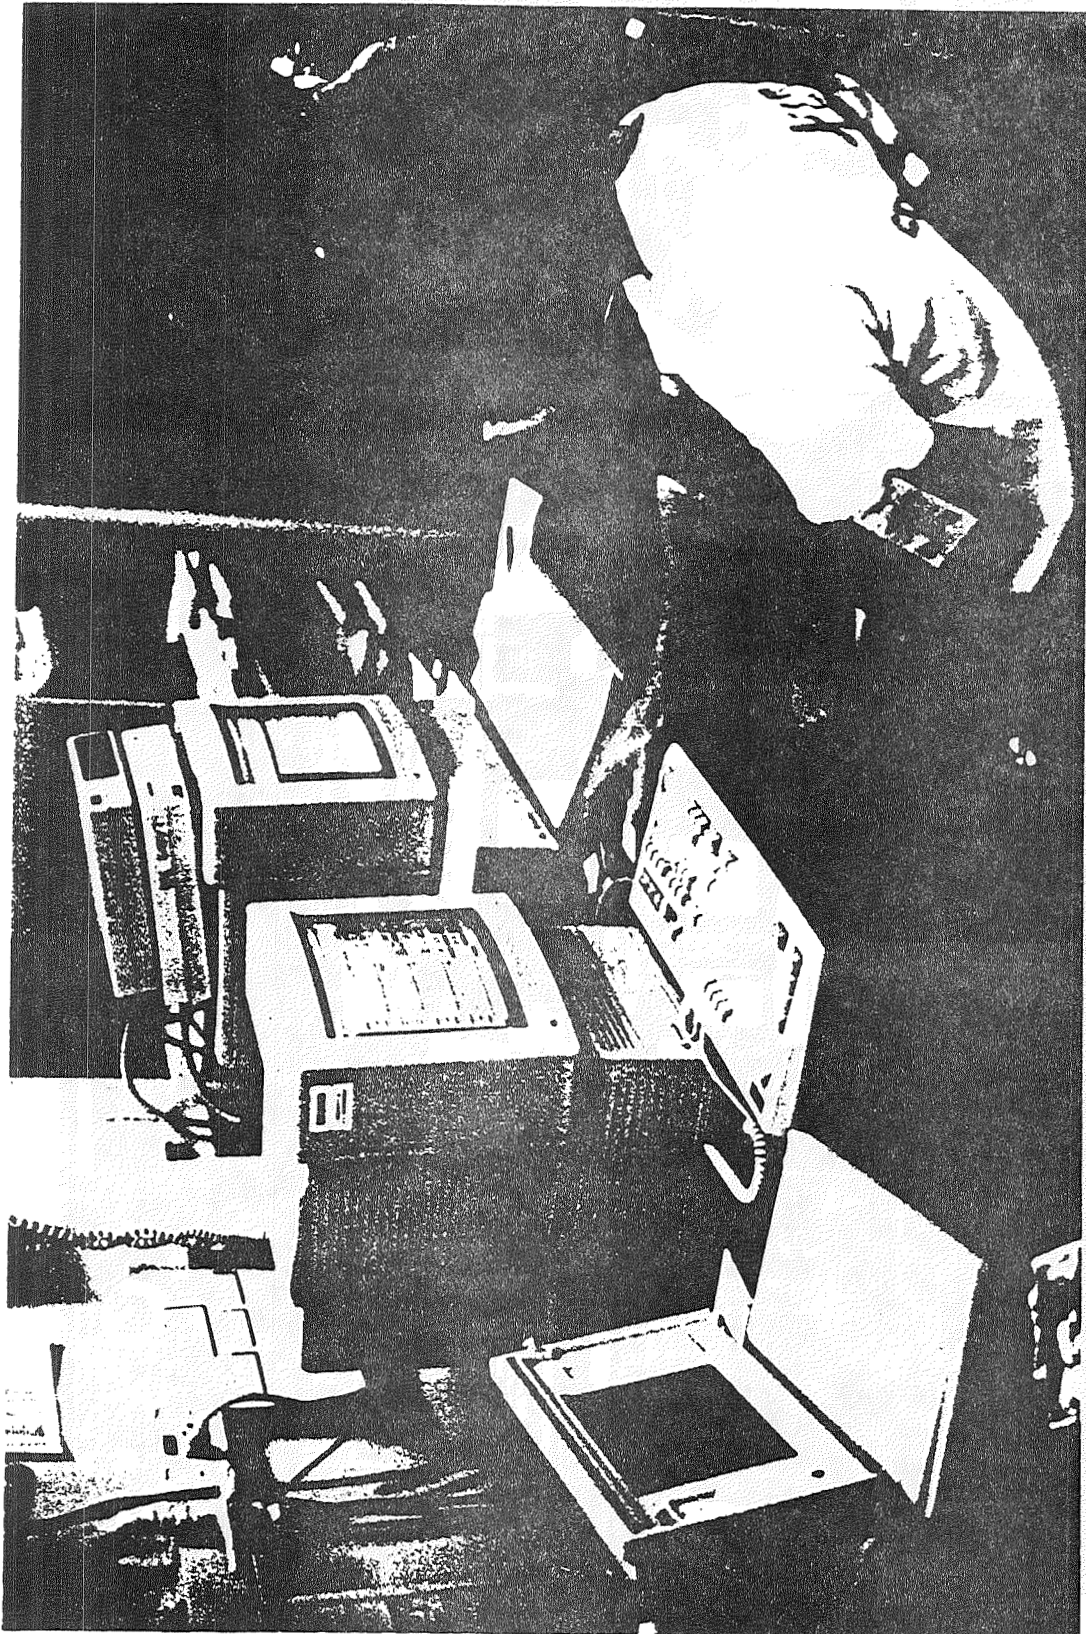

ORIGINAL PAGE IS
OF POOR QUALITY

Accomplishments

The system worked under realistic conditions.

- Collection and archival of downlinked data
- Quick-look analysis and summary of data
- Generation of potential new protocols



Lessons Learned

- Space science should permit reactivity to
 - cope with problems
 - pursue unexpected opportunities
- The ASA would have been very useful to crew in-flight (particularly for troubleshooting and replanning).
- Conduct of the experiment suggested an increased emphasis on experiment set-up would be useful.
- An in-flight system could avoid many of the limitations inherent in ground-based systems.



"Shuttle Science" vs SSF Science

	Shuttle	Space Station Freedom
Mission Duration	days	months
Experiment Variety	low to medium	high
Experiment Protocols	tightly scripted	adaptable to initial results

A square logo containing the Greek letter pi (π).



Milestones

1990

1991

1992

1993

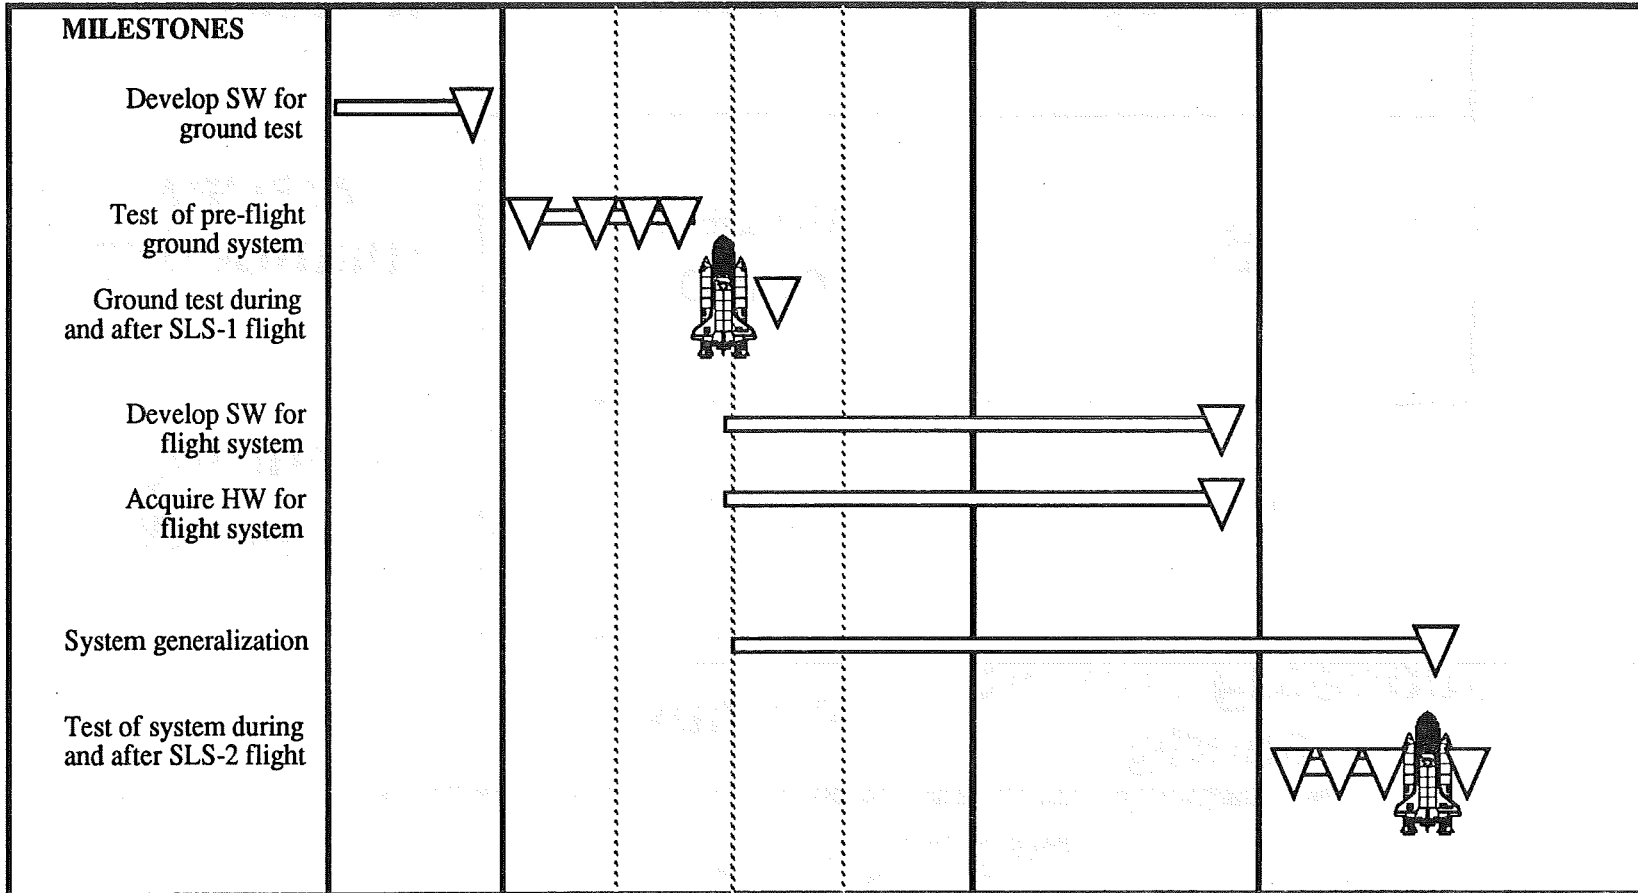

Potential Applications

- The Vestibular Sled Experiment
- Simulation of Titan Atmosphere in Gas Grain Simulation Facility (GGSF)
- Cell Growth in Wiessman Apparatus
- Biomedical Monitoring and Space Research Centrifuge



Conclusions: Implications for SSF

- Long-term "missions" aboard SSF will require a different approach to ground support of experiments
- Scientific return increases with reactivity
- Automation techniques can reduce reliance on ground

