

DEPARTMENT OF MECHANICAL ENGINEERING & MECHANICS
COLLEGE OF ENGINEERING & TECHNOLOGY
OLD DOMINION UNIVERSITY
NORFOLK, VIRGINIA 23529

**ANALYSIS AND CONTROL OF ASYMMETRIC VORTEX FLOWS
AND SUPERSONIC VORTEX BREAKDOWN**

By

Osama A. Kandil, Principal Investigator

Progress Report

For the period December 1, 1990 to July 31, 1991

Prepared for

National Aeronautics and Space Administration
Langley Research Center
Hampton, Virginia 23665

Under

Research Grant NAG-1-994

Dr. C. H. Liu, Technical Monitor

FLDMD-Theoretical Flow Physics Branch

(NASA-CR-188637) ANALYSIS AND CONTROL OF
ASYMMETRIC VORTEX FLOWS AND SUPERSONIC
VORTEX BREAKDOWN Progress Report, 1 Dec.
1990 - 31 Jul. 1991 (Old Dominion Univ.)

79 p

CSCL 01A G3/02

N91-30081

--THRU--

N91-30083

Unclas

0032457

August 1991

Old Dominion University Research Foundation is a not-for-profit corporation closely affiliated with Old Dominion University and serves as the University's fiscal and administrative agent for sponsored programs.

Any questions or comments concerning the material contained in this report should be addressed to:

Executive Director
Old Dominion University Research Foundation
P. O. Box 6369
Norfolk, Virginia 23508-0369

Telephone: (804) 683-4293
FAX Number: (804) 683-5290

DEPARTMENT OF MECHANICAL ENGINEERING & MECHANICS
COLLEGE OF ENGINEERING & TECHNOLOGY
OLD DOMINION UNIVERSITY
NORFOLK, VIRGINIA 23529

**ANALYSIS AND CONTROL OF ASYMMETRIC VORTEX FLOWS
AND SUPERSONIC VORTEX BREAKDOWN**

By

Osama A. Kandil, Principal Investigator

Progress Report


For the period December 1, 1990 to July 31, 1991


Prepared for
National Aeronautics and Space Administration
Langley Research Center
Hampton, Virginia 23665

Under
Research Grant NAG-1-994
Dr. C. H. Liu, Technical Monitor
FLDMD-Theoretical Flow Physics Branch

Submitted by the
Old Dominion University Research Foundation
P.O. Box 6369
Norfolk, Virginia 23508-0369

August 1991





ANALYSIS AND CONTROL OF ASYMMETRIC VORTEX FLOWS AND SUPERSONIC VORTEX BREAKDOWN

Osama A. Kandil*

In the period of December 1, 1990 to July 31, 1991, the Principal Investigator and two of his Ph.D. students have achieved the following accomplishments under this grant.

I. Conference Papers, Proceedings and Journal Publications:

1. Kandil, O. A., Wong, T. C. and Liu, C. H., "Prediction of Steady and Unsteady Asymmetric Vortical Flow Around Cones," AIAA Journal, Vol. 29, No. 9, September 1991.
2. Kandil, O. A. and Kandil, H. A., "Computation of Compressible Quasi-Axisymmetric Slender Vortex Flow and Breakdown," Journal of Computer Physics Communications, Vol. 65, North-Holland, March 1991, pp. 164-172. (a copy is enclosed)
3. Kandil, O. A., Wong, T. C. and Liu, C. H., "Numerical Simulation of Unsteady Asymmetric Flows around Cones," Journal of Fluids and Structures, Academic Press, December 1991.
4. Liu, C. H., Kandil, O. A. and Wong, T. C., "Computational Study for Passive Control of Supersonic Asymmetric Vortical Flows around Cones," Impact Journal of Computing in Science and Engineering, Academic Press, Inc., December, 1991.
5. Kandil, O. A., Wong, T. C. and Liu, C. H., "Analysis and Computation of Trailing Vortices and Their Hazardous Effects," Federal Aviation Administration International Wake Vortex Symposium, Washington, D.C., October 29-31, 1991.
6. Kandil, O. A., Kandil, H. A. and Liu, C. H., "Supersonic Quasi-Axisymmetric Vortex Breakdown," Proceedings of AIAA 9th Applied Aerodynamic Conference, AIAA 91-3311-CP, Baltimore, Maryland, September 23-25, 1991. (a copy is enclosed)
7. Wong, T. C., Kandil, O. A. and Liu, C. H., "Three-Dimensional Computational Study of Asymmetric Flows Using Navier-Stokes Equations," Asian Pacific Conference on Computational Mechanics, Hong Kong, December 11-13, 1991.
8. Kandil, O. A., Sharaf, H. H. and Liu, C. H., "Active Control of Asymmetric Vortical Flows Around Cones Using Injection and Heating," Second National Fluid Dynamics Congress, Los Angeles, CA, June 22-25, 1992. (Accepted)
9. Kandil, O. A., Wong, T. C. and Liu, C. H., "Three-Dimensional Navier-Stokes Asymmetric Solutions for Cone and Cone-Cylinder configuration," AIAA 91-1732, AIAA 22nd Fluid and Plasmadynamics Conference, Honolulu, Hawaii, June 24-27, 1991. (a copy is enclosed)

* Professor and Eminent Scholar, Department of Mechanical Engineering and Mechanics, Old Dominion University, Norfolk, VA 23529.



10. Kandil, O. A. and Kandil, H. A., "Computation of Steady and Unsteady Compressible Quasi-Axisymmetric Vortex Flow and Breakdown," AIAA 91-0752, AIAA 29th Aerospace Sciences Meeting, Reno, Nevada, Jan. 1991. (a copy is enclosed)
11. Kandil, O. A., Wong, T. C., Kandil, H. A. and Liu, C. H., "Thin-Layer and Full Navier-Stokes Locally-Conical and Three-Dimensional Asymmetric Solutions," AIAA 91-0547, AIAA 29th Aerospace Sciences Meeting, Reno, Nevada, Jan. 1991. (a copy is enclosed)

II. Papers Submitted to Journals

1. Kandil, O. A., Wong, T. C. and Liu, C. H., "Three-Dimensional Navier-Stokes Asymmetric Solutions for Cones and Cone-Cylinder Configurations," submitted for Publication to the AIAA Journal, July 10, 1991, Log. No. J19810.
2. Kandil, O. A., Kandil, H. A. and liu, C. H., "Supersonic Quasi-Axisymmetric Vortex Breakdown," submitted for Publication to the ASME Journal of Fluids Engineering, August 14, 1991.
3. Kandil, O. A., Wong, T. C., Kandil, H. A. and Liu, C. H., "Thin-Layer and Full Navier-Stokes Locally-Conical and Three-Dimensional Asymmetric Solutions," submitted for Publication to the ASME Journal of Fluids Engineering, August 18, 1991.
4. Kandil, O. A., Wong, T. C. and Liu, C. H., "Asymmetric Flow Around Cones with Noncircular Sections," submitted for Publication to the Journal of Computers and Fluids, August 6, 1990.

III. NASA Research Highlights Publication and Presentation

1. Kandil, O. A., Wong, T. C. and Liu, C. H., "Computational Prediction of Three-Dimensional Asymmetric Flows Around Cones," NASA Research Highlights, RTOP 505-59-32-02, December 1990.
2. "Asymmetric Locally-Conical and Three-Dimensional Flows Around Cones," NASA Executive Administration Review, NASA Langley, Hampton, VA, February 19, 1991. Presented by Dr. Kandil



IV. National and International Presentations

1. "Supersonic Quasi-Axisymmetric Vortex Breakdown," AIAA 9th Applied Aerodynamic Conference, Baltimore, Maryland, September 23-25, 1991. Presentation by Dr. Kandil.
2. "Navier-Stokes Calculation of Separated Vortex Flows," The 4th Nobeyama Workshop on Supercomputing and Experiments in Fluid Dynamics, Nobeyama, Japan, September 3-5, 1991. Presentation by Dr. Liu.
3. "Three-Dimensional Navier-Stokes Asymmetric Solutions for Cone-Cylinder Configurations," AIAA 22nd Fluid and Plasma Dynamics Conference, Honolulu, Hawaii, June 24-27, 1991. Presented by Dr. Kandil.
4. "Vortex-Dominated Flows: Physical Issues and Computational Applications," Televised Seminar, Old Dominion University, April 5, 1991. Presented by Dr. Kandil.
5. "Computation of Steady and Unsteady Compressible Quasi-Axisymmetric Vortex Flow and Breakdown," AIAA 29th Aerospace Sciences Meeting, Reno, January 7-10, 1991. Presented by Dr. Wong.
6. "Thin-Layer and Full Navier-Stokes, Locally-Conical and Three-Dimensional Asymmetric Solutions," AIAA 29th Aerospace Sciences Meeting, Reno, January 7-10, 1991. Presented by Dr. Wong.
7. "Locally-Conical and Three-Dimensional Supersonic Asymmetric Flows Around Cones," Symposium on Computational Technology for Flight Vehicles, Washington, D. C., November 5-7, 1990. Presented by Dr. Kandil.

V. Graduate Students

1. Mr. T. C. Wong defended his Ph.D. dissertation in April, 1991 and graduated in May 1991. A copy of his dissertation has been delivered to the grant monitor (a copy of cover page and abstract is enclosed)
2. Mr. Hamdy A. Kandil passed his Ph.D. qualifying exam in June 1991. He is currently a Ph.D. candidate.
3. Mr. Hazem H. Sharaf will take his Ph.D. preliminary Exam in Nov. 1991.





Computation of compressible quasi-axisymmetric slender vortex flow and breakdown

Osama A. Kandil¹ and Hamdy A. Kandil²

Department of Mechanical Engineering and Mechanics, Old Dominion University, Norfolk, VA 23529-0247, USA

Analysis and computation of steady, compressible, quasi-axisymmetric flow of an isolated, slender vortex are considered. The compressible Navier–Stokes equations are reduced to a simpler set by using the slenderness and quasi-axisymmetry assumptions. The resulting set along with a compatibility equation are transformed from the diverging physical domain to a rectangular computational domain. Solving for a compatible set of initial profiles and specifying a compatible set of boundary conditions, the equations are solved using a type-differencing scheme. Vortex breakdown locations are detected by the failure of the scheme to converge. Computational examples include isolated vortex flows at different Mach numbers, external axial-pressure gradients and swirl ratios. Excellent agreement is shown for a bench-mark case between the computed results using the slender vortex equations and those of a full Navier–Stokes solver.



Computation of compressible quasi-axisymmetric slender vortex flow and breakdown

Osama A. Kandil¹ and Hamdy A. Kandil²

Department of Mechanical Engineering and Mechanics, Old Dominion University, Norfolk, VA 23529-0247, USA

Analysis and computation of steady, compressible, quasi-axisymmetric flow of an isolated, slender vortex are considered. The compressible Navier–Stokes equations are reduced to a simpler set by using the slenderness and quasi-axisymmetry assumptions. The resulting set along with a compatibility equation are transformed from the diverging physical domain to a rectangular computational domain. Solving for a compatible set of initial profiles and specifying a compatible set of boundary conditions, the equations are solved using a type-differencing scheme. Vortex breakdown locations are detected by the failure of the scheme to converge. Computational examples include isolated vortex flows at different Mach numbers, external axial-pressure gradients and swirl ratios. Excellent agreement is shown for a bench-mark case between the computed results using the slender vortex equations and those of a full Navier–Stokes solver.

1. Introduction

The phenomenon of vortex breakdown or bursting was observed in the water vapor condensation trails along the leading-edge vortex cores of a gothic wing. Two forms of the leading-edge vortex breakdown, a bubble type and a spiral type, have been documented experimentally [1]. The bubble type shows an almost axisymmetric sudden swelling of the core into a bubble, and the spiral type shows an asymmetric spiral filament followed by a rapidly spreading turbulent flow. Both types are characterized by an axial stagnation point and a limited region of reversed axial flow. Much of our knowledge of vortex breakdown has been obtained from experimental studies in tubes where both types of breakdown and other types as well were generated [2–4].

The major effort of numerical simulation of vortex breakdown flows has been focused on incompressible, quasi-axisymmetric isolated vortices. Grabowski and Berger [5] used the incompressible, quasi-axisymmetric Navier–Stokes equations. Ha-

fez et. al [6] solved the incompressible, steady, quasi-axisymmetric Euler and Navier–Stokes equations using the stream function–vorticity formulation and predicted vortex breakdown flows similar to those of Garbowski and Berger. Spall, Gatski and Grosch [7] used the vorticity–velocity formulation to solve the three-dimensional, incompressible, unsteady Navier–Stokes equations.

Flows around highly swept wings and slender wing-body configurations at transsonic and supersonic speeds and at moderate to high angles of attack are characterized by vortical regions and shock waves, which interact with each other. Other applications which encounter vortex–shock interaction include a supersonic inlet ingesting a vortex and injection into a supersonic combustor to enhance the mixing process, see Delery et. al [8] and Metwally, Settles and Horstman [9]. These problems and others call for developing computational schemes to predict, study and control compressible vortex flows and their interaction with shock waves. Unfortunately, the literature lacks this type of analysis with the exception of the preliminary work of Liu, Krause and Menne [10] and Copening and Anderson [11].

In this paper, the steady, compressible Navier–Stokes equations are simplified using the quasi-

¹ Professor and Eminent Scholar.

² Graduate Research Assistant.



axisymmetry and slenderness assumptions. A compatibility equation [10] has been used and the governing equations are transformed to a rectangular computational domain by using a Levey-Lee-type transformation. A compatible set of initial conditions and boundary conditions is obtained and the problem is solved using a type-differencing scheme. The numerical results show the effects of compressibility, external axial pressure gradients and the swirl ratio on the vortex breakdown location. A bench-mark flow case has been solved using these equations and the full Navier-Stokes equations. The results are in excellent agreement with each other.

2. Highlights of the formulation and computational scheme

Starting with the steady, compressible Navier-Stokes equations which are expressed in the cylindrical coordinates (\tilde{x} , \tilde{r} and ϕ), assuming the isolated vortex flow to be slender [$\tilde{r}/l = O(1/\sqrt{Re})$, $\tilde{v}/U_\infty = O(1/\sqrt{Re})$, where l is a characteristic length, \tilde{v} the radial velocity, U_∞ the freestream velocity and Re the freestream Reynolds number] and quasi-axisymmetric [$\partial/\partial\phi(\) = 0$], and performing an order-of-magnitude analysis, the equations are reduced to a compressible, quasi-axisymmetric, boundary-layer-like set. The dimensionless flow variables ρ , p , u , v , w , T and μ are non-dimensionalized by ρ_∞ , $\rho_\infty a_\infty^2$, a_∞ , a_∞^2/C_p and μ_∞ for the density, pressure, velocity, temperature and viscosity, respectively, where C_p is the specific heat at constant pressure. Next, we introduce a Levey-Lee-type transformation which is given by

$$\xi = \int_0^x \rho_e \mu_e dx, \quad \eta = \frac{\rho_e}{\lambda(\xi)} \int_0^r \frac{\rho}{\rho_e} dr, \quad (1)$$

where λ is given by

$$\text{MSF} = \frac{\lambda(\xi)}{f(\rho)} = \frac{r_e(\xi)}{r_e(\xi_i)} \equiv \text{modified shape factor characterizing the growth of vortex-flow boundary} \quad (2)$$

and $f(\rho)$ is a function relating the density integral at any axial station to that at the initial station. It is equal to 1 for incompressible flow. The subscript e refers to external conditions and the subscript i refers to initial location.

The governing equations become

$$\frac{\partial V}{\partial \eta} + \frac{1}{r\lambda} \frac{\partial}{\partial \xi} (\lambda ur) + \frac{\lambda}{\rho r} V = 0, \quad \text{where } v = \frac{\rho_e \mu_e \lambda}{\rho} V - \eta_x \frac{\lambda u}{\rho}, \quad \text{and } \eta_x = \frac{\partial \eta}{\partial x}, \quad (3)$$

$$u \frac{\partial u}{\partial \xi} + V \frac{\partial u}{\partial \eta} = -\frac{1}{\rho} \frac{\partial p}{\partial \xi} - \frac{\lambda}{\rho} \theta \frac{w^2}{r} + \frac{M}{\lambda r} \frac{\partial}{\partial \eta} \left(\frac{cr}{\lambda} \frac{\partial u}{\partial \eta} \right), \quad (4a)$$

where

$$\theta = \frac{1}{\rho_e \mu_e} \eta_x \quad \text{and} \quad c = \frac{\rho \mu}{\rho_e \mu_e}, \quad (4b)$$

$$\frac{\lambda}{r} w^2 = \frac{\partial p}{\partial \eta}, \quad (5)$$

$$u \frac{\partial w}{\partial \xi} + V \frac{\partial w}{\partial \eta} + \frac{\lambda}{\rho r} (V - \theta u) w = \frac{M}{\lambda^2 r^2} \frac{\partial}{\partial \eta} \left[cr^3 \frac{\partial}{\partial \eta} \left(\frac{w}{r} \right) \right], \quad (6)$$

$$u \frac{\partial T}{\partial \xi} + V \frac{\partial T}{\partial \eta} = \frac{u}{\rho} \frac{\partial p}{\partial \xi} + \frac{\lambda}{\rho} \frac{V w^2}{r} + \frac{M}{Pr \lambda^2 r} \frac{\partial}{\partial \eta} \left(cr \frac{\partial T}{\partial \eta} \right) + \frac{Mc}{\lambda^2} \left\{ \left(\frac{\partial u}{\partial \eta} \right)^2 + \left[r \frac{\partial}{\partial \eta} \left(\frac{w}{r} \right) \right]^2 \right\}, \quad (7)$$

where $Pr \equiv$ Prandtl number = 0.72.

$$p = \frac{\gamma - 1}{\gamma} \rho T, \quad (8)$$

where $\gamma \equiv$ ratio of specific heats.

The viscosity μ is related to the temperature through the Sutherland law. At the initial boundary, $\xi = \xi_i$, we specify

$$u_i = u(\eta), \quad w_i = w(\eta) \quad \text{and} \quad T_i = T(\eta). \quad (9)$$

The other compatible initial conditions are obtained from a compatibility equation and eqs. (5)


and (8). At the vortex axis, $\eta = 0$, we specify

$$\frac{\partial u}{\partial \eta} = V = w = \frac{\partial T}{\partial \eta} = 0. \quad (10)$$

At the outer boundary, $\eta = \eta_e$, we assume the boundary to be a stream surface, specify the axial

pressure gradient $(\partial p / \partial \xi)_e$ and use the Euler equations to match the outer profiles to those of the viscous core to obtain the conditions on u_e, w_e, T_e, ρ_e .

Eqs. (3)–(7) are solved using an implicit, type-differencing scheme. The computational proce-

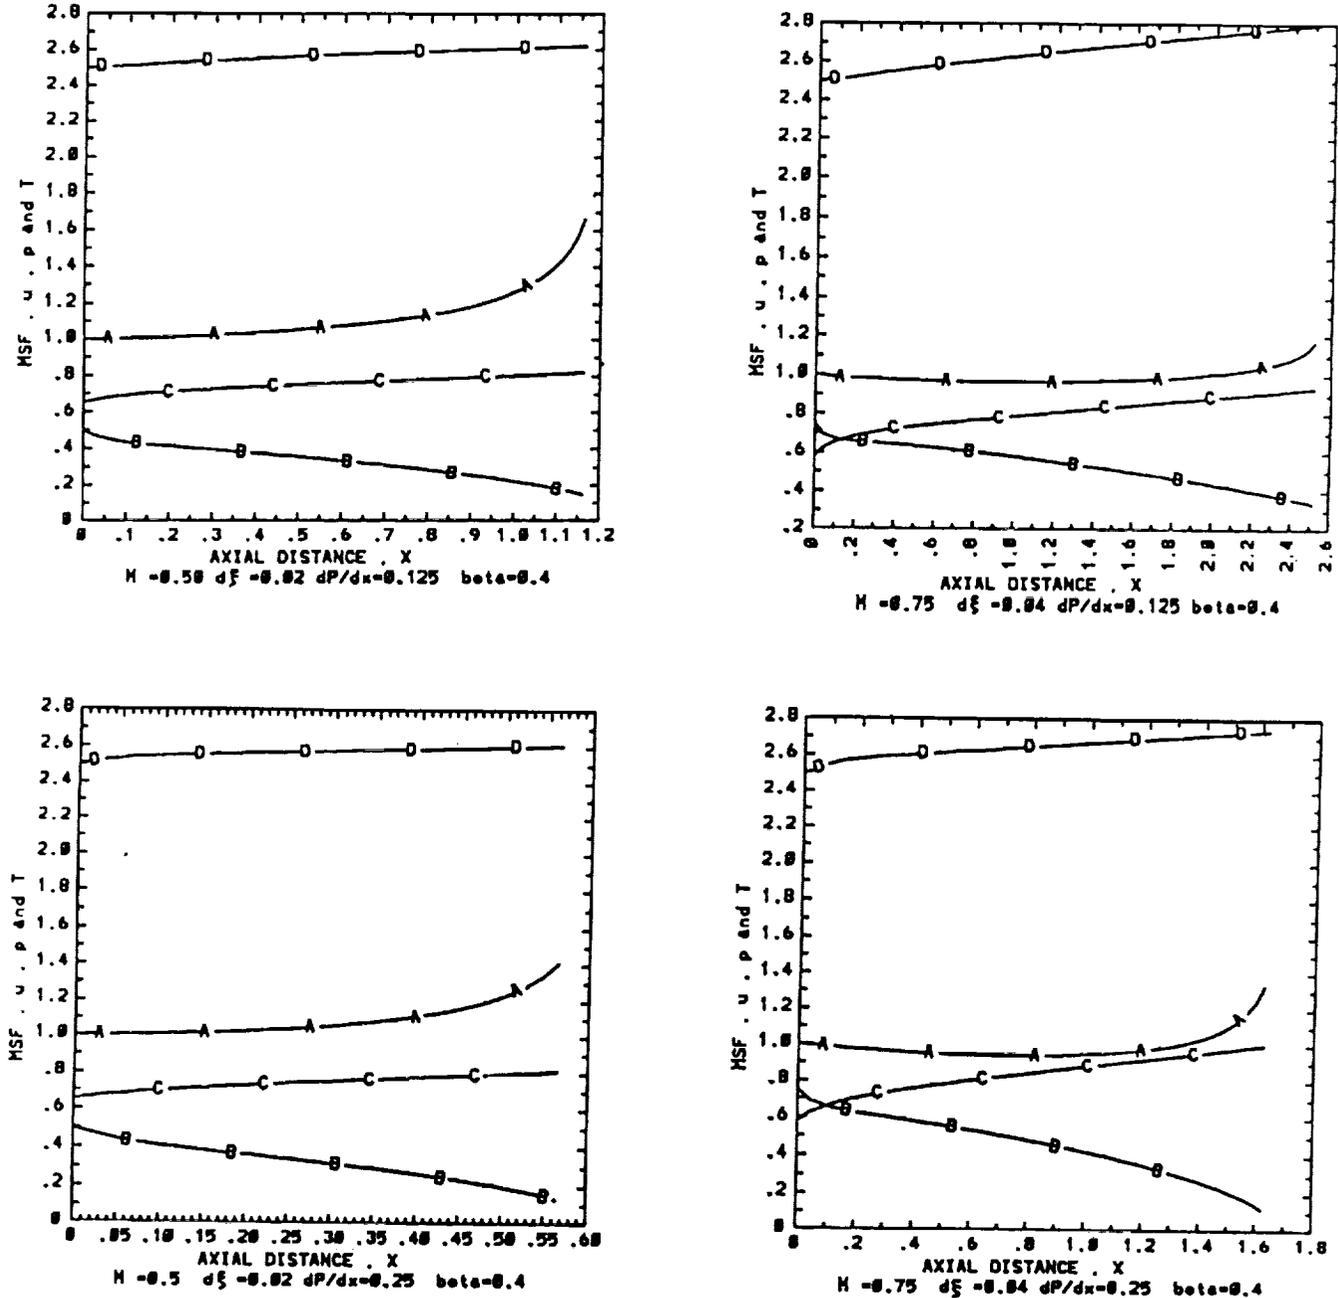

$$A = \text{MSF}, B = u_a, C = p_a, D = T_a$$

Fig. 1. Slender quasi-axisymmetric flow solutions for the effect of Mach number, external axial pressure gradient and swirl ratio.

ture consists of two parts. In the first part a compatible set of initial profiles are obtained at $\xi = \xi_1$ and in the second part we use eqs. (4)–(8) and the compatibility equation to obtain p , u , w , ρ , T and V (or v).

3. Numerical examples

In the present numerical examples, the outer edge of the vortex, η_c , is taken as 10, and 1000 grid points are used and hence $\Delta\eta_c = 0.01$. The

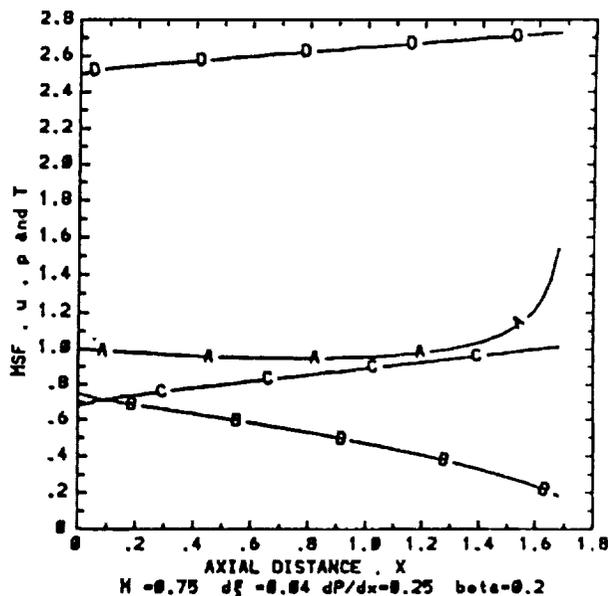
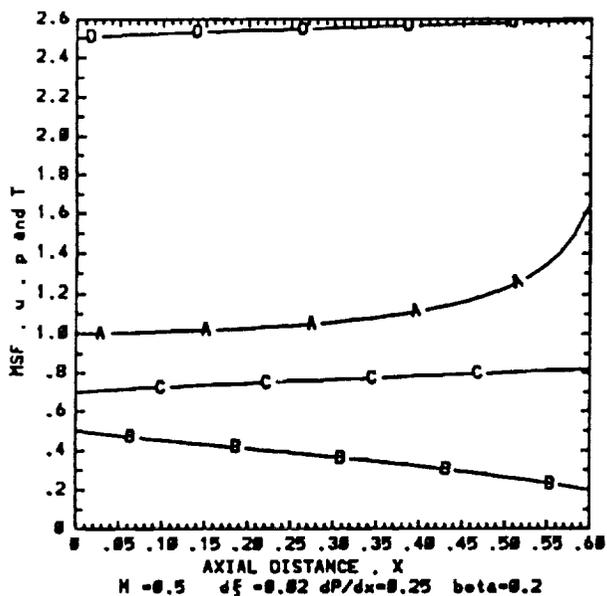
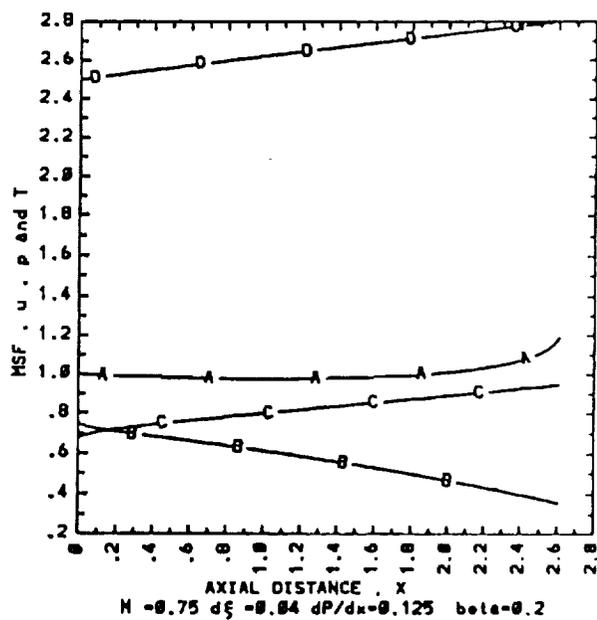
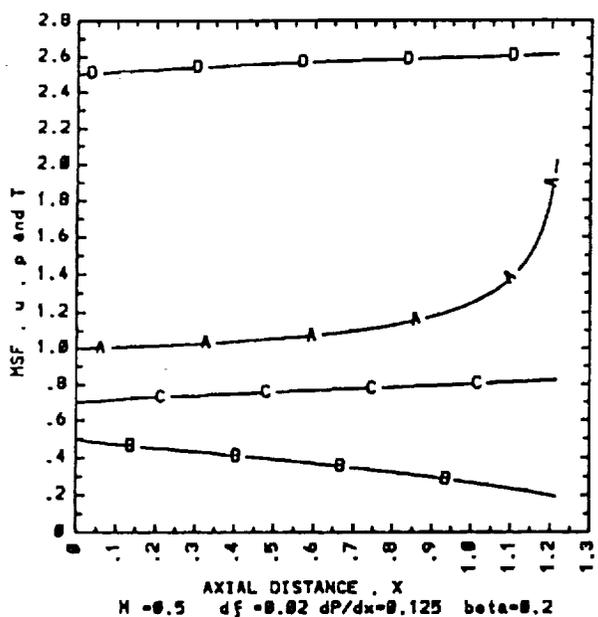


Fig. 1 (continued).

results are shown for two Mach numbers: $M = 0.5$ and 0.75 . The step size in the axial direction is 0.02 for $M = 0.5$ and 0.04 for $M = 0.75$. For each Mach-number case, we solve for two external axial pressure gradients; $(\partial p/\partial x)_e = 0.125$ and 0.25 and two swirl ratios; $\beta = (w/u)_{r=1} = 0.2$ and 0.4 . The initial profiles for u_i , w_i and T_i are $u_i = \text{constant}$, $w_i = \beta u_i r(2 - r^2)$ for $r \leq 1$ and $w_i = \beta u_i/r$ for

$r \geq 1$ and $T_i = 2.5$, respectively. Fig. 1 shows MSF, u_a , p_a and T_a which are referred to by curves A, B, C and D; respectively. The results show that the breakdown length is more than doubled when the Mach number increases from 0.5 to 0.75 . They also show that while the outer boundary continuously increases for $M = 0.5$, it initially decreases and then increases for $M = 0.75$; see the A curves.

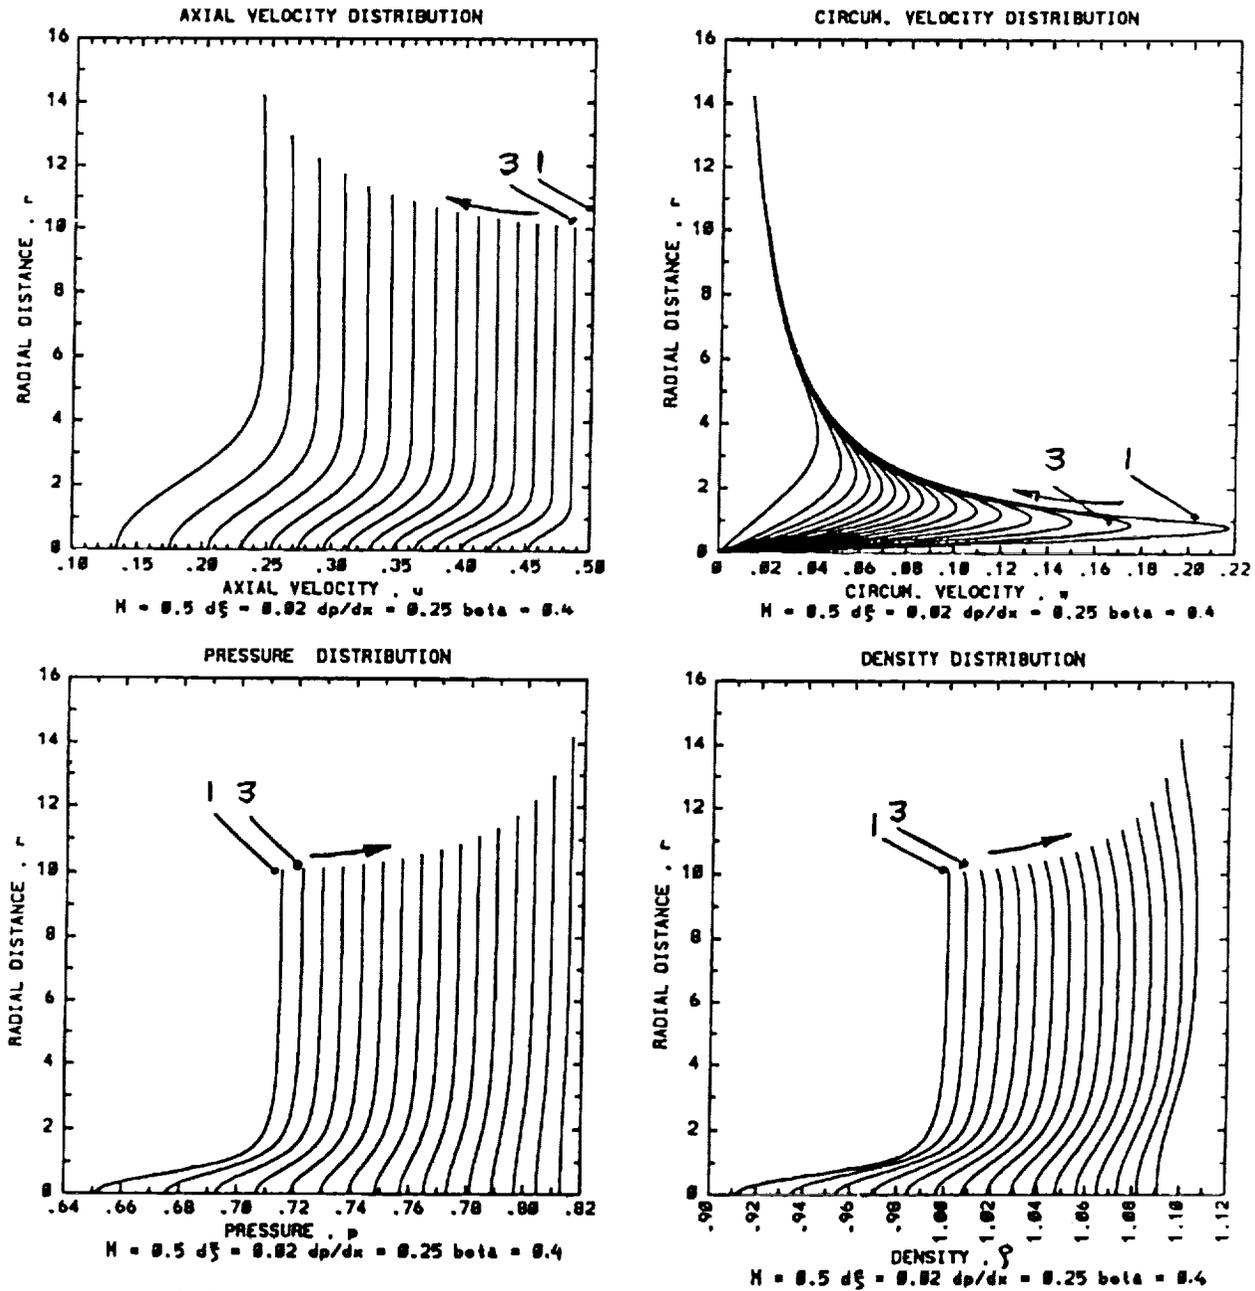


Fig. 2. Flow profiles for slender quasi-axisymmetric flows at $M = 0.5$ and 0.75 , $\beta = 0.4$, $(dp/dx)_e = 0.25$.

The adverse pressure gradient at the vortex axis decreases faster for $M = 0.75$ than for $M = 0.5$. The results also show that the external axial pressure gradient is a dominant parameter on the breakdown length. As the external axial pressure gradient is doubled, the breakdown length substantially decreases. Doubling the swirl ratio slightly decreases the breakdown length.

Fig. 2 shows the profiles of u , w , p and ρ across r at axial stations until the breakdown location for $M = 0.5$ and 0.75 for the cases of $(dp/dx)_e = 0.25$ and $\beta = 0.4$. The initial profiles are indicated by the number 1 and the next shown station is indicated by 3. At $M = 0.75$, it is noticed that the pressure and density gradients in the axial direction decrease faster than those at $M = 0.5$.

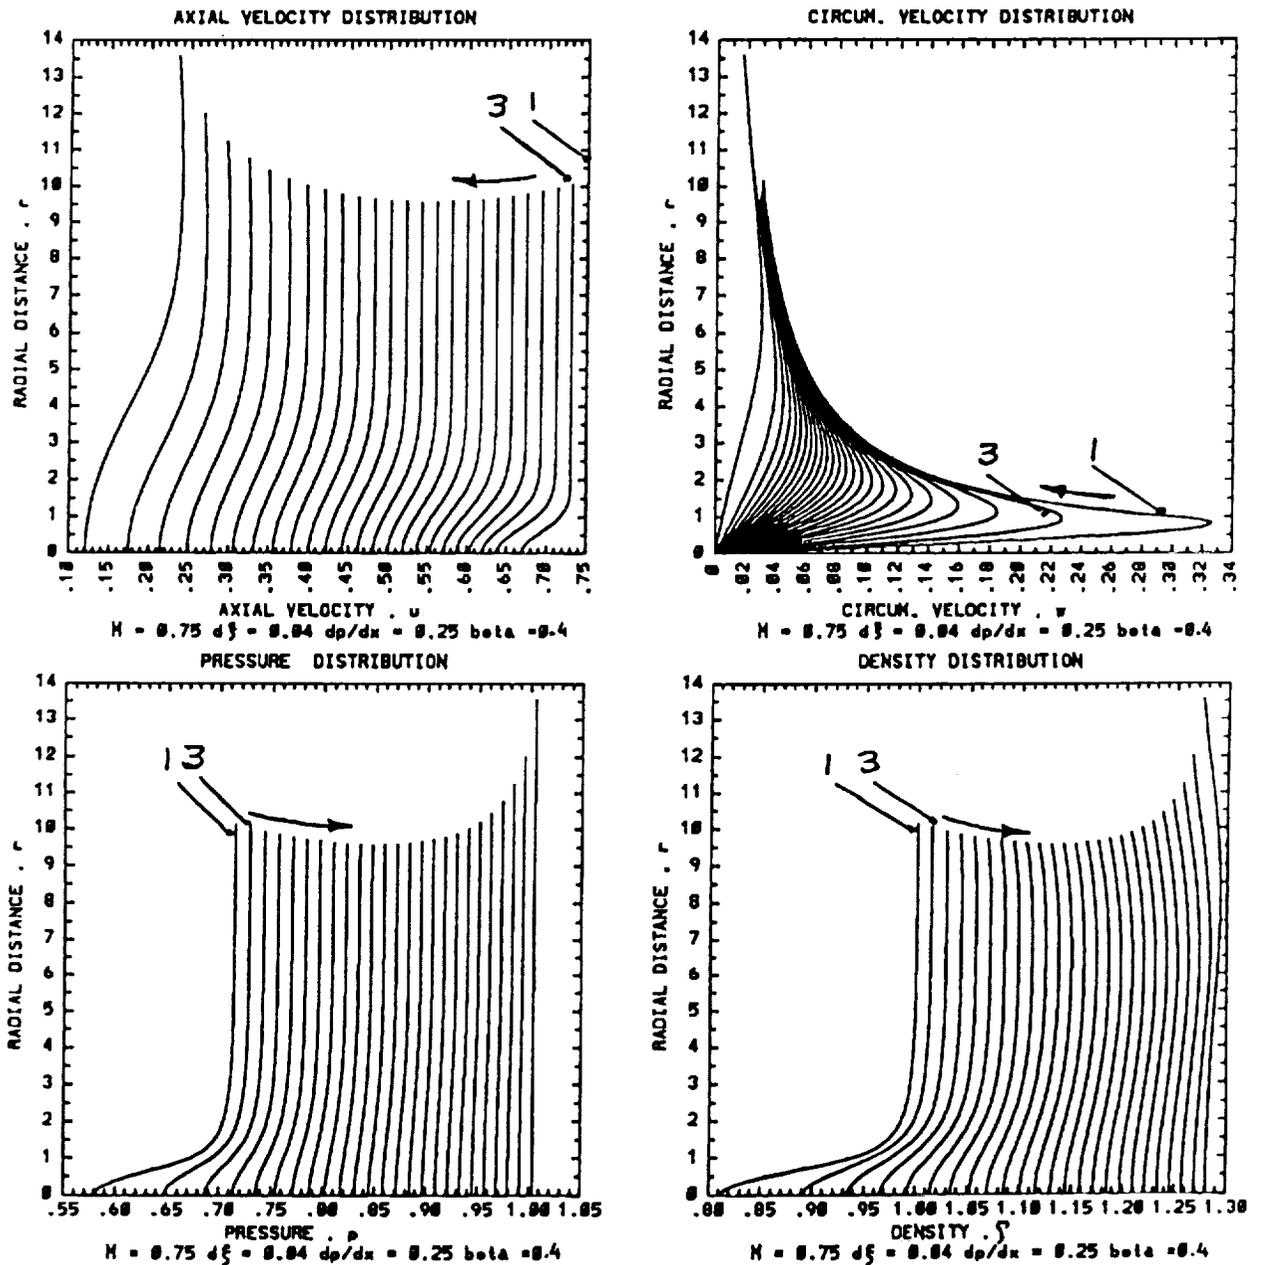


Fig. 2 (continued).

The profiles show that the viscous diffusion at $M = 0.75$ is larger than that at $M = 0.5$.

Fig. 3 shows the profiles of u , w , v and p which has been computed by the present method and by an upwind Navier–Stokes solver for the case of $M = 0.5$, $\beta = 0.6$ and $(dp/dx)_e = 0$. For the Navier–Stokes solver a rectangular grid of $100 \times 51 \times 51$ in the axial direction and cross-flow

plane is used. The curves are labeled by the capital letters A, B, ... etc. Comparing the curves of the two sets, a remarkable agreement is seen.

It is concluded from the given numerical examples that increasing the flow Mach number has a favorable effect on the vortex breakdown location. The external axial pressure gradient is a dominant parameter on the vortex breakdown. Its effect

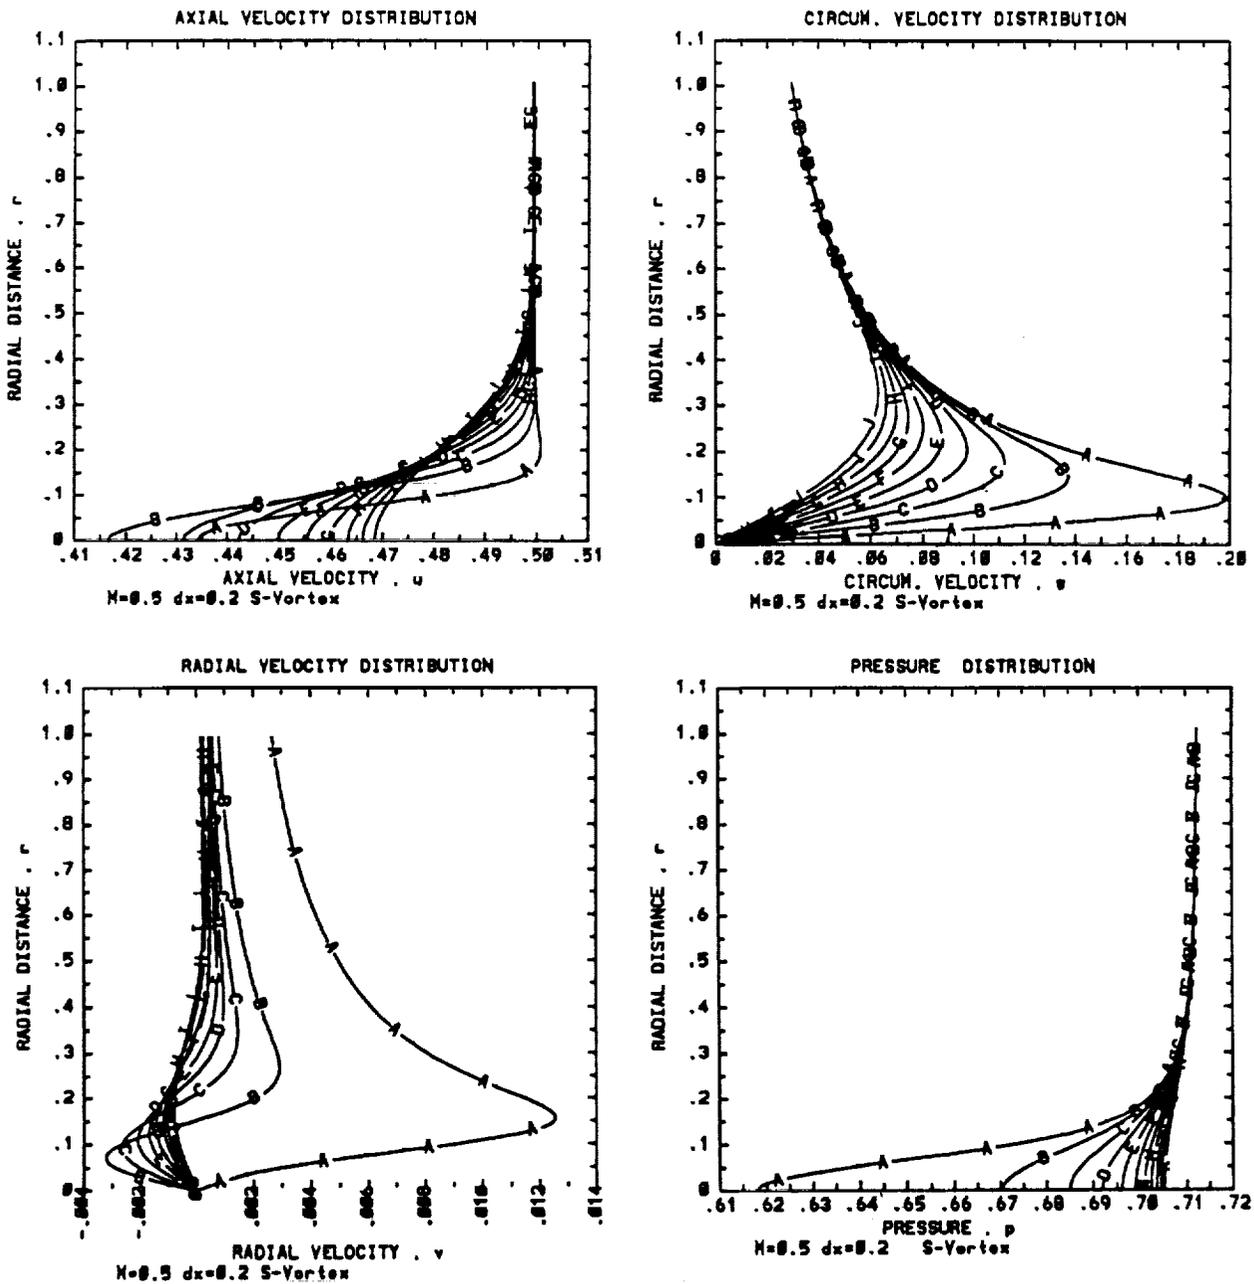


Fig. 3. Flow profiles for slender quasi-axisymmetric flows using the present method and the full Navier–Stokes equations, $M = 0.5$, $\beta = 0.6$, $(dp/dx)_e = 0.0$.

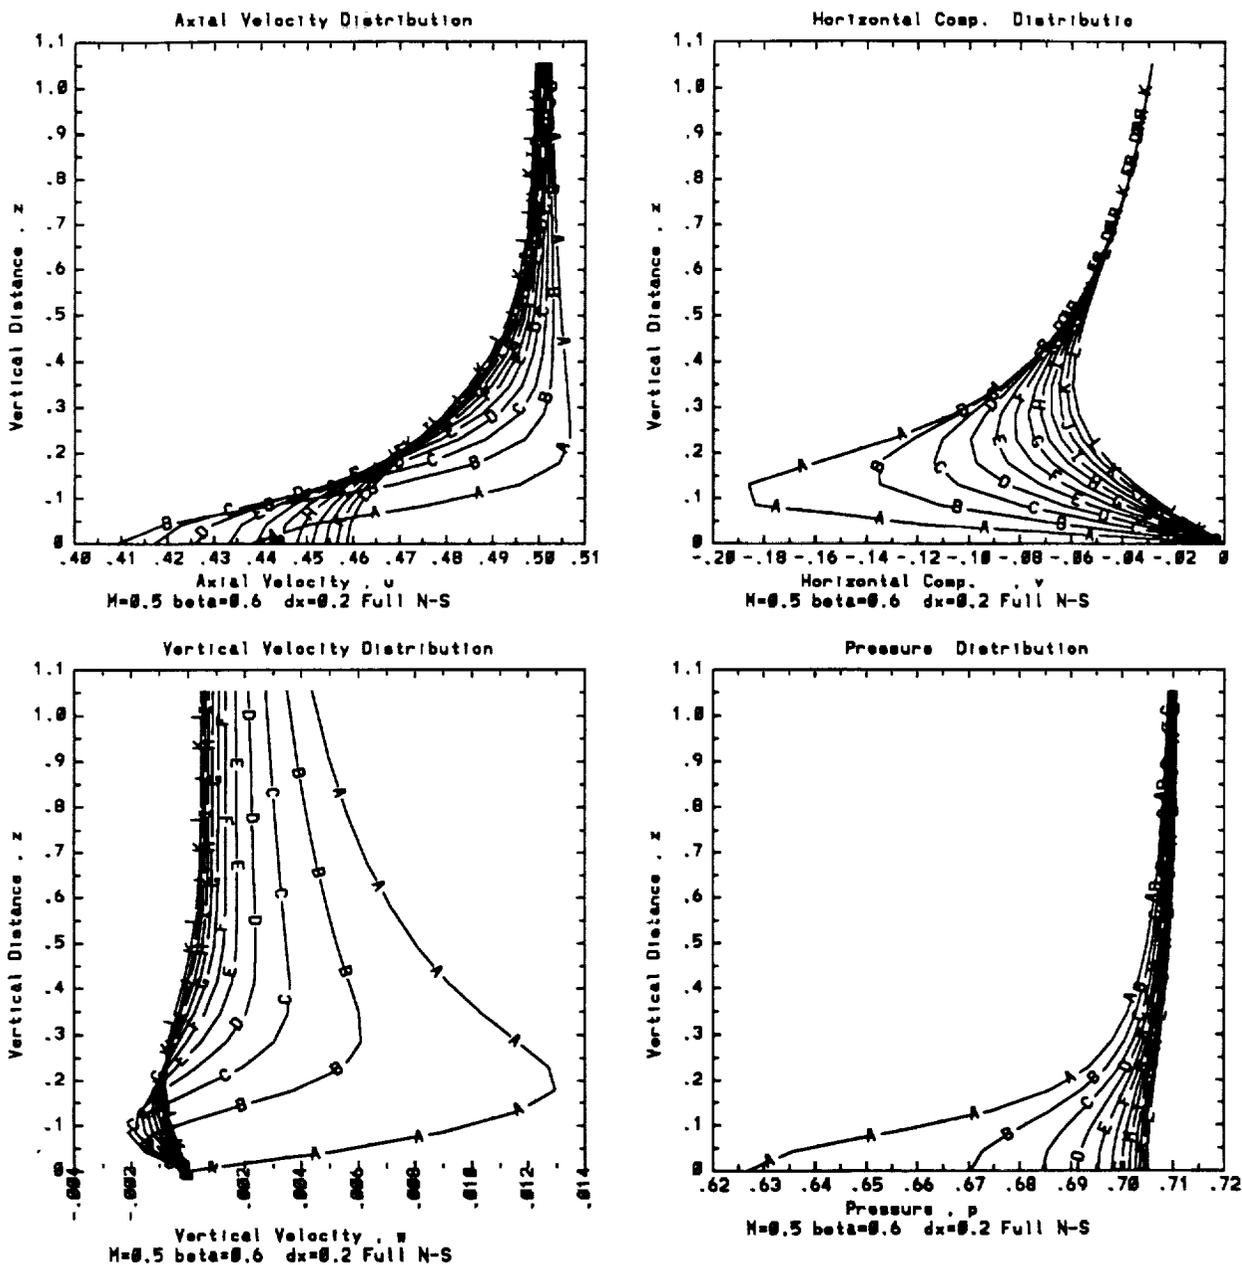


Fig. 3 (continued).

decreases as the Mach number is increased. Comparison of the present results with the full Navier-Stokes results gives a strong confidence in the present analysis. The present formulation and results are used to generate compatible initial profiles for the full Navier-Stokes solutions, and to provide data for breakdown-potential cases for accurate computations using the full Navier-Stokes equations. The full Navier-Stokes equa-

tions are currently applied to these cases, so that we can solve for the flow in the breakdown region.

Acknowledgement

This research work is supported by the NASA Langley Research Center under Grant No. NAG-1-994.

References

- [1] N.C. Lambourne and D.W. Bryer, Bursting of leading-edge vortices: Some observations and discussion of the phenomenon, Aeronautical Research Council, R&M 3282 (1961).
- [2] T. Sarpkaya, Vortex breakdown in swirling conical flows, *AIAA J.* 9 (1971) 1791.
- [3] S. Leibovich, Vortex stability and breakdown survey and extension, *AIAA J.* 23 (1984) 1194.
- [4] M.P. Escudier and N. Zender, Vortex flow regimes, *J. Fluid Mech.* 115 (1982) 105.
- [5] W.J. Grabowski and S.A. Berger, Solutions of the Navier-Stokes equations for vortex breakdown, *J. Fluid Mech.* 75 (1976) 525.
- [6] M. Hafez, G. Kuruvila and M.D. Salas, Numerical study of vortex breakdown, *J. Appl. Num.* 2 (1987) 291.
- [7] R.E. Spall, T. Gatski and C.E. Grosch, A criterion for vortex breakdown, ICASE Report 87-3 (January 1987).
- [8] J. Delery, E. Horowitz, O. Leuchter and J.L. Solignac, Fundamental studies of vortex flows, *Rech. Aerosp. No.* (1984) 1.
- [9] O. Metwally, G. Settles and C. Horstman, An experimental study of shock wave/vortex interaction, *AIAA Paper* 89-0082 (January 1989).
- [10] C.H. Liu, E. Krause and S. Menne, Admissible upstream conditions for slender compressible vortices, *AIAA Paper* 86-1093 (July 1986).
- [11] G. Copening and J. Anderson, Numerical solutions to three-dimensional shock/vortex interaction at hypersonic speeds, *AIAA Paper* 89-0674 (January 1989).



AIAA 91-0752

**COMPUTATION OF STEADY AND
UNSTEADY COMPRESSIBLE
QUASI-AXISYMMETRIC VORTEX
FLOW AND BREAKDOWN**

O. A. KANDIL AND H. A. KANDIL
Old Dominion University, Norfolk, VA

C. H. LIU
NASA Langley Research Center, Hampton, VA

29th Aerospace Sciences Meeting

January 7-10, 1991/Reno, Nevada



COMPUTATION OF STEADY AND UNSTEADY COMPRESSIBLE QUASI-AXISYMMETRIC VORTEX FLOW AND BREAKDOWN

Osama A. Kandil* and Hamdy A. Kandil**
Old Dominion University, Norfolk, VA

C. H. Liu***
NASA Langley Research Center, Hampton, VA

Abstract

The unsteady, compressible Navier-Stokes equations are used to compute and analyze compressible quasi-axisymmetric isolated vortices. The Navier-Stokes equations are solved using an implicit, upwind, flux-difference splitting finite-volume scheme. The developed three-dimensional solver has been verified by comparing its solution profiles with those of a slender, quasi-axisymmetric vortex solver for a subsonic, isolated quasi-axisymmetric vortex in an unbounded domain. The Navier-Stokes solver is then used to solve for a supersonic quasi-axisymmetric vortex flow in a configured circular duct. Steady and unsteady vortex-shock interactions and breakdown have been captured. The problem has also been calculated using the Euler solver of the same code and the results are compared with those of the Navier-Stokes solver. The effect of the initial swirl has been tentatively studied.

Introduction

The phenomenon of vortex breakdown or bursting was observed in the water vapor condensation trails along the leading-edge vortex cores of a gothic wing. Two forms of the leading-edge vortex breakdown, a bubble type and a spiral type, have been documented experimentally¹. The bubble type of vortex breakdown shows an almost axisymmetric sudden swelling of the core into a bubble, and the spiral type of vortex breakdown shows an asymmetric spiral filament followed by a rapidly spreading turbulent flow. Both types are characterized by an axial stagnation point and a limited region of reversed axial flow. Much of our knowledge of vortex breakdown has been obtained from experimental studies of pipe flows where both types of breakdown and other types as well were generated and documented²⁻⁴. The major effort of numerical simulation of vortex breakdown flows has been focused on incompressible, quasi-axisymmetric isolated vortices. Grabowski and Berger⁵ used the incompressible, quasi-axisymmetric Navier-Stokes equations to study isolated vortex flow in an unbounded region. Hafez, et al⁶ solved the incompressible, steady, quasi-axisymmetric Euler and

Navier-Stokes equations using the stream function-vorticity formulation for isolated vortex flows. They predicted vortex breakdown flows similar to those of Grabowski and Berger. Menne⁷ has also used the stream function vorticity formulation for unsteady, incompressible quasi-axisymmetric isolated vortex flow. Menne and Liu⁸ used the Navier-Stokes equations to study three-dimensional incompressible flows in a tube. Spall, et al⁹, presented a study of the structure and dynamics of bubble-type vortex breakdown in incompressible flows using the vorticity-velocity formulation. For more information on the physical and computational aspects of the incompressible vortex breakdown, the reader can refer to the paper by Krause¹⁰.

Flows around highly swept wings and slender wing-body configurations at transonic and supersonic speeds and at moderate to high angles of attack are characterized by vortical regions and shock waves, which interact with each other. Other applications which encounter vortex-shock interaction include a supersonic inlet ingesting a vortex and injection into a supersonic combustor to enhance the mixing process, see Delery, et al¹¹ and Metwally, settles, and Horstman¹². Figure 1 shows these examples, where Fig. 1.a and 1.b are taken from ref. 11 and Fig.1.c is taken from ref. 12. These problems and others call for developing computational schemes to predict, study and control compressible vortex flows and their interaction with shock waves. Unfortunately, the literature lacks this type of analysis with the exception of the preliminary work of Liu, Krause and Menne¹³, Copening and Anderson¹⁴, Delery, et al¹¹, Kandil and Kandil¹⁵, Meadows, Kumar and Hussain¹⁶.

In this paper, we use the unsteady, compressible full Navier-Stokes equations to compute and analyze compressible and supersonic quasi-axisymmetric isolated vortices. An implicit, upwind, flux-difference splitting finite-volume scheme, which is based on the Roe scheme, has been used to solve the full Navier-Stokes equations. The three-dimensional solver, which is called "FTNS3D", has been used to solve two problems of isolated vortex flows. The first problem is that of a subsonic, isolated quasi-axisymmetric vortex in an unbounded domain. This case has been verified by comparing the flow-profiles solutions with those of the slender vortex solver of ref. 15. Next, the three-dimensional Navier-Stokes equations are used to solve for a supersonic quasi-axisymmetric vortex flow

*Professor and Eminent Scholar, Department of Mechanical Engineering and Mechanics, Associate Fellow, AIAA.

**Graduate Research Assistant, Same Dept., Member AIAA

***Group Leader, Theoretical Flow Physics Branch, Senior Member, AIAA.

in a configured circular duct¹¹. Since the flow is quasi-axisymmetric, the solution is obtained by forcing the flow variables to be equal on two axial (meridian) planes. Solutions for steady and unsteady vortex-shock interactions and breakdown have been obtained. These solutions are compared with those of the Euler equations using the inviscid version of same solver. Effects of the initial swirl ratio has been tentatively investigated.

Formulation

The conservative form of the dimensionless, unsteady, compressible, full Navier-Stokes equations in terms of time-independent, body-conformed coordinates ξ^1, ξ^2 and ξ^3 is given by

$$\frac{\partial \bar{Q}}{\partial t} + \frac{\partial \bar{E}_m}{\partial \xi^m} - \frac{\partial (\bar{E}_v)_s}{\partial \xi^s} = 0; \quad m = 1-3, \quad s = 1-3 \quad (1)$$

where

$$\xi^m = \xi^m(x_1, x_2, x_3) \quad (2)$$

$$\bar{Q} = \frac{\bar{q}}{J} = \frac{1}{J} [\rho, \rho u_1, \rho u_2, \rho u_3, \rho e]^t \quad (3)$$

$$\begin{aligned} \bar{E}_m &\equiv \text{inviscid flux} \\ &= \frac{1}{J} \left[\partial_k \xi^m \bar{E}_k \right]^t \\ &= \frac{1}{J} [\rho U_m, \rho u_1 U_m + \partial_1 \xi^m p, \rho u_2 U_m \\ &\quad + \partial_2 \xi^m p, \rho u_3 U_m + \partial_3 \xi^m p, (\rho e + p) U_m]^t \end{aligned} \quad (4)$$

$$\begin{aligned} (\bar{E}_v)_s &\equiv \text{viscous and heat-conduction flux in } \xi^s \\ &\quad \text{direction} \\ &= \frac{1}{J} [0, \partial_k \xi^s \tau_{k1}, \partial_k \xi^s \tau_{k2}, \partial_k \xi^s \tau_{k3}, \\ &\quad \partial_k \xi^s (u_n \tau_{kn} - q_k)]^t; \quad k = 1-3, \quad n = 1-3 \end{aligned} \quad (5)$$

$$U_m = \partial_k \xi^m u_k \quad (6)$$

The first element of the three momentum elements of Eq. (5) is given by

$$\begin{aligned} \partial_k \xi^s \tau_{k1} &\equiv \frac{M_\infty \mu}{Re} \left[\left(\partial_k \xi^s \partial_1 \xi^n - \frac{2}{3} \partial_1 \xi^s \partial_k \xi^n \right) \frac{\partial u_k}{\partial \xi^n} \right. \\ &\quad \left. + \partial_k \xi^s \partial_k \xi^n \frac{\partial u_1}{\partial \xi^n} \right] \end{aligned} \quad (7)$$

The second and third elements of the momentum elements are obtained by replacing the subscript 1, everywhere in

Eq. (7), with 2 and 3, respectively. The last element of Eq. (5) is given by

$$\begin{aligned} \partial_k \xi^s (u_p \tau_{kp} - q_k) &\equiv \frac{M_\infty \mu}{Re} \left[\left(\partial_k \xi^s \partial_p \xi^n \right. \right. \\ &\quad \left. \left. - \frac{2}{3} \partial_p \xi^s \partial_k \xi^n \right) u_p \frac{\partial u_k}{\partial \xi^n} \right. \\ &\quad \left. + \partial_k \xi^s \partial_k \xi^n u_p \frac{\partial u_p}{\partial \xi^n} \right. \\ &\quad \left. + \frac{1}{(\gamma - 1) Pr} \partial_k \xi^s \frac{\partial (a^2)}{\partial \xi^n} \right]; \quad p = 1-3 \end{aligned} \quad (8)$$

The reference parameters for the dimensionless form of the equations are $L, a_\infty, L/a_\infty, \rho_\infty$ and μ_∞ for the length, velocity, time, density and molecular viscosity, respectively. The Reynolds number is defined as $Re = \rho_\infty V_\infty L / \mu_\infty$, where L is the initial radius of the vortex or the duct inlet radius. The pressure, p , is related to the total energy per unit mass and density by the gas equation

$$p = (\gamma - 1) \rho \left[e - \frac{1}{2} (u_1^2 + u_2^2 + u_3^2) \right] \quad (9)$$

The viscosity is calculated from the Sutherland law

$$\mu = T^{3/2} \left(\frac{1 + C}{T + C} \right), \quad C = 0.4317 \quad (10)$$

and the Prandtl number $Pr = 0.72$. In Eqs. (1)-(8), the indicial notation is used for convenience.

Computational Scheme

The computational scheme used to solve the full Navier-Stokes equations is an implicit, upwind, flux-difference splitting, finite-volume scheme. It employs the flux-difference splitting scheme of Roe. The Jacobian matrices of the inviscid fluxes, $A_s = \frac{\partial \bar{E}_s}{\partial q}$; $s = 1-3$, are split into backward and forward fluxes according to the signs of the eigenvalues of the inviscid Jacobian matrices. Flux limiters are used to eliminate oscillations in the shock region. The viscous and heat-flux terms are centrally differenced. The resulting difference equation is solved using approximate factorization in the ξ^1, ξ^2 and ξ^3 directions. In addition to the three-dimensional flows, the present computer program can solve for axisymmetric and quasi-axisymmetric flows. The resulting computer program can also be used to solve the Euler equations. This code is a modified version of the CFL3D which is currently called "FTNS3D". The modifications have been developed by the present authors.

Computational Applications

In this section, two computational applications are presented. The first application is that of a steady, subsonic quasi-axisymmetric vortex flow in an unbounded domain. The purpose of this application is to verify the Navier-Stokes solver by comparing the results of this case with those of a previously developed slender vortex solver, see ref. 15. The second application is that of a steady and unsteady, supersonic quasi-axisymmetric vortex flow in a configured circular duct. This application is solved by using pseudo-time stepping and accurate-time stepping. The results are compared with those of the Euler equations solver of the same computer program. Next, we consider each application and discuss its results.

Steady Subsonic Quasi-Axisymmetric Vortex Flow in an Unbounded Domain

Here, the three-dimensional Navier-Stokes is used to solve for an isolated quasi-axisymmetric flow. The computational domain for the Navier-Stokes equations is a parallelepiped rectangular domain with a square cross-section of 10×10 units. The downstream length is 10 units. The rectangular grid consists of $51 \times 51 \times 100$ points in the two directions of the square section and in the axial direction, respectively. The grid is clustered algebraically at the axis of the parallelepiped domain. The step size in the axial direction is 0.1.

For the slender-vortex solver¹⁵, the computational domain is a cylindrical one and the solution is obtained on one meridian plane having a radius of 10 and a length of 10. The number of grid points in the radial direction is 1000. The step size in the axial direction is 0.1. The initial profile for the slender vortex solver are given by $u_i \equiv$ axial velocity = constant, $w_i \equiv$ tangential velocity = $\beta u_i r(2-r^2)$ for $r \leq 1$ and $w_i = \beta u_i/r$ for $r \geq 1$ and $T_i \equiv$ temperature = 2.5, where $\beta = 0.6$. The Mach number at the outer radius of the initial station, $M_o = 0.5$. The other compatible initial profiles for p_i , v_i and ρ_i (pressure, radial velocity and density; respectively) are obtained from the radial momentum equation, a compatibility equation¹³ and the equation of state. The external axial pressure gradient is selected as $\left(\frac{\partial p}{\partial x}\right)_o = 0$. The external boundary conditions on the cylindrical outer boundary are obtained by using the Euler equations to match the outer profiles to those of the viscous core in order to obtain the conditions on u_o , w_o , T_o and ρ_o .

For the Navier-Stokes solver, the initial profiles are obtained from the previous initial profiles by interpolating the slender vortex profiles on the rectangular grid at the initial station. The Reynolds number of the Navier-Stokes solver for this case is set at 100.

Figure 2 shows the Navier-Stokes solutions on the left and the slender-vortex solutions on the right. The figure shows comparison of the profiles of axial velocity u , tangential velocity w , radial velocity v , pressure p and density ρ at the same axial stations which are marked

by A, B, C,.... It is remarkable to see the excellent agreement between the Navier-Stokes solutions and the slender-vortex solutions at every axial station. It should be emphasized here that the Navier-Stokes solutions for this quasi-axisymmetric flow have been obtained by using the three-dimensional solver on a three-dimensional grid.

Having verified the Navier-Stokes solver, the next problem to consider is the supersonic vortex flow in a configured circular duct.

Supersonic Quasi-Axisymmetric Vortex in a Configured Circular Duct

Figure 3 shows a configured circular duct which consists of a straight cylindrical part at the inlet that is followed by a short, diverging cylindrical part. At $x = 0.75$ and beyond, the duct radius is kept constant and a convergent-divergent nozzle with a throat radius of 0.95 is attached. The overall dimensions of the duct is 1×2.90 . This configured duct ensures that the inlet supersonic flow will become supersonic at the exit. Moreover, the convergent part near the inlet ensures the stability of the formed shock in the inlet region. This configured duct has also been used by Delery, et. al¹¹ for their Euler equations computations in an attempt to computationally model an experimental set up. It should be pointed here that the Euler equations, used by Delery, et. al, assume isenthalpic flow in order to drop the energy equation. This is a serious approximation since the upstream flow is a rotational flow. Moreover, as our present calculations show, the flow is actually unsteady and hence, the isenthalpic assumption is not valid.

The Navier-Stokes solver is used to compute this flow case by using a grid of 200×51 on two meridian planes, where the 200 points are in the axial direction and the 51 points are in the radial direction. The grid is clustered at the center line (CL) and at the wall. It is also clustered in the diverging part near the inlet. The two meridian planes are spaced circumferentially at a certain angle so that the aspect ratio of the minimum grid size will be less than 2. The upstream Mach number is $M_\infty = 1.75$ and the Reynolds number for the Navier-Stokes computations is 10^4 . The initial profile for the tangential velocity is given by

$$\frac{w}{U_\infty} = \frac{k_o}{r} \left[1 - \exp\left(-\frac{r^2}{r_m^2}\right) \right] \quad (11)$$

where $U_\infty = 1.74$, $r_m = 0.2$ and $k_o = 0.1$. The maximum $\frac{w}{U_\infty}$ is at $r = 0.224$ and it is equal to 0.32. The radial velocity, v , at the initial station is set equal to zero and the radial momentum equation is integrated to obtain the initial pressure profile. Finally, the density ρ is obtained from the definition of the speed of sound for the inlet flow. With these compatible set of profiles, the computations for both the Navier-Stokes equations and the Euler equations start. The exit boundary conditions are obtained by extrapolation from the interior since the flow is supersonic at the exit. The wall boundary conditions follow the

typical Navier-Stokes and Euler equations solid-boundary conditions. These computations have been carried out on the CRAY YMP of the NAS-Ames computational facilities. The CPU time is 30 μ s/grid point/iteration for the Navier-Stokes calculation and 20 μ s/grid point/iteration for the Euler equations.

a. Pseudo-Time-Stepping Solutions

Figure 4 shows the pseudo-time stepping solutions of the Navier-Stokes (NS) equations on the left and the Euler (E) equations on the right. Each column in the figure shows flow properties at the center line, the total Mach contours, the streamlines throughout the duct and a blow up of the streamlines in the vortex breakdown region.

The figure of properties along the center line of the NS solution shows a strong shock at the inlet. Behind the shock, the pressure and density sharply increase and the axial velocity decreases to a negative value (upstream flow) at $x = 0.10$. The axial velocity becomes more negative one more time at $x = 0.4$ indicating the formation of another bubble. At $x = 0.7$, the axial velocity becomes positive and it continuously increases till the duct exit. The Mach number contours of the NS solutions shows the shock system near the inlet. The shock at the center line is a normal strong shock, then it becomes an oblique strong shock, again it becomes a normal strong shock, and at the wall it becomes an oblique weak shock (supersonic-supersonic flows upstream and downstream of the shock). It is seen that the oblique shock at the wall is followed by a separation bubble (see the streamline figure) which is due to the shock and the divergence of the duct at this location. The streamlines figure of the NS solution shows a very large vortex-breakdown bubble and the blow-up figure of the streamlines shows another small bubble upstream of the large one.

The figure of Euler solution shows similar vortex breakdown features with a few differences from the NS solution. These differences are due to the absence of viscous forces. The figure of properties along the center line of the E solution shows a strong shock at the inlet. Behind the shock, the pressure and density sharply increase to a level higher than that of the NS solution. The axial velocity decreases to a negative value which is less than that of the NS solution. The Mach-number contours of the E solution show the shock system near the inlet. The shock at the center line is a normal strong system, then it becomes an oblique weak shock and at the wall it becomes a strong normal shock where there is no shock induced separation. Another normal shock develops at $x = 0.61$, where the axial velocity becomes substantially negative. The streamline figure shows three vortex-breakdown bubbles; two small counter rotating bubbles and a third large bubble. The size of vortex-breakdown bubbles of the E solutions is larger than those of the NS solution.

It should be stressed here that this is the first time, that we know of, such solutions have been presented for supersonic vortex breakdown.

b. Time-Accurate-Stepping Solutions

It has been noticed during the pseudo-time stepping solutions that the residual-error dropped two orders of magnitude and then it went through oscillations. It is then decided that time-accurate-stepping solutions must be checked. The same problem was recalculated using the NS equations and E equations with $\Delta t = 0.005$. Figures 5-8 show snap shots of the time accurate solutions of the NS equations on the left and the E equations on the right. The snap shots are shown every 400 time steps. The figures show the streamlines (Fig. 5), blow-up of streamlines in the breakdown region (Fig. 6), total Mach-number contours (Fig. 7) and flow properties at the center line (Fig. 8).

Following the snap shots of NS streamlines (Figs. 5 and 6), we see a large bubble forming at the center line at the time $t = 4$. At $t = 6$, the bubble expands in the upstream and lateral directions. During this time period $t = 4-6$, the Mach contours (Fig. 7) show the shock system at the inlet moving in the upstream direction. At $t = 8$, two bubbles appear and are convected in the downstream direction. The Mach contours show that the shock moves upstream and reaches the inlet as a normal strong shock. At $t = 10$, a new vortex breakdown occurs producing new small bubbles which combine to form a large bubble at $t = 12$. It should be noted here that the bubble at $t = 12$ resembles that at $t = 4$. This suggests that the vortex breakdown process is almost periodic. To show the periodicity of the breakdown, one has to pick up the exact corresponding snap shots which are one period apart. This search is underway and it will be shown in the near future. The solutions at $t = 12, 14$ and 16 show a trend of repetition of the breakdown process. It should be noted that the separation bubble at the wall goes through a periodic process of convection and reproduction. The Mach contours in the period of $t = 10-16$ show that the shock system moves in the downstream direction again. Figure 8 shows snap shots of the corresponding properties variations along the center line. It shows the shock motion and the motion of the negative values of the axial velocity.

Following the snap shots of the E equations, we see that a large vortex appears at the center line at $t = 4$. At $t = 6$, the vortex grows up and extends laterally and upstreams. At $t = 8$, it is convected downstreams and another vortex appears behind the shock near the inlet. Figure 7 shows that the shock system near the inlet moves upstreams in the period of $t = 4-8$. The convection process and production of new vortices behind the shock continue thereafter (Figs. 5 and 6) while the shock system moves downstreams. It should be noted that the motion of the shock system of the E solutions is larger than that of the NS solutions. The reason is the absence of the viscosity and hence the flow slips at the wall. Moreover, there is no separation bubble at the divergent part of the channel. The flow properties at the center line show the

motion of the shock system and the motion of the negative values of the axial velocity.

Effect of Increasing Swirl Ratio

Next, the flow conditions and duct dimensions are kept constant while the initial swirl ratio is increased to $J = 0.38$. The pseudo-time-stepping results are shown in Fig. 9. It is seen that the number of vortex breakdown bubbles increases to three instead of the two bubbles of the previous case, Fig. 4. Moreover, we notice that the shock system of the present case is nearer to the inlet in comparison with the shock system of the previous case. Figure 10 show snap shots of the time-accurate-stepping solutions of this case at $t = 5, 12.5$ and 15.5 . Again, we see the vortex breakdown process of production and convection and the associated oscillation of shock system. The solution shows larger size and more number of bubbles in comparison with those of the previous case (Figs. 5-7). The time step of this case is the same as that of the previous one, $\Delta t = 0.005$.

Concluding Remarks

The unsteady, compressible full Navier-Stokes equations are used to compute and analyze compressible and supersonic quasi-axisymmetric isolated vortices. First, the three-dimensional Navier-Stokes solver has been verified by solving for a subsonic, isolated quasi-axisymmetric vortex in an unbounded domain. The results have been compared with those of a slender-vortex solver and they are in excellent agreement. Second, the three-dimensional Navier-Stokes and Euler solvers are used to solve for a supersonic quasi-axisymmetric vortex in a configured circular duct. The duct is designed such that the inflow and outflow conditions are supersonic. The quasi-axisymmetric solution is obtained by forcing the flowfield vector to be equal on two meridian planes in close proximity of each other. For the first time, we have obtained supersonic vortex breakdown solutions behind a shock. The time-accurate solution of the problem shows that the vortex breakdown bubbles and the shock system ahead of them are time dependent. The solution strongly indicates that the vortex breakdown process and the motion of the shock system are periodic. The Euler solution shows larger size and more number of bubbles than those of the Navier-Stokes solution. The Euler solution also shows that the amplitude of the shock oscillation is larger than that of the Navier-Stokes solution. Increasing the initial swirl ratio shows that the size and number of vortex-breakdown bubbles increase. These results are vital for the mixing process in scramjets and their design for the best performance and efficiency. A very careful parametric study is underway to show the effects of the swirl ratio, Mach number, Reynolds number and relative dimensions of the duct. Three-dimensional solutions are currently being developed.

Acknowledgements

This research work is supported by the NASA Langley Research Center under Grant No. NAG-1-994. The authors would like also to acknowledge the computational time provided through a grant from the NAS-Ames computational facilities.

References

1. Lambourne, N. C. and Bryer, D. W., "Bursting of Leading-Edge Vortices: Some Observations and Discussion of the Phenomenon," Aeronautical Research Council, R&M 3282, 1961.
2. Sarpkaya, T., "Vortex Breakdown in Swirling Conical Flows," AIAA Journal, Vol. 9, No. 9, Sept. 1971, pp. 1791-1799.
3. Leibovich, S., "Vortex Stability and Breakdown Survey and Extension," AIAA Journal, Vol. 23, No. 9, Sept. 1984, pp. 1194-1206.
4. Escudier, M. P. and Zender, N., "Vortex Flow Regimes," Journal of Fluid Mechanics, Vol. 115, 1982, pp. 105-122.
5. Grabowski, W. J. and Berger, S. A., "Solutions of the Navier-Stokes Equations for Vortex Breakdown," Journal of Fluid Mechanics, Vol. 75, Part 3, 1976, pp. 525-544.
6. Hafez, M., Kuruwila, G. and Salas, M. D., "Numerical Study of Vortex Breakdown," Journal of Applied Numerical Mathematics, No. 2, 1987, pp. 291-302.
7. Menne, S., "Vortex Breakdown in an Axisymmetric Flow," AIAA 88-0506, January 1988.
8. Menne, S. and Liu, C. H., "Numerical Simulation of a Three-Dimensional Vortex Breakdown," Z. Flugwiss. Weltraumforsch. 14, 1990, pp. 301-308.
9. Spall, R. E., Gatski, T. B. and Ash, R. L., "The Structure and Dynamics of Bubble-Type Vortex Breakdown," Proc. R. Soc., London, A429, 1990, pp. 613-637.
10. Krause, E., "Vortex Breakdown: Physical Issue and Computational Simulation," Third International Congress of Fluid Mechanics, Cairo, Egypt, January 1990, Vol. 1, pp. 335-344.
11. Delery, J., Horowitz, E., Leuchter, O. and Solignac, J. L., "Fundamental Studies of Vortex Flows," La Recherche Aérospatiale, No. 1984-2, 1984, pp. 1-24.
12. Metwally, O., Settles, G. and Horstman, C., "An Experimental Study of Shock Wave/Vortex Interaction," AIAA 89-0082, January 1989.
13. Liu, C. H., Krause, E. and Menne, S., "Admissible Upstream Conditions for Slender Compressible Vortices," AIAA 86-1093, 1986.

14. Copening, G. and Anderson, J., "Numerical Solutions to Three-Dimensional Shock/Vortex Interaction at Hypersonic Speeds," AIAA 89-0674, January 1989.
15. Kandil, O. A. and Kandil, H. A., "Computation of Compressible Quasi-Axisymmetric Slender Vortex Flow and Breakdown," IMACS 1st International Conference on Computational Physics, University of Colorado, Boulder, June 1990, pp. 46-51. Also to appear in the Journal of Computer Physics Communications, North Holland Publishing Co., 1991.
16. Meadows, K., Kumar, A. and Hussaini, M., "A Computational Study on the Interaction Between a Vortex and a Shock Wave," AIAA 89-1043, April 1989.








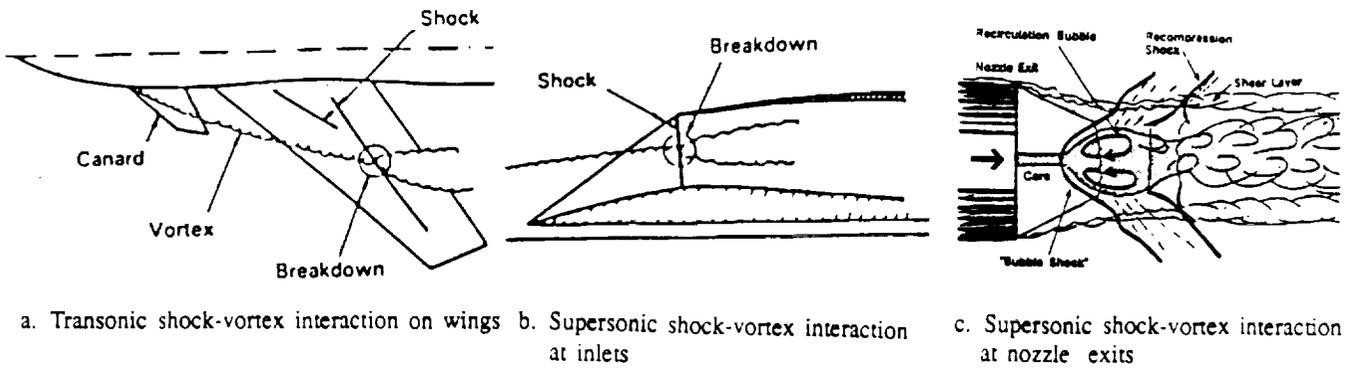


Figure 1. Applications of vortex-shock interaction and vortex breakdown

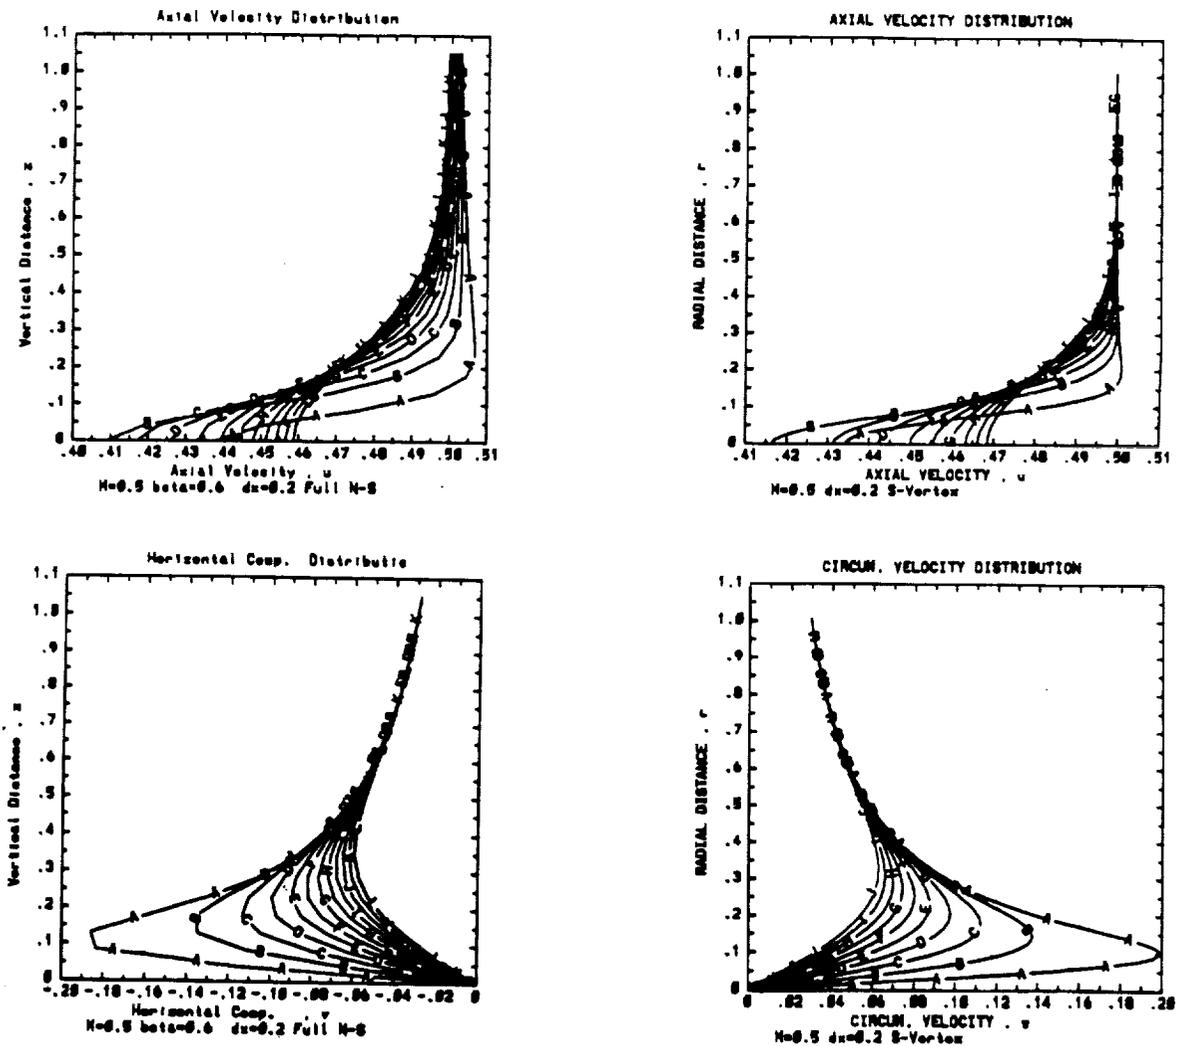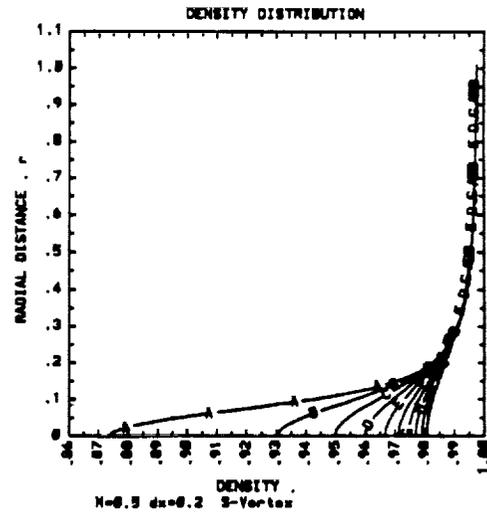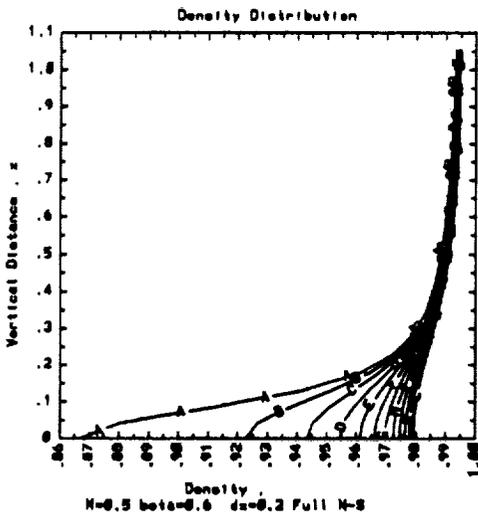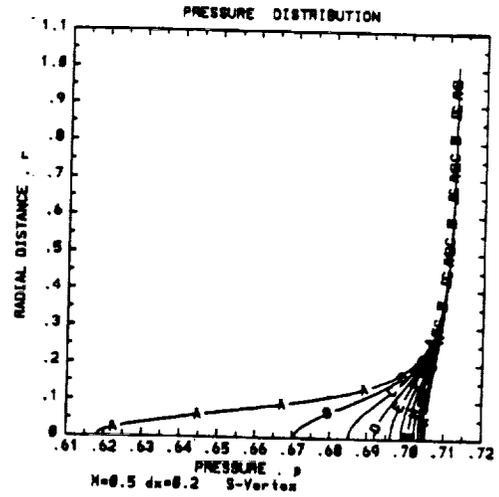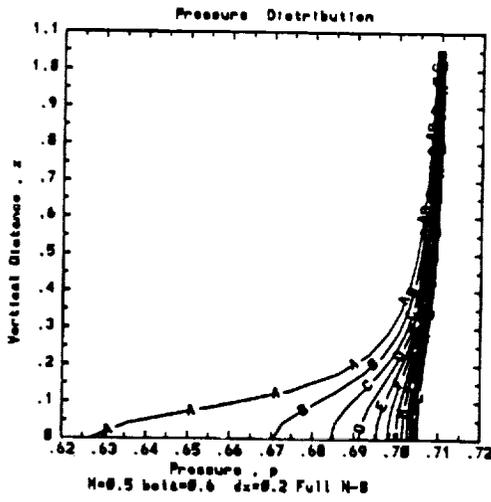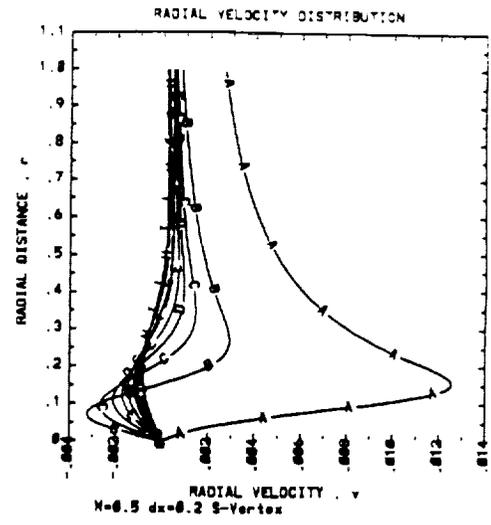

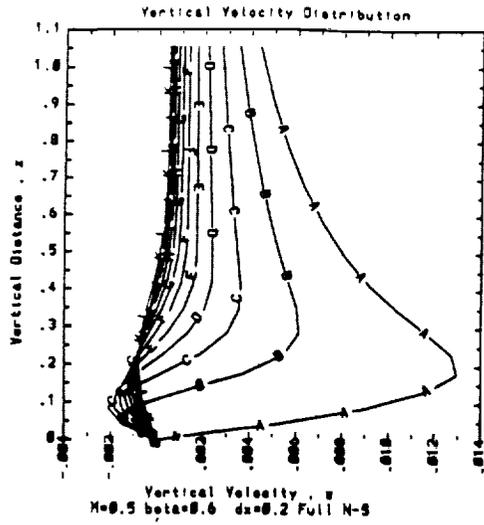

Navier-Stokes solutions

Slender-vortex solutions

Figure 2. Comparison of flow profiles using Navier-Stokes and slender-vortex equations,
 $M_e = 0.5$, $\beta = 0.6$, $\left(\frac{dp}{dx}\right)_e = 0$, $100 \times 51 \times 51$ grid for NS Eqs.






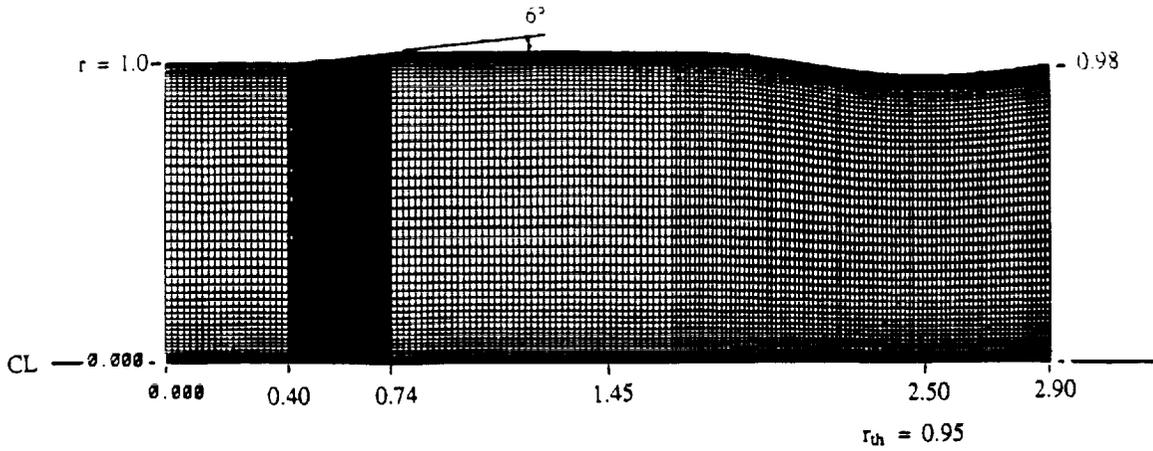



Figure 3. Typical grid for a supersonic axisymmetric duct configuration; $200 \times 51 \times 2$

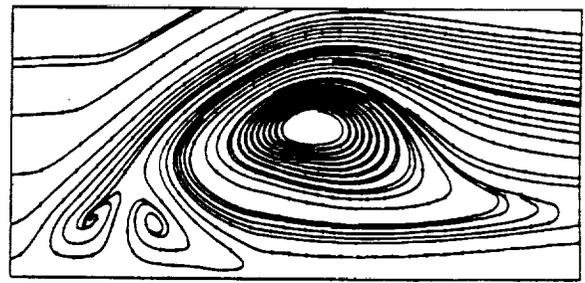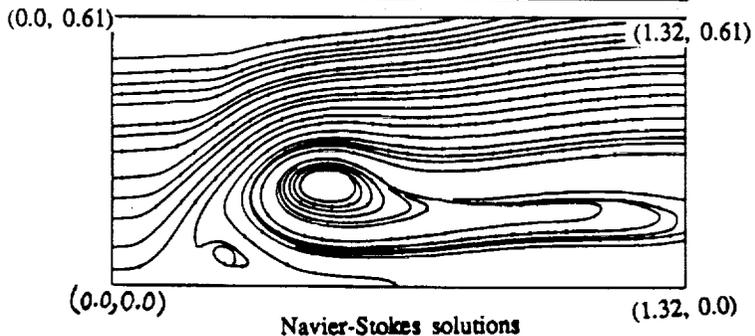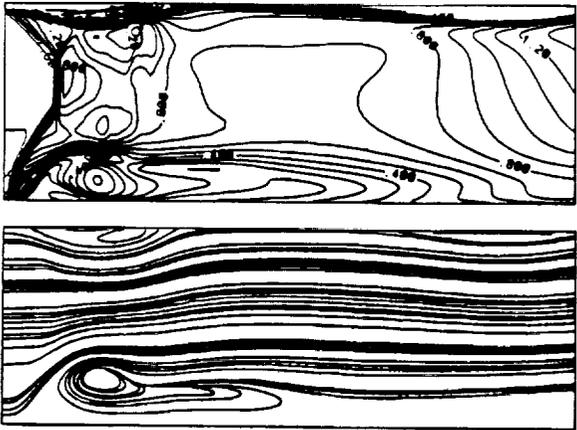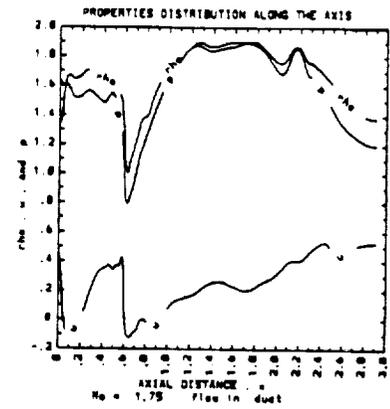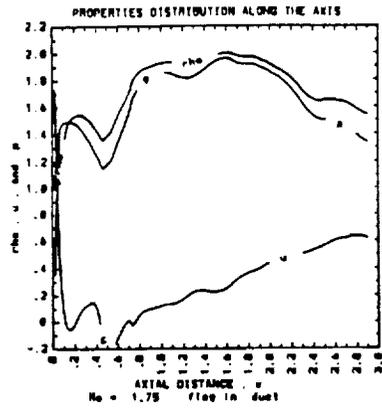


Navier-Stokes solutions

Euler solutions

Figure 4. Comparison of steady flow solutions using Navier-Stokes and Euler Eqs.; properties variation at centerline, Mach contours, streamlines, blow-up at breakdown, $M = 1.75$, $\beta = 0.32$, $R_e = 10^4$.

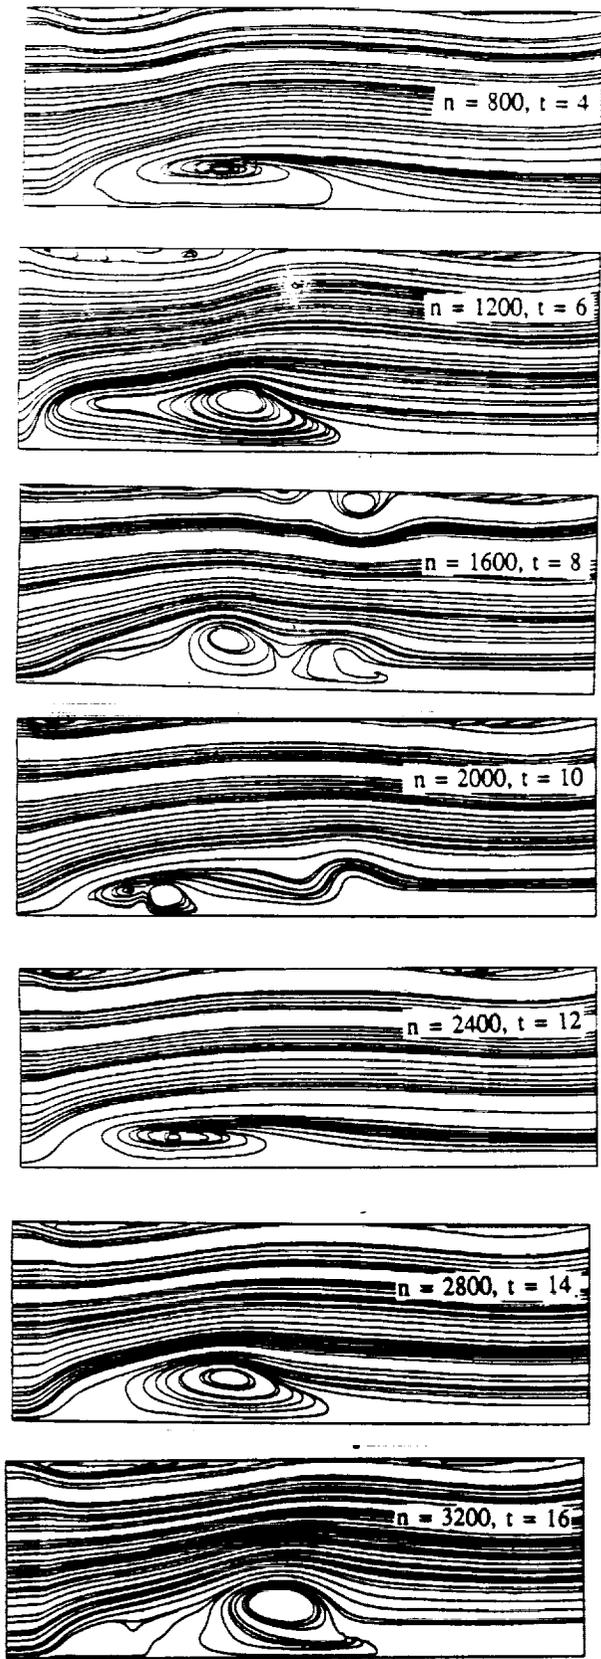


Navier-Stokes solutions

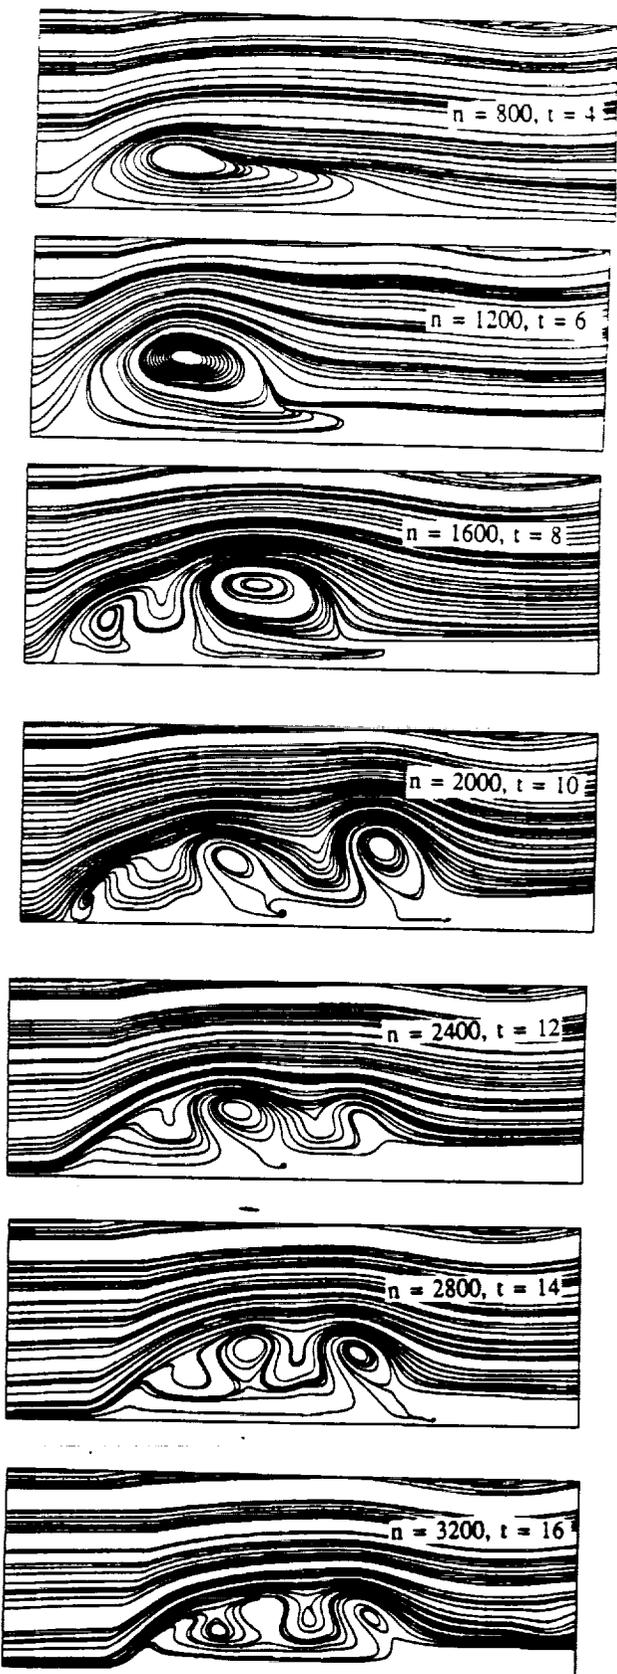


Euler solutions

Figure 5. Comparison of unsteady flow streamlines using Navier-Stokes and Euler Eqs., $M = 1.75$, $\beta = 0.32$, $R_3 = 10^4$, $\Delta t = 0.005$.

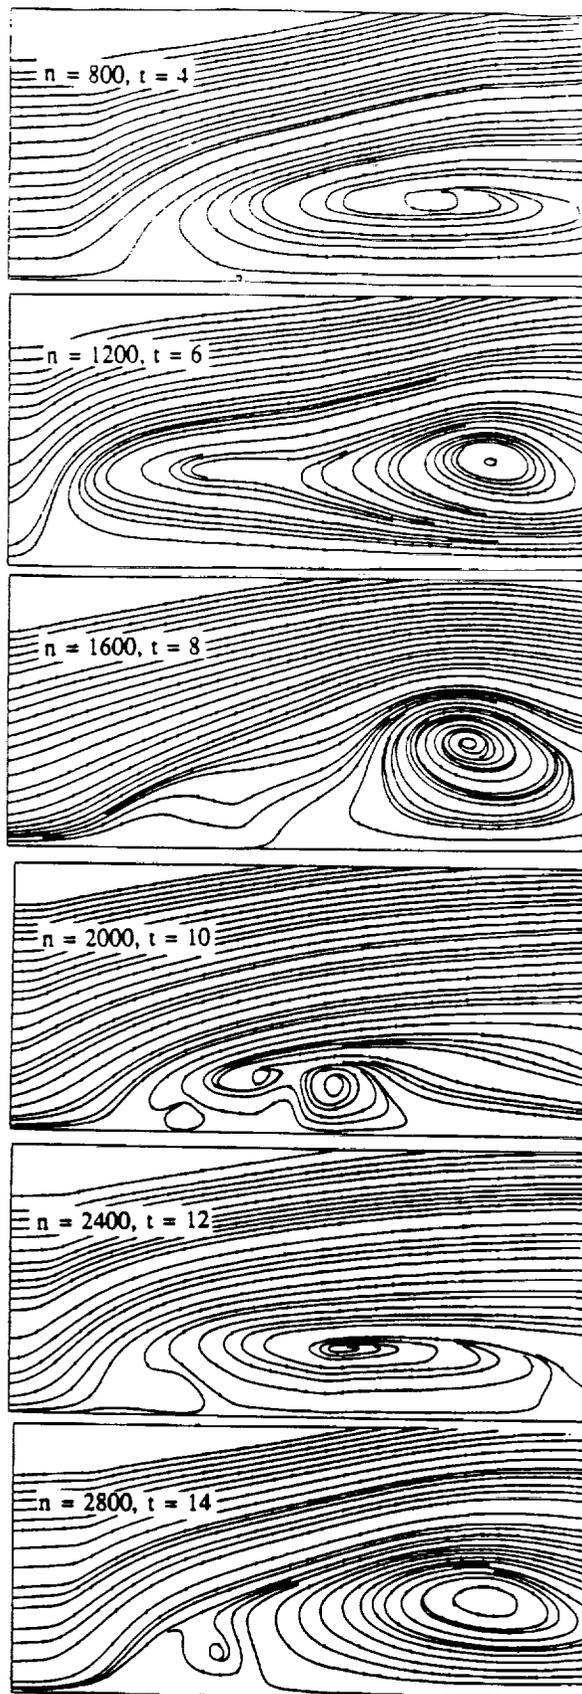


Navier-Stokes solutions

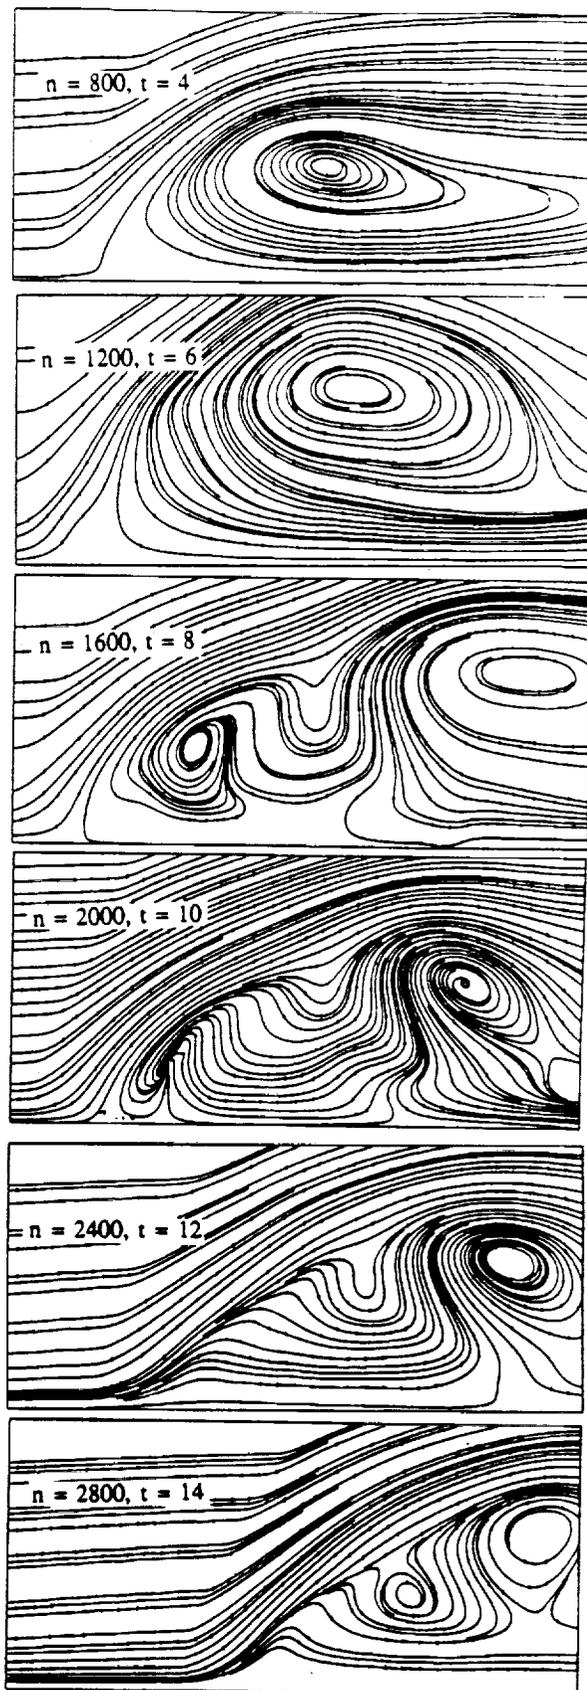


Euler solutions

Figure 6. Comparison of unsteady flow blow-up of streamlines using Navier-Stokes and Euler Eqs., $M = 1.75$, $\beta = 0.32$, $R_a = 10^4$, $\Delta t = 0.005$.

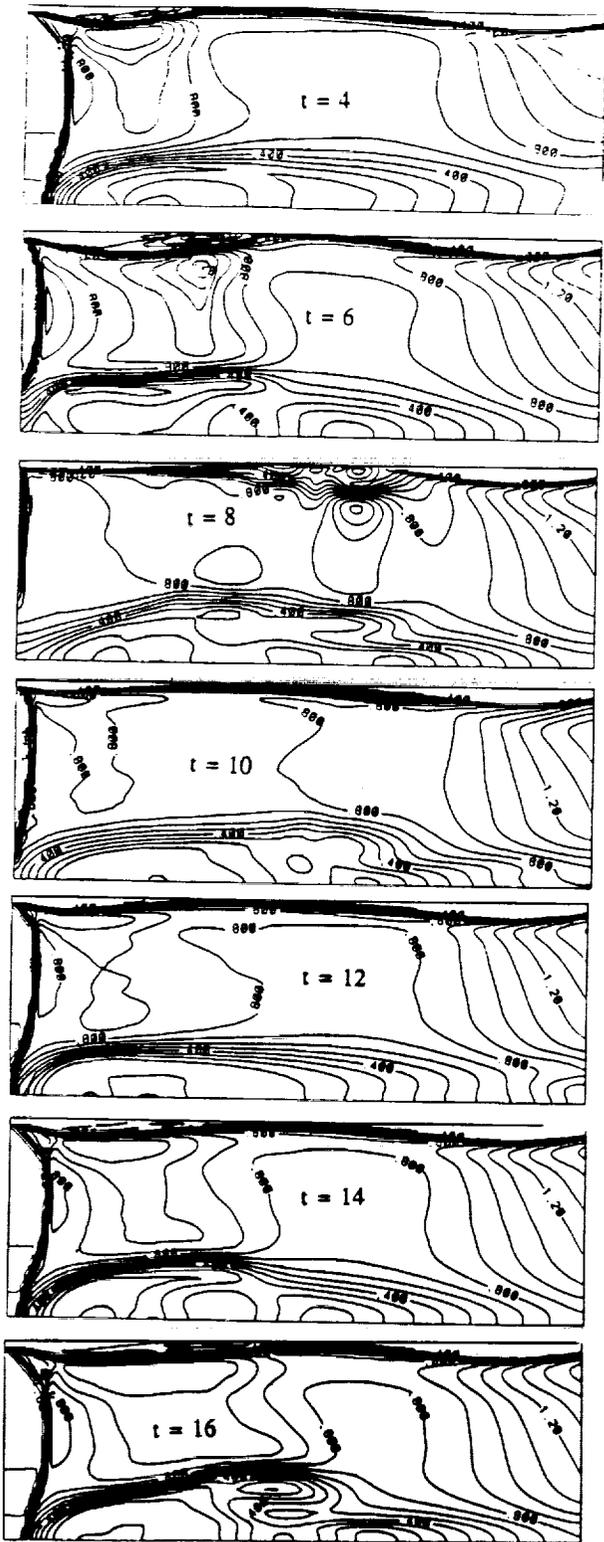


Navier-Stokes solutions

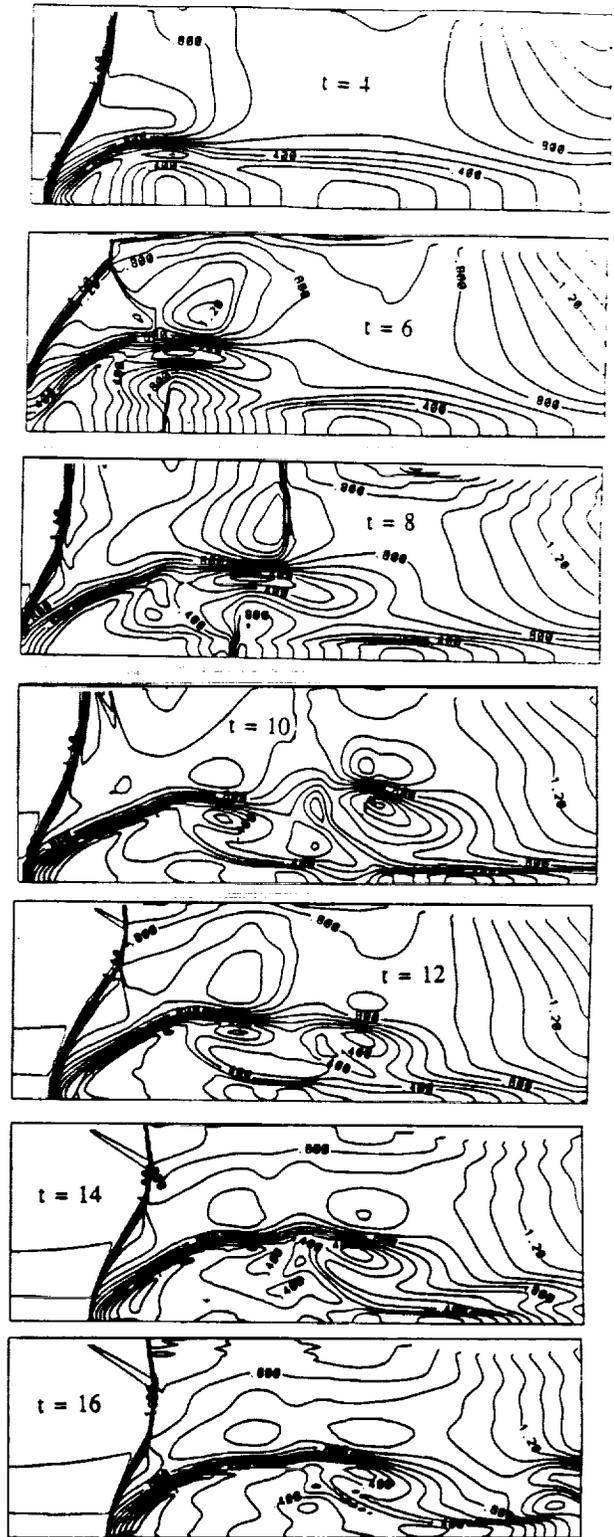

Euler solutions

Figure 7. Comparison of unsteady flow Mach contours using Navier-Stokes and Euler Eqs., $M = 1.75$, $\beta = 0.32$, $Re = 10^4$, $\Delta t = 0.005$.

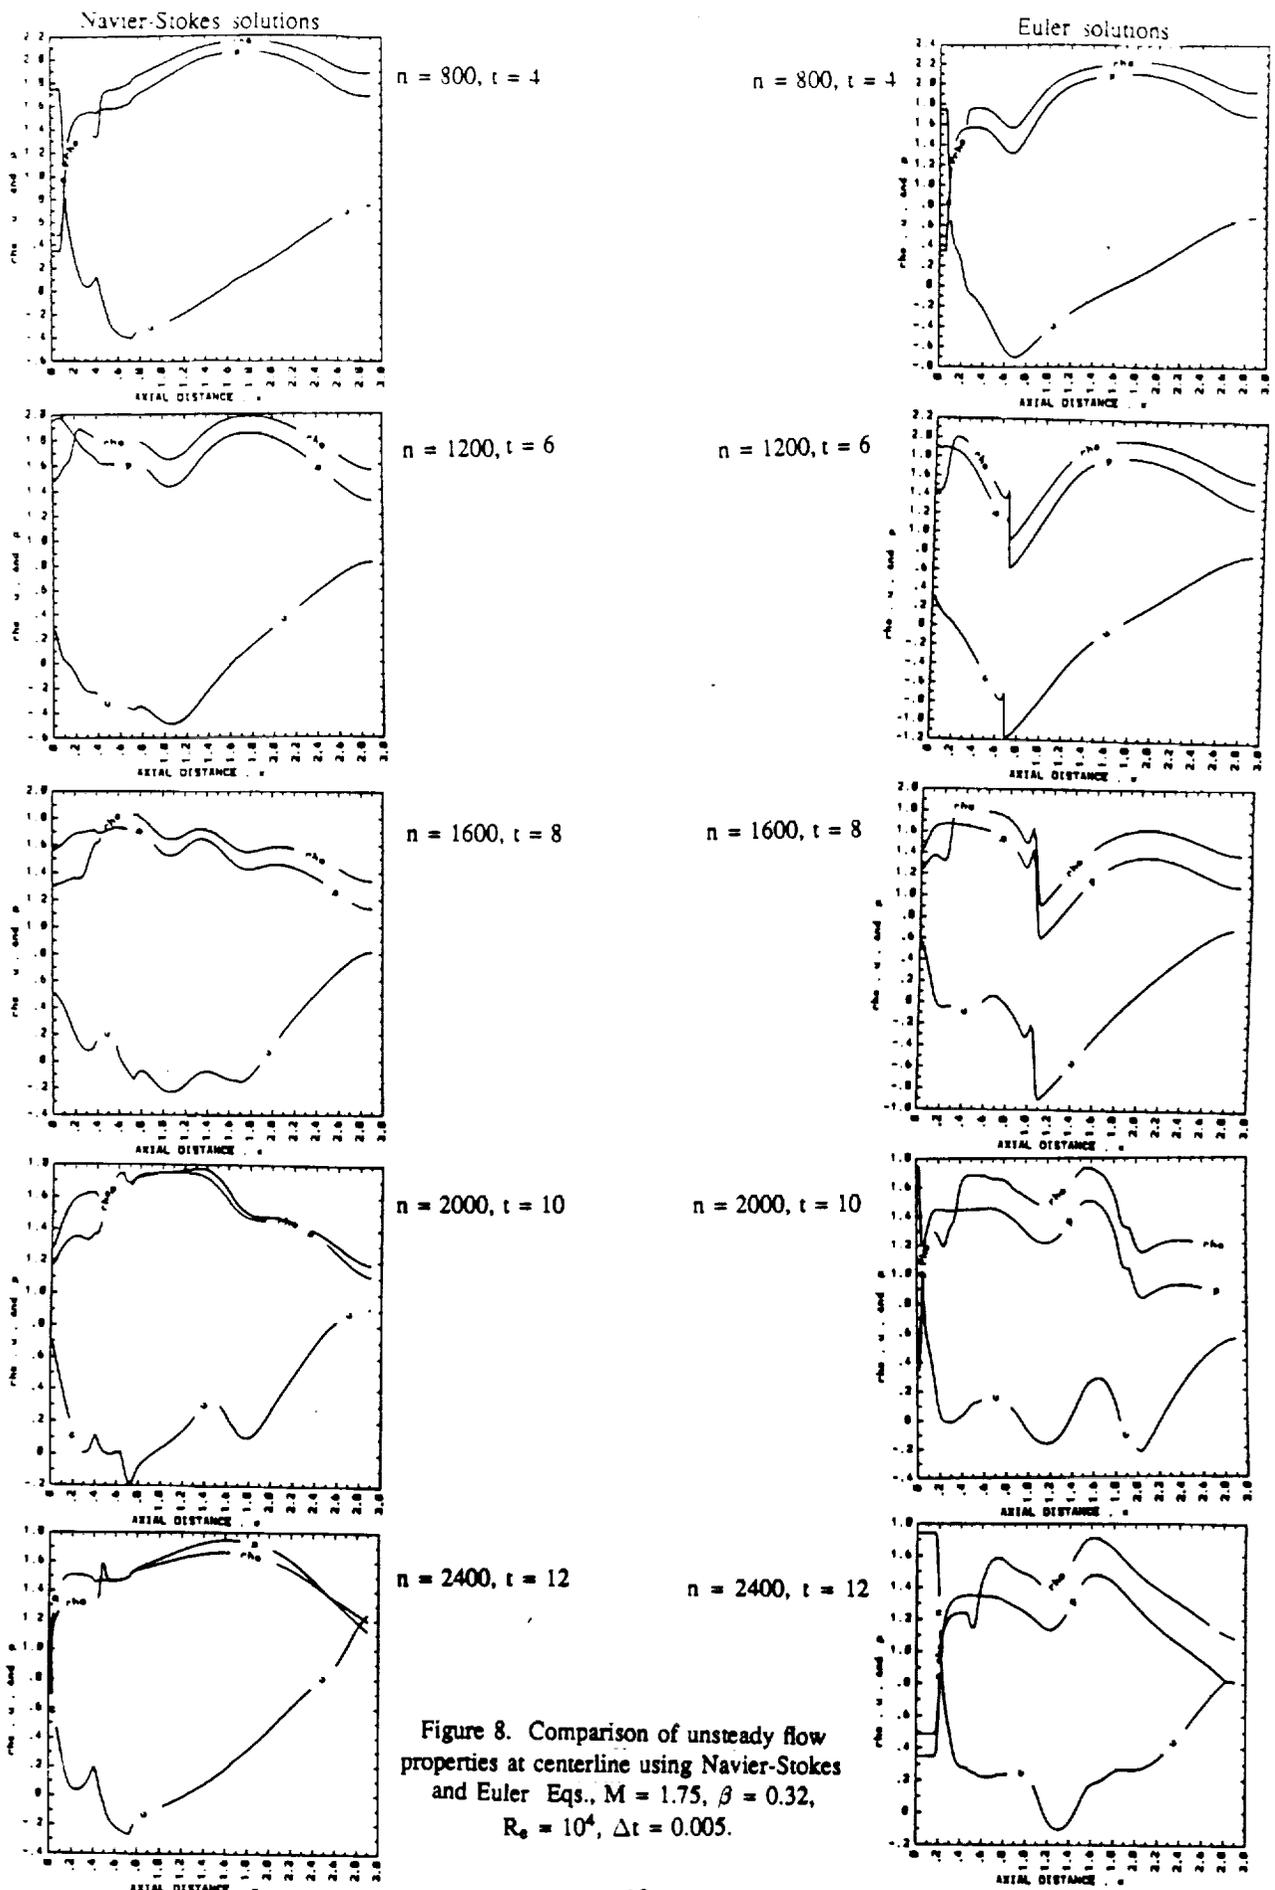

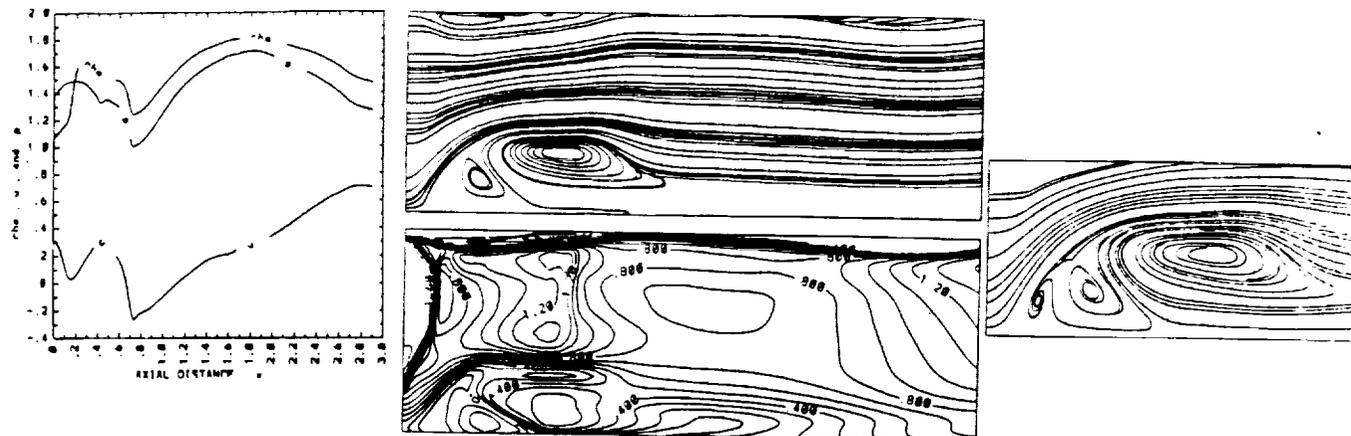


Figure 9. Steady flow solution using Navier-Stokes Eqs., properties at centerline, streamlines, Mach contours, streamlines blow-ups, $M = 1.75$, $\beta = 0.38$, $R_e = 10^4$.

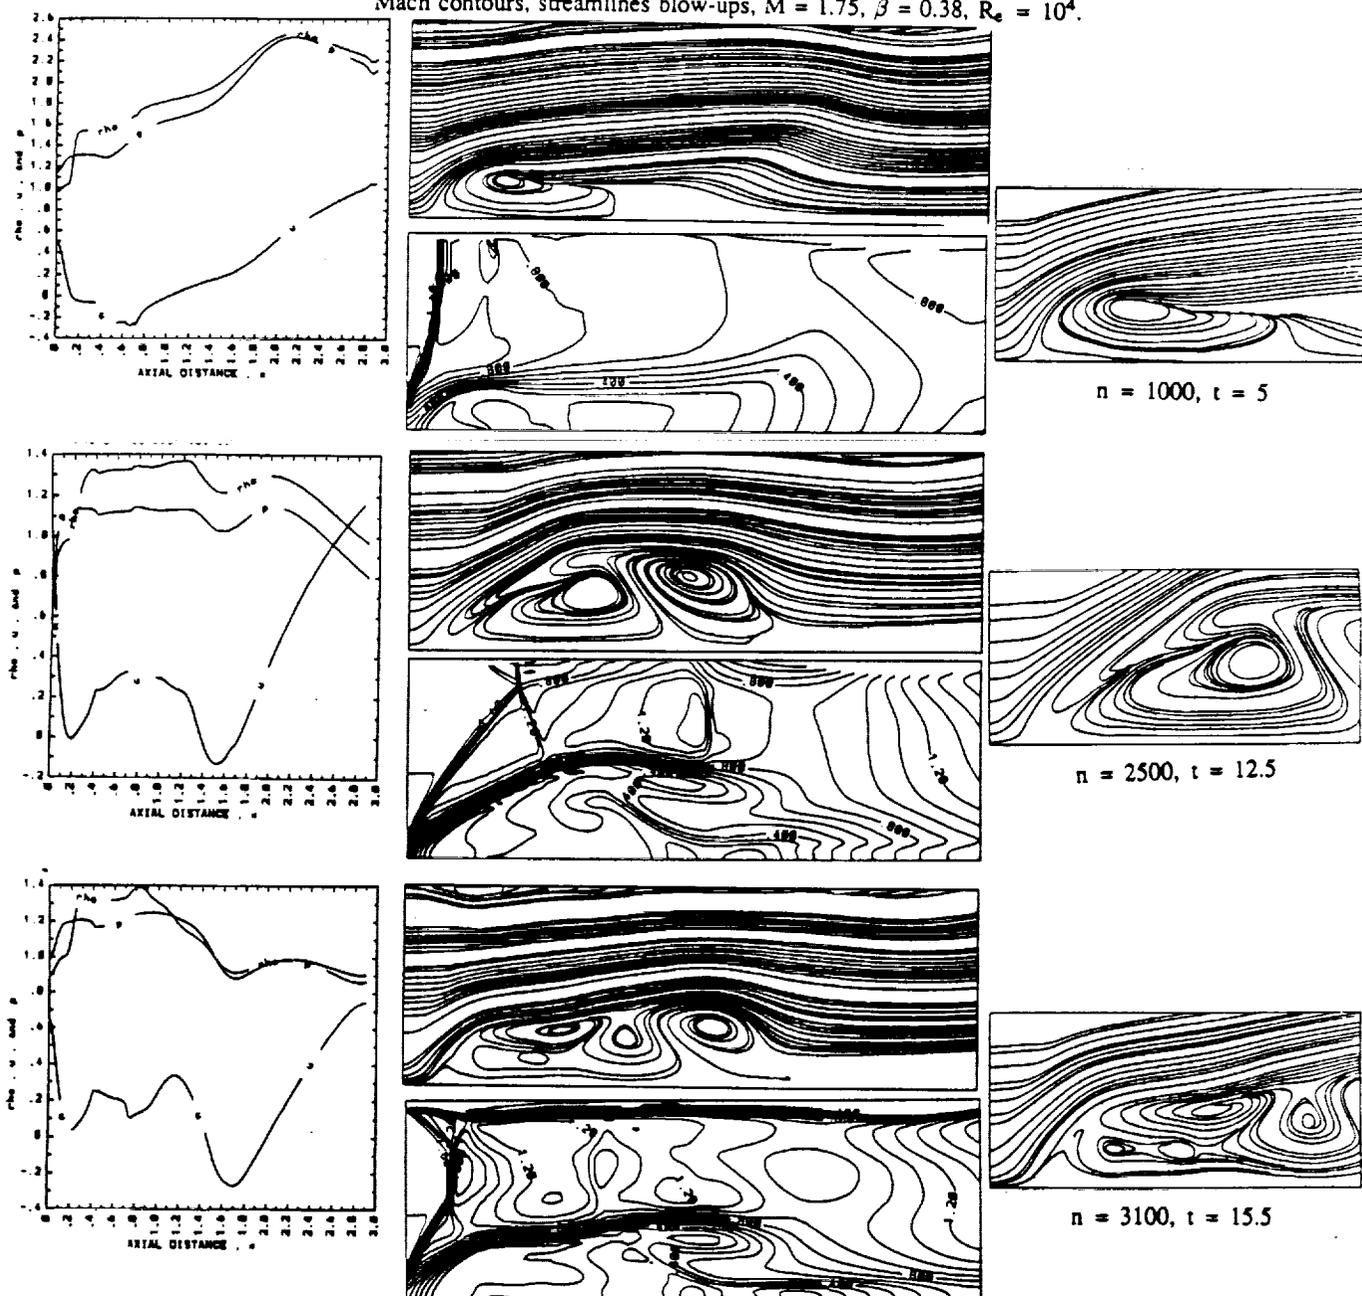


Figure 10. Unsteady flow solution using Navier-Stokes Eqs., properties at centerline, streamlines, Mach contours, streamlines blow-ups, $M = 1.75$, $\beta = 0.38$, $R_e = 10^4$.



N91-30083

AIAA 91-3311-CP


SUPERSONIC QUASI-AXISYMMETRIC VORTEX BREAKDOWN

**Osama A. Kandil and Hamdy A. Kandil
Old Dominion University, Norfolk, VA 23529**

**C. H. Liu
NASA Langley Research Center, Hampton, VA 23665**

AIAA 9th Applied Aerodynamics Conference

Baltimore, Maryland, September 23-25, 1991



SUPERSONIC QUASI-AXISYMMETRIC VORTEX BREAKDOWN

Osama A. Kandil* and Hamdy A. Kandil**
Old Dominion University, Norfolk, VA 23529

C. H. Liu***
NASA Langley Research Center, Hampton, VA 23665

ABSTRACT

An extensive computational study of supersonic quasi-axisymmetric vortex breakdown in a configured circular duct is presented. The unsteady, compressible, full Navier-Stokes (NS) equations are used for the present computational study. The NS equations are solved for quasi-axisymmetric flows using an implicit, upwind, flux-difference splitting, finite-volume scheme. The quasi-axisymmetric solutions are time accurate and are obtained by forcing the components of the flowfield vector to be equal on two axial planes, which are in close proximity of each other. The computational study addresses the effect of the Reynolds number, for laminar flows, on the evolution and persistence of vortex breakdown. The effect of boundary conditions at the duct exit on vortex breakdown is also studied. Finally, the effect of swirl ratio at the duct inlet is investigated.

Introduction

The majority of the experimental studies of vortex breakdown phenomenon has been focused on incompressible flows in pipes¹⁻⁵. Two main types of vortex breakdown have been documented experimentally: the quasi-axisymmetric bubble type and the asymmetric spiral type. Other types of vortex breakdown were also generated in pipes.

The major effort of numerical study of vortex breakdown flows, has also been focused on incompressible, quasi-axisymmetric isolated vortices. Grabowski and Berger⁶ were the first to use the incompressible, quasi-axisymmetric NS equations to study isolated vortex flow in an unbounded region. Hafez, et. al⁷ solved the incompressible, steady, quasi-axisymmetric Euler and NS equations using the stream function-vorticity formulation for isolated vortex flows. They predicted vortex breakdown flows similar to those of Grabowski and Berger. Salas and Kuruvila⁸ solved the unsteady, quasi-axisymmetric NS equations in a straight circular pipe. They obtained steady, multiple bubble-type vortex breakdown for a Reynolds number range of 100-1,800. Menne⁹ has also

used the stream function-vorticity formulation for studying unsteady, incompressible quasi-axisymmetric isolated vortex flows. Wu and Hwang¹⁰ used the stream function-vorticity formulation to study quasi-axisymmetric vortex breakdown in a pipe. Their study focused on the effects of inflow, wall boundary conditions and Reynolds number on breakdown structure. They showed that the evolution of breakdown can be steady, periodic or unsteady depending on the inflow velocity profiles and Reynolds number. Menne and Liu¹¹ integrated the laminar, incompressible, NS equations for the breakdown of a vortex in a slightly diverging pipe. They showed breakdown flow cases which are based on the purely quasi-axisymmetric and non-axisymmetric analyses. The results were in good agreement with the experimental results of Leibovich⁴. Spall, et. al¹² used the vorticity-velocity formulation of the incompressible NS equations to study the three-dimensional vortex breakdown. Breuer and Hänel¹³ solved the unsteady incompressible NS equations using a dual-time stepping, upwind scheme to study the temporal evolution of the three-dimensional vortex breakdown. In Refs. 12 and 13, both types of breakdown; the bubble type and the spiral type, were predicted. Reviews of the physical and computational aspects of the incompressible vortex breakdown were presented by Krause in Refs. 14 and 15. One of the most important aspect of vortex breakdown which Krause discusses in Ref. 15 is the effect of side boundary conditions on the up- or downstream motion of the breakdown point. Also, he presents alternative outflow boundary conditions.

Transonic and supersonic flows around highly swept wings and slender wing-body configurations at moderate to high angles of attack are characterized by interacting vortex cores and shock waves. Other applications which encounter vortex-shock interaction include a supersonic inlet ingesting a vortex and injection of a swirling fuel jet into a supersonic combustor to enhance mixing between the air stream and the fuel¹⁶⁻¹⁸. In all these applications vortex breakdown due to the interaction of a longitudinal vortex and a shock wave may occur or is intended to occur. For such problems, computational schemes are needed to study, predict and control vortex-shock interaction including vortex breakdown. Unfortunately, the literature lacks this type of analysis with the exception of the preliminary work of Liu, Krause and Menne¹⁹, Copening and Anderson²⁰, Delery, et. al¹⁶, Kandil and Kandil²¹ and Meadows, Kumer and Hussaini²².

*Professor and Eminent Scholar, Department of Mechanical Engineering and Mechanics, Associate Fellow AIAA.

** Graduate Research Assistant, Member AIAA.

*** Group Leader, Theoretical Flow Physics Branch, Senior Member AIAA.

1950

1951

1952

1953

1954

1955

1956

1957

1958

1959

1960

1961

1962

1963

1964

The first time-accurate NS solution for a supersonic vortex breakdown was developed by the present authors in Ref. 23. They considered a supersonic quasi-axisymmetric vortex flow in a configured circular duct. The time-accurate solution of the unsteady, compressible NS equations was obtained using an implicit, upwind, flux-difference splitting finite-volume scheme. A shock wave has been generated near the duct inlet and unsteady vortex breakdown has been predicted behind the shock. The predicted flow was characterized by the evolution, convection and shedding of vortex breakdown bubbles. The Euler equations were also used to solve the same problem. The Euler solution showed larger size and number of vortex-breakdown bubbles in comparison with those of the NS solutions. The time-accurate solution was carried out for 3,200 time steps which are equivalent to a dimensionless time of 16. Only one value of Reynolds number of 10,000 was considered in Ref. 23.

In the present paper, we expand our study of this flow using time-accurate computations of the NS equations with a fine grid in the shock-vortex interaction region and for long computational times. Several issues are addressed in the present study. First, we show the effect of Reynolds number on the temporal evolution and persistence of vortex-breakdown bubbles behind the shock. In this stage of computations, the conditions at the downstream exit are obtained by extrapolating the components of the flowfield vector from the interior cell centers. Although the flow is supersonic over a large portion of the duct exit, subsonic flow exists over a small portion of the exit around the duct centerline. Therefore, selected flow cases have been recomputed using a Riemann-invariant-type boundary conditions at subsonic points of the duct exit. Finally, the effect of swirl ratio at the duct inlet has been investigated.

Formulation

The conservative form of the dimensionless, unsteady, compressible, full NS equations in terms of time-independent, body-conformed coordinates ξ^1, ξ^2 and ξ^3 is given by

$$\frac{\partial \bar{Q}}{\partial t} + \frac{\partial \bar{E}_m}{\partial \xi^m} - \frac{\partial (\bar{E}_v)_s}{\partial \xi^s} = 0; \quad m = 1-3, \quad s = 1-3 \quad (1)$$

where

$$\xi^m = \xi^m(x_1, x_2, x_3) \quad (2)$$

$$\bar{Q} = \frac{\hat{q}}{J} = \frac{1}{J} [\rho, \rho u_1, \rho u_2, \rho u_3, \rho e]^t \quad (3)$$

$$\begin{aligned} \bar{E}_m &\equiv \text{inviscid flux} \\ &= \frac{1}{J} [\partial_k \xi^m \bar{E}_k]^t \\ &= \frac{1}{J} [\rho U_m, \rho u_1 U_m + \partial_1 \xi^m p, \rho u_2 U_m \\ &\quad + \partial_2 \xi^m p, \rho u_3 U_m + \partial_3 \xi^m p, (\rho e + p) U_m]^t \quad (4) \end{aligned}$$

$$\begin{aligned} (\bar{E}_v)_s &\equiv \text{viscous and heat-conduction flux in } \xi^s \\ &\quad \text{direction} \\ &= \frac{1}{J} [0, \partial_k \xi^s \tau_{k1}, \partial_k \xi^s \tau_{k2}, \partial_k \xi^s \tau_{k3}, \\ &\quad \partial_k \xi^s (u_n \tau_{kn} - q_k)]^t; \quad k = 1-3, \quad n = 1-3 \quad (5) \end{aligned}$$

$$U_m = \partial_k \xi^m u_k \quad (6)$$

The first element of the three momentum elements of Eq. (5) is given by

$$\begin{aligned} \partial_k \xi^s \tau_{k1} &\equiv \frac{M_\infty \mu}{Re} \left[\left(\partial_k \xi^s \partial_1 \xi^n - \frac{2}{3} \partial_1 \xi^s \partial_k \xi^n \right) \frac{\partial u_k}{\partial \xi^n} \right. \\ &\quad \left. + \partial_k \xi^s \partial_k \xi^n \frac{\partial u_1}{\partial \xi^s} \right] \quad (7) \end{aligned}$$

The second and third elements of the momentum elements are obtained by replacing the subscript 1, everywhere in Eq. (7), with 2 and 3, respectively. The last element of Eq. (5) is given by

$$\begin{aligned} \partial_k \xi^s (u_p \tau_{kp} - q_k) &\equiv \frac{M_\infty \mu}{Re} \left[(\partial_k \xi^s \partial_p \xi^n \right. \\ &\quad - \frac{2}{3} \partial_p \xi^s \partial_k \xi^n) u_p \frac{\partial u_k}{\partial \xi^n} \\ &\quad + \partial_k \xi^s \partial_k \xi^n u_p \frac{\partial u_p}{\partial \xi^s} \\ &\quad \left. + \frac{1}{(\gamma-1)Pr} \partial_k \xi^s \frac{\partial (a^2)}{\partial \xi^n} \right]; \quad p = 1-3 \quad (8) \end{aligned}$$

The reference parameters for the dimensionless form of the equations are $L, a_\infty, L/a_\infty, \rho_\infty$ and μ_∞ for the length, velocity, time, density and molecular viscosity, respectively. The Reynolds number is defined as $Re = \rho_\infty V_\infty L / \mu_\infty$, where L is the initial radius of the vortex or the duct inlet radius. The pressure, p , is related to the total energy per unit mass and density by the gas equation

$$p = (\gamma - 1) \rho \left[e - \frac{1}{2} (u_1^2 + u_2^2 + u_3^2) \right] \quad (9)$$

The viscosity is calculated from the Sutherland law

$$\mu = T^{3/2} \left(\frac{1+C}{T+C} \right), \quad C = 0.4317 \quad (10)$$

and the Prandtl number $Pr = 0.72$. In Eqs. (1)-(8), the indicial notation is used for convenience.



Computational Scheme

The Computational scheme used to solve the unsteady, compressible full NS equations is an implicit, upwind, flux-difference splitting, finite-volume scheme. It employs the flux-difference splitting scheme of Roe which is based on the solution of the approximate one-dimensional Riemann problem in each of the three directions. In the Roe scheme, the inviscid flux difference at the interface of a computational cell is split into left and right flux differences. The splitting is accomplished according to the signs of the eigenvalues of the Roe averaged-Jacobian matrix of the inviscid flux at the cell interface. The smooth limiter is used to eliminate oscillations in the shock region. The viscous and heat-flux terms are linearized and the cross-derivative terms of the viscous Jacobians are dropped in the implicit operator. These terms are differenced using second-order spatially accurate central differencing. The resulting difference equation is approximately factored and is solved in three sweeps in the ξ^1 , ξ^2 and ξ^3 directions. The scheme is used for third-order spatial accuracy and first-order temporal accuracy. The scheme is coded in the computer program which is called "FTNS3D".

Computational Study and Discussion

Figure 1 shows a configured circular duct which consists of a short, straight cylindrical part at the inlet which is followed by a short divergent cylindrical part until the axial length of 0.74. The divergence angle is 6° . The duct radius is then kept constant and a convergent-divergent nozzle with a throat radius of 0.95 is attached. The duct exit radius is 0.98 and its total length is 2.9. The divergent part of the duct ensures the stability of the formed shock in the inlet region. The configuration of the duct is intended to ensure that the supersonic inflow will become supersonic at the exit. As the computations will show, a small portion of the duct exit near its centerline becomes subsonic at certain times for the specified inflow conditions.

This configured duct has also been used by Delery, et al.¹⁶ for their Euler equations computations of supersonic vortex breakdown in an attempt to computationally model an experimental set up. It should be pointed here that the Euler equations, used by Delery, et al., assume isenthalpic flow in order to drop the energy equation. This is a serious approximation since the upstream flow is rotational. Moreover, as our present calculations show, the flow is actually unsteady and hence, the isenthalpic assumption is not valid.

The NS solver is used to compute all the following flow cases by using a grid of 221x51 on two axial planes, where 221 points are in the axial direction and 51 points are in the radial direction. In the inlet region up to the 0.74 axial station, 100 grid points are used and the remaining 121 points are used in the remaining part of the duct. The grid is also clustered at the centerline (CL)

and the wall. The minimum radial grid size at the CL is 0.002. The two axial planes are spaced circumferentially at a certain angle so that the aspect ratio of the minimum grid size will be less than 2. The upstream Mach number is kept at 1.75 and the Reynolds number is varied from 2,000 up to 100,000. The initial profile for the tangential velocity is given by

$$\frac{w}{U_\infty} = \frac{k_e}{r} \left[1 - \exp\left(-\frac{r^2}{r_m^2}\right) \right] \quad (11)$$

where $U_\infty = 1.74$, $r_m = 0.2$ and $k_e = 0.1$. The maximum $\frac{w}{U_\infty}$, swirl ratio β , is at $r = 0.224$. The radial velocity, v , at the initial station is set equal to zero and the radial momentum equation is integrated to obtain the initial pressure profile. Finally, the density ρ is obtained from the definition of the speed of sound for the inlet flow. With these compatible set of profiles, the computations are carried out accurately in time with $\Delta t = 0.0025$. The wall boundary conditions follow the typical Navier-Stokes solid-boundary conditions. These computations have been carried out on the CRAY YMP of the NASA Langley Research Center. The CPU time is 40 μ s/grid point/iteration for the NS calculation.

Next, we present the results of the computational study which covers the effects of Reynolds number, the exit boundary conditions and the inlet swirl ratio.

Effect of Reynolds Number

For these flow cases, the Reynolds number values are 2,000; 4,000; 10,000; 20,000 and 100,000. The swirl ratio, β , is kept fixed at 0.32. The exit boundary conditions are obtained by extrapolation from the interior cell centers.

Re = 2,000


Figure 2 shows the streamlines and Mach contours for this flow case at $t = 11$, which is equivalent to 4,400 time steps. No vortex breakdown develops and the Mach contours show a steady shock at the duct inlet. The shock is a normal shock over most of the duct inlet. The flow at the duct exit is supersonic.

Re = 4,000

Figure 3 shows snapshots of the streamlines and Mach contours for the flow case of $Re = 4,000$. For this value of Reynolds number a single breakdown bubble is seen at $t = 5$ and it is convected downstreams as time passes. This breakdown bubble is formed during the downstream motion of the inlet shock, which reaches its maximum downstream displacement at $t = 5$. Later on, the shock moves upstream, as it is seen at $t = 8$, while the breakdown bubble is convected in the downstream direction. Thereafter, the shock stays stationary at the inlet. This swirling flow case shows a transient single breakdown flow. It should be noticed that at $t = 5$ a small portion of the duct exit at its centerline becomes subsonic. At $t = 8$, it expands radially to about 25% of the duct exit radius.

Re = 10,000

Figures 4 and 5 show snapshots of the streamlines and



Mach contours for the flow case of $Re = 10,000$. At $t = 3$, a single breakdown bubble is formed behind the downstream moving shock. In this range of $t = 3-5$, the bubble grows in all directions while the shock moves downstreams. In the time range of $t = 6-8$, the breakdown bubble splits into two bubbles which are convected as they diffuse in the downstream direction. The inlet shock moves upstreams during this time range. During the time range of $t = 9-12$, the inlet shock slightly oscillates at the duct inlet while a new breakdown bubble is formed behind the shock. As the bubble size and strength increase, the inlet shock moves very slowly downstreams. More breakdown bubbles (three bubbles) are formed as seen at $t = 17$. The breakdown bubbles are then convected downstreams ($t = 19$) while the inlet shock again moves upstreams. As the most downstream bubble is shed through the totally supersonic exit, the inlet shock slowly moves downstreams. In the time range $t = 22-33$, the shock keeps its slow downstream motion until it becomes stationary. During this time, downstream shedding of breakdown bubbles continues and the formation of new breakdown bubbles slows down until it stops when the inlet shock becomes stationary. Thereafter, no breakdown bubbles are formed and the flow becomes steady. This swirling flow case shows a transient multi-bubble breakdown flow.

$Re = 20,000$

Figures 6 and 7 show snapshots of the streamlines and Mach contours for the flow case of $Re = 20,000$. The mechanism of evolution, convection and shedding of the vortex-breakdown bubbles while the inlet shock is moving downstreams, then upstreams and finally downstreams to become stationary is very similar to the previous case of $Re = 10,000$. However there are some few differences. First, the size, number and strength of breakdown bubbles are larger than those of the case of $Re = 10,000$. Second, the displacements of the inlet shock are larger than those of the case of $Re = 10,000$. Third, the transient time of the multi-bubble breakdown is longer than that of the case of $Re = 10,000$. The reader can easily compare the snapshots of the streamlines and Mach contours of the two cases at exactly the same time instants. Again this swirling flow case shows a transient multi-bubble breakdown flow.

$Re = 100,000$

Figures 8 and 9 show snapshots of the streamlines and Mach contours for the flow case of $Re = 100,000$. It should be noted that the radial extension of the shown streamlines snapshots is $r = 0.6$, which is larger than those of $Re = 2,000 - 20,000$. Again the mechanism of evolution, convection and shedding of the vortex breakdown bubbles up to $t = 30$ is very similar to the previous flow cases of $Re = 10,000$ and $20,000$. It is noticed that the size, number and strength of breakdown bubbles are larger than those of the previous cases. Moreover, it is noticed here that short periodic evolution, merging, convection and shedding cycles of the breakdown bubbles occur, e.g.; the time periods of 16-21, 22-27 and 28-32.

At $t = 33$ and beyond, a new mode of evolution, convection and shedding of the breakdown bubbles occurs. It should be noticed that the inlet shock keeps on moving slowly in the downstream direction and another shock, which is downstream of the inlet shock, does not extend to the duct axis and is first seen at $t = 30$, also keeps on moving in the downstream direction. During the motion of these shocks a breakdown bubble grows behind the inlet shock and sheds a breakdown bubble in the downstream direction. At $t = 61$, the downstream bubble grows up in size and strength. Later on, the upstream breakdown bubble also grows up in size and strength. The upstream breakdown bubble becomes larger and stronger than the downstream bubble, and the downstream bubble is convected through the duct exit at $t = 78$. Next the upstream breakdown bubble is convected downstreams and new breakdown bubbles appear behind the inlet shock. In the time range of $t = 84-95$, the mechanism of the evolution, merging, convection and shedding which is similar to that in the time range of $t = 24-35$ is repeated. In the time range of $t = 96-120$, the flow is similar to that of the time range of $t = 37-78$. At $t = 123$ and beyond, the whole process of vortex-breakdown-bubbles evolution, merging, convection and shedding is repeated. It is seen that the snapshots of streamlines at $t = 124$ and 130 are exactly similar to those at $t = 3$ and 17 . Therefore, it is concluded that the vortex-breakdown mechanism for this flow case is periodic with a long period of time. Within this long cycle, short periodic cycles of vortex-breakdown develops. In summary, this flow case shows that several periodic modes of vortex breakdown develop, which correspond to different frequencies.

Effect of Exit Boundary Conditions

The Mach contours of the previous cases show that varying small portions of the duct exit become subsonic. Hence, extrapolating the components of the flowfield vector from the interior cell centers for the duct exit boundary conditions is mathematically improper when it is viewed through the behavior of the characteristics at subsonic points. However, such boundary conditions could represent typical physical conditions. Therefore, it is decided to examine the effect of using the Riemann-invariant-type boundary conditions at the subsonic points. This requires that four variables are extrapolated from the interior cell centers while the fifth must be specified at the exit. We chose to specify the pressure at the duct exit at the subsonic points.

For the flow case of $Re = 100,000$, we specified the exit pressure $P_b = P_\infty$ at the subsonic points. This type of boundary condition is enforced at $t = 45$ of the previous flow case (the solution of previous case at $t = 45$ serves as initial condition for the present case). Thereafter, the time-accurate integration with this type of boundary condition is continued. Figure 10 shows snapshots of the streamlines and Mach contours of this case. Although the solutions of this case in the time range



of $t = 46-61$ is very similar to those of the previous case, a completely different flow for this case develops as of $t = 63$. The two breakdown bubbles which are seen at $t = 61$ start moving in the downstream direction. They are continuously convected without any new generation of breakdown bubbles until they are completely shed through the small subsonic portion of the duct exit. In the meantime, the inlet shock disappears and the flow becomes supersonic throughout the duct.

Figures 11 and 12 show the results for $Re = 20,000$ with $P_b = P_\infty$ and $P_b = 2P_\infty$, respectively. At $t = 5$, the breakdown bubble is exactly the same for these two cases, as it is seen from the streamline figures and the Mach-contour figures as well. At this instant of time, these solutions are the same as those of Fig. 6. It is obvious that the exit boundary conditions has not yet affected the upstream breakdown bubble. At the advanced time instants $t = 18-20$, we can see substantial differences between the solutions at each time instant of Figures 11, 12 and 6.

Thus, it is concluded that the exit boundary conditions have a substantial effect on the mechanism of breakdown bubbles evolution, merging, convection and shedding. In particular, the solutions which are based on the Riemann-invariant-type boundary conditions are dependent upon the specified value of the pressure. It should be noted here that the Riemann-invariant-type boundary conditions, as it is well known is one dimensional and is based on inviscid analysis. Although the duct-exit flow is neither one-dimensional nor inviscid, the Riemann-invariant-type-boundary conditions are the best available non-reflective boundary conditions. Therefore, the question remains: what is the proper type of exit boundary condition that one needs to apply? Refer to Krause¹⁵ for discussion on alternative boundary conditions.

Effect of The Inlet Swirl Ratio

In this flow case, the Reynolds number is kept at 100,000 and the inlet swirl ratio is increased to 0.38. Figure 13 shows snapshots of the streamlines and Mach contours up to $t = 30$. Comparing the results of the present flow case with those of $\beta = 0.32$, Figs. 8 and 9, we notice that the breakdown bubbles are larger and stronger. Moreover, in the time range of $t = 17-30$, the breakdown bubbles are oscillating around a mean position and a process of bubble generation, convection and shedding is taking place around a large breakdown bubble. The inlet shock has a very small amplitude oscillation around a mean position. This is a completely different mechanism from that of the case of Figs. 8 and 9. The computations of this flow case have not yet been carried out further in time.

Concluding Remarks


The unsteady, compressible NS equations are used for extensive computational study of supersonic quasi-axisymmetric vortex breakdown in a configured circular duct. The quasi-axisymmetric solutions are time accurate. Several issues have been addressed in this paper. First, we have shown the effect of Reynolds number on the evolution, merging convection and shedding of vortex breakdown bubbles. Several modes of vortex breakdown have been obtained; a transient single-bubble breakdown, a transient multi-bubble breakdown and an unsteady periodic multi-bubble breakdown. These solutions have been obtained by using extrapolated flow conditions from the interior cell centers at the duct exit. Next, selected flow cases have been recomputed using a Riemann-invariant-type boundary conditions at the subsonic points of the duct exit. It has been shown that substantial different solutions have been obtained and the question of what is the proper type of exit boundary conditions remains to be answered. Finally, the effect of the inlet swirl ratio has been investigated for the high Reynolds-number flow. It has been shown that a completely different mechanism of vortex breakdown develops at advanced time instants. Work is underway to understand this mode of vortex breakdown.

Acknowledgment

For the first two authors, this work has been supported by the NASA Langley Research Center under Grant No. NAG-1-994.

References

1. Harvey, J. K., "Some Observations of The Vortex Breakdown Phenomenon," *Journal of Fluid Mech.*, Vol. 14, 1962, pp. 595-592.
2. Sarpkaya, T., "Vortex Breakdown in Swirling Conical Flows," *AIAA Journal*, Vol. 9, No. 9, Sept. 1971, pp. 1792-1799.
3. Sarpkaya, T., "Effect of The Adverse Pressure Gradient on Vortex Breakdown," *AIAA Journal*, Vol. 12, No. 12, Dec. 1974, pp. 602-607.
4. Leibovich, S., "Vortex Stability and Breakdown: Survey and Extension," *AIAA Journal*, Vol. 22, No. 9, Sept. 1984, pp. 1192-1206.
5. Escudier, M. P. and Zender, N., "Vortex Flow Regimes," *Journal of Fluid Mechanics*, Vol. 115, 1982, pp. 105-122.
6. Grabowski, W. J. and Berger, S. A., "Solutions of the Navier-Stokes Equations for Vortex Breakdown," *Journal of Fluid Mechanics*, Vol. 75, Part 3, 1976, pp. 525-544.
7. Hafez, M., Kuruvila, G. and Salas, M. D., "Numerical Study of Vortex Breakdown," *Journal of Applied Numerical Mathematics*, No. 2, 1987, pp. 291-302.



8. Salas, M. D. and Kuruwila, G., "Vortex Breakdown Simulation: A Circumspect Study of The Steady, Laminar, Axisymmetric Model," *Computers and Fluids*, Vol. 17, No. 1, 1989, pp. 247-262.
9. Menne, S., "Vortex Breakdown in an Axisymmetric Flow," AIAA 88-0506, January 1988.
10. Wu, J. C. and Hwang, S., "Computational Study of Vortex Breakdown in Circular Tube," AIAA 91-1820, June 1991.
11. Menne, S. and Liu, C. H., "Numerical Simulation of a Three-Dimensional Vortex Breakdown," *Z. Flugwiss. Weltraumforsch.* 14, 1990, pp. 301-308.
12. Spall, R. E., Gatski, T. B. and Ash, R. L., "The Structure and Dynamics of Bubble-Type Vortex Breakdown," *Proc. R. Soc., London*, A429, 1990, pp. 613-637.
13. Breuer, M. and Hänel, D., "Solution of The 3-D Incompressible Navier-Stokes Equations for the Simulation of Vortex Breakdown," Eight GAMM Conference, Delft, Netherlands, September 27-29, 1989.
14. Krause, E., "Vortex Breakdown: Physical Issues and Computational Simulation," Third International Congress of Fluid Mechanics, Cairo, Egypt, January 1990, Vol. 1, pp. 335-344.
15. Krause, E., "The Solution of The Problem of Vortex Breakdown," Invited paper, International Conference on Numerical Methods for Fluid Dynamics, Oxford, England, June 1990.
16. Delery, J., Horowitz, E., Leuchter, O. and Solignac, J. L., "Fundamental Studies of Vortex Flows," *La Recherche Aérospatiale*, No. 1984-2, 1984, pp. 1-24.
17. Metwally, O., Settles, G. and Horstman, C., "An Experimental Study of Shock Wave/Vortex Interaction," AIAA 89-0082, January 1989.
18. Cutler, A. D. and Levey, B. S., "Vortex Breakdown in a Supersonic Jet," AIAA 91-1815, June 1991.
19. Liu, C. H., Krause, E. and Menne, S., "Admissible Upstream Conditions for Slender Compressible Vortices," AIAA 86-1093, 1986.
20. Copening, G. and Anderson, J., "Numerical Solutions to Three-Dimensional Shock/Vortex Interaction at Hypersonic Speeds," AIAA 89-0674, January 1989.
21. Kandil, O. A. and Kandil, H. A., "Computation of Compressible Quasi-Axisymmetric Slender Vortex Flow and Breakdown," IMACS 1st International Conference on Computational Physics, University of Colorado, Boulder, June 1990, pp. 46-51. Also in *Computer Physics Communications*, Vol. 65, North-Holland, March 1991, pp. 164-172.
22. Meadows, K., Kumar, A. and Hussaini, M., "A Computational Study on the Interaction Between a Vortex and a Shock Wave," AIAA 89-1043, April 1989.
23. Kandil, O. A., Kandil, H. A. and Liu, C. H., "Computation of Steady and Unsteady Compressible Quasi-Axisymmetric Vortex Flow and Breakdown," AIAA 91-0752, January, 1991.



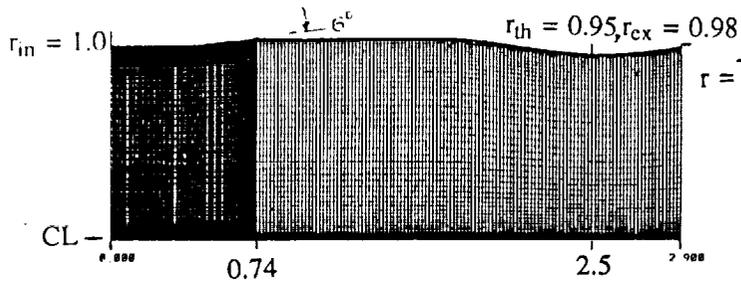


Figure 1. Typical grid for a supersonic configured circular duct; 221x51x2

$r = 0.49$

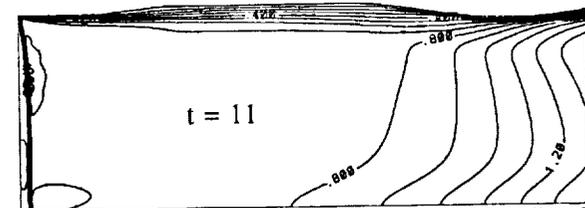


Figure 2. Streamlines and Mach contours for a swirling flow without breakdown, $M_\infty = 1.75$, $\beta = 0.32$, $R_e = 2,000$.

$r = 0.49$

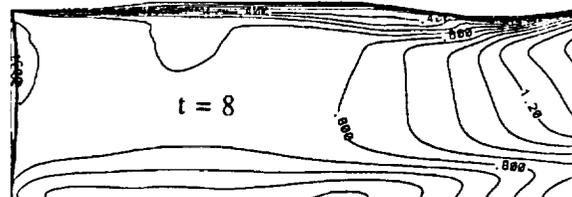
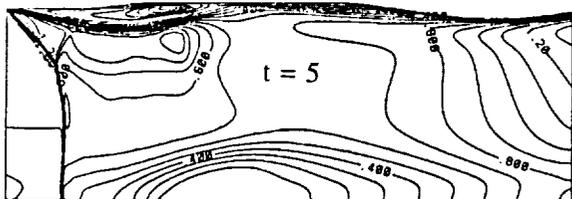


Figure 3. Streamlines and Mach contours for a swirling flow with a transient breakdown, $M_\infty = 1.75$, $\beta = 0.32$, $R_e = 4,000$.






Figure 4. Streamlines for a swirling flow with transient multi-bubble breakdowns, $M_\infty = 1.75$, $\beta = 0.32$, $R_e = 10,000$.



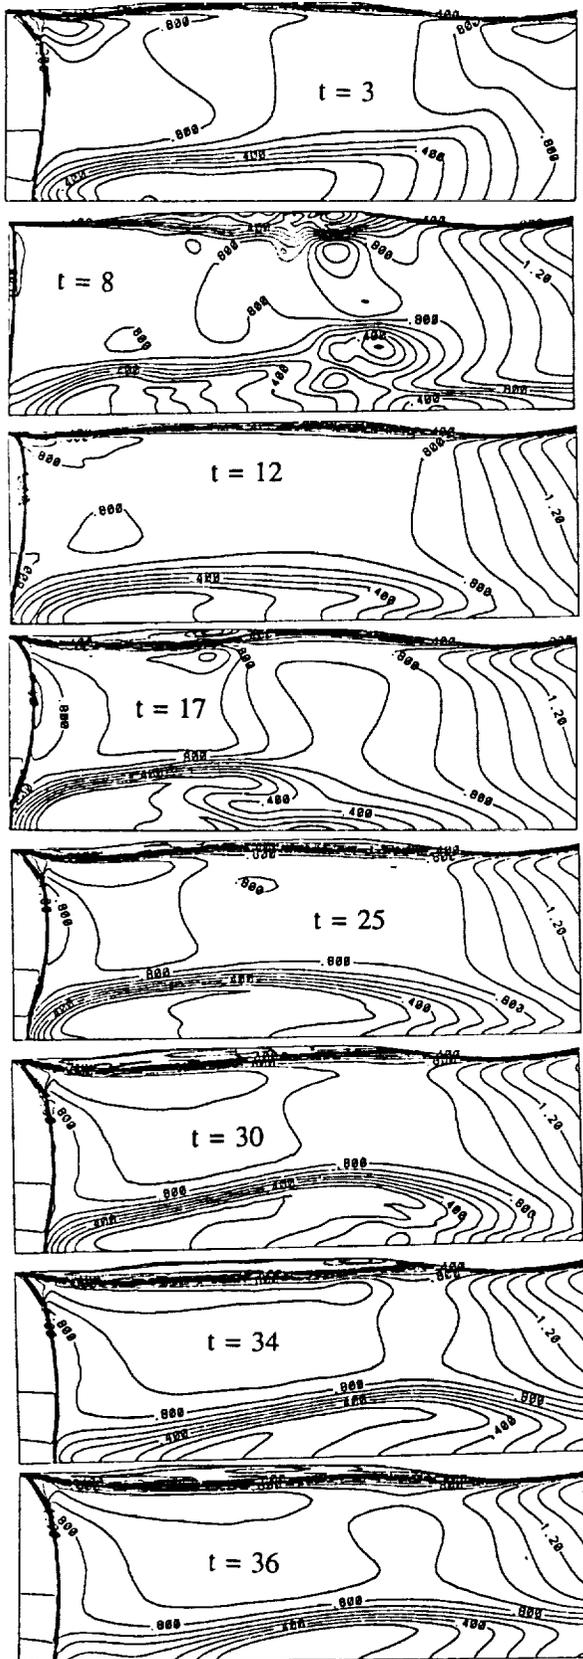


Figure 5. Mach contours for a swirling flow with transient multi-bubble breakdowns, $M_\infty = 1.75$, $\beta = 0.32$, $Re = 10,000$.

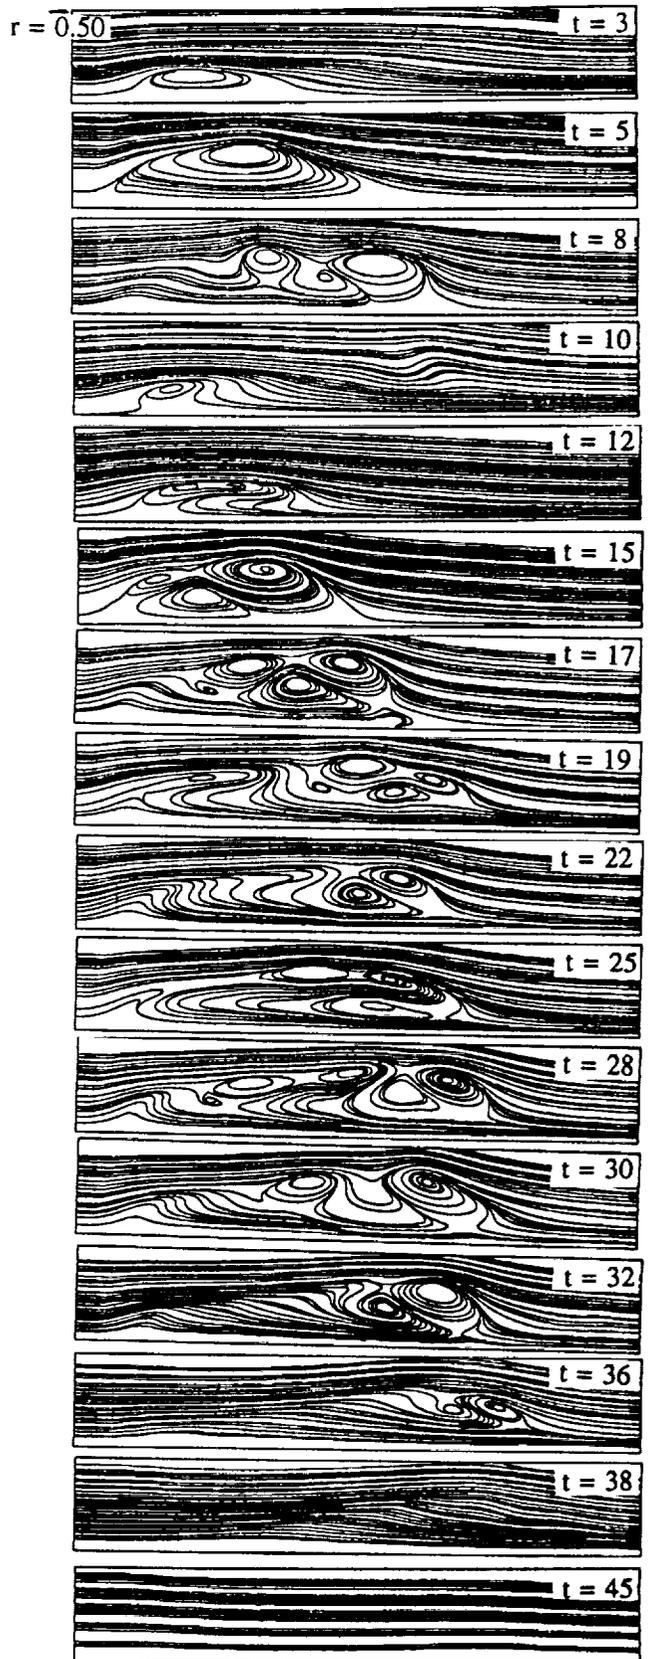


Figure 6. Streamlines for a swirling flow with transient multi-bubble breakdowns, $M_\infty = 1.75$, $\beta = 0.32$, $Re = 20,000$.

1000
1000
1000

1000
1000
1000

1000
1000
1000



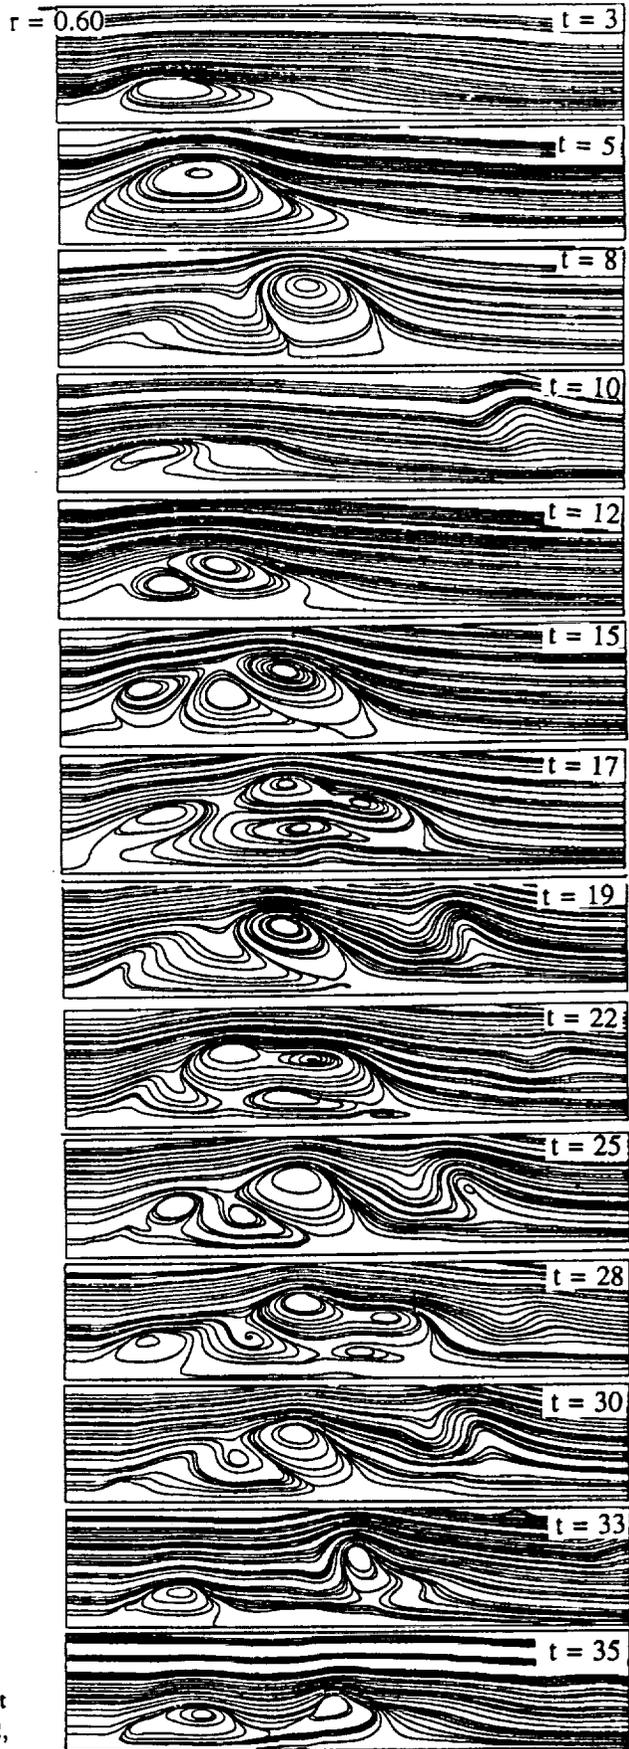
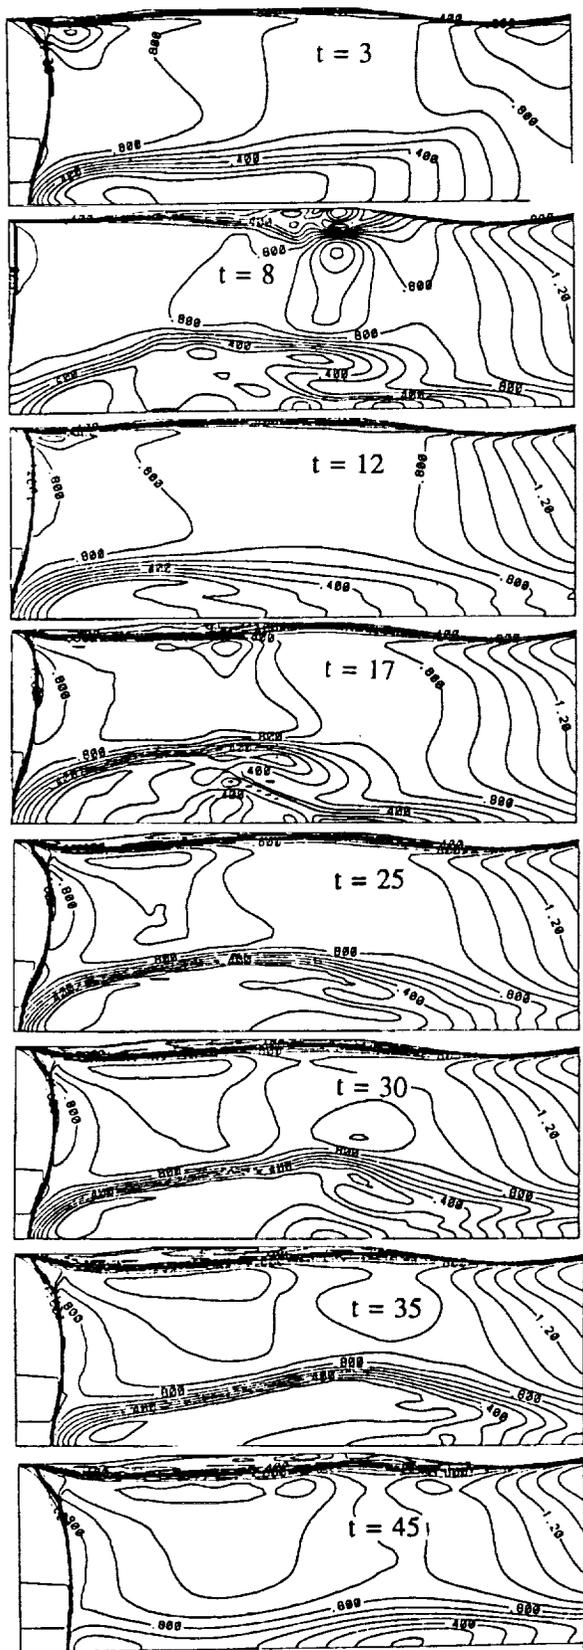


Figure 7. Mach contours for a swirling flow with transient multi-bubble breakdowns, $M_\infty = 1.75$, $\beta = 0.32$, $Re = 20,000$.



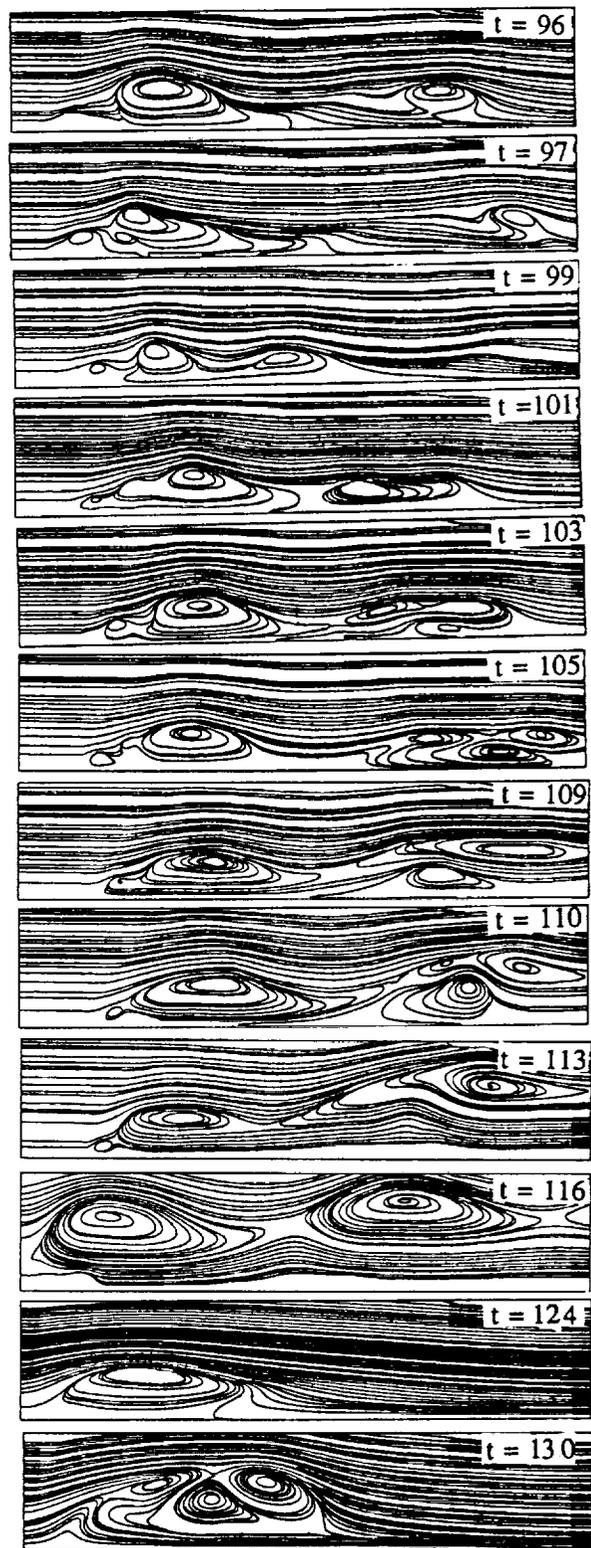
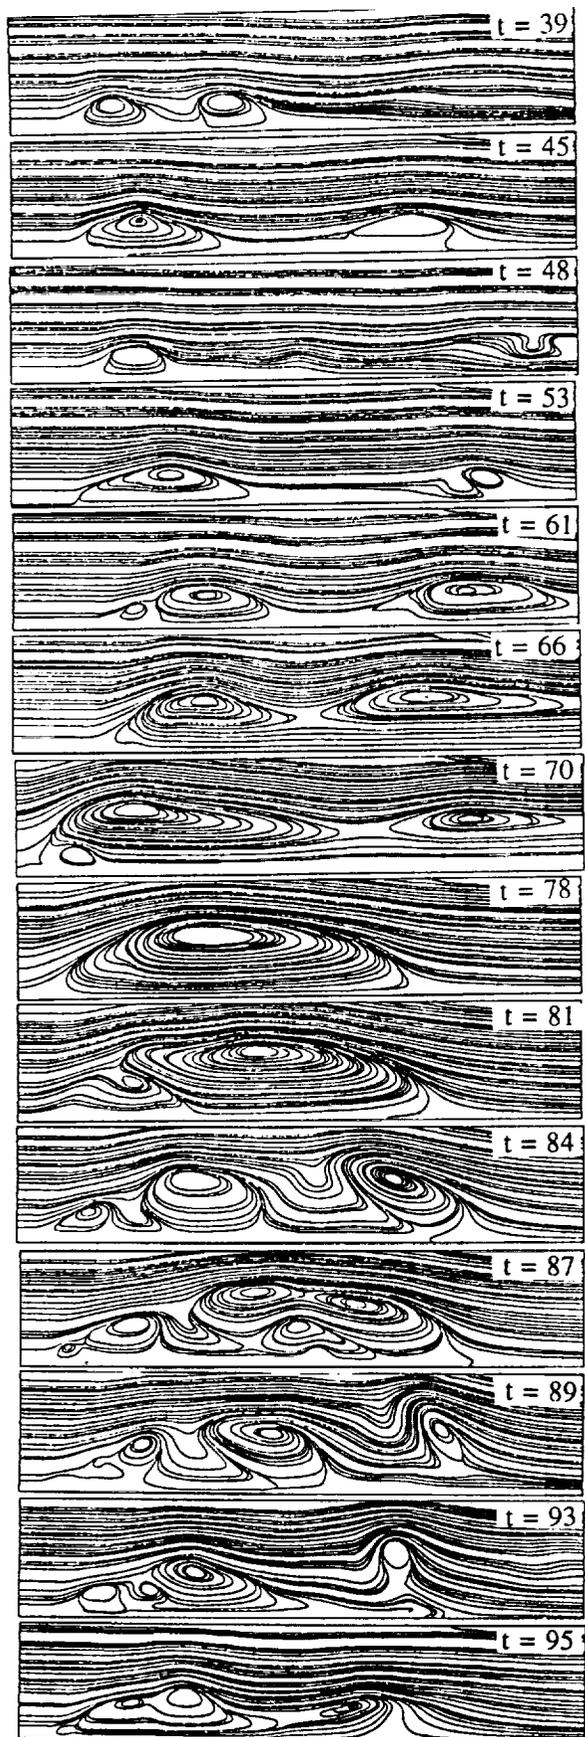



Figure 8. Streamlines for a swirling flow with unsteady multi-bubble breakdowns, $M_\infty = 1.75$, $\beta = 0.32$, $R_e = 100,000$.



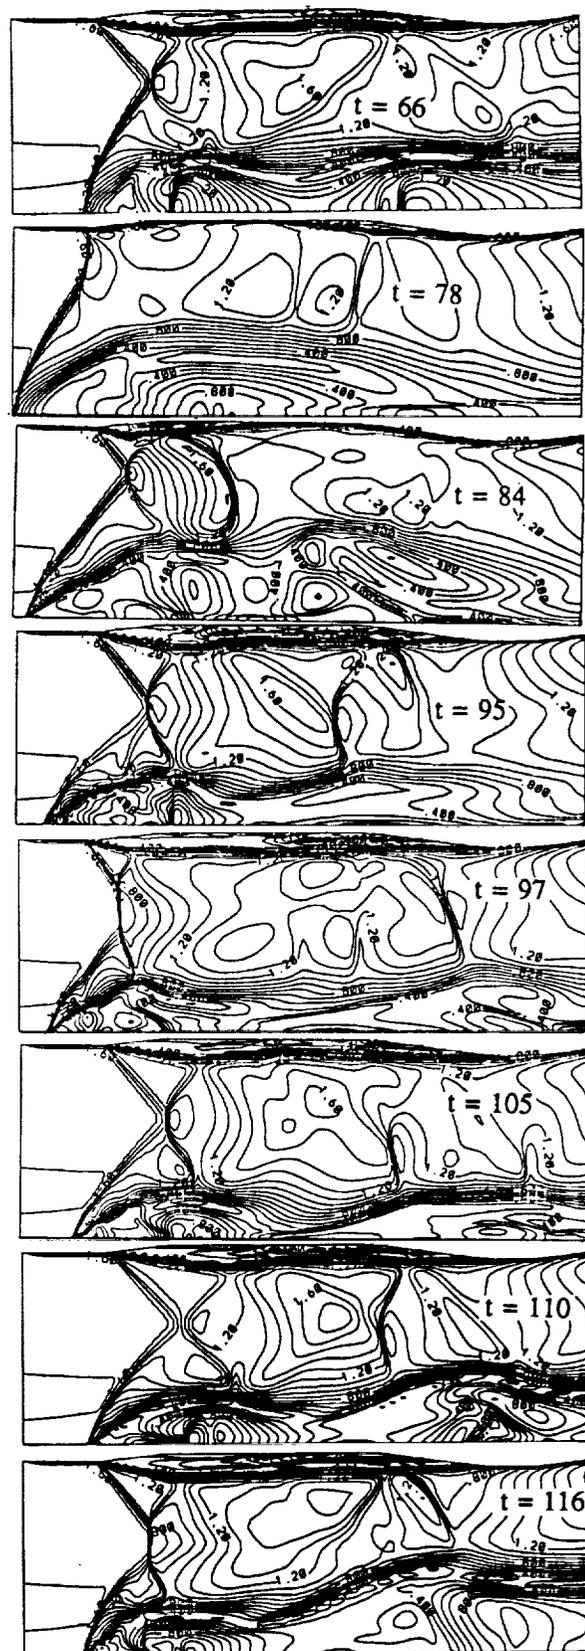
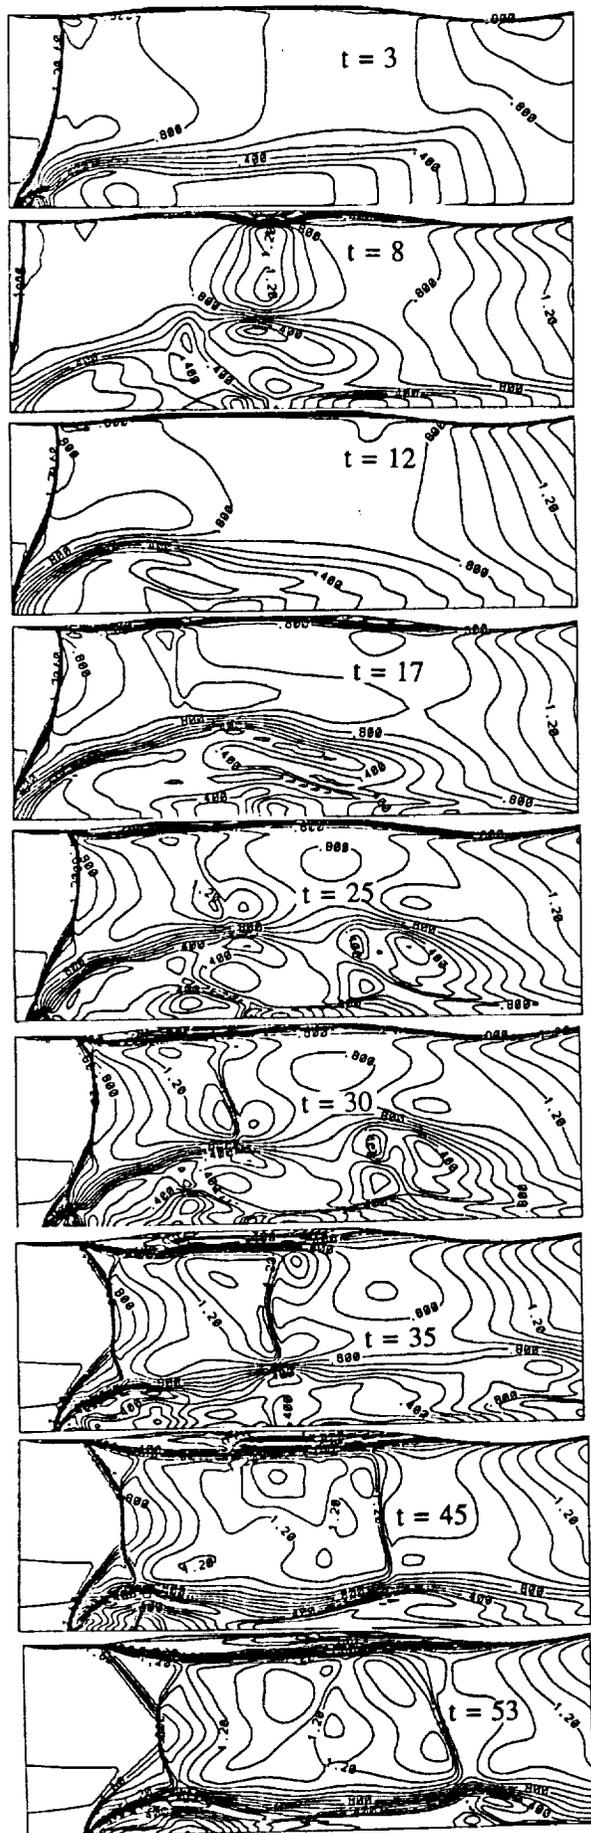



Figure 9. Mach contours for a swirling flow with unsteady multi-bubble breakdowns, $M_\infty = 1.75$, $\beta = 0.32$, $Re = 100,000$.



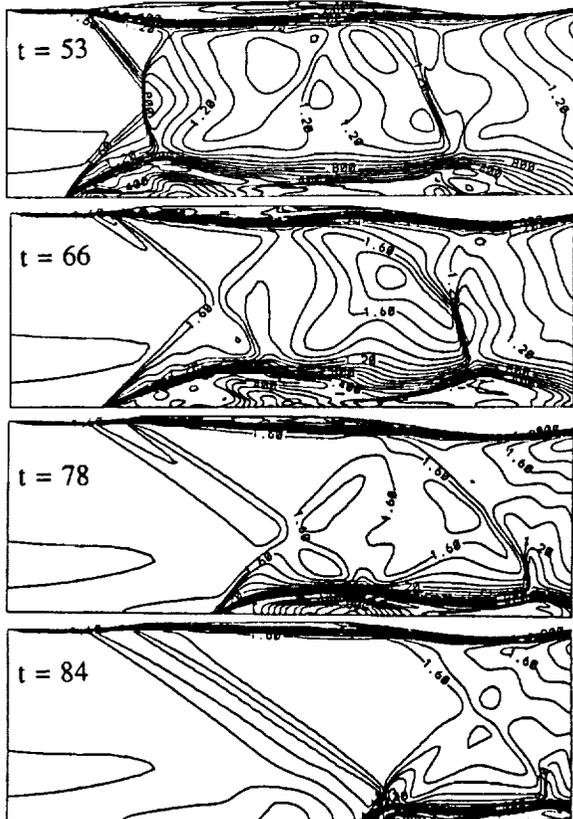
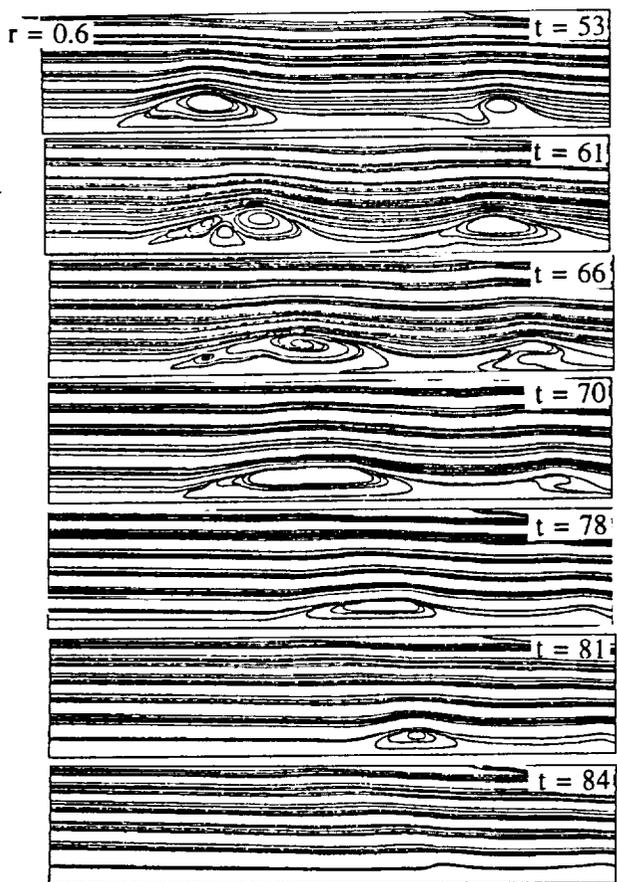


Figure 10. Streamlines and Mach contours for a swirling flow with transient multi-bubble breakdowns, $M_\infty = 1.75, \beta = 0.32, R_e = 100,000, P_b = P_\infty$

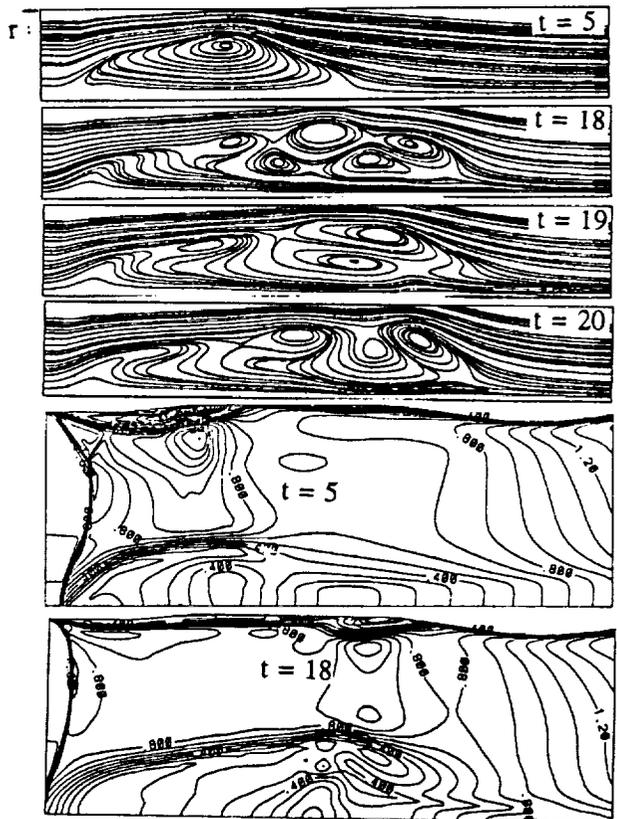


Figure 11. Effect of exit boundary condition, $P_b = P_\infty$, $M_\infty = 1.75, \beta = 0.32, R_e = 20,000$.

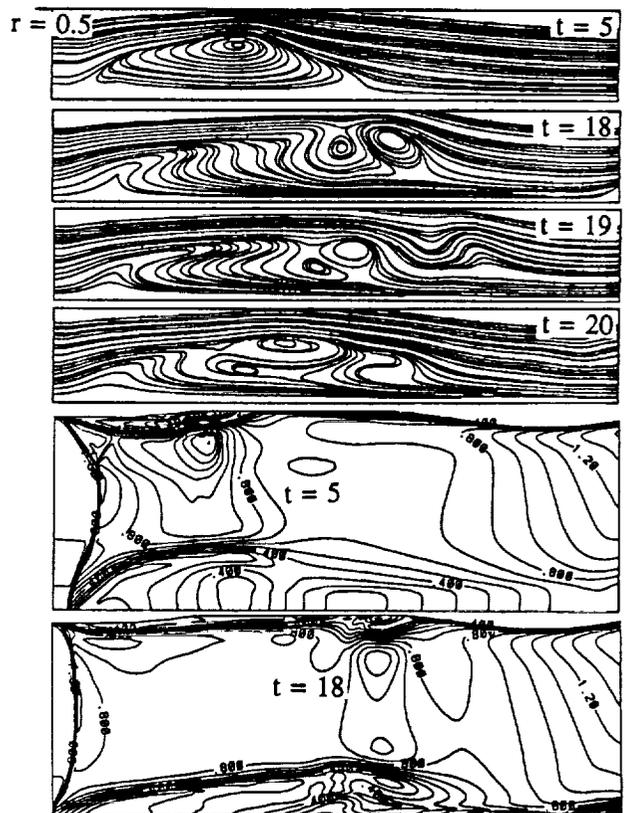


Figure 12. Effect of exit boundary condition, $P_b = 2P_\infty$; $M_\infty = 1.75, \beta = 0.32, R_e = 20,000$.




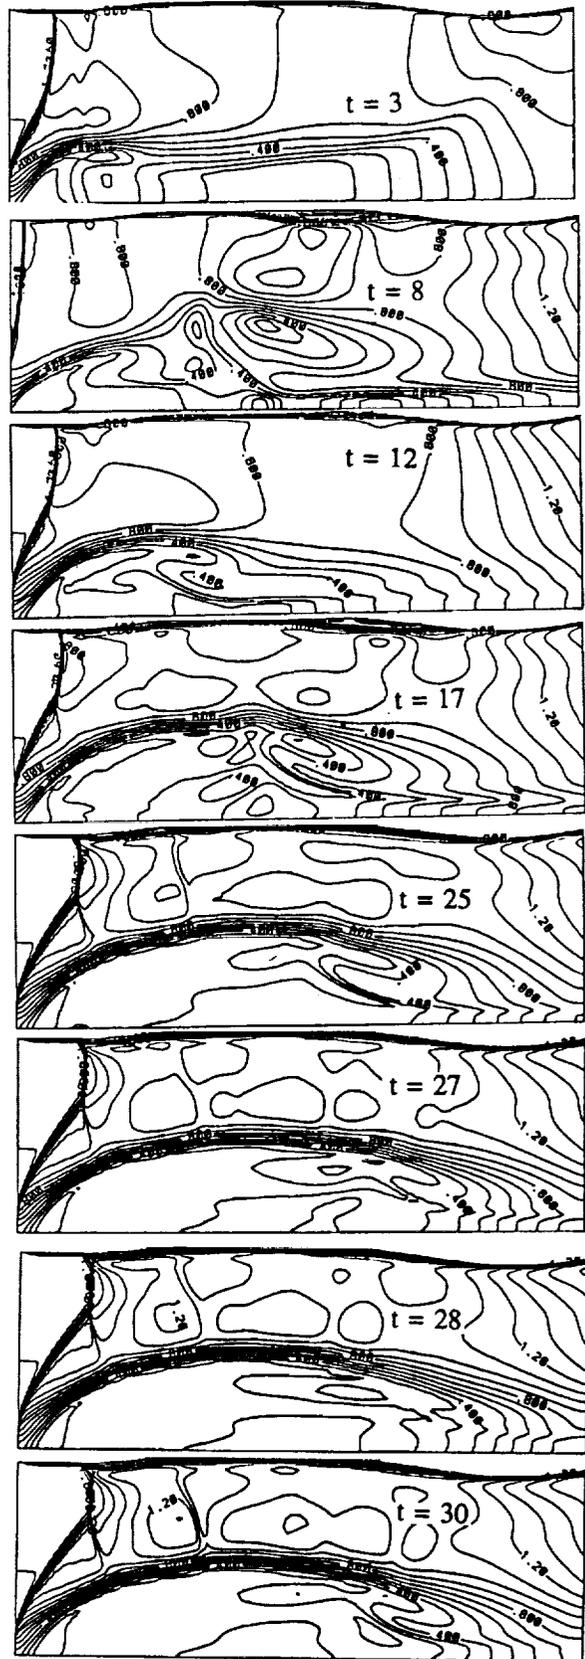


Figure 13. Streamlines and Mach contours for a swirling flow with unsteady multi-bubble breakdowns, $M_\infty = 1.75$, $\beta = 0.38$, $Re = 100,000$.



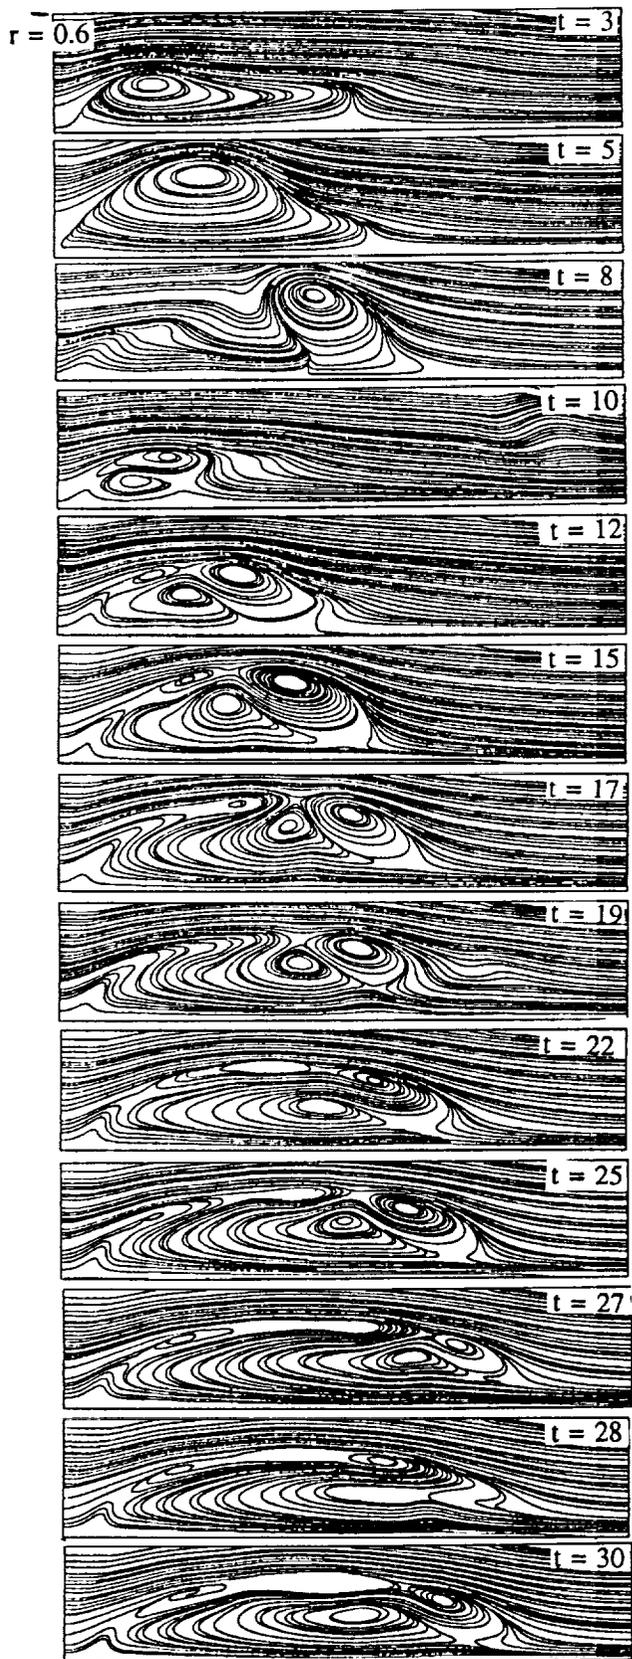

AIAA-91-0547

**THIN-LAYER AND FULL
NAVIER-STOKES, LOCALLY-CONICAL
AND THREE-DIMENSIONAL
ASYMMETRIC SOLUTIONS**

**O. A. Kandil, T.-C. Wong and H. A. Kandil
Old Dominion University, Norfolk, VA**

**C. H. Liu
NASA Langley Research Center, Hampton, VA**

29th Aerospace Sciences Meeting

January 7-10, 1991/Reno, Nevada



THIN-LAYER AND FULL NAVIER-STOKES, LOCALLY-CONICAL AND THREE-DIMENSIONAL ASYMMETRIC SOLUTIONS

O. A. Kandil*, T.-C. Wong** and H. A. Kandil***
Old Dominion University, Norfolk, VA
C. H. Liu†
NASA Langley Research Center, Hampton, VA

Abstract

The unsteady, compressible thin-layer and full Navier-Stokes equations are used to numerically simulate steady and unsteady asymmetric, supersonic, locally-conical flows around a 5° -semiapex angle circular cone. The main computational scheme used for the present computations is the implicit, upwind, flux-difference splitting, finite-volume scheme. Comparisons of the solutions using the two sets of equations are presented for the flow asymmetry and its control. Computational studies are also presented to investigate the effects of the freestream Reynolds number and the locally-scaled Reynolds number on the flow asymmetry. These studies are carried out using the full Navier-Stokes equations. Three-dimensional, asymmetric flow solutions are also presented for a 5° -semiapex angle cone of unit length and a cone-cylinder configuration. The three-dimensional solutions are obtained by using the thin-layer equations and short-duration transient side-slip disturbances along with a very fine grid.

Introduction

Highly swept, round and sharp-leading-edge wings and pointed slender bodies are common aerodynamic components to fighter aircraft and missiles. The study of vortex-dominated flow around these isolated aerodynamic components adds to our basic understanding of vortical flows under various conditions including unsteady vortex-dominated flows, vortex-shock interaction, asymmetric vortex flow and vortex breakdown. In this paper, we focus on the problem of asymmetric vortex flow about slender bodies in the high AOA range. The problem is of vital importance to the dynamic stability and controllability of missiles and fighter aircraft.

The onset of flow asymmetry occurs when the relative incidence (ratio of angle of attack to nose semiapex angle) of pointed forebodies exceeds certain critical values. At these critical values of relative incidence, flow asymmetry develops due to natural and/or forced disturbances. The origin of natural disturbances may be a transient side slip, an acoustic disturbance, or likewise disturbance of short duration. The origin of forced disturbances is geometric

perturbations due to imperfections in the nose geometric symmetry or likewise disturbances of permanent nature. In addition to the relative incidence as one of the determinable parameters for the onset of flow asymmetry, the freestream Mach number, Reynolds number and shape of the body-cross sectional area are important determinable parameters.

Kandil, Wong and Liu¹ used the unsteady, thin-layer Navier-Stokes equations along with two different implicit schemes to simulate asymmetric vortex flows around cones with different cross-section shapes. The numerical investigation was focused on a 5° -semiapex angle circular cone and local conical flow was assumed. The first computational scheme was an implicit, upwind, flux-difference splitting, finite-volume scheme and the second one was an implicit, central-difference, finite-volume scheme. Keeping the Mach number and Reynolds number constants at 1.8 and 10^5 , respectively, the angle of attack was varied from 10° to 30° . At $\alpha = 10^\circ$, a steady symmetric solution was obtained and the results of the two schemes were in excellent agreement. At $\alpha = 20^\circ$ and irrespective of the type or level of the disturbance, a steady asymmetric solution was obtained and the results of the two schemes were in excellent agreement. Two types of flow disturbances were used; a random round-off error or a random truncation-error disturbance and a controlled transient side-slip disturbance with short duration. For the controlled transient side-slip disturbance, the solution was unique, and for the uncontrolled random disturbance, the solution was also unique with the exception of having the same asymmetry changing sides on the cone. At $\alpha = 30^\circ$, an unsteady asymmetric solution with vortex shedding was obtained, and the vortex shedding was perfectly periodic. Next, the angle of attack was kept fixed at 20° and the Mach number was increased from 1.8 to 3.0 with a step of 0.4. The solutions showed that the asymmetry become weaker as the Mach number is increased. The flow recovered its symmetry when the Mach number reached 3.0. Selected solutions of steady and unsteady asymmetric flows have also been presented for cones with elliptic and diamond cross-sectional areas. Passive control of the flow asymmetry has been tentatively demonstrated by using a fin on the leeward side of the body along the plane of geometric symmetry.

Siclar² used the unsteady, Navier-Stokes equations with a multi-grid, central-difference, finite-volume scheme to solve for steady asymmetric conical flows

*Professor and Eminent Scholar, Dept. of Mechanical Engineering and Mechanics, Associate Fellow, AIAA.

**Graduate Research Assistant, Same Dept., Member AIAA.

***Graduate Research Assistant, Same Dept., Member AIAA

†Group Leader, Theoretical Flow Physics Branch, Senior Member AIAA

around cones with elliptic, diamond and biparabolic sections. He addressed steady-flow problems similar to those of the present authors in reference 1. He considered the flow around circular cones with semiapex angles of 5°, 6°, 7° and 8° at an angle of attack of 20° and a Reynolds number of 10⁵. Varying the Mach number from 1.4 to 3.0 with a step of 0.4, he showed that the flow recovered its symmetry as the Mach number increased. The higher the semiapex angle was, the lower the Mach number for the flow to recover its symmetry. Fixing the Mach number at 1.8, the angle of attack at 20°, the Reynolds number at 10⁵ and the semiapex angle at 5°, he decreased the cross-section fineness ratio (ratio of width to length) for different cross-sectional shapes. He showed that the flow recovered its symmetry at a fineness ratio of 0.4 for the elliptic-section cone, at 0.6 for the biparabolic-section cone and at 0.6 for the diamond-section cone.

In a very recent paper by Kandil, Wong, and Liu³, several issues related to the asymmetric flow solutions have been addressed. It has been shown that a unique asymmetric flow solution is obtained irrespective of the size of the minimum grid spacing at the solid boundary. The asymmetry could reverse sides due to the random nature of the disturbance. It has been also shown that for the same flow conditions and same section fineness ratio, diamond-section cones with sharp edges have less flow asymmetry than those of the elliptic-section cones. Moreover, it has been shown that passive control of flow asymmetry of diamond-section cones requires fin heights that are not necessarily equal to the local section width. On the other hand, passive control of flow asymmetry of circular and elliptic-section cones requires fins with heights that are, at least, equal to the local section width. Again, it was also shown that unsteady periodic asymmetric flow with vortex shedding has been predicted.

In reference 4 by Kandil, Wong and Liu, several unsteady, asymmetric vortex flows with periodic vortex shedding for circular and noncircular section cones using the thin-layer Navier-Stokes equations were presented and studied. In reference 5 by Kandil, et. al, the authors addressed the problem of asymmetric flow control using side strakes and the thin-layer Navier-Stokes equations. Two asymmetric flow cases have also been solved using the full Navier-Stokes equations.

In the present paper, we address several issues related to the flow asymmetry around circular cones. Under the locally-conical flow assumption, steady and unsteady asymmetric solutions using the thin-layer and full Navier-Stokes equations are presented and compared. Also, control of flow asymmetry using vertical fins and side strakes are covered. The solutions for the control cases are carried out using the thin-layer and full Navier-Stokes equations and their results are compared and discussed. Next, the effect of the freestream Reynolds number on the flow asymmetry is studied under the locally-conical flow assumption using the full Navier-Stokes equations. This is achieved by keeping the axial station, at which the

locally-conical solution is obtained, constant at the value of unity and changing the Reynolds number. The effect of scaled Reynolds number (Reynolds number based on the local axial station) on the flow asymmetry is also studied using the full Navier-Stokes equations. This is achieved by reducing the axial station and accordingly scaling the Reynolds number, the cross-section diameter, the grid fineness and the computational domain. Finally, three-dimensional flow asymmetry is investigated around a circular cone and a cone-cylinder configuration using the thin-layer Navier-Stokes equations. The purpose of this study is obtain flow asymmetry due to short-duration disturbances and to investigate the effect of Reynolds number, angle of attack and the cylinder afterbody on the flow asymmetry.

Formulation

Full and Thin-Layer Navier-Stokes Equations

The conservative form of the dimensionless, unsteady, compressible, full Navier-Stokes equations in terms of time-independent, body-conformed coordinates ξ^1 , ξ^2 and ξ^3 is given by

$$\frac{\partial \bar{Q}}{\partial t} + \frac{\partial \bar{E}_m}{\partial \xi^m} - \frac{\partial (\bar{E}_v)_s}{\partial \xi^s} = 0; \quad m = 1 - 3, \quad s = 1 - 3 \quad (1)$$

where

$$\xi^m = \xi^m(x_1, x_2, x_3) \quad (2)$$

$$\bar{Q} = \frac{\bar{q}}{J} = \frac{1}{J} [\rho, \rho u_1, \rho u_2, \rho u_3, \rho e]^t \quad (3)$$

$$\begin{aligned} \bar{E}_m &\equiv \text{inviscid flux} \\ &= \frac{1}{J} [\partial_k \xi^m \bar{E}_k]^t \\ &= \frac{1}{J} [\rho U_m, \rho u_1 U_m + \partial_1 \xi^m p, \rho u_2 U_m \\ &\quad + \partial_2 \xi^m p, \rho u_3 U_m + \partial_3 \xi^m p, (\rho e + p) U_m]^t \end{aligned} \quad (4)$$

$$\begin{aligned} (\bar{E}_v)_s &\equiv \text{viscous and heat-conduction flux in } \xi^s \\ &\quad \text{direction} \\ &= \frac{1}{J} [0, \partial_k \xi^s \tau_{k1}, \partial_k \xi^s \tau_{k2}, \partial_k \xi^s \tau_{k3}, \\ &\quad \partial_k \xi^s (u_n \tau_{kn} - q_k)]^t; \quad k = 1 - 3, \quad n = 1 - 3 \end{aligned} \quad (5)$$

$$U_m = \partial_k \xi^m u_k \quad (6)$$

The first element of the three momentum elements of Eq. (5) is given by

$$\begin{aligned} \partial_k \xi^s \tau_{k1} &\equiv \frac{M_\infty \mu}{Re} \left[\left(\partial_k \xi^s \partial_1 \xi^n - \frac{2}{3} \partial_1 \xi^s \partial_k \xi^n \right) \frac{\partial u_k}{\partial \xi^n} \right. \\ &\quad \left. + \partial_k \xi^s \partial_k \xi^n \frac{\partial u_1}{\partial \xi^s} \right] \end{aligned} \quad (7)$$

The second and third elements of the momentum elements are obtained by replacing the subscript 1, everywhere in Eq. (7), with 2 and 3, respectively. The last element of Eq. (5) is given by

$$\begin{aligned} \partial_k \xi^s (u_p \tau_{kp} - q_k) \equiv & \frac{M_\infty \mu}{Re} \left[(\partial_k \xi^s \partial_p \xi^n \right. \\ & - \frac{2}{3} \partial_p \xi^s \partial_k \xi^n) u_p \frac{\partial u_k}{\partial \xi^n} \\ & + \partial_k \xi^s \partial_k \xi^n u_p \frac{\partial u_p}{\partial \xi^n} \\ & \left. + \frac{1}{(\gamma - 1) Pr} \partial_k \xi^s \frac{\partial (a^2)}{\partial \xi^n} \right]; p = 1 - 3 \quad (8) \end{aligned}$$

The single thin-layer approximations of the full Navier-Stokes equations demand that we only keep the derivatives in the normal direction to the body, ξ^2 , in the viscous and heat flux terms in Eqs. (1), (7) and (8). Thus, we let $s = 2$ for the term $\frac{\partial (\bar{E}_v)}{\partial \xi^s}$ in Eq. (1) and $s = 2$ and $n = 2$ in Eqs. (7) and (8). These equations reduce to

$$\frac{\partial \bar{Q}}{\partial t} + \frac{\partial \bar{E}_m}{\partial \xi^m} - \frac{\partial (\bar{E}_v)_2}{\partial \xi^2} = 0 \quad (9)$$

$$\partial_k \xi^2 \tau_{k1} \equiv \frac{M_\infty \mu}{Re} \left(\psi \partial_1 \xi^2 + \phi \frac{\partial u_1}{\partial \xi^2} \right) \quad (10)$$

$$\begin{aligned} \partial_k \xi^2 (u_p \tau_{kp} - q_k) \equiv & \frac{M_\infty \mu}{Re} \left\{ \psi W \right. \\ & + \phi \left[\frac{1}{2} \frac{\partial}{\partial \xi^2} (u_1^2 + u_2^2 + u_3^2) \right. \\ & \left. \left. + \frac{1}{(\gamma - 1) Pr} \frac{\partial (a^2)}{\partial \xi^2} \right] \right\} \quad (11) \end{aligned}$$

where

$$\phi_1 = \partial_k \xi^2 \partial_k \xi^2, \psi = \frac{1}{3} \partial_k \xi^2 \frac{\partial u_k}{\partial \xi^2}, W = \partial_p \xi^2 u_p \quad (12)$$

The reference parameters for the dimensionless form of the equations are $L, a_\infty, L/a_\infty, \rho_\infty$ and μ_∞ for the length, velocity, time, density and molecular viscosity, respectively. The Reynolds number is defined as $Re = \rho_\infty V_\infty L / \mu_\infty$, where L is the body length, and the pressure, p , is related to the total energy per unit mass and density by the gas equation

$$p = (\gamma - 1) \rho \left[e - \frac{1}{2} (u_1^2 + u_2^2 + u_3^2) \right] \quad (13)$$

The viscosity is calculated from the Sutherland law

$$\mu = T^{3/2} \left(\frac{1 + C}{T + C} \right), C = 0.4317 \quad (14)$$

and the Prandtl number $Pr = 0.72$. In Eqs. (1)-(12), the indicial notation is used for convenience.

Boundary and Initial Conditions

Boundary conditions are explicitly implemented. They include inflow-outflow conditions and solid-boundary conditions. At the plane of geometric symmetry, periodic conditions are used for symmetric or asymmetric flow applications on the whole computational domain (right and left domains). At the farfield inflow boundaries freestream conditions are specified since we are dealing with supersonic flows, while at the far-field outflow boundaries first-order extrapolation from the interior points is used. On the solid boundary, the no-slip and no-penetration conditions are enforced; $u_1 = u_2 = u_3 = 0$ and the normal pressure gradient is set equal to zero. For the temperature, the adiabatic boundary condition is enforced on the solid boundary.

For the passive control applications using vertical fins, double thin-layer Navier-Stokes equations are used, where one thin-layer is used normal to the body and another thin-layer is used normal to the fin surface. For these applications, solid-boundary conditions are enforced on both sides of the fin.

The initial conditions correspond to the uniform flow with $u_1 = u_2 = u_3 = 0$ on the solid boundary.

Computational Scheme

The main computational scheme used to solve the thin-layer and full Navier-Stokes equations is an implicit, upwind, flux-difference splitting, finite-volume scheme. It employs the flux-difference splitting scheme of Roe. The Jacobian matrices of the inviscid fluxes, $A_s = \frac{\partial E_s}{\partial q}$; $s = 1-3$, are split into backward and forward fluxes according to the signs of the eigenvalues of the inviscid Jacobian matrices. Flux limiters are used to eliminate oscillations in the shock region. The viscous and heat-flux terms are centrally differenced. The resulting difference equation is solved using approximate factorization in the ξ^1, ξ^2 and ξ^3 directions. The resulting computer program can be used to solve the thin-layer Navier-Stokes equations and the full Navier-Stokes equations. This code is a modified version of the CFL3D which is currently called "FTNS3D". In this code, the implicit, flux-vector splitting, finite-volume scheme, which is based on the Van-Leer scheme⁶, can also be used instead of the flux-difference splitting scheme.

Computational Applications and Discussions

I. Locally-Conical Asymmetric Flow Applications

Locally-conical solutions of the thin-layer or full Navier-Stokes equations are obtained using one of two methods. In the first method, the governing equations

are transformed using the conical-coordinate transformation. Invoking the conical flow conditions which require that the flow variables be independent of the radial distance (or axial distance, depending on the transformation) from the cone vertex, equating the radial distance (or axial distance) which appears in the transformed equations to a constant (equals to unity in most of the present locally-conical solutions), the resulting equations are solved on one spherical (or cross-flow) surface. In the second method, the three-dimensional flow equations are solved on two spherical (or cross-flow) surfaces which are located in the very near proximity of a constant radial (or axial) distance. During the pseudo-time or accurate-time stepping, the flowfield vector is forced to be equal at the corresponding grid centers on the two surfaces. This method is used in the present paper to obtain locally-conical solutions. The resulting solutions from these two methods are the same locally-conical solutions. These solutions correspond to the specified radial (or axial) distance and hence they change as we change the radial (or axial) distance. The reason behind that is simply because the transformed equations, according to the first method, are not self-similar and hence they are not globally conical. This is shown below by developing the transformed equations of the first method. Considering the unsteady, compressible, Navier-Stokes equations in the Cartesian coordinates,

$$\frac{\partial q}{\partial t} + \frac{\partial(\bar{E} - \bar{E}_v)_i}{\partial x_i} = 0 \quad ; i = 1 - 3 \quad (15)$$

introducing the conical coordinates,

$$\eta_1 = \frac{x_1}{x_3}, \quad \eta_2 = \frac{x_2}{x_3}, \quad \eta_3^2 = x_4 x_1 \quad (16)$$

and using the chain rule, Eq. (15) is transformed to

$$\begin{aligned} \frac{\eta_3}{m} \frac{\partial q}{\partial t} + \frac{\partial}{\partial \eta_1} (\bar{E} - \bar{E}_v)_1 + \frac{\partial}{\partial \eta_2} (\bar{E} - \bar{E}_v)_2 \\ + \frac{\eta_3}{m^2} \frac{\partial}{\partial \eta_3} (\bar{E} - \bar{E}_v)_3 + 2(\bar{I} - \bar{I}_v) = 0 \end{aligned} \quad (17)$$

where

$$\begin{aligned} m &= \sqrt{1 + \eta_1^2 + \eta_2^2}, \quad \bar{E}_1 = E_1 - \eta_1 E_3, \quad \bar{E}_2 \\ &= E_2 - \eta_2 E_3, \quad \bar{E}_3 = E_3 + \eta_1 E_1 + \eta_2 E_2, \\ \bar{I} &= \bar{E}_3, \quad \bar{E}_{v1} = E_{v1} - \eta_1 E_{v3}, \quad \bar{E}_{v2} \\ &= E_{v2} - \eta_2 E_{v3}, \quad \bar{E}_{v3} = E_{v3} + \eta_1 E_{v1} + \eta_2 E_{v2}, \\ \bar{I}_v &= \bar{E}_{v3} \end{aligned} \quad (18)$$

The conical flow condition requires the flow variables be independent of the coordinate η_3 (radial distance). Invoking this condition in Eq. (17) by dropping the derivatives with respect to η_3 , Eq. (17) reduces to

$$\frac{\eta_3}{m} \frac{\partial q}{\partial t} + \frac{\partial}{\partial \eta_1} (\bar{E} - \bar{E}_v)_1 + \frac{\partial}{\partial \eta_2} (\bar{E} - \bar{E}_v)_2 + 2(\bar{I} - \bar{I}_v) = 0 \quad (19)$$

It is obvious that the unsteady term includes η_3 . Moreover, the viscous terms $\frac{\partial \bar{E}_1}{\partial \eta_1}$, $\frac{\partial \bar{E}_2}{\partial \eta_2}$ and \bar{I}_v include η_3 , and

hence Eq. (19) is not self-similar. The explicit dependence of the viscous terms on η_3 can be shown through one of the elements of these vectors. For example, we consider

$$\begin{aligned} \frac{\partial}{\partial \eta_1} (\tau_{xx} - \eta_1 \tau_{xz}) &= \frac{M_\infty}{R_e} \frac{\partial}{\partial \eta_1} \left[\mu \left(2 \frac{\partial u_1}{\partial x} \right. \right. \\ &\quad \left. \left. - \frac{2}{3} \left(\frac{\partial u_1}{\partial x} + \frac{\partial u_2}{\partial y} + \frac{\partial u_3}{\partial z} \right) - \eta_1 \left(\frac{\partial u_1}{\partial z} + \frac{\partial u_3}{\partial x} \right) \right) \right] \\ &= \frac{M_\infty m}{R_e \eta_3} \frac{\partial}{\partial \eta_1} \left[\mu \left(\left(\frac{4}{3} - \eta_1^2 \right) \frac{\partial u_1}{\partial \eta_1} \right. \right. \\ &\quad \left. \left. + \eta_1 \frac{\partial u_1}{\partial \eta_2} - \frac{2}{3} \frac{\partial u_2}{\partial \eta_2} - \frac{\eta_1}{3} \frac{\partial u_3}{\partial \eta_1} + \frac{2}{3} \eta_2 \frac{\partial u_3}{\partial \eta_2} \right) \right] \end{aligned} \quad (20)$$

Thus, the unsteady term and viscous terms are scaled by the radial distance η_3 and Eq. (19) does not represent a globally-conical flow. The best to be done to make use of this equation is to select a constant value for η_3 , and solve the resulting equation for what we call "locally-conical flow". If η_3 is assigned another constant value, the resulting equation will have another scale for the unsteady term and viscous terms. It is concluded that Eq. (19) becomes globally conical if the unsteady term and viscous terms vanish, and hence only the steady Euler equations are globally conical.

Next, we present comparison of the solutions using the thin-layer and full Navier-Stokes equations. We also present steady flow solutions using different Reynolds numbers keeping $\eta_3 = 1$ and steady solutions using $\eta_3 = 0.5, 0.25, 0.1$ and $R_e = 50,000; 25,000; 10,000$; respectively.

Steady Asymmetric Flow ($\alpha = 20^\circ$, $M_\infty = 1.8$, $R_e = 10^5$)

Supersonic flow around a 5° -semiapex angle circular cone at 20° angle of attack, freestream Mach number of 1.8 and Reynolds number of 10^5 is considered. The thin-layer and full Navier-Stokes equations are used to solve for asymmetric flow on a grid of 161×81 points in the circumferential and normal directions, respectively. The grid is generated by using a modified Joukowski transformation with a geometric series for grid clustering in the normal direction. The minimum grid spacing in the normal direction at the solid boundary is 10^{-4} . The maximum radius of the computational domain is $21 r$, where r is the radius of the circular cone at the axial station of unity. Figure 1 shows the results of thin-layer solution. The color graphics figure shows six snapshots for the evolution of the steady asymmetric solution during 10,000 iteration steps. The number from 1-6 on the total-pressure-loss contours correspond to the number from 1-6 on the logarithmic residual-iterations curve. It is seen that the solution is symmetric during the first 3000 iteration when the residual drops to machine zero (No. 1). Then, the solution becomes slightly asymmetric as the residual grows up (Nos. 2, 3). As the residual drops again to machine zero, the flow asymmetry becomes strong until it reaches to the stable asymmetric solution

(Nos. 4, 5, 6). The final total-pressure-loss contour and the corresponding surface-pressure coefficient are also shown.

The full Navier-Stokes solution is shown in Fig. 2. The residual-error drops 4.5 orders of magnitude in 2,000 steps, increases one order of magnitude after a total of 3,000 steps and then drops to machine zero in a total number of iteration steps of 6,000. It is clear that the full Navier-Stokes equations produce the asymmetric solution faster than the thin-layer Navier-Stokes equations. The total-pressure-loss contours show that the full Navier-Stokes solution produces thicker shear layers than those of the thin-layer solution. More contour resolution in the vortex cores is produced by the full Navier-Stokes solutions than that of the thin-layer solution. Finally, the free-shear layer on the body right-side of the full Navier-Stokes solution is shorter than that of the thin-layer solution. However, the C_p figures of the two solutions are exactly the same.

Asymmetric Flow Control Using Vertical Fins ($h = 0.5r$, $h = r$)

Figures 3 and 4 show comparisons of the thin-layer and full Navier-Stokes solutions for the control of the flow of the preceding case. Two vertical fins of heights $h = 0.5r$ and r are placed in the leeward plane of geometric symmetry, where r is the cone local radius. Figures 3 and 4 show the total-pressure-loss contours and the surface-pressure coefficient. The thin-layer solutions are shown on the left and the full Navier-Stokes solutions are shown on the right. With $h = 0.5r$ and using the thin-layer equations, two vortex cores which are connected to each other and to the body through free-shear layers, develop from the left side of the body. From the right side of the body, a free-shear layer develops and crosses over the fin to the left side of the body. It produces two vortex cores; one at each corner of the body-fin juncture with secondary separation below them. This case has been solved accurately in time but it does not show any vortex shedding or unsteadiness. When the fin height is increased to $h = r$, perfect flow symmetry is obtained.

With $h = 0.5r$ and using the full Navier-Stokes equations, a mirror image of the vortex system and flow separations of the thin-layer solutions is obtained. This is due to the random nature of the disturbance. However, the free-shear layer and vortex cores on the right are thicker and shorter in height than those of the thin-layer solution. However, the C_p coefficients of the two sets of equations are exact mirror image of each other. With $h = r$, the full Navier-Stokes equations produce the exact same solution as that of the thin-layer equations. The reason behind the flow asymmetry with $h = 0.5r$ is that the free-shear layer from the right-hand side of the body is still higher than the fin height, which allows the flow disturbances from the right and left side to interact.

Asymmetric Flow Control Using Side Strakes ($h = 0.3r$)

Figure 5 shows a comparison of the thin-layer and full Navier-Stokes solutions for the control of the flow of the case of Fig. 1. Side strakes of height $h = 0.3r$, when r is the local radius of the cone, are used for this purpose. The grid used is generated using a hyperbolic grid generator with transfinite grid interpolation to refine the grid at the strake sharp edge. While the thin-layer solution shows perfect symmetric flow, the full Navier-Stokes solution shows slightly asymmetric flow. This can be seen by comparing both the total-pressure-loss contours and the surface-pressure coefficient of the two solutions. Both solutions are obtained using a grid of 161×81 with the same transfinite interpolation. Both surface-pressure coefficients show a jump in the pressure value at the leading edges of the strakes. It should be noted that side-strakes produce higher lift than that of the vertical fin control.

Unsteady Asymmetric Flow ($\alpha = 30^\circ$, $M_\infty = 1.8$, $R_e = 10^5$)

Figures 6 and 7 show comparisons of the full Navier-Stokes solutions and the thin-layer solutions for unsteady asymmetric flow with vortex shedding. The solutions are obtained by using the full Navier-Stokes equations with a grid of 161×81 and the flux difference splitting (FDS) scheme, thin-layer equations with a grid of 161×81 and the FDS scheme, thin-layer equations with a grid of 161×81 and the flux-vector splitting (FVS) scheme, and full Navier-Stokes equations with a grid of 241×81 and the FDS scheme. Typical of all the four solutions, the residual error curves show a drop in the error followed by a transient response and ending by a periodic response. The lift coefficient curves show the final periodic response. The first three solutions exactly show the same number of time steps ($\Delta t = 10^{-3}$) of 700 for one-half of the cycle of vortex shedding. The full Navier-Stokes solution on the fine grid (Fig. 7) shows a slightly bigger number of time steps ($\Delta t = 10^{-3}$) of 725 for one-half of the cycle of vortex shedding. This is expected of the full Navier-Stokes equations on the fine grid since the flow has more real damping and viscous-force resolution than the other three solutions. In the fourth case, the damping will elongate the period of shedding and hence it reduces the frequency of shedding. The frequency of shedding of the first three solutions is 4.488 and the frequency of shedding of the fourth solution is 4.333.

Asymmetric Flow Control Using a Vertical Fin ($h = r$)

Figure 8 shows the full Navier-Stokes solution of asymmetric flow control using a vertical fin of $h = r$. This is the flow considered in the preceding case. It is seen that the vertical fin height is not enough to eliminate the flow asymmetry. The flow is still asymmetric but steady.

Effect of Decreasing the Reynolds Number Keeping the Axial Distance Fixed ($x = 1$, $\alpha = 20^\circ$, $M_\infty = 1.8$, $R_e = 20,000; 15,000; 10,000$)

Figure 9 shows the results of a study to investigate the effect of reducing the Reynolds number on the flow asymmetry. The full Navier-Stokes equations are used on a grid of 241×81 . As the Reynolds number is decreased keeping $x = 1$, the flow asymmetry decreases but it does not completely diminish. In this study, the computational domain is kept fixed in size and the minimum grid spacing at the solid boundary is kept at 10^{-4} . It should be stressed here that with decreasing the Reynolds number to the values considered, only the full Navier-Stokes solutions on a relatively fine grid will be valid. Strictly speaking, the cut-off Reynolds number for flow asymmetry is below 10,000.

Effect of Decreasing the Reynolds Number and the Axial Distance ($x = 0.5, 0.25, 0.1$, $\alpha = 20^\circ$, $M_\infty = 1.8$, $R_e = 50,000; 25,000; 10,000$)

Figure 10 shows the results of a study to investigate the effect of reducing the axial distance and proportionally the Reynolds number, the computational domain and the minimum grid spacing at the solid boundary. In other words, we are investigating whether the flow is self-similar or not. The solutions shown in the figure ensure that the flow is not self similar as the problem is scaled at each axial station. However, in another numerical study, we have shown that if the Reynolds number is increased by the same ratio as that of decreasing the axial station (e.g. if $x = 0.5$ then $R_e = 200,000$ such that $xR_e = 100,000$) and the problem is solved for the corresponding reduced radius of the cone section and its reduced computational domain, the asymmetric flow solution is self similar at any section.

Unsteady Asymmetric Flow ($\alpha = 35^\circ$, $M_\infty = 1.8$, $R_e = 10^5$)

Figure 11 shows snap shots of the unsteady asymmetric flow of the full Navier-Stokes equations for the same circular cone as the angle of attack is increased to 35° . The residual error curve and the lift coefficient curve show the same typical responses as those of Figs. 6 and 7. The period of shedding is smaller and equals to $550 \times 10^{-3} = 0.55$ and the corresponding shedding frequency is 11.424.

II. Three-Dimensional Flow Applications

In Figs. 12–19, we present the results of three-dimensional asymmetric flow solutions of the thin-layer equations on a grid of $161 \times 81 \times 65$ in the circular, normal and axial directions, respectively. There are several issues to be answered through the present computational study. First, for the same circular cone and for the same flow conditions (angle of attack, Mach number and Reynolds number), will the three-dimensional flow solution be the same as that of the locally-conical solution of Fig. 1? If

the answer is negative, the next question to address is: Is there a length scale which relates the three-dimensional solution to the locally-conical solution? The second issue to be addressed is the effect of the Reynolds number, the angle of attack and the cylindrical-afterbody length on the three-dimensional flow asymmetry?

To address these issues, a 5° -semiapex angle circular cone of unit length (cone length is the characteristic length) is considered. The three-dimensional grid of $161 \times 81 \times 65$ is generated by using a modified Joukowski transformation at axial stations. The grid is clustered in the normal direction of the body using a geometric series with the minimum grid spacing of 10^{-6} at the vertex and 10^{-6} at the axial station of unit length. A typical grid is shown in Fig. 12. With the flow conditions set at $\alpha = 20^\circ$, $M_\infty = 1.8$ and $R_e = 10^5$, which are the same conditions as those of the locally conical flow of Fig. 1, the three-dimensional solution produced a symmetric flow, unlike the local-conical solution which produces asymmetric steady flow. The reason for the difference is well understood since the local-conical solution is obtained at an axial station of $x = 1.0$. Hence, a length scale is involved in the Reynolds number, as can be seen from the analytical conical equation for steady viscous flow, Eq. (19). Next, the search is directed at obtaining asymmetric flow solutions for the three-dimensional cone flow. In Fig. 13, we show the solution for the same cone at $\alpha = 40^\circ$, $M_\infty = 1.4$ and $R_e = 4 \times 10^6$. It is seen that the solution is asymmetric and is nearly self-similar over a long axial distance of the cone length.

Next, the Reynolds number is increased to 6×10^6 and 8×10^6 keeping the other flow conditions constant at $\alpha = 40^\circ$ and $M_\infty = 1.4$. Figures 14 and 15 show strong asymmetric-flow solutions with already shed vortices. It should be noticed that the flow asymmetry changes sides as we move in the downstream direction. Hence, we have spatial asymmetric vortex shedding which is qualitatively similar to the temporal asymmetric vortex shedding of the locally-conical flow solutions of Figs. 6, 7 and 11. The flow instability is of spatial type.

In an attempt to address the issue of the effect of the cylindrical afterbody on the flow asymmetry, a cylindrical afterbody of unit length is added to the unit conical forebody. The flow configuration is solved for the flow conditions of the isolated cone of Fig. 13. The results are shown in Fig. 16. Comparing the total-pressure-loss contours of Figs. 13 and 16, we see that the flow asymmetry is stronger for the cone-cylinder configuration in comparison with that of the cone alone. It should be noted that inside the shock cone surrounding the cone-cylinder configuration, subsonic flow exists and hence the downstream boundary has an upstream effect. Figures 17 and 18 show the total-pressure-loss contours and surface-pressure coefficients in cross-flow planes for the cases of Figs. 15 and 16.

Finally, the angle of attack is increased to 50° keeping the Mach number and Reynolds number constants at 1.4 and 8×10^6 , respectively. The solution is obtained accurately in time. In Fig. 19, we show two snap shots of the solution at the time steps of $n = 10,116$ and $11,818$ which correspond to $t = 0.10116$ and 0.11818 , respectively, since $\Delta t = 10^{-5}$. Comparing the two solutions, one can see vortex shedding. This case of three-dimensional unsteady vortex shedding is computationally very expensive since the stable time step is 10^{-5} , and hence it was not completed.

Concluding Remarks

In the present paper, the unsteady, compressible thin-layer and full Navier-Stokes equations have been used to solve for steady and unsteady asymmetric flows and their passive control around a 5° -semiapex angle cone. For the steady locally-conical asymmetric solutions, we have shown that the full Navier-Stokes solutions produce thicker and shorter free-shear layers than those of the thin-layer solutions. For the unsteady locally-conical asymmetric solutions, we have shown that the full Navier-Stokes solutions on a fine grid produce longer periods of vortex shedding and hence smaller shedding frequencies than those of the thin-layer solutions. Next, we addressed the effects of reducing the Reynolds number on the flow asymmetry. First, the Reynolds number is reduced keeping the axial distance constant. We have shown that the cut-off Reynolds number for the flow asymmetry is less than 10,000. Second, the Reynolds number is reduced along with the proportional reduction of the axial distance, the computational domain and the minimum grid spacing. We have shown that the flow asymmetry disappears below the Reynolds number value of 25,000. Moreover, we have shown that the flow is not globally conical. Finally, the three-dimensional flow problem is addressed for the same cone and a cone-cylinder configuration. Flow asymmetry has been obtained using short-duration disturbances. The flow asymmetry becomes stronger as the Reynolds number and the angle of attack are increased. It also becomes strong due to the addition of a cylindrical afterbody. Unsteady flow asymmetry has also been obtained. It has also been noticed that for certain flow conditions, the flow asymmetry shows spatial vortex shedding

which is qualitatively similar to the temporal vortex shedding of the unsteady locally-conical asymmetric flow.

Acknowledgement



This research work has been supported by the NASA Langley Research Center under grants No. NAS-1-18584-71 and NAG-1-994. The authors would like to acknowledge the computational resources provided by the NAS-Ames computing facilities and the NASA-Langley computing facilities.

References

1. Kandil, O. A., Wong, T.-C. and Liu, C. H., "Prediction of Steady and Unsteady Asymmetric Vortical Flow Around Cones," AIAA 90-0598, January 1990. Also to appear in AIAA Journal, Vol. 29, No. 7, 1991.
2. Siclari, M. J., "Asymmetric Separated Flows at Supersonic Speeds," AIAA 90-0595, January 1990.
3. Kandil, O. A., Wong, T.-C. and Liu, C. H., "Asymmetric Flow Around Cones with Noncircular Sections," AGARD Symposium on Missile Aerodynamics, AGARD CP No. 493, Friedrickshafen, Germany, October 1990, pp. 16.1-16.11.
4. Kandil, O. A., Wong, T.-C. and Liu, C. H., "Numerical Simulation of Steady and Unsteady Asymmetric Vortical Flows," ASME Symposium on Non-Steady Fluid Dynamics, FED-Vol. 92, Toronto, Canada, June 1990, pp. 99-108.
5. Kandil, O. A., Wong, T.-C., Kandil, H. A. and Liu, C. H., "Computation and Control of Asymmetric Vortex Flow Around Circular Cones Using Navier-Stokes Equations," ICAS Paper No. 3.5.3, Vol. 2, Stockholm, Sweden, September 1990, pp. 883-893.
6. Rumsey, L. C. and Anderson, W. Kyle, "Some Numerical Aspects of Unsteady Navier-Stokes Computations of Unsteady Navier-Stokes Computations over Airfoils Using Dynamic Meshes," AIAA 88-0329, January 1988.

Steady Asymmetric Flow

$\alpha=20^\circ$, $M=1.8$, $Re=100,000$
Total-Pressure-Loss Contours

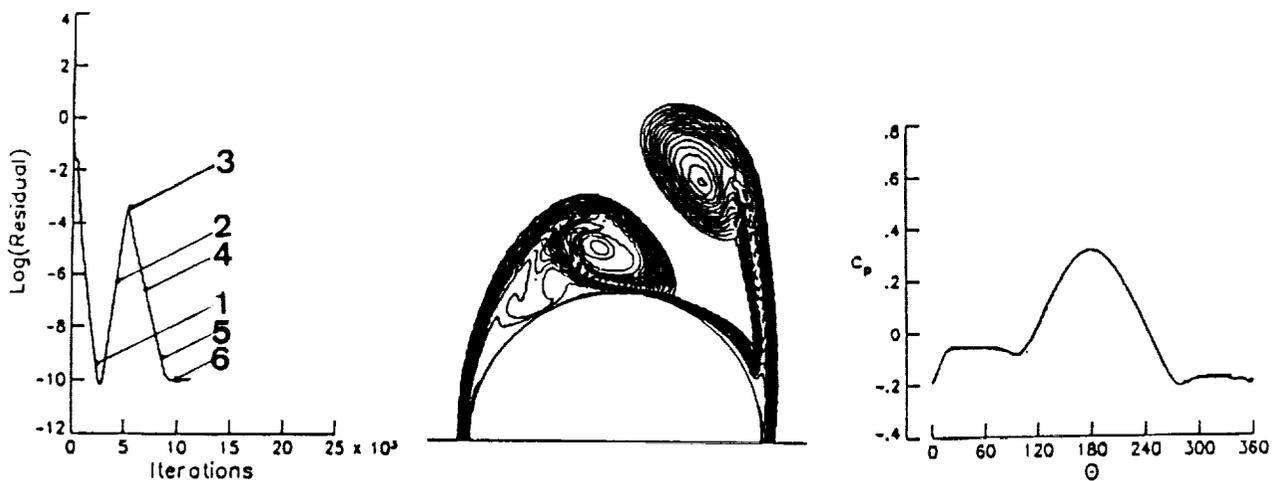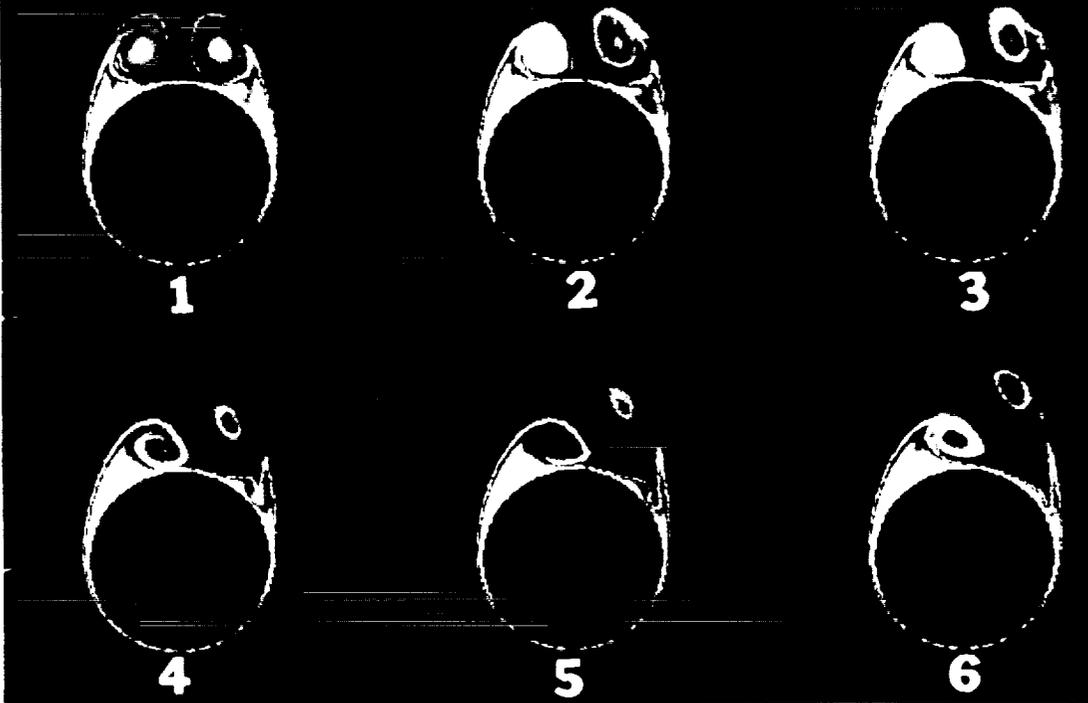

Thin-Layer Navier-Stokes Solution

Figure 1. Evolution of a steady flow asymmetry, total-pressure-loss contours, logarithmic residual history, converged solution, surface-pressure coefficient, thin-layer solution.

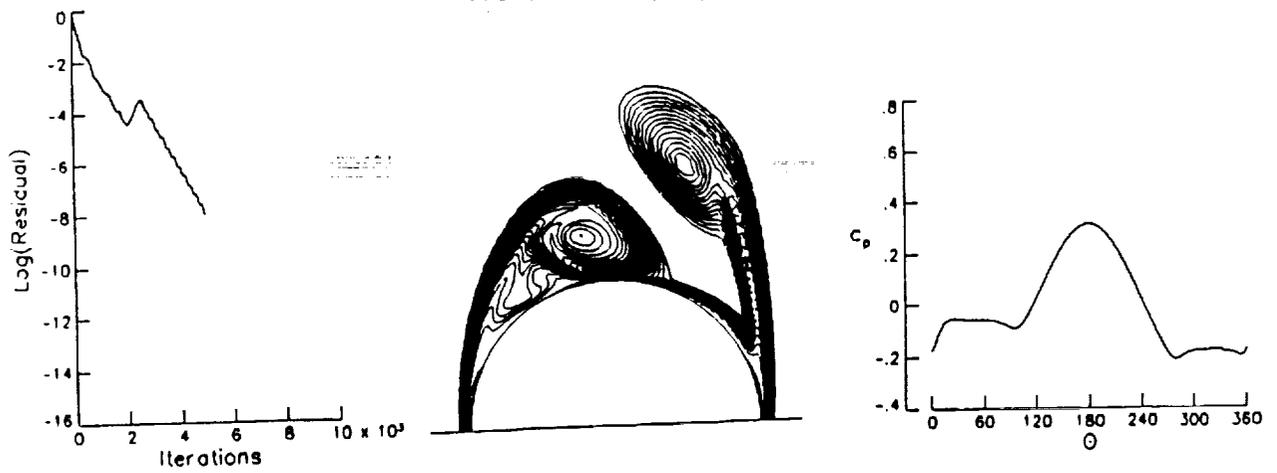


Figure 2. A steady flow asymmetry, logarithmic residual history, converged solution, surface-pressure coefficient, full Navier-Stokes solution.

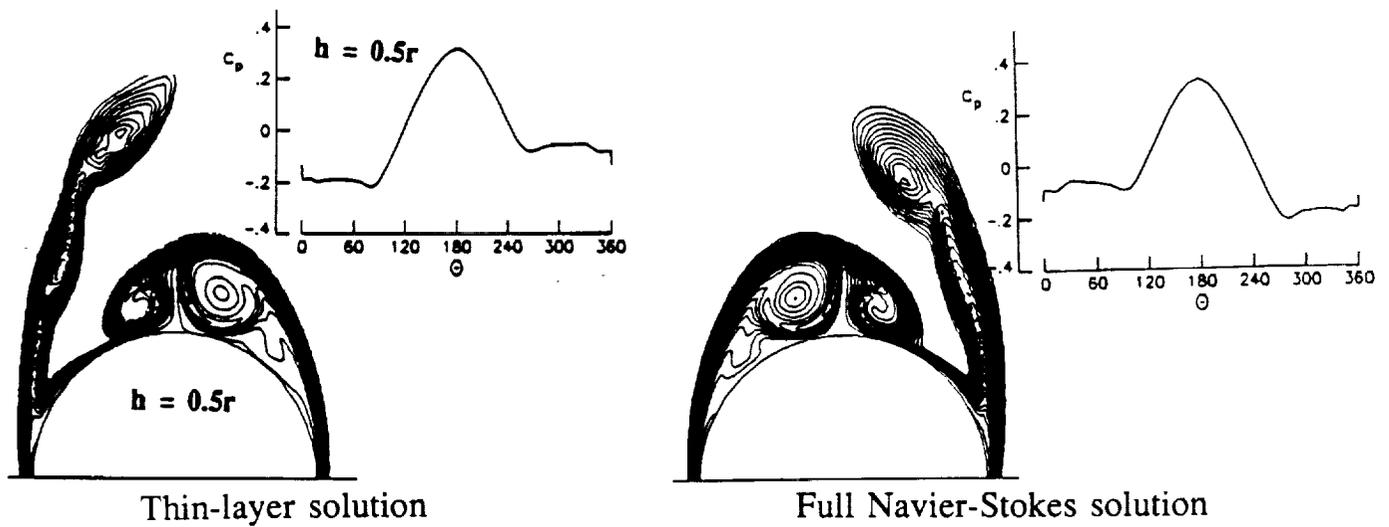


Figure 3. Comparison of passive flow control using a vertical fin, $h = 0.5r$.

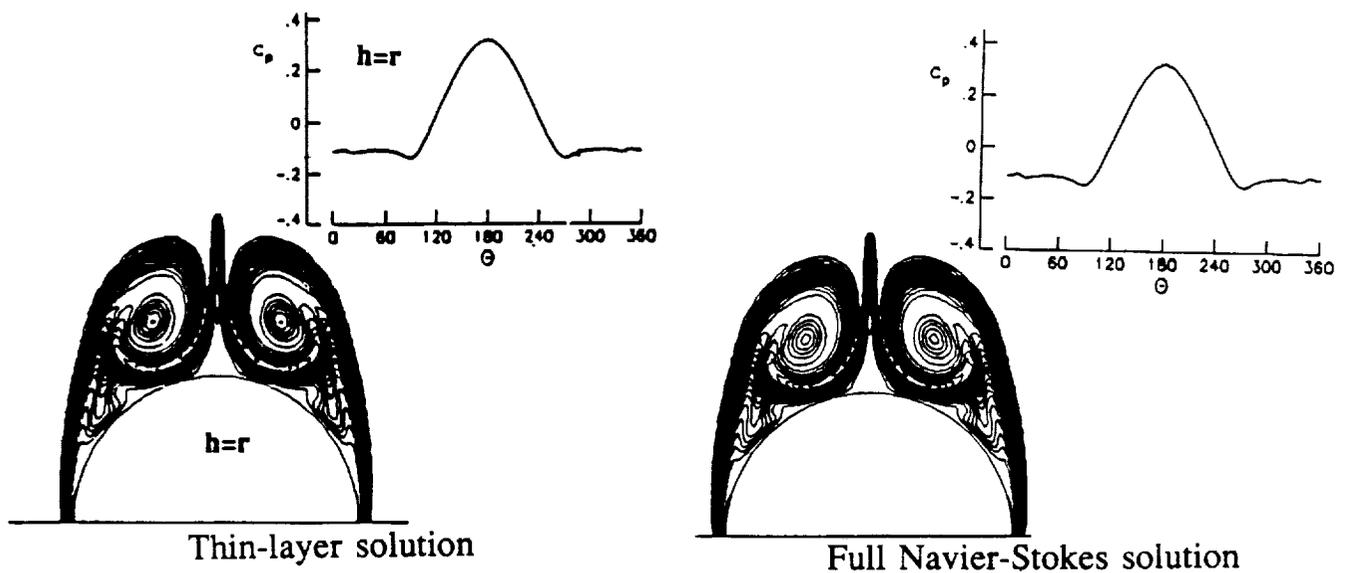


Figure 4. Comparison of passive flow control using a vertical fin, $h = r$.

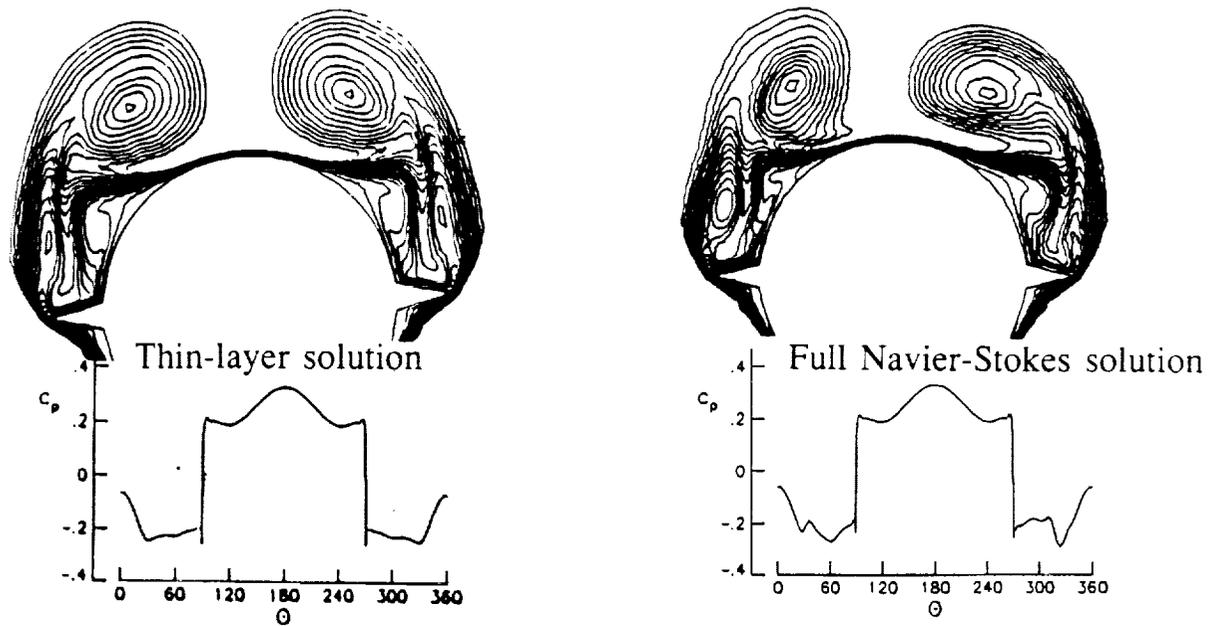


Figure 5. Comparison of passive flow control using strakes, $h = 0.3r$.

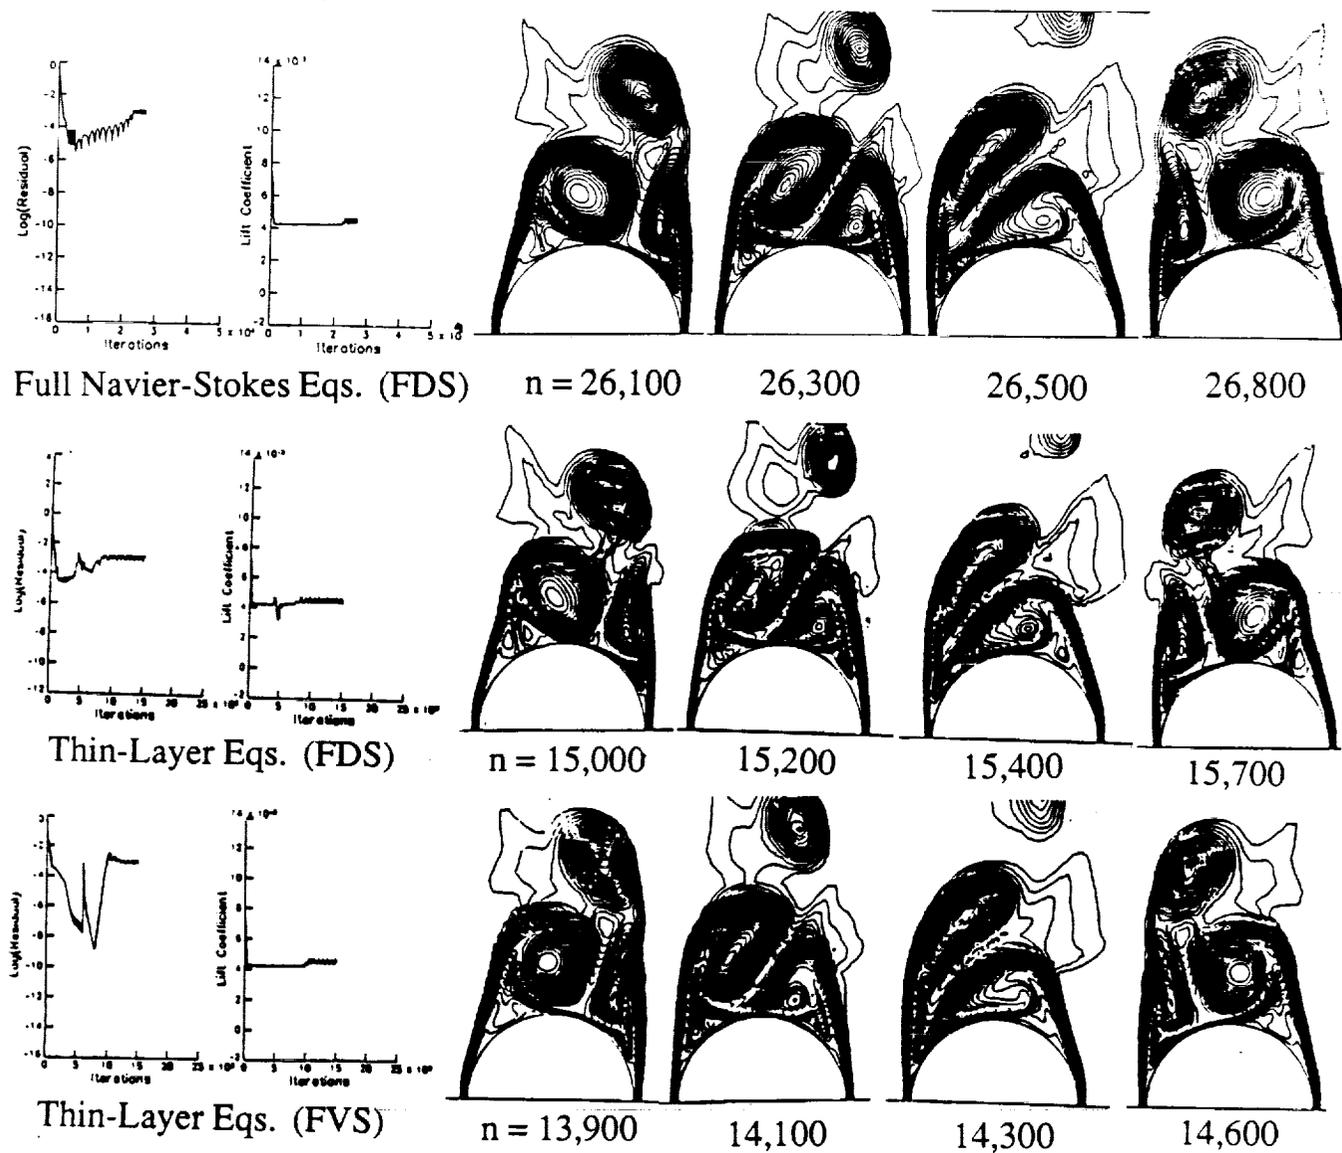


Figure 6. Comparison of unsteady flow asymmetry using the full Navier-Stokes equations and the thin-layer equations.

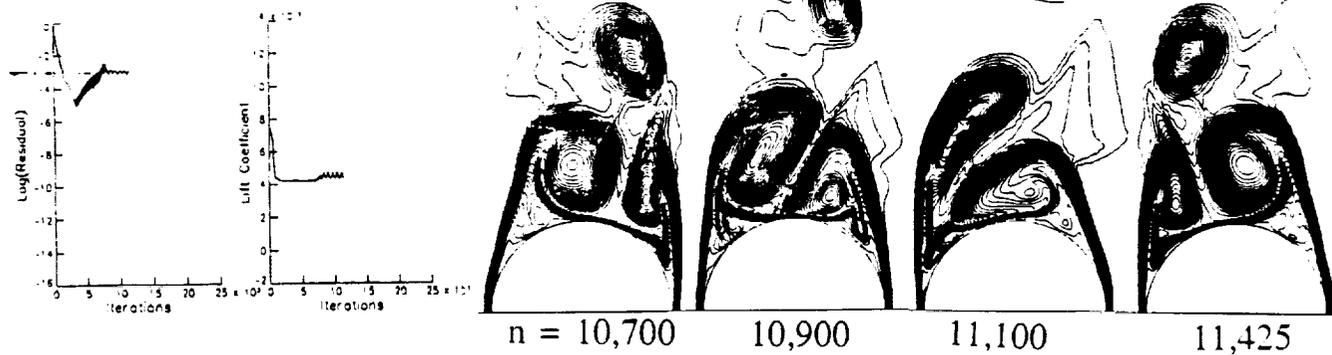


Figure 7. Unsteady flow asymmetry using the full Navier-Stokes equations on a fine grid 241×81 .



Figure 8. Passive flow control using a vertical fin, $h = r$, full Navier-Stokes solution.

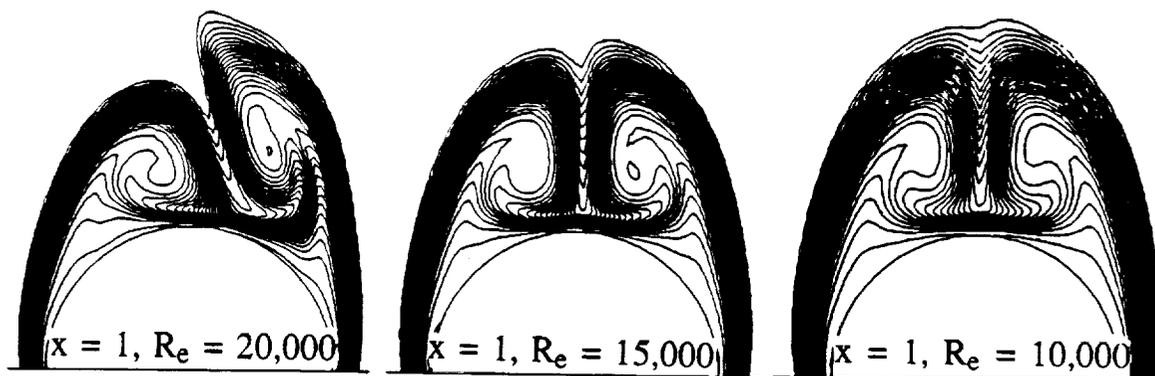


Figure 9. Effect of decreasing the Reynolds number keeping the axial station constant, $x = 1$, 241×81 , full Navier-Stokes solutions.

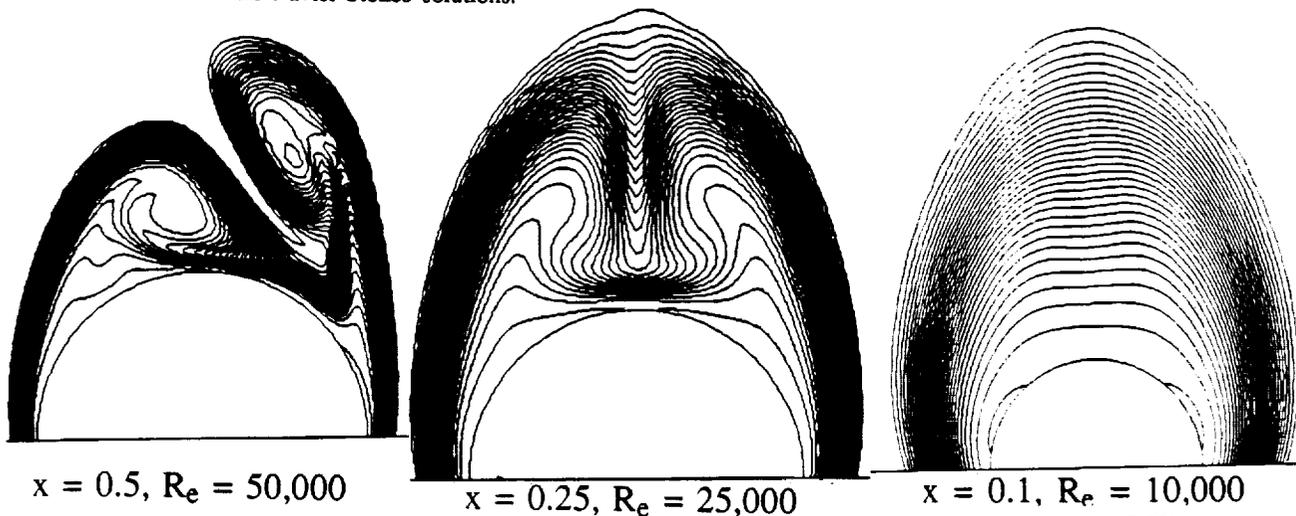


Figure 10. Effect of decreasing the Reynolds number and the axial station, $Re = 50,000; 25,000; 10,000$; $x = 0.5, 0.25, 0.1$; 241×161 , full Navier-Stokes solutions.

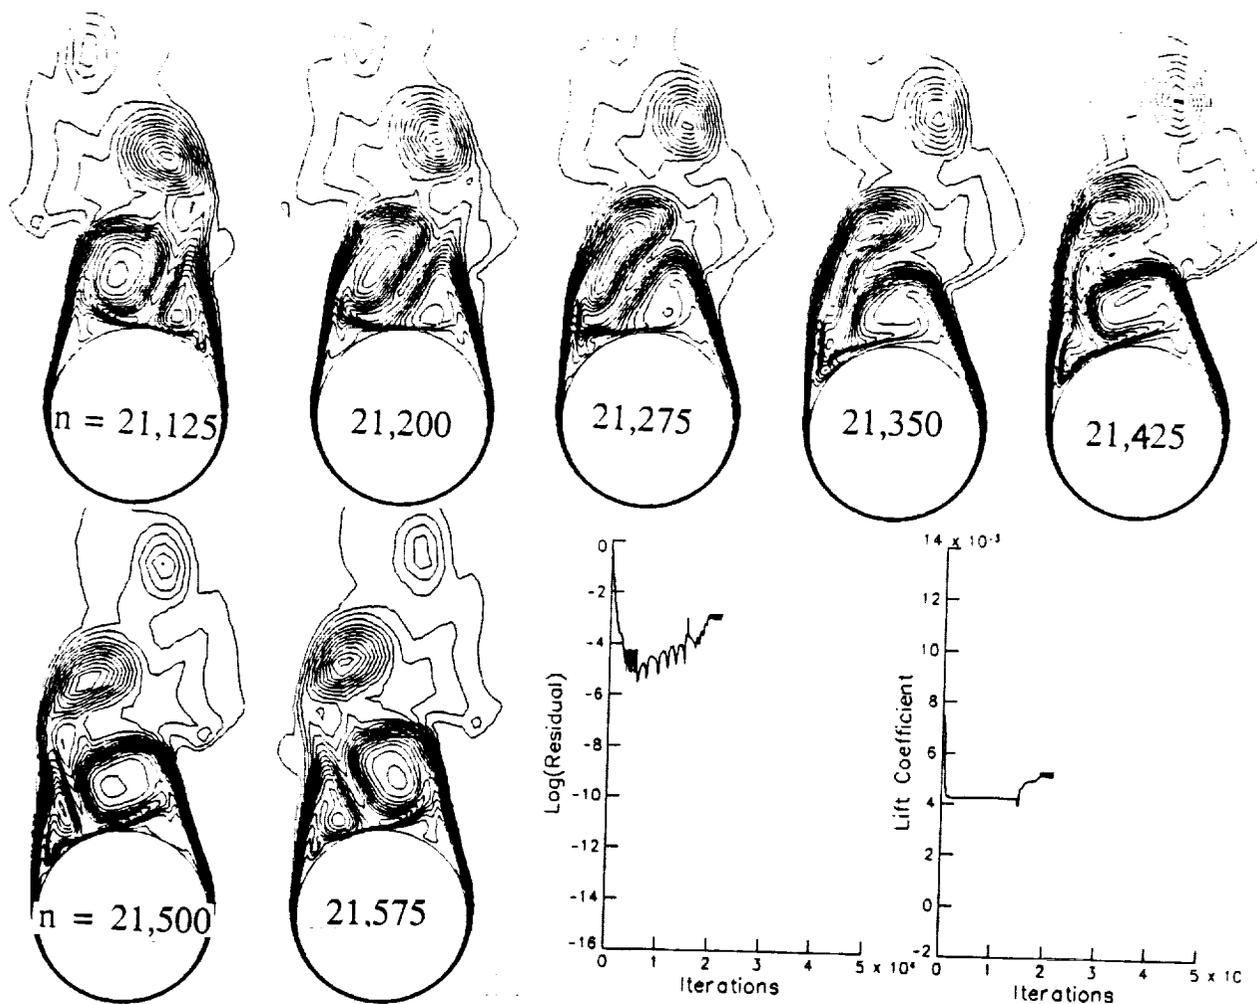


Figure 11. Unsteady flow asymmetry using the full Navier-Stokes equations, $\alpha = 35^\circ$, $M_\infty = 1.8$, $Re = 10^5$.


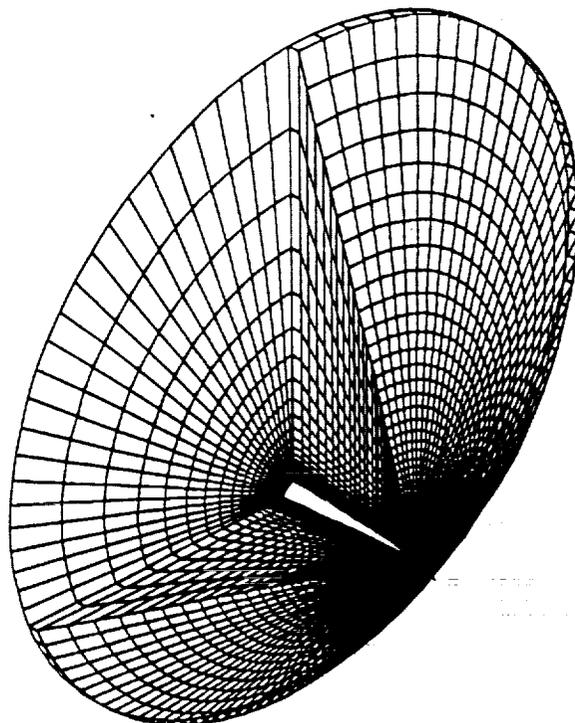


Figure 12. Typical conical grid for a three-dimensional cone, $161 \times 81 \times 65$, $\Delta \xi_{\min}^2 = 10^{-6}$ at the vertex.

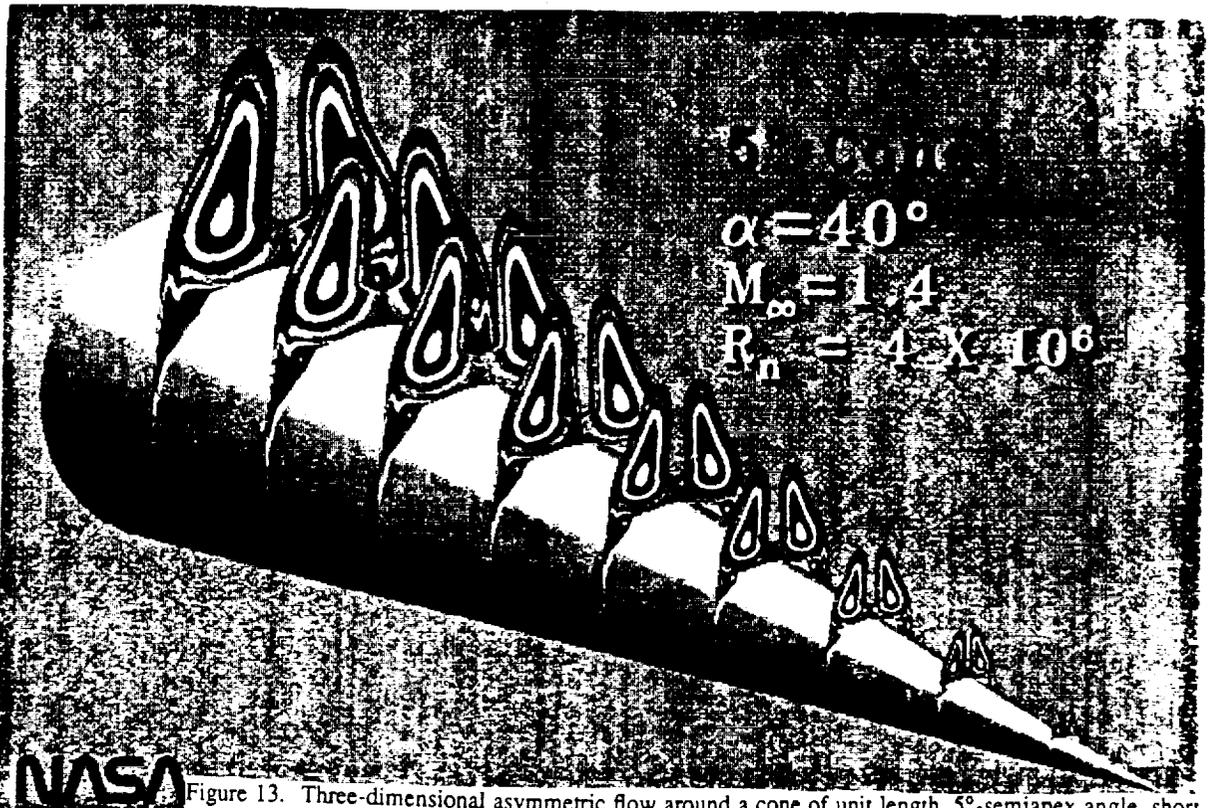

NASA

Figure 13. Three-dimensional asymmetric flow around a cone of unit length, 5°-semiapex angle, short-duration disturbance.

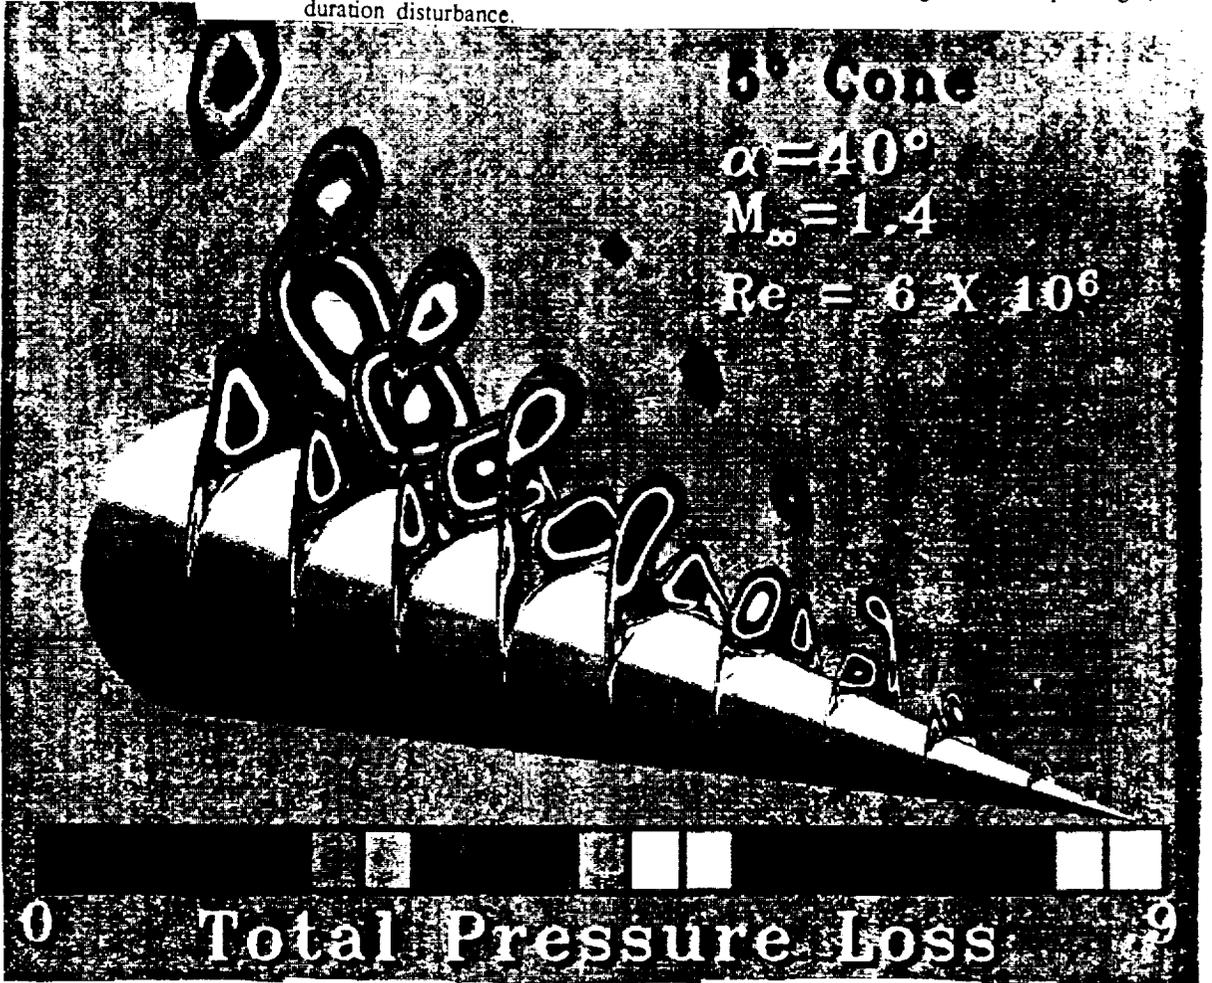


Figure 14. Three-dimensional asymmetric flow around a cone of unit length, 5°-semiapex angle, short-duration disturbance.

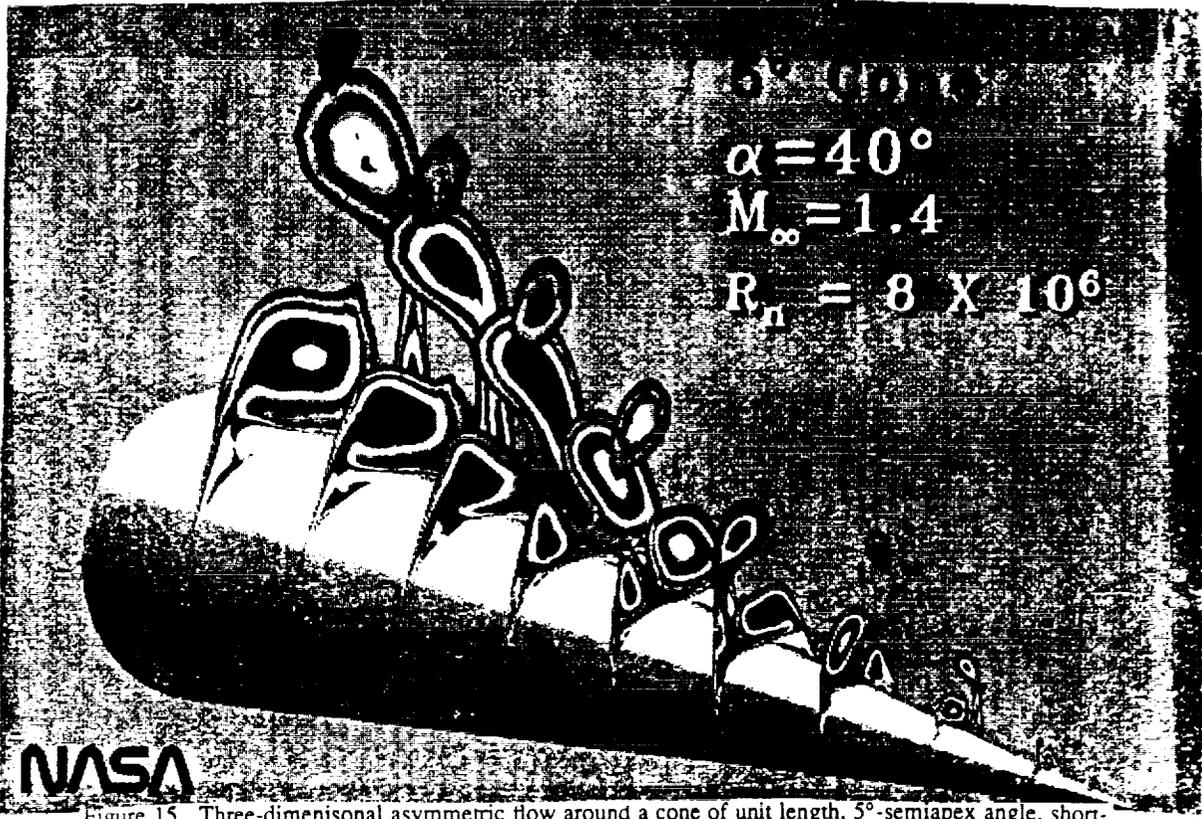


Figure 15. Three-dimensional asymmetric flow around a cone of unit length, 5°-semiapex angle, short-duration disturbance.



Figure 16. Three-dimensional asymmetric flow around a cone-cylinder configuration, each is of unit length, 5°-semiapex angle cone, short-duration disturbance.

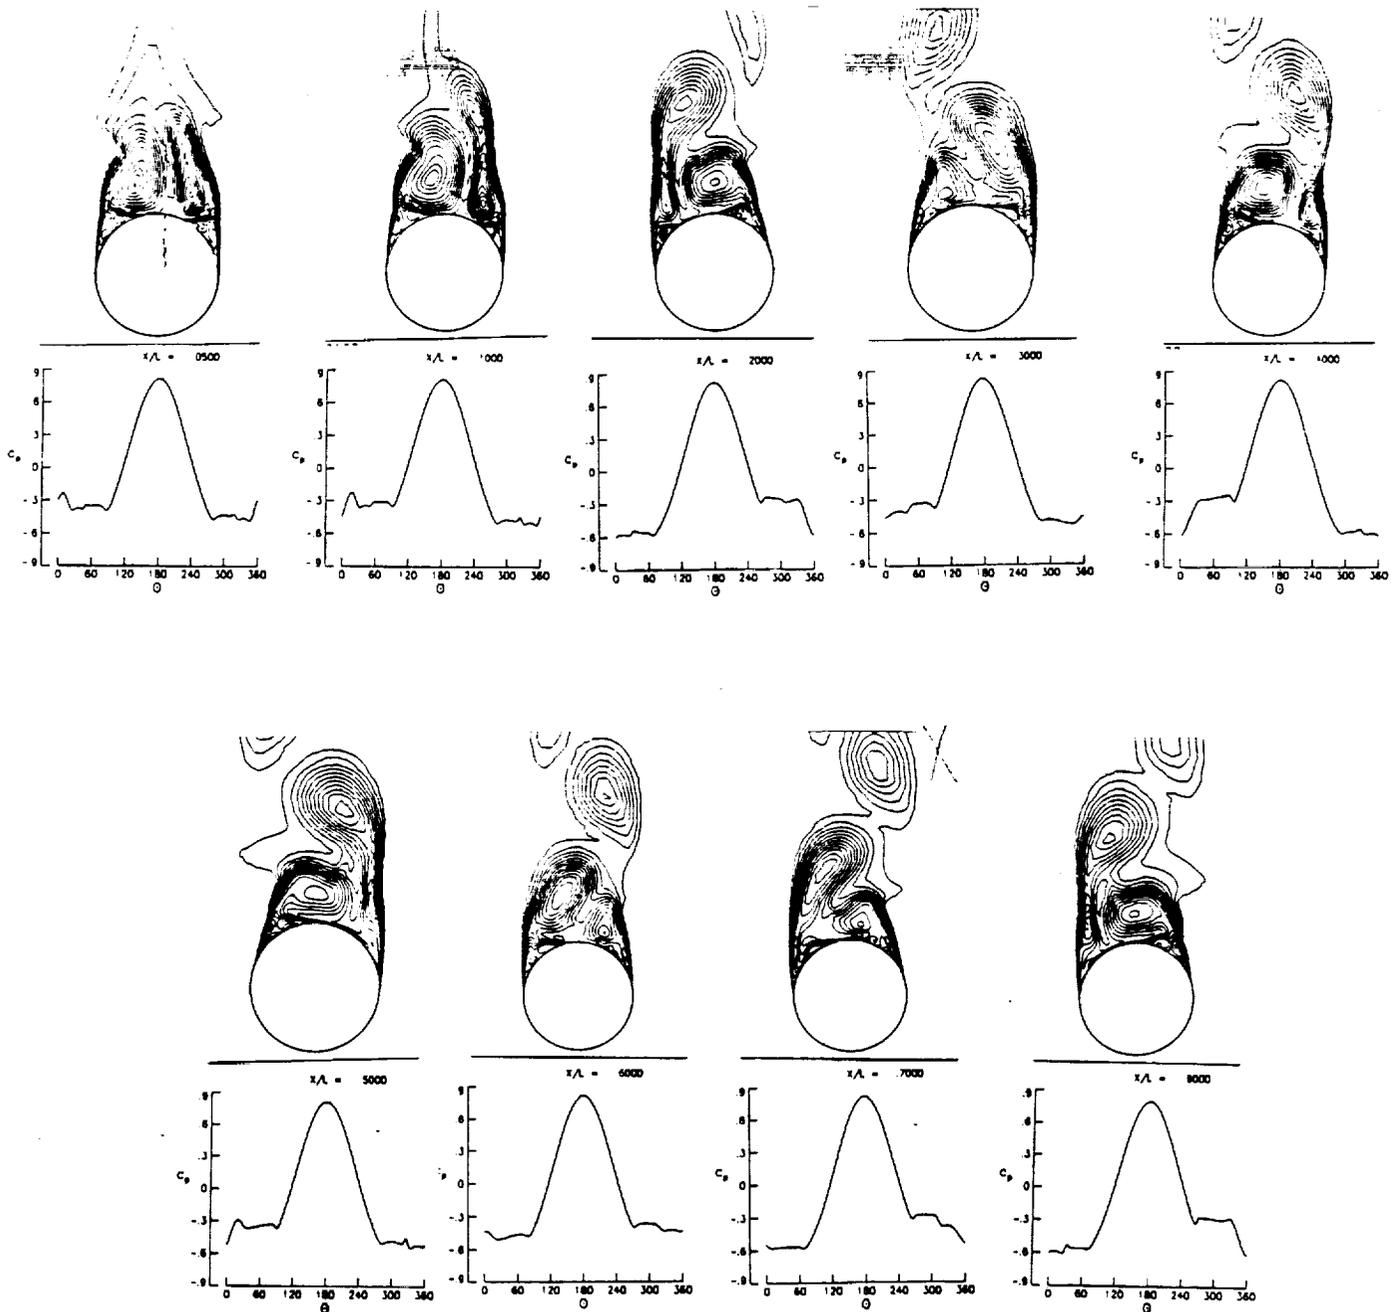


Figure 17. Total-pressure-loss contours and surface-pressure coefficients on cross-flow planes for asymmetric flow around a cone of unit length, $\alpha = 40^\circ$, $M_\infty = 1.4$, $Re = 8 \times 10^6$.

ORIGINAL PAGE IS
OF POOR QUALITY

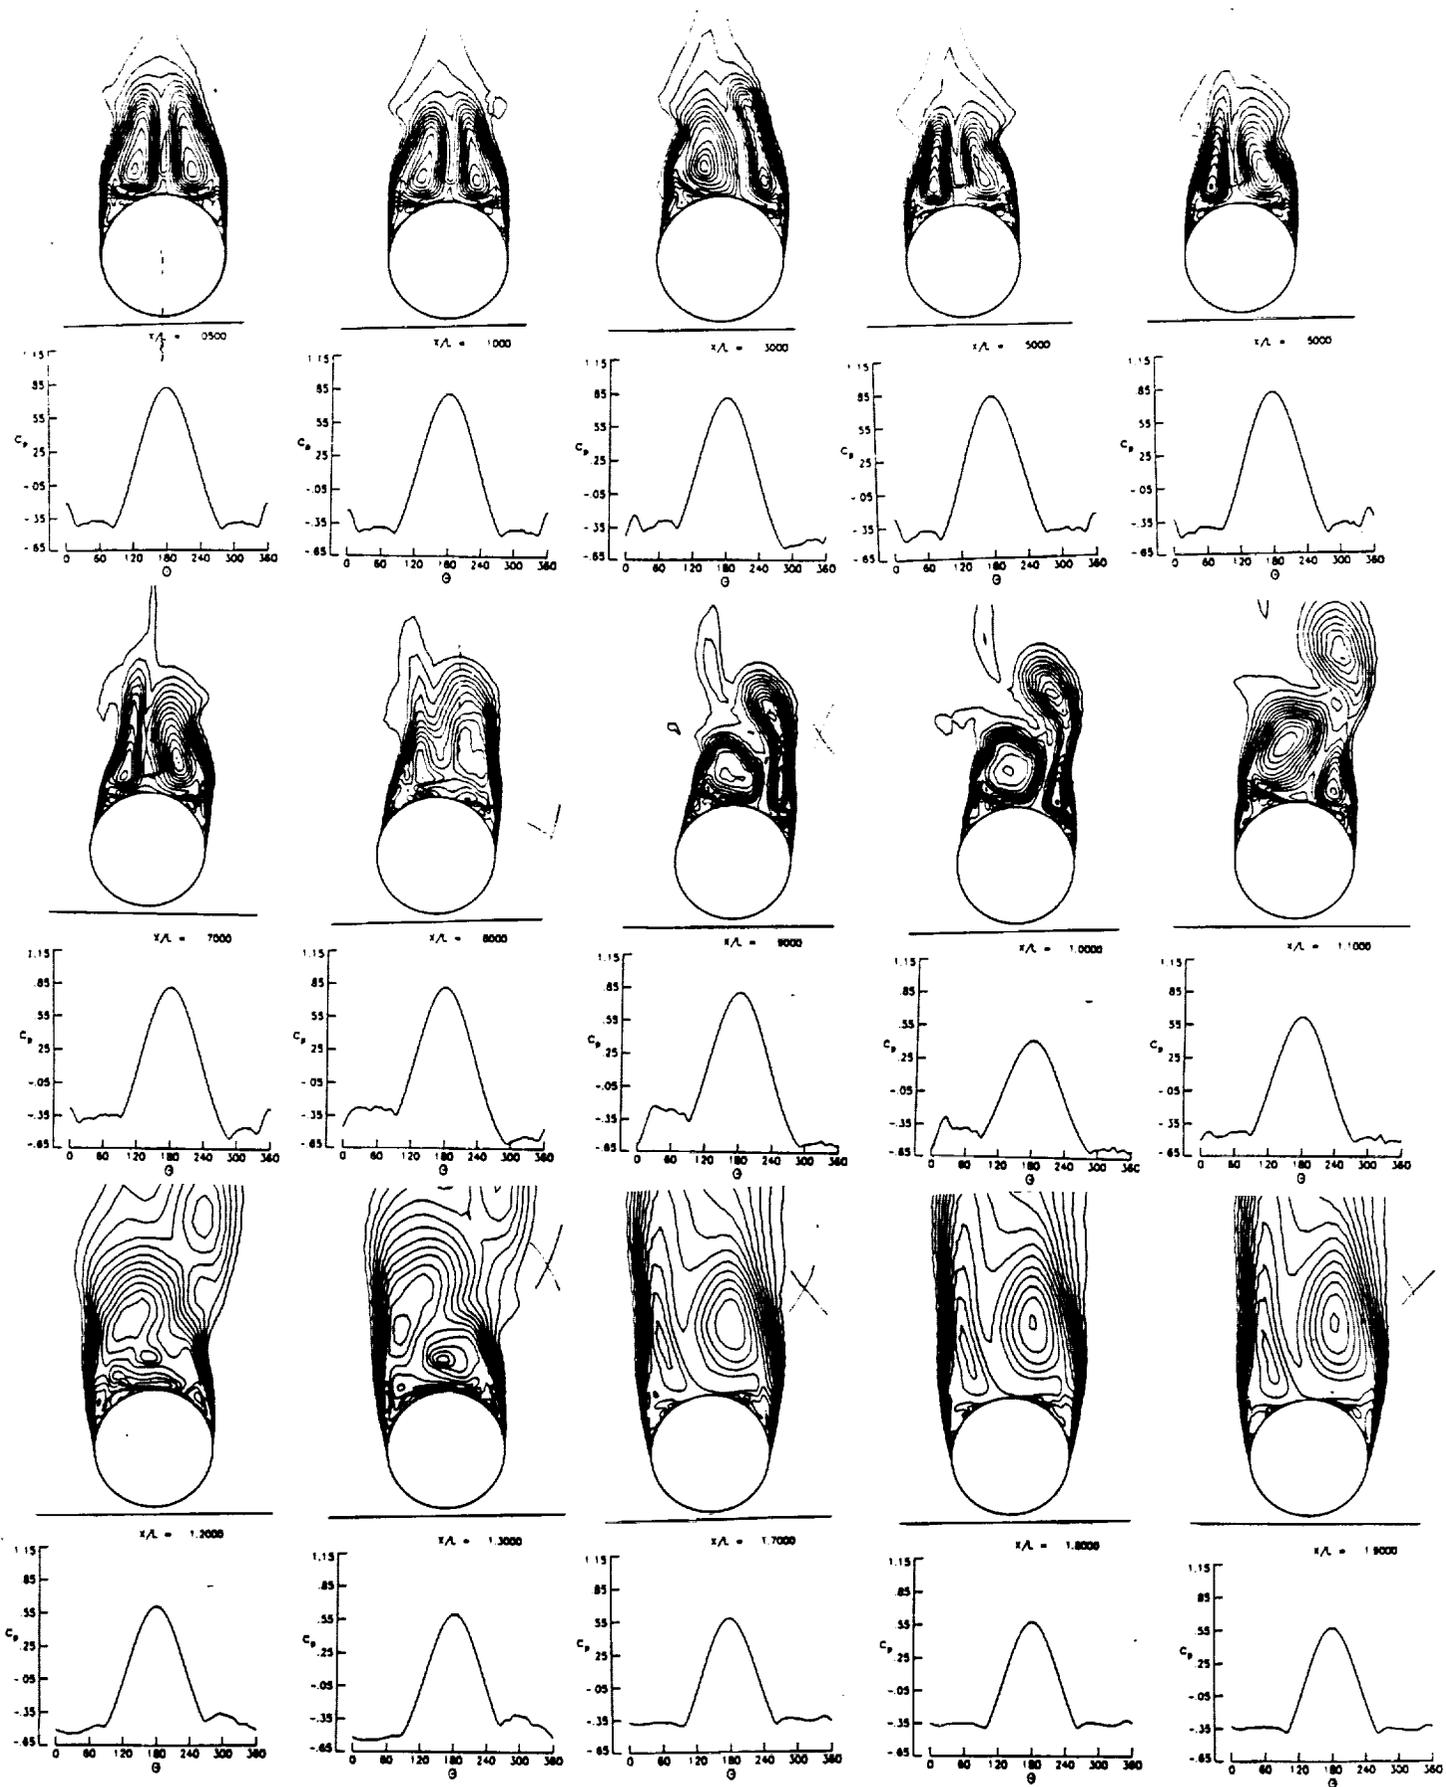


Figure 18. Total-pressure-loss contours and surface-pressure coefficients on cross-flow planes for asymmetric flow around a cone-cylinder configuration, $\alpha = 40^\circ$, $M_\infty = 1.4$, $R_e = 4 \times 10^6$.


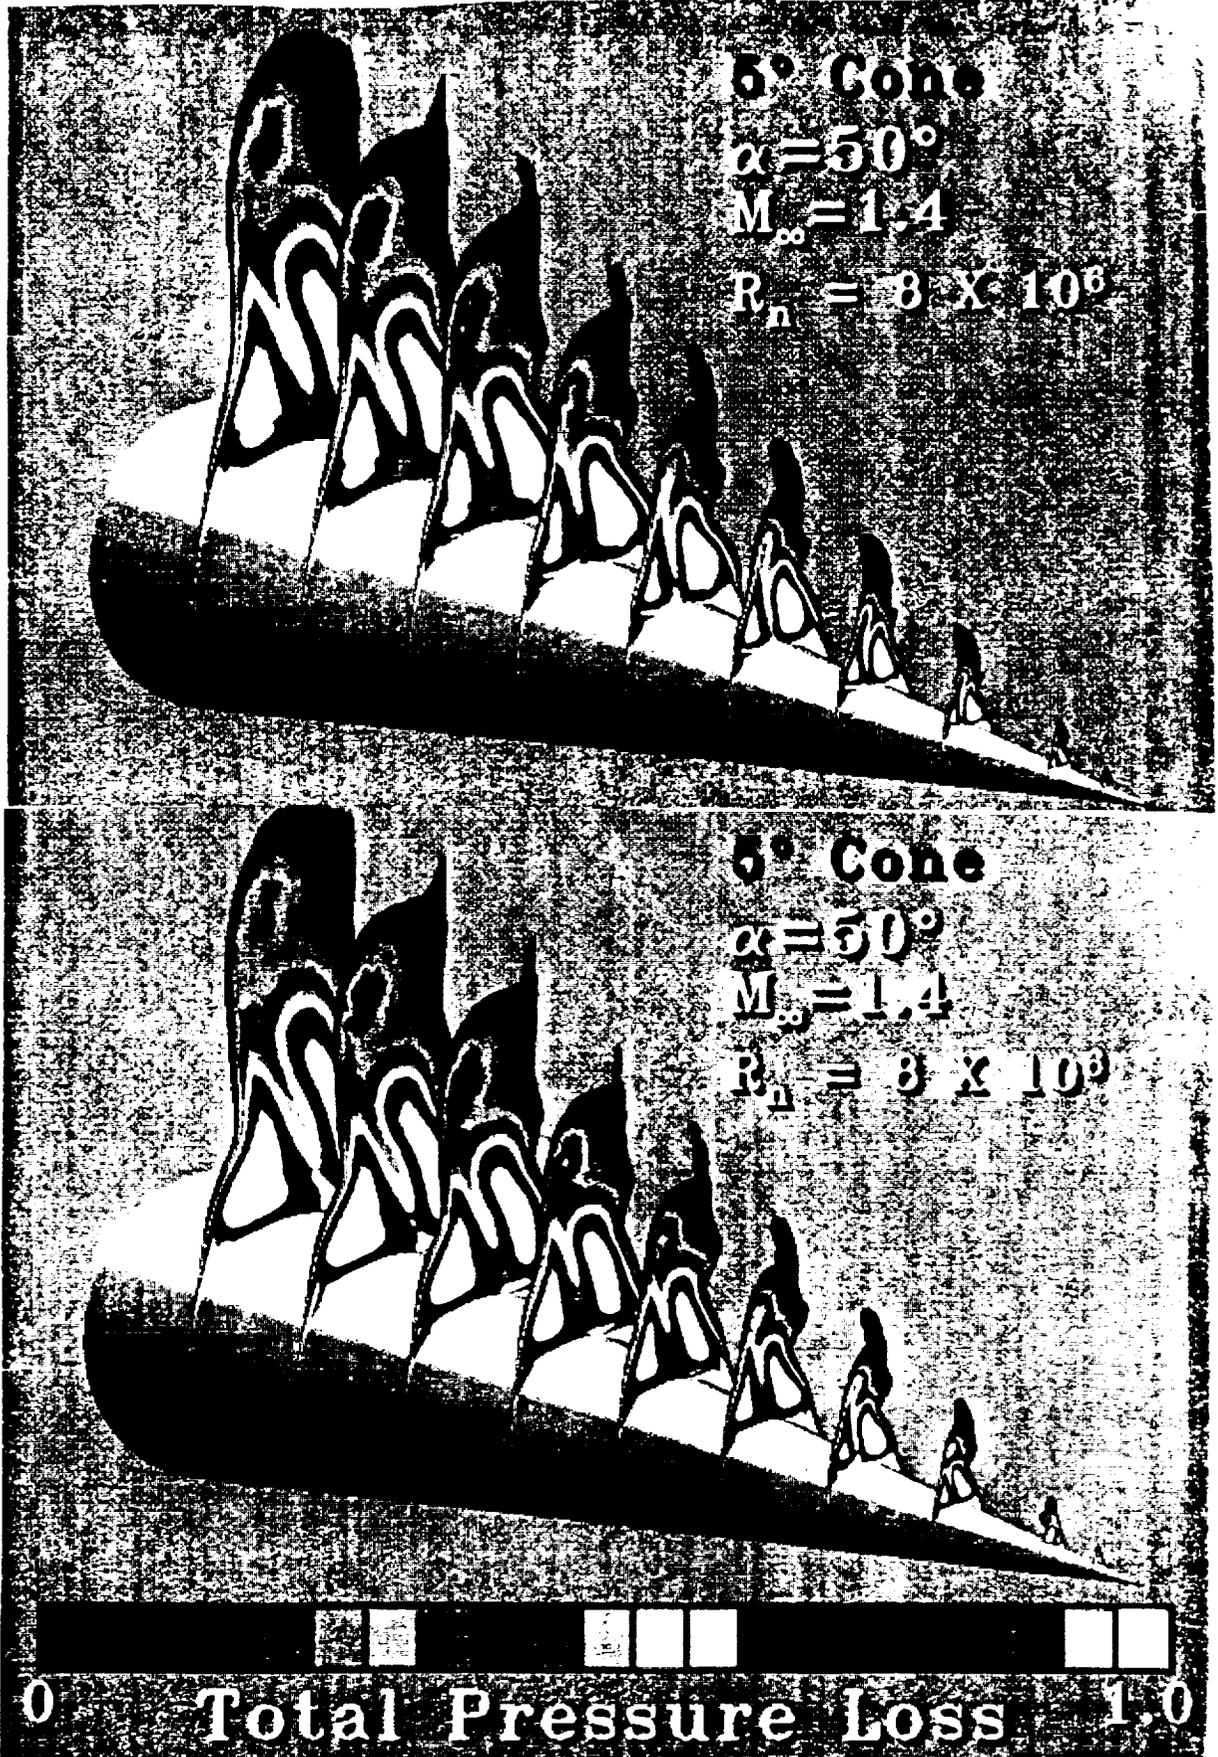


Figure 19. Unsteady three-dimensional asymmetric flow around a cone of unit length, 5°-semiapex angle, $n_1 = 10,116$, $n_2 = 11,818$, $\Delta t = 10^{-5}$.





AIAA-91-1732


THREE-DIMENSIONAL NAVIER-STOKES ASYMMETRIC SOLUTIONS FOR CONES AND CONE-CYLINDER CONFIGURATIONS

Osama A. Kandil and Tin-Chee Wong
Old Dominion University, Norfolk, VA 23529

C. H. Liu
NASA Langley Research Center, Hampton, VA 23665

**AIAA 22nd Fluid Dynamics, Plasma Dynamics
& Lasers Conference**

June 24-26, 1991 / Honolulu, Hawaii



THREE-DIMENSIONAL NAVIER-STOKES ASYMMETRIC SOLUTIONS FOR CONES AND CONE-CYLINDER CONFIGURATIONS

Osama A. Kandil* and Tin-Chee Wong†
Old Dominion University, Norfolk, VA 23529
C. H. Liu‡

NASA Langley Research Center, Hampton, VA 23665

Abstract

The unsteady, compressible, thin-layer Navier-Stokes equations are used to obtain three-dimensional, asymmetric, vortex-flow solutions around cones and cone-cylinder configurations. The equations are solved using an implicit, upwind, flux-difference splitting, finite-volume scheme. The computational applications cover asymmetric flows around a 5° semi-apex angle cone of unit length at various Reynolds number. Next, a cylindrical afterbody of various length is added to the conical forebody to study the effect of the length of cylindrical afterbody on the flow asymmetry. One of the computational solutions has been validated by comparing the computed surface pressure with those of the experimental data. All the asymmetric flow solutions have been obtained by using a short-duration side-slip disturbance.

Introduction

In this paper, the problem of asymmetric vortex-flow around three-dimensional cone and cone-cylinder body is addressed. This problem has received considerable attention by researchers in the computational fluid dynamics area¹⁻⁷ and by researchers in the experimental fluid dynamics area⁶⁻¹³. The problem is of vital importance to the dynamic stability and controllability of missiles and fighter aircraft. When flow asymmetry develops, it produces side forces, asymmetric lifting forces and corresponding yawing, rolling and pitching moments that might be larger than those available by the control system of the vehicle. The onset of flow asymmetry occurs when the relative incidence (ratio of angle of attack to nose semi-apex angle) of pointed forebodies exceeds certain critical values. At these critical values of relative incidence, flow asymmetry develops due to natural and/or forced disturbances. The origin of natural disturbances may be a transient side-slip, an acoustic disturbance, or similar disturbance of short duration. The origin of forced disturbances is geometric perturbations due to imperfections in the nose geometric symmetry or similar disturbances of permanent nature. In addition to

the relative incidence as one of the influential parameters for the onset of flow asymmetry, the freestream Mach number, Reynolds number and shape of the body-cross sectional area are also important parameters.

In several recent papers by the present authors¹⁻⁴, the unsteady, thin-layer, compressible Navier-Stokes equations have been used to simulate steady and unsteady, asymmetric vortex flows, including their passive control, around cones with different cross-sectional shapes. The emphasis of these papers was extensive computational studies of the parameters which influence the asymmetric flow phenomenon and its passive control. Since the computational cost associated with the solution of three-dimensional-flow problems with reasonable flow resolution is very expensive, all the computational solutions were obtained using a locally-conical flow assumption. Such an assumption reduces the problem solution to that on two conical planes, which are in close proximity of each other, and hence it reduces the computational cost by an order of magnitude. Moreover, such solutions still provide extensive understanding of the flow physics since one can use very fine grids for reasonable flow resolution. These studies showed that asymmetric flow solutions were unique irrespective of the type of flow disturbance; a random disturbance in the form of a machine round-off error or a controlled disturbance in the form of a short-duration side-slip disturbance. Unsteady asymmetric flow solutions with perfectly periodic vortex shedding were successfully simulated, and the solutions were unique irrespective of the computational scheme used. We also showed that as the Mach number was increased, the flow asymmetry was decreased and as the Reynolds number was increased, the flow asymmetry was increased. The cross-sectional shape of the cone has been shown to be a very influential parameter on the flow asymmetry. Circular sections produced very strong flow asymmetry and diamond sections produced relatively-weaker flow asymmetry. Passive control of the flow asymmetry was demonstrated by using vertical fins of different heights along the leeward plane of geometric symmetry and by using thin and thick side strakes with different orientations. It was also shown that side-strakes control is more practical than the vertical-fin control since it was effective over a wide range of angle of attack and provided additional lifting force. In a later paper, by the present authors⁵, the full Navier-Stokes solutions were compared with the thin-layer Navier-Stokes solutions. It was shown that the full Navier-Stokes solutions produced thicker free-shear

*Professor and Eminent Scholar, Dept. of Mechanical Engineering and Mechanics, Associate Fellow AIAA.

†Research Assistant Professor, Same Dept., AIAA member.

‡Group Leader, Theoretical Flow Physics Branch, Senior member AIAA.

layers and more vortex-core resolution as compared with those of the thin-layer Navier-Stokes equations. In reference 5, a few tentative three-dimensional flow solutions were also presented.

In an attempt to simulate asymmetric vortex flow around an ogive-cylinder body at an angle of attack of 40°, a freestream Mach number of 0.2 and a freestream Reynolds number of 200,000; Degani and Schiff⁶ used the unsteady, thin-layer, Navier-Stokes equations along with an implicit scheme which is second-order accurate in time. The scheme uses central-differencing in the cross-flow plane and upwind flux-vector splitting in the streamwise direction. By introducing a forced asymmetric disturbance near the body nose in the form of a small surface jet, asymmetric flow solution was obtained. When the jet was turned off, the flow asymmetry dissipated and the flow recovered its symmetry.

In a later paper by Degani⁷, the same computational scheme was used to solve for the flow around the same ogive-cylinder body over a wide range of angle of attack; $\alpha = 20^\circ - 80^\circ$. His numerical experiments focused on investigating the origin of vortex asymmetry. Based on his results, he suggested that the flowfield around slender bodies could be divided into three main groups depending on the angle of attack range. This range might change by $\pm 10^\circ$, depending on the flow conditions. In the range $0^\circ < \alpha < 30^\circ$, the flow was symmetric and introduction of small disturbances near the nose had a small effect on the flow symmetry. In the second range, $30^\circ < \alpha < 60^\circ$, the flow became steady asymmetric upon introduction of a space-fixed forced disturbance near the nose. The level of asymmetry was a function of the location and size of the forced disturbance, and for large size disturbances, the asymmetry became unsteady with very high frequency. However, when the disturbance was removed the flow recovered its symmetric shape. He attributed the origin of asymmetry to a convective-type-instability mechanism. In the very high range, $60^\circ < \alpha < 80^\circ$, the flow became unsteady with vortex shedding upon introduction of a small transient disturbance with short duration. He attributed the origin of flow unsteadiness and vortex shedding to an absolute-type-instability mechanism. In that range of angle of attack, he also showed that the convective-type-instability mechanism was possible upon introduction of a space-fixed disturbance near the nose. Although this investigation revealed good tentative conclusions, there are several remaining questions to be addressed, which are related to the scheme dissipative effects, particularly in the cross-flow planes, and the grid fineness and its resolution of the disturbance growth.

In the present paper, we focus on the three-dimensional asymmetric flow problem. In particular, we address several important issues concerning the flow asymmetry around three-dimensional bodies. First, the three-dimensional asymmetric flow around a 5° semi-apex angle cone of unit length is considered in response to a short-duration disturbance in the form of a transient side

slip. With guidance from the locally-conical solutions, the angle of attack is varied between 30° and 50°, the Mach number is varied between 1.4 and 1.8 and the Reynolds number is varied between 10^5 and 8×10^8 searching for asymmetric flow solutions due to a short-duration disturbance. Next, the flow conditions are fixed and a cylindrical afterbody is added to the same cone of unit length to study the effect of the length of the cylindrical afterbody. The computational results have also been verified using comparison of the surface-pressure coefficient with that of the experimental data of Landrum⁸.

Formulation

Thin-Layer Navier-Stokes Equations

The conservative form of the dimensionless, unsteady, compressible, thin-layer Navier-Stokes equations in terms of time-independent, body-conformed coordinates ξ^1, ξ^2 and ξ^3 is given by

$$\frac{\partial \bar{Q}}{\partial t} + \frac{\partial \bar{E}_s}{\partial \xi^s} - \frac{\partial (\bar{E}_v)_2}{\partial \xi^2} = 0; \quad s = 1 - 3 \quad (1)$$

where

$$\xi^m = \xi^m(x_1, x_2, x_3) \quad (2)$$

$$\bar{Q} = \frac{\bar{q}}{J} = \frac{1}{J} [\rho, \rho u_1, \rho u_2, \rho u_3, \rho e]^t \quad (3)$$

$$\begin{aligned} \bar{E}_m &\equiv \text{inviscid flux} \\ &= \frac{1}{J} [\partial_k \xi^m \bar{E}_k]^t \\ &= \frac{1}{J} [\rho U_m, \rho u_1 U_m + \partial_1 \xi^m p, \rho u_2 U_m \\ &\quad + \partial_2 \xi^m p, \rho u_3 U_m + \partial_3 \xi^m p, (\rho e + p) U_m]^t \end{aligned} \quad (4)$$

$$\begin{aligned} (\bar{E}_v)_2 &\equiv \text{viscous and heat-conduction flux in } \xi^2 \\ &\quad \text{direction} \\ &= \frac{1}{J} [0, \partial_k \xi^2 \tau_{k1}, \partial_k \xi^2 \tau_{k2}, \partial_k \xi^2 \tau_{k3}, \\ &\quad \partial_k \xi^2 (u_n \tau_{kn} - q_k)]^t; \quad k = 1 - 3, \quad n = 1 - 3 \end{aligned} \quad (5)$$

$$U_m = \partial_k \xi^m u_k \quad (6)$$

The first element of the three momentum elements of Eq. (5) is given by

$$\partial_k \xi^s \tau_{k1} \equiv \frac{M_\infty \mu}{\text{Re}} \left(\psi \partial_1 \xi^2 + \phi \frac{\partial u_1}{\partial \xi^2} \right) \quad (7)$$

The second and third elements of the momentum elements are obtained by replacing the subscript 1, everywhere in

Eq. (7), with 2 and 3, respectively. The last element of Eq. (5) is given by

$$\partial_k \xi^2 (u_n \tau_{kn} - q_k) \equiv \frac{M_\infty \mu}{Re} \left\{ \psi W + \phi \left[\frac{1}{2} \frac{\partial}{\partial \xi^2} (u_p u_p) + \frac{1}{(\gamma - 1) Pr} \frac{\partial (a^2)}{\partial \xi^2} \right] \right\}; p = 1 - 3 \quad (8)$$

where

$$\phi = \partial_k \xi^2 \partial_k \xi^2, \psi = \frac{1}{3} \partial_k \xi^2 \frac{\partial u_k}{\partial \xi^2}, W = \partial_n \xi^2 u_n \quad (9)$$

In Eqs. (1)-(9), the dimensionless variables are referenced to their appropriate freestream values. The dimensionless density ρ , Cartesian velocity components u_1, u_2 and u_3 , total energy per unit mass, e , dynamic viscosity, μ and speed of sound, a , are defined as the ratio of the corresponding physical quantities to those of the freestream; namely, $\rho_\infty, a_\infty, \rho_\infty a_\infty^2, \mu_\infty$ and a_∞ ; respectively. The pressure, p , is non-dimensionalized by $\rho_\infty a_\infty^2$, and is related to the total energy for a perfect gas by the equation of state

$$p = (\gamma - 1) \rho \left(e - \frac{1}{2} u_j u_j \right); j = 1 - 3 \quad (10)$$

where γ is the ratio of specific heats and its value is 1.4. The viscosity, μ , is calculated from the Sutherland's law

$$\mu = T^{3/2} \left(\frac{1 + c}{T + c} \right), c = 0.4317 \quad (11)$$

where T is the temperature which is non-dimensionalized by T_∞ . The Prandtl number, Pr , is fixed at 0.72. The Reynolds number is defined as $Re = \rho_\infty U_\infty L / \mu_\infty$ and the characteristic length, L , is chosen as the length of the body.

In Eqs. (1)-(10), the indicial notation is used for convenience. The subscripts k, n, p and j are summation indices, the superscript or subscript s is a summation index and the superscript or subscript m is a free index. The partial derivative $\frac{\partial}{\partial x_k}$ is referred to by ∂_k .

Boundary and Initial Conditions

Boundary conditions are explicitly implemented. They include the inflow-outflow conditions and the solid-boundary conditions. At the plane of geometric symmetry, periodic conditions are used. Since the freestream Mach number is supersonic and the inflow-outflow boundaries are also supersonic, freestream conditions are specified at the inflow boundaries and first-order extrapolation of the flow variables is used at the outflow boundaries. The conical shock enclosing the body is captured as part of the solution. On the solid boundary, the no-slip and no-penetration conditions are enforced; $u_1 = u_2 = u_3 = 0$, and the normal pressure gradient is set equal

to zero. For the temperature, the adiabatic boundary condition is enforced at the solid boundary.

The initial conditions correspond to the freestream conditions with $u_1 = u_2 = u_3 = 0$ on the solid boundary. The freestream conditions are given by

$$\begin{aligned} \rho_\infty &= a_\infty = T_\infty = 1, \\ u_{1\infty} &= M_\infty \cos \alpha \cos \beta, \\ u_{2\infty} &= -M_\infty \sin \beta, \\ u_{3\infty} &= M_\infty \sin \alpha \cos \beta, \\ p_\infty &= 1/\gamma, e_\infty = \frac{1}{\gamma(\gamma - 1)} + \frac{M_\infty^2}{2} \end{aligned} \quad (12)$$

where α is the angle of attack and β the side slip angle.

Computational Scheme

The implicit, upwind, flux-difference splitting finite-volume scheme is used to solve the unsteady, compressible, thin-layer Navier-Stokes equations. The scheme uses the flux-difference splitting scheme of Roe which is based on the solution of the approximate Riemann problem. In the Roe scheme, the inviscid flux difference at the interface of computational cells is split into two parts; left and right flux differences. The splitting is accomplished according to the signs of the eigenvalues of the Roe averaged-Jacobian matrix of the inviscid fluxes at the cell interface. The min-mod flux limiter is used to eliminate oscillations in the shock region. The viscous and heat-flux terms are linearized and the cross-derivative terms are eliminated in the implicit operator. The viscous terms are differenced using a second-order accurate central differencing. The resulting difference equation is approximately factored and is solved in three sweeps in the ξ^1, ξ^2 and ξ^3 directions. The computational scheme is coded in the computer program "CFL3D."

Computational Applications and Discussions

In the present computational applications, we consider the three-dimensional solutions of the unsteady, compressible, thin-layer Navier-Stokes equations for asymmetric vortex flows around a circular cone and circular cone-cylinder configurations. There are several issues to be addressed through the present study. First, for the same circular cone of 5° -semi-apex angle¹ and for the same flow conditions and source of disturbance, will the three-dimensional flow solution be the same as that of the locally-conical flow solution? If the answer is negative, the next question to address is: Is there a length scale which relates the three-dimensional solution to the locally-conical solution? The second issue to be addressed is the effect of Reynolds number on the flow asymmetry? The third issue to be addressed is the effect of the cylindrical-afterbody length on the flow asymmetry. Finally, we address the question of code and grid validation by comparing the results of an asymmetric flow solution with those of the experimental data⁴.

Circular Cone

A 5°-semi-apex angle circular cone of unit length (cone length is the characteristic length) is considered to address the first two issues mentioned above. This is the same circular cone which was considered by the authors in Ref. 1 for the locally-conical flow solutions. A three-dimensional grid of $161 \times 81 \times 65$ in the wrap around, normal and axial directions, respectively, is generated by using a modified Joukowski transformation at axial stations. The grid is clustered algebraically in the normal direction of the body using a geometric series with minimum grid spacing of 10^{-6} at the cone vertex and 10^{-5} at the axial station of unit length. A typical grid is shown in Fig. 1. The cross-flow grid size of 161×81 is the same grid size which was used for the locally-conical flow solutions of Ref. 1.

With the flow conditions set at $\alpha = 20^\circ$, $M_\infty = 1.8$ and $R_e = 10^5$, which are the same conditions as those of the locally-conical flow of Ref. 1, the three-dimensional solution produces a symmetric steady flow, unlike the locally-conical solution which produces asymmetric steady flow. The reason for the difference is well understood since the locally-conical solution is obtained at an axial station of $x = 1.0$. Hence, a length scale is involved in the Reynolds number, as can be seen from the analytical conical equation for steady viscous flow. Next, the search is directed at obtaining asymmetric flow solutions for the three-dimensional cone flow. In Fig. 2, we show the solution in the form of total-pressure loss for the same cone at $\alpha = 40^\circ$, $M_\infty = 1.4$ and $R_e = 4 \times 10^6$. It is seen that the solution is asymmetric and is nearly self-similar over a long axial distance of the cone length. This solution is obtained using a short-duration side-slip disturbance. When the residual error drops four orders of magnitude, a side-slip disturbance of $\beta = 2^\circ$ is applied for 100 iteration steps, then it is removed. Thereafter, the pseudo time stepping is continued until the residual error drops again four to five orders of magnitude and a stable asymmetric solution is obtained. It should be noted that a machine round-off error type of random disturbance cannot be used to obtain three-dimensional asymmetric solutions since the residual error never drops to machine zero.

Next, the Reynolds number is increased to 5×10^6 and 6×10^6 keeping the other flow conditions constant at $\alpha = 40^\circ$ and $M_\infty = 1.4$. Figures 3 and 4 show the total-pressure-loss solutions for these cases. Figure 3 shows that the asymmetry of the vortical flow gets strong and the self similarity of the flow asymmetry is substantially lost. However, it is noticed that the flow asymmetry does not change sides as the solution develops in the downstream direction. Figure 6, which corresponds to the R_e of 6×10^6 , shows that the flow asymmetry changes sides as the solution develops in the downstream direction. Moreover, it is noticed that shed vortices exist in the flow. A close study of the solutions between the shown fourth cross-flow plane and seventh cross-flow plane reveals that the flow asymmetry changes from the right side

(fourth cross-flow plane) to the left side (seventh cross-flow plane). The solutions on these two planes are nearly scaled mirror-images of each other. The present spatial flow asymmetry is qualitatively similar to the temporal flow asymmetry of the locally-conical flow solution of Ref. 1 (see Figure 8 of the present paper).

Figures 5 and 6 show front and rear side views of the limiting streamlines for the cases of $R_e = 4 \times 10^6$ and $R_e = 6 \times 10^6$, respectively. By comparing the streamlines, lines of separation and attachment of the front and rear sideviews in each figure, it is noticed that the flow asymmetry exists on the boundary and becomes stronger as the Reynolds number increases. As the Reynolds number increases, the separation and reattachment lines changes from radial straight lines to highly curved lines.

Figure 7 shows the total-pressure-loss solution for the same cone for a higher Reynolds number, $R_e = 8 \times 10^6$. The asymmetry of the vortex flow becomes much stronger as compared with the previous cases of Figs. 2-4. By comparing the solution of this case with that of the $R_e = 6 \times 10^6$, it is noticed the flow asymmetry of the case with high R_e changes sides along a shorter axial distance (third and fifth cross-flow planes) in comparison with that of the low R_e . Moreover, the flow asymmetry of the case with high R_e changes sides one more time (fifth and ninth cross-flow planes) and thus a complete wave length of flow asymmetry is formed between the third and ninth cross-flow planes. Strong spatial shed vortex exists in the flowfield. This solution is strongly similar to the unsteady asymmetry local-conical flow solution at different time steps which is depicted in Fig. 8 on a cylinder with the axis of the cylinder representing time. The behavior of the flow asymmetry over one period in Fig. 8 is qualitatively similar to the behavior of the flow asymmetry over one wave length in Fig. 7. Figure 9 shows the total-pressure-loss contours and surface-pressure coefficient at different axial stations for the case of Fig. 7. The solutions at axial stations of $X/L = 0.2$ and 0.9 are almost the same (the total pressure losses are drawn to a scale given by the ratio of the circular diameters at $X/L = 1$ station and the local axial station). The flow asymmetry between these two stations represents a full wave length.

Circular Cone-Cylinder Configurations

To address the issue of the effect of cylindrical afterbody length on the flow asymmetry a cylindrical afterbody of different lengths is added to the unit-length conical forebody. The flow around the resulting cone-cylinder configurations is solved with the flow conditions of $\alpha = 40^\circ$, $M_\infty = 1.4$ and $R_e = 4 \times 10^6$, which are the same flow conditions of the isolated unit-length cone of Fig. 2. The lengths of the cylindrical afterbody are chosen as 1, 1.5 and 2 and the corresponding grid sizes are taken as $161 \times 81 \times 65$, $161 \times 81 \times 69$ and $161 \times 81 \times 72$; respectively. The source of flow disturbance is the same short duration 2° -side-slip disturbance. The computed total-pressure loss for these cases are given in Figs. 10,

11 and 12; respectively. For the cone-cylinder configuration of 1:1 (cone length: cylinder length), Fig. 10 shows a very strong asymmetric flow on the cone, in comparison with the flow asymmetry of the isolated cone of Fig. 2, and on the cylindrical afterbody as well. It should be noted that inside the conical shock surrounding the cone-cylinder configuration, subsonic flow regions exist and hence the downstream cylindrical-afterbody boundary has an upstream effect. The cylindrical afterbody has dual effects which increases the flow asymmetry, the first is due to the cone-cylinder juncture and the second is due to the increase of the local angle of attack of the leeward side of the cylinder. Both of these effects increase the spatial growth of the flow asymmetry.

For the cone-cylinder configuration of 1:1.5, Fig. 11 shows stronger forebody asymmetry (first five cross-flow planes) in comparison with that of Fig. 10. On the cylindrical afterbody, three cross-flow planes are only shown on a portion of its length. It should be noted here that slight flow unsteadiness has been detected during the computations. In Fig. 12, two snap shots are shown for the unsteady asymmetric flow solution of the cone-cylinder configuration of 1:2. Since the time step for a stable time-accurate solution of this case does not exceed 10^{-5} , it is computationally prohibitive to fully solve this case.

Next, we show a comparison of the computed results with available experimental data. For this purpose, we consider the cone-cylinder configuration of 0.5:0.5 which was experimentally tested by Landrum⁸. The configuration angle of attack is 46.1° , the Mach number is 1.6 and the Reynolds number based on the total configuration length (cone + cylinder) is 6.6×10^6 . The cone semi-apex angle is 9.5° . The problem is solved using a grid size of $161 \times 81 \times 65$. Figure 13 shows the surface-pressure coefficient along with the experimental data, the total-pressure-loss contours and the total Mach-number contours at the axial stations of 0.075, 0.125, 0.225, 0.475, 0.575 and 0.775. First, the computed and measured surface-pressure coefficient are in good agreement on all the axial stations. Second, by studying the total-pressure-loss contours along with the total Mach-number contours, it is seen that flow asymmetry starts slightly at $X/L = 0.0750$, and spatially grows in the downstream direction. Moreover, the asymmetry changes sides in the downstream direction. This comparison conclusively validates our computed results and the grid size.

Concluding Remarks

The unsteady, compressible, thin-layer Navier-Stokes equations are used to obtain three-dimensional, asymmetric, vortex-flow solutions around cones and cone-cylinder configurations. Several important issues are addressed in the present study. By increasing the flow Reynolds number for flows around a cone, we have shown that the flow asymmetry becomes strong and changes sides in

the downstream direction. For the high-Reynolds flows, the spatial asymmetric flow develops in a wavy manner, which is qualitatively similar to the temporal asymmetric flow development of the locally-conical solutions, where the flow asymmetry develops in a periodic manner. By adding a cylindrical afterbody to the conical forebody, the flow asymmetry becomes stronger in comparison with that of the isolated cone. As the length of the cylindrical afterbody is increased, the flow asymmetry becomes stronger and unsteady. All these flow solutions have been obtained by using a short-duration side-slip disturbance. Finally, the computed results and grid used are conclusively validated.

Acknowledgement

This research work is supported by the NASA Langley Research Center under Grant No. NAG-1-994. The computations have been carried out using the CRAY 2-XMP (Voyager) of the NASA Langley Research Center.

References

1. Kandil, O. A., Wong, T-C. and Liu, C. H., "Prediction of Steady and Unsteady Asymmetric Vortical Flow Around Cones," AIAA 90-0598, January 1990. Also to appear in AIAA Journal, Vol. 29, NO. 8, 1991.
2. Kandil, O. A., Wong, T-C. and Liu, C. H., "Asymmetric Flow Around Cones with Noncircular Sections," AGARD Symposium on Missile Aerodynamics, AGARD CP No. 493, Friedrickshafen, Germany, October 1990, pp. 16.1-16.11.
3. Kandil, O. A., Wong, T-C. and Liu, C. H., "Numerical Simulation of Steady and Unsteady Asymmetric Vortical Flows," ASME Symposium on Non-Steady Fluid Dynamics, FED-Vol. 92, Toronto, Canada, June 1990, pp. 99-108. To appear in the Journal of Fluids and Structures, 1991.
4. Kandil, O. A., Wong, T-C., Kandil, H., A. and Liu, C. H., "Computation and Control of Asymmetric Vortex Flow Around Circular Cones Using Navier-Stokes Equations," ICAS Paper No. 3.5.3, Vol. 2, Stockholm, Sweden, September 1990, pp. 883-893.
5. Kandil, O. A., Wong, T-C., Kandil, H. A. and Liu, C. H., "Thin-Layer and Full Navier-Stokes, Locally-Conical and Three-Dimensional Asymmetric Solutions," AIAA 91-0547, January 1991.
6. Degani, D. and Schiff, L. B., "Numerical Simulation of the Effect of Spatial Disturbance on Vortex Asymmetry," AIAA Paper 89-0340, January 1989.
7. Degani, D., "Numerical Investigation of the Origin of Vortex Asymmetry," AIAA 90-0593, January 1990.

8. Landrum, E. J., "Wind-Tunnel Pressure Data at Mach Numbers from 1.6 to 4.63 for a Series of Bodies of Revolution at Angles of Attack from -4° to 60° ," NASA Technical Memorandum, NASA TM-X-3558, October 1977.
9. Peake, D. J., Fisher, D. f. and McRae, D. S., "Flight Wind Tunnel and Numerical Experiments with a Slender Cone at Incidence," AIAA Journal, Vol. 20, No. 10, October 1979, pp. 1338-1345.
10. Lamont, P. J., "Pressure Around an Inclined Ogive Cylinder with Laminar, Transitional, or Turbulent Separation," AIAA Journal, Vol. 20, No. 11, November 1980, pp. 1492-1499.
11. Lamont, P. J., "The Complex Asymmetric Flow Over a 3.5D Ogive Nose and Cylindrical Afterbody at High Angles of Attack," AIAA Paper 82-0053, January 1982.
12. Yanta, W. J. and Wardlaw Jr., "The Secondary Separated Region on a Body at High Angles-of-Attack," AIAA Paper 82-0343, January 1982.
13. Keener, E. R. and Chapman, G. R., "Similarity in Vortex Asymmetries Over Slender Bodies and Wings," AIAA Journal, Vol. 15, No. 9, September 1977, pp. 1370-1372.
14. Rediniotis, O., Stapountzis, H. and Telinois, D. P., "Vortex Shedding Over Nonparallel Edges," VPI&SU Engineering Report, VPI-E-88-39, December 1988.
15. Zilliac, G., Degani, D. and Tobak, "Asymmetric Vortices on a Slender Body of Revolution," AIAA 90-0388, January 1990.


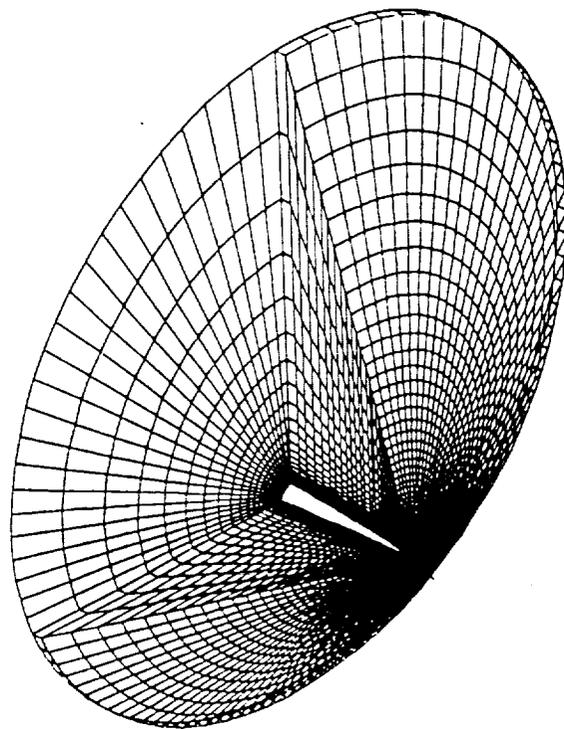


Figure 1. Typical conical grid for a three-dimensional cone, $161 \times 81 \times 65$.



5° Cone
 $\alpha = 40^\circ$
 $M_\infty = 1.4$
 $R_\mu = 4 \times 10^6$

NASA

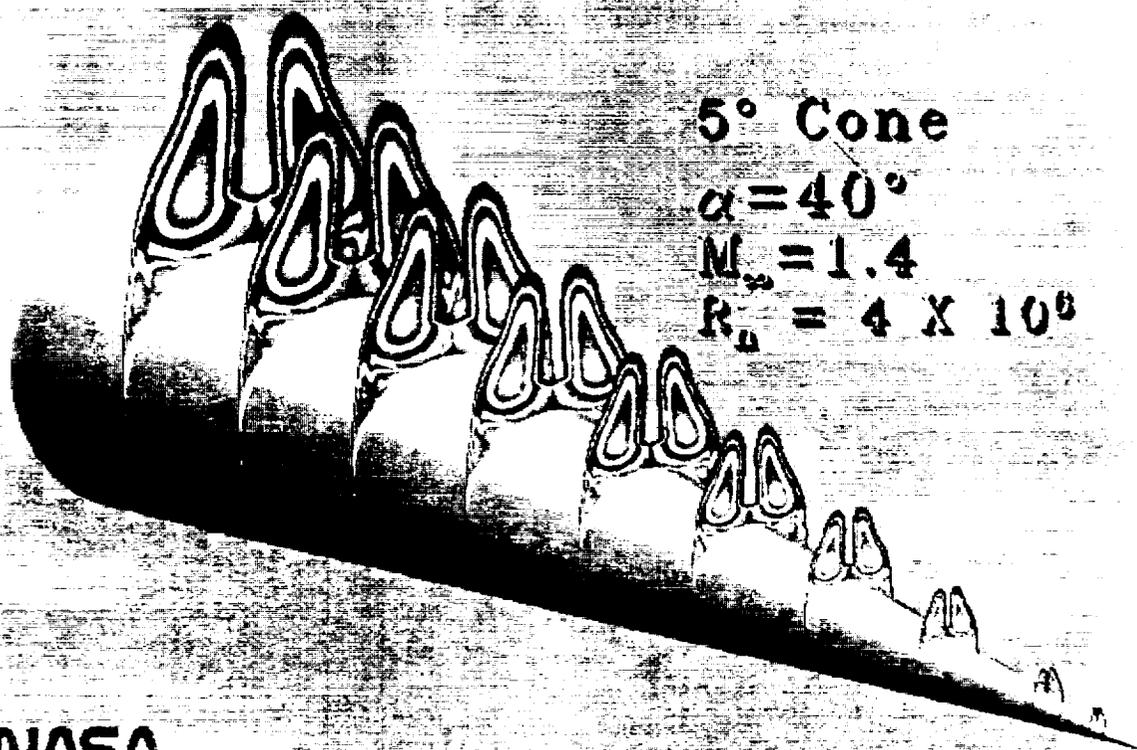

0 Total Pressure Loss .9

Figure 2. Asymmetric flow solution around a cone of unit length, short-duration side slip.

5° Cone

$\alpha = 40^\circ$

$M_\infty = 1.4$

$Re = 5 \times 10^5$

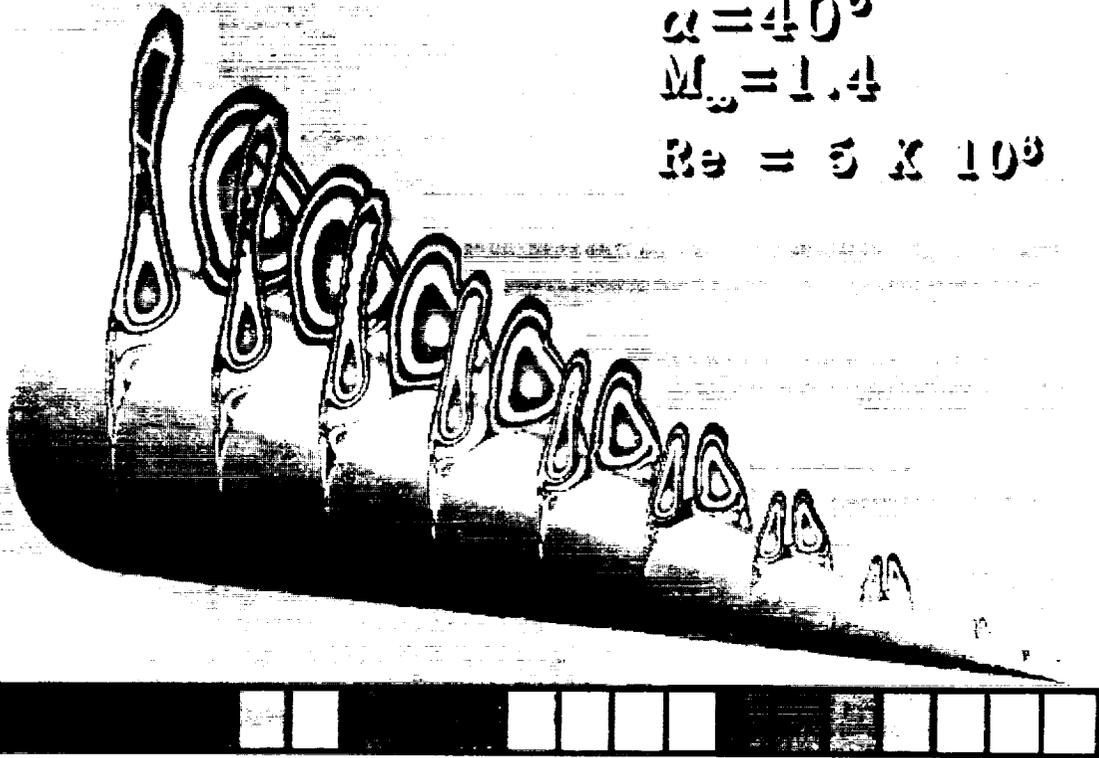


Figure 3. Asymmetric flow solution around a cone of unit length, short-duration side slip.

5° Cone

$\alpha = 40^\circ$

$M_\infty = 1.4$

$Re = 6 \times 10^5$

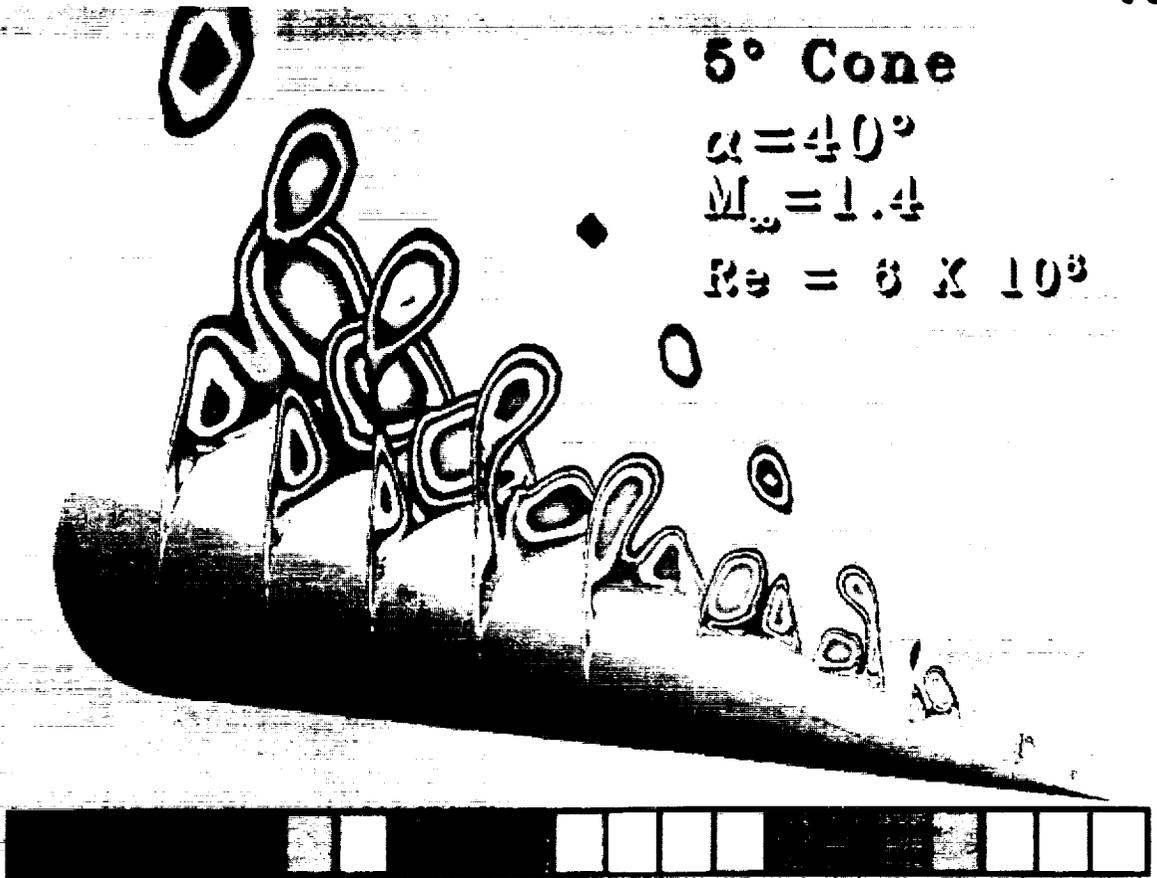


Figure 4. Asymmetric flow solution around a cone of unit length, short-duration side slip.

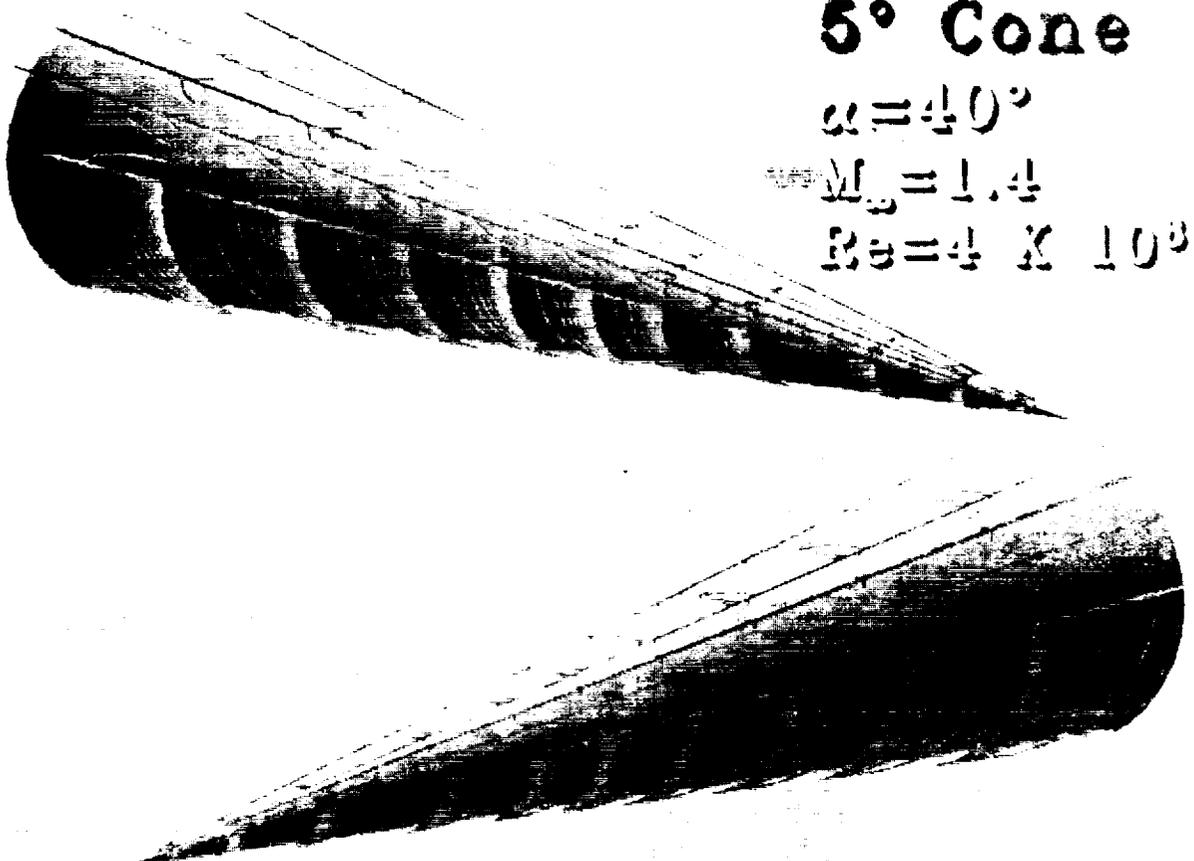


Figure 5. Front and rear sideviews of the limiting streamlines.

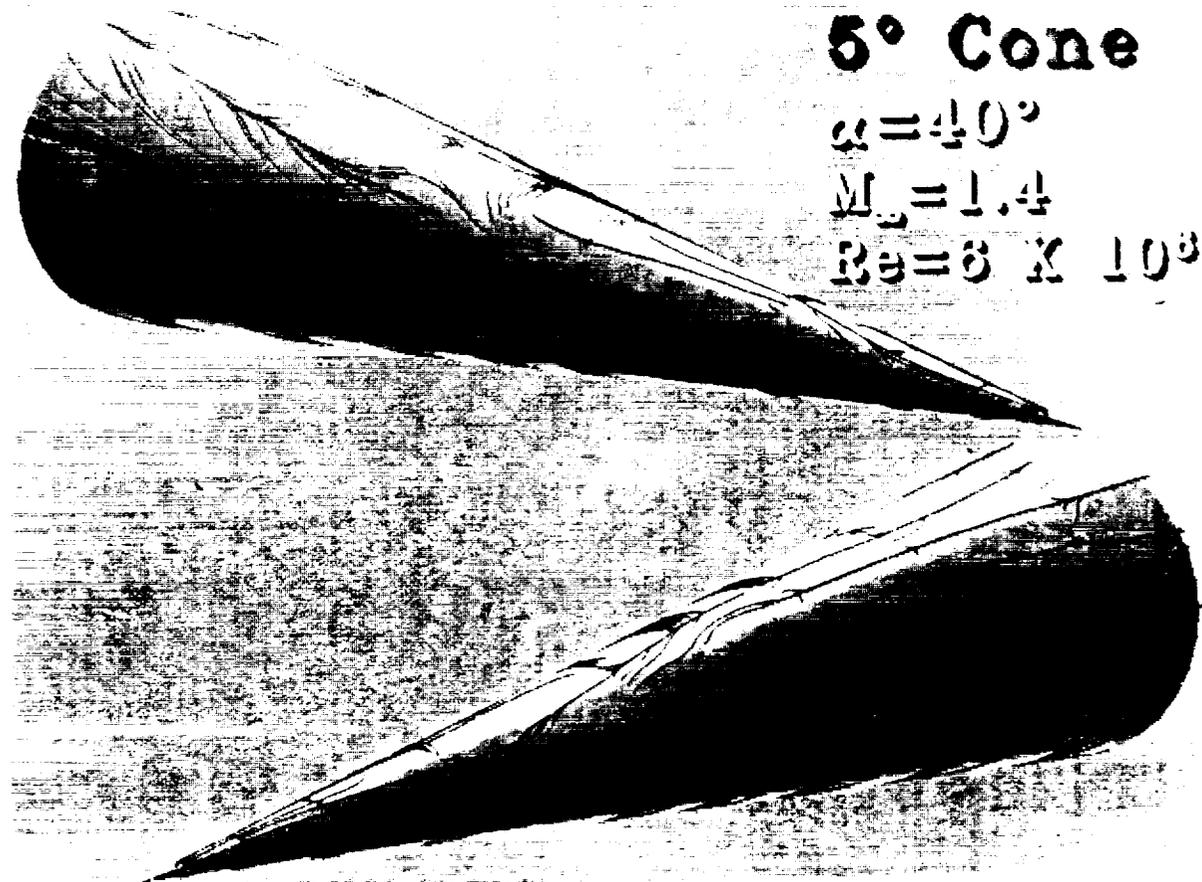


Figure 6. Front and rear sideviews of the limiting streamlines.

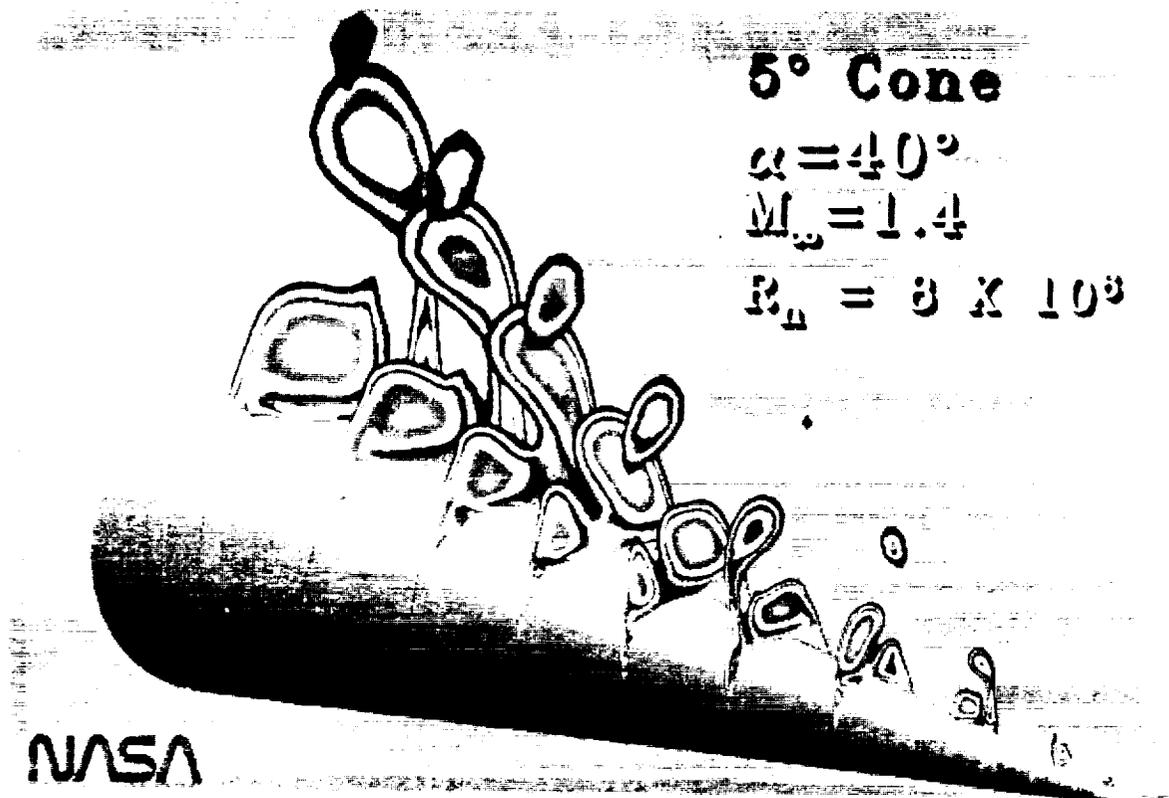


Figure 7. Asymmetric flow solution around a cone of unit length, short-duration side slip.

Locally-Conical Flow

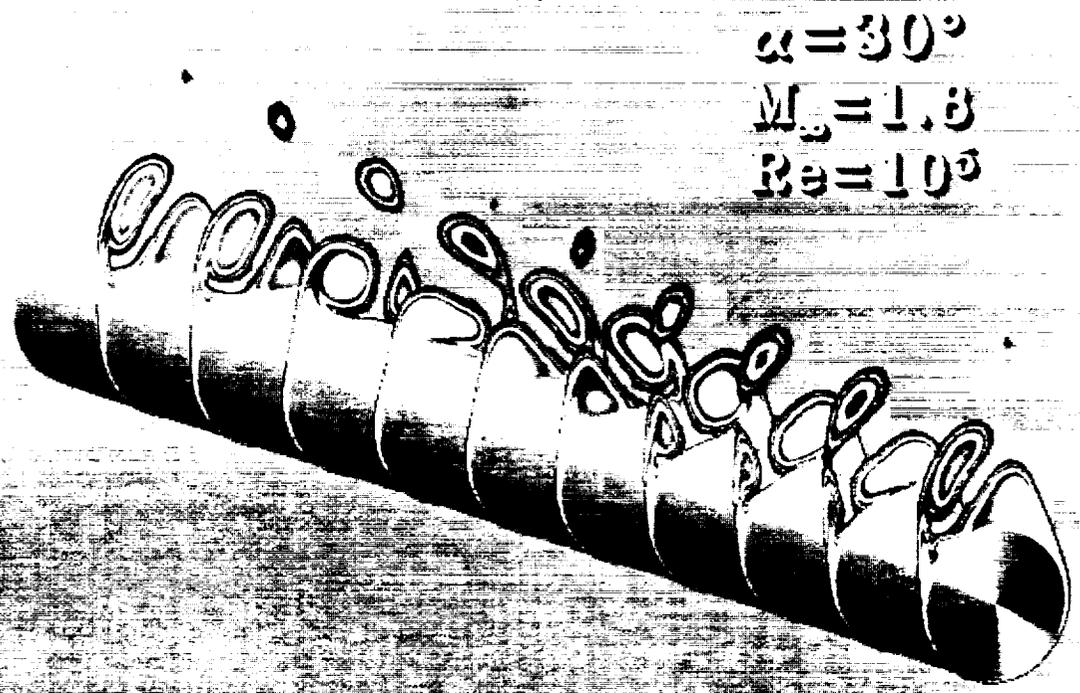


Figure 8. Unsteady asymmetric locally-conical flow solution at different time steps within one cycle (cylinder axis is a time axis), $\Delta t = 10^{-3}$.


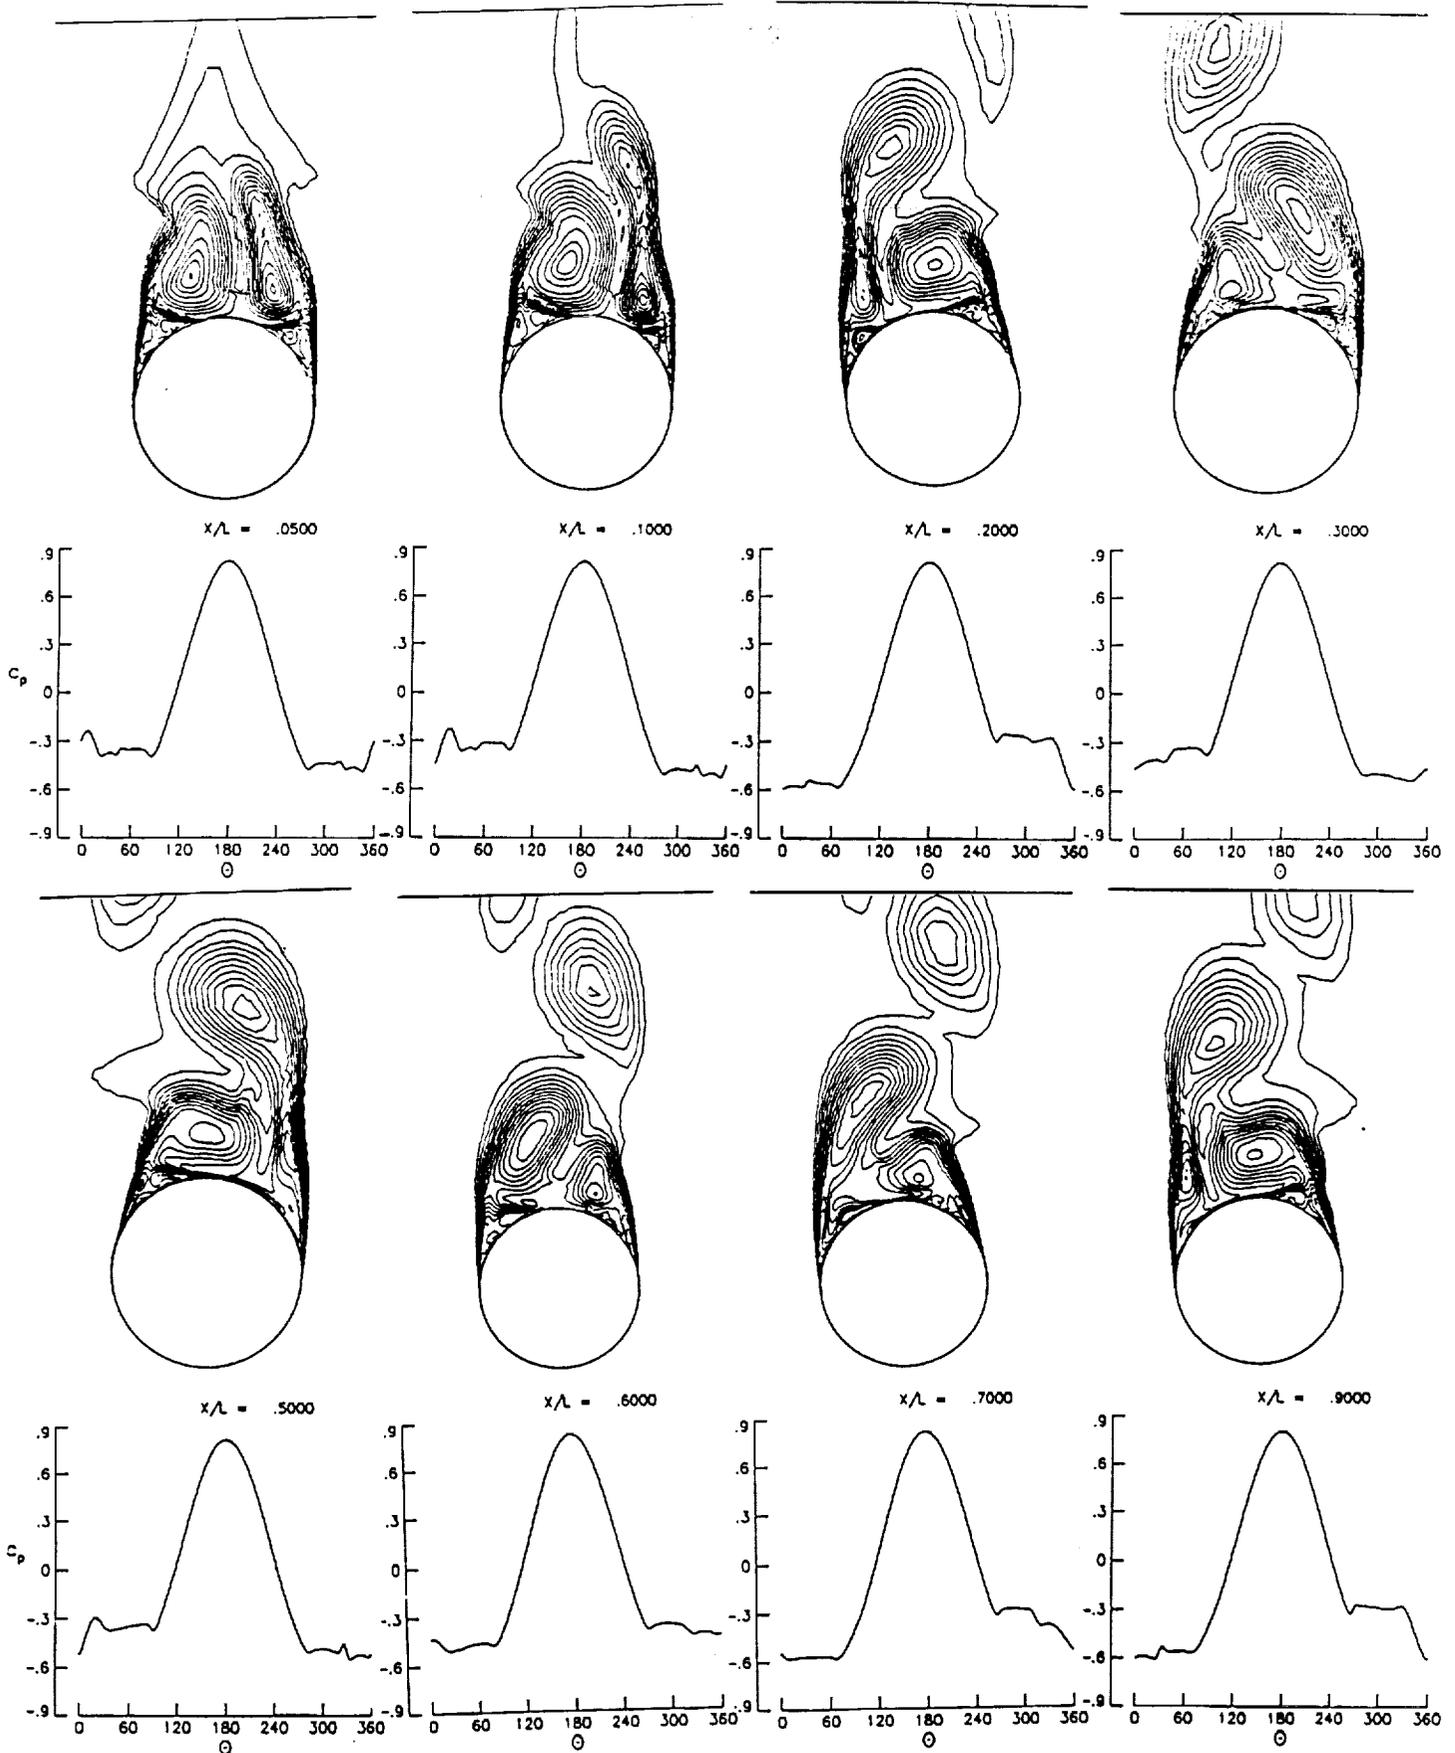


Figure 9. Total-pressure-loss contours and surface-pressure coefficient at different axial stations, a cone of unit length, $\alpha = 40^\circ$, $M_\infty = 1.4$, $R_e = 8 \times 10^6$.

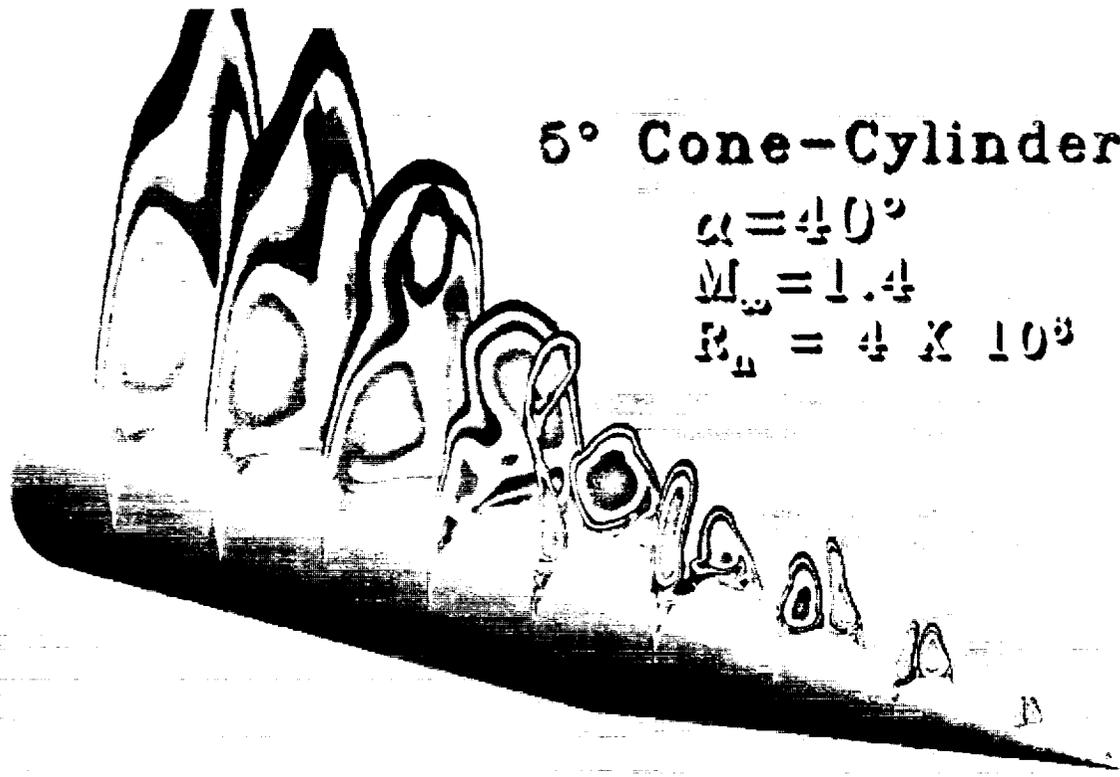

5° Cone-Cylinder


$\alpha = 40^\circ$

$M_\infty = 1.4$

$Re = 4 \times 10^3$



0 Figure 10. Asymmetric flow solution around a cone-cylinder configuration 1:1. 9

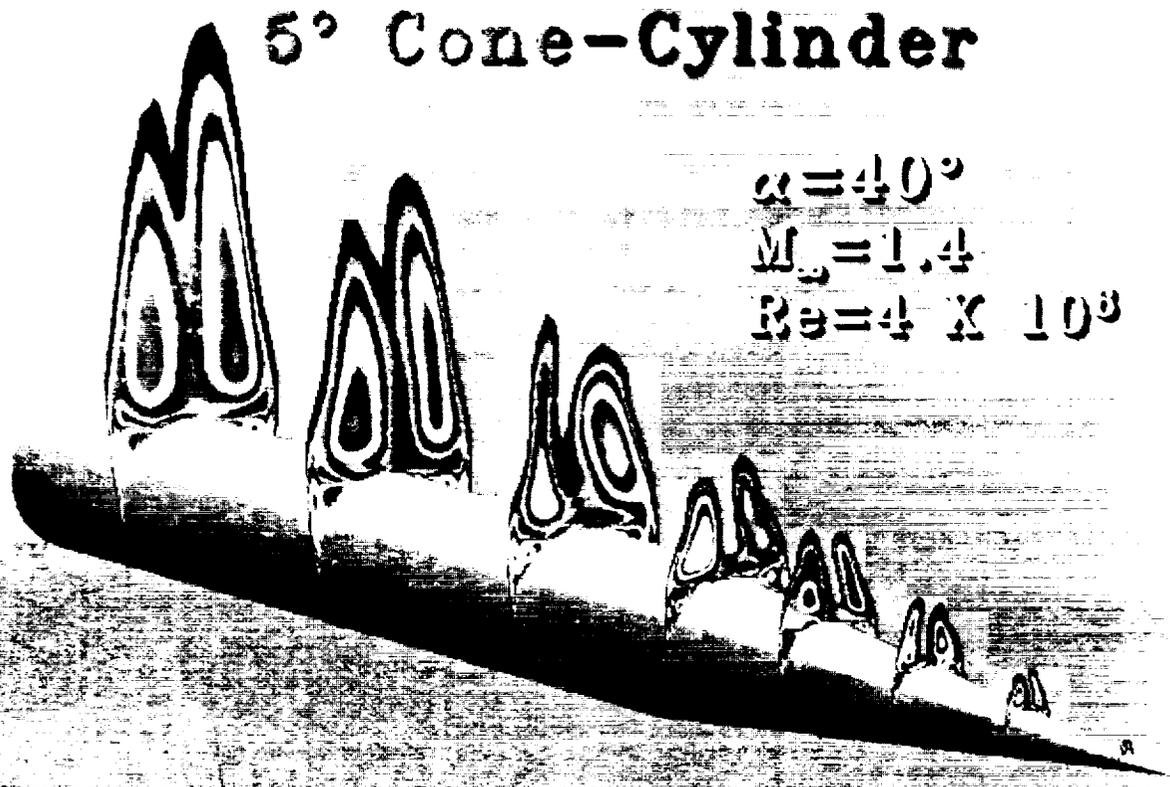

5° Cone-Cylinder

$\alpha = 40^\circ$


$M_\infty = 1.4$

$Re = 4 \times 10^3$



0 Figure 11. Asymmetric flow solution around a cone-cylinder configuratoin 1:1.5. 0.98

5° Cone-Cylinder

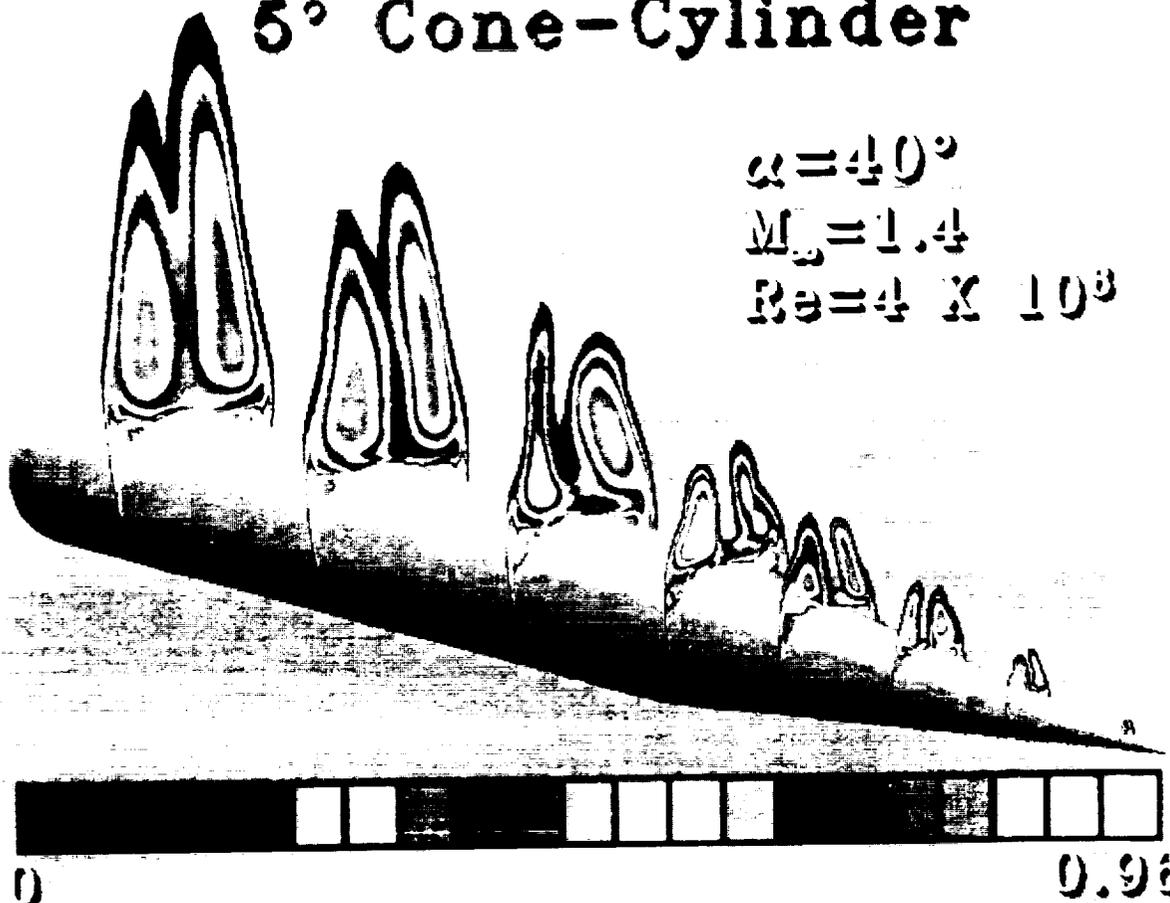

5° Cone-Cylinder

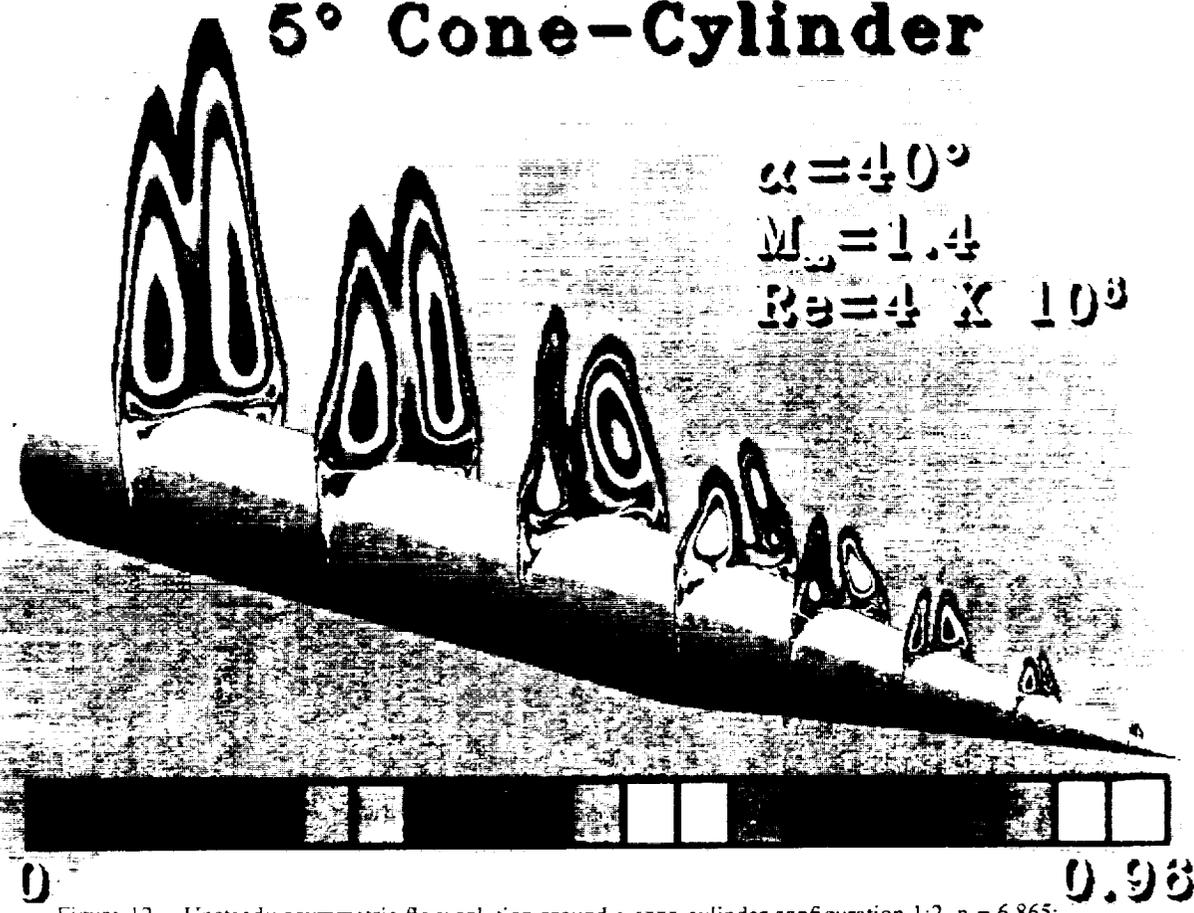
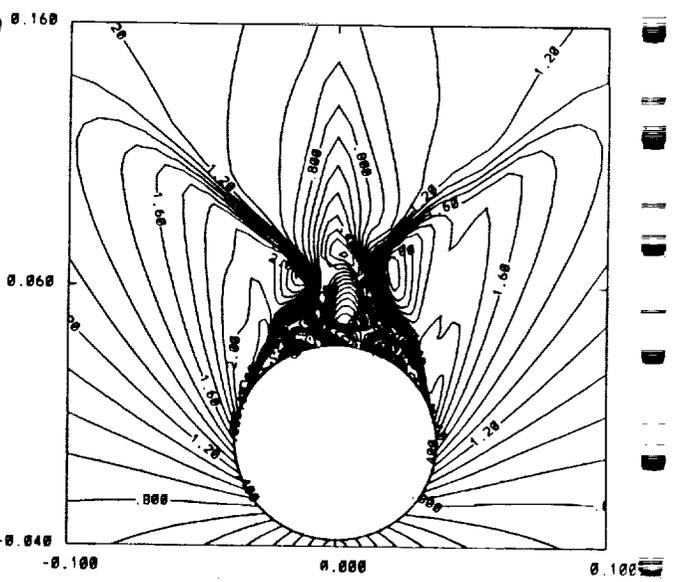
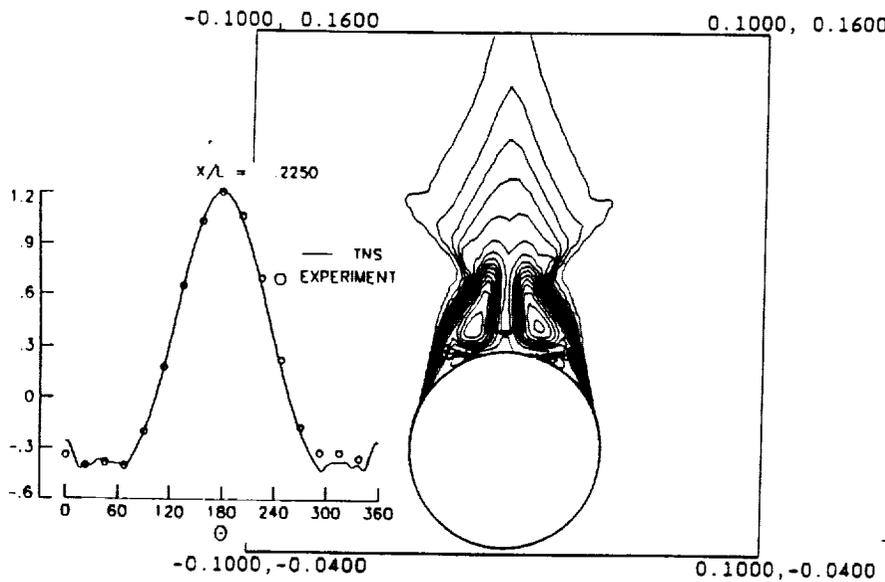
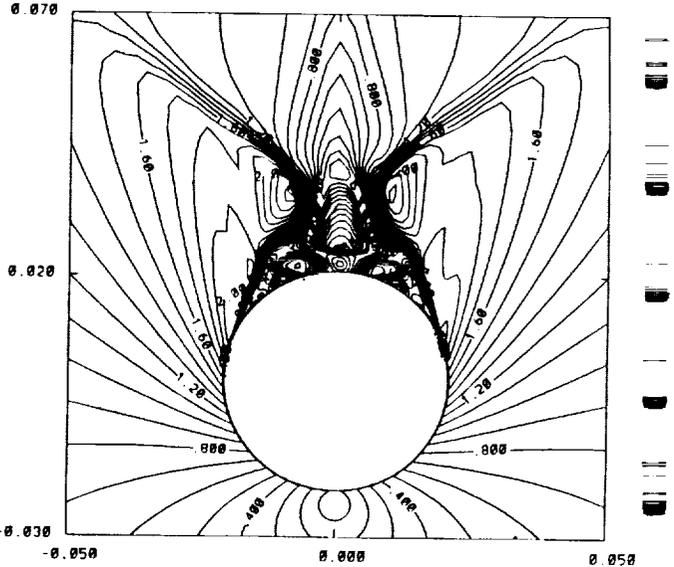
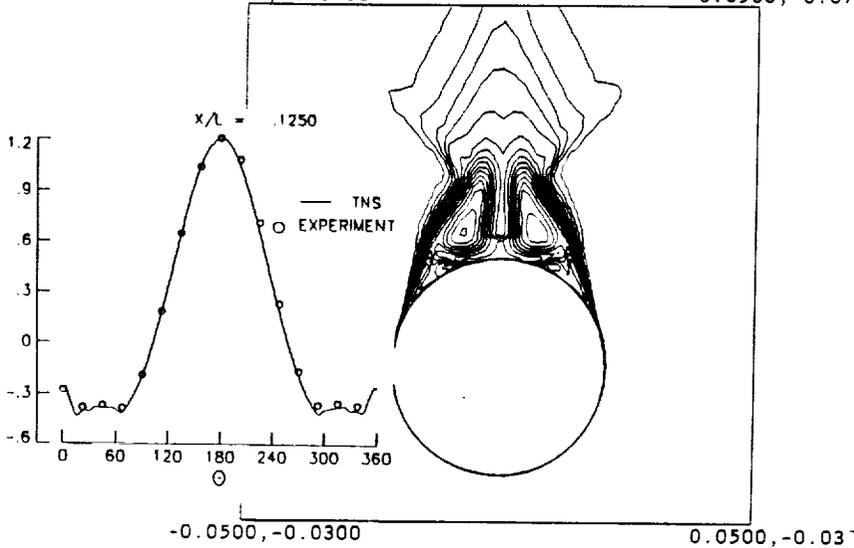
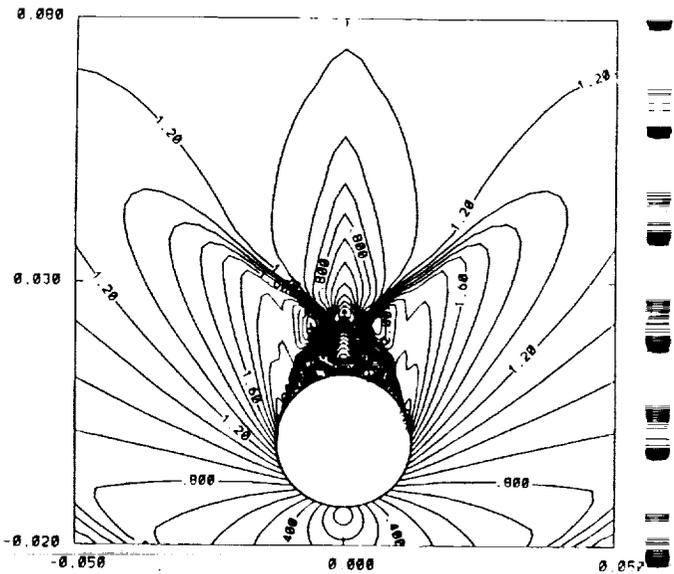
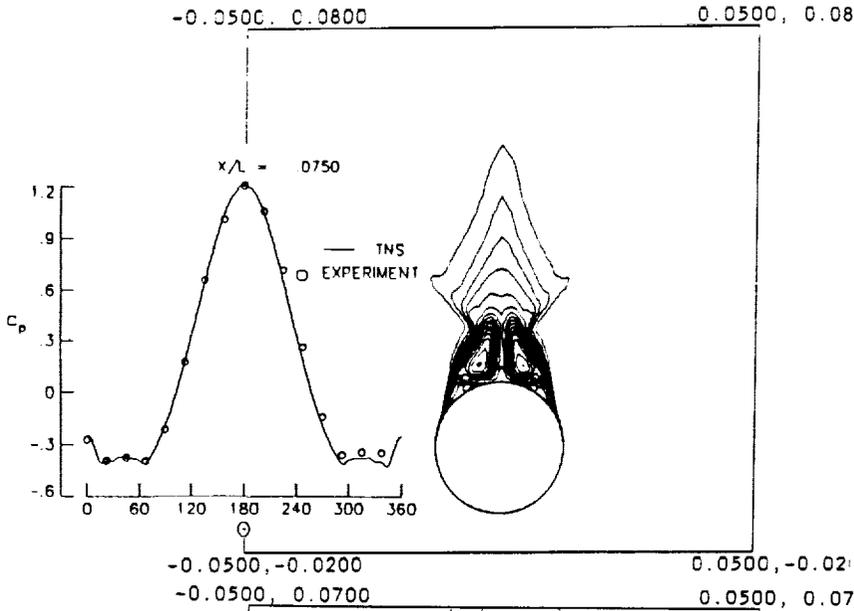


Figure 12. Unsteady asymmetric flow solution around a cone-cylinder configuration 1:2, $n = 6,865$; 9767, $\Delta t = 10^{-5}$.



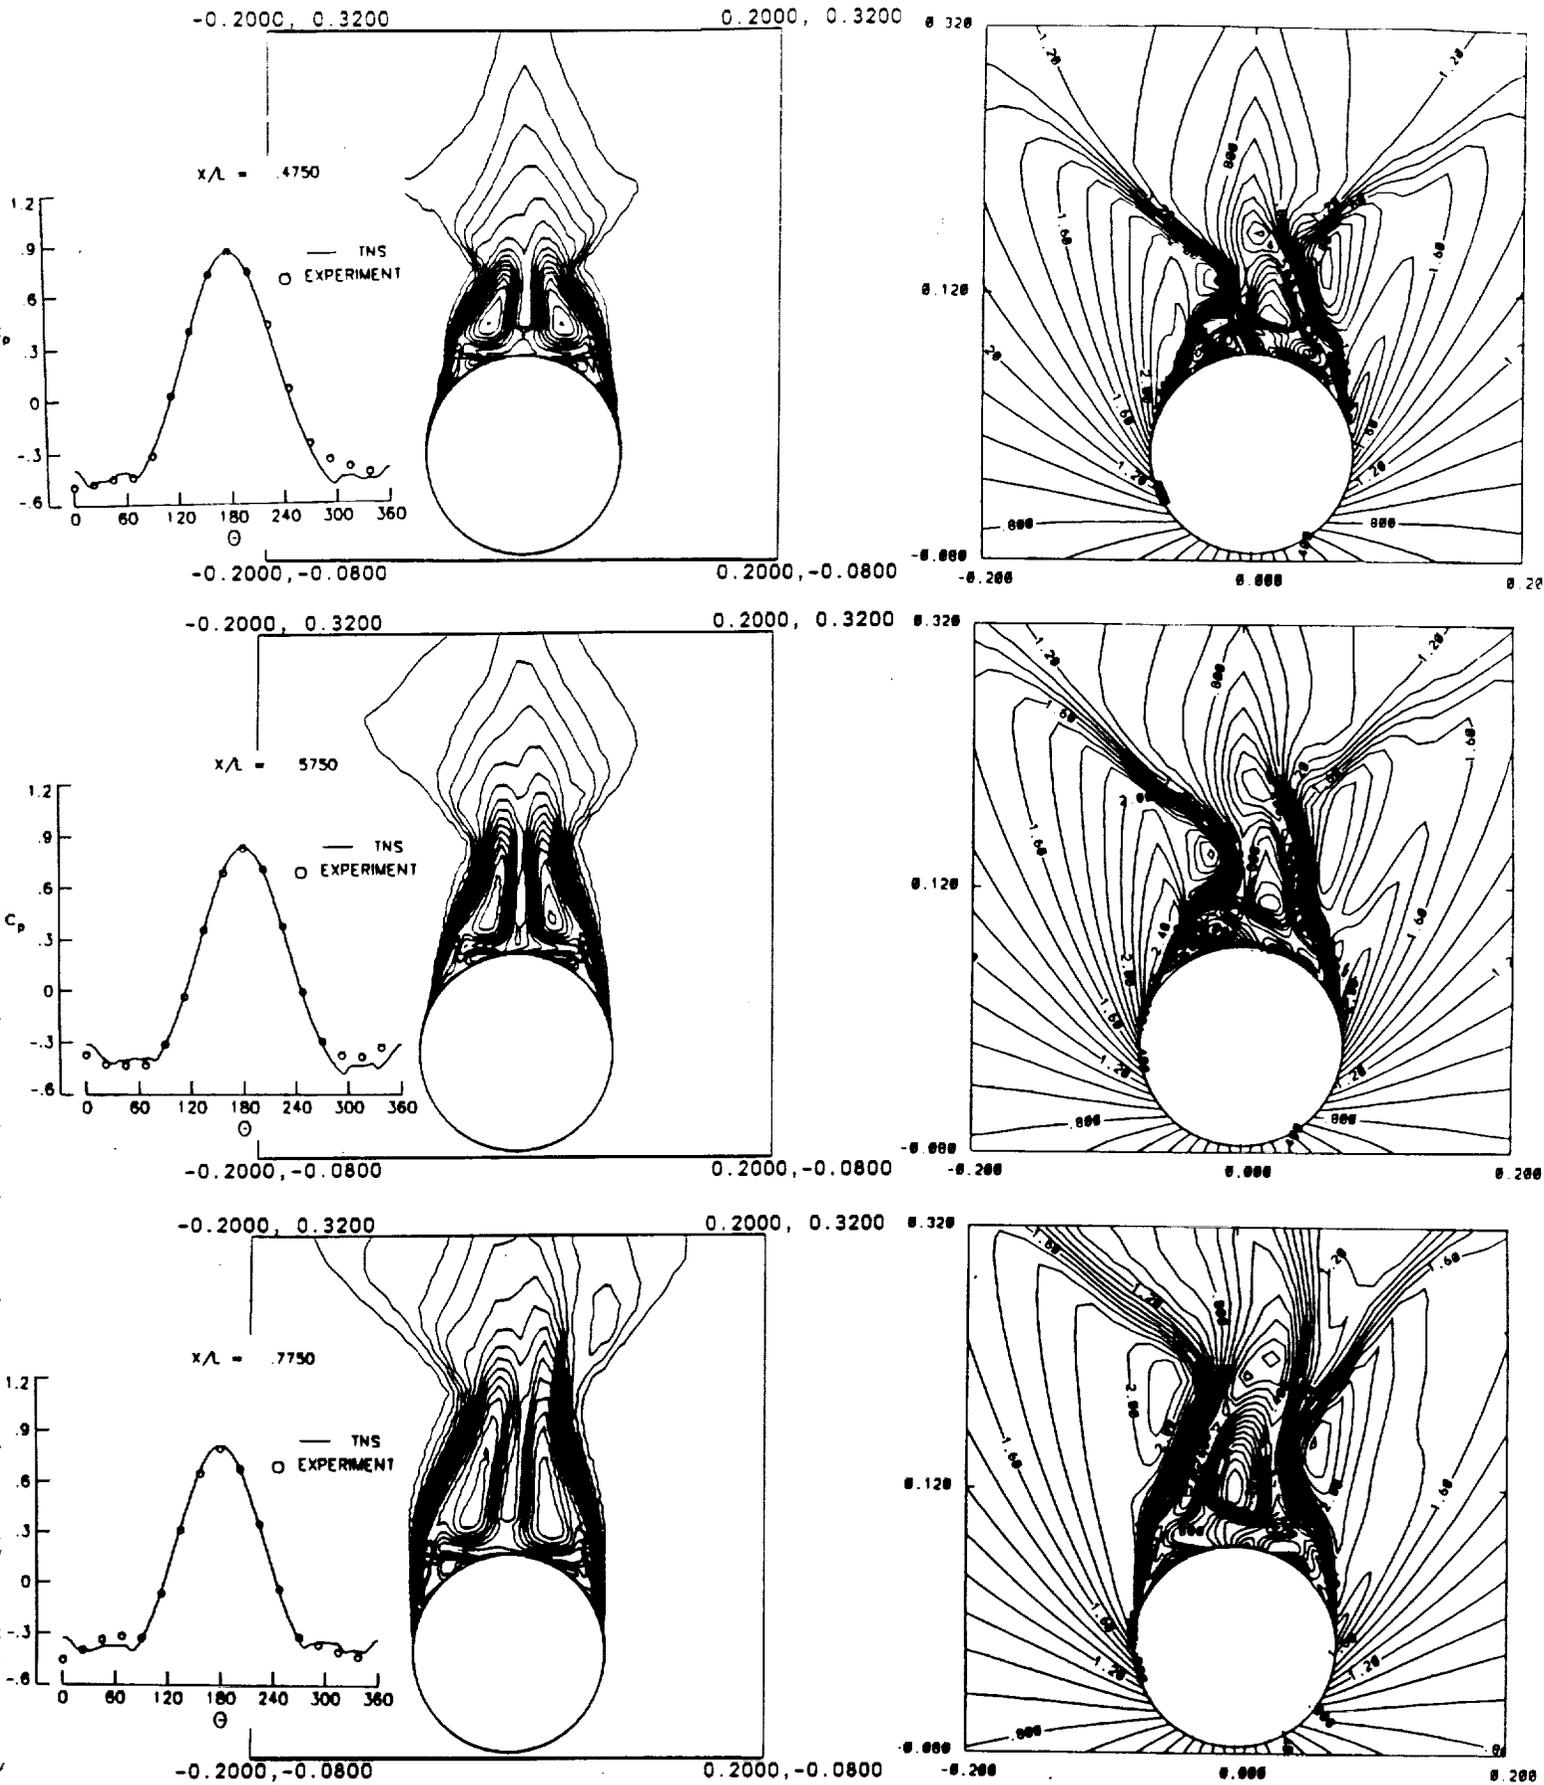


Figure 13. Surface pressure, total-pressure-loss and Mach contours at different axial stations, conical-cylinder configuration 1:1, $\alpha = 46.1^\circ$, $M_\infty = 1.6$, $R_e = 6.6 \times 10^6$, comparison with experimental data (Ref. 8).

