



National Aeronautics and  
Space Administration  
Washington, D.C.  
20546

11-82  
12218

Reply to Attn of:

NASA Case No. SSC-00010-1  
Print Figure 1

NOTICE

The invention disclosed in this document resulted from research in aeronautical and space activities performed under programs of the National Aeronautics and Space Administration. The invention is owned by NASA and is, therefore, available for licensing in accordance with the NASA Patent Licensing Regulation (14 Code of Federal Regulation 1245.2).

To storage commercial utilization of NASA-owned inventions, it is NASA policy to grant licenses to commercial concerns. Although NASA encourage nonexclusive licensing to promote competition and achieve the widest possible utilization, NASA will consider the granting of a limited exclusive license, pursuant to the NASA Patent Licensing Regulations, when such a license will provide the necessary incentive to the licensee to achieve early practical application of the invention.

Address inquires and all applications for license for this invention to  
Office of Patent Counsel (CCO1)  
NASA/George C. Marshall Space Flight Center  
Marshall Space Flight Center, AL 35812

Approved NASA forms for application for nonexclusive or exclusive license are available from the above address.

Serial No. 07/591,643  
Filed Date October 1, 1990

N91-23976

Unclas  
G3/82 0012218

C5CL 058

(NASA-Case-SSC-00010-1) DIGITAL DATA  
REGISTRATION AND DIFFERENCING COMPRESSION  
SYSTEM Patent Application (NASA) 38 P

PATENT APPLICATION ABSTRACT

The field of technology of the invention relates to digital data imagery compression and storage. The general application or field of use is for electronic transmission and/or storage of radiological data (teleradiology), such as high volume data for X-ray imagery.

With reference to application Figure 1, an initial read step 1 obtains a subject image containing digital imagery data. Modeling step 2 of the subject image is preformed upon a three-dimensional model to provide a modeled subject image. The registration process 3 registers the modeled subject image with a modeled reference image obtained from modeling a relatively unrelated standard reference image upon the same three-dimensional model. Registration results in the modeled subject image and modeled reference image being translationally correlated, with the resulting correlation thereof in spatial and spectral dimensions. A subtraction or differencing process 4 is performed for the modeled reference image and the modeled subject image to form a differenced image. A compression operation 5 is performed on the differenced image to provide a compressed differenced image, which may be subsequently transmitted and/or stored for subsequent decompression and addition processing to obtain an approximated subject image at either a remote location and/or at a remote period in time.

The present invention permits image compression through differencing of images which are spatially relatively uncorrelated (i.e., the subject image and the reference image). Permitting the two images involved in the differencing operation to be relatively uncorrelated is particularly advantageous for applicability of the system in general teleradiology and digital image storage applications. With such two images being acquired separately and independently from one another, optional compression and storage of a small, interactively operator-selected region

of interest permits overall compression ratios of 100:1,  
even for thoracic X-rays.

Inventors:	Gary A. Ransford Vivien J. Cambridge
Employer:	Sverdrup Technology, Inc.
Date Filed:	October 2, 1990
Serial No.:	07/591,643

Attorney Docket No.: SSC -00010-1

TITLE: DIGITAL DATA REGISTRATION AND DIFFERENCING  
COMPRESSION SYSTEM

ORIGIN OF THE INVENTION

5 The invention described herein was made in performance of work under a NASA contract, and is subject to the provisions of Section 305 of the National Aeronautics and Space Act of 1958, Public Law 85-568 (72 Stat. 435; 42 U.S.C. § 2457).

BACKGROUND OF THE INVENTION

10 This invention generally concerns a digital data compression system capable of reducing transmission time and storage requirements, and particularly concerns compression and subsequent decompression of digital data images, such as X-rays, which are inherently similar in many respects; and, wherefore, a priori knowledge of such images can be used in their compression.

15 Although the preferred areas of application (and the following discussion of background and description) of the invention pertain mainly to the medical and teleradiological fields, similar problems as discussed herein exist in other similar systems which deal with the compression and storage of large amounts of digital data; accordingly, advantages and benefits of this invention are equally applicable to such other systems. With such an understanding, it should be appreciated that the following discussion of specific exemplary present embodiments is in no way meant to limit the scope of the present invention to strictly medical applications.

20 Electronic transmission of various types of digital data, in particular radiological data (teleradiology), involves the transmission of a tremendous volume of data. Unless expensive broadband systems are used, such high data volume causes the transmission process to be relatively slow, and with the quality of the transmitted image often

25

30

deteriorated. In the case of teleradiology, the transmission time is crucial for prompt analysis of a patient's condition and the sharing of analytical expertise between hospitals, clinics, and the like.

5 State of the art radiological systems produce digital imagery which may contain one megabyte of data per image. Since there is information throughout the frame, systems which attempt to transmit for example chest X-rays must process the entire volume of image data. Because of such  
10 large volume of data, most systems include relatively expensive image compression schemes. The efficiency of compression can be measured by the ratio of the necessary storage size before compression to the necessary storage size after compression (compression ratio). However, the compression  
15 algorithms incorporated in such schemes rarely achieve compression ratios greater than 5:1. State of the art image transmission systems incorporating conventional image compression and using 9600 baud telephone lines still require more than six minutes for the transmission of one  
20 1024 x 1024 image.

Storage of the imagery data is also a problem. One uncompressed image requires approximately one megabyte of storage space, obviously necessitating considerable storage capability to maintain a library of any significant number  
25 of different digital images.

Various forms of digital image differencing for image compression and digital image differencing for image enhancement are known. However, such differencing methods of the prior art do not provide features and advantages of  
30 the present invention.

Methods which perform differencing for image enhancement generally aim to enhance images by removing contrast detail information which is similar in the images. In such cases, the information in the difference image is  
35 typically presumed to be diagnostically interesting. The

5 difference image contains sharply reduced intensity values  
in the regions where the contrast detail of the original  
images was similar, and normal intensity values in the  
regions where there were appreciable differences. Hence,  
contrast between such forms of difference information and  
the background is enhanced. Such prior method of image  
enhancement is often used in medical imaging to examine  
changes in the medical condition of specific parts of  
anatomy or to visualize vessels and cavities by subtracting  
10 images taken before and after some tracer element is  
injected (e.g., Digital Subtraction Angiography).

15 The difference image obtained with the foregoing often  
contains less contrast detail than the original images. At  
a minimum, if the original images were similar, the inten-  
sity values of most pixels in the difference image are low.  
This, however, does not mean that the size of the difference  
image (i.e., the volume of data) is smaller than that of the  
original image. Indeed, a difference image which entirely  
comprises eight bit, low intensity pixels is as large as an  
20 original image which contain the same number of eight bit  
pixels, but which displays maximum contrast detail.

25 U.S. Patent No. 3,905,045 to Nickel concerns an  
apparatus for image processing using a plurality of opera-  
tions in sequence to produce a difference image, including  
bilinear mapping of one image on the other to register the  
images and photoequalization to generate a difference image.  
Image warp transformation is disclosed using operator  
selected match points on a pair of images, along with an  
image correlation process using a second group of matching  
30 points. The size of the differenced image is, however, as  
large as either of the two original images, wherefore no  
compression is achieved.

35 U.S. Patent No. 4,533,947 to Smith discloses a method  
for increasing the data storage transfer rate in a system\*to  
permit the recording of a rapid sequence of high resolution

images by eliminating designated portions of each image in the sequence. The disclosed method operates on the premise that two images which are related, particularly through temporal continuity, have similar intensity values over a significant portion of the pixel matrix. Portions of the image where pixel values have not changed beyond some threshold from corresponding portions in a related image are recognized, and those image portions where significant change is indicated are transmitted. A high degree of spatial correlation is assumed between the image matrices before they enter the system. The method does not accommodate situations in which images do not match because of differences such as in orientation, location, gray scale intensity range, and scale of component elements. Such may be typical whenever images are not recorded in rapid sequence.

U.S. Patent No. 4,742,558 to Ishibashi et al. discloses a method for the reduction of codes necessary to display a designated image area contained in a global image. An original image is represented by a hierarchical structure from a global image of high level to a local image of low level. Only difference information between the images of the respective levels is coded and stored so that the number of codes will not be increased. The method includes a step in which differencing of image data takes place, but one image is not differenced from another relatively unrelated image. Rather, the image is compared to and differenced from itself. The objective is apparently not to reduce image data but to reduce the cost of splitting the image into several levels of a hierarchical structure according to different resolutions of the image.

U.S. Patent No. 4,802,093 to Ema discloses an X-ray image processing apparatus which performs image differencing and gray scale transformation to reduce the gray scale differences between images prior to differencing. The

invention relates to image enhancement by digital differencing such as Digital Subtraction Angiography (DSA). The system transforms the gray scales of the respective images to minimize the total intensity difference between them. This results in a difference image whereby the background to the contrast enhanced areas has lower intensity values, making the contrast enhanced areas more visible.

U.S. Patent No. 4,809,350 to Shimoni et al. discloses an image compression system which mathematically approximates the image function and defines the difference image as the difference between the image and the approximating model. An image is used to predict itself and the model is subsequently used in the differencing operation. Although steps of acquisition, image subtraction, compression, storage, decompression, and image addition are disclosed, the differencing method is fundamentally different from the present invention. Shimoni et al. is inherently limited as an effective system because, for example, it uses an inherently related image in the subtraction process, while the present invention advantageously makes use of a relatively unrelated reference image. The fact that the images of the present invention are not inherently related allows greater flexibility and higher compression ratios as explained in the DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS.

U.S. Patent No. 4,685,146 to Fenster et al. discloses a method for correcting for artifacts generated by object-motion caused misregistration between different images. Enhancement is provided through image differencing, and in particular a method is disclosed for assuring valid registration of images to be compared to obtain image enhancement with minimal artifacts.

U.S. Patent No. 4,635,293 to Watanabe and U.S. Patent No. 4,644,582 to Morishita et al. also generally disclose various methods for image registration and alignment.



SUMMARY OF THE INVENTION

5 The present invention recognizes and addresses various  
of the foregoing problems and shortcomings, and others,  
concerning digital imagery generally. This invention more  
particularly addresses the expense and time required for the  
transmission and/or storage of an image containing a large  
10 volume of digital data, especially in the field of teler-  
radiology. Accordingly, it is one principal object of the  
present invention to provide an improved method for digital  
image compression which reduces transmission time and/or  
storage requirements. It is an additional object to provide  
for effective decompression of the transmitted and/or stored  
data.

15 A further object of the present invention is to provide  
a method which makes more efficient and effective use of  
present conventional compression algorithms.

20 It is also an object of the present invention to  
provide a method that enables separation and amplification  
of diagnostically significant data contained in a larger  
image, thereby providing a useful diagnostic tool.

Another object of the present invention is to provide a  
method of image compression that achieves a far greater  
overall compression ratio than conventional compression  
systems.

25 Yet another object of the present invention is to  
provide a method of producing an image that is less severely  
distorted by potent compression algorithms, thereby allowing  
for stronger compression tools.

30 Another principal object of the present invention is to  
provide a method whereby relatively insignificant data can  
be edited from a subject image prior to compression yet  
still be represented in the final approximation of the same  
subject image.

35 Still another object of the present invention is to  
provide an effective differencing and compression system

capable of use for relatively unrelated and uncorrelated images.

Additional objects and advantages of the invention will be set forth in part in the description which follows, and in part, will be obvious from the description or may be learned by practice of the invention. The objects and advantages of the invention may be realized and attained by means of the instrumentalities and combinations pointed out in the appended claims.

Also, it should be appreciated that modifications and variations to the specifically illustrated and discussed features and steps hereof may be practiced in various embodiments and uses of this invention without departing from the spirit and scope thereof, by virtue of present reference thereto. Such variations may include, but are not limited to, substitution of equivalent steps and features for those shown or discussed, and the functional or positional reversal of various steps, or the like, where no substantial change to the present invention results.

Still further, it is to be understood that different embodiments, as well as different presently preferred embodiments, of the present invention may include various combinations of presently disclosed features, steps, or their equivalents (including combinations thereof not expressly shown or stated).

To achieve the present objects and in accordance with the purpose and spirit of the invention as embodied and broadly described herein, one exemplary method of the present invention for the compression of digital imagery data comprises the steps of: obtaining a subject image containing digital imagery data; modeling the subject image upon a three-dimensional model to provide a modeled subject image; performing registration of the modeled subject image with a modeled reference image obtained from modeling a relatively unrelated standard reference image upon the

three-dimensional model, so that the modeled subject image and modeled reference image are translationally correlated, with resulting correlation of the modeled images in spatial and spectral dimensions; differencing the modeled reference image and the modeled subject image to form a differenced image; and compressing the differenced image to provide a compressed differenced image.

The invention is applicable generally to any situation where a large volume of data is desired to be transferred at high speed; accordingly, it is within the scope and spirit of the present invention to include all such applications of the teachings hereof. Although radiography and X-rays will be discussed in describing the invention, it should be understood that such is for the purpose of disclosing present preferred embodiments and not for limiting the scope of the invention to one area.

The subject image may be formed with one of any known type of digital imagery, for example X-rays, and preferably, obtaining the subject image can be by way of any known conventional method, for example, use of digital radiographic systems.

Presently disclosed interactive editing of the subject image preferably comprises identifying an area of interest on the subject image through operator selection. In one alternative embodiment, such editing may be accomplished automatically by computer identification of a predetermined area of the subject image (such as based on "advance" operator selection through programming). This may be accomplished by gray scale value discrimination, pixel contrast intensity, pixel location, or any other applicable method.

In one preferred embodiment, interactive editing is accomplished by an operator viewing the subject image and designating the area of interest. For example, the operator

may view a subject image upon a CRT screen and designate the area of interest such as through use of a light pencil.

5           The feature of modeling a subject image upon a three-dimensional model representative of a particular element contained in the subject image preferably includes steps whereby a two-dimensional subject image is "transformed" into a three-dimensional representation based upon the three-dimensional model. The term "based upon" refers to the fact that the three-dimensional model need not be an  
10           exact (scale, location, aspect, etc.) model of a particular element of the subject image but can be merely representative of an element contained in the image. The modeling operation correlates the subject image to the model so that the three-dimensional representation is said to fit the  
15           model. The subject image is correlated to the model; the model is not correlated to the subject image.

          In one preferred embodiment of the present invention, modeling features include an image warping operation which emulates three-dimensional transformation. The image warping operation may employ known image warping algorithms to  
20           transform the two-dimensional subject image into a three-dimensional representation of itself and back into a two-dimensional modeled image with reassigned pixel values corresponding to the three-dimensional representation.

25           In a further embodiment of the present invention, the three-dimensional model comprises a computer-generated model representative of a component element common to the subject image and the reference image.

          In yet another embodiment of the invention, the  
30           standard reference image is capable of being correlated with subject images originating from more than one source. For example, a single standard reference image can be correlated with a subject image from sources A, B, or C. There is no necessity that a reference image be compatible with only \*

subject images from one source, or that the reference image itself originates from the same source as the subject image.

In a further, alternative preferred embodiment, a region smoothing operation may be applied to the differenced image to decrease noise therefrom.

In one embodiment of the invention, the compression of the differenced area of interest is accomplished with conventional compression algorithms, so as to allow for more efficient use of the algorithms resulting in relatively greatly increased compression ratios over prior usage of the same algorithms.

In accordance with yet a further alternative feature of the invention, an enhanced intermediary storage capability may be provided whereby the differenced image can be stored for subsequent recall and decompression thereof. Such intermediary storage capability can be provided at the situs of compression prior to any data transmission, at a receiving station prior to decompression, or at some intermediary storage facility.

To further achieve present objects and in accordance with purposes of the invention, as embodied and broadly described herein, there is provided a method for the effective compression and transmission of radiographic imagery exploiting prior known information of the image. Such method comprises first obtaining a subject X-ray which contains data of relative diagnostic importance. Interactive editing of the subject X-ray results in operator selection of an area of interest encompassing at least the diagnostically important data. The subject X-ray is then modeled upon a three-dimensional model representative of a particular element contained in the subject X-ray to provide a modeled subject X-ray. The modeled subject X-ray is registered with a modeled reference X-ray which is obtained by modeling a relatively unrelated standard reference X-ray upon the same three-dimensional model as the subject X-ray

was modeled upon. Such standard reference X-ray preferably comprises the relative equivalent of the subject X-ray without the diagnostically important data.

5 With the foregoing steps, the modeled images, by being modeled upon the same three-dimensional model, are translationally correlated during the registration operation to provide for correlation of the modeled images in spatial and spectral dimensions. After being so registered, the modeled subject X-ray and the modeled reference X-ray are  
10 differenced, providing a differenced X-ray which includes the previously identified area of interest. The differenced X-ray is (optionally) subsequently reduced to eliminate undesired portions therefrom which further significantly reduces the amount of data to be compressed, such reduction  
15 (if practiced) providing a reduced differenced X-ray including at least the area of interest. Enhanced compression of at least the area of interest of the differenced X-ray (after reduction, if practiced) provides a compressed differenced X-ray.

20 The compressed differenced X-ray may then be transmitted if desired to a predetermined receiving station so that the compressed area of interest can be subsequently decompressed for addition to a duplicate of the standard reference X-ray. Such addition yields a relatively precise  
25 approximation of the original subject image. Alternatively to transmission, local storage may be practiced with the same subsequent decompression/addition operations available for image recall function.

30 In another preferred embodiment of the invention, the three-dimensional model comprises a computer-generated model of a human thorax with the subject and reference X-rays being modeled thereupon.

35 In yet another preferred embodiment of the invention, the subject X-ray comprises a chest X-ray and the standard reference X-ray comprises a "healthy" chest X-ray without

diagnostically important data. Preferably, the standard reference X-ray is compatible with subject X-rays originating from various sources and is not restricted to use with subject X-rays originating from the same source.

5 Those of ordinary skill in the art will better appreciate the features and aspects of such embodiments, and others, upon review of the remainder of the specification.

#### BRIEF DESCRIPTION OF THE DRAWINGS

10 A full and enabling disclosure of the present invention, including the best mode thereof, directed to one of ordinary skill in the art, is set forth in the remainder of the specification, which makes reference to the appended figures, in which:

15 Figure 1 is a block diagram overview of one preferred exemplary embodiment of the method of the present invention;

Figure 2 is a block diagram of another present exemplary embodiment;

20 Figures 3, 4, and 5 are more detailed block diagrams of certain aspects of the embodiment referenced in present Figure 2; and

Figure 6 is a block diagram of yet another exemplary preferred embodiment of the present invention.

25 Repeat use of reference characters throughout the present specification and appended drawings is intended to represent same or analogous features or aspects of the invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

30 Reference will now be made in detail to the present preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings. Those of ordinary skill in the art will appreciate that the following disclosure is for purposes of example only, and is not intended to limit broader aspects of the invention referenced thereby.

Broadly speaking, the method of the present invention for the effective compression (and optional transmission) of digital imagery data exploits prior known information of an image. The method makes use of the fact that images are inherently similar and that therefore, a priori knowledge of the images can be used in their compression. Such technique allows subtraction of two images, for example, one standard "healthy" image and one containing data of relative diagnostic significance, including correction for differences in orientation and geometry of the features contained in the images before subtraction. The image which remains after subtraction comprises information due to the differences between the images. It is this difference information caused by the diagnostically significant data that is potentially meaningful and which desirably should be preserved for storage and/or transmission.

Present Figure 1 discloses in general block diagram format a first presently preferred embodiment of this invention. The illustrated steps are represented in a specific sequence, and generally disclose the minimum necessary steps for achieving the present goal of image compression through differencing of images which are spatially relatively uncorrelated (*i.e.*, the subject image and the reference image). The illustrated system correlates the images through a process which spatially adjusts X-ray images of preferably a human thorax by a two-dimensional image warping operation which emulates three-dimensional transformations of the thorax. Such procedure results in corrected differences for location and scale of the thoraxes, as well as for relatively small or minor orientational differences. It is particularly advantageous that the system presently represented allows the images involved in the subtraction process to be relatively uncorrelated. The resulting system is applicable because of such features to general teleradiology and digital image storage applications.



In addition, the fact that the two above-described images are acquired separately and independently from one another allows the method to optionally compress and store only a small, interactively identified region of interest. The remainder or complementary portion of the image may be replaced with image data similar to it in a final step, *i.e.*, whenever the difference image is added back to the reference image.

Referring more specifically to Figure 1, an initial step 1 involves reading or otherwise obtaining a subject image containing digital imagery data. A subsequent step 2 involves modeling the obtained subject image. Preferably, a three-dimensional model is used to provide a modeled subject image, as indicated as emerging from such step 2.

A next step involves registration of the modeled subject image with a modeled reference image obtained from modeling a relatively unrelated standard reference image, preferably upon a three-dimensional model. Present Figure 1 broadly represents such registration in step 3, which as indicated, results in spatial adjustment of images to correct for location, scale, and orientation differences. In other words, the modeled subject image and modeled reference image are translationally correlated, with the resulting correlation of the modeled images in spatial and spectral dimensions.

What emerges from registration step 3 may be referred to as a modeled reference image as well as a modeled subject image, both of which are forwarded to a subtraction step or difference step 4. In such step, the modeled reference image and modeled subject image are differenced to form what may be termed a differenced image, which may be subsequently compressed in compression step 5.

In the foregoing exemplary methodology, the subject image may contain medical imagery containing data of relative diagnostic importance. Particularly in connection with

such specific methodology, the preferred method may further include interactive editing of the subject image prior to the modeling thereof, so that an area of interest encompassing data of relative diagnostic importance may be specified. Such interactive editing may including viewing of the subject image by an operator with operator designation of the defined area of interest.

Where the subject image includes medical imagery containing data of relative diagnostic importance, the three-dimensional model preferably is representative of a particular element contained in the subject image, with the resulting standard reference image being equivalent to the subject image without the imagery data of relative diagnostic importance.

In addition to the foregoing, the preferred methodology may also include the step of reducing the differenced image prior to compression of such differenced image, so as to provide a reduced differenced image for compression.

It is to be further understood that such methodology may optionally include an additional step of transmitting and/or storing the compressed differenced image for subsequent decompression and reconstitution thereof. Decompression preferably would involve decompressing the compressed differenced image so as to provide a decompressed differenced image. Such reconstitution may comprise combining the decompressed differenced image with the modeled referenced image (or the same information at a remote location) so as to form a reconstituted subject image.

The modeling step 2 of present Figure 1 may comprise an image warping operation incorporating image warping algorithms. Such image warping operation preferably emulates three-dimensional transformation of a two-dimensional image into a three-dimensional representation of itself based upon the three-dimensional model referenced above and transformation back into a corresponding warped

two-dimensional image. Such three-dimensional model preferably comprises a computer-generated model of a component element common to the subject image and the reference image.

5 Additionally as to the foregoing exemplary methodology, a standard reference image is preferably adapted to be correlated with subject images originating from more than one image source. Also, a region smoothing operation may be performed to the differenced image to decrease undesired noise therefrom. Separate from immediate transmission of a  
10 compressed image, the compressed differenced image may be stored on location or at an intermediate storage location, for subsequent recall and decompression thereof.

In further accordance with another exemplary embodiment of the present invention, a present exemplary method  
15 commences with the operation of obtaining a subject image containing data of relative diagnostic importance. As embodied herein and shown for example in Figure 2, such method 10 begins with a subject image 12 which includes data of diagnostic importance 14. The source of the subject  
20 image 12 is not a critical element of the invention. Hence, the invention is applicable to subject images 12 originating from a variety of known digital imagery sources, such as radiography, satellite photography and imaging, etc. The data of relative diagnostic importance 14 can be virtually  
25 any information contained in the image desired to be diagnosed for potential analytical purposes.

Such exemplary method of the present invention preferably further includes interactive editing of the subject image whereby an area of interest is identified,  
30 with the area of interest encompassing at least the diagnostically important data. As represented in Figure 2, interactive editing 16 comprises a method whereby the subject image 12 is designated with an area of interest 18. This can be accomplished by various known means, details of  
35 which do not form a particular aspect of this invention. In

one preferred embodiment of the invention, editing 16 may be accomplished by direct operator viewing of subject image 12 and designation of an area of interest 18 by any applicable means. In a preferred embodiment, an operator may view the subject image 12 displayed on a CRT screen and designate the area of interest 18 with a light pen. Alternatively, the editing 16 may be accomplished automatically by computer designation of predetermined portions of the subject image 12. Although the area of interest 18 may contain additional data, it should at least contain the data of diagnostic importance 14.

In one alternative embodiment, editing 16 may also include the designation of portions of the subject image 12 which will later be used for registration 26 and modeling functions 20. For example, in the editing of a subject chest X-ray, the operator may directly designate an area of interest which includes the outline of the thorax for use in the modeling step and edges of the spine for use in the registration step. In a preferred embodiment, the operator merely designates the portion of the subject image 12 containing the data of diagnostic importance 14 as the area of interest 18. Preferably, software automatically recognizes the component of the subject image 12 to be used in the modeling process 20 and the registration process 26.

As embodied herein and depicted in Figures 2 and 3, such exemplary method of the present invention further comprises the operation 20 of modeling the subject image 12 upon a three-dimensional model 22 representative of a particular element contained in the subject image 12 so as to provide a modeled subject image 24. Following the modeling operation subject image is registered to the reference image. Preferably, the registration process 26 comprises an image warping operation 52 as shown in Figure 3. The image warping operation 52 incorporates image warping algorithms 52 to emulate three-dimensional transformation of

a two-dimensional image (subject image 12) into a three-dimensional representation 54 of itself based upon a three-dimensional model 22 and back into a corresponding warped two-dimensional image 57 with reassigned pixel values corresponding to the three-dimensional representation. Such modeling operation 20 provides a modeled subject image 24. Various image warping techniques and algorithms are well-known to those of ordinary skill in the art (see for example, prior art patents referenced above); and details thereof need not be discussed herewith for a full understanding and appreciation of the present invention.

The modeling function 20 also correlates the subject image 12 to the model 22 so that the three-dimensional representation 54 "fits" the model 22. The subject image 12 is correlated to the model 22; the model 22 is not correlated to the subject image 12.

The three-dimensional model 22 is a representative model of a particular component depicted in the subject image 12. The model 22 need not be an exact model of the component in the subject image 22, but merely a close enough approximation to allow the warping algorithms for register the subject image 12 to the reference image (30). Thus, it should be understood that the model 22 can be used for subject images 12 originating from various sources and is not restricted to any one subject image 12 originating from any one source. In the preferred embodiment of the invention, the model 22 comprises a computer-generated model of a component element common to the subject image 12 and the reference image 30. For example, the model 22 can comprise a computer-generated model of a human thorax where the subject image 12 constitutes a chest X-ray.

As embodied herein and shown for example in Figures 2 and 4, such exemplary method of the present invention further comprises the process of registration 26 of the modeled subject image 24 with a modeled reference image 28.

It is well known to those skilled in the art that, prior to subtraction, images preferably should be registered to provide an artifact-free differenced image. Various registration methods themselves are generally well known in the art and any such method (such as edge recognition and comparison or point recognition and comparison) are considered within the scope and spirit of this invention.

The modeled reference image 28 is obtained from the modeling 20 (as described above) of a standard reference image 30 upon the same three-dimensional model 22 that the subject image 12 was modeled upon. It should be understood that, since the subject image 12 and reference image 30 are modeled upon the same common model 22, the resultant modeled subject image 24 and modeled reference image 28 can be translationally correlated, correcting for any orientational and translational disagreement. In other words, there is correlation of modeled images in spatial and spectral dimensions.

The standard reference image 30 is the relative equivalent of the subject image 12 without the data of relative diagnostic importance; in essence, a "healthy" image (such as where patient X-rays are involved). It should be understood that the reference image 30 and subject image 12 need not be related in the time dimension, spectral dimension, or spatial dimension. The method 10 corrects for any differences between the images in such respects. The fact that method 10 (and other present exemplary embodiments of this invention) allows such images to be relatively unrelated is particularly important for applicability of the system in general teleradiology and digital image storage situations. Thus a reference image 30 may be kept on file for repeated use with relatively unrelated "fresh" subject images 12. Additionally, the reference image 30 need not come from the same source as the subject image 12. In one embodiment of the present invention, reference image 30 may

be correlated with subject images originating from more than one subject source. For example, in the case of a chest X-ray, a standard reference chest X-ray may be used for subject chest X-rays from patient A, B, or C.

5           As depicted by the dashed lines in Figures 2 and 3, the modeling 20 concerning reference image 30 can be accomplished at virtually any time so long as a modeled reference image 28 is provided prior to the differencing operation 32. In a preferred embodiment of the invention, modeling 20 of  
10 the standard reference image 30 is accomplished prior to obtaining the subject image 12 and stored for subsequent use with the remainder of method 10. In such manner, additional time need not be expended to generate the modeled reference image 28.

15           Besides correlating the modeled subject image 24 and modeled reference image 28 in the spatial dimension, the registration process 26 also registers the images in the spectral dimension. Spectral registration is provided to correct for global gray scale differentials existing between  
20 the modeled images caused by the use of different equipment, processing methods, time dependent variations in exposure intensity between the images, and the like. Spectral registration ensures that a gray scale difference between the images will not "mask" any true difference. Methods of gray  
25 scale transformation and correction are well known in the art and selection and use of any such method is within the scope of this invention. The object of the gray scale or spectral registration is to convert the contrast levels (gray scale value) of one of the modeled images into the  
30 value of the other, i.e., to match gray scale values, thereby automatically correcting for contrast differences between the images.

The present invention further includes the process of differencing the modeled subject image and modeled reference  
35 image. Forms of digital image differencing for image en-

hancement have been known in the art for some time and are understood by those skilled in the art. Basically, differencing enhances images by removing contrast detail information which is similar in the images. The information in the differenced image is presumed to be diagnostically (or for other reasons) interesting. The differenced image contains sharply reduced intensity values in the regions where the contrast detail of the original images are similar, and normal intensity values in the regions where the images are appreciably different. Hence, the contrast between this difference information and the background is enhanced. It is understood by those in the art though that when images are differenced, they are not typically compressed. A differenced image which comprises entirely eight bit, low intensity pixels is as large as the image which contains the same number of eight bit pixels, but which displays maximum contrast detail.

As embodied herein and depicted in Figures 2 and 4, the method 10 includes the operation 32 of differencing the modeled subject image 24 and modeled reference image 28 so as to provide a differenced image 34. The differenced image 34 comprises noise, some information due to misregistration of the images, and information due to true differences between the images (data 14 of relative diagnostic importance). The differenced image 34 includes at least the previously identified area of interest 18, which encompassed portions of the subject image 12 containing potential diagnostically important data 14. Hence, the method 10 is also useful as a diagnostic tool, since abnormalities in the subject image 12 are amplified in the differenced image 34.

In an alternative embodiment of the invention as embodied herein and shown for example in Figures 2 and 4, the method 10 further comprises (optionally) a region smoothing operation 55 to eliminate noise from the



differenced image 34. The region smoothing process 55 employs known medium or noise: one embodiment of the present invention makes use of the fact that a difference image can be compressed more efficiently than the high contrast original images, as the system of the present invention applies a compression algorithm to the difference image, which algorithm includes the step of image segmentation to reduce fluctuation of the image function in the difference image and thereby allow greater compression ratios. Application of such potent compression algorithms to the difference image rather than the subject image reduces the artifacts which such algorithms often cause.

One method of the present invention further optionally comprises the operation of reduction of the differenced image to provide a reduced differenced image which includes at least the previously identified area of interest. The differenced image is reduced by removing portions of information therefrom that will still be contained in the final image but which will come from the reference image. Therefore, the final image will appear "whole" even though only a portion of the subject image was actually compressed.

As embodied herein and depicted for example in Figures 2 and 4, the method 10 may include reduction operation 36. In reduction 36, the differenced image 34 is edited or "trimmed" of the portions outside the previously identified area of interest 18. Various known conventional means can be utilized to so reduce the differenced image 34. Preferably, an editing program or the like is used to automatically eliminate portions of the differenced image outside the area of interest 18, with such "eliminated" portions being subsequently replenished such as from the standard reference image or data. In an alternative embodiment, an operator can designate which portions of the differenced image 34 are to be eliminated. The concept of a reduction operation 36 of the differenced image 34 is not

crucial to the spirit of the invention and can be accomplished in any known applicable manner.

5 The foregoing exemplary method of the present invention may further optionally comprise the feature of enhanced compression of at least the area of interest of the reduced differenced image. The broad concept of compression per se of digital imagery is widely known in the art and need not be explained here in detail for a full and adequate understanding of this invention. Practice of the present invention, however, greatly enhances the effectiveness of even such conventional compression operations beyond the prior achievements of such conventional methods operated by themselves. By applying known compression algorithms to the reduced differenced image, the invention exploits the fact that such algorithms are more efficient at compressing images with a lower dynamic intensity range.

10 For example, a typical X-ray image has an expected dynamic intensity range of values from 0 to 255, which requires 8-bit units to store the data. Differencing may reduce the expected range to less than 0 to 64, which requires 6-bit units to store the data, thereby reducing the total amount of data contained in the image. Secondly, practice of the present invention allows for reduction of the difference image file to an identified region of interest, thereby greatly reducing the amount of data to be subsequently compressed. Thirdly, the invention exploits the fact that compression of a differenced image results in less severe artifacts being generated by the compression algorithms. Hence, stronger compression tools can be used on a differenced image without sacrificing reliability.

20 25 30 35 As embodied herein and shown for example in Figures 2 and 5, method 10 preferably includes the process of enhanced compression 38 of at least the area of interest from the reduced differenced image 39 so as to provide a compressed differenced image 40. In the exemplary preferred embodi-

ment of the invention as shown in Figure 5, compression 38 is accomplished with conventional compression algorithms 56, with practice of the overall method 10 resulting in more efficient use of such algorithms 56, as explained above.

5           The foregoing exemplary method of the present invention further optionally includes the step 42 of transmission of the compressed differenced image to a predetermined receiving station whereby the compressed area of interest can be subsequently decompressed for addition to a duplicate of the  
10 standard reference image. Transmission can be accomplished by conventional known means, for example, via 9600 baud telephone lines. Due to the enhanced compression and increased compression ratios, the time required for transmission is greatly reduced as compared to conventional  
15 methods.

          As embodied herein and shown for example in Figures 2 and 5, such exemplary method 10 includes the optional step of transmission 42. In such preferred embodiment of the invention, standard 9600 baud telephone lines are utilized  
20 whereby the compressed difference image 40 is transmitted to a desired receiving station (which may be an "end" destination or an intermediate storage location from which subsequent transmission to an "end" station is made). The only requirement for the receiving station (if it is an "end"  
25 station at which reproduction is desired) is that it have a duplicate 48 of the standard reference image 30 for addition 46 to the decompressed reduced area of interest 39, and that it have the applicable hardware/software to perform decompression 44 and addition 46. Preferably, the receiving  
30 station is in possession of the duplicate reference image 48 well ahead of the expected transmission time.

          Decompression 44 may be accomplished with conventional (de)compression algorithms 56 (see Figure 5). Decompression 44 is a widely known technique to those  
35 skilled in the art. The addition process 46 comprises the

operation of combining the duplicate reference image 48 with the decompressed area of interest 39. This results in an approximated (or reconstructed) subject image 50 which is a relatively precise approximation of the original subject image 12. The portions of the differenced image 34 eliminated by the reduction process 36 are present in the approximated image 50 since they are never eliminated from the duplicate reference image 48. In essence, the approximated subject image 50 represents a complete picture composed of the area of interest 18 of the subject image 12 and with the reference image 30 comprising the remainder of the picture.

Storage of digital images can be quite expensive, requiring vast storage space. Due to the enhanced compression achieved with the present invention, storage requirements are greatly reduced. In a preferred embodiment of the invention as shown in Figures 2 and 5, the method 10 further optionally includes an enhanced intermediary storage capability 43 whereby the compressed differenced image 40 can be stored and repeatedly recalled for subsequent decompression 44. Any conventional means for storing digital data can be employed. For example, the image 40 can be stored on magnetic tape, storage disc, etc. Such storage function 43 can exist at the transmitting station, the receiving station, or at an intermediary station.

In further accordance with the present invention, the foregoing method is provided for the effective compression and transmission of radiographic imagery exploiting prior known information of the image. The following briefly overviews an exemplary present process specifically in the context of X-rays. As embodied herein and shown for example in Figures 2 through 5, a subject X-ray 12 comprising data of relative diagnostic importance 14 is obtained. The subject X-ray 12 undergoes interactive editing 16 to identify an area of interest 18.

The modeling operation 20 incorporates image warping algorithms 53 to generate of three-dimensional representation 54 of the subject X-ray 12 based upon a computer-generated three-dimensional model 22 representative of a particular element contained in the subject X-ray 12.

A standard reference X-ray 30 is modeled according to the same process 20, and upon the same computer-generated three-dimensional model 22, to provide a modeled reference X-ray 28. The standard reference X-ray 30 is the relative equivalent of the subject X-ray 12 without the diagnostically important data 14.

The modeled reference X-ray 28 and modeled subject X-ray 24 then undergo the registration process 26, and then undergo a differencing operation 32. The differenced X-ray 34 may then undergo reduction 36, followed by compression 38.

The compressed differenced X-ray 40 is then subjected to either a transmission operation 42 or storage operation 43 for recall and later use. In either event, during any subsequent decompression operation 44, a duplicate standard reference X-ray 48 is used to form an approximated subject X-ray 50.

An exemplary embodiment of the present invention directed more specifically to the compression and transmission of chest X-rays is depicted in Figure 6. A subject chest X-ray 61 comprising data of relative diagnostic importance 14 is obtained. The subject chest X-ray 61 undergoes a process of interactive direct operator editing 16 whereby the operator determines and identifies an area of interest 18 of the subject chest X-ray 61 which includes at least the diagnostically important data 14.

The subject chest X-ray 61 is then subjected to a modeling process. Although not specifically designated in Figure 6, such modeling process is preferably the equivalent of the modeling process depicted in Figures 2 and 3. Some

time prior to modeling of the subject chest X-ray 61, a relatively unrelated standard reference chest X-ray 64 is modeled according to the same process used on the subject chest X-ray 61, and upon the same computer-generated three-dimensional thorax model 60, so as to provide a modeled reference chest X-ray 68. The standard reference chest X-ray 64 is the relative equivalent of the subject chest X-ray 61 without the diagnostically important data 14. Following the modeling process the subject image undergoes a registration process, which registration process incorporates image warping algorithms 53 to spatially correct the subject image eliminating spatial differences between subject and reference images.

The reference chest X-ray 68 and registered subject chest X-ray 66 then undergo a differencing operation 32 and region smoothing operation 55 so as to provide a differenced chest X-ray 70. At a minimum, the differenced chest X-ray 70 includes the previously identified area of interest 18 which encompasses at least the data of diagnostic importance 14.

The differenced chest X-ray 70 then undergoes a reduction process 36 to provide a reduced differenced chest X-ray 72. The reduction process 36 eliminates unwanted portions of the differenced chest X-ray 70 with the reduced differenced chest X-ray 72 comprising at a minimum the area of interest 18.

At a minimum, the reduced area of interest 39 of the reduced differenced chest X-ray 72 then undergoes a compression process 38. The compression process 38 utilizes compression algorithms to produce a compressed differenced chest X-ray 40.

The compressed differenced chest X-ray 40 is then subjected to a transmission operation 42 whereby the chest X-ray 40 is transmitted to a receiving station. Optionally, the compressed differenced chest X-ray 40 may undergo


storage 43 at the same or a remote location for recall and later use. At the receiving station, the compressed differenced chest X-ray 40 undergoes decompression 44 so as to provide at least the reduced area of interest 39. The  
5 reduced area of interest is then combined with a duplicate standard reference chest X-ray 74 to provide a precise approximated subject chest X-ray 76.

It should be apparent to those skilled in the art that various modifications and variations can be made in the  
10 method of the present invention without departing from the scope and spirit of the invention. Likewise, it will be understood that the foregoing language is by way of example only, and is not intended as limiting broader present features and aspects. Thus it is intended that the present  
15 invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

## ABSTRACT OF THE DISCLOSURE

A process for X-ray registration and differencing results in more efficient compression. Differencing of registered modeled subject image with a modeled reference image forms a differenced image for compression with conventional compression algorithms. Obtention of a modeled reference image includes modeling a relatively unrelated standard reference image upon a three-dimensional model, which three-dimensional model is also used to model the subject image for obtaining the modeled subject image. The registration process of the modeled subject image and modeled reference image translationally correlates such modeled images for resulting correlation thereof in spatial and spectral dimensions. Prior to compression, a portion of the image falling outside a designated area of interest may be eliminated, for subsequent replenishment with a standard reference image. The compressed differenced image may be subsequently transmitted and/or stored, for subsequent decompression and addition to a standard reference image so as to form a reconstituted or approximated subject image at either a remote location and/or at a later moment in time. Overall effective compression ratios of 100:1 are possible for thoracic X-ray digital images.



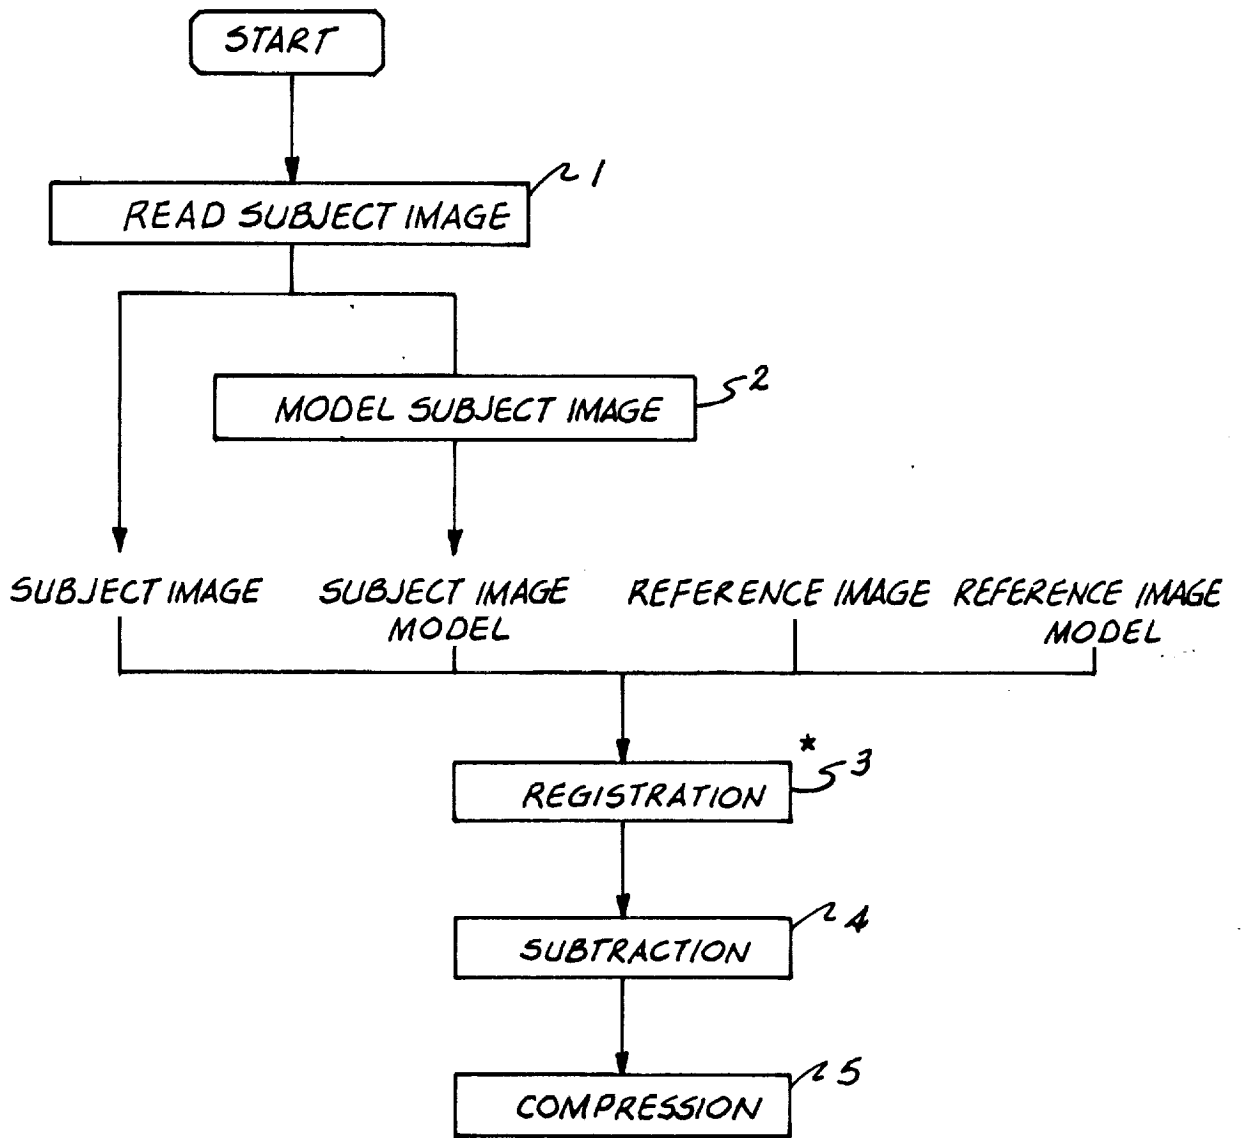

\* SPATIAL ADJUSTMENT OF IMAGES TO CORRECT LOCATION, SCALE, AND ORIENTATION DIFFERENCES

*Fig. 1*

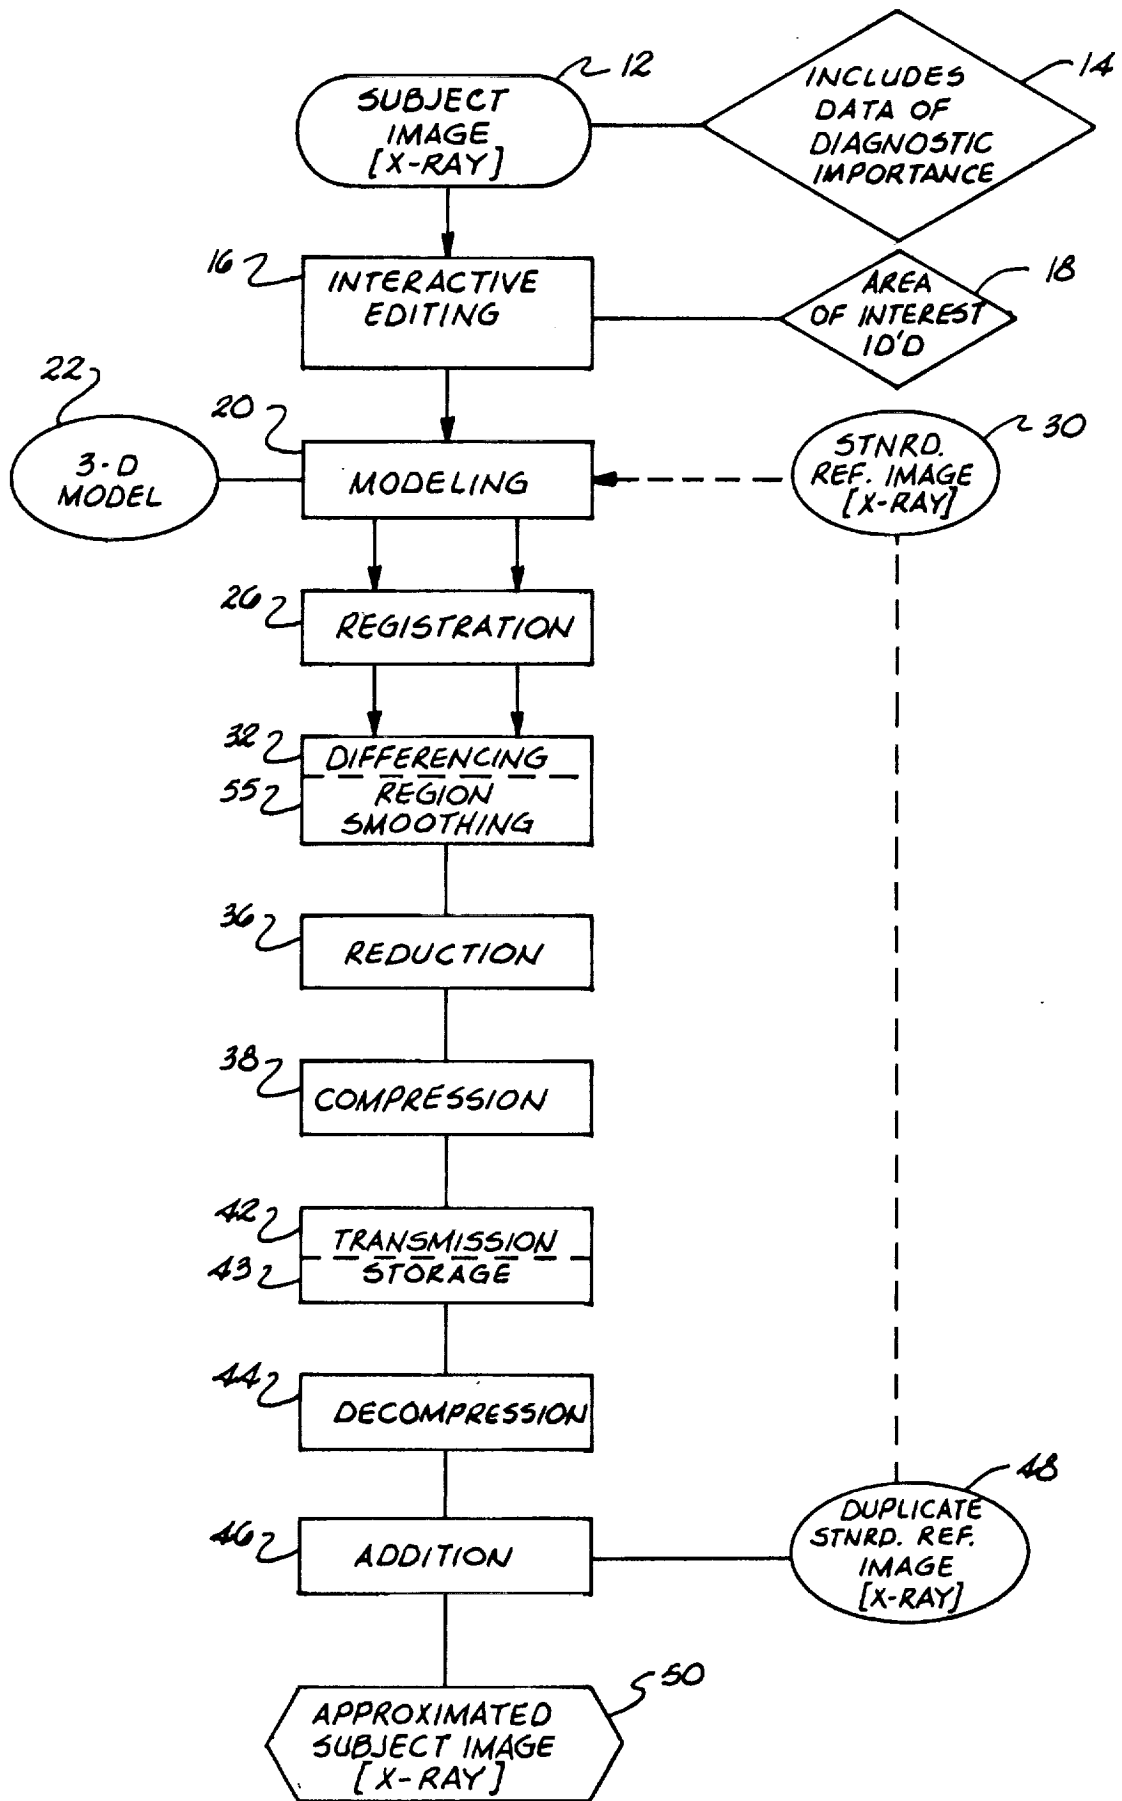


Fig. 2

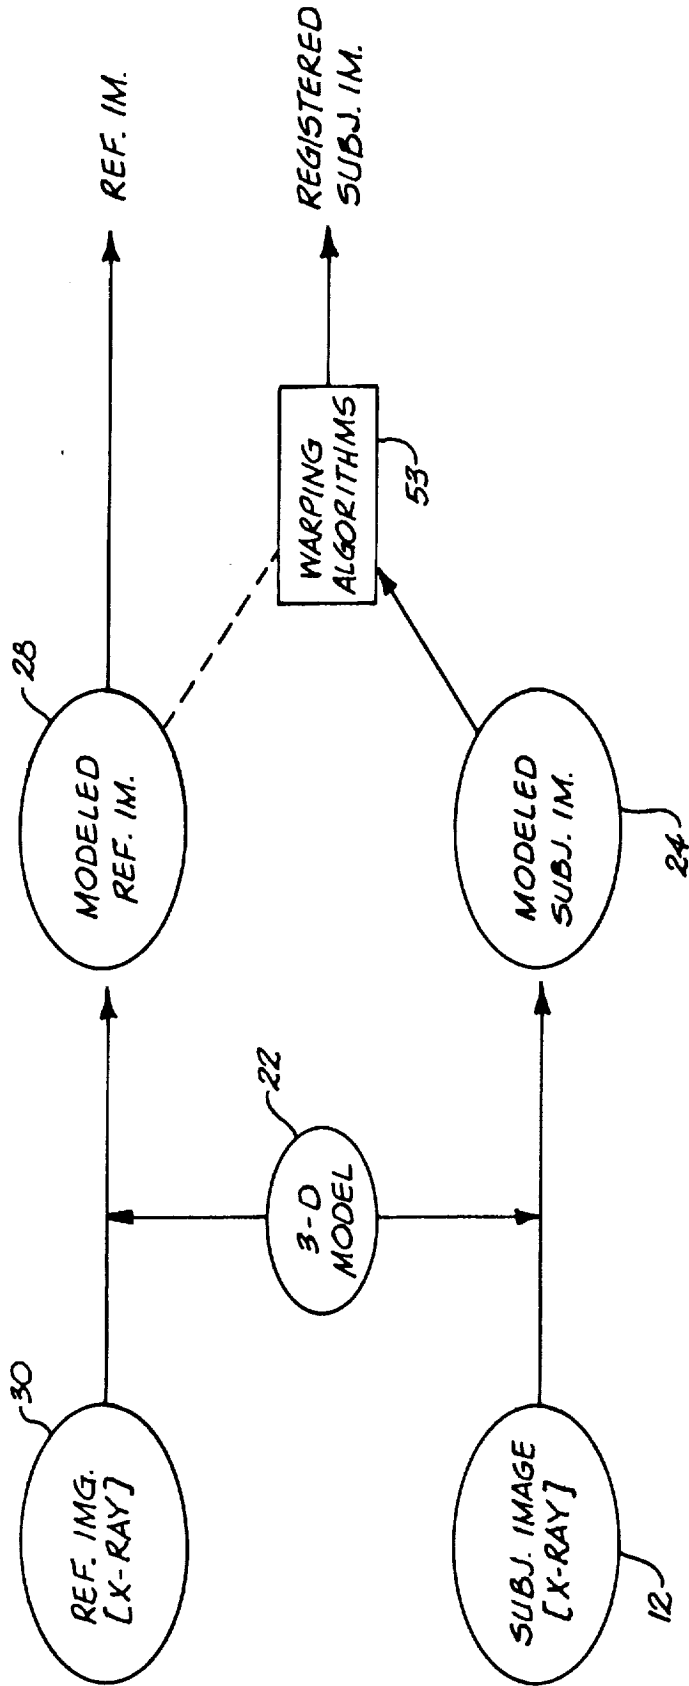


Fig. 3

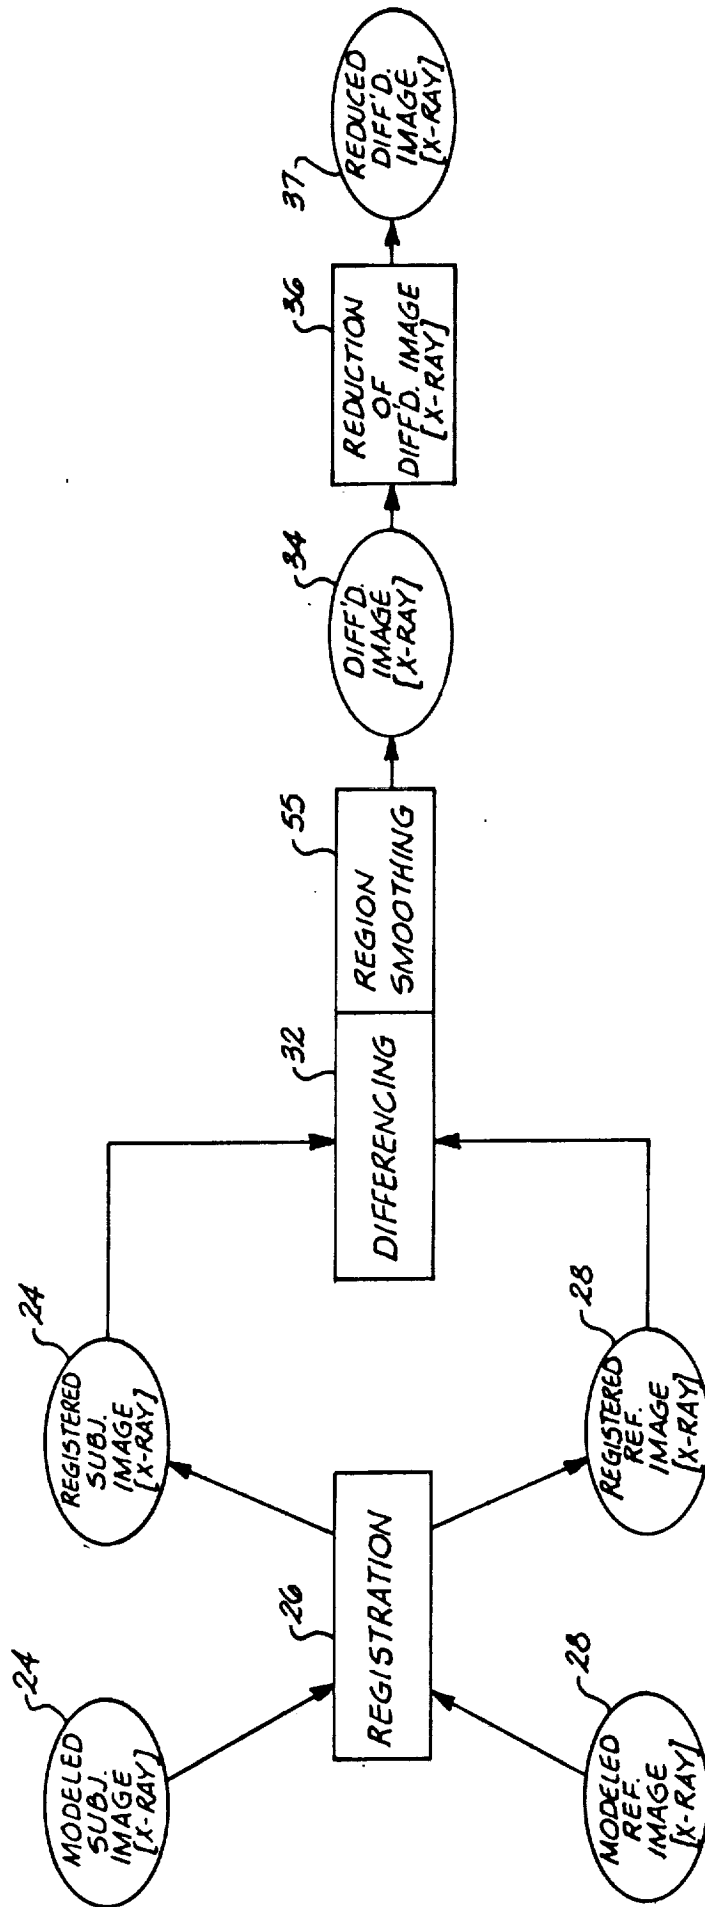


Fig. 4

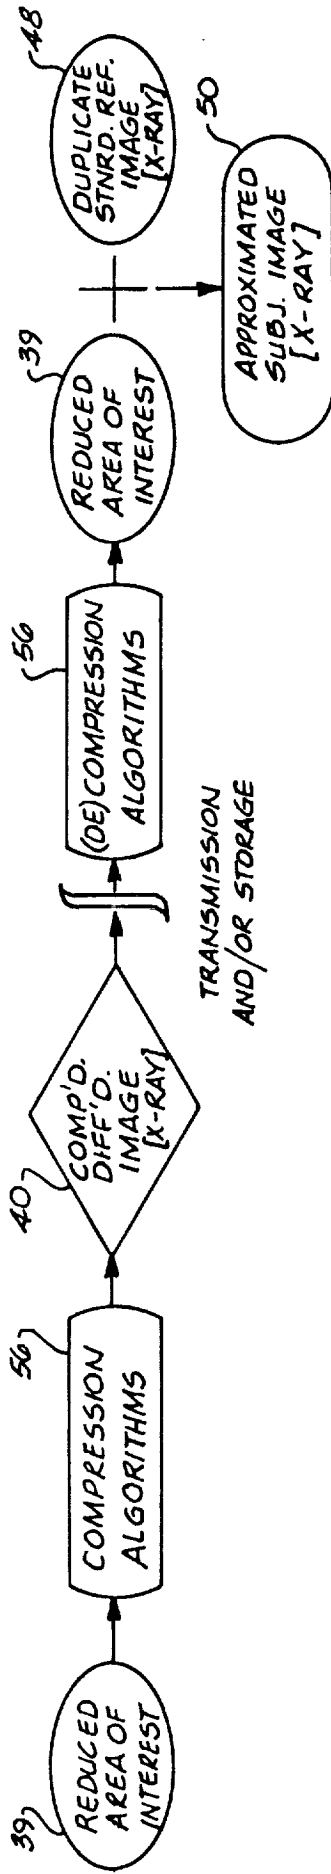


Fig. 5

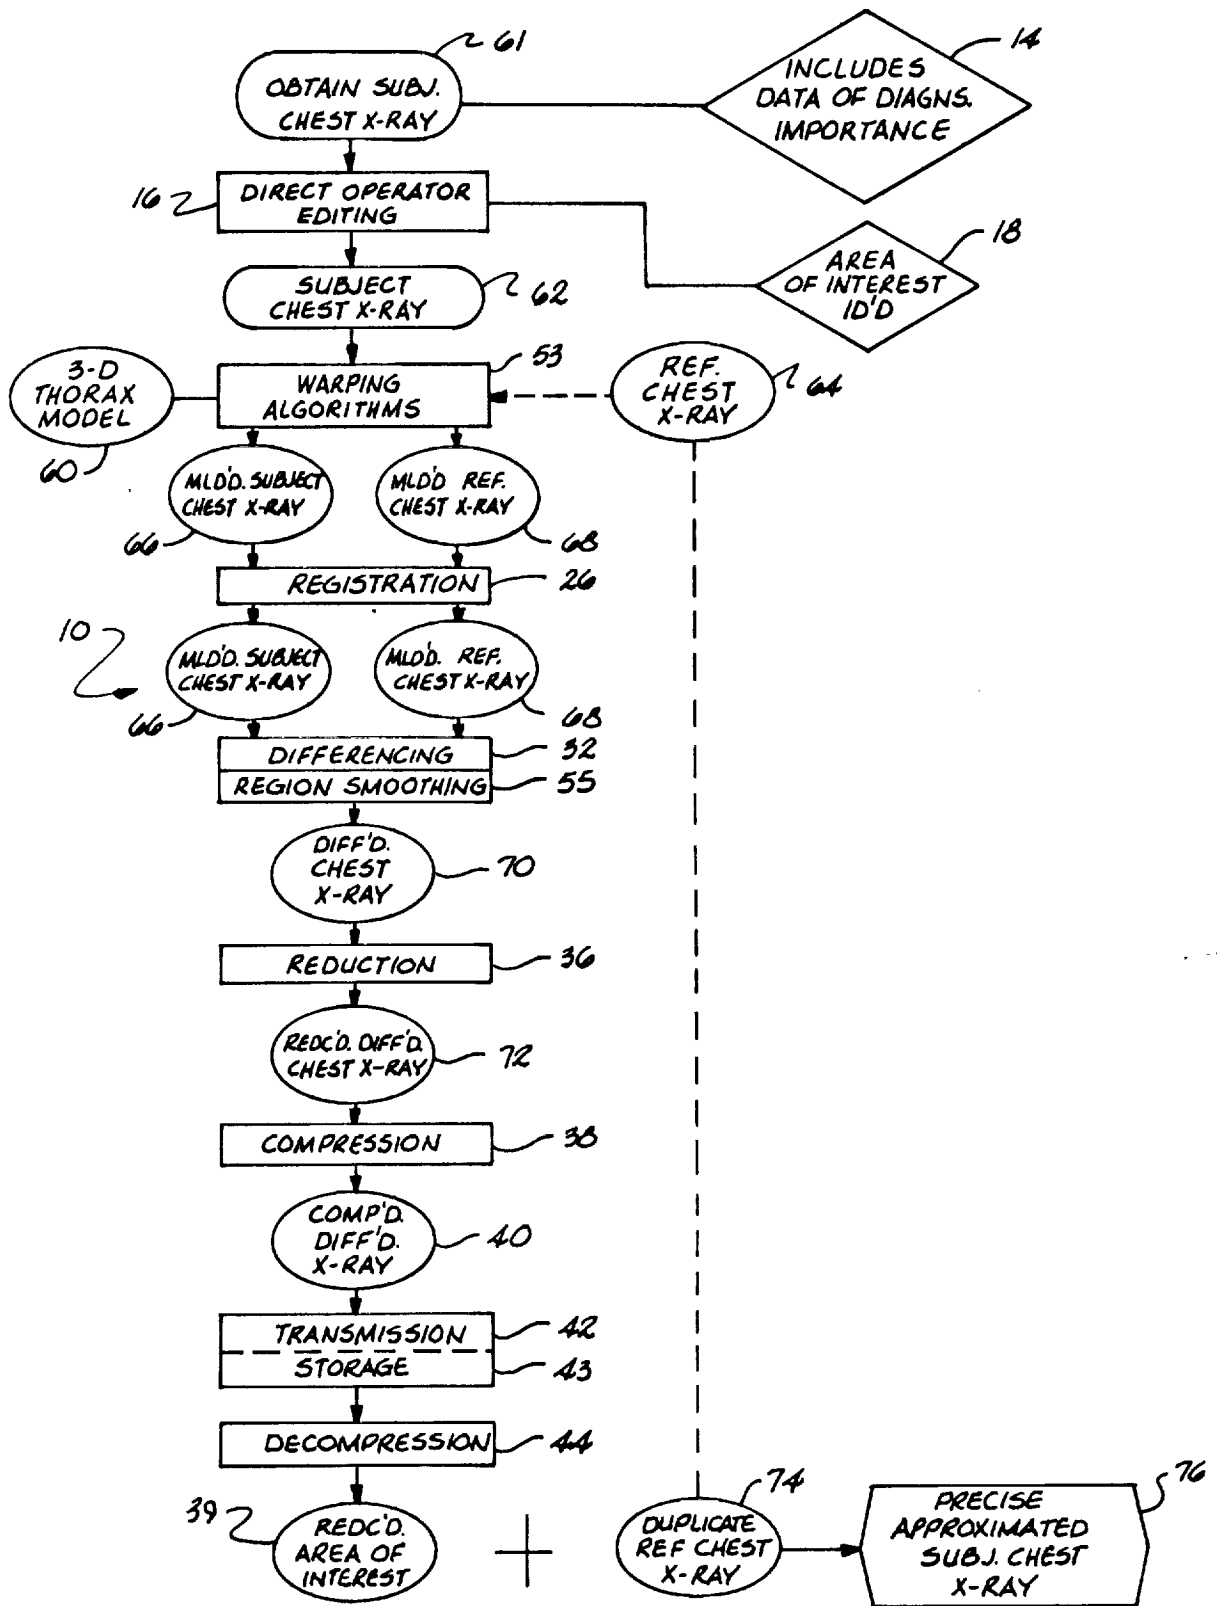


Fig. 6