

1N-39  
1595  
P15

NASA Technical Memorandum 103680

# Probabilistic Simulation of Uncertainties in Thermal Structures

Christos C. Chamis  
*National Aeronautics and Space Administration  
Lewis Research Center  
Cleveland, Ohio*

and

Michael Shiao  
*Sverdrup Technology, Inc.  
Lewis Research Center Group  
Brook Park, Ohio*

Prepared for the  
First Thermal Structures Conference  
sponsored by the University of Virginia  
Charlottesville, Virginia, November 13-15, 1990



(NASA-TM-103680) PROBABILISTIC SIMULATION  
OF UNCERTAINTIES IN THERMAL STRUCTURES  
(NASA) 15 p CSCL 20K

N91-19472

Unclas  
G3/39 0001595



# PROBABILISTIC SIMULATION OF UNCERTAINTIES IN THERMAL STRUCTURES

Christos C. Chamis\*  
National Aeronautics and Space Administration  
Lewis Research Center  
Cleveland, Ohio 44135

and

Michael Shiao\*\*  
Sverdrup Technology, Inc.  
Lewis Research Center Group  
Brook Park, Ohio 44142

## SUMMARY

E-5897

Development of probabilistic structural analysis methods for hot structures is a major activity at NASA Lewis Research Center. It consists of five program elements: (1) probabilistic loads, (2) probabilistic finite element analysis, and (3) probabilistic material behavior, (4) assessment of reliability and risk, and (5) probabilistic structural performance evaluation. Recent progress includes: (1) quantification of the effects of uncertainties for several variables on High Pressure Fuel Turbopump (HPFT) blade temperature, pressure, and torque of the Space Shuttle Main Engine (SSME), (2) the evaluation of the cumulative distribution function for various structural response variables based on assumed uncertainties in primitive structural variables, (3) evaluation of the failure probability, (4) reliability and risk-cost assessment, and (5) an outline of an emerging approach for eventual hot structures certification. Collectively, the results demonstrate that the structural durability/reliability of hot structural components can be effectively evaluated in a formal probabilistic framework. In addition, the approach can be readily extended to computationally simulate certification of hot structures for aerospace environments.

## INTRODUCTION

It is becoming increasingly evident that deterministic structural analysis methods will not be sufficient to properly design critical components in hot structures in general and propulsion structures in particular. These structural components are subjected to a variety of complex, and severe cyclic loading conditions, including high temperatures and high temperature gradients. Most of these are quantifiable only as best engineering estimates. These complex loading conditions subject the material to coupled nonlinear behavior which depends on stress, temperature, and time. Coupled nonlinear material behavior is nonuniform, is very difficult to determine experimentally, and it is difficult (if not impossible) to quantify deterministically. In addition, hot rotating structural components are relatively small. Fabrication tolerances on these components, which in essence are small thickness variations, can have significant effects on the component structural response. Fabrication tolerances by their very nature are statistical. Furthermore, the attachment of components in the structural system generally differs by some indeterminate degree from that assumed for designing the component. In summary, all four fundamental aspects -- (1) loading conditions, (2) materials behavior, (3)

---

\*Senior Aerospace Scientist, Structures Division.

\*\*Research Engineer.

geometric configuration, and (4) boundary conditions (on which structural analyses are based) -- are of random nature. The direct way to formally account for all these uncertain aspects is to develop probabilistic structural analysis methods where all participating variables are described by appropriate probability functions.

The development of the probabilistic structural analysis methodology is an on-going joint program of NASA Lewis Research Center in-house and sponsored research (ref. 1). Theoretical considerations, computer codes, and other relevant applications are described in papers presented in various recent conferences (refs. 2 to 32). Activities and progress up to June 1989 are summarized in reference 33. The objectives of this invited paper are (1) to provide a brief description of the fundamental aspects and (2) to demonstrate the application of this methodology to a specific example (the reliability/risk of turbine blade components of rocket propulsion systems). The specific example includes the four key elements required in probabilistic structural analysis of thermal structures, namely: (1) probabilistic loads, (2) probabilistic finite element analysis, (3) probabilistic description of coupled nonlinear material behavior, and (4) evaluation of reliability and risk. Throughout the specific example discussion appropriate comments are included to illustrate the generality of the method and its application to a variety of hot structures.

#### FUNDAMENTAL CONSIDERATION

Central to the probabilistic structural analysis described herein is the fundamental consideration that: Uncertainties observed in the structural performance (displacements), frequencies, buckling, global fracture toughness, stresses/strains of hot structures can be quantified in terms of corresponding uncertainties in basic parameters (primitive variables). The primitive variables are those which are used to describe the structure and its respective environment. For example: (1) structural configuration, (2) boundary conditions, (3) loading conditions, and (4) material thermomechanical nonlinear behavior.

The uncertainties in these primitive variables are then integrated through structural mechanics to quantify the uncertainties in the global structural responses (example-displacements) and are decomposed to quantify the uncertainties in local responses (example-stresses/strains). The concept is schematically illustrated in figure 1. The structural component is the blade which is modelled for finite element analysis. The input uncertainties are the blade loads (centrifugal, pressure, and temperature), geometry and material variables. The output is quantification of uncertainties in structural responses or in local stresses for probable fracture initiation. Brief descriptions are given on subsequent sections on each of these as it is applied to the specific example.

#### PROBABILISTIC SIMULATION OF LOADS

The fundamental assumption for the probabilistic simulation of loads is that each individual load condition is the probabilistic time synthesis of four primitive parts: (1) steady state, (2) periodic, (3) random, and (4) spike. Each of these parts, except random, is described by a deterministic portion and a probabilistic perturbation about this deterministic portion. The resulting distribution is similar to the schematic, in figure 1 upper left and as described in reference 33. One justification for describing each loading condition in terms of primitive parts is

that experts, over the years, have developed good judgment on the ranges of the perturbations about nominal (deterministic) conditions. A computer code with dedicated expert systems (Composite Load Spectra) has been developed to synthesize these four parts by using (1) available data from various SSME engines, (2) probability theory, and (3) expert opinion, as depicted schematically in figure 2.

The results from the application of the Composite Load Spectra computer code to probabilistically simulate loads for two blades are summarized in table I. The first 5 lines are uncertainties in some of the engine specific primitive variables, while the last four are the predicted loads. The comparisons of predicted loads with the measured data are in very good agreement considering the large number of primitive variables (47) required to synthesize these loads. The conclusion is that methods can be developed and are available to probabilistically synthesize complex load conditions for hot structures.

### PROBABILISTIC FINITE ELEMENT STRUCTURAL ANALYSIS

The fundamental assumption for developing probabilistic finite element structural analysis (PFEM) is that the uncertainties in each primitive structural variable can be represented by a probabilistic distribution. Primitive structural variables are those which are used to describe a structure such as: (1) stiffness, (2) strength, (3) thickness and tolerance, (4) spatial location, (5) attachment, and (6) various nonlinear material dependencies (temperature, stress, time, etc) typical to the schematic in figure 1 upper right (ref. 33). Subsequently, the uncertainties in the load conditions (described by the composite load spectra) and the uncertainties in the primitive structural variables are computationally synthesized by performing probabilistic finite element structural analysis to simulate uncertainties in the structural response of a specific SSME structural component. The structural response such as displacement, frequencies, buckling loads, and global fracture toughness as was already mentioned, is generally described in terms of cumulative probability distribution.

PFEM has been formalized and integrated into a computer code identified as NESSUS (Numerical Evaluation of Stochastic Structures Under Stress). NESSUS is driven by an expert system. A schematic diagram of NESSUS is shown in figure 3. Representative results obtained using NESSUS for one of the blades are shown in figure 4 for stress at two different points. The distributions assumed for the primitive variables are listed in table II in addition to the blade loads from the CLS computer code. The combined effects of the primitive variable uncertainties on effective effect stress are shown in figure 4 in terms of cumulative probability distribution (CPD). The information generated during the generation of the CPD can also be used to evaluate the sensitivities as shown in figure 4 for each point. The significant point is that the PFEM yields a wealth of information which can be used to evaluate: (1) the uncertainties in the local structural response, and (2) the sensitivities which can be used to adjust the design for enhanced probability of success. The important conclusion is that probabilistic finite element methods can be developed and are available to quantify uncertainties in the structural performance of hot structures. In addition the sensitivities in the primitive variables that influence this performance can be evaluated and ranked.

## PROBABILISTIC SIMULATION OF MATERIAL BEHAVIOR

The fundamental assumptions to probabilistically simulate nonlinear material behavior are: (1) a relationship for material behavior can be developed in terms of primitive variables affecting this behavior and (2) the uncertainties in the primitive variables can be described by assumed distributions (ref. 33). A multifactor interaction model (MFIM) for this relationship is shown in figure 5, where its constituent primitive variables are identified.

This MFIM is applied to the blade to probabilistically determine: (1) the resistance curve for damage (crack) initiation and (2) damage propagation and its effects on global structural response. The inputs are summarized in table III. The results for the most probable damage path, with a probability of occurrence of 0.0002, and the respective degradation in frequencies are shown in figure 6. The important observation is that the uncertainties in damage initiation, propagation and subsequent effects on structural performance can be probabilistically simulated by the methodology described herein. It is worthy of note that this methodology can readily be incorporated to monitor the in-service health of aerospace hot structures (provide suitable monitoring devices are available).

## RISK-COST ASSESSMENT

The methodology described previously can be extended to perform reliability and risk-cost assessments. In order to accomplish this, (1) the cost for component flight readiness needs to be quantified and (2) the cost as a consequence of failure must be established. Assumed aspects of both of these have been integrated into the methodology described herein (ref. 34). Application of this methodology to the blade in the previous section yields the results summarized in figure 7.

It can be seen in figure 7 that: (1) the probability of damage initiation can be evaluated versus fatigue cycles and (2) the total cost, which is used to assess risk, is evaluated versus fatigue cycles. The important observation from the aforementioned discussion is that the reliability and risk-cost of hot structures can be assessed using the probabilistic methods of the type described herein. The implications are far-reaching because these methods can be applied to existing hot structures to evaluate their risk for continuing service as well as those on the design board and those still in the conceptual phase.

## RELIABILITY/CERTIFICATION -- AN EMERGING APPROACH

The collective observations from the previous discussion lead to an emerging approach to computationally simulate hot structures reliability, risk, component qualification, and eventually vehicle structure certification. The general steps for this emerging approach are outlined as follows:

1. Develop a hot structural component/vehicle (global) analysis model.
2. Conduct probabilistic structural analysis (PSA) of the types described herein.
3. Identify the critical component/vehicle areas from the results of PSA.

4. Perform global/local PSA to evaluate nonlinear effects and to locate probable sites of damage initiation.
5. Determine the most probable damage propagation path.
6. Evaluate probable structural degradation along this path.
7. Establish probable path extent for violation of specified structural performance criteria (for example, 10-percent reduction in the first vibration mode).
8. Assess corresponding reliability and risk and decide on their acceptability.
9. Schedule inspection intervals and retirement for cause criteria based on the results of items 5 to 7.
10. Verify with probabilistically selected (using respective sensitivities) critical hot-structures components and prototype tests.
11. Design a suitable in-service health monitoring system using the results from items 8 and 9 above in order to ascertain that the component/structure will meet the acceptable reliability and risk.

#### CONCLUSIONS

A methodology has been developed for the formal probabilistic quantification of uncertainties in the structural performance of aerospace hot structures. The key elements in this methodology are: (1) probabilistic load simulation, (2) probabilistic finite element analysis, (3) probabilistic simulation of thermomechanical nonlinear material behavior, and (4) risk-cost assessment. This methodology is described herein in terms of fundamental aspects and application to a specific structural component which is a turbopump blade of the Space Shuttle Main Engine (SSME). The specific example illustrates how the uncertainties in all the basic parameters (primitive variables) for loads, structure and material behavior are incorporated in order to probabilistically simulate the uncertainties in the structural response (global and local). Also, the example illustrates how the reliability and risk-cost can be assessed. Collectively, the summary of the fundamental considerations and the results from the specific example demonstrate that a formal methodology is available to evaluate the reliability and risk-cost of hot structures in aerospace environments. In addition, an emerging approach is outlined which can be used to computationally qualify and eventually certify hot structures.

#### REFERENCES

1. Chamis, C.C.: Probabilistic Structural Analysis Methods for Space Propulsion System Components. NASA TM-88861, 1986.
2. Liu, W.K.; Belytschko, T.; and Besterfield, G.H.: A Probabilistic Hu-Washizu Variational Principle. 28th Structures, Structural Dynamics and Materials Conference, Part 1, AIAA, 1987, pp. 252-259.
3. Wirsching, P.H.; Ortiz, K.; and Lee, S.J.: An Overview of Reliability Methods in Mechanical and Structural Design. 28th Structures, Structural Dynamics and Materials Conference, Part 1, AIAA, 1987, pp. 260-267.

4. Nagpal, V.K.; Rubinstein, R.; and Chamis, C.C.: Probabilistic Structural Analysis to Quantify Uncertainties Associated with Turbopump Blades. 28th Structures, Structural Dynamics and Materials Conference, Part 1, AIAA, 1987, pp. 268-274.
5. Chamis, C.C.: Probabilistic Structural Analysis to Evaluate the Structural Durability of SSME Critical Components. Structural Integrity and Durability of Reuseable Space Propulsion Systems, NASA CP-2471, 1987, pp. 117-120.
6. Cruse, T.A.: Probabilistic Structural Analysis Methods for Select Space Propulsion System Structural Components (PSAM). Structural Integrity and Durability of Reusable Space Propulsion Systems, NASA CP-2471, 1987, pp. 121-126.
7. Dias, J.B.; Nagtegaal, J.C.; and Nakazawa, S.: The Nessus Finite Element Code. Structural Integrity and Durability of Reuseable Space Propulsion Systems, NASA CP-2471, 1987, pp. 127-132.
8. Rajagopal, K.R.: Probabilistic Structural Analysis Verification Studies. Structural Integrity and Durability of Reuseable Space Propulsion Systems, NASA CP-2471, 1987, pp. 133-138.
9. Burnside, O.: Nessus/Expert and Nessus/FPI in the Probabilistic Structural Analysis Methods (PSAM) Program. Structural Integrity and Durability of Reuseable Space Propulsion Systems, NASA CP-2471, 1987, pp. 139-144.
10. Wirsching, P.H.: Advanced Probabilistic Method Development. Structural Integrity and Durability of Reusable Space Propulsion Systems, NASA CP-2471, 1987, pp. 145-150.
11. Atluri, S.N.: Stochastic and Hybrid-Stress Plate/Shell Finite Elements for Hot-Section Components. Structural Integrity and Durability of Reusable Space Propulsion Systems, NASA CP-2471, 1987, pp. 151-152.
12. Belytschko, T.; and Liu, W.K.: Probabilistic Finite Elements. Structural Integrity and Durability of Reusable Space Propulsion Systems, NASA CP-2471, 1987, pp. 153-160.
13. Shiao, M.; Rubinstein, R.; and Nagpal, V.K.: Probabilistic SSME Blades Structural Response Under Random Pulse Loading. Structural Integrity and Durability of Reusable Space Propulsion Systems, NASA CP-2471, 1987, pp. 161-166.
14. Nagpal, V.K.: Quantifying Uncertainties in the Structural Response of SSME Blades. Structural Integrity and Durability of Reusable Space Propulsion Systems, NASA CP-2471, 1987, pp. 167-174.
15. Newell, J.F.: Composite Load Spectra For Select Space Propulsion Structural Components. Structural Integrity and Durability of Reusable Space Propulsion Systems, NASA CP-2471, 1987, pp. 175-188.
16. Kurth, R.; and Newell, J.F.: Probabilistic Load Model Development and Validation for Composite Load Spectra for Select Space Propulsion Engines. Structural Integrity and Durability of Reusable Space Propulsion Systems, NASA CP-2471, 1987, pp. 189-2000.



17. Spencer, B.F., Jr.; and Hopkins, D.A.: An Expert System for Probabilistic Description of Loads on Space Propulsion System Structural Components. 29th Structures, Structural Dynamics and Materials Conference, Part 3, AIAA, 1988, pp. 1262-1266.
18. Wu, Y.T.; and Burnside, O.H.: Validation of the NESSUS Probabilistic Finite Element Analysis Computer Program. 29th Structures, Structural Dynamics and Materials Conference, Part 3, AIAA, 1988, pp. 1267-1274.
19. Shiao, M.C.; Nagpal, V.K.; and Chamis, C.C.: Probabilistic Structural Analysis of Aerospace Components Using NESSUS. 29th Structures, Structural Dynamics and Materials Conference, Part 3, AIAA, 1988, pp. 1267-1274.
20. Millwater, H.; Palmer, K.; and Fink, P.: NESSUS/Expert - An Expert System for Probabilistic Structural Analysis Methods. 29th Structures, Structural Dynamics and Materials Conference, Part 3, AIAA, 1988, pp. 1283-1288.
21. Stock, T.A., et al.: Probabilistic Composite Micromechanics. 29th Structures, Structural Dynamics and Materials Conference, Part 3, AIAA, 1988, pp. 1289-1298.
22. Boyce, L.; and Chamis, C.C.: Probabilistic Constitutive Relationships for Cyclic Material Strength Models. 29th Structures, Structural Dynamics and Materials Conference, Part 3, AIAA, 1988, pp. 1299-1306.
23. Boyce, L.; and Chamis, C.C.: Probabilistic Constitutive Relationships for Material Strength Degradation Models. 30th Structures, Structural Dynamics and Materials Conference, Part 4, AIAA, 1989, pp. 1832-1839.
24. McClung, R.C., et al.: An Approximate Methods Approach to Probabilistic Structural Analysis. 30th Structures, Structural Dynamics and Materials Conference, Part 4, AIAA, 1989, pp. 1840-1845.
25. Millwater, H.R.; and Wu, Y.T.: Structural Reliability Analysis Using a Probabilistic Finite Element Program, 30th Structures, Structural Dynamics and Materials Conference, Part 4, AIAA, 1989, pp. 1846-1851.
26. Wu, Y.T.; Millwater, H.R.; and Cruse, T.A.: An Advanced Probabilistic Structural Analysis Method for Implicit Performance Functions. 30th Structures, Structural Dynamics and Materials Conference, Part 4, AIAA, 1989, pp. 1852-1859.
27. Newell, J.F.; Rajagopal, K.R.; and Ho, H.: Probabilistic Structural Analysis of Space Propulsion System Turbine Blades. 30th Structures, Structural Dynamics and Materials Conference, Part 4, AIAA, 1989, pp. 1860-1868.
28. Thacker, B.H.; McClung, R.C.; and Millwater, H.R.: Application of the Probabilistic Approximate Analysis Method to a Turbopump Blade Analysis. 31st Structures, Structural Dynamics and Materials Conference, Part 2, AIAA, 1990, pp. 1039-1047.
29. Millwater, H.R.; and Wu, Y.T.; and Fossum, A.F.: Probabilistic Analysis of a Materially Nonlinear Structure. 31st Structures, Structural Dynamics and Materials Conference, Part 2, AIAA, 1990, pp. 1048-1053.

30. Debchaudhury, A., et al.: A Probabilistic Approach to the Dynamic Analysis of Ducts Subjected to Multibase Harmonic and Random Excitation. 31st Structures, Structural Dynamics and Materials Conference, Part 2, AIAA, 1990, pp. 1054-1061.
31. Newell, J.F., et al.: Probabilistic Structural Analysis of Space Propulsion System LOX Post. 31st Structures, Structural Dynamics and Materials Conference, Part 2, AIAA, 1990, pp. 1062-1069.
32. Shiao, M.C.; and Chamis, C.C.: A Methodology for Evaluating the Reliability and Risk of Structures Under Complex Service Environments. 31st Structures, Structural Dynamics and Materials Conference, Part 2, AIAA, 1990, pp. 1070-1080.
33. Chamis, C.C.; and Hopkins, D.A.: Probabilistic Structural Analysis Methods of Hot Engine Structures. NASA TM-102091, 1989.
34. Shiao, M.C.; and Chamis, C.C.: Probability of Failure and Risk Assessment of Propulsion Structural Components. 1990 JANNAF Propulsion Meeting, Vol. 1, D.S. Eggleston and K.L. Strange, eds., CPIA-PUBL-515-VOL-1, Chemical Propulsion Information Agency, Laurel, MD, 1990, pp. 135-162 (Also, NASA TM-102323).

TABLE I. - HPOTP AND HPFTP PARAMETERS PHASE II ENGINE CALCULATED VERSUS MEASURED

Condition	HPOTP				HPFTP			
	Speed		Turbine discharge temperature		Speed		Turbine discharge temperature	
	Calculated, rpm	Measured, rpm	Calculated, °R	Measured, °R	Calculated, rpm	Measured, rpm	Calculated, °R	Measured, °R
Hardware - 2σ random	294	-----	53	-----	288	-----	65	-----
Test - 2σ random	210	-----	157	-----	306	-----	20	-----
Total random	360	-----	165	-----	554	-----	70	-----
Low NPSP - det	620	-----	225	-----	56	-----	52	-----
High NPSP - det	-317	-----	-219	-----	-94	-----	-62	-----
Range = random + det	1 660	1 500	475	400	1 260	1 000	114	150
Max	28 090	29 100	1630	1650	35 742	35 750	1740	1760
Nom	28 100	28 200	1374	1380	35 130	35 300	1688	1690
Min	27 430	27 500	1155	1250	34 482	34 750	1625	1610

Measured: Measured variation for phase II test set.

Hardware: Variations engine hardware.

Test: Initial lost conditions - inlet temperatures and mixture ratio.


Det: Duty cycle effects of inlet pressures plus correlated 2σ variations of cavitation.

TABLE II. - RANDOM VARIABLES CONSIDERED AND THEIR STATISTICS

Number	Random variable	Type	Affected FEM quantities	Mean	Standard deviation
1	Material axis Z	Material orientation Effects	Anisotropic material Orientation angles	-0.087266 radian	0.067544
2	Material axis Y			-0.034907	0.067544
3	Material axis X			-0.052360	0.067544
4	Elastic modulus	Material properties	Elastic constants	18.38E6 psi	0.4595E6
5	Poisson's ratio			0.386	0.00965
6	Shear modulus			18.63E6 psi	0.046575E6
7	Geometric lean	Geometrical variations	Node coordinates	0 deg	0.14 deg
8	Geometric tilt			0 deg	0.14 deg
9	Geometric twist			0 deg	0.30 deg
10	Mixture ratio	System independent loads	Pressure, temperature, centrifugal force	6.0	0.02
11	Fuel inlet pressure			30.0 psi	5.00
12	Oxidizer inlet pressure			100.00 psi	26.00
13	Fuel inlet temperture			37 °R	0.50
14	Oxidizer inlet temperature	164 °R	1.33		
15	Pump efficiency	Component independent loads	Pressure, temperature, centrifugal force	1.00	0.008
16	Head coefficient			1.024	0.008
17	Coolant seal leakage	Local effects	Temperature	1.0	0.10
18	Hot gas seal leakage			1.0	0.05

TABLE III. - PRIMITIVE VARIABLE PROBABILITY DISTRIBUTIONS FOR PROBABILISTIC MATERIAL PROPERTY MODEL

Variable	Distribution type	Mean	Standard deviation	
			Value	Percent of mean
$T_F$	Normal	2750 °F	51.4 °F	2.0
$T_O$	Normal	68 °F	2.04 °F	3.0
$S_F$	Normal	212.0 ksi	10.6 ksi	5.0
$\sigma_o$	Constant	0	0	0
$N_{MF}$	Lognormal	$10^8$	$5 \times 10^6$	5.0
$N_{MO}$	Lognormal	$10^3$	50	5.0
n	Normal	0.25	-----	3.0
p	Normal	0.25	-----	3.0
q	Normal	0.25	-----	3.0

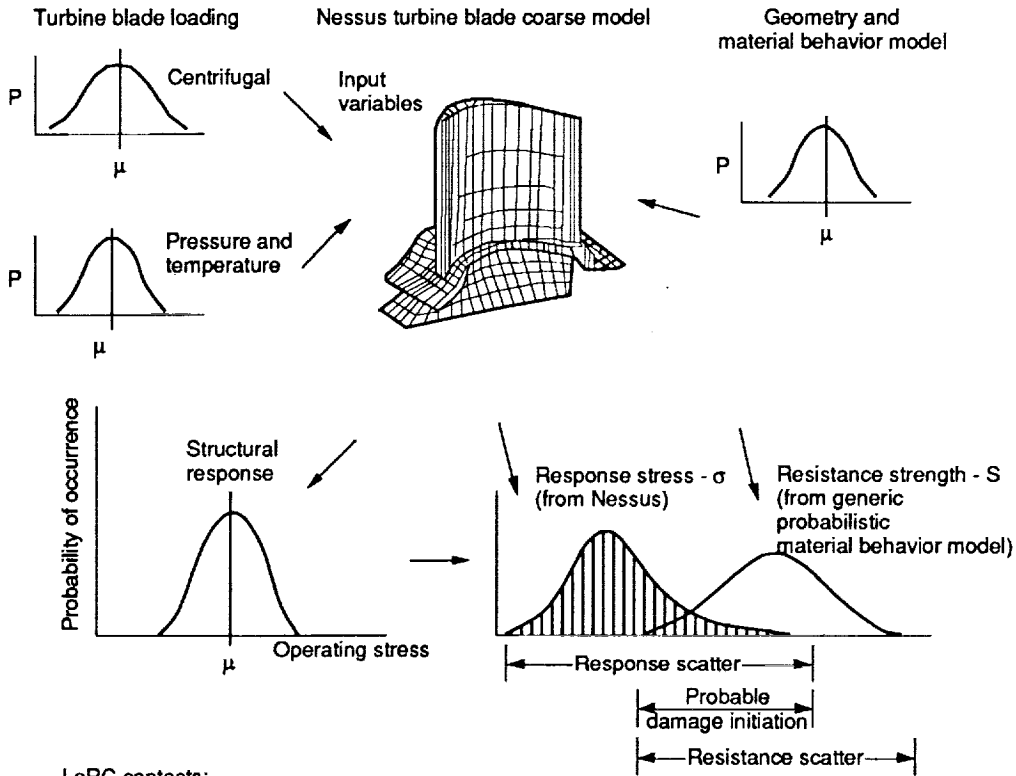

LeRC contacts:  
 CLS – Composite Load Spectra – Rocketdyne  
 PSAM – Probabilistic Structural Analysis Methods – SWRI  
 PMBM – Initial assessment – In-house

Figure 1.—Probabilistic simulation of component reliability using CLS coupled with PSAM and PMBM.

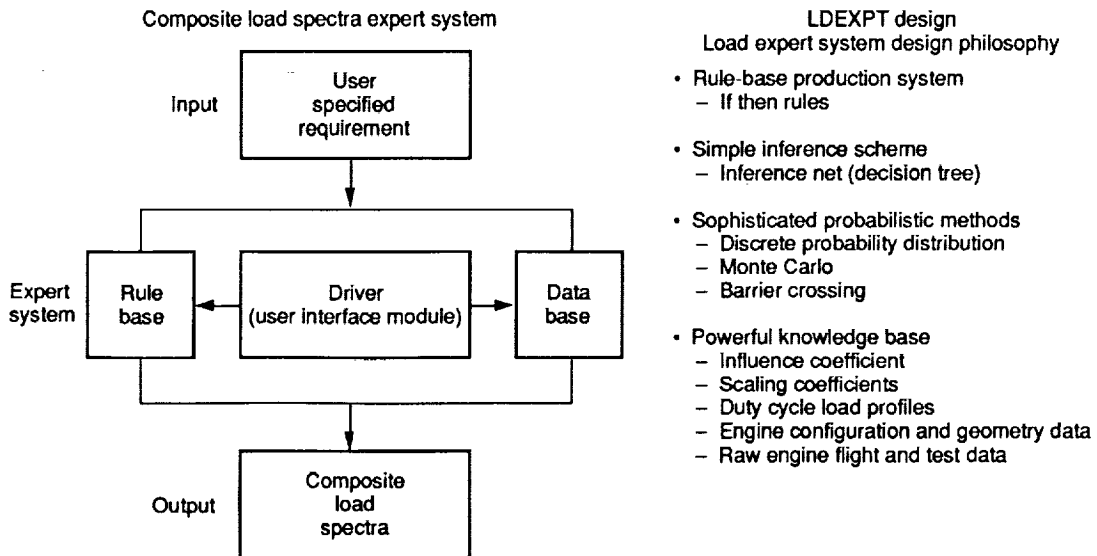


Figure 2.—Composite load spectra simulation using expert systems.

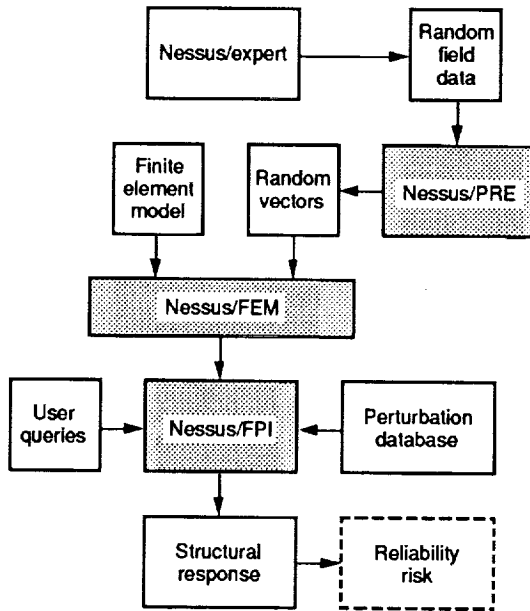


Figure 3.—Computational simulation of probabilistic structural response using Nessus.

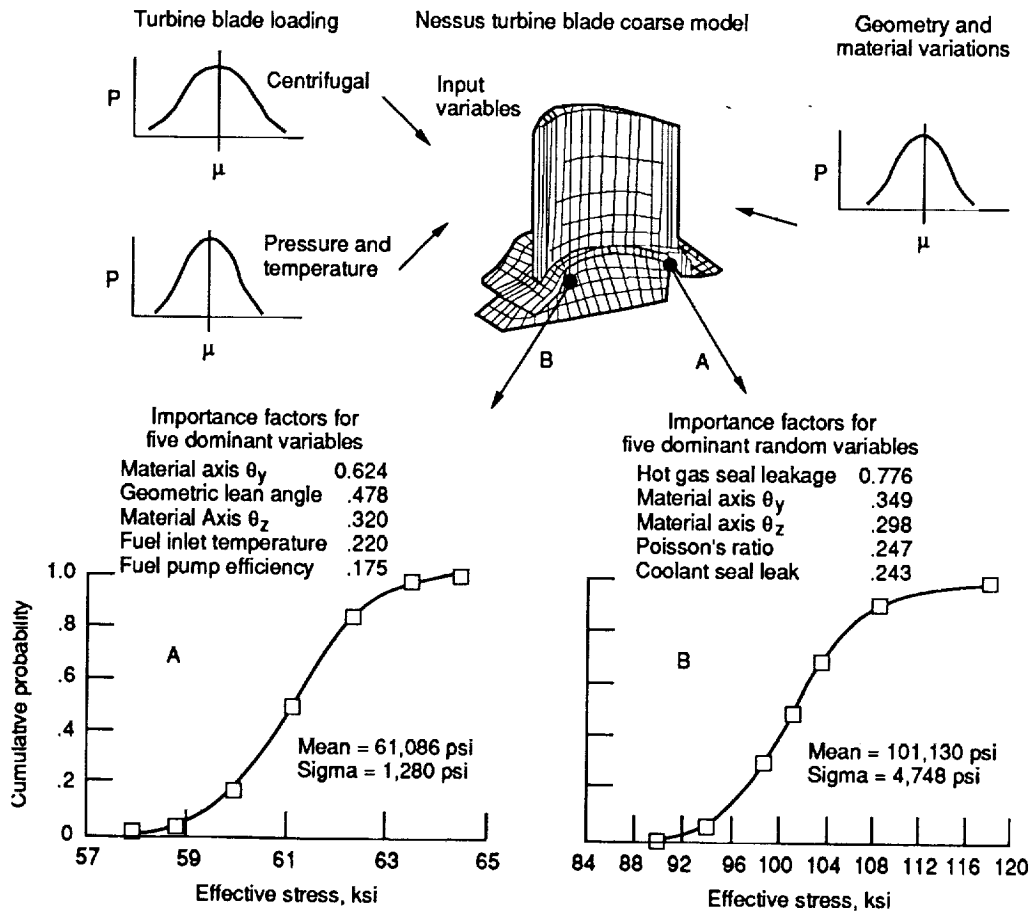


Figure 4.—Probabilistic component stress analysis.

$$M_p = M_{pO} \left[ \frac{T_F - T}{T_F - T_O} \right]^n \left[ \frac{S_F - \sigma}{S_F - \sigma_O} \right]^p \left[ \frac{\log N_{MF} - \log N_M}{\log N_{MF} - \log N_{MO}} \right]^q$$

Primitive variables		Subscripts	
$M_p$	= Degraded material property	F	= Final characteristic value
T	= Temperature	O	= Reference property
S	= Strength		
$\sigma$	= Stress		
$N_M$	= Mechanical cycles		

Figure 5.—Generic probabilistic material property degradation model in terms of primitive variables.

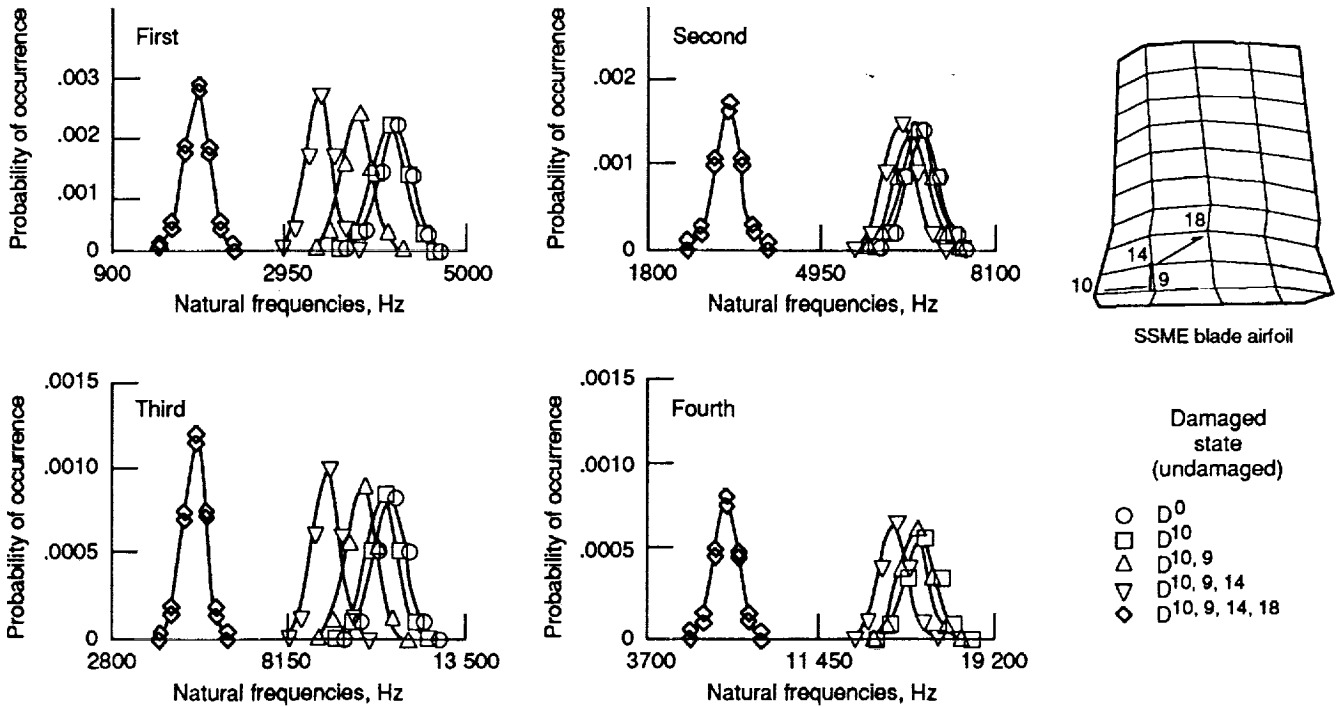


Figure 6.—Natural frequencies decrease as fracture progresses.

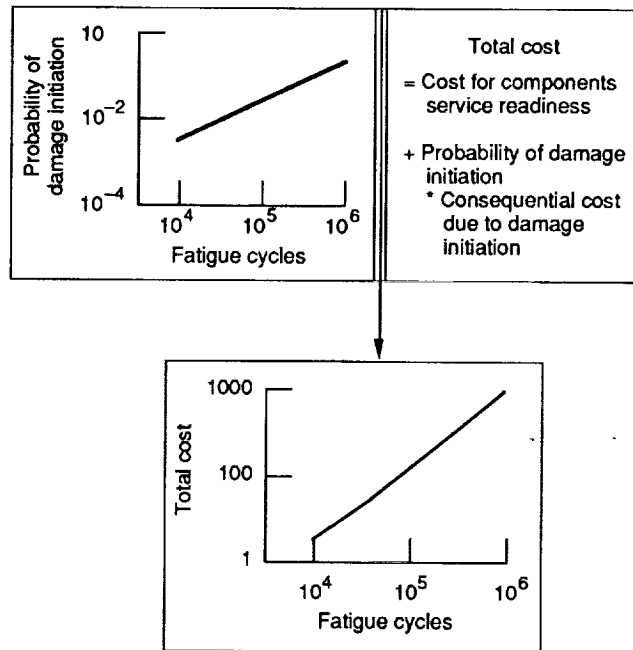


Figure 7.—Probabilistic risk-cost assessment.

1. Report No. NASA TM-103680		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Probabilistic Simulation of Uncertainties in Thermal Structures				5. Report Date	
				6. Performing Organization Code	
7. Author(s) Christos C. Chamis and Michael Shiao				8. Performing Organization Report No. E-5897	
				10. Work Unit No. 553-13-00	
9. Performing Organization Name and Address National Aeronautics and Space Administration Lewis Research Center Cleveland, Ohio 44135-3191				11. Contract or Grant No.	
				13. Type of Report and Period Covered Technical Memorandum	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D.C. 20546-0001				14. Sponsoring Agency Code	
15. Supplementary Notes Prepared for the First Thermal Structures Conference sponsored by the University of Virginia, Charlottesville, Virginia, November 13-15, 1990. Invited paper. Christos C. Chamis, NASA Lewis Research Center. Michael Shiao, Sverdrup Technology, Inc., Lewis Research Center Group, 2001 Aerospace Parkway, Brook Park, Ohio 44142.					
16. Abstract Development of probabilistic structural analysis methods for hot structures is a major activity at Lewis Research Center. It consists of five program elements: (1) probabilistic loads, (2) probabilistic finite element analysis, and (3) probabilistic material behavior, (4) assessment of reliability and risk, and (5) probabilistic structural performance evaluation. Recent progress includes: (1) quantification of the effects of uncertainties for several variables on High Pressure Fuel Turbopump (HPFT) blade temperature, pressure, and torque of the Space Shuttle Main Engine (SSME), (2) the evaluation of the cumulative distribution function for various structural response variables based on assumed uncertainties in primitive structural variables, (3) evaluation of the failure probability, (4) reliability and risk-cost assessment, and (5) an outline of an emerging approach for eventual hot structures certification. Collectively, the results demonstrate that the structural durability/reliability of hot structural components can be effectively evaluated in a formal probabilistic framework. In addition, the approach can be readily extended to computationally simulate certification of hot structures for aerospace environments.					
17. Key Words (Suggested by Author(s)) Structural analysis; Finite elements; Strength degradation; Fracture mechanics; Failure probability; Structural durability; Fatigue life; Probability distributions			18. Distribution Statement Unclassified-Unlimited Subject Category 39		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of pages 14	22. Price* A03