

**N90-17654**

INVESTIGATION OF CAST-10-2/DOA 2 AIRFOIL IN NAE  
HIGH REYNOLDS NUMBER TWO-DIMENSIONAL TEST FACILITY

Y. Y. Chan  
National Aeronautical Establishment  
National Research Council Canada

## Introduction

The NAE/NRC-NASA Langley Cooperative Program on Two-Dimensional Wind Tunnel Wall Interference Research was initiated in 1984. The objective of the program is to develop the technology for elimination of correction of wall interference in transonic two-dimensional tests using the Langley 0.3-m Transonic Cryogenic Tunnel with an adaptive wall test section and the NAE 1.5-m High Reynolds Number Two-Dimensional Test Facility. A common model with the CAST 10-2/DOA-2 profile and 228 mm (9 inches) chord length has been tested in both tunnels. The tests performed in NAE covered the Mach numbers from 0.3 to 0.8 and Reynolds numbers from 10 to 30 million. The model was tested with transition free and with transition fixed at 5 percent chord for both the upper and the lower surfaces.


The NAE facility consists of a two-dimensional test section inserted into the 1.5 m transonic test section of the Transonic Wind Tunnel. The 2-D test section is 0.38 m (15 inches) wide, 1.5 m (60 inches) high and 3.6 m (141 inches) long. The side walls are solid and the top and the bottom walls are perforated with 21% porosity, the surfaces of which are covered by fine mesh screens for elimination of edge tone generated by the perforation. A static pressure tube is installed along the center-line of each wall for monitoring the pressure distribution at the wall. The model is situated at mid-height of the test section. A balance is housed at each side wall and the model is mounted on both balances. The side wall boundary layer in the vicinity of the model is controlled by normal suction. The suction area, 0.61 m x 0.46 m (24 in. x 18 in.), is covered by a porous plate and moderate suction is applied to control the adverse growth of the boundary layer. A pitot rake with four probes is mounted 0.41 m (16 in.) downstream from the model trailing edge for measuring the wake profiles. The tunnel is precisely controlled to give the required free stream Mach number and Reynolds number. The test results are available in tabulated and graphical forms immediately after the test run. The airfoil data are corrected for the top and bottom wall interference. The effect of sidewall boundary layer is being investigated.

## Conclusions


The data obtained have been analysed for the effects of Reynolds number, transition fixing and Mach number. The role of the boundary layer on the displacement effect, the interaction with the shock wave and the trailing edge separation are examined. The results are summarized as follows.

1. The airfoil performance depends strongly on Reynolds number and transition fixing.
2. With transition fixed, the aerodynamic quantities such as lift, pitching moment and drag show a monotonic variation with Reynolds number.
3. With transition free, the aerodynamic quantities vary less regularly with Reynolds number and a slight parametric dependency is shown. The weak dependency is due to the compensatory effect of the forward shift of the transition position and the thinning of the turbulent boundary layer as Reynolds number increases.
4. The shock Mach number and the shock position are weakly dependent on Reynolds number.

5. The long extent of the laminar boundary layer at transonic speeds reduces the drag appreciably at low Reynolds numbers. The drag bucket around the design Mach number can be observed below Reynolds number 15 million.

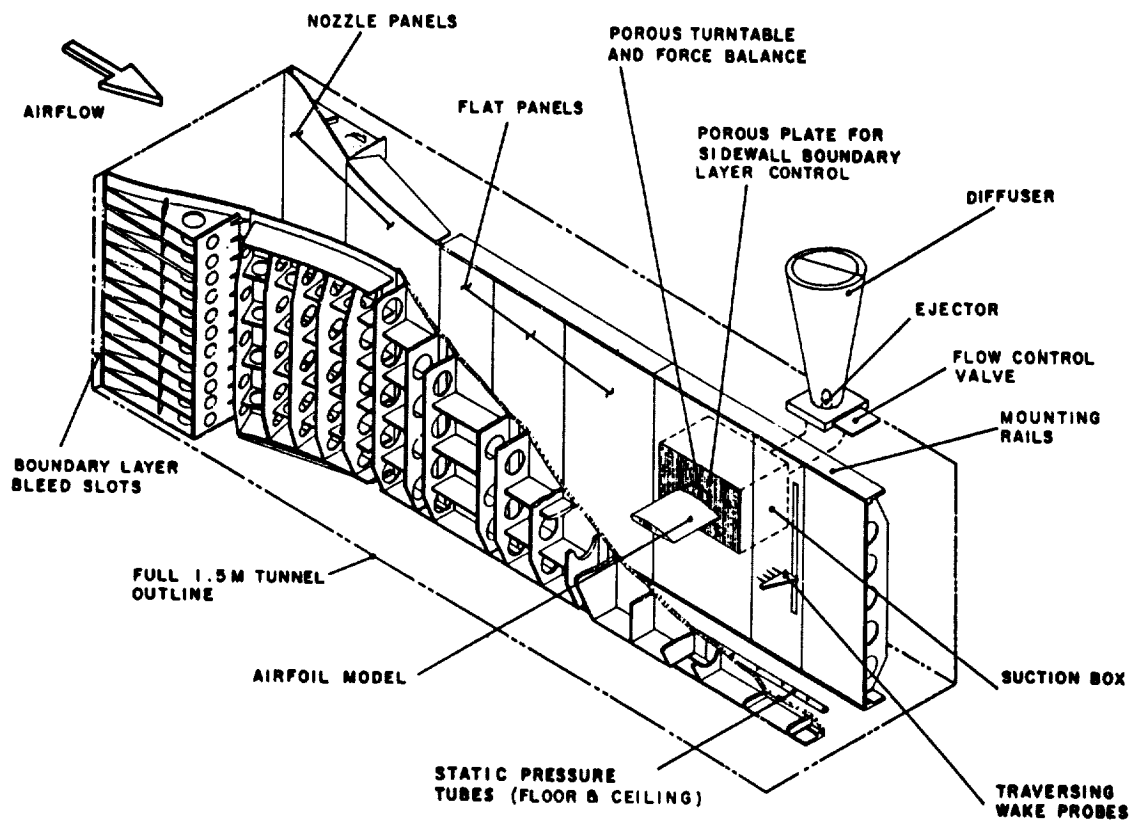


**NAE 2-DIMENSIONAL  
TEST SECTION**

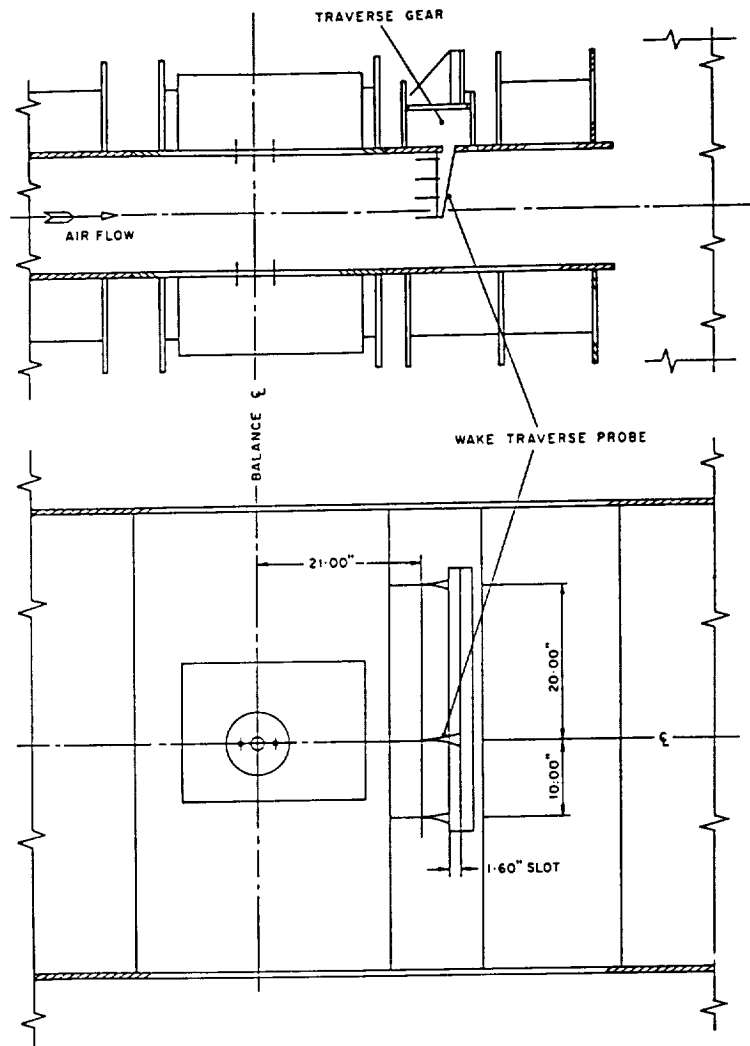


**SIDEWALL MOUNTED WAKE TRAVERSE PROBE SYSTEM**

HOLE NO.	X"	HOLE NO.	X"
1	-80.900	21	-2.900
2	-74.900	22	-1.400
3	-68.900	23	0.100
4	-62.900	24	1.600
5	-56.900	25	3.100
6	-50.900	26	4.600
7	-44.900	27	6.100
8	-38.900	28	7.600
9	-32.900	29	9.100
10	-26.900	30	10.600
11	-20.900	31	12.100
12	-14.900	32	13.600
13	-8.900	33	15.100
14	-2.900	34	16.600
15	3.100	35	18.100
16	9.100	36	19.600
17	15.100	37	21.100
18	21.100	38	22.600
19	27.100	39	24.100
20	33.100	40	25.600


PRESSURE TUBING  
0.020" ID  
0.032" OD




BALANCE  
ε




**WALL STATIC TUBES**

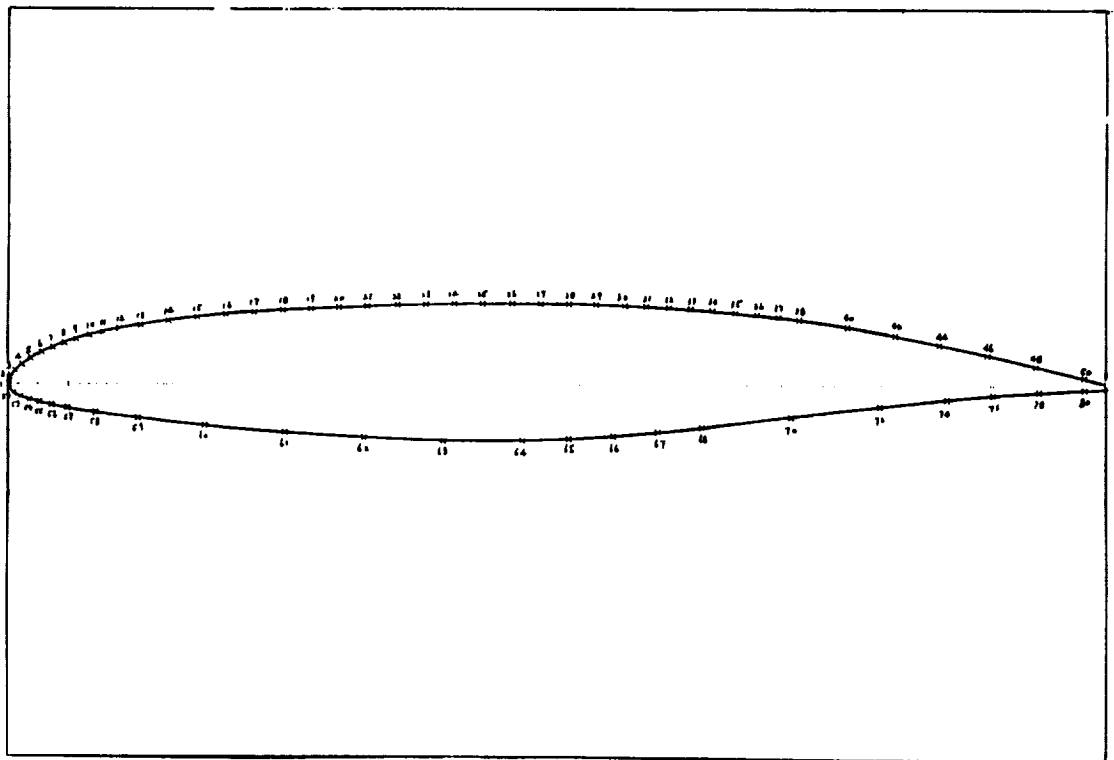



SECTION PROFILE OF CAST-10-2/DOA AIRFOIL  
& PRESSURE ORIFICE LOCATION

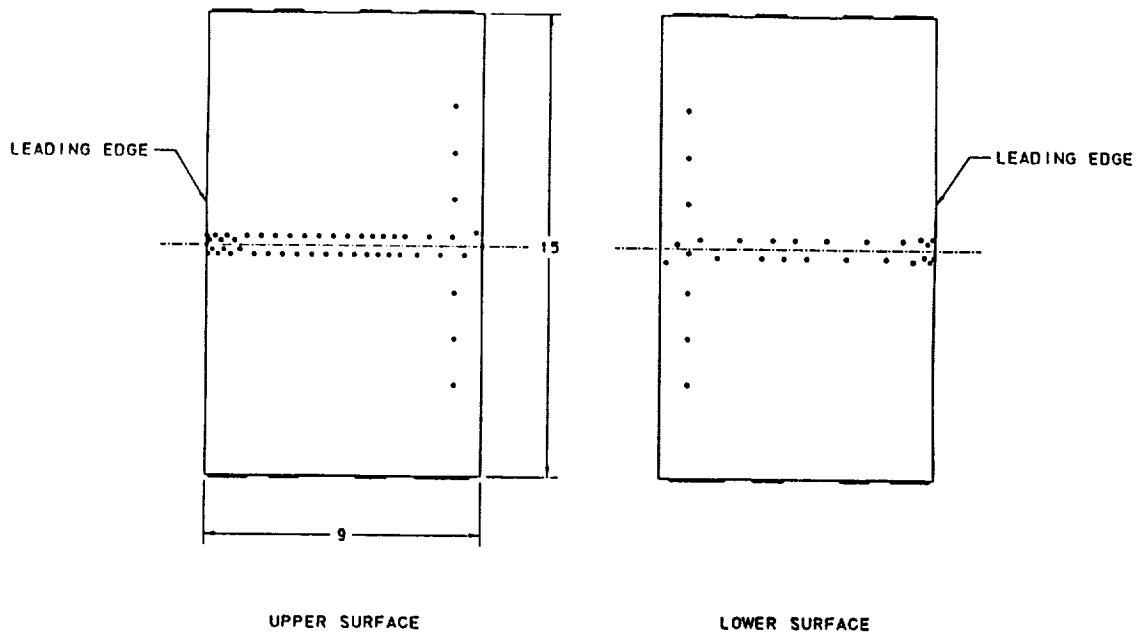


UPPER SURFACE                      LOWER SURFACE  
LOCATIONS OF PRESSURE ORIFICES AT UPPER AND LOWER  
SURFACES PLANE VIEW

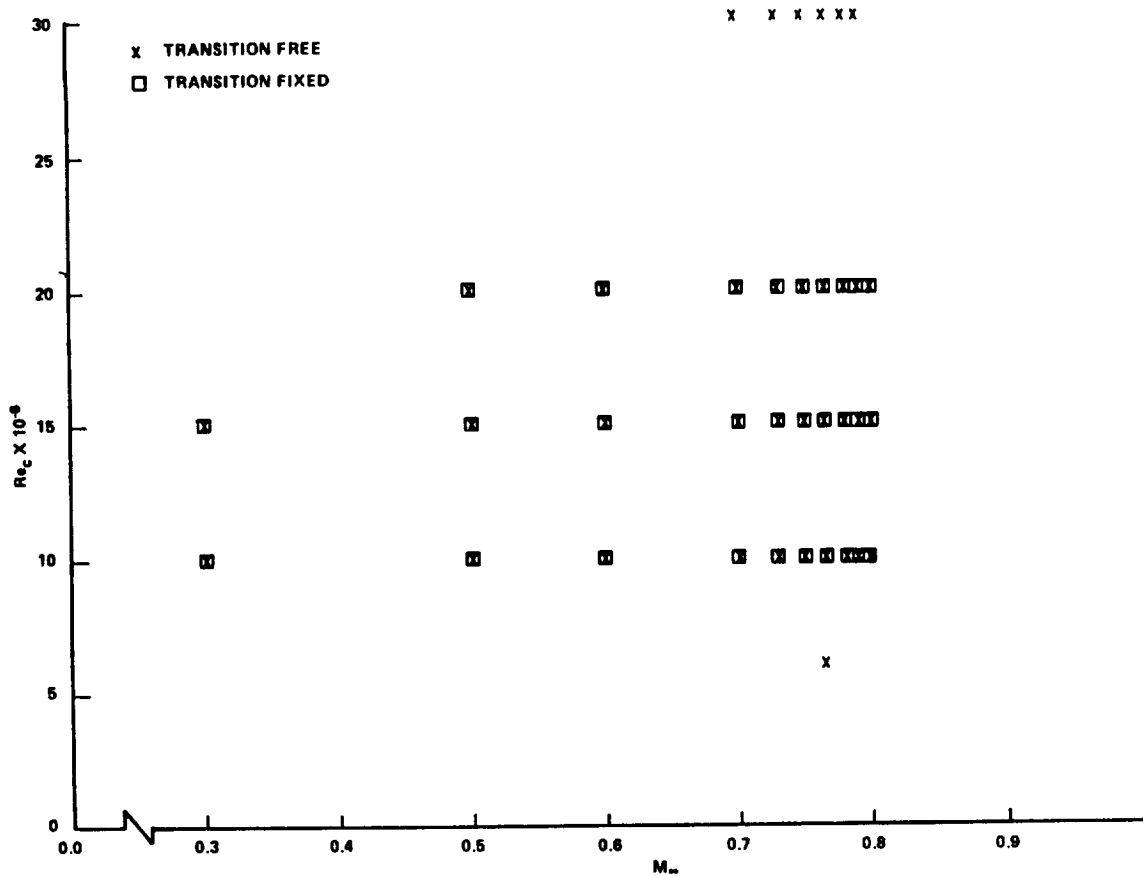


ENVELOPE OF TEST CONDITIONS

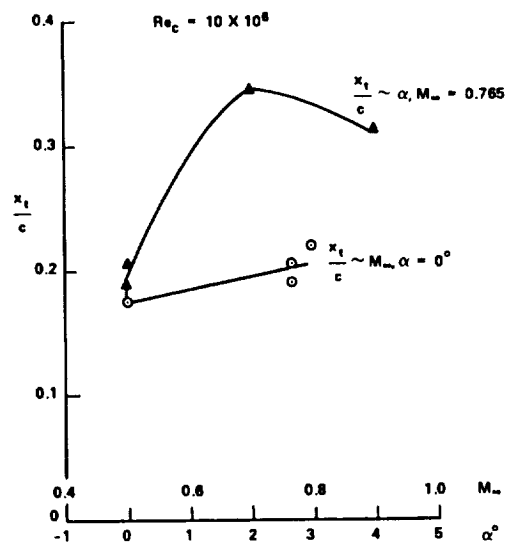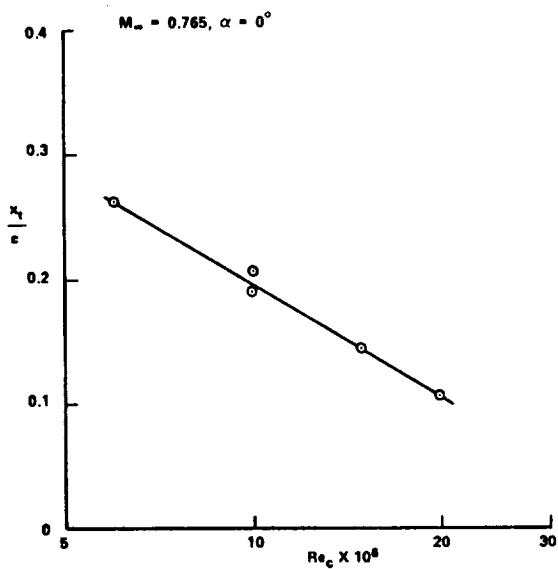

EFFECTS OF REYNOLDS NUMBER, MACH NUMBER AND INCIDENCE TO LOCATIONS OF BOUNDARY LAYER TRANSITION ON THE UPPER SURFACE OF THE MODEL

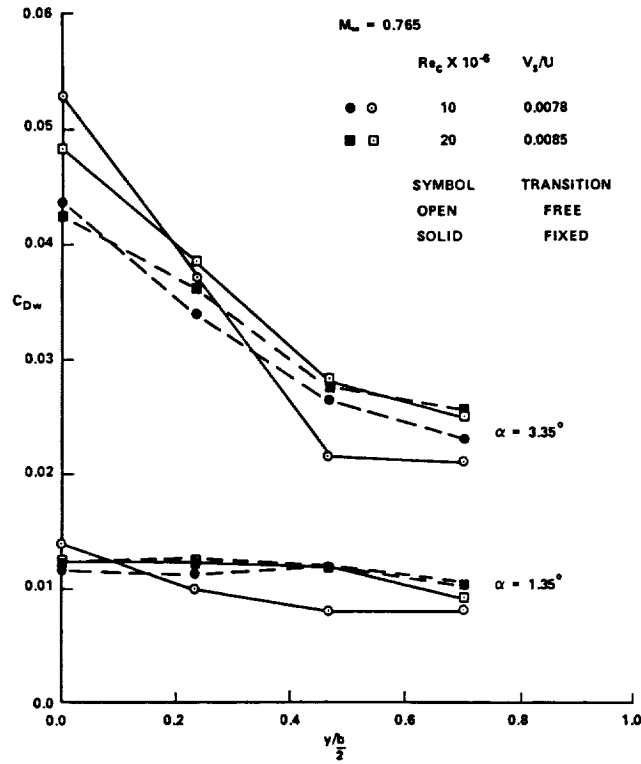


**SPANWISE WAKE DRAG VARIATION AT VARIOUS REYNOLDS NUMBERS FOR TWO ANGLES OF ATTACK WITH FIXED OR FREE TRANSITION,  $M_\infty = 0.765$**

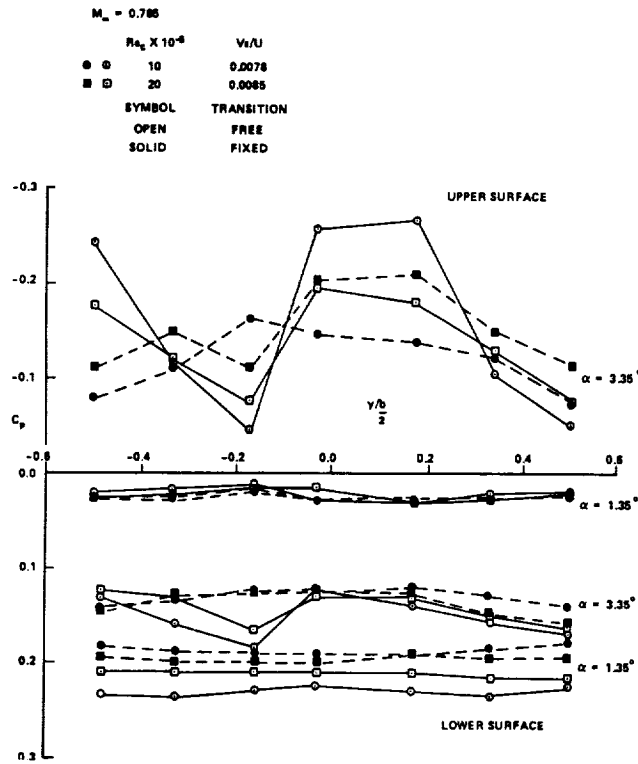

**SPANWISE PRESSURE DISTRIBUTIONS AT  $X/C = 0.9$  FOR TWO ANGLES OF ATTACK AT VARIOUS REYNOLDS NUMBERS WITH FIXED OR FREE TRANSITION,  $M_\infty = 0.765$**



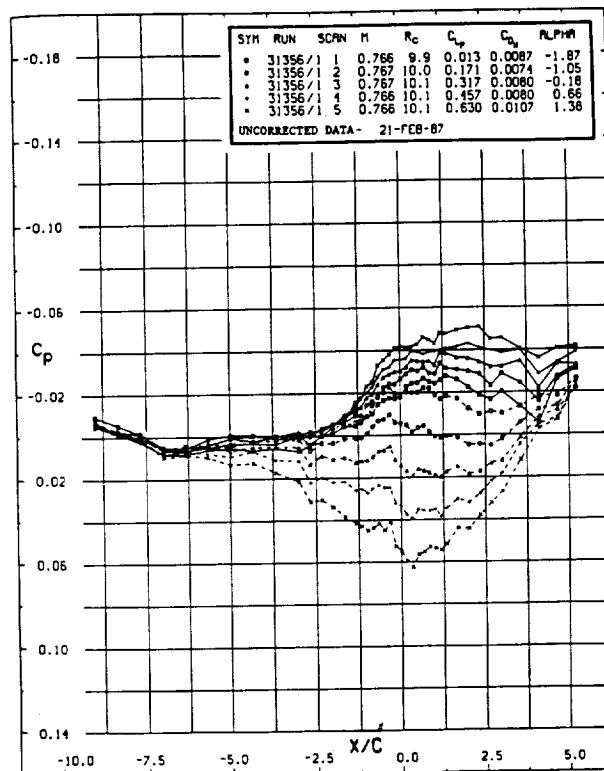


TYPICAL STATIC PRESSURE DISTRIBUTIONS ALONG TOP AND BOTTOM WALLS OF TEST SECTION.


RUN 25812/6

Rc =  $10.23 \times 10^6$   
 M = 0.7724  
 $\alpha = 2.441^\circ$   
 CN = 0.627E  
 CX = -0.0026  
 CM = -0.082E  
 A = 0.0850  
 c/h = 0.1500



$\Delta M = -0.0073$   
 $\Delta \alpha = -0.663^\circ$   
 $c \times \Delta M / \Delta x = 0.0010$   
 $c \times \Delta \alpha / \Delta x = -0.008^\circ$   
 $M_{cor} = 0.7651$   
 $\alpha_{cor} = 1.778^\circ$

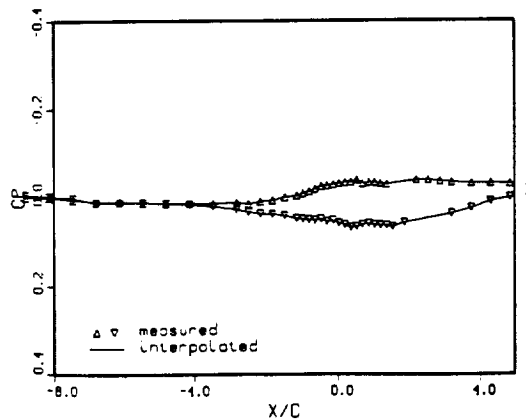


TYPICAL INTERFERENCE CALCULATION FOR SPECIFIC MODEL CONDITION.

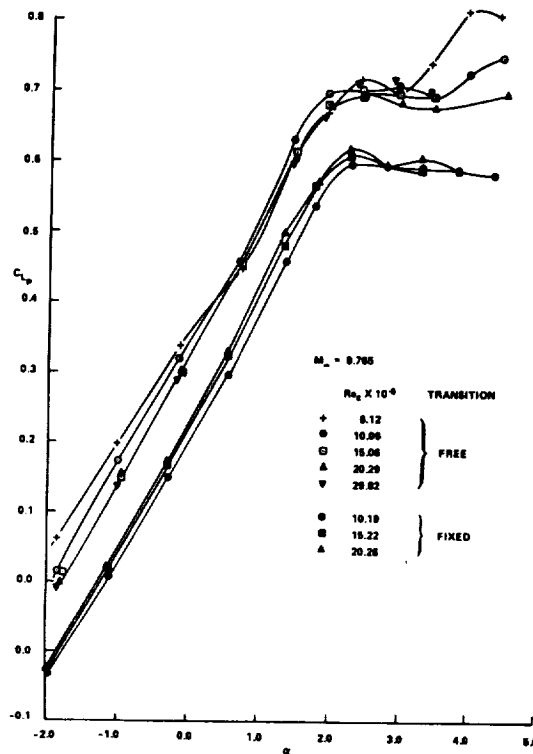


**LIFT VERSUS ANGLE OF ATTACK AT VARIOUS REYNOLDS NUMBERS WITH FIXED OR FREE TRANSITION AT NOMINAL  $M_\infty = 0.765$**

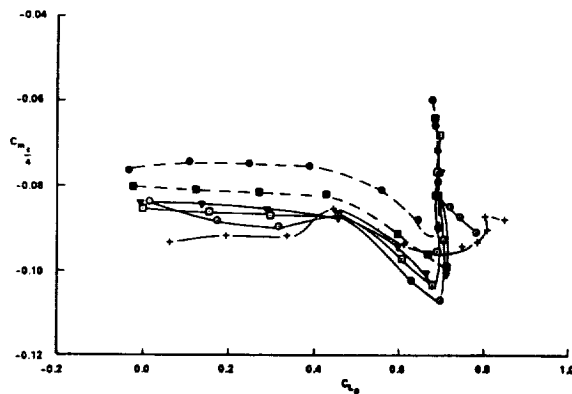


**PITCHING MOMENT VERSUS LIFT AT VARIOUS REYNOLDS NUMBERS WITH FIXED OR FREE TRANSITION AT NOMINAL  $M_\infty = 0.765$**

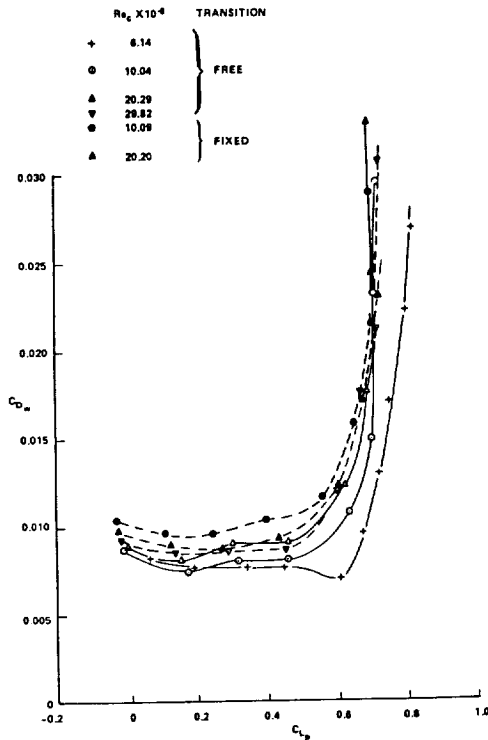


**DRAG VERSUS LIFT AT VARIOUS REYNOLDS NUMBERS WITH: FIXED OR FREE TRANSITION AT NOMINAL  $M_\infty = 0.765$**

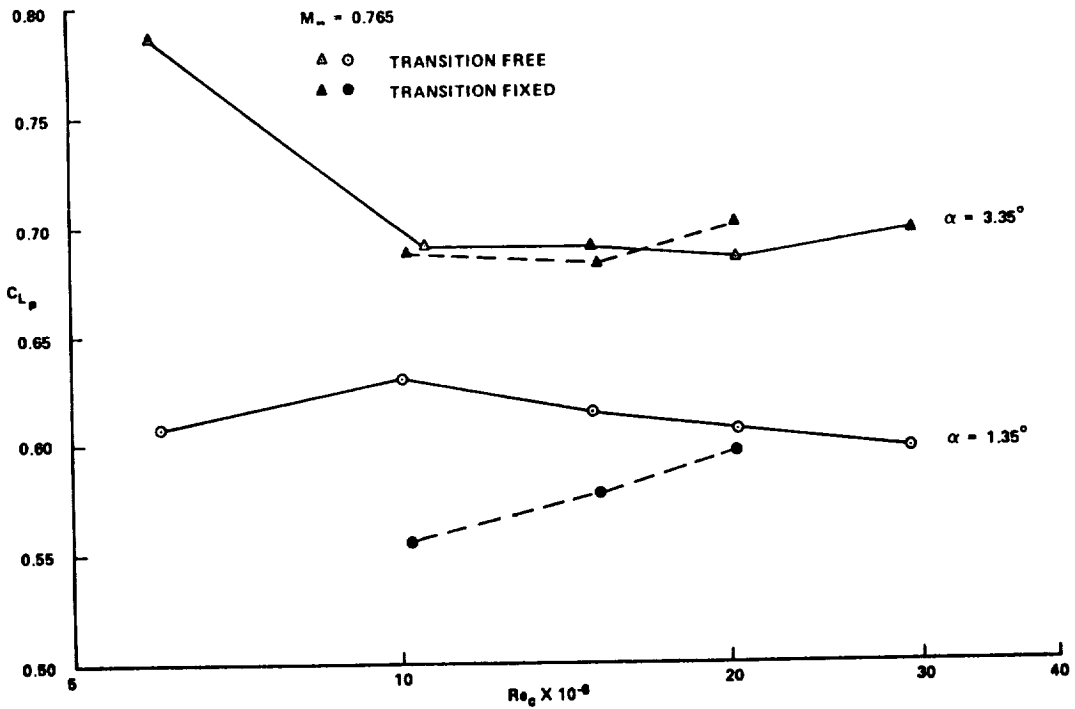


**REYNOLDS NUMBER DEPENDENCE OF LIFT FOR TWO ANGLES OF ATTACK WITH FIXED OR FREE TRANSITION**

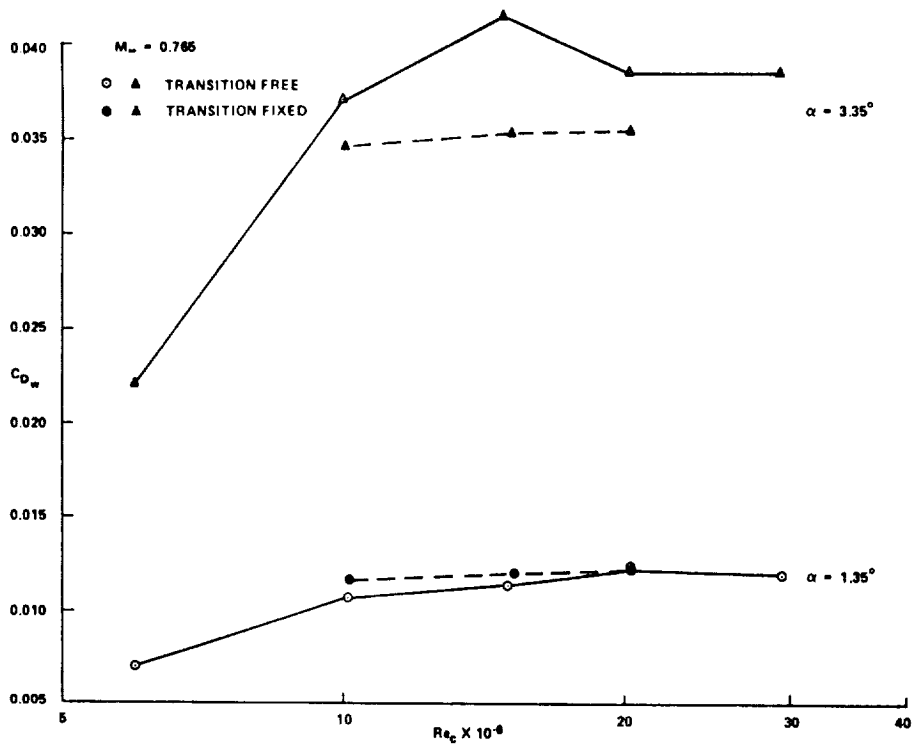


REYNOLDS NUMBER DEPENDENCE OF DRAG FOR TWO ANGLES OF ATTACK WITH FIXED OR FREE TRANSITION

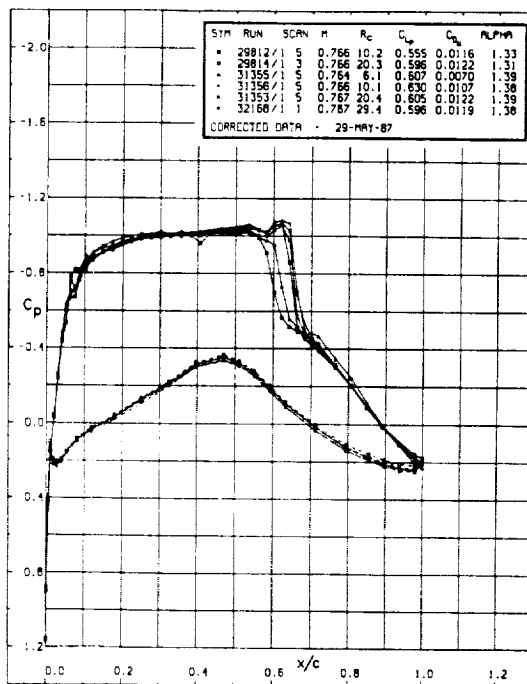


REYNOLDS NUMBER EFFECTS ON SURFACE PRESSURE DISTRIBUTIONS AT NOMINAL  $\alpha = 3.35^\circ$ ,  $M_\infty = 0.765$ . THE FIRST TWO CASES ARE WITH TRANSITION FIXED, THE REST ARE TRANSITION FREE

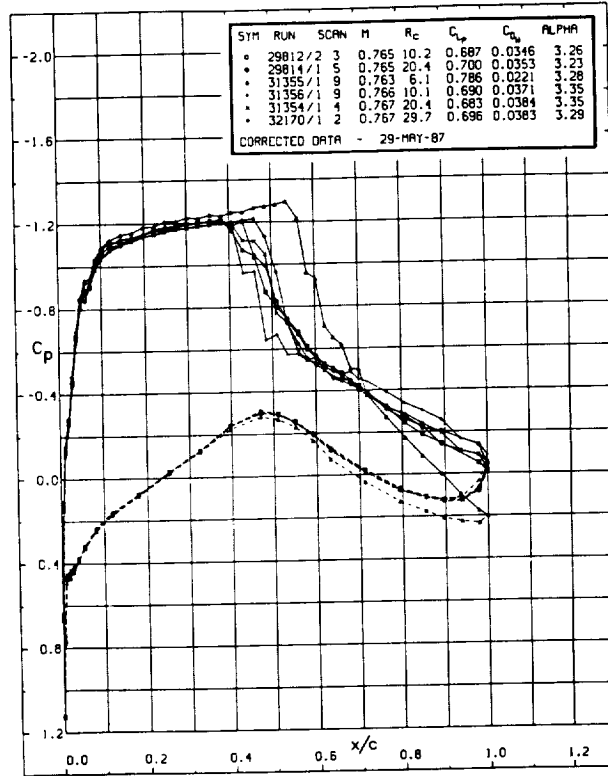


REYNOLDS NUMBER EFFECTS ON SURFACE PRESSURE DISTRIBUTIONS AT NOMINAL  $\alpha = 1.35^\circ$ ,  $M_\infty = 0.765$ . THE FIRST TWO CASES ARE WITH TRANSITION FIXED, THE REST ARE TRANSITION FREE

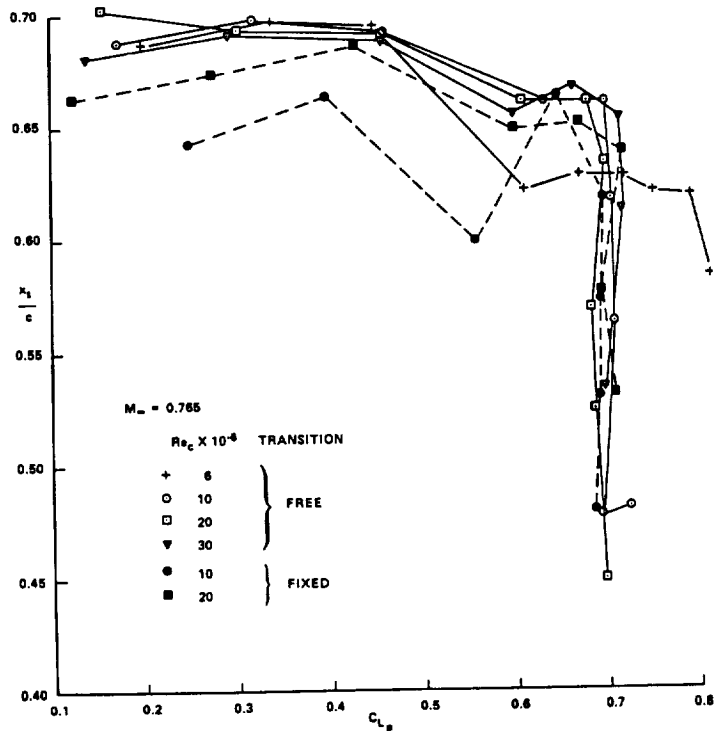


SHOCK LOCATION VERSUS LIFT AT VARIOUS REYNOLDS NUMBERS WITH FIXED OR FREE TRANSITION AT NOMINAL  $M_\infty = 0.765$

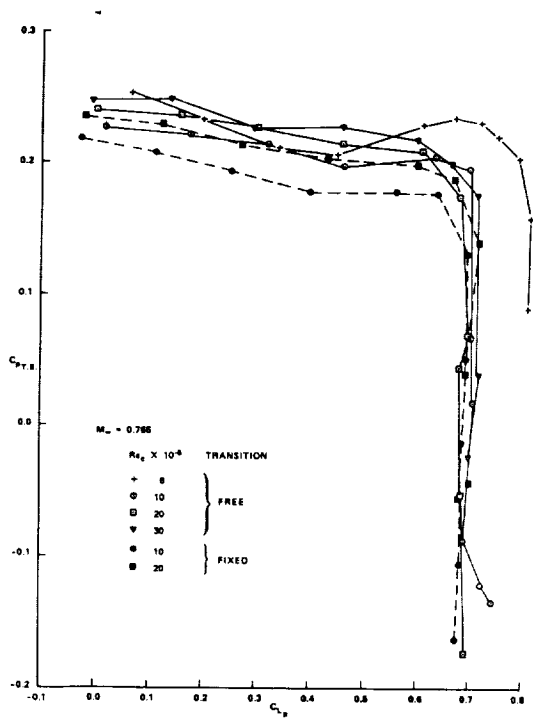


TRAILING EDGE PRESSURE VERSUS LIFT AT VARIOUS REYNOLDS NUMBERS WITH FIXED OR FREE TRANSITION AT NOMINAL  $M_\infty = 0.765$

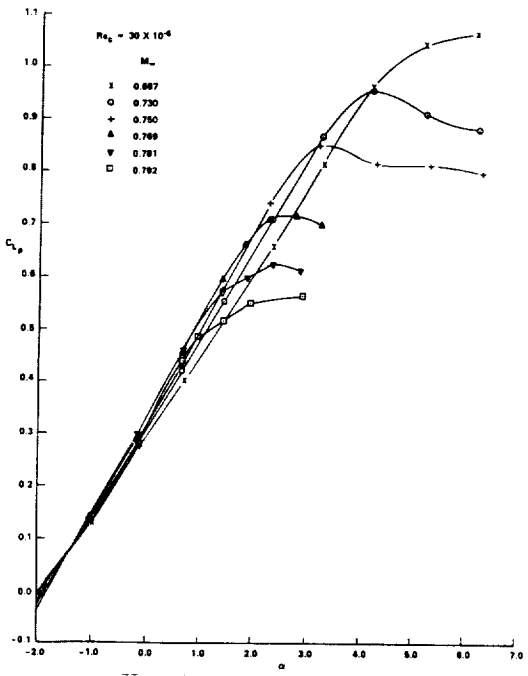


LIFT VERSUS ANGLE OF ATTACK AT VARIOUS MACH NUMBERS AT NOMINAL  $Re_c = 30 \times 10^6$  WITH FREE TRANSITION

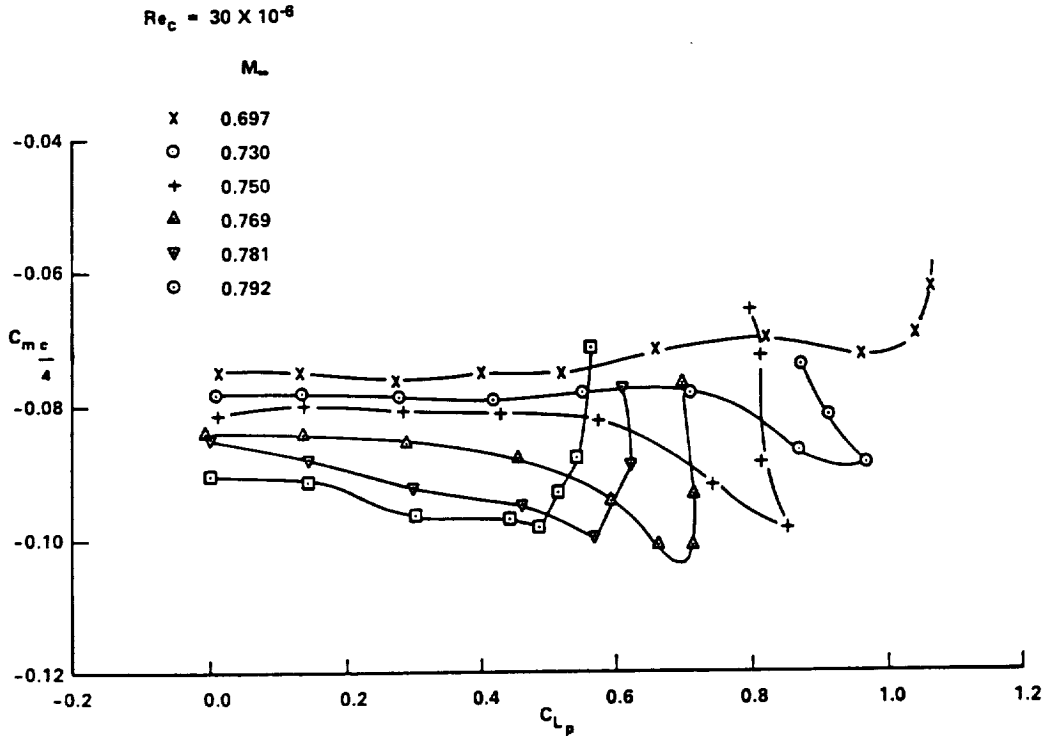


**PITCHING MOMENT VERSUS LIFT AT VARIOUS MACH NUMBERS  
AT NOMINAL  $Re_c = 30 \times 10^6$  WITH FREE TRANSITION**

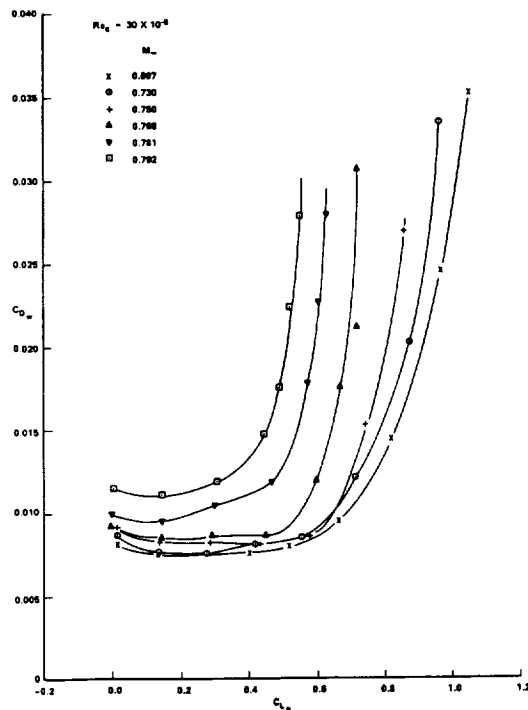

**DRAG VERSUS LIFT AT VARIOUS MACH NUMBERS AT NOMINAL  
 $Re_c = 30 \times 10^6$  WITH FREE TRANSITION**

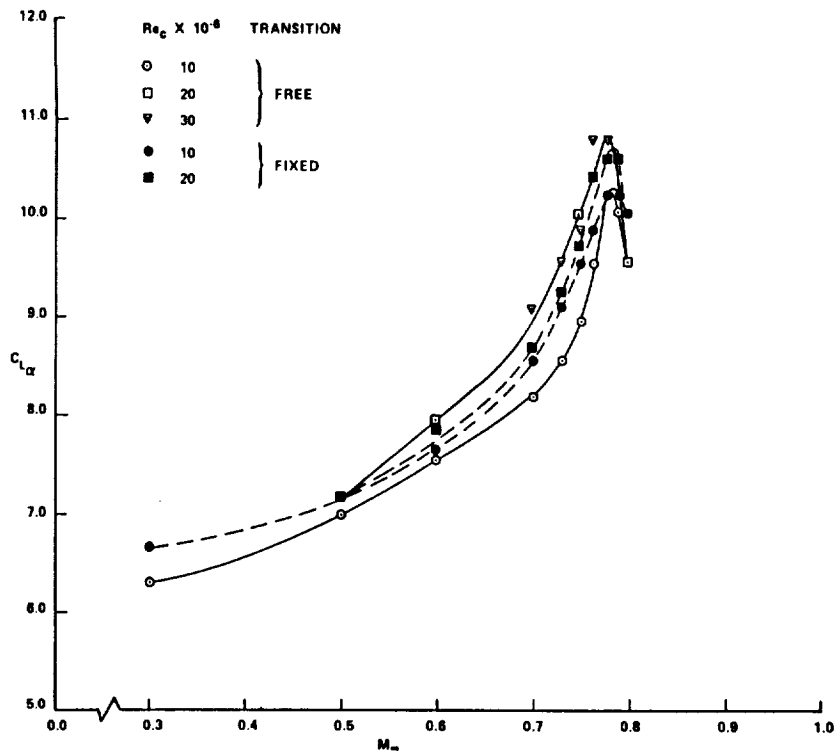


LIFT CURVE SLOPE AT ZERO LIFT VERSUS MACH NUMBER AT VARIOUS REYNOLDS NUMBERS WITH FIXED OR FREE TRANSITION

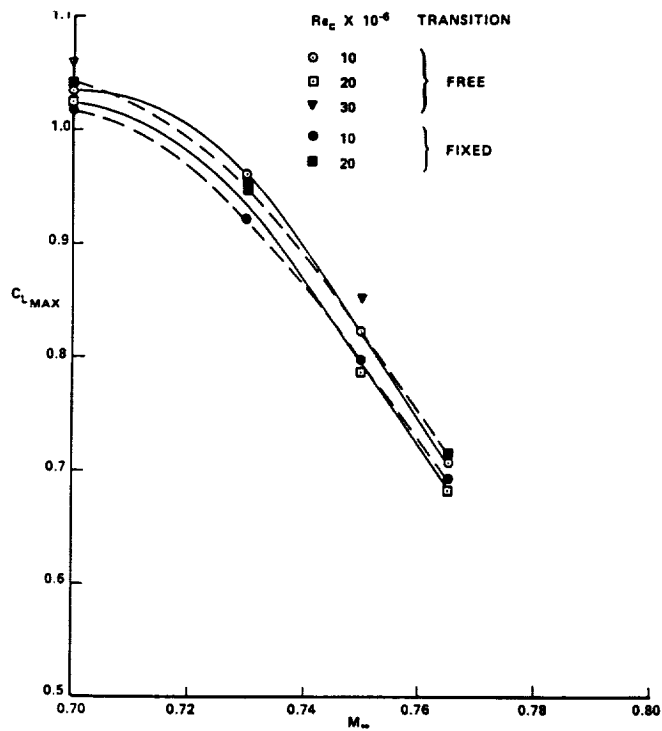


MAXIMUM LIFT VERSUS MACH NUMBER AT VARIOUS REYNOLDS NUMBERS WITH FIXED OR FREE TRANSITION




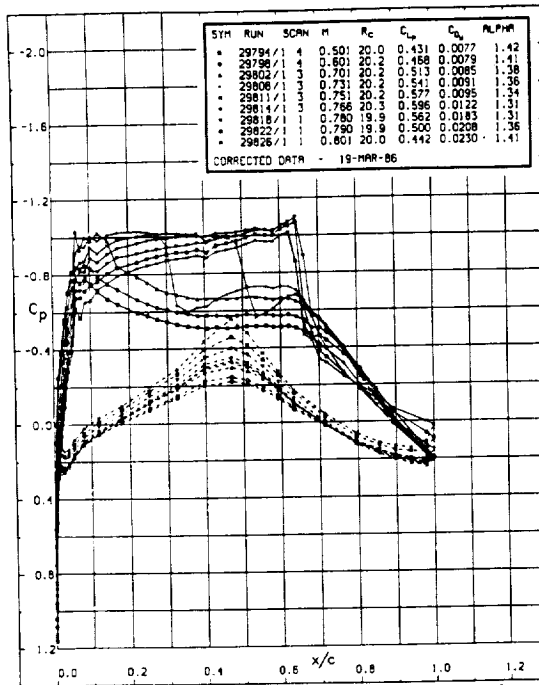


MACH NUMBER EFFECTS ON SURFACE PRESSURE DISTRIBUTIONS AT NOMINAL  $\alpha = 1.35^\circ$ ,  $Re_c = 20 \times 10^6$  WITH FIXED TRANSITION

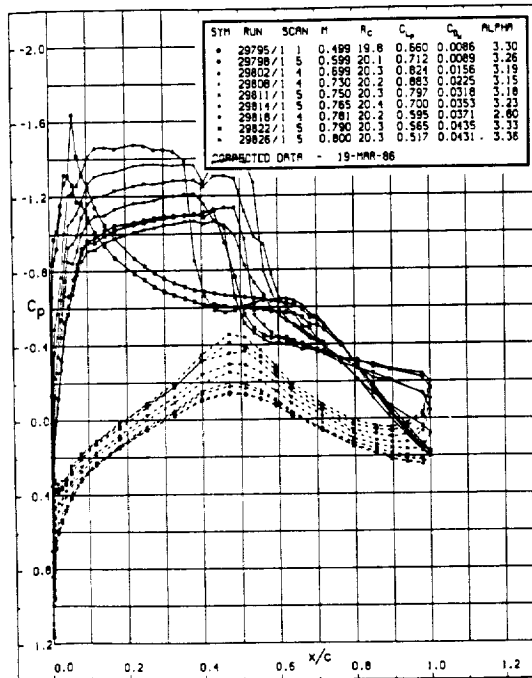


MACH NUMBER EFFECTS ON SURFACE PRESSURE DISTRIBUTIONS AT NOMINAL  $\alpha = 3.35^\circ$ ,  $Re_c = 20 \times 10^6$  WITH FIXED TRANSITION

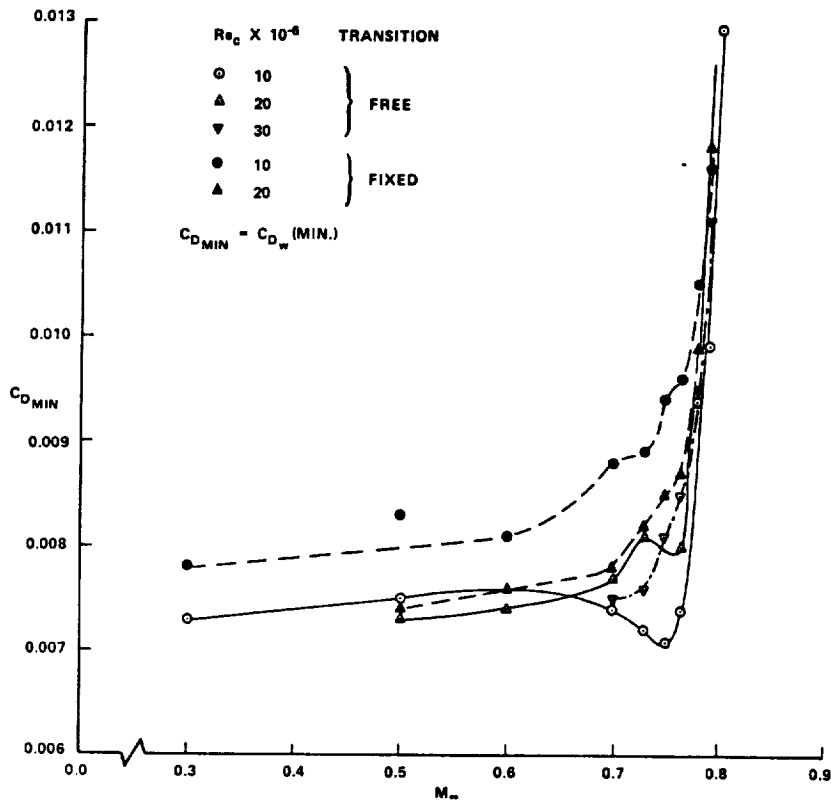


MINIMUM DRAG VERSUS MACH NUMBER AT VARIOUS REYNOLDS NUMBERS WITH FIXED OR FREE TRANSITION

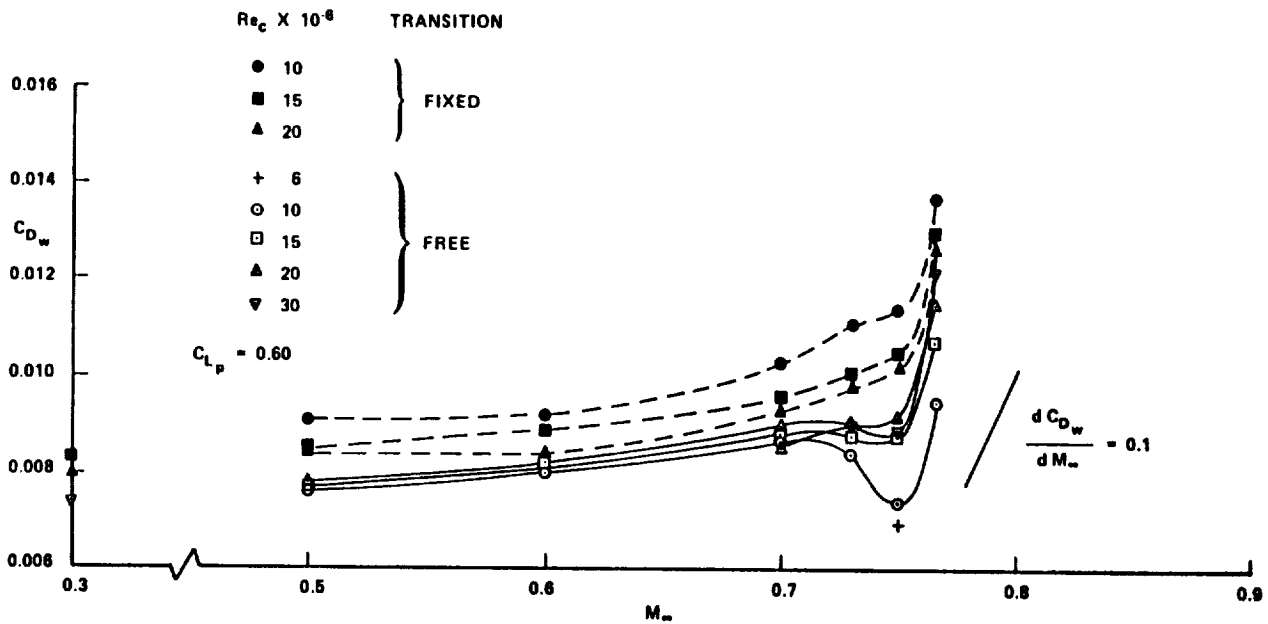

DRAG AT  $C_{L_p} = 0.6$  VERSUS MACH NUMBER AT VARIOUS REYNOLDS NUMBERS WITH FIXED OR FREE TRANSITION

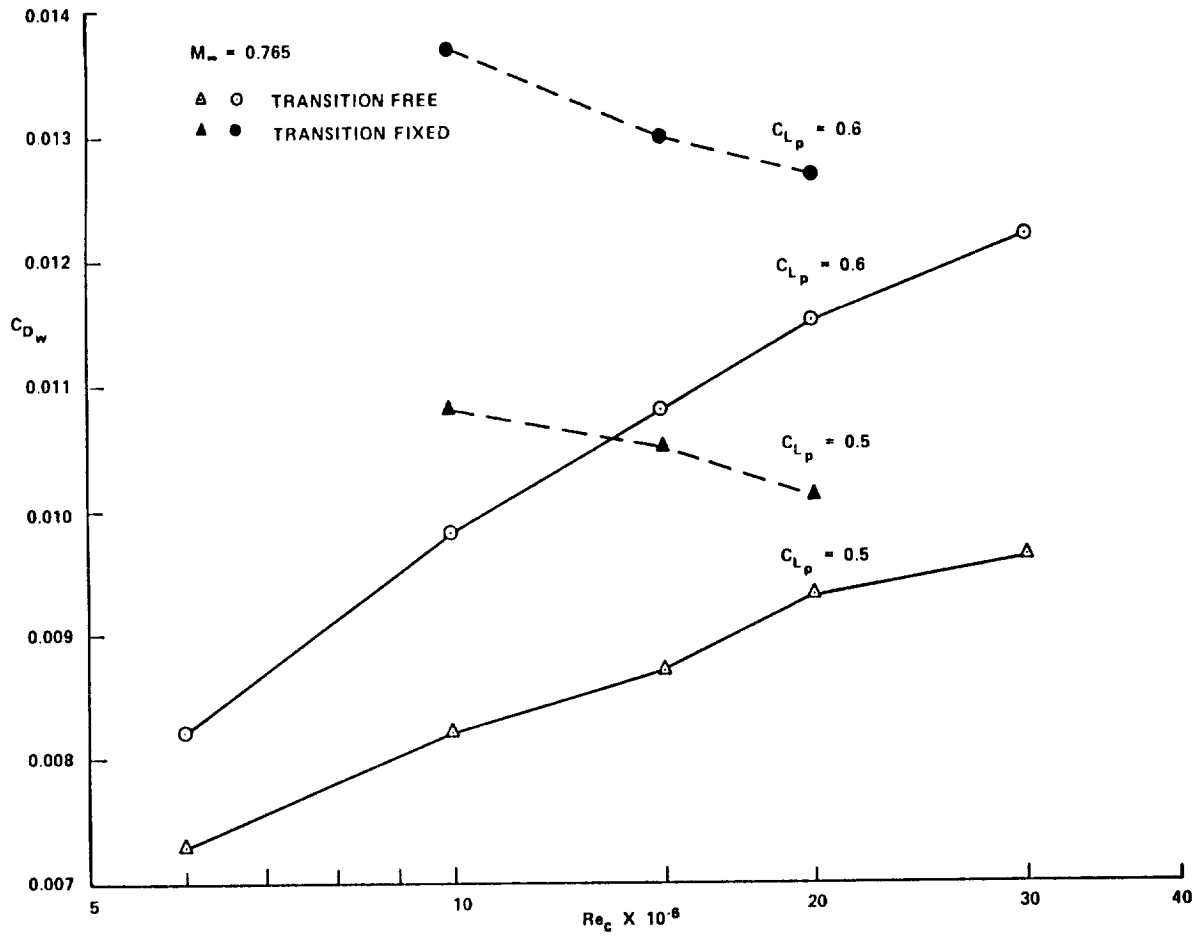

REYNOLDS NUMBER DEPENDENCE OF DRAG AT  $M_\infty = 0.765$ ,  $C_{L_p} = 0.5, 0.6$  WITH FIXED OR FREE TRANSITION

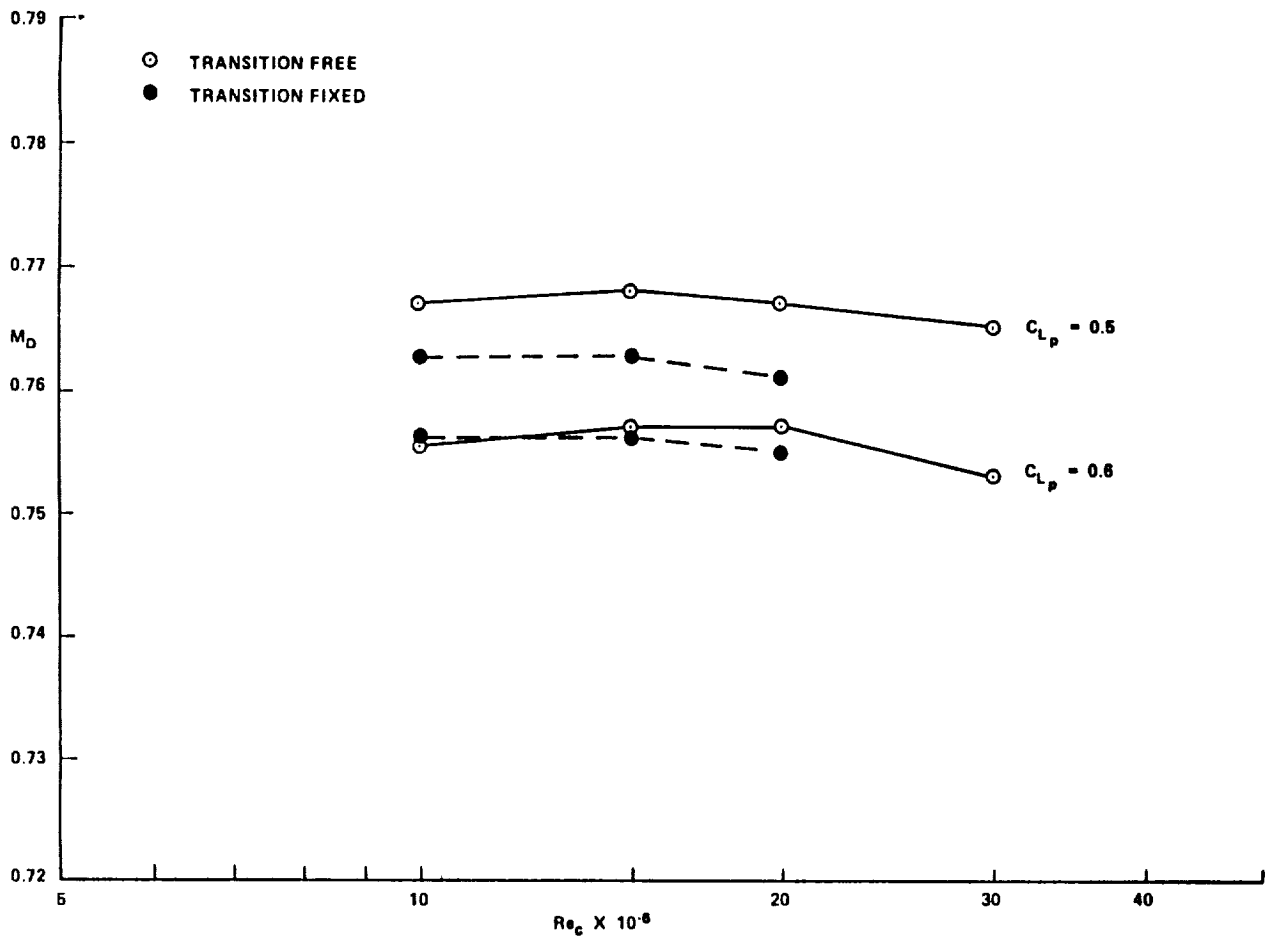

REYNOLDS NUMBER DEPENDENCE OF DRAG WITH MACH NUMBER FOR TWO LIFT CONDITIONS WITH FIXED AND FREE TRANSITION