

**N90-13423**

Shuttle Relative Navigation of a Tethered Satellite  
Mission with Current On Board Software

Kevin A. Lee

McDonnell Douglas Space Systems Company  
Engineering Services Division  
16055 Space Center Blvd  
Houston Texas, 77062

**ABSTRACT**

A Shuttle mission planned in 1991 will test the feasibility of tethers in space. This mission, a joint effort between Italy and the United States, will connect a satellite (built by the Italians) to the Shuttle with a 20 km long tether.

This mission poses unique navigation problems. The flight software on the Shuttle was never designed to account for the low level acceleration that is generated by the gravity gradient. IMUs on the Shuttle will sense the acceleration of the tether but it turns out that incorporating the continuous accelerometer noise also generates large error growth. Relative navigation is another important issue since the majority of the mission will be conducted while the satellite is out of the visual range of the crew. Some kind of feedback on the motion of the satellite will be desirable. Feedback of the satellite motion can be generated by using the rendezvous radar. To process the radar measurements, the flight software uses a 13 state Kalman Filter, but unfortunately with the filter currently tuned as it is, valid measurements tend to be ignored. This is due to the constraint of the tether on the satellite, which is an unmodeled force. Analysis shows that with proper tuning, relative navigation is possible.

**PRECEDING PAGE BLANK NOT FILMED**

## 1.0 INTRODUCTION

The first tether satellite mission (TSS1) is an attempt to fly the easiest profile that can be performed and yet provide us with valuable data to proceed with more complex tethered missions. Several questions and issues need to be resolved: Can the onboard flight software propagate the inertial state accurately enough? Can the ground software update the state? Can the Shuttle maintain a good target state? Additionally, there are numerous proximity issues that will also need to be answered. This paper will describe the analysis and answer the questions that pertain to the current onboard flight software, and in particular, to relative navigation issues.

The basic design of this mission is to fly the Shuttle at an altitude of 296 km. A satellite, built by Aeritalia, will be deployed away from the Earth (upward deploy) on a 20 km. long tether. The satellite is a 1.5 m diameter sphere containing various instrumentation. The tether consists of kevlar with a conducting wire passing through it. The mission does call for a 1 amp current to be passed along the tether.

Satellite thrusters will be used during the deploy until the gravity gradient between the Shuttle and the satellite is sufficient to continue deploying at the desired rate. During the deploy, the satellite will fall behind the z radial of the Shuttle and during the retrieval, it will be in front of the z radial. This can be seen pictorially in Figure 7.

There are two basic programs used to perform this analysis. The tether mission trajectories are generated using Shuttle Tethered Object Control Simulation (STOCS). STOCS is a high fidelity Shuttle simulation with a general purpose tether model attached. Reference 1 describes STOCS in greater detail. Onboard software is modeled in Shuttle Environment and Navigation Software for Onorbit and Rendezvous (SENSOR). Section 2.1 gives more explanation of the onboard software and Reference 2 gives a full description of SENSOR.

## 2.0 DISCUSSION

The satellite, a small object, will be out of visual range of the crew for the majority of the mission. Sensors mounted on the boom indicate, among other things, tether tension, tether angle and length of tether deployed, but this information does not give a lot of direct feedback on the satellite itself. More useful information could be obtained by using the rendezvous radar, which generates range, range rate and in and out of plane angles of the satellite. This radar data is also information that the crew has seen before and is familiar with.

The radar is self contained and handles tracking by itself so the simplest method of use would be to turn it on and watch the data. What happens if the radar breaks lock? Remember that the satellite is small and will be up to 20 km from the radar. Since the default search mode of the radar is to start the search with a shaft and trunnion angle of 0° and a range of 609 m, it is unlikely that the radar will be able to reacquire the target. An alternative would be to use the Relative Navigation (Rel Nav) function on the Shuttle. Using Rel Nav allows the flight software to maintain a target state. When the radar tries to acquire a target, the navigation software (Nav) will supply a target state vector. As will be seen later, there are also problems using the radar with Rel Nav.

### 2.1 FLIGHT SOFTWARE BASICS

There are two methods for incorporating accelerations into the state propagations. The first is by using modeled atmospheric drag and modeled vent and thrusting. An alternative method is by using the Inertial Measuring Unit (IMU) sensed acceleration output. The appropriate acceleration source is chosen by comparing the IMU sensed accelerations against the 1,000  $\mu\text{g}$  threshold. If the sensed accelerations are less than this threshold, then the models are used, otherwise the IMU output is used. Sensed accelerations will also be used if the digital autopilot (DAP) jet flag is turned on during a given Nav cycle. The DAP jet flag is used to incorporate jet firing when it is known that the low level accelerations are due to the jet firing. Finally, a 4 x 4 gravity model is used for the state propagation which is performed by the Super G integrator.

Relative navigation data processing is done using a thirteen state Kalman Filter. The first three components of the state are the inertial position and velocity vectors. States seven through nine are the inertial unmodeled acceleration biases, which are used in the calculation of the vehicle accelerations. Finally, the last four states are the measurement biases. The flight software has a choice of filtering the Shuttle state or the target state.

## 2.2 PROCESSING A TETHER MISSION

The first step to onboard processing is to propagate the inertial position and velocity of the vehicles. For the Shuttle, the immediate consequence of having the tether attached is to impart a continuous low level acceleration. Unfortunately, the tether acceleration is below 1,000  $\mu\text{g}$ . Setting the acceleration limit lower so that the state propagation could pick up the tether acceleration does not work since IMU errors are also incorporated. This leads to worse state propagation than when the tether is ignored. Ruling out flight software modifications, the inertial error growth will have to be accepted and handled through ground processing with state vector uplinks.

The next step to onboard processing is to address the relative navigation problem. Typically, the Shuttle state is the choice state for filtering. The reason is that normally the target has been tracked for months and it's orbit is well known. Also, the target will be essentially dead and therefore will not be venting or thrusting. Modeled accelerations are sufficiently accurate in propagating the target state for these types of rendezvous. The Shuttle, on the other hand, is conducting numerous venting and thrusting. Thus, the Shuttle state is better suited for filtering during a nominal rendezvous. For the tether mission, the Shuttle is still performing the venting and thrusting, but look at what the target is doing. It will be moving from an orbit at 296 km to an orbit at 316 km. Thus, the target state is better suited for filtering during the tether mission.

During the propagation/update process, the filter takes the measurements and adjusts the state by using the measurement residual and the Kalman gain. When the measurements are coming in, one would expect the filter to bring the state

closer to the truth. As shown in Figure 1, this does not happen.

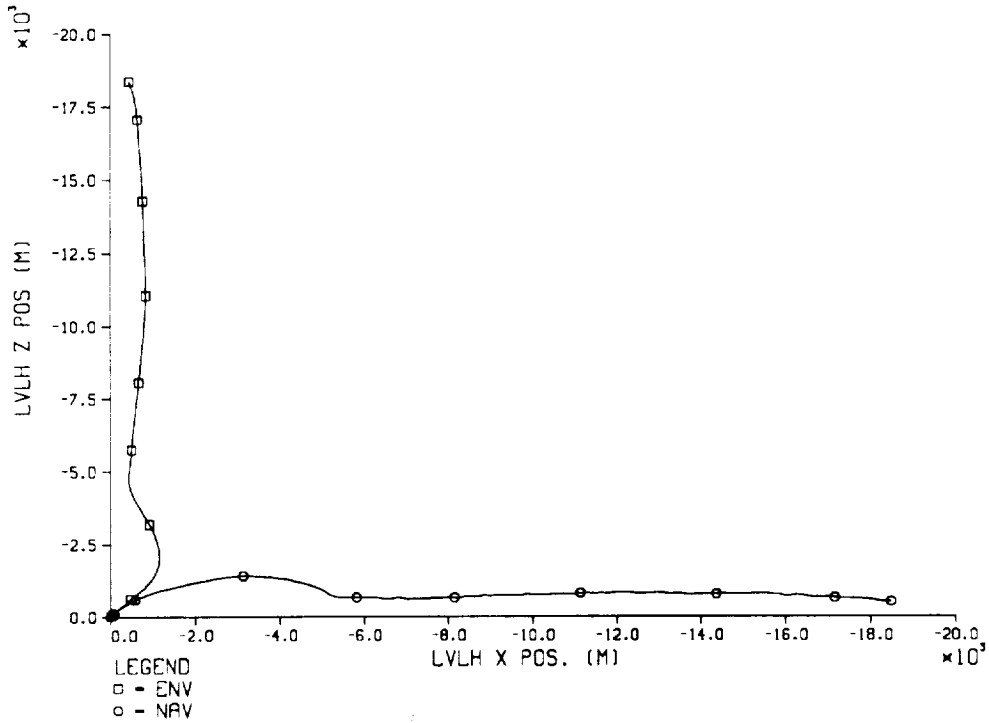


Figure 1 - RELATIVE MOTION FOR STVHO  
USING STANDARD I-LOADS

If measurements were not being used, the satellite would follow a path shown in Figure 2, which depicts the natural motion of the satellite had the tether not been connected. This seems to indicate that Nav is using the dynamics in the state propagation and is ignoring the measurements. What is actually happening can be seen in Figure 3 and Figure 4. The measurements aren't being edited but rather the filter is adjusting the shaft bias by about 80° and the trunnion bias by 25°. Successful relative navigation now requires tuning the filter and giving the measurements more weight so that they are "believed" over the coded dynamics.

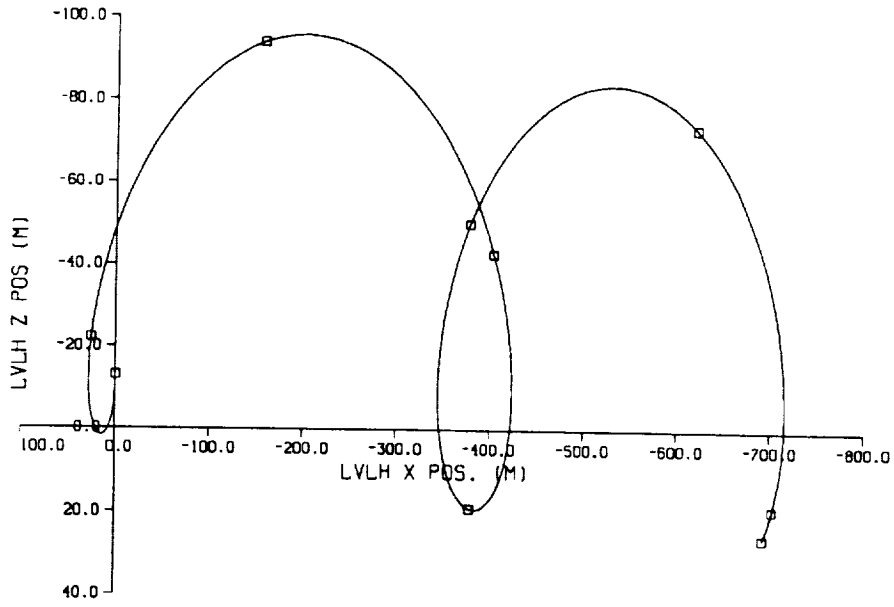


Figure 2 - RELATIVE MOTION OF SATELLITE  
WITH OUT TETHER ATTACHED

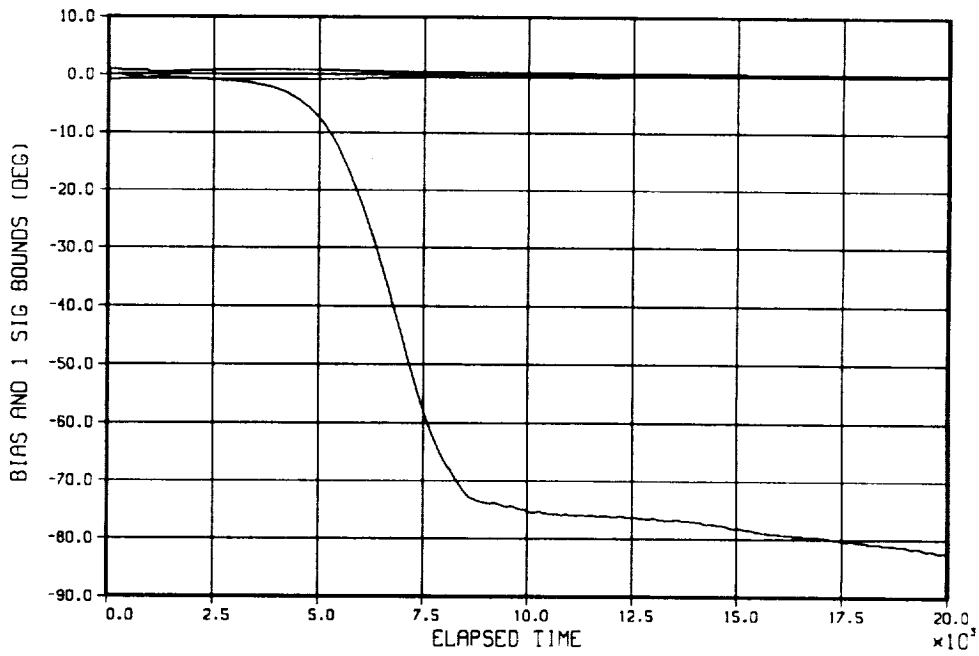


Figure 3 - RADAR SHAFT BIAS

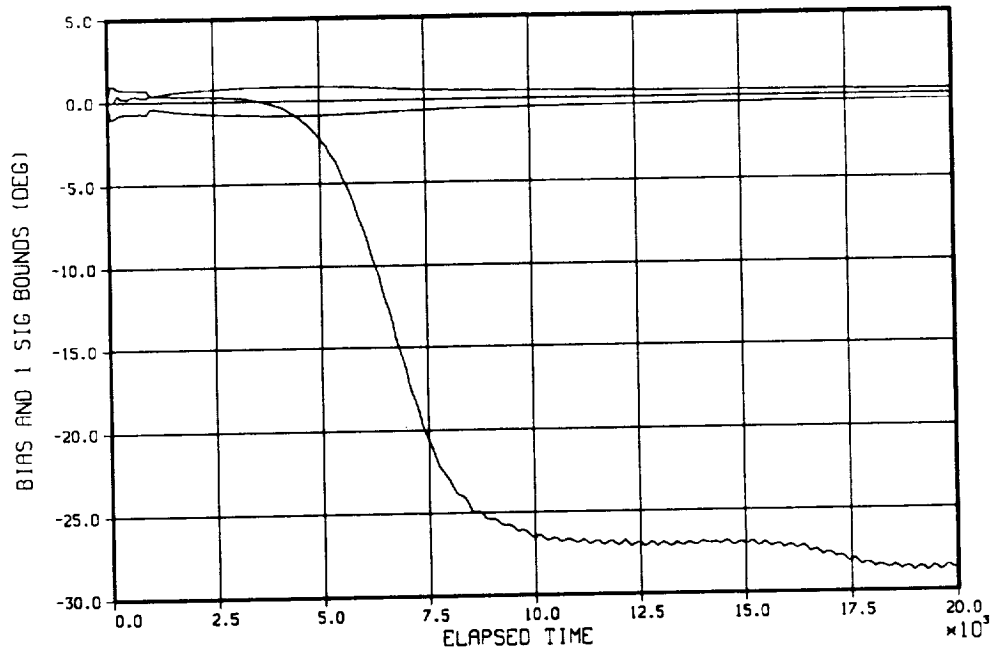


Figure 4 - RADAR TRUNNION BIAS

### 2.3 FILTER TUNING

The flight software is designed so that various parameters (called I-LOADs) can be changed without major recoding of the software. As an example, the choice of which vehicle state to filter is set by the I-LOAD Shuttle\_filter\_flag. Eight of these I-LOADs were found to require adjustments in order to properly tune the filter. The eight I-LOADs are shown in table 1.

TABLE 1 - I-LOADS USED TO TUNE THE FILTER

<u>I-LOAD NAME</u>	<u>DESCRIPTION</u>
UNMOD_ACC_BIAS_FLAG	Enable the filter to solve for unmodeled acceleration
SIG_UPDATE	change initial position and velocity $\sigma$ to prox ops values
VAR_RRDOT	decrease initial range variance
VAR_RR_ANGLES	decrease initial radar angle variance
COV_U_A_COAST	increase initial unmodeled acceleration variance
BIAS_VAR_RRDOT	decrease range ecrv bias $\sigma$ for state noise
BIAS_VAR_RR_ANGLES	decrease radar angle ecrv bias $\sigma$ for state noise
VAR_U_A_COAST	increase unmodeled acceleration ecrv bias $\sigma$ for state

SIG\_UPDATE is used to initialize the covariance. Normally it is only used at the beginning of a rendezvous, but for the tether mission, uplinks are required which triggers a covariance reinitialization. COV\_U\_A\_COAST will also be used at each uplink to reinitialize the unmodeled acceleration slots of the covariance matrix. Measurement variances are only used at rendezvous start up time and when an instrument is switched. The bias slots of the state (slots 7 - 13) are modeled as exponentially correlated random variables (ecrv). The last three parameters in table 1 control the ecrv state noise for the propagation.

#### 2.4 RADAR BREAK-LOCK

A major impact to using relative Navigation during this mission will be if the radar loses the lock on the target. Having Rel Nav active will aid in the radar finding the target by telling the radar where to look, but in the period of time that no measurements are being processed, Nav is simply propagating the target state. The target state vector would then be following a path similar to that shown in Figure 2. Eventually Nav will be telling the radar



to point in the wrong direction. The question for the break-lock studies is how long will it take before Nav points the radar such that it can't locate the target? To answer this, some radar basics are needed.

When the radar is in GPC mode, it takes a state vector from Nav and points to that location. If a positive return signal is not received, a spiralling search within a designated cone is begun. The limit of the cone is determined by the expected distance to the target. For instance, a cone of  $\pm 20^\circ$  is searched at 20 km and a cone of  $\pm 30^\circ$  is searched at 13 km. A new search is begun every 20 seconds until the target is found.

This topic is studied from a navigation standpoint only. There are other concerns about the actual functioning of the radar hardware. One concern is that the radar may begin tracking the tether instead of the satellite. This can easily be checked real time by watching the radar data and comparing it to the timeline and the tether length output. If this phenomenon does happen, it will be during the portions of the mission when the satellite is towards the 20 km point and the tether begins to bow. At some point during the retrieval, the radar should be able to reacquire the satellite via Rel Nav and target state vector uplinks. Reacquiring the target during retrieval will still be a useful aid to the mission and crew by having some radar feedback as the satellite approaches the Shuttle.

### 3.0 MISSION ANALYSIS

Several different trajectories were generated and processed for the TSS1 mission. The purpose of having the different trajectories is to try to encompass the actual performance (a true unknown) within simulated data. To do this, various scenarios were generated by adjusting mission parameters. By doing this, the most difficult mission to navigate was found to be one that needed a lot of attitude controlling. This mission profile also required numerous uplinks to keep the Shuttle inertial state errors within procedural limits.

The particular trajectory used in this paper is named STVHO. The profile uses vernier jet control and there is a current flowing through the tether during the on-station phase of the mission. The Shuttle is held at a pitch of 25° nose up with 2° attitude dead bands. Six uplinks were required for this profile.

There is a concern as to what happens to a standard rendezvous when I-LOADs are changed. This could be a question if another rendezvous is scheduled for the same Shuttle mission or if an unplanned rendezvous would be desired. To look at this, I used a trajectory called OMP13, which is simulated data. A 30 cycle Monte Carlo run was performed on both STVHO and OMP13.

#### 3.1 ANALYSIS OF STVHO

Figures 5 and 6 show the 30 cycle Monte Carlo output for STVHO. These two plots indicate good Rel Nav performance. The downtrack and cross track errors are both 320 m during the on-station phase and reducing to zero towards the end of the retrieval. The radial position error remains around 20 m throughout the whole mission. Velocity errors seen in Figure 6 also are acceptable. The spikes, which are more prominent in the velocity plot, are due to the state vector uplinks. When an uplink occurs, the covariance gets reset and it takes about 1,000 seconds for the filter to recover.

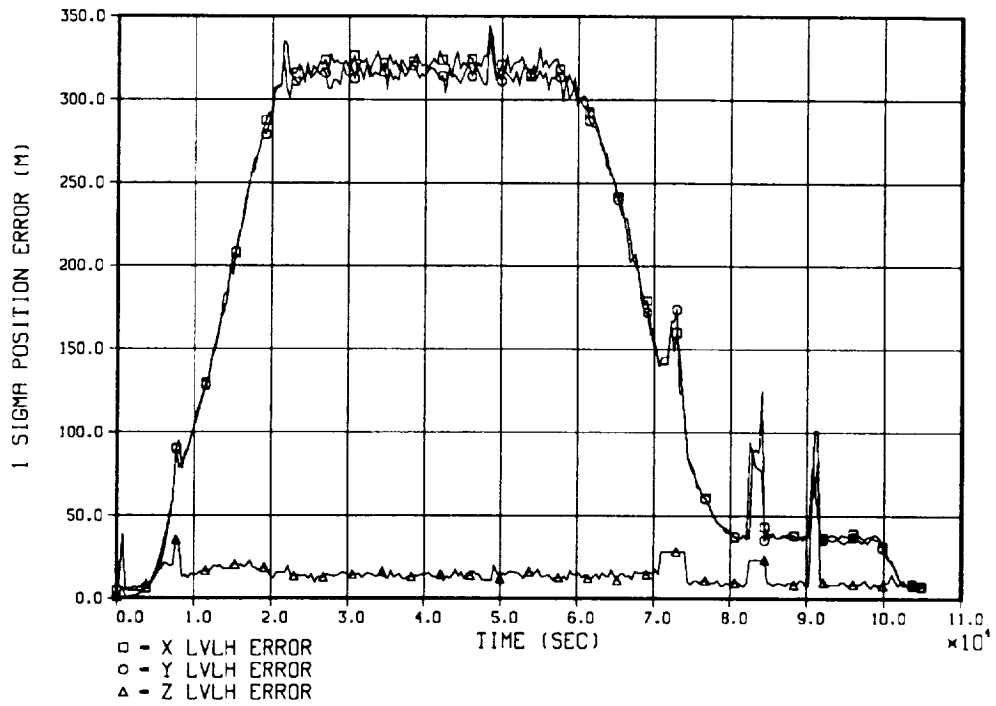


Figure 5 - RELATIVE POSITION ERROR FOR STVHO

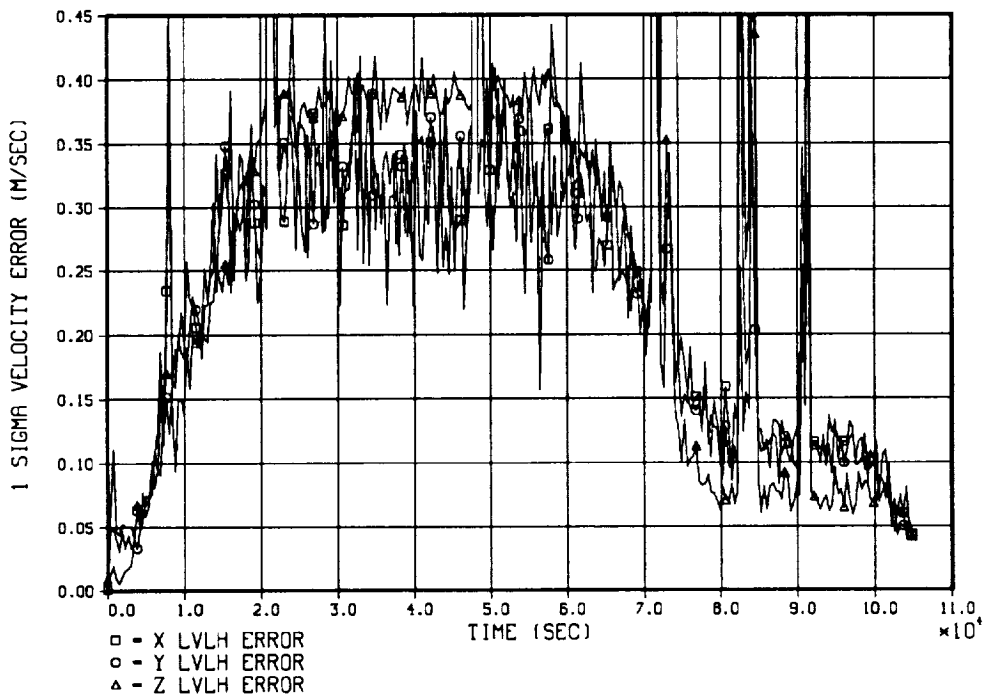


Figure 6 - RELATIVE VELOCITY ERROR FOR STVHO

Figure 7 shows the Shuttle centered relative motion plot for STVHO. Differences seen in the trace of the environment versus Nav is due to the measurement errors so the actual mission could vary depending on how well the measurement errors have been predicted. With the measurement errors used, the angle between the line of site error to the on-station points seen in Figure 7 is around 1.3°.

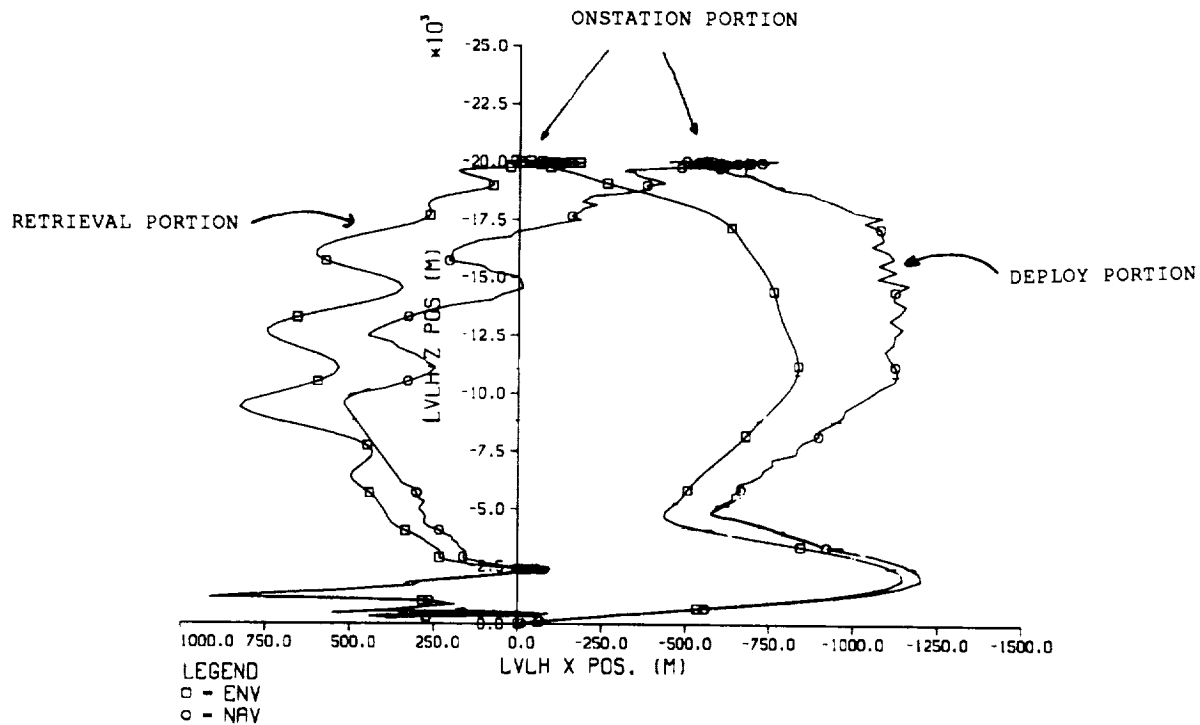


Figure 7 - RELATIVE MOTION PLOT FOR STVHO

### 3.2 ANALYSIS OF OMP13 USING THE NEW I-LOADS

Figures 8 and 9 show OMP13 using the standard filter I-LOADS. Star tracker measurements are taken during the first portion of the rendezvous. At 10,000 seconds the measurement source is switched to the rendezvous radar. These plots show typical performance. Figure 10 is the target centered relative motion plot. Figures 11, 12 and 13 are for OMP13 using the new I-LOAD set. Performance is the same up until 12,000 seconds. This is the point of the profile where the Terminal phase Initiation (TI) burn is executed.

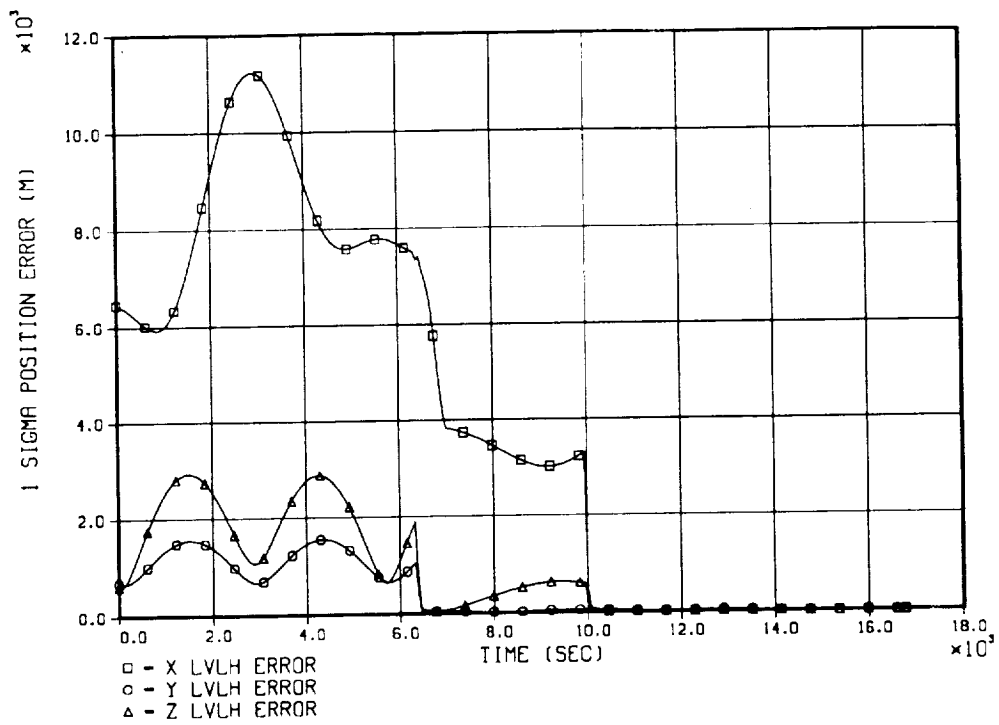


Figure 8 - RELATIVE POSITION ERROR FOR OMP13 WITH THE STANDARD I-LOADS

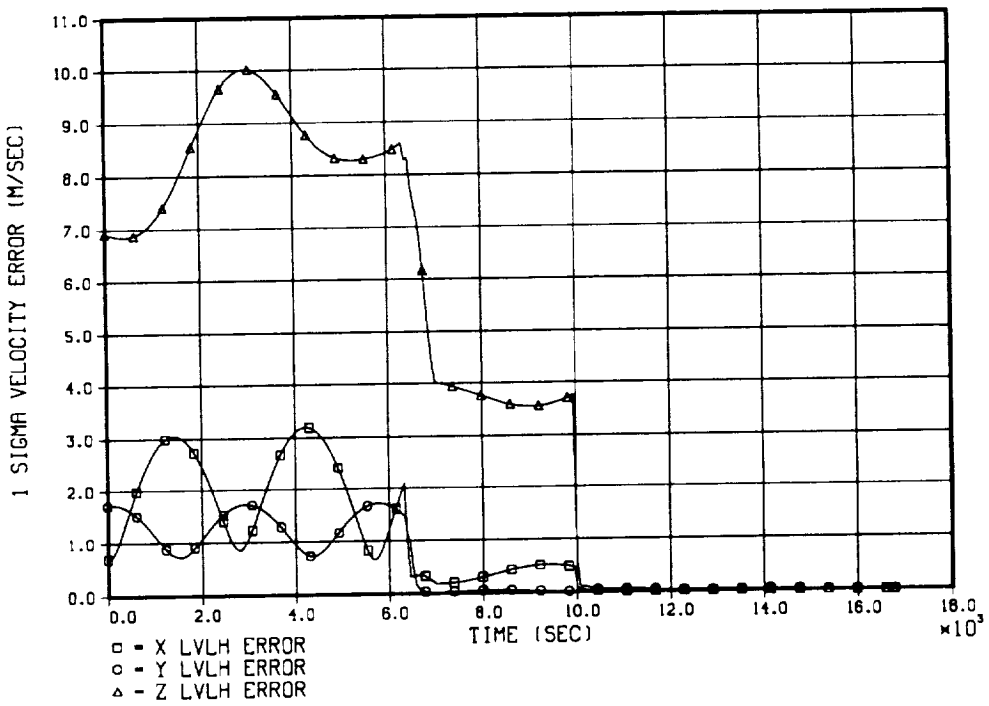


Figure 9 - RELATIVE VELOCITY ERROR FOR OMP13 WITH STANDARD I-LOADS

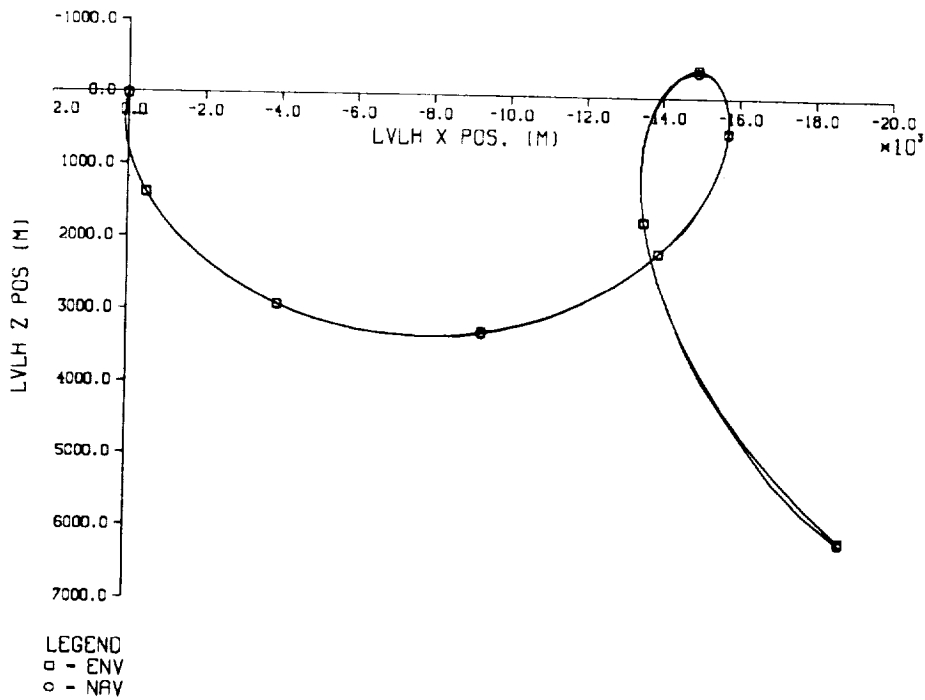


Figure 10 - RELATIVE MOTION PLOT FOR OMP13 WITH STANDARD I-LOADS

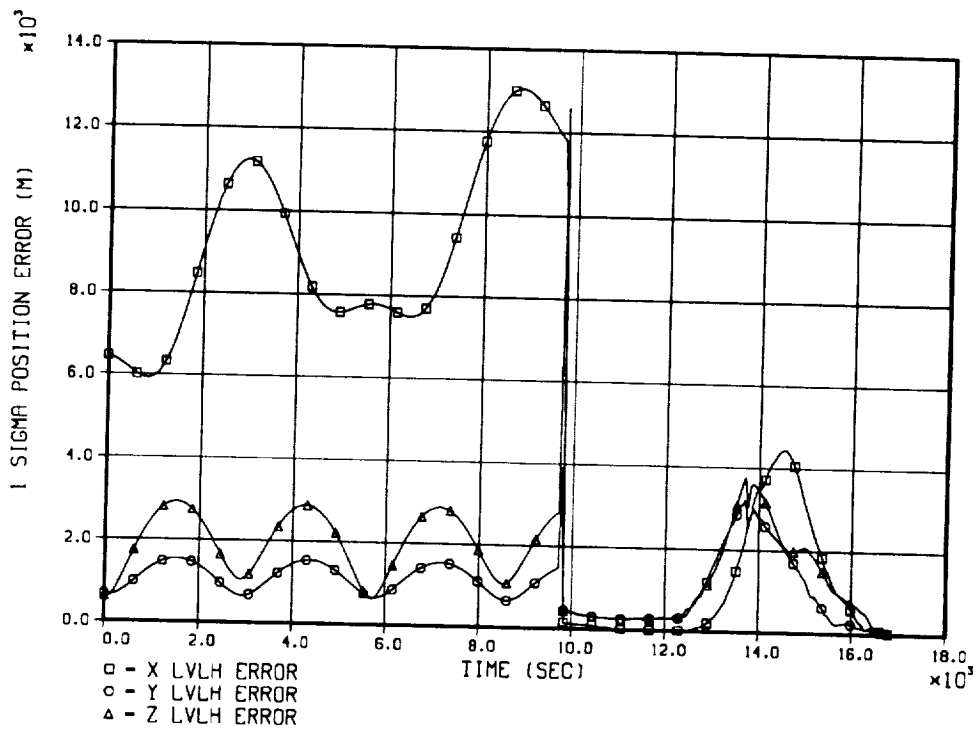


Figure 11 - RELATIVE POSITION ERROR FOR OMP13 WITH NEW I-LOADS

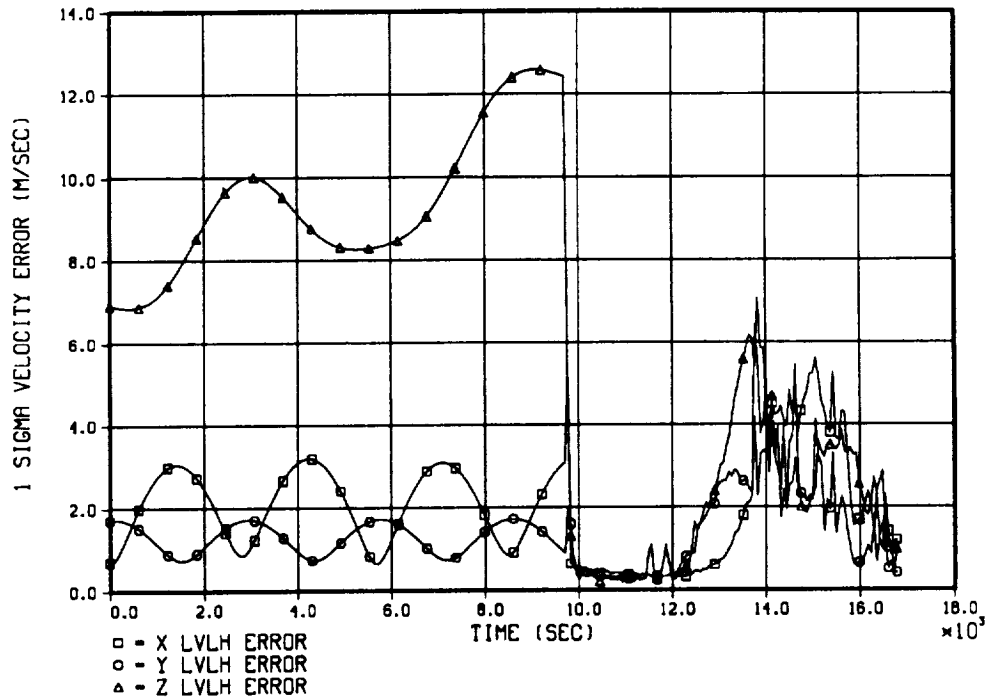


Figure 12 - RELATIVE VELOCITY ERROR FOR OMP13 WITH NEW I-LOADS

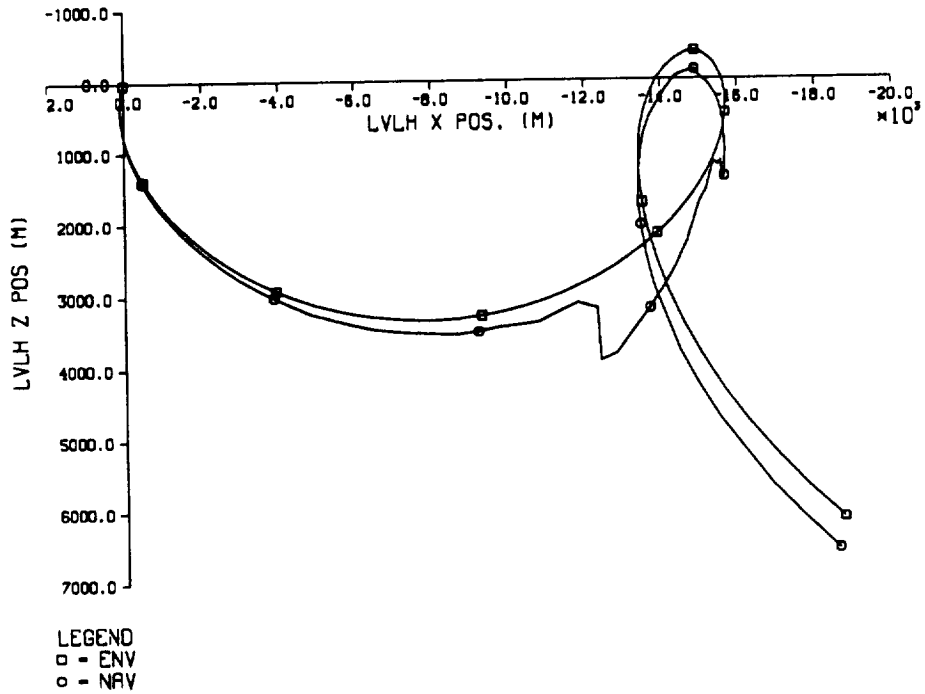


Figure 13 - RELATIVE MOTION PLOT FOR OMP13 WITH NEW I-LOADS

Another significant event during this time is angle measurements drop out from 12,000 seconds to 14,000 seconds. The relative motion data in Figure 13 does not reflect the state errors shown in Figure 11 because Figure 13 is from a single cycle run. The Monte Carlo analysis in SENSOR does not print the relative state for each cycle.

The performance of OMP13 with the new I-LOAD set is not good. The Root-Sum-Squared (RSS) position error at 14,000 seconds into the run is 7,000 m. The actual distance between the Shuttle and the target at this time is approximately 12,000 m. This portion of the rendezvous requires several midcourse maneuvers, which are normally targeted onboard. The plots show that the Nav state would not be accurate enough to do this.

### 3.3 RADAR BREAK-LOCK ANALYSIS

This analysis was performed by inhibiting measurements at a given time. This allowed Nav to propagate the target state using normal orbital dynamics. Figures 14, 15 and 16 show results at three different times: 1,000 seconds, 15,000 seconds and 45,000 seconds respectively. Relative times can be taken from the plots since there is 38.4 seconds between markers.

The objective is to see how long Nav can propagate the state before the state error is too large to help the radar point at the target. The lines shown on the plots indicate the point after which the target will not be within the search cone of a given Nav state. The work shown here attempts to answer the break-lock question from a navigation stand point. The actual radar hardware could shorten the period of time for reacquisition.

Figure 14 shows an interesting propagation, which is due to the unusual motion of the satellite at the time the measurements are shut off. This plot indicates that it will take 800 seconds before the Nav state will point the radar in the correct direction to find the target. From this point, there is 700 seconds for which the Nav state will point the radar such that it can reacquire the target.

The next run, shown in Figure 15, behaves as expected. If the break-lock happens 15,000 seconds into the deploy, the radar has 450 seconds to reacquire



the target before Nav state errors become too large. This time is based only on the search cone. There is also a large range difference between the Nav state and the actual position of the target which could also limit the reacquisition time.

Figure 16 shows the final case analyzed. This break-lock is simulated at 45,000 seconds into the run, which is during the on-station phase of the mission. This plot indicates that about 400 seconds are available for Nav to help the radar find the target. Again, as previously mentioned, there is a large range difference between the environment and the Nav state.


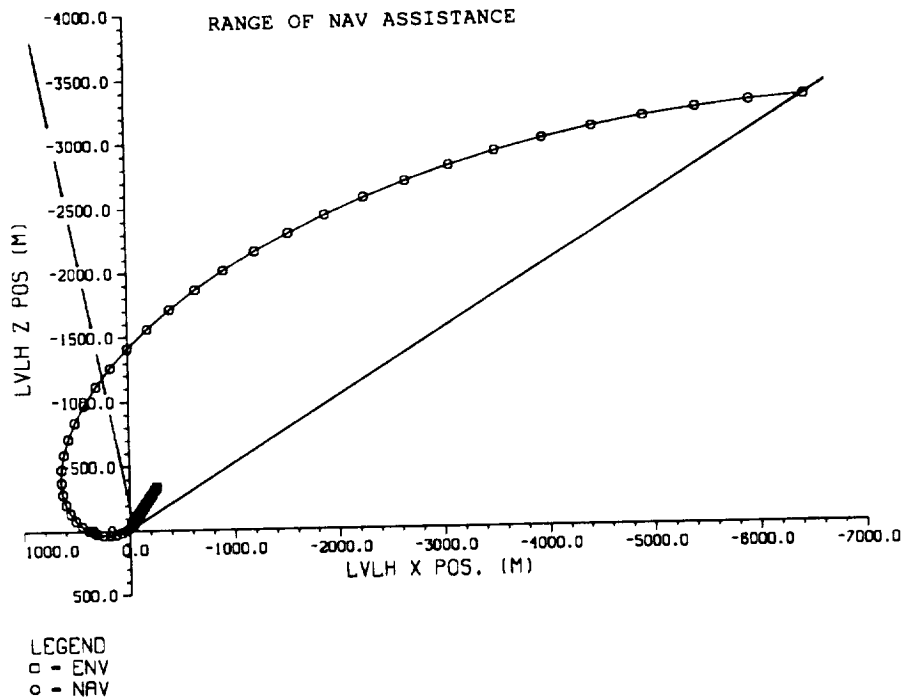


Figure 14 - RADAR BREAK-LOCK AT 1000 SECONDS

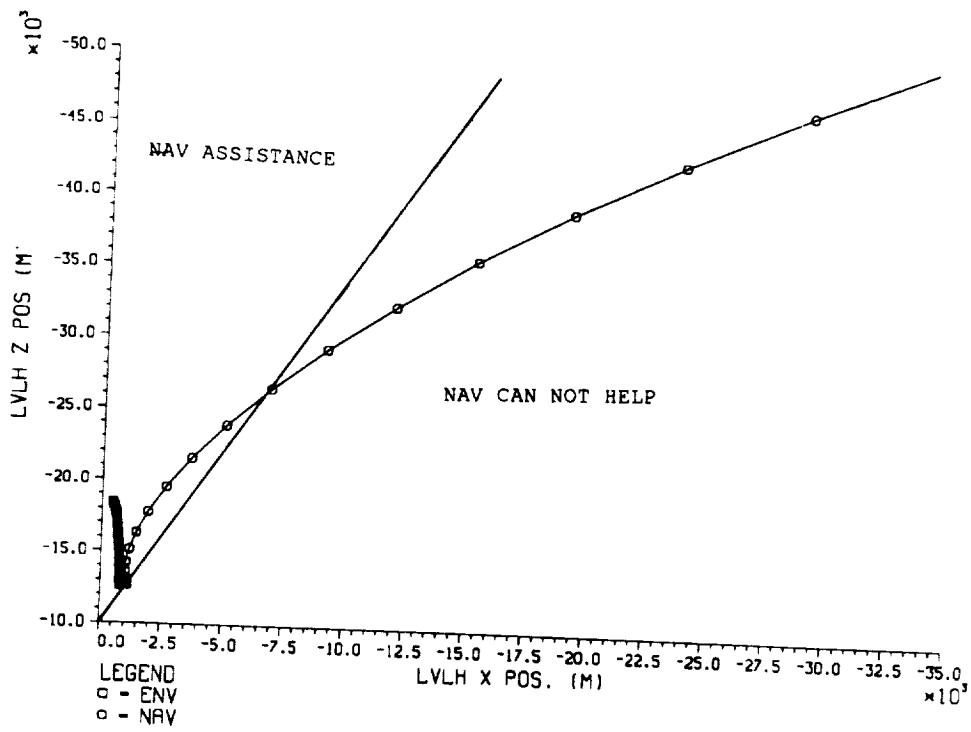

#### 4.0 CONCLUSIONS

Relative navigation performance is acceptable for the TSS1 mission. To do this requires 9 I-LOADs to be changed. This new I-LOAD set does work for the standard rendezvous trajectory that I have available, but shows poor performance during the final 14 km of the rendezvous. State vector uplinks around the time of the TI burn might be able to keep the state errors within acceptable limits. An alternative method of performing a standard rendezvous would be to target the midcourse maneuvers on the ground and then uplink them to the Shuttle. These ideas require more analysis.

The performance of the radar itself is a question that may not be completely answered until the mission. The satellite is small and will be difficult to track at 20 km. If tracking of the satellite is not possible at the extreme distances, Rel Nav and the radar, with the help of ground uplinks, should be able to acquire the target at some point during the retrieval.

## 5.0 REFERENCES

1. Wacker, R.A. and crew, "STOCS USER MANUAL", McDonnell Douglas Astronautics Co.-Houston Division, 1.1-TM-EH86020-06, 14 February 1986.
2. Alland, K.A. and Kralicek, T.L., "SENSOR6A USER'S GUIDE", McDonnell Douglas Technical Services Co.-Houston Astronautics Division, 1.2-TM-FM85018-219, 29 August 1985.