

NAC8-059

MARSHALL
GRANT

IN-64-CR

123403

28p

Modification of a Successive Corrections Objective Analysis
for Improved Higher Order Calculations

by

Gary L. Achtemeier
Climate and Meteorology Section
Illinois State Water Survey
Champaign, IL 61820

(NASA-CR-182467) MODIFICATION OF A
SUCCESSIVE CORRECTIONS OBJECTIVE ANALYSIS
FOR IMPROVED HIGHER ORDER CALCULATIONS

Status Report (Illinois State Water Survey)
28 p

N88-17370

Unclas

CSCL 12A G3/64 0123403

Modification of a Successive Corrections Objective Analysis
for Improved Higher Order Calculations

by

Gary L. Achtemeier
Climate and Meteorology Section
Illinois State Water Survey
Champaign, IL 61820

Abstract

The use of objectively analyzed fields of meteorological data for the initialization of numerical prediction models and for complex diagnostic studies places the requirements upon the objective method that derivatives of the gridded fields be accurate and free from interpolation error. We propose a modification of an objective analysis developed by Barnes that provides improvements in analyses of both the field and its derivatives. Theoretical comparisons, comparisons between analyses of analytical monochromatic waves, and comparisons between analyses of actual weather data are used to show the potential of the new method. The new method restores more of the amplitudes of desired wavelengths while simultaneously filtering more of the amplitudes of undesired wavelengths. These results also hold for the first and second derivatives calculated from the gridded fields. Greatest improvements were for the Laplacians of the height field; the new method reduced the variance of

undesirable very short wavelengths by 72 percent. Other improvements were found in the divergence of the gridded wind field and near the boundaries of the field of data.

1. Introduction

In the analysis of weather data, it is often necessary to transform the data from nonuniformly distributed observation sites to a rectangular grid suitable for numerical calculations. The transformation is accomplished by some form of interpolation and is referred to as "objective analysis". An important class of objective analysis techniques known as "successive corrections methods (SC)" originated into meteorology in 1955 (Bergthorsson and Doos, 1955) and was introduced into operational meteorology by Cressman (1959). Though recently replaced by multivariate statistical techniques as the operational interpolation method in some synoptic scale numerical forecasting models, the successive corrections methods remain among the most commonly used in practice (Bengtsson et al., 1981).

Because the SC methods have been widely used for gridding meteorological data, it is appropriate that they should be benchmarks for comparisons with newer objective analysis techniques (Seaman, 1983; Schlatter, 1976; Davidson, 1982). It is therefore important that the intercomparisons be done with SC methods for which the analysis parameters have been set to yield as closely as possible the optimum analysis. Further, SC methods have been shown to be interchangeable with statistical interpolation methods (Bratseth, 1986; Lorenc, 1986), and since the SC methods are more economical, they will find greater application for the initialization of numerical prediction models. And

because the numerical models (and also some diagnostic models) involve higher order calculations and products therefrom, it is crucial to obtain accurate derivatives from objectively gridded fields of meteorological data.

This study presents a modification of the Barnes (1964, 1973) SC method to increase the accuracy of the objective analysis of smaller scale features contained in the data and to increase the accuracy of the derivatives calculated from the gridded fields. The Barnes method was chosen for this study because it has been widely used for gridding meteorological data and has been made part of data assimilation and analysis packages (Koch, etal., 1983; Smith and Leslie, 1984). Some of the advantages of the scheme for this study are: (1) Its Gaussian weighting scheme has been incorporated into statistical methods (Seaman, 1983), (2) the weight function is not arbitrarily truncated (a practice that introduces high frequency noise into the gridded fields), (3) the response characteristics of the method have been well-documented, and (4) the shape of the weight function is not tied to an influence radius; the influence of data can be extended without changing the response characteristics of the weight function.

Achtemeier (1987) results suggested that the desired improvements were possible if the traditionally used 2-pass version developed by Barnes (1973) were modified to include a third pass. Since the new method incorporates much of the original methodology developed by Barnes, we adopt the terminology, Barnes OBjective ANalysis Three Pass (BOBAN3) for the 3-pass version. In the next section, we derive the response equations for BOBAN3 and demonstrate the theoretical increase in accuracy over the 2-pass method. In addition, comparative results from analyses of monochromatic sine waves are presented.

In Section 3, analyses of a jet streak embedded within an intense synoptic scale cyclone on 12 GMT 11 April 1979 are presented to show how BOBAN3 improves over the 2-pass method. The significance of these results is discussed in Section 4.

2. Theoretical Analysis

Only portions of the theory developed by Barnes are reproduced here to provide the reader with the necessary background to understand this study. A more complete explanation is available in Barnes (1973) and is also contained in Koch et al. (1983) and Achtemeier (1987).

The horizontal distribution of an atmospheric variable can be described mathematically by a linear combination of an infinite number of sinusoidal waves, a Fourier Integral representation. If we wish to suppress some of the information in the actual field and represent only components larger than an arbitrarily chosen wavelength, we can apply a judiciously-selected filtering function to the distribution. The effect upon the resulting depiction of the field can be demonstrated for a single sinusoidal wave of the form $f(x,y) = A \sin(ax)$, where $a = 2\pi/L$ and L is the wavelength. The filtered (or objectively analyzed) field, $g(x,y)$, is represented by

$$g(x,y) = \int_0^{2\pi} \int_0^{\infty} f(x+r\cos\theta, y+r\sin\theta) w(r,k) r dr d\theta. \quad (1)$$

where the filter is a function of the distance, r , between the arbitrary point (x,y) and all other points in the field. Barnes (1964) chose a Gaussian function for $w(r,k)$

(5)

$$w(r,k) = (4\pi k)^{-1} \exp(-r^2/4k). \quad (2)$$

If the data concerning the atmospheric variable are distributed continuously over an infinite plane surrounding (x,y) , as they are in this analytical example, then (1) becomes

$$g(x,y) = D(a,k) f(x,y), \quad (3)$$

where the amplitude response, $D(a,k)$, is given by

$$D(a,k) = \exp(-a^2k). \quad (4)$$

Here k is a selectable parameter that determines the shape of the weighting curve for the filter.

Equation (4) gives the response of the Gaussian filter after one application. Barnes (1964) showed that more of the details inherent in the data could be recovered if the filtered residual differences between $f(x,y)$ and $g(x,y)$ were added to the original filtered field. However, several additions of smoothed corrections to a smoothed initial analysis, were required to retrieve the important details inherent in the data. In 1973, he modified his method so that most of the important details are recovered in only two passes through the data. If $k = k_0$ and $D(a,k_0) = D_0$ for the initial pass, and $k_1 = \tau k_0$ for the correction pass, then the final response D' is given by

$$D' = D_0(1 + D_0^{\tau-1} - D_0^\tau). \quad (5)$$

Here τ is an arbitrary weighting parameter that decreases the number of iterations required to achieve desired response.

Achtemeier (1987) found from theoretical studies that equivalent or better accuracy could be obtained over the 2-pass 1973 (traditional) method by a 2-pass method with the same filter parameters on the initial and correction passes (fixed method). These studies required the final responses for the traditional and fixed methods to be equal at an arbitrary "reference wavelength" (usually the $2S$ wavelength where S is the average separation between observations). Accuracy was defined by how well the method retains desired wavelengths and removes undesired wavelengths. Applications revealed that the more sparsely and irregularly distributed are the data, the less the results are in accord with the predictions of theory. No single set of filter parameters for the 2-pass method produce the most accurate objective analysis for all wavelengths. The traditional method developed the most accurate objective analysis of the longer wavelengths. The fixed method added information present in the shorter wavelengths without increasing the contribution by undesired very short wavelengths.

This information about how different filter parameters modify the performance of the 2-pass objective analysis was used to develop the 3-pass method that includes the desirable properties of both the traditional and fixed methods. This modification is but a minor extension of the existing technique. A very smooth first pass captures the long wavelengths and an additional 2-passes with the fixed method retains the desired shorter

wavelengths. Consider a 3-pass method for which the first pass response is D_0 and the second and third pass responses are D_1 . The final response after 3-passes is

$$D' = D_0 + (1 - D_0)D_1(1 + D_1^{\tau-1} - D_1^{\tau}) \quad (6)$$

where the third pass response is related to the second pass response by $D_2 = \tau D_1$. If $D_0 = 0$, the first pass only restores the mean of the data field and has zero response for all wavelengths. Then the final response reduces to the response for the traditional 2-pass method given by (5). The final response for BOBAN3 is obtained upon setting $\tau=1$,

$$D' = 1 - (1 - D_0)(1 - D_1)^2 \quad (7)$$

Choosing a small D_0 (say $D_0 = 2.5 \times 10^{-4}$) allows the restoration of some of the longer wavelengths but has near zero response at the reference wavelength. Then the filter parameters for the fixed method give the desired final response at the reference wavelength after two correction passes. Fig. 1 shows the theoretical final response curves for BOBAN3 and the traditional method. The responses are identical (0.25) at the reference wavelength (2S). BOBAN3 offers an additional 7-9 percent restoration of the 4S - 5S wavelengths.

Though D_0 has near zero response at the reference wavelength, and therefore contributes negligibly to the final response there, its contribution to the final response at the longer wavelengths is not negligible. The solid line in Fig. 2 shows the differences between the final responses for the fixed method and BOBAN3 expressed as percent of the amplitude of the original wave.

The standard of comparison is the fixed method. The negative percentages mean that inclusion of the third pass causes restoration of more of the original wave. There is no difference between the two methods at the reference wavelength (2S wave). BOBAN3 restores two percent more of the 4S wave. It restores lesser percentages at the longer wavelengths because the 2-pass fixed method has almost perfectly restored these wavelengths already and there remains almost no additional information to add to the fixed analysis.

Following a procedure for the analysis of monochromatic sine and cosine waves with analytical data (Achtemeier, 1987), we performed objective analyses by BOBAN3, the fixed method, and the traditional method for waves that range from 2S to 12S in wavelength. RMS differences between the true field and each analysis were calculated for the grid interior. The statistic of relative performance is the difference between the RMS differences for BOBAN3 and the traditional method and for the fixed method and the traditional method normalized by the amplitude of the analytical wave. It is a measure of how well each method restores the whole wave, not just the amplitude. This statistic approximates the percent of the amplitude of the original wave used for the comparisons of theoretical responses.

Fig. 2 compares the relative performances of the BOBAN3 and fixed methods with the traditional method. The RMS errors are taken from within the interior of a field of data with highly irregular distribution. Here the standard of comparison is the traditional method. The results for the fixed method (squares) are superior in the 3S to 8S wavelength range and are inferior in the wavelengths greater than 8S relative to the traditional method. There is no relative increase in the accuracy of the BOBAN3 analysis (circles) for the

short wavelengths because the first pass response for these waves is approximately zero. The analyses of the longer wavelengths by BOBAN3 were superior to the results from either the fixed or traditional methods. Greatest increases over the traditional method were approximately 8 percent for the 4S wavelength.

Comparison of the results from BOBAN3 and the fixed method (Fig. 2) reveals the following. Both methods yield similar improvements over the traditional method for wavelengths in the range 2S-3S. For 4S or greater wavelengths, BOBAN3 outperformed the fixed method by 2-3 percent. These percentage improvements are for the whole wave and, locally, the improvements can be much larger. Now the only difference between BOBAN3 and the fixed method is the very smooth first pass of BOBAN3 and the differences between the theoretical final responses of the two methods are given by the solid line. It is apparent that relative improvements by BOBAN3 in the 2S-5S wavelength range can be explained by the first pass of BOBAN3. Simply add the differences in the theoretical response curve (solid line) to the values for the fixed method. However, for wavelengths greater than 6S, the relative improvements by BOBAN3 can not be explained by the increase in the final response gained by including the third pass because the theoretical percentage increases are too small. There must exist, therefore, some factor related to the analysis of unevenly spaced observations that accounts for the relative improvement of BOBAN3 over the fixed method.

To determine if the factor also accounts for some of the improvement of BOBAN3 over the traditional method, we repeated the comparative objective analyses for the one dimensional monochromatic waves on a 21 by 21 grid and

set the analysis parameters so that analyses would be equally accurate at the 4S wavelength for BOBAN3 and the traditional method applied to a grid of uniformly spaced data. It was necessary to require the equivalence with analyses of uniformly spaced data when it was found that the traditional method does not filter the short waves to the extent predicted by theory. We restored the 4S wave to 75 percent of its original amplitude. The solid line in Fig. 3 gives differences between the analyses in percent of the amplitudes of the original waves. The traditional method is the standard of comparison. Fig. 3 shows that BOBAN3 has the desirable property of restoring more of the longer wavelengths (negative percentages) and filtering more of the short wavelengths (positive percentages) relative to the traditional method. However, BOBAN3 has restored about 2.5 percent more of the 4S wavelength.

Recall that we set the analysis parameters so that the amplitude response of analyses with uniformly spaced data were equivalent. Therefore, the differences between the two methods cannot be attributed entirely to differences in maximum amplitudes. We therefore define and test another measure of the accuracies of an objective analysis - the smoothness of the fitted surfaces as one looks normal to the wave front and parallel to the wave crests. This is a crucial test because an analysis that better returns the amplitudes of the shorter wavelengths as measured by the RMS values for the whole wave, as does BOBAN3, may in fact generate more high frequency noise in the fitted surface thus giving a "sawtooth" appearance to the analyzed wave. It may be better to filter the wave with the traditional method than to retain it with a poor analysis especially if there is to be the calculation of derivatives of the gridded fields.

The fitted surfaces should be uniform in the direction of the crests of

the one dimensional waves. However, the analysis of irregularly distributed data introduces nonuniformities into the fitted surfaces. The slopes parallel to the wave crests of the fitted surfaces were calculated for each grid point pair located within the grid interior. Since the slopes of the true analytic surfaces are zero in this direction, any nonzero values are analysis errors. The RMS errors for BOBAN3 were compared with the RMS errors for the traditional method (the traditional method was used as the standard of comparison) and the results expressed as percent of the amplitude of the original wave per grid space. As shown by the dashed line in Fig. 3, these percentages are negative for the whole range of wavelengths studied, meaning that the slopes parallel to the wave crests as analyzed by BOBAN3 are on the whole not as large as the slopes analyzed by the traditional method.

To provide more detail into the behavior of these two analysis methods, we produce in Fig. 4 three pairs of cross sections showing first derivatives of the analyzed waves. The first cross section is taken along the crest of a wave, the second taken part way between an inflection point and a wave crest, and the third taken along an inflection point. The crosses (circles) identify the BOBAN3 (traditional) method. There are several ways to interpret these cross sections. First, the most accurate method gives the smaller departures from zero, the true slope. BOBAN3 almost always gave the smaller departures. Second, changes in the sign of the slope identify erroneous extrema in the analyzed surface. BOBAN3 tends to produce fewer short wavelength peaks (see point 11 Cross Section a). Third, the curvature is a measure of how well an analysis method produces smooth surfaces. The greater the "saw tooth" appearance of the lines, such as Cross Section b, the larger is the "noise" contained in the second derivative.

3. Comparisons Between BOBAN3 and Traditional Method Analyses of Real Data.

It was shown in the last section that BOBAN3 analyses of irregularly distributed data are superior to comparative analyses by the traditional method in the following ways. (1) BOBAN3 restores more of the amplitudes of the desirable long and short waves, (2) BOBAN3 filters more of the amplitudes of the undesirable short waves, and (3) BOBAN3 produces analyses with smaller interpolation error. But these results are based upon analyses of one dimensional monochromatic waves and there remains some question whether the improvements are meteorologically significant and justify the added expense of a third pass. We therefore perform comparative analyses of meteorological data and also compare the first and second derivatives calculated from the analyzed fields.

An intense cyclone located over the western United States on 12 GMT, 11 April 1979 (SESAME I). It was mostly a synoptic event that involved long wavelengths and the theoretical response curves predict only small differences between the two methods. However, the event also included several jet streaks and associated gradients in the height and temperature fields. The data were gridded onto a 40x25 mesh with 100 km grid spacing and analyses done for wind components, temperature, and height at 100 mb intervals from the surface to 100 mb. Derivative fields such as divergence, vorticity, and Laplacian of the heights were calculated also. Analysis parameters were selected so that the final responses for the 2S wavelength were 0.25.

Differences that could be considered as meteorologically significant were found mostly in areas of strong height and temperature gradients and also within important small scale features such as jet streak maxima and the depth of the major cyclone. Comparative results for the 300 mb heights are presented in Fig. 5. Gradients were largest at this level and the relative impacts of the two methods upon the final analyses were most apparent. Heights analyzed by the traditional method and BOBAN3 are shown in Fig. 5a and 5b. The most notable difference is that the low over New Mexico (shaded area) has been deepened 20 m by BOBAN3, a better fit to the data. Elsewhere, the trough over Idaho has been deepened by 5-10 m and the ridge over Wyoming has been amplified by 5-10 m. These increases in resolution by BOBAN3 are about 2-4 percent of the approximate 500 m amplitude of the 300 mb height pattern.

The Laplacian of the height field is proportional to the geostrophic vorticity and is therefore an important meteorological variable. The Laplacians of the height fields analyzed by the traditional method and BOBAN3 (Fig. 5c and 5d) reveal the advantages of BOBAN3 in three ways. First, both Laplacian fields show evidence for cyclonic curvature and steep height gradients from New Mexico through Nebraska and from Washington through Nevada. The amplitude of the pattern over New Mexico is 8-10 percent larger revealing that the BOBAN3 analysis has restored more of the desired short wavelengths. Second, the patterns calculated from the BOBAN3 Laplacians are smoother and show less apparently nonmeteorological short wavelength features. And third, the BOBAN3 analyses appear to be less sensitive to boundaries in the data field (Achtemeier, 1986). This advantage of BOBAN3 is more tenuous because there exist other methods for reducing the impacts of data boundaries (Koch, etal., 1983).

In order to identify the short wavelengths in the Laplacian fields, we removed most of the longer wavelengths with a high pass filter (Fig. 1) that consists of a 2-pass Barnes analysis (fixed method). This filter, applied to the gridded data, passes 75 percent of the 2S wave and up to 100 percent of the shorter wavelengths. Figs. 5e and 5f show the short wavelengths remaining after the application of the filter. The patterns consist of some small fraction of meteorologically significant wavelengths and mostly undesirable high frequency "noise" waves introduced through the gridding of irregularly spaced data. They are mostly 2S waves. An amplitude of 2 units corresponds to an error in geostrophic vorticity of approximately $2 \cdot 10^{-5} \text{ sec}^{-1}$. Largest amplitudes are found within and around the deep trough. By contrast, Fig. 5f shows these waves much suppressed by BOBAN3. Furthermore, the almost imperceptible extension of the ridge in the height field over Illinois and a weak trough over Nebraska (Fig. 5a) into a large data void located over Missouri has introduced a couplet, a positive and negative center, in the Laplacian field (Fig. 5c) over the same area. Consisting mostly of analysis error, it has been reduced by approximately 50 percent in the BOBAN3 analysis.

Excluding from the calculations three rows and columns of grid points along the boundary, the variance of the high frequency wavelengths in Figs. 5e and 5f was reduced 72 percent by BOBAN3.

Streamlines calculated by an accurate method proposed by Achtemeier (1979) and isotachs of the 300 mb wind (Fig. 6a and 6b) reveal only subtle differences. BOBAN3 has increased the jet streak maximum over Kansas by about

2 m sec⁻¹. Overall, BOBAN3 reduced the RMS differences between the observations and vector wind speed interpolated to the locations of the observations from the gridded fields by approximately 6 percent. The field of differences between the two analyses (Fig. 6c) reveals that BOBAN3 added about 2 m sec⁻¹ along the full length of the jet streak to bring the wind speeds into better agreement with the observations. Elsewhere, the rather large differences in wind speed over Idaho and parts of Montana are the result of a shift by BOBAN3 of the deformation field southwestward toward the jet streak located over Nevada. Since the deformation field was located within an area devoid of observations, it was not possible to determine whether the southwestward shift by BOBAN3 was an improvement to the analysis.

Comparisons between fields of derivatives calculated from the components of the wind gridded by the two methods (Fig. 7) reveal that BOBAN3 increased the magnitudes of the cyclonic shear near the jet streak and also the anticyclonic vorticity over Illinois by approximately one unit (Fig. 7a and 7b). These increases were accomplished without the addition of analysis noise. The improvements by BOBAN3 in the divergence (Fig 7c and 7d) appear mostly in the divergence patterns. Patterns of divergence calculated from components of the vector wind gridded by the traditional method tend to be broken into small centers located in data voids midway between observation sites. For example, the zone of divergence that extends from Texas into the Great Lakes appears as four distinct centers, one each over north Texas, Arkansas, southeastern Illinois, and central Wisconsin. Several of these centers are present in the BOBAN3 analysis but much reduced magnitudes give the appearance of a smoother, more continuous field of divergence. The tendency of BOBAN3 to retain the divergence magnitudes and produce more uniform patterns is also apparent in

the analysis of the convergence over Iowa and Kansas, and the area of divergence that extends from Canada southward through the High Plains to near the Colorado border.

4. Discussion

Achtemeier's (1987) analysis of the Barnes (1964, 1973) method for gridding irregularly spaced weather data found that improvements, particularly in the retrieval of short but resolvable wavelengths, were possible if the traditional 2-pass method were replaced with a 3-pass method. In this paper, the theory for the 3-pass method (BOBAN3) was advanced and tested with analyses of analytical and real data. Comparisons between the traditional method and BOBAN3 verified the theoretical prediction that BOBAN3 would restore some of the desired longer wavelengths, restore more of the desired shorter wavelengths, and filter more of the undesired short wavelengths. The more specific results of this study are:

1. Both theoretical results and comparisons between analyses of one dimensional analytical waves showed that BOBAN3 would restore 7-9 percent more of the desired short wavelengths (3-5S). BOBAN3, upon analysis of the 300 mb 1200 GMT 11 April 1979 height and wind fields, restored approximately six percent more of the magnitudes of short wavelength features such as jet streak maxima ($2-4 \text{ m sec}^{-1}$) and the depth of the major cyclone (20 m). This result is in accord with theoretical predictions.

2. Comparisons between analyses of one dimensional analytical waves by BOBAN3 and the traditional method revealed that the magnitudes of errors in the first derivatives of fields gridded by BOBAN3 were significantly reduced. In the

study of the behavior of derivatives of the gridded wind field, it was found that the divergences calculated from the BOBAN3 wind field were not dismembered into small centers located midway between observations to the extent as were the divergences calculated from wind fields gridded by the traditional method.

3. The analysis of the analytical waves also indicated that significant improvements by BOBAN3 in the second derivatives were possible. We calculated the Laplacians of the heights, an important meteorological variable proportional to the geostrophic vorticity. The magnitude of the cyclonic center calculated from the height field gridded by BOBAN3 was approximately six percent greater than that calculated from heights gridded by the traditional method. In addition, BOBAN3 produced a simultaneous reduction of the variance of the undesired 2S wavelengths by 72 percent. Given the locations of these waves with respect to the locations of the observations, it is apparent that they originated mostly through the interpolation of irregularly spaced data. The ability of BOBAN3 to reduce short wavelength noise in the gridded fields is in accord with the results of the analytical studies.

4. The heights gridded by BOBAN3 were contaminated with less noise of the type associated with interpolation across data boundaries. Some of the problems inherent in the successive corrections objective analysis in the presence of boundaries in the field of data have been described by Achtemeier (1986).

Whether the modifications of the traditional Barnes successive corrections objective analysis into the BOBAN3 method produces meteorologically significant improvements to justify the added expense of a

third pass depends upon the purpose for the analysis. The traditional Barnes method is a highly accurate method for gridding meteorological data. If the analysis is to provide a "viewing" of the weather patterns, then the traditional method should be satisfactory. If the analysis requirements include the calculation of derivative fields and products therefrom, then the more precise BOBAN3 method may be preferred.

As has been noted, meteorological data gridded by the Barnes methods have often been used as standards for comparisons with new objective analysis techniques. When the objective fields are to be used in higher order calculations, such as terms of the differential equations that describe atmospheric flow, new objective analysis techniques should be compared against BOBAN3.

Acknowledgements

This research was supported by a grant from NASA for the development of new theoretical methods to assimilate quantitative satellite data with conventional meteorological data. The supporting grant is NAG8-059.

References

- Achtemeier, G. L., 1987: On the concept of varying influence radii for a successive corrections objective analysis. Mon. Wea. Rev. 115., 1760-1771.
- _____, 1986: The impact of data boundaries upon a successive corrections objective analysis of limited-area datasets. Mon. Wea. Rev. 114., 40-49.
- _____, 1979. Evaluation of operational objective streamline methods. Mon. Wea. Rev. 107, 198-206.

- Barnes, S. L., 1973: Mesoscale objective analysis using weighted time-series observations. NOAA Tech. Memo. ERL NSSL-62, National Severe Storms Laboratory, Norman, OK 73069, 60 pp. (NTIS COM-73-10781).
- _____, 1964: A technique for maximizing details in numerical weather map analysis. J. Appl. Meteor., 3, 396-409.
- Bengtsson, L., M. Ghil, and E. Kallen (eds.), 1981: Dynamic Meteorology: Data Assimilation Methods. Springer, 331 pp.
- Bergthorsson, P., and B. Doos, 1955: Numerical weather map analysis. Tellus, 7, 329-340.
- Bratseth, A. M., 1986: Statistical interpolation by means of successive corrections. Tellus, 38A, 439-447.
- Cressman, G. P., 1959: An operational objective analysis system. Mon. Wea. Rev., 87, 367-374.
- Davidson, N. E., 1982: Diagnostic capabilities of objective analysis schemes: areal mean vertical motion fields of some weather regimes over Australia. Aust. Met. Mag., 30, 211-221.
- Koch, S. E., M. DesJardins, and P. J. Kocin, 1983: An interactive Barnes objective map analysis scheme for use with satellite and conventional data. J. Climate and Appl. Meteor., 22, 1487-1503.
- Lorenc, A. C., 1986: Analysis methods for numerical weather prediction. Quart. J. R. Met. Soc., 112, 1177-1194.
- Schlatter, T. W., G. W. Branstator, and L. G. Thiel, 1976: Testing a global multivariate statistical objective analysis scheme with observed data. Mon. Wea. Rev., 104, 765-783.
- Seaman, R. S., 1983: Objective analysis accuracies of statistical interpolation and successive correction schemes. Aust. Met. Mag., 31, 225-240.
- Smith, D. R., and F. W. Leslie, 1984: Error determination of a successive correction type objective analysis scheme. J. Atmos. and Oceanic Tech. 1, 120-130.

Figure Captions

Fig. 1. Theoretical final response curves for BOBAN3 and the traditional Barnes method. The responses are identical (0.25) at the reference wavelength (2S). Third line: response curve for high-pass filter.

Fig. 2. (Solid line) Differences between the final responses for the fixed method and BOBAN3 for reference wavelength equal to 2S. Relative analysis accuracies for the traditional method and the fixed method (squares) and traditional method and BOBAN3 (circles) for analyses of irregularly spaced data. The relative accuracy is the difference between the RMS errors for each analysis pair normalized by the amplitude of the analytical wave and converted to percent.

Fig. 3. (Solid line) Relative analysis accuracies for the traditional method and BOBAN3 for reference wavelength equal to 4S. (Dashed line) Relative analysis accuracies for derivatives normal to the wave fronts for the traditional method and BOBAN3 expressed as percent of the amplitude of the original wave per grid space.

Fig. 4. Cross sections normal to the wave front showing derivatives of 4S wave along a) wave crest, b) mid-way between wave crest and inflection point and c) inflection point. Crosses (traditional method) and circles (BOBAN3).

Fig. 5. Comparative results for analyses of the 300 mb heights for 12 GMT, 11 April 1979 for the traditional method (left panels) and BOBAN3 (right panels). Height contours (a and b), Laplacian of heights (c and d), and Laplacian residuals after filtering (e and f). Units converted to geostrophic vorticity are 10^{-5} sec^{-1} for panels c, d, e, and f.

Fig. 6. Streamlines and isotachs by a) the traditional method and b) BOBAN3 of the 300 mb wind. c) Differences in wind speed (m sec^{-1}) between BOBAN3 and the traditional method.

Fig. 7. Comparative of vorticity and divergence for the traditional method (left panels) and BOBAN3 (right panels). Vorticity (a and b) and divergence (c and d) units are 10^{-5} sec^{-1} .

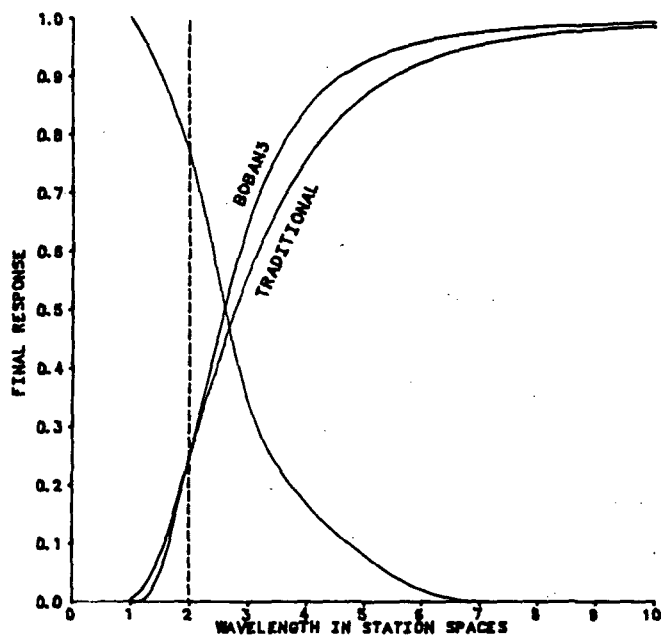


FIG. 1

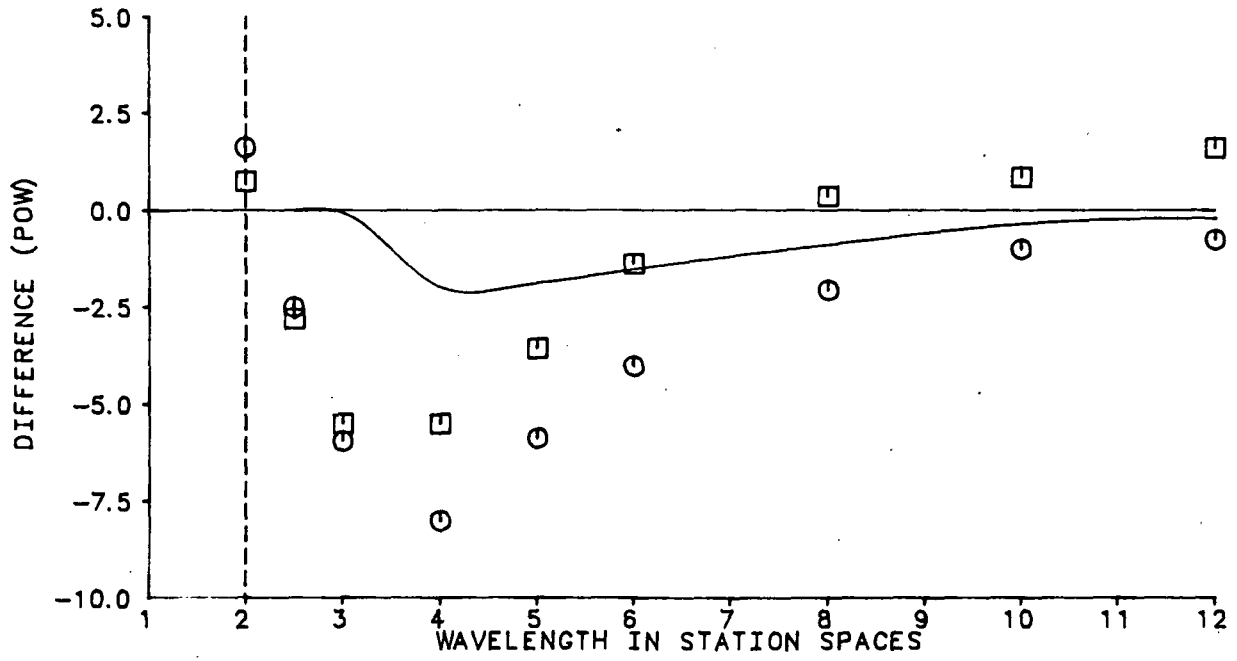


FIG. 2


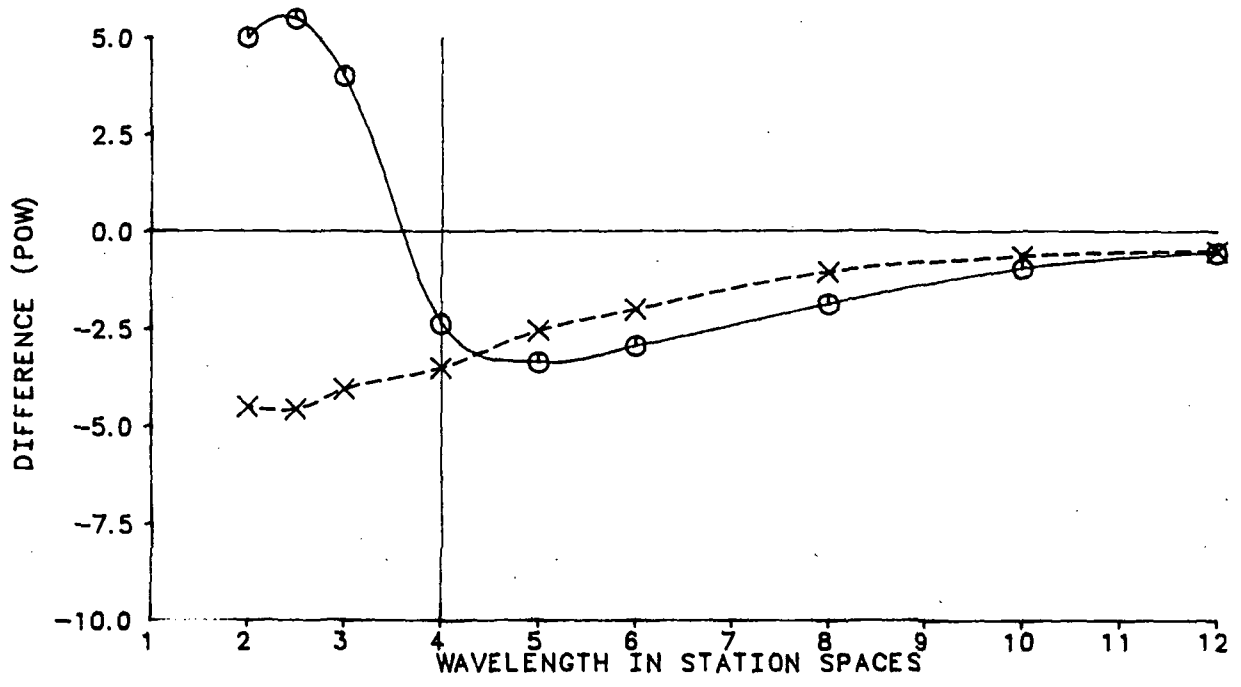


FIG. 3

FIG. 4

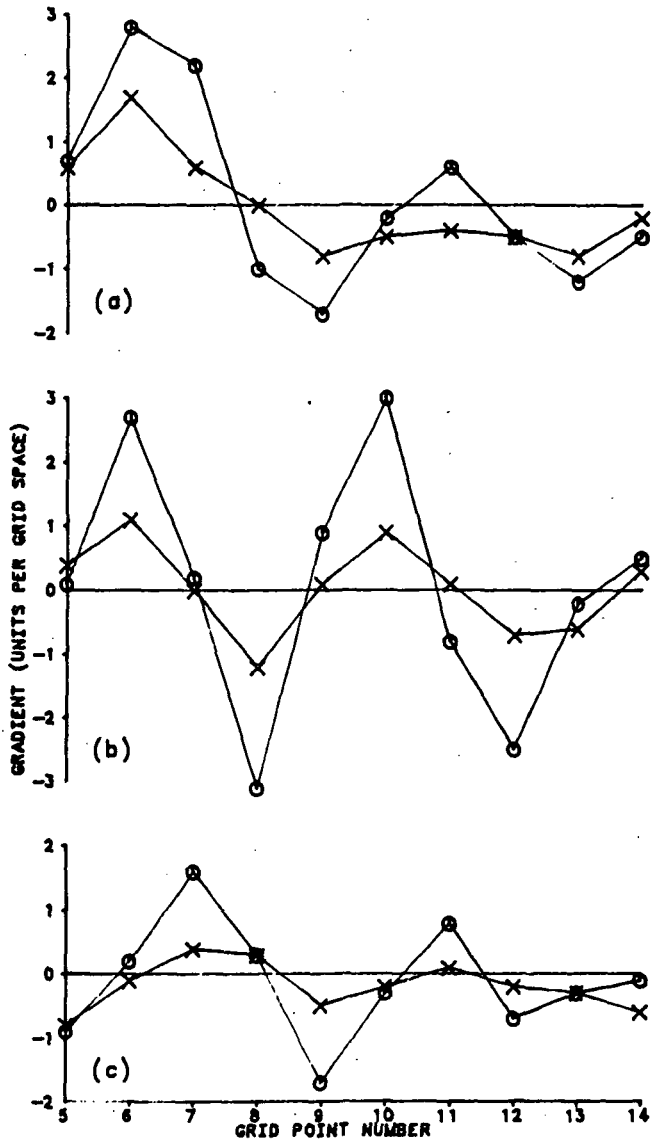

ORIGINAL PAGE IS
OF POOR QUALITY

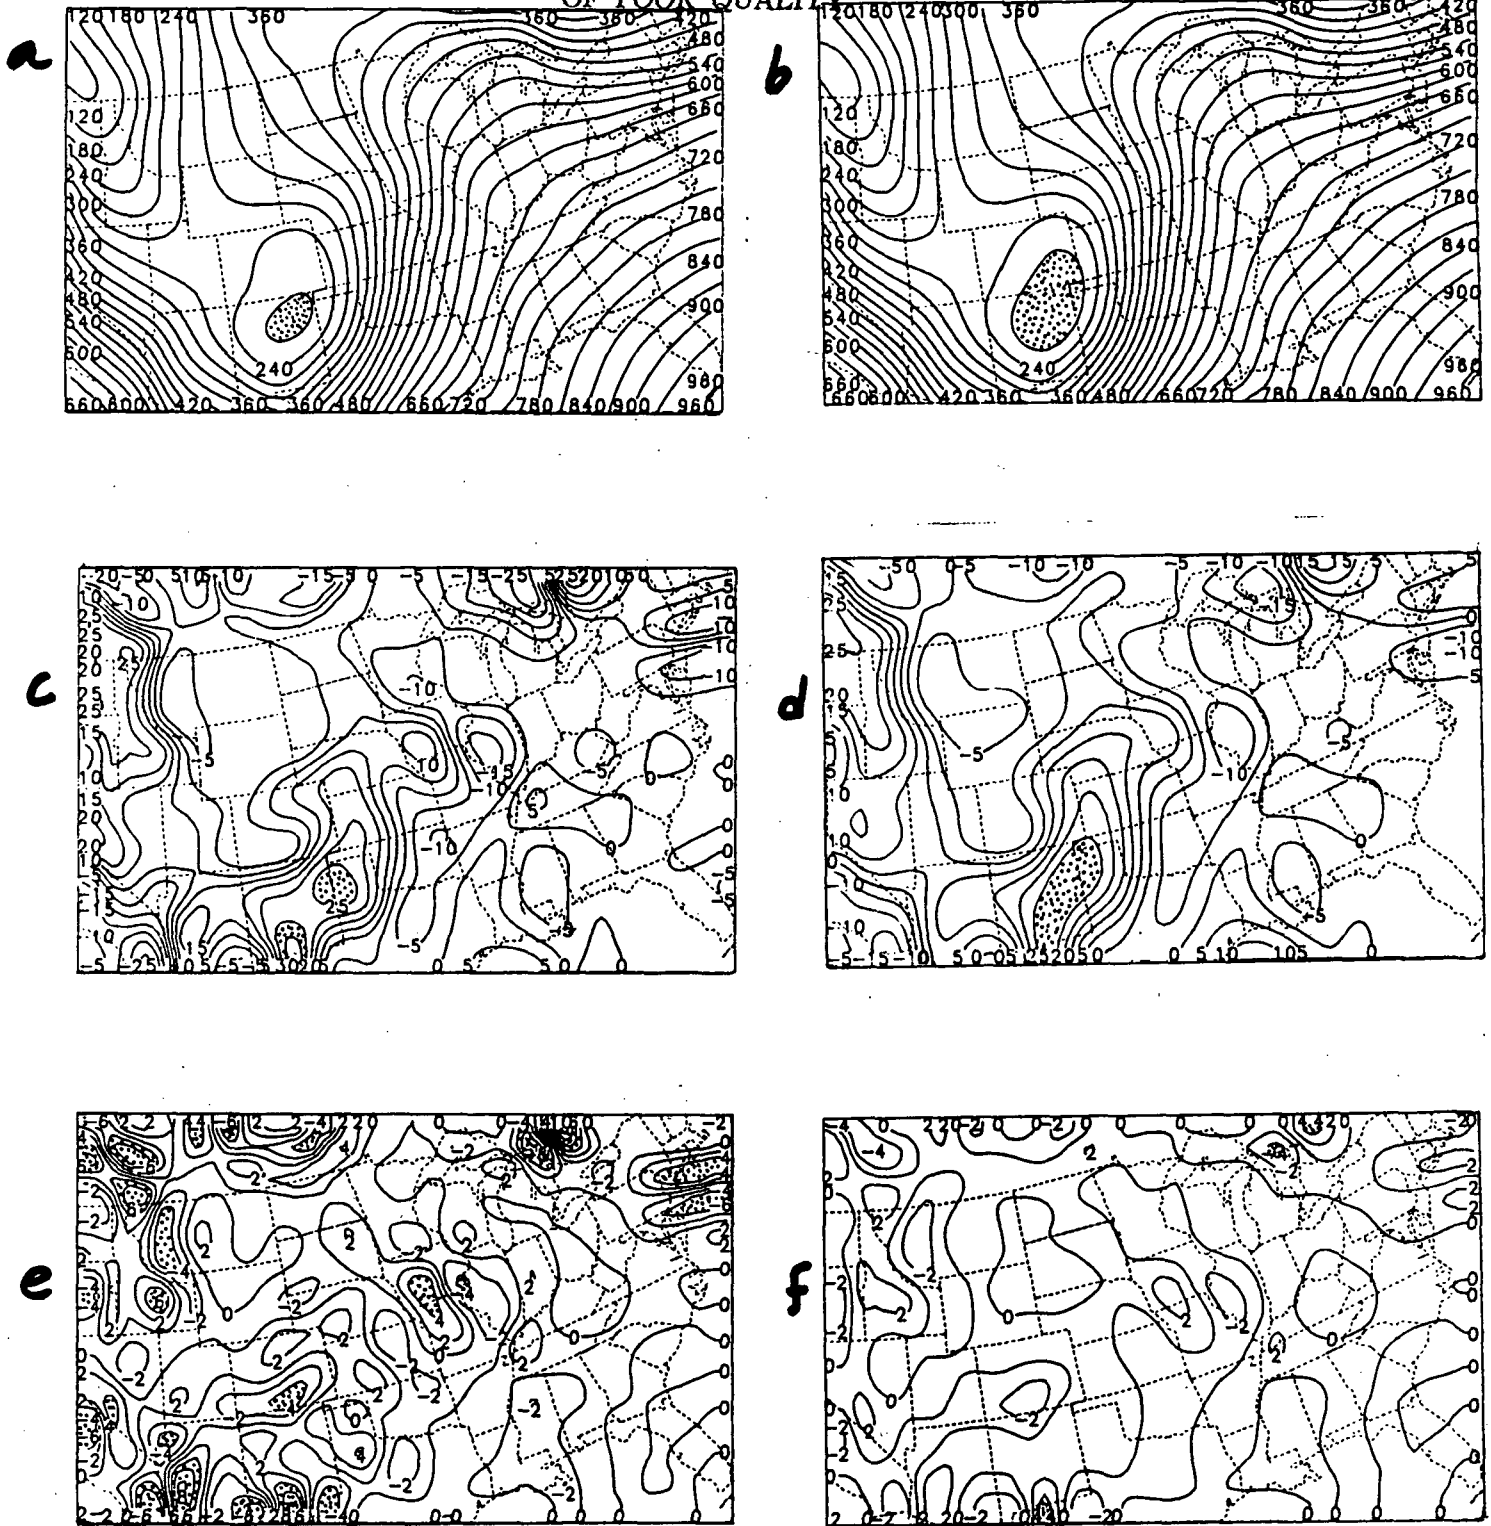


FIG 5

ORIGINAL PAGE IS
OF POOR QUALITY

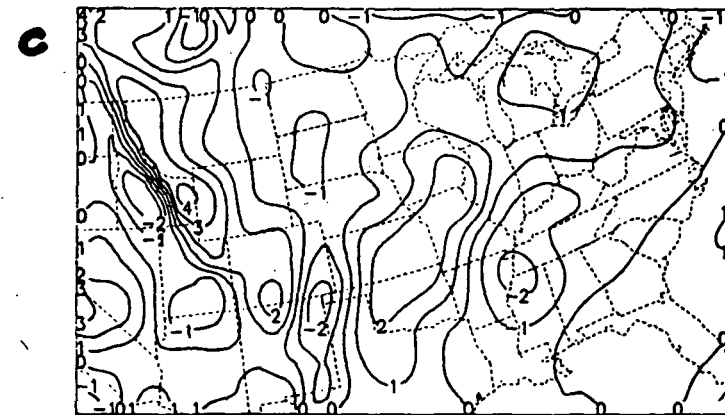
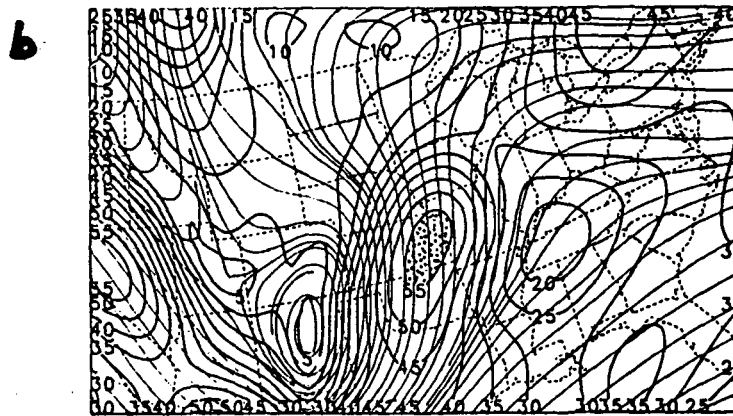
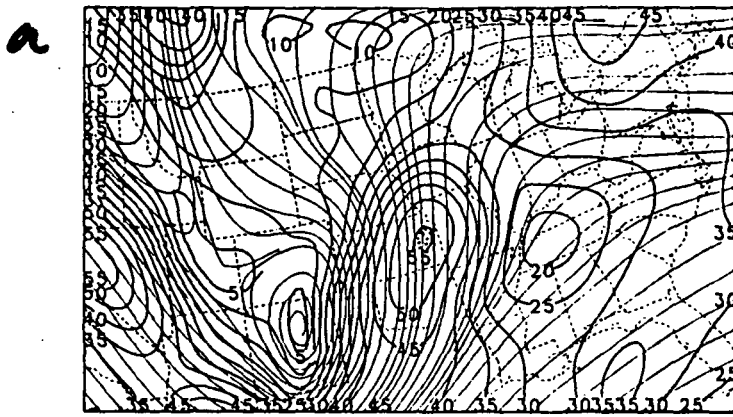


FIG. 6

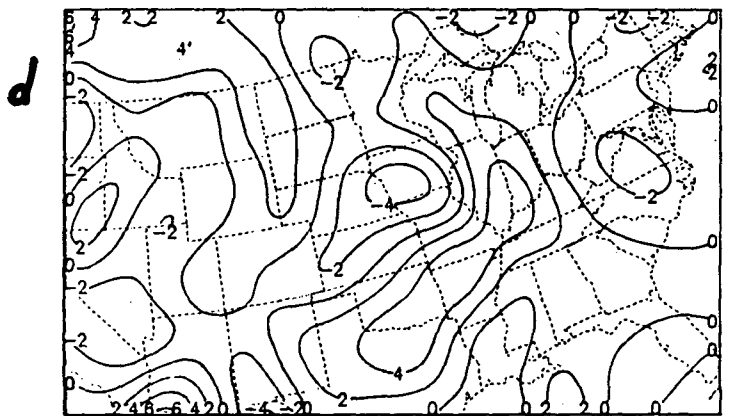
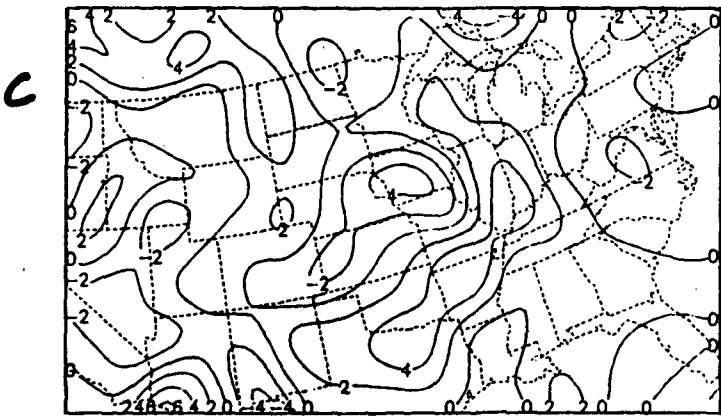
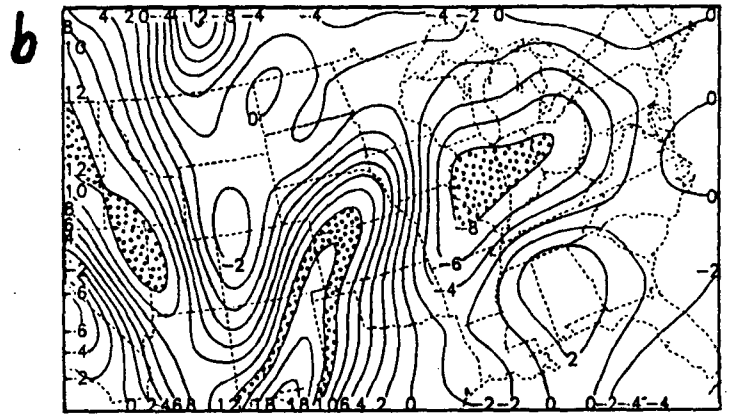
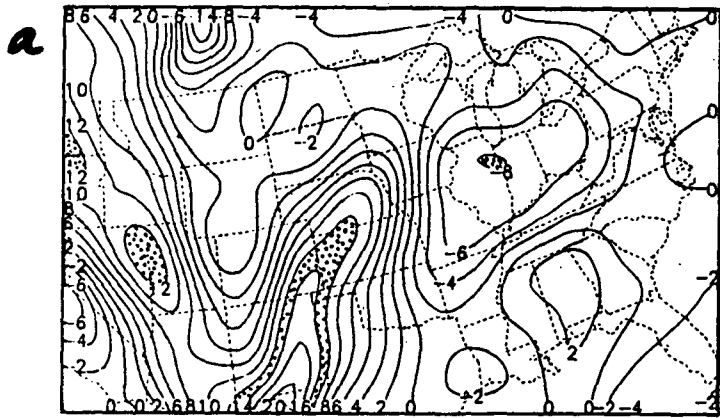


FIG. 7