

ON THE MEASUREMENT OF ATMOSPHERIC DENSITY USING  
DIAL IN THE O<sub>2</sub> A-BAND (770 nm)\*

T.D. Wilkerson, G.K. Schwemmer<sup>(+)</sup>,  
L.J. Cotnoir, and U.N. Singh

Institute for Physical Science and Technology, University of  
Maryland, College Park, Maryland 20742

<sup>(+)</sup>Laboratory for Atmospheres, NASA Goddard Space Flight  
Center, Greenbelt, Maryland 20771

Differential absorption lidar measurements in the A-band of molecular oxygen have been suggested<sup>1</sup> as a means of profiling atmospheric density. This paper reports progress towards this capability.

Figure 1 illustrates the "troughs" in which optical absorption by O<sub>2</sub> is roughly temperature independent for near-ambient conditions. For measuring density (or pressure<sup>2,3,4</sup>) the "on-line" DIAL transmission is tuned to the appropriate trough, and the off-line laser is tuned to just outside the A-band. Identification of the "density troughs" is based on the far wing line absorption coefficient given by

$$K(\nu) = \frac{Ck^2 b_c^0(T_0)}{\pi P_0 (\nu - \nu_0)^2} \left(\frac{T_0}{T}\right)^n N^2 e^{-E/kT} \{1 - h.o.(3\%)\}$$

where N is particle density,  $b_c^0(T_0)$  is the line profile HWHM at reference temperature  $T_0$ , pressure  $P_0 = NkT_0$ , and the exponent  $n \sim 0.7$  for O<sub>2</sub>.

We have carried out error analyses for this type of lidar and for related temperature- and pressure-measuring techniques that utilize the O<sub>2</sub> A-band. The parameters assumed are given in Table I. Figure 2 shows a representative example of the numerical simulations for a fixed altitude resolution of 150 meters; elevation angles of 90°, 60°, and 30° are used for time periods in the range 1-4 min. The accuracy of these O<sub>2</sub> density profile measurements is predicted to be 0.3% or better throughout most of the troposphere. Standard lidar instrumentation has been

---

\*Research supported by NASA LaRC through Cooperative Agreement NCC1-25, NOAA-NESDIS through Grant NA83-AA-A-00036, and by U.S. Army ASL through Contract DAAG 29-81-D-0100.

assumed. We have shown that tropospheric density can be profiled with accuracies of order 0.1-0.5%, with good altitude resolution, over a useful range of atmospheric conditions.

Density profiles in the atmosphere may also be measured via Raman scattering by  $N_2$ , but require precise knowledge of the optical form factor for the lidar system. This requirement does not apply to the two-beam  $O_2$  DIAL technique. However, DIAL does require careful monitoring of laser wavelength and linewidth, using spectrometer/wave-meter instrumentation.<sup>5,6</sup>

Generation of tunable, narrow band, pulsed laser output at 760-770 nm can be done with laser-pumped dye lasers or with a tunable crystal laser such as Alexandrite. As part of a program<sup>7</sup> described elsewhere at this meeting, we are investigating<sup>1</sup> the alternative of "Raman shifting" in  $H_2$  ( $\Delta\nu=4100\text{ cm}^{-1}$ ) starting with tunable dye laser output at 585 nm. Due to a special design, the radiation bandwidth can be as low as  $0.02\text{ cm}^{-1}$ .

Detailed results on energy and narrow linewidth at 770 nm will be presented for both the straight dye laser and the Raman-shifted dye laser, including high resolution scans of the  $O_2$  absorption spectrum for comparison with quantitative spectroscopic data.<sup>8,9</sup> This work is part of a general approach to develop a meteorological lidar system for measuring density, pressure, temperature, and humidity - all based on DIAL and the very near infrared absorption lines of  $H_2O$  and  $O_2$  (700-1140 nm).

We thank K. Ritter, B. Grossmann, and S. Higdon for assistance in this research.

Table I. Meteorological Lidar Parameters for  $O_2$  A-band

Tunable laser: 100 mJ pulse energy, 10Hz PRF,  $\lambda\lambda$  760-770 nm  
Rcvr. area  $1.0\text{ m}^2$ ; Optical efficiency 5% (night), 2.5% (day)  
Transmitted beam divergence 0.3 mrad; Rcvr. FOV 0.5 mrad.

## References

1. C.L. Korb and C.Y. Weng, "A Two-Wavelength Lidar Technique for the Measurement of Atmospheric Density Profiles," Proc. CLEO, Phoenix, AZ (April 1982).
2. C.L. Korb and C.Y. Weng, Appl. Optics 22, 3759 (1983).
3. G.K. Schwemmer, C.L. Korb, M. Dombrowski and R.M. Kagann, "Atmospheric Pressure Profiles Measured Using an Alexandrite Laser Differential Absorption Lidar," Proc. OSA Topical Meeting on Optical Remote Sensing of the Atmosphere, Incline Village, NV (January 1985).
4. C.L. Korb, G.K. Schwemmer, M. Dombrowski, J. Milrod, and H. Walden, "Airborne Lidar Measurements of the Atmospheric Pressure Profile with Tunable Alexandrite Lasers," Proc. 13th International Laser Radar Conf., Toronto, Canada (August 1986).
5. C. Cahen, J.P. Jegou, J. Pelon, P. Gildwarg, and J. Porteneuve, Rev. Phys. Appl. 16, 353, (1981).
6. L.J. Cotnoir, T.D. Wilkerson, M. Dombrowski, R.H. Kagann, C.L. Korb, G.K. Schwemmer, and H. Walden, "A Wavemeter for Use with a Line-Narrowed Alexandrite Laser in Differential Absorption Lidar," Proc. OSA Topical Meeting on Tunable Solid-State Lasers, Arlington, VA (May 1985).
7. B.E. Grossmann, U.N. Singh, N.S. Higdon, L.J. Cotnoir, T.D. Wilkerson, and E.V. Browell, "Linewidth Characteristics of Raman-Shifted Dye Laser Output at 720 nm and 940 nm," Proc. 13th International Laser Radar Conference, Toronto, Canada (August 1986).
8. B.E. Grossmann, "Etude par spectroscopie d'absorption laser en regime continu et impulsional des molecules d'eau et d'oxygene: Applications aux sondage lasers de l'atmosphere," Ph.D. thesis in Physics, l'Universite Pierre at Marie Curie (December 1984).
9. K.J. Ritter and T.D. Wilkerson, "Strengths, Widths, and Pressure Shifts of Fifty Four Oxygen A-band Lines," Proc. 13th International Laser Radar Conference, Toronto, Canada (August 1986).

00001-1

ORIGINAL PAGE IS  
OF POOR QUALITY

Temp: 288K  
Press: 1013mb  
Path: 1000M  
Oxygen: 21%

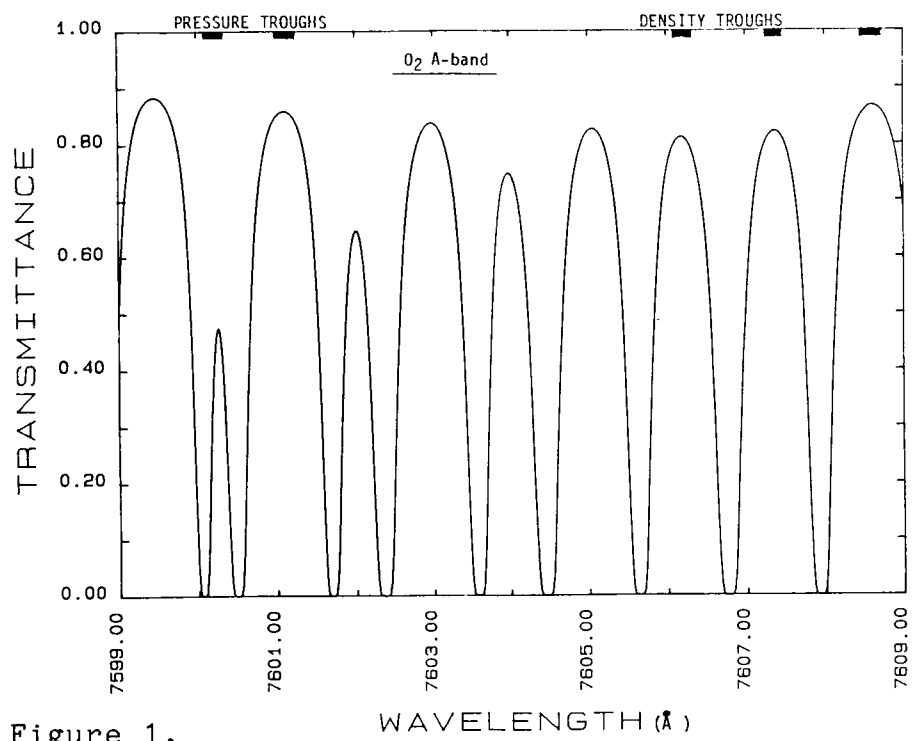


Figure 1.

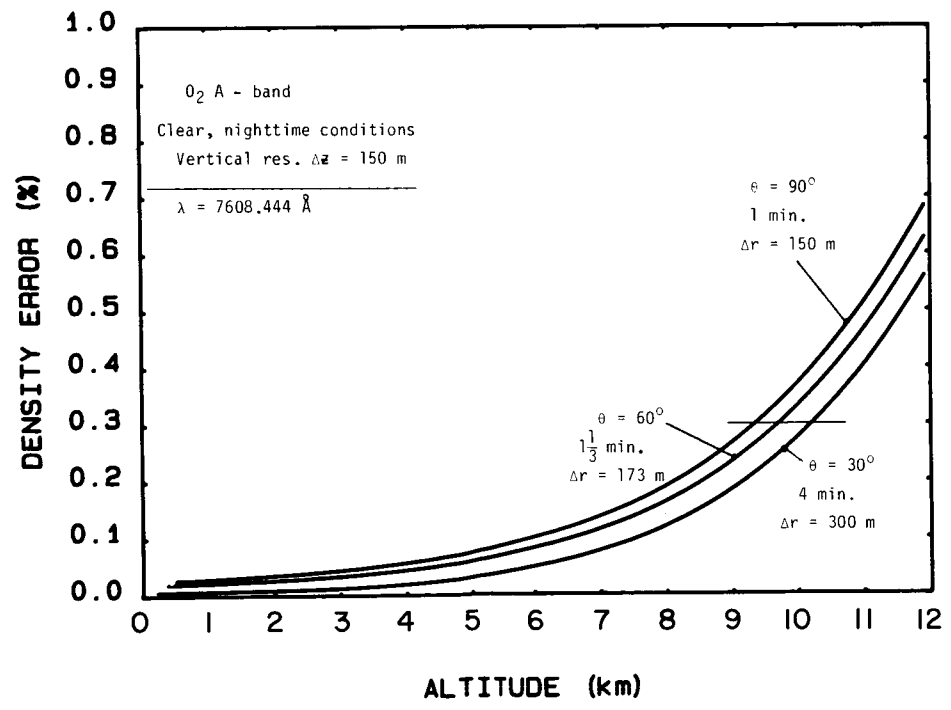


Figure 2.