

NASA
Technical
Memorandum

NASA TM-86525

ATMOSPHERIC ENVIRONMENT FOR SPACE SHUTTLE
(STS-51B) LAUNCH

By G. L. Jasper, D. L. Johnson, C. K. Hill,
and G. W. Batts
Systems Dynamics Laboratory

July 1985

(NASA-TM-86525) ATMOSPHERIC ENVIRONMENT FOR
SPACE SHUTTLE (STS-51B) LAUNCH (NASA) 45 p
HC A03/MF A01 CSCL 04B

N86-12917


Unclass
04823

G3/47



National Aeronautics and
Space Administration

George C. Marshall Space Flight Center

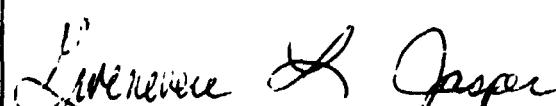TECHNICAL REPORT STANDARD TITLE PAGE			
1. REPORT NO. NASA TM- 86525	2. GOVERNMENT ACCESSION NO.	3. RECIPIENT'S CATALOG NO.	
4. TITLE AND SUBTITLE Atmospheric Environment for Space Shuttle (STS-51B) Launch		5. REPORT DATE July 1985	6. PERFORMING ORGANIZATION CODE
7. AUTHOR(S) G. L. Jasper, D. L. Johnson, C. K. Hill, and G. W. Batts*		8. PERFORMING ORGANIZATION REPORT #	
9. PERFORMING ORGANIZATION NAME AND ADDRESS George C. Marshall Space Flight Center Marshall Space Flight Center, Alabama 35812		10. WORK UNIT NO.	11. CONTRACT OR GRANT NO.
12. SPONSORING AGENCY NAME AND ADDRESS National Aeronautics and Space Administration Washington, D.C. 20546		13. TYPE OF REPORT & PERIOD COVERED Technical Memorandum	
14. SPONSORING AGENCY CODE			
15. SUPPLEMENTARY NOTES Prepared by Atmospheric Sciences Division, System Dynamics Laboratory, Science and Engineering Directorate. *Computer Sciences Corporation, Huntsville, Alabama			
16. ABSTRACT <p>This report presents a summary of selected atmospheric conditions observed near Space Shuttle STS-51B launch time on April 29, 1985, at Kennedy Space Center Florida. Values of ambient pressure, temperature, moisture, ground winds, visual observations (cloud), and winds aloft are included. The sequence of pre-launch Jimsphere measured vertical wind profiles is given in this report. The final atmospheric tape, which consists of wind and thermodynamic parameters versus altitude, for STS-51B vehicle ascent has been constructed. The STS-51B ascent atmospheric data tape has been constructed by Marshall Space Flight Center's Atmospheric Sciences Division to provide an internally consistent data set for use in post flight performance assessments.</p> <p>This is the last regular formal report of Space Shuttle launched from Kennedy Space Center, Florida. The Atmospheric Effects Branch will maintain atmospheric environment data files for reference on future missions through the first few Vandenberg Air Force Base (VAFB) launches.</p>			
17. KEY WORDS STS-51B Launch Atmospheric Summary Pressure Temperature Relative Humidity Winds, Winds Aloft, Clouds Space Shuttle		18. DISTRIBUTION STATEMENT  Unclassified - Unlimited	
19. SECURITY CLASSIF. (of this report) Unclassified	20. SECURITY CLASSIF. (of this page) Unclassified	21. NO. OF PAGES 44	22. PRICE NTIS

ACKNOWLEDGMENTS

The authors wish to thank the personnel at NASA Kennedy Space Center, along with those at the Cape Canaveral Air Force Station and their Pan American World Airways contractors, for the acquisition and distribution of all related atmospheric data received at MSFC.

Thanks are due to Paul Meyer of the Atmospheric Physics Branch, MSFC, for his help in extracting atmospheric data and satellite cloud photographs that are used in this report. Also, special thanks to Bill Jeffries and Joyce Bailey of Computer Sciences Corporation for their assistance in processing all the upper air data used in producing the STS-51B final atmospheric data tapes. Finally, appreciation is expressed to Rhonda Blocker and Steve Edwards of Boeing Computer Support Services for the GRA model and ESDB computer support, respectively.

TABLE OF CONTENTS

	Page
I. INTRODUCTION	1
II. SOURCES OF DATA	1
III. GENERAL SYNOPTIC SITUATION AT LAUNCH TIME	1
IV. SURFACE OBSERVATIONS AT LAUNCH TIME	2
V. UPPER AIR MEASUREMENTS DURING LAUNCH.....	2
A. Wind Speed.....	2
B. Wind Direction.....	2
C. Prelaunch/Launch Wind Profiles.....	3
D. Thermodynamic Data.....	3
E. SRB Upper Air and Surface Measurements	3
REFERENCES	35

LIST OF ILLUSTRATIONS

Figure	Title	Page
1.	Surface synoptic chart 4 hr 2 min prior to launch of STS-51B	25
2.	500 mb map 4 hr 2 min prior to launch of STS-51B	26
3.	GOES-6 visible imagery of cloud cover 2 min before launch of STS-51B (1600 UT, April 29, 1985). 500-mb contours and wind barbs are also included for 1200 UT.....	27
4.	Enlarged view of GOES-6 visible imagery of cloud cover taken 2 min before launch of STS-51B (1600 UT, April 29, 1985). Surface temperatures and wind barbs for 1600 UT are also included.....	28
5.	Scalar wind speed and direction at launch time of STS-51B	29
6.	STS-51B prelaunch/launch Jimsphere-measured wind speeds (FPS)	30
7.	STS-51B prelaunch/launch Jimsphere-measured wind directions (degrees)	31
8.	STS-51B prelaunch/launch Jimsphere-measured in-plane component winds (FPS). Flight azimuth = 38 degrees	32
9.	STS-51B prelaunch/launch Jimsphere-measured out-of-plane component winds (FPS). Flight azimuth = 38 degrees.....	33
10.	STS-51B temperature profiles versus altitude for launch (ascent)	34

LIST OF TABLES

Table	Title	Page
1.	Selected Atmospheric Observations for the Flights of the Space Shuttle Vehicles.....	4
2.	Systems Used to Measure Upper Air Wind Data for STS-51B Ascent	5
3.	Surface Observations at STS-51B Launch Time.....	6
4.	STS-51B Pre-Launch Through Launch KSC Pad 39A Atmospheric Measurements	7
5.	STS-51B Ascent Atmospheric Data Tape.....	8

TECHNICAL MEMORANDUM

ATMOSPHERIC ENVIRONMENT FOR SPACE SHUTTLE (STS-51B) LAUNCH

I. INTRODUCTION

This report presents an evaluation of the atmospheric environmental data taken during the launch of the Space Shuttle/STS-51B vehicle. This Space Shuttle vehicle was launched from Pad 39A at Kennedy Space Center (KSC), Florida, on a bearing of 38 deg east of north at 1602 UT (1202 EDT) on April 29, 1985.

This report presents a summary of the atmospheric environment at launch time (L+0) of the STS-51B, together with the sequence of prelaunch Jimosphere measured winds aloft profiles from L-22 hr through liftoff. The general atmospheric situation for the launch and flight area is described, and surface and upper level wind/thermodynamic observations near launch time are given. Since the ship Redstone was unavailable for STS-51B duty, the SRB descent/impact atmospheric data were not taken. However, one can use the STS-51B ascent data for SRB studies, as the best substitute.

Previous MSFC-related launch vehicle atmospheric environmental conditions have been published as Appendix A of individual MSFC Saturn Flight Evaluation Working Group reports [1]. Office memorandums have been issued for previous flights giving launch pad wind information. A report has also been published [2] which summarizes most launch atmospheric conditions observed for the past 155 MSFC/ABMA-related vehicle launches through SA-208 (Skylab 4). Reports summarizing ASTP, STS-1 through STS-51D launch conditions are presented in References 3 through 19, respectively. Table 1 gives the atmospheric L+0 launch conditions for all Space Shuttle missions.

II. SOURCES OF DATA

Atmospheric observational data used in this report were taken from synoptic maps made by the National Weather Service, plus all available surface observations and measurements from around the launch area. Upper air observations were taken from balloon-released instruments sent aloft from Cape Canaveral Air Force Station (CCAFS). High-altitude winds and thermodynamic data were measured by the Super-Loki rocketsondes launched from the CCAFS. Table 2 presents a listing of systems used to obtain the upper level wind profiles used in compiling the final ascent atmospheric data tape. Data cutoff altitudes are also given in Table 2.

III. GENERAL SYNOPTIC SITUATION AT LAUNCH TIME

A massive area of high pressure, centered over Michigan, was building over the eastern half of the United States during the launch of STS-51B. A weak frontal system stretched eastward from a low over northeastern New Mexico extending into the Atlantic Ocean, just east of Georgia. Surface winds were moderate and northerly. Figure 1 shows the surface weather map approximately 4 hr before launch of STS-51B.

The wind flow aloft was ruled by northwesterly winds over the KSC Florida area. Figure 2 depicts the winds aloft condition approximately 4 hr prior to launch. Clouds were scattered over the KSC launch area around launch of STS-51B. Total sky cover at liftoff was five-tenths. Figure 3 exhibits the GOES-6 visible picture taken at 1600 UT (2 min before liftoff). Figure 4 presents an up-close visible picture of the Florida peninsula as recorded by GOES-6, taken also at 1600 UT.

IV. SURFACE OBSERVATIONS AT LAUNCH TIME

Surface observations at launch time for selected KSC locations are given in Table 3. Included are pad 39A, shuttle runway, and CCAFS balloon release station observations. Neither precipitation nor lightning was observed at launch time.

Table 4 presents Pad 39A wind data along with other standard hourly atmospheric measurements and sky observations for the 6-hr period prior to launch of STS-51B. Values for wind speed and direction are given for the 84 m (275 ft) FSS reference level and 18 m (60 ft) pad light pole level.

V. UPPER AIR MEASUREMENTS DURING LAUNCH

The FPS-16 Jimsphere (1617 UT), MSS Rawinsonde (1628 UT), Super-Loki Rocketsonde (1730 UT), and Super-Loki Robin (1700 UT) systems were used to measure the upper level wind and thermodynamic parameters for STS-51B launch. At altitudes above the rocket-measured data, the Global Reference Atmosphere (GRA) [20] parameters for April KSC conditions were used. A tabulation of the STS-51B final atmospheric data for ascent is presented in Table 5 which lists the wind and thermodynamic parameters versus altitude. A brief summary of parameters is given in the following paragraphs.

A. Wind Speed

At launch time, wind speeds were 11.5 ft/sec (6.8 kn) at 60 ft and increased to a maximum of 68 ft/sec (40 kn) flowing from 297 deg. This maximum occurred at an altitude of 40,700 ft (12,405 m). The winds decreased above this level as shown in Figure 5. The overall maximum measured speed was 189 ft/sec (112 kn) at 257,000 ft (78,334 m) altitude.

B. Wind Direction

At launch time, the 60-ft wind direction was from the north (005 deg) and shifted to a northwesterly component by 5,000 ft (1524 m). Winds kept this northwesterly flow until the 51,400 ft (15,667 m) altitude level where they returned to a northerly flow. The winds displayed an oscillatory pattern above the previously mentioned level throughout 209,000 ft (63,703 m). Above this level to 301,000 ft (91,745 m) winds favored an easterly component and above this altitude the winds displayed a westerly component.

C. Prelaunch/Launch Wind Profiles

Prelaunch/launch wind profiles presented in Figures 6 through 9 were measured by the Jimsphere FPS-16 system for the launch at 1602 UT, April 29, 1985. Data are shown for four measurement periods beginning at L-13 hr and extending through L+0.

The wind speed and direction profiles for the 13 hr period prior to and including L+0 are shown in Figures 6 and 7. The in-plane (head-tail wind) and out-of-plane (left-right crosswind) profiles are given on Figures 8 and 9. The wind speeds and associated component values did not differ significantly from the April means. No exceedances in the simulated, ascent loads were calculated throughout the entire countdown period. The prelaunch atmospheric conditions are discussed in more detail in Section III.

D. Thermodynamic Data

The thermodynamic data taken at STS-51B launch time, consisting of atmospheric temperature, dew-point temperature, pressure, and density have been compiled as the STS-51B ascent atmospheric data and are presented in Table 5. The vertical structure of temperature (T) and dew-point temperature (T_d) for the STS-51B ascent are shown graphically versus altitude in Figure 10.

The atmospheric thermodynamic parameters of temperature, pressure, and density, measured during STS-51B launch below 116,000 ft were all within 4 percent of their respective PRA-63 [21] annual values. All these parameters stayed within 13 percent of their respective PRA-63 values, at all levels of measurement.

E. SRB Upper Air and Surface Measurements

As has been mentioned in the introduction, since there was no ship available, an SRB descent atmospheric data tape has not been constructed. The tabular values for the ascent atmospheric tape as presented in Table 5 should be used for SRB descent/impact studies since it is the closest measured data source.

TABLE 1. SELECTED ATMOSPHERIC OBSERVATIONS FOR THE FLIGHTS OF THE SPACE SHUTTLE VEHICLES

Seq. No.	Vehicle No.	Launch Date	Vehicle Data			Surface Observations			Wind ^b			Inflight Conditions Below 60,000 ft			Count Down and Launch Comments of Meteorological Significance
			Time (EST) Nearest Minute	Press. ^c N/cm ²	Temp. ^d (°C)	Rel. Hum. (%)	Speed (ft/sec)	Dir. (deg)	Alt. (ft)	Speed (ft/sec)	Dir. (deg)				
1	STS-1 Columbia	4/12/81	0700	10.234 ^e	21	82	11.8 15.2	125 120	44,300	98	250				
2	STS-2 Columbia	11/12/81	1010	10.166	23	61	27.0	345 355	36,300	158	286				
3	STS-3 Columbia	3/22/82	1100	10.160	24	71	7.0 ^e 8.0 ^e	50 ^e 145 ^e	45,000	119	250	Wind directional change observed at Pad just prior to L+0. Onset of sea breeze.			
4	STS-4 Columbia	6/27/82	1100 ^f	10.200	29	70	5.8 ^g 4.9 ^g	133 ^g 141 ^g	47,900	37	329				
5	STS-5 Columbia	11/11/82	0719	10.227	22	69	22.0	90	40,600	146	336				
6	STS-6 Challenger	4/1/83	1330	10.183	23	55	12.7 16.4	63 55	46,100	155	277				
7	STS-7 Challenger	6/18/83	0733 ^f	10.146	25	80	5.9 ^e 10.3 ^e	45.900 350 ^e	76	278					
8	STS-8 Challenger	8/30/83	0232 ^f	10.111	24	97	8.8	269	45,100	30	349	17 min countdown delay due to adverse weather conditions.			
9	STS-9 (SL-1) Columbia	11/28/83	1100	10.153	24	83	19.1 32.0	183 190	47,100	117	252				
10	STS-11 (41-B) Challenger	2/3/84	0800	10.173	17	75	0.0 NA	0 NA	38,200	143	288				
11	STS-13 (41-C) Challenger	4/6/84	0858	10.149	16	56	21.5 18.6	320 275	37,700	176	289				
12	STS-41D Discovery	8/30/84	0842 ^f	10.172	26	81	3.0 3.6	106 39	40,300	44	270				
13	STS-41G Challenger	10/5/84	0703 ^f	10.210	23	60	16.5 14.8	73 58	40,600	78	303				
14	STS-51A Discovery	11/8/84	0715	10.227	20	59	23.0 31.1	24 10	33,100	131	272	1 day delay due to excessive wind loads, calculated at high altitudes.			

a. Pad 39A thermodynamic measurements taken at approximately 1.2 m (4 ft) above natural grade at camera site No. 3.

b. 1 min average prior to L+0 of 60 ft PLP (listed first) and 275 ft FSS winds measured above natural grade.

c. Pressure measurement applicable to 21 ft above MSL unless otherwise indicated.

d. Pressure measurement applicable to 14 ft above MSL.

e. 10 sec average prior to L+0.

f. Eastern Daylight Time.

g. 30 sec average prior to L+0.

h. All vehicles launched from LC39A.

TABLE 1. (Concluded)

Seq. No.	Vehicle No.	Launch Date	Time (EST) Nearest Minute	Surface Observations			Inflight Conditions Max. Wind Below 60,000 ft		
				Thermodynamic ^a	Wind ^b	Wind ^b	Alt. (ft)	Speed (ft/sec)	Dir. (deg)
15	STS-51C Discovery	1/24/85	1450	10.173	1.8	46	17.1	228	42,900 199
16	STS-51D Discovery	4/12/85	1359	10.257	21	55	15.5 19.9 22.3	253 82 82	42,600 134
17	STS-51B Challenger	4/29/85	1202 ^f	10.128	27	65	11.5 18.4	005 337	32,900 40,700 68 320 68 297

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 2. SYSTEMS USED TO MEASURE UPPER AIR WIND DATA
FOR STS-51B ASCENT

Type of Data	Date: April 29, 1985		Portion of Data Used		
	Release Time	Time After L+0 (min)	Start	Time After L+0 (min)	End
	Time (UT) (hr/min)	Altitude m (ft)	Altitude m (ft)	Altitude m (ft)	Time After L+0 (min)
FPS-16 Jimsphere	16:17	15	6 (21)	15	18,288 (60,000)
MSS Rawinsonde	16:28	26	18,593 (61,000)	87	29,870 (98,000)
Super-Loki Rocketsonde (Datasonde)	17:30	88	58,826 (193,000)	88	30,175 (99,000)
Super-Loki Rocketsonde (Robin)	17:00	58	83,515 (274,000)	58	59,131 (194,000)

TABLE 3. SURFACE OBSERVATIONS AT STS-51B LAUNCH TIME

Location ^a	Time After L+0 (min)	Pressure (MSL) N/cm ² (psia)	Temperature °K (°F)	Dew Point °K (°F)	Relative Humidity (%)	Visibility km (miles)	Sky Cover		Wind		
							Cloud** Amount	Cloud Type	Height of Base Meters (ft)	Speed ft/sec (kt)	Direction (deg)
NASA Space Shuttle Runway X68e Winds Measured at 10.4 m (34 ft)	1	10.135 (14.699)	302.2 (84.2)	294.3 (70.0)	63	11 (7)	2	Cumulus Cirro-stratus	610 (2,000) 7,620 (25,000)	13.5 (8.0)	360
CCAFS XMRC Surface Measurements	1	10.132 (14.695)	301.9 (83.8)	292.6 (67.0)	58	11 (7)	4	Cumulus Cirro-stratus	549 (1,800) 7,620 (25,000)	21.9 (13.0)	360
Pad 39A ^d Lightpole NW 18.3 m (60.0 ft)	9	10.128* (14.689)*	300.5 (81.3)	293.2 (68.0)	65	-	-	-	-	11.5 ^b (6.8)	005b
Pad 39A FSS (Top NW) 83.8 m (275 ft)	0	-	-	-	-	-	-	-	-	18.4 ^b (10.9)	337b

*Pad 39A Camera Site 3 barometric pressure instrument appeared to be reading too low. Therefore, the KSC Shuttle runway station pressure value interpolated to 10.128 N/cm² at 21 ft above MSL was used as the L+0 pad atmospheric pressure measurement.

**5/10 total sky cover reported at X68 and 10/10 at XMRC.

- a. Altitudes of measurements are above natural grade, except where noted.
- b. Approximately 1 min average prior to L+0.
- c. Balloon release site.
- d. Pad 39A thermodynamic measurements are taken at camera site No. 3, approximately 6.4 m (21 ft) above MSL.
- e. Official STS-51B sky observational site.

ORIGINAL PAGE IS OF POOR QUALITY

TABLE 4. STS-51B PRE-LAUNCH THROUGH LAUNCH KSC PAD 39A ATMOSPHERIC MEASUREMENTS^a

29 April 1985 Time UT	Hourly Atmospheric Measurements						Sky Condition ^b				Other Remarks
	Temp. (°F)	Dew Point (°F)	RH (%)	275' Level (NW)		60' Level (NW)		Clouds		Total Sky Cover	Vis. (mi)
	WS	Kt	WD°	WS	Kt	WD°	WS	Kt	WD°		
1000	71	68	90	13	258	11	291	Scattered at 1200 and 3000 ft and overcast at 25,000 ft		10/10	7
1100	71	68	91	14	246	9	272	Scattered at 25,000 ft		5/10	5 Vision obstructed by fog.
1200	72	69	91	11	257	8	295	Clear skys		0/10	5 Vision obstructed by fog and haze
1300	75	70	85	14	265	12	294	Scattered at 1200 ft		2/10	6 Vision obstructed by haze
1400	78	71	79	12	272	12	304	Scattered at 1200 ft and thin scattered at 29,000 ft		2/10	7
1500	81	69	68	10	305	10	329	Scattered at 1500, 14,000 and 29,000 ft		3/10	7
1600	81	68	65	7	307	8	359	Scattered at 2000 and thin scattered at 25,000 ft		5/10	7
L+0 ^c	81	68	65	11	337	7	005	Scattered at 2000 and thin scattered at 25,000 ft		5/10	7 Towering Cumulus SW

a. Hourly pad observations (obtained via MSFC/HOSC), averaged over 2 min, centered on the hour.

b. Sky observations taken at the Shuttle runway site X68.

c. L+0 PAD Wind and thermodynamic parameters obtained from HOSC data bank. NW Anemometers used at 60 and 275 ft levels for L+0 wind conditions (approximately 1 min average prior to L+0). Pad 39A L+0 atmospheric pressure, at 21 ft (MSL), was 10.128 N/cm². Sea level pressure was 10.135 N/cm².

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 5. STS-51B ASCENT ATMOSPHERIC DATA TAPE

ALTITUDE (FT)	WIND SPEED (FT/SEC)	MIND DIRECTION (DEG E)	TEMPERATURE (DEG C)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	DEW POINT (DEG C)
0000021	013	355	27.4	.013+04	.016+04	20.1
0001100	013	358	27.0	.010+04	.016+04	19.7
0002200	015	346	26.5	.006+04	.016+04	19.2
0003300	017	340	25.9	.003+04	.015+04	18.6
0004400	014	351	25.4	.999+03	.157+03	18.1
0005500	015	354	24.9	.9959+03	.1155+04	17.6
0006600	015	355	24.4	.9925+03	.1153+04	17.1
000700	016	355	23.9	.9890+03	.1152+04	16.6
0008400	016	356	23.3	.9855+03	.1150+04	16.0
0009900	016	356	22.8	.9821+03	.1148+04	15.5
0010000	017	357	22.3	.9787+03	.1146+04	15.0
0011000	017	357	22.0	.9753+03	.1143+04	15.1
0012400	017	358	21.7	.9718+03	.1141+04	15.3
0013000	018	358	21.4	.9685+03	.1138+04	15.4
0014000	018	359	21.1	.9651+03	.1135+04	15.6
0015500	018	359	20.8	.9617+03	.1132+04	15.7
0016600	019	360	20.4	.9584+03	.1129+04	15.8
0017000	019	000	20.1	.9550+03	.1126+04	16.0
0018000	020	000	19.8	.9517+03	.1123+04	16.1
0019000	020	001	19.5	.9484+03	.1121+04	16.3
0020000	019	353	19.2	.9450+03	.1118+04	16.4
0021000	021	358	19.0	.9417+03	.1115+04	16.2
0022200	020	003	18.8	.9384+03	.1111+04	16.0
0023300	019	357	18.7	.9351+03	.1108+04	15.8
0024000	019	355	18.5	.9318+03	.1105+04	15.6
0025000	019	003	18.3	.9295+03	.1102+04	15.4
0026000	016	007	18.1	.9252+03	.1099+04	15.2
0027000	016	357	17.9	.9219+03	.1096+04	15.0
0028000	317	349	17.8	.9187+03	.1092+04	14.8
0029000	019	357	17.6	.9154+03	.1089+04	14.6
0030000	018	001	17.4	.9122+03	.1086+04	14.4
0031100	016	356	17.2	.9089+03	.1083+04	14.3
0032200	015	342	17.0	.9057+03	.1080+04	14.2
0033300	016	343	16.8	.9025+03	.1077+04	14.2
0034400	019	346	16.6	.8993+03	.1074+04	14.1
0035500	020	357	16.4	.8961+03	.1071+04	14.0
0036000	019	351	16.1	.8929+03	.1068+04	13.9
0037000	018	354	15.9	.8897+03	.1065+04	13.8
C038000	021	355	15.7	.8865+03	.1062+04	13.8
0039000	019	003	15.5	.8834+03	.1059+04	13.7
0040000	018	353	15.3	.8802+03	.1056+04	13.6
0041000	018	346	15.1	.8771+03	.1053+04	13.5
0042000	019	156	14.9	.8739+03	.1050+04	13.3
0043000	015	003	14.6	.8708+03	.1047+04	13.2
0044000	013	352	14.4	.8677+03	.1044+04	13.1
0045000	014	350	14.2	.8646+03	.1041+04	13.0
0046000	016	351	14.0	.8615+03	.1038+04	12.8
0047000	015	003	13.8	.8584+03	.1036+04	12.7
0048000	013	340	13.5	.8553+03	.1033+04	12.6
0049000	019	336	13.3	.8522+03	.1030+04	12.4

TABLE 5. (Continued)

ALTIMETER (FT)	MIND SPEED (FT/SEC)	MIND DIRECTION (DEG E)	TEMPERATURE (DEG C)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	DEW POINT (DEG C)
0050000	0.21	312	-1.1	.8492±0.1	.1027±0.0	12.3
0051000	0.20	311	1.2	.8461±0.3	.1024±0.0	12.0
0052000	0.19	324	1.2	.8431±0.1	.1021±0.0	11.7
0053000	0.22	322	1.2	.8400±0.3	.1018±0.4	11.3
0054000	0.24	329	1.2	.8370±0.3	.1015±0.4	11.0
0055000	0.26	332	1.2	.8340±0.3	.1012±0.4	10.7
0056000	0.25	325	1.2	.8310±0.3	.1009±0.4	10.4
0057000	0.25	317	1.1	.8280±0.3	.1006±0.4	10.1
0058000	0.29	316	1.1	.8250±0.3	.1003±0.4	9.7
0059000	0.31	320	1.1	.8220±0.3	.1001±0.4	9.4
0060000	0.29	329	1.1	.8190±0.3	.9977±0.3	9.1
0061000	0.27	324	1.1	.8160±0.3	.9949±0.3	8.9
0062000	0.26	312	1.0	.8131±0.3	.9921±0.3	8.8
0063000	0.29	310	1.0	.8101±0.3	.9893±0.3	8.6
0064000	0.13	312	1.0	.8072±0.1	.9865±0.3	8.4
0065000	0.32	316	1.0	.8042±0.3	.9837±0.3	8.3
0066000	0.31	316	1.0	.8013±0.3	.9809±0.3	8.1
0067000	0.31	312	0.9	.7984±0.3	.9781±0.3	7.9
0068000	0.32	308	0.9	.7955±0.3	.9759±0.3	7.7
0069000	0.35	308	0.9	.7926±0.3	.9726±0.3	7.6
0070000	0.36	309	0.9	.7897±0.3	.9699±0.3	7.4
0071000	0.35	311	0.9	.7868±0.3	.9670±0.3	7.2
0072000	0.32	310	0.7	.7839±0.3	.9642±0.3	7.1
0073000	0.33	307	0.5	.7810±0.3	.9614±0.3	6.9
0074000	0.36	304	0.1	.7782±0.3	.9586±0.3	6.8
0075000	0.38	306	0.1	.7753±0.3	.9558±0.3	6.6
0076000	0.38	310	0.9	.7725±0.3	.9530±0.3	6.4
0077000	0.37	312	0.7	.7696±0.3	.9502±0.3	6.3
0078000	0.31	312	0.5	.7668±0.3	.9474±0.3	6.1
0079000	0.37	307	0.3	.7640±0.3	.9446±0.3	6.0
0080000	0.42	307	0.1	.7612±0.3	.9419±0.3	5.8
0081000	0.44	304	0.0	.7584±0.3	.9388±0.3	5.7
0082000	0.43	305	0.0	.7556±0.3	.9356±0.3	4.7
0083000	0.40	304	0.9	.7528±0.3	.9325±0.3	4.2
0084000	0.41	301	0.9	.7500±0.3	.9298±0.3	4.1
0085000	0.43	299	0.8	.7473±0.3	.9263±0.3	3.2
0086000	0.44	300	0.7	.7445±0.3	.9232±0.3	2.6
0087000	0.44	304	0.7	.7418±0.3	.9201±0.3	2.1
0088000	0.40	301	0.6	.7390±0.3	.9170±0.3	1.6
0089000	0.38	299	0.6	.7363±0.3	.9139±0.3	1.0
0090000	0.40	297	0.5	.7336±0.3	.9109±0.3	0.5
0091000	0.41	301	0.4	.7309±0.3	.9079±0.3	-0.3
0092000	0.38	304	0.4	.7282±0.3	.9049±0.3	-1.2
0093000	0.35	308	0.3	.7255±0.3	.9019±0.3	-2.0
0094000	0.34	306	0.2	.7228±0.3	.8990±0.3	-2.9
0095000	0.36	308	0.2	.7201±0.3	.8960±0.3	-3.7
0096000	0.37	313	0.1	.7175±0.3	.8930±0.3	-4.5
0097000	0.36	317	0.0	.7148±0.3	.8901±0.3	-5.4
0098000	0.36	315	0.9	.7122±0.3	.8871±0.3	-6.2
0099000	0.38	311	0.9	.7095±0.3	.8842±0.3	-7.1

TABLE 5. (Continued)

ORIGINAL PAGE IS
OF POOR QUALITY

ALTITUDE (FT)	MIND SPEED (FT/SEC)	MIND DIRECTION (DEG)	TEMPERATURE (DEG C)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	DEW POINT (DEG C)
0101000	0.91	316	5.8	.7069+03	.8812+03	-7.9
0102000	0.38	322	5.7	.7043+03	.8782+03	-6.7
0103000	0.36	315	5.6	.7017+03	.8752+03	-9.5
0104000	0.38	313	5.6	.6991+03	.8723+03	-10.3
0105000	0.35	316	5.6	.6965+03	.8691+03	-11.1
0106000	0.32	323	5.5	.6939+03	.8663+03	-11.9
0107000	0.31	318	5.4	.6913+03	.8634+03	-12.7
0108000	0.34	320	5.4	.6887+03	.8604+03	-13.5
0109000	0.33	326	5.3	.6862+03	.8575+03	-14.3
0110000	0.31	325	5.3	.6836+03	.8545+03	-15.1
0111000	0.34	320	5.2	.6801+03	.8516+03	-15.9
0112000	0.31	330	5.0	.6785+03	.8491+03	-16.7
0113000	0.29	329	4.8	.6760+03	.8466+03	-16.0
0114000	0.31	323	4.5	.6735+03	.8441+03	-16.1
0115000	0.33	326	4.1	.6710+03	.8416+03	-16.3
0116000	0.32	310	4.1	.6685+03	.8391+03	-16.4
0117000	0.31	325	3.9	.6666+03	.8367+03	-16.5
0118000	0.33	322	3.7	.6635+03	.8342+03	-16.6
0119000	0.35	325	3.4	.6610+03	.8318+03	-16.7
0120000	0.34	331	3.2	.6585+03	.8293+03	-16.9
0121000	0.33	329	3.0	.6561+03	.8269+03	-17.0
0122000	0.35	327	2.8	.6536+03	.8245+03	-17.1
0123000	0.38	330	2.5	.6511+03	.8222+03	-17.1
0124000	0.36	331	2.3	.6487+03	.8198+03	-17.1
0125000	0.38	327	2.0	.6463+03	.8175+03	-17.0
0126000	0.40	326	1.8	.6438+03	.8151+03	-17.0
0127000	0.40	332	1.5	.6414+03	.8128+03	-17.0
0128000	0.37	334	1.3	.6390+03	.8104+03	-17.0
0129000	0.37	329	1.0	.6366+03	.8081+03	-16.9
0130000	0.38	329	.8	.6342+03	.8058+03	-16.9
0131000	0.37	334	.5	.6318+03	.8035+03	-16.9
0132000	0.29	336	.3	.6294+03	.8011+03	-16.9
0137000	0.36	337	.0	.6270+03	.7987+03	-16.6
0133000	0.34	335	.0	.6246+03	.7963+03	-16.4
0134000	0.36	331	-.2	.6223+03	.7940+03	-16.4
0135000	0.37	334	-.4	.6202+03	.7798+03	-15.8
0136000	0.38	334	-.6	.6199+03	.7916+03	-15.5
0137000	0.35	335	-.9	.6175+03	.7892+03	-15.3
0138000	0.37	330	-1.1	.6152+03	.7869+03	-15.0
0139000	0.39	324	-1.3	.6129+03	.7845+03	-14.7
0140000	0.39	327	-1.6	.6105+03	.7822+03	-14.5
0141000	0.37	330	-1.8	.6082+03	.7707+03	-14.3
0142000	0.39	328	-2.0	.6059+03	.7775+03	-14.2
0143000	0.38	320	-2.3	.6036+03	.7753+03	-14.2
0144000	0.38	324	-2.5	.6013+03	.7730+03	-14.3
0145000	0.38	326	-2.8	.5989+03	.7707+03	-14.3
0146000	0.38	320	-3.0	.5967+03	.7684+03	-14.3
0147000	0.35	326	-3.5	.5921+03	.7662+03	-14.3
0148000	0.33	323	-3.7	.5898+03	.7639+03	-14.3
0149000	0.36	321	-4.0	.5876+03	.7594+03	-14.3

TABLE 5. (Continued)

LATITUDE (FT)	WIND SPEED (ft SEC) 0.5	WIND DIRECTION (DEG)	TEMPERATURE (DEG C) -4.2	PRESSURE (IN MILLIBARS) 7512.03	DENSITY (GRAM/M3) 0.751203	DEW POINT (DEG C) -14.9
015100	0.3	331	-4.4	.5631+03	.7518+03	-14.6
015200	0.32	329	-4.6	.5508+03	.7524+03	-14.7
015300	0.31	323	-4.8	.5786+03	.7501+03	-14.9
015400	0.32	323	-5.0	.5763+03	.7477+03	-15.0
015500	0.34	329	-5.1	.5741+03	.7453+03	-15.2
015600	0.33	337	-5.3	.5719+03	.7430+03	-15.4
015700	0.30	334	-5.5	.5697+03	.7407+03	-15.5
015800	0.31	330	-5.7	.5675+03	.7381+03	-15.7
015900	0.33	327	-5.9	.5653+03	.7360+03	-15.8
016000	0.37	331	-6.1	.5631+03	.7337+03	-16.0
016100	0.38	335	-6.3	.5609+03	.7315+03	-16.2
016200	0.37	338	-6.6	.5587+03	.7294+03	-16.4
016300	0.37	323	-6.8	.5566+03	.7272+03	-16.7
016400	0.92	321	-7.1	.5544+03	.7250+03	-16.9
016500	0.40	322	-7.3	.5522+03	.7228+03	-17.1
016600	0.90	322	-7.5	.5501+03	.7201+03	-17.3
016700	0.93	320	-7.8	.5480+03	.7186+03	-17.5
016800	0.45	324	-8.0	.5458+03	.7165+03	-17.8
016900	0.94	324	-8.3	.5437+03	.7143+03	-18.0
017000	0.93	319	-8.5	.5416+03	.7122+03	-18.2
017100	0.95	319	-8.6	.5395+03	.7097+03	-18.4
017200	0.48	323	-8.7	.5374+03	.7072+03	-18.7
017300	0.97	324	-8.8	.5353+03	.7047+03	-18.9
017400	0.99	321	-8.9	.5332+03	.7022+03	-19.1
017500	0.50	321	-9.0	.5311+03	.6997+03	-19.3
017600	0.96	321	-9.1	.5290+03	.6973+03	-19.5
017700	0.95	316	-9.2	.5269+03	.6948+03	-19.8
017800	0.95	310	-9.3	.5249+03	.6924+03	-20.0
017900	0.92	310	-9.4	.5228+03	.6899+03	-20.3
018000	0.93	304	-9.5	.5207+03	.6875+03	-20.5
018100	0.92	300	-9.6	.5187+03	.6851+03	-20.6
018200	0.39	306	-9.8	.5167+03	.6826+03	-20.7
018300	0.37	309	-9.9	.5146+03	.6804+03	-20.9
018400	0.40	308	-10.0	.5126+03	.6781+03	-21.0
018500	0.40	311	-10.1	.5106+03	.6758+03	-21.1
018600	0.35	312	-10.3	.5086+03	.6735+03	-21.2
018700	0.38	309	-10.4	.5066+03	.6711+03	-21.3
018800	0.40	315	-10.5	.5046+03	.6688+03	-21.5
018900	0.38	316	-10.7	.5026+03	.6665+03	-21.6
019000	0.39	313	-10.8	.5006+03	.6642+03	-21.7
019100	0.41	312	-11.0	.4986+03	.6621+03	-22.0
019200	0.91	314	-11.2	.4967+03	.6601+03	-22.3
019300	0.39	311	-11.4	.4947+03	.6580+03	-22.7
019400	0.42	309	-11.6	.4928+03	.6559+03	-23.0
019500	0.42	309	-11.8	.4908+03	.6539+03	-23.3
019600	0.39	307	-12.1	.4889+03	.6518+03	-23.6
019700	0.41	300	-12.3	.4869+03	.6498+03	-23.9
019800	0.41	303	-12.5	.4850+03	.6477+03	-24.3
019900	0.38	301	-12.7	.4831+03	.6457+03	-24.6

TABLE 5. (Continued)

ALTITUDE (FT)	WIND SPEED (FT/SEC)	WIND DIRECTION (DEG)	TEMPERATURE (DEG C)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	DEW POINT (DEG C)
020000.0	0.38	227	-12.2	.9812+0.3	.6437+0.3	-24.9
020100.0	0.39	303	-13.1	.9792+0.3	.6417+0.3	-25.0
020200.0	0.36	307	-13.3	.9773+0.3	.6396+0.3	-25.0
020300.0	0.37	303	-13.6	.9754+0.3	.6376+0.3	-25.1
020400.0	0.31	304	-13.8	.9735+0.3	.6356+0.3	-25.1
020500.0	0.35	302	-14.0	.9716+0.3	.6336+0.3	-25.2
020600.0	0.36	298	-14.2	.9698+0.3	.6316+0.3	-25.3
020700.0	0.35	302	-14.4	.9679+0.3	.6296+0.3	-25.3
020800.0	0.35	302	-14.7	.9660+0.3	.6277+0.3	-25.4
020900.0	0.38	301	-14.9	.9642+0.3	.6257+0.3	-25.4
021000.0	0.35	306	-15.1	.9623+0.3	.6237+0.3	-25.5
021100.0	0.36	302	-15.4	.9604+0.3	.6218+0.3	-25.5
021200.0	0.38	307	-15.6	.9586+0.3	.6199+0.3	-25.5
021300.0	0.36	312	-15.9	.9567+0.3	.6181+0.3	-25.5
021400.0	0.36	309	-16.1	.9549+0.3	.6162+0.3	-25.5
021500.0	0.39	313	-16.4	.9531+0.3	.6143+0.3	-25.5
021600.0	0.37	315	-16.7	.9512+0.3	.6125+0.3	-25.5
021700.0	0.40	311	-16.9	.9494+0.3	.6106+0.3	-25.5
021800.0	0.39	316	-17.2	.9476+0.3	.6088+0.3	-25.5
021900.0	0.39	313	-17.4	.9458+0.3	.6070+0.3	-25.5
022000.0	0.40	308	-17.7	.9440+0.3	.6051+0.3	-25.5
022100.0	0.37	308	-17.9	.9422+0.3	.6032+0.3	-25.5
022200.0	0.42	306	-18.2	.9404+0.3	.6013+0.3	-24.8
022300.0	0.43	306	-18.4	.9386+0.3	.5994+0.3	-24.5
022400.0	0.46	302	-18.7	.9368+0.3	.5975+0.3	-24.1
022500.0	0.46	303	-18.9	.9351+0.3	.5956+0.3	-23.8
022600.0	0.47	301	-19.1	.9333+0.3	.5938+0.3	-23.4
022700.0	0.48	302	-19.4	.9315+0.3	.5919+0.3	-23.1
022800.0	0.46	300	-19.6	.9298+0.3	.5900+0.3	-22.7
022900.0	0.50	299	-19.9	.9280+0.3	.5882+0.3	-22.4
023000.0	0.48	299	-20.1	.9263+0.3	.5863+0.3	-22.0
023100.0	0.49	297	-20.3	.9245+0.3	.5845+0.3	-21.2
023200.0	0.52	296	-20.6	.9228+0.3	.5828+0.3	-20.5
023300.0	0.53	295	-20.8	.9211+0.3	.5810+0.3	-20.3
023400.0	0.54	295	-21.1	.9193+0.3	.5792+0.3	-20.9
023500.0	0.57	295	-21.3	.9176+0.3	.5774+0.3	-20.1
023600.0	0.55	296	-21.6	.9159+0.3	.5757+0.3	-20.4
023700.0	0.52	294	-21.8	.9142+0.3	.5739+0.3	-20.6
023800.0	0.57	294	-22.1	.9125+0.3	.5722+0.3	-31.8
023900.0	0.59	291	-22.3	.9108+0.3	.5704+0.3	-33.1
024000.0	0.59	293	-22.6	.9091+0.3	.5686+0.3	-34.3
024100.0	0.58	291	-22.9	.9074+0.3	.5669+0.3	-34.2
024200.0	0.61	290	-23.1	.9057+0.3	.5651+0.3	-34.2
024300.0	0.62	293	-23.4	.9040+0.3	.5634+0.3	-34.1
024400.0	0.61	289	-23.7	.9023+0.3	.5617+0.3	-34.0
024500.0	0.64	288	-23.9	.9007+0.3	.5599+0.3	-33.9
024600.0	0.63	290	-24.2	.8990+0.3	.5582+0.3	-33.9
024700.0	0.62	287	-24.5	.8974+0.3	.5565+0.3	-33.8
024800.0	0.64	287	-24.8	.8957+0.3	.5548+0.3	-33.7
024900.0	0.62	289	-25.0	.8941+0.3	.5531+0.3	-33.7

TABLE 5. (Continued)

ALTITUDE (FT.)	MIND SPEED (FT/SEC.)	WIND DIRECTION (DEG.)	TEMPERATURE (DEG C.)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	OPEN POINT (DEG C.)
025000	062	287	-25.1	.1924+0.3	.5518+0.3	-33.6
025100	062	288	-25.5	.3908+0.3	.5495+0.3	-34.0
025200	061	289	-25.7	.1821+0.3	.5476+0.3	-34.3
025300	061	289	-25.8	.3875+0.3	.5457+0.3	-34.7
025400	059	288	-26.0	.3852+0.3	.5438+0.3	-35.1
025500	058	291	-26.2	.3843+0.3	.5419+0.3	-35.4
025600	059	291	-26.4	.3827+0.3	.5401+0.3	-35.8
025700	053	287	-26.6	.3811+0.3	.5382+0.3	-36.2
025800	051	288	-26.7	.3795+0.3	.5363+0.3	-36.6
025900	049	288	-26.9	.3779+0.3	.5345+0.3	-36.9
026000	051	285	-27.1	.3763+0.3	.5327+0.3	-37.3
026100	052	285	-27.3	.3747+0.3	.5309+0.3	-37.2
026200	050	289	-27.5	.3731+0.3	.5291+0.3	-37.1
026300	050	288	-27.8	.3716+0.3	.5273+0.3	-37.0
026400	052	286	-28.0	.3700+0.3	.5256+0.3	-36.9
026500	053	286	-28.2	.3684+0.3	.5238+0.3	-36.8
026600	049	287	-28.4	.3669+0.3	.5221+0.3	-36.1
026700	048	285	-28.6	.3653+0.3	.5203+0.3	-36.6
026800	047	283	-28.9	.3638+0.3	.5186+0.3	-36.5
026900	046	289	-29.1	.3622+0.3	.5169+0.3	-36.4
027000	045	293	-29.3	.3607+0.3	.5152+0.3	-36.3
027100	042	291	-29.4	.3592+0.3	.5132+0.3	-37.4
027200	045	290	-29.5	.3577+0.3	.5113+0.3	-38.5
027300	044	295	-29.6	.3561+0.3	.5094+0.3	-39.6
027400	041	293	-29.7	.3546+0.3	.5074+0.3	-40.7
027500	040	298	-29.8	.3531+0.3	.5055+0.3	-41.8
027600	043	296	-30.0	.3516+0.3	.5026+0.3	-42.9
027700	044	300	-30.1	.3501+0.3	.5017+0.3	-44.0
027800	040	304	-30.2	.3486+0.3	.4998+0.3	-45.1
027900	044	296	-30.3	.3479+0.3	.4979+0.3	-46.2
028000	046	297	-30.4	.3457+0.3	.4960+0.3	-47.3
028100	045	301	-30.6	.3442+0.3	.4943+0.3	-47.3
028200	048	297	-30.8	.3427+0.3	.4926+0.3	-47.3
028300	050	301	-31.0	.3413+0.3	.4908+0.3	-47.2
028400	047	305	-31.1	.3398+0.3	.4891+0.3	-47.2
028500	048	304	-31.2	.3386+0.3	.4874+0.3	-47.2
028600	049	305	-31.3	.3383+0.3	.4857+0.3	-47.2
028700	048	312	-32.6	.3355+0.3	.4840+0.3	-47.2
028800	047	313	-32.8	.3343+0.3	.4823+0.3	-47.1
028900	049	313	-33.1	.3326+0.3	.4806+0.3	-47.1
029000	050	306	-32.3	.3312+0.3	.4790+0.3	-47.1
029100	048	313	-33.6	.3241+0.3	.4728+0.3	-47.4
029200	047	312	-32.6	.3227+0.3	.4713+0.3	-47.5
029300	049	313	-33.8	.3203+0.3	.4759+0.3	-47.2
029400	046	317	-33.1	.3269+0.3	.4743+0.3	-47.3
029500	046	313	-33.3	.3255+0.3	.4728+0.3	-47.4
029600	046	314	-33.6	.3241+0.3	.4713+0.3	-47.4
029700	045	316	-34.1	.3213+0.3	.4682+0.3	-47.6
029800	046	311	-34.4	.3192+0.3	.4667+0.3	-47.7
029900	045	317	-34.6	.3185+0.3	.4652+0.3	-47.7

TABLE 5. (Continued)

ALTITUDE (FT)	WIND SPEED (FT/SEC)	MIND DIRECTION (DEG)	TEMPERATURE (DEG C)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	DEW POINT (DEG C)
03000	0.98	314	-34.9	.3171+03	.4631+03	-97.8
030100	0.96	310	-35.2	.3158+03	.4622+03	-97.9
030200	0.95	312	-35.5	.3148+03	.4608+03	-98.1
030300	0.94	311	-35.8	.3130+03	.4593+03	-98.2
030400	0.96	311	-36.1	.3116+03	.4579+03	-98.4
030500	0.94	315	-36.3	.3103+03	.4564+03	-98.5
030600	0.95	309	-36.6	.3089+03	.4550+03	-98.7
030700	0.95	310	-36.9	.3076+03	.4536+03	-98.8
030800	0.93	309	-37.2	.3062+03	.4521+03	-99.0
030900	0.93	307	-37.5	.3049+03	.4507+03	-99.1
031000	0.96	307	-37.8	.3036+03	.4493+03	-99.3
031100	0.94	306	-38.1	.3022+03	.4478+03	-99.4
031200	0.95	305	-38.3	.3009+03	.4463+03	-99.6
031300	0.96	307	-38.6	.2996+03	.4449+03	-99.7
031400	0.97	306	-38.8	.2982+03	.4434+03	-99.8
031500	0.96	304	-39.1	.2969+03	.4419+03	-99.9
031600	0.98	310	-39.4	.2956+03	.4405+03	-50.1
031700	0.97	308	-39.6	.2943+03	.4390+03	-50.2
031800	0.95	310	-39.9	.2930+03	.4375+03	-50.3
031900	0.99	314	-40.1	.2917+03	.4361+03	-50.5
032000	0.95	312	-40.4	.2904+03	.4347+03	-50.6
032100	0.94	316	-40.6	.2881+03	.4333+03	-50.8
032200	0.95	317	-40.8	.2878+03	.4316+03	-50.9
032300	0.98	316	-41.1	.2866+03	.4304+03	-51.1
032400	0.91	321	-41.3	.2853+03	.4286+03	-51.3
032500	0.92	318	-41.5	.2840+03	.4271+03	-51.4
032600	0.93	320	-41.7	.2827+03	.4256+03	-51.6
032700	0.97	321	-41.9	.2815+03	.4241+03	-51.8
032800	0.95	322	-42.2	.2802+03	.4228+03	-52.0
032900	0.98	320	-42.4	.2790+03	.4211+03	-52.1
033000	0.95	318	-42.6	.2777+03	.4196+03	-52.3
033100	0.95	319	-42.9	.2765+03	.4182+03	-52.5
033200	0.93	319	-43.1	.2752+03	.4166+03	-52.6
033300	0.92	316	-43.4	.2740+03	.4154+03	-52.8
033400	0.92	319	-43.6	.2727+03	.4140+03	-53.0
033500	0.90	319	-43.9	.2715+03	.4126+03	-53.1
033600	0.91	316	-44.2	.2703+03	.4112+03	-53.3
033700	0.90	317	-44.4	.2691+03	.4098+03	-53.5
033800	0.90	318	-44.7	.2679+03	.4084+03	-53.7
033900	0.96	314	-44.9	.2667+03	.4070+03	-53.8
034000	0.59	315	-45.2	.2655+03	.4057+03	-54.0
034100	0.59	313	-45.5	.2642+03	.4043+03	-54.1
034200	0.59	311	-45.8	.2630+03	.4030+03	-54.2
034300	0.59	312	-46.0	.2618+03	.4016+03	-54.3
034400	0.59	309	-46.3	.2606+03	.4003+03	-54.4
034500	0.60	310	-46.6	.2595+03	.3989+03	-54.5
034600	0.60	309	-46.9	.2583+03	.3976+03	-54.7
034700	0.58	310	-47.2	.2571+03	.3963+03	-54.8
034800	0.60	308	-47.4	.2559+03	.3950+03	-54.9
034900	0.58	307	-47.7	.2548+03	.3937+03	-55.0

TABLE 5. (Continued)

ALTITUDE (FT)	WIND SPEED (FT/SEC.)	WIND DIRECTION (DEG.)	TEMPERATURE (DEG C.)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	DEW POINT (DEG C.)
015900	058	307	-48.0	.2516±0.03	.1923±0.13	-55.1
035100	058	309	-48.3	.2524±0.03	.1910±0.03	-55.3
035200	059	307	-48.5	.2513±0.03	.1896±0.03	-55.5
035300	058	309	-48.8	.2501±0.03	.1882±0.03	-55.7
035400	059	309	-49.0	.2498±0.03	.1869±0.03	-55.9
035500	060	307	-49.3	.2476±0.03	.1855±0.03	-56.0
035600	058	311	-49.5	.2461±0.03	.1842±0.03	-56.2
035700	060	309	-49.8	.2455±0.03	.1828±0.03	-56.4
035800	057	311	-50.0	.2449±0.03	.1815±0.03	-56.6
035900	059	309	-50.3	.2433±0.03	.1802±0.03	-56.8
036000	059	311	-50.5	.2421±0.03	.1788±0.03	-57.0
036100	058	311	-50.8	.2410±0.03	.1775±0.03	-57.2
036200	060	308	-51.0	.2399±0.03	.1762±0.03	-57.4
036300	060	312	-51.3	.2388±0.03	.1749±0.03	-57.6
036400	060	311	-51.5	.2376±0.03	.1735±0.03	-57.8
036500	061	309	-51.8	.2365±0.03	.1722±0.03	-58.0
036600	061	311	-52.0	.2354±0.03	.1709±0.03	-58.2
036700	062	312	-52.3	.2343±0.03	.1695±0.03	-58.4
036800	062	312	-52.5	.2332±0.03	.1682±0.03	-58.5
036900	065	312	-52.8	.2322±0.03	.1669±0.03	-58.7
037000	063	314	-53.0	.2311±0.03	.1656±0.03	-58.9
037100	066	311	-53.2	.2300±0.03	.1643±0.03	-59.1
037200	065	314	-53.5	.2289±0.03	.1630±0.03	-59.3
037300	065	312	-53.7	.2278±0.03	.1617±0.03	-59.5
037400	064	316	-54.0	.2267±0.03	.1604±0.03	-59.8
037500	063	315	-54.2	.2257±0.03	.1590±0.03	-60.0
037600	066	315	-59.4	.2246±0.03	.1577±0.03	-60.2
037700	062	313	-54.7	.2235±0.03	.1564±0.03	-60.4
037800	065	313	-54.9	.2225±0.03	.1552±0.03	-60.6
037900	063	314	-55.2	.2214±0.03	.1540±0.03	-60.9
038000	063	311	-55.4	.2204±0.03	.1526±0.03	-61.1
038100	064	315	-55.6	.2193±0.03	.1513±0.03	-61.3
038200	062	314	-55.8	.2183±0.03	.1499±0.03	-61.5
038300	066	312	-56.1	.2173±0.03	.1486±0.03	-61.7
038400	064	311	-56.3	.2162±0.03	.1473±0.03	-61.9
038500	064	314	-56.5	.2152±0.03	.1460±0.03	-62.1
038600	064	312	-56.7	.2142±0.03	.1447±0.03	-62.3
038700	063	312	-56.9	.2131±0.03	.1434±0.03	-62.5
038800	066	314	-57.2	.2121±0.03	.1421±0.03	-62.7
038900	060	314	-57.4	.2111±0.03	.1409±0.03	-63.1
039000	058	315	-57.6	.2101±0.03	.1396±0.03	-63.3
039100	057	308	-57.8	.2091±0.03	.1383±0.03	-9999.
039200	056	311	-58.0	.2081±0.03	.1370±0.03	-9999.
039300	055	309	-58.3	.2071±0.03	.1357±0.03	-9999.
039400	057	307	-58.5	.2061±0.03	.1346±0.03	-9999.
039500	055	304	-58.7	.2051±0.03	.1332±0.03	-9999.
039600	055	302	-58.9	.2041±0.03	.1319±0.03	-9999.
039700	056	299	-59.1	.2031±0.03	.1307±0.03	-9999.
039800	056	297	-59.4	.2022±0.03	.1294±0.03	-9999.
039900	058	296	-59.6	.2012±0.03	.1282±0.03	-9999.

TABLE 5. (Continued)

ORIGINAL PAGE IS
OF POOR QUALITY

ALITUDE (FT)	WIND SPEED (FT/SEC)	WIND DIRECTION (DEG)	TEMPERATURE (DEG C)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	DEW POINT (DEG C)
040000	062	292	-52.8	.20002+03	.1262+03	-9999.
040100	059	297	-60.0	.1992+03	.1257+03	-9999.
040200	062	294	-60.3	.1983+03	.1245+03	-9999.
040300	062	296	-60.5	.1973+03	.1233+03	-9999.
040400	065	294	-60.8	.1963+03	.1221+03	-9999.
040500	066	295	-61.0	.1954+03	.1208+03	-9999.
040600	066	296	-61.2	.1944+03	.1196+03	-9999.
040700	068	297	-61.5	.1935+03	.3185+03	-9999.
040800	066	296	-61.7	.1926+03	.3173+03	-9999.
040900	064	292	-62.0	.1916+03	.3161+03	-9999.
041000	060	298	-62.2	.1907+03	.3149+03	-9999.
041100	062	292	-62.3	.1897+03	.3135+03	-9999.
041200	061	290	-62.5	.1888+03	.3122+03	-9999.
041300	058	294	-62.6	.1879+03	.3109+03	-9999.
041400	057	291	-62.7	.1870+03	.3095+03	-9999.
041500	057	292	-62.8	.1860+03	.3082+03	-9999.
041600	057	292	-63.0	.1851+03	.3069+03	-9999.
041700	058	295	-63.1	.1842+03	.3056+03	-9999.
041800	058	295	-63.2	.1833+03	.3042+03	-9999.
041900	058	294	-63.4	.1824+03	.3029+03	-9999.
042000	056	299	-63.5	.1815+03	.3016+03	-9999.
042100	062	295	-63.2	.1806+03	.2997+03	-9999.
042200	059	300	-62.8	.1798+03	.2978+03	-9999.
042300	054	319	-62.5	.1789+03	.2958+03	-9999.
042400	055	323	-62.2	.1780+03	.2939+03	-9999.
042500	050	327	-61.9	.1771+03	.2920+03	-9999.
042600	051	327	-61.5	.1763+03	.2902+03	-9999.
042700	049	327	-61.2	.1754+03	.2883+03	-9999.
042800	045	331	-60.9	.1746+03	.2864+03	-9999.
042900	046	326	-60.5	.1740+03	.2846+03	-9999.
043000	046	323	-61.9	.1737+03	.2828+03	-9999.
043100	045	336	-60.2	.1728+03	.2816+03	-9999.
043200	045	316	-60.4	.1720+03	.2805+03	-9999.
043300	045	335	-60.6	.1712+03	.2794+03	-9999.
043400	044	336	-60.7	.1703+03	.2782+03	-9999.
043500	044	330	-61.1	.1697+03	.2771+03	-9999.
043600	041	329	-61.3	.1679+03	.2760+03	-9999.
043700	039	324	-61.5	.1670+03	.2749+03	-9999.
043800	040	317	-61.6	.1662+03	.2738+03	-9999.
043900	038	324	-61.8	.1654+03	.2727+03	-9999.
044000	035	319	-62.0	.1646+03	.2716+03	-9999.
044100	035	319	-62.0	.1638+03	.2703+03	-9999.
044200	029	336	-62.0	.1630+03	.2690+03	-9999.
044300	026	324	-62.0	.1622+03	.2677+03	-9999.
044400	023	325	-62.0	.1614+03	.2664+03	-9999.
044500	021	322	-62.0	.1606+03	.2651+03	-9999.
044600	022	313	-62.1	.1598+03	.2638+03	-9999.
044700	024	306	-62.1	.1591+03	.2625+03	-9999.
044800	025	304	-62.1	.1583+03	.2612+03	-9999.
044900	025	296	-62.1	.1575+03	.2600+03	-9999.

TABLE 5. (Continued)

ALITUDE (FT)	WIND SPEED (FT/SEC)	WIND DIRECTION (DEG)	TEMPERATURE (DEG C)	PRESSURE (IN MILLIBARS)	DENSITY (GRAM/M3)	DEW POINT (DEG C)
045000	0.27	295	-62.1	.1567+03	.2587+03	-9999.
045100	0.30	292	-62.1	.1560+03	.2574+03	-9999.
045200	0.33	293	-62.0	.1552+03	.2561+03	-9999.
045300	0.38	288	-62.0	.1505+03	.2548+03	-9999.
045400	0.41	281	-61.9	.1537+03	.2535+03	-9999.
045500	0.42	289	-61.9	.1529+03	.2522+03	-9999.
045600	0.41	291	-61.9	.1522+03	.2509+03	-9999.
045700	0.46	297	-61.8	.1515+03	.2497+03	-9999.
045800	0.51	300	-61.8	.1507+03	.2488+03	-9999.
045900	0.51	306	-61.7	.1500+03	.2471+03	-9999.
046000	0.53	306	-61.7	.1492+03	.2459+03	-9999.
046100	0.59	309	-61.7	.1485+03	.2447+03	-9999.
046200	0.59	316	-61.7	.1478+03	.2435+03	-9999.
046300	0.49	308	-61.8	.1471+03	.2424+03	-9999.
046400	0.49	316	-61.8	.1464+03	.2412+03	-9999.
046500	0.50	296	-61.8	.1456+03	.2401+03	-9999.
046600	0.49	296	-61.8	.1449+03	.2389+03	-9999.
046700	0.51	292	-61.8	.1442+03	.2378+03	-9999.
046800	0.51	291	-61.9	.1435+03	.2366+03	-9999.
046900	0.51	293	-61.9	.1428+03	.2355+03	-9999.
047000	0.59	296	-61.9	.1421+03	.2344+03	-9999.
047100	0.44	303	-62.0	.1414+03	.2333+03	-9999.
047200	0.52	303	-62.1	.1407+03	.2323+03	-9999.
047300	0.43	307	-62.2	.1400+03	.2312+03	-9999.
047400	0.43	315	-62.3	.1394+03	.2302+03	-9999.
047500	0.44	309	-62.3	.1387+03	.2292+03	-9999.
047600	0.53	317	-62.4	.1380+03	.2281+03	-9999.
047700	0.44	314	-62.5	.1373+03	.2271+03	-9999.
047800	0.45	312	-62.6	.1366+03	.2261+03	-9999.
047900	0.45	310	-62.7	.1360+03	.2251+03	-9999.
048000	0.46	312	-62.8	.1353+03	.2241+03	-9999.
048100	0.9	308	-62.9	.1346+03	.2231+03	-9999.
048200	0.52	307	-63.0	.1340+03	.2221+03	-9999.
048300	0.48	307	-63.1	.1333+03	.2211+03	-9999.
048400	0.51	306	-63.2	.1327+03	.2201+03	-9999.
048500	0.53	306	-63.3	.1320+03	.2192+03	-9999.
048600	0.55	307	-63.4	.1314+03	.2182+03	-9999.
048700	0.59	309	-63.5	.1307+03	.2172+03	-9999.
048800	0.64	310	-63.6	.1301+03	.2163+03	-9999.
048900	0.65	306	-63.7	.1294+03	.2153+03	-9999.
049000	0.67	307	-63.8	.1288+03	.2143+03	-9999.
049100	0.65	309	-63.9	.1282+03	.2133+03	-9999.
049200	0.62	313	-63.9	.1275+03	.2124+03	-9999.
049300	0.61	311	-64.0	.1269+03	.2114+03	-9999.
049400	0.69	315	-64.0	.1263+03	.2103+03	-9999.
049500	0.59	313	-64.1	.1257+03	.2094+03	-9999.
049600	0.58	317	-64.2	.1250+03	.2084+03	-9999.
049700	0.58	320	-64.2	.1244+03	.2075+03	-9999.
049800	0.56	317	-64.3	.1238+03	.2065+03	-9999.
049900	0.60	321	-64.3	.1232+03	.2055+03	-9999.

TABLE 5. (Continued)

ALTITUDE (FT.)	MIND SPEED (FT/SEC.)	WIND DIRECTION (006)	TEMPERATURE (DEG. C.)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	DEW POINT (DEG. C.)
0500000	061	329	-64.8	.1226+03	.2046+03	-9999.
0501000	062	323	-64.5	.1220+03	.2036+03	-9999.
0502000	064	327	-64.6	.1218+03	.2027+03	-9999.
0503000	062	326	-64.6	.1208+03	.2018+03	-9999.
0504000	062	330	-64.7	.1202+03	.2008+03	-9999.
0505000	063	332	-64.7	.1196+03	.1999+03	-9999.
0506000	062	338	-64.8	.1190+03	.1990+03	-9999.
0507000	061	335	-64.9	.1184+03	.1981+03	-9999.
0508000	062	337	-65.0	.1178+03	.1971+03	-9999.
0509000	063	338	-65.0	.1172+03	.1962+03	-9999.
0510000	062	340	-65.1	.1166+03	.1953+03	-9999.
0511000	064	343	-65.2	.1161+03	.1945+03	-9999.
0512000	063	345	-65.4	.1155+03	.1936+03	-9999.
0513000	065	348	-65.5	.1149+03	.1928+03	-9999.
0514000	066	350	-65.6	.1143+03	.1919+03	-9999.
0515000	063	350	-65.7	.1138+03	.1911+03	-9999.
0516000	064	349	-65.9	.1132+03	.1903+03	-9999.
0517000	063	352	-66.0	.1127+03	.1895+03	-9999.
0518000	059	352	-66.1	.1121+03	.1886+03	-9999.
0519000	059	352	-66.3	.1115+03	.1878+03	-9999.
0520000	059	350	-66.4	.1110+03	.1870+03	-9999.
0521000	059	348	-66.6	.1104+03	.1862+03	-9999.
0522000	057	348	-66.8	.1099+03	.1855+03	-9999.
0523000	055	351	-67.0	.1093+03	.1847+03	-9999.
0524000	051	349	-67.2	.1088+03	.1840+03	-9999.
0525000	050	349	-67.4	.1082+03	.1832+03	-9999.
0526000	049	350	-67.6	.1077+03	.1825+03	-9999.
0527000	048	346	-67.8	.1071+03	.1818+03	-9999.
0528000	049	349	-68.0	.1066+03	.1810+03	-9999.
0529000	047	351	-68.2	.1061+03	.1803+03	-9999.
0530000	048	351	-68.4	.1055+03	.1796+03	-9999.
0531000	047	349	-68.6	.1050+03	.1789+03	-9999.
0532000	045	349	-68.8	.1045+03	.1781+03	-9999.
0533000	047	350	-69.1	.1039+03	.1774+03	-9999.
0534000	049	351	-69.3	.1034+03	.1767+03	-9999.
0535000	046	352	-69.5	.1029+03	.1760+03	-9999.
0536000	045	354	-69.7	.1024+03	.1753+03	-9999.
0537000	044	352	-69.9	.1019+03	.1746+03	-9999.
0538000	043	351	-70.2	.1013+03	.1739+03	-9999.
0539000	045	345	-70.4	.1008+03	.1732+03	-9999.
0540000	042	348	-70.6	.1003+03	.1725+03	-9999.
0541000	041	351	-70.8	.9981+02	.1717+03	-9999.
0542000	044	348	-70.7	.9930+02	.1709+03	-9999.
0543000	044	347	-70.7	.9879+02	.1700+03	-9999.
0544000	045	345	-70.8	.9829+02	.1692+03	-9999.
0545000	047	347	-70.8	.9779+02	.1684+03	-9999.
0546000	045	352	-70.8	.9729+02	.1675+03	-9999.
0547000	045	351	-70.9	.9679+02	.1667+03	-9999.
0548000	046	353	-70.9	.9630+02	.1659+03	-9999.
0549000	047	351	-71.0	.9581+02	.1651+03	-9999.

TABLE 5. (Continued)

ALTITUDE (FT.)	MIND SPEED (FT/SEC)	MIND DIRECTION (DEG)	TEMPERATURE (DEG C.)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	DEW POINT (DEG C.)
055000	0.8	34.9	-71.0	.9532+02	.1691+03	-9999.
055100	0.9	35.0	-70.9	.949+02	.1633+03	-9999.
055200	0.96	35.0	-70.8	.9235+02	.1624+03	-9999.
055300	0.99	35.0	-70.7	.9387+02	.1615+03	-9999.
055400	0.50	34.8	-70.6	.9139+02	.1606+03	-9999.
055500	0.52	34.8	-70.4	.9292+02	.1597+03	-9999.
055600	0.53	35.1	-70.3	.9285+02	.1588+03	-9999.
055700	0.53	000	-70.2	.9198+02	.1579+03	-9999.
055800	0.51	006	-70.1	.9151+02	.1570+03	-9999.
055900	0.48	005	-70.0	.9104+02	.1561+03	-9999.
056000	0.48	006	-69.9	.9058+02	.1553+03	-9999.
056100	0.45	004	-70.0	.9012+02	.1545+03	-9999.
056200	0.43	004	-70.0	.8966+02	.1538+03	-9999.
056300	0.38	35.7	-70.1	.8921+02	.1531+03	-9999.
056400	0.40	35.9	-70.2	.8875+02	.1521+03	-9999.
056500	0.38	35.4	-70.2	.8830+02	.1516+03	-9999.
056600	0.38	35.1	-70.3	.8785+02	.1509+03	-9999.
056700	0.40	35.3	-70.4	.8741+02	.1502+03	-9999.
056800	0.39	35.1	-70.5	.8696+02	.1495+03	-9999.
056900	0.39	35.1	-70.5	.8652+02	.1488+03	-9999.
057000	0.39	35.2	-70.6	.8608+02	.1480+03	-9999.
057100	0.38	35.4	-70.7	.8564+02	.1473+03	-9999.
057200	0.39	35.5	-70.7	.8520+02	.1466+03	-9999.
057300	0.2	35.7	-70.6	.8477+02	.1459+03	-9999.
057400	0.44	35.6	-70.6	.8434+02	.1452+03	-9999.
057500	0.44	35.7	-70.9	.8391+02	.1445+03	-9999.
057600	0.47	35.8	-71.0	.8348+02	.1438+03	-9999.
057700	0.49	001	-71.0	.8305+02	.1431+03	-9999.
057800	0.48	002	-71.1	.8263+02	.1424+03	-9999.
057900	0.47	004	-71.1	.8221+02	.1418+03	-9999.
058000	0.45	004	-71.2	.8179+02	.1411+03	-9999.
058100	0.43	005	-71.2	.8137+02	.1404+03	-9999.
058200	0.40	003	-71.3	.8096+02	.1397+03	-9999.
058300	0.39	006	-71.3	.8054+02	.1390+03	-9999.
058400	0.40	004	-71.3	.8013+02	.1381+03	-9999.
058500	0.42	001	-71.3	.7972+02	.1376+03	-9999.
058600	0.42	002	-71.4	.7932+02	.1369+03	-9999.
058700	0.46	006	-71.4	.7891	.1362+03	-9999.
058800	0.45	006	-71.4	.7855	.1359+03	-9999.
058900	0.44	004	-71.5	.7811	.1349+03	-9999.
059000	0.44	007	-71.5	.7771	.1343+03	-9999.
059100	0.45	007	-71.6	.7731+02	.1336+03	-9999.
059200	0.46	009	-71.6	.7691+02	.1330+03	-9999.
059300	0.43	009	-71.9	.7652+02	.1324+03	-9999.
059400	0.40	011	-72.0	.7613+02	.1319+03	-9999.
059500	0.38	014	-72.1	.7573+02	.1313+03	-9999.
059600	0.18	017	-72.3	.7535+02	.1307+03	-9999.
059700	0.36	021	-72.4	.7496+02	.1301+03	-9999.
059800	0.34	022	-72.5	.7457+02	.1295+03	-9999.
059900	0.32	023	-72.7	.7419+02	.1289+03	-9999.

TABLE 5. (Continued)

ALITUDE (FT)	WIND SPEED (FT/SEC)	WIND DIRECTION (DEG)	TEMPERATURE (DEG C)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	OPEN POINT (DEG C)
060000	0.33	028	-72.8	7.7101+05	0.1283+03	-9999.
061000	0.35	033	-74.1	7.009+02	0.1227+03	-9999.
062000	0.35	039	-73.2	6.6655+02	0.1164+03	-9999.
063000	0.34	046	-71.8	6.320+02	0.1093+03	-9999.
064000	0.33	055	-70.9	6.005+02	0.1034+03	-9999.
065000	0.33	060	-70.3	5.707+02	0.9014+02	-9999.
066000	0.32	063	-69.7	5.424+02	0.288+02	-9999.
067000	0.26	068	-68.4	5.157+02	0.774+02	-9999.
068000	0.21	076	-65.2	4.901+02	0.6215+02	-9999.
069000	0.18	079	-65.5	4.6617+02	0.7830+02	-9999.
070000	0.1	074	-61.5	4.992+02	0.7301+02	-9999.
071000	0.16	082	-61.3	4.229+02	0.954+02	-9999.
072000	0.17	081	-60.2	4.029+02	0.591+02	-9999.
073000	0.19	096	-59.3	3.839+02	0.259+02	-9999.
074000	0.21	105	-58.1	3.658+02	0.5926+02	-9999.
075000	0.21	115	-56.5	3.987+02	0.5607+02	-9999.
076000	0.17	128	-56.8	3.325+02	0.5354+02	-9999.
077000	0.11	127	-57.0	3.170+02	0.5109+02	-9999.
078000	0.05	101	-57.0	3.022+02	0.9871+02	-9999.
079000	0.07	036	-57.4	2.861+02	0.9652+02	-9999.
080000	0.13	039	-56.6	2.747+02	0.8221+02	-9999.
081000	0.16	050	-55.9	2.620+02	0.4201+02	-9999.
082000	0.19	062	-54.8	2.499+02	0.3937+02	-9999.
083000	0.20	078	-53.0	2.384+02	0.3772+02	-9999.
084000	0.20	029	-52.9	2.215+02	0.3550+02	-9999.
085000	0.19	102	-48.2	2.173+02	0.3365+02	-9999.
086000	0.15	108	-47.3	2.076+02	0.3202+02	-9999.
087000	0.09	111	-47.3	1.983+02	0.3059+02	-9999.
088000	0.05	123	-47.0	1.895+02	0.2919+02	-9999.
089000	0.02	177	-46.7	1.611+02	0.2786+02	-9999.
090000	0.04	248	-46.6	1.730+01	0.2660+02	-9999.
091000	0.05	290	-47.5	1.377+02	0.2552+02	-9999.
092000	0.06	319	-48.0	1.161+02	0.2023+02	-9999.
093000	0.08	352	-48.1	1.509+02	0.2441+02	-9999.
094000	0.08	020	-47.5	1.095+02	0.2336+02	-9999.
095000	0.08	041	-47.5	1.441+02	0.2225+02	-9999.
096000	0.06	065	-47.0	1.173+01	0.2121+02	-9999.
097000	0.04	114	-46.5	1.671+02	0.1294+02	-9999.
098000	0.06	179	-44.5	1.258+02	0.1560+02	-9999.
099000	0.10	196	-42.5	1.199+02	0.1917+02	-9999.
100000	0.13	207	-41.8	1.163+02	0.1811+02	-9999.
101000	0.20	203	-41.2	1.091+02	0.1721+02	-9999.
102000	0.16	198	-37.6	8.750+01	0.1294+02	-9999.
103000	0.18	209	-40.2	1.043+02	0.1240+02	-9999.
104000	0.18	207	-39.4	0.980+01	0.1487+02	-9999.
105000	0.20	203	-38.6	9.550+01	0.1419+02	-9999.
106000	0.21	195	-38.1	9.191+01	0.1355+02	-9999.
107000	0.21	193	-37.9	8.375+01	0.1240+02	-9999.
108000	0.23	191	-38.0	8.017+01	0.1180+02	-9999.
109000	0.23	195	-37.5	7.674+01	0.1137+02	-9999.
				7.396+01	0.1086+02	-9999.

TABLE 5. (Continued)

**ORIGINAL PAGE IS
OF POOR QUALITY**

ALTITUDE (FT.)	WIND SPEED (FT/SEC.)	MIND DIRECTION (DEG.)	TEMPERATURE (DEG C.)	PRESSURE (MILLIBARS)	DEW POINT	
					(GRAM/M3)	(DEG C.)
1100000	023	201	-16.3	10134+01	0.10135+02	-9999.
1110000	023	208	-15.3	6.735	0.9866+01	-9999.
1120000	025	218	-14.6	6.951+01	0.9221+01	-9999.
1130000	027	227	-13.9	6.179+01	0.8998+01	-9999.
1140000	032	218	-13.4	5.919+01	0.8601+01	-9999.
1150000	037	238	-12.2	5.671+01	0.8200+01	-9999.
1160000	042	241	-10.1	5.935+01	0.7790+01	-9999.
1170000	042	247	-27.5	5.211+01	0.7391+01	-9999.
1180000	038	252	-25.7	4.999+01	0.7037+01	-9999.
1190000	035	251	-24.3	4.796+01	0.6713+01	-9999.
1200000	030	250	-23.5	4.602+01	0.6422+01	-9999.
1210000	027	248	-23.3	4.417+01	0.6159+01	-9999.
1220000	023	246	-23.6	4.239+01	0.5818+01	-9999.
1230000	023	245	-25.3	4.068+01	0.5673+01	-9999.
1240000	027	248	-21.9	3.905+01	0.5418+01	-9999.
1250000	028	254	-19.8	3.749+01	0.5156+01	-9999.
1260000	028	263	-17.4	3.609+01	0.4904+01	-9999.
1270000	030	275	-15.5	3.460+01	0.4677+01	-9999.
1280000	030	286	-13.8	3.125+01	0.4483+01	-9999.
1290000	030	296	-15.0	3.195+01	0.4311+01	-9999.
1300000	028	298	-16.1	3.070+01	0.4161+01	-9999.
1310000	025	298	-17.1	2.950+01	0.4011+01	-9999.
1320000	020	291	-17.9	2.834+01	0.3860+01	-9999.
1330000	016	279	-17.5	2.722+01	0.3710+01	-9999.
1340000	013	258	-17.5	2.615+01	0.3564+01	-9999.
1350000	013	226	-17.5	2.512+01	0.3424+01	-9999.
1360000	018	206	-17.5	2.414+01	0.3289+01	-9999.
1370000	021	201	-17.2	2.319+01	0.3157+01	-9999.
1380000	023	196	-16.8	2.228+01	0.3028+01	-9999.
1390000	025	193	-16.0	2.141+01	0.2900+01	-9999.
1400000	027	190	-15.4	2.057+01	0.2780+01	-9999.
1410000	030	187	-14.9	1.977+01	0.2667+01	-9999.
1420000	032	186	-14.4	1.900+01	0.2558+01	-9999.
1430000	033	185	-14.0	1.826+01	0.2455+01	-9999.
1440000	033	186	-13.4	1.756+01	0.2355+01	-9999.
1450000	035	188	-12.4	1.688+01	0.2254+01	-9999.
1460000	030	196	-10.3	1.623+01	0.2150+01	-9999.
1470000	018	193	-9.6	1.561+01	0.2063+01	-9999.
1480000	011	167	-9.3	1.501+01	0.1983+01	-9999.
1490000	016	167	-8.2	1.444+01	0.1899+01	-9999.
1500000	006	185	-6.8	1.390+01	0.1817+01	-9999.
1510000	005	029	-5.2	1.338+01	0.1739+01	-9999.
1520000	015	072	-3.9	1.287+01	0.1666+01	-9999.
1530000	020	092	-2.5	1.240+01	0.1595+01	-9999.
1540000	027	106	-1.0	1.194+01	0.1528+01	-9999.
1550000	025	109	2	1.150+01	0.1465+01	-9999.
1560000	027	122	4	1.107+01	0.1410+01	-9999.
1570000	028	138	-5	1.067+01	0.1363+01	-9999.
1580000	020	134	-1.6	1.027+01	0.1318+01	-9999.
1590000	020	086	-2.6	9.892+00	0.1274+01	-9999.

TABLE 5. (Continued)

ALTITUDE (FT.)	WIND SPEED (FT./SEC.)	WIND DIRECTION (DEG.)	TEMPERATURE (DEG C)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	DEW POINT (DEG C)
160000	0.28	0.53	-4.7	.9169+00	.1190+01	-9999.
161000	0.25	0.45	-5.6	.8825+00	.1231+01	-9999.
162000	0.23	0.49	-6.5	.8494+00	.1110+01	-9999.
163000	0.28	0.64	-7.4	.8173+00	.1072+01	-9999.
164000	0.45	0.89	-8.5	.7864+00	.1035+01	-9999.
165000	0.69	1.05	-9.6	.7565+00	.9990+00	-9999.
166000	0.84	1.16	-10.0	.7277+00	.9635+00	-9999.
167000	0.86	1.26	-10.4	.7000+00	.9280+00	-9999.
168000	0.76	1.38	-10.5	.6733+00	.8930+00	-9999.
169000	0.60	1.54	-10.7	.6475+00	.8596+00	-9999.
170000	0.47	1.76	-10.9	.6228+00	.8274+00	-9999.
171000	0.40	1.97	-11.1	.5920+00	.7963+00	-9999.
172000	0.35	2.01	-11.2	.5760+00	.7661+00	-9999.
173000	0.33	1.86	-11.4	.5540+00	.7374+00	-9999.
174000	0.38	1.64	-11.6	.5328+00	.7098+00	-9999.
175000	0.52	1.56	-11.8	.5123+00	.6829+00	-9999.
176000	0.65	1.56	-12.0	.4927+00	.6572+00	-9999.
177000	0.76	1.61	-12.2	.4738+00	.6326+00	-9999.
178000	0.81	1.70	-12.4	.4556+00	.6094+00	-9999.
179000	0.81	1.78	-12.7	.4380+00	.5887+00	-9999.
180000	0.76	1.83	-13.9	.4210+00	.5694+00	-9999.
181000	0.69	1.85	-15.6	.4046+00	.5406+00	-9999.
182000	0.67	1.83	-16.5	.3868+00	.5119+00	-9999.
183000	0.70	1.72	-19.5	.3734+00	.5128+00	-9999.
184000	0.77	1.70	-20.1	.3587+00	.4938+00	-9999.
185000	0.82	1.66	-20.6	.3445+00	.4753+00	-9999.
186000	0.79	1.66	-21.4	.3308+00	.4578+00	-9999.
187000	0.69	1.66	-22.4	.3177+00	.4413+00	-9999.
188000	0.54	1.62	-23.3	.3050+00	.4253+00	-9999.
189000	0.18	1.49	-24.3	.2227+00	.4097+00	-9999.
190000	0.28	1.24	-25.4	.2809+00	.3950+00	-9999.
191000	0.32	0.92	-26.3	.2719+00	.3837+00	-9999.
192000	0.40	0.75	-27.2	.2633+00	.3729+00	-9999.
193000	0.40	0.67	-27.6	.2549+00	.3616+00	-9999.
194000	0.42	0.69	-28.0	.2468+00	.3507+00	-9999.
195000	0.43	0.71	-28.4	.2389+00	.3400+00	-9999.
196000	0.47	0.71	-28.8	.2303+00	.3283+00	-9999.
197000	0.48	0.68	-29.2	.2216+00	.3165+00	-9999.
198000	0.50	0.60	-29.6	.2125+00	.3040+00	-9999.
199000	0.52	0.48	-30.0	.2035+00	.2916+00	-9999.
200000	0.59	0.39	-30.4	.1950+00	.2798+00	-9999.
201000	0.65	0.36	-30.8	.1868+00	.2685+00	-9999.
202000	0.74	0.35	-31.2	.1791+00	.2578+00	-9999.
203000	0.82	0.37	-31.2	.1717+00	.2472+00	-9999.
204000	0.91	0.42	-32.2	.1646+00	.2380+00	-9999.
205000	0.99	0.48	-36.0	.1578+00	.2318+00	-9999.
206000	1.06	0.56	-39.0	.1511+00	.2248+00	-9999.
207000	1.11	0.63	-40.2	.1446+00	.2162+00	-9999.
208000	1.18	0.71	-40.7	.1384+00	.2074+00	-9999.

TABLE 5. (Continued)

ALTITUDE (FT)	WIND SPEED (FT/SEC)	WIND DIRECTION (DEG)	TEMPERATURE (DEG C.)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M ³)	DEW POINT (DEG C.)
210000	124	019	-43.2	.1325+00	.2007+00	-9999.
211000	131	086	-43.2	.1267+00	.1919+00	-9999.
212000	136	092	-41.2	.1213+00	.1821+00	-9999.
213000	140	098	-40.2	.1161+00	.1736+00	-9999.
214000	140	103	-39.3	.1111+00	.1662+00	-9999.
215000	138	108	-41.2	.1063+00	.1596+00	-9999.
216000	135	111	-41.2	.1018+00	.1529+00	-9999.
217000	130	118	-40.8	.0946+00	.1460+00	-9999.
218000	121	123	-39.2	.0932+00	.1388+00	-9999.
219000	114	128	-39.9	.0930+01	.1334+00	-9999.
220000	104	133	-41.6	.0950+01	.1286+00	-9999.
221000	092	138	-44.6	.0980+01	.1248+00	-9999.
222000	081	142	-48.1	.0920+01	.1211+00	-9999.
223000	069	147	-51.8	.0747+01	.1176+00	-9999.
224000	057	152	-54.9	.0714+01	.1140+00	-9999.
225000	045	156	-58.0	.0681+01	.1102+00	-9999.
226000	035	158	-59.2	.0690+01	.1056+00	-9999.
227000	023	154	-60.1	.0618+01	.1011+00	-9999.
228000	013	132	-61.6	.0582+01	.0970+01	-9999.
229000	011	077	-64.1	.0560+01	.0934+01	-9999.
230000	018	045	-65.7	.0534+01	.0896+01	-9999.
231000	030	037	-67.2	.0590+01	.0868+01	-9999.
232000	040	035	-68.2	.0485+01	.0842+01	-9999.
233000	050	036	-69.2	.0461+01	.0807+01	-9999.
234000	059	038	-69.8	.0439+01	.0752+01	-9999.
235000	069	041	-71.2	.0417+01	.0719+01	-9999.
236000	077	045	-71.8	.0397+01	.0686+01	-9999.
237000	086	048	-73.3	.0377+01	.0657+01	-9999.
238000	096	050	-74.9	.0358+01	.0629+01	-9999.
239000	104	052	-76.4	.0340+01	.0602+01	-9999.
240000	111	055	-77.2	.0323+01	.0574+01	-9999.
241000	119	057	-78.2	.0307+01	.0548+01	-9999.
242000	126	058	-77.3	.0291+01	.0517+01	-9999.
243000	135	060	-78.5	.0277+01	.0495+01	-9999.
244000	141	062	-79.2	.0263+01	.0472+01	-9999.
245000	150	065	-79.2	.0249+01	.0447+01	-9999.
246000	155	066	-79.2	.0237+01	.0425+01	-9999.
247000	160	068	-80.2	.0224+01	.0404+01	-9999.
248000	165	069	-81.1	.0213+01	.0386+01	-9999.
249000	170	071	-81.2	.0202+01	.0366+01	-9999.
250000	173	072	-82.2	.0192+01	.0342+01	-9999.
251000	179	073	-82.7	.0182+01	.0329+01	-9999.
252000	182	074	-84.2	.0172+01	.0317+01	-9999.
253000	184	075	-85.7	.0163+01	.0303+01	-9999.
254000	187	075	-87.3	.0155+01	.0290+01	-9999.
2550rJ	187	075	-88.2	.0146+01	.0279+01	-9999.
256000	189	075	-89.2	.0139+01	.0263+01	-9999.
257000	189	075	-90.2	.0131+01	.0249+01	-9999.
258000	187	025	-90.3	.0124+01	.0236+01	-9999.
259000	187	075	-91.7	.0118+01	.0226+01	-9999.


TABLE 5. (Continued)

ALTITUDE (FT)	MIND SPEED (FT/SEC)	MIND DIRECTION (DEG)	TEMPERATURE (DEG C)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	DEM POINT (DEG C)
260000	184	074	-92.4	.1110-01	.2132-01	-9999.
261000	182	074	-93.5	*1050-01	.2041-01	-9999.
262000	179	074	-94.4	.9900-02	.1930-01	-9999.
263000	175	074	-95.2	.9400-02	.1840-01	-9999.
264000	172	073	-95.2	.9200-02	.1742-01	-9999.
265000	167	072	-95.2	.8400-02	.1644-01	-9999.
266000	162	072	-94.8	.1900-02	.1543-01	-9999.
267000	155	071	-94.2	.7500-02	.1460-01	-9999.
268000	148	070	-93.7	.7100-02	.1378-01	-9999.
269000	140	069	-93.2	.6700-02	.1297-01	-9999.
270000	131	068	-92.2	.6100-02	.1213-01	-9999.
271000	123	066	-91.2	.6000-02	.1148-01	-9999.
272000	113	065	-90.6	.5700-02	.1088-01	-9999.
273000	103	063	-90.1	.5300-02	.1009-01	-9999.
274000	91	060	-89.2	.5100-02	.9656-02	-9999.
275000	86	060	-88.5	.4923-02	.9320-02	-9999.
276000	82	061	-87.9	.4752-02	.8996-02	-9999.
277000	77	062	-87.2	.4586-02	.8684-02	-9999.
278000	73	063	-86.6	.4427-02	.8382-02	-9999.
279000	68	064	-86.0	.4273-02	.8090-02	-9999.
280000	64	065	-85.3	.4125-02	.7809-02	-9999.
281000	59	066	-84.7	.3981-02	.7538-02	-9999.
282000	55	068	-84.1	.3843-02	.7276-02	-9999.
283000	51	070	-83.4	.3709-02	.7023-02	-9999.
284000	46	072	-82.8	.3560-02	.6772-02	-9999.
285000	42	075	-82.2	.3456-02	.6543-02	-9999.
286000	38	078	-81.5	.3336-02	.6316-02	-9999.
287000	34	082	-80.9	.3220-02	.6096-02	-9999.
288000	30	087	-80.3	.3108-02	.5884-02	-9999.
289000	27	093	-79.6	.3000-02	.5680-02	-9999.
290000	22	07	-80.8	.2570-02	.4640-02	-9999.
291000	31	066	-81.9	.2200-02	.4000-02	-9999.
292000	24	063	-82.9	.1830-02	.3330-02	-9999.
293000	13	052	-83.	.1550-02	.2830-02	-9999.
294000	6	006	33.1	-83.7	.1310-02	-9999.
295000	23	079	-80.6	.3000-02	.1110-02	-9999.
296000	29	071	-84.1	.2570-02	.1720-02	-9999.
297000	9	066	-84.5	.2200-02	.1460-02	-9999.
298000	24	063	-84.2	.2020-03	.1230-02	-9999.
299000	13	052	-83.1	.1810-03	.1030-02	-9999.
300000	6	006	33.1	-83.7	.1550-03	-9999.
301000	23	079	-80.9	.4180-03	.8700-03	-9999.
302000	29	071	-79.8	.4180-03	.7320-03	-9999.
303000	9	066	-78.7	.3040-03	.5170-03	-9999.
304000	24	063	-75.2	.2600-03	.4330-03	-9999.
305000	13	052	-71.7	.2220-03	.3640-03	-9999.
306000	6	006	-68.2	.2220-03	.3750-03	-9999.
307000	23	079	-64.6	.1900-03	.1460-02	-9999.
308000	29	071	-61.1	.1630-03	.2560-02	-9999.
309000	9	066	-56.4	.1410-03	.2160-03	-9999.
310000	24	063	-50.4	.1230-03	.1840-03	-9999.

TABLE 5. (Concluded)

ALTITUDE (FT)	WIND SPEED (FT/SEC)	WIND DIRECTION (DEG)	TEMPERATURE (DEG C.)	PRESSURE (MILLIBARS)	DENSITY (GRAM/M3)	DEN POINT (DEG C.)
352000	0.3	262	-44.4	.1080-03	.1580-03	-9999.
355000	0.72	259	-38.5	*9450-04	*1330-03	-9999.
358000	0.6	255	-32.5	.8260-04	.1130-03	-9999.
361000	0.59	258	-1.5	.7220-04	*9590-04	-9999.
364000	0.61	254	-1.6	.6490-04	.8320-04	-9999.
367000	0.61	250	-10.6	.5830-04	.7220-04	-9999.
370000	0.61	243	-2.7	.5220-04	.6270-04	-9999.
373000	0.60	235	5.2	.4680-04	.5440-04	-9999.
376000	0.60	224	13.1	.4190-04	.4720-04	-9999.
379000	0.45	234	21.7	*3790-04	*4120-04	-9999.
382000	0.47	231	31.0	.3450-04	.3630-04	-9999.
385000	0.48	227	40.5	*3150-04	*3210-04	-9999.
388000	0.50	224	50.3	.2890-04	.2850-04	-9999.
391000	0.52	220	60.3	.2660-04	.2530-04	-9999.
394000	0.55	217	70.6	.2450-04	.2260-04	-9999.
397000	0.58	214	80.9	.2270-04	.2020-04	-9999.
400000	0.61	211	91.5	.2100-04	.1810-04	-9999.


ORIGINAL PAGE IS
OF POOR QUALITY

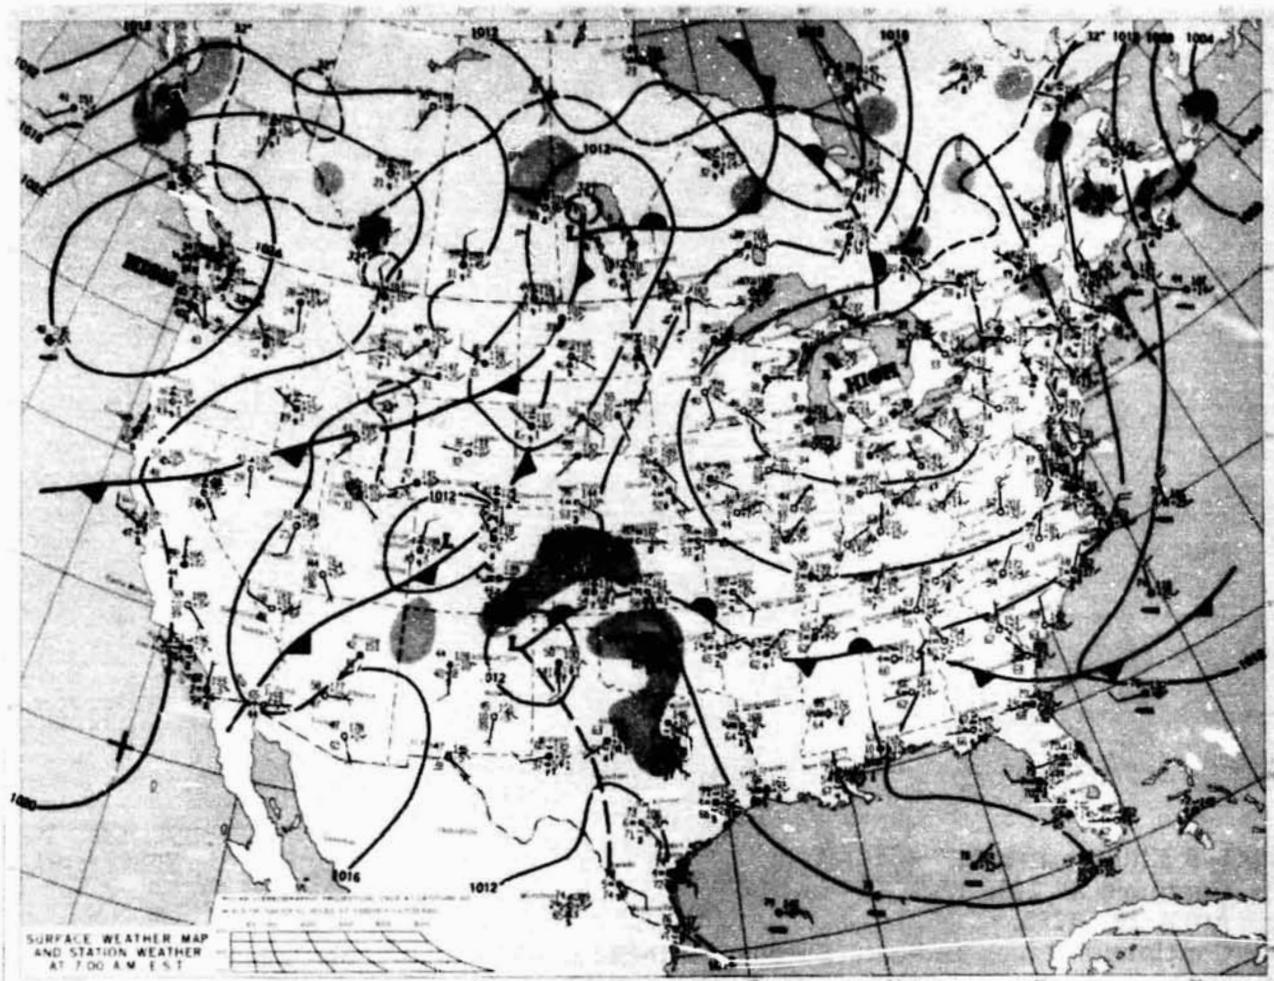

Surface Synoptic Map at 1200 UT April 29, 1985 — Isobaric, Frontal, and Precipitation Patterns are Shown in Standard Symbolic Form.

Figure 1. Surface synoptic chart 4 hr 2 min prior to launch of STS-51B.

ORIGINAL PAGE IS
OF POOR QUALITY

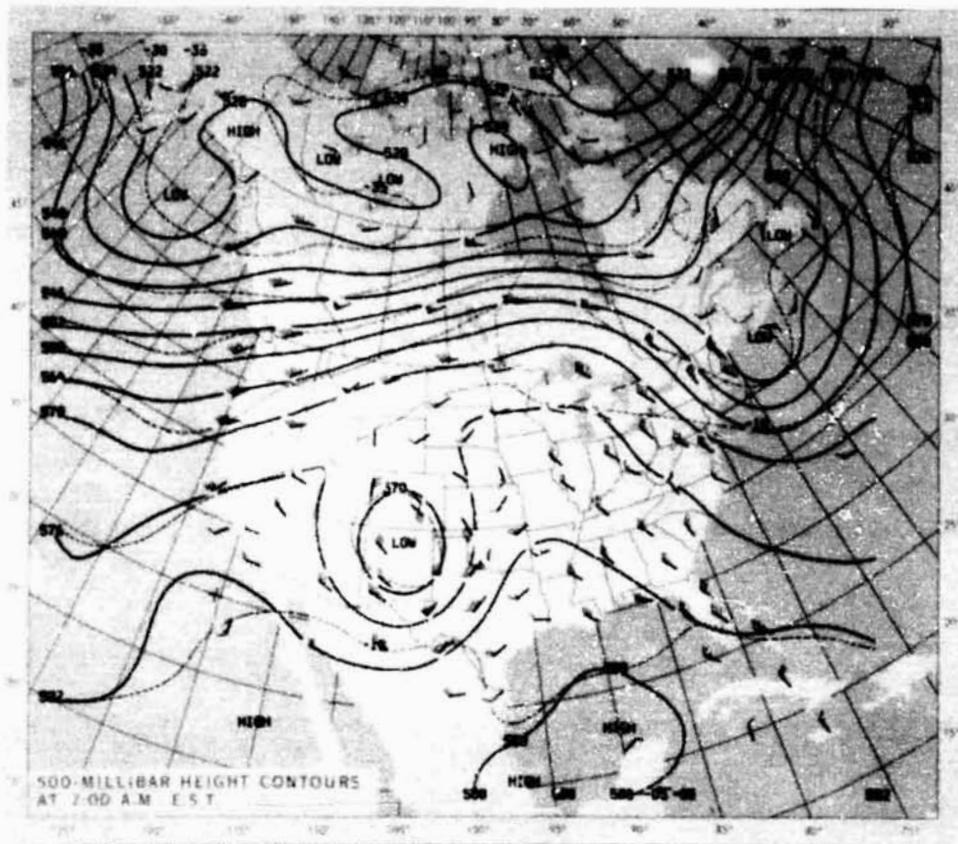

500 Millibar Height

Contours at 1200 UT

April 29, 1985.

Continuous Lines Indicate Height Contours in Feet Above Sea Level.
Dashed Lines are Isotherms In Degrees Centigrade. Arrows Show
Wind Direction and Speed at the 500 MB Level.

Figure 2. 500 mb map 4 hr 2 min prior to launch of STS-51B.

ORIGINAL PAGE IS
OF POOR QUALITY



Figure 3. GOES-6 visible imagery of cloud cover 2 min before launch of STS-51B (1600 UT, April 29, 1985). 500-mb contours and wind barbs are included for 1200 UT.

ORIGINAL PAGE IS
OF POOR QUALITY



Figure 4. Enlarged view of GOES-6 visible imagery of cloud cover taken 2 min before launch of STS-51B (1600 UT, April 29, 1985). Surface temperatures and wind barbs for 1600 UT are also included.

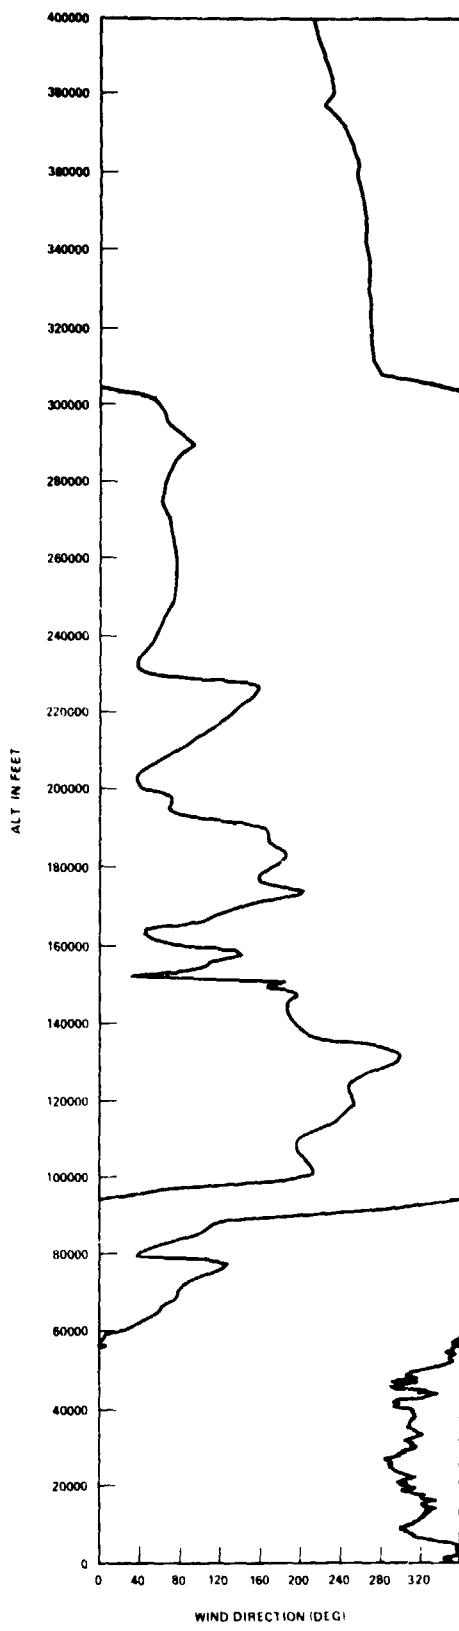
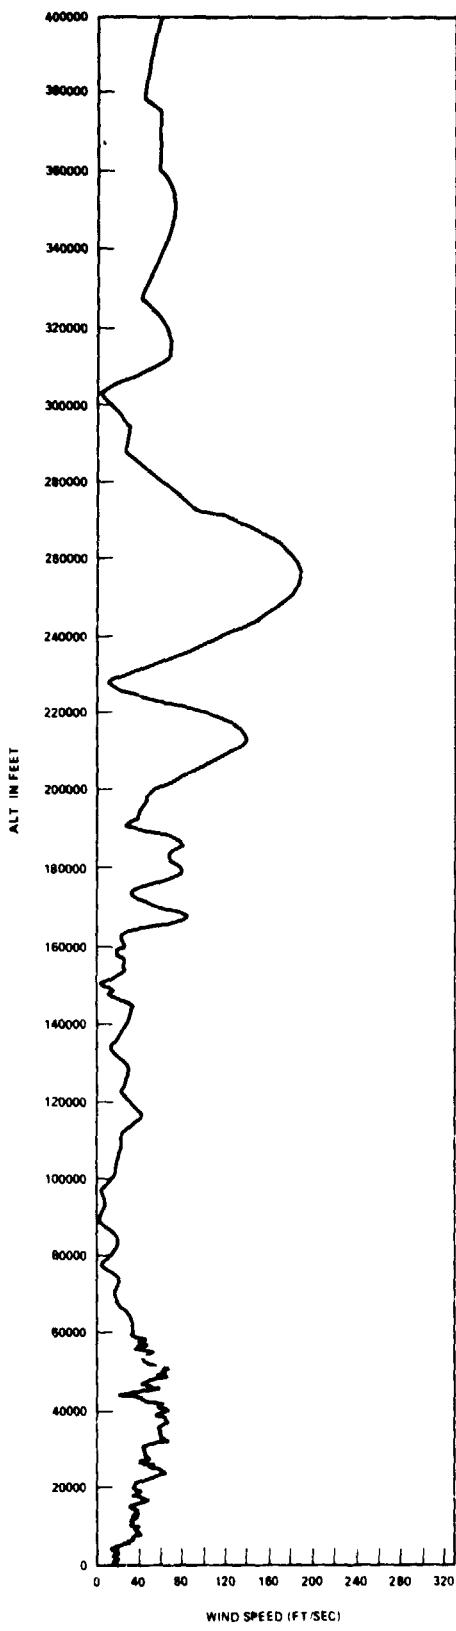


Figure 5. Scalar wind speed and direction at launch time of STS-51B.

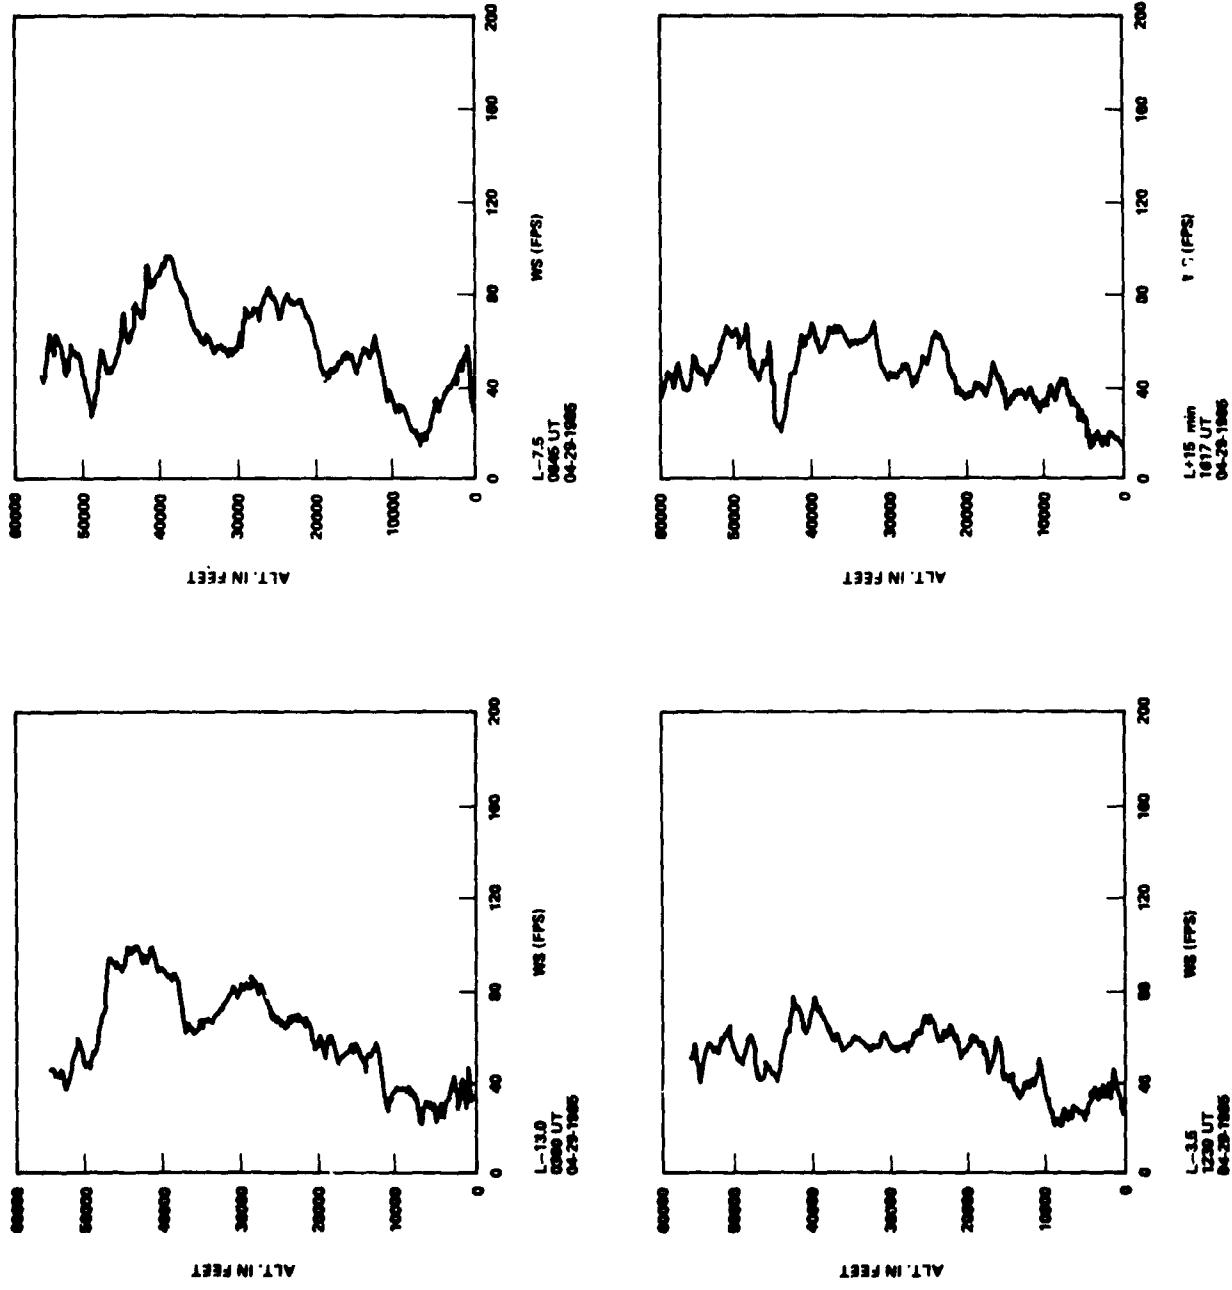


Figure 6. STS-51B prelaunch/launch Jimsphere-measured wind speeds (FPS).

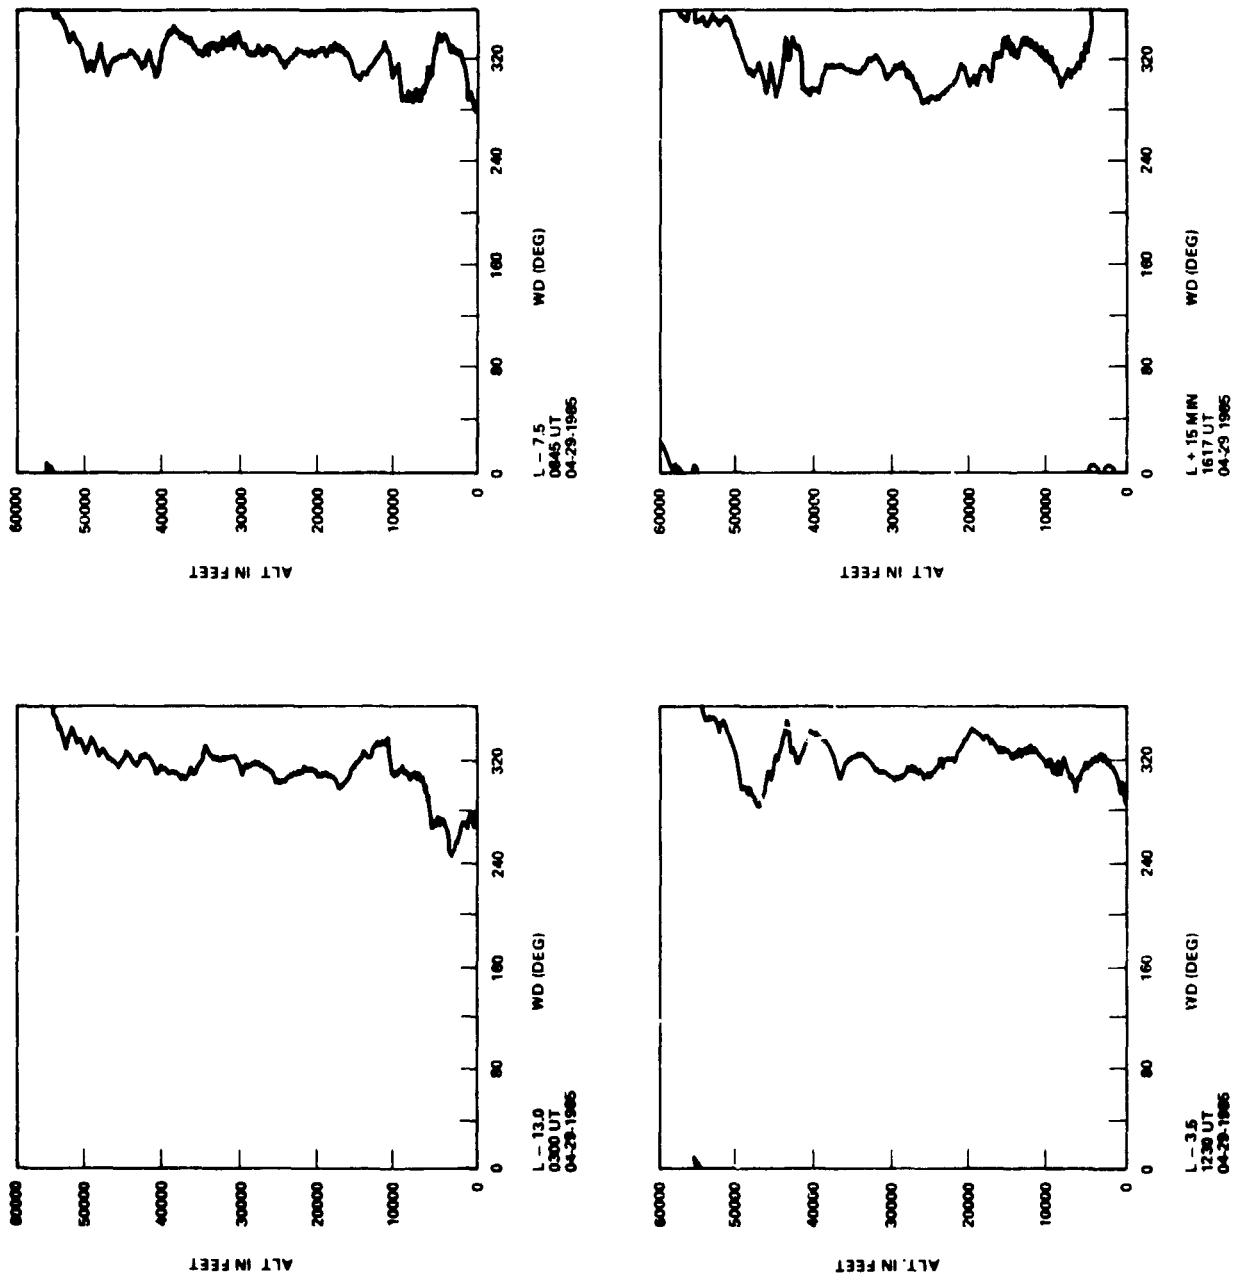


Figure 7. STS-51B prelaunch/launch Jimosphere-measured wind directions (degrees).

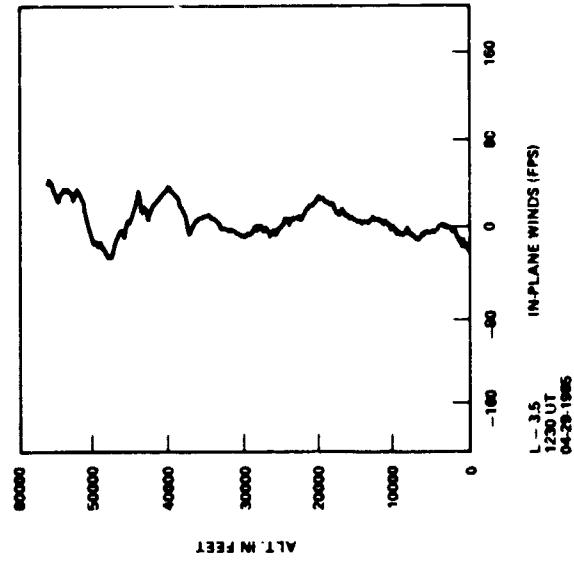
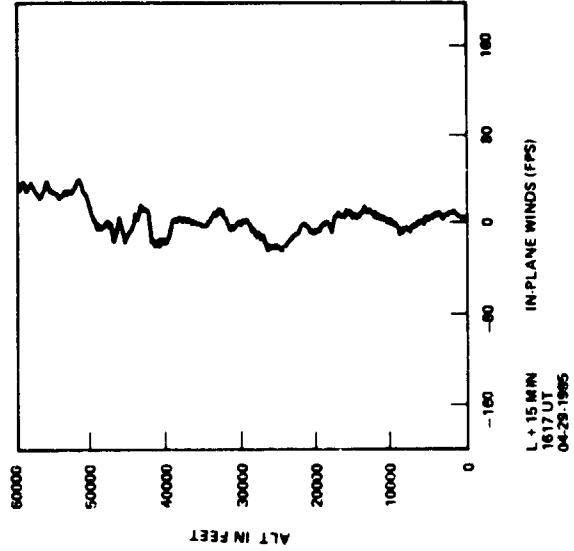
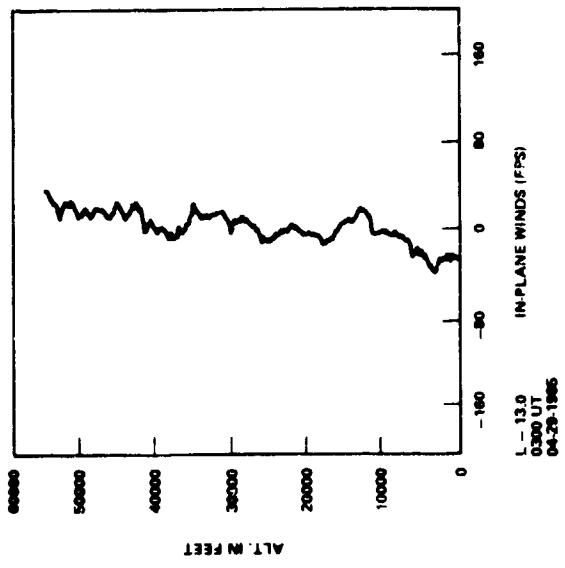
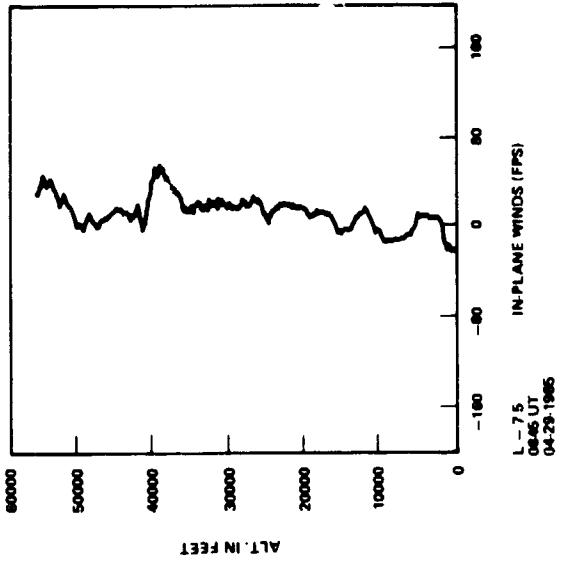


Figure 8. STS-51B prelaunch/launch Jimsphere-measured in-plane component winds (FPS).
Flight & azimuth = 38 degrees.

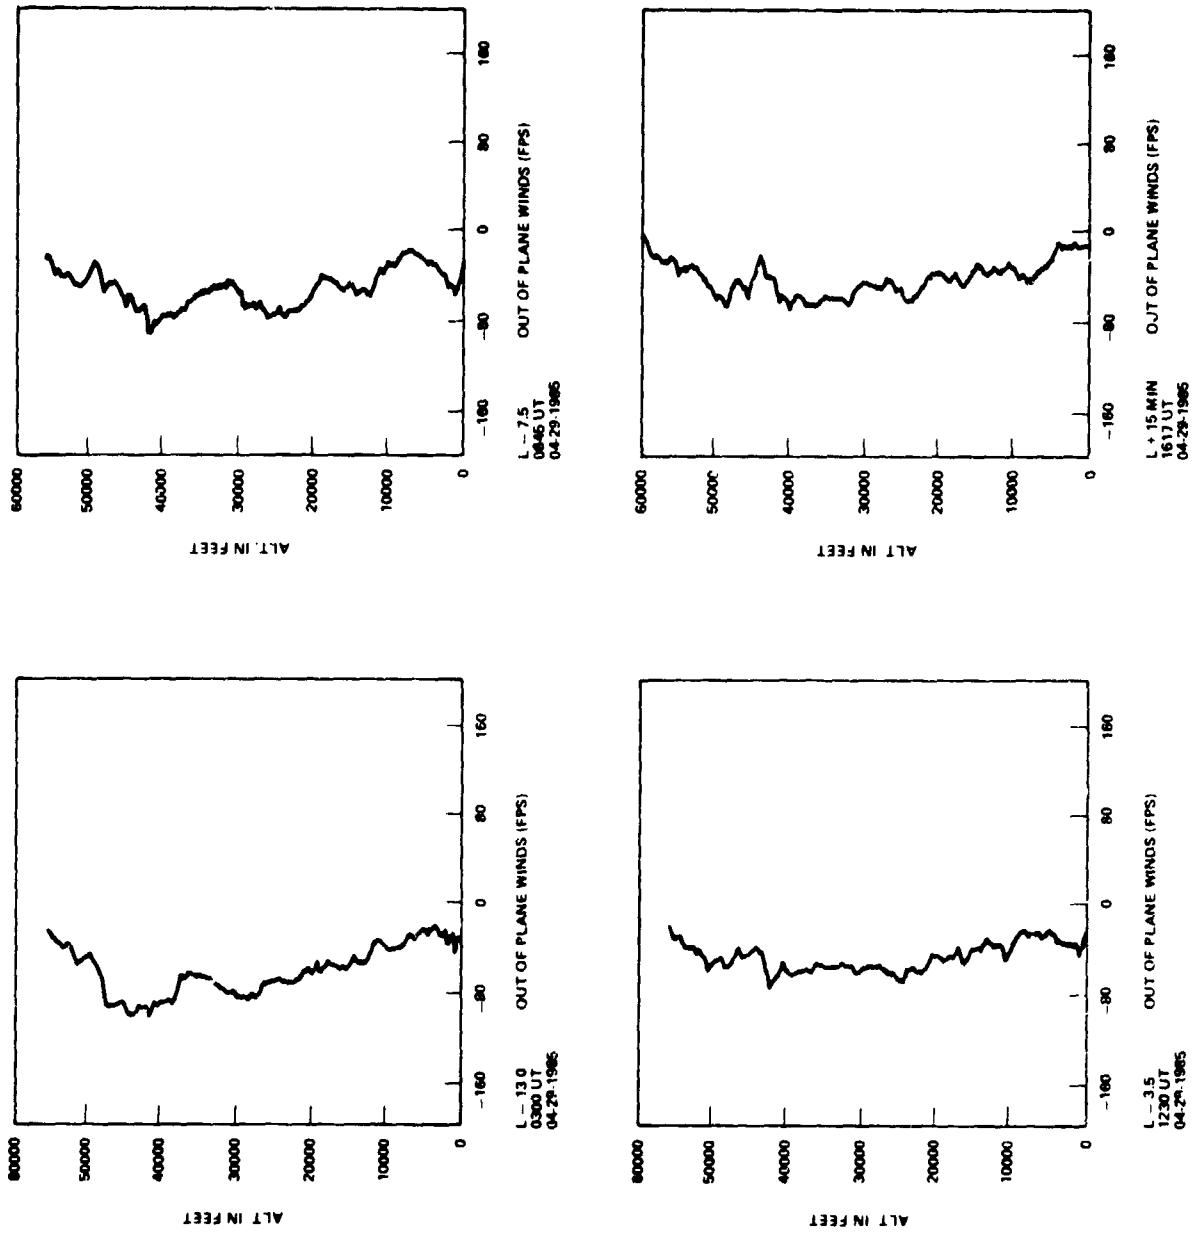


Figure 9. STS 51B prelaunch/launch Jimosphere-measured out-of-plane components winds (FPS).
Flight azimuth = 38 degrees.

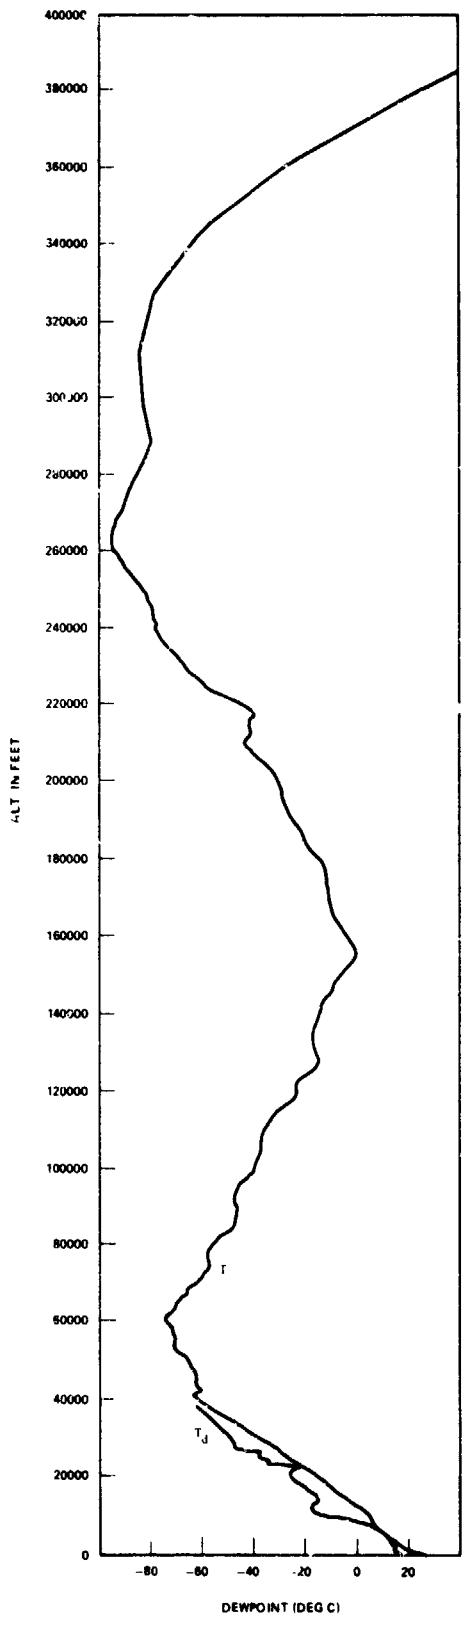


Figure 10. STS-51B temperature profiles versus altitude for launch (ascent).

REFERENCES

1. Saturn Flight Evaluation Working Group: Saturn Launch Vehicle Flight Evaluation Report — Appendix A — Atmosphere (A separate report is prepared for each Saturn vehicle launch operation). George C. Marshall Space Flight Center, Alabama.
2. Johnson, D. L.: Summary of Atmospheric Data Observations for 155 Flights of MSFC/ABMA Related Aerospace Vehicles. NASA TM X-64796, December 5, 1973.
3. Johnson, D. L.: Atmospheric Environment for ASTP (SA-210) Launch. NASA TM X-64990. February 1976.
4. Johnson, D. L., Jasper, G., and Brown, S. C.: Atmospheric Environment for Space Shuttle (STS-1) Launch. NASA TM 82436, July 1981.
5. Johnson, D. L. and Brown, S. C.: Atmospheric Environment for Space Shuttle (STS-2) Launch. NASA TM 82463, December 1981.
6. Johnson, D. L., Brown, S. C., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-3) Launch. NASA TM 82480, April 1982.
7. Johnson, D. L., Hill, C. K., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-4) Launch. NASA TM 82498, July 1982.
8. Johnson, D. L., Hill, C. K., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-5) Launch. NASA TM 82515, March 1983.
9. Johnson, D. L., Hill, C. K., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-6) Launch. NASA TM 82529, May 1983.
10. Johnson, D. L., Hill, C. K., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-7) Launch. NASA TM 82542, July 1983.
11. Johnson, D. L., Hill, C. K., Turner, R. E., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-8) Launch. NASA TM 82560, October 1983.
12. Johnson, D. L., Hill, C. K., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-9) Launch. NASA TM 82572, January 1984.
13. Johnson, D. L., Hill, C. K., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-11) Launch. NASA TM 82580, March 1984.
14. Johnson, D. L., Hill, C. K., Jasper, G., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-13) Launch. NASA TM 82588, May 1984.
15. Johnson, D. L., Hill, C. K., Jasper, G., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-41D) Launch. NASA TM 84684, October 1984.
16. Johnson, D. L., Hill, C. K., Jasper, G., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-41G) Launch. NASA TM 84686, November 1984.

17. Johnson, D. L., Jasper, G., Hill, C. K. and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-51A) Launch. NASA TM 84697, December 1984.
18. Jasper, G. L., Johnson, D. L., Hill, C. K., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-51C) Launch. NASA TM 86508, April 1985.
19. Jasper, G. L., Johnson, D. L., Hill, C. K., and Batts, G. W.: Atmospheric Environment for Space Shuttle (STS-51D) Launch. NASA TM , June 1985.
20. Justus, C. G., et al.: The NASA/MSFC Global Reference Atmosphere Model — Mod 3 (with Spherical Harmonic Wind Model). NASA CR-3256, March 1980.
21. Smith, O. E. and Weidner, D. K.: A Reference Atmosphere for Patrick AFB, Florida, Annual (1963 Revision). NASA TM X-53139, September 23, 1964.

APPROVAL

ATMOSPHERIC ENVIRONMENT FOR SPACE SHUTTLE (STS-51B) LAUNCH

By G. Jasper, D. L. Johnson, C. K. Hill, and G. W. Batts

The information in this report has been reviewed for technical content. Review of any information concerning Department of Defense or nuclear energy activities or programs has been made by the MSFC Security Classification Officer. This report, in its entirety, has been determined to be unclassified.

William W. Vaughan
W. W. VAUGHAN
Chief, Atmospheric Sciences Division

G. F. McDonough
G. F. McDONOUGH
Director, Systems Dynamics Laboratory