

ACCESSION NUMBER RANGES

Accession numbers cited in this Supplement fall within the following ranges.

STAR (N-10000 Series)	N84-24528 - N84-26564
IAA (A-10000 Series)	A84-33163 - A84-36462

AERONAUTICAL ENGINEERING

A CONTINUING BIBLIOGRAPHY WITH INDEXES

(Supplement 178)

A selection of annotated references to unclassified reports and journal articles that were introduced into the NASA scientific and technical information system and announced in August 1984 in

- *Scientific and Technical Aerospace Reports (STAR)*
- *International Aerospace Abstracts (IAA).*

This supplement is available as NTISUB 141 093 from the National Technical Information Service (NTIS), Springfield, Virginia 22161 at the price of \$6.00 domestic; \$12.00 foreign.

INTRODUCTION

Under the terms of an interagency agreement with the Federal Aviation Administration this publication has been prepared by the National Aeronautics and Space Administration for the joint use of both agencies and the scientific and technical community concerned with the field of aeronautical engineering. The first issue of this bibliography was published in September 1970 and the first supplement in January 1971.

This supplement to *Aeronautical Engineering -- A Continuing Bibliography* (NASA SP-7037) lists 426 reports, journal articles, and other documents originally announced in August 1984 in *Scientific and Technical Aerospace Reports (STAR)* or in *International Aerospace Abstracts (IAA)*.

The coverage includes documents on the engineering and theoretical aspects of design, construction, evaluation, testing, operation, and performance of aircraft (including aircraft engines) and associated components, equipment, and systems. It also includes research and development in aerodynamics, aeronautics, and ground support equipment for aeronautical vehicles.

Each entry in the bibliography consists of a standard bibliographic citation accompanied in most cases by an abstract. The listing of the entries is arranged by the first nine *STAR* specific categories and the remaining *STAR* major categories. This arrangement offers the user the most advantageous breakdown for individual objectives. The citations include the original accession numbers from the respective announcement journals. The *IAA* items will precede the *STAR* items within each category.

Six indexes -- subject, personal author, corporate source, contract number, report number, and accession number -- are included.

An annual cumulative index will be published.

AVAILABILITY OF CITED PUBLICATIONS

IAA ENTRIES (A84-10000 Series)

All publications abstracted in this Section are available from the Technical Information Service, American Institute of Aeronautics and Astronautics, Inc. (AIAA), as follows: Paper copies of accessions are available at \$8.50 per document. Microfiche⁽¹⁾ of documents announced in *IAA* are available at the rate of \$4.00 per microfiche on demand. Standing order microfiche are available at the rate of \$1.45 per microfiche for *IAA* source documents.

Minimum air-mail postage to foreign countries is \$2.50 and all foreign orders are shipped on payment of pro-forma invoices.

All inquiries and requests should be addressed to AIAA Technical Information Service. Please refer to the accession number when requesting publications.

STAR ENTRIES (N84-10000 Series)

One or more sources from which a document announced in *STAR* is available to the public is ordinarily given on the last line of the citation. The most commonly indicated sources and their acronyms or abbreviations are listed below. If the publication is available from a source other than those listed, the publisher and his address will be displayed on the availability line or in combination with the corporate source line.

Avail: NTIS. Sold by the National Technical Information Service. Prices for hard copy (HC) and microfiche (MF) are indicated by a price code preceded by the letters HC or MF in the *STAR* citation. Current values for the price codes are given in the tables on page viii.

Documents on microfiche are designated by a pound sign (#) following the accession number. The pound sign is used without regard to the source or quality of the microfiche.

Initially distributed microfiche under the NTIS SRIM (Selected Research in Microfiche) is available at greatly reduced unit prices. For this service and for information concerning subscription to NASA printed reports, consult the NTIS Subscription Section, Springfield, Va. 22161.

NOTE ON ORDERING DOCUMENTS: When ordering NASA publications (those followed by the * symbol), use the N accession number. NASA patent applications (only the specifications are offered) should be ordered by the US-Patent-Appl-SN number. Non-NASA publications (no asterisk) should be ordered by the AD, PB, or other *report* number shown on the last line of the citation, not by the N accession number. It is also advisable to cite the title and other bibliographic identification.

Avail: SOD (or GPO). Sold by the Superintendent of Documents, U.S. Government Printing Office, in hard copy. The current price and order number are given following the availability line. (NTIS will fill microfiche requests, as indicated above, for those documents identified by a # symbol.)

Avail: NASA Public Document Rooms. Documents so indicated may be examined at or purchased from the National Aeronautics and Space Administration, Public Document Room (Room 126), 600 Independence Ave., S.W., Washington, D.C. 20546, or public document rooms located at each of the NASA research centers, the NASA Space Technology Laboratories, and the NASA Pasadena Office at the Jet Propulsion Laboratory.

(1) A microfiche is a transparent sheet of film, 105 by 148 mm in size containing as many as 60 to 98 pages of information reduced to micro images (not to exceed 26.1 reduction).

- Avail: DOE Depository Libraries. Organizations in U.S. cities and abroad that maintain collections of Department of Energy reports, usually in microfiche form, are listed in *Energy Research Abstracts*. Services available from the DOE and its depositories are described in a booklet, *DOE Technical Information Center - Its Functions and Services* (TID-4660), which may be obtained without charge from the DOE Technical Information Center.
- Avail: Univ. Microfilms. Documents so indicated are dissertations selected from *Dissertation Abstracts* and are sold by University Microfilms as xerographic copy (HC) and microfilm. All requests should cite the author and the Order Number as they appear in the citation.
- Avail: USGS. Originals of many reports from the U.S. Geological Survey, which may contain color illustrations, or otherwise may not have the quality of illustrations preserved in the microfiche or facsimile reproduction, may be examined by the public at the libraries of the USGS field offices whose addresses are listed in this introduction. The libraries may be queried concerning the availability of specific documents and the possible utilization of local copying services, such as color reproduction.
- Avail: HMSO. Publications of Her Majesty's Stationery Office are sold in the U.S. by Pendragon House, Inc. (PHI), Redwood City, California. The U.S. price (including a service and mailing charge) is given, or a conversion table may be obtained from PHI.
- Avail: BLL (formerly NLL): British Library Lending Division, Boston Spa, Wetherby, Yorkshire, England. Photocopies available from this organization at the price shown. (If none is given, inquiry should be addressed to the BLL.)
- Avail: Fachinformationszentrum, Karlsruhe. Sold by the Fachinformationszentrum Energie, Physik, Mathematik GMBH, Eggenstein Leopoldshafen, Federal Republic of Germany, at the price shown in deutschmarks (DM).
- Avail: Issuing Activity, or Corporate Author, or no indication of availability. Inquiries as to the availability of these documents should be addressed to the organization shown in the citation as the corporate author of the document.
- Avail: U.S. Patent and Trademark Office. Sold by Commissioner of Patents and Trademarks, U.S. Patent and Trademark Office, at the standard price of 50 cents each, postage free.
- Avail: ESDU. Pricing information on specific data items, computer programs, and details on ESDU topic categories can be obtained from ESDU International Ltd. Requesters in North America should use the Virginia address while all other requesters should use the London address, both of which are on page vi.
- Other availabilities: If the publication is available from a source other than the above, the publisher and his address will be displayed entirely on the availability line or in combination with the corporate author line.

GENERAL AVAILABILITY

All publications abstracted in this bibliography are available to the public through the sources as indicated in the category sections. It is suggested that the bibliography user contact his own library or other local libraries prior to ordering any publication inasmuch as many of the documents have been widely distributed by the issuing agencies, especially NASA. A listing of public collections of NASA documents is included on the inside back cover.

PUBLIC COLLECTIONS OF NASA DOCUMENTS

DOMESTIC: NASA and NASA-sponsored documents and a large number of aerospace publications are available to the public for reference purposes at the library maintained by the American Institute of Aeronautics and Astronautics, Technical Information Service, 555 West 57th Street, 12th Floor, New York, New York 10019.

EUROPEAN: An extensive collection of NASA and NASA-sponsored publications is maintained by the British Library Lending Division, Boston Spa, Wetherby, Yorkshire, England for public access. The British Library Lending Division also has available many of the non-NASA publications cited in *Star*. European requesters may purchase facsimile copy or microfiche of NASA and NASA-sponsored documents, those identified by both the symbols # and * from ESA - Information Retrieval Service European Space Agency, 8-10 rue Mario-Nikis, 75738 Paris CEDEX 15, France.

FEDERAL DEPOSITORY LIBRARY PROGRAM

In order to provide the general public with greater access to U.S. Government publications, Congress established the Federal Depository Library Program under the Government Printing Office (GPO), with 50 regional depositories responsible for permanent retention of material, inter-library loan, and reference services. Over 1,300 other depositories also exist. A list of the regional GPO libraries appears on the inside back cover.

ADDRESSES OF ORGANIZATIONS

American Institute of Aeronautics and
Astronautics
Technical Information Service
555 West 57th Street, 12th Floor
New York, New York 10019

British Library Lending Division,
Boston Spa, Wetherby, Yorkshire,
England

Commissioner of Patents and
Trademarks
U.S. Patent and Trademark Office
Washington, D.C. 20231

Department of Energy
Technical Information Center
P.O. Box 62
Oak Ridge, Tennessee 37830

ESA-Information Retrieval Service
ESRIN
Via Galileo Galilei
00044 Frascati (Rome) Italy

ESDU International, Ltd.
1495 Chain Bridge Road
McLean, Virginia 22101

ESDU International, Ltd.
251-259 Regent Street
London, W1R 7AD, England

Fachinformationszentrum Energie, Physik,
Mathematik GMBH
7514 Eggenstein Leopoldshafen
Federal Republic of Germany

Her Majesty's Stationery Office
P.O. Box 569, S.E. 1
London, England

NASA Scientific and Technical Information
Facility
P.O. Box 8757
B.W.I. Airport, Maryland 21240

National Aeronautics and Space
Administration
Scientific and Technical Information
Branch (NIT-1)
Washington, D.C. 20546

National Technical Information Service
5285 Port Royal Road
Springfield, Virginia 22161

Pendragon House, Inc.
899 Broadway Avenue
Redwood City, California 94063

Superintendent of Documents
U.S. Government Printing Office
Washington, D.C. 20402

University Microfilms
A Xerox Company
300 North Zeeb Road
Ann Arbor, Michigan 48106

University Microfilms, Ltd.
Tylers Green
London, England

U.S. Geological Survey Library
National Center – MS 950
12201 Sunrise Valley Drive
Reston, Virginia 22092

U.S. Geological Survey Library
2255 North Gemini Drive
Flagstaff, Arizona 86001

U.S. Geological Survey
345 Middlefield Road
Menlo Park, California 94025

U.S. Geological Survey Library
Box 25046
Denver Federal Center, MS 914
Denver, Colorado 80225

NTIS PRICE SCHEDULES

Schedule A

STANDARD PAPER COPY PRICE SCHEDULE

(Effective January 1, 1983)

Price Code	Page Range	North American Price	Foreign Price
A01	Microfiche	\$ 4.50	\$ 9.00
A02	001-025	7.00	14.00
A03	026-050	8.50	17.00
A04	051-075	10.00	20.00
A05	076-100	11.50	23.00
A06	101-125	13.00	26.00
A07	126-150	14.50	29.00
A08	151-175	16.00	32.00
A09	176-200	17.50	35.00
A10	201-225	19.00	38.00
A11	226-250	20.50	41.00
A12	251-275	22.00	44.00
A13	276-300	23.50	47.00
A14	301-325	25.00	50.00
A15	326-350	26.50	53.00
A16	351-375	28.00	56.00
A17	376-400	29.50	59.00
A18	401-425	31.00	62.00
A19	426-450	32.50	65.00
A20	451-475	34.00	68.00
A21	476-500	35.50	71.00
A22	501-525	37.00	74.00
A23	526-550	38.50	77.00
A24	551-575	40.00	80.00
A25	576-600	41.50	83.00
A99	601-up	- 1	- 2

1/ Add \$1.50 for each additional 25 page increment or portion thereof for 601 pages up.

2/ Add \$3.00 for each additional 25 page increment or portion thereof for 601 pages and more.

Schedule E

EXCEPTION PRICE SCHEDULE

Paper Copy & Microfiche


Price Code	North American Price	Foreign Price
E01	\$ 6.50	\$ 13.50
E02	7.50	15.50
E03	9.50	19.50
E04	11.50	23.50
E05	13.50	27.50
E06	15.50	31.50
E07	17.50	35.50
E08	19.50	39.50
E09	21.50	43.50
E10	23.50	47.50
E11	25.50	51.50
E12	28.50	57.50
E13	31.50	63.50
E14	34.50	69.50
E15	37.50	75.50
E16	40.50	81.50
E17	43.50	88.50
E18	46.50	93.50
E19	51.50	102.50
E20	61.50	123.50
E-99 - Write for quote		
N01	35.00	45.00

TABLE OF CONTENTS


	Page
Category 01 Aeronautics (General)	571
Category 02 Aerodynamics Includes aerodynamics of bodies, combinations, wings, rotors, and control surfaces; and internal flow in ducts and turbomachinery.	573
Category 03 Air Transportation and Safety Includes passenger and cargo air transport operations; and aircraft accidents.	587
Category 04 Aircraft Communications and Navigation Includes digital and voice communication with aircraft; air navigation systems (satellite and ground based); and air traffic control.	590
Category 05 Aircraft Design, Testing and Performance Includes aircraft simulation technology.	594
Category 06 Aircraft Instrumentation Includes cockpit and cabin display devices; and flight instruments.	599
Category 07 Aircraft Propulsion and Power Includes prime propulsion systems and systems components, e.g., gas turbine engines and compressors; and on-board auxiliary power plants for aircraft.	600
Category 08 Aircraft Stability and Control Includes aircraft handling qualities; piloting; flight controls; and autopilots.	609
Category 09 Research and Support Facilities (Air) Includes airports, hangars and runways; aircraft repair and overhaul facilities; wind tunnels; shock tube facilities; and engine test blocks.	611
Category 10 Astronautics Includes astronautics (general); astrodynamics; ground support systems and facilities (space); launch vehicles and space vehicles; space transportation; spacecraft communications, command and tracking; spacecraft design, testing and performance; spacecraft instrumentation; and spacecraft propulsion and power.	613
Category 11 Chemistry and Materials Includes chemistry and materials (general); composite materials; inorganic and physical chemistry; metallic materials; nonmetallic materials; and propellants and fuels.	614

Category 12 Engineering	618
Includes engineering (general); communications; electronics and electrical engineering; fluid mechanics and heat transfer; instrumentation and photography; lasers and masers; mechanical engineering; quality assurance and reliability; and structural mechanics.	
Category 13 Geosciences	628
Includes geosciences (general); earth resources; energy production and conversion; environment pollution; geophysics; meteorology and climatology; and oceanography.	
Category 14 Life Sciences	N.A.
Includes sciences (general); aerospace medicine; behavioral sciences; man/system technology and life support; and planetary biology.	
Category 15 Mathematics and Computer Sciences	629
Includes mathematical and computer sciences (general); computer operations and hardware; computer programming and software; computer systems; cybernetics; numerical analysis; statistics and probability; systems analysis; and theoretical mathematics.	
Category 16 Physics	630
Includes physics (general); acoustics; atomic and molecular physics; nuclear and high-energy physics; optics; plasma physics; solid-state physics; and thermodynamics and statistical physics.	
Category 17 Social Sciences	632
Includes social sciences (general); administration and management; documentation and information science; economics and cost analysis; law and political science; and urban technology and transportation.	
Category 18 Space Sciences	N.A.
Includes space sciences (general); astronomy; astrophysics; lunar and planetary exploration; solar physics; and space radiation.	
Category 19 General	633
Subject Index	A-1
Personal Author Index	B-1
Corporate Source Index	C-1
Contract Number Index	D-1
Report Number Index	E-1
Accession Number Index	F-1

TYPICAL CITATION AND ABSTRACT FROM STAR

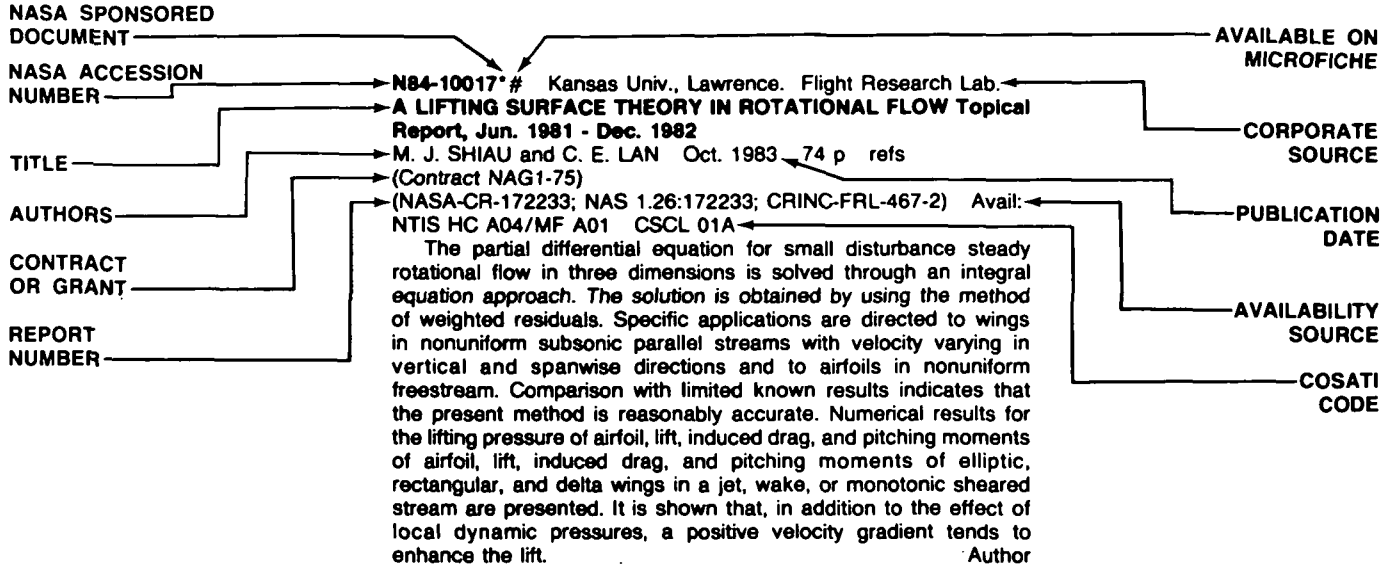

TYPICAL CITATION AND ABSTRACT FROM IAA

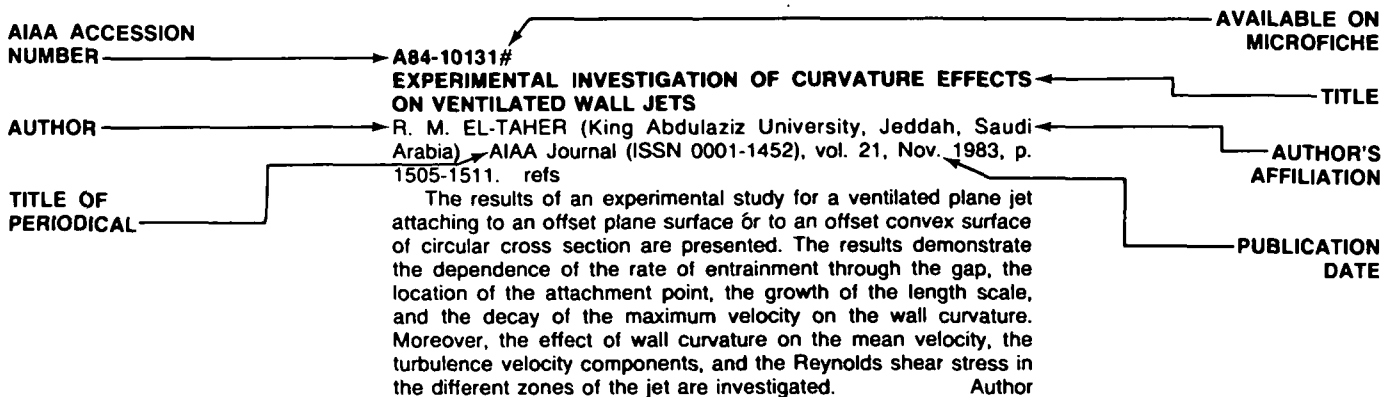

AEROSPACE MEDICINE AND BIOLOGY

(A Continuing Bibliography (Suppl. 178))

SEPTEMBER 1984

01

AERONAUTICS (GENERAL)

A84-34171

EVOLUTION OF THE COMBAT AIRCRAFT [EVOLUTION DE L'AVION DE COMBAT]

L. ROSENTHAL (Centre de Documentation de l'Armement, Paris, France) *L'Aeronautique et l'Astronautique* (ISSN 0001-9275), no. 104, 1984, p. 3-15. In French. refs

The combat aircraft introduced at the 34th Airshow at Le Bourget (the F-20, Mirage III NG, C7, JAS 39, Lavi, and AMX) are described, together with aircraft about to undergo flight testing (e.g., the Grumman X-29A). Attention is also given to combat aircraft projects: the Agil Combat Aircraft, the Taktische Kampf Flugzeug, the Avion de Combat Experimental, and the Dornier-Northrop project (an F-18 with a delta airfoil and with vectorial thrust). Supersonic cruise interceptors (e.g., the Advanced Fighter Concept) and supersonic V/STOL are considered. Topics also covered include maneuverability, flow over tapered bodies, mobile canards, automatic camber variation, generalized automatic control, propulsion, and materials (e.g., with carbon fibers for aeroelastic stability). C.M.

A84-35214#

HISTORY OF SOLAR FLIGHT

R. J. BOUCHER (Astro Flight, Inc., Venice, CA) *AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984*. 14 p. (AIAA PAPER 84-1429)

This paper discusses the seven solar powered aircraft flown to date. The characteristics of these airplanes are reviewed, and the prospects for future advancements in solar flight are addressed. Author

A84-35377#

AUSTRALIAN AIRSPACE MANAGEMENT

T. JENSEN *Navigation* (ISSN 0077-6262), vol. 6, Dec. 1983, p. 1149-1158. refs

The Australian Air Coordinating Committee (ACC), composed of two governmental departments (Defense and Aviation), was formed to resolve joint aviation problems by mutual agreement. ACC's basic principles (e.g., safety and expedition) and working groups (e.g., which determine high speed, low level military training routes) are considered. Also covered are airspace design and sharing, public transport, and air traffic control. A National Airspace Users Advisory Council and five Regional Committees are proposed, the objectives of which will include promoting discussion and consultation between the Department of Aviation and the civil airspace users. The Canadian airspace modernization system is considered as a future model. C.M.

N84-24528*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

V/STOL WIND-TUNNEL TESTING

D. G. KOENIG May 1984 74 p refs (NASA-TM-85936; A-9694; NAS 1.15:85936) Avail: NTIS HC A04/MF A01 CSCL 01B

Factors influencing effective program planning for V/STOL wind-tunnel testing are discussed. The planning sequence itself, which includes a short checklist of considerations that could enhance the value of the tests, is also described. Each of the considerations, choice of wind tunnel, type of model installation, model development and test operations, is discussed, and examples of appropriate past and current V/STOL test programs are provided. A short survey of the moderate to large subsonic wind tunnels is followed by a review of several model installations, from two-dimensional to large-scale models of complete aircraft configurations. Model sizing, power simulation, and planning are treated, including three areas of test operations: data-acquisition systems, acoustic measurements in wind tunnels, and flow surveying. Author

N84-24529# Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio. Control Systems Development Branch.

PROCEEDINGS OF THE WORKSHOP ON MULTIVARIABLE CONTROL SYSTEMS Final Report, Mar. 1982 - Sep. 1983

M. A. MASI and D. E. RUSS Sep. 1983 667 p refs Workshop held at Wright-Patterson AFB, Ohio, 3 Dec. 1982 (AD-A139050; AFWAL-TR-83-3098) Avail: NTIS HC A99/MF A01 CSCL 01C

The advent of highly augmented flight control systems, system integration at all levels, and the use of multiple function control surfaces, has led to the extensive requirement for multivariable multi-input/multi-output control systems. The need for alternative multivariable design techniques was documented. The present control law design methodologies of linear quadratic regulator (LQR), eigenvalue/eigenvector assignment, and classical single input/output do not always meet the handling qualities performance and control system specifications, i.e., phase and gain margins and bandwidth, without modification to cope with the high dynamic uncertainties of an aircraft. Application of singular perturbation method of asymptotic eigenvalue assignment as applied to control systems has progressed from modal control theory through complete eigenstructure assignment to the use of high gain feedback to the use of output feedback for error-actuated tracker controllers using the method described for the design of several multivariable control systems.

N84-24536# Transportation Systems Center, Cambridge, Mass. GENERAL AVIATION ACTIVITY AND AVIONICS SURVEY Annual Summary Report

J. C. SCHWENK and B. A. ROVNER Dec. 1983 232 p (AD-A139936; TSC-FAA-83-3; FAA-MS-83-5) Avail: NTIS HC A11/MF A01 CSCL 01B

This report presents the results and a description of the 1982 General Aviation Activity and Avionics Survey. The survey was conducted during 1983 by the FAA to obtain information on the activity and avionics of the United States registered general aviation aircraft fleet, the dominant component of civil aviation in the U.S. The survey was based on a statistically selected sample of about 10.2 percent of the general aviation fleet and obtained a response

01 AERONAUTICS (GENERAL)

rate of 68 percent. Survey results are based upon responses but are expanded upward to represent the total population. Survey results revealed that during 1982 an estimated 36.5 million hours of flying time were logged by the 209,779 active general aviation aircraft in the U.S. fleet, yielding a mean annual flight time per aircraft of 174 hours. The active aircraft represented about 82 percent of the registered general aviation fleet. The report contains breakdowns of these and other statistics by manufacturer/model group, aircraft type, state and region of based aircraft, and primary use. Also included are fuel consumption, lifetime airframe hours, avionics, and engine hours estimates. In addition, tables are included for detailed analysis of the avionics capabilities of the GA fleet. GRA

N84-25605*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

AN ADVANCED PITCH CHANGE MECHANISM INCORPORATING A HYBRID TRACTION DRIVE

B. M. STEINETZ, D. F. SARGISSON (GE, Evendale, Ohio), G. WHITE (Transmission Research Inc.), and S. H. LOEWENTHAL 1984 18 p refs Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984 (Contract NAS3-23044)

(NASA-TM-83709; E-2137; NAS 1.15:83709; AIAA-84-1383)
Avail: NTIS HC A02/MF A01 CSCL 01A

A design of a propeller pitch control mechanism is described that meets the demanding requirements of a high-power, advanced turboprop. In this application, blade twisting moment torque can be comparable to that of the main reduction gearbox output: precise pitch control, reliability and compactness are all at a premium. A key element in the design is a compact, high-ratio hybrid traction drive which offers low torque ripple and high torsional stiffness. The traction drive couples a high speed electric motor/alternator unit to a ball screw that actuates the blade control links. The technical merits of this arrangement and the performance characteristics of the traction drive are discussed. Comparisons are made to the more conventional pitch control mechanisms.

Author

N84-25606*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

AN ANALYTICAL METHOD TO PREDICT EFFICIENCY OF AIRCRAFT GEARBOXES

N. E. ANDERSON, S. H. LOEWENTHAL, and J. D. BLACK (Allison Gas Turbine Operations) 1984 23 p refs Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984 (NASA-TM-83716; E2169; NAS 1.15:83716; USAAVSCOM-TR-84-C-8; AIAA-84-1500) Avail: NTIS HC A02/MF A01 CSCL 01A

A spur gear efficiency prediction method previously developed by the authors was extended to include power loss of planetary gearsets. A friction coefficient model was developed for MIL-L-7808 oil based on disc machine data. This combined with the recent capability of predicting losses in spur gears of nonstandard proportions allows the calculation of power loss for complete aircraft gearboxes that utilize spur gears. The method was applied to the T56/501 turboprop gearbox and compared with measured test data. Bearing losses were calculated with large scale computer programs. Breakdowns of the gearbox losses point out areas for possible improvement. Author

N84-25607*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

APPLICATION OF AN OPTIMIZATION METHOD TO HIGH PERFORMANCE PROPELLER DESIGNS

K. C. LI (Purdue Univ.) and G. L. STEFKO 1984 11 p refs Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984

(NASA-TM-83710; E-2086; NAS 1.15:83710; AIAA-84-1203)
Avail: NTIS HC A02/MF A01 CSCL 01A

The application of an optimization method to determine the propeller blade twist distribution which maximizes propeller efficiency is presented. The optimization employs a previously

developed method which has been improved to include the effects of blade drag, camber and thickness. Before the optimization portion of the computer code is used, comparisons of calculated propeller efficiencies and power coefficients are made with experimental data for one NACA propeller at Mach numbers in the range of 0.24 to 0.50 and another NACA propeller at a Mach number of 0.71 to validate the propeller aerodynamic analysis portion of the computer code. Then comparisons of calculated propeller efficiencies for the optimized and the original propellers show the benefits of the optimization method in improving propeller performance. This method can be applied to the aerodynamic design of propellers having straight, swept, or nonplanar propeller blades. Author

N84-25608# Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany). Information und Dokumentation.

PERFORMANCES AND PROGRAMS AS A REFLECTION OF THE PROJECTS AND PROGRAMS AS A REFLECTION OF THE PERFORMANCES OF ENGINEERS IN AIRCRAFT MAKING BY HANS-WOCKE [PROJEKTE UND PROGRAMME ALS SPIEGEL DER LEISTUNGEN DES FLUGZEUGBAU-INGENIERS HANS WOCKE]

H. FLOSDORFF 1983 31 p In GERMAN Presented at VDI-Tech. Univ., Hamburg Kollog. zue Ehren von Herrn Senator E. H. Dipl.-Ing. Hans Wocke, Hamburg, Oct. 1983 (MBB-UT-24-83-O) Avail: NTIS HC A03/MF A01

Developments in the European Aerospace technology, and in particular the development of the European Airbus A300, are described. Progress in aerodynamics, wind tunnel tests, statics and construction progress in the industry are outlined. Transport aircraft design and development are examined. The organization of a team of aeronautic engineers which has gained experience in the areas of construction, research and development, and management of international projects is discussed.

Transl. by E.A.K.

N84-25611# Air Force Systems Command, Wright-Patterson AFB, Ohio. Foreign Technology Div.

JOURNAL OF AERONAUTICAL MATERIALS (SELECTED ARTICLES)

27 Mar. 1984 120 p Transl. into ENGLISH from Hangkong Cailiao (China), v. 3, no. 1 p 1-12; 17-45; 58-58 (AD-A140181; FTD-ID(RS)T-1870-83) Avail: NTIS HC A06/MF A01 CSCL 01C

The physical properties and mechanical behavior of various alloys and composite materials are discussed. Specific materials include titanium and other metal alloys, silicon carbide fiber reinforced aluminum composites, and glass fiber/epoxy resin composites; among the physical properties reviewed were superplasticity, notch strength, and tensile strength. The effect of various influences on such processes as solidification, curing, crack propagation, and thermal fatigue is presented. R.S.F.

N84-25612# Naval Postgraduate School, Monterey, Calif.

NAVAL AVIATION IMA REPAIR CAPABILITY: A READINESS TO RESOURCES APPROACH M.S. Thesis

D. R. MERRILL Dec. 1983 103 p (AD-A140465) Avail: NTIS HC A06/MF A01 CSCL 05A

This thesis studies intermediate repair planning at the Naval Air Systems Command (NAVAIR) level. Maintenance information system initiatives (Naval Aviation Logistics Command Management Information System (NALCOMIS)/Naval Aviation Logistics Data Analysis (NALDA)/AIMD Performance Management System (APMS) and an analytical systems model (Analytic Hierarchy Process (AHP)) are examined. The study concludes that information system initiatives provide the performance measurement orientation and information processing base required in support of NAVAIR tactical planning. It further concludes that complex logistics problems can be modeled through the AHP. AHP is a promising technique for integrating performance information and expert opinion into a hierarchical, multiple objective planning structure. It provides a method for determining resource requirement priorities in support of readiness goals. The study recommends that research

be expanded to include development of a NAVAIR decision support framework utilizing the AHP. GRA

N84-25613# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

WORKSHOP ON REQUIREMENTS FOR AIRCRAFT CORROSION CONTROL

W. M. IMRIE, ed. Mar. 1984 78 p refs Workshop held in London, 10-15 Apr. 1983

(AGARD-R-714; ISBN-92-835-1467-X) Avail: NTIS HC A05/MF A01

Conference proceedings on aircraft corrosion and corrosion prevention are given. A number of topics are discussed in the areas of design specifications, manufacturing, maintenance, and cost.

N84-25619# Atlantic Fleet, Norfolk, Va.

US NAVY CORROSION CONTROL MAINTENANCE

G. T. BROWNE /in AGARD Workshop on Requirements for Aircraft Corrosion Control 11 p Mar. 1984

Avail: NTIS HC A05/MF A01

The U.S. Navy Aircraft Corrosion Prevention/Control Maintenance Program is described. Program elements, present maintenance practice, maintenance control procedures and corrective actions from discovery, resolution and documentation are discussed. A system of checks and balances which are accomplished through a material condition audit program that assesses the quality of information provided for use by mechanics and the ability of the aircraft operator to maintain the aircraft are discussed. The training for personnel involved in the program is also discussed. R.J.F.

N84-25621# National Defence Headquarters, Ottawa (Ontario). Directorate of Aerospace Support Engineering.

CORROSION CONTROL MAINTENANCE PRACTICES FOR CANADIAN AIRCRAFT

R. SIMARD /in AGARD Workshop on Requirements for Aircraft Corrosion Control 7 p Mar. 1984

Avail: NTIS HC A09/MF A01

The corrosion control program for aircraft of the Canadian Armed Forces is reviewed. Documentation outlining general guidelines and policy is presented along with excerpts from a manual specific to one particular aircraft. The effects of the operational environment on the extent of the corrosion control program for an aircraft is discussed, with Sea King helicopters and CF-104 aircraft serving as examples. The equipment contained in a corrosion control first aid kit for CF aircraft is highlighted, along with instructions for its use. The training given to CF aviation tradesmen is also outlined. Finally, the protective coating system selected for all CF aircraft is described and its importance to the overall corrosion control program is noted. R.J.F.

N84-25623# Naval Air Development Center, Warminster, Pa.

METHODOLOGY FOR ASSESSMENT OF CORROSION COSTS

I. S. SHAFFER /in AGARD Workshop on Requirements for Aircraft Corrosion Control 7 p Mar. 1984 refs

Avail: NTIS HC A05/MF A01

Corrosion has a significant impact on the life cycle costs of naval aircraft. Materials, energy, labor and technical expertise that would otherwise be available for alternative uses must be allocated for corrosion control. To help justify the added expense of designing more corrosion resistance in future Navy aircraft and spending more on corrosion research and technology, valid estimates of the magnitude of corrosion costs and the relative distribution of those costs among various aircraft types and aircraft systems are important. While many factors make up the Navy's cost of corrosion for aircraft ownership, the overwhelming one is the effort spent doing maintenance. The maintenance data collection system is discussed. Tables and graphs showing costs are given. R.J.F.

N84-25624# British Airways, Middlesex (England). Aircraft Engineering (Structures).

COST OF CORROSION FOR COMMERCIAL AVIATION

R. G. MITCHELL /in AGARD Workshop on Requirements for Aircraft Corrosion Control 1 p Mar. 1984

Avail: NTIS HC A05/MF A01

A preliminary analysis of aircraft corrosion costs based on the annual costs of scheduled maintenance, modification, and replacement is discussed. The results show the financial cost of the corrosion problem which can be expressed in several ways. The direct cost per flying hour, depending on operators and aircraft type (not including maintenance overhead) was \$8-\$12 in 1979 and \$8-\$20 in 1983. The percentage of direct airframe maintenance cost was between 6% and 8%. The total annual direct cost for International Transport Association member airlines was \$100 M based on 1976 operations and \$200 M based on 1982 operations. It should be noted that the values represent costs for a range of operators and aircraft types. The lowest value is very conservative and is largely based on one operators actual modification project costs only. The higher value is probably closer to the true cost since it is based upon a breakdown of actual modification, routine maintenance and inspection costs. Closer examination of these figures reveal that the major component in the cost values associated with corrosion prevention and control is due to labor costs. An additional cost not reflected in the above figures is the unscheduled downtime both at main base and route stations. R.J.F.

N84-25625# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

SPECIAL COURSE ON V/STOL AERODYNAMICS

Loughton, England Apr. 1984 383 p refs Course held in Rhode-Saint-Genese, Belgium, 14-18 May 1984, and in Moffett Field, Calif., 4-8 Jun. 1984

(AGARD-R-710; ISBN-92-835-1472-6) Avail: NTIS HC A17/MF A01

The aim of the Special Course on V/STOL Aerodynamics was to outline and discuss the additional knowledge of aerodynamics needed to embark on the design of V/STOL aircraft. The influence of V/STOL features on wing design, layout considerations, engine and air intake considerations, effects of jet effluxes, wind tunnel and flight testing, maneuverability and control, performance assessment and special aspects of flight aerodynamics were discussed.

02

AERODYNAMICS

Includes aerodynamics of bodies, combinations, wings, rotors, and control surfaces; and internal flow in ducts and turbomachinery.

A84-33849

AN ADVANCED AEROSPIKE TO MINIMIZE NOSE DRAG

J. P. REDING and D. M. JECMEN (Lockheed Missiles and Space Co., Inc., Sunnyvale, CA) Lockheed Horizons, no. 15, 1984, p. 46-54.

The design of a hydrogen-burning aerospike for the nose of ballistic missiles is discussed, and some preliminary experimental results are summarized and illustrated with graphs and photographs. It is shown that the aerospike with combustion reduces overall drag by 75 percent relative to the smooth nose and by 50 percent relative to a nonburning aerospike. The techniques developed to scale the wind-tunnel test results to operational values and the system design factors are examined. Using solid propellants supplying 15 percent usable H₂ by weight, it is estimated that a spike 1.5 nose diameters in length with H₂ mass-flow ratio 0.0003 will give maximum range gain. Further study is recommended to determine whether combustion itself or the heat injected is the major factor in reducing drag. T.K.

02 AERODYNAMICS

A84-34172

EXHAUST SYSTEM FOR COMBAT AIRCRAFT OPTIMIZED FOR SUPERSONIC CRUISE [ENSEMBLE D'EJECTION POUR AVION DE COMBAT OPTIMISEE EN CROISIERE SUPERSONIQUE]

J.-M. HARDY (S.N.E.C.M.A., Centre de Melun-Villaroche, Moissy-Cramayel, Seine-et-Marne, France) L'Aeronautique et l'Astronautique (ISSN 0001-9275), no. 104, 1984, p. 16-28. In French. refs

The Concorde nozzle principle is described together with its calculation methods. Results from an optimization study of the internal structure of the Concorde ejector in supersonic cruise are analyzed, emphasizing the significance of the secondary pressure level in the selection of the primary ejector type and taking into consideration the hot gas effect during interpretation of wind tunnel data. Topics covered include techniques for supersonic cruise optimization; Mirage nozzles; calculations of the primary flow, of the flow in a two-flux ejector (short and long ejectors); the adaptation of the afterbody to subsonic flight conditions; the effect of external parameters on afterbody performance; long ejectors for a primary convergent-divergent nozzle; biconic nozzles; and optimization of the propulsion system. C.M.

A84-34342#

THEORY OF A THIN WING WITH A CIRCULAR MEAN LINE [THEORIE DE L'AILE MINCE ASQUELETTE CIRCULAIRE]

C. JACOB Revue Roumaine des Sciences Techniques, Serie de Mecanique Appliquee (ISSN 0035-4074), vol. 28, Sept.-Oct. 1983, p. 453-473. In French. refs

A thin wing with a circular nonnegligible curvature of the mean line and subjected to rotation in a plane ideal-fluid flow is investigated analytically, applying classical theory. The resulting Dirichlet problem is solved for the complex plane having a circular arc as its boundary, and the solution is applied to cases with symmetric, asymmetric, or arbitrary rational parameters. General expressions for determining the complex velocity and direct methods for the case of a wing reduced to its circular mean line are derived. T.K.

A84-34347#

THE SUPERSONIC FLOW AROUND A CONIC NOZZLE [L'ÉCOULEMENT SUPERSONIQUE AUTOUR D'UN INJECTEUR]

H. DUMITRESCU (Institutul National pentru Creatie Stiintifica si Tehnica, Bucharest, Rumania) and E. CARAFOLI Revue Roumaine des Sciences Techniques, Serie de Mecanique Appliquee (ISSN 0035-4074), vol. 29, Mar.-Apr. 1984, p. 107-118. In French.

Velocity and pressure fields are determined analytically for a porous cone in an inviscid uniform supersonic flow at zero incidence when a combustion mixture is injected through the wall and ignited, forming a combustion wave. The entire flow region from the shock wave to the cone surface is characterized, and a division into hot and cold zones is found at the flame front. The results are presented in graphs. T.K.

A84-34454#

COMPUTATION OF TRANSONIC FLOW AROUND AIRFOILS WITH TRAILING EDGE AND SHOCK/BOUNDARY LAYER INTERACTIONS

M. M. S. KHAN (Lockheed-Georgia Co., Marietta, GA), G. R. INGER (West Virginia University, Morgantown, WV), and S. G. LEKOUKIS (Georgia Institute of Technology, Atlanta, GA) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 380-388. Research supported by the Lockheed-Georgia Co. refs

Previously cited in issue 18, p. 2841, Accession no. A82-37474

A84-34459*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

TWO-DIMENSIONAL WIND-TUNNEL INTERFERENCE FROM MEASUREMENTS ON TWO CONTOURS

E. T. SCHAIRER (NASA, Ames Research Center, Moffett Field, CA) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 414-419. refs

This paper describes how wall-induced velocities near a model in a two-dimensional wind tunnel can be estimated from upwash distributions measured along two contours surrounding a model. The method is applicable to flows that can be represented by linear theory. It was derived by applying the Schwarz Integral Formula separately to the two contours and by exploiting the free-air relationship between upwashes along the contours. Advantages of the method are that only one flow quantity need be measured and no representation of the model is required. A weakness of the method is that it assumes streamwise interference velocity vanishes far upstream of the model. This method was applied to a simple theoretical model of flow in a solid-wall wind tunnel. The theoretical interference velocities and the velocities computed using the method were in excellent agreement. The method was then used to analyze experimental data acquired during adaptive-wall experiments at Ames Research Center. This analysis confirmed that the wall adjustments reduced wall-induced velocities near the model. Author

A84-34460*# Boeing Commercial Airplane Co., Renton, Wash. **ON THE CONVERGENCE OF UNSTEADY GENERALIZED AERODYNAMIC FORCES**

W. S. ROWE (Boeing Commercial Airplane Co., Flutter Research Group, Renton, WA) and H. J. CUNNINGHAM (NASA, Langley Research Center, Unsteady Aerodynamics Branch, Hampton, VA) (Structures, Structural Dynamics and Materials Conference, 22nd, Atlanta, GA., April 6-8, 1981, and AIAA Dynamics Specialists Conference, Atlanta, GA, April 9, 10, 1981, Technical Papers. Part 2, p. 699-708) Journal of Aircraft (ISSN 9921-8669), vol. 21, June 1984, p. 420-427. refs

Previously cited in issue 12, p. 1923, Accession no. A81-29500

A84-34461#

AERODYNAMICS OF POINTED FOREBODIES AT HIGH ANGLES OF ATTACK

V. J. MODI, T. RIES, A. KWAN (British Columbia, University, Vancouver, Canada), and E. LEUNG Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 428-432. Sponsorship: Natural Sciences and Engineering Research Council of Canada. refs (Contract NSERC-A-2181)

Previously cited in issue 19, p. 2793, Accession no. A83-41942

A84-34462#

EFFICIENT METHOD FOR CALCULATING THE AXIAL VELOCITIES INDUCED ALONG ROTATING BLADES BY TRAILING HELICAL VORTICES

O. RAND and A. ROSEN (Technion - Israel Institute of Technology, Haifa, Israel) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 433-435. refs

An efficient method for the calculation of induced velocities in the axial component of the vortex filaments that are trailed by propeller blades is presented. Attention is given to the case of three equally spaced propeller blades which are rotating with constant velocity. The use of this approximate method is noted to reduce the region of integration in calculations by almost three orders of magnitude. O.C.

A84-34464#

CALCULATION OF POTENTIAL FLOW PAST SIMPLE BODIES USING AXIAL SOURCES AND A LEAST-SQUARES METHOD

G. S. CAMPBELL (Connecticut, University, Storrs, CT) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 437, 438. refs

Attention is given to results of a study employing systematic variations of the number of sources and control points in the potential flow of ellipsoids of varying fineness ratio. The stream function $\psi(x, y)$ is evaluated at a large number of points on the surface of the body. A small absolute value of ψ at all points identifies an accurate position. O.C.

A84-34465#

UNSTEADY PRESSURES AND FORCES DURING TRANSONIC BUFFETING OF A SUPERCRITICAL AIRFOIL

B. H. K. LEE and L. H. OHMAN (National Aeronautical Establishment, High Speed Aerodynamics Laboratory, Ottawa, Canada) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 439-441; Abridged. refs (AD-A133139; NAE-AN-14)

Previously announced in STAR as N84-15503

A84-34466#

MEASUREMENTS OF GROUND EFFECT FOR DELTA WINGS

J. KATZ and D. LEVIN (Technion - Israel Institute of Technology, Haifa, Israel) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 441-443. Research supported by the Technion - Israel Institute of Technology. refs

The effect of ground proximity on the aerodynamic performance of delta wings is investigated for wings with an aspect ratio of 0.71 at high angles of attack (up to 40 deg). The main conclusion of the study is that the ground effect increases the wing lift even in the case of the vortex-induced lift of delta wings. The lift increase is larger for positive angles of attack than for negative ones. This difference is attributed to the effect of a small displacement in the location of the leading-edge vortices trapped between the wing and the ground surface. V.L.

A84-34467#

PROFILE DRAG FROM LASER-DOPPLER VELOCIMETER MEASUREMENT

S. KOBAYASHI (ORI, Inc., Ship Systems Engineering Div., Silver Spring, MD) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 444-446. refs (Contract N00014-76-C-0357)

The momentum theory and the hypothetical flow concept introduced by Betz (1979) are used to derive a formula for predicting the profile drag from laser-Doppler velocimetry data. The values of the profile drag computed from the measured velocity distributions at various streamwise locations are presented for two types of foil sections. The values obtained are found to be in good agreement with data in the literature. V.L.

A84-34468*# Maryland Univ., College Park.

ENGINEERING ANALYSIS OF DROOPED LEADING-EDGE WINGS NEAR STALL

J. D. ANDERSON, JR. (Maryland, University, College Park, MD) and T. H. CHO Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 446-448. refs (Contract NSG-1570)

Numerical results obtained with a three-dimensional vortex panel computer program for the calculation of inviscid, incompressible (potential) flow over infinitely thin finite wings with camber are presented. The program, which is designed for wings with drooped leading edge discontinuities, is essentially a numerical representation of lifting surface theory, involving both spanwise and chordwise distributions of vorticity. The results also include two engineering approximations. First, the effect of the leading-edge discontinuities is modeled by assuming that the vortices emanating from the discontinuities aerodynamically divide the wing into three distinct sections of lower aspect ratio. Secondly, the effect of the separated flow at high angle of attack is modeled by applying

rectangular vortex panels with a varying vortex strength over the portions of the wing with attached flow. V.L.

A84-34500

ON THE AERODYNAMIC OPTIMIZATION OF SUPERSONIC WINGS

H. J. BOS Delft, Technische Hogeschool, Doctor in de Technische Wetenschappen Thesis, 1984, 361 p. refs

Drag minimization for a wing of zero thickness and given lift is examined in the context of linearized supersonic wing theory. Planform variations are considered, and the curvature effect of subsonic leading edges is stressed. Topics covered include momentum flux methods, qualitative properties of optimum wings, and applications of the inverse and the direct optimization methods. It is shown that a disturbance velocity potential with a degree of one-half homogeneity is required, and a method that extends Germain's and Fenain's homogeneous flow theory to noninteger degrees of homogeneity is provided. C.M.

A84-34691

THE SEARS PROBLEM FOR A LIFTING AIRFOIL REVISITED - NEW RESULTS

H. M. ATASSI (Notre Dame, University, Notre Dame, IN) Journal of Fluid Mechanics (ISSN 0022-1120), vol. 141, April 1984, p. 109-122. refs (Contract AF-AFOSR-82-0269)

It is shown that for a thin airfoil with small camber and small angle of attack moving in a periodic gust pattern, the unsteady lift caused by the gust can be constructed by linear superposition to the Sears lift of three independent components accounting separately for the effects of airfoil thickness, airfoil camber and non-zero angle of attack to the mean flow. This is true in spite of the nonlinear dependence of the unsteady flow on the mean potential flow of the airfoil. Specific lift formulas are derived and analyzed to assess the importance of mean flow angle of attack and airfoil camber on the gust response. Author

A84-34695

PROGRESS TOWARDS A THEORY OF JET-FLAP THRUST RECOVERY

P. M. BEVILAQUA, E. F. SCHUM, and C. J. WOAN (Rockwell International Corp., Columbus, OH) Journal of Fluid Mechanics (ISSN 0022-1120), vol. 141, April 1984, p. 347-364. refs (Contract F49620-78-C-0069)

A combination of analysis and testing has been utilized to develop a theory of jet-flap thrust recovery at the low speeds and high deflection angles characteristic of V/STOL lift systems. The contribution of jet mixing to the loss of thrust recovery has been computed with a viscid/inviscid interaction analysis. The results of this computation are compared to surface pressure and wake survey measurements made with a two-dimensional jet-flapped airfoil model. It is concluded that the jet-mixing drag causes a small loss of recovery at small values of the jet-thrust coefficient and deflection angle. However, at larger values of either jet parameter, the mainstream separates from the airfoil, producing a large loss of recovery. The loss increases suddenly, since it is due to bursting of the leading-edge separation bubble. Author

A84-34719

COMPUTATION OF THE THRUST VECTOR OF OBLIQUELY CUT SUPERSONIC NOZZLES [BERECHNUNG DES SCHUBVEKTORS BEI SCHRAEG ABGESCHNITTENEN UEBERSCHALLDUESEN]

G. JUNGCLAUS (Messerschitt-Boelkow-Blohm GmbH, Munich, West Germany) (Deutsche Gesellschaft fuer Luft- und Raumfahrt, Sitzung, Ottobrunn, West Germany, Dec. 7, 8, 1982) Zeitschrift fuer Flugwissenschaften und Weltraumforschung (ISSN 0342-068X), vol. 8, Mar.-Apr. 1984, p. 110-112. In German.

The axial and lateral thrust of supersonic nozzles with rotational symmetry and obliquely cut exits is calculated using a simplified approximation technique in stream-tube theory. The results are compared with those for side-deflected rotationally symmetric and obliquely cut plane nozzles and confirmed by experimental measurements. T.K.

02 AERODYNAMICS

A84-34832

MODELLING OF AN AIRFOIL EMPIRICAL FLOW FIELD BELOW AND THROUGH DYNAMIC STALL

D. FAVIER, C. MARESCA, and J. REBONT (Aix-Marseille II, Universite, Marseille, France) Journal de Mecanique Theorique et Appliquee (ISSN 0750-7240), vol. 3, no. 1, 1984, p. 15-39. Sponsorship: Direction Technique des Constructions Aeronautiques. refs
(Contract DTCA-78/98417)

Analytical models of the incompressible flow around a NACA 0012 airfoil below and during dynamic stall are developed. A potential-flowfield approach is employed, with provision for concentrated vorticity regions in the vicinity of the airfoil surface; the model for dynamic stall requires some empirical input. The results are presented in graphs and diagrams, and good agreement is obtained with published experimental measurements. T.K.

A84-35017#

EXPERIMENTAL INVESTIGATION OF WALL INTERFERENCE AND TWO-DIMENSIONALITY OF THE FLOW IN A TRANSONIC AIRFOIL WIND TUNNEL

TH. HOTTNER (Stuttgart, Universitaet, Stuttgart, West Germany) and N. ZHANG (Northwestern Polytechnical University, Journal, vol. 2, April 1984, p. 151-162. In Chinese, with abstract in English. refs

An experimental investigation in an airfoil wind tunnel to determine the effect of the ratio of the half height of the test section (S) to the airfoil chord (L) on the flow around airfoils is reported. The results indicate that, for Mach number smaller than 0.75, the S/L ratio can be reduced to 1.25 without introducing significant model blockage interference effects. However, satisfactory results for the lift coefficient were not obtained for experiments involving angle of attack and S/L less than 1.5. The two-dimensionality of the flow around airfoils was studied in order to ascertain the effects of the side wall interference at the test section. The results indicate that, for angle of attack of 6 or 8 deg, the two-dimensionality is very inferior for S/L = 1.5 as compared to S/L = 2.0. C.D.

A84-35018#

A STUDY ON THE BETWEEN-STAGE FLOW PATTERN OF AN AXIAL-FLOW COMPRESSOR WITH INLET DISTORTION - CALCULATION METHOD FOR AND EXPERIMENTAL RESEARCH ON INLET DISTORTION TRANSMISSION

W. LI, M. CONG, and F. CHEN (Northwestern Polytechnical University, Journal, vol. 2, April 1984, p. 163-174. In Chinese, with abstract in English. refs

A numerical method for calculating an unsymmetrical between-stage flow of a multistage axial-flow compressor with inlet distortion is presented. The effects of circumferential velocity fluctuation and of flow unsteadiness are taken into account. An actuator-disk/crossflow/hysteresis model is developed and experimentally verified using a turbojet engine with a nine-stage axial-flow compressor. The inlet distortion caused by the screen and the circumferential profiles of the total and static pressures and of the total temperature at the inlet, exit, and interstages of the compressor are measured for engine speeds of 98.9, 93.3, 90, and 87 percent of the engine design speed. Comparison of predicted results with the experimental data shows that the introduction of crossflow and unsteady effects into the model provides better prediction results. C.D.

A84-35023#

AN APPROXIMATE ANALYTICAL SOLUTION OF INCOMPRESSIBLE POTENTIAL FLOW AROUND A CIRCULAR CYLINDER BETWEEN TWO PARALLEL FLAT PLATES

C. Q. LIN (Northwestern Polytechnical University, Xian, Shaanxi, People's Republic of China) (Northwestern Polytechnical University, Journal, vol. 2, no. 2, 1984) Northwestern Polytechnical University, English Translation of Selected Papers, ET-11, April 1984, p. 1-9. Translation.

An approximate analytical solution of incompressible potential flow around a circular cylinder between two parallel flat plates is

given in the present paper. The Joukowski transformation is first used by which the circular cylinder is mapped into a secant along the streamline, and the plates into walls of a channel with variable cross sections. Then the solution of the problem is obtained by using the asymptotic expansion of stream function for a slender channel. The accuracy of this approximate analytical solution is fairly good. Author

A84-35173#

COMPUTATIONAL DESIGN AND VALIDATION TESTS OF ADVANCED CONCEPT SUBSONIC INLETS

T. J. BARBER (United Technologies Research Center, East Hartford, CT), D. C. IVES, D. P. NELSON, and R. M. MILLER (United Technologies Corp., Pratt and Whitney Group, East Hartford, CT) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 9 p. refs
(AIAA PAPER 84-1329)

A NASA/industry cooperative program was established to develop new computational methodologies for subsonic inlet design, and to demonstrate them in the design of several configurations. The program produced three P and W designs that were tested at NASA Langley Research Center. The basic computational methods were corroborated by the test results through comparisons with the predicted surface pressure distributions as well as with the calculated total drag coefficient. Furthermore, the analysis and test program demonstrated that the use of laminar shock free concepts in combination with an inverse analysis can produce performance improvements over conventionally designed inlets. Author

A84-35175*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

FLOW-FIELD INVESTIGATION OF A SUPERCRUISE FIGHTER MODEL

D. E. REUBUSH, E. A. BARE, S. F. YAROS (NASA, Langley Research Center, Transonic Aerodynamics Div., Hampton, VA), and J. A. YETTER (NASA, Langley Research Center, Hampton, VA; Boeing Military Airplane Co., Seattle, WA) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 13 p. refs
(AIAA PAPER 84-1331)

A NASA Langley investigation was conducted in the 16-foot Transonic Tunnel to survey the flow field around a model of a Supersonic cruise fighter configuration. In this investigation, a model of a supersonic cruise fighter configuration formerly utilized in afterbody-nozzle performance investigations was surveyed with a single, multiholed probe to determine local values of angle of attack, side flow, and Mach number. The investigation was conducted at Mach numbers of 0.6, 0.9, and 1.2 at angles of attack from 0 to 10 deg. The purpose of the investigation was to provide a data base of experimental data for use in verification of theoretical methods, and to compare the experimental data with predictions from currently available theoretical techniques. Results from this investigation show that local angles of attack were generally greater than free stream above the wing and generally less than free stream below the wing. Also there were large spanwise gradients above the wing at the higher angles of attack. The comparisons of experimental data with theoretical predictions show that the theoretical techniques give a qualitative estimate of the flow-field but will require much work to give good quantitative results. Author

A84-35190#

STUDY OF AN ASYMMETRIC FLAP NOZZLE AS A VECTOR-THRUST DEVICE

C. C. WU (California State University, Los Angeles, CA) and W. L. CHOW (Illinois, University, Urbana, IL) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 9 p. refs
(Contract DAAG29-79-C-0184; DAAG29-83-K-0043)
(AIAA PAPER 84-1360)

The problem of compressible flow through an asymmetric 2-D convergent nozzle is solved by employing the method of hodograph

transformation, coupled with finite-difference computation. With the given appropriate flow parameters, the solution is first established in the hodograph domain. The corresponding nozzle configuration and local flowfield properties are subsequently obtained through direct integration. The vector-thrust performance and configuration design under certain constraints are also presented. Wind tunnel experiments are also conducted to obtain pressure data along the nozzle walls for verification purposes. The numerical results are found to be in good agreement with the measured data.

Author

A84-35192*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

NUMERICAL SIMULATION OF FLOW THROUGH INLETS/DIFFUSERS WITH TERMINAL SHOCKS

N. A. TALCOTT, JR. and A. KUMAR (NASA, Langley Research Center, High-Speed Aerodynamics Div., Hampton, VA) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 8 p. refs (AIAA PAPER 84-1362)

Two-dimensional Euler and Navier-Stokes solutions of the flow through three inlet/diffuser configurations with terminal shock systems are reported. Calculations without bleed indicate that the terminal shock location is very sensitive to the outflow back pressure. For cases where there are no available experimental results, it becomes difficult to estimate the back pressure that will result in a terminal shock. Estimates based on quasi-one-dimensional analysis are not found adequate for complex two-dimensional flows. It is found that since the flow downstream of the terminal shock is subsonic, and what happens at the outflow boundary affects the flow inside the inlet, enough of the subsonic diffuser must be modeled to accurately predict the terminal shock region. The diffuser portion should be fairly long with the outflow boundary occurring in a region of more or less uniform flow to be able to prescribe a uniform back pressure. The third configuration studied was investigated with and without incorporating bleed in the code. It is found that the use of bleed stabilizes the shock location and allows solutions which without bleed result in unstating of the inlet. Comparisons are made with available experimental data.

Author

A84-35193#

NUMERICAL COMPUTATION OF THE REYNOLDS STRESS IN SUPERSONIC INLET FLOWS

Y. OBIKANE (Universe Research Co., Ltd., Tokyo, Japan) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 9 p. refs (AIAA PAPER 84-1364)

The prediction of the Reynolds stress in an axisymmetric supersonic inlet flow is demonstrated. To predict the Reynolds stress a computational method and a second order turbulence model have been proposed. For the bench mark test of the turbulence model, a supersonic compression corner flow is computed. The bench mark results agree qualitatively with the experiment. The simple method is quite practical and useful for designers who treat properties related to turbulent kinetic energy, such as the flows in ramjet engines or the prediction of noise generated from the tips of the fan.

Author

A84-35234#

STEADY AND UNSTEADY DISTORTED INLET FLOW SIMULATION FOR ENGINE GROUND TESTS

J. R. BION (ONERA, Chatillon-sous-Bagneux, Hauts-de-Seine, France) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 7 p. (AIAA PAPER 84-1490)

During the early stages of gas turbine engine compressor development, a designer must ascertain the surge margin reduction which can result from inlet flow distortions over the entire range of an aircraft's flight envelope. Since theoretical methods have yet to be developed for such surge margin determinations, ground test methods have become indispensable. Attention is given to the use of a bellmouth with various leading edges to simulate

inlet flow distortions in a ground test apparatus. It is shown that airstream separations identical to those of a cylindrical duct at a high angle of attack are obtainable by this means. O.C.

A84-35239#

A LINEAR MULTIVARIABLE DYNAMICAL MODEL OF SUPERSONIC INLET-ENGINE COMBINATION

Y. GUAN, S. YARNG (Northwestern Polytechnical University, Xian, Shaanxi, People's Republic of China), and J. YARNG AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 12 p. refs (AIAA PAPER 84-1496)

A linear multivariable dynamical model of supersonic inlet-engine combination, both in the form of state-space and frequency domain and its simulation, is presented. The inlet portion is modeled by applying and extending Willoh's method of inlet dynamical analysis with piecewise lumped-volumes of subsonic duct to the case both of downstream and upstream perturbations. The portion of engine is primarily modeled on the linearized one-dimensional channel flow with experimental data of engine components considering variable specific heat of gas. The steady-state flow matching of the inlet and the engine is carried out by varying the opening of the bypass doors. The stiff differential equations of the model are solved by the combined Newton-Raphson and Runge-Kutta methods with different time steps for different time intervals. Then, the dynamics of the NASA 48-cm inlet - J85 engine combination is digitally simulated.

Author

A84-35302* National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

COMPUTATIONAL AERODYNAMICS AND DESIGN

W. F. BALLHAUS, JR. (NASA, Ames Research Center, Moffett Field, CA) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings. Berlin, Springer-Verlag, 1982, p. 1-20. refs

The role of computational aerodynamics in design is reviewed with attention given to the design process; the proper role of computations; the importance of calibration, interpretation, and verification; the usefulness of a given computational capability; and the marketing of new codes. Examples of computational aerodynamics in design are given with particular emphasis on the Highly Maneuverable Aircraft Technology. Finally, future prospects are noted, with consideration given to the role of advanced computers, advances in numerical solution techniques, turbulence models, complex geometries, and computational design procedures. Previously announced in STAR as N82-33348 B.J.

A84-35307

FLOW SIMULATION BY DISCRETE VORTEX METHOD

K. OSHIMA (Tokyo, University, Tokyo, Japan) and Y. OSHIMA (Ochanomizu University, Tokyo, Japan) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings. Berlin, Springer-Verlag, 1982, p. 94-106. refs

Applicability of discrete vortex approximation was tested experimentally for four types of flow conditions; an oscillating airfoil, roll-up of wake vortex layer originated from an oscillating plate, an impulsively started flat plate with an angle-of-attack and a two-dimensional rotating elliptic airfoil. Detailed flow visualization reveals the mechanism of creation, growth and migration of vortices and the comparison with those predicted by discrete vortex method has been done. It is concluded that this numerical simulation method is most useful to predict global feature of the flow fields and care must be taken not to excessively increase the spatial and time resolution.

Author

02 AERODYNAMICS

A84-35309* New York Univ., New York.

SIMULATION OF THE FLUCTUATING FIELD OF A FORCED JET

A. BAYLISS (New York University, NY), L. MAESTRELLO (NASA, Langley Research Center, Hampton, VA), and E. TURKEL (Tel Aviv University, Tel Aviv, Israel) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 131-137. refs
(Contract NAS1-14471; NAS1-16394; DE-AC02-76ER-03077; AF-AFOSR-76-2881)

The fluctuating field of a jet excited by transient mass injection is simulated numerically. The model is developed by expanding the state vector as a mean state plus a fluctuating state. Nonlinear terms are not neglected and the effect of nonlinearity is studied. The results show a significant spectral broadening in the flow field due to the nonlinearity. In addition, large scale structures are broken down into small scales. Previously announced in STAR as N82-34191

Author

A84-35311* United Technologies Research Center, East Hartford, Conn.

ANALYSIS OF SEPARATED BOUNDARY-LAYER FLOWS

J. E. CARTER and V. N. VATSA (United Technologies Research Center, East Hartford, CT) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 167-174. Army-NASA-Navy-supported research. refs

A method for predicting the strong interaction between the viscous and inviscid flows which occurs in flow separation is reviewed. An inverse boundary-layer procedure approximately accounts for normal pressure gradients that may be important in strongly interacting flows. Transformed boundary-layer equations are written in which the pressure gradient is set equal to the inviscid pressure gradient. As the boundary-layer edge is approached and the viscous shear and heat conduction terms vanish, the viscous flow solution is required to asymptotically approach the inviscid solution over the generalized displacement body. Attention is then focused on viscous-inviscid interacting flows with a first-order viscous formulation and constant pressure across the boundary layer. Results obtained with this procedure are presented for: (1) transitional separation bubbles near an airfoil leading edge, (2) subsonic boattail separated turbulent flow, and (3) transonic turbulent shock wave boundary-layer interaction on an axisymmetric bump configuration.

J.N.

A84-35317

COMPUTATION OF INVISCID TRANSONIC INTERNAL FLOW

U. GIESE (Aachen, Rheinisch-Westfälische Technische Hochschule, Aachen, West Germany) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 217-223. refs

Compressible internal flows are studied with an implicit finite difference solution of the full potential equation in conservative form. For numerical stability in supersonic regions an artificial compressibility formulation is introduced. Boundary fitted curvilinear coordinates are used which are stretched in order to cope with regions of strong gradients. The equations are solved by an approximate factorization technique. Results are presented for nozzle flow and for flows through valve inlets with different wall contours. Some results are compared with Mach-Zehnder Interferograms.

Author

A84-35325* National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

TRANSONIC-FLOW COMPUTATION USING AN EXPLICIT-IMPLICIT METHOD

W. KORDULLA (NASA, Ames Research Center, Moffett Field, CA; Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Institut fuer Theoretische Stroemungsmechanik, Goettingen, West Germany) and R. W. MACCORMACK (NASA, Ames Research Center, Moffett Field, CA; Washington, University, Seattle, WA) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 286-295. refs

The explicit-implicit predictor corrector method of MacCormack (1981) is applied to the analysis of flows past airfoils. By comparing results obtained with different methods and meshes, it is shown that the above method provides, after certain modifications, reasonably good predictions of inviscid and viscous flows about an airfoil. Good results are also obtained for the transonic regime if the free-stream conditions are correct and if a suitable mesh is used.

V.L.

A84-35326

NUMERICAL SOLUTION OF TRANSONIC SHEAR FLOWS PAST THIN BODIES

K. KOZEL, J. POLASEK, and M. VAVRINCOVA (Ceske Vysoke Uceni Technicke, Prague, Czechoslovakia) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 302-307. refs

A numerical solution method was developed for three-dimensional inviscid steady shear flows past thin bodies in a tunnel or through a cascade. A governing equation is derived from perturbation theory and the problem is solved by a finite-difference technique. The system of difference equations is then solved by a modification of the successive line relaxation method. Results are presented for transonic shear flows past a NACA 0012 profile in a tunnel with free-stream Mach number equal to 0, 73 + 0, and 6z/LZ with z between 0 and LZ. Results are also given for transonic shear flows through a cascade with stagger angle $\beta = \pi/2$, $p/c = 2$ and for flow past a system of bodies in a tunnel with cascade geometry.

J.N.

A84-35328

MESH GENERATION STRATEGIES FOR CFD ON COMPLEX CONFIGURATIONS

S. LEICHER, W. FRITZ, J. GRASHOF, and J. LONGO (Dornier GmbH, Friedrichshafen, West Germany) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 329-334. refs

An overview of different mesh generation methods in use and under further development at Dornier will be given. Some presented examples (e.g. air intakes, fuselages, wings, wing-fuselage combinations and other related technical combinations) demonstrate the capability of mesh generation techniques to make possible complex three-dimensional flowfield computations. All methods described have in common contour-conformal meshes, i.e. the body surface is a coordinate surface. From the topological point of view two grid types are discerned: single block grids and multi-block structured grids. For both grid types different mesh types like H-H, C-H, O-O or C-O meshes can be used. Each mesh can be generated by one of the described methods.

Author

A84-35330

FINITE DIFFERENCE COMPUTATION OF PRESSURE AND WAVE-DRAG OF SLENDER BODIES OF REVOLUTION AT TRANSONIC SPEEDS WITH ZERO-LIFT

S.-Y. LI and S.-J. LUO (Northwestern Polytechnical University, Xian, Shaanxi, People's Republic of China) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 350-356. refs

The pressure, the wave-drag and the positions of shock-wave of slender bodies of revolution at transonic speeds with zero-lift are obtained by solving the transonic axisymmetric potential equation with large disturbance in the free stream direction and small disturbance in the transverse direction, using the Murman-Cole schemes of finite differences. The computed results for three different configurations agree well with known wind tunnel test results. A linearized analysis of the stability and the convergence of line overrelaxation of the difference equations for steady axisymmetric small perturbation potential flow is made. The numerical experiences do agree with the theoretical conclusions.

Author

A84-35334* Ohio State Univ., Columbus.

NONITERATIVE GRID GENERATION USING PARABOLIC DIFFERENCE EQUATIONS FOR FUSELAGE-WING FLOW CALCULATIONS

S. NAKAMURA (Ohio State University, Columbus, OH) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 396-401. (Contract NCA2-OR-565-101)

A fast method for generating three-dimensional grids for fuselage-wing transonic flow calculations using parabolic difference equations is described. No iterative scheme is used in the three-dimensional sense; grids are generated from one grid surface to the next starting from the fuselage surface. The computational procedure is similar to the iterative solution of the two-dimensional heat conduction equation. The proposed method is at least 10 times faster than the elliptic grid generation method and has much smaller memory requirements. Results are presented for a fuselage and wing of NACA-0012 section and thickness ratio of 10 percent. Although only H-grids are demonstrated, the present technique should be applicable to C-grids and O-grids in three dimensions.

J.N.

A84-35340

NUMERICAL SOLUTION OF VISCOUS FLOW AROUND ARBITRARY AIRFOILS IN A STRAIGHT CASCADE

M. ROSENFELD and M. WOLFSHTEIN (Technion - Israel Institute of Technology, Haifa, Israel) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 433-439. refs

A two-dimensional separated flow field around arbitrary airfoils arranged in a straight cascade is computed assuming isothermal and laminar flow. Only steady flow is considered, thus excluding the possibility of resolving unsteady separation which usually persists at high Reynolds numbers and is mostly turbulent. Finite difference solutions are obtained for the elliptic vorticity and stream function equations in nonorthogonal curvilinear coordinates. V.L.

A84-35344

EULER SOLUTIONS AS LIMIT OF INFINITE REYNOLDS NUMBER FOR SEPARATION FLOWS AND FLOWS WITH VORTICES

W. SCHMIDT and A. JAMESON (Dornier GmbH, Friedrichshafen, West Germany; Princeton University, Princeton, NJ) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 468-473. refs

A combination of a finite volume discretisation in conjunction with carefully designed dissipative terms of third order, and a fourth order Runge Kutta time stepping scheme, is shown to yield an

efficient and accurate method for solving the time-dependent Euler equations in arbitrary geometric domains. Convergence to the steady state has been accelerated by the use of different techniques described briefly. The main attempt of the present paper however is the demonstration of inviscid compressible flow computations as solutions to the full time dependent Euler equations over two- and three-dimensional configurations with separation. It is clearly shown that in inviscid flow separation can occur on sharp corners as well as on smooth surfaces as a consequence of compressibility effects. Results for non-lifting and lifting two- and three-dimensional flows with separation from round and sharp corners are presented. Author

A84-35351

NUMERICAL SOLUTION OF THE PROBLEM OF SUPERSONIC FLOW PAST WINGS OF ARBITRARY FORM WITH A DETACHED SHOCK WAVE

G. P. VOSKRESENSKII (Akademii Nauk SSSR, Institut Prikladnoi Matematiki, Moscow, USSR) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 513-518.

A numerical method has been developed to calculate supersonic inviscid gas flow around wings of arbitrary form with a shock wave detached from the leading edge. The solution domain is divided into three subdomains. A total algorithm is formed from the specific ones of each subdomains, depending on the wing configuration. For the front part of the wing where the flow is subsonic and supersonic the problem is solved by using the time-dependent stationary principle. The remaining parts of the wing including its tip side are treated as three-dimensional stationary cases. A number of test cases are computed for the flow around the wings of various configurations. Author

A84-35354

NUMERICAL SOLUTION OF THE EULER EQUATION FOR A COMPRESSIBLE FLOW PROBLEM

S. M. YEN and S. H. LEE (Illinois, University, Urbana, IL) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 539-545.

The objective of the present work is to find the numerical solution of the Euler equation for a triconic body in compressible flow. The implicit factored scheme which was developed by Beam and Warming (1977) was used to solve the Navier-Stokes equations. Computations were made using the version of the AIR3D Navier-Stokes Computer Program (developed at NASA/AMES) adapted by Nietubicz (1979) for an azimuthally invariant thin layer. The major effort was in developing a mesh system adaptable to the triconic body, as well as to the flow features encountered in the compressible flow regime. Also, the implementation of boundary conditions was studied very carefully. Author

A84-35497

LINEAR PROBLEM OF A VIBRATOR OSCILLATING HARMONICALLY AT SUPERCRITICAL FREQUENCIES IN A SUBSONIC BOUNDARY LAYER [LINEINAIA ZADACHA O VIBRATORE, SOVERSHAIUSHCHEM GARMONICHESKIE KOLEBANIIA NA ZAKRITICHESKIKH CHASTOTAKH V DOZVUKOVOM POGRANICHNOM SLOE]

E. D. TERENCEV Prikladnaia Matematika i Mekhanika (ISSN 0032-8235), vol. 48, Mar.-Apr. 1984, p. 264-272. In Russian. refs

An analysis is made of a subsonic flow past a flat plate with a triangular vibrator which commences to oscillate in an unperturbed boundary layer. The method used is based on the Fourier transformation with respect to the longitudinal coordinate and the Laplace transformation with respect to time. The pressure-oscillation amplitude dependent on the longitudinal coordinate is determined. When the vibrator frequency is less than the critical frequency, the amplitude is damped both upstream and downstream; when these two frequencies are equal, there is damping upstream but not downstream; when the vibrator

02 AERODYNAMICS

frequency is greater than the critical frequency, the amplitude is damped upstream but increases downstream. With distance from the vibrator downstream, the perturbations degenerate into a Tollmein-Schlichting wave whose amplitude depends on the vibrator frequency. B.J.

A84-35653#

NUMERICAL PREDICTIONS OF INTERNAL FLOWS USING A DIAGONALIZED FLUX VECTOR SPLITTING ALGORITHM

E. VON LAVANTE and J. TREVINO (Texas A & M University, College Station, TX) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 7 p. refs (AIAA PAPER 84-1246)

A diagonal form of the flux vector splitting algorithm has been developed which is computationally more efficient than the standard form, yet retains its robustness and stability characteristics. The present algorithm has been applied to solutions of the Euler equations in general, body-fitted coordinates for several internal flow geometries. The results obtained indicate that although the algorithm's stability limit was $O(1)$, it exhibited fast convergence. Its strong natural dissipation may be advantageous in the presence of strong shocks. O.C.

A84-35682

HANG GLIDING [DEL'TAPLANERIZM]

V. G. OSTASHOV (Novosibirsk, Izdatel'stvo Nauka, 1983, 112 p. In Russian. refs

An examination of the principles of flexible wing aerodynamics introduces formulas for calculating important aerodynamic characteristics and reviews the stability and controllability of hang gliders. Several means of improving aerodynamic characteristics are suggested, and attention is given to increased safety for flutter dive and flight in tow. A discussion of weather factors, air currents, and atmospheric turbulence with an application to hang gliding is also included. Equations are provided for determining the cut of a sail-wing of arbitrary form, calculating the geometry of a cylindrical wing, and selecting the load-bearing structure for a hang glider with an auxiliary motor. Attention is also given to safe construction techniques, parachutes, and pilot preparation. J.N.

A84-35730

FRICTION AND HEAT TRANSFER IN LAMINAR AND TURBULENT BOUNDARY LAYERS IN THE CASE OF NONUNIFORM SUPERSONIC FLOW PAST AXISYMMETRIC BODIES [TRENIE I TEPLOOBMEN V LAMINARNOM I TURBULENTNOM POGRANICHNYKH SLOIAKH PRI OBTEKANII OSESIMMETRICHNYKH TEL NEODNORODNYM SVERKHZVUKOVYM POTOKOM]

I. G. EREMITSEV and N. N. PILIUGIN (Akademiia Nauk SSSR, Izvestiia, Mekhanika Zhidkosti i Gaza (ISSN 0568-5281), Mar.-Apr. 1984, p. 65-72. In Russian. refs

A theoretical study is made of the supersonic flow of a heated gas past an axisymmetric blunt body. General formulas are derived for heat fluxes and shear stress in laminar and turbulent boundary layers in cases of uniform and nonuniform flow past the body. As an example, a nonuniform gas flow past a spherically blunt body is examined in detail. B.J.

A84-35734

HYSTERESIS OF SUPERSONIC SEPARATED FLOWS [O GISTEREZHSE SVERKHZVUKOVYKH OTRYVNYKH TECHENII]

A. I. GUZHAVIN and I. A. P. KOROBV (Akademiia Nauk SSSR, Izvestiia, Mekhanika Zhidkosti i Gaza (ISSN 0568-5281), Mar.-Apr. 1984, p. 116-125. In Russian. refs

Wind-tunnel-test results on the hysteresis of supersonic separated flows are examined. It is shown that various hysteresis phenomena in aerodynamics have a common nature, consisting in the spontaneous avalanche restructuring of the flow. The specific mechanisms of flow restructuring can vary widely. At supersonic velocities, an important role is played by the formation and disappearance of supercritical flow regions in zones of the reconnection of viscous mixing layers. At subsonic velocities, the

hysteresis is similarly connected with flow instability and its spontaneous transition to a new stable state. B.J.

A84-35735

NUMERICAL ANALYSIS OF SEPARATED LAMINAR VISCOUS-GAS FLOWS IN THE CASE OF SUPERSONIC FLOW PAST BODIES WITH LEADING SPIKES [CHISLENNOE ISSLEDOVANIE OTRYVNYKH LAMINARNYKH TECHENII VIAZKOGO GAZA PRI SVERKHZVUKOVOM OBTEKANII TEL S PEREDNIMI IGLAMII]

V. M. PASKONOV and N. A. CHERANEVA (Akademiia Nauk SSSR, Izvestiia, Mekhanika Zhidkosti i Gaza (ISSN 0568-5281), Mar.-Apr. 1984, p. 126-131. In Russian. refs

The complete Navier-Stokes equations for a compressible viscous ideal heat-conducting gas are used to perform a numerical study of separated laminar flows in the case of supersonic axisymmetric flow past cylinders with a conical tip and a leading spike of finite thickness. The flow structure is analyzed in relation to spike length and the semi-angle of the conical tip of the cylinder. The existence of steady-state flow regimes is established for freestream Mach numbers of 2-6, freestream Reynolds numbers of 100-500, and spike lengths not exceeding the cylinder diameter. It is also shown that the presence of the spike in front of the body reduces the total drag of the body and the heat flux to the surface. B.J.

A84-35736

PROPULSIVE EFFICIENCY OF AN OSCILLATING WING IN SUPERSONIC FLOW [O PROPUL'SIVNOM K.P.D. VIBRIRUIUSHCHEGO KRYLA V SVERKHZVUKOVOM POTOKE]

M. N. KOGAN and M. V. USTINOV (Akademiia Nauk SSSR, Izvestiia, Mekhanika Zhidkosti i Gaza (ISSN 0568-5281), Mar.-Apr. 1984, p. 132-139. In Russian.

A simplified approach is developed for the analysis of the propulsive efficiency of an oscillating wing in supersonic flow. Two problems are solved: (1) the problem of determining the minimum power necessary for obtaining prescribed lift and thrust forces; and (2) the problem of determining the maximum power acquired by the wing from the flow for a given drag. The analysis is carried out in the framework of linear supersonic-flow theory. B.J.

A84-35742

HYPERSONIC SIMILARITY IN THE FLOW PAST A COMBINATION OF A CIRCULAR CONE AND DELTA WING [O GIPERZVUKOVOM PODOBII PRI OBTEKANII KOMBINATSII KRUGOVOGO KONUSA I TREUGOL'NOGO KRYLA]

V. E. MAKAROV (Akademiia Nauk SSSR, Izvestiia, Mekhanika Zhidkosti i Gaza (ISSN 0568-5281), Mar.-Apr. 1984, p. 188-190. In Russian. refs

A stationary analog of the Godunov difference method is used to analyze flows past various configurations consisting of a circular cone and a delta wing with supersonic leading edges. Shocks and characteristic surfaces bounding the region of conical flow are identified. The validity of the hypersonic similarity law for such flows is confirmed with respect to both integral and local flow parameters. B.J.

A84-35876

FIRST EXPERIMENTAL EVIDENCE OF VORTEX SPLITTING

P. FREYMUTH, W. BANK, and M. PALMER (Colorado, University, Boulder, CO) Physics of Fluids (ISSN 0031-9171), vol. 27, May 1984, p. 1045, 1046. refs (Contract AF-AFOSR-81-0037)

Attention is given to the smoke visualization of an accelerating airflow around a NACA 0015 airfoil after start from rest. A moving picture sequence is obtained for the vortex patterns generated by the airfoil in the smoke, which indicates the process of vortex splitting predicted by Moore and Saffman (1971) and by Christiansen and Zabuski (1973) for some flows. O.C.

A84-36460

INVESTIGATION OF TRANSITION FROM LAMINAR TO TURBULENT BOUNDARY LAYER FLOW BY MEANS OF A THERMAL IMAGING SYSTEM

M. A. GOLOVKIN, V. P. GORBAN, V. B. DOROKHOV, V. M. LUTOVINOV, V. S. PONOMAREVA, A. A. POSKACHEI, V. I. SUKHAREV, V. V. TROITSKII, and S. M. SHESTAEV (TsAGI, Uchenye Zapiski, vol. 14, no. 2, 1983, p. 48-57) Fluid Mechanics - Soviet Research (ISSN 0096-0764), vol. 12, Mar.-Apr. 1983, p. 110-120. Translation. refs

The potential of a thermal imaging system for investigating boundary-layer flow on a wing at low free-stream velocities is examined. Recording of thermal radiation from the surface of a rectangular wing makes it possible to define the position of transition from laminar to turbulent flow in the boundary layer at flow velocities between 10 and 30 m/sec. The results of this study are compared with those obtained by other methods.

Author

N84-24537*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

UNSTEADY LAMINAR BOUNDARY-LAYER CALCULATIONS ON OSCILLATING CONFIGURATIONS INCLUDING BACKFLOW. PART 2: AIRFOIL IN HIGH-AMPLITUDE PITCHING MOTION. DYNAMIC STALL

W. GEISLER Jul. 1983 58 p refs
(NASA-TM-84319-PT-2; A-9403; NAS 1.15:84319-PT-2) Avail: NTIS HC A04/MF A01 CSCL 01A

A previously developed finite-difference procedure for calculating unsteady, incompressible, laminar boundary layers on an oscillating flat plate is applied to a wing section undergoing high-amplitude pitching oscillations about various mean incidences. To start the entire boundary-layer calculation, appropriate initial conditions and outer boundary conditions are specified, using a stagnation-point fixed frame of reference. The breakdown of the numerical calculation procedure in the x,t -domain is interpreted to coincide with unsteady separation. Details of the boundary-layer behavior in the vicinity of separation are investigated, and a close analogy between the present results and those for a three-dimensional steady separation is found.

Author

N84-24538*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

AEROPROPULSIVE CHARACTERISTICS OF NONAXISYMMETRIC-NOZZLE THRUST REVERSERS AT MACH NUMBERS FROM 0 TO 1.20

G. T. CARSON, JR., F. J. CAPONE, and M. L. MASON May 1984 126 p refs
(NASA-TP-2306; L-15724; NAS 1.60:2306) Avail: NTIS HC A07/MF A01 CSCL 01A

An investigation was conducted in the Langley 16-Foot Transonic Tunnel to determine the performance of nonaxisymmetric-nozzle thrust reversers installed on a generic twin-engine fighter aircraft model. Test data were obtained at static conditions and at Mach numbers from 0.15 to 1.20 with jet exhaust simulated by high pressure air. Results showed that reverse-thrust levels of greater than 50 percent at static conditions and greater than 30 percent at in-flight conditions could be achieved. Internal reverser-port passage length was found to be very important in improving reverser performance. Increasing the reverser-port passage length improved reverse-thrust performance by as much as 28 percent at static conditions and by as much as 17 percent at Mach 1.20.

Author

N84-24539*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

CALCULATION OF TRANSONIC FLOW IN A LINEAR CASCADE

L. F. DONOVAN 1984 13 p refs Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984; sponsored by AIAA, SAE and ASME
(NASA-TM-83697; E-2155; NAS 1.15:83697) Avail: NTIS HC A02/MF A01 CSCL 01A

Turbomachinery blade designs are becoming more aggressive in order to achieve higher loading and greater range. New analysis tools are required to cope with these heavily loaded blades that may operate with a thin separated region near the trailing edge on the suction surface. An existing, viscous airfoil code was adapted to cascade conditions in an attempt to provide this capability. Comparisons with recently obtained data show that calculated and experimental surface Mach numbers were in good agreement but loss coefficients and outlet air angles were not.

Author

N84-24540*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

NAVIER-STOKES CALCULATIONS FOR THE VORTEX OF A ROTOR IN HOVER

C. H. LIU, J. L. THOMAS (NASA Langley Research Center), and C. TUNG (Army Research and Technology Labs.) May 1984 11 p refs Previously announced in IAA as A83-37184
(NASA-TM-85894; A-9611; NAS 1.15:85894; USAAVSCOM-TR-4-A-3) Avail: NTIS HC A02/MF A01

An efficient finite-difference scheme for the solution of the incompressible Navier-Stokes equation is used to study the vortex wake of a rotor in hover. The solution Procedure uses a vorticity-stream function formulation and incorporates an asymptotic far-field boundary condition enabling the size of the computational domain to be reduced in comparison to other methods. The results from the present method are compared with experimental data obtained by smoke flow visualization and hot-wire measurements for several rotor blade configurations.

Author

N84-24541# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (West Germany). Abt. Flaechenflugzeuge.

FLIGHT MECHANICAL ANALYSIS OF DYNAMIC DERIVATIVES OF THE DORNIER VARIATION WIND TUNNEL MODEL

D. ALTENKIRCH Nov. 1983 119 p refs In GERMAN; ENGLISH summary Also announced as translation (ESA-TT-854)
(DFVLR-FM-83-38; ESA-TT-854) Avail: NTIS HC A06/MF A01; DFVLR, Cologne DM 38

Wind-tunnel measurements with a principal fighter-type aircraft model on a dynamic balance are discussed. The principal fuselage with closed engine inlets could be combined with three wing configurations, swept back wing, rhombic wing and delta wing and additional horizontal and vertical stabilizer modifications. One more variation could be made by a strake. The aim of this investigation is measuring the influence of wing shape, stabilizer configuration and strake on the dynamic derivatives of the longitudinal and lateral motion and to compare these results with theoretical computations. This comparison made it obvious, that existing theoretical methods could not describe special physical phenomena, which occur at higher angles of attack.

R.J.F.

N84-24542# Bristol Univ. (England). Dept. of Aeronautical Engineering.

WAKE VISUALIZATION B.S. Thesis

S. N. EDLUND and P. D. LUCAS Jun. 1983 65 p refs Original contains color illustrations
(BU-282) Avail: NTIS HC A04/MF A01

The objective of this project was to design, build and test a Wake Imaging System, based on a scheme proposed by the Boeing Aircraft Company Aerodynamic Laboratories. A pitot probe, behind which were grouped three small colored light sources, was traversed in a plane behind a wind tunnel model. The lights were lit in regions of predefined pressure loss. A long exposure

02 AERODYNAMICS

photograph recorded the position of the lights, revealing total pressure contours in the wake. The Wake Imaging System was successful, resulting in a series of pictures of the flow behind three airfoils of varying planform. These yielded useful information about the extent of the wake and required much less time and computing effort than conventional methods. This report follows the progression towards the final system configuration. The effects of certain parameters are discussed, and recommendations are made for further development. Author

N84-24544# Bristol Univ. (England). Dept. of Aeronautical Engineering.

AN INVESTIGATION INTO THE NATURE AND CONTROL OF VORTEX FLOW ROUND HELICOPTER UPSWEEP B.S. Thesis
A. E. GIBSON and P. F. NEWRICK Jun. 1983 54 p refs
(BU-285) Avail: NTIS HC A04/MF A01

The nature of the vortex flow around a helicopter fuselage with a view to flow control is examined. Tests are carried out with a specific fuselage configuration known to exhibit the flow change. Wind tunnel tests are performed on a one fifth scale model of a Westland Lynx helicopter. The effects of adding strakes, spoilers and flow deflectors to the rear fuselage are studied in order to find an optimum method of controlling the vortex flow. The strakes and spoilers had only a marginal effect. The deflector prevents the flow change from occurring, at least within the incidence range investigated, at the expense of incurring flow instability at positive helicopter incidences. M.A.C.

N84-24545# Bristol Univ. (England). Dept. of Aeronautical Engineering.

THE EFFECT OF PERFORATION ON THE AERODYNAMICS OF A SPOILER B.S. Thesis
M. L. LANGE-SMITH and N. MEADOWS Jun. 1983 61 p refs
(BU-286) Avail: NTIS HC A04/MF A01

The aerodynamic characteristics of perforated spoilers mounted on a flat plate are investigated. Various perforation patterns are tested, with the emphasis on recording the pressure response on spoiler opening, establishing the static pressure distribution on the plate either side of the spoiler, as well as attempts at flow visualization. Measurement of the static pressures enabled the calculation of a force coefficient, which served as a measure of the influence of each spoiler on the overall pressure field. Perforation which gives a simple throughflow of air is not sufficiently effective. Significant improvements are achieved with a design for aeration of the spoiler which gives a preferred direction to the throughflow of air. The penalty in introducing perforation to a spoiler is a reduction in its spoiling effectiveness. M.A.C.

N84-24547# Bristol Univ. (England). Dept. of Aeronautical Engineering.

THE AERODYNAMIC EFFECTS OF CAVITIES IN A BODY B.S. Thesis
A. L. MOONEY and J. G. C. POWELL Jun. 1983 29 p refs
(BU-289) Avail: NTIS HC A03/MF A01

The aerodynamic effects of cavities in a fuselage body were investigated. The tests were carried out for an incidence range of - 5 deg to 12 deg and for three fuselage/cavity configurations. The Reynolds number, based on model length, was 1 million. Overall force and moment coefficients were obtained which showed little change in pitching moment due to the presence of cavities, but increased in lift and drag. Pressure coefficients showed the flow in a cavity to be largely independent of the other cavities present. R.J.F.

N84-24549# Bristol Univ. (England). Dept. of Aeronautical Engineering.

AN INVESTIGATION INTO ANTI-SWIRL DEVICES FOR S-SHAPED AIR INTAKES B.S. Thesis
L. D. BACON and J. M. MAGOWAN Jun. 1983 49 p refs
(BU-293) Avail: NTIS HC A03/MF A01

The paper presents the results of an investigation into the effectiveness of streamwise fences as anti-swirl devices for use in an S-shaped duct of typical air intake proportions. Fences were

positioned in the first bend of the duct on the lower and outside walls. The effects of twelve configurations of such fences of varying heights have been studied. The swirl characteristics over an incidence range of 10 deg to 30 deg were measured in terms of swirl coefficient (SC sub 60), distortion coefficient (DC sub 60) and pressure recovery. In addition static pressures at the wall were measured either side of the fences. It was found that all fence configurations tested improved the swirl characteristics of the duct (by arresting rotational flow in the first bend), and indeed the swirl direction could be reversed. The configuration consisting of a lower and side fence meeting on the center-line of the duct was found to possess the most favorable characteristics of the configurations tested. B.W.

N84-24551# Bristol Univ. (England). Dept. of Aeronautical Engineering.

A CIRCULATION METER FOR THE MEASUREMENT OF DISCRETE VORTICES B.S. Thesis
L. W. MOLLAN and C. A. WREN Jun. 1983 39 p refs
(BU-300) Avail: NTIS HC A03/MF A01

An instrument was designed and tested to locate, and to measure, the circulation in a discrete vortex. The circulation meter consists of three Conrad type yawmeters, with the facility for radial movement, positioned equally, at 120 deg separation, around a central sphere-static probe. This instrument was shown to produce accurate and consistent results when measuring vortices in low speed flow. R.J.F.

N84-24553# Glasgow Univ. (Scotland). Faculty of Engineering.
AN ALGORITHM FOR THE PREDICTION OF UNSTEADY POTENTIAL FLOW ABOUT AN ARBITRARY AEROFOIL
M. VEZZA and R. A. M. GALBRAITH Oct. 1983 36 p refs
(GU-AERO-8306) Avail: NTIS HC A03/MF A01

A new model is presented for the calculation of the incompressible, inviscid flow around an arbitrary aerofoil undergoing unsteady motion. The numerical algorithm was developed from the steady flow model of Leishman and Galbraith, in which use was made of a linear distribution of panel vorticity, and also using a technique similar to that proposed by Basu and Hancock. A brief history of unsteady flow modelling is given in the introduction, followed by the mathematical details of the current method. Results are presented and discussed for a number of cases which clearly illustrate certain characteristics of unsteady flow. Author

N84-24554# Glasgow Univ. (Scotland). Faculty of Engineering.
AN INVESTIGATION OF THREE-DIMENSIONAL STALL DEVELOPMENT ON NACA 23012 AND NACA 0012 AEROFOILS

L. Y. SETO, J. G. LEISHMANN, and R. A. M. GALBRAITH Jan. 1983 30 p refs
(Contract SERC-E.3131; MOD-2048/026XR/STR)
(GU-AERO-8300) Avail: NTIS HC A03/MF A01

Two airfoil sections, NACA 23012 and NACA 0012 were tested, one (23012) in a subsonic wind tunnel and the other (0012) in a 0.84 m x 1.14 m low speed wind tunnel. Both sections are problematic in respect of their stalling characteristics as they lie on the boundary between two types. Over a range of Reynolds number, the airfoil might have a trailing edge with a gradual forward movement of the point of separation as incidence is increased, or, at some higher Reynolds number, it may exhibit a combined leading and trailing edge type stall. For the latter case the airfoil starts to stall with evident turbulent boundary layer separation moving forward from the trailing edge and the flow breakdown being completed by the bursting of the laminar separation bubble; i.e., the laminar separation of the flow in the leading edge region failing to reattach after transition of the free shear layer to a turbulent one. R.J.F.

N84-24557# Instituto Nacional de Tecnica Aeroespacial, Madrid (Spain).

STUDY OF AEROSPACE MATERIALS, COATINGS, ADHESIONS AND PROCESSES. AIRCRAFT ICING PROCESSES Final Scientific Report, 15 Jul. 1982 - 14 Sep. 1983

E. M. RODRIGUEZ 14 Sep. 1983 182 p
(Contract AF-AFOSR-0316-82; AF PROJ. 2301)
(AD-A139743; EOARD-TR-84-11-1) Avail: NTIS HC A09/MF A01 CSCL 01D

INTA has been provided with a versatile and powerful FORTRAN Program that permits a full analysis of the trajectories described by the droplets of a cloud with respect to an infinitely long cylinder moving inside it normally to its longitudinal axis. Author (GRA)

N84-24559# Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese (Belgium).

THE STUDY OF AN IDEALIZED WING/BODY JUNCTION Final Scientific Report, 30 Apr. 1983 - 31 Jan. 1984

G. STRINGFIELD 31 Mar. 1984 61 p
(Contract AF-AFOSR-0127-83; AF PROJ. 2301)
(AD-A139933; VKI-PR-1983-28; EOARD-TR-84-13) Avail: NTIS HC A04/MF A01 CSCL 20D

An experimental study was performed to determine the influence of fairings on the reduction of drag which is produced by the wing-body junction. The wing-body junction was represented by a wing mounted on a flat plate and the junction was contoured by placing different fairing sizes at the wing leading edge and wing trailing edge. The purpose of the experiment was to observe the effect of the different fairing sizes on the wing-body junction aerodynamics. Author (GRA)

N84-24561# Massachusetts Inst. of Tech., Cambridge. Gas Turbine Plasma Dynamics Lab.

ON THE STABILITY OF FLIGHT VEHICLES IN THE LOW REYNOLDS NUMBER NON-LINEAR REGIME Final Report

E. E. COVERT, O. W. K. LEE, and C. M. VACZY Feb. 1984 4 p
(Contract N00014-82-K-0310)

(AD-A140008) Avail: NTIS HC A02/MF A01 CSCL 20D
The first part consists of a literature survey in external fluid mechanics, (i.e., flow over wings and bodies) in the Reynolds number range of 20,000 to 200,000. The second part was a technical review of the material presented at Low Reynolds Number Flow. The third part was a trajectory study for a vehicle flying in the low Reynolds number regime. The trajectory study was initiated as a means of accessing the stability of a vehicle flying under circumstances where: (1) the aerodynamic characteristics are non-linear, and (2) there is coupling between lateral motion (which can induced local stalling) and pitching motion. It is found that for the case studied a modified form of the Liapunov Stability Criteria using a phase-plane, provided a suitable description of the motion. The unstable lateral motion of the vehicle chosen for analysis is shown. The instability is indicated by steady growth of the curve away from any particular point shown on the plane. This work is incomplete in that time did not permit study of reverse interesting features; like the effect of lift curves hysteresis on the motion.

GRA

N84-24562# California Univ., Livermore. Lawrence Livermore Lab. Systems, Microwave Measurements and Effects Group.

F-14 SCALE MODEL MEASUREMENTS. PART 1: EXTERNAL RESPONSE

H. G. HUDSON and D. M. WYTHE Jul. 1983 277 p refs
Sponsored in part by Defense Nuclear Agency
(Contract W-7405-ENG-48)
(DE84-008201; AD-B081776; UCID-19944-PT-1) Avail: NTIS HC A13/MF A01

This report documents the work accomplished on the scale model F-14 (referred to hereafter as the model) aircraft and only includes measurements taken on data on the external portions of the model. These measurements are intended to simulate the measurements taken on a full scale F-14 aircraft (referred to hereafter as the F-14) at the Air Force Weapons Laboratory

(AFWL). The model was tested in eight different configurations of wing position and field incidence. The various model configurations are detailed for which data were taken. All data are presented and include the impulse responses and their Fourier transforms, the estimated model responses to the incident fields of the AFWL Vertically Polarized Dipole (VPD) and the AFWL Horizontally Polarized Dipole (HPD) simulators compared with the F-14 measurements taken at these simulators and a comparison of our transfer functions with CW measurements taken at the same points at the University of Michigans' anechoic measurement facility.

DOE

N84-24563# Sandia Labs., Albuquerque, N. Mex. Aerodynamics Dept.

IMPROVED PREDICTION OF PARACHUTE LINE SAIL DURING LINES-FIRST DEPLOYMENT

J. W. PURVIS Apr. 1984 10 p refs Presented at the 8th AIAA Aerodyn. Decelerator and Balloon Technol. Conf., Hyannis, Mass., 2 Apr. 1984
(Contract DE-AC04-76DP-00789)

(DE84-007340; SAND-84-0348C; CONF-840496-9) Avail: NTIS HC A02/MF A01

A numerical deployment simulation with the capability to predict line sail is presented. A finite element approach is used in which both canopy and suspension lines are modeled as flexible, distributed-mass structures connected to a finite-mass forebody. Translation and rotation of both the forebody and the deployment bag are determined from three-degree-of-freedom flight mechanics equations. The model includes all aspects of the deployment problem, such as suspension line aerodynamics, line ties, and canopy/deployment bag friction. The model was verified by comparison with experimental data and used to investigate proposed solutions for a system with a line sail problem. DOE

N84-25631*# McDonnell Aircraft Co., St. Louis, Mo.

JET FLOWFIELDS

D. R. KOTANSKY In AGARD Spec. Course on V/STOL Aerodyn. 48 p Apr. 1984 refs

(Contract NAS2-9646; NAS2-10184; NAS2-11161; N62269-76-C-0086; N62269-81-C-0717; N00014-79-C-0130)
Avail: NTIS HC A17/MF A01 CSCL 01A

The unique aero/fluid mechanics of V/STOL jet flowfields both in and out of ground effect and how they influence and may be accommodated in the aircraft design process are described. Key topics addressed include the following: jet development in static and cross-flow conditions, jet impingement (round jets/rectangular jets including nozzle pressure ratio and temperature effects), multiple jet impingement and fountain upwash formation and development (ground surface flows, stagnation lines, fountain characteristics), fountain impingement on the airframe, jet induced effects on the airframe in and out of ground effect including trim and stability considerations, effects of forward (STOL) and cross-wind velocities, and exhaust gas ingestion (VTOL, STOL). Discussion of the above items will include their influence on vehicle design and system performance and their quantification and prediction via theoretical and empirical predictions, and small and large scale wind tunnel tests. Aero/propulsion devices discussed include V/STOL multiple jet lift systems (low and high pressure ratio) and STOL thrust vectoring/reversing nozzles. R.J.F.

N84-25633*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

V/STOL WIND-TUNNEL TESTING

D. G. KOENIG In AGARD Spec. Course on V/STOL Aerodyn. 71 p Apr. 1984 refs

Avail: NTIS HC A17/MF A01 CSCL 01A

Factors influencing effective program planning for V/STOL wind-tunnel testing are discussed. The planning sequence itself, which includes a short checklist of considerations that could enhance the value of the tests, is also described. Each of the considerations, choice of wind tunnel, type of model installation, model development and test operations is discussed, and examples of appropriate past and current V/STOL test programs are provided.

02 AERODYNAMICS

A short survey of the moderate to large subsonic wind tunnels is followed by a review of several model installations, from dimensional to large-scale models of complete aircraft configurations. Model sizing, power simulation, and planning are treated, including three areas in test operations: data acquisition systems, acoustic measurements in wind tunnels, and flow surveying. Author

N84-25635# British Aerospace Public Ltd. Co., Preston (England).

AERODYNAMICS OF V/STOL AIRCRAFT: PERFORMANCE ASSESSMENT

D. C. LEYLAND *In* AGARD Spec. Course on V/STOL Aerodyn. 26 p Apr. 1984 refs

Avail: NTIS HC A17/MF A01

Combat performance assessment of jet-borne V/STOL aircraft of the Harrier/AV8B family is discussed. Performance requirements for vertical takeoff and short takeoff are outlined and reviewed. Parameters considered for vertical operation include: margin for acceleration and maneuver, jet-induced lift losses, hot gas reingestion, and reaction control air bleed. Cruise, vectored thrust, jet lift enhancement, and the accelerating transition maneuver from jet-borne flight to aerodynamic lift are also discussed. R.S.F.

N84-25636*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

ASSESSMENT OF AERODYNAMIC PERFORMANCE OF V/STOL AND STOVL FIGHTER AIRCRAFT

W. P. NELMS *In* AGARD Spec. Course on V/STOL Aerodyn. 35 p Apr. 1984 refs Previously announced as N84-22536

Avail: NTIS HC A17/MF A01 CSCL 01C

The aerodynamic performance of V/STOL and STOVL fighter/attack aircraft was assessed. Aerodynamic and propulsion/airframe integration activities are described and small-and large-scale research programs are considered. Uncertainties affecting aerodynamic performance that are associated with special configuration features resulting from the V/STOL requirement are addressed. Example uncertainties related to minimum drag, wave drag, high angle of attack characteristics, and power-induced effects. Engine design configurations from several aircraft manufacturers are reviewed. Author

N84-25638 Dayton Univ., Ohio.

ACTIVE SUPPRESSION OF AEROELASTIC INSTABILITIES FOR FORWARD SWEPT WINGS Ph.D. Thesis

T. E. NOLL 1983 127 p Previously announced in IAA as A83-29869

Avail: Univ. Microfilms Order No. DA8404707

The potential of applying active feedback principles for controlling aeroelastic instabilities on a forward swept wing was investigated. Control laws were developed for a cantilever flexible wing and for the wing/fuselage model free in pitch. Design philosophy consisted of using a leading edge surface with displacement feedback to prevent the lower frequency instability of the wing and using a trailing edge surface commanded by angular acceleration feedback to increase the flutter speed of a higher frequency mode involving coupling of 2nd bending and torsion. The blended system successfully controlled the instabilities of both wind configurations up to a significantly higher airspeed. The design provided respectable gain margins. However, phase margins were low and would require tradeoffs with airspeed improvement to obtain more desirable values. E.A.K.

N84-25639*# Old Dominion Univ., Norfolk, Va. Dept. of Mechanical Engineering and Mechanics.

AN INVESTIGATION OF AERODYNAMIC CHARACTERISTICS OF WINGS HAVING VORTEX FLOW USING DIFFERENT NUMERICAL CODES Final Report, period ending 31 Mar. 1984

S. CHATURVEDI and F. GHAFARI Apr. 1984 30 p (Contract NSG-1561)

(NASA-CR-173596; NAS 1.26:173596) Avail: NTIS HC A03/MF A01 CSCL 01A

Three different numerical codes are employed to determine the aerodynamic characteristics of wings with separation induced vortex flows. Both flat as well as cambered wings of various planform shapes are studied. The effects of wing thickness, fuselage, notch ratio and multiple vortex modeling on aerodynamic performance of the wing are also examined. The theoretically predicted results are compared with experimental results to validate the various computer codes used in this study. An analytical procedure for designing aerodynamically effective leading edge extension (LEE) for a thick delta wing is also presented. M.A.C.

N84-25640# Technion - Israel Inst. of Tech., Haifa. Dept. of Aeronautical Engineering.

CALCULATION OF AERODYNAMIC CHARACTERISTICS OF WINGS WITH THICKNESS AND CAMBER BY A NEW METHOD BASED ON THE MODIFIED VORTEX LATTICE METHOD

R. GORDON and J. ROM Jul. 1982 88 p refs Sponsored in part by Army

(Contract AF-AFOSR-0064-80)

(TAE-493) Avail: NTIS HC A05/MF A01

A vortex lattice model for the calculation of the flow over delta shaped wing planforms at high angles of attack in subsonic flow is presented. This model enables the prediction of the aerodynamic coefficients and the pressure distributions for a wide range of wing planforms, in particular for delta shaped wings with and without camber. A method, based on the combination of the vortex lattice and the panel source singularities, is applied to the calculations of aerodynamic characteristics of thick wings having sharp leading edges. The calculated results are in a very good agreement with experimental data. A parametric study of the numerical model and some numerical considerations which enable considerable reduction of the computer time are also discussed. Author

N84-25641*# Bihrlé Applied Research, Inc., Jericho, N. Y.

ROTARY BALANCE DATA FOR A TYPICAL SINGLE-ENGINE GENERAL AVIATION DESIGN FOR AN ANGLE-OF-ATTACK RANGE OF 20 TO 90 DEG. 3: INFLUENCE OF CONTROL DEFLECTION ON PREDICTED MODEL D SPIN MODES

J. N. RALSTON and B. P. BARNHART Jun. 1984 338 p refs

(Contract NAS1-16205)

(NASA-CR-3248; NAS 1.26:3248) Avail: NTIS HC A15/MF A01 CSCL 01A

The influence of control deflections on the rotational flow aerodynamics and on predicted spin modes is discussed for a 1/6-scale general aviation airplane model. The model was tested for various control settings at both zero and ten degree sideslip angles. Data were measured, using a rotary balance, over an angle-of-attack range of 30 deg to 90 deg, and for clockwise and counter-clockwise rotations covering an $\omega/g\Delta V$ range of 0 to 0.5. Author

N84-25642*# Washington Univ., Seattle.

A NUMERICAL STUDY OF THE CONTROLLED FLOW TUNNEL FOR A HIGH LIFT MODEL

P. C. PARIKH 1984 120 p refs

(Contract NSG-2260)

(NASA-CR-166572; NAS 1.26:166572) Avail: NTIS HC A06/MF A01 CSCL 01A

A controlled flow tunnel employs active control of flow through the walls of the wind tunnel so that the model is in approximately free air conditions during the test. This improves the wind tunnel test environment, enhancing the validity of the experimentally obtained test data. This concept is applied to a three dimensional jet flapped wing with full span jet flap. It is shown that a special

treatment is required for the high energy wake associated with this and other V/STOL models. An iterative numerical scheme is developed to describe the working of an actual controlled flow tunnel and comparisons are shown with other available results. It is shown that control need be exerted over only part of the tunnel walls to closely approximate free air flow conditions. It is concluded that such a tunnel is able to produce a nearly interference free test environment even with a high lift model in the tunnel. M.G.

N84-25643# Cranfield Inst. of Tech., Bedfordshire (England). Dept. of Aerodynamics.

FULL SCALE WIND TUNNEL TESTS ON HANG GLIDER PILOTS

E. A. KILKENNY Apr. 1984 66 p refs
(CA-8416) Avail: NTIS HC A04/MF A01

The weight shift control of hang gliders and the position of the pilot makes the aerodynamic characteristics of hang glider pilots an integral part of hang glider stability and performance calculations. Full scale mobile facilities were developed to measure the characteristics of the wings but very little information is available about the pilot. A series of full scale wind tunnel measurements were carried out to investigate the aerodynamic characteristics of hang glider pilots. Five pilots were tested over a range of positions and wind speeds with various types of pilots harnesses. The results are strongly dependent on each pilot and the flying position he adopts. A range of pilot drag figures should be used in stability calculations rather than just one mean value. Author

N84-25644*# National Aeronautics and Space Administration, Washington, D. C.

COLD-AIR PERFORMANCE OF COMPRESSOR-DRIVE TURBINE OF DEPARTMENT OF ENERGY UPGRADED AUTOMOBILE GAS TURBINE ENGINE. 3: PERFORMANCE OF REDESIGNED TURBINE

R. J. ROELKE and J. E. HAAS Jan. 1984 40 p refs Prepared in cooperation with Army Research and Technology Labs.
(Contract DE-AI01-80CS-50194)

(NASA-TM-83627; E-2044; DOE/NASA/50194-39; NAS 1.15:83627; USAAVSCOM-TR-84-C-7) Avail: NTIS HC A03/MF A01 CSCL 21A

The aerodynamic performance of a redesigned compressor drive turbine of the gas turbine engine is determined in air at nominal inlet conditions of 325 K and 0.8 bar absolute. The turbine is designed with a lower flow factor, higher rotor reaction and a redesigned inlet volute compared to the first turbine. Comparisons between this turbine and the originally designed turbine show about 2.3 percentage points improvement in efficiency at the same rotor tip clearance. Two versions of the same rotor are tested: (1) an as cast rotor, and (2) the same rotor with reduced surface roughness. The effect of reducing surface roughness is about one half percentage point improvement in efficiency. Tests made to determine the effect of Reynolds number on the turbine performance show no effect for the range from 100,000 to 500,000. M.A.C.

N84-25645*# National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.

REYNOLDS NUMBER EFFECTS ON PRESSURE LOSS AND TURBULENCE CHARACTERISTICS OF FOUR TUBE-BUNDLE HEAT EXCHANGERS

W. B. IGOE and C. L. GENTRY, JR. Jun. 1983 28 p refs
(NASA-TM-85807; L-15721; NAS 1.15:85807) Avail: NTIS HC A03/MF A01 CSCL 01A

The aerodynamic characteristics of pressure loss and turbulence on four tube-bundle configurations representing heat-exchanger geometries with nominally the same heat capacity were measured as a function of Reynolds numbers from about 4000 to 400,000 based on tube hydraulic diameter. Two configurations had elliptical tubes, the other two had round tubes, and all four had plate fins. The elliptical-tube configurations had lower pressure loss and turbulence characteristics than the round-tube configurations over the entire Reynolds number range. Author

N84-25646*# Tennessee Univ., Knoxville. Dept. of Mechanical and Aerospace Engineering.

MEASUREMENT OF LOCAL CONNECTIVE HEAT TRANSFER COEFFICIENTS OF FOUR ICE ACCRETION SHAPES Final Report

M. E. SMITH, R. V. ARMILLI, and E. G. KESHOCK May 1984 97 p refs

(Contract NAG3-83)

(NASA-CR-174680; NAS 1.26:174680) Avail: NTIS HC A05/MF A01 CSCL 20D

In the analytical study of ice accretions that form on aerodynamic surfaces (airfoils, engine inlets, etc.) it is often necessary to be able to calculate convective heat transfer rates. In order to do this, local convective heat transfer coefficients for the ice accretion shapes must be known. In the past, coefficients obtained for circular cylinders were used as an approximation to the actual coefficients since no better information existed. The purpose of this experimental study was to provide local convective heat transfer coefficients for four shapes that represent ice accretions. The shapes were tested with smooth and rough surfaces. The experimental method chosen was the thin-skin heat rate technique. Using this method local Nusselt numbers were determined for the ice shapes. In general it was found that the convective heat transfer was higher in regions where the model's surfaces were convex and lower in regions where the model's surfaces were concave. The effect of roughness was to increase the heat transfer in the high heat transfer regions by approximately 100% while little change was apparent in the low heat transfer regions. Author

N84-25647*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

APPLICATION OF A QUASI-3D INVISCID FLOW AND BOUNDARY LAYER ANALYSIS TO THE HUB-SHROUD CONTOURING OF A RADIAL TURBINE

K. C. CIVINSKAS and L. A. POVINELLI 1984 21 p refs

Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984; sponsored by the AIAA, SAE and ASME

(Contract DA PROJ. 1L1-61102-AH-45)

(NASA-TM-83669; E-2112; NAS 1.15:83669;

USAAVSCOM-TR-84-C-1; AIAA-84-1297) Avail: NTIS HC A02/MF A01 CSCL 21E

Application of a quasi-3D approach to the aerodynamic analysis of several radial turbine configurations is described. The objective was to improve the rotor aerodynamic characteristics by hub-shroud contouring. The approach relies on available 2D inviscid methods coupled with boundary layer analysis to calculate profile, mixing, and endwall losses. Windage, tip clearance, incidence, and secondary flow losses are estimated from correlations. To eliminate separation along the hub and blade suction surfaces of a baseline rotor, the analysis was also applied to three alternate hub-shroud geometries. Emphasis was on elimination an inducer velocity overshoot as well as increasing hub velocities. While separation was never eliminated, the extent of the separated area was progressively reduced. Results are presented in terms of mid-channel and blade surface velocities; kinetic energy loss coefficients; and efficiency. The calculation demonstrates a first step for a systematic approach to radial turbine design that can be used to identify and control aerodynamic characteristics that ultimately determine heat transfer and component life. Experimentation will be required to assess the extent to which flow and boundary layer behavior were predicted correctly. M.G.

N84-25648*# National Aeronautics and Space Administration, Ames Research Center, Moffett Field, Calif.

NONLINEAR PROBLEMS IN FLIGHT DYNAMICS

G. T. CHAPMAN and M. TOBAK May 1984 79 p refs

Presented at the Berkeley-Ames Conf. on Nonlinear Probl. in Control and Fluid Dyn., Berkeley, Calif., 31 May - 10 Jun. 1983

(NASA-TM-85940; A-9707; NAS 1.15:85940) Avail: NTIS HC A05/MF A01 CSCL 01A

A comprehensive framework is proposed for the description and analysis of nonlinear problems in flight dynamics. Emphasis

02 AERODYNAMICS

is placed on the aerodynamic component as the major source of nonlinearities in the flight dynamic system. Four aerodynamic flows are examined to illustrate the richness and regularity of the flow structures and the nature of the flow structures and the nature of the resulting nonlinear aerodynamic forces and moments. A framework to facilitate the study of the aerodynamic system is proposed having parallel observational and mathematical components. The observational component, structure is described in the language of topology. Changes in flow structure are described via bifurcation theory. Chaos or turbulence is related to the analogous chaotic behavior of nonlinear dynamical systems characterized by the existence of strange attractors having fractal dimensionality. Scales of the flow are considered in the light of ideas from group theory. Several one and two degree of freedom dynamical systems with various mathematical models of the nonlinear aerodynamic forces and moments are examined to illustrate the resulting types of dynamical behavior. The mathematical ideas that proved useful in the description of fluid flows are shown to be similarly useful in the description of flight dynamic behavior. M.G.

N84-25649# National Aerospace Lab., Tokyo (Japan).
DOUBLET POINT METHOD FOR CALCULATIONS ON OSCILLATORY LIFTING SURFACES. PART 2: SUPERSONIC FLOW

T. UEDA 1983 15 p refs
(NAL-TR-785-PT-2; ISSN-0389-4010) Avail: NTIS HC A02/MF A01

A method to predict unsteady aerodynamic forces on lifting surfaces in supersonic flow is presented. The wing is divided into small segments in which the lift force is expressed by a single point doublet of the acceleration potential. This is the same concept as the doublet point method developed by the authors for subsonic flows. In order to avoid sensitiveness to the Mach number, the upwash due to the point doublet is calculated by averaging over small areas. The integration is done analytically so that it requires no numerical quadrature. Pressure distributions are directly obtained as the unknowns of an algebraic equation. The results are compared with those obtained by other methods for various wing geometries including the AGARD Wing-tail configuration. Author

N84-25650# National Aerospace Lab., Tokyo (Japan).
WIND TUNNEL INVESTIGATION OF THE ROLLING MOMENT OF A RECTANGULAR WIND WITH SOME WINGLETS ON THE LEFT UPPER TIP

A. IWASAKI, N. TAKIZAWA, and N. KAWAHATA Nov. 1983
29 p refs In JAPANESE; ENGLISH summary
(NAL-TR-788; ISSN-0389-4010) Avail: NTIS HC A03/MF A01

Wind tunnel tests were conducted to investigate the increment of rolling moment due to a winglet mounted on the left upper tip of a rectangular wing of aspect ratio of 5.2 with a NACA 0012 section. Two planforms of winglets, rectangular and swept back forms, were tested. Both winglets are equipped with plain flaps to control their side forces. The winglets were canted outboard 90 deg or 75 deg dihedral and toed in or out up to 20 deg relative to the wing chord. The flaps of the winglets were also deflected up to + or - 30 deg. The low speed (Reynold's number based on wing chord 5 x 10 to the 5th power) data were obtained over angles of attack of approximately + or - 15 deg and at the angles of sideslip of 0 deg and + or - 10 deg. The results indicated that a single winglet produce a relatively large rolling moment with side force, but when left upper and right lower winglets were combined at a time the two rolling moments cancelled each other out. It was also found that the incremental rolling moment by a single winglet of 75 deg dihedral is about 40% larger than that of 90 deg dihedral. B.W.

N84-25651# National Aerospace Lab., Tokyo (Japan).
AERODYNAMIC CHARACTERISTICS OF FAN-JET STOL AIRCRAFT

N. INUMARU, H. TAKAHASHI, K. HIROSUE, N. TODA, and N. KUWANO 1983 102 p refs In JAPANESE; In JAPANESE; ENGLISH summary
(NAL-TR-790; ISSN-0389-4010) Avail: NTIS HC A06/MF A01

Research on Fan-Jet STOL aircraft was initiated by NAL in 1975 as a wind-tunnel-based program aimed at the design study of experimental STOL aircraft. Aerodynamic characteristics of the Augmentor Wing type model and the Upper Surface Blowing type models are examined by a series of wind-tunnel tests. Three-component longitudinal data of each model are presented. Six-component lateral data of a USB type model are also presented with four engines operating and with one engine out. The general aerodynamic trends of Powered-Lift systems are discussed through comparison with existing data. Discussions concerning the test-techniques are also included. The research was concluded in 1979, making direct contributions to the basic design of NAL Quiet STOL Experimental Aircraft. Author

N84-25652# European Space Agency, Paris (France).
WIND TUNNEL INVESTIGATIONS ON THIN SUPERCRITICAL AIRFOILS IN THE HIGH SUBSONIC FLOW REGIME

H. KOERNER and W. PUFFERT-MEISSNER May 1983 65 p refs Transl. into ENGLISH of "Windkanaluntersuchungen an duennen superkritischen profilen im hohen unterschall" rept. DFVLR-FB-82-06 DFVLR, Brunswick, Feb. 1982

(ESA-TT-774; DFVLR-FB-82-06) Avail: NTIS HC A04/MF A01; Original German report available from DFVLR, Cologne DM 19,30

This report deals with experimental investigations on four thin airfoils ($d/1 = 0.05$ - see list of symbols), three supercritical airfoils being compared with a conventional one with reference to aerodynamic efficiency. The investigations, conducted in the DFVLR's Brunswick transonic wind tunnel, at Mach numbers ranging from 0.6 to 0.95 and at a Reynolds number 4.10 to the 6th power (6.10 to the 6th power) show the superiority of supercritical airfoil design. This is demonstrated in terms of overall coefficients, efficiency limits and, in particular cases, pressure distributions. Author

N84-25654# European Space Agency, Paris (France).
THE GENERATION OF HIGHER LEVELS OF TURBULENCE IN THE TEST SECTION OF THE HIGH SPEED CASCADE WIND TUNNEL AT BRUNSWICK FOR SIMULATION OF TURBOMACHINERY CONDITIONS

R. KLOCK, G. LASKOWSKI, and H. HOHEISEL Jul. 1983 52 p refs Transl. into ENGLISH of "Die erzeugung hoeherer turbulenzgrade in der messstrecke des hochgeschwindigkeits-gitterwindkanals, Braunschweig, zur simulation turbomaschinenaehnlicher bedingungen" rept. DFVLR-FB-82-25 DFVLR, Brunswick, Mar. 1982

(ESA-TT-815; DFVLR-FB-82-25) Avail: NTIS HC A04/MF A01; original German report available from DFVLR, Cologne DM 19,50

The flow through a turbomachine is characterized by strong turbulence. Periodic velocity changes are superposed by stochastic velocity fluctuations, and the degree of turbulence achieves values up to 20%. Similar turbulence should be simulated at the investigation of cascades in the wind tunnel. For this purpose, turbulence was generated by grids of crossed bars in a high speed cascade wind tunnel. Now a turbine cascade can be investigated at its design point with a degree of turbulence of $Tu_{sub} 1$ 0.8%, 3.1%, 5.6%, and 7.9% defined in the cascade inlet plane. Considerably higher values are achieved only in the case of increasing inhomogeneous distribution of dynamic head and turbulence across the test section. Author

N84-25655# Societe Nationale Industrielle Aerospatiale, Marignane (France.) Helicopter Div.

EXPERIMENTAL MODAL ANALYSIS

TROUVE and CHABASSIEU 1983 8 p Presented at the AAFAF 8th European Rotorcraft and Powered Lift Aircraft Forum, Aix-en-Provence, France, 31 Aug. - 3 Sep. 1982 (SNIAS-832-210-110) Avail: NTIS HC A02/MF A01

The development of an experimental software program that analyzes the dynamic behavior of structural vibration is examined. Helicopter rotor vibrations are analyzed for shape animation, damping methods, and general model refinement. M.A.C.

N84-25656# Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese (Belgium).

HYPERSONIC AEROTHERMODYNAMICS

1984 587 p refs Lecture Ser. held at Rhode-Saint-Genese, Belgium, 6-10 Feb. 1984

(VKI-LS-1984-01; D/1984/0238/293) Avail: NTIS HC A25/MF A01

The fundamentals of hypersonic flow are reviewed. Following a review of hypersonic flow theory and a summary of facility and computational requirements, two important aspects of hypersonic vehicle design were stressed: stability and heat transfer. Much valuable information on lifting reentry was recently made available from an analysis of the performance of the US space shuttle; comparison of the flight test results with predictions and a summary of those areas of hypersonics requiring greater understanding are presented. A thorough examination of one possible candidate configuration for lifting reentry and tactical missiles, the waverider concept, was made, emphasizing the trade-offs necessary for a successful design.

N84-25670# George Washington Univ., Washington, D.C.
THE COMPRESSIBLE AERODYNAMICS OF ROTATING BLADES USING AN ACOUSTIC FORMULATION Ph.D. Thesis

L. N. LONG 1983 126 p

Avail: Univ. Microfilms Order No. DA8324481

This work develops a theoretical formulation for the pressure on the surface of an arbitrary body moving subsonically through a compressible fluid. It also describes a method for solving the resulting integral equation numerically. Important applications exist in the areas of propeller, helicopter, and wing theory. Farassat's integral representation of the linearized conservation of mass and momentum equations describes the pressure due to an arbitrary body in motion. This has been very useful in calculating noise due to propellers and helicopters. As is typical of integral solutions formulated using a Green's function, the solution developed by Farassat is only valid on the surface in the limit as the observer goes to the surface. The present paper performs this limiting process and thus derives the governing equation for the surface pressure. This analysis is nontrivial because the integral is over a surface in three dimensional space and time. Dissert. Abstr.

N84-25671# Minnesota Univ., Minneapolis.

A THEORETICAL ANALYSIS OF THE AERODYNAMIC AND STRUCTURAL FORCES ASSOCIATED WITH A RIBBON PARACHUTE CANOPY IN STEADY DESCENT Ph.D. Thesis

K. K. MURAMOTO 1983 314 p

Avail: Univ. Microfilms Order No. DA8404210

A computational procedure for predicting the performance of a ribbon parachute canopy in steady descent is presented. The structural integrity of the canopy is established through the finite element code CANO 2. The efficiency of CANO 2 has been improved by implementing a Newton-Raphson procedure in the bulge half angle calculation. This scheme not only reduces the computational time but also results in convergence for cases in which the earlier version does not converge. Numerical results obtained from this improved version are presented and compared with existing experimental data. Although there is a considerable variation in the magnitudes of the calculated and measured local distributions, the general trends predicted by CANO 2 are consistent with the experimental results. The theoretical framework needed for optimal canopy design is provided by the coupling of the CANO

2 structural code with an inviscid flow field analysis. The aerodynamic problem is analyzed by treating the parachute as a finite sized porous screen placed in an approaching uniform flow.

Dissert. Abstr.

N84-25987# National Aerospace Lab., Amsterdam (Netherlands).

NUMERICAL COMPUTATION OF VORTICAL FLOWS ABOUT WINGS

H. W. M. HOEIJMAKERS In Von Karman Inst. for Fluid Dynamics Computational Fluid Dyn., Vol. 2 142 p 1984 refs Avail: NTIS HC A17/MF A01

Computational methods for vortex wakes and flow predictions of vortical type configurations are investigated. Vortex flow computation associated with separation from the leading, side, and trailing edges is discussed. These methods are directed toward three dimensional subsonic steady flow applications. M.A.C.

N84-26435 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).

VORTEX FLAP SYSTEM FOR THIN WINGS [VORDERKANTEN-KLAPPENSYSTEME FUER SCHLANKT FLUEGEL: VORTEX FLAPS]

W. STAUDACHER In its Tech. and Sci. Publ. 1983 p 61-84 1983 refs In GERMAN Presented at DGLR Symp.: Leistungssteigerungen bei Flaechenflugzeugen, Frankfurt, 11-12 Nov. 1982

(MBB-FE-122/S/PUB/102) Avail: Issuing Activity

Vortex flap systems for thin wings are discussed. The aerodynamic characteristics of mechanical vortex flap systems are examined. Whether the formation of stable, rolled vortex flap turbulence is eliminated by thin wings, vortex flap and whether the vortex flaps are the right solution for the low induced resistance in far reachin use of nonlinear booster aerodynamic lift is investigated. Transl. by E.A.K.

03

AIR TRANSPORTATION AND SAFETY

Includes passenger and cargo air transport operations; and aircraft accidents.

A84-33525

CLOUDS AND FLIGHT SAFETY [OBLAKA I BEZOPASNOST' POLETOV]

A. M. BARANOV Leningrad, Gidrometeoizdat, 1983, 232 p. In Russian. refs

Data from the literature, together with information obtained from meteorological radars and satellites, are used in discussing the spatial and microphysical structure of frontal and air-mass clouds, including cumulonimbus and thunderstorm clouds. The effects of clouds, precipitation, and thunderstorms on costs, flight schedules, and the safety of flight are analyzed. Data on accidents throughout the world are presented, along with the circumstances surrounding these accidents that have to do with clouds, precipitation, thunderstorms, and wind shears. The equipment that airports and aircraft should have to ensure flight safety in clouds is described. Special attention is given to flight safety in the presence of thunderstorms. C.R.

A84-34456#

WORLDWIDE AVIATION OUTLOOK

B. ELLE (International Civil Aviation Organization, Montreal, Canada) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 397-400.

Previously cited in issue 16, p. 2297, Accession no. A83-36952

03 AIR TRANSPORTATION AND SAFETY

A84-35359

CHINOOK'S TRIAL BY ICE

I. PARKER Flight International (ISSN 0015-3710), vol. 125, April 28, 1984, p. 1160-1163.

Icing poses a special problem for helicopters because few deicing and antiicing systems have been developed or incorporated to date. Attention is presently given to a Chinook helicopter that has been converted by the RAF into an airborne deicing laboratory. A computer-integrated onboard data collection and analysis system permits the evaluation of icing effects without telemetry to ground stations. Data are being gathered on such basic aircraft performance parameters as airspeed, altitude, stress, and torque, in addition to specific deicing system data, which include rotor blade heater power density and sequencing. The composite rotor blades are noted to have sustained no damage as a result of the heating system used. O.C.

A84-35360

CRASH FOR SAFETY

J. MOXON Flight International (ISSN 0015-3710), vol. 125, May 12, 1984, p. 1270, 1271, 1274.

In July 1984, NASA plans to conduct the first deliberate crash of a large radio-controlled airliner in order to obtain general test data on structural behavior and, in particular, on the flammability of a novel fuel formulation. This fuel will be an 'antimisting kerosene' treated with FM-9 antimisting additive. The crash will represent one in which the majority of passengers would have survived if there had not been a fireball. Fuselage integrity will be maintained, so that the ripples traveling along the airframe after impact can be measured. This test is prompted by the 'fireball' effect which follows the combustion of misting kerosene from ruptured fuel tanks in many airliner crashes, with catastrophic loss of life resulting. O.C.

A84-35361

DASH 8 - DE HAVILLAND CANADA'S QUIET PERFORMER

H. HOPKINS Flight International (ISSN 0015-3710), vol. 125, May 12, 1984, p. 1275-1278.

A flight test assessment is made of the DHC-8 commuter airliner, which has already accumulated 650 hr of evaluation flying. Attention is given to this two-engined turboprop aircraft's takeoff, landing, and handling characteristics, its cockpit visibility and instrumentation effectiveness, avionics performance, and auxiliary systems operations. Payload/range and performance data are given, together with a tabular comparison of DHC-8 specifications with those of its current competitors on the world market. O.C.

N84-24564# Naval Postgraduate School, Monterey, Calif.
SYSTEM SAFETY AND THE COAST GUARD LIGHTER-THAN-AIR SYSTEM PROJECT M.S. Thesis
P. J. DANAHER Dec. 1983 85 p
(AD-A139807) Avail: NTIS HC A05/MF A01 CSCL 13L

The Coast Guard is evaluating the potential of Lighter-Than-air (LTA) vehicles for possible future Coast Guard utilization. Progress of the project is explored. Safety science is an emerging field particularly of value in the historically hazardous realm of aviation. The System Safety Concept as applicable to major project development is examined. One of the fundamental tasks of system safety management is to identify possible hazards early in the conceptual phase of product development. If the concept is not without historical precedence, part of this task is accomplished by examining historical safety records to identify potential hazards. To this end, records of Navy LTA mishaps are examined and comparisons are made to Coast Guard aircraft mishap records.

Author (GRA)

N84-24565# Naval Weapons Center, China Lake, Calif.
AIRCREW GLIDING ESCAPE SYSTEM (AGES) EXPLORATORY DEVELOPMENT INVESTIGATION OF AIRCREW EMERGENCY ESCAPE RAM-AIR INFLATED, FLEXIBLE WING Summary
Report, Aug. 1975 - Jun. 1983

J. T. MATSUO and M. C. J. BUTLER Sep. 1983 38 p
(Contract F41-451)
(AD-A139928; AD-E900306; NWC-TP-6098) Avail: NTIS HC A03/MF A01 CSCL 01C

This report describes the research, development, fabrication, and testing of the AGES ram-air inflated parachute wings. The primary focus of the investigation to date was on high-air-speed tests in order to obtain data on the structural integrity of the parachute wing and reefing system design and performance.

GRA

N84-25672# National Transportation Safety Board, Washington, D. C. Bureau of Safety Programs.
ANNUAL REVIEW OF AIRCRAFT ACCIDENT DATA: US GENERAL AVIATION, 1980

12 Apr. 1984 152 p refs
(PB84-182914; NTS/ARG-84/01) Avail: NTIS HC A07/MF A01 CSCL 01C

The record of general aviation accidents for calendar year 1980 is given. Statistics which describe the 3,597 general aviation accidents which occurred in 1980 are given. Eight sections report on subsets of the accidents defined by the type of aircraft involved. Six sections contain statistics on subsets defined by the kind of flying involved (e.g., personal, business, instruction). R.J.F.

N84-25673# National Transportation Safety Board, Washington, D. C.

SAFETY RECOMMENDATIONS A-84-1 THROUGH -3

6 Jan. 1984 2 p
Avail: NTIS HC A02/MF A01

A Bellanca Model crashed after the right wing separated in flight; both occupants were killed. Extensive deterioration (wood decay) of the inboard lower portion of the airplane's right wing front spar was noted. Normally, wing strap fittings are bolted to the wood spar, however, because of the decay, this portion of the spar was disconnected from the wing straps. The straps themselves, with the wing through bolts in place, remained attached to the fuselage. The bolts were corroded. A similar accident was also caused by undetected wing spar deterioration and prompted the Federal Aviation Administration (FAA) to issue an airworthiness directive requiring compliance with a Bellanca service letter. The decay was obscured visually because it was behind the wing straps and was covered by the straps and the spar's forward face plate. Additionally, since the wing strap to fuselage attaching bolt is located in this area, a probe inspection of the lower root end of the spar cannot be performed. In order to provide for an immediate, reliable inspection of the wing structure, required remedial actions should include measures beyond the scope of previous directives such as wing removal/disassembly and/or removal of lower wing straps and bolts. M.A.C.

N84-25674# National Transportation Safety Board, Washington, D. C.

SAFETY RECOMMENDATION A-84-7

21 Feb. 1984 2 p
Avail: NTIS HC A02/MF A01

A Grumman G 159 Gulfstream I was operating as an all cargo flight. At about 4000 feet altitude above ground level, an inflight fire occurred in the area of the right engine and engine cowl. The flightcrew secured the engine and discharged both fire extinguishers. The crew declared an emergency and returned the airplane to the airport without further incident. The inflight fire was caused by a failure of the No. 5 combustion chamber flame tube suspension pin, which allowed a flame breakout through the No.5 combustion chamber. Following several flame breakout incidents, the engine manufacturer issued a Service Bulletin. The Federal Aviation Administration (FAA) responded by issuing an airworthiness directive. M.A.C.

N84-25675# National Transportation Safety Board, Washington, D. C.

SAFETY RECOMMENDATIONS A-84-8 AND -9, AND A-84-17 THROUGH -20

29 Mar. 1984 6 p refs

Avail: NTIS HC A02/MF A01

A Lockheed L-1011 airplane, was en route from Miami, Florida, to Nassau, Grand Bahama Island, when the flightcrew noted an indication of loss of oil pressure on the No. 2 engine and shut it down. The captain decided to return to Miami because of better weather and terminal approach aids there. However, after the airplane's course was reversed, the No. 3 engine flamed out; about 5 minutes later, the No. 1 engine flamed out. The flightcrew considered it probable that they would be forced to ditch the airplane and the flight engineer told the senior flight attendant to prepare the cabin for imminent ditching. The flightcrew succeeded in restarting the No. 2 engine, and subsequently landed the airplane safely in Miami. The O ring seals were missing from the master chip detector on each of the airplane's three engines, and that the lack of seals permitted the lubricating oil to leak from each of the engines. The Nos. 1 and 3 engines stopped operating because of damage to the internal gearboxes which interrupted operation of the fuel pumps. M.A.C.

N84-25676# National Transportation Safety Board, Washington, D. C.

SAFETY RECOMMENDATION(S) A-84-10 AND -11

J. BURNETT 8 Feb. 1984 2 p

Avail: NTIS HC A02/MF A01

About 17 minutes after takeoff on February 2, 1981, a Piper PA-28R-210, N4542Q, crashed near the Houghton County Airport in Michigan. The pilot and two of the passengers were seriously injured. One other passenger received minor injuries and the plane was destroyed. The investigation showed that engine stoppage during flight was the consequence of oil starvation. The front crankcase oil seal was displaced outward and the crankcase breather line contained several of 1/2 inch-diameter pieces of ice. The engine was not equipped with any winterization devices to prevent ice from blocking the crankcase breather line. From January 1, 1977 to September 30, 1983, there were five recorded entries of frozen crankcase breather lines on Piper model PA-28 airplanes recommended that operators of such aircraft be advised of the hazard of operating high-time engines in very cold weather conditions without winterization kits on crankcase breather lines and the design of these line installations be evaluated to determine the need to provide icing protection, and that retrofitting be initiated if necessary. A.R.H.

N84-25678# National Transportation Safety Board, Washington, D. C.

SAFETY RECOMMENDATIONS A-84-14 AND -15

14 Mar. 1984 4 p refs

Avail: NTIS HC A02/MF A01

A DHC 6, crashed during its final landing approach. Of the eight persons aboard the airplane, seven received serious injuries and the other received minor injuries. The airplane was destroyed. Pitch control of the airplane was lost because an elevator control linkage separated. An improper and unsecured bolt was used in the linkage connection, and the bolt had backed out of the linkage. Further investigation into the origin of the improper bolt and the maintenance performed on the airplane disclosed deficiencies in maintenance and inspection organization and procedures. M.A.C.

N84-25679# National Transportation Safety Board, Washington, D. C.

SAFETY RECOMMENDATION(S) A-84-16

J. BURNETT 9 Mar. 1984 3 p refs

Avail: NTIS HC A02/MF A01

On July 23, 1982, at 0220 Pacific daylight time, a Bell UH-1B helicopter, N87701, crashed during the filming of a movie in Valencia, California. The helicopter hovered about 25 ft above a motion picture set showing a typical Vietnam village under attack

from heavy ordinance. As the pilot turned to facilitate camera coverage, the tail section was engulfed in a fireball created by the detonation of special effects explosives. The tail rotor assembly separated and the helicopter descended out of control. The main rotor blade fatally injured three actors on the ground. Six occupants on the aircraft sustained minor injuries and the aircraft was damaged substantially. The facts, conditions, and circumstances of this accident amply demonstrate the need for a requirement that helicopter operators prepare a manual and carry out its provisions as a prerequisite for the use of a helicopter in movie and television film production. The manual should contain provisions for pilot qualification, mandatory briefings of film production personnel on the risks involved, safeguards needed during operations, a plan for communications among all participating personnel, and a provision confirming the pilot-in-command's ultimate authority to control all flight regimes relative to this type of operation. A.R.H.

N84-25680# National Transportation Safety Board, Washington, D. C.

SAFETY RECOMMENDATION: CESSNA MODEL 402C AIRPLANE, SEPTEMBER 5, 1983, TAMPA INTERNATIONAL AIRPORT, TAMPA, FLORIDA

1 Feb. 1984 2 p

Avail: NTIS HC A02/MF A01

On September 5, 1983, a Cessna Model 402C airplane, N29PB, was involved in an accident at the Tampa International Airport, Tampa, Florida. Upon touchdown, the nose landing gear collapsed as a result of a fatigue failure of the bearing (part No. MS-21242S-4K) in the rod end of the hydraulic actuator. Similarly caused accidents in the Cessna Model 400 series occurred elsewhere. Until recently, the bearings installed in the actuator rod end were produced for Cessna by several vendors. The original specifications and standards for their design and manufacture were those contained in Military Standard MS-21242. On January 31, 1978, they were superseded by those in Military Specification MIL-B-81935. Investigations of the accidents at Tampa and Gainesville disclosed that the bearings did not conform to either. The slope of each of the respective bearing housings, measured relative to the bearing's longitudinal axis, exceeded the maximum specified angle of 35. This resulted in a reduction in the size and strength of the bearing housings which, the Safety Board concluded, contributed to the structural fatigue of these parts. Recommendations to the Federal Aviation Administration on performance testing, engineering analysis, and the issuance of directives are given. R.J.F.

N84-25681# National Transportation Safety Board, Washington, D. C.

STATISTICAL REVIEW OF ALCOHOL-INVOLVED AVIATION ACCIDENTS Safety Study, 1975 - 1981

1 May 1984 28 p

(NTSB/SS-84/03) Avail: NTIS HC A03/MF A01

During the years 1975-1981, more than 10 percent of the toxicological tests on deceased pilots were positive for alcohol. However, no pilot of a U.S. certificated air carrier operated under 14 CFR 121 was found to have a positive alcohol test since at least 1964. Toxicological tests were positive for alcohol in 6.4 percent of the tests taken from fatally injured scheduled 14 CFR 135 (commuter) pilots and in 7.4 percent of fatally injured pilots in nonscheduled 14 CFR 135 (on demand air taxi) operations. In general aviation, 10.5 percent of toxicological tests on fatally injured pilots were positive for alcohol. The extent of which alcohol is involved in nonfatal accidents is not known because there is no Federal authority to test surviving pilots for alcohol. Positive toxicological tests were obtained from pilots of all certificate levels and all levels of flight-time, indicating that experience cannot and does not compensate for the performance degradation caused by alcohol. Author

03 AIR TRANSPORTATION AND SAFETY

N84-25682# Naval Air Development Center, Warminster, Pa. Aircraft and Crew Systems Technology Directorate.
HELICOPTER PILOT/COPILOT SURVIVAL SYSTEM
G. P. GILLESPIE Jun. 1983 8 p
(AD-A140358; NADC-83098-60) Avail: NTIS HC A02/MF A01
CSCL 06G

The Helicopter Pilot/Copilot Survival System described in this report is designed for pilots, copilots and other aircrewmen who perform similar functions as stationary aircrewmen. They require a survival system designed to provide the necessary survival capabilities to cover a wide range of emergencies when escaping from a downed helicopter. The Helicopter Pilot/Copilot Survival System was designed to be worn constantly during missions over land or water; and to provide armor protection, flotation capability, lift compatibility, and use of survival items. The system and its subsystems are compatible with current aircrew requirements and do not interfere with the standard duties of the wearer. The purpose of this report is to document the development to-date, of this Helicopter Pilot/Copilot Survival System. Due to this system's present unfunded status, development has been curtailed. Upon resumption of development, this report will be utilized to assist those involved in future development of this system. GRA

N84-25683# Federal Aviation Administration, Washington, D.C. Office of Aviation Medicine.
CABIN SAFETY SUBJECT INDEX
D. W. POLLARD, J. A. STEEN, W. J. BIRON, and R. L. CREMER
Jan. 1984 17 p
(AD-A140409; FAA-AM-84-1) Avail: NTIS HC A02/MF A01
CSCL 05B

The most frequently used Federal Aviation Administration published cabin safety information is indexed and cross referenced. This includes Federal Aviation Regulations numbers, Air Carrier Operations Bulletin numbers, Advisory Circular numbers, and Office of Aviation Medicine report numbers. Author (GRA)

04

AIRCRAFT COMMUNICATIONS AND NAVIGATION

Includes digital and voice communication with aircraft; air navigation systems (satellite and ground based); and air traffic control.

A84-34648
EAST-WEST NONRECIPROCAL PROPAGATION OF OMEGA NAVIGATIONAL VLF WAVES ON THE LOW LATITUDE AND TRANSEQUATORIAL PATHS

T. KIKUCHI, A. OHTANI, K. NOZAKI, N. KURIHARE, Y. KURATANI, and M. OHSE Radio Research Laboratories, Journal (ISSN 0033-8001), vol. 30, July-Nov. 1983, p. 151-173. refs

The east-west nonreciprocities of the diurnal phase shift and field intensity change and their latitudinal dependence near the geomagnetic equator are clarified, and the anomalous E-W nonreciprocities are interpreted in terms of single mode propagation by making use of conventional anisotropic waveguide models. Measurements taken in Japan and aboard ship between Japan and Australia show that the diurnal phase shift on the transequatorial path is 35 percent less for E-W propagation than in the opposite direction, while the shift on the low latitude path is 30-40 percent greater for E-W propagation than in the W-E direction. Short-term fluctuations of the phase and field intensity and phase cycle slippage occur on the HAIKU (13.6 KHz) signal propagating E-W at the geomagnetic equator. These results can be explained by single mode propagation in the anisotropic models of Galejs (1972) and Gallenberger and Swanson (1971). C.D.

A84-35589
PROBLEMS IN AIR NAVIGATION AT THE NORTH POLE. II [PROBLEMES DE NAVIGATION AERIENNE AU POLE NORD. II]

J. F. FOURNIER and J. HAMELIN Navigation (Paris) (ISSN 0028-1530), vol. 32, April 1984, p. 179-182; 187-201. In French.

The procedures used by aircraft equipped with inertial navigation systems (INS) when operating at latitudes above 75 deg N are reviewed. The operation of a typical INS is explained, and the transformation of grid headings to true headings is described. A technique used by Air France to determine the heading in case of failure of both INS units is illustrated, and the importance of precise navigation is emphasized in view of increasing polar-region commercial traffic. T.K.

A84-35590
AIR NAVIGATION 1973-1983 [NAVIGATION AERIENNE 1973-1983]

P. FOMBONNE Navigation (Paris) (ISSN 0028-1530), vol. 32, April 1984, p. 202-222. In French. refs

The development of air traffic and of air navigation systems during the period 1973-1983 is reviewed. The slow growth of commercial and general-aviation traffic during the period is attributed to increases in fuel prices and to global economic stagnation. The current use and planned further development of navigation systems for long and intermediate distances and for approach and landing are then discussed, including Ioran-C, Omega, Navstar/GPS, VOR/DME and precision DME, anticollision and traffic-control systems, integrated communication/navigation/surveillance/anticollision systems, MLS (in its various proposed versions), onboard equipment, and control-center equipment. T.K.

A84-35694
IMPROVEMENT OF THE ACCURACY OF DOPPLER DIRECTION FINDERS FOR GENERAL AVIATION BY SPECTRAL SIGNAL ANALYSIS [VERBESSERUNG DER GENAUIGKEIT VON DOPPLERPEILERN ZUR KONTROLLE DER ALLGEMEINEN LUFTFAHRT DURCH SPEKTRALE SIGNALAUSWERTUNG]

R. SPRINGER Braunschweig, Technische Universitaet, Fakultae fuer Maschinenbau und Elektrotechnik, Dr.-Ing. Dissertation, 1983, 157 p. In German. refs

An improved Doppler direction finder (DDF) based on the analysis of the modulation phase is developed, simulated numerically, and tested in a laboratory version. The direction-finding requirements of general aviation are reviewed; the principles of DDFs are explained; and problems arising in conventional DDFs (scattering, diffraction, attenuation, noise, and reflection) are analyzed. The proposed DDF employs a following superhet with an FM auxiliary oscillator and a narrowband IF filter to analyze the entire output spectrum including both carrier and sidebands. Comparison of a computer simulation and laboratory measurements demonstrates the greatly increased precision attainable with this device. Graphs, diagrams, and sample spectra are provided. T.K.

A84-35862
AN ELECTRONIC UMBRELLA - THE B-1B DEFENSIVE AVIONICS SYSTEM

H. PEOT (USAF, Aeronautical Systems Div., Wright-Patterson AFB, OH) Defense Systems Review and Military Communications, vol. 2, May 1984, p. 15-18.

The design features and operational capabilities of the AN/ALQ-161 defensive avionics system for the B-1B bomber, which has been optimized for low altitude penetration of hostile airspace at high subsonic speed, are discussed. The AN/ALQ-161 system consists of (1) a receiver system that supplies directional data on detected signals; (2) a digital processor which employs digital LRUs and interfaces with a general purpose AP-101F computer that directs enemy radar tracking and jamming operations; (3) transmitters and antennas; and (4) a tail-mounted signal receiver warning system. The modularity and digital bus structure employed by the AN/ALQ-161 system ensures that it will be able to

incorporate novel and improved technology, effectively precluding obsolescence. O.C.

A84-35863
TACTICAL BATTLEFIELD AIRCRAFT STILL LACK ALL WEATHER LANDING SYSTEMS

F. B. POGUST (Eaton Corp., AIL Div., Deer Park, NY) Defense Systems Review and Military Communications, vol. 2, May 1984, p. 19-21.

The ICAO and FAA have standardized on a microwave landing system (MLS) that operates in C-band and uses a Time Reference Scanning Beam signal format. The U.S. military services have developed a strong interest in the adoption of such a system, in order to achieve civil/military compatibility in landing guidance techniques. The Air Force has been designated 'lead service' for the development of a tactical version of the MLS, which will be used at locations where it is impractical to site the type of equipment under development by the FAA for civilian airports. The degree of tactical mobility that can be achieved must be traded off against the desire for compatibility with the civilian system. O.C.

A84-36229
IS THERE A FUTURE FOR INFRA-RED MISSILE SYSTEMS?

A. R. NEWBERY (Royal Aircraft Establishment, Attack Weapons Dept., Farnborough, Hants., England) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982. Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 21-26. refs

This paper traces the history of IR missile seekers, from the early days of single element reticle systems to the modern multi-element imaging homing heads. It compares IR and radar homing, and suggests how the relative merits of the two technologies may be changed by the development of millimetric-wave systems. Author

A84-36230#
ELECTRONICALLY STEERABLE SATCOM TERMINALS FOR AIRBORNE USE

R. J. MAILLOUX (USAF, Electromagnetic Sciences Div., Bedford, MA) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982. Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 31-36.

This paper describes several classes of aircraft array antennas for satellite communication. At SHF frequencies candidate arrays include hybrid mechanical electronic scanned systems, fully conformal flush mounted and low profile arrays, and various multi-face arrays. At EHF frequencies the technology does not now support arrays with electronic scan in both planes, but hybrid electronic-mechanical scanned arrays offer viable technological options. Author

A84-36232
A CW CO₂ LASER RANGEFINDER/VELOCIMETER USING HETERODYNE DETECTION

K. F. HULME and B. S. COLLINS (Royal Signals and Radar Establishment, Malvern, Worcs., England) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982. Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 59-65. refs

An examination is made of ways in which system design problems are overcome in the RSRE chirp system based on a CW CO₂ laser externally modulated by an acoustooptic device. These problems arise from the use of heterodyne detection at an IR frequency 10,000 times higher than conventional microwave frequencies. Particular consideration is given to the factors governing the choice of the transmitter signal; the technique for processing the received signal using a SAW device; and a method for increasing the SNR by the digital integration of extremely large numbers (e.g., 100,000) of pulses. B.J.

A84-36240#
DESIGN CONSIDERATIONS AND TRADE-OFFS IN RPV COMMUNICATION LINKS

P. K. BLAIR (Standard Telecommunications Laboratories, Ltd., Harlow, Essex, England) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982. Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 148-156. refs

The essentially microwave aspects of RPV communication links are reviewed and their functions are outlined with the aim of informing designers of device, circuit, and subsystem requirements. Particular attention is given to frequency band choice, the air vehicle antenna requirements, the ground station, ECCM by the antenna, the airborne and ground receivers, and transmitters. B.J.

A84-36263#
POSITION UPDATING USING A PASSIVE MILLIMETER WAVE SENSOR

M. EIBERT and H. P. NIEMITZ (Dornier GmbH, Friedrichshafen, West Germany) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982. Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 352-362.

Low altitude 90 GHz radiometric images of man-made and natural objects were analyzed to determine the feasibility of position updating for pre-planned low altitude flights with passive millimeter wave sensors. The aim of the investigations was to determine constant or reproducible radiometric characteristics of objects for classification and reference generation. The analysis consisted of a comparison of images with maps, computation of gray value distributions (i.e., histograms) with respect to objects, calculation of standard deviation and mean, comparison of histograms with normalized Gaussian distribution functions and the definition of a 'relative contrast' to group objects into gray level classes. A method is proposed allowing the assignment of current and sensor compatible gray values to objects in the reference map. Author

A84-36264#
DESIGN AND PERFORMANCE EVALUATION OF A FIVE CHANNEL NAVSTAR RECEIVER

J. P. SUDWORTH (Royal Aircraft Establishment, Farnborough, Hants., England), P. J. HARGRAVE, R. E. HALL, and P. E. JONES (Standard Telecommunications Laboratories, Ltd., Harlow, Essex, England) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982. Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 363-372. Research supported by the Ministry of Defence (Procurement Executive).

The satellite navigation system Navstar is planned to consist of 18 satellites, each transmitting two navigation signals, designated L1 and L2, centered at 1575 and 1228 MHz, respectively. A high performance Navstar receiver might contain up to five code/carrier channels; four would be dedicated to L1 reception from each of four satellites and the fifth would sequentially sample the satellites at the L2 frequency to provide ionospheric correction measurements. An experimental receiver designed for the purpose of experimental evaluation on both air- and sea-borne platforms is described. The receiver operates from both C/A and P codes and consists of: (1) an RF unit containing two separate RF and IF channels, (2) a channel unit with five interchangeable correlator channels, (3) a processor unit with an 11-state Kalman filter, and (4) a control and display unit. Results from an early flight trial are presented. J.N.

A84-36265#
GPS GUIDANCE CONCEPTS

S. ROEMERMAN (Texas Instruments, Inc., Lewisville, TX) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982. Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 373-378. refs

Significant improvements afforded by the use of NAVSTAR GPS in several areas of weapons guidance have demonstrated

04 AIRCRAFT COMMUNICATIONS AND NAVIGATION

the potential to profoundly affect the nature of deployment, targeting, and tactics of guided-weapon use. This paper gives examples of GPS-equipped weapon concepts and describes results from GPS tests. In a comparison with Omega, LORAN, TACAN, and TERCON, GPS demonstrated strong advantages in ECM resistance, coverage, and update rate. The use of GPS with time domain multiplexing is reviewed. J.N.

A84-36266#

AIRBORNE SELF PROTECTION JAMMER - ASPJ/ALQ-165

D. J. RICE (Westinghouse Electric Corp., Electronic Warfare Div., Baltimore, MD) and A. S. KAUFMAN (ITT, ITT Avionics Div., Nutley, NJ) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982. Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 389-399.

The AN/ALQ-165 Airborne Self-Protection Jammer (ASPJ) for new U.S.-built tactical aircraft will be installed in F-16s, F-18s, F-14s, AV-8Bs, A-6Es, and EA-6Bs (1700-3000 aircraft). The ASPJ's development has been jointly undertaken by the Navy and Air Force. First production units are expected to be delivered in late 1985. The ASPJ's function is to degrade and deceive all radar-guided weapons systems used by the enemy, automatically selecting the best technique for the identified threat. Multiple threats can be countered simultaneously. O.C.

A84-36281#

DEPOLARISATION PROPERTIES OF AIRBORNE RADOMES

A. HIZAL, N. ADATIA, and G. S. GUPTA (ERA Technology, Ltd., Leatherhead, Surrey, England) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982. Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 493-499. Research supported by the Ministry of Defence (Procurement Executive).

Vector diffraction analysis is employed to study the depolarization properties of airborne radomes. The model developed is then used to study the depolarization properties of two typical aircraft radome geometries (a half-wave solid ogive and an A-sandwich ogive) and to establish their characteristics in linear and circular polarization. Measurements on a high-performance corrugated conical horn enclosed by a conical radome validate the theoretical predictions. J.N.

A84-36291

AN ADAPTIVE ARRAY PROCESSOR WITH A PERTURBATION ALGORITHM

J. KILVINGTON (Royal Aircraft Establishment, Farnborough, Hants., England) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982. Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 563-568.

An adaptive aerial array processor using a perturbation algorithm has been developed, based on an 8-bit microprocessor and using Walsh functions as the perturbing sequences. The great advantage of this processor is its low cost, due mainly to the absence of dedicated receiver circuitry for each loop, and the consequent flexibility of application to many systems. The major features of the algorithm are described, followed by details of the hardware interface to the protected receiver, the RF weighting network and the associated linearising circuit. Author

A84-36292#

AN ADAPTIVE ANTENNA FOR MILITARY AIRCRAFT COMMUNICATIONS

E. M. DAVENPORT (British Aerospace, PLC, Dynamics Group, Bristol, England) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982. Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 569-574. Research supported by the Ministry of Defence (Procurement Executive).

The development of an adaptive antenna for a military aircraft communications system will be described. The antenna is designed as a retro-fitted option which will improve the desired signal to

noise ratio at the receiver when operating in a tactical situation. Unwanted jammer signals are nulled out by the adaptive processor which is controlled by the LMS algorithm. The processor operates at RF (microwave) frequencies. The adaption rate and improvement in signal to noise levels are sensitive to the precise design of the array and the processor feedback loop, and the components used therein. A computer simulation of the adaptive system has been made to assist in the processor development and the results of these aspects of the study will be presented. Author

N84-24566*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

DEVELOPMENT AND FLIGHT TEST OF A HELICOPTER COMPACT, PORTABLE, PRECISION LANDING SYSTEM CONCEPT

G. R. CLARY, J. S. BULL, T. J. DAVIS, and J. P. CHISHOLM (Sierra Nevada Corp.) Apr. 1984 11 p refs (NASA-TM-85951; A-9729; NAS 1.15:85951) Avail: NTIS HC A02/MF A01 CSCL 17G

An airborne, radar-based, precision approach concept is being developed and flight tested as a part of NASA's Rotorcraft All-Weather Operations Research Program. A transponder-based beacon landing system (BLS) applying state-of-the-art X-band radar technology and digital processing techniques, was built and is being flight tested to demonstrate the concept feasibility. The BLS airborne hardware consists of an add-on microprocessor, installed in conjunction with the aircraft weather/mapping radar, which analyzes the radar beacon receiver returns and determines range, localizer deviation, and glide-slope deviation. The ground station is an inexpensive, portable unit which can be quickly deployed at a landing site. Results from the flight test program show that the BLS concept has a significant potential for providing rotorcraft with low-cost, precision instrument approach capability in remote areas. Author

N84-24568# Systems Control Technology, Inc., West Palm Beach, Fla.

CONUS LORAN-C ERROR BUDGET: FLIGHT TEST Final Report

L. D. KING, E. D. MCCONKEY, and K. J. VENEZIA Dec. 1983 127 p (Contract DTFA01-83-C-20041) (AD-A139871; FAA-PM-83-32) Avail: NTIS HC A07/MF A01 CSCL 17G

This report contains the description and results of a Loran-C flight test program conducted in the continental United States (CONUS). The data collection period was during July 1983. The purpose of the program was to collect Loran-C signal coverage and accuracy data representative of low altitude, low speed operations typical of helicopters and general aviation aircraft. The test aircraft use a Beechcraft Queen Air, Model 65. The aircraft was configured with a data collection palate and multipin electrical connectors located in the aircraft cabin. A Teledyne TDL-711 navigation receiver was used in the test, utilizing an E-field antenna mounted on the top of the fuselage. A microprocessor controlled data collection system, utilizing a scanning DME and other aircraft navigation instruments, was used to record data and establish aircraft reference position. Route segments, totaling over 9500 nm covering much of CONUS, were flown during the project. Data were recorded on all route segments. Over 12,000 data points were used in the accuracy analysis. Calibration procedures, used at five locations, reduced errors throughout an area within a 75 nm radius of the calibration point. Author (GRA)

04 AIRCRAFT COMMUNICATIONS AND NAVIGATION

N84-25685# Radio Technical Commission for Aeronautics, Washington, D. C.

MINIMUM OPERATIONAL PERFORMANCE STANDARDS FOR TRAFFIC ALERT AND COLLISION AVOIDANCE SYSTEM (TCAS) AIRBORNE EQUIPMENT, VOLUME 1

23 Sep. 1983 366 p 2 Vol.

(RTCA-DO-185-VOL-1; SC-147-VOL-1) Avail: NTIS HC A16/MF A01

Minimum operational performance standards for the Traffic alert and Collision Avoidance System (TCAS) are described. Equipment applications and operational goals, definition of performance under standard and stressed environmental conditions, and an overview of the collision avoidance algorithms are included. Specific bench and performance tests for the electronic equipment are outlined.

M.A.C.

N84-25686# Radio Technical Commission for Aeronautics, Washington, D. C.

MINIMUM OPERATIONAL PERFORMANCE STANDARDS FOR TRAFFIC ALERT AND COLLISION AVOIDANCE SYSTEM (TCAS) AIRBORNE EQUIPMENT, VOLUME 2

23 Sep. 1983 372 p 2 Vol.

(RTCA/DO-185-VOL-2; SC-147-VOL-2) Avail: NTIS HC A16/MF A01

The specifications for the collision avoidance algorithms are presented. The data structures, interfaces, and system parameters used by the Collision Avoidance System. The logic for the main loop, which cycles at a nominal rate of once per second and calls the tasks contained in later sections, and the logic performed when a Traffic Alert and Collision Avoidance System (TCAS) related message is received through the Mode S transponder is described. The tracking algorithms for intruder aircraft and own aircraft altitude and sensitivity level are defined. The threat detection algorithms are included. The logic for selection of resolution advisories, for coordination with equipped threats, and cleanup of data structures is examined. The algorithms for generating traffic advisories, and the composite display of resolution and traffic advisories are explained.

M.A.C.

N84-25687# Human Engineering Labs., Aberdeen Proving Ground, Md.

EMULATION OF A VOICE INTERACTIVE DOPPLER NAVIGATION SET Final Technical Note

R. G. HACKENBERG and F. J. MALKIN Mar. 1984 27 p

(AD-A140204; HEL-TN-5-84) Avail: NTIS HC A03/MF A01 CSDL 09B

Software emulating the operation of the Doppler Navigation Set entirely by voice commands is described. The software, written in Microsoft BASIC using a vocabulary of 67 words, is implemented on the Interstate Electronics VRT 103 Voice Recognition Terminal. Procedural diagrams illustrating the man-machine interaction occurring during the program's subroutines are included.

Author (GRA)

N84-25688# Systems Control Technology, Inc., West Palm Beach, Fla.

CONUS (CONTINENTAL UNITED STATES) OMEGA/VLF DATA COLLECTION: FLIGHT TEST Final Report

L. D. KING and E. D. MCCONKEY Dec. 1983 114 p

(Contract DOT-FA01-80-C-10080)

(AD-A140252; FAA/PM-83/35) Avail: NTIS HC A06/MF A01 CSDL 17G

This report contains the description and results of an Omega/VLF flight program conducted in the continental United States (CONUS). The data collection period was during May 1983. The purpose of the program was to collect Omega and VLF signal coverage and accuracy data representative of low altitude, low speed operations typical of helicopters and general aviation aircraft. The aircraft used was a Beechcraft Queen Air, Model 65. The aircraft was configured with a data collection palate and multipin electrical connectors located in the aircraft cabin. An ARINC 599 type Omega/VLF navigation receiver was used in the project. A flat plate, E-field antenna was mounted in the bottom of the

fuselage near the empennage. A microprocessor controlled data collection system, utilizing a scanning DME and other aircraft navigation instruments, was used to record data and establish aircraft reference position. Route segments, totaling over 7000 nm covering much of CONUS, were flown during the project. Data were recorded on all route segments. Over 7000 data points were used in the accuracy analysis. GRA

N84-25691# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

ADVANCES IN STRAPDOWN INERTIAL SYSTEMS

Apr. 1984 225 p refs In ENGLISH and FRENCH Lecture held in Athens, 14-15 May 1984, in Rome, 17-18 May 1984, and in Copenhagen, 21-22 May 1984

(AGARD-LS-133; ISBN-92-835-0351) Avail: NTIS HC A10/MF A01

Advances in strapdown inertial system technology during the last five years are addressed. Areas include advances in strapdown instruments, computational algorithms and the application to commercial aircraft, remotely piloted vehicles, flight controls, instrumentation, and navigation problems in general.

N84-25692# Draper (Charles Stark) Lab., Inc., Cambridge, Mass. G&N Advanced Programs Div.

ADVANCES IN STRAPDOWN INERTIAL SYSTEMS: INTRODUCTION AND OVERVIEW

G. T. SCHMIDT In AGARD Advan. in Strapdown Inertial Systems 4p Apr. 1984 refs

Avail: NTIS HC A10/MF A01

The significant advances in strapdown inertial system technology since the last Lecture Series (No. 95) in 1978 on the subject are presented. Areas that are addressed in the Lecture Series include advances in strapdown instruments and computational algorithms and the applications to commercial aircraft, remotely piloted vehicles, flight controls, instrumentation, and navigation problems in general. Author

N84-25693# Strapdown Associates, Inc., Minnetonka, Minn.

ADVANCES IN STRAPDOWN SENSORS

P. G. SAVAGE In AGARD Advan. in Strapdown Inertial Systems 24p Apr. 1984 refs

Avail: NTIS HC A10/MF A01

The advanced that have taken place in strapdown sensor technology since 1978 are reviewed. Principal areas addressed in strapdown gyro technology are the state of the art in mainstream floated rate-integrating and tuned-rotor strapdown gyros, performance advances in laser gyros, special design considerations associated with mechanically dithered laser gyros, the state of the art in magnetic mirror and multioscillator laser gyros, present and projected application areas for laser gyros related to size, performance and cost, the theory of operation and state of the art in fiber optic rate sensor technology, and the fundamental distinctions between the laser gyro and fiber optic rate sensor. Basic areas addressed in strapdown accelerometer technology are performance advances in pendulous accelerometers, and the theory of operation and state of the art in vibrating beam accelerometer technology. Author

N84-25695# Boeing Commercial Airplane Co., Seattle, Wash. Navigation Sensors/Displays Dept.

REQUIREMENTS, APPLICATIONS, AND RESULTS OF STRAPDOWN INERTIAL TECHNOLOGY TO COMMERCIAL AIRPLANES

P. J. FENNER In AGARD Advan. in Strapdown Inertial Systems 47p Apr. 1984 refs

Avail: NTIS HC A10/MF A01

The basis for selection of strapdown inertial system for short to medium range jet transports is discussed. Inertial data requirements and associated performance requirements are shown for commercial airplanes. Good performance at low cost and high reliability are key requirements of inertial technology application to commercial airplanes which do not have a long range navigation need. The Honeywell laser inertial reference system (IRS) selected

04 AIRCRAFT COMMUNICATIONS AND NAVIGATION

by Boeing for the 757/767/737 airplanes is described, along with airplane installation and interface details. Test programs instituted to validate the design and reduce program risk are described. Performance and reliability experience data from Boeing flight tests, and over the first year of airline service, are shown to exceed expectations. Author

N84-25696# Societe de Fabrication d'Instruments de Mesure, Massy (France). Strapdown Systems Engineering Group.
STRAPDOWN INERTIAL SYSTEMS FOR TACTICAL MISSILES USING MASS UNBALANCED TWO-AXIS RATE GYROS
J. L. MICHELIN and P. MASSON (Lab. de Recherches Balistiques et Aerodynamiques.) *In* AGARD Advan. in Strapdown Inertial Systems 41p Apr. 1984
Avail: NTIS HC A10/MF A01

In 1979, SFIM began work on strapdown inertial systems using two axis dry tuned gyros (DTG). Since the first feasibility developments SFIM has worked on a large number of applications, the most important being for tactical missiles. All current developments are based on the same concepts - mass unbalanced gyros (M.U.G.) - fully digitized electronics - leading to a systems family - SIL 1 (Systemes Inertiels lies) - in which the cost and volume requirements are the essential points. The basic ideas, some examples of utilization and the test results obtained on some functional models and prototypes by SFIM and essentially by LRBA are presented. Author

N84-25697# Draper (Charles Stark) Lab., Inc., Cambridge, Mass. Inertial Subsystem Div.
MODULAR STRAPDOWN GUIDANCE UNIT WITH EMBEDDED MICROPROCESSORS

J. P. GILMORE *In* AGARD Advan. in Strapdown Inertial Systems 16p Apr. 1984 refs Previously announced as A80-18534 (Contract F08635-76-C-0306)
Avail: NTIS HC A10/MF A01

The Low-Cost Inertial Guidance System (LCIGS) is a modular strapdown implementation of attitude (gyro) and velocity (accelerometer) axes which permits the interchangeable use of different manufacturer's instruments without affecting the system's electronic or mechanical interfaces or processing software. This design flexibility is made possible by the use of microprocessors for processing and control. The microprocessors are embedded in each module and five are used: one per accelerometer triad, one each per gyro module, and one in the service module. The processors effect on-line digital torquing control of the gyros, active instrument error model compensation, including modeling for temperature sensitivity effects, temperature control, self-testing, etc. Adaptation of processing and calibration algorithms to accommodate for instrument changes or sensed environmental variations is achieved through the use of an alterable read-only data base that may be updated by the LCIGS support equipment as required at calibrations or upon an instrument replacement. This data base is accessed by the microprocessors and used to compute coefficient corrections for the processing algorithms. The system architecture is presented and the microprocessor software partitioning and functions are described. (Author) IAA

N84-25698# Air Force Wright Aeronautical Labs., Wright-Patterson AFB, Ohio. Flight Dynamics Lab.
APPLICATION OF MULTIFUNCTION STRAPDOWN INERTIAL SYSTEM

D. L. SEBRING (McDonnell Douglas Corp., St. Louis), J. M. PERDZOCK, and J. T. YOUNG *In* AGARD Advan. in Strapdown Inertial Systems 20p Apr. 1984 refs
Avail: NTIS HC A10/MF A01

Reliability, redundancy, and survivability are key issues as integrated requirements for flight control, fire control, propulsion control and navigation are developed. These integrated systems require dependable sources of inertial measurement data. Current inertial sensors, however, are expensive to acquire and maintain, dedicated to specific systems, and are not designed to meet integrated reliability, redundancy, and survivability requirements. The Multifunction Strapdown Inertial System concept uses a

minimum number of inertial sensors in a survivable configuration to provide inertial data for flight control, navigation, weapon delivery, cockpit displays, and sensor stabilization. Because of advantages in survivability, life cycle cost, maintainability and performance, the Multifunction Flight Control Reference System (MFCRS) program was initiated to verify, through flight test, on a McDonnell Douglas F-15 Eagle the key issues of redundancy management and flight control. A redundancy management system based on parity equations was designed. Author

N84-25699# Litton Technische Werke, Freiburg (West Germany). Systems Design Dept.

INITIAL ALIGNMENT AND AUGMENTATION OF THE ARINC 705 STRAPDOWN AHRS LTR-81
W. HASENPFUG and M. KLEINSCHMIDT *In* AGARD Advan. in Strapdown Inertial Systems 14p Apr. 1984 refs
Avail: NTIS HC A10/MF A01

After systems hardware description the attitude, heading and vertical loops are discussed. System simulation results are compared with flight test results achieved during A 300 B4 FFC flight certification and BMFT/LITEF sponsored flight tests. Techniques for further system improvements are shortly described. Author

05

AIRCRAFT DESIGN, TESTING AND PERFORMANCE

Includes aircraft simulation technology.

A84-34451#
DESIGN AND EXPERIMENTAL VERIFICATION OF THE USB FLAP PANEL STRUCTURE FOR NAL-STOL RESEARCH AIRCRAFT

M. SANO (National Aerospace Laboratory, Tokyo, Japan), Y. FUJIMORI (National Space Development Agency, Tokyo, Japan), and S. MAEKAWA (Kawasaki Heavy Industries, Ltd., Gifu, Japan) (International Council of the Aeronautical Sciences, Congress, 13th and AIAA Aircraft Systems and Technology Conference, Seattle, WA, August 22-27, 1982, Proceedings. Volume 1, p. 370-375) *Journal of Aircraft* (ISSN 0021-8669), vol. 21, June 1984, p. 353, 354; Abridged.

Previously cited in issue 20, p. 3149, Accession no. A82-40917

A84-34452#
APPLICATION OF COMPUTATIONAL AERODYNAMICS TO AIRPLANE DESIGN

L. R. MIRANDA (Lockheed-California Co., Computational Aerodynamics Dept., Burbank, CA) *Journal of Aircraft* (ISSN 0021-8669), vol. 21, June 1984, p. 355-370. refs

Previously cited in issue 08, p. 1185, Accession no. A82-22028

A84-34907*# Boeing Commercial Airplane Co., Seattle, Wash.
WINGLET EFFECTS ON THE FLUTTER OF TWIN-ENGINE-TRANSPORT TYPE WING

K. G. BHATIA, K. S. NAGARAJA (Boeing Commercial Airplane Co., Seattle, WA), and C. L. RUHLIN (NASA, Langley Research Center, Configuration Aeroelasticity Branch, Hampton, VA) AIAA, ASME, ASCE, and AHS, Structures, Structural Dynamics and Materials Conference, 25th, Palm Springs, CA, May 14-16, 1984. 11 p. refs
(AIAA PAPER 84-0905)

Flutter characteristics of a cantilevered high aspect ratio wing with winglet were investigated. The configuration represented a current technology, twin-engine airplane. A low-speed and a high-speed model were used to evaluate compressibility effects through transonic Mach numbers and a wide range of mass-density

ratios. Four flutter mechanisms were obtained in test, as well as analysis from various combinations of configuration parameters. The coupling between wing tip vertical and chordwise motions was shown to have significant effect under some conditions. It is concluded that, for the flutter model configurations studied, the winglet related flutter was amenable to the conventional flutter analysis techniques. Author

A84-34950

AIRCRAFT NOISE CONTROL - PROGRESS AND PROSPECTS
M. J. T. SMITH (Rolls-Royce, Ltd., London, England) Aerospace (UK) (ISSN 0305-0831), vol. 11, May-June 1984, p. 27-37. refs

Attention is given to a range of experimental determinations concerning turbofan-powered airliner noise emission patterns, as well as to the development status of technology aimed at reducing such noise emissions. To date, a reduction of 20 dB has been achieved from the levels of the pure turbojet engines which originally powered the 707-generation airliners. A more recent stagnation in noise reduction gains is due to the lack of commercial interest, during recession years, which would otherwise have warranted the launching of engine design initiatives and regulatory uncertainties associated with the certification process for new engine derivatives. An evaluation is made of the effect on noise of thrust requirement reductions, 'managed' low drag approaches, selective use of noise shielding techniques, and greater climb and descent angles. O.C.

A84-35024**USB APPLIED TO HIGH-SPEED AIRCRAFT**

D. J. HOLT Aerospace Engineering (ISSN 0736-2536), vol. 4, May-June 1984, p. 15-18.

NASA's Quiet Short-haul Research Aircraft was originally developed to investigate the low speed aerodynamic effects associated with its Upper Surface Blowing (USB) propulsive lift technique. A novel proposal currently under consideration would extend USB development and testing to an advanced high speed aircraft. NASA is contemplating the use of an existing A-3B airframe, which is stressed for high subsonic speeds and carrier landings. This aircraft is, moreover, of the high-wing, fuselage-mounted landing gear configuration required for the conversion to USB operation. Four turbofan engines will be mounted above slightly swept wings, which will incorporate tip winglets, and a high T-tail empennage will be added to prevent engine exhaust impingement on control surfaces. O.C.

A84-35025**TILT ROTOR CONCEPT EXAMINED**

D. J. HOLT Aerospace Engineering (ISSN 0736-2536), vol. 4, May-June 1984, p. 40-44.

The design principles and operational capabilities of tilt-rotor aircraft are discussed, with a view to their bridging of the current performance gap between the helicopter and conventional turboprop aircraft. Attention is given to the recent demonstration of the tilt rotor concept by the XV-15 experimental aircraft, and to the specifications which are being addressed by tilt rotor aircraft designers for the Joint Services Advanced Vertical Lift Aircraft, or J VX, program. These include the ability to hover out of ground effect at 4000 ft, a 250-knot cruise speed, a tactical range of 1400 nautical miles, an endurance of 4 hr at 30,000 ft altitude, and high ballistic survivability and shipboard capability. O.C.

A84-35174#**F/A-18A/F404 PROPULSION SYSTEM INTEGRATION**

B. R. WILLIAMS (McDonnell Aircraft Co., St. Louis, MO) and C. J. WENDEL (General Electric Co., Lynn, MA) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 11 p.
(AIAA PAPER 84-1330)

The propulsion system integration program instituted for the F-18 fighter and its F404 engines emphasized unrestricted operational capability, optimum naval carrier suitability, and excellent propulsion system reliability and maintainability. Over 5000 aircraft flight hours were flown during the Full Scale Development

flight test program. Both subsonic and supersonic inlet/engine compatibility trials demonstrated surge-free operation. Attention was given to the compatibility of armament firing and release operations with the engine inlet system, especially at flight envelope and maneuvering extremes. O.C.

A84-35215*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

DESIGN OF LONG-ENDURANCE UNMANNED AIRPLANES INCORPORATING SOLAR AND FUEL CELL PROPULSION

J. W. YOUNGBLOOD, T. A. TALAY, and R. J. PEGG (NASA, Langley Research Center, Hampton, VA) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 11 p. refs
(AIAA PAPER 84-1430)

Attention is given to the design features and operational capabilities of a class of unmanned flight vehicles possessing multiday mission endurance capabilities, based on the use of a mixed-mode electric power system which incorporates solar cells for diurnal energy production and a nonregenerative H₂-O₂ fuel cell for nocturnal energy supply. Energy is thereby provided for not only propulsion, but also the operation of the payload and the vehicle's avionics. The excess solar energy available during high insolation portions of the diurnal period may be used for climb/maneuvering or payload-related functions. Empirical structure scaling algorithms are combined with low Reynolds number aerodynamics algorithms to estimate requisite size and geometry for the chosen mission. Wing loadings will be of the order of 0.9-1.3 lb/sq ft. O.C.

A84-35687**AIRCRAFT STRUCTURES (2ND EDITION)**

J. J. AZAR (Tulsa, University, Tulsa, OK) and D. J. PEERY New York, McGraw-Hill Book Co., 1982, 463 p. refs

An exposition is made of the fundamental concepts in the design and analysis of flight structures, and unified analytical tools are developed for the prediction and assessment of structural behavior irrespective of the field of application. Attention is first given to the definition of a structural system and its constituents, loads, supports, and reactions, as well as to the concepts of statics and the principles of mechanics. There follows a discussion of the basic elasticity relations and of material behavior and selection. The load analysis of flight vehicles and the analysis and design of specific flight vehicle structural components is undertaken using finite difference, stiffness matrix and energy methods for the deflections of structures. O.C.

N84-24569 Forschungsinstitut fuer Funk und Mathematik, Werthoven (West Germany).

ESTIMATION OF THE FLIGHT PARAMETERS OF LOW FLYING AIRCRAFT USING THE RADIATED NOISE Thesis - Hochschule der Bundeswehr

J. SCHILLER Sep. 1983 157 p refs In GERMAN; ENGLISH summary Sponsored by Bundesministerium der Verteidigung (LFD-211; REPT-4-83) Avail: Issuing Activity

The use of acoustic sensors might make it possible to close the RADAR detection gap for low flying aircraft. Measurements made using one single sensor are presented. Variances in bearing angle are given and compared with computer simulation results. Two methods for estimating the dynamic flight parameters of inertially moving targets on the basis of single sensor measurements are developed and tested with real data. It is shown, that in the case of targets at high speed the retardation effect can be used for parameter estimation. Author

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

N84-24570# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (West Germany). Inst. fuer Flugmechanik.

SYSTEM MODELING AND IDENTIFICATION OF EQUIVALENT SYSTEMS WITH AND WITHOUT COMPENSATING TIME DELAY FOR CONTROL-AUGMENTED AIRCRAFT

J. SKUDRIDAKIS Nov. 1983 106 p refs In GERMAN; ENGLISH summary Also announced as translation (ESA-TT-852)

(DFVLR-FB-83-36; ESA-TT-852) Avail: NTIS HC A06/MF A01; DFVLR, Cologne DM 34

The identification of the aerodynamic and equivalent derivatives in the longitudinal and lateral motions of modern fighter aircraft is described. The goal of the investigation was, in particular, the determination of handling qualities parameters through reduced evaluation methods in order to fulfill the requirements of the MIL-F-8785 C calculation. To accomplish this goal, the highly complex method of observing aircraft motion was reduced by means of goal-oriented simplifications to a lower order system. The report describes the mathematical modelling for various control inputs with and without compensating time-delay, their influence on the results and their accuracy. Author

N84-24571# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Oberpfaffenhofen (West Germany). Abt. Wolkenphysik.

FIRST STAGE OF EQUIPMENT FOR AIRCRAFT DO 28 OF DFVLR AS A RESEARCH AIRCRAFT FOR ICING AND FIRST RESEARCH RESULTS

H. E. HOFFMAN and J. DEMMEL Nov. 1983 65 p refs In GERMAN; ENGLISH summary Report will also be announced as translation (ESA-TT-855)

(DFVLR-FB-83-40) Avail: NTIS HC A04/MF A01; DFVLR, Cologne DM 22,50

The first stage of equipment of a Do 28 of DFVLR as a research aircraft for icing has been finished. These measurements can be made: Liquid water content (2 types of devices), temperature, rel. humidity, backscatter coefficient, ice accretion (on three different standard cylinders). During first flights in February and March 1983 the measurements resulted among other things in: The thickness of ice accretion on the standard cylinders increased linear with liquid water content between 0,06 and 0,30 g/sq m LWC; the ice accretion was the more intensive the thinner the cylinder was; when the temperature was only some degrees lower, the ice accretion was significant thicker; two different types of devices for measuring LWC resulted in good consistency. Author

N84-24572# National Aerospace Lab., Amsterdam (Netherlands). Structures and Materials Div.

THE USE OF ARALL IN FUSELAGE SKINS

J. B. DEJONGE 20 Aug. 1982 28 p refs (Contract NIVR-1950)

(AD-B080831; NLR-TR-82081-U) Avail: NTIS HC A03/MF A01

A general review of the loading of transport aircraft fuselages is given as well as the consequent fuselage skin stresses. Taking the F-28 fuselage as an example, the potential weight savings that can be obtained by using aramide reinforced aluminum laminate as skin material, are assessed. R.J.F.

N84-24573# Bristol Univ. (England). Dept. of Aeronautical Engineering.

THE INFLUENCE OF A MOVING SUSPENSION ON THE BEHAVIOUR OF MODELLED HELICOPTER UNDERSLUNG LOADS B.S. Thesis

J. D. LESSER and G. J. WALKER Jun. 1983 91 p refs (BU-288) Avail: NTIS HC A05/MF A01

The influence of a moving suspension on the behavior of helicopter underslung loads was investigated both experimentally and analytically. Experimental modelling was achieved using a double pendulum arrangement incorporating three mutually perpendicular translational support stiffnesses. Both experimentally and analytically, the influence of suspension point characteristics on the behavior of the load was shown to be radical. Generic

classification of this non-linear system enabled the predominant behavioral features to be isolated. Author

N84-24574# Bristol Univ. (England). Dept. of Aeronautical Engineering.

THE STRUCTURAL AND AERODYNAMIC BEHAVIOUR OF A SEMI-INFLATABLE WING B.S. Thesis

M. J. HOPKINSON and A. S. HANNHEIM Jun. 1983 44 p refs Original contains color illustrations (BU-297) Avail: NTIS HC A03/MF A01

The viability of a semi-inflatable aerofoil structure to be used as a collapsible wing on a small Remotely Piloted Vehicle (RPV) is investigated. A prototype is tested in an open jet wind tunnel both from an aerodynamic and a structural point of view. As first tested, the form of construction was found to be inadequate. The aerofoil, in its final form, was found to be suitable for the RPV application, although improvement in the basic design could reduce the overall weight of the structure, and the internal pressure required. M.A.C.

N84-24575# Societe Nationale Industrielle Aerospatiale, Toulouse (France). Direction Etudes.

STATISTICAL APPROACH TO DAMAGE TOLERANCE ASSESSMENT

J. M. THOMAS, B. LACHAUD, C. LAURENT, and J. M. LEONARD 23 Feb. 1984 17 p Presented at 12th ICAF Conf., Toulouse, 25-27 May 1983

(SNIAS-832-111-112) Avail: NTIS HC A02/MF A01

Civil transport aircraft fatigue strength is a very arduous problem, considering the complexity of aircraft, the diversity of their missions and airline operation and the present state of science in this field. In order to take the influence of parameters such weight, flight frequency, mission characteristics and the stress level associated with the structural design into account in a global approach, and with a view to customizing fatigue predictions for the type of operation of each commercial airline, an extensive statistical fatigue methodology was developed. This fully computerized methodology associates on one hand a parametric phase enabling an aircraft and its operation to be customized by mean of two data bases: the parametric stress data base and the disturbance statistics data base, and on the other a statistical fatigue analysis based on a representation of the stress spectrum as a stress/frequency diagram. The analysis uses a rain flow type method extended to the statistical aspect and clearly highlights the contribution of the ground-air-ground cycle. R.J.F.

N84-24576# Air Force Flight Test Center, Edwards AFB, Calif.

ELECTRICAL SUBSYSTEMS FLIGHT TEST HANDBOOK Final Report, Jun. 1983 - Jan. 1984

K. J. LUSH Jan. 1984 104 p

(AD-A139783; AFFTC-TIH-84-1) Avail: NTIS HC A06/MF A01 CSCL 01C

This Handbook provides engineers with guidelines for the testing of aircraft electrical subsystems. Future technological advances, characteristics of individual aircraft and test programs and cost constraints may necessitate other methods being used in some cases. A background is provided on aircraft electrical subsystems and the requirements to which they are designed. Details are provided of individual tests, test support requirements and evaluation criteria and suggestions made for presentation of results. Author (GRA)

N84-25615# Naval Air Development Center, Warminster, Pa. **CURRENT PROCUREMENT SPECIFICATION DESIGN REQUIREMENTS FOR US NAVY AIRCRAFT**

S. J. KETCHAM In AGARD Workshop on Requirements for Aircraft Corrosion Control 2 p Mar. 1984

Avail: NTIS HC A05/MF A01

An important step in the acquisition of a new naval aircraft is the review of detailed specifications by materials and process specialists. The specifications are studied for compliance with SD-24, MIL-F-7179 and MIL-S-5002. In addition, reports on Adhesives, Lubricants, Finishes and Corrosion Control Plans are

furnished as a contractual requirement. Some of the most important considerations are the materials to be used, designs incorporating dissimilar metals, and water tightness. Test programs may be necessary to validate a particular choice of material of design. In the final analysis, however, cost and performance are the overriding considerations so some compromises usually have to be made. The challenge is to obtain as corrosion free a vehicle as possible within these constraints. Author

N84-25616# Army Materials and Mechanics Research Center, Watertown, Mass.
CURRENT DESIGN REQUIREMENTS FOR CORROSION CONTROL ON HELICOPTERS

M. LEVY and R. D. FRENCH *In* AGARD Workshop on Requirements for Aircraft Corrosion Control 5 p Apr. 1984
 Avail: NTIS HC A05/MF A01

Aeronautical Design Standard ADS-13C embodies the general requirements for the materials and processes utilized in the design and construction of Army aircraft. The materials and processes are utilized in accordance with AMCP706-203, the Engineering Design Handbook Helicopter Engineering, part three, Qualification Assurance. The properties of materials are generally obtained from MIL-HDBK-5, MIL-HDBK-17 and MIL-HDBK-23, for metallic materials, plastics, and structural sandwich composites respectively. All of the system parts are finished to provide protection from corrosion and other forms of material deterioration in accordance with a contractor prepared and Government-approved material deterioration prevention and control (MADPAC) plan which is detailed in the appendix to ADS-13. This appendix describes the managerial and technical responsibilities of Army contractors in the design, validation, development and production phases of Army aviation systems. It provides a mechanism for the implementation of sound materials selection practices and finish treatments during the life cycle of all Army aviation weapon systems and defines the organization and implementation of a MADPAC finish specification which complies with MIL-F-7179. ADS-13C represents the most recent revision of the standard which embodies some of the corrosion lessons learned from Army helicopters where weight reduction was the overriding concern in the design and construction of the aircraft. Author

N84-25617# Westland Aircraft Ltd., Yeovil (England).
THE INTERPRETATION OF DESIGN REQUIREMENTS FOR MULTI-MARKET HELICOPTERS

D. R. HAYWARD *In* AGARD Workshop on Requirements for Aircraft Corrosion Control 3 p Mar. 1984
 Avail: NTIS HC A05/MF A01

An approach to corrosion control in helicopters is given. All drawing are vetted before issue to ensure that obvious corrosion sites, sharp edges, and water traps are designed out and of course to obtain the most economical means of protecting components. Wherever possible a coat of paint is applied before assembly. Measures are taken to prevent ingress of water to joints and structures by the use of caulking materials; however, great care is taken to ensure structures are adequately drained. Specific treatments of aluminum, steel, and magnesium are detailed. R.J.F.

N84-25618# Saab-Space A.B., Linköping (Sweden). Materials Lab.
CURRENT REQUIREMENTS ON SPECIFICATIONS FOR CORROSION PREVENTION

E. HULTGREN *In* AGARD Workshop on Requirements for Aircraft Corrosion Control 13 p Mar. 1984
 Avail: NTIS HC A05/MF A01

The of aluminum, low alloy steel, magnesium, titanium, and composite materials in aircraft construction aimed at corrosion prevention and resistance is discussed. Protective coatings, adhesives and sealants are discussed. The importance of design considerations is explained. R.J.F.

N84-25620# Vought Corp., Dallas, Tex. Materials and Processes Dept.

DESIGN AND MANUFACTURING PRACTICES TO MINIMIZE CORROSION IN AIRCRAFT

A. E. HOHMAN *In* AGARD Workshop on Requirements for Aircraft Corrosion Control 5 p Mar. 1984 refs
 Avail: NTIS HC A05/MF A01

Military weapon systems face tradeoffs of performance, cost of production and maintenance versus long term durability and reduced reliability resulting from corrosion. There is a broad set of requirements presented to contractors which represent the collective wisdom of what is needed for durability. These requirements are judged to be cost effective and near optimum in this tradeoff of performance/cost with corrosion resistance. A few examples of some specific designs, processes and materials which were found by one manufacturer to have significant advantages in this tradeoff by their excellence of protection with minimum tradeoff penalties are discussed. These details of successful experiences are intended to set the stage for two other theses. The first is that the data incorporated in United States Military documents, such as the requirements in MIL-F-7179, Protection of Aerospace Weapon Systems, Mil-Std-1568, Materials and Processes for Corrosion Control, and the materials portions of SD-24, Design and Construction of Weapon Systems, are indeed an excellent base from which we can begin the design of a weapon system. But it is an almost impossible situation to try to spell out the details required to actually obtain performance excellence in the design tradeoffs; or to define the required intricate details necessary to accomplish optimum protection from the pervasive thermodynamics of materials seeking lower free energy states. R.J.F.

N84-25627# British Aerospace Aircraft Group, Kingston-upon-Thames (England).

THE INFLUENCE OF V/STOL ON WING DESIGN AND TAILPLANE DESIGN

C. L. BORE *In* AGARD Spec. Course on V/STOL Aerodyn. 6 p Apr. 1984
 Avail: NTIS HC A17/MF A01

It is shown that one of the most powerful influences upon the payload/range of V/STOL aircraft is exerted by reducing the weight of the wing. The process of designing a lightweight wing involves meticulous effort to achieve exceptionally high maneuvering lift coefficients, combined with due attention to the geometrical and structural interactions. There are constraints all round, such as the need to avoid undue interference with jet effluxes below the wing roots, and the physical constraint of providing fuel volume and space for low drag store carriage. Any structural complexities which threaten to increase wing weight seriously (such as cut-outs, opening panels for fans or ejectors and so on) are inefficiencies which should be entertained only for valuable benefits. B.W.

N84-25628*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

V/STOL CONCEPTS IN THE UNITED STATES: PAST, PRESENT, AND FUTURE

W. P. NELMS and S. B. ANDERSON *In* AGARD Spec. Course on V/STOL Aerodyn. 44 p Apr. 1984 refs Previously announced as N84-22532
 Avail: NTIS HC A17/MF A01 CSCL 01C

Nonhelicopter types of V/STOL aircraft developed in the United States are reviewed, and some lessons learned from a selected number of concepts are highlighted. The AV-8B, which was developed by modifications to the British Harrier is the only current concept examined. Configurations proposed for the future subsonic, multimission aircraft and the future supersonic fighter/attack aircraft are described. Emphasis is on these supersonic concepts. B.W.

05 AIRCRAFT DESIGN, TESTING AND PERFORMANCE

N84-25634# British Aerospace Aircraft Group, Kingston-upon-Thames (England).

GROUND BASED TESTING WITHOUT WIND TUNNELS

C. L. BORE *In* AGARD Spec. Course on V/STOL Aerodyn. 6 p Apr. 1984 refs

Avail: NTIS HC A17/MF A01

Ground based tests of V/STOL aircraft not requiring wind tunnels are described. Harrier aircraft and the Bristol-Siddeley BS 53 (Pegasus) engine are given particular consideration. Tests of aircraft reaction controls, air intakes, anti-lift (suckdown) forces, and hot gas recirculation (HGR) are discussed. Jet thrust was the critical parameter studied in all of the test schemes. Modifications in aircraft design, such as the use of underfuselage strakes, were addressed. R.S.F.

N84-25637# British Aerospace Aircraft Group, Kingston-upon-Thames (England).

NOTES ON SPECIAL FLIGHT ASPECTS, SUCH AS STO, SKI-JUMP AND ODM

C. L. BORE *In* AGARD Spec. Course on V/STOL Aerodyn. 6 p Apr. 1984 refs

Avail: NTIS HC A17/MF A01

The dimensionless parameters which dominate the performance of jet-lift V/STOL aircraft are reviewed. Thrust ratings, forces extant in partially jet-borne flight, short takeoff, takeoff-weight ratio, ski-jump takeoff, and deck launch are considered. Harrier aircraft and the Bristol-Siddeley BS 53 (Pegasus) engine serve as the paradigms for the discussion. R.S.F.

N84-25700# Cranfield Inst. of Tech., Bedfordshire (England). College of Aeronautics.

A TECHNIQUE FOR OPTIMIZING THE AERODYNAMIC DESIGN OF A GENERALIZED COMBAT AIRCRAFT WITH FORWARD SWEEPED WINGS FOR THE PURPOSES OF STABILITY AND CONTROL INVESTIGATION

M. V. COOK and S. J. P. ORIORDAN Jan. 1984 87 p refs (CA-8325) Avail: NTIS HC A05/MF A01

A technique was developed to optimize the airframe for aerodynamic performance of a generalized combat aircraft with a forward swept wing with close coupled canard. A computer program was written and its output includes geometric and other parameters as a required for stability and control studies. A second computer program was written to estimate the aerodynamic stability and control derivatives of an optimized airframe. Two airframes with a single engine and with two engines were investigated. The flying qualities problems arising from the configurations were studied. An analogue simulation was carried out which highlighted some problems resulting from the longitudinal static instability inherent in both configurations. A trade off between the requirement for minimum weight and the stability characteristics is undertaken. E.A.K.

N84-25701*# Bolt, Beranek, and Newman, Inc., Cambridge, Mass.

F-14 MODELING STUDY Final Report

W. H. LEVISON and S. BARON May 1984 91 p refs (Contract NAS1-16738)

(NASA-CR-172336; NAS 1.26:172336) Avail: NTIS HC A05/MF A01 CSCL 01C

Preliminary results in the application of a closed loop pilot/simulator model to the analysis of some simulator fidelity issues are discussed in the context of an air to air target tracking task. The closed loop model is described briefly. Then, problem simplifications that are employed to reduce computational costs are discussed. Finally, model results showing sensitivity of performance to various assumptions concerning the simulator and/or the pilot are presented. M.G.

N84-25702*# Lockheed Missiles and Space Co., Sunnyvale, Calif.

STRUCTURAL SIZING OF A SOLAR POWERED AIRCRAFT Final Report

D. W. HALL and S. A. HALL Apr. 1984 105 p refs (Contract NAS1-16975)

(NASA-CR-172313; NAS 1.26:172313; LMSC-D878711) Avail: NTIS HC A06/MF A01 CSCL 01C

The development of sizing algorithms for very lightweight aircraft structure was studied. Three types of bracing schemes were analyzed and fully cantilevered strut bracing and wire bracing and scaling rules were determined. It is found that wire bracing provides the lightest wing structure for solar high altitude powered platforms. E.A.K.

N84-25703# Societe Nationale Industrielle Aerospatiale, Toulouse (France). Direction Etudes.

RENOVATION OF THE HELICE [LA RENOVATION DE L'HELICE]

D. BERGER and P. JACQUET 23 Feb. 1984 25 p In FRENCH Presented at Salon Intern. Des Tech. et Energies Du Futur (SITEF) 83, Toulouse, 18 - 23 Oct. 1983

(SNIAS-832-111-109; REPT-474.145/83) Avail: NTIS HC A02/MF A01

Technical, economic, and political reasons for renewed interest in propulsion by propeller are examined. Manifestations of this revival are new aircraft programs and studies conducted by the designers of propellers and aircraft engines. Highlights of the American Advanced Turboprop project (propfan technology) are included. The French program for developing propellers for aircraft capable of flight between 0.7 and 0.8 Mach number is emphasized. Transl. by A.R.H.

N84-25704# Societe Nationale Industrielle Aerospatiale, Toulouse (France). Direction Etudes.

CARBON STRUCTURES ON THE WING OF THE REGIONAL TRANSPORT PLANE ATR-42 [LES STRUCTURES DU CARBONE SUR LA VOILURE DE L'AVION DE TRANSPORT REGIONAL ATR-42]

G. HELLARD 23 Feb. 1984 17 p In FRENCH Presented at SAMPE Conf., Bordeaux, 17 - 20 Oct. 1983

(SNIAS-832-111-113) Avail: NTIS HC A02/MF A01

The A.T.R. 42 aircraft, capable of transporting from 42 to 50 passengers a maximum distance of 1760 km, has a number of important structural composites on the wing as well as the fuselage and the empennages. Kevlar and the hybrid Kevlar/carbon are used for the wing unit. Carbon fibers are used for the ailerons and the high lift flaps. Studies conducted to define the best performing material for the ailerons and flaps, at minimal cost, are described. It was found that the monolithic multiribbed box are best for the wing and that carbon/Nida sandwich structures are best for the flaps. These elements were certified by static tests and fatigue/aging test of the entire part. A.R.H.

N84-25705# Societe Nationale Industrielle Aerospatiale, Marignane (France.) Helicopter Div.

SYSTEM CONCEPTS FOR HELICOPTER AIR-TO-AIR COMBAT BRUNELLO, LETOUZEY, SCARAMUZZINO, and CATANI

1983 4 p Presented at the AAAF 8th European Rotorcraft and Powered Lift Aircraft Forum, Aix-en-Provence, France, 31 Aug - 3 Sep. 1982

(SNIAS-832-210-102) Avail: NTIS HC A02/MF A01

A simulation method for helicopter air to air combat is described. A model is developed and firing data is compared through actual sighting and firing experiments. Examples of firing simulation and subsequent accuracy are examined. M.A.C.

N84-25706# Societe Nationale Industrielle Aerospatiale, Marignane (France.) Helicopter Div.
THE DEVELOPMENT OF THE NAVY VARIANT OF THE DAUPHIN 2 HELICOPTER

A. CASSIER 1983 12 p Presented at the AAAF 9th European Rotorcraft and Powered Lift Aircraft Forum, Stresa, Italy, 13-15 Sep. 1983

(SNIAS-832-210-106) Avail: NTIS HC A02/MF A01

AEROSPATIALE'S SA 365 DAUPHIN is a new generation 4 tons helicopter. It has been designed to meet civil and military operator's requirements in various configurations. The civil version, SA 365 N, has been in service since 1981; it is particularly well suited for passengers' transport or offshore missions. This multipurpose helicopter is easily adapted to military roles. The naval version, SA 365 F, was developed in 1981 and is being delivered now. SA 365 F is available in several configurations for Search and Rescue (SAR), Anti Surface Vessel Warfare (ASV) and Anti Submarine Warfare (ASW) missions. The purpose of this expose is to review the main characteristics of these various configurations and to discuss the development of this helicopter.

Author

N84-25707# Societe Nationale Industrielle Aerospatiale, Marignane (France.) Helicopter Div.

AEROSPATIALE'S EXPERIENCE ON HELICOPTER FLIGHT IN ICING CONDITIONS

D. TRIVIER and G. AVEDISSIAN 1983 10 p refs Presented at the AAAF 9th European Rotorcraft and Powered Life Aircraft Forum, Stresa, Italy, 13-15 Sep. 1983

(SNIAS-832-210-107) Avail: NTIS HC A02/MF A01

Helicopter rotor icing protection systems are evaluated through flight tests under actual icing conditions. The development of a practical flight envelope which considers altitude, temperature, and icing severity is discussed. Flights without deicing protection are conducted to determine flight characteristics under total system failure.

M.A.C.

N84-25709# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (West Germany). Abteilung Flaechenflugzeuge.

DESIGN AND IMPLEMENTATION OF INPUT SIGNALS FOR IDENTIFICATION OF PILOT/AIRCRAFT MODELS

R. KOEHLER Jan. 1984 45 p refs In GERMAN; ENGLISH summary Translation will also be announced as ESA-TT-880 (DFVLR-FB-84-08; ESA-TT-880) Avail: NTIS HC A03/MF A01; DFVLR, Cologne DM 17

A flight test method to investigate flying qualities of combat aircraft in ground attack maneuvers is presented. Simulated attacks to dynamically switched ground based targets are carried out to assess flying qualities and to identify pilot/aircraft systems. The method has been successfully applied in pilot rating tests. This report deals with the design of input signals and preparation of flight tests.

Author

N84-26437 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany). Unternehmensbereich.

THE AIRBUS: THE STATE-OF-THE-ART TODAY, AND FUTURE DEVELOPMENTS [DER AIRBUS: HEUTIGER STAND UND ZUKUNFTIGE ENTWICKLUNGEN]

H. G. KLUG *In its* Tech. and Sci. Publ. 1983 p 109-118 1983 In GERMAN Presented at Haus der Tech., Essen, 16 Nov. 1982 (MBB-UT-22-83-O) Avail: Issuing Activity

The European collaboration on the European Airbus construction is reported. The historical background of the Airbus, and the contributions by the participating countries are enumerated. The structural characteristics, and the further development and improvements are discussed.

Transl. by E.A.K.

N84-26439 Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen (West Germany). Werkstoff-und Verfahrenstechnik.

SUCCESSFUL UTILIZATION OF ECONOMIC, LIGHT ALUMINUM-CASTED STRUCTURES IN AIRPLANE CONSTRUCTION [ERFOLGREICHE EINFUEHRUNG WIRTSCHAFTLICHER UND LEICHTER ALUMINIUM-GUSSSTRUKTUREN IM FLUGZEUGBAU]

D. MIETRACH *In* MBB Tech. and Sci. Publ. 1983 p 139-157 1983 refs In GERMAN Presented at Lehrgang: Ontwerpen en Gieten van Hoogwaardige Construct., Delft, 19-20 Oct. 1983 (VFW-31/83-O) Avail: Issuing Activity

Aluminum casting techniques in the aircraft industry are examined. The advantages of casting techniques, casting procedures and materials, directions for casters and quality control are described. New casting methods, test methods and possibilities, and reproducible castings are discussed.

Transl. by E.A.K.

06

AIRCRAFT INSTRUMENTATION

Includes cockpit and cabin display devices; and flight instruments.

A84-33830

INDICATION AND ALERTING

T. E. FORD Aircraft Engineering (ISSN 0002-2667), vol. 56, April 1984, p. 6-9.

The Engine Indication and Crew Alerting (EICAS) system incorporated into the flight decks of the 757 and 767 airliners is arranged so that each parameter has a dedicated display location for normal operations, while automatic display changes occur only to indicate engine or system abnormality. Redundant computers and CRT displays ensure EICAS availability in the event of a component failure, and the built-in test equipment has a ground test mode (including a test pattern and a system of self-test indication) on each CRT. The EICAS computers monitor over 400 analog and digital input signals for the generation of alert, status, and maintenance messages. Automatic recording of subsystem parameters occurs whenever an alert message is indicated.

O.C.

A84-35899

REDUNDANT COLOR CODING ON AIRBORNE CRT DISPLAYS

C. B. LUDER (Birkbeck College; London, University, London, England) and P. J. BARBER (Birkbeck College, London, England) Human Factors (ISSN 0018-7208), vol. 26, Feb. 1984, p. 19-32. refs

An experiment is described that compares the use of redundant color coding for search and identification tasks under dual-task conditions; subjects made judgements about the state of components of a systems-management display while performing a compensatory tracking task. The availability of redundant color coding on the secondary task resulted in a global improvement in tracking performance (primary task) that applied at all times, even when subjects were not attending to the systems-management display. With regard to the response-time data for the color-coded display, redundant color coding improved search performance, but there was no benefit for performance on the identification task. The implications of the results for hypotheses relating to the serial or parallel processing of shape and color, and for cockpit applications generally, are discussed.

Author

06 AIRCRAFT INSTRUMENTATION

A84-36259#

DIGITAL SCAN CONVERSION

J. C. WALLACE (Philips Electronics and Associated Industries, Ltd., MEL Div., Crawley, Sussex, England) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982 . Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 301-306.

The choice of format for the airborne display of digital scan-converter pictures is discussed, as are problems involved in the processing of raw radar data required for a standard 625 line TV to display the many shapes needed to categorize the varied radar echoes in a busy tactical scene. A constant scanner rotational speed is considered, and both the pulse width and PRF are varied for different tactical requirements. Incoming data are digitized at a high rate and transferred to the mainstore for further processing and TV readout. The data are later parallel processed using pattern recognition and enhancement prior to conversion from R0 to XY coordinates. It is established that the replacement of a 'high definition' direct view display with a comparatively low definition raster scanned TV display results in less operator fatigue, greater accuracy of data, and sharper clarity of display. J.N.

A84-36261

A SMALL INTEGRATED J BAND ALTIMETER

L. D. CLOUGH, D. E. LLOYD, J. C. PARKER, and W. RICHMOND (Royal Signals and Radar Establishment, Malvern, Worcs., England) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982 . Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 339-343.

A miniature totally-integrated radar altimeter constructed using thick film microstrip and hybrid techniques is described. The receive and transmit antennas are of the traveling-array type fabricated in thick film microstrip on alumina substrates. The antennas have a gain of 7 dBs with a beamwidth of approximately 35 deg in both E and H planes. The antennas are protected with a radome interface which only slightly modify the polar diagram. The transmitter is a GaAs Read IMPATT diode in a microstrip matching circuit giving 8 watts peak power in a 80 ns pulse. The transmitter modulator is directly integrated to the device in thick film hybrid using VMOS technology. A drop in isolator is used between the transmitter and the antenna. The receiver uses a 90 deg hybrid balanced mixer in thick film microstrip with a conversion loss of 8 dBs. The LO uses a low power Gunn diode microstrip oscillator which is stabilized by a dielectric resonator. The video amplifier and processing electronics are fabricated in thick film hybrid and packaged in three 40 pin packages. The overall unit measures 300 mm x 90 mm x 60 mm. Author

A84-36262#

A 60 GHZ COLLISION WARNING SENSOR FOR HELICOPTERS

B. REMBOLD, H. G. WIPPICH, M. BISCHOFF, and W. F. X. FRANK (Telefunken AG, Ulm, West Germany) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982 . Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 344-351. refs

Using a frequency near the atmospheric attenuation maximum of 60 GHz a short range collision warning device for helicopters has been developed. The system consists of a pulsed radar sensor using semiconductors exclusively, a fast scanning mechanism and a display. First measurements showed that high voltage transmission lines having diameters of about 20 mm could be detected at a distance of more than 400 m. Author

A84-36287#

NEW RESULTS OF AIRBORNE MEASUREMENTS WITH A SENSITIVE, HIGH RESOLUTION 90 GHZ RADIOMETER - FIRST RESULTS FOR AN EQUIVALENT 140 GHZ SYSTEM

H. SUESS, K. GRUENER (Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Institut fuer Hochfrequenztechnik, Oberpfaffenhofen, West Germany), and B. VOWINKEL (Koeln, Universitaet, Cologne, West Germany) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982 . Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 534-540. refs

The principal possibilities of passive airborne imaging in the 90 GHz and 140 GHz region by a sensitive high resolution system are demonstrated. The front-end module of the system consists of an antenna scalar feed horn and a GaAs single-ended Schottky mixer and an integrated first-stage FET IF-amplifiers. The scanning antenna system consists of a high-speed swinging offset parabolic mirror. Results of 90 GHz measurements carried out during fog are presented, and initial data for 140 GHz measurements are compared to equivalent 90 GHz measurements. J.N.

A84-36299

INFRA-RED LASER VELOCIMETRY

J. M. VAUGHAN (Royal Signals and Radar Establishment, Malvern, Worcs., England) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982 . Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 625-631.

Optical and signal processing techniques for the remote measurement of velocity employing coherent laser radars at 10 microns are described. Both CW and stabilized pulse lasers may be used; recent investigations have achieved quantum limited efficiencies. A number of applications are outlined including a compact airborne system for measurement of true airspeed and gust and shear warning. Most recent studies with the Laser True Airspeed System (LATAS), currently installed in the HS125 trials aircraft at RAE Bedford, are described. Author

07

AIRCRAFT PROPULSION AND POWER

Includes prime propulsion systems and systems components, e.g., gas turbine engines and compressors; and on-board auxiliary power plants for aircraft.

A84-34134

STRENGTH CALCULATION FOR AN AVIATION GTE STATOR IN AXISYMMETRIC DEFORMATION [RASCHE T NA PROCHNOST' STATORA AVIATIONNOGO GTD PRI OSESIMMETRICHNOM DEFORMIROVANII]

V. B. ZHUKOV Problemy Prochnosti (ISSN 0556-171X), no. 4, 1984, p. 93-101. In Russian.

The forces, displacements, and stresses associated with a stator in axisymmetric deformation are determined for an evaluation of the strength and economic operation of gas-turbine engines. The present calculation method models the stator structure as an integral arrangement of circular rings, annular plates, and shells. The rings serve as the principal connecting elements and are used to determine boundary conditions and the junction of plates and shells. The shells are of finite length and zero Gaussian curvature, and are calculated using the theory of restoring moments supplemented by edge effect equations. All elements are considered to operate in the elastic region. Conditions for the simultaneous deformation of stator elements are given for both ascending and descending systems of rings, plates, and shells. The computer solution of 2m linear algebraic equations for m rings in terms of radial displacements and angular rotations also

solves for displacements of the center of gravity of the ring sections. J.N.

**A84-34455*# Southwest Research Inst., San Antonio, Tex.
SPECIFICATION, DESIGN, AND TEST OF AIRCRAFT ENGINE ISOLATORS FOR REDUCED INTERIOR NOISE**

J. F. UNRUH (Southwest Research Institute, San Antonio, TX) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 389-396. refs

(Contract NAS1-14861)

Previously cited in issue 10, p. 1377, Accession no. A83-25932

**A84-34457#
THRUST REVERSER EXHAUST PLUME REINGESTION MODEL TESTS**

N. F. AMIN and C. J. RICHARDS (Northrop Corp., Advanced Design Propulsion Dept., Hawthorne, CA) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 401-407.

Previously cited in issue 16, p. 2307, Accession no. A83-36293

**A84-34723
COMPARISON OF COMBUSTION EFFICIENCIES FOR RAMJET ENGINES [VERGLEICH VON VERBRENNUNGSGUETEGRADEN FUER STAUSTRAHLANTRIEBE]**

J. W. BERGMANN (Industrieanlagen - Betriebsgesellschaft mbH, Ottobrunn, West Germany) Zeitschrift fuer Flugwissenschaften und Weltraumforschung (ISSN 0342-068X), vol. 8, Mar.-Apr. 1984, p. 129-133. In German.

Four different combustion efficiencies commonly used for assessing ramjet engines are compared. The mixture ratios cover a range from stoichiometric to an equivalence ratio of 0.2, and the polyethylene/air propellant system is used. The ratio of effective to ideal temperature rise is taken as reference efficiency. As might be expected, major differences can be observed near stoichiometric and down to equivalence ratios of 0.5. These are quantitatively demonstrated. Author

**A84-34905#
DESIGN OF INTEGRALLY DAMPED COMPRESSOR VANES**

P. M. NISKODE, R. B. DICKMAN, and M. J. SCHUMACHER (General Electric Co., Cincinnati, OH) AIAA, ASME, ASCE, and AHS, Structures, Structural Dynamics and Materials Conference, 25th, Palm Springs, CA, May 14-16, 1984. 7 p. (AIAA PAPER 84-0867)

Integrally damped compressor stator vane configurations use viscoelastic material sleeves bonded to both the vane inboard end and the inboard shroud ring to dissipate vibratory energy in shear as well as in extension and compression. The degree and the character of the energy dissipation, which are dependent on the vane's configuration and its vibratory mode characteristics, are presently calculated by means of a finite element program. Both the vane and the viscoelastic materials are modeled in terms of isoparametric, eight-node box elements. Study results indicate vibratory stress levels for integrally damped vanes which are significantly lower than those of their undamped counterparts. This offers designers latitude for the minimization of compressor weight. O.C.

**A84-35128#
DESIGN OF ROBUST DIGITAL CONTROLLERS FOR GAS TURBINES WITH EXPLICIT ACTUATOR AND SENSOR DYNAMICS**

B. PORTER (Salford, University, Salford, Lancs., England) and T. MANGANAS AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 8 p. refs (AIAA PAPER 84-1185)

Multi-input multi-output dynamical systems such as gas turbines usually exhibit explicit actuator and sensor dynamics which are often ill-defined. Singular perturbation methods are accordingly used to provide a basis for the design of discrete-time tracking systems incorporating fast-sampling error-actuated digital

controllers for multivariable plants with such explicit actuator and sensor dynamics. These general results are illustrated by designing a robust digital controller for the rotational speeds of the low-pressure and high-pressure spools of a typical gas turbine. Author

**A84-35133#
AXIAL FLOW COMPRESSOR PERFORMANCE DETERIORATION**

C. BALAN and W. TABAKOFF (Cincinnati, University, Cincinnati, OH) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 14 p. refs

(Contract DAAG29-82-K-0029)

(AIAA PAPER 84-1208)

Aircraft engines operating in areas where the atmosphere is polluted with small solid particles are subjected to performance deterioration. Improvement in performance deterioration can prolong the engine life and save operating expenses. Such an improvement is possible only by understanding the basic mechanism of erosion and the associated performance degradation. This paper presents experimental work carried out on two-dimensional compressor cascades along with a theoretical model to predict the performance deterioration of cascades subjected to erosion. In addition, investigations are carried out on a single stage axial flow compressor to study the effect of erosion on performance. Author

**A84-35134#
AXISYMMETRIC APPROACH AND LANDING THRUST REVERSER CONCEPTS IN-GROUND EFFECTS WIND TUNNEL TEST RESULTS**

M. F. EIGENMANN, D. E. KITZMILLER (McDonnell Aircraft Co., St. Louis, MO), and A. D. HAKIM (USAF, Aero Propulsion Laboratory, Wright-Patterson AFB, OH) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 13 p. refs

(AIAA PAPER 84-1215)

Low speed wind tunnel model tests were conducted to evaluate the operational effects of three axisymmetric nozzle approach and landing thrust reverser (ALTR) concepts on the stability and control characteristics of a typical twin-engine fighter aircraft. Both in-ground and out-of-ground effects testing was accomplished. To broaden the general applicability of the data, single centerline vertical tail and twin vertical tail airframe configurations were evaluated with selected ALTRs. The in-ground effects test results showed that, in general, the ALTRs had a minimal (sometimes favorable) impact on the aircraft longitudinal and directional stability and control characteristics. The changes in longitudinal characteristics from the baseline aircraft were primarily due to the interaction of the lower reverser jets with the ground flowfield. Changes in directional characteristics were due to the reverser jet influence on the vertical tail flowfield. Reverser flowfield visualization obtained during the testing indicated that the potential for inlet hot gas ingestion is a direct function of the reverser flow turning angle, lateral splay angle, and nozzle pressure ratio. Author

**A84-35136#
AN EXPLORATORY STUDY OF RETIREMENT-FOR-CAUSE FOR GAS TURBINE ENGINE COMPONENTS**

J. N. YANG and S. CHEN (George Washington University, Washington, DC) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 14 p. refs (Contract F33615-81-C-5015)

(AIAA PAPER 84-1220)

A probabilistic retirement-for-cause (RFC) analysis methodology based on the application of fracture mechanics is developed for gas turbine engine components. The initial fatigue quality is represented by both the statistical distributions of the initial flaw size and the time to crack initiation. Various statistical uncertainties in the entire RFC system, such as nondestructive evaluations, crack growth damage accumulations, etc., have been taken into account. A cost/risk optimization analysis has been been

07 AIRCRAFT PROPULSION AND POWER

formulated to determine the optimal inspection interval and the corresponding life-cycle-cost savings. It is shown that the scheduled inspection maintenance can be used to improve the reliability of gas turbine engine components significantly, and that the application retirement-for-cause procedures results in a substantial life-cycle-cost saving. Practical examples are given to demonstrate the application of the proposed methodology. Author

A84-35149*# National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.

HIGHLY INTEGRATED DIGITAL ENGINE CONTROL SYSTEM ON AN F-15 AIRPLANE

F. W. BURCHAM, JR. (NASA, Flight Research Facility, Edwards, CA) and E. A. HAERING, JR. AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 11 p. refs
(AIAA PAPER 84-1259)

The highly integrated digital electronic control (HIDEC) program will demonstrate and evaluate the improvements in performance and mission effectiveness that result from integrated engine-airframe control systems. This system is being used on the F-15 airplane at the Dryden Flight Research Facility of NASA Ames Research Center. An integrated flightpath management mode and an integrated adaptive engine stall margin mode are being implemented into the system. The adaptive stall margin mode is a highly integrated mode in which the airplane flight conditions, the resulting inlet distortion, and the engine stall margin are continuously computed; the excess stall margin is used to uptrim the engine for more thrust. The integrated flightpath management mode optimizes the flightpath and throttle setting to reach a desired flight condition. The increase in thrust and the improvement in airplane performance is discussed in this paper. Author

A84-35153#

REGENERATIVE INTERCOOLED TURBINE ENGINE (RITE) STUDY

E. A. T. MOCK, R. T. CALDWELL, and K. E. BOYD (Garrett Turbine Engine Co., Phoenix, AZ) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 11 p.
(AIAA PAPER 84-1267)

A study was conducted to determine the suitability of an advanced technology Regenerated Intercooled Turbine Engine (RITE) for aircraft propulsion. A cycle performance analysis was conducted for a 250 shp, 25,000 ft cruise turboprop engine for a pressurized twin engine six-place turboprop aircraft. The RITE engine cycle consists of a two-stage compressor with a rotary intercooler, gas generator turbine driving the compressors, a combustor, rotary regenerator, and power turbine. Cycles were analyzed over a range of design-point pressure ratios and heat exchanger sizes at a turbine inlet temperature of 2500 F. An aircraft and its flight characteristics were defined to evaluate candidate engines on the basis of prescribed mission fuel consumption. After preliminary design selection, a life cycle cost analysis was performed in which the reference engine was compared to a conventional turboprop engine. The selected engine design achieves a cruise specific fuel consumption of 0.252 lb/hp-hr which is about half that of a conventional engine with the same power rating. The predicted life cycle cost of the engine is lower without an intercooler, due to marginal improvement in cycle efficiency contributed by intercooling. Author

A84-35154#

ADVANCED TURBOFAN CONCEPT WITH REGENERATOR AND INTER-COOLED COMPRESSOR

Y. MIURA and C. SAKURAI (Metropolitan College of Technology, Tokyo, Japan) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 10 p. refs
(AIAA PAPER 84-1270)

A performance prediction assessment is made for a high bypass turbofan engine concept which incorporates not only the exhaust waste heat-recirculating regenerator stage of previous investigations, but also an intercooling stage between high and low pressure compressors. The intercooler employs both cool fan

exhaust air and cold freestream ram air as heat sinks. Detailed thermodynamic calculations are presented for the various stages of the combined intercooler/regenerator cycle, and performance levels are predicted for both cruising flight and takeoff conditions that are then compared with performance values representative of similarly sized conventional turbofans. Improvements are noted in thrust-specific fuel consumption, with favorable consequences for flight range. O.C.

A84-35155#

ASPECTS OF ADVANCED FIGHTER ENGINE DESIGN ON THE BASIS OF EQUAL TECHNOLOGY

H. TOENSKOETTER (Industrieanlagen-Betriebsgesellschaft mbH, Ottobrunn, West Germany) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 12 p.
(AIAA PAPER 84-1271)

The extended high thrust mission phases of future air-defense fighters, together with technologically increased turbine inlet temperature, will consequently lead to a reheatless (dry) engine concept. To illustrate this, a dry-engine and a reheat engine with low bypass-ratios have been projected, utilizing a moderate-advanced technology level available for engines of the early nineties. Due to the different engine characteristics, life potential of the dry-engine hot parts can be much lower compared with the reheat engine. Furthermore, the dry engine will feature a lower overall pressure ratio (lower cooling-air temperature), so that for this engine type a more than 100 K higher turbine inlet temperature can be realized. Nevertheless, the technology levels of both engines are equal. Comparing a dry-engine and a reheat engine, both individually tailored to the air-defense fighter role, the dry-engine leads to a 20 percent reduction in total propulsive weight and to about 10 percent lower aircraft weight. Author

A84-35176*# National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.

PRELIMINARY FLIGHT TEST RESULTS OF THE F100 EMD ENGINE IN AN F-15 AIRPLANE

L. P. MYERS and F. W. BURCHAM, JR. (NASA, Flight Research Center, Edwards, CA) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 10 p. refs
(AIAA PAPER 84-1332)

An assessment is given of results from a 17-flight evaluation of the F100 Engine Model Derivative (EMD) powerplant in an F-15 fighter. The EMD variant of the F100 engine incorporates a larger fan, a higher temperature turbine, a digital control system, and a 16-segment afterburner. These modifications result in a 15 to 20 percent increase in thrust which is exhibited in the reduction of F-15 acceleration time to Mach 2.0 by 23 percent. The only uncorrected shortcoming of the engine upon completion of the 17-flight test course was the occurrence of compressor stalls at the throttle's idle setting. These stalls had not been predicted by either ground facility tests or compressor stability assessments. O.C.

A84-35177#

LESSONS LEARNED IN THE DEVELOPMENT OF A DIGITAL ELECTRONIC ENGINE CONTROL

R. CORY (Pratt and Whitney Aircraft, West Palm Beach, FL) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 8 p.
(AIAA PAPER 84-1335)

Recent F15 and F16 flight tests have substantiated the predicted benefits of a full authority electronic engine control system. These benefits, which include improved performance, operability and on line failure detection and accommodation, have paved the way for incorporation of the Digital Electronic Engine Control (DEEC) system into derivatives of the F100 engine. The DEEC, which is the primary engine control, ensures safe engine operation while controlling the various engine variables. The basic control concept was conceived and developed over a period of time beginning in 1974. A large analytical effort supported the control mode selection, along with several thousand engine test

hours at sea level and altitude conditions. The advent of digital electronic engine controls has brought about 'new lessons learned' as part of the development process. This paper reports on these lessons and the impact they have had and will continue to have on the development of the next generation of full authority electronic engine control systems. Author

A84-35178#
V/STOL ENGINE DEVELOPMENT

W. J. LEWIS (Rolls-Royce, Ltd., Bristol, England) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 8 p. (AIAA PAPER 84-1337)

The development of the Pegasus vectored thrust V/STOL engine is described with particular emphasis on achieving thrust growth while meeting the requirement imposed by its V/STOL aircraft installation. In addition, problems that occurred with certain components of the engine due to its V/STOL application are outlined. Some of the lessons learned during the development program of both the basic engine and of the powerplant installation are listed and these provide an indication of some procedures that need to be accepted to ease the development of future V/STOL propulsion systems. Author

A84-35199#
DEMONSTRATION OF A NEW BODY-FITTED COORDINATE CODE FOR MODELING GAS-TURBINE COMBUSTOR FLOWS

W. SHYY, S. M. CORREA, and S. S. TONG (General Electric Co., Schenectady, NY) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 8 p. refs (AIAA PAPER 84-1381)

Since gas-turbine combustors have complex shapes, models for predicting their behavior should be based on curvilinear coordinate systems. Ease of grid generation and the possibility of dynamically adaptive grids are consequent advantages. An assumed shape pdf/fast-chemistry, k-epsilon turbulence model using the Favre-averaged Navier-Stokes equations and based on numerical coordinate transformation is presented. The model is applied to a generic two-dimensional combustor by way of demonstration and to assess the performance of various finite-difference operators (first-order upwind, second-order central, second-order upwind and QUICK) in the transformed equations. Three grids were used: a relatively uniform 31 x 26 grid, a less uniform 31 x 26 grid, and a 41 x 41 grid. It is demonstrated that the second-order upwind scheme is the best compromise in terms of accuracy and stability. The code was also used to study grid clustering and showed that the optimal grid is highly flow-dependent. Finally, an internal check on the accuracy and the sufficiency of the grid - based on the continuity of mass flux in the physical domain - shows that the denser grids (40 x 40) are very satisfactory. Author

A84-35204*#
DESIGN OF A HIGH-PERFORMANCE ROTARY STRATIFIED-CHARGE RESEARCH AIRCRAFT ENGINE

C. JONES and R. E. MOUNT (John Deere Technologies International, Inc., Rotary Engine Div., Wood-Ridge, NJ) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 11 p. refs (Contract NAS3-23056)

(AIAA PAPER 84-1395)

The power section for an advanced rotary stratified-charge general aviation engine has been designed under contract to NASA. The single-rotor research engine of 40 cubic-inches displacement (RCI-40), now being procured for test initiation this summer, is targeted for 320 T.O. horse-power in a two-rotor production engine. The research engine is designed for operating on jet-fuel, gasoline or diesel fuel and will be used to explore applicable advanced technologies and to optimize high output performance variables. Design of major components of the engine is described in this paper. Author

A84-35207#
UNITED KINGDOM MILITARY ENGINE MONITORING EXPERIENCE

G. L. P. ALDHOUSE AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 7 p. (AIAA PAPER 84-1409)

Royal Air Force (RAF) policy is to progress as expeditiously as possible towards on condition maintenance for its entire engine inventory. In connection with the need to achieve this goal in a cost-effective manner, the RAF became actively involved in the development of engine usage and monitoring systems. The characteristics of the developed Engine Usage Monitoring System (EUMS) are discussed, taking into account aspects of EUMS application, the Data Acquisition Unit, the Quick Access Recorder, the Ground Data Processing Station, and the minicomputers with the microprocessor. EUMS results are examined, giving attention to low cycle fatigue (LCF), LCF exchange rates calculated from EUMS data, the LCF counter, and EUMS improvements. A description of engine condition monitoring systems is also provided, and future developments are discussed. G.R.

A84-35208#
EVALUATION OF BENEFITS OF THE A-10/TF34 TURBINE ENGINE MONITORING SYSTEM SQUADRON INTEGRATION PROGRAM

S. W. TARQUINIO, J. W. OLSEN (ARINC Research Corp., Annapolis, MD), J. FLORES (USAF, San Antonio Air Logistics Center, Kelly AFB, TX), and R. B. CHRISTOPHEL (ARINC Research Center, San Antonio, TX) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 9 p. refs (AIAA PAPER 84-1414)

The A-10/TF34 Turbine Engine Monitoring System (TEMS) Squadron Integration Program (SIP) was initiated in September 1981 to establish an engine maintenance environment based on continuous in-flight engine monitoring. The primary objective is the integration of engine monitoring and diagnostic capabilities into the maintenance and logistics procedures for the A-10/TF34 engine. That maintenance environment is further supported by the prototype Comprehensive Engine Management System (CEMS) Increment IV, which provides ground-based data processing capability. ARINC Research Corporation evaluated the overall operational effectiveness of the TEMS SIP in the areas of flight operations, maintainability, logistics, and maintenance procedures. Preliminary results indicate that continuous in-flight monitoring enhances base level maintenance and is especially effective in identifying potential engine problems early enough to avoid catastrophic failure. This paper outlines the SIP operations, summarizes our experience with the TEMS detections of engine failures, and reviews the preliminary results of TEMS on the engine maintenance process. Author

A84-35216#
PROPANE POWERED ENGINE FOR LONG DURATION UNMANNED AIRCRAFT

J. E. BORETZ (TRW, Inc., Applied Technology Div., Redondo Beach, CA) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 7 p. refs (AIAA PAPER 84-1431)

Attention is given to six propulsion system alternatives which have been systematically considered as the basis for unmanned aircraft missions of duration ranging from several days to 4 years at altitudes of from 47,500 ft to 110,000 ft. Each propulsion system studied furnishes an electrical power output to electric motor-driven propellers. The system configurations were (1) a solar cell array with storage batteries; (2) a propane-powered Organic Rankine Cycle Electric Power System (ORCEPS); (3) a solar array/propane-powered ORCEPS combination; (4) a Po-210 isotope ORCEPS; (5) a Pu-238 isotope ORCEPS; and (6) a liquid metal-cooled U-ZrH reactor ORCEPS system. O.C.

07 AIRCRAFT PROPULSION AND POWER

A84-35222#

MEASURING TURBINE ENGINE INLET TOTAL TEMPERATURE PROBLEMS AND SOLUTIONS

J. L. EDWARDS, T. J. SCHWARTZ (Rosemount, Inc., Minneapolis, MN), and R. J. HART (Pratt and Whitney Aircraft of Canada, Ltd., Quebec, Canada) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 11 p. (AIAA PAPER 84-1457)

The use of a platinum resistance thermometer is assumed in the present discussion of the problems encountered in the gathering of accurate total temperature measurements for turbine engine inlets. Such accurate measurements are required in order to both reduce pilot workload and ensure safe and efficient engine operation. Significantly improved prospects for the achievement of high measurement accuracies are noted for the use of microprocessors, since sensors that might previously have been considered too inaccurate can be used as control system inputs to which error source rating margins will be automatically applied.

O.C.

A84-35232#

DEVELOPMENT OF THE NAVY JET TRAINER DUTY CYCLE

S. M. COTE (U.S. Naval Material Command, Naval Air Development Center, Warminster, PA) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 5 p. refs (AIAA PAPER 84-1486)

The U.S. Navy has selected the T-45 aircraft powered by the Adour Mk851 turbofan to serve as its new advanced jet trainer. To avoid significant engine durability problems and associated system support costs, an accelerated simulated mission endurance test (ASMET) was developed. A T-2C and TA-4J aircraft were instrumented for recording actual trainer engine usage data which were the basis for the ASMET. Squadron interviews determined the specific training flight profiles and hot time content. The new trainer duty cycle was developed to simulate 1000 engine operating hours. A production Adour engine was tested to this duty cycle, demonstrating its component durability. Results of the test have shown that the Adour engine has adequate durability to satisfy the new trainer duty cycle requirements. Other aspects regarding usage and durability are discussed.

Author

A84-35235#

FUEL EFFECTS ON GAS TURBINE COMBUSTION - LINER TEMPERATURE, PATTERN FACTOR AND POLLUTANT EMISSIONS

A. H. LEFEBVRE (Purdue University, West Lafayette, IN) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 18 p. USAF-supported research. refs (AIAA PAPER 84-1491)

Data acquired on the effects of fuel properties on the performance and reliability of several gas turbine combustors, including J79-17A, J79-17C, F101, TF41, TF39, J85, TF33, and F100 are studied. Quantitative relationships are derived between liner wall temperature, pattern factor, and exhaust emissions, and the fuel properties, combustor design features, and combustor operating conditions. It is concluded that fuel chemistry, as indicated by hydrogen content and/or aromatics content, has a significant effect on flame radiation and liner wall temperature, but only a slight effect on the emissions of carbon monoxide and oxides of nitrogen. The physical properties that govern atomization quality and evaporation rates affect carbon monoxide emissions, but other important performance parameters, such as nitrogen oxide emissions and liner wall temperature, are sensibly independent of physical properties over the range of fuels studied.

Author

A84-35651#

EVALUATION OF SINGLE AND COUNTER ROTATION GEARBOXES FOR PROPULSION SYSTEMS

J. GODSTON and F. J. MIKE (United Technologies Corp., Pratt and Whitney Group, East Hartford, CT) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 13 p. refs (AIAA PAPER 84-1195)

Attention is given to the conceptual development status of advanced gear-driven propfan propulsion systems that are being investigated under NASA program sponsorship. Both 31-percent lower fuel burn and 14-percent lower operating costs are envisaged for these single- and counter-rotation gear-boxes, by comparison with turbofan engines of comparable sophistication. These performance gains are predicted on a minimization of the number of bearings and gears, the provision of an external blade pitch control system, modular construction principles, and technology that is to be available in 1988. Both tractor and pusher propfan installation configurations are under consideration, and the gearing systems include dual compound idler, offset spur and inline differential planetary, inline split path planetary, and inline interprop planetary types.

O.C.

A84-35652#

AXISYMMETRIC APPROACH AND LANDING THRUST REVERSERS FOR SINGLE ENGINE FIGHTERS

W. C. BITTRICK (General Dynamics Corp., Fort Worth, TX) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 11 p. refs (AIAA PAPER 84-1214)

The axisymmetric Approach and Landing Thrust Reverser (ALTR) was evaluated to (1) identify and quantify the potential benefits of thrust reversers, and (2) develop the technical data base required to validate feasibility and performance characteristics in order to justify their further development for tactical aircraft. Candidate ALTR concepts were integrated into an Advanced Tactical Combat Aircraft (ATCA) and into the F-16, and the effects on structure, weight, c.g., performance, and stability and control were predicted. On the basis of cost, the ALTR proved a rational selection for achieving balanced field-length capability. Also, the ALTR impacts on the F-16 engine and airframe and the resulting airplane performance characteristics were predicted. The ALTR proved a functionally/mechanically feasible means of achieving balanced fieldlength capability.

Author

A84-35655#

AN ENGINE FOR TOMORROW'S SMALL HELICOPTERS

E. E. COHEN and D. R. JACOBY (Hughes Helicopters, Inc., Culver City, CA) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 5 p. (AIAA PAPER 84-1277)

The present consideration of small helicopter engine development requirements notes that, while current engine design criteria are primarily concerned with the achievement of the lowest possible specific fuel consumption at full rated power (with partial power output being predicated on lowered component efficiencies), future fuel consumption, weight and cost criteria will be strongly driven by life cycle considerations. As a result, maximum efficiency will be achieved at some partial power output value, at an altitude as low as 4000 ft. Power will be added at decreasing efficiency until full rated power values are reached.

O.C.

A84-35656#

THE AHIP POWER PLANT

F. E. CONN (General Motors Corp., Allison Gas Turbine Div., Indianapolis, IN) and F. M. SHALLENE (Bell Helicopter Textron, Fort Worth, TX) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 12 p. (AIAA PAPER 84-1282)

The U.S. Army's Helicopter Improvement Program (AHIP) has led to the certification of the 250-C30R engine for the OH-58D helicopter. The engine has already accumulated over 3/4-million hours of commercial service, and it has over the 1800 test stand

and 1800 flight test hours of the AHIP program fully demonstrated the capabilities and reliability of a novel digital control system. The 250-C30R's 650 shp rating represents a highly effective output of 518 shp at 4000 ft, under ambient temperature conditions of 95 F. Installation features include an integral vortex tube particle separator, a low loss exhaust system, maintenance-free drive couplings, and a suction fuel supply system. O.C.

A84-35659#
FUTURE COMBAT ENVIRONMENTS - IMPLICATIONS FOR THE ENGINE DEVELOPMENT PROCESS

J. L. BIRKLER (Rand Corp., Santa Monica, CA) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 5 p.
 (AIAA PAPER 84-1339)

The demands and unpredictability of future combat environments will require turbofan engine subsystems exhibiting superior reliability, durability and maintainability. Accordingly, maintainability will have to receive development emphasis comparable to that given reliability and durability. Substantial progress has already been demonstrated in this regard with the F404 engine. The reliability and durability requirements have made the demonstration and validation phase of engine development more intensive and protracted, and emphasis in this process is moving away from design point performance toward an approximation of full-scale development engine characteristics that can be tested at a far earlier point in the powerplant acquisition cycle. O.C.

A84-35666#
DEVELOPMENT OF THE ENGINE CONDITION MONITORING SYSTEM FOR THE HH-65A HELICOPTER

K. K. EHLERS (Aerospatiale Helicopter Corp., Grand Prairie, TX) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 9 p.
 (AIAA PAPER 84-1411)

The Engine Condition Monitoring System (ECMS) developed for the U.S. Coast Guard's Short Range Recovery Helicopter has as its goals the reduction of operating costs, the reduction of flight crew workload, and the elimination of monitoring system weight increases through the obviating of dedicated hardware. ECMS software is supplied to the Mission Computer Unit, in order to coordinate aircraft sensor data with the Cockpit Control/Display units, Caution Advisory Panel, and Flight Data Storage Unit. The resulting flight data processing is used to accurately calculate and record cycles, trends, and out-of-limit conditions. O.C.

N84-24577* National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

COMBUSTOR LINER CONSTRUCTION Patent

H. M. CRAIG (United Technologies Corp., East Hartford, Conn.), W. B. WAGNER (United Technologies Corp., East Hartford, Conn.), and W. J. STROCK, inventors (to NASA) (United Technologies Corp., East Hartford, Conn.) 15 Nov. 1983 6 p Filed 2 Apr. 1980 Sponsored by NASA

(NASA-CASE-LEW-14035-1; US-PATENT-4,414,816;
 US-PATENT-APPL-SN-136652; US-PATENT-CLASS-60-757)
 Avail: US Patent and Trademark Office CSCL 21E

A combustor liner is fabricated from a plurality of individual segments each containing counter/parallel Finwall material and are arranged circumferentially and axially to define the combustion zone. Each segment is supported by a hook and ring construction to an opened lattice frame with sufficient tolerance between the hook and ring to permit thermal expansion with a minimum of induced stresses.

Official Gazette of the U.S. Patent and Trademark Office

N84-24578*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

LEWIS RESEARCH CENTER SPIN RIG AND ITS USE IN VIBRATION ANALYSIS OF ROTATING SYSTEMS

G. V. BROWN, R. E. KIELB, E. H. MEYN, R. E. MORRIS, and S. J. POSTA May 1984 19 p refs
 (NASA-TP-2304; E-1829; NAS 1.60:2304) Avail: NTIS HC A02/MF A01 CSCL 21E

The Lewis Research Center spin rig was constructed to provide experimental evaluation of analysis methods developed under the NASA Engine Structural Dynamics Program. Rotors up to 51 cm (20 in.) in diameter can be spun to 16,000 rpm in vacuum by an air motor. Vibration forcing functions are provided by shakers that apply oscillatory axial forces or transverse moments to the shaft, by a natural whirling of the shaft, and by an air jet. Blade vibration is detected by strain gages and optical blade-tip motion sensors. A variety of analog and digital processing equipment is used to display and analyze the signals. Results obtained from two rotors are discussed. A 56-blade compressor disk was used to check proper operation of the entire spin rig system. A special two-blade rotor was designed and used to hold flat and twisted plates at various setting and sweep angles. Accurate Southwell coefficients have been obtained for several modes of a flat plate oriented parallel to the plane of rotation. Author

N84-24579*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

TANDEM FAN APPLICATIONS IN ADVANCED STOVL FIGHTER CONFIGURATIONS

C. L. ZOLAR, S. B. WILSON, III, and M. A. ESKEY 1984 20 p refs Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984

(NASA-TM-83689; E-2140; NAS 1.15:83689) Avail: NTIS HC A02/MF A01 CSCL 21E

The series/parallel tandem fan engine is evaluated for application in advanced STOVL supersonic fighter aircraft. Options in engine cycle parameters and design of the front fan flow diverter are examined for their effects on engine weight, dimensions, and other factors in integration of the engine with the aircraft. Operation of the engine in high-bypass flow mode during cruise and loiter flight is considered as a means of minimizing fuel consumption. Engine thrust augmentation by burning in the front fan exhaust is discussed. Achievement of very short takeoff with vectored thrust is briefly reviewed for tandem fan engine configurations with vectorable front fan nozzles. Examples are given of two aircraft configuration planforms, a delta-canard, and a forward-swept wing, to illustrate the major features, design considerations, and potential performance of the tandem fan installation in each. Full realization of the advantages of tandem fan propulsion are found to depend on careful selection of the aircraft configuration, since integration requirements can strongly influence the engine performance. Author

N84-24580*# General Electric Co., Lynn, Mass. Aircraft Business Group.

ROTORCRAFT CONTINGENCY POWER STUDY Final Report

R. HIRSCHKRON, J. F. HAYNES, D. N. GOLDSTEIN, and R. H. DAVIS May 1984 157 p refs
 (Contract NAS3-23705)

(NASA-CR-174675; NAS 1.26:174675; R84AEB012) Avail: NTIS HC A08/MF A01 CSCL 21E

Twin helicopter engines are often sized by the power requirement of a safe mission completion after the failure of one of the two engines. This study was undertaken for NASA Lewis by General Electric Co. to evaluate the merits of special design features to provide a 2-1/2 Contingency Power rating, permitting an engine size reduction. The merits of water injection, turbine cooling airflow modulation, throttle push, and a propellant auxiliary power plant were evaluated using military Life Cycle Cost (LCC) and commercial helicopter Direct Operating Cost (DOC) merit factors in a rubber engine and a rubber aircraft scenario. Author

07 AIRCRAFT PROPULSION AND POWER

N84-24582*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.
SUPERSONIC STOVL AIRCRAFT WITH TURBINE BYPASS/TURBO-COMPRESSOR ENGINES
L. C. FRANCISCUS and R. W. LUIDENS 1984 15 p refs Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984; sponsored by AIAA, SAE and ASME (NASA-TM-83686; E-2138; NAS 1.15:83686) Avail: NTIS HC A02/MF A01 CSCL 21E

Three propulsion systems for a Mach 2 STOVL fighter were compared. The three propulsion systems are: (1) turbine bypass engine with a turbocompressor used for STOVL only; (2) turbine bypass engine with a turbocompressor for both STOVL and thrust during forward flight; and (3) mixed flow afterburning turbofan with a remote burner lift system. In the first system, the main engines have afterburners and the turbocompressors use after burning during STOVL. In the second system, the turbine bypass engines are dry and the turbocompressors have afterburners. The mission used in the study is a deck launched intercept mission. It is indicated that large improvements in combat time are possible when the turbocompressors are used for both left and thrust for forward flight. E.A.K.

N84-24583*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.
AN OVERVIEW OF NASA INTERMITTENT COMBUSTION ENGINE RESEARCH
E. A. WILLIS and W. T. WINTUCKY 1984 33 p refs Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984; sponsored by AIAA, SAE and ASME (NASA-TM-83668; E-2111; NAS 1.15:83668) Avail: NTIS HC A03/MF A01 CSCL 21E

This paper overviews the current program, whose objective is to establish the generic technology base for advanced aircraft I.C. engines of the early 1990's and beyond. The major emphasis of this paper is on development of the past two years. Past studies and ongoing confirmatory experimental efforts are reviewed, which show unexpectedly high potential when modern aerospace technologies are applied to inherently compact and balanced I.C. engine configurations. Currently, the program is focussed on two engine concepts the stratified-charge, multi-fuel rotary, and the lightweight two-stroke diesel. A review is given of contracted and planned high performance one-rotor and one-cylinder test engine work addressing several levels of technology. Also reviewed are basic supporting efforts, e.g., the development and experimental validation of computerized airflow and combustion process models, being performed in-house at Lewis Research Center and by university grants. Author

N84-24584*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.
COMBUSTION GAS PROPERTIES OF VARIOUS FUELS OF INTEREST TO GAS TURBINE ENGINEERS
R. E. JONES, A. M. TROUT, and J. D. WEAR 1984 11 p refs Presented at the Joint Power Generation Conf., Toronto, 1-4 Oct. 1984; sponsored by ASME (NASA-TM-83682; E-2133; NAS 1.15:83682) Avail: NTIS HC A02/MF A01 CSCL 21E

A series of computations were made using the gas property computational schemes of Gordon and McBride to compute the gas properties and species concentration of ASTM-Jet A and dry air. The computed gas thermodynamic properties in a revised graphical format which gives information which is useful to combustion engineers is presented. A series of reports covering the properties of many fuel and air combinations will be published. The graphical presentation displays on one chart of the output of hundreds of computer sheets. The reports will contain microfiche cards, from which complete tables and graphs can be obtained. The extent of the planned effort and is documented samples of the many tables and charts that will be available on the microfiche cards are presented. E.A.K.

N84-24585*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.
SENSOR FAILURE DETECTION FOR JET ENGINES USING ANALYTICAL REDUNDANCE
W. C. MERRILL 1984 24 p refs Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984; sponsored by AIAA, SAE and ASME (NASA-TM-83695; E-2123; NAS 1.15:83695; AIAA-84-1452) Avail: NTIS HC A02/MF A01 CSCL 21E

Analytical redundant sensor failure detection, isolation and accommodation techniques for gas turbine engines are surveyed. Both the theoretical technology base and demonstrated concepts are discussed. Also included is a discussion of current technology needs and ongoing Government sponsored programs to meet those needs. Author

N84-24586*# Massachusetts Inst. of Tech., Cambridge. Gas Turbine and Plasma Dynamics Lab.
FLUTTER AND FORCED RESPONSE OF MISTUNED ROTORS USING STANDING WAVE ANALYSIS
D. J. BUNDAS and J. DUNGUNDJI Mar. 1983 155 p refs Previously announced as A83-29823 (Contract NAG3-214) (NASA-CR-173555; NAS 1.26:173555; GT/PDL-170) Avail: NTIS HC A08/MF A01 CSCL 21E

A standing wave approach is applied to the analysis of the flutter and forced response of tuned and mistuned rotors. The traditional traveling wave cascade airforces are recast into standing wave arbitrary motion form using Pade approximants, and the resulting equations of motion are written in the matrix form. Applications for vibration modes, flutter, and forced response are discussed. It is noted that the standing wave methods may prove to be more versatile for dealing with certain applications, such as coupling flutter with forced response and dynamic shaft problems, transient impulses on the rotor, low-order engine excitation, bearing motion, and mistuning effects in rotors. V.L. (IAA)

N84-24587*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.
HIGHLY INTEGRATED DIGITAL ENGINE CONTROL SYSTEM ON AN F-15 AIRPLANE Final Report
F. W. BURCHAM, JR. and E. A. HAERING, JR. Jun. 1984 13 p refs Presented at the 20th AIAA/ASME/SAE Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984 (NASA-TM-86040; H-1240; NAS 1.15:86040) Avail: NTIS HC A02/MF A01 CSCL 21E

The Highly Integrated Digital Electronic Control (HIDEC) program will demonstrate and evaluate the improvements in performance and mission effectiveness that result from integrated engine/airframe control systems. This system is being used on the F-15 airplane. An integrated flightpath management mode and an integrated adaptive engine stall margin mode are implemented into the system. The adaptive stall margin mode is a highly integrated mode in which the airplane flight conditions, the resulting inlet distortion, and the engine stall margin are continuously computed; the excess stall margin is used to uptrim the engine for more thrust. The integrated flightpath management mode optimizes the flightpath and throttle setting to reach a desired flight condition. The increase in thrust and the improvement in airplane performance is discussed. M.A.C.

N84-24588*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.
PRELIMINARY FLIGHT TEST RESULTS OF THE F100 EMD ENGINE IN AN F-15 AIRPLANE Final Report
L. P. MYERS and F. W. BURCHAM, JR. Jun. 1984 12 p refs Presented at the 20th AIAA/ASME/SAE Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984 (NASA-TM-85902; H-1247; NAS 1.15:85902) Avail: NTIS HC A02/MF A01 CSCL 21E

A flight evaluation of the F100 Engine Model Derivative (EMD) is conducted. The F100 EMD is an advanced version of the F100 engine that powers the F15 and F16 airplanes. The F100 EMD

features a bigger fan, higher temperature turbine, a Digital Electronic Engine Control system (DEEC), and a newly designed 16 segment afterburner, all of which results in a 15 to 20 percent increase in sea level thrust. The flight evaluations consist of investigation of performance (thrust, fuel flow, and airflow) and operability (transient response and airstart) in the F-15 airplane. The performance of the F100 EMD is excellent. Aircraft acceleration time to Mach 2.0 is reduced by 23 percent with two F100 EMD engines. Several anomalies are discovered in the operability evaluations. A software change to the DEEC improved the throttle, and subsequent Cooper Harper ratings of 3 to 4 are obtained. In the extreme upper left hand corner of the flight enveloped, compressor stalls occur when the throttle is retarded to idle power. These stalls are not predicted by altitude facility tests or stability for the compressor. M.A.C.

N84-24589*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

PERFORMANCE OF A HIGH-WORK LOW ASPECT RATION TURBINE TESTED WITH A REALISTIC INLET RADIAL TEMPERATURE PROFILE

R. G. STABE, W. J. WHITNEY, and T. P. MOFFITT 1984 24 p refs Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984

(NASA-TM-83655; E-2098; NAS 1.15:83655; AIAA-84-1161)

Avail: NTIS HC A02/MF A01 CSCL 21E

Experimental results are presented for a 0.767 scale model of the first stage of a two-stage turbine designed for a high by-pass ratio engine. The turbine was tested with both uniform inlet conditions and with an inlet radial temperature profile simulating engine conditions. The inlet temperature profile was essentially mixed-out in the rotor. There was also substantial underturning of the exit flow at the mean diameter. Both of these effects were attributed to strong secondary flows in the rotor blading. There were no significant differences in the stage performance with either inlet condition when differences in tip clearance were considered. Performance was very close to design intent in both cases.

Author

N84-24590# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Cologne (West Germany). Abt. Verdichter.

INVESTIGATION OF THE BEHAVIOR OF AXIAL COMPRESSOR STAGES WITH STEADY STATE INLET DISTORTIONS Ph.D. Thesis - Technische Hochschule, Aachen

M. LECHT 1983 208 p refs In GERMAN; ENGLISH summary (DFVLR-FB-83-39) Avail: NTIS HC A10/MF A01; DFVLR, Cologne DM 65

The influence of nonuniform inlet flow on the performance of a subsonic and a transonic axial compressor stage are investigated. Both compressor stages are exposed to screen-induced circumferential total pressure distortions, and moreover, the transonic stage is exposed to an inlet swirl distortion delivered by a special inlet guide vane. The influence of these types of distortion on the performance map as well as on the distribution of the main flow quantities within the stage is shown. An analysis of the measurements is directed to the unsteady rotor behavior in correspondence with a single airfoil subjected to instantaneous flow conditions. The phenomena of hysteresis as well as an unsteady overshoot of loading over the steady state limits are demonstrated. Based hereon and by means of an unsteady transfer behavior, a model of two compressors working in parallel is extended to give a better estimation of the surge line. Author

N84-24592# Stevens Inst. of Tech., Hoboken, N. J. Dept. of Mechanical Engineering.

BEHAVIOR OF CASCADED AIRFOILS UNDER CONDITIONS OF HIGH MEAN LOADING AND FLOW UNSTEADINESS Final Technical Report, 1 Jun. 1982 - 31 May 1983

F. SISTO and R. B. COLE 15 Dec. 1983 48 p

(Contract N00014-82-K-0369)

(AD-A139799; ME-RT-83007) Avail: NTIS HC A03/MF A01

CSCL 21E

The objectives of this research program were to measure the unsteady flow field in the rotor passage of an axial compressor and map this velocity field when operating near rotor blade stall. A laser Doppler velocimeter system was developed for this purpose and used in conjunction with a single stage compressor designed expressly to facilitate these measurements. An extensive data acquisition system utilizing microcomputer components was designed and partially assembled and data processing algorithms were developed to yield the velocity mapping from the data. Various program sub-elements were completed, but a successful on-rotor velocity realization was not achieved at contract termination. Propagating stall was observed on the compressor and modelling studies using simulated inputs to the data processing system indicated a potential for successful unsteady velocity field mapping. Author (GRA)

N84-24738# Pratt and Whitney Aircraft of Canada Ltd., Mississauga (Ontario). Combustion Aerodynamics Dept.

FUEL CHARACTER EFFECTS ON PERFORMANCE OF SMALL GAS TURBINE COMBUSTION SYSTEMS

P. SAMPATH and M. GRATTON In AGARD Combust. Probl. in Turbine Eng. 12p Jan. 1984 refs

Avail: NTIS HC A19/MF A01

The effects of potential broadened specification and alternate source jet fuels on the performance of small gas turbine combustors are presented. The review is based primarily on the results of a research program to evaluate the performance of a small 'can' combustor and two reverse flow annular combustors with fifteen fuels. The fuels represented variations in several key characteristics such as hydrogen content, aromatics, viscosity, boiling range, volatility and thermal stability. Alternate source fuels included oil shale and tar sand derived fuels. Results of property changes of performance parameters of the 'can' combustor, such as life, starting and stability characteristics, exhaust emissions and smoking tendencies, are discussed. Author

N84-24755# Rolls-Royce Ltd., Derby (England). Combustion Technology Dept.

THE DESIGN AND DEVELOPMENT OF A LOW EMISSIONS TRANSPLY COMBUSTOR FOR THE CIVIL SPEY ENGINE

J. K. BHANGU, D. M. SNAPE, and B. R. EARDLEY In AGARD Combust. Probl. in Turbine Eng. 18p Jan. 1984. refs

Avail: NTIS HC A19/MF A01

This paper describes the design and development of a low emission turbo-annular combustor now entering service in the Spey aero gas turbine engine. The combustors, ten of which form the turbo-annular combustion system, are constructed from an advanced cooling material known as Transply. Use of this pseudo transpiration cooling material enables a significant saving to be made in the utilization of the wall cooling air. This air is used in optimizing the primary zone and intermediate zone stoichiometry which, combined with the use of an aerodynamic curved vane swirler, results in a substantial reduction in the emission levels. A number of significant durability problems have been overcome to meet the rigorous demands of aero-engine operation. The paper outlines the development process, starting with the constraints imposed by an existing engine design and describing the rig and engine test program leading to a full definition of the aero-thermodynamics of the developed combustor. Author

07 AIRCRAFT PROPULSION AND POWER

N84-24756# Motoren- und Turbinen-Union Muenchen G.m.b.H. (West Germany).

ADVANCED COMBUSTOR LINER COOLING CONCEPTS

B. SIMON, D. SCHUBER, and U. BASLER /in AGARD Combust. Probl. in Turbine Eng. 10p Jan. 1984 refs Sponsored in part by German Ministry of Defence
Avail: NTIS HC A19/MF A01

Small gas turbine liner cooling is especially difficult due to the low combustor air flow and relatively large flame tube areas. Therefore, it is desirable to increase the cooling potential of the cooling air by application of combined convective-film cooling. Its advantage must be balanced carefully against the disadvantage of increased weight and production cost. The large number of variable parameters of a combined cooling configuration requires a computer model which allows the simulation of different cooling approaches. For the verification of this, model tests with various configurations were conducted in a 2D-cooling rig. Good agreement between measured and calculated liner temperatures could be achieved. Thus, the model is suitable to show under which conditions a marked decrease of wall temperature can be reached compared with the case of straight film cooling under the same conditions. Author

N84-24757# Karlsruhe Univ. (West Germany). Lehrstuhl und Inst. fuer Thermische Stroemungsmaschinen.

DEVELOPMENT OF TEMPERATURE-, VELOCITY- AND CONCENTRATION-PROFILES IN A CURVED COMBUSTOR

S. WITTIG, R. KUTZ, B. E. NOLL, and K. H. PLATZER /in AGARD Combust. Probl. in Turbine Eng. 9p Jan. 1984 refs Sponsored in part by Deutsche Forschungsgemeinschaft
Avail: NTIS HC A19/MF A01

The influence of bends as found in reverse-flow combustors or in various stationary gas turbines on the flow exiting the mixing zone was studied experimentally. In a first approach, a duct with circular cross-section was chosen with a predetermined temperature-, velocity- and concentration-profile exiting the primary zone of an atmospheric burner. The velocity profiles were measured in three planes (0, 45, 90 deg) and downstream of the bend using a five-hole spherical probe. Also, the temperature and pressure distribution as well as the concentration profiles particularly of CO₂ were measured in the respective planes. It was found, that energy as well as species-transport arises primarily from secondary flow phenomena combined with strong pressure gradients. In a first attempt to clarify the various phenomena, the development of the static pressure and the temperature is calculated for two-dimensional flow using a finite difference scheme utilizing the well known k-epsilon-turbulence model. It is shown that similar pressure characteristics are obtained. Corresponding temperature profiles, however, result from different sources. M.G.

N84-24764# Office National d'Etudes et de Recherches Aerospatiales, Toulouse (France). Dept. de Mecanique et Energetique des Systemes.

AN AERODYNAMIC STUDY OF COMBUSTION IN THE COMBUSTION CHAMBERS OF TURBOMACHINES: EXPERIMENTAL AND THEORETICAL APPROACHES [ETUDE AERODYNAMIQUE DE LA COMBUSTION DANS LES FOYERS DE TURBOMACHINES: APPROCHES EXPERIMENTALES ET THEORIQUES]

G. FRAGER, P. HEBRARD, G. LAVERGNE, and A. MIR /in AGARD Combust. Probl. in Turbine Eng. 16p Jan. 1984 refs In FRENCH

Avail: NTIS HC A19/MF A01

Instead of using local resolution methods which are often too costly at the rough-draft stage of combustor design, there is often an advantage in using either a modular or mixed method approach. In the modular approach, numerous hydraulic tunnel tests and diverse video imaging techniques supply the basic data used in the schematics of diverse combustors in the form of a combination of elementary reactors. The addition of chemical kinetics, more or less detailed, (aggregate mode, semi-aggregate, with vaporization) allows the prediction of the total performance of these various

combustion chambers with good precision. In the more precise mixed method approach, only the recirculation zones are modeled by an collection of elementary reactors. The regions of direct flow (jet, swirler...) are the object of local calculation (Kappa, Epsilon) in which the behavior of the drops (size, trajectory, vaporization) is considered beginning with a collection of geometric measurements carried out at DERMES. Transl. by A.R.H.

N84-25630# Rolls-Royce Ltd., Bristol (England).

V/STOL PROPULSION SYSTEM AERODYNAMICS

W. J. LEWIS /in AGARD Spec. Course on V/STOL Aerodyn. 24 p Apr. 1984

Avail: NTIS HC A17/MF A01

Different V/STOL propulsion system concepts are briefly described. Highlighted are those features of the systems which present the aerodynamicist with either more severe problems or different problems from those present on conventional takeoff and landing engines. After illustrating some of the demands V/STOL makes on the engine cycle choice and some of the compromises necessary, the individual parts of the propulsion system are considered in turn. Because of the enormous scope of the subject, attention was limited to aspects which are common to a number of the different propulsion systems. Author

N84-25712*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

DEVELOPMENT OF DYNAMIC SIMULATION OF TF34-GE-100 TURBOFAN ENGINE WITH POST-STALL CAPABILITY

S. M. KROSEL 1984 11 p refs Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984

(NASA-TM-83660; E-2104; NAS 1.15:83660; AIAA-84-1184)

Avail: NTIS HC A02/MF A01 CSCL 21E

This paper describes the development of a hybrid computer simulation of a TF34-GE-100 turbofan engine with post-stall capability. The simulation operates in real-time and will be used to test and evaluate stall recovery control modes for this engine. The simulation calculations are performed by an analog computer with a peripheral multivariable function generation unit used for computing bivariate functions. Tabular listings of a simulation variables are obtained by interfacing to a digital computer and using a custom software package for data collection and display. Author

N84-25715# European Space Agency, Paris (France).

COMPARISON OF A PROPAN/TURBOFAN ENGINE BY THERMODYNAMIC CYCLE CALCULATION

P. SCHIMMING Oct. 1983 44 p refs Transl. into ENGLISH of "Vergleichende kreisprozessrechnungen fuer ein propan-/tubofan-triebwerk" rept. DFVLR-Mitt-82-18 DFVLR, Goettingen, West Germany, Nov. 1982 Original language document announced as N83-30431

(ESA-TT-820; DFVLR-MITT-82-18) Avail: NTIS HC A03/MF A01; original German report available from DFVLR, Cologne DM 16,80

Propfans are expected to replace turbofans in commercial subsonic, air transportation systems for short and medium range. Thermodynamic cycle calculations are performed for a propan and a turbofan propulsion systems for a 150 seat twin engine medium range transport aircraft, in order to obtain the difference in specific fuel consumption. Common definitions for the efficiencies of propeller and fan and common treatment of the thermodynamic cycles form the basis of the analysis. M.A.C.

N84-25728# National Research Council of Canada, Ottawa (Ontario). Div. of Mechanical Engineering.

PERFORMANCE DERIVATION OF TURBOJETS AND TURBOFANS FROM TESTS IN SEA-LEVEL TEST CELLS

D. M. RUDNITSKI /in AGARD Operational and Performance Meas. on Eng. in Sea Level Test Facilities 22p Mar. 1984 refs

Avail: NTIS HC A09/MF A01

To most users of aircraft jet engines, the definition of engine performance means the thrust level, and the fuel consumption

required to generate it. Just as important, however, is mechanical performance, as an engine may meet the thrust requirement, yet lack sufficient mechanical integrity. The operator must therefore have some means of quantifying engine performance before he can pronounce it as healthy. This type of routine testing is generally conducted in an enclosed ground level test bed. During an engine test, data are recorded at several power settings, corrected for cell effects, and compared against manufacturer's supplied curves to determine actual performance. If an engine was tested on an outdoor stand, under zero wind conditions, the measured thrust, corrected for instrument error, would be the true engine thrust. The act of bringing the engine into an enclosed facility has an effect on measured engine performance. The procedure for quantifying this effect, sometimes called establishing a cell factor, is usually done by correlating the customer's facility to the manufacturer's standard test cell using a gold plated engine. This paper describes the types of measurements, performance parameters, and methods of data presentation for a correlation program. Author

N84-26438 Vereinigte Flugtechnische Werke G.m.b.H., Bremen (West Germany).

GROUND AND INFLIGHT OPERATIONAL EFFECTS OF APU'S

J. H. RENKEN *In* MBB Tech. and Sci. Publ. 1983 p 119-137 1983 Presented at AGARD Propulsion and Energetics (PEP) Meeting/Specialists' Meeting on Auxiliary Power Systems, Copenhagen, 30-31 May 1983 (VFW-30/83-O) Avail: Issuing Activity

The Airbus APU has to deliver well defined quantities of bleed air and electrical power under two very different conditions: on ground and inflight. The on ground operation is essentially governed by problems like noise generation and emission, and ingestion of hot gas, constraining the possible range of intake and exhaust position. The inflight operation is dominated by the external fuselage flow conditions intake and exhaust are exposed to and which may effect significantly the installation pressure-ratio and with that the inflight restart envelope and inflight performance. Depending on fuselage surface pressure and boundary layer conditions, intake and exhaust geometries and ducting have to be designed so that a favorable IPR is provided during APU starting as well as APU operation, keeping at the same time negative effects on the aircraft as for instance drag increase at minimum. The effect of these environmental conditions on the APU performance is discussed. E.A.K.

AIRCRAFT STABILITY AND CONTROL

Includes aircraft handling qualities; piloting; flight controls; and autopilots.

A84-33847

TIME FLIES - THE 4D FLIGHT MANAGEMENT SYSTEM

B. WEAVER, D. MOOR, and T. PALMIERI (Lockheed-California Co., Burbank, CA) Lockheed Horizons, no. 15, 1984, p. 20-32.

In the L-1011 '4D' Flight Management System (FMS), time becomes a 'fourth dimension' among aircraft control parameters (geographic location, speed and altitude). This offers the capability of automatically interfacing with air traffic control systems, by positioning the aircraft over a predetermined fix into a terminal area established by ground controllers well in advance of the aircraft's arrival. The basic FMS hardware consists of a computer with 64K words of memory and a control and display unit that interfaces the crew with the FMS. Hardware and software schematics are provided, together with sample display states of the control and display unit for cruise, descent, and metering. Attention is given to the results of the 4D FMS's in-service evaluation with a major airline. O.C.

A84-34453#

AN EXPERIMENTAL INVESTIGATION OF VTOL FLYING QUALITIES REQUIREMENTS IN SHIPBOARD LANDINGS

R. C. RADFORD (Calspan Advanced Technology Center, Buffalo, NY) and D. ANDRISANI, II (Purdue University, West Lafayette, IN) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 371-379. refs

(Contract N62269-78-C-0043)

Previously cited in issue 20, p. 3666, Accession no. A80-45913

A84-34458#

THRUST VECTOR CONTROL OF A V/STOL AIRSHIP

B. L. NAGABHUSHAN and G. D. FAISS (Goodyear Aerospace Corp., Defense Systems Div., Akron, OH) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 408-413. refs

Potential concepts for thrust vector control of a modern airship were investigated using a six degree-of-freedom flight dynamics simulation. The specific thrust vectors simulated included those from two ducted fans mounted one on either side of the airship car, each having the capability of tilting in pitch and roll to give vertical and lateral thrust for control. An auxiliary thruster at the bow or stern of the airship, which augments its directional control, was also considered. It has been found that the tiltable ducted fans provide the airship with greater operational flexibility, especially during takeoff and landing. Thrust vectoring to provide roll control was found to be effective while ground handling. The bow/stern thruster was found to give excellent directional control, which significantly improved the airship lateral maneuverability at low speeds. Thrust reversibility, thrust application rate, and tilt rate of thrust vectors were found to be important design parameters having considerable effect on airship flying qualities. Author

N84-24530# Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio.

MULTIVARIABLE CONTROL LAW THEORY

In its Proc. of the Workshop on Multivariate Control Systems p 8-37 Sep. 1983 refs

Avail: NTIS HC A99/MF A01 CSCL 01C

A summary of the techniques used in the design of high performance tracking systems for aircraft control is provided. A discussion of important facets in their application is also included. The theoretical discussions cover the discrete case and the corresponding continuous design equations. This approach is taken because, although the designs are for a digital implementation, the insight and experience with continuous design principles is used effectively. The methods are essentially identical for continuous and discrete designs. It is often more meaningful to consider the s-plane root locations and migrations as opposed to z-plane analysis. For those cases where the continuous methods are employed, sampling effects and discrete time delay must be examined prior to design acceptance. Author

N84-24531# Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio.

MULTIVARIABLE CONTROL LAWS FOR THE AFTI/F-16 M.S. Thesis

A. F. BARFIELD *In its* Proc. of the Workshop on Multivariate Control Systems p 41-256 Sep. 1983 refs Previously announced as N84-18210

(AFIT/GE/EE/83S-4) Avail: NTIS HC A99/MF A01 CSCL 01C

Recently evolved multivariable design techniques are used to develop control laws for the AFTI/F-16. Designs are investigated to provide pilot control of vehicle rotational rates and accelerations. This line of inquiry is in contrast to the angle control concepts required in previous applications of these new techniques. A computer aided design package called "MULTI" is used in refining the control laws to the preliminary design stage. An aircraft model is developed in state space form for the AFTI vehicle from linearized aerodynamic data. This is accomplished at several points in the flight envelope. After validation, these models are used for the design and evaluation of the control laws. Author

08 AIRCRAFT STABILITY AND CONTROL

N84-24532# Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio.

DESIGN OF A COMPLETE MULTIVARIABLE DIGITAL FLIGHT CONTROL SYSTEM M.S. Thesis

J. M. BAUSCHLICHER *In its Proc. of the Workshop on Multivariate Control Systems* p 259-416 Sep. 1983 refs (AFIT/GE/EE/82D-18) Avail: NTIS HC A99/MF A01 CSCL 01C

The application of a singular perturbation method in the design of a complete (lateral and longitudinal) multivariable, error actuated, tracking, digital flight controller is examined. The aircraft model used to test the method is a hypothesized design proposed by Lockheed with augmented flight control surfaces including horizontal and vertical canards, and jet flaps. Multivariable tracker control laws can be designed for the aircraft model examined here equipped with augmented control surfaces - ailerons, rudder, maneuver flaps, canards, and jet flaps. The controllers all perform very satisfactorily at the flight condition for which they are designed. In addition a universal controller is found that is capable of producing satisfactory responses for the three flight conditions previously mentioned, eliminating much of the gain scheduling required with present digital flight controllers. Author

N84-24533# Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio.

DIGITAL MULTIVARIABLE TRACKER CONTROL LAWS FOR THE C-141-A STARLIFTER AIRCRAFT M.S. Thesis

M. A. MASI *In its Proc. of the Workshop on Multivariate Control Systems* p 419-515 Sep. 1983 refs (AFIT/GE/EE/82D-47) Avail: NTIS HC A99/MF A01 CSCL 01C

The design of digital, multivariable tracker control laws for the C-141-A Starlifter aircraft are investigated. Controllers for the aircraft at three diverse flight conditions were developed. Additions and modifications to the computer package MULTI are included. A six degree of freedom aircraft model is developed. The equations of motion assume linearized aircraft models which make only small perturbations about each nominal flight condition. A discussion of robustness of the control laws determined is included. Digital tracker control laws are designed for this aircraft. A more accurate fully coupled aircraft model should be derived in order to further tune the control laws. MULTI, the computer design and simulation program, is available from the Air Force Institute of Technology. Author

N84-24534# Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio.

HIGH-GAIN ERROR ACTUATED FLIGHT CONTROL SYSTEMS FOR CONTINUOUS LINEAR MULTIVARIABLE PLANTS M.S. Thesis

T. LEWIS *In its Proc. of the Workshop on Multivariate Control Systems* p 517-573 Sep. 1983 refs (AFIT/GAE/EE/82D-1) Avail: NTIS HC A99/MF A01 CSCL 01C

The theory of high gain error actuated feedback control is applied to the design of various lateral directional decoupling flight control systems for an advanced aircraft. The controllers developed utilize output feedback with proportional plus integral control to produce desirable closed loop responses with minimal interactions between outputs. Because of the structure of the system, measurement variables in addition to the outputs are necessary to apply this method. Controller design robustness are examined by varying the flight conditions or maneuver commands from the ones the controller is specifically designed for, and then judges system performance. The controller is robust with respect to varying flight conditions, but is not robust with respect to varying maneuver commands. The effect of first order actuator dynamics in the system model is examined. Actuator dynamics are shown to significantly affect the control system response, indicating that a simplified model, without actuators, is not desirable in one's control design scheme. Author

N84-24535# Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio.

RECONFIGURABLE DIGITAL CONTROL LAWS FOR THE A-7D DIGITAC 2 AIRCRAFT WITH FAILED PRIMARY CONTROL SURFACES M.S. Thesis

D. E. RUSS *In its Proc. of the Workshop on Multivariate Control Systems* p 575-671 Sep. 1983 refs (AFIT/GE/EE/82D-59) Avail: NTIS HC A99/MF A01 CSCL 01C

A set of high gain, error actuated multivariable digital control laws for the A-7D DIGITAC 2 aircraft was developed at three different flight conditions and for the aircraft with three different control surface failures. Additional modifications to the computer aided design package MULTI are included. The aircraft model is based on a six degree of freedom model which contains separate left and right horizontal stabilizer and left and right aileron control surfaces. These split surfaces provide additional flexibility and permit the aircraft to perform both conventional and CCV maneuvers. The design procedure used to obtain the various tracker control laws is outlined. The presentation includes a discussion of the effects of surface failures on aircraft performance and the robustness of the controllers at other flight conditions. A proposed reconfiguration strategy is also included. Author

N84-24593*# Purdue Univ., Lafayette, Ind. School of Aeronautics and Astronautics.

OPTIMAL COOPERATIVE CONTROL SYNTHESIS APPLIED TO A CONTROL-CONFIGURED AIRCRAFT

D. K. SCHMIDT and M. INNOCENTI *Jan. 1984* 33 p refs (Contract NAG4-1) (NASA-CR-170411; NAS 1.26:170411) Avail: NTIS HC A03/MF A01 CSCL 01C

A multivariable control augmentation synthesis method is presented that is intended to enable the designer to directly optimize pilot opinion rating of the augmented system. The approach involves the simultaneous solution for the augmentation and predicted pilot's compensation via optimal control techniques. The methodology is applied to the control law synthesis for a vehicle similar to the AFTI F16 control-configured aircraft. The resulting dynamics, expressed in terms of eigenstructure and time/frequency responses, are presented with analytical predictions of closed loop tracking performance, pilot compensation, and other predictors of pilot acceptance. M.A.C.

N84-24595# Glasgow Univ. (Scotland). Dept. of Aeronautics and Fluid Mechanics.

A SIMPLIFIED METHOD OF EVALUATING AIRCRAFT HANDLING QUALITIES USING A PILOT TRANSFER FUNCTION MODEL

P. N. HUANG *4 Jan. 1984* 16 p refs (GU-AERO-8302) Avail: NTIS HC A02/MF A01

Calculations of the performance of a pilot and aircraft closed loop system were made using a simple pilot mathematical model obtained from simulator testing. Results show that correlation exists between the pilot handling rating and the mean square error signal in the pilot-aircraft circuit in response to a selected disturbance input. This approach could provide the basis for the approximate evaluation of aircraft handling qualities. Author

N84-24596# Glasgow Univ. (Scotland). Dept. of Aeronautics and Fluid Mechanics.

FAST ESTIMATION OF STATE FEEDBACK GAIN FOR THE DESIGN OF AIRCRAFT AUTOPILOTS

S. Y. GUAN *4 Jan. 1984* 24 p refs (GU-AERO-8305) Avail: NTIS HC A02/MF A01

A fast estimation method to design autopilots for aircraft is presented. A two state feedback gains is determined simultaneously during the preliminary design stage according to some specified requirements. It is shown that the method is simple and straightforward and can be of practical use in the design of some widely used autopilots. E.A.K.

09 RESEARCH AND SUPPORT FACILITIES (AIR)

N84-24597# Neilsen Engineering and Research, Inc., Mountain View, Calif.

PRELIMINARY METHOD FOR ESTIMATING HINGE MOMENTS OF ALL-MOVABLE CONTROLS Final Report, 1 Mar. - 30 Nov. 1981

J. N. NIELSEN and F. K. GOODWIN Mar. 1982 344 p
(Contract N00014-81-C-0267)
(AD-A139726; AD-E401117; NEAR-TR-268) Avail: NTIS HC A15/MF A01 CSCL 20D

The objective of the first phase of this 2-phase study is to develop a hinge-moment prediction method for all-movable controls for angles of attack up to 20 deg, control deflections to 15 deg, the complete range of roll angles, and Mach numbers from subsonic to hypersonic if possible. Based on a review of the literature, it was decided to modify an existing computer program, MISSILE 2, to improve its accuracy of hinge-moment prediction. A method based on strip theory and shock-expansion theory is used to improve the prediction of fin axial center-of-pressure position. A special method is included to account for canard and body vortices on fin axial center-of-pressure location. Special extrapolation procedures for the underlying data base were added. Comparison between hinge-moment data and prediction show good agreement at zero roll between Mach numbers of 1.3 and 3.7, but not at transonic speeds. When body or canard vortices are close to tail fins on the leeward side of the body, the predictions were usually not good. Canard fin hinge moments were generally well predicted. GRA

N84-24598# Army Research and Technology Labs., Moffett Field, Calif. Aeromechanics Lab.

A PILOTED SIMULATOR INVESTIGATION OF DECOUPLING HELICOPTERS BY USING A MODEL FOLLOWING CONTROL SYSTEM

G. BOUWER and K. B. HILBERT May 1984 17 p Presented at the 40th Ann. Forum of the American Helicopter Society, Arlington, Va., 16-18 May 1984
(AD-A139976) Avail: NTIS HC A02/MF A01 CSCL 01C

A U.S. and German piloted simulation experiment conducted to evaluate the performance of a model following control system by applying it to hingeless rotor and teetering rotor helicopters is reported. The explicit model was a linear, decoupled model such that the pilot commanded pitch attitude with the longitudinal cyclic, roll attitude with the lateral cyclic, yaw rate with the pedals, and Earth fixed downward velocity with the collective. The results of the simulation indicate that the performance of the model following control system is primarily dependent on the limitations of the actuating system. Satisfactory handling qualities were achieved for both augmented helicopters flying two specified evaluation tasks: dolphin and slalom maneuvers. The significant improvements in task performance and handling qualities achieved for these two radically different helicopters, augmented with the designed model following control system, indicates the flexibility and versatility of this control technique. Author (GRA)

N84-25632*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

V/STOL MANEUVERABILITY AND CONTROL

J. A. FRANKLIN and S. B. ANDERSON *In* AGARD Spec. Course on V/STOL Aerodyn. 47 p Apr. 1984 refs Previously announced as N84-22584
Avail: NTIS HC A17/MF A01 CSCL 01C

Maneuverability and control of V/STOL aircraft in powered-life flight is studied with specific considerations of maneuvering in forward flight. A review of maneuverability for representative operational mission tasks is presented and covers takeoff, transition, hover, and landing flight phases. Maneuverability is described in terms of the ability to rotate and translate the aircraft and is specified in terms of angular and translational accelerations imposed on the aircraft. Characteristics of representative configurations are reviewed, including experience from past programs and expectations for future designs. The review of control covers the characteristics inherent in the basic airframe and propulsion system and the behavior associated with control

augmentation systems. Demands for augmented stability and control response to meet certain mission operational requirements are discussed. Experience from ground-based simulation and flight experiments that illustrates the impact of augmented stability and control on aircraft design is related by example. Author

N84-25716*# Analytical Mechanics Associates, Inc., Mountain View, Calif.

VTOL SHIPBOARD LETDOWN GUIDANCE SYSTEM ANALYSIS

A. V. PHATAK and M. S. KARMALI May 1983 60 p refs
(Contract NAS2-10288)
(NASA-CR-166519; NAS 1.26:166519; AMA-82-43) Avail: NTIS HC A04/MF A01 CSCL 01C

Alternative letdown guidance strategies are examined for landing of a VTOL aircraft onboard a small aviation ship under adverse environmental conditions. Off line computer simulation of shipboard landing task is utilized for assessing the relative merits of the proposed guidance schemes. The touchdown performance of a nominal constant rate of descent (CROD) letdown strategy serves as a benchmark for ranking the performance of the alternative letdown schemes. Analysis of ship motion time histories indicates the existence of an alternating sequence of quiescent and rough motions called lulls and swells. A real time algorithms lull/swell classification based upon ship motion pattern features is developed. The classification algorithm is used to command a go/no go signal to indicate the initiation and termination of an acceptable landing window. Simulation results show that such a go/no go pattern based letdown guidance strategy improves touchdown performance. M.A.C.

N84-25719# Naval Postgraduate School, Monterey, Calif.

COMPUTER PROGRAM TO SIMULATE DIGITAL COMPUTER BASED LONGITUDINAL FLIGHT CONTROL LAWS IN A HIGH PERFORMANCE AIRCRAFT M.S. Thesis

J. R. CARTER Dec. 1983 73 p
(AD-A140143) Avail: NTIS HC A04/MF A01 CSCL 01D

The IBM Company's Continuous Systems Modeling Program was used to simulate the longitudinal flight control system of the F/A-18 aircraft. The model is intended for use in investigations of aircraft response to flight conditions which approach spin or stall and is restricted to the automatic flaps up (AFU) flight mode. Program outputs include stabilator deflection, leading and trailing edge flap positions, and cross-axis interconnect signals. Various stick forces, motion sensor inputs and air pressure inputs were simulated to produce transient control surface responses. These computer generated responses exhibited characteristics corresponding to predicted aircraft control surface movements. Author (GRA)

09

RESEARCH AND SUPPORT FACILITIES (AIR)

Includes airports, hangars and runways; aircraft repair and overhaul facilities; wind tunnels; shock tube facilities; and engine test blocks.

N84-25721# Washington Univ., Seattle.

A NUMERICAL STUDY OF THE CONTROLLED FLOW TUNNEL FOR A HIGH LIFT MODEL Ph.D. Thesis

P. C. PARIKH 1984 122 p
Avail: Univ. Microfilms Order No. DA8404937

A controlled flow tunnel employs active control of flow through the walls of the wind tunnel so that the model is in approximately free air conditions during the test. This improves the wind tunnel test environment, enhancing the validity of the experimentally obtained test data. In the present study this concept is applied to a three dimensional jet flapped wing with full span jet flap. It is shown that a special treatment is required for the high energy wake associated with this and other V/STOL models. An iterative

09 RESEARCH AND SUPPORT FACILITIES (AIR)

numerical scheme is developed to describe working of an actual controlled flow tunnel and comparisons are shown with other available results. It is shown that control need be exerted over only part of the tunnel walls to closely approximate free air flow conditions. It is concluded that such a tunnel is able to produce a nearly interference free test environment even with a high lift model in the tunnel. Dissert. Abstr.

N84-25723# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

OPERATIONAL AND PERFORMANCE MEASUREMENT ON ENGINES IN SEA LEVEL TEST FACILITIES

Loughton, England Mar. 1984 176 p refs Lecture held in Rome, 26-27 Apr. 1984, in Ankara, Turkey, 30 Apr. - 1 May 1984, and in Athens, 3-4 May 1984
(AGARD-LS-132; ISBN-92-835-0350-3) Avail: NTIS HC A09/MF A01

This Lecture Series considers all the basic features of turbojets and turbofan testing. In the introduction, test cell design is set in historical perspective with brief descriptions of the test arrangement and instrumentation used to test the early jet engines. The way in which these have evolved to modern designs is outlined. Three typical uses for sea level test beds, routine proof testing following overhaul, performance evaluation for type certification and general development testing are described and covered in detail by specialist lectures. One lecture is devoted specifically to turboprop testing. Instrumentation and data handling are dealt with in two lectures, one covering measurement techniques and the other covering data acquisitions and handling. One lecture is devoted to the derivation of the performance of the engine from the test bed measurements.

N84-25724# Ashwood (P. F.), Farnham (England).

OPERATION AND PERFORMANCE MEASUREMENT ON ENGINES IN SEA-LEVEL TEST FACILITIES: INTRODUCTION AND GENERAL SURVEY

P. F. ASHWOOD *In* AGARD Operational and Performance Meas. on Eng. in Sea Level Test Facilities 15p Mar. 1984
Avail: NTIS HC A09/MF A01

Several aspects of sea level testing are reviewed to provide an introduction and background to the specialist papers which make up this Lecture Series. The review commences by setting cell design in historical perspective and considering the facilities that were used in the UK to test the early jet engines. A more modern cell, the Glen Test House at Pyestock, is described in detail because its design contains all the basic features required for testing turbojets and turbofans. Attention is drawn to two areas where the original Glen systems have been enhanced to meet modern requirements: the instrumentation and the method of measuring thrust. Three typical uses for sea level test beds, routine proof testing, performance evaluation and general development testing, are each briefly described and their influence on test bed design and instrumentation requirements discussed. Instrumentation is considered only in outline because of its highly specialist nature, but attention is drawn to the need for the data output to be presented in easily assimilated form, particularly when processing is carried out on line. Finally an account is given of an investigation made at Pyestock under the author's direction to examine the aerodynamic factors which influence thrust measurement. As published information on this topic is still extremely limited, and in view of its relevance to the present Lecture Series, the opportunity has been taken to make the results of these tests more widely available. Author

N84-25725# Ecole Royale Militaire, Brussels (Belgium). **AERO/THERMODYNAMIC AND ACOUSTIC CONSIDERATIONS IN THE DESIGN OF TEST-BEDS FOR TURBOJET AND TURBOFANS**

R. JACQUES *In* AGARD Operational and Performance Meas. on Eng. in Sea Level Test Facilities 23p Mar. 1984 refs
Avail: NTIS HC A09/MF A01

The testing of noninstalled engines or trimming of engines installed on aircraft has to be performed in closed test beds on

most of the airfields. The lecture starts with a general presentation of the closed test bed and the layout of the buildings. The thermodynamic equations for the calculation of the air and waterflows needed for the cooling of the hot gases ejected by the turbojet are established. These flows are a function of the thermodynamic performance parameters of the engine, and the maximum value of the temperature allowed by the materials used in the exhaust. Correct measurement of the thrust imposes restrictions on the aerodynamics of the flow such as speeds and depression in the test room. The required air flow enables us to determine the cross section of the test room. The choice of a test bed with one or two air intakes depends on the airflows. The aerodynamic equations must be established in order to calculate approximately the airflows through the test bed. The airflows are functions of the cross sectional areas of intake and exhaust stacks, ejector, flow loss coefficients and such engine parameters as thrust, temperatures and airflow. Noise reduction in the surrounding environment is the first aim of the test bed designer. The allowable noise level imposed by the user depends on the location and the orientation of the test cell, and the distances from residential buildings, offices or workshops. B.W.

N84-25727# Pratt and Whitney Aircraft, West Palm Beach, Fla. Dept. of Test Instrumentation.

INSTRUMENTATION TECHNIQUES IN SEA LEVEL TEST FACILITIES

C. E. CRONIN *In* AGARD Operational and Performance Meas. on Eng. in Sea Level Test Facilities 10p Mar. 1984 refs
Avail: NTIS HC A09/MF A01

This paper describes the application of instrumentation used during testing of turbojet and turbofan engines in sea level test facilities. The operating principal of various transducer types are discussed along with errors encountered and techniques used for calibration. A brief description of systems used for data acquisition, monitoring of engine health, and ensuring safety of the engine under test is also presented. It is the intention of this paper to present general information in the application of instrumentation devices and systems for the benefit of individuals with limited experience in the field of instrumentation. It discusses some, but by no means all, of the measurement techniques practiced in the engine development process. A selection of references is provided for those interested in reading further. Author

N84-25729# Motoren- und Turbinen-Union Muenchen G.m.b.H. (West Germany).

TESTING OF TURBOSHAFT ENGINES

M. D. WUNDER *In* AGARD Operational and Performance Meas. on Eng. in Sea Level Test Facilities 11p Mar. 1984
Avail: NTIS HC A09/MF A01

Safety in flying is of paramount importance. The high standard of the theoretical principles behind research and design and quality measures during production on their own are not sufficient for guaranteeing adequate safety. Therefore testing of components and engines before installation in aircraft is still required. It may prove possible to reduce the extent of testing, based on more sophisticated evaluation methods and testing techniques. Modular designed engines may be tested even less in the future, if the effect of specific replaced modules is well understood. This lecture is concerned with engine development, manufacturing and maintenance. B.W.

N84-25731# Royal Air Force, Barry (England).

UNINSTALLED AERO ENGINE TESTING IN OPERATION IN THE ROYAL AIR FORCE

J. A. ROWLAND, B. SCOFIELD, C. HAYNES, and C. BROAD *In* AGARD Operational and Performance Meas. on Eng. in Sea Level Test Facilities 19p Mar. 1984
Avail: NTIS HC A09/MF A01

The RAF started with Avon and Spey Uninstalled Testing Run Up Stands (UTRUS) with limited scope, but soon established firm requirements for the comprehensive UETF facilities which we now have to support Adour and RB199. These have full thrust measurement and comprehensive instrumentation; various

developments are described. Data analysis methods are emphasized including the use of desk top calculators and the advantages gained from ADP and Automated Power Plant Testing (APT). CSDE's work on continuous calibration is described with examples and a brief introduction to their V mask technique. The paper concludes with a description of the RAF Training schemes for UETF Operators. Author

N84-25732# Aeronautical Research Labs., Melbourne (Australia).

DIGITAL CONTROL OF FLIGHT SIMULATOR MOTION BASE ACTUATOR

J. SANDOR Jan. 1984 54 p refs
(ARL-SYS-TM-69; AR-003-006) Avail: NTIS HC A04/MF A01

Digital control strategies for a nonlinear motion base actuator are considered and a compound linear/nonlinear algorithm is derived for velocity tracking under a range of load conditions for representative motion demands. Discrete frequency domain methods are employed to synthesize the linear components of the control law and to establish the stability of the closed loop system via describing function analysis. The nonlinear compensation, providing attenuation of Coulomb friction effects, is realized through a velocity dependent gain term, which does not significantly affect the satisfactory large amplitude system response. Overall closed loop system performance is validated through computer simulation. Author

N84-25735# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

THE WIND TUNNEL S2MA OF THE AERODYNAMIC TESTING PLANT IN MODENE-AVRIEUX, FRANCE [LA SOUFFLERIE S2MA DU CENTRE D'ESSAIS AERODYNAMIQUES DE MODANE-AVRIEUX]

J. LAVERRE and F. CHARPIN 1983 64 p In FRENCH Report will be announced as translation ESA-TT-862
(ONERA-NT-1983-5; ESA-TT-862) Avail: NTIS HC A04/MF A01

The continuous pressurized S2MA wind tunnel has a 1.75 x 1.77 sq m transonic section (Mach 0.1 to 1.3) and a 1.75 x 1.935 sq m supersonic section (Mach 1.5 to 3.1). The different supports used are described as well as an overview of the tests conducted which illustrate the possibilities offered by this facility. Instrumentation as well as data acquisition and processing are discussed. Schematics are included. A.R.H.

10

ASTRONAUTICS

Includes astronautics (general); astrodynamics; ground support systems and facilities (space); launch vehicles and space vehicles; space transportation; spacecraft communications, command and tracking; spacecraft design, testing and performance; spacecraft instrumentation; and spacecraft propulsion and power.

A84-34915*# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

THERMOELASTIC LIMIT CYCLING OF ZIPPERED CROSS SECTION SPACECRAFT BOOMS

R. A. LASKIN (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, CA) AIAA, ASME, ASCE, and AHS, Structures, Structural Dynamics and Materials Conference, 25th, Palm Springs, CA, May 14-16, 1984. 25 p. NASA-supported research. refs
(AIAA PAPER 84-1065)

The phenomenon of thermal flutter of open cross section storable tubular extendible member (STEM) spacecraft booms was first observed in OGO IV and subsequently on a number of other satellites. Theoretical work ultimately ascribed the anomalous, undamped oscillations to the low torsional rigidity of the open section booms. This was confirmed when 'zippered' cross section

booms, with substantially higher torsional rigidity, were later flown without exhibiting thermal flutter. However, zippered STEM booms generally have sizeable torsional backlash zones. It is shown here that small amplitude thermoelastic limit cycling within this backlash zone is theoretically possible and is the likely explanation for undamped oscillations recorded on Voyager 1 and 2 in the early stages of the Voyager mission. Author

A84-35156*# General Research Corp., McLean, Va.
A VIEW OF FUTURE TECHNOLOGY NEEDS FOR SPACE TRANSPORTATION

C. F. GARTRELL (General Research Corp., McLean, VA) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 10 p. refs
(Contract NASW-3592)
(AIAA PAPER 84-1283)

This paper addresses an independent assessment of space transportation requirements within the NASA and Military Space Systems Technology Models. A critical examination is made of the system needs of the various flight elements with the models as compared to independent technology forecasts and possible technology deficiencies are discussed. These deficits impact the requisite developments needed for chemical propulsion, thermal protection systems, fuel cells, guidance, avionics and data processing for both launch vehicles and orbital transfer vehicles. Also addressed are potential alternative propellant technologies and their impact upon transfer vehicle systems. The primary focus of these anticipated technology developments will be to reduce operational costs, expand flexibility, and increase the payload capability of space transportation. Author

N84-24600*# National Academy of Sciences - National Research Council, Washington, D. C.

ACTIVITIES OF THE AERONAUTICS AND SPACE ENGINEERING BOARD COMMISSION ON ENGINEERING AND TECHNICAL SYSTEMS Summary Report, 1 Jan. - 31 Mar. 1984

Apr. 1984 7 p
(Contract NASW-3455)
(NASA-CR-173529; NAS 1.26:173529; SR-14) Avail: NTIS HC A02/MF A01 CSCL 13B

The agenda of the Aeronautics and Space Engineering Board meeting is reviewed. Items discussed included; engineering and technical requirements of the space station, NASA's altitude wind tunnel, rocket engine casings, advanced flight vehicle technology, the space shuttle, and on-orbit space maintenance. Board members along with their institutional affiliation are listed. R.S.F.

N84-24698# Naval Postgraduate School, Monterey, Calif.
DESIGN AND ANALYSIS OF COORDINATED BANK-TO-TURN (CBTT) AUTOPILOTS FOR BANK-TO-TURN (BTT) MISSILES M.S. Thesis

I. S. LIOULIS Dec. 1983 311 p
(AD-A140103) Avail: NTIS HC A14/MF A01 CSCL 16B

This work addresses the design and analysis of the Pitch, Yaw and Roll autopilot for application to the Bank-to-Turn (BTT) missiles. At first, the linear uncoupled channels were designed and analyzed according to the desired requirements. Utilizing the uncoupled channels, the linear coupled autopilots were designed, not including the inertial, kinematic and aerodynamic cross-coupling. Then, the nonlinear CBTT autopilots were designed and analyzed, using the linear CBTT (Coordinated Bank-to-Turn) models, which now have coupled with kinematic, inertial and aerodynamic cross-coupling. The minimization of the above kinematic and inertial coupling and their effects were completed using feedbacks of angle-of-attack and rate of angle-of-attack in the Pitch autopilot. Author (GRA)

CHEMISTRY AND MATERIALS

Includes chemistry and materials (general); composite materials; inorganic and physical chemistry; metallic materials; nonmetallic materials; and propellants and fuels.

A84-35724

CRACK RESISTANCE OF PRESSED AND ROLLED SEMIFINISHED PRODUCTS FROM ALUMINUM ALLOYS USED IN LOAD-BEARING UNITS IN AIRCRAFT WINGS [TRESHCHINOSTOIKOST' PRESSOVANNYKH I KATANYKH POLUFABRIKATOV IZ ALIUMINIEVYKH SPLAVOV, PRIMENIAEMYKH V SILOVYKH KONSTRUKTSIIAKH KRYLA SAMOLETOV]

A. G. VOVNIANKO and A. M. DOTSENKO Fiziko-Khimicheskaia Mekhanika Materialov (ISSN 0430-6252), vol. 20, Mar.-Apr. 1984, p. 99-102. In Russian. refs

The growth rate of cracks 30-500 mm long and with large stress intensity factors is analyzed in specimens of the alloys D16chT, V95pchT1, V95pchT2, 1161T, and 1163T which are used in aircraft panels and wind-box skin. The conditional stress intensity factors characterizing the residual strength of thin-walled structures with a crack are determined. The influence of thickness on crack resistance was studied in semifinished products 4, 8, and 12 mm thick that were cut with the grain. The influence on crack growth rate of sigma-max, which ranged from 68.5 to 216 MPa, was also examined. According to cyclic crack resistance and the conditional critical stress intensity factor, pressed panels of D16chT were superior to rolled slabs of the same alloy. The application of a softening aging regime T2 instead of T1 for the V95pch alloy significantly lowered the crack growth rate, especially for high values of K-max. J.N.

A84-35761

DETERMINATION OF THE HEAT OF COMBUSTION OF REACTIVE FUELS BY A CALCULATION METHOD [OPREDELENIE TEPLoty SGORANIIA REAKTIVNYKH TOPLIV RASCHETNYM METODOM]

A. F. GORENKOV, T. A. LIFANOVA, I. G. KLIUIKO, and A. I. KUPREEV Khimiia i Tekhnologiia Topliv i Masel (ISSN 0023-1169), no. 5, 1984, p. 35, 36. In Russian.

An empirical formula for calculation of the heat of combustion accounts for the relationship between carbon and hydrogen in the molecules of reactive fuels as well as for the mass of the molecules and their arrangement. The present equation for the specific lower heat of combustion is expressed in terms of the percent mass content of aromatic hydrocarbons, the mean temperature of boiling evaporation of the fuel, and the fuel density at 20 C. The maximum deviation from experimental data does not exceed 150 kJ/kg. J.N.

A84-35920#

SURVEY LECTURE AND SPECIAL EXPERIENCES IN FRG

K. BRUNSCH (Messerschmitt-Boelkow-Blohm GmbH, Munich, West Germany) International Conference on Carbon Fibre Application, Brazil, Dec. 5-9, 1983, Paper. 40 p. (MBB-UD-410-83-OE)

An overview of experience gained in the development of carbon fiber composite (CFC) structures for aerospace application is presented. Consideration is given to materials, the use of CFC structures in the solar arrays of Intelsat V, thermal expansion molding for transportation aircraft components, military aircraft, and the use of CFC to regulate torsional stiffness in helicopter rotor blades. For cost-effectiveness, small volume production of aerospace CFC structures indicates a well balanced mix of automated and manual processing. Various testing techniques for quality control of composite components are briefly reviewed. J.N.

A84-36175#

STATISTICS OF CRACK GROWTH OF A SUPERALLOY UNDER SUSTAINED LOAD

J. N. YANG (George Washington University, Washington, DC) and R. C. DONATH (USAF, Materials Laboratory, Wright-Patterson AFB, OH) ASME, Transactions, Journal of Engineering Materials and Technology (ISSN 0094-4289), vol. 106, Jan. 1984, p. 79-83. refs

A statistically-formulated fracture mechanics model for crack growth under sustained load is used to analyze crack growth data from 23 compact tension specimens of IN100, a turbojet engine disk material. The procedures characterize crack growth rates assuming that the growth rate is a lognormal random variable. The mean and standard deviation of the growth rate are determined from test data using the method of maximum likelihood. From these estimates, a lognormal creep crack growth rate model is developed from which is derived a statistical distribution of the crack size at any time. The distribution of time to reach some critical crack size is also presented. These distributions allow for the determination of the effect of hold time in the loading cycle on the life prediction of gas turbine engine disks. Author

N84-24715# Naval Postgraduate School, Monterey, Calif.

ANALYSIS OF SYMMETRIC REINFORCEMENT OF QUASI-ISOTROPIC GRAPHITE-EPOXY PLATES WITH A CIRCULAR CUTOUT UNDER UNIAXIAL TENSILE LOADING M.S. Thesis

D. H. PICKETT and P. SULLIVAN Dec. 1983 112 p (AD-A139998) Avail: NTIS HC A06/MF A01 CSCL 11D

An experimental and computational analysis was made of the strain field around a reinforced circular hole in four HMF330/34 graphite/epoxy (G/Ep) panels under uniaxial tensile loading. The basic panel was a 10.0 in. wide, 26.0 in. long, eight ply, quasi-isotropic (0/+45/90)s cloth laminate. Each panel was reinforced during manufacture by concurring two circular plies of the same material to each side of the panel. A circular one inch hole was drilled concentrically through the laminate to provide a stress concentration. The symmetric reinforcement reported here provided an improvement of 29 to 40% in ultimate strength over a similar but unreinforced panel under the same loading conditions. Test results indicated that panel failure would occur when the fibers in the dominating orientation were strained approximately 1%. There appeared to be a significant load transfer within the laminate at high strains from the failed fibers. A finite element analysis was made and found in excellent agreement with experimental results. GRA

N84-24732# Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).

COMBUSTION PROBLEMS IN TURBINE ENGINES

Loughton, England Jan. 1984 434 p refs In ENGLISH and FRENCH Symp. held in Cesme, Turkey, 3-6 Oct. 1983

(AGARD-CP-353; ISBN-92-835-0346-5) Avail: NTIS HC A19/MF A01

With ever increasing emphasis on improving gas turbine cycle efficiency, reducing engine development time/cost, reducing cost of ownership, minimizing pollutant emissions, and more recently the need to develop fuel tolerant combustion systems, the combustion problems in gas turbine engines require special considerations. Alternative fuels, fuel preparation, kinetics, soot, liner cooling, and combustion modeling are among the topics discussed.

N84-24733# National Research Council of Canada, Ottawa (Ontario). Fuels and Lubricants Lab.

AVIATION FUEL SPECIFICATION REQUIREMENTS: THEIR SIGNIFICANCE AND FUTURE TRENDS

L. GARDNER and R. B. WHYTE In AGARD Combust. Probl. in Turbine Eng. 15p Jan. 1984 refs

Avail: NTIS HC A19/MF A01

During at least the next twenty years the only economically available fuels for aviation turbine engines will be hydrocarbons, but the composition will change due to increased demand relative

to other petroleum products, changes in available crudes, changes in refinery processing and the introduction of synthetic crudes from heavy oils, tar sands, shale and coal. An attempt is made to predict some of the changes in fuel properties which are likely to occur and the problems these will cause in current turbine engines. Increasing shortages of suitable crude feedstocks and the threat of disruptions in supply due to world economic and potential international conflicts may require a broadening of current jet fuel specifications to improve availability and to allow, at minimum cost and maximum energy efficiency, the use of feedstocks from alternative sources including heavy petroleum crudes, tar sands, oil shale and coal. To prepare for an uncertain future in jet fuel quality and availability, research is needed to more fully understand the effects of varying fuel properties on engine and aircraft fuel system performance, reliability and durability and to build the technology base that would allow greater fuel flexibility in future aircraft. Since current production engines will still be in service at the turn of the century, research and advanced technology to accommodate possible future fuels must include cost effective retrofit options for current production aircraft as well as new engine and aircraft fuel systems. R.J.F.

N84-24734*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

RESEARCH ON AVIATION FUEL INSTABILITY

C. E. BAKER, D. A. BITTKER, S. M. COHEN, and G. T. SENG
In AGARD Combust. Probl. in Turbine Eng. 11p Jan. 1984
 refs

Avail: NTIS HC A19/MF A01 CSCL 21B

Current aircraft turbine fuels do not present a significant problem with fuel thermal stability. However, turbine fuels with broadened properties or nonpetroleum derived fuels may have reduced thermal stability because of their higher content of olefins, heteroatoms, and trace metals. Moreover, advanced turbine engines will increase the thermal stress on fuels because of their higher pressure ratios and combustion temperature. In recognition of the importance of this problem, NASA Lewis is currently engaged in a broadly based research effort to better understand the underlying causes of fuel thermal degradation. The progress and status of our various activities in this area are discussed. Topics covered include: nature of fuel instability and its temperature dependence, methods of measuring the instability, chemical mechanisms involved in deposit formation, and instrumental methods for characterizing fuel deposits. Finally, some preliminary thoughts on design approaches for minimizing the effects of lowered thermal stability are briefly discussed. R.J.F.

N84-24735# United Technologies Corp., East Hartford, Conn.

ALTERNATIVE FUEL DEPOSIT FORMATION

J. TEVELDE, L. J. SPADACCINI, E. J. SZETELA, and M. R. GLICKSTEIN (Pratt and Whitney Aircraft) *In* AGARD Combust. Probl. in Turbine Eng. 10p Jan. 1984 refs
 (Contract M00140-80-C-0097)

Avail: NTIS HC A19/MF A01

A heated tube apparatus was used to evaluate the deposit formation rates of four liquid hydrocarbon fuels and to determine the effect fuel deposits have on the transfer characteristics of aircraft gas turbine fuel systems. The fuels tested were: a low aromatic JP-5, a blend of 80 percent JP-5 and 20 percent hydrocracked gas oil, a blend of 50 percent JP-5 and 50 percent No. 2 heating oil, and a shale derived JP-5. Deposit formation rates ranging from 10 micrograms per square centimeter per hour to 3000 micrograms per square centimeter per hour were obtained at tube wall temperatures ranging from 480 K to 800 K, with peak formation rates occurring at initial surface temperatures of 644 K to 672 K. Results indicate that deposit formation rate correlates very well with initial surface temperature and the thermal stability rankings derived from present experimental results agree very well with rankings based upon independent analysis. The deposit thermal resistance, as calculated from heat transfer measurements, correlates well with measured deposit quantity and thickness. Heat transfer analyses indicate that the deposit thermal conductivity increases with increasing deposit thickness, and ranges from values

approximating the thermal conductivity of the fuel to values approaching that of amorphous carbon. R.J.F.

N84-24736# General Electric Co., Cincinnati, Ohio. Aircraft Engine Business Group.

COMBUSTOR TECHNOLOGY FOR BROADENED-PROPERTIES FUELS

W. J. DODDS *In* AGARD Combust. Probl. in Turbine Eng. 12p Jan. 1984 refs

Avail: NTIS HC A19/MF A01

In order to increase the availability and reduce the cost of future fuels for aircraft gas turbine engines, it may be necessary to broaden fuel specifications. Anticipated changes in fuel properties, and the effects of these changes on combustion system performance, operating characteristics, durability, and emissions are briefly reviewed, and results to date of a program being conducted to develop and demonstrate combustor technology required to utilize broadened properties fuels in current and next generation engines are described. Combustion system design considerations and tradeoffs for burning broadened properties fuels are discussed, and test experience with several applicable combustor design modifications to the General Electric CF6-80A combustion system is reviewed. Modifications were demonstrated to improve liner cooling and reduce smoke in the conventional annular combustor, thereby reducing effects of variations in fuel hydrogen content. Advanced staged and variable geometry combustor concepts for burning broadened properties fuels were also demonstrated. R.J.F.

N84-24737# Pratt and Whitney Aircraft, West Palm Beach, Fla. Engineering Div.

FUEL EFFECTS ON GAS TURBINE COMBUSTION SYSTEMS

S. A. MOSIER *In* AGARD Combust. Probl. in Turbine Eng. 15p Jan. 1984 refs Sponsored in part by the U.S. Army and U.S. Navy

Avail: NTIS HC A19/MF A01

The effects of variations in properties and characteristics of liquid hydrocarbon base fuels in gas turbine engine combustors was investigated. Baseline fuels consisted of military specification materials processed from petroleum and shale oil. Experimental fuels were comprised of liquid petroleum blends that were prepared specifically to exhibit desired physical and chemical properties. These fuels were assessed for their influence on ignition and performance characteristics in combustors of the F100, TF30, and J57 (TF33) engines at simulated operating conditions. In general, during relatively short duration tests, combustor ignition and performance became increasingly poorer as fuel quality deviated from specification or historical values. Author

N84-24739# Southwest Research Inst., San Antonio, Tex.

U.S. ARMY ALTERNATIVE GAS-TURBINE FUELS RESEARCH: MERADCOM

C. A. MOSES *In* AGARD Combust. Probl. in Turbine Eng. 10p Jan. 1984 refs

Avail: NTIS HC A19/MF A01

A research program on the effects of alternative fuels on gas turbine engine combustion is reviewed. Experimental programs primarily concentrated on two areas of changing fuel properties; one, the effects of volatility on combustor performance characteristics such as ignition and combustion efficiency; and, two, the effects of changing fuel chemistry on soot formation and flame radiation. R.J.F.

N84-24741# Avco Lycoming Div., Stratford, Conn. Advanced Combustor Design Dept.

ALTERNATIVE FUELS USE IN A VEHICULAR GAS TURBINE

N. R. MARCHIONNA *In* AGARD Combust. Probl. in Turbine Eng. 13p Jan. 1984 refs

Avail: NTIS HC A19/MF A01

Practical aspects of combustor design for the use of alternate fuels in the AGT 1500 vehicular gas turbine engine are discussed. Engine performance test results are compared to laboratory data and to combustor component performance over the range of engine

11 CHEMISTRY AND MATERIALS

operating conditions. Fuel effects on starting and low power efficiency are related to atomizer performance and to drop size distribution. Smoke emissions are correlated with fuel characteristics, engine operating conditions, and combustor primary zone design parameters. Results are presented for fuels ranging from gasoline to No. 6 oil. E.A.K.

N84-24758# Leeds Univ. (England). Dept. of Mechanical Engineering.

AN INVESTIGATION OF THE INTERACTION BETWEEN MULTIPLE DILUTION JETS AND COMBUSTION PRODUCTS

P. V. CHLEBOUN (Rolls Royce Ltd.), S. H. NASSER, F. B. SEBOWA, and C. G. W. SHEPPARD *In* AGARD Combust. Probl. in Turbine Eng. 11p Jan. 1984 refs

Avail: NTIS HC A19/MF A01

An investigation was made of the interaction between multiple dilution jets discharging from a common annulus into hot combustion products. Gas concentrations, mean and fluctuating gas temperatures (using compensated fine wire thermocouples) were measured throughout the mixing region for three dilution jet flow rates. A parallel theoretical study of the same flows was conducted using the Rolls-Royce PACE computer code (a finite difference program employing a k-e turbulence sub-model). The output from this program proved useful in visualizing the flow and interpreting the experimental data. Attention is drawn to the care needed when comparing various types of experimental information and apparently similar parameters output from computer codes on a mass flow weighted basis. M.G.

N84-24759# Centre National de la Recherche Scientifique, Poitiers (France). Lab. d'Energetique et de Detonique.

A STUDY OF THE FUNDAMENTAL PROBLEMS OF COMBUSTION IN THE COMBUSTION CHAMBERS OF TURBOJETS USING A TUBULAR REACTOR [ETUDE DE PROBLEMES FONDAMENTAUX DE LA COMBUSTION DANS LES FOYERS DE TURBOREACTEURS AU MOYEN D'UN REACTEUR TUBULAIRE]

J. C. BELLET, P. CAMBRAY, M. CHAMPION, and D. KARMED *In* AGARD Combust. Probl. in Turbine Eng. 13p Jan. 1984 refs *In* FRENCH

Avail: NTIS HC A19/MF A01

At the entrance of a tubular reactor, cool gases (hydrocarbon-air) and heated gases are rapidly mixed in such a way that combustion is stabilized by recirculating the heated gases. This tubular reactor is used to validate, under representative combustion chamber conditions, the kinetics of hydrocarbon combustion proposed by other authors, as well as to study the interactions between thermal turbulence and the rates of chemical production. Results obtained previously show that the influence of turbulence on the rate of chemical production can be neglected by a first approximation and the flow in the center line can be considered as quasi-one dimensional. The measured profiles of molecular fractions are used to test models proposed for propane combustion. It appears that, if the most recent models correctly predict the first phase of combustion, they overestimate the reaction rates at the end of combustion, especially in the case of a propane-air-heated gas mixture. In addition, it is proven that, as theory predicts, combustion augments the amplitude of temperature fluctuations present in the initial mixture. Transl. by A.R.H.

N84-24822# Air Force Engineering and Services Center, Tyndall AFB, Fla.

DEGRADATION OF JET FUEL HYDROCARBONS BY AQUATIC MICROBIAL COMMUNITIES Interim Report, 23 Oct. 1981 - 30 Sep. 1983

J. C. SPAIN, C. C. SOMERVILLE, L. C. BUTLER, T. J. LEE, and A. W. BOURQUIN Nov. 1983 226 p (Contract AF PROJ. 1900)

(AD-A139791; AFESC/ESL-TR-83-26) Avail: NTIS HC A11/MF A01 CSCL 21D

A model fuel mixture of fifteen hydrocarbons representative of those in distillate jet fuels was used to determine whether degradation by natural microbial communities could affect the

persistence of such fuels released into aquatic environments. The mixture included hexane, cyclohexane, n-heptane, methylcyclohexane, toluene, n-octane, ethylcyclohexane, p-xylene, cumene, 1,3,5-trimethylbenzene, indan, naphthalene, 2-methylnaphthalene, n-tetradecane, and 2,3-dimethylnaphthalene. The water-soluble fraction of the model fuel was incubated in shake flasks with water or water and sediment suspensions collected at estuarine and freshwater sites. Surface films of the model mixture were studied under quiescent incubation. The disappearance of hydrocarbons was measured by capillary gas chromatography. Control flasks were sterilized with HgCl₂ to estimate losses due to abiotic processes. Fate tests were repeated with petroleum-derived JP-4. The soluble components of JP-4 were volatilized too rapidly for biodegradation to occur. Sedimentation dramatically affected the fate of fuel components when mixing of the hydrocarbon and sediment layers was studied. Sediment-associated components were more resistant to volatilization and microbial attack. GRA

N84-24824# Naval Postgraduate School, Monterey, Calif.

ELECTRICAL SPRAY MODIFICATION WITH VARIOUS FUELS IN A T56 COMBUSTOR

A. ZAJDMAN Mar. 1984 74 p

(AD-A139961; NPS67-83-003CR) Avail: NTIS HC A04/MF A01 CSCL 21D

The possibility of electrically altering the droplet size distribution and injection cone angle of gas turbine fuel injectors has been investigated. The work was carried out both in a combustor rig incorporating a T-56 combustor liner/nozzle and in a non-burning spray optical absorption apparatus into each of which a high voltage electrode could be introduced. Several electrode designs were investigated in an effort to minimize flameholding and subsequent electrical shot circuiting. Fuels investigated included JP-4, the design fuel, JET-A, JP-5, and Diesel Fuel Number 2. Results of the optical experiments indicated reductions in the Sauter Mean Diameter of 7.7 percent. Results of the combustion experiments indicated increases in combustor efficiency of up to 3.6 percent for Diesel Fuel Number 2 and increases up to 0.6 percent for JP-4. Author (GRA)

N84-24825# Defence Research Establishment, Ottawa. (Ontario).

COMPARISON OF JFTOT (JET FUEL THERMAL OXIDATION TESTER) AND ABSORBANCE METHODS FOR DETERMINING JET FUEL THERMAL STABILITY

J. R. COLEMAN and L. D. GALLOP Dec. 1983 26 p *In* ENGLISH and FRENCH

(AD-A138673; DREO-TN-83-34) Avail: NTIS HC A03/MF A01 CSCL 21D

The thermal stability of five aviation turbine fuels was examined employing the jet fuel thermal oxidation tests and an optical absorbance based on the Phillips 5 ml bomb test. No correlation was observed between the fuels by the two methods. Author

N84-25060*# General Electric Co., Cincinnati, Ohio. Aircraft Engine Business Group.

STATUS OF UNDERSTANDING FOR BEARING MATERIALS

E. N. BAMBERGER *In* NASA Lewis Research Center Tribology in the 80's, vol. 2 p 773-794 Apr. 1984 refs

Avail: NTIS HC A17/MF A01 CSCL 11F

The structural materials and potential failure modes for high technology aircraft gas turbine bearings are reviewed. Among the failure modes discussed for iron-base through-hardened bearing materials are fatigue, surface distress, and corrosion. It is shown that the sub-surface initiated rolling-contact fatigue failure mode is reasonably well understood and in most cases can be controlled by proper material selection and design. Current bearing materials provide long life and high reliability in existing applications. A new generation of materials are being developed which will provide improved fracture toughness, better corrosion resistance, and a further extension of bearing fatigue life. Bearing problems due to surface distress, caused by a variety of surface and near surface anomalies, are less well understood. This area will require the

implementation of an interdisciplinary effort to improve the level of understanding of metallic surface-lubricant reactions and interactions.
R.S.F.

N84-25614# Royal Aircraft Establishment, Farnborough (England).
Materials and Structures Dept.

CORROSION CONTROL REQUIREMENTS FOR UK MILITARY AIRCRAFT

V. C. R. MCLOUGHLIN /in AGARD Workshop on Requirements for Aircraft Corrosion Control 5 p Mar. 1984

Avail: NTIS HC A05/MF A01

The designer is given advice on the selection of materials based upon their resistance to corrosion, and mandatory requirements for processes and materials to be used in aircraft structures so as to minimize deterioration and corrosion. Details are given of these requirements and the various sequences of operations required for corrosion control purposes.
R.J.F.

N84-25772# Societe Nationale Industrielle Aerospatiale, Toulouse (France). Direction Etudes.

COMPOSITE MATERIALS: THE USER AND THE PRODUCER [LES COMPOSITES: UTILISATEUR ET PRODUCTEUR]

R. RADONDY and TREMILLON (ELF Aquitaine, France) 23 Feb. 1984 34 p In FRENCH Presented at Salon Intern. des Tech. et Energies du Futur (SITEF) 83, Toulouse, 18 - 23 Oct. 1983

(SNIAS-832-111-108) Avail: NTIS HC A03/MF A01

International competition requires the aircraft manufacturer to be constantly on the look out for recent construction materials having the best performance, mass, and cost. Carbon-resin composites are a good compromise for aircraft structures. Currently introduced in moveable surface of civil aviation aircraft, the carbon-resin composite should eventually be adopted for large size primary structures. The process of fiber production is being mastered. To meet the expectations of the aeronautics industry, new generations of carbon fibers were developed (T.400, X.550, type 3, etc.). The intrinsic characteristics of these fibers are discussed as well as the comparative performance of layered structures prepared from T.300 and T.400. Composites used on the Caravel, the Concorde, the Airbus, the Mirage 2000, the Falcon 10, and the ATR 42 aircraft are discussed. Improvements required in properties and fabrication processes are identified.

Transl. by A.R.H.

N84-25774# Electrical Research Association, Leatherhead (England).

INVESTIGATION OF THE RF PROPERTIES OF CARBON FIBRE COMPOSITE MATERIALS Final Report

D. A. BULL, G. A. JACKSON, A. MCHALE, and B. W. SMITHERS Jul. 1982 282 p

(AD-A140261; ERA-81-109; DRIC-BR-84464) Avail: NTIS HC A13/MF A01 CSCL 11D

The resistivity of small CFC samples at frequencies up to 300 MHz was measured using Q-meter techniques. Values of 0.00003 to 0.00015 ohm-meter are typical at low frequencies and increase with increasing frequency indicating the presence of skin effect. Samples showed little change in their d.c. resistance as a result of prolonged exposure to various liquids although boiling in tap or sea water produced substantial increases in resistance. Screening effectiveness to magnetic fields in the range 0.15 - 30 MHz and electric fields in the range 30 - 1000 MHz was measured for panels of CFC incorporated as one face of a copper cubic enclosure and as one surface panel of a Wessex helicopter tail cone. Screening effectiveness of a cylinder completely fabricated from CFC was also measured. Results indicate that the screening effectiveness of a CFC or part CFC fuselage, particularly in the hf band, will be critically dependent on the electrical continuity of bonds and joints and may be significantly less than for present day metal airframes. At vhf and uhf the screening effectiveness of part CFC and present day metal airframes are similar. The performances of vhf and uhf aeriels when mounted on CFC or metal ground planes were similar and essentially within manufacturers' specifications.
GRA

N84-25828# Materials Research Labs., Melbourne (Australia).
Organic Chemistry Div.

INTERACTIONS BETWEEN F-111 FUSELAGE FUEL TANK SEALANTS. PART 1: CHARACTERISATION OF POLYESTER SEALANTS AND THEIR HYDROLYTIC DEGRADATION PRODUCTS

P. J. HANHELA and D. B. PAUL Dec. 1983 24 p refs

(MRL-R-657-PT-1; AR-003-298-PT-1) Avail: NTIS HC A02/MF A01

Interactions between polysulfides and the hydrolysis products of polyester sealants EC 5106 and EC 5146 within integral fuselage fuel tanks of F-111 aircraft lead to fuel leaks. To assist in determining the mechanisms involved in this process a study of the physical changes which occur during contact of typical polysulfides with actual and model polyester products is to be undertaken. Prior to this investigation a detailed analysis of the polyester sealants was necessary to assist selection of model degradation products. Exhaustive degradation of the polyester resins using the transesterification reagent of lithium methoxide in methanol provided suitable samples for analysis by gc/ms and other spectroscopic techniques. Major components were shown to be sebacic acid and neopentyl glycol. The most significant difference between the two polyester prepolymers was in the larger proportion of trihydric alcohol in EC 5146 which would result in a greater degree of crosslinking of this sealant compared with EC 5106.
B.W.

N84-25833# Societe Nationale Industrielle Aerospatiale, Suresnes (France). Lab. Central.

INFLUENCE OF THE ENVIRONMENT ON THE APPLICATION AND DRYING QUALITY OF ORGANIC PAINTS [INFLUENCE DES CONDITIONS D'AMBIANCE LORS DE L'APPLICATION ET DU SECHAGE SUR LA QUALITE DES PEINTURES ORGANIQUES]

28 Nov. 1983 23 p In FRENCH Presented at SURFAIR 4 Journees d'Etudes Intern. des Traitements de Surface dans l'Ind.

Aeron. et Spatiale, Cannes, France, Sep. 1982

(SNIAS-832-551-102; C.44.593) Avail: NTIS HC A02/MF A01

Problems that surface during the painting of aircraft are associated with the chemical nature of the paints used. Aircraft manufacturers are using type 2 polyurethanes with a hydrolyzed polymer and a polyisocyanate. A climate chamber in which the spraying and drying of paints can be accomplished under strictly controlled conditions is described. The conditions for the appearance of microblisters are listed and the probable cause is identified as carbon dioxide in the film. The benefits of airless and pneumatic spray guns are examined. Studies show that paint should dry at ambient temperatures without any special deposition. Time for the second coating should not be any longer than 6 to 8 hours for base paint and only 4 hours for the decorative trim.

Transl. by A.R.H.

N84-25854*# Simmonds Precision Products, Inc., Vergennes, Vermont. Instrument Systems Div.

STUDY OF EFFECTS OF FUEL PROPERTIES IN TURBINE-POWERED BUSINESS AIRCRAFT Final Report

F. D. POWELL, R. J. BIEGEN, P. G. WEITZ, JR., and A. M. DUKE Apr. 1984 89 p refs

(Contract NAS3-22827)

(NASA-CR-174627; E-2470; NAS 1.26:174627) Avail: NTIS HC A05/MF A01 CSCL 21D

Increased interest in research and technology concerning aviation turbine fuels and their properties was prompted by recent changes in the supply and demand situation of these fuels. The most obvious change is the rapid increase in fuel price. For commercial airplanes, fuel costs now approach 50 percent of the direct operating costs. In addition, there were occasional local supply disruptions and gradual shifts in delivered values of certain fuel properties. Dwindling petroleum reserves and the politically sensitive nature of the major world suppliers make the continuation of these trends likely. A summary of the principal findings, and conclusions are presented. Much of the material, especially the tables and graphs, is considered in greater detail later. The economic analysis and examination of operational considerations

are described. Because some of the assumptions on which the economic analysis is founded are not easily verified, the sensitivity of the analysis to alternates for these assumptions is examined. The data base on which the analyses are founded is defined in a set of appendices. Author

12

ENGINEERING

Includes engineering (general); communications; electronics and electrical engineering; fluid mechanics and heat transfer; instrumentation and photography; lasers and masers; mechanical engineering; quality assurance and reliability; and structural mechanics.

A84-33701* National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.
EFFECTS OF STRUCTURAL COUPLING ON MISTUNED CASCADE FLUTTER AND RESPONSE
R. E. KIELB and K. R. V. KAZA (NASA, Lewis Research Center, Cleveland, OH) ASME, Transactions, Journal of Engineering for Gas Turbines and Power (ISSN 0022-0825), vol. 106, Jan. 1984, p. 17-24. refs
(ASME PAPER 83-GT-117)

The effects of structural coupling on mistuned cascade flutter and response are analytically investigated using an extended typical section model. This model includes both structural and aerodynamic coupling between the blades. The model assumes that the structurally coupled system natural modes were determined and are represented in the form of N bending and N torsional uncoupled modes for each blade, where N is the number of blades and, hence, is only valid for blade dominated motion. The aerodynamic loads are calculated by using two dimensional unsteady cascade theories in the subsonic and supersonic flow regimes. The results show that the addition of structural coupling can affect both the aeroelastic stability and frequency. The stability is significantly affected only when the system is mistuned. The resonant frequencies can be significantly changed by structural coupling in both tuned and mistuned systems, however, the peak response is significantly affected only in the latter. Previously announced in STAR as N83-15672 S.L.

A84-33702* National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.
MEASUREMENTS OF SELF-EXCITED ROTOR-BLADE VIBRATIONS USING OPTICAL DISPLACEMENTS
A. P. KURKOV (NASA, Lewis Research Center, Cleveland, OH) ASME, Transactions, Journal of Engineering for Gas Turbines and Power (ISSN 0022-0825), vol. 106, Jan. 1984, p. 44-49. refs
(ASME PAPER 83-GT-132)

The characteristics of optical displacement spectra and their role of monitoring rotor blade vibrations are discussed. During the operation of a turbofan engine at part speed, near stall, and elevated inlet pressure and temperature, several vibratory instabilities were excited simultaneously on the first fan rotor. The torsional and bending contributions to the main flutter mode were resolved by using casing-mounted optical displacement sensors. Other instabilities in the blade deflection spectra were identified. Previously announced in STAR as N83-14523 E.A.K.

A84-33706* National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

LENGTH TO DIAMETER RATIO AND ROW NUMBER EFFECTS IN SHORT PIN FIN HEAT TRANSFER

B. A. BRIGHAM and G. J. VANFOSSEN (NASA, Lewis Research Center, Cleveland, OH) ASME, Transactions, Journal of Engineering for Gas Turbines and Power (ISSN 0022-0825), vol. 106, Jan. 1984, p. 241-245. refs
(ASME PAPER 83-GT-54)

The relative effects of pin length to diameter ratio and of pin row geometry on the heat transfer from pin fins, was determined. Array averaged heat transfer coefficients on pin and endwall surfaces were measured for two configurations of staggered arrays of short pin fins (length to diameter ratio of 4). One configuration contained eight streamwise rows of pins, while the other contained only four rows. Results showed that both the 8-row and the 4-row configurations for an L sub p/D of 4, exhibit higher heat transfer than in similar tests on shorter pin fins (L sub p/D of 1/2 and 2). It was also found that for this L sub p/D ratio, the array averaged heat transfer was slightly higher with eight rows of staggered pins than with only four rows. Previously announced in STAR as N83-14431 J.D.

A84-33707

EFFECTS OF PIN SHAPE AND ARRAY ORIENTATION ON HEAT TRANSFER AND PRESSURE LOSS IN PIN FIN ARRAYS

D. E. METZGER, C. S. FAN, and S. W. HALEY (Arizona State University, Tempe, AZ) (Tokyo International Gas Turbine Congress, Tokyo, Japan, Oct. 24-28, 1983) ASME, Transactions, Journal of Engineering for Gas Turbines and Power (ISSN 0022-0825), vol. 106, Jan. 1984, p. 252-257. refs

In order to reduce the cooling airflow required by gas turbine blades, two families of pin fin array geometries which may potentially improve such air-cooled turbine blade airfoils' internal cooling performance are experimentally studied. One family uses circular cross section pins with various array orientations relative to the mean flow direction. The other family employs pins with an oblong cross section, again with various orientations. Heat transfer and pressure loss results indicate that the use of circular pins whose array orientation varies between the staggered and the inline can, in some cases, increase heat transfer while decreasing pressure loss. Elongated pins increased heat transfer, but with increased pressure loss. Pin surface heat transfer coefficients are double the endwall values. O.C.

A84-33829

EDM IN THE AIRCRAFT INDUSTRY

M. WHITMORE (Amchem Co., Ltd., Sibley, Leics., England) Aircraft Engineering (ISSN 0002-2667), vol. 56, April 1984, p. 2-4.

Electrical Discharge Machining (EDM) is particularly suitable for complex contours and cavities in hardened and tough materials that are difficult to machine by conventional metal cutting methods. Computerized numerical control of the discharge parameters, and accurate sensing devices which locate the component prior to machining, can fully automate machining cycles. Attention is presently given to the case of high accuracy, noncircular small hole drilling in the aircraft industry by EDM methods. A high power pulse generator allows fast drilling speeds, while the advanced positioning system employed ensures accuracy of hole location without slowing the production rate. Also noted are the operating principles of a 'rotary transfer' EDM system which machines similar engine components, such as aircraft gas turbine honeycomb ring seals. O.C.

A84-33850

FLOW VISUALIZATION AS AN AERODYNAMIC DIAGNOSTIC TOOL

A. S. W. THOMAS and M. C. WHIFFEN (Lockheed-Georgia Co., Marietta, GA) Lockheed Horizons, no. 15, 1984, p. 56-64.

Current aerodynamic flow-visualization techniques are surveyed and illustrated. Techniques examined include (in water-channel experiments) dye injection, smoke injection, hydrogen bubbles, schlieren photography, a smoke-visualization wind-tunnel, and

laser-Doppler velocimetry. The value of digital image processing for deriving quantitative data from visual images is indicated.

T.K.

A84-34129

METHOD FOR DETERMINING STRESS INTENSITY FACTORS IN BLADES OF GAS TURBINE ENGINES [METODIKA OPREDELENIIA KOEFFITSIENTA INTENSIVNOSTI NAPRIAZHENII V LOPATKAKH GTD]

A. V. PROKOPENKO (Akademiia Nauk Ukrainskoi SSR, Institut Problem Prochnosti, Kiev, Ukrainian SSR) Problemy Prochnosti (ISSN 0556-171X), no. 4, 1984, p. 21-24. In Russian.

An approximate procedure is suggested for calculating stress intensity factors for turbine blades in tension with a crack from either the leading or trailing edges. The essence of this procedure, based on the method of sections, lies in the fact that the force not transmitted through the plane of the crack is compensated by an increase of stresses with an asymptotic distribution at the crack tip. The present method also accounts for the effect of centrifugal forces in life calculations. J.N.

A84-34133

ESTIMATION OF VIBRATIONAL STRESSED STATE FOR GTE BLADES UNDER RANDOM VIBRATIONS [OTSENKA VIBRONAPRIAZHENNOSTI LOPATOK GTD PRI SLUCHAINYKH KOLEBANIYAKH]

I. V. EGOROV and A. I. STEBUNOV (Tsentral'nyi Nauchno-Issledovatel'skii Institut Aviatsionnogo Motorostroeniia, Moscow, USSR) Problemy Prochnosti (ISSN 0556-171X), no. 4, 1984, p. 85-90. In Russian. refs

A method for the nonparametric estimation of equivalent stresses in a turbine blade under random vibrations is based on statistical processing and an analog computer analysis of actual processes. The proposed schematization of the random vibration process is represented by the sum of two harmonic components of widely differing frequencies. The amplitude of each harmonic is equal to the amplitudes of several narrow-band processes characterized by random blade vibrations. The probability density of the amplitude distribution is determined by the histogram method, and the equivalent stresses are calculated from digital processed information about the vibrations according to a model of fatigue fracture based on linear damage accumulation. The present technique yields an acceptable degree of precision even in the absence of sufficiently complete information on the fatigue behavior of the given turbine blades. J.N.

A84-34463#

DIVERGENCE BOUNDARY PREDICTION FROM RANDOM RESPONSES - NAL'S METHOD

Y. MATSUZAKI and Y. ANDO (National Aerospace Laboratory, Tokyo, Japan) Journal of Aircraft (ISSN 0021-8669), vol. 21, June 1984, p. 435, 436. refs

The Japanese National Aerospace Laboratory's method for the prediction of flutter and divergence boundaries from turbulence-excited responses at subcritical speeds is presently applied to the subcritical divergence testing of a cantilever forward swept wing model in a supersonic wind tunnel. The one-mode analysis indicates that the stability parameter $G(1)$ of Jury's (1964) criteria governing static stability is closely related to the squared value of the frequency of the mode which is losing stability. O.C.

A84-34722

AEROELASTIC OPTIMIZATION OF AXISYMMETRIC CIRCULAR CYLINDRICAL SHELLS FOR SUPERSONIC FLOW

L. LIBRESCU and L. BEINER (Tel Aviv University, Tel Aviv, Israel) Zeitschrift fuer Flugwissenschaften und Weltraumforschung (ISSN 0342-068X), vol. 8, Mar.-Apr. 1984, p. 124-129. refs

The paper deals with the weight minimization problem of axisymmetric circular shells of finite length placed in a high supersonic flow field. The structure is subject to uniform axial loading and to a flutter speed constraint. By using optimal control theory, the necessary conditions for a minimum weight cylindrical shell are derived. To these optimality conditions, a supplementary

one is appended which ensures that the flutter speed of the minimum weight structure coincides with the prescribed one. Initial rough estimates of the optimal thickness distribution obtained using Galerkin's method are presented and the influence of the in-plane loading is given. Author

A84-34909*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

FLAP-LAG DAMPING OF AN ELASTIC ROTOR BLADE WITH TORSION AND DYNAMIC INFLOW IN HOVER FROM SYMBOLICALLY GENERATED EQUATIONS

T. S. R. REDDY (NASA, Ames Research Center, Moffett Field, CA) AIAA, ASME, ASCE, and AHS, Structures, Structural Dynamics and Materials Conference, 25th, Palm Springs, CA, May 14-16, 1984. 15 p. refs (AIAA PAPER 84-0989)

A program written in FORTRAN IV and coded into subroutines for subsequent numerical study is used to derive symbolically the governing equations of motion of the elastic rotor blade and the dynamic inflow equations. By rearranging the coefficients of the equations, the blade and dynamic inflow equations are converted into equations in a multiblade coordinated system. The final multiblade equations can accommodate any number of elastic blade modes. It is noted that with a given data set, the entire process, from the derivation of the equations to the numerical calculations, is computerized and requires only limited user interface. To demonstrate the usefulness of the approach, damping data in hover with and without dynamic inflow effects are presented for various rotor blade models, including flap-lag, flap-lag-torsion, quasi-static torsion, and rigid blade lag-flap. C.R.

A84-35022#

EXPERIMENTAL DETERMINATION OF THE NATURAL MODES OF SWEEP-WING MODELS USING LASER HOLOGRAPHIC INTERFEROMETRY

W. YOU and S. GU Northwestern Polytechnical University, Journal, vol. 2, April 1984, p. 245-256. In Chinese, with abstract in English.

The fundamental principles of laser time-averaged holographic interferometry are briefly reviewed, and method is proposed for determining the modes of tow swept-wing models by using holographic interferometry supplemented by the method of sand contours. Procedures for controlling the density of fringes on the images reconstructed from time-averaged holograms are explained. The measured mode data are orthogonalized using both Gravitz's and McGrew's methods. The experimental results are found to agree well with calculative results from a finite element program. C.D.

A84-35135#

COUNTER-ROTATING INTERSHAFT SEALS FOR ADVANCED ENGINES

W. L. GAMBLE (United Technologies Corp., Pratt and Whitney Group, West Palm Beach, FL) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 6 p.

(AIAA PAPER 84-1216)

Feasibility for application of a counter-rotating intershaft carbon seal to high thrust-to-weight military gas turbine engines was demonstrated through a series of rig tests. The non-contacting high speed (800 ft/sec) seal incorporating hydrodynamic lift geometry with spiral grooves in the seal plates is similar to that designed by NASA-Lewis Research Center (DiRusso, 1983). Seal air leakage and carbon wear rates were determined for each of two configurations in rig screening evaluations of ten hours duration. One seal assembly was subjected to an additional fifty hours of endurance testing. For both configurations, seal air leakage was approximately one-third the leakage that would occur with a conventional labyrinth seal. The wear rate was low for the configuration tested a total of sixty hours. Author

12 ENGINEERING

A84-35195#

SIDEWALL BOUNDARY LAYER CORRECTIONS IN SUBSONIC, TWO-DIMENSIONAL AIRFOIL/HYDROFOIL TESTING

A. L. TREASTER, G. B. GURNEY (Pennsylvania State University, State College, PA), and P. P. JACOBS, JR. (USAF, Flight Test Center, Edwards AFB, OH) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 9 p. Navy-supported research. refs (AIAA PAPER 84-1366)

Historically, two-dimensional airfoil or hydrofoil section characteristics have been obtained by measuring individually the lift, drag and pitching moment by the most accurate technique available. The use of force balances to measure the three quantities simultaneously has met with only partial success. Although the lift and pitching moment data have usually been acceptable, the drag data have varied by as much as an order of magnitude from previous reference data. To investigate the parameters which influence two-dimensional force measurements, an experimental program was conducted in the subsonic wind tunnel of the Applied Research Laboratory at The Pennsylvania State University. From the results of this test program, the sidewall boundary layer was identified as the primary factor contributing to the erroneous drag measurements. A correction procedure which is based on the airfoil/hydrofoil geometry, the flow environment and the measured data was developed. Corrected data from the subject test program and from similar programs in other experimental facilities for both symmetrical and cambered sections are in good agreement with the reference data in all cases. Author

A84-35223*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

MEASUREMENT OF FLUID PROPERTIES USING RAPID-DOUBLE-EXPOSURE AND TIME-AVERAGE HOLOGRAPHIC INTERFEROMETRY

A. J. DECKER (NASA, Lewis Research Center, Cleveland, OH) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 9 p. refs (AIAA PAPER 84-1461)

The holographic recording of the time history of a flow feature in three dimensions is discussed. The use of diffuse illumination holographic interferometry or the three-dimensional visualization of flow features such as shock waves and turbulent eddies is described. The double-exposure and time-average methods are compared using the characteristic function and the results from a flow simulator. A time history requires a large hologram recording rate. Results of holographic cinematography of the shock waves in a flutter cascade are presented as an example. Future directions of this effort, including the availability and development of suitable lasers, are discussed. Previously announced in STAR as N84-21849 Author

A84-35237#

PREDICTION OF TURBULENT FLOWS IN COMBUSTOR BY USING REYNOLDS-STRESS CLOSURE

R. S. AMANO and V. S. KODALI (Wisconsin, University, Milwaukee, WI) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 6 p. refs (AIAA PAPER 84-1494)

A numerical study is reported on the flow in combustion chambers of gas turbine engines in which there is a region of reverse currents created by means of swirlers or bluff bodies. The computations are made by using a Reynolds-stress turbulence closure model. The computed results are compared with experimental data in literature. It was shown that the computed velocity profiles with the present model agree with experiment better than an analytical solution does. The creation and decay of the Reynolds-stresses are further discussed in the flow passage. Author

A84-35301

INTERNATIONAL CONFERENCE ON NUMERICAL METHODS IN FLUID DYNAMICS, 8TH, RHEINISCH-WESTFAELISCHE TECHNISCHE HOCHSCHULE AACHEN, AACHEN, WEST GERMANY, JUNE 28-JULY 2, 1982, PROCEEDINGS

E. KRAUSE, ED. (Aachen, Rheinisch-Westfaelische Technische Hochschule, Aachen, West Germany) Conference supported by the Deutsche Forschungsgemeinschaft, Dornier GmbH, Messerschmitt-Boelkow-Blohm GmbH, U.S. Navy, and U.S. Army. Berlin, Springer-Verlag (Lecture Notes in Physics. Volume 170), 1982, 580 p.

Various aspects of the use of numerical methods to study fluid dynamics are discussed. The topics considered include: computational aerodynamics and change; numerical computations of gas explosions; two-dimensional separated flows; numerical simulation of wall-bounded turbulent shear flows; shock capturing, fitting, and recovery; and flow simulation by discrete vortex method. Numerous other subjects in the area are examined. C.D.

A84-35327

ON THE USE OF SEVERAL COMPACT METHODS FOR THE STUDY OF UNSTEADY INCOMPRESSIBLE VISCOUS FLOW FOR OUTER PROBLEMS. II

Y. LECOINTE and J. PIQUET (Ecole Nationale Supérieure de Mécanique, Nantes, France) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings. Berlin, Springer-Verlag, 1982, p. 323-328. Sponsorship: Direction des Recherches, Etudes et Techniques. refs (Contract DRET-81-075)

The present work is concerned with the Navier-Stokes equations in their vorticity stream function formulation discretized spatially by compact algorithms. Four different space discretizations for the vorticity are compared for the case of an impulsively started circular cylinder. The four schemes include a standard upwind scheme with second order corrections implemented in connection with an A.D.I. method in time, either in conservative form or convective form, and two formally fourth-order accurate schemes of the 'mehrstellen' type. It was found that wiggles determine the quality of the mesh resolution, and that unwinding must be switched off at the rear stagnation point in order to protect the symmetry of the flow. J.N.

A84-35341

A COMPOSITE VELOCITY PROCEDURE FOR THE INCOMPRESSIBLE NAVIER-STOKES EQUATIONS

S. G. RUBIN and P. K. KHOSLA (Cincinnati, University, Cincinnati, OH) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings. Berlin, Springer-Verlag, 1982, p. 448-454. refs (Contract AF-AFOSR-80-0047)

A boundary layer relaxation procedure for the calculation of large Reynolds number problems with a dominant flow direction is based on a composite velocity formulation for an incompressible Navier-Stokes system. The gradients are considered to be largest in the surface normal direction and the flow outside the thin viscous region is essentially inviscid and is represented by a potential function. The composite representation of the velocity field reflects the matched asymptotic boundary layer-inviscid behavior. The present Navier-Stokes procedure does not significantly differ from its incompressible flow counterpart, and a direct extension to transonic flows is indicated. The equations are written in a body-fitted orthogonal coordinate system and application to internal and external flows is discussed. Laminar flow solutions for Reynolds numbers in the range 1000-100,000 were obtained for a boattail simulator, a Joukowski airfoil, a finite plate and channel geometries. J.N.

A84-35352* Scientific Research Associates, Inc., Glastonbury, Conn.

SOLUTION OF THREE-DIMENSIONAL TIME-DEPENDENT VISCOUS FLOWS

B. C. WEINBERG and H. MCDONALD (Scientific Research Associates, Inc., Glastonbury, CT) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 519-525. refs
(Contract NAS2-10016)

A procedure for solving three-dimensional, time-dependent turbulent flows is presented. The consistently split Linearized Block Implicit (LBI) scheme is used in conjunction with the QR Operator scheme to solve an approximate form of the Navier-Stokes equations in generalized nonorthogonal coordinates employing physical velocity components. Results of computations for both second order finite differences and the fourth order generalized Operator Compact Implicit (OCI) schemes are presented. Author

A84-35353* National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.

A MINIMAL RESIDUAL METHOD FOR TRANSONIC POTENTIAL FLOWS

Y. S. WONG (NASA, Langley Research Center, Institute for Computer Applications in Science and Engineering, Hampton, VA) and M. M. HAFEZ (George Washington University, Washington, DC) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 526-532. refs
(Contract NAS1-15810; NAS1-16394)

For transonic flow calculations, a combination of the successive line over-relaxation (SLOR) and the preconditioned conjugate gradient (CG) method has been suggested by Wong and Hafez (1981). This paper studies the method of minimal residual (MR) which avoids a combined iteration. This method is closely related to the CG method, may be regarded as a first-order gradient method, and is applicable to symmetric and nonsymmetric matrices. The problem is formulated as a nonlinear mixed elliptic-hyperbolic partial differential equation which includes an artificial viscosity and a switching function which is zero in subsonic regions and nonzero in supersonic regions. Alternatives to the SLOR method which provide faster convergence rates are introduced. The preconditioned MR algorithm is developed, and transonic potential flows around NACA 0012 airfoil are calculated for different Mach numbers and angles of attack. Preliminary results are presented, demonstrating that the MR algorithm requires no parameter estimation and rapidly converges for subsonic flows. J.N.

A84-35356 SOME NEW DEVELOPMENTS OF THE SINGULARITY-SEPARATING DIFFERENCE METHOD

Y.-L. ZHU, B.-M. CHEN, X.-H. WU, and Q.-S. XU (Chinese Academy of Sciences, Computing Centre, Beijing, People's Republic of China) IN: International Conference on Numerical Methods in Fluid Dynamics, 8th, Aachen, West Germany, June 28-July 2, 1982, Proceedings . Berlin, Springer-Verlag, 1982, p. 553-559. refs

The singularity-separating difference method is applied to the problem of calculating the problem of interaction between three-dimensional discontinuities in unsteady supersonic multimaterial flow. At the beginning of the flow, there are a shock and a contact discontinuity with different materials on its two sides. The shock then intersects the contact discontinuity, and a shock (or centered wave) is reflected. There are finally two shocks, or a shock and a centered wave, and a contact discontinuity in the flow field. Shocks, contact discontinuities, and boundaries of centered waves are taken as internal boundaries, and the problem is solved using a second-order mixed scheme for initial-boundary-value problems. For comparison with other methods, calculations were carried out using the L-W scheme for an unsteady flow with a shock, a contact discontinuity, and a centered wave. J.N.

A84-35535

OPTIMIZATION OF LARGE COMPOSITE STRUCTURES WITH STRENGTH AND LOCAL STABILITY RESTRICTIONS [OPTIMIZATSIIA BOL'SHIKH KOMPOZITNYKH KONSTRUKTSII S OGRANICHENIAMI PO PROCHNOSTI I LOKAL'NOI USTOICHIVOSTI]

R. I. NEPERSHIN, I. B. GINKO, and V. G. PILOSIAN (Akademiia Nauk SSSR, Institut Mashinovedeniia, Moscow, USSR) (Vsesoiuznaia Konferentsiia po Mekhanike Polimernykh i Kompozitnykh Materialov, 5th, Riga, Latvian SSR, Oct. 1983) Mekhanika Kompozitnykh Materialov (ISSN 0203-1272), Mar.-Apr. 1984, p. 313-319. In Russian. refs

A computer program is developed for the optimization of large three-dimensional composite structures using the energy criterion of optimality with restrictions on thickness, strength, and local stability of the elements of the finite-element model of the structure. This technique involves various strength criteria and the local stability of both continuous and three-layer membrane elements with a honeycomb filler and composite carrying layers. Optimization examples are given for a composite cellular cantilever beam and for a carbon-plastic aerodynamic fin structure. The respective finite-element models contained 108 and 580 independent design variables. The spars and ribs of the fin are modeled as shear and rod elements, and the web material is considered to be uniform and orthotropic. J.N.

A84-35537

USE OF COMPOSITE MATERIALS FOR FABRICATING THE ANISOTROPIC STRUCTURE OF A SWEEP-FORWARD WING REQUIRED BY AEROELASTICITY AND STRENGTH CONSIDERATIONS [ISPOL'ZOVANIE KOMPOZITNYKH MATERIALOV DLIA SOZDANIIA TREBUEMOI PO USLOVIU AEROUVRUGOSTI I PROCHNOSTI ANIZOTROPNOI KONSTRUKTSII KRYLA OBRATNOI STRELOVIDNOSTI]

V. M. FROLOV and A. N. SHANYGIN (Vsesoiuznaia Konferentsiia po Mekhanike Polimernykh i Kompozitnykh Materialov, 5th, Riga, Latvian SSR, Oct. 1983) Mekhanika Kompozitnykh Materialov (ISSN 0203-1272), Mar.-Apr. 1984, p. 353-357. In Russian.

The optimal parameters of the primary structure of a swept-forward wing having structural anisotropy are calculated and selected in terms of stiffness and mass characteristics. The skin is modeled as an isotropic plate, and the longitudinal wing skeleton is modeled by rods oriented at a certain angle to the structural axis of the wing. The optimum orientation angles are determined. The skeleton is considered to be fabricated from a unidirectional composite with a high modulus of elasticity. It is shown that the stress-strained state of the plate structure may be calculated knowing only the vertical deflections at each point of the midplane. The efficiency of using the present scheme with a large degree of anisotropy for decreasing the critical divergence rate is demonstrated. Increasing the modulus of elasticity and thickness of the unidirectional layer significantly improved stiffness characteristics. J.N.

A84-35592

SHEAR STRESS DISTRIBUTION AND SHEAR STIFFNESS IN TRANSVERSELY LOADED, INHOMOGENEOUS CROSS-SECTIONS OF ARBITRARY FORM MADE OF ORTHOTROPIC MATERIALS [ZUR SCHUBSPANNUNGSVERTEILUNG UND SCHUBSTEIFIGKEIT BEI QUERKRAFTBEANSPRUCHTEN, INHOMOGENEN QUERSCHNITTEN BELIEBIGER FORM AUS ORTHOTROPEN WERKSTOFFEN]

R. WOERNLE (Messerschmitt-Boelkow-Blohm GmbH, Munich, West Germany) and H. MANG (Wien, Technische Universitaet, Vienna, Austria) Ingenieur-Archiv (ISSN 0020-1154), vol. 54, no. 1, 1984, p. 25-42. In German. refs

A new semianalytical method for solving the shear flexure problem of inhomogeneous, orthotropic cantilever beams loaded at their free ends is proposed. The shape of the beam cross-section is arbitrary but constant along the beam axis. The method combines two-dimensional finite element analysis of cross-sectional warping with analysis based on the theory of elasticity. The method is

applied to a homogeneous, isotropic beam with a rectangular cross-section for which an analytical solution is available, an inhomogeneous, isotropic beam with a rectangular cross section for which a three-dimensional finite element analysis is performed, and a rotor blade of a helicopter, for which numerical results are compared with experimental ones. The agreement in all three cases is excellent. C.D.

A84-35654#

ORTHOGONAL GRID GENERATION

D. C. IVES and W. D. SIDONS, JR. (United Technologies Corp., Pratt and Whitney Group, East Hartford, CT) AIAA, SAE, and ASME, Joint Propulsion Conference, 20th, Cincinnati, OH, June 11-13, 1984. 11 p. refs (AIAA PAPER 84-1248)

A technique is presented for the generation of two-dimensional orthogonal grids which is accurate, rapid, conceptually simple, relatively robust, and general enough to be applicable to a wide range of applications when coupled with modern flow solvers. A novel application of the hinge point transformation is used to map a contour onto a half plane, which is thereby transformed into an open rectangle, where the points added to close the rectangle and grid boundary point locations are specified according to preselected stretchings. Exponential spline interpolation determines the physical plane locations corresponding to the grid boundary point locations on three sides of the rectangle, and physical locations corresponding to the fourth side are obtained by inverting the transformations. A fast Poisson solver is then used to determine the physical location of the interior grid nodes. A method for building complex multiple region grids through the matching of simpler grids at common boundaries is illustrated. Suitable grids can be produced for a wide range of nonperiodic geometries. O.C.

A84-35921#

AUTOCCLAVE - CURING OF EXTREMELY THIN HM CFC-SKINS

K. BRUNSCH (Messerschmitt-Boelkow-Blohm GmbH, Munich, West Germany) International Conference on Carbon Fibre Application, Brazil, Dec. 5-9, 1983, Paper. 17 p. (MBB-UD-409-83-OE)

An overview of autoclave and compression molding in aerospace industry presents information on autoclave curing of extremely thin high-modulus carbon fiber composite skin of the Intelsat IV solar array structure and on autoclave curing of a thickness-tapered high-tensile (HT) carbon-fiber-composite (CFC) skin of a taileron. Data obtained during the fabrication of thick HT CFC rotor hub components by press curing are given. An advanced production line for vacuum-oven curing of composite structures, including glass and aramide phenolic prepregs as well as carbon fiber components, is described. J.N.

A84-36151#

TURBULENT HEAT TRANSPORT IN CIRCULAR DUCTS WITH CIRCUMFERENTIALLY VARYING HEAT FLUX

J. W. BAUGHN, M. A. HOFFMAN, R. K. TAKAHASHI (California, University, Davis, CA), and B. E. LAUNDER (University of Manchester Institute of Science and Technology, Manchester, England) ASME, Transactions, Journal of Heat Transfer (ISSN 0022-1481), vol. 106, Feb. 1984, p. 64-70. refs (Contract NSF CME-77-27613)

Experiments have been performed with turbulent air flow in a tube with uniform and with top-half heating; the flow was hydrodynamically fully developed at the start of the heated section, and there were negligible buoyancy effects. Numerical solutions of the mean momentum and energy equations which use the suggestion that the ratio of radial-to-circumferential turbulent diffusivities is equal to the corresponding ratio of mean square velocity fluctuations in these directions agree well with the experimental results. Author

A84-36160#

NONLINEAR BENDING AND COLLAPSE OF LONG, THIN, OPEN SECTION BEAMS AND CORRUGATED PANELS

R. C. BENSON (Rochester, University, Rochester, NY) ASME, Transactions, Journal of Applied Mechanics (ISSN 0021-8936), vol. 51, March 1984, p. 141-145. Research supported by the Xerox Corp. refs (ASME PAPER 84-APM-4)

Long, thin, open section beams and corrugated panels undergo a cross section flattening when bent longitudinally. This leads to a 'soft' nonlinear moment-curvature response and geometrical instability. The problem is analyzed by means of a closed, convergent sequence of algebraic and integral equations which are tractable on modern microcomputers. The shape of the cross section is unrestricted, save that it be thin, symmetrical, and not self-penetrating. Results for circular section and angle section beams are obtained and compared with the existing literature. Example results for a wide, corrugated panel are also obtained. Bifurcations in the deformed cross section are found to occur. Author

A84-36298#

INFRA-RED SURVEILLANCE TECHNIQUES FOR GUIDED WEAPON SYSTEMS

A. T. BAILEY and G. J. ALLOCK (British Aerospace, PLC, Dynamics Group, Stevenage Herts., England) IN: Military microwaves '82; Proceedings of the Conference, London, England, October 20-22, 1982. Tunbridge Wells, Kent, England, Microwave Exhibitions and Publishers, Ltd., 1983, p. 619-623. Research supported by the Ministry of Defence (Procurement Executive).

A method of giving passive infrared surveillance systems a ranging capability by means of an integrated pulsed CO₂ laser is presented. The problem of providing the required speed of deflection was solved by utilizing the acoustooptical interaction within a crystal to diffract or steer the laser beam. The target detection system includes a multielement cadmium mercury telluride array cooled to 77 K and subtending several degrees in the vertical plane. A helical scan of the scene is provided, giving a coverage pattern of 360 deg in azimuth. In field trial tests, 96 percent of all aircraft which came within the engagement envelope were detected. J.N.

N84-24744# Cranfield Inst. of Tech., Bedfordshire (England). School of Mechanical Engineering.

EFFECTS OF AIRBLAST ATOMIZER DESIGN UPON SPRAY QUALITY

A. K. JASUJA /n AGARD Combust. Probl. in Turbine Eng. 14p Jan. 1984 refs Sponsored in part by U.K. Ministry of Defence Avail: NTIS HC A19/MF A01

The application of airblast atomization to gas turbine engines was investigated. The need to identify the effect of various design features on the spray quality to design atomizers of optimum performance with a minimum of cost and complexity is designed. The atomizer scale, configuration, the nature of fuel preparation before exposure to air, for the most commonly used prefilming and plain airblast atomizers are emphasized. The experimental mean drop size data was obtained through the use of laser light scattering techniques over a wide range of conditions. It is concluded that the plain jet airblast atomizer which features multiple, transversely injected liquid jets into a swirling airstream yield spray quality comparable to that achieved by their prefilming counterparts especially under high air pressure conditions. E.A.K.

N84-24747*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

DETAILED FUEL SPRAY ANALYSIS TECHNIQUES

E. J. MULARZ (AVRADCOM), M. A. BOSQUE, and F. M. HUMENIK /n AGARD Combust. Probl. in Turbine Eng. 10p Jan. 1984 refs Previously announced as N83-34943 Avail: NTIS HC A19/MF A01 CSCL 20D

Fuel spray analyses which are a necessary input to the analytical modeling of the complex mixing and combustion processes which

occur in advanced combustor systems are discussed. It is anticipated that by controlling fuel air reaction conditions, combustor temperatures can be better controlled, leading to improved combustion system durability. The capability to measure liquid droplet size, velocity, and number density throughout a fuel spray and to utilize this measurement technique in laboratory benchmark experiments was demonstrated. The experiment to characterize fuel sprays is described. The experiments and data are useful for application to and validation of turbulent flow modeling to improve the design systems of future advanced technology engines.

E.A.K.

N84-24929# National Aerospace Lab., Amsterdam (Netherlands). Informatics Div.

ELECTROMAGNETIC COMPATIBILITY IN AEROSPACE VEHICLES

O. B. M. PIETERSEN 1 Nov. 1983 10 p refs Presented at NERG Symp. of Electromagnetic Compatibility, Delft, 4 Nov. 1982 (NLR-MP-83002-U) Avail: NTIS HC A02/MF A01

Electromagnetic compatibility in aerospace vehicles which requires careful consideration because of the generally high packing density of electronic equipment aboard aircraft or spacecraft, the complex cable harness and the required reliability margins. The practical and computer aided methods which are in use to arrive at an undisturbed living together of electronic systems board these vehicles are reviewed.

E.A.K.

N84-24999*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

A REVIEW OF INTERNAL COMBUSTION ENGINE COMBUSTION CHAMBER PROCESS STUDIES AT NASA LEWIS RESEARCH CENTER

H. J. SCHOCK 1984 12 p refs Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984; sponsored by AIAA, SAE and ASME

(NASA-TM-83666; E-2085; NAS 1.15:83666) Avail: NTIS HC A02/MF A01 CSCL 20D

The performance of internal combustion stratified-charge engines is highly dependent on the in-cylinder fuel-air mixing processes occurring in these engines. Current research concerning the in-cylinder airflow characteristics of rotary and piston engines is presented. Results showing the output of multidimensional models, laser velocimetry measurements and the application of a holographic optical element are described. Models which simulate the four-stroke cycle and seal dynamics of rotary engines are also discussed.

R.S.F.

N84-25001*# Pennsylvania State Univ., State College. Applied Research Lab.

THE BOUNDARY LAYER ON COMPRESSOR CASCADE BLADES Semiannual Progress Report, 1 Dec. 1983 - 1 Jun. 1984

S. DEUTSCH and W. C. ZIERKE 1984 76 p refs (Contract NSG-3264)

(NASA-CR-173514; NAS 1.26:173514) Avail: NTIS HC A05/MF A01 CSCL 20D

The characteristics of the flow field about highly loaded turbocompressor blades in a cascade wind tunnel were investigated. Experimental tests were conducted at chord Reynolds number ($R_{sub c}$) near 500,000. A laser Doppler anemometer was employed in flow velocity measurement. Suction surface mean velocity and turbulence intensity profiles at a single incidence angle are presented. These data contribute to further understanding of two-dimensional boundary layer profiles, points of separation, and transition zones for turbomachine blades, and concomitantly, to compressor cascade predictive models.

R.S.F.

N84-25012# Argonne National Lab., Ill.

FLUID FORCES ON A RIGID CYLINDER IN TURBULENT CROSSFLOW

T. M. MULCAHY 1984 14 p refs Presented at the ASME Winter Ann. Meeting, New Orleans, 9 Dec. 1984 (Contract W-31-109-ENG-38)

(DE84-006364; CONF-841201-5) Avail: NTIS HC A02/MF A01

Fluctuating lift and drag, and steady drag force coefficients are presented which were obtained in water flows with Reynolds numbers in the range 3×10^4 to 2×10^5 . Turbulence intensities were varied from 1.5 to 15% while integral scale lengths ranged from 0.5 to 2 tube diameters. The turbulence generated is described and the method of force measurement is outlined. Empirical bounds on the force spectra are given, and available information on spanwise correlation lengths are identified so that the data can be used to make RMS vibration response predictions where fluid structure interaction does not occur.

DOE

N84-25013# Massachusetts Inst. of Tech., Cambridge.

CONICAL FLOWS WITH LEADING EDGE VORTICES

E. S. PEREZ and K. G. POWELL 1984 31 p

Avail: NTIS HC A03/MF A01

View graphs show possible leading edge vortex flow patterns. An approach is presented for solving the problem which includes finite volume approximation, smoothing, shock fitting, and the body boundary conditions. The axisymmetric case and small and larger angles of attack are considered.

A.R.H.

N84-25019*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

OPTIMIZATION OF FRINGE-TYPE LASER ANEMOMETERS FOR TURBINE ENGINE COMPONENT TESTING

R. G. SEASHOLTZ, L. G. OBERLE, and D. H. WEIKLE 1984 16 p refs Presented at the 20th Joint Propulsion Conf., Cincinnati, 11-13 Jun. 1984; sponsored by AIAA, SAE and ASME

(NASA-TM-83658; E-2099; NAS 1.15:83658; AIAA-84-1459)

Avail: NTIS HC A02/MF A01 CSCL 14B

The fringe type laser anemometer is analyzed using the Cramer-Rao bound for the variance of the estimate of the Doppler frequency as a figure of merit. Mie scattering theory is used to calculate the Doppler signal wherein both the amplitude and phase of the scattered light are taken into account. The noise from wall scatter is calculated using the wall bidirectional reflectivity and the irradiance of the incident beams. A procedure is described to determine the optimum aperture mask for the probe volume located a given distance from a wall. The expected performance of counter type processors is also discussed in relation to the Cramer-Rao bound. Numerical examples are presented for a coaxial backscatter anemometer.

Author

N84-25061*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

STATUS OF UNDERSTANDING FOR GEAR MATERIALS

D. P. TOWNSEND *In its* Tribology in the 80's, vol. 2 p 795-809 Apr. 1984 refs

Avail: NTIS HC A17/MF A01 CSCL 13I

A wide variety of gear materials is available today for the gear designer. The choice of which material to use should be based on the requirements of the application and will include the operating conditions of load, speed, and temperature in addition to reliability, weight, noise limitation, accuracy, and cost. In aircraft applications such as helicopters, V/STOL aircraft, and turboprops, the dominant factors to be considered are reliability and weight. The following gear materials are reviewed herein with an emphasis upon mechanical properties, cost, and durability: plastics, nonferrous metals, copper alloys, iron alloys, metal powders, and steels.

R.S.F.

12 ENGINEERING

N84-25062*# Pratt and Whitney Aircraft Group, East Hartford, Conn.

STATUS OF UNDERSTANDING FOR SEAL MATERIALS

P. F. BROWN *In* NASA Lewis Research Center Tribology in the 80's, vol. 2 p 811-829 Apr. 1984 refs
Avail: NTIS HC A17/MF A01 CSCL 131

Material selection for mainshaft face and ring seals, labyrinth seals, accessory gearbox face seals, and lip seals are discussed in light of tribology requirements and a given seal application. Carbon graphite has been found to be one of the best sealing materials and it is widely used in current gas turbine mainshaft and accessory gearbox seals. Its popularity is due to its unique combination of properties which consists of dimensional stability, corrosion resistance, low friction, good self lubricating characteristics, high thermal conductivity and low thermal expansion, the latter two properties combining to provide good thermal shock resistance. A brief description of the seals and the requirements they must meet are discussed to provide insight into the limitations and advantages of the seals in containing the lubricant. A forecast is made of the operational requirements of main shaft and gearbox seals for advanced engines and candidate materials and coatings that may satisfy these advanced engine requirements. Author

N84-25088*# General Dynamics Corp., San Diego, Calif.

INHERENT PROBLEMS IN DESIGNING TWO-FAILURE TOLERANT ELECTROMECHANICAL ACTUATORS

S. HORNYAK *In* NASA. Goddard Space Flight Center The 18th Aerospace Mech. Symp. p 155-170 May 1984
Avail: NTIS HC A14/MF A01 CSCL 131

An electromechanical ac-powered rotary actuated four-bar linkage system for rotating the Shuttle/Centaur deployment adapter is described. The essential features of the deployment adapter rotation system (DARS) are increased reliability for mission success and maximum practical hazard control for safety. The requirements, concept development, hardware configuration, quality assurance provisions, and techniques used to meet two-fault tolerance requirements are highlighted. The rationale used to achieve a degree of safety equivalent of that of two-failure tolerance is presented. Conditions that make this approach acceptable, including single failure point components with regard to redundancy versus credibility of failure modes, are also discussed. Author

N84-25092*# National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md.

SPACELAB 4: PRIMATE EXPERIMENT SUPPORT HARDWARE

P. R. FUSCO and R. J. PEYRAN *In its* The 18th Aerospace Mech. Symp. p 215-241 May 1984
Avail: NTIS HC A14/MF A01 CSCL 14B

A squirrel monkey feeder and automatic urine collection system were designed to fly on the Spacelab 4 Shuttle Mission presently scheduled for January 1986. Prototypes of the feeder and urine collection systems were fabricated and extensively tested on squirrel monkeys at the National Aeronautics and Space Administration's (NASA) Ames Research Center (ARC). The feeder design minimizes impact on the monkey's limited space in the cage and features improved reliability and biocompatibility over previous systems. The urine collection system is the first flight qualified, automatic urine collection device for squirrel monkeys. Flight systems are currently being fabricated. Author

N84-25107# Old Dominion Univ., Norfolk, Va.

LARGE DEFLECTION MULTIMODE RESPONSE OF CLAMPED RECTANGULAR PANELS TO ACOUSTIC EXCITATION, VOLUME 1 Final Report, 1 Oct. 1980 - 31 May 1983

C. MEI Wright-Patterson AFB, Ohio AFWAL Dec. 1983 67 p (Contract AF-AFOSR-0107-80; AF PROJ. 2307) (AD-A139622; AFWAL-TR-83-3121-VOL-1) Avail: NTIS HC A04/MF A01 CSCL 20K

An analytical method is developed for the determination of large deflection multimodal random response of clamped rectangular plates subjected to normal incidence acoustic

impingements. The Karman-Herrmann large deflection plate equations are solved by a technique which reduced the fourth order nonlinear partial differential equations to a set of second order nonlinear differential equations with time as the independent variable. The differential equation solution utilizes a Fourier-type series representation of the areas function and out-of-plane reflection. The compatibility equation is solved by direct substitution, and the equilibrium equation is solved through the use of Bubnov-Galerkin method. The acoustic excitation is assumed to be Gaussian. The Krylov-Bogoliuboc-Caughey equivalent linearization method is then employed so that the derived set of second order nonlinear differential equations is linearized to an equivalent set of second order linear differential equations. Transformations of coordinates from the generalized displacements to the normal-mode coordinates and an iterative scheme are employed to obtain root-mean-square (RMS) maximum panel deflection, RMS maximum strain and equivalent linear (or nonlinear) frequencies of vibration for clamped rectangular panels at various excitation pressure spectral density (PSD). Convergence of the results is demonstrated by using 4, 6, 10 and 15 terms in the transverse deflection function. Effects of panel length-to-width ratio and damping ratio on panel response are also studied. There are two volumes reporting this research effort; this volume, Volume 1, contains the mathematical formulations and numerical results, Volume 2 gives the computer program codes. Author (GRA)

N84-25864# Cranfield Inst. of Tech., Bedfordshire (England).

EVOLUTION OF A HEAVE CONTROL SYSTEM FOR AN AMPHIBIOUS HOVERCRAFT

P. A. T. CHRISTOPHER, K. F. MAN, Y. N. CHENG, and E. W. OSBOURN Jan. 1984 234 p refs
(CAR-8401; ISBN-0902937-97-9) Avail: NTIS HC A11/MF A01

A heave control system for amphibious hovercraft was designed and tested. The central element in the system being an axial flow, lift fan whose blade angles are continuously varied by means of feedback signals from a pressure transducer located in the front end of the hovercraft cushion and from an accelerometer measuring the heave acceleration are discussed. Results from experiments, conducted on the Cranfield Whirling-Arm facility, have shown that the system provides a rapid and effective means of controlling the heave acceleration, and, in addition, produces a valuable reduction in craft drag whilst traversing waves. An extensive parameter identification program, using a nonlinear optimization algorithm, was constructed and applied to the control subsystem, such that a full mathematical model of the controlled craft was obtained. This was then used to design an optimum control with particular reference to passenger ride comfort. Author

N84-25865# Societe Nationale Industrielle Aerospatiale, Paris (France). Direction Technique.

THE INDUSTRY'S MATERIALS: SNIAS AND GENERAL CONDITIONS OF ITS ENVIRONMENT [LES MATERIAUX DE L'INDUSTRIE: AEROSPATIALE ET LES CONDITIONS GENERALES DE LEURS ENVIRONNEMENTS]

20 Jun. 1983 11 p In FRENCH
(SNIAS-832-502-101) Avail: NTIS HC A02/MF A01

An overview of the physical characteristics, service life, and prevalent environmental conditions of aircraft and spacecraft construction materials is presented. Emphasis is placed on light weight, high strength metal alloys, and various fiber reinforced composite materials. The role these materials play in the construction of supersonic and subsonic transport aircraft, satellites, civil aircraft, helicopters, and missile engines is charted. Trans. by M.A.C.

N84-25870# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

LA RECHERCHE AEROSPATIALE, BIMONTHLY BULLETIN, NO. 1983-6, 217/NOVEMBER-DECEMBER

C. SEVESTRE, ed. Apr. 1984 61 p refs Transl. into ENGLISH of La Rech. Aerospatiale, Bull. Bimensuel, No. 1983-6, 217/Nov.-Dec. (Paris), 1983

(ESA-TT-841) Avail: NTIS HC A04/MF A01; HC available at ONERA, Paris FF 55; original report in FRENCH available at ONERA, Paris FF 60

Various topics of concern to aerospace engineering are addressed. Nonlinear sampled-data control systems, noise fields generated by launch vehicles, pressure transducers for cryogenic wind tunnels, structural vibration testing, and the structural analysis of laminated plates are discussed.

N84-25920# Air Force Systems Command, Wright-Patterson AFB, Ohio. Foreign Technology Div.

RADOMES FOR FLIGHT VEHICLES

B. A. PRIGODA and V. S. KOKUNKO 26 Mar. 1984 6 p Transl. into ENGLISH from mono. "Obtekateli Antenn Letatelnykh Appartov" Moscow, Mashinostroyeniye, 1970 p 70-73

(AD-A140174; FTD-ID(RS)T-0398-84) Avail: NTIS HC A02/MF A01 CSCL 09E

The dielectric properties, structural stability, and structural design of a thin walled aircraft radome supported by a metal frame are considered. Radio transmittance and structural weight are emphasized. The theory of long lines facilitates finding a path for lowering the weight of the walls while preserving their radio-engineering characteristics.

R.S.F.

N84-25930# European Space Research and Technology Center, Noordwijk (Netherlands). Product Assurance Div.

DERATING REQUIREMENTS AND APPLICATION RULES FOR ELECTRONIC COMPONENTS

Dec. 1982 29 p

(ESA-PSS-01-301-ISSUE-1; ISSN-0379-4059) Avail: NTIS HC A03/MF A01

The minimum derating requirements and application rules for electronic, electrical, and electromechanical components used in flight standard equipment are defined. Parameter degradations to be considered in performing worst case analyses are given.

E.A.K.

N84-25960# Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese (Belgium).

UNSTEADY FLOW IN TURBOMACHINES, VOLUME 1

1984 323 p refs Lecture Ser. held at Rhode-Saint-Genese, Belgium, 20 - 24 Feb. 1984 2 Vol.

(VKI-LS-1984-02-VOL-1) Avail: NTIS HC A14/MF A01

Unsteady flow is an essential aspect of the energy exchange between the fluid and blade rows in a turbomachine. This lecture series concentrated mainly on the rotating stall by discussing the prediction methods for single and multistage compressors, analyzing new experimental evidence on cell patterns and cell structure and proposing methods for the determination of the stall line in industrial and aeromachine compressors. A review of numerical methods for the handling of unsteady flows and the experience of manufacturers and research organizations with engine stall completed the lecture series.

N84-25961*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

UNSTEADY FLOW IN TURBOMACHINERY: AN OVERVIEW

In Von Karman Inst. for Fluid Dynamics Unsteady Flow in Turbomachines, Vol. 1 p 1-20 1984 refs

Avail: NTIS HC A14/MF A01

The importance of understanding and modeling the unsteady flow phenomena in turbomachinery is discussed. Historical events in the application and development of gas turbines for aircraft propulsion are traced. Technology advancements over the years are highlighted with focus on the compression system components. Trends in compressor research within the National Advisory

Committee for Aeronautics (NACA)/National Aeronautics and Space Administration (NASA) are noted. The impact of technology advancements on the increased occurrences of unsteady flow related problems in advanced engine development programs is discussed. The impact of the new and more demanding requirements being imposed on the propulsion system to meet advanced aircraft mission needs are also noted. Brief discussions on the present day understanding and modeling capability of the unsteady flow phenomena are presented to include discussions on rotating stall, surge, flutter, forced response and noise generation.

Author

N84-25962# Massachusetts Inst. of Tech., Cambridge.

INTRODUCTION TO UNSTEADY FLOW IN TURBOMACHINES

E. M. GREITZER In Von Karman Inst. for Fluid Dynamics Unsteady Flow in Turbomachines, Vol. 1 62 p 1984 refs

Avail: NTIS HC A14/MF A01

In this lecture some of the fluid dynamic phenomena that are associated with unsteady flow in turbomachines will be examined. It will be seen that there are several different sources of this unsteadiness, and that which of these is most important will depend on which aspect of the overall performance of the turbomachine is being examined. This discussion is intended to be an introduction to the subject and to provide an appreciation for the basic fluid mechanic concepts, rather than to be an exhaustive review. The topics to be covered are: (1) the Inherent Unsteadiness of Turbomachinery Flows; (2) Sources of Flow Unsteadiness in Turbomachines; and (3) Introductory Discussion of Unsteady Viscous Flows.

B.W.

N84-25963# Massachusetts Inst. of Tech., Cambridge.

STABILITY OF PUMPS AND COMPRESSORS

E. M. GREITZER In Von Karman Inst. for Fluid Dynamics Unsteady Flow in Turbomachines, Vol. 1 78 p 1984 refs

Avail: NTIS HC A14/MF A01

This lecture describes the types of flow instabilities that are encountered in dynamic compression and pumping systems. A detailed review is presented in which the different fluid mechanic phenomena associated with these instabilities, as well as the techniques that have been developed for predicting the onset of instability, are surveyed. This paper also contains elementary analyses that shows the phenomena associated with the instabilities, in several different systems of current engineering interest. The second part covers four topics. The first of these is an elementary analysis of rotating stall inception in axial compressors. The second is a description of a procedure for predicting the stalling pressure rise capability of axial flow compressor stages. The third is some additional material on the use of compressor casing and/or hub treatment (i.e. grooves) for stability enhancement. The final topic consists of a brief summary of a recent non-linear analysis of rotating stall in multistage compressors.

B.W.

N84-25964# Cornell Univ., Ithaca, N.Y.

THEORY OF ROTATING STALL OF MULTISTAGE AXIAL COMPRESSORS

F. K. MOORE In Von Karman Inst. for Fluid Dynamics Unsteady Flow in Turbomachines, Vol. 1 112 p 1984 refs

Avail: NTIS HC A14/MF A01

An analysis is made of rotating stall in compressors of many stages, finding conditions under which a flow distortion can occur which is steady in a traveling reference frame, even though upstream total and downstream static pressure are constant. In the compressor, a pressure-rise hysteresis is assumed. Flow in entrance and exit ducts yield additional lags. These lags balance to give a formula for stall propagation speed. For small disturbances, it is required that the compressor characteristic be flat in the neighborhood of average flow coefficient. Results are compared with the experiments of Day and Cumpaty. If a compressor lag of about twice that due only to fluid inertia is used predicted propagation speeds agree almost exactly with experimental values, taking into account changes of number of stages, stagger angle, row spacing, and number of stall zones.

12 ENGINEERING

The agreement obtained gives encouragement for the extension of the theory to account for large amplitudes. Author

N84-25965# Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese (Belgium).

UNSTEADY FLOW IN TURBOMACHINES, VOLUME 2

1984 353 p refs Lecture Ser. held at Rhode-Saint-Genese, Belgium, 20-24 Feb. 1984
(VKI-LS-1984-02-VOL-2; D/1984/0238/294-VOL-2) Avail: NTIS HC A16/MF A01

Various topics concerned with unsteady flow phenomena in turbomachinery are addressed. Particular attention is given to rotating stall, surges, and blade flutter in axial flow compressors.

N84-25966# Rolls-Royce Ltd., Derby (England).

ENCOUNTERS WITH SURGE

A. B. MCKENZIE *In* Von Karman Inst. for Fluid Dynamics Unsteady Flow in Turbomachinery, Vol. 2 30 p 1984
Avail: NTIS HC A16/MF A01

A review of the development of axial compressors for gas turbine engines is presented and the surge characteristics for each particular design are discussed. The Avon, Avon RA14, Conway, Tyne, Spey and RB 211 are addressed. Rotating stall, inlet maldistribution, and design parameters effecting surge occurrences are examined. M.G.

N84-25967# Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese (Belgium).

STRUCTURE OF ROTATING STALL CELLS. PART 1: ABSOLUTE MOTION

K. MATHIOUDAKIS and F. A. E. BREUGELMANS *In its* Unsteady Flow in Turbomachines, Vol. 2 49 p 1984 refs
Avail: NTIS HC A16/MF A01

Measurement and data processing techniques developed in order to define rotating stall characteristics are presented. Application of these techniques to experiments on an axial flow compressor yielded several conclusions on the structure of the stalled flow field as it is seen from the stationary frame of reference. Two qualitatively different types of rotating stall have been identified: small stall and big stall. Small stall results in a gradual drop in the performance of the compressor. It is characterized by many cells of small amplitude fluctuations of velocity and angle. It is linked to separation on the blades, but the flow continues to move through the rotor without significant reorganization. Big stall causes an abrupt drop in the performance. The velocity and angle variations are very big and the flow field inside the cells is reorganized in a three dimensional manner with the appearance of reverse flow in front of the rotor. Comparison with results of other investigations showed the similarity of the flow field inside the big cells in all cases. M.G.

N84-25968*# National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.

NUMERICAL ASPECTS OF UNSTEADY FLOW CALCULATIONS

J. J. ADAMCZYK *In* Von Karman Inst. for Fluid Dynamics Unsteady Flow in Turbomachines, Vol. 2 75 p 1984 refs
Avail: NTIS HC A16/MF A01 CSCL 20D

The numerical aspects of simulation unsteady flows which arise in turbomachinery are addressed. In particular the simulation of rotating stall and surge is discussed. Author

N84-25969# Gremlı Systemdynamik A.G., Abtwil (Switzerland).

SURGE PREDICTION IN INDUSTRIAL COMPRESSORS

C. GREMLI *In* Von Karman Inst. for Fluid Dynamics Unsteady Flow in Turbomachines, Vol. 2 36 p 1984 refs
Avail: NTIS HC A16/MF A01

The stability limit of industrial compressors is strongly influenced by the dynamics of the surrounding process and the individual slopes of the stage characteristics. Most common stall criterions which are also used as surge criterions do not take this into account. In order to include the system dynamics and the individual slopes of the stage characteristics into the surge line prediction, the TOLDYM-method was developed. TOLDYM stands for Two

Variable, One Dimensional, Linearized Dynamic Model. The real system is represented by a mathematical model. If the model is stable the real system is assumed to be stable too. Three simplifications (1-dimensional, linearized, constant temperature) are made in order to reduce model complexity. A set of model element types is available for the assembling of a model. The mathematical representation of the model elements and of the entire model are transfer matrices. The test of stability is performed by checking the real part of the eigenvalues of the transfer function. Three examples show that the results of this method are in agreement with measurements. M.G.

N84-25970# Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese (Belgium).

STRUCTURE OF ROTATING STALL CELLS. PART 2: RELATIVE MOTION

F. A. E. BREUGELMANS and K. MATHIOUDAKIS *In its* Unsteady Flow in Turbomachines, Vol. 2 81 p 1984 refs
Avail: NTIS HC A16/MF A01

The velocity was measured near the blade surface at three different chordwise and two radial positions for all operating conditions of a low speed axial flow compressor. The local flow angle increases in the streamwise direction for a given operating condition on the negative slope part of the characteristic. This flow angle varies in the unstalled region from -7 deg, 18 deg to 60 deg. Important radial flow angles are observed during one and two cell rotating stall patterns. The 25% chord location experience a radially inward flow during rotating stall, while the 50% and 75% locations show radially outward flow. This radial motion decreases near the tip and mixes with the clearance flow. M.G.

N84-25971# Societe Nationale d'Etudes et de Construction de Moteurs d'Aviation, Moissy-Cramayel (France).

DETERMINATION OF THE STABLE OPERATING CONDITIONS OF AN AXIAL FLOW COMPRESSOR

B. DELAHAYE *In* Von Karman Inst. for Fluid Dynamics Unsteady Flow in Turbomachines, Vol. 2 48 p 1984 refs
Avail: NTIS HC A16/MF A01

Unsteady flow phenomena in axial flow compressors are classified and some basic principles of measurement for each unsteady behavior are reviewed. Rotating stall, surge, blade flutter, stall margin, and distorted inlet flow are discussed. The prediction of stable operating conditions is also addressed with emphasis given to stall boundary prediction. Finally, methods for improving engine stability are reviewed. M.G.

N84-25972# Technische Hochschule, Aachen (West Germany). Inst. fuer Strahlantriebe und Turboarbeitsmaschinen.

UNSTEADY INTERACTIONS IN SUPERSONIC COMPRESSOR STAGES

K. D. BROICHHAUSEN and H. E. GALLUS *In* Von Karman Inst. for Fluid Dynamics Unsteady Flow in Turbomachines, Vol. 2 32 p 1984 refs
Avail: NTIS HC A16/MF A01

The unsteady phenomena in the case of supersonic compressor flow are discussed on the basis of characteristic experimental results. The following conclusions can be drawn: the unsteady upstream disturbances caused by a supersonic rotor decrease hyperbolically and can be predicted by theoretic approaches for the relative flow; speeds generating slight supersonic relative inlet flow are critical for upstream interference; the downstream interference is caused by wakes and shockwaves; the unsteady pulsations in the stator increase with higher speeds; at high speeds the change of the flow angle is responsible for the unsteady effects; at lower speeds the influence of the velocity decay becomes more and more important; the unsteady fluctuations do not decrease continuously, but are intensified whenever shock oscillations are caused; and, finally, unsteady pulsations are able to influence the stage-performance particularly near the blockage-line. M.G.

N84-25986# Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese (Belgium).

COMPUTATIONAL FLUID DYNAMICS, VOLUME 2

1984 395 p refs Lecture Ser. held at Rhode-Saint-Genese, Belgium, 12 - 16 Mar. 1984 2 Vol.

(VKI-LS-1984-04-VOL-2) Avail: NTIS HC A17/MF A01

Various examples for Euler and Navier-Stokes equations in the solution of computational fluid dynamic flow problems are described. Topics include vortical flow around several wing configurations, implicit time dependent solutions for transonic flows, multigrid techniques for Euler equation solutions, and turbulent flow applications of the Navier-Stokes equations.

N84-25990# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

IMPLICIT TIME DEPENDENT METHODS FOR THE SOLUTION OF THE EULER EQUATIONS. PART 2: APPLICATION TO TRANSONIC FLOWS

J. SIDES /n Von Karman Inst. for Fluid Dynamics Computational Fluid Dyn., Vol. 2 29 p 1984 refs

Avail: NTIS HC A17/MF A01

Numerical implicit methods are examined for an efficient solution of the unsteady compressible Euler equations. The interest of implicit methods lies in the fact that they can theoretically benefit from the absence of any limitation on the choice of the time step. Basic implicit schemes are applied to the solution of realistic flow problems governed by the Euler equations. The implicit finite volume method is also considered. M.A.C.

N84-25997# Boeing Military Airplane Development, Seattle, Wash.

MULTI-LENGTH SCALE TURBULENCE MODELS Final Report, 15 Apr. 1982 - 18 Jul. 1983

S. F. BIRCH Aug. 1983 50 p

(Contract F49620-82-C-0032; AF PROJ. 2307)

(AD-A140527; AFOSR-84-0249TR) Avail: NTIS HC A03/MF

A01 CSCL 20D

Development of a new two-length scale turbulence model is described. This work was undertaken because the performance of current models for certain flows appears to be limited by an inadequate treatment of the turbulence length scale. One flow for which current turbulence models are not adequate is the initial developing region of a plane mixing layer. Available mixing layer data is briefly reviewed. An improved ability to analyze this flow is required for improved prediction of the near field of a jet for a wide range of applications including those for STOL aircraft applications. The work was performed in the context of developing an improved turbulence model for general application to complex three-dimensional jets. The new model is based on the physical observation that the turbulence shear stress and the turbulence energy production are associated primarily with the large scale eddies, while most of the turbulence energy is dissipated by small scale eddies near the high frequency end of the turbulence energy spectrum. Therefore, except for flows close to equilibrium, separate turbulence length scales are required to characterize the large and small scale motions. GRA

N84-26032# Air Products and Chemicals, Inc., Allentown, Pa. **SOLID STATE COMPRESSOR Status Report, 1 Oct. - 31 Dec. 1983**

W. A. STEYERT 20 Jan. 1984 20 p

(Contract N00014-83-C-0394; DARPA ORDER 4746)

(AD-A140498; SR-2) Avail: NTIS HC A02/MF A01 CSCL 13G

The overall goal of this program is to develop a gas compressor which uses modern piezoelectric or electrostrictive materials in place of a magnetic type motor. These materials can exert very large forces, but have only a limited travel. The key to the successful implementation of this compressor concept is a motion amplifier which will be studied at APCI in a one cell simulator. Prior to building the simulator which will be used primarily to study material properties, we have analyzed the elastomer requirements. The motion amplifier is an elastomer which is squeezed between two plates. The elastomer is basically incompressible; therefore,

as the plates move together the elastomer will extrude from around the edges. It is necessary to understand the mechanics of the elastomer motion in order to design the motion amplifier and, thus, the compressor. GRA

N84-26044# European Space Research and Technology Center, Noordwijk (Netherlands). Product Assurance Div.

A THERMAL CYCLING TEST FOR THE SCREENING OF SPACE MATERIALS AND PROCESSES

Aug. 1982 24 p

(ESA-PSS-01-704-ISSUE-1; ISSN-0379-4059) Avail: NTIS HC A02/MF A01

A thermal cycling test under vacuum for the screening of materials and processes intended for use in the fabrication of ESA spacecraft and associated equipment is outlined. The test determines the ability of these articles to withstand extreme changes of ambient temperature under vacuum. E.A.K.

N84-26045# Societe Nationale Industrielle Aeronautique, Marignane (France.) Quality Control Dept.

NONDESTRUCTIVE TESTING OF COMPOSITE STRUCTURES

M. CHIQUILLO, B. GAGNAGE, and M. TORRES 1983 11 p Presented at the AAAF 8th European Rotorcraft and Powered Life Aircraft Forum, Aix-en-Provence, France, 31 Aug. - 3 Sep. 1982

(SNIAS-832-210-108) Avail: NTIS HC A02/MF A01

The use of composite materials in helicopter construction is growing rapidly. With composite parts, the composite material and the final aircraft are obtained simultaneously during the curing process. Manufacturing defects may appear not only at the junction areas but also at the core of the composites. The purpose of non-destructive tests is to detect such defects and thus determine the conformity of the parts. Nondestructive tests appropriate for the examination of composite parts are reviewed, and the general principle of each method along with some examples of application are given. Among the tests reviewed are: sonic inspection, ultrasonic flow detection, X-ray inspection, holographic interferometry, stiffness measurement, acoustic emission, and stroboscopic inspection. R.S.F.

N84-26048# Aeronautical Research Labs., Melbourne (Australia).

NERF: A COMPUTER PROGRAM FOR THE NUMERICAL EVALUATION OF RELIABILITY FUNCTIONS-RELIABILITY MODELING, NUMERICAL METHODS AND PROGRAM DOCUMENTATION

G. D. MALLINSON and A. D. GRAHAM 1983 622 p refs

(AR-00-984; ARL-STRUC-397) Avail: NTIS HC A99/MF A01

A computer program is described which was designed to evaluate reliability functions derived by Payne and others that result from the application of reliability analysis to the fatigue of aircraft structures. The development of the reliability functions evaluated by the NERF program is elaborated. A.R.H.

N84-26057# National Aerospace Lab., Amsterdam (Netherlands). Structures and Materials Div.

REVIEW OF AERONAUTICAL FATIGUE INVESTIGATIONS IN THE NETHERLANDS DURING THE PERIOD MARCH 1981 - FEBRUARY 1983

J. B. DEJONGE, ed. Mar. 1983 45 p refs Presented at 18th ICAF Conf., Toulouse, 30-31 May 1983

(AD-B082166; NLR-MP-83016-U) Avail: NTIS HC A03/MF A01

A brief review is given of work performed in the Netherlands in the field of aeronautical fatigue. Where possible, applicable references are presented. Flight simulation testing procedures, crack propagation studies, fatigue of joints, fatigue of composite materials, and nondestructive inspection and repair procedures are discussed. R.J.F.

12 ENGINEERING

N84-26058# Societe Nationale Industrielle Aerospatiale, Marignane (France.) Helicopter Div.

THE SARIB VIBRATION ABSORBER

P. HEGE and G. GENOUX 1983 13 p Presented at the AAAF 9th European Rotorcraft and Powered Lift Aircraft Forum, Stresa, Italy, 13-15 Sep. 1983 (SNIAS-832-210-104) Avail: NTIS HC A02/MF A01

The SARIB I and II vibration absorbing systems were tested. The major vibration absorber systems under study or installed on Aerospatiale's and other various world manufacturers' aircraft are reviewed and the results of the flight tests performed on the SARIB I and II vibration absorbers as mounted on the AS 350 Ecureuil are presented. It is shown that the reduction in vibration level is quite significant and also weight saving. E.A.K.

N84-26059# Ballistic Research Labs., Aberdeen Proving Ground, Md.

REVISIONS TO THE PETROS 4 SHELL RESPONSE CODE Final Report

N. J. HUFFINGTON, JR. and H. L. WISNIEWSKI Feb. 1984 93 p

(Contract DA PROJ. 1L1-61102-AH-43)

(AD-A140268; AD-F300408; ARBRL-TR-02550-REV) Avail: NTIS HC A05/MF A01 CSCL 01B

The existing PETROS 4 finite deflection elastoplastic structural shell response code was modified to permit analysis of the response of structural panels to nearby high explosive detonations. A modified constitutive formulation involving prescribed through-thickness stresses was introduced. Previously omitted surface traction terms were added to the equations of motion. A recycling option based on a strain equivalence criterion was introduced to inhibit the unrestricted growth of a breathing mode. Additional printer and plotter output features were incorporated into the program. GRA

N84-26431 Vereinigte Flugtechnische Werke G.m.b.H., Bremen (West Germany).

ON IMPROVING THE FATIGUE PERFORMANCE OF A DOUBLE-SHEAR LAP JOINT

L. SCHWARMANN *In* MBB Tech. and Sci. Publ. 1983 p 9-17 1983 refs

(VFW-29/83-O) Avail: Issuing Activity

Different methods for improving the fatigue performance of a double-shear lap joint which is representative of airframe structures are discussed. Considering all aspects concerning fatigue performance, fabrication problems and costs, one method is recommended for practical application in aviation. This method involves the installation of cylindrical fasteners with a low degree of interference-fit into cold-worked holes. Author

N84-26440 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany). Unternehmensbereich Drehfluegler und Verkehr.

A PRINCIPAL ROTOR WITHOUT JOINTS AND PILLOWS, MADE OF FIBER MATERIALS, FOR DYNAMIC SYSTEMS OF FUTURE HELICOPTERS [GELENK- UND LAGERLOSER HAUPTROTOR IN FASERVERBUNDBAUWEISE FUER DYNAMISCHE SYSTEME ZUKUENFTIGER HUBSCHRAUBER]

M. HUBER *In* its Tech. and Sci. Publ. 1983 p 159-187 1983 refs *In* GERMAN Presented at 3rd Bundesmin. fuer Forsch. u. Technol. (BMFT)-Statusseminar: Luftfahrtforsch. u. Luftfahrttechnol., Hamburg, 2-4 May 1983 (MBB-UD-384-83-O) Avail: Issuing Activity

The development of joint and bearingless main rotors for dynamic systems for helicopters is discussed. The performance, acceleration, durability and safety, and simultaneous reduction of production cost is outlined. Transl. by E.A.K.

N84-26441 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).

A REAR ENGINE WITHOUT JOINTS AND PILLOWS [GELENK-UND LAGERLOSES HECKROTORSYSTEM IN FASERVERBUNDBAUWEISE]

H. FROMMLET *In* its Tech. and Sci. Publ. 1983 p 189-219 1983 refs *In* GERMAN Presented at 3rd Bundesmin. fuer Forsch. u. Technol. (BMFT)-Statusseminar: Luftfahrtforsch. u. Luftfahrttechnol., Hamburg, 2-4 May 1983 Sponsored by Bundesministerium fuer Forschung und Technologie (MBB-UD-383-83-O) Avail: Issuing Activity

A new joint and bearingless tail rotor was developed. The bearings and joints, which cause the three blade movements, are replaced by a flexible bending/tension element made out of fiber composite materials. The moving rotor performance system was measured. It is found that the swing deflector of the tail rotor can be improved. Transl. by E.A.K.

13

GEOSCIENCES

Includes geosciences (general); earth resources; energy production and conversion; environment pollution; geophysics; meteorology and climatology; and oceanography.

A84-34508#

AIR-ICE DRAG COEFFICIENTS FOR FIRST-YEAR SEA ICE DERIVED FROM AIRCRAFT MEASUREMENTS

B. A. WALTER, J. E. OVERLAND (NOAA, Pacific Marine Environmental Laboratory, Seattle, WA), and R. O. GILMER (NOAA, Environmental Research Laboratories, Boulder, CO) *Journal of Geophysical Research* (ISSN 0148-0227), vol. 89, May 20, 1984, p. 3550-3560. Navy-supported research. refs

The air-ice drag coefficient (CD) over 1-m-thick first-year sea ice is calculated on the basis of turbulent-flux measurements obtained with the gust probe on the NOAA p-3 aircraft at altitudes 42, 90, 195, and 340 m over the Bering Sea during February, 1982. The data are presented in graphs and tables, and maps and an NOAA-6 IR image are provided. CD referred to 10 m anemometer height is found to be 0.003 + or 0.0006, and the bulk heat-transfer coefficient from turbulent heat flux measurements is 0.00073 + or - 0.00016. Other parameters estimated include Bowen ratio greater than 2.8, geostrophic drag coefficient 0.047, surface-wind turning angle 32 deg, and surface-wind/geostrophic-wind speed ratio 0.76. T.K.

A84-35250

THE DETERMINATION OF VISIBILITY CONDITIONS AT THE FINAL PORTION OF A DESCENT GLIDE [OPREDELENIE USLOVII VIDIMOSTI NA KONECHNOM UCHASTKE GLISSADY SNIZHENIIA]

V. A. KOVALEV (Glavnaia Geofizicheskaiia Observatoriia, Leningrad, USSR) *Meteorologiya i Gidrologiya* (ISSN 0130-2906), May 1984, p. 40-47. *In* Russian. refs

The information content of measurements of slant visibility conditions for aircraft landing is discussed. Attention is focused on the possibility of extrapolating data from ground-based instruments which measure horizontal visibility range at runways. The measurements take into account such factors as cloud-layer thickness, background haze, background luminosity, and altitude. It is found that a reasonable agreement exists between measurements of slant and horizontal visibility range. I.H.

N84-25154# Royal Inst. of Tech., Stockholm (Sweden). Dept. of Photogrammetry.

MULTI-MODELS TO INCREASE ACCURACY

K. TORLEGAARD *In its* Photogrammetric Res. 109 p 1983 refs

Avail: NTIS HC A10/MF A01

Classical theory of error for photogrammetry divides errors in three groups: blunders, systematic errors and random errors. Systematic errors are caused by the lacking fidelity of the functional part of the mathematical model to the real geometric relations. Block adjustment with additional parameters, multiple photographic coverage and snooping after blunders provide results with high reliability, fidelity and precision. Results based on multi-models formed by averaging two or more single stereo-models are presented. The comprising single models are calculated without correction to lens distortion, atmospheric refraction and earth curvature. The improvement of accuracy by forming multi-models is studied. The precision of photogrammetric stereo-models is decomposed into components related to ground coordinates, image coordinates and image motion due to aircraft speed. The multi-model method provides an increase of the accuracy which is similar to the additional parameters in photogrammetric block adjustment, because both methods are based on multiple photographic coverage. Author

N84-25182# Applied Physics Lab., Johns Hopkins Univ., Laurel, Md.

OCEAN ENERGY SYSTEMS Quarterly Report, Jan. - Mar. 1983 1983 24 p refs

(Contract DE-AI01-77ET-20342)

(DE84-005200; JHU/APL-OQR-83-1) Avail: NTIS HC A02/MF A01

Progress is reported on the development of Ocean Thermal Energy Conversion (OTEC) systems that will provide synthetic fuels (e.g., methanol), energy-intensive products such as ammonia (for fertilizers and chemicals), and aluminum. The work also includes assessment and design concepts for hybrid plants, such as geothermal-OTEC (GEOTEC) plants. Another effort that began in the spring of 1982 is a technical advisory role to DOE with respect to their management of the conceptual and preliminary design activity of industry teams that are designing a shelf-mounted offshore OTEC pilot plant that could deliver power to Oahu, Hawaii. In addition, a program is underway to evaluate and test the Pneumatic Wave-Energy Conversion System (PWECs), an ocean-energy device consisting of a turbine that is air-driven as a result of wave action in a chamber. The work on the various tasks as of 31 March 1983 is reported. DOE

N84-25223*# National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md.

FACILITIES FOR METEOROLOGICAL RESEARCH AT NASA GODDARD/WALLOPS FLIGHT FACILITY Final Report

J. C. GERLACH and R. E. CARR Jun. 1984 6 p refs

(NASA-TM-84422; NAS 1.15:84422) Avail: NTIS HC A02/MF A01 CSCL 04B

The technical characteristics of the Atmospheric Sciences Research Facility, the improvements being made to the instrumentation there which will enhance its usefulness in atmospheric research, and several of the on-going research programs are described. Among the area of atmospheric research discussed are clouds and precipitation, lightning, ozone, wind, and storms. Meteorological instruments including Doppler radar, spectrophotometers, and ozone sensors are mentioned. Atmospheric research relevant to aircraft design and COMSTAR communication satellites is briefly discussed. R.S.F.

MATHEMATICAL AND COMPUTER SCIENCES

Includes mathematical and computer sciences (general); computer operations and hardware; computer programming and software; computer systems; cybernetics; numerical analysis; statistics and probability; systems analysis; and theoretical mathematics.

A84-34773

OPTIMAL CONTROL OF MULTIMODE PLANTS [OPTIMAL'NOE UPRAVLENIE MNOGOREZHMNYMI OB'EKTAMI]

K. G. FAVORSKII (Moskovskii Aviatsionnyi Institut, Moscow, USSR) *Priborostroenie* (ISSN 0021-3454), vol. 27, March 1984, p. 34-38. In Russian. refs

An analysis is made of a multimode plant with piecewise-stationary parameters. In the case of control in various sections, the control-law parameters satisfying the chosen quality criterion must take into account variations of the plant parameters. A proper choice of state variables makes it possible to achieve stationarity of the control processes. As an example, consideration is given to the synthesis of a system for the time-optimal control of the roll of a flight vehicle for different flight speeds. B.J.

A84-36131*# Cincinnati Univ., Ohio.

PERTURBATION ANALYSIS OF OPTIMAL INTEGRAL CONTROLS

G. L. SLATER (Cincinnati, University, Cincinnati, OH) ASME, Transactions, Journal of Dynamic Systems, Measurement, and Control (ISSN 0022-0434), vol. 106, March 1984, p. 114-116. (Contract NCA2-OR-130-801)

The application of linear optimal control to the design of systems with integral control action on specified outputs is considered. Using integral terms in a quadratic performance index, an asymptotic analysis is used to determine the effect of variable quadratic weights on the eigenvalues and eigenvectors of the closed loop system. It is shown that for small integral terms the placement of integrator poles and gain calculation can be effectively decoupled from placement of the primary system eigenvalues. This technique is applied to the design of integral controls for a STOL aircraft outer loop guidance system. Author

N84-25307*# SRI International Corp., Menlo Park, Calif.

INVESTIGATION, DEVELOPMENT, AND EVALUATION OF PERFORMANCE PROVING FOR FAULT-TOLERANT COMPUTERS Final Interim Report

K. N. LEVITT, R. SCHWARTZ, D. HARE, J. S. MOORE, P. M. MELLIAR-SMITH, R. E. SHOSTAK, R. S. BOYER, M. W. GREEN, and W. D. ELLIOTT Aug. 1983 531 p refs

(Contract NAS1-15528; SRI PROJ. 7821)

(NASA-CR-166008; NASA 1.26:166008) Avail: NTIS HC A23/MF A01 CSCL 09B

A number of methodologies for verifying systems and computer based tools that assist users in verifying their systems were developed. These tools were applied to verify in part the SIFT ultrareliable aircraft computer. Topics covered included: STP theorem prover; design verification of SIFT; high level language code verification; assembly language level verification; numerical algorithm verification; verification of flight control programs; and verification of hardware logic.

N84-25308*# SRI International Corp., Menlo Park, Calif.

STP: A MECHANIZED LOGIC FOR SPECIFICATION AND VERIFICATION Final Report

R. E. SHOSTAK, R. SCHWARTZ, and P. M. MELLIAR-SMITH *In its* Invest., Develop., and Evaluation of Performance Proving for Fault-Tolerant Computers p 11-28 Aug. 1983 refs

(Contract NAS1-15528; F49620-79-C-0099; NSF MCS-79-04081)

Avail: NTIS HC A23/MF A01 CSCL 09B

A logic and proof theory that was mechanized and successfully applied to prove nontrivial properties of a fully distributed fault tolerant system is described. The system is close to achieving

15 MATHEMATICAL AND COMPUTER SCIENCES

the critical balance in man machine interaction necessary for successful application by users other than the system developers. Motivation for the form of man machine interaction embodied by STP is discussed. A formal description of the logic and the proof theory is contained, and the description illustrated with an example. The use of STP in a large scale effort to prove nontrivial properties on SIFT, a distributed Software Implemented Fault Tolerant operating system for aircraft flight control is discussed. Finally, directions for further work are described. Author

N84-25309*# SRI International Corp., Menlo Park, Calif.
SPECIFYING AND VERIFYING ULTRA-RELIABILITY AND FAULT-TOLERANCE PROPERTIES Final Report

R. L. SCHWARTZ and P. M. MELLIAR-SMITH *In its Invest., Develop., and Evaluation of Performance Proving for Fault-Tolerant Computers* p 37-47 Aug. 1983 refs (Contract NAS1-15528)

Avail: NTIS HC A23/MF A01 CSCL 09B

A methodology to rigorously verify ultrareliability and fault tolerance system properties is described. The methodology utilizes a hierarchy of formal mathematical specifications of system design and incremental design proof to prove the system has the desired properties. A small example of the approach is given, and the application of the methodology to the large scale proof of SIFT, a fault tolerant flight control operating system, is discussed. Author

N84-25322*# SRI International Corp., Menlo Park, Calif.
THE USE OF A FORMAL SIMULATOR TO VERIFY A SIMPLE REAL TIME CONTROL PROGRAM Final Report

R. S. BOYER, M. W. GREEN, and J. S. MOORE *In its Invest., Develop. and Evaluation of Performance Proving for Fault-Tolerant Computers* p 521-531 Aug. 1983 refs Previously announced as N84-12745

Avail: NTIS HC A23/MF A01 CSCL 09B

The authors present an initial and elementary investigation of the formal specification and mechanical verification of programs that interact with environments. They describe a mechanical proof that a simple, real time control program keeps a vehicle on a straightline course in a variable crosswind. To formalize the specification they define a mathematical function which models the interaction of the program and its environment. They then state and proved two theorems about this function: the simulated vehicle never gets farther than three units away from the intended course, and it comes to the course if the wind ever remains steady for at least four sampling units. GRA (IAA)

N84-25871# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).
ROBUSTNESS QUANTIFICATION FOR NONLINEAR SAMPLED-DATA SYSTEMS WITH DYNAMIC MULTIPLICATIVE PERTURBATIONS

Y. JOANNIC and O. MERCIER *In its La Rech. Aerospaciale, Bimonthly Bull., No. 1983-6, 217/Nov.-Dec. p 1-16 Apr. 1984 refs*

Avail: NTIS HC A04/MF A01; HC available at ONERA, Paris FF 55; original report in FRENCH available at ONERA, Paris FF 60

Feedback control gains are always computed on the basis of a nominal or average condition for the controlled system. Yet this system is subjected to model variations or mismatches which, combining with attenuation and phase shifts caused by actuators and measuring units, may destabilize the overall regulation. For a given regulator, quantification of admissible perturbations or verifications of a residual stability margin, while accounting for dynamic multiplicative perturbations in the feedback loops, are of extreme importance for the design of multivariable flight controllers of advanced aircraft, whose dynamics are both strongly nonlinear and variable from one point to another of the flight domain. A discrete-time nonlinear system is considered which is subjected to dynamic additive and multiplicative disturbances, the latter kind being modelled by convolution operators (described by transfer matrices in z). Starting with a stability theorem, extending Lyapunov's theory to recurrent systems with convolution operators,

structural robustness theorems are established, allowing quantitative measurement of stability margins. More specific results are given with respect to linear-quadratic regulators: they permit evaluation of the multivariable gain and phase margins, in the discrete frequency domain. Altogether, they complement other recently obtained results, dealing with continuous-time feedback control systems. M.G.

N84-26374# Societe Nationale Industrielle Aerospaciale, Marignane (France.) Helicopter Div.

SINGLE-PILOT IFR FLIGHTS AND OPERATIONS

P. LORANCHET 1983 6 p Presented at the AAAF 9th European Rotorcraft and Powered Lift Aircraft Forum, Stresa, Italy, 13-15 Sep. 1983

(SNIAS-832-210-103) Avail: NTIS HC A02/MF A01

The operational, technical, and human features specific to the single pilot Instrument Flight Rules (IFR) are investigated. Problem solving methods are examined. The results of a pilot questionnaire on single pilot IFR are presented. M.A.C.

16

PHYSICS

Includes physics (general); acoustics; atomic and molecular physics; nuclear and high-energy physics; optics; plasma physics; solid-state physics; and thermodynamics and statistical physics.

A84-34173

TOWARDS A BETTER UNDERSTANDING OF HELICOPTER EXTERNAL NOISE [VERS UNE MEILLEURE COMPREHENSION DU BRUIT EXTERNE DE L'HELICOPTERE]

A. DAMONGEOT, F. DAMBRA, and B. MASURE (Societe Nationale Industrielle Aerospaciale, Division Helicopteres, Marignane, Bouches-du-Rhone, France) *L'Aeronautique et l'Astronautique (ISSN 0001-9275), no. 104, 1984, p. 29-44. In French. refs*

The problem of total helicopter noise generation is examined in the context of regulations determined by the ICAO. Flyover, takeoff, and approach are considered, as well as the following noise sources: rotor rotational noise (thickness noise, airload noise, quadrupolar noise), engine noise, and broadband noise. Assessment methods include narrow band analysis of ground microphone recordings, and ground measurements of engine noise. During flyover, the rotor rotational noise of the AS 332 Super-Puma is found to be insignificant compared to engine noise, and consequently, another source of broadband type is required to explain total helicopter noise. The sensitivity of radiated noise level to design parameters is covered, and recommendations for reducing overall noise in flyover and approach are presented (e.g., thickness-tapered, chord-tapered, swept-back blade tips). C.M.

A84-34718

ON THE PROPAGATION OF SOUND IN NOZZLES OF VARIABLE CROSS-SECTION CONTAINING LOW MACH NUMBER MEAN FLOW

L. M. B. C. CAMPOS *Zeitschrift fuer Flugwissenschaften und Weltraumforschung (ISSN 0342-068X), vol. 8, Mar.-Apr. 1984, p. 97-109. refs*

Acoustic propagation in nozzles is investigated analytically, taking amplitude, phase, and filtering effects of nonuniform cross section and associated acceleration and deceleration of the mean flow into account. The case of the ID longitudinal acoustic mode in a low-Mach-number flow is considered, and a nozzle wave operator and associated differential wave invariant are developed to generalize both horn and constricted wave operators. An approximate solution in the WKB limit for a nozzle of slowly varying cross section and an exact solution for an exponential nozzle are obtained, and the modified WKB and exact solutions are compared in graphs and tables. It is shown that the WKB calculation is adequate for determining sound level, acoustic velocity, and

pressure amplitude but not for evaluating phase and interference effects. T.K.

A84-34746* National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.
PROPAGATION AND RADIATION OF SOUND FROM FLANGED CIRCULAR DUCTS WITH CIRCUMFERENTIALLY VARYING WALL ADMITTANCES. I SEMI-INFINITE DUCTS. II - FINITE DUCTS WITH SOURCES

C. R. FULLER (NASA, Langley Research Center, Hampton, VA) Journal of Sound and Vibration (ISSN 0022-460X), vol. 93, April 8, 1984, p. 321-351. Research supported by the National Research Council. refs

Sound propagation in infinite, semiinfinite, and finite circular ducts with circumferentially varying wall admittances is investigated analytically. The infinite case is considered, and an example demonstrates the effects of wall-admittance distribution on dispersion characteristics and mode shapes. An exact solution is obtained for the semiinfinite case, a circular duct with a flanged opening: sidelobe suppression and circumferential-mode energy scattering leading to radiated-field asymmetry are found. A finite duct system with specified hard-walled pressure sources is examined in detail, evaluating reflection coefficients, transmission losses, and radiated-field directivity. Graphs and diagrams are provided, and the implications of the results obtained for the design of aircraft-turbofan inlet liners are discussed. T.K.

N84-25422*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.
EFFECTS OF SIMULATED FLIGHT ON THE STRUCTURE AND NOISE OF UNDEREXPANDED JETS

T. D. NORUM and J. G. SHEARIN May 1984 32 p refs (NASA-TP-2308; L-15760; NAS 1.60:2308) Avail: NTIS HC A03/MF A01 CSCL 20A

Mean plume static and pitot pressures and far-field acoustic pressure were measured for an underexpanded convergent nozzle in simulated flight. Results show that supersonic jet mixing noise behaves in flight in the same way that subsonic jet mixing noise does. Regarding shock-associated noise, the frequencies of both screech and peak broadband shock noise were found to decrease with flight speed. The external flow determines the dominant screech mode over a wide range of nozzle pressure ratios. Change in the screech mode strongly affects both the development of the downstream shock structure and the characteristic frequency of the broadband shock-associated noise. When no mode change occurs, the main effect of the external flow is to stretch the axial development of the shock cells. Author

N84-25425*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.
INSTALLATION NOISE MEASUREMENTS OF MODEL SR AND CR PROPELLERS

P. J. W. BLOCK May 1984 103 p refs (NASA-TM-85790; NAS 1.15:85790) Avail: NTIS HC A06/MF A01 CSCL 20A

Noise measurements on a 0.1 scale SR-2 propeller in a single and counter rotation mode, in a pusher and tractor configuration, and operating at non-zero angles of attack are summarized. A measurement scheme which permitted 143 measurements of each of these configurations in the Langley 4- by 7-meter low speed tunnel is also described. A.R.H.

N84-25426*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

ACOUSTIC MEASUREMENTS OF A FULL-SCALE ROTOR WITH FOUR TIP SHAPES. VOLUME 2: APPENDICES C, D, E AND F
 M. MOSHER Apr. 1984 347 p refs (NASA-TM-85878-VOL-2; A-9602-VOL-2; NAS 1.15:85878-VOL-2) Avail: NTIS HC A15/MF A01 CSCL 20A

A full scale helicopter with four different blade tip geometries is tested in a 40- by 80-foot wind tunnel. Performance, loads, and noise are measured. The four tip shapes tested were rectangular, tapered, swept, and swept/tapered. The noise data include

measurements of the sound pressure levels in decibels dB, decibels adjusted dBA, and tone-corrected PNdB, for all of the conditions tested. Also included are the detailed measurements, 1/3 octave spectra and time histories for some selected data, and plots of dBA as function of test condition. Some performance measurements are included to aid interpretation of the noise data. M.A.C.

N84-25429# Bolt, Beranek, and Newman, Inc., Canoga Park, Calif.

A COMPARISON OF MEASURED TAKE-OFF AND FLYOVER SOUND LEVELS FOR SEVERAL GENERAL AVIATION PROPELLER-DRIVEN AIRCRAFT Final Report

J. F. WILBY and E. G. WILBY Feb. 1984 137 p (Contract DTFA01-83-P-81230) (AD-A139901; BBN-5450; FAA-EE-84-9) Avail: NTIS HC A07/MF A01 CSCL 20A

The Federal Aviation Administration is currently reviewing noise certification procedures for general aviation propeller-driven aircraft. As part of this review noise measurements were made for take-offs and flyovers of several propeller-driven aircraft at Dulles International Airport. The data from the tests were analyzed by FAA in terms of the A-weighted sound level. This analysis indicated that there were general differences between take-off and flyover sound levels. The intent of this report is to present a review of the data without going into detailed analyses. Possible reasons for differences between take-off and flyover sound levels are explored and certain conclusions drawn. Recommendations are then made for future work in order to provide a more-detailed understanding of the physical phenomena involved. GRA

N84-25430# Federal Aviation Administration, Washington, D.C. Office of Environment and Energy.

NOISE MEASUREMENT FLIGHT TEST: DATA/ANALYSES BELL 222 TWIN JET HELICOPTER

J. S. NEWMAN, E. J. RICKLEY, T. L. BLAND, and S. A. DABOIN Feb. 1984 215 p (AD-A139906; FAA-EE-84-1) Avail: NTIS HC A10/MF A01 CSCL 20A

This report contains documentary sections describing the acoustical characteristics of the subject helicopter and provides analyses and discussions addressing topics ranging from acoustical propagation to environmental impact of helicopter noise. The report is the first in a series of seven documenting the FAA helicopter noise measurement program conducted at Dulles International Airport during the summer of 1983. The Bell 222 test program involved the acquisition of detailed acoustical, position and meteorological data. This test program was designed to address a series of objectives including: (1) evaluation of 'Fly Neighborly' (minimum noise) operating procedures for helicopters, (2) acquisition of acoustical data for use in heliport environmental impact, (3) documentation of directivity characteristics for static operation of helicopters, (4) establishment of ground-to-ground and air-to-ground acoustical propagation relationships for helicopters, (5) determination of noise event duration influences on energy dose acoustical metrics, (6) examination of the differences between noise measured by surface mounted microphone and a microphone mounted at a height of four feet (1.2 meters), and (7) documentation of noise levels acquired using international helicopter noise certification test procedures. GRA

N84-26382*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

NOISE GENERATED BY A PROPELLER IN A WAKE

P. J. W. BLOCK May 1984 65 p refs (NASA-TM-85794; NAS 1.15:85794) Avail: NTIS HC A04/MF A01 CSCL 20A

Propeller performance and noise were measured on two model scale propellers operating in an anechoic flow environment with and without a wake. Wake thickness of one and three propeller chords were generated by an airfoil which spanned the full diameter of the propeller. Noise measurements were made in the relative near field of the propeller at three streamwise and three azimuthal

positions. The data show that as much as 10 dB increase in the OASPL results when a wake is introduced into an operating propeller. Performance data are also presented for completeness.

Author

N84-26385# European Space Agency, Paris (France).
PROPELLER NOISE AT SUBSONIC BLADE TIP SPEEDS, TORQUE AND THRUST FORCE

R. STUFF Nov. 1983 84 p refs Transl. into ENGLISH of "Propellerlaerm bei unterschallblattspitzenmachzahlen umfangskraft und axialkraft" rept. DFVLR-Mitt-82-17 DFVLR, Goettingen, West Germany, Oct. 1982 Original language document announced as N83-31425

(ESA-TT-821; DFVLR-MITT-82-17) Avail: NTIS HC A05/MF A01; original German report available from DFVLR, Cologne DM 27,90

A detailed investigation of the generation of sound and noise arising from propeller blade forces was made. Use is made of an acceleration potential in the mathematical treatment. Analytical solutions are obtained for the sound field of a propeller in yaw with asymmetric disk loading.

Author

N84-26386# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

CONTRIBUTION TO THE STUDY OF LIGHT AIRCRAFT PROPELLER NOISE Ph.D. Thesis - Univ. de Technologie de Compeigne

H. GOUNET 1982 122 p refs In FRENCH; ENGLISH summary Report will also be announced as ESA-TT-865

(AD-B073101; ONERA-NT-1982-8; ISSN-0078-3781; ESA-TT-865) Avail: NTIS HC A06/MF A01 CSCL 20A

A propeller noise prediction program was developed; a numerical application was made in order to determine the parameters acting on the tone acoustic level. The emitted noise is essentially caused by the mean load on the blades and the tip rotation Mach number is the major parameter of the acoustic emission. These results were confirmed by flight measurements. An assessment method for the acoustic field emitted by a propeller derived from charts was reviewed in order to determine its ability for the prediction study of light aircraft propeller noise. With a view to predicting the perceived acoustic levels under acoustic certification conditions for light aircraft, ground reflection phenomena of sound waves were studied and incorporated in the computation model.

Author

N84-26387# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

COMPUTATION OF NOISE RADIATING FROM A FREE JET PERPENDICULAR TO ITS AXIS VIA LASER ANEMOMETRY MEASUREMENTS

J. MAULARD and G. ELAIS 1983 53 p refs In FRENCH; ENGLISH summary Report will also be announced as ESA-TT-870

(ONERA-NT-1983-6; ISSN-0078-3781; ESA-TT-870) Avail: NTIS HC A04/MF A01

A model for the acoustic radiation of a cylindrical free jet in a direction perpendicular to its axis of symmetry is presented. This model is based on Lighthill's equation but with a simplified source term. A number of aerodynamic parameters derived from experience are included. They relate in particular to the power spectral densities associated with (a) the fluctuations of the velocity component which is perpendicular to the jet axis and (b) the fluctuations of the squared value of this velocity component. These velocity spectra have been measured by means of laser anemometry and are expressed by an empirical formula which covers all the various results obtained in the effective acoustic field of the jet. The theoretical expression of the radiated acoustic field as derived from the model and including the measured aerodynamic parameters has been computed. This expression does not rely on any empirical coefficient to match the calculated values and the acoustic measurements. For cold as well as hot jets, both sub and supersonic (if the mixing noise only is considered), a good agreement is achieved between theory and experiment

not only for the overall acoustic field but also for its power spectra density.

Author

N84-26388# Societe Nationale Industrielle Aerospatiale, Marignane (France.) Helicopter Div.

TOWARDS A BETTER UNDERSTANDING OF HELICOPTER EXTERNAL NOISE

A. DAMONGEOT, F. DAMBRA, and B. MASURE 1983 15 p refs Presented at the 39th Ann. Am. Helicopter Soc. Forum, St. Louis, 9-11 May 1983

(SNIAS-832-210-113) Avail: NTIS HC A02/MF A01

A survey of all noise sources which contribute to total external noise of an helicopter is first attempted. This survey is carried out in the frame of the flight configurations (flyover, take off, approach) settled by ICAO for noise regulation. Noise sources considered are: rotor rotational noise (thickness noise, airload noise, quadrupolar noise), engine noise, rotor broadband noise. Noise source levels are assessed through (1) narrow band analysis of ground microphone recordings (2) ground measurements of engine noise (3) theoretical means. The rather quiet AS 332 Super-Puma is taken as an example and ICAO annoyance noise unit (PNLdB) is used. Sensitivity of radiated noise level to design parameters is dealt with and some recommendations are suggested in order to reduce the overall noise level in flyover and approach. In particular, thickness-tapered, chord-tapered, swept-back blade tips appear as a good means to reduce the noise in these two flight configurations as it derives from flight measurements carried out on four Aerospatiale helicopters.

Author

17

SOCIAL SCIENCES

Includes social sciences (general); administration and management; documentation and information science; economics and cost analysis; law and political science; and urban technology and transportation.

N84-25525# International Trade Administration, Washington, D.C. Industry Analysis Div.

COMPETITIVE ASSESSMENT OF THE U.S. CIVIL AIRCRAFT INDUSTRY Final Report

Mar. 1984 192 p refs (PB84-154913) Avail: NTIS HC A09/MF A01 CSCL 05C

The future international competitiveness of the U.S. civil aircraft industry is examined in terms of its principal businesses: large transport, commuter, business and helicopter aircraft. There is no single view of how the U.S. large transport aircraft business may fare in the 1990s in competition with the European Airbus and a potential, independent entry from Japan. U.S. international competitiveness depends on the performance of an interaction among an array of economic, market and technological variables. The United States does not have an independent entry in the larger commuter aircraft market, a market whose size continues to grow. Future U.S. international competitiveness in this business is expected to remain weak. U.S. business aircraft and helicopter businesses are challenged by strong foreign competition, and imports now account for a significant share of the U.S. market.

GRA

N84-25526# Committee on Science and Technology (U. S. House).

THE 1985 NASA AUTHORIZATION

Washington GPO 1984 82 p Hearing before the Subcomm. on Transportation, Aviation and Mater. of the Comm. on Sci. and Technol., 98th Congr., 2d Sess., no. 69, 9 Feb. 1984 (GPO-31-453) Avail: Subcommittee on Transportation, Aviation and Materials

Budget requirements and appropriations for NASA research programs are examined. Current structures, aerodynamics,

propulsion systems, flight controls, rotorcraft, and high performance aircraft research projects are discussed with particular emphasis on cost effectiveness and technological advancement. M.A.C.

N84-25529# Committee on Science and Technology (U. S. House).

FUTURE OF AERONAUTICS

Washington GPO 1984 144 p Hearings before the Subcomm. on Transportation, Aviation and Mater. of the Comm. on Sci. and Technol., 98th Congr., 1st Sess., no. 52, 5 Dec. 1983 (GPO-29-744) Avail: Subcommittee on Transportation, Aviation and Materials

Topics relevant to the long term research and development goals for aeronautics are discussed. Subjects include general information on certain NASA and DOD projects, civil aviation, vertical takeoff aircraft, aircraft control systems, aircraft construction materials, and aerodynamic configurations through computer aided design. Current developments in civil aviation as well as future research plans are outlined by representatives of the aviation industry. M.A.C.

N84-25531# Committee on Appropriations (U. S. House).

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

In its Dept. of Housing and Urban Develop.-Independent Agencies Appropriation Bill, 1985 p 33-38 Washington GPO 1984

Avail: US Capitol, House Document Room

The appropriations for the National Aeronautics and Space Administration are described. The research and development account includes funding for the space station and various programs involving the application of space capabilities in remote sensing of land resources, ocean and atmospheric conditions; materials processing; and communications. In the area of space science it includes projects designed to explore the solar system and expand man's knowledge of the universe. Also included under this heading are development programs involving aeronautics technology which support the civilian and military capability of the United States in the area of airframe and engine manufacturing. M.G.

N84-26430 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany). Abt. Wissenschaftliche-Technische Information.

TECHNICAL AND SCIENTIFIC PUBLICATION 1983: RESEARCH AND DEVELOPMENT [TECHNISCHE WISSENSCHAFTLICHE VEROEFFENTLICHEN 1983: FORSCHUNG UND ENTWICKLUNG]

1983 360 p refs In ENGLISH and GERMAN

Avail: Issuing Activity

Research and development in science and technology are reported. Topics discussed include: materials science and materials handling in aerospace engineering; transport aircrafts; rotary wings; space transportation, and computer techniques; defense technology; and civil engineering.

N84-26455# Office National d'Etudes et de Recherches Aeronautiques, Paris (France).

THE ONERA AERONAUTICS RESEARCH ESTABLISHMENT IN CANNES (FRANCE) [L'ESTABLISSEMENT ONERA DE CANNES AU SERVICE DE LA RESEARCH AERONAUTIQUE]

A. BEVERT 1983 116 p refs In FRENCH Report will also be announced as ESA-TT-875

(ONERA-P-1983-2; ISSN-0078-379X) Avail: NTIS HC A06/MF A01

The origins, characteristics, equipment, and first tests conducted at the wind tunnel in Cannes are reviewed as well as historical reasons for its location in that city. Further evolution of equipment and the types of tests conducted are described. Research themes include: wing bending; high lift by internal and external blowing; ground effect; vertical takeoff and landing aircraft; ground effect vehicles; supersonic transport aircraft; aircraft with variable bending; the European Airbus; and aerodynamics and active control.

Transl. by A.R.H.

N84-26484*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

REAL-TIME SIMULATION OF AN AUTOMOTIVE GAS TURBINE USING THE HYBRID COMPUTER Final Report

W. COSTAKIS and W. C. MERRILL May 1984 26 p (Contract DE-AI01-77CS-51040)

(NASA-TM-83593; E-1994; DOE/NASA/51040-52; NAS 1.15:83593) Avail: NTIS HC A03/MF A01 CSCL 13F

A hybrid computer simulation of an Advanced Automotive Gas Turbine Powertrain System is reported. The system consists of a gas turbine engine, an automotive drivetrain with four speed automatic transmission, and a control system. Generally, dynamic performance is simulated on the analog portion of the hybrid computer while most of the steady state performance characteristics are calculated to run faster than real time and makes this simulation a useful tool for a variety of analytical studies. Author

19

GENERAL

N84-25602*# National Aeronautics and Space Administration, Washington, D. C.

ASTRONAUTICS AND AERONAUTICS, 1976. A CHRONOLOGY

E. H. RITCHIE 1984 392 p

(NASA-SP-4021; NAS 1.21:4021) Avail: NTIS HC A17/MF A01 CSCL 05D

A chronology of events concerning astronautics and aeronautics for the year 1976 is presented. Some of the many and varied topics include the aerospace industry, planetary exploration, space transportation system, defense department programs, politics, and aerospace medicine. The entries are organized by the month and presented in a news release format. M.A.C.

N84-26564*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.


LANGLEY AERONAUTICS AND SPACE TEST HIGHLIGHTS, 1983

Jun. 1984 80 p

(NASA-TM-85806; NAS 1.15:85806) Avail: NTIS HC A05/MF A01 CSCL 05B

The role of the Langley Research Center is to perform basic and applied research necessary for the advancement of aeronautics and space flight, to generate new and advanced concepts for the accomplishment of related national goals, and to provide research advice, technological support, and assistance to other NASA installations, other government agencies, and industry. Some of the significant tests which were performed during calendar year 1983 in Langley test facilities, a number of which are unique in the world are highlighted. Both the broad range of the research and technology activities at the Langley Research Center and the contributions of this work toward maintaining United States leadership in aeronautics and space research are illustrated. R.J.F.

Typical Subject Index Listing

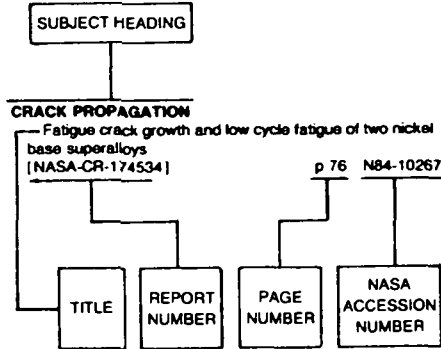

The subject heading is a key to the subject content of the document. The title is used to provide a description of the subject matter. When the title is insufficiently descriptive of the document content, the title extension is added, separated from the title by three hyphens. The (NASA or AIAA) accession number and the page number are included in each entry to assist the user in locating the abstract in the abstract section. If applicable, a report number is also included as an aid in identifying the document. Under any one subject heading, the accession numbers are arranged in sequence with the AIAA accession numbers appearing first.

A

A-10 AIRCRAFT

Evaluation of benefits of the A-10/TF34 Turbine Engine Monitoring System Squadron Integration Program [AIAA PAPER 84-1414] p 603 A84-35208

A-7 AIRCRAFT

Reconfigurable digital control laws for the A-7D DIGITAC 2 aircraft with failed primary control surfaces [AFIT/GE/EE/82D-59] p 610 N84-24535

ABSORPTANCE

Comparison of JFTOT (Jet Fuel Thermal Oxidation Tester) and absorbance methods for determining jet fuel thermal stability [AD-A138673] p 616 N84-24825

ACCUMULATORS

Spacelab 4: Primate experiment support hardware p 624 N84-25092

ACCURACY

Improvement of the accuracy of Doppler direction finders for general aviation by spectral signal analysis --- German thesis p 590 A84-35694
Spacelab 4: Primate experiment support hardware p 624 N84-25092

ACOUSTIC DUCTS

Propagation and radiation of sound from flanged circular ducts with circumferentially varying wall admittances. I Semi-infinite ducts. II - Finite ducts with sources p 631 A84-34746

ACOUSTIC EXCITATION

Large deflection multimode response of clamped rectangular panels to acoustic excitation, volume 1 [AD-A139622] p 624 N84-25107

ACOUSTIC IMPEDANCE

Propagation and radiation of sound from flanged circular ducts with circumferentially varying wall admittances. I Semi-infinite ducts. II - Finite ducts with sources p 631 A84-34746

ACOUSTIC MEASUREMENT

Estimation of the flight parameters of low flying aircraft using the radiated noise [LFD-211] p 595 N84-24569

ACOUSTIC NOZZLES

On the propagation of sound in nozzles of variable cross-section containing low Mach number mean flow p 630 A84-34718

ACOUSTIC PROPERTIES

Operational and Performance Measurement on Engines in Sea Level Test Facilities [AGARD-LS-132] p 612 N84-25723
Aero/thermodynamic and acoustic considerations in the design of test-beds for turbojets and turbofans p 612 N84-25725

ACTIVE CONTROL

A numerical study of the controlled flow tunnel for a high lift model [NASA-CR-166572] p 584 N84-25642

ACTUATORS

Inherent problems in designing two-failure tolerant electromechanical actuators p 624 N84-25088
Safety recommendation: Cessna Model 402C airplane, September 5, 1983, Tampa International Airport, Tampa, Florida p 589 N84-25680
Digital control of flight simulator motion base actuator [ARL-SYS-TM-69] p 613 N84-25732

ADAPTIVE CONTROL

An adaptive array processor with a perturbation algorithm --- for aircraft radio navigation p 592 A84-36291

AERIAL EXPLOSIONS

Effects of airblast atomizer design upon spray quality p 622 N84-24744

AEROACOUSTICS

On the propagation of sound in nozzles of variable cross-section containing low Mach number mean flow p 630 A84-34718

AERODYNAMIC BALANCE

Rotary balance data for a typical single-engine general aviation design for an angle-of-attack range of 20 to 90 deg. 3: Influence of control deflection on predicted model D spin modes [NASA-CR-3248] p 584 N84-25641

AERODYNAMIC CHARACTERISTICS

Application of computational aerodynamics to airplane design p 594 A84-34452
Aerodynamics of pointed forebodies at high angles of attack p 574 A84-34461
Numerical solution of viscous flow around arbitrary airfoils in a straight cascade p 579 A84-35340
Numerical predictions of internal flows using a diagonalized flux vector splitting algorithm [AIAA PAPER 84-1246] p 580 A84-35653
Hang gliding --- Russian book p 580 A84-35682
Hysteresis of supersonic separated flows p 580 A84-35734

Multivariable control laws for the AFTI/F-16 [AFIT/GE/EE/83S-4] p 609 N84-24531

The effect of perforation on the aerodynamics of a spoiler [BU-286] p 582 N84-24545

The aerodynamic effects of cavities in a body [BU-289] p 582 N84-24547

The structural and aerodynamic behaviour of a semi-inflatable wing [BU-297] p 596 N84-24574

An aerodynamic study of combustion in the combustion chambers of turbomachines: Experimental and theoretical approaches p 608 N84-24764

Special Course on V/STOL Aerodynamics [AGARD-R-710] p 573 N84-25625

An investigation of aerodynamic characteristics of wings having vortex flow using different numerical codes [NASA-CR-173596] p 584 N84-25639

Reynolds number effects on pressure loss and turbulence characteristics of four tube-bundle heat exchangers [NASA-TM-85807] p 585 N84-25645

Aerodynamic characteristics of fan-jet STOL aircraft [NAL-TR-790] p 586 N84-25651

A technique for optimizing the aerodynamic design of a generalized combat aircraft with forward swept wings for the purposes of stability and control investigation [CA-8325] p 598 N84-25700

The development of the Navy variant of the Dauphin 2 helicopter [SNIAS-832-210-106] p 599 N84-25706

Computation of noise radiating from a free jet perpendicular to its axis via laser anemometry measurements [ONERA-NT-1983-6] p 632 N84-26387

Vortex flap system for thin wings [MBB-FE-122/S/PUB/102] p 587 N84-26435

AERODYNAMIC COEFFICIENTS

Measurements of ground effect for delta wings p 575 A84-34466

Calculation of aerodynamic characteristics of wings with thickness and camber by a new method based on the modified vortex lattice method [TAE-493] p 584 N84-25640

AERODYNAMIC CONFIGURATIONS

Flow visualization as an aerodynamic diagnostic tool p 618 A84-33850

On the aerodynamic optimization of supersonic wings --- Thesis p 575 A84-34500

Mesh generation strategies for CFD on complex configurations p 578 A84-35328

Numerical solution of the Euler equation for a compressible flow problem p 579 A84-35354

Aeropropulsive characteristics of nonaxisymmetric-nozzle thrust reversers at Mach numbers from 0 to 1.20 [NASA-TP-2306] p 581 N84-24538

An investigation into the nature and control of vortex flow round helicopter upsweep [BU-285] p 582 N84-24544

The aerodynamic effects of cavities in a body [BU-289] p 582 N84-24547

Tandem fan applications in advanced STOVL fighter configurations [NASA-TM-83689] p 605 N84-24579

Acoustic measurements of a full-scale rotor with four tip shapes. Volume 2: Appendices C, D, E and F [NASA-TM-85878-VOL-2] p 631 N84-25426

Application of an optimization method to high performance propeller designs [NASA-TM-83710] p 572 N84-25607

The influence of V/STOL on wing design and tailplane design p 597 N84-25627

A technique for optimizing the aerodynamic design of a generalized combat aircraft with forward swept wings for the purposes of stability and control investigation [CA-8325] p 598 N84-25700

Towards a better understanding of helicopter external noise [SNIAS-832-210-113] p 632 N84-26388

AERODYNAMIC DRAG

Air-ice drag coefficients for first-year sea ice derived from aircraft measurements p 628 A84-34508

AERODYNAMIC FORCES

On the convergence of unsteady generalized aerodynamic forces p 574 A84-34460

Doublet point method for calculations on oscillatory lifting surfaces. Part 2: Supersonic flow [NAL-TR-785-PT-2] p 586 N84-25649

A theoretical analysis of the aerodynamic and structural forces associated with a ribbon parachute canopy in steady descent p 587 N84-25671

Operation and performance measurement on engines in sea-level test facilities: Introduction and general survey p 612 N84-25724

AERODYNAMIC INTERFERENCE

Two-dimensional wind-tunnel interference from measurements on two contours p 574 A84-34459

Experimental investigation of wall interference and two-dimensionality of the flow in a transonic airfoil wind tunnel p 576 A84-35017

AERODYNAMIC LOADS

Effects of structural coupling on mistuned cascade flutter and response [ASME PAPER 83-GT-117] p 618 A84-33701

AERODYNAMIC NOISE

- Installation noise measurements of model SR and CR propellers
 [NASA-TM-85790] p 631 N84-25425
 Noise generated by a propeller in a wake
 [NASA-TM-85794] p 631 N84-26382
 Propeller noise at subsonic blade tip speeds, torque and thrust force
 [ESA-TT-821] p 632 N84-26385

AERODYNAMIC STABILITY

- Measurements of self-excited rotor-blade vibrations using optical displacements
 [ASME PAPER 83-GT-132] p 618 N84-33702
 Active suppression of aeroelastic instabilities for forward swept wings
 p 584 N84-25638
 Full scale wind tunnel tests on hang glider pilots
 [CA-8416] p 585 N84-25643
 A technique for optimizing the aerodynamic design of a generalized combat aircraft with forward swept wings for the purposes of stability and control investigation
 [CA-8325] p 598 N84-25700

AERODYNAMIC STALLING

- Engineering analysis of drooped leading-edge wings near stall
 p 575 N84-34468
 Modelling of an airfoil empirical flow field below and through dynamic stall
 p 576 N84-34832
 An investigation of three-dimensional stall development on NACA 23012 and NACA 0012 aerofoils
 [GU-AERO-8300] p 582 N84-24554

AERODYNAMICS

- Computation of the thrust vector of obliquely cut supersonic nozzles
 p 575 N84-34719
 Computational aerodynamics and design
 p 577 N84-35302
 The study of an idealized wing/body junction
 [AD-A139933] p 583 N84-24559
 Projects and programs as a reflection of the performances of engineers in aircraft making by Hans-Wocke
 [MBB-UT-24-83-O] p 572 N84-25608
 Jet flowfields
 p 583 N84-25631
 Notes on special flight aspects, such as STO, ski-jump and ODM
 p 598 N84-25637
 Nonlinear problems in flight dynamics
 [NASA-TM-85940] p 585 N84-25648
 The wind tunnel S2MA of the aerodynamic testing plant in Modene-Avrieux, France
 [ONERA-NT-1983-5] p 613 N84-25735
 The ONERA Aeronautics Research Establishment in Cannes (France)
 [ONERA-P-1983-2] p 633 N84-26455
 Langley aeronautics and space test highlights, 1983
 [NASA-TM-85806] p 633 N84-26564

AEROELASTICITY

- Effects of structural coupling on mistuned cascade flutter and response
 [ASME PAPER 83-GT-117] p 618 N84-33701
 Measurements of self-excited rotor-blade vibrations using optical displacements
 [ASME PAPER 83-GT-132] p 618 N84-33702
 Divergence boundary prediction from random responses - NAL's method --- aeroelastic instability boundary estimation for subcritical divergence cantilever wing model test
 p 619 N84-34463
 Aeroelastic optimization of axisymmetric circular cylindrical shells for supersonic flow
 p 619 N84-34722
 Flap-lag damping of an elastic rotor blade with torsion and dynamic inflow in hover from symbolically generated equations
 [AIAA PAPER 84-0989] p 619 N84-34909
 Use of composite materials for fabricating the anisotropic structure of a swept-forward wing required by aeroelasticity and strength considerations
 p 621 N84-35537
 Propulsive efficiency of an oscillating wing in supersonic flow
 p 580 N84-35736
 Flutter and forced response of mistuned rotors using standing wave analysis
 [NASA-CR-173555] p 606 N84-24586
 Active suppression of aeroelastic instabilities for forward swept wings
 p 584 N84-25638

AERONAUTICAL ENGINEERING

- Computational aerodynamics and design
 p 577 N84-35302
 Activities of the Aeronautics and Space Engineering Board Commission on Engineering and Technical Systems
 [NASA-CR-173529] p 613 N84-24600
 Future of aeronautics
 [GPO-29-744] p 633 N84-25529
 Astronautics and aeronautics, 1976. A chronology
 [NASA-SP-4021] p 633 N84-25602
 Review of aeronautical fatigue investigations in the Netherlands during the period March 1981 - February 1983
 [AD-B082166] p 627 N84-26057

AERONAUTICS

- General aviation activity and avionics survey
 [AD-A139936] p 571 N84-24536
 The ONERA Aeronautics Research Establishment in Cannes (France)
 [ONERA-P-1983-2] p 633 N84-26455

AEROSPACE ENGINEERING

- Astronautics and aeronautics, 1976. A chronology
 [NASA-SP-4021] p 633 N84-25602
 Projects and programs as a reflection of the performances of engineers in aircraft making by Hans-Wocke
 [MBB-UT-24-83-O] p 572 N84-25608
 La Recherche Aerospaciale, Bimonthly Bulletin, no. 1983-6, 217/November-December
 [ESA-TT-841] p 625 N84-25870
 The Airbus: The state-of-the-art today, and future developments
 [MBB-UT-22-83-O] p 599 N84-26437

AEROSPACE INDUSTRY

- Projects and programs as a reflection of the performances of engineers in aircraft making by Hans-Wocke
 [MBB-UT-24-83-O] p 572 N84-25608
 The industry's materials: SNIAS and general conditions of its environment
 [SNIAS-832-502-101] p 624 N84-25865

AEROSPACE MEDICINE

- Astronautics and aeronautics, 1976. A chronology
 [NASA-SP-4021] p 633 N84-25602

AEROSPACE SCIENCES

- Technical and scientific publication 1983: Research and development
 p 633 N84-26430

AEROSPACE SYSTEMS

- Future of aeronautics
 [GPO-29-744] p 633 N84-25529

AEROSPACE TECHNOLOGY TRANSFER

- Technical and scientific publication 1983: Research and development
 p 633 N84-26430

AEROSPACE VEHICLES

- Future of aeronautics
 [GPO-29-744] p 633 N84-25529

AEROTHERMODYNAMICS

- Turbulent heat transport in circular ducts with circumferentially varying heat flux
 p 622 N84-36151
 Hypersonic Aerothermodynamics
 [VKI-LS-1984-01] p 587 N84-25656
 Operational and Performance Measurement on Engines in Sea Level Test Facilities
 [AGARD-LS-132] p 612 N84-25723
 Aero/thermodynamic and acoustic considerations in the design of test-beds for turbojets and turbofans
 p 612 N84-25725

AIR COOLING

- Effects of pin shape and array orientation on heat transfer and pressure loss in pin fin arrays
 p 618 N84-33707

AIR DEFENSE

- Infra-red surveillance techniques for guided weapon systems
 p 622 N84-36298

AIR FLOW

- A review of internal combustion engine combustion chamber process studies at NASA Lewis Research Center
 [NASA-TM-83666] p 623 N84-24999
 Aero/thermodynamic and acoustic considerations in the design of test-beds for turbojets and turbofans
 p 612 N84-25725

AIR INTAKES

- An investigation into anti-swirl devices for s-shaped air intakes
 [BU-293] p 582 N84-24549
 Ground based testing without wind tunnels
 p 598 N84-25634

AIR NAVIGATION

- Problems in air navigation at the North Pole. II
 p 590 N84-35589
 Air navigation 1973-1983
 p 590 N84-35590
 Position updating using a passive millimeter wave sensor --- for low altitude air navigation
 p 591 N84-36263

AIR POLLUTION

- Axial flow compressor performance deterioration
 [AIAA PAPER 84-1208] p 601 N84-35133

AIR SEA ICE INTERACTIONS

- Air-ice drag coefficients for first-year sea ice derived from aircraft measurements
 p 628 N84-34508

AIR TRAFFIC CONTROL

- Time flies - The 4D flight management system
 p 609 N84-33847
 Air navigation 1973-1983
 p 590 N84-35590
 Minimum operational performance standards for traffic alert and collision avoidance system (TCAS) airborne equipment, volume 2
 [RTCA/DO-185-VOL-2] p 593 N84-25686
 Single-pilot IFR flights and operations
 [SNIAS-832-210-103] p 630 N84-26374

AIRBORNE EQUIPMENT

- Redundant color coding on airborne CRT displays
 p 599 N84-35899
 A 60 GHz collision warning sensor for helicopters
 p 600 N84-36262
 Airborne Self Protection Jammer - ASPJ/ALQ-165
 p 592 N84-36266
 Depolarisation properties of airborne radomes
 p 592 N84-36281
 New results of airborne measurements with a sensitive, high resolution 90 GHz radiometer - First results for an equivalent 140 GHz system
 p 600 N84-36287

AIRBORNE/SPACEBORNE COMPUTERS

- Development of the Engine Condition Monitoring System for the HH-65A helicopter
 [AIAA PAPER 84-1411] p 605 N84-35666
 Highly integrated digital engine control system on an F-15 airplane
 [NASA-TM-86040] p 606 N84-24587
 Investigation, development, and evaluation of performance proving for fault-tolerant computers
 [NASA-CR-166008] p 629 N84-25307
 STP: A mechanized logic for specification and verification
 p 629 N84-25308
 Specifying and verifying ultra-reliability and fault-tolerance properties
 p 630 N84-25309

AIRCRAFT ACCIDENT INVESTIGATION

- Safety recommendation(s) A-84-10 and -11
 p 589 N84-25676
 Safety recommendation(s) A-84-16
 p 589 N84-25679

AIRCRAFT ACCIDENTS

- System safety and the Coast Guard lighter-than-air system project
 [AD-A139807] p 588 N84-24564
 Annual review of aircraft accident data: US general aviation, 1980
 [PB84-182914] p 588 N84-25672
 Safety recommendation: Cessna Model 402C airplane, September 5, 1983, Tampa International Airport, Tampa, Florida
 p 589 N84-25680

AIRCRAFT ANTENNAS

- Electronically steerable SATCOM terminals for airborne use
 p 591 N84-36230
 Depolarisation properties of airborne radomes
 p 592 N84-36281
 An adaptive antenna for military aircraft communications
 p 592 N84-36292
 AIRCRAFT COMMUNICATION
 Design considerations and trade-offs in RPV communication links
 p 591 N84-36240
 An adaptive antenna for military aircraft communications
 p 592 N84-36292

AIRCRAFT COMPARTMENTS

- Cabin safety subject index
 [AD-A140409] p 590 N84-25683

AIRCRAFT CONFIGURATIONS

- Axisymmetric approach and landing thrust reverse concepts In-ground effects wind tunnel test results
 [AIAA PAPER 84-1215] p 601 N84-35134
 V/STOL wind-tunnel testing
 [NASA-TM-85936] p 571 N84-24528
 Special Course on V/STOL Aerodynamics
 [AGARD-R-710] p 573 N84-25625
 V/STOL concepts in the United States: Past, present, and future
 p 597 N84-25628
 Assessment of aerodynamic performance of V/STOL and STOVL fighter aircraft
 p 584 N84-25636

AIRCRAFT CONSTRUCTION MATERIALS

- Use of composite materials for fabricating the anisotropic structure of a swept-forward wing required by aeroelasticity and strength considerations
 p 621 N84-35537
 Survey lecture and special experiences in FRG --- carbon fiber composite structures for aerospace application
 [MBB-UD-410-83-OE] p 614 N84-35920
 Current requirements on specifications for corrosion prevention
 p 597 N84-25618
 The industry's materials: SNIAS and general conditions of its environment
 [SNIAS-832-502-101] p 624 N84-25865
 Nondestructive testing of composite structures
 [SNIAS-832-210-108] p 627 N84-26045

AIRCRAFT CONTROL

- Time flies - The 4D flight management system
 p 609 N84-33847
 An experimental investigation of VTOL flying qualities requirements in shipboard landings
 p 609 N84-34453
 Axisymmetric approach and landing thrust reverse concepts In-ground effects wind tunnel test results
 [AIAA PAPER 84-1215] p 601 N84-35134
 Multivariable control law theory
 p 609 N84-24530
 The use of a formal simulator to verify a simple real time control program
 p 630 N84-25322
 V/STOL maneuverability and control
 p 611 N84-25632

- La Recherche Aerospatiale, Bimonthly Bulletin, no. 1983-6, 217/November-December [ESA-TT-841] p 625 N84-25870
- Robustness quantification for nonlinear sampled-data systems with dynamic multiplicative perturbations p 630 N84-25871
- AIRCRAFT DESIGN**
- Evolution of the combat aircraft p 571 A84-34171
- Design and experimental verification of the USB flap panel structure for NAL-STOL research aircraft p 594 A84-34451
- Application of computational aerodynamics to airplane design p 594 A84-34452
- On the aerodynamic optimization of supersonic wings --- Thesis p 575 A84-34500
- USB applied to high-speed aircraft --- upper surface blowing p 595 A84-35024
- Tilt rotor concept examined p 595 A84-35025
- Aspects of advanced fighter engine design on the basis of equal technology [AIAA PAPER 84-1271] p 602 A84-35155
- History of solar flight [AIAA PAPER 84-1429] p 571 A84-35214
- Design of long-endurance unmanned airplanes incorporating solar and fuel cell propulsion [AIAA PAPER 84-1430] p 595 A84-35215
- Propane powered engine for long duration unmanned aircraft [AIAA PAPER 84-1431] p 603 A84-35216
- Measurement of fluid properties using rapid-double-exposure and time-average holographic interferometry [AIAA PAPER 84-1461] p 620 A84-35223
- Computational aerodynamics and design p 577 A84-35302
- Axisymmetric approach and landing thrust reversers for single engine fighters [AIAA PAPER 84-1214] p 604 A84-35652
- Aircraft structures (2nd edition) --- Book p 595 A84-35687
- Tandem fan applications in advanced STOVL fighter configurations [NASA-TM-83689] p 605 N84-24579
- Fast estimation of state feedback gain for the design of aircraft autopilots [GU-AERO-8305] p 610 N84-24596
- Astronautics and aeronautics, 1976. A chronology [NASA-SP-4021] p 633 N84-25602
- An advanced pitch change mechanism incorporating a hybrid traction drive [NASA-TM-83709] p 572 N84-25605
- Corrosion control requirements for UK military aircraft p 617 N84-25614
- Current procurement specification design requirements for US Navy aircraft p 596 N84-25615
- Current design requirements for corrosion control on helicopters p 597 N84-25616
- Design and manufacturing practices to minimize corrosion in aircraft p 597 N84-25620
- V/STOL concepts in the United States: Past, present, and future p 597 N84-25628
- Ground based testing without wind tunnels p 598 N84-25634
- Aerodynamics of V/STOL aircraft: Performance assessment p 584 N84-25635
- Assessment of aerodynamic performance of V/STOL and STOVL fighter aircraft p 584 N84-25636
- An investigation of aerodynamic characteristics of wings having vortex flow using different numerical codes [NASA-CR-173596] p 584 N84-25639
- Safety recommendations A-84-1 through -3 p 588 N84-25673
- Requirements, applications, and results of strapdown inertial technology to commercial airplanes p 593 N84-25695
- Evolution of a heave control system for an amphibious hovercraft [CAR-8401] p 624 N84-25864
- Radomes for flight vehicles p 625 N84-25920
- [AD-A140174] p 625 N84-25961
- Unsteady flow in turbomachinery: An overview p 625 N84-25961
- Numerical computation of vortical flows about wings p 587 N84-25987
- Ground and inflight operational effects of APU's [VFW-30/83-O] p 609 N84-26438
- AIRCRAFT DETECTION**
- Infra-red surveillance techniques for guided weapon systems p 622 A84-36298
- Estimation of the flight parameters of low flying aircraft using the radiated noise [LFD-211] p 595 N84-24569
- AIRCRAFT ENGINES**
- Strength calculation for an aviation GTE stator in axisymmetric deformation p 600 A84-34134
- Specification, design, and test of aircraft engine isolators for reduced interior noise p 601 A84-34455
- Axial flow compressor performance deterioration [AIAA PAPER 84-1208] p 601 A84-35133
- Counter-rotating intershaft seals for advanced engines [AIAA PAPER 84-1216] p 619 A84-35135
- Highly integrated digital engine control system on an F-15 airplane [AIAA PAPER 84-1259] p 602 A84-35149
- Regenerative Intercooled Turbine Engine (RITE) study [AIAA PAPER 84-1267] p 602 A84-35153
- Advanced turbofan concept with regenerator and inter-cooled compressor [AIAA PAPER 84-1270] p 602 A84-35154
- F/A-18A/F404 propulsion system integration [AIAA PAPER 84-1330] p 595 A84-35174
- Preliminary flight test results of the F100 EMD engine in an F-15 airplane [AIAA PAPER 84-1332] p 602 A84-35176
- Lessons learned in the development of a digital electronic engine control [AIAA PAPER 84-1335] p 602 A84-35177
- V/STOL engine development [AIAA PAPER 84-1337] p 603 A84-35178
- Design of a high-performance rotary stratified-charge research aircraft engine [AIAA PAPER 84-1395] p 603 A84-35204
- United Kingdom military engine monitoring experience [AIAA PAPER 84-1409] p 603 A84-35207
- Measuring turbine engine inlet total temperature problems and solutions [AIAA PAPER 84-1457] p 604 A84-35222
- Development of the Navy jet trainer duty cycle [AIAA PAPER 84-1486] p 604 A84-35232
- Steady and unsteady distorted inlet flow simulation for engine ground tests [AIAA PAPER 84-1490] p 577 A84-35234
- A linear multivariable dynamical model of supersonic inlet-engine combination [AIAA PAPER 84-1496] p 577 A84-35239
- Evaluation of single and counter rotation gearboxes for propulsion systems [AIAA PAPER 84-1195] p 604 A84-35651
- Future combat environments - Implications for the engine development process [AIAA PAPER 84-1339] p 605 A84-35659
- General aviation activity and avionics survey [AD-A139936] p 571 N84-24536
- An overview of NASA intermittent combustion engine research [NASA-TM-83668] p 606 N84-24583
- Status of understanding for bearing materials p 616 N84-25060
- Status of understanding for seal materials p 624 N84-25062
- Safety recommendations A-84-8 and -9, and A-84-17 through -20 p 589 N84-25675
- Safety recommendation(s) A-84-10 and -11 p 589 N84-25676
- Comparison of a propfan/turbofan engine by thermodynamic cycle calculation [ESA-TT-820] p 608 N84-25715
- Unsteady flow in turbomachinery: An overview p 625 N84-25961
- Ground and inflight operational effects of APU's [VFW-30/83-O] p 609 N84-26438
- AIRCRAFT EQUIPMENT**
- Chinook's trial by ice p 588 A84-35359
- First stage of equipment for aircraft Do 28 of DFVLR as a research aircraft for icing and first research results [DFVLR-FB-83-40] p 596 N84-24571
- Electrical subsystems flight test handbook [AD-A139783] p 596 N84-24576
- Emulation of a voice interactive Doppler navigation set [AD-A140204] p 593 N84-25687
- Advances in strapdown sensors p 593 N84-25693
- AIRCRAFT FUEL SYSTEMS**
- Alternative fuel deposit formation p 615 N84-24735
- Safety recommendation A-84-7 p 588 N84-25674
- AIRCRAFT FUELS**
- Combustion Problems in Turbine Engines [AGARD-CP-353] p 614 N84-24732
- Aviation fuel specification requirements: Their significance and future trends p 614 N84-24733
- Research on aviation fuel instability p 615 N84-24734
- Alternative fuel deposit formation p 615 N84-24735
- Combustor technology for broadened-properties fuels p 615 N84-24736
- Fuel effects on gas turbine combustion systems p 615 N84-24737
- Fuel character effects on performance of small gas turbine combustion systems p 607 N84-24738
- U.S. Army alternative gas-turbine fuels research: MERADCOM p 615 N84-24739
- Study of effects of fuel properties in turbine-powered business aircraft [NASA-CR-174627] p 617 N84-25854
- AIRCRAFT GUIDANCE**
- VTOL shipboard letdown guidance system analysis [NASA-CR-166519] p 611 N84-25716
- AIRCRAFT HAZARDS**
- Clouds and flight safety --- Russian book p 587 A84-33525
- Study of aerospace materials, coatings, adhesions and processes. Aircraft icing processes [AD-A139743] p 583 N84-24557
- System safety and the Coast Guard lighter-than-air system project [AD-A139807] p 588 N84-24564
- First stage of equipment for aircraft Do 28 of DFVLR as a research aircraft for icing and first research results [DFVLR-FB-83-40] p 596 N84-24571
- AIRCRAFT INDUSTRY**
- Evolution of the combat aircraft p 571 A84-34171
- Competitive assessment of the U.S. Civil aircraft industry [PB84-154913] p 632 N84-25525
- Design and manufacturing practices to minimize corrosion in aircraft p 597 N84-25620
- AIRCRAFT INSTRUMENTS**
- Improvement of the accuracy of Doppler direction finders for general aviation by spectral signal analysis --- German thesis p 590 A84-35694
- Infra-red laser velocimetry p 600 A84-36299
- Advances in strapdown inertial systems: Introduction and overview p 593 N84-25692
- AIRCRAFT LANDING**
- An experimental investigation of VTOL flying qualities requirements in shipboard landings p 609 A84-34453
- Axisymmetric approach and landing thrust reverser concepts In-ground effects wind tunnel test results [AIAA PAPER 84-1215] p 601 A84-35134
- The determination of visibility conditions at the final portion of a descent glide p 628 A84-35250
- Tactical battlefield aircraft still lack all weather landing systems p 591 A84-35863
- Tandem fan applications in advanced STOVL fighter configurations [NASA-TM-83689] p 605 N84-24579
- AIRCRAFT MAINTENANCE**
- Naval aviation IMA repair capability: A readiness to resources approach [AD-A140465] p 572 N84-25612
- Workshop on Requirements for Aircraft Corrosion Control [AGARD-R-714] p 573 N84-25613
- US Navy corrosion control maintenance p 573 N84-25619
- Corrosion control maintenance practices for Canadian aircraft p 573 N84-25621
- Methodology for assessment of corrosion costs p 573 N84-25623
- Safety recommendations A-84-8 and -9, and A-84-17 through -20 p 589 N84-25675
- Safety recommendations A-84-14 and -15 p 589 N84-25678
- AIRCRAFT MANEUVERS**
- High-gain error actuated flight control systems for continuous linear multivariable plants [AFIT/GAE/EE/82D-1] p 610 N84-24534
- System modeling and identification of equivalent systems with and without compensating time delay for control-augmented aircraft [DFVLR-FB-83-36] p 596 N84-24570
- V/STOL maneuverability and control p 611 N84-25632
- AIRCRAFT MODELS**
- Experimental determination of the natural modes of swept-wing models using laser holographic interferometry p 619 A84-35022
- F-14 scale model measurements. Part 1: External response [DE84-008201] p 583 N84-24562
- System modeling and identification of equivalent systems with and without compensating time delay for control-augmented aircraft [DFVLR-FB-83-36] p 596 N84-24570
- Design and implementation of input signals for identification of pilot/aircraft models [DFVLR-FB-84-08] p 599 N84-25709
- AIRCRAFT NOISE**
- Towards a better understanding of helicopter external noise p 630 A84-34173
- Aircraft noise control - Progress and prospects p 595 A84-34950
- A comparison of measured take-off and flyover sound levels for several general aviation propeller-driven aircraft [AD-A139901] p 631 N84-25429

- Noise measurement flight test: Data/Analyses Bell 222 twin jet helicopter p 631 N84-25430
 [AD-A139906] p 631 N84-25430
 The compressible aerodynamics of rotating blades using an acoustic formulation p 587 N84-25670
 Noise generated by a propeller in a wake [NASA-TM-85794] p 631 N84-26382
- AIRCRAFT PERFORMANCE**
 Dash 8 - de Havilland Canada's quiet performer p 588 A84-35361
 Aerodynamics of V/STOL aircraft: Performance assessment p 584 N84-25635
 Assessment of aerodynamic performance of V/STOL and STOVL fighter aircraft p 584 N84-25636
 Notes on special flight aspects, such as STO, ski-jump and ODM p 598 N84-25637
- AIRCRAFT PILOTS**
 Safety recommendation(s) A-84-16 p 589 N84-25679
 Helicopter Pilot/Copilot survival system [AD-A140358] p 590 N84-25682
- AIRCRAFT POWER SUPPLIES**
 Design of long-endurance unmanned airplanes incorporating solar and fuel cell propulsion [AIAA PAPER 84-1430] p 595 A84-35215
 Propane powered engine for long duration unmanned aircraft [AIAA PAPER 84-1431] p 603 A84-35216
- AIRCRAFT PRODUCTION**
 EDM in the aircraft industry --- Electrical Discharge Machining p 618 A84-33829
- AIRCRAFT RELIABILITY**
 Future combat environments - Implications for the engine development process [AIAA PAPER 84-1339] p 605 A84-35659
 A comparison of measured take-off and flyover sound levels for several general aviation propeller-driven aircraft [AD-A139901] p 631 N84-25429
- AIRCRAFT SAFETY**
 Crash for safety p 588 A84-35360
 System safety and the Coast Guard lighter-than-air system project [AD-A139807] p 588 N84-24564
 Safety recommendations A-84-8 and -9, and A-84-17 through -20 p 589 N84-25675
 Safety recommendations A-84-14 and -15 p 589 N84-25678
 Cabin safety subject index [AD-A140409] p 590 N84-25683
- AIRCRAFT STABILITY**
 On the stability of flight vehicles in the low Reynolds number non-linear regime [AD-A140008] p 583 N84-24561
- AIRCRAFT STRUCTURES**
 Aircraft structures (2nd edition) --- Book p 595 A84-35687
 Crack resistance of pressed and rolled semifinished products from aluminum alloys used in load-bearing units in aircraft wings p 614 A84-35724
 Survey lecture and special experiences in FRG --- carbon fiber composite structures for aerospace application [MBB-UD-410-83-OE] p 614 A84-35920
 Autoclave - Curing of extremely thin HM CFC-skins --- for fabrication of fiber composite aerospace structures [MBB-UD-409-83-OE] p 622 A84-35921
 Large deflection multimode response of clamped rectangular panels to acoustic excitation, volume 1 [AD-A139622] p 624 N84-25107
 Safety recommendations A-84-1 through -3 p 588 N84-25673
 Influence of the environment on the application and drying quality of organic paints --- aircraft structures [SNIAS-832-551-102] p 617 N84-25833
 Radomes for flight vehicles [AD-A140174] p 625 N84-25920
 Revisions to the PETROS 4 shell response code [AD-A140268] p 628 N84-26059
 On improving the fatigue performance of a double-shear lap joint [VFW-29/83-O] p 628 N84-26431
 Successful utilization of economic, light aluminum-casted structures in airplane construction [VFW-31/83-O] p 599 N84-26439
- AIRCRAFT SURVIVABILITY**
 Future combat environments - Implications for the engine development process [AIAA PAPER 84-1339] p 605 A84-35659
 Application of multifunction strapdown inertial system p 594 N84-25698
- AIRCRAFT WAKES**
 Wake visualization [BU-282] p 581 N84-24542
 Installation noise measurements of model SR and CR propellers [NASA-TM-85790] p 631 N84-25425
- Noise generated by a propeller in a wake [NASA-TM-85794] p 631 N84-26382
- AIRFOIL PROFILES**
 Profile drag from laser-Doppler velocimeter measurement p 575 A84-34467
 Experimental investigation of wall interference and two-dimensionality of the flow in a transonic airfoil wind tunnel p 576 A84-35017
 Sidewall boundary layer corrections in subsonic, two-dimensional airfoil/hydrofoil testing [AIAA PAPER 84-1366] p 620 A84-35195
 Numerical solution of viscous flow around arbitrary airfoils in a straight cascade p 579 A84-35340
- AIRFOILS**
 Computation of transonic flow around airfoils with trailing edge and shock/boundary layer interactions p 574 A84-34454
 Unsteady pressures and forces during transonic buffeting of a supercritical airfoil [AD-A133139] p 575 A84-34465
 Modelling of an airfoil empirical flow field below and through dynamic stall p 576 A84-34832
 Design of integrally damped compressor vanes [AIAA PAPER 84-0867] p 601 A84-34905
 Solution of three-dimensional time-dependent viscous flows p 621 A84-35352
 Calculation of transonic flow in a linear cascade [NASA-TM-83697] p 581 N84-24539
 An algorithm for the prediction of unsteady potential flow about an arbitrary aerofoil [GU-AERO-8306] p 582 N84-24553
 An investigation of three-dimensional stall development on NACA 23012 and NACA 0012 aerofoils [GU-AERO-8300] p 582 N84-24554
 The structural and aerodynamic behaviour of a semi-inflatable wing [BU-297] p 596 N84-24574
 Behavior of cascaded airfoils under conditions of high mean loading and flow unsteadiness [AD-A139799] p 607 N84-24592
 Introduction to unsteady flow in turbomachines p 625 N84-25962
- AIRFRAME MATERIALS**
 Carbon structures on the wing of the regional transport plane ATR-42 [SNIAS-832-111-113] p 598 N84-25704
 Composite materials: The user and the producer [SNIAS-832-111-108] p 617 N84-25772
 A thermal cycling test for the screening of space materials and processes [ESA-PSS-01-704-ISSUE-1] p 627 N84-26044
 Review of aeronautical fatigue investigations in the Netherlands during the period March 1981 - February 1983 [AD-B082166] p 627 N84-26057
- AIRFRAMES**
 A technique for optimizing the aerodynamic design of a generalized combat aircraft with forward swept wings for the purposes of stability and control investigation [CA-8325] p 598 N84-25700
 Uninstalled aero engine testing in operation in the Royal Air Force p 612 N84-25731
 Successful utilization of economic, light aluminum-casted structures in airplane construction [VFW-31/83-O] p 599 N84-26439
- AIRLINE OPERATIONS**
 Time files - The 4D flight management system p 609 A84-33847
 Worldwide aviation outlook --- for passenger and freight traffic 1982-1992 p 587 A84-34456
 Safety recommendations A-84-8 and -9, and A-84-17 through -20 p 589 N84-25675
 Safety recommendations A-84-14 and -15 p 589 N84-25678
- AIRSHIPS**
 Thrust vector control of a V/STOL airship p 609 A84-34458
 System safety and the Coast Guard lighter-than-air system project [AD-A139807] p 588 N84-24564
- AIRSPACE**
 Australian airspace management p 571 A84-35377
- ALCOHOLS**
 Statistical review of alcohol-involved aviation accidents [NTSB/SS-84/03] p 589 N84-25681
- ALGORITHMS**
 Minimum operational performance standards for traffic alert and collision avoidance system (TCAS) airborne equipment, volume 1 [RTCA-DO-185-VOL-1] p 593 N84-25685
 Minimum operational performance standards for traffic alert and collision avoidance system (TCAS) airborne equipment, volume 2 [RTCA/DO-185-VOL-2] p 593 N84-25686
- Advances in strapdown inertial systems: Introduction and overview p 593 N84-25692
 Application of multifunction strapdown inertial system p 594 N84-25698
 Structural sizing of a solar powered aircraft [NASA-CR-172313] p 598 N84-25702
- ALL-WEATHER LANDING SYSTEMS**
 Tactical battlefield aircraft still lack all weather landing systems p 591 A84-35863
 Development and flight test of a helicopter compact, portable, precision landing system concept [NASA-TM-85951] p 592 N84-24566
- ALLOYS**
 Journal of aeronautical materials (selected articles) [AD-A140181] p 572 N84-25611
- ALUMINUM ALLOYS**
 Crack resistance of pressed and rolled semifinished products from aluminum alloys used in load-bearing units in aircraft wings p 614 A84-35724
 The use of Aral in fuselage skins [AD-B080831] p 596 N84-24572
- AMPLIFICATION**
 High-gain error actuated flight control systems for continuous linear multivariable plants [AFIT/GAE/EE/82D-1] p 610 N84-24534
- AMPLITUDES**
 Unsteady laminar boundary-layer calculations on oscillating configurations including backflow. Part 2: Airfoil in high-amplitude pitching motion. Dynamic stall [NASA-TM-84319-PT-2] p 581 N84-24537
 The influence of a moving suspension on the behaviour of modelled helicopter underslung loads [BU-288] p 596 N84-24573
- ANALOG COMPUTERS**
 Development of dynamic simulation of TF34-GE-100 turbofan engine with post-stall capability [NASA-TM-83660] p 608 N84-25712
- ANGLE OF ATTACK**
 Aerodynamics of pointed forebodies at high angles of attack p 574 A84-34461
 Rotary balance data for a typical single-engine general aviation design for an angle-of-attack range of 20 to 90 deg. 3: Influence of control deflection on predicted model D spin modes [NASA-CR-3248] p 584 N84-25641
- ANTENNA ARRAYS**
 Electronically steerable SATCOM terminals for airborne use p 591 A84-36230
 An adaptive array processor with a perturbation algorithm --- for aircraft radio navigation p 592 A84-36291
- ANTENNA DESIGN**
 Electronically steerable SATCOM terminals for airborne use p 591 A84-36230
 An adaptive antenna for military aircraft communications p 592 A84-36292
- APPROACH**
 Axisymmetric approach and landing thrust reversers for single engine fighters [AIAA PAPER 84-1214] p 604 A84-35652
 Tandem fan applications in advanced STOVL fighter configurations [NASA-TM-83689] p 605 N84-24579
- APPROPRIATIONS**
 National Aeronautics and Space Administration p 633 N84-25531
- APPROXIMATION**
 Conical flows with leading edge vortices p 623 N84-25013
- ARCTIC REGIONS**
 Problems in air navigation at the North Pole. II p 590 A84-35589
- ASTRONOMY**
 Astronautics and aeronautics, 1976. A chronology [NASA-SP-4021] p 633 N84-25602
- ATMOSPHERIC EFFECTS**
 Influence of the environment on the application and drying quality of organic paints --- aircraft structures [SNIAS-832-551-102] p 617 N84-25833
- ATMOSPHERIC OPTICS**
 The determination of visibility conditions at the final portion of a descent glide p 628 A84-35250
- ATOMIZERS**
 Alternative fuels use in a vehicular gas turbine p 615 N84-24741
- ATOMIZING**
 Effects of airblast atomizer design upon spray quality p 622 N84-24744
- ATTITUDE CONTROL**
 Multivariable control laws for the AFTI/F-16 [AFIT/GAE/EE/83S-4] p 609 N84-24531
 A piloted simulator investigation of decoupling helicopters by using a model following control system [AD-A139976] p 611 N84-24598

- Numerical solution of the problem of supersonic flow past wings of arbitrary form with a detached shock wave p 579 A84-35351
- Solution of three-dimensional time-dependent viscous flows p 621 A84-35352
- A minimal residual method for transonic potential flows p 621 A84-35353
- Numerical solution of the Euler equation for a compressible flow problem p 579 A84-35354
- Some new developments of the singularity-separating difference method p 621 A84-35356
- Numerical predictions of internal flows using a diagonalized flux vector splitting algorithm [AIAA PAPER 84-1246] p 580 A84-35653
- Hypersonic similarity in the flow past a combination of a circular cone and delta wing p 580 A84-35742
- Turbulent heat transport in circular ducts with circumferentially varying heat flux p 622 A84-36151
- Navier-Stokes calculations for the vortex of a rotor in hover [NASA-TM-85894] p 581 N84-24540
- Conical flows with leading edge vortices p 623 N84-25013
- Calculation of aerodynamic characteristics of wings with thickness and camber by a new method based on the modified vortex lattice method [TAE-493] p 584 N84-25640
- Numerical aspects of unsteady flow calculations p 626 N84-25968
- Computational Fluid Dynamics, volume 2 [VKI-LS-1984-04-VOL-2] p 627 N84-25986
- Implicit time dependent methods for the solution of the Euler equations. Part 2: Application to transonic flows p 627 N84-25990
- COMPUTATIONAL GRIDS**
- Demonstration of a new body-fitted coordinate code for modeling gas-turbine combustor flows [AIAA PAPER 84-1381] p 603 A84-35199
- Mesh generation strategies for CFD on complex configurations p 578 A84-35328
- Noniterative grid generation using parabolic difference equations for fuselage-wing flow calculations p 579 A84-35334
- Orthogonal grid generation [AIAA PAPER 84-1248] p 622 A84-35654
- COMPUTER AIDED DESIGN**
- Computational design and validation tests of advanced concept subsonic inlets [AIAA PAPER 84-1329] p 576 A84-35173
- Computational aerodynamics and design p 577 A84-35302
- Multivariable control laws for the AFTI/F-16 [AFIT/GE/EE/83S-4] p 609 N84-24531
- Digital multivariable tracker control laws for the C-141-A Starlifter aircraft [AFIT/GE/EE/82D-47] p 610 N84-24533
- Reconfigurable digital control laws for the A-7D DIGITAC 2 aircraft with failed primary control surfaces [AFIT/GE/EE/82D-59] p 610 N84-24535
- Experimental modal analysis [SNIAS-832-210-110] p 587 N84-25655
- COMPUTER PROGRAMMING**
- Minimum operational performance standards for traffic alert and collision avoidance system (TCAS) airborne equipment, volume 2 [RTCA/DO-185-VOL-2] p 593 N84-25686
- COMPUTER PROGRAMS**
- On the convergence of unsteady generalized aerodynamic forces p 574 A84-34460
- Calculation of transonic flow in a linear cascade [NASA-TM-83697] p 581 N84-24539
- Study of aerospace materials, coatings, adhesions and processes. Aircraft icing processes [AD-A139743] p 583 N84-24557
- The influence of a moving suspension on the behaviour of modelled helicopter underslung loads [BU-288] p 596 N84-24573
- Highly integrated digital engine control system on an F-15 airplane [NASA-TM-86040] p 606 N84-24587
- Advanced combustor liner cooling concepts p 608 N84-24756
- An analytical method to predict efficiency of aircraft gearboxes [NASA-TM-83716] p 572 N84-25606
- An investigation of aerodynamic characteristics of wings having vortex flow using different numerical codes [NASA-CR-173596] p 584 N84-25639
- A theoretical analysis of the aerodynamic and structural forces associated with a ribbon parachute canopy in steady descent p 587 N84-25671
- Minimum operational performance standards for traffic alert and collision avoidance system (TCAS) airborne equipment, volume 2 [RTCA/DO-185-VOL-2] p 593 N84-25686
- Emulation of a voice interactive Doppler navigation set [AD-A140204] p 593 N84-25687
- Computer program to simulate digital computer based longitudinal flight control laws in a high performance aircraft [AD-A140143] p 611 N84-25719
- NERF: A computer program for the numerical evaluation of reliability functions-reliability modeling, numerical methods and program documentation [AR-00-984] p 627 N84-26048
- COMPUTER SYSTEMS DESIGN**
- Modular strapdown guidance unit with embedded microprocessors p 594 N84-25697
- COMPUTER TECHNIQUES**
- An adaptive array processor with a perturbation algorithm --- for aircraft radio navigation p 592 A84-36291
- Advances in Strapdown Inertial Systems [AGARD-LS-133] p 593 N84-25691
- Initial alignment and augmentation of the ARINC 705 strapdown AHRS LTR-81 p 594 N84-25699
- Technical and scientific publication 1983: Research and development p 633 N84-26430
- COMPUTERIZED SIMULATION**
- Application of computational aerodynamics to airplane design p 594 A84-34452
- Thrust vector control of a V/STOL airship p 609 A84-34458
- On the convergence of unsteady generalized aerodynamic forces p 574 A84-34460
- An adaptive antenna for military aircraft communications p 592 A84-36292
- Optimal cooperative control synthesis applied to a control-configured aircraft [NASA-CR-170411] p 610 N84-24593
- The use of a formal simulator to verify a simple real time control program p 630 N84-25322
- Experimental modal analysis [SNIAS-832-210-110] p 587 N84-25655
- System concepts for helicopter air-to-air combat [SNIAS-832-210-102] p 598 N84-25705
- Development of dynamic simulation of TF34-GE-100 turbofan engine with post-stall capability [NASA-TM-83660] p 608 N84-25712
- VTOL shipboard letdown guidance system analysis [NASA-CR-166519] p 611 N84-25716
- Computer program to simulate digital computer based longitudinal flight control laws in a high performance aircraft [AD-A140143] p 611 N84-25719
- Revisions to the PETROS 4 shell response code [AD-A140268] p 628 N84-26059
- Real-time simulation of an automotive gas turbine using the hybrid computer [NASA-TM-83593] p 633 N84-26484
- CONCORDE AIRCRAFT**
- Exhaust system for combat aircraft optimized for supersonic cruise p 574 A84-34172
- CONFERENCES**
- International Conference on Numerical Methods in Fluid Dynamics, 8th, Rheinisch-Westfaelische Technische Hochschule Aachen, Aachen, West Germany, June 28-July 2, 1982, Proceedings p 620 A84-35301
- Proceedings of the Workshop on Multivariable Control Systems [AD-A139050] p 571 N84-24529
- Combustion Problems in Turbine Engines [AGARD-CP-353] p 614 N84-24732
- Workshop on Requirements for Aircraft Corrosion Control [AGARD-R-714] p 573 N84-25613
- Cost of corrosion for commercial aviation p 573 N84-25624
- CONGRESSIONAL REPORTS**
- The 1985 NASA authorization [GPO-31-453] p 632 N84-25526
- Future of aeronautics [GPO-29-744] p 633 N84-25529
- National Aeronautics and Space Administration p 633 N84-25531
- CONICAL BODIES**
- Aerodynamics of pointed forebodies at high angles of attack p 574 A84-34461
- CONICAL FLOW**
- Conical flows with leading edge vortices p 623 N84-25013
- CONICAL NOZZLES**
- The supersonic flow around a conic nozzle p 574 A84-34347
- CONTINUOUS WAVE LASERS**
- A CW CO₂ laser rangefinder/velocimeter using heterodyne detection p 591 A84-36232
- CONTROL CONFIGURED VEHICLES**
- Active suppression of aeroelastic instabilities for forward swept wings p 584 N84-25638
- CONTROL SIMULATION**
- An experimental investigation of VTOL flying qualities requirements in shipboard landings p 609 A84-34453
- CONTROL STABILITY**
- Perturbation analysis of optimal integral controls p 629 A84-36131
- CONTROL SURFACES**
- On the convergence of unsteady generalized aerodynamic forces p 574 A84-34460
- Autoclave - Curing of extremely thin HM CFC-skins --- for fabrication of fiber composite aerospace structures [MBB-UD-409-83-OE] p 622 A84-35921
- Multivariable control law theory p 609 N84-24530
- An investigation into the nature and control of vortex flow round helicopter upsweep [BU-285] p 582 N84-24544
- Preliminary method for estimating hinge moments of all-movable controls [AD-A139726] p 611 N84-24597
- CONTROL THEORY**
- Design of robust digital controllers for gas turbines with explicit actuator and sensor dynamics [AIAA PAPER 84-1185] p 601 A84-35128
- Optimal cooperative control synthesis applied to a control-configured aircraft [NASA-CR-170411] p 610 N84-24593
- Computer program to simulate digital computer based longitudinal flight control laws in a high performance aircraft [AD-A140143] p 611 N84-25719
- La Recherche Aerospatiale, Bimonthly Bulletin, no. 1983-6, 217/November-December [ESA-TT-841] p 625 N84-25870
- CONTROLLABILITY**
- An experimental investigation of VTOL flying qualities requirements in shipboard landings p 609 A84-34453
- System modeling and identification of equivalent systems with and without compensating time delay for control-augmented aircraft [DFVLR-FB-83-36] p 596 N84-24570
- A simplified method of evaluating aircraft handling qualities using a pilot transfer function model [GU-AERO-8302] p 610 N84-24595
- CONVECTIVE HEAT TRANSFER**
- Effects of pin shape and array orientation on heat transfer and pressure loss in pin fin arrays p 618 A84-33707
- Measurement of local convective heat transfer coefficients of four ice accretion shapes [NASA-CR-174680] p 585 N84-25646
- CONVERGENCE**
- On the convergence of unsteady generalized aerodynamic forces p 574 A84-34460
- CONVERGENT NOZZLES**
- Study of an asymmetric flap nozzle as a vector-thrust device [AIAA PAPER 84-1360] p 576 A84-35190
- Effects of simulated flight on the structure and noise of underexpanded jets [NASA-TP-2308] p 631 N84-25422
- COOLING**
- Combustor liner construction [NASA-CASE-LEW-14035-1] p 605 N84-24577
- The design and development of a low emissions transply combustor for the civil Spey engine p 607 N84-24755
- Advanced combustor liner cooling concepts p 608 N84-24756
- COOLING FINNS**
- Effects of pin shape and array orientation on heat transfer and pressure loss in pin fin arrays p 618 A84-33707
- COOLING SYSTEMS**
- Combustor liner construction [NASA-CASE-LEW-14035-1] p 605 N84-24577
- COPPER ALLOYS**
- Status of understanding for gear materials p 623 N84-25061
- CORDAGE**
- Improved prediction of parachute line sail during lines-first deployment [DE84-007340] p 583 N84-24563
- CORRELATION**
- Performance derivation of turbojets and turbofans from tests in sea-level test cells p 608 N84-25728
- CORROSION**
- Status of understanding for bearing materials p 616 N84-25060
- Workshop on Requirements for Aircraft Corrosion Control [AGARD-R-714] p 573 N84-25613
- Cost of corrosion for commercial aviation p 573 N84-25624
- CORROSION PREVENTION**
- Workshop on Requirements for Aircraft Corrosion Control [AGARD-R-714] p 573 N84-25613

- Current procurement specification design requirements for US Navy aircraft p 596 N84-25615
 Current design requirements for corrosion control on helicopters p 597 N84-25616
 The interpretation of design requirements for multi-market helicopters p 597 N84-25617
 Current requirements on specifications for corrosion prevention p 597 N84-25618
 US Navy corrosion control maintenance p 573 N84-25619
 Design and manufacturing practices to minimize corrosion in aircraft p 597 N84-25620
 Corrosion control maintenance practices for Canadian aircraft p 573 N84-25621
 Methodology for assessment of corrosion costs p 573 N84-25623
- CORROSION RESISTANCE**
 Workshop on Requirements for Aircraft Corrosion Control [AGARD-R-714] p 573 N84-25613
 Corrosion control requirements for UK military aircraft p 617 N84-25614
 Current design requirements for corrosion control on helicopters p 597 N84-25616
 The interpretation of design requirements for multi-market helicopters p 597 N84-25617
 Corrosion control maintenance practices for Canadian aircraft p 573 N84-25621
 Methodology for assessment of corrosion costs p 573 N84-25623
- CORRUGATED PLATES**
 Nonlinear bending and collapse of long, thin, open section beams and corrugated panels [ASME PAPER 84-APM-4] p 622 A84-36160
- COST ANALYSIS**
 Status of understanding for gear materials p 623 N84-25061
- COST ESTIMATES**
 Methodology for assessment of corrosion costs p 573 N84-25623
 Cost of corrosion for commercial aviation p 573 N84-25624
- COUNTER ROTATION**
 Counter-rotating intershaft seals for advanced engines [AIAA PAPER 84-1216] p 619 A84-35135
- COUPLING**
 Effects of structural coupling on mistuned cascade flutter and response [ASME PAPER 83-GT-117] p 618 A84-33701
- CRACK GEOMETRY**
 An exploratory study of retirement-for-cause for gas turbine engine components [AIAA PAPER 84-1220] p 601 A84-35136
- CRACK PROPAGATION**
 An exploratory study of retirement-for-cause for gas turbine engine components [AIAA PAPER 84-1220] p 601 A84-35136
 Crack resistance of pressed and rolled semifinished products from aluminum alloys used in load-bearing units in aircraft wings p 614 A84-35724
 Statistics of crack growth of a superalloy under sustained load p 614 A84-36175
- CRASH LANDING**
 Crash for safety p 588 A84-35360
 Safety recommendations A-84-14 and -15 p 589 N84-25678
- CRASHWORTHINESS**
 Crash for safety p 588 A84-35360
- CREW PROCEDURES (INFLIGHT)**
 Safety recommendation A-84-7 p 588 N84-25674
- CROSS FLOW**
 An investigation of the interaction between multiple dilution jets and combustion products p 616 N84-24758
 Fluid forces on a rigid cylinder in turbulent crossflow [DE84-006364] p 623 N84-25012
- CRUISING FLIGHT**
 Exhaust system for combat aircraft optimized for supersonic cruise p 574 A84-34172
- CURVATURE**
 Development of temperature-, velocity- and concentration-profiles in a curved combustor p 608 N84-24757
- CURVED PANELS**
 Nonlinear bending and collapse of long, thin, open section beams and corrugated panels [ASME PAPER 84-APM-4] p 622 A84-36160
- CYCLIC LOADS**
 Thermoelastic limit cycling of zippered cross section spacecraft booms [AIAA PAPER 84-1065] p 613 A84-34915
- CYLINDRICAL BODIES**
 Fluid forces on a rigid cylinder in turbulent crossflow [DE84-006364] p 623 N84-25012
- CYLINDRICAL SHELLS**
 Aeroelastic optimization of axisymmetric circular cylindrical shells for supersonic flow p 619 A84-34722
- D**
- DAMAGE**
 Statistical approach to damage tolerance assessment [SNIAS-832-111-112] p 596 N84-24575
- DATA ACQUISITION**
 V/STOL wind-tunnel testing [NASA-TM-85936] p 571 N84-24528
 CONUS Loran-C error budget: Flight test [AD-A139871] p 592 N84-24568
- DATA PROCESSING**
 Towards a better understanding of helicopter external noise [SNIAS-832-210-113] p 632 N84-26388
- DE HAVILLAND AIRCRAFT**
 Dash 8 - de Havilland Canada's quiet performer p 588 A84-35361
- DECOUPLING**
 A piloted simulator investigation of decoupling helicopters by using a model following control system [AD-A139976] p 611 N84-24598
- DEFENSE INDUSTRY**
 Technical and scientific publication 1983: Research and development p 633 N84-26430
- DEFENSE PROGRAM**
 Astronautics and aeronautics, 1976. A chronology [NASA-SP-4021] p 633 N84-25602
- DEFLECTION**
 Large deflection multimode response of clamped rectangular panels to acoustic excitation, volume 1 [AD-A139622] p 624 N84-25107
 Rotary balance data for a typical single-engine general aviation design for an angle-of-attack range of 20 to 90 deg. 3: Influence of control deflection on predicted model D spin modes [NASA-CR-3248] p 584 N84-25641
- DEICERS**
 Chinook's trial by ice p 588 A84-35359
- DEICING**
 Aerospatiale's experience on helicopter flight in icing conditions [SNIAS-832-210-107] p 599 N84-25707
- DELTA WINGS**
 Measurements of ground effect for delta wings p 575 A84-34466
 Hypersonic similarity in the flow past a combination of a circular cone and delta wing p 580 A84-35742
 An investigation of aerodynamic characteristics of wings having vortex flow using different numerical codes [NASA-CR-173596] p 584 N84-25639
 Calculation of aerodynamic characteristics of wings with thickness and camber by a new method based on the modified vortex lattice method [TAE-493] p 584 N84-25640
- DEPLOYMENT**
 Improved prediction of parachute line sail during lines-first deployment [DE84-007340] p 583 N84-24563
 Inherent problems in designing two-failure tolerant electromechanical actuators p 624 N84-25088
- DEPOLARIZATION**
 Depolarisation properties of airborne radomes p 592 A84-36281
- DESIGN ANALYSIS**
 Design and analysis of Coordinated Bank-To-Turn (CBTT) autopilots for Bank-To-Turn (BTT) missiles [AD-A140103] p 613 N84-24698
 Special Course on V/STOL Aerodynamics [AGARD-R-710] p 573 N84-25625
 Aero/thermodynamic and acoustic considerations in the design of test-beds for turbojets and turbofans p 612 N84-25725
 Determination of the stable operating conditions of an axial flow compressor p 626 N84-25971
- DETECTION**
 Sensor failure detection for jet engines using analytical redundancy [NASA-TM-83695] p 606 N84-24585
- DETERIORATION**
 Safety recommendations A-84-1 through -3 p 588 N84-25673
- DIESEL ENGINES**
 An overview of NASA intermittent combustion engine research [NASA-TM-83668] p 606 N84-24583
- DIFFRACTION PATTERNS**
 Optimization of fringe-type laser anemometers for turbine engine component testing [NASA-TM-83658] p 623 N84-25019
- DIFFUSERS**
 Numerical simulation of flow through inlets/diffusers with terminal shocks [AIAA PAPER 84-1362] p 577 A84-35192
 Introduction to unsteady flow in turbomachines p 625 N84-25962
- DIGITAL COMPUTERS**
 Design of a complete multivariable digital flight control system [AFIT/GE/EE/82D-18] p 610 N84-24532
- DIGITAL SYSTEMS**
 Indication and alerting --- digital cockpit displays for Boeing 757 engine monitoring p 599 A84-33830
 Time flies - The 4D flight management system p 609 A84-33847
 Highly integrated digital engine control system on an F-15 airplane [AIAA PAPER 84-1259] p 602 A84-35149
 Lessons learned in the development of a digital electronic engine control [AIAA PAPER 84-1335] p 602 A84-35177
- DIGITAL TECHNIQUES**
 Design of robust digital controllers for gas turbines with explicit actuator and sensor dynamics [AIAA PAPER 84-1185] p 601 A84-35128
 Digital scan conversion --- for airborne radar display p 600 A84-36259
 Lewis Research Center spin rig and its use in vibration analysis of rotating systems [NASA-TP-2304] p 605 N84-24578
 Uninstalled aero engine testing in operation in the Royal Air Force p 612 N84-25731
- DILUTION**
 An investigation of the interaction between multiple dilution jets and combustion products p 616 N84-24758
- DIMENSIONLESS NUMBERS**
 Notes on special flight aspects, such as STO, ski-jump and ODM p 598 N84-25637
- DIMENSIONS**
 Length to diameter ratio and row number effects in short pin fin heat transfer [ASME PAPER 83-GT-54] p 618 A84-33706
- DISPLACEMENT**
 Measurements of self-excited rotor-blade vibrations using optical displacements [ASME PAPER 83-GT-132] p 618 A84-33702
- DISPLAY DEVICES**
 Indication and alerting --- digital cockpit displays for Boeing 757 engine monitoring p 599 A84-33830
 Redundant color coding on airborne CRT displays p 599 A84-35899
 Digital scan conversion --- for airborne radar display p 600 A84-36259
- DISTORTION**
 Investigation of the behavior of axial compressor stages with steady state inlet distortions [DFVLR-FB-83-39] p 607 N84-24590
 Introduction to unsteady flow in turbomachines p 625 N84-25962
- DIVERGENCE**
 Divergence boundary prediction from random responses - NAL's method --- aeroelastic instability boundary estimation for subcritical divergence cantilever wing model test p 619 A84-34463
- DOPPLER EFFECT**
 Optimization of fringe-type laser anemometers for turbine engine component testing [NASA-TM-83658] p 623 N84-25019
- DOPPLER NAVIGATION**
 Improvement of the accuracy of Doppler direction finders for general aviation by spectral signal analysis --- German thesis p 590 A84-35694
 Emulation of a voice interactive Doppler navigation set [AD-A140204] p 593 N84-25687
- DRAG MEASUREMENT**
 Sidewall boundary layer corrections in subsonic, two-dimensional airfoil/hydrofoil testing [AIAA PAPER 84-1366] p 620 A84-35195
- DRAG REDUCTION**
 An advanced aerospike to minimize nose drag p 573 A84-33849
 Winglet effects on the flutter of twin-engine-transport type wing [AIAA PAPER 84-0905] p 594 A84-34907
- DROOPED AIRFOILS**
 Engineering analysis of drooped leading-edge wings near stall p 575 A84-34468
- DROP SIZE**
 Electrical spray modification with various fuels in a t56 combustor [AD-A139961] p 616 N84-24824
- DROPS (LIQUIDS)**
 Study of aerospace materials, coatings, adhesions and processes. Aircraft icing processes [AD-A139743] p 583 N84-24557

- Detailed fuel spray analysis techniques
p 622 N84-24747
- Electrical spray modification with various fuels in a 156 combustor
[AD-A139961] p 616 N84-24824
- DRYING**
Influence of the environment on the application and drying quality of organic paints --- aircraft structures
[SNIAS-832-551-102] p 617 N84-25833
- DUCTED FLOW**
Development of temperature-, velocity- and concentration-profiles in a curved combustor
p 608 N84-24757
- DYNAMIC MODELS**
A linear multivariable dynamical model of supersonic inlet-engine combination
[AIAA PAPER 84-1496] p 577 A84-35239
- DYNAMIC RESPONSE**
Flutter and forced response of mistuned rotors using standing wave analysis
[NASA-CR-173555] p 606 N84-24586
Revisions to the PETROS 4 shell response code
[AD-A140268] p 628 N84-26059
- DYNAMIC STRUCTURAL ANALYSIS**
Estimation of vibrational stressed state for GTE blades under random vibrations
p 619 A84-34133
Flap-lag damping of an elastic rotor blade with torsion and dynamic inflow in hover from symbolically generated equations
[AIAA PAPER 84-0989] p 619 A84-34909
Lewis Research Center spin rig and its use in vibration analysis of rotating systems
[NASA-TP-2304] p 605 N84-24578
- E**
- EARTH OBSERVATIONS (FROM SPACE)**
New results of airborne measurements with a sensitive, high resolution 90 GHz radiometer - First results for an equivalent 140 GHz system
p 600 A84-36287
- EDUCATION**
Single-pilot IFR flights and operations
[SNIAS-832-210-103] p 630 N84-26374
- EFFICIENCY**
An overview of NASA intermittent combustion engine research
[NASA-TM-83668] p 606 N84-24583
An analytical method to predict efficiency of aircraft gearboxes
[NASA-TM-83716] p 572 N84-25606
Application of an optimization method to high performance propeller designs
[NASA-TM-83710] p 572 N84-25607
Wind tunnel investigations on thin supercritical airfoils in the high subsonic flow regime
[ESA-TT-774] p 586 N84-25652
Unsteady Flow in Turbomachines, volume 1
[VKI-LS-1984-02-VOL-1] p 625 N84-25960
- EJECTORS**
Exhaust system for combat aircraft optimized for supersonic cruise
p 574 A84-34172
- ELASTIC DAMPING**
Design of integrally damped compressor vanes
[AIAA PAPER 84-0867] p 601 A84-34905
Flap-lag damping of an elastic rotor blade with torsion and dynamic inflow in hover from symbolically generated equations
[AIAA PAPER 84-0989] p 619 A84-34909
- ELASTOMERS**
Design of integrally damped compressor vanes
[AIAA PAPER 84-0867] p 601 A84-34905
Solid state compressor
[AD-A140498] p 627 N84-26032
- ELECTRIC DISCHARGES**
EDM in the aircraft industry --- Electrical Discharge Machining
p 618 A84-33829
- ELECTRIC EQUIPMENT TESTS**
Electrical subsystems flight test handbook
[AD-A139783] p 596 N84-24576
- ELECTRICAL PROPERTIES**
Investigation of the RF properties of carbon fibre composite materials
[AD-A140261] p 617 N84-25774
Derating requirements and application rules for electronic components
[ESA-PSS-01-301-ISSUE-1] p 625 N84-25930
- ELECTRODES**
Electrical spray modification with various fuels in a 156 combustor
[AD-A139961] p 616 N84-24824
- ELECTROMAGNETIC COMPATIBILITY**
Electromagnetic compatibility in aerospace vehicles
[NLR-MP-83002-U] p 623 N84-24929
- ELECTROMAGNETIC INTERFERENCE**
Electromagnetic compatibility in aerospace vehicles
[NLR-MP-83002-U] p 623 N84-24929
- ELECTROMAGNETIC PULSES**
F-14 scale model measurements. Part 1: External response
[DE84-008201] p 583 N84-24562
- ELECTROMECHANICS**
Inherent problems in designing two-failure tolerant electromechanical actuators
p 624 N84-25088
- ELECTRONIC CONTROL**
Highly integrated digital engine control system on an F-15 airplane
[AIAA PAPER 84-1259] p 602 A84-35149
Lessons learned in the development of a digital electronic engine control
[AIAA PAPER 84-1335] p 602 A84-35177
- ELECTRONIC COUNTERMEASURES**
Airborne Self Protection Jammer - ASPJ/ALQ-165
p 592 A84-36266
- ELECTRONIC EQUIPMENT TESTS**
Minimum operational performance standards for traffic alert and collision avoidance system (TCAS) airborne equipment, volume 1
[RTCA-DO-185-VOL-1] p 593 N84-25685
- ELECTRONIC WARFARE**
An electronic umbrella - The B-1B defensive avionics system
p 590 A84-35862
- ELEVATORS (CONTROL SURFACES)**
Safety recommendations A-84-14 and -15
p 589 N84-25678
- ENERGY CONSUMPTION**
Reynolds number effects on pressure loss and turbulence characteristics of four tube-bundle heat exchangers
[NASA-TM-85807] p 585 N84-25645
- ENGINE AIRFRAME INTEGRATION**
Highly integrated digital engine control system on an F-15 airplane
[AIAA PAPER 84-1259] p 602 A84-35149
Highly integrated digital engine control system on an F-15 airplane
[NASA-TM-86040] p 606 N84-24587
- ENGINE CONTROL**
Design of robust digital controllers for gas turbines with explicit actuator and sensor dynamics
[AIAA PAPER 84-1185] p 601 A84-35128
Highly integrated digital engine control system on an F-15 airplane
[AIAA PAPER 84-1259] p 602 A84-35149
- ENGINE DESIGN**
Strength calculation for an aviation GTE stator in axisymmetric deformation
p 600 A84-34134
Specification, design, and test of aircraft engine isolators for reduced interior noise
p 601 A84-34455
Comparison of combustion efficiencies for ramjet engines
p 601 A84-34723
Advanced turbofan concept with regenerator and inter-cooled compressor
[AIAA PAPER 84-1270] p 602 A84-35154
Aspects of advanced fighter engine design on the basis of equal technology
[AIAA PAPER 84-1271] p 602 A84-35155
Computational design and validation tests of advanced concept subsonic inlets
[AIAA PAPER 84-1329] p 576 A84-35173
V/STOL engine development
[AIAA PAPER 84-1337] p 603 A84-35178
Design of a high-performance rotary stratified-charge research aircraft engine
[AIAA PAPER 84-1395] p 603 A84-35204
Propane powered engine for long duration unmanned aircraft
[AIAA PAPER 84-1431] p 603 A84-35216
A linear multivariable dynamical model of supersonic inlet-engine combination
[AIAA PAPER 84-1496] p 577 A84-35239
An engine for tomorrow's small helicopters
[AIAA PAPER 84-1277] p 604 A84-35655
The AHIP power plant
[AIAA PAPER 84-1282] p 604 A84-35656
Future combat environments - Implications for the engine development process
[AIAA PAPER 84-1339] p 605 A84-35659
Preliminary flight test results of the F100 EMD engine in an F-15 airplane
[NASA-TM-85902] p 606 N84-24588
Cold-air performance of compressor-drive turbine of department of energy upgraded automobile gas turbine engine. 3: Performance of redesigned turbine
[NASA-TM-83627] p 585 N84-25644
Safety recommendation A-84-7
p 588 N84-25674
Operational and Performance Measurement on Engines in Sea Level Test Facilities
[AGARD-LS-132] p 612 N84-25723
- Instrumentation techniques in sea level test facilities
p 612 N84-25727
Uninstalled aero engine testing in operation in the Royal Air Force
p 612 N84-25731
The industry's materials: SNIAS and general conditions of its environment
[SNIAS-832-502-101] p 624 N84-25865
Encounters with surge
p 626 N84-25966
- ENGINE FAILURE**
Lessons learned in the development of a digital electronic engine control
[AIAA PAPER 84-1335] p 602 A84-35177
Development of dynamic simulation of TF34-GE-100 turbofan engine with post-stall capability
[NASA-TM-83660] p 608 N84-25712
Unsteady Flow in Turbomachines, volume 1
[VKI-LS-1984-02-VOL-1] p 625 N84-25960
Stability of pumps and compressors
p 625 N84-25963
Theory of rotating stall of multistage axial compressors
p 625 N84-25964
- ENGINE INLETS**
A study on the between-stage flow pattern of an axial-flow compressor with inlet distortion - Calculation method for and experimental research on inlet distortion transmission
p 576 A84-35018
Computational design and validation tests of advanced concept subsonic inlets
[AIAA PAPER 84-1329] p 576 A84-35173
Numerical computation of the Reynolds stress in supersonic inlet flows
[AIAA PAPER 84-1364] p 577 A84-35193
Measuring turbine engine inlet total temperature problems and solutions
[AIAA PAPER 84-1457] p 604 A84-35222
Steady and unsteady distorted inlet flow simulation for engine ground tests
[AIAA PAPER 84-1490] p 577 A84-35234
- ENGINE MONITORING INSTRUMENTS**
Indication and alerting --- digital cockpit displays for Boeing 757 engine monitoring
p 599 A84-33830
United Kingdom military engine monitoring experience
[AIAA PAPER 84-1409] p 603 A84-35207
Evaluation of benefits of the A-10/TF34 Turbine Engine Monitoring System Squadron Integration Program
[AIAA PAPER 84-1414] p 603 A84-35208
Measuring turbine engine inlet total temperature problems and solutions
[AIAA PAPER 84-1457] p 604 A84-35222
Development of the Engine Condition Monitoring System for the HH-65A helicopter
[AIAA PAPER 84-1411] p 605 A84-35666
- ENGINE NOISE**
Specification, design, and test of aircraft engine isolators for reduced interior noise
p 601 A84-34455
- ENGINE PARTS**
An exploratory study of retirement-for-cause for gas turbine engine components
[AIAA PAPER 84-1220] p 601 A84-35136
- ENGINE TESTS**
Regenerative Intercooled Turbine Engine (RITE) study
[AIAA PAPER 84-1267] p 602 A84-35153
F/A-18A/F404 propulsion system integration
[AIAA PAPER 84-1330] p 595 A84-35174
Preliminary flight test results of the F100 EMD engine in an F-15 airplane
[AIAA PAPER 84-1332] p 602 A84-35176
Preliminary flight test results of the F100 EMD engine in an F-15 airplane
[NASA-TM-85902] p 606 N84-24588
Comparison of a propfan/turbofan engine by thermodynamic cycle calculation
[ESA-TT-820] p 608 N84-25715
Operation and performance measurement on engines in sea-level test facilities: Introduction and general survey
p 612 N84-25724
Instrumentation techniques in sea level test facilities
p 612 N84-25727
Performance derivation of turbojets and turbofans from tests in sea-level test cells
p 608 N84-25728
Testing of turboshaft engines
p 612 N84-25729
Uninstalled aero engine testing in operation in the Royal Air Force
p 612 N84-25731
Unsteady flow in turbomachinery: An overview
p 625 N84-25961
- ENTHALPY**
Introduction to unsteady flow in turbomachines
p 625 N84-25962
- ENVIRONMENT EFFECTS**
The industry's materials: SNIAS and general conditions of its environment
[SNIAS-832-502-101] p 624 N84-25865
Ground and inflight operational effects of APU's
[VFW-30/83-O] p 609 N84-26438

ENVIRONMENT PROTECTION

- Aircraft noise control - Progress and prospects
p 595 A84-34950
- EPOXY RESINS**
Journal of aeronautical materials (selected articles)
[AD-A140181] p 572 N84-25611
- ERROR ANALYSIS**
Multi-models to increase accuracy
p 629 N84-25154
- ERROR FUNCTIONS**
High-gain error actuated flight control systems for continuous linear multivariable plants
[AFIT/GE/EE/82D-1] p 610 N84-24534
- ERRORS**
CONUS Loran-C error budget: Flight test
[AD-A139871] p 592 N84-24568
- ESCAPE SYSTEMS**
Aircrew Gliding Escape System (AGES) exploratory development investigation of aircrew emergency escape ram-air inflated, flexible wing
[AD-A139928] p 588 N84-24565
- EULER EQUATIONS OF MOTION**
Simulation of the fluctuating field of a forced jet
p 578 A84-35309
Euler solutions as limit of infinite Reynolds number for separation flows and flows with vortices
p 579 A84-35344
Numerical solution of the Euler equation for a compressible flow problem
p 579 A84-35354
Numerical predictions of internal flows using a diagonalized flux vector splitting algorithm
[AIAA PAPER 84-1246] p 580 A84-35653
Computational Fluid Dynamics, volume 2
[VKI-LS-1984-04-VOL-2] p 627 N84-25986
Implicit time dependent methods for the solution of the Euler equations. Part 2: Application to transonic flows
p 627 N84-25990
- EUROPEAN AIRBUS**
Projects and programs as a reflection of the performances of engineers in aircraft making by Hans-Wocke
[MBB-UT-24-83-O] p 572 N84-25608
The Airbus: The state-of-the-art today, and future developments
[MBB-UT-22-83-O] p 599 N84-26437
Ground and inflight operational effects of APU's
[VFW-30/83-O] p 609 N84-26438
- EXHAUST EMISSION**
Fuel effects on gas turbine combustion - Liner temperature, pattern factor and pollutant emissions
[AIAA PAPER 84-1491] p 604 A84-35235
The design and development of a low emissions transpily combustor for the civil Spey engine
p 607 N84-24755
- EXHAUST GASES**
Thrust reverser exhaust plume reingestion model tests
p 601 A84-34457
- EXHAUST NOZZLES**
Exhaust system for combat aircraft optimized for supersonic cruise
p 574 A84-34172
- EXHAUST SYSTEMS**
Exhaust system for combat aircraft optimized for supersonic cruise
p 574 A84-34172
- EXTRUDING**
Solid state compressor
[AD-A140498] p 627 N84-26032
- F**
- F-14 AIRCRAFT**
F-14 scale model measurements. Part 1: External response
[DE84-008201] p 583 N84-24562
F-14 modeling study
[NASA-CR-172336] p 598 N84-25701
- F-15 AIRCRAFT**
Highly integrated digital engine control system on an F-15 airplane
[AIAA PAPER 84-1259] p 602 A84-35149
Preliminary flight test results of the F100 EMD engine in an F-15 airplane
[AIAA PAPER 84-1332] p 602 A84-35176
- F-16 AIRCRAFT**
Proceedings of the Workshop on Multivariable Control Systems
[AD-A139050] p 571 N84-24529
Multivariable control laws for the AFTI/F-16
[AFIT/GE/EE/83S-4] p 609 N84-24531
- F-18 AIRCRAFT**
F/A-18A/F404 propulsion system integration
[AIAA PAPER 84-1330] p 595 A84-35174
Computer program to simulate digital computer based longitudinal flight control laws in a high performance aircraft
[AD-A140143] p 611 N84-25719

FABRICATION

- Composite materials: The user and the producer
[SNIAS-832-111-108] p 617 N84-25772
- FAILURE ANALYSIS**
Reconfigurable digital control laws for the A-7D DIGITAC 2 aircraft with failed primary control surfaces
[AFIT/GE/EE/82D-59] p 610 N84-24535
Sensor failure detection for jet engines using analytical redundancy
[NASA-TM-83695] p 606 N84-24585
Analysis of symmetric reinforcement of quasi-isotropic graphite-epoxy plates with a circular cutout under uniaxial tensile loading
[AD-A139998] p 614 N84-24715
Safety recommendation: Cessna Model 402C airplane, September 5, 1983, Tampa International Airport, Tampa, Florida
p 589 N84-25680
- FAIRINGS**
The study of an idealized wing/body junction
[AD-A139933] p 583 N84-24559
- FAN IN WING AIRCRAFT**
Tandem fan applications in advanced STOVL fighter configurations
[NASA-TM-83689] p 605 N84-24579
- FASTENERS**
On improving the fatigue performance of a double-shear lap joint
[VFW-29/83-O] p 628 N84-26431
- FATIGUE (MATERIALS)**
Statistical approach to damage tolerance assessment
[SNIAS-832-111-112] p 596 N84-24575
Status of understanding for bearing materials
p 616 N84-25060
Review of aeronautical fatigue investigations in the Netherlands during the period March 1981 - February 1983
[AD-B082166] p 627 N84-26057
- FATIGUE LIFE**
Design and experimental verification of the USB flap panel structure for NAL-STOL research aircraft
p 594 A84-34451
On improving the fatigue performance of a double-shear lap joint
[VFW-29/83-O] p 628 N84-26431
- FATIGUE TESTS**
Review of aeronautical fatigue investigations in the Netherlands during the period March 1981 - February 1983
[AD-B082166] p 627 N84-26057
- FAULT TOLERANCE**
Inherent problems in designing two-failure tolerant electromechanical actuators
p 624 N84-25088
Investigation, development, and evaluation of performance proving for fault-tolerant computers
[NASA-CR-166008] p 629 N84-25307
STP: A mechanized logic for specification and verification
p 629 N84-25308
Specifying and verifying ultra-reliability and fault-tolerance properties
p 630 N84-25309
- FEDERAL BUDGETS**
The 1985 NASA authorization
[GPO-31-453] p 632 N84-25526
National Aeronautics and Space Administration
p 633 N84-25531
- FEEDBACK**
Multivariable control law theory
p 609 N84-24530
- FEEDBACK CONTROL**
High-gain error actuated flight control systems for continuous linear multivariable plants
[AFIT/GE/EE/82D-1] p 610 N84-24534
A simplified method of evaluating aircraft handling qualities using a pilot transfer function model
[GU-AERO-8302] p 610 N84-24595
Fast estimation of state feedback gain for the design of aircraft autopilots
[GU-AERO-8305] p 610 N84-24596
Robustness quantification for nonlinear sampled-data systems with dynamic multiplicative perturbations
p 630 N84-25871
- FEEDERS**
Spacelab 4: Primate experiment support hardware
p 624 N84-25092
- FIBER COMPOSITES**
Autoclave - Curing of extremely thin HM CFC-skins --- for fabrication of fiber composite aerospace structures
[MBB-UD-409-83-OE] p 622 A84-35921
A rear engine without joints and pillows
[MBB-UD-383-83-O] p 628 N84-26441
- FIBER OPTICS**
Advances in strapdown sensors
p 593 N84-25693
- FIBER REINFORCED COMPOSITES**
Shear stress distribution and shear stiffness in transversely loaded, inhomogeneous cross-sections of arbitrary form made of orthotropic materials
p 621 A84-35592

- The use of Arall in fuselage skins
[AD-B080831] p 596 N84-24572
Journal of aeronautical materials (selected articles)
[AD-A140181] p 572 N84-25611
The industry's materials: SNIAS and general conditions of its environment
[SNIAS-832-502-101] p 624 N84-25865
- FIBERS**
A principal rotor without joints and pillows, made of fiber materials, for dynamic systems of future helicopters
[MBB-UD-384-83-O] p 628 N84-26440
- FIELD THEORY (PHYSICS)**
Simulation of the fluctuating field of a forced jet
p 578 A84-35309
- FIGHTER AIRCRAFT**
Evolution of the combat aircraft
p 571 A84-34171
Thrust reverser exhaust plume reingestion model tests
p 601 A84-34457
Axisymmetric approach and landing thrust reverser concepts in-ground effects wind tunnel test results
[AIAA PAPER 84-1215] p 601 A84-35134
Aspects of advanced fighter engine design on the basis of equal technology
[AIAA PAPER 84-1271] p 602 A84-35155
Flow-field investigation of a supercruise fighter model
[AIAA PAPER 84-1331] p 576 A84-35175
Axisymmetric approach and landing thrust reversers for single engine fighters
[AIAA PAPER 84-1214] p 604 A84-35652
Aeropropulsive characteristics of nonaxisymmetric-nozzle thrust reversers at Mach numbers from 0 to 1.20
[NASA-TP-2306] p 581 N84-24538
Flight mechanical analysis of dynamic derivatives of the Dornier variation wind tunnel model
[DFVLR-FM-83-38] p 581 N84-24541
System modeling and identification of equivalent systems with and without compensating time delay for control-augmented aircraft
[DFVLR-FB-83-36] p 596 N84-24570
Assessment of aerodynamic performance of V/STOL and STOVL fighter aircraft
p 584 N84-25636
Design and implementation of input signals for identification of pilot/aircraft models
[DFVLR-FB-84-08] p 599 N84-25709
- FINITE DIFFERENCE THEORY**
Finite difference computation of pressure and wave-drag of slender bodies of revolution at transonic speeds with zero-lift
p 579 A84-35330
Some new developments of the singularity-separating difference method
p 621 A84-35356
Unsteady laminar boundary-layer calculations on oscillating configurations including backflow. Part 2: Airfoil in high-amplitude pitching motion. Dynamic stall
[NASA-TM-84319-PT-2] p 581 N84-24537
Navier-Stokes calculations for the vortex of a rotor in hover
[NASA-TM-85894] p 581 N84-24540
- FINS**
Length to diameter ratio and row number effects in short pin fin heat transfer
[ASME PAPER 83-GT-54] p 618 A84-33706
Preliminary method for estimating hinge moments of all-movable controls
[AD-A139726] p 611 N84-24597
- FIRE CONTROL**
System concepts for helicopter air-to-air combat
[SNIAS-832-210-102] p 598 N84-25705
- FIRE PREVENTION**
Safety recommendation A-84-7
p 588 N84-25674
- FLAPPING**
Flap-lag damping of an elastic rotor blade with torsion and dynamic inflow in hover from symbolically generated equations
[AIAA PAPER 84-0989] p 619 A84-34909
- FLAPS (CONTROL SURFACES)**
Design and experimental verification of the USB flap panel structure for NAL-STOL research aircraft
p 594 A84-34451
Study of an asymmetric flap nozzle as a vector-thrust device
[AIAA PAPER 84-1360] p 576 A84-35190
- FLAT PLATES**
Unsteady laminar boundary-layer calculations on oscillating configurations including backflow. Part 2: Airfoil in high-amplitude pitching motion. Dynamic stall
[NASA-TM-84319-PT-2] p 581 N84-24537
Large deflection multimode response of clamped rectangular panels to acoustic excitation, volume 1
[AD-A139622] p 624 N84-25107
- FLEXIBLE WINGS**
Aircrew Gliding Escape System (AGES) exploratory development investigation of aircrew emergency escape ram-air inflated, flexible wing
[AD-A139928] p 588 N84-24565

FLIGHT CHARACTERISTICS

- Estimation of the flight parameters of low flying aircraft using the radiated noise
[LFD-211] p 595 N84-24569
- Computer program to simulate digital computer based longitudinal flight control laws in a high performance aircraft
[AD-A140143] p 611 N84-25719

FLIGHT CONDITIONS

- The determination of visibility conditions at the final portion of a descent glide p 628 A84-35250

FLIGHT CONTROL

- Optimal control of multimode plants -- for flight control p 629 A84-34773
- Proceedings of the Workshop on Multivariable Control Systems
[AD-A139050] p 571 N84-24529
- Design of a complete multivariable digital flight control system
[AFIT/GE/EE/82D-18] p 610 N84-24532
- Digital multivariable tracker control laws for the C-141-A Starfighter aircraft
[AFIT/GE/EE/82D-47] p 610 N84-24533
- High-gain error actuated flight control systems for continuous linear multivariable plants
[AFIT/GAE/EE/82D-1] p 610 N84-24534
- Reconfigurable digital control laws for the A-7D DIGITAC 2 aircraft with failed primary control surfaces
[AFIT/GE/EE/82D-59] p 610 N84-24535
- Highly integrated digital engine control system on an F-15 airplane
[NASA-TM-86040] p 606 N84-24587
- Optimal cooperative control synthesis applied to a control-configured aircraft
[NASA-CR-170411] p 610 N84-24593
- Investigation, development, and evaluation of performance proving for fault-tolerant computers
[NASA-CR-166008] p 629 N84-25307
- STP: A mechanized logic for specification and verification p 629 N84-25308
- Specifying and verifying ultra-reliability and fault-tolerance properties p 630 N84-25309
- Full scale wind tunnel tests on hang glider pilots
[CA-8416] p 585 N84-25643
- Advances in Strapdown Inertial Systems
[AGARD-LS-133] p 593 N84-25691
- Advances in strapdown inertial systems: Introduction and overview p 593 N84-25692
- Computer program to simulate digital computer based longitudinal flight control laws in a high performance aircraft
[AD-A140143] p 611 N84-25719
- Evolution of a heave control system for an amphibious hovercraft
[CAR-8401] p 624 N84-25864
- FLIGHT CREWS**
Helicopter Pilot/Copilot survival system
[AD-A140358] p 590 N84-25682
- FLIGHT HAZARDS**
Clouds and flight safety --- Russian book p 587 A84-33525
- Safety recommendation(s) A-84-16 p 589 N84-25679
- FLIGHT INSTRUMENTS**
Derating requirements and application rules for electronic components
[ESA-PSS-01-301-ISSUE-1] p 625 N84-25930
- Single-pilot IFR flights and operations
[SNIAS-832-210-103] p 630 N84-26374
- FLIGHT MECHANICS**
Flight mechanical analysis of dynamic derivatives of the Dornier variation wind tunnel model
[DFVLR-FM-83-38] p 581 N84-24541
- Nonlinear problems in flight dynamics
[NASA-TM-85940] p 585 N84-25648
- FLIGHT PATHS**
VTOL shipboard letdown guidance system analysis
[NASA-CR-166519] p 611 N84-25716
- FLIGHT SAFETY**
Clouds and flight safety --- Russian book p 587 A84-33525
- Safety recommendations A-84-1 through -3 p 588 N84-25673
- Safety recommendation A-84-7 p 588 N84-25674
- Safety recommendations A-84-8 and -9, and A-84-17 through -20 p 589 N84-25675
- Safety recommendation(s) A-84-10 and -11 p 589 N84-25676
- Safety recommendations A-84-14 and -15 p 589 N84-25678
- Safety recommendation(s) A-84-16 p 589 N84-25679
- Aerospatiale's experience on helicopter flight in icing conditions
[SNIAS-832-210-107] p 599 N84-25707

FLIGHT SIMULATION

- An experimental investigation of VTOL flying qualities requirements in shipboard landings p 609 A84-34453
- Development of the Navy jet trainer duty cycle
[AIAA PAPER 84-1486] p 604 A84-35232
- Effects of simulated flight on the structure and noise of underexpanded jets
[NASA-TP-2308] p 631 N84-25422
- F-14 modeling study
[NASA-CR-172336] p 598 N84-25701
- System concepts for helicopter air-to-air combat
[SNIAS-832-210-102] p 598 N84-25705
- FLIGHT SIMULATORS**
A piloted simulator investigation of decoupling helicopters by using a model following control system
[AD-A139976] p 611 N84-24598
- Digital control of flight simulator motion base actuator
[ARL-SYS-TM-69] p 613 N84-25732
- FLIGHT TEST INSTRUMENTS**
CONUS Loran-C error budget: Flight test
[AD-A139871] p 592 N84-24568
- FLIGHT TESTS**
F/A-18A/F404 propulsion system integration
[AIAA PAPER 84-1330] p 595 A84-35174
- Preliminary flight test results of the F100 EMD engine in an F-15 airplane
[AIAA PAPER 84-1332] p 602 A84-35176
- Dash 8 - de Havilland Canada's quiet performer p 588 A84-35361
- Development and flight test of a helicopter compact, portable, precision landing system concept
[NASA-TM-85951] p 592 N84-24566
- Noise measurement flight test: Data/Analyses Bell 222 twin jet helicopter
[AD-A139906] p 631 N84-25430
- CONUS (Continental United States) Omega/VLF data collection: Flight test
[AD-A140252] p 593 N84-25688
- Aerospatiale's experience on helicopter flight in icing conditions
[SNIAS-832-210-107] p 599 N84-25707
- Design and implementation of input signals for identification of pilot/aircraft models
[DFVLR-FB-84-08] p 599 N84-25709
- FLOW CHARACTERISTICS**
The effect of perforation on the aerodynamics of a spoiler
[BU-286] p 582 N84-24545
- A numerical study of the controlled flow tunnel for a high lift model
[NASA-CR-166572] p 584 N84-25642
- Application of a quasi-3D inviscid flow and boundary layer analysis to the hub-shroud contouring of a radial turbine
[NASA-TM-83669] p 585 N84-25647
- FLOW DEFLECTION**
Calculation of potential flow past simple bodies using axial sources and a least-squares method p 575 A84-34464
- Numerical solution of transonic shear flows past thin bodies p 578 A84-35326
- Hypersonic similarity in the flow past a combination of a circular cone and delta wing p 580 A84-35742
- FLOW DISTORTION**
A study on the between-stage flow pattern of an axial-flow compressor with inlet distortion - Calculation method for and experimental research on inlet distortion transmission p 576 A84-35018
- Steady and unsteady distorted inlet flow simulation for engine ground tests
[AIAA PAPER 84-1490] p 577 A84-35234
- FLOW DISTRIBUTION**
A study on the between-stage flow pattern of an axial-flow compressor with inlet distortion - Calculation method for and experimental research on inlet distortion transmission p 576 A84-35018
- Simulation of the fluctuating field of a forced jet p 578 A84-35309
- V/STOL wind-tunnel testing
[NASA-TM-85936] p 571 N84-24528
- Development of temperature-, velocity- and concentration-profiles in a curved combustor p 608 N84-24757
- The boundary layer on compressor cascade blades
[NASA-CR-173514] p 623 N84-25001
- Special Course on V/STOL Aerodynamics
[AGARD-R-710] p 573 N84-25625
- Jet flowfields p 583 N84-25631
- Structure of rotating stall cells. Part 1: Absolute motion p 626 N84-25967
- Structure of rotating stall cells. Part 2: Relative motion p 626 N84-25970
- FLOW EQUATIONS**
Numerical predictions of internal flows using a diagonalized flux vector splitting algorithm
[AIAA PAPER 84-1246] p 580 A84-35653

Numerical aspects of unsteady flow calculations

p 626 N84-25968

FLOW GEOMETRY

- Effects of pin shape and array orientation on heat transfer and pressure loss in pin fin arrays p 618 A84-33707
- Orthogonal grid generation
[AIAA PAPER 84-1248] p 622 A84-35654
- Conical flows with leading edge vortices p 623 N84-25013

FLOW MEASUREMENT

- Two-dimensional wind-tunnel interference from measurements on two contours p 574 A84-34459
- Experimental investigation of wall interference and two-dimensionality of the flow in a transonic airfoil wind tunnel p 576 A84-35017
- A circulation meter for the measurement of discrete vortices
[BU-300] p 582 N84-24551

FLOW STABILITY

- Computational Fluid Dynamics, volume 2
[VKI-LS-1984-04-VOL-2] p 627 N84-25986
- Implicit time dependent methods for the solution of the Euler equations. Part 2: Application to transonic flows p 627 N84-25990

FLOW THEORY

- Theory of a thin wing with a circular mean line p 574 A84-34342
- Progress towards a theory of jet-flap thrust recovery p 575 A84-34695

FLOW VELOCITY

- Two-dimensional wind-tunnel interference from measurements on two contours p 574 A84-34459
- Efficient method for calculating the axial velocities induced along rotating blades by trailing helical vortices p 574 A84-34462
- Profile drag from laser-Doppler velocimeter measurement p 575 A84-34467
- A composite velocity procedure for the incompressible Navier-Stokes equations p 620 A84-35341
- Development of temperature-, velocity- and concentration-profiles in a curved combustor p 608 N84-24757
- The boundary layer on compressor cascade blades
[NASA-CR-173514] p 623 N84-25001
- Digital control of flight simulator motion base actuator
[ARL-SYS-TM-69] p 613 N84-25732

FLOW VISUALIZATION

- Flow visualization as an aerodynamic diagnostic tool p 618 A84-33850
- Thrust reverser exhaust plume reingestion model tests p 601 A84-34457
- Measurement of fluid properties using rapid-double-exposure and time-average holographic interferometry
[AIAA PAPER 84-1461] p 620 A84-35223
- First experimental evidence of vortex splitting p 580 A84-35876
- Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system p 581 A84-36460
- Wake visualization
[BU-282] p 581 N84-24542
- An aerodynamic study of combustion in the combustion chambers of turbomachines: Experimental and theoretical approaches p 608 N84-24764

FLUID DYNAMICS

- V/STOL wind-tunnel testing
[NASA-TM-85936] p 571 N84-24528
- The generation of higher levels of turbulence in the test section of the high speed cascade wind tunnel at Brunswick for simulation of turbomachinery conditions
[ESA-TT-815] p 586 N84-25654
- Unsteady Flow in Turbomachines, volume 1
[VKI-LS-1984-02-VOL-1] p 625 N84-25960
- Introduction to unsteady flow in turbomachines p 625 N84-25962
- Stability of pumps and compressors p 625 N84-25963
- Theory of rotating stall of multistage axial compressors p 625 N84-25964

FLUID MECHANICS

- On the stability of flight vehicles in the low Reynolds number non-linear regime
[AD-A140008] p 583 N84-24561
- Jet flowfields p 583 N84-25631

FLUTTER

- Measurements of self-excited rotor-blade vibrations using optical displacements
[ASME PAPER 83-GT-132] p 618 A84-33702
- Winglet effects on the flutter of twin-engine-transport type wing
[AIAA PAPER 84-0905] p 594 A84-34907
- Active suppression of aeroelastic instabilities for forward swept wings p 584 N84-25638

- Unsteady Flow in Turbomachines, volume 2
[VKI-LS-1984-02-VOL-2] p 626 N84-25965
- FLUTTER ANALYSIS**
Divergence boundary prediction from random responses - NAL's method --- aeroelastic instability boundary estimation for subcritical divergence cantilever wing model test p 619 N84-34463
Thermoelastic limit cycling of zippered cross section spacecraft booms p 613 A84-34915
Linear problem of a vibrator oscillating harmonically at supercritical frequencies in a subsonic boundary layer p 579 A84-35497
Flutter and forced response of mistuned rotors using standing wave analysis [NASA-CR-173555] p 606 N84-24586
- FLYING PLATFORMS**
Structural sizing of a solar powered aircraft [NASA-CR-172313] p 598 N84-25702
- FORCED VIBRATION**
Flutter and forced response of mistuned rotors using standing wave analysis [NASA-CR-173555] p 606 N84-24586
- FOREBODIES**
Aerodynamics of pointed forebodies at high angles of attack p 574 A84-34461
- FORECASTING**
Worldwide aviation outlook --- for passenger and freight traffic 1982-1992 p 587 A84-34456
- FORMING TECHNIQUES**
Successful utilization of economic, light aluminum-casted structures in airplane construction [VFW-31/83-O] p 599 N84-26439
- FRACTURE MECHANICS**
An exploratory study of retirement-for-cause for gas turbine engine components [AIAA PAPER 84-1220] p 601 A84-35136
Statistics of crack growth of a superalloy under sustained load p 614 A84-36175
- FRACTURE STRENGTH**
Strength calculation for an aviation GTE stator in axisymmetric deformation p 600 A84-34134
- FRACTURES (MATERIALS)**
Status of understanding for bearing materials p 616 N84-25060
- FRAMES**
Radomes for flight vehicles [AD-A140174] p 625 N84-25920
- FREE FLOW**
A numerical study of the controlled flow tunnel for a high lift model [NASA-CR-166572] p 584 N84-25642
- FUEL COMBUSTION**
Fuel effects on gas turbine combustion - Liner temperature, pattern factor and pollutant emissions [AIAA PAPER 84-1491] p 604 A84-35235
Determination of the heat of combustion of reactive fuels by a calculation method p 614 A84-35761
Combustion Problems in Turbine Engines [AGARD-CP-353] p 614 N84-24732
Combustor technology for broadened-properties fuels p 615 N84-24736
Fuel character effects on performance of small gas turbine combustion systems p 607 N84-24738
U.S. Army alternative gas-turbine fuels research: MERADCOM p 615 N84-24739
Electrical spray modification with various fuels in a t56 combustor [AD-A139961] p 616 N84-24824
A review of internal combustion engine combustion chamber process studies at NASA Lewis Research Center [NASA-TM-83666] p 623 N84-24999
- FUEL CONSUMPTION**
Performance derivation of turbojets and turbofans from tests in sea-level test cells p 608 N84-25728
Study of effects of fuel properties in turbine-powered business aircraft [NASA-CR-174627] p 617 N84-25854
- FUEL CONTAMINATION**
Degradation of jet fuel hydrocarbons by aquatic microbial communities [AD-A139791] p 616 N84-24822
- FUEL CONTROL**
Ground based testing without wind tunnels p 598 N84-25634
- FUEL INJECTION**
Electrical spray modification with various fuels in a t56 combustor [AD-A139961] p 616 N84-24824
- FUEL SPRAYS**
Detailed fuel spray analysis techniques p 622 N84-24747
Electrical spray modification with various fuels in a t56 combustor [AD-A139961] p 616 N84-24824

FUEL SYSTEMS

- Alternative fuels use in a vehicular gas turbine p 615 N84-24741

FUEL TANKS

- Interactions between F-111 fuselage fuel tank sealants. Part 1: Characterisation of polyester sealants and their hydrolytic degradation products [MRL-R-657-PT-1] p 617 N84-25828

FUEL TESTS

- Fuel effects on gas turbine combustion - Liner temperature, pattern factor and pollutant emissions [AIAA PAPER 84-1491] p 604 A84-35235

FUEL-AIR RATIO

- Detailed fuel spray analysis techniques p 622 N84-24747

FUNCTIONAL DESIGN SPECIFICATIONS

- Status of understanding for gear materials p 623 N84-25061
Status of understanding for seal materials p 624 N84-25062

FUNCTIONS (MATHEMATICS)

- NERF: A computer program for the numerical evaluation of reliability functions-reliability modeling, numerical methods and program documentation [AR-00-984] p 627 N84-26048

FUSELAGES

- Noniterative grid generation using parabolic difference equations for fuselage-wing flow calculations p 579 A84-35334
The aerodynamic effects of cavities in a body [BU-289] p 582 N84-24547
The use of Arall in fuselage skins [AD-B080831] p 596 N84-24572
Interactions between F-111 fuselage fuel tank sealants. Part 1: Characterisation of polyester sealants and their hydrolytic degradation products [MRL-R-657-PT-1] p 617 N84-25828

G**GAS COMPOSITION**

- Combustion gas properties of various fuels of interest to gas turbine engines [NASA-TM-83682] p 606 N84-24584

GAS FLOW

- Numerical solution of the problem of supersonic flow past wings of arbitrary form with a detached shock wave p 579 A84-35351

GAS TEMPERATURE

- Development of temperature-, velocity- and concentration-profiles in a curved combustor p 608 N84-24757

GAS TURBINE ENGINES

- Effects of pin shape and array orientation on heat transfer and pressure loss in pin fin arrays p 618 A84-33707
Method for determining stress intensity factors in blades of gas turbine engines p 619 A84-34129
Estimation of vibrational stressed state for GTE blades under random vibrations p 619 A84-34133
Strength calculation for an aviation GTE stator in axisymmetric deformation p 600 A84-34134
Design of robust digital controllers for gas turbines with explicit actuator and sensor dynamics [AIAA PAPER 84-1185] p 601 A84-35128
Counter-rotating intershaft seals for advanced engines [AIAA PAPER 84-1216] p 619 A84-35135
An exploratory study of retirement-for-cause for gas turbine engine components [AIAA PAPER 84-1220] p 601 A84-35136
Evaluation of benefits of the A-10/TF34 Turbine Engine Monitoring System Squadron Integration Program [AIAA PAPER 84-1414] p 603 A84-35208
Measuring turbine engine inlet total temperature problems and solutions [AIAA PAPER 84-1457] p 604 A84-35222
Fuel effects on gas turbine combustion - Liner temperature, pattern factor and pollutant emissions [AIAA PAPER 84-1491] p 604 A84-35235
Prediction of turbulent flows in combustor by using Reynolds-stress closure [AIAA PAPER 84-1494] p 620 A84-35237
A linear multivariable dynamical model of supersonic inlet-engine combination [AIAA PAPER 84-1496] p 577 A84-35239
Combustor liner construction [NASA-CASE-LEW-14035-1] p 605 N84-24577
Sensor failure detection for jet engines using analytical redundancy [NASA-TM-83695] p 606 N84-24585
Combustion Problems in Turbine Engines [AGARD-CP-353] p 614 N84-24732
Fuel effects on gas turbine combustion systems p 615 N84-24737

- Fuel character effects on performance of small gas turbine combustion systems p 607 N84-24738
U.S. Army alternative gas-turbine fuels research: MERADCOM p 615 N84-24739
Alternative fuels use in a vehicular gas turbine p 615 N84-24741
Effects of airblast atomizer design upon spray quality p 622 N84-24744
Detailed fuel spray analysis techniques p 622 N84-24747
The design and development of a low emissions transpily combustor for the civil Spey engine p 607 N84-24755
Advanced combustor liner cooling concepts p 608 N84-24756
Status of understanding for seal materials p 624 N84-25062
Journal of aeronautical materials (selected articles) [AD-A140181] p 572 N84-25611
Cold-air performance of compressor-drive turbine of department of energy upgraded automobile gas turbine engine. 3: Performance of redesigned turbine [NASA-TM-83627] p 585 N84-25644
Encounters with surge p 626 N84-25966
Structure of rotating stall cells. Part 1: Absolute motion p 626 N84-25967
Structure of rotating stall cells. Part 2: Relative motion p 626 N84-25970
Real-time simulation of an automotive gas turbine using the hybrid computer [NASA-TM-83593] p 633 N84-26484
- GAS TURBINES**
Demonstration of a new body-fitted coordinate code for modeling gas-turbine combustor flows [AIAA PAPER 84-1381] p 603 A84-35199
Combustion gas properties of various fuels of interest to gas turbine engines [NASA-TM-83682] p 606 N84-24584
Application of a quasi-3D inviscid flow and boundary layer analysis to the hub-shroud contouring of a radial turbine [NASA-TM-83669] p 585 N84-25647
Unsteady flow in turbomachinery: An overview p 625 N84-25961

GEARS

- Evaluation of single and counter rotation gearboxes for propulsion systems [AIAA PAPER 84-1195] p 604 A84-35651
Status of understanding for gear materials p 623 N84-25061
An analytical method to predict efficiency of aircraft gearboxes [NASA-TM-83716] p 572 N84-25606

GENERAL AVIATION AIRCRAFT

- Design of a high-performance rotary stratified-charge research aircraft engine [AIAA PAPER 84-1395] p 603 A84-35204
Australian airspace management p 571 A84-35377
A comparison of measured take-off and flyover sound levels for several general aviation propeller-driven aircraft [AD-A139901] p 631 N84-25429
Competitive assessment of the U.S. Civil aircraft industry [PB84-154913] p 632 N84-25525
Rotary balance data for a typical single-engine general aviation design for an angle-of-attack range of 20 to 90 deg. 3: Influence of control deflection on predicted model D spin modes [NASA-CR-3248] p 584 N84-25641
Annual review of aircraft accident data: US general aviation, 1980 [PB84-182914] p 588 N84-25672
CONUS (Continental United States) Omega/VLF data collection: Flight test [AD-A140252] p 593 N84-25688
Renovation of the Helice [SNIAS-832-111-109] p 598 N84-25703

GEOGRAPHY

- Astronautics and aeronautics, 1976. A chronology [NASA-SP-4021] p 633 N84-25602

GLASS FIBER REINFORCED PLASTICS

- Journal of aeronautical materials (selected articles) [AD-A140181] p 572 N84-25611

GLOBAL POSITIONING SYSTEM

- GPS guidance concepts --- for weapons p 591 A84-36265

GOVERNMENT PROCUREMENT

- The 1985 NASA authorization [GPO-31-453] p 632 N84-25526
Current procurement specification design requirements for US Navy aircraft p 596 N84-25615

GRAPHITE

- Status of understanding for seal materials p 624 N84-25062

GRAPHITE-EPOXY COMPOSITES

- Analysis of symmetric reinforcement of quasi-isotropic graphite-epoxy plates with a circular cutout under uniaxial tensile loading
[AD-A139998] p 614 N84-24715
- Carbon structures on the wing of the regional transport plane ATR-42
[SNIAS-832-111-113] p 598 N84-25704
- Composite materials: The user and the producer
[SNIAS-832-111-108] p 617 N84-25772
- GROUND EFFECT**
Ground and inflight operational effects of APU's
[VFW-30/83-O] p 609 N84-26438
- GROUND EFFECT (AERODYNAMICS)**
Measurements of ground effect for delta wings
p 575 N84-34466

GUSTS

- The Sears problem for a lifting airfoil revisited - New results
p 575 N84-34691

H**HANG GLIDERS**

- Hang gliding --- Russian book p 580 N84-35682
- Full scale wind tunnel tests on hang glider pilots
[CA-8416] p 585 N84-25643

HARMONIC OSCILLATORS

- Linear problem of a vibrator oscillating harmonically at supercritical frequencies in a subsonic boundary layer
p 579 N84-35497

HARMONICS

- Installation noise measurements of model SR and CR propellers
[NASA-TM-85790] p 631 N84-25425

HARRIER AIRCRAFT

- Ground based testing without wind tunnels
p 598 N84-25634
- Aerodynamics of V/STOL aircraft: Performance assessment
p 584 N84-25635

HEAT EXCHANGERS

- Reynolds number effects on pressure loss and turbulence characteristics of four tube-bundle heat exchangers
[NASA-TM-85807] p 585 N84-25645

HEAT FLUX

- Turbulent heat transport in circular ducts with circumferentially varying heat flux
p 622 N84-36151

HEAT OF COMBUSTION

- Determination of the heat of combustion of reactive fuels by a calculation method
p 614 N84-35761

HEAT RESISTANT ALLOYS

- Statistics of crack growth of a superalloy under sustained load
p 614 N84-36175

HEAT TRANSFER

- Length to diameter ratio and row number effects in short pin fin heat transfer
[ASME PAPER 83-GT-54] p 618 N84-33706
- Friction and heat transfer in laminar and turbulent boundary layers in the case of nonuniform supersonic flow past axisymmetric bodies
p 580 N84-35730
- Advanced combustor liner cooling concepts
p 608 N84-24756

HEAT TRANSFER COEFFICIENTS

- Measurement of local connective heat transfer coefficients of four ice accretion shapes
[NASA-CR-174680] p 585 N84-25646

HELICOPTER CONTROL

- A 60 GHz collision warning sensor for helicopters
p 600 N84-36262

HELICOPTER DESIGN

- An engine for tomorrow's small helicopters
[AIAA PAPER 84-1277] p 604 N84-35655
- The AHIP power plant
[AIAA PAPER 84-1282] p 604 N84-35656
- An investigation into the nature and control of vortex flow round helicopter upsweep
[BU-285] p 582 N84-24544
- Acoustic measurements of a full-scale rotor with four tip shapes. Volume 2: Appendices C, D, E and F
[NASA-TM-85878-VOL-2] p 631 N84-25426
- The interpretation of design requirements for multi-market helicopters
p 597 N84-25617
- Experimental modal analysis
[SNIAS-832-210-110] p 587 N84-25655
- Aerospatiale's experience on helicopter flight in icing conditions
[SNIAS-832-210-107] p 599 N84-25707

HELICOPTER ENGINES

- An engine for tomorrow's small helicopters
[AIAA PAPER 84-1277] p 604 N84-35655
- The AHIP power plant
[AIAA PAPER 84-1282] p 604 N84-35656
- Development of the Engine Condition Monitoring System for the HH-65A helicopter
[AIAA PAPER 84-1411] p 605 N84-35666

HELICOPTER PERFORMANCE

- Chinook's trial by ice p 588 N84-35359
- System concepts for helicopter air-to-air combat
[SNIAS-832-210-102] p 598 N84-25705
- Aerospatiale's experience on helicopter flight in icing conditions
[SNIAS-832-210-107] p 599 N84-25707
- Single-pilot IFR flights and operations
[SNIAS-832-210-103] p 630 N84-26374

HELICOPTER TAIL ROTORS

- The compressible aerodynamics of rotating blades using an acoustic formulation
p 587 N84-25670
- The SARIB vibration absorber
[SNIAS-832-210-104] p 628 N84-26058

HELICOPTER WAKES

- Navier-Stokes calculations for the vortex of a rotor in hover
[NASA-TM-85894] p 581 N84-24540

HELICOPTERS

- Towards a better understanding of helicopter external noise
p 630 N84-34173
- Development and flight test of a helicopter compact, portable, precision landing system concept
[NASA-TM-85951] p 592 N84-24566
- The influence of a moving suspension on the behaviour of modelled helicopter underslung loads
[BU-288] p 596 N84-24573
- Rotorcraft contingency power study
[NASA-CR-174675] p 605 N84-24580
- A piloted simulator investigation of decoupling helicopters by using a model following control system
[AD-A139976] p 611 N84-24598
- Noise measurement flight test: Data/Analyses Bell 222 twin jet helicopter
[AD-A139906] p 631 N84-25430
- Current design requirements for corrosion control on helicopters
p 597 N84-25616
- The interpretation of design requirements for multi-market helicopters
p 597 N84-25617
- The compressible aerodynamics of rotating blades using an acoustic formulation
p 587 N84-25670
- Helicopter Pilot/Copilot survival system
[AD-A140358] p 590 N84-25682
- The development of the Navy variant of the Dauphin 2 helicopter
[SNIAS-832-210-106] p 599 N84-25706
- Evolution of a heave control system for an amphibious hovercraft
[CAR-8401] p 624 N84-25864
- Nondestructive testing of composite structures
[SNIAS-832-210-108] p 627 N84-26045
- The SARIB vibration absorber
[SNIAS-832-210-104] p 628 N84-26058
- Towards a better understanding of helicopter external noise
[SNIAS-832-210-113] p 632 N84-26388

HIGH ALTITUDE

- Structural sizing of a solar powered aircraft
[NASA-CR-172313] p 598 N84-25702

HIGH REYNOLDS NUMBER

- The boundary layer on compressor cascade blades
[NASA-CR-173514] p 623 N84-25001

HIGH SPEED

- USB applied to high-speed aircraft --- upper surface blowing
p 595 N84-35024

HINGES

- Preliminary method for estimating hinge moments of all-movable controls
[AD-A139726] p 611 N84-24597

HOLE GEOMETRY (MECHANICS)

- Analysis of symmetric reinforcement of quasi-isotropic graphite-epoxy plates with a circular cutout under uniaxial tensile loading
[AD-A139998] p 614 N84-24715

HOLOGRAPHIC INTERFEROMETRY

- Experimental determination of the natural modes of swept-wing models using laser holographic interferometry
p 619 N84-35022

HOLOGRAPHY

- Measurement of fluid properties using rapid-double-exposure and time-average holographic interferometry
[AIAA PAPER 84-1461] p 620 N84-35223

HOMING DEVICES

- Is there a future for infra-red missile systems?
p 591 N84-36229

HORIZONTAL FLIGHT

- V/STOL maneuverability and control
p 611 N84-25632

HORIZONTAL TAIL SURFACES

- The influence of V/STOL on wing design and tailplane design
p 597 N84-25627

HOVERING

- Flap-lag damping of an elastic rotor blade with torsion and dynamic inflow in hover from symbolically generated equations
[AIAA PAPER 84-0989] p 619 N84-34909
- Navier-Stokes calculations for the vortex of a rotor in hover
[NASA-TM-85894] p 581 N84-24540

HUBS

- Application of a quasi-3D inviscid flow and boundary layer analysis to the hub-shroud contouring of a radial turbine
[NASA-TM-83669] p 585 N84-25647

HYDROCARBON FUELS

- Determination of the heat of combustion of reactive fuels by a calculation method
p 614 N84-35761
- Alternative fuels use in a vehicular gas turbine
p 615 N84-24741

HYDROCARBONS

- Degradation of jet fuel hydrocarbons by aquatic microbial communities
[AD-A139791] p 616 N84-24822

HYDROFOILS

- Profile drag from laser-Doppler velocimeter measurement
p 575 N84-34467
- Sidewall boundary layer corrections in subsonic, two-dimensional airfoil/hydrofoil testing
[AIAA PAPER 84-1366] p 620 N84-35195

HYDROGEN OXYGEN FUEL CELLS

- Design of long-endurance unmanned airplanes incorporating solar and fuel cell propulsion
[AIAA PAPER 84-1430] p 595 N84-35215

HYDROLYSIS

- Interactions between F-111 fuselage fuel tank sealants. Part 1: Characterisation of polyester sealants and their hydrolytic degradation products
[MRL-R-657-PT-1] p 617 N84-25828

HYDROMETEOROLOGY

- Clouds and flight safety --- Russian book
p 587 N84-33525

HYPERSONIC FLOW

- Hyper sonic similarity in the flow past a combination of a circular cone and delta wing
p 580 N84-35742
- Hyper sonic Aerothermodynamics
[VKI-LS-1984-01] p 587 N84-25656

HYSTERESIS

- Hysteresis of supersonic separated flows
p 580 N84-35734
- Investigation of the behavior of axial compressor stages with steady state inlet distortions
[DFVLR-FB-83-39] p 607 N84-24590

I**ICE FORMATION**

- Study of aerospace materials, coatings, adhesions and processes. Aircraft icing processes
[AD-A139743] p 583 N84-24557

- First stage of equipment for aircraft Do 28 of DFVLR as a research aircraft for icing and first research results
[DFVLR-FB-83-40] p 596 N84-24571

- Measurement of local connective heat transfer coefficients of four ice accretion shapes
[NASA-CR-174680] p 585 N84-25646

- Safety recommendation(s) A-84-10 and -11
p 589 N84-25676

- Aerospatiale's experience on helicopter flight in icing conditions
[SNIAS-832-210-107] p 599 N84-25707

ICE PREVENTION

- First stage of equipment for aircraft Do 28 of DFVLR as a research aircraft for icing and first research results
[DFVLR-FB-83-40] p 596 N84-24571

- Measurement of local connective heat transfer coefficients of four ice accretion shapes
[NASA-CR-174680] p 585 N84-25646

- Aerospatiale's experience on helicopter flight in icing conditions
[SNIAS-832-210-107] p 599 N84-25707

IMAGE PROCESSING

- Digital scan conversion --- for airborne radar display
p 600 N84-36259

- Wake visualization
[BU-282] p 581 N84-24542

IMAGE RECONSTRUCTION

- Experimental determination of the natural modes of swept-wing models using laser holographic interferometry
p 619 N84-35022

IMAGING TECHNIQUES

- Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system
p 581 N84-36460

IMPAIRMENT
 Statistical review of alcohol-involved aviation accidents [NTSB/SS-84/003] p 589 N84-25681

IN-FLIGHT MONITORING
 United Kingdom military engine monitoring experience [AIAA PAPER 84-1409] p 603 A84-35207
 Evaluation of benefits of the A-10/TF34 Turbine Engine Monitoring System Squadron Integration Program [AIAA PAPER 84-1414] p 603 A84-35208
 Development of the Engine Condition Monitoring System for the HH-65A helicopter [AIAA PAPER 84-1411] p 605 A84-35666
 Safety recommendation A-84-7 p 588 N84-25674

INCOMPRESSIBLE FLOW
 Modelling of an airfoil empirical flow field below and through dynamic stall p 576 A84-34832
 An approximate analytical solution of incompressible potential flow around a circular cylinder between two parallel flat plates p 576 A84-35023
 On the use of several compact methods for the study of unsteady incompressible viscous flow for outer problems. II p 620 A84-35327
 A composite velocity procedure for the incompressible Navier-Stokes equations p 620 A84-35341
 Unsteady laminar boundary-layer calculations on oscillating configurations including backflow. Part 2: Airfoil in high-amplitude pitching motion. Dynamic stall [NASA-TM-84319-PT-2] p 581 N84-24537

INDEXES (DOCUMENTATION)
 Cabin safety subject index [AD-A140409] p 590 N84-25683

INDUCTANCE
 Radomes for flight vehicles [AD-A140174] p 625 N84-25920

INERTIAL NAVIGATION
 Problems in air navigation at the North Pole. II p 590 A84-35589

INFLATABLE STRUCTURES
 The structural and aerodynamic behaviour of a semi-inflatable wing [BU-297] p 596 N84-24574

INFORMATION DISSEMINATION
 Combustion gas properties of various fuels of interest to gas turbine engines [NASA-TM-83682] p 606 N84-24584

INFRARED DETECTORS
 Is there a future for infra-red missile systems? p 591 A84-36229

INFRARED IMAGERY
 Is there a future for infra-red missile systems? p 591 A84-36229

INFRARED LASERS
 Infra-red laser velocimetry p 600 A84-36299

INFRARED RADAR
 A CW CO₂ laser rangefinder/velocimeter using heterodyne detection p 591 A84-36232

INFRARED SCANNERS
 Infra-red surveillance techniques for guided weapon systems p 622 A84-36298

INGESTION (ENGINES)
 Thrust reverser exhaust plume reingestion model tests p 601 A84-34457

INLET FLOW
 A study on the between-stage flow pattern of an axial-flow compressor with inlet distortion - Calculation method for and experimental research on inlet distortion transmission p 576 A84-35018
 Numerical simulation of flow through inlets/diffusers with terminal shocks [AIAA PAPER 84-1362] p 577 A84-35192
 Steady and unsteady distorted inlet flow simulation for engine ground tests [AIAA PAPER 84-1490] p 577 A84-35234
 Introduction to unsteady flow in turbomachines p 625 N84-25962

INSTRUMENT ERRORS
 CONUS Loran-C error budget: Flight test [AD-A139871] p 592 N84-24568

INSTRUMENT FLIGHT RULES
 Single-pilot IFR flights and operations [SNIAS-832-210-103] p 630 N84-26374

INTEGRATED CIRCUITS
 A small integrated J band altimeter p 600 A84-36261

INTERACTIONAL AERODYNAMICS
 Computation of transonic flow around airfoils with trailing edge and shock/boundary layer interactions p 574 A84-34454

INTERCONTINENTAL BALLISTIC MISSILES
 An advanced aerospike to minimize nose drag p 573 A84-33849

INTERFEROMETRY
 Measurement of fluid properties using rapid-double-exposure and time-average holographic interferometry [AIAA PAPER 84-1461] p 620 A84-35223

INTERNAL COMBUSTION ENGINES
 An overview of NASA intermittent combustion engine research [NASA-TM-83668] p 606 N84-24583
 A review of internal combustion engine combustion chamber process studies at NASA Lewis Research Center [NASA-TM-83666] p 623 N84-24999

INVISCID FLOW
 Analysis of separated boundary-layer flows p 578 A84-35311
 Computation of inviscid transonic internal flow p 578 A84-35317
 Euler solutions as limit of infinite Reynolds number for separation flows and flows with vortices p 579 A84-35344
 Numerical solution of the problem of supersonic flow past wings of arbitrary form with a detached shock wave p 579 A84-35351
 An algorithm for the prediction of unsteady potential flow about an arbitrary airfoil [GU-AERO-8306] p 582 N84-24553
 Application of a quasi-3D inviscid flow and boundary layer analysis to the hub-shroud contouring of a radial turbine [NASA-TM-83669] p 585 N84-25647
 A theoretical analysis of the aerodynamic and structural forces associated with a ribbon parachute canopy in steady descent p 587 N84-25671

IRON ALLOYS
 Status of understanding for gear materials p 623 N84-25061

J

JAMMERS
 Airborne Self Protection Jammer - ASPJ/ALQ-165 p 592 A84-36266

JET AIRCRAFT
 Requirements, applications, and results of strapdown inertial technology to commercial airplanes p 593 N84-25695

JET AIRCRAFT NOISE
 On the propagation of sound in nozzles of variable cross-section containing low Mach number mean flow p 630 A84-34718
 Simulation of the fluctuating field of a forced jet p 578 A84-35309
 Effects of simulated flight on the structure and noise of underexpanded jets [NASA-TP-2308] p 631 N84-25422
 Computation of noise radiating from a free jet perpendicular to its axis via laser anemometry measurements [ONERA-NT-1983-6] p 632 N84-26387

JET ENGINE FUELS
 Determination of the heat of combustion of reactive fuels by a calculation method p 614 A84-35761
 Degradation of jet fuel hydrocarbons by aquatic microbial communities [AD-A139791] p 616 N84-24822
 Electrical spray modification with various fuels in a t56 combustor [AD-A139961] p 616 N84-24824
 Comparison of JFTOT (Jet Fuel Thermal Oxidation Tester) and absorbance methods for determining jet fuel thermal stability [AD-A138673] p 616 N84-24825

JET ENGINES
 Development of the Navy jet trainer duty cycle [AIAA PAPER 84-1486] p 604 A84-35232
 An investigation into anti-swirl devices for s-shaped air intakes [BU-293] p 582 N84-24549
 Preliminary flight test results of the F100 EMD engine in an F-15 airplane [NASA-TM-85902] p 606 N84-25588
 Operation and performance measurement on engines in sea-level test facilities: Introduction and general survey p 612 N84-25724
 Aero/thermodynamic and acoustic considerations in the design of test-beds for turbojets and turbofans p 612 N84-25725
 Instrumentation techniques in sea level test facilities p 612 N84-25727
 Performance derivation of turbojets and turbofans from tests in sea-level test cells p 608 N84-25728
 Testing of turboshaft engines p 612 N84-25729

JET EXHAUST
 Ground based testing without wind tunnels p 598 N84-25634

JET FLAPS
 Progress towards a theory of jet-flap thrust recovery p 575 A84-34695
 A numerical study of the controlled flow tunnel for a high lift model [NASA-CR-166572] p 584 N84-25642
 A numerical study of the controlled flow tunnel for a high lift model p 611 N84-25721

JET FLOW
 Simulation of the fluctuating field of a forced jet p 578 A84-35309
 An investigation of the interaction between multiple dilution jets and combustion products p 616 N84-24758

JET MIXING FLOW
 An investigation of the interaction between multiple dilution jets and combustion products p 616 N84-24758
 Effects of simulated flight on the structure and noise of underexpanded jets [NASA-TP-2308] p 631 N84-25422
 Multi-length scale turbulence models [AD-A140527] p 627 N84-25997

JET THRUST
 Progress towards a theory of jet-flap thrust recovery p 575 A84-34695
 Ground based testing without wind tunnels p 598 N84-25634
 Aerodynamics of V/STOL aircraft: Performance assessment p 584 N84-25635
 Notes on special flight aspects, such as STO, ski-jump and ODM p 598 N84-25637

JOINTS (JUNCTIONS)
 A rear engine without joints and pillows [MBB-UD-383-83-O] p 628 N84-26441

JP-5 JET FUEL
 Alternative fuel deposit formation p 615 N84-24735

K

KALMAN FILTERS
 Advances in Strapdown Inertial Systems [AGARD-LS-133] p 593 N84-25691

KINEMATICS
 Design and analysis of Coordinated Bank-To-Turn (CBTT) autopilots for Bank-To-Turn (BTT) missiles [AD-A140103] p 613 N84-24698

L

LAMINAR BOUNDARY LAYER
 Friction and heat transfer in laminar and turbulent boundary layers in the case of nonuniform supersonic flow past axisymmetric bodies p 580 A84-35730

LAMINAR FLOW
 Numerical analysis of separated laminar viscous-gas flows in the case of supersonic flow past bodies with leading spikes p 580 A84-35735

LAMINATES
 The use of Arall in fuselage skins [AD-B080831] p 596 N84-24572

LANDING AIDS
 Axisymmetric approach and landing thrust reversers for single engine fighters [AIAA PAPER 84-1214] p 604 A84-35652

LANDING GEAR
 Safety recommendation: Cessna Model 402C airplane, September 5, 1983, Tampa International Airport, Tampa, Florida p 589 N84-25680

LANDING SIMULATION
 VTOL shipboard letdown guidance system analysis [NASA-CR-166519] p 611 N84-25716

LAP JOINTS
 On improving the fatigue performance of a double-shear lap joint [VFW-29/83-O] p 628 N84-26431

LASER ANEMOMETERS
 Infra-red laser velocimetry p 600 A84-36299
 Optimization of fringe-type laser anemometers for turbine engine component testing [NASA-TM-83658] p 623 N84-25019

LASER DOPPLER VELOCIMETERS
 Profile drag from laser-Doppler velocimeter measurement p 575 A84-34467
 A CW CO₂ laser rangefinder/velocimeter using heterodyne detection p 591 A84-36232
 A review of internal combustion engine combustion chamber process studies at NASA Lewis Research Center [NASA-TM-83666] p 623 N84-24999

LASER GYROSCOPES
 Advances in Strapdown Inertial Systems
 [AGARD-LS-133] p 593 N84-25691
 Advances in strapdown sensors p 593 N84-25693

LASER RANGE FINDERS
 A CW CO₂ laser rangefinder/velocimeter using heterodyne detection p 591 A84-36232

LASER TARGET DESIGNATORS
 Infra-red surveillance techniques for guided weapon systems p 622 A84-36298

LATERAL CONTROL
 Optimal control of multimode plants --- for flight control p 629 A84-34773

LAUNCH VEHICLES
 A view of future technology needs for space transportation
 [AIAA PAPER 84-1283] p 613 A84-35156

LEADING EDGES
 Engineering analysis of drooped leading-edge wings near stall p 575 A84-34468
 The study of an idealized wing/body junction
 [AD-A139933] p 583 N84-24559
 Conical flows with leading edge vortices p 623 N84-25013

LEAST SQUARES METHOD
 Calculation of potential flow past simple bodies using axial sources and a least-squares method p 575 A84-34464

LIFE (DURABILITY)
 Status of understanding for gear materials p 623 N84-25061

LIFE CYCLE COSTS
 Rotorcraft contingency power study
 [NASA-CR-174675] p 605 N84-24580
 Methodology for assessment of corrosion costs p 573 N84-25623

LIFE SPAN
 Derating requirements and application rules for electronic components
 [ESA-PSS-01-301-ISSUE-1] p 625 N84-25930

LIFT
 The Sears problem for a lifting airfoil revisited - New results p 575 A84-34691
 A numerical study of the controlled flow tunnel for a high lift model p 611 N84-25721

LIFT AUGMENTATION
 Engineering analysis of drooped leading-edge wings near stall p 575 A84-34468

LIFT DEVICES
 Doublet point method for calculations on oscillatory lifting surfaces. Part 2: Supersonic flow
 [NAL-TR-785-PT-2] p 586 N84-25649

LIFTING BODIES
 Doublet point method for calculations on oscillatory lifting surfaces. Part 2: Supersonic flow
 [NAL-TR-785-PT-2] p 586 N84-25649

LIGHT AIRCRAFT
 Contribution to the study of light aircraft propeller noise
 [AD-B073101] p 632 N84-26386

LIGHT SCATTERING
 Effects of airblast atomizer design upon spray quality p 622 N84-24744

LIGHT SOURCES
 Wake visualization
 [BU-282] p 581 N84-24542

LIGHTNING
 Facilities for meteorological research at NASA Goddard/Wallops Flight Facility
 [NASA-TM-84422] p 629 N84-25223

LINEAR VIBRATION
 Linear problem of a vibrator oscillating harmonically at supercritical frequencies in a subsonic boundary layer p 579 A84-35497

LININGS
 Combustor liner construction
 [NASA-CASE-LEW-14035-1] p 605 N84-24577
 Advanced combustor liner cooling concepts p 608 N84-24756

LOADS (FORCES)
 Statistics of crack growth of a superalloy under sustained load p 614 A84-36175
 The influence of a moving suspension on the behaviour of modelled helicopter underslung loads
 [BU-288] p 596 N84-24573
 Propeller noise at subsonic blade tip speeds, torque and thrust force
 [ESA-TT-821] p 632 N84-26385
 Contribution to the study of light aircraft propeller noise
 [AD-B073101] p 632 N84-26386

LOGIC DESIGN
 Minimum operational performance standards for traffic alert and collision avoidance system (TCAS) airborne equipment, volume 1
 [RTCA-DO-185-VOL-1] p 593 N84-25685

Minimum operational performance standards for traffic alert and collision avoidance system (TCAS) airborne equipment, volume 2
 [RTCA/DO-185-VOL-2] p 593 N84-25686

LOGISTICS MANAGEMENT
 Naval aviation IMA repair capability: A readiness to resources approach
 [AD-A140465] p 572 N84-25612

LONGITUDINAL CONTROL
 An advanced pitch change mechanism incorporating a hybrid traction drive p 572 N84-25605
 Computer program to simulate digital computer based longitudinal flight control laws in a high performance aircraft
 [AD-A140143] p 611 N84-25719

LORAN C
 CONUS Loran-C error budget: Flight test
 [AD-A139871] p 592 N84-24568

LOW ALTITUDE
 Position updating using a passive millimeter wave sensor --- for low altitude air navigation p 591 A84-36263
 Estimation of the flight parameters of low flying aircraft using the radiated noise
 [LFD-211] p 595 N84-24569

LOW ASPECT RATIO
 Performance of a high-work low aspect ratio turbine tested with a realistic inlet radial temperature profile
 [NASA-TM-83655] p 607 N84-24589

LOW REYNOLDS NUMBER
 On the stability of flight vehicles in the low Reynolds number non-linear regime
 [AD-A140008] p 583 N84-24561

M

MAINTENANCE
 Uninstalled aero engine testing in operation in the Royal Air Force p 612 N84-25731

MAN MACHINE SYSTEMS
 STP: A mechanized logic for specification and verification p 629 N84-25308
 Emulation of a voice interactive Doppler navigation set
 [AD-A140204] p 593 N84-25687
 F-14 modeling study
 [NASA-CR-172336] p 598 N84-25701

MANAGEMENT INFORMATION SYSTEMS
 Naval aviation IMA repair capability: A readiness to resources approach
 [AD-A140465] p 572 N84-25612

MANEUVERABILITY
 Special Course on V/STOL Aerodynamics
 [AGARD-R-710] p 573 N84-25625

MANUFACTURING
 Design and manufacturing practices to minimize corrosion in aircraft p 597 N84-25620
 Testing of turboshaft engines p 612 N84-25729

MAPPING
 Multi-models to increase accuracy p 629 N84-25154

MARINE TECHNOLOGY
 VTOL shipboard letdown guidance system analysis
 [NASA-CR-166519] p 611 N84-25716

MARKET RESEARCH
 Competitive assessment of the U.S. Civil aircraft industry
 [PB84-154913] p 632 N84-25525

MATERIALS SCIENCE
 Technical and scientific publication 1983: Research and development p 633 N84-26430

MATHEMATICAL MODELS
 An algorithm for the prediction of unsteady potential flow about an arbitrary aerofoil
 [GU-AERO-8306] p 582 N84-24553
 Optimal cooperative control synthesis applied to a control-configured aircraft
 [NASA-CR-170411] p 610 N84-24593
 A simplified method of evaluating aircraft handling qualities using a pilot transfer function model
 [GU-AERO-8302] p 610 N84-24595
 An aerodynamic study of combustion in the combustion chambers of turbomachines: Experimental and theoretical approaches p 608 N84-24764
 Multi-models to increase accuracy p 629 N84-25154
 An investigation of aerodynamic characteristics of wings having vortex flow using different numerical codes
 [NASA-CR-173596] p 584 N84-25639
 Nonlinear problems in flight dynamics
 [NASA-TM-85940] p 585 N84-25648
 Study of effects of fuel properties in turbine-powered business aircraft
 [NASA-CR-174627] p 617 N84-25854
 Computational Fluid Dynamics, volume 2
 [VKI-LS-1984-04-VOL-2] p 627 N84-25986

Numerical computation of vortical flows about wings p 587 N84-25987

NERF: A computer program for the numerical evaluation of reliability functions-reliability modeling, numerical methods and program documentation
 [AR-00-984] p 627 N84-26048

MATRICES (MATHEMATICS)
 Multivariable control laws for the AFTI/F-16
 [AFIT/GE/EE/83S-4] p 609 N84-24531
 Stability of pumps and compressors p 625 N84-25963

MECHANICAL DRIVES
 An advanced pitch change mechanism incorporating a hybrid traction drive
 [NASA-TM-83709] p 572 N84-25605

MECHANICAL PROPERTIES
 Status of understanding for gear materials p 623 N84-25061
 Solid state compressor
 [AD-A140498] p 627 N84-26032

METAL PLATES
 Solid state compressor
 [AD-A140498] p 627 N84-26032

METAL POWDER
 Status of understanding for gear materials p 623 N84-25061

METALS
 Journal of aeronautical materials (selected articles)
 [AD-A140181] p 572 N84-25611
 Successful utilization of economic, light aluminum-casted structures in airplane construction
 [VFW-31/83-0] p 599 N84-26439

METEOROLOGICAL FLIGHT
 Air-ice drag coefficients for first-year sea ice derived from aircraft measurements p 628 A84-34508

METEOROLOGICAL INSTRUMENTS
 Facilities for meteorological research at NASA Goddard/Wallops Flight Facility
 [NASA-TM-84422] p 629 N84-25223

MICROORGANISMS
 Degradation of jet fuel hydrocarbons by aquatic microbial communities
 [AD-A139791] p 616 N84-24822

MICROPROCESSORS
 Modular strapdown guidance unit with embedded microprocessors p 594 N84-25697

MICROWAVE ANTENNAS
 An adaptive antenna for military aircraft communications p 592 A84-36292

MICROWAVE EQUIPMENT
 A small integrated J band altimeter p 600 A84-36261
 A 60 GHz collision warning sensor for helicopters p 600 A84-36262

MICROWAVE IMAGERY
 New results of airborne measurements with a sensitive, high resolution 90 GHz radiometer - First results for an equivalent 140 GHz system p 600 A84-36287

MICROWAVE RADIOMETERS
 Position updating using a passive millimeter wave sensor --- for low altitude air navigation p 591 A84-36263
 New results of airborne measurements with a sensitive, high resolution 90 GHz radiometer - First results for an equivalent 140 GHz system p 600 A84-36287

MICROWAVE SCANNING BEAM LANDING SYSTEM
 Tactical battlefield aircraft still lack all weather landing systems p 591 A84-35863

MICROWAVE TRANSMISSION
 Design considerations and trade-offs in RPV communication links p 591 A84-36240

MILITARY AIRCRAFT
 Evolution of the combat aircraft p 571 A84-34171
 Counter-rotating intershaft seals for advanced engines
 [AIAA PAPER 84-1216] p 619 A84-35135
 United Kingdom military engine monitoring experience
 [AIAA PAPER 84-1409] p 603 A84-35207
 Australian airspace management p 571 A84-35377
 Tactical battlefield aircraft still lack all weather landing systems p 591 A84-35863
 A technique for optimizing the aerodynamic design of a generalized combat aircraft with forward swept wings for the purposes of stability and control investigation
 [CA-8325] p 598 N84-25700

MILITARY OPERATIONS
 Future combat environments - Implications for the engine development process
 [AIAA PAPER 84-1339] p 605 A84-35659
 The development of the Navy variant of the Dauphin 2 helicopter
 [SNIAS-832-210-106] p 599 N84-25706

MILITARY TECHNOLOGY
 GPS guidance concepts --- for weapons p 591 A84-36265

MILITARY VEHICLES
 Alternative fuels use in a vehicular gas turbine p 615 N84-24741

MILLIMETER WAVES

- Is there a future for infra-red missile systems?
p 591 A84-36229
- Position updating using a passive millimeter wave sensor
--- for low altitude air navigation p 591 A84-36263
- New results of airborne measurements with a sensitive, high resolution 90 GHz radiometer - First results for an equivalent 140 GHz system p 600 A84-36287
- MINIATURE ELECTRONIC EQUIPMENT**
A small integrated J band altimeter p 600 A84-36261

MINIMUM DRAG

- On the aerodynamic optimization of supersonic wings
--- Thesis p 575 A84-34500

MISSILE COMPONENTS

- Preliminary method for estimating hinge moments of all-movable controls [AD-A139726] p 611 N84-24597

MISSILE CONTROL

- Strapdown inertial systems for tactical missiles using mass unbalanced two-axis rate gyros p 594 N84-25696
- Modular strapdown guidance unit with embedded microprocessors p 594 N84-25697

MISSILE DETECTION

- Is there a future for infra-red missile systems?
p 591 A84-36229

MISSILE TRAJECTORIES

- Design and analysis of Coordinated Bank-To-Turn (CBTT) autopilots for Bank-To-Turn (BTT) missiles [AD-A140103] p 613 N84-24698

MISSILES

- Design and analysis of Coordinated Bank-To-Turn (CBTT) autopilots for Bank-To-Turn (BTT) missiles [AD-A140103] p 613 N84-24698

MODELS

- F-14 modeling study [NASA-CR-172336] p 598 N84-25701

MOLDS

- Autoclave - Curing of extremely thin HM CFC-skins --- for fabrication of fiber composite aerospace structures [MBS-UD-409-83-OE] p 622 A84-35921

MOMENTS

- Preliminary method for estimating hinge moments of all-movable controls [AD-A139726] p 611 N84-24597

MONKEYS

- Spacelab 4: Primate experiment support hardware p 624 N84-25092

MOVING TARGET INDICATORS

- Estimation of the flight parameters of low flying aircraft using the radiated noise [LFD-211] p 595 N84-24569

MULTIPHASE FLOW

- Some new developments of the singularity-separating difference method p 621 A84-35356

N

NASA PROGRAMS

- USB applied to high-speed aircraft --- upper surface blowing p 595 A84-35024
- Activities of the Aeronautics and Space Engineering Board Commission on Engineering and Technical Systems [NASA-CR-173529] p 613 N84-24600
- The 1985 NASA authorization [GPO-31-453] p 632 N84-25526
- Future of aeronautics [GPO-29-744] p 633 N84-25529
- National Aeronautics and Space Administration p 633 N84-25531

NAVIER-STOKES EQUATION

- Demonstration of a new body-fitted coordinate code for modeling gas-turbine combustor flows [AIAA PAPER 84-1381] p 603 A84-35199
- Transonic-flow computation using an explicit-implicit method p 578 A84-35325
- On the use of several compact methods for the study of unsteady incompressible viscous flow for outer problems. II p 620 A84-35327
- A composite velocity procedure for the incompressible Navier-Stokes equations p 620 A84-35341
- Navier-Stokes calculations for the vortex of a rotor in hover [NASA-TM-85894] p 581 N84-24540
- Computational Fluid Dynamics, volume 2 [VKI-LS-1984-04-VOL-2] p 627 N84-25986

NAVIGATION

- The development of the Navy variant of the Dauphin 2 helicopter [SNIAS-832-210-106] p 599 N84-25706

NAVIGATION AIDS

- Position updating using a passive millimeter wave sensor --- for low altitude air navigation p 591 A84-36263

NAVIGATION INSTRUMENTS

- Design and performance evaluation of a five channel Navstar receiver p 591 A84-36264

NAVSTAR SATELLITES

- Design and performance evaluation of a five channel Navstar receiver p 591 A84-36264

NEWTON THEORY

- Hypersonic Aerothermodynamics [VKI-LS-1984-01] p 587 N84-25656

NEWTON-RAPHSON METHOD

- A theoretical analysis of the aerodynamic and structural forces associated with a ribbon parachute canopy in steady descent p 587 N84-25671

NICKEL ALLOYS

- Statistics of crack growth of a superalloy under sustained load p 614 A84-36175

NOISE MEASUREMENT

- Towards a better understanding of helicopter external noise p 630 A84-34173
- Installation noise measurements of model SR and CR propellers [NASA-TM-85790] p 631 N84-25425
- Acoustic measurements of a full-scale rotor with four tip shapes. Volume 2: Appendices C, D, E and F [NASA-TM-85878-VOL-2] p 631 N84-25426
- Noise measurement flight test: Data/Analyses Bell 222 twin jet helicopter [AD-A139906] p 631 N84-25430

NOISE PREDICTION (AIRCRAFT)

- Contribution to the study of light aircraft propeller noise [AD-B073101] p 632 N84-26386

NOISE PROPAGATION

- Propagation and radiation of sound from flanged circular ducts with circumferentially varying wall admittances. I Semi-infinite ducts. II - Finite ducts with sources p 631 A84-34746

NOISE REDUCTION

- Specification, design, and test of aircraft engine isolators for reduced interior noise p 601 A84-34455
- Aircraft noise control - Progress and prospects p 595 A84-34950

- Towards a better understanding of helicopter external noise [SNIAS-832-210-113] p 632 N84-26388

NONDESTRUCTIVE TESTS

- Nondestructive testing of composite structures [SNIAS-832-210-108] p 627 N84-26045

NONFERRIOUS METALS

- Status of understanding for gear materials p 623 N84-25061

NONLINEAR SYSTEMS

- On the stability of flight vehicles in the low Reynolds number non-linear regime [AD-A140008] p 583 N84-24561
- Nonlinear problems in flight dynamics [NASA-TM-85940] p 585 N84-25648
- Robustness quantification for nonlinear sampled-data systems with dynamic multiplicative perturbations p 630 N84-25871

NOSE TIPS

- An advanced aerospoke to minimize nose drag p 573 A84-33849

NOSE WHEELS

- Safety recommendation: Cessna Model 402C airplane, September 5, 1983, Tampa International Airport, Tampa, Florida p 589 N84-25680

NOZZLE DESIGN

- Exhaust system for combat aircraft optimized for supersonic cruise p 574 A84-34172
- Computation of the thrust vector of obliquely cut supersonic nozzles p 575 A84-34719
- Study of an asymmetric flap nozzle as a vector-thrust device [AIAA PAPER 84-1360] p 576 A84-35190

NOZZLE FLOW

- The supersonic flow around a conic nozzle p 574 A84-34347
- On the propagation of sound in nozzles of variable cross-section containing low Mach number mean flow p 630 A84-34718

- Aeropropulsive characteristics of nonaxisymmetric-nozzle thrust reversers at Mach numbers from 0 to 1.20 [NASA-TP-2306] p 581 N84-24538

NOZZLE GEOMETRY

- Aeropropulsive characteristics of nonaxisymmetric-nozzle thrust reversers at Mach numbers from 0 to 1.20 [NASA-TP-2306] p 581 N84-24538

NOZZLE THRUST COEFFICIENTS

- Study of an asymmetric flap nozzle as a vector-thrust device [AIAA PAPER 84-1360] p 576 A84-35190

NUMERICAL ANALYSIS

- Numerical analysis of separated laminar viscous-gas flows in the case of supersonic flow past bodies with leading spikes p 580 A84-35735
- A numerical study of the controlled flow tunnel for a high lift model [NASA-CR-166572] p 584 N84-25642

NUMERICAL CONTROL

- Lessons learned in the development of a digital electronic engine control [AIAA PAPER 84-1335] p 602 A84-35177
- Proceedings of the Workshop on Multivariable Control Systems [AD-A139050] p 571 N84-24529
- Reconfigurable digital control laws for the A-7D DIGITAC 2 aircraft with failed primary control surfaces [AFIT/GE/EE/82D-59] p 610 N84-24535
- Modular strapdown guidance unit with embedded microprocessors p 594 N84-25697
- Digital control of flight simulator motion base actuator [ARL-SYS-TM-69] p 613 N84-25732

NUMERICAL FLOW VISUALIZATION

- Numerical simulation of flow through inlets/diffusers with terminal shocks [AIAA PAPER 84-1362] p 577 A84-35192
- Simulation of the fluctuating field of a forced jet p 578 A84-35309

- A review of internal combustion engine combustion chamber process studies at NASA Lewis Research Center [NASA-TM-83666] p 623 N84-24999

NUMERICAL INTEGRATION

- Transonic-flow computation using an explicit-implicit method p 578 A84-35325

O

OCEAN THERMAL ENERGY CONVERSION

- Ocean energy systems [DE84-005200] p 629 N84-25182

OMEGA NAVIGATION SYSTEM

- East-West nonreciprocal propagation of Omega Navigational VLF waves on the low latitude and transequatorial paths p 590 A84-34648
- CONUS (Continental United States) Omega/VLF data collection: Flight test [AD-A140252] p 593 N84-25688

ONBOARD EQUIPMENT

- Electromagnetic compatibility in aerospace vehicles [NLR-MP-83002-U] p 623 N84-24929

OPTICAL HETERODYNYING

- A CW CO₂ laser rangefinder/velocimeter using heterodyne detection p 591 A84-36232

OPTICAL PROPERTIES

- Measurements of self-excited rotor-blade vibrations using optical displacements [ASME PAPER 83-GT-132] p 618 A84-33702

OPTICAL RADAR

- Infra-red laser velocimetry p 600 A84-36299

OPTIMAL CONTROL

- Perturbation analysis of optimal integral controls p 629 A84-36131
- Optimal cooperative control synthesis applied to a control-configured aircraft [NASA-CR-170411] p 610 N84-24593
- Robustness quantification for nonlinear sampled-data systems with dynamic multiplicative perturbations p 630 N84-25871

OPTIMIZATION

- On the aerodynamic optimization of supersonic wings --- Thesis p 575 A84-34500
- Aeroelastic optimization of axisymmetric circular cylindrical shells for supersonic flow p 619 A84-34722
- Optimization of large composite structures with strength and local stability restrictions p 621 A84-35535
- A review of internal combustion engine combustion chamber process studies at NASA Lewis Research Center [NASA-TM-83666] p 623 N84-24999
- Optimization of fringe-type laser anemometers for turbine engine component testing [NASA-TM-83658] p 623 N84-25019
- Application of an optimization method to high performance propeller designs [NASA-TM-83710] p 572 N84-25607

ORGANIC MATERIALS

- Influence of the environment on the application and drying quality of organic paints --- aircraft structures [SNIAS-832-551-102] p 617 N84-25833

ORTHOgonALITY

- Orthogonal grid generation [AIAA PAPER 84-1248] p 622 A84-35654

- Supersonic STOVL aircraft with turbine bypass/turbo-compressor engines [NASA-TM-83686] p 606 N84-24582
- An overview of NASA intermittent combustion engine research [NASA-TM-83668] p 606 N84-24583
- Preliminary flight test results of the F100 EMD engine in an F-15 airplane [NASA-TM-85902] p 606 N84-24588
- V/STOL propulsion system aerodynamics p 608 N84-25630
- Cold-air performance of compressor-drive turbine of department of energy upgraded automobile gas turbine engine. 3: Performance of redesigned turbine [NASA-TM-83627] p 585 N84-25644
- Unsteady flow in turbomachinery: An overview p 625 N84-25961
- Ground and inflight operational effects of APU's [VFW-30/83-O] p 609 N84-26438
- PROPULSIVE EFFICIENCY**
- Propulsive efficiency of an oscillating wing in supersonic flow p 580 A84-35736
- Preliminary flight test results of the F100 EMD engine in an F-15 airplane [NASA-TM-85902] p 606 N84-24588
- Cold-air performance of compressor-drive turbine of department of energy upgraded automobile gas turbine engine. 3: Performance of redesigned turbine [NASA-TM-83627] p 585 N84-25644
- Comparison of a propfan/turbofan engine by thermodynamic cycle calculation [ESA-TT-820] p 608 N84-25715
- PROTECTION**
- Helicopter Pilot/Copilot survival system [AD-A140358] p 590 N84-25682
- PUMPS**
- Stability of pumps and compressors p 625 N84-25963

Q

- QUIET ENGINE PROGRAM**
- Dash 8 - de Havilland Canada's quiet performer p 588 A84-35361

R

- RADAR BEACONS**
- Development and flight test of a helicopter compact, portable, precision landing system concept [NASA-TM-85951] p 592 N84-24566
- RADAR EQUIPMENT**
- The development of the Navy variant of the Dauphin 2 helicopter [SNIAS-832-210-106] p 599 N84-25706
- RADAR SCANNING**
- Digital scan conversion --- for airborne radar display p 600 A84-36259
- RADIAL FLOW**
- Application of a quasi-3D inviscid flow and boundary layer analysis to the hub-shroud contouring of a radial turbine [NASA-TM-83669] p 585 N84-25647
- RADIO ALTIMETERS**
- A small integrated J band altimeter p 600 A84-36261
- RADIO COMMUNICATION**
- Design considerations and trade-offs in RPV communication links p 591 A84-36240
- RADIO DIRECTION FINDERS**
- Improvement of the accuracy of Doppler direction finders for general aviation by spectral signal analysis --- German thesis p 590 A84-35694
- RADIO FREQUENCIES**
- Investigation of the RF properties of carbon fibre composite materials [AD-A140261] p 617 N84-25774
- RADIO NAVIGATION**
- Air navigation 1973-1983 p 590 A84-35590
- RADIO RECEIVERS**
- Design and performance evaluation of a five channel Navstar receiver p 591 A84-36264
- RADIO RELAY SYSTEMS**
- Design considerations and trade-offs in RPV communication links p 591 A84-36240
- RADIO TRANSMISSION**
- East-West nonreciprocal propagation of Omega Navigational VLF waves on the low latitude and transequatorial paths p 590 A84-34648
- Radomes for flight vehicles [AD-A140174] p 625 N84-25920
- RADOMES**
- Depolarisation properties of airborne radomes p 592 A84-36281

- Radomes for flight vehicles [AD-A140174] p 625 N84-25920
- RAMJET ENGINES**
- Comparison of combustion efficiencies for ramjet engines p 601 A84-34723
- RANDOM VIBRATION**
- Estimation of vibrational stressed state for GTE blades under random vibrations p 619 A84-34133
- Large deflection multimode response of clamped rectangular panels to acoustic excitation, volume 1 [AD-A139622] p 624 N84-25107
- RCA SATCOM SATELLITES**
- Electronically steerable SATCOM terminals for airborne use p 591 A84-36230
- REACTION KINETICS**
- A study of the fundamental problems of combustion in the combustion chambers of turbojets using a tubular reactor p 616 N84-24759
- REAL TIME OPERATION**
- The use of a formal simulator to verify a simple real time control program p 630 N84-25322
- RECTANGULAR FLUID FLOW**
- An aerodynamic study of combustion in the combustion chambers of turbomachines: Experimental and theoretical approaches p 608 N84-24764
- Ground based testing without wind tunnels p 598 N84-25634
- RECTANGULAR PANELS**
- Large deflection multimode response of clamped rectangular panels to acoustic excitation, volume 1 [AD-A139622] p 624 N84-25107
- RECTANGULAR WINGS**
- Wind tunnel investigation of the rolling moment of a rectangular wing with some winglets on the left upper tip [NAL-TR-788] p 586 N84-25650
- REDUNDANCY**
- Sensor failure detection for jet engines using analytical redundancy [NASA-TM-83695] p 606 N84-24585
- Application of multifunction strapdown inertial system p 594 N84-25698
- REGENERATIVE COOLING**
- Regenerative Intercooled Turbine Engine (RITE) study [AIAA PAPER 84-1267] p 602 A84-35153
- Advanced turbofan concept with regenerator and inter-cooled compressor [AIAA PAPER 84-1270] p 602 A84-35154
- REINFORCED PLATES**
- Analysis of symmetric reinforcement of quasi-isotropic graphite-epoxy plates with a circular cutout under uniaxial tensile loading [AD-A139998] p 614 N84-24715
- REINFORCING MATERIALS**
- A principal rotor without joints and pillows, made of fiber materials, for dynamic systems of future helicopters [MBB-UD-384-83-O] p 628 N84-26440
- RELAXATION METHOD (MATHEMATICS)**
- A minimal residual method for transonic potential flows p 621 A84-35353
- RELIABILITY**
- Application of multifunction strapdown inertial system p 594 N84-25698
- RELIABILITY ANALYSIS**
- NERF: A computer program for the numerical evaluation of reliability functions-reliability modeling, numerical methods and program documentation [AR-00-984] p 627 N84-26048
- REMOTE SENSORS**
- Initial alignment and augmentation of the ARINC 705 strapdown AHRS LTR-81 p 594 N84-25699
- REMOVELY PILOTED VEHICLES**
- Design of long-endurance unmanned airplanes incorporating solar and fuel cell propulsion [AIAA PAPER 84-1430] p 595 A84-35215
- Propane powered engine for long duration unmanned aircraft [AIAA PAPER 84-1431] p 603 A84-35216
- Design considerations and trade-offs in RPV communication links p 591 A84-36240
- The structural and aerodynamic behaviour of a semi-inflatable wing [BU-297] p 596 N84-24574
- REQUIREMENTS**
- Current design requirements for corrosion control on helicopters p 597 N84-25616
- Current requirements on specifications for corrosion prevention p 597 N84-25618
- RESEARCH AIRCRAFT**
- USB applied to high-speed aircraft --- upper surface blowing p 595 A84-35024
- Design of a high-performance rotary stratified-charge research aircraft engine [AIAA PAPER 84-1395] p 603 A84-35204
- RESEARCH AND DEVELOPMENT**
- An engine for tomorrow's small helicopters [AIAA PAPER 84-1277] p 604 A84-35655

- An overview of NASA intermittent combustion engine research [NASA-TM-83668] p 606 N84-24583
- The 1985 NASA authorization [GPO-31-453] p 632 N84-25526
- Future of aeronautics [GPO-29-744] p 633 N84-25529
- RESEARCH FACILITIES**
- Langley aeronautics and space test highlights, 1983 [NASA-TM-85806] p 633 N84-26564
- RESEARCH MANAGEMENT**
- The 1985 NASA authorization [GPO-31-453] p 632 N84-25526
- RETIREMENT FOR CAUSE**
- An exploratory study of retirement-for-cause for gas turbine engine components [AIAA PAPER 84-1220] p 601 A84-35136
- REYNOLDS NUMBER**
- Fluid forces on a rigid cylinder in turbulent crossflow [DE84-006364] p 623 N84-25012
- REYNOLDS STRESS**
- Numerical computation of the Reynolds stress in supersonic inlet flows [AIAA PAPER 84-1364] p 577 A84-35193
- Prediction of turbulent flows in combustor by using Reynolds-stress closure [AIAA PAPER 84-1494] p 620 A84-35237
- RIBBON PARACHUTES**
- A theoretical analysis of the aerodynamic and structural forces associated with a ribbon parachute canopy in steady descent p 587 N84-25671
- RIDING QUALITY**
- Evolution of a heave control system for an amphibious hovercraft [CAR-84011] p 624 N84-25864
- ROBUSTNESS (MATHEMATICS)**
- Design of robust digital controllers for gas turbines with explicit actuator and sensor dynamics [AIAA PAPER 84-1185] p 601 A84-35128
- Digital multivariable tracker control laws for the C-141-A Starlifter aircraft [AFIT/GE/EE/82D-47] p 610 N84-24533
- Robustness quantification for nonlinear sampled-data systems with dynamic multiplicative perturbations p 630 N84-25871
- ROLLING MOMENTS**
- Wind tunnel investigation of the rolling moment of a rectangular wing with some winglets on the left upper tip [NAL-TR-788] p 586 N84-25650
- ROTARY ENGINES**
- Design of a high-performance rotary stratified-charge research aircraft engine [AIAA PAPER 84-1395] p 603 A84-35204
- A review of internal combustion engine combustion chamber process studies at NASA Lewis Research Center [NASA-TM-83666] p 623 N84-24999
- ROTARY WINGS**
- Efficient method for calculating the axial velocities induced along rotating blades by trailing helical vortices p 574 A84-34462
- Navier-Stokes calculations for the vortex of a rotor in hover [NASA-TM-85894] p 581 N84-24540
- Acoustic measurements of a full-scale rotor with four tip shapes. Volume 2: Appendices C, D, E and F [NASA-TM-85878-VOL-2] p 631 N84-25426
- A principal rotor without joints and pillows, made of fiber materials, for dynamic systems of future helicopters [MBB-UD-384-83-O] p 628 N84-26440
- ROTATING FLUIDS**
- Unsteady flow in turbomachinery: An overview p 625 N84-25961
- Theory of rotating stall of multistage axial compressors p 625 N84-25964
- ROTATING STALL**
- Unsteady Flow in Turbomachines, volume 2 [VKI-LS-1984-02-VOL-2] p 626 N84-25965
- Structure of rotating stall cells. Part 1: Absolute motion p 626 N84-25967
- Numerical aspects of unsteady flow calculations p 626 N84-25968
- Structure of rotating stall cells. Part 2: Relative motion p 626 N84-25970
- Determination of the stable operating conditions of an axial flow compressor p 626 N84-25971
- ROTOR AERODYNAMICS**
- Flutter and forced response of mistuned rotors using standing wave analysis [NASA-CR-173555] p 606 N84-24586
- Application of a quasi-3D inviscid flow and boundary layer analysis to the hub-shroud contouring of a radial turbine [NASA-TM-83669] p 585 N84-25647
- Unsteady interactions in supersonic compressor stages p 626 N84-25972

- ROTOR BLADES**
Flap-lag damping of an elastic rotor blade with torsion and dynamic inflow in hover from symbolically generated equations
[AIAA PAPER 84-0989] p 619 A84-34909
The SARIB vibration absorber
[SNIAS-832-210-104] p 628 N84-26058
- ROTOR BLADES (TURBOMACHINERY)**
Measurements of self-excited rotor-blade vibrations using optical displacements
[ASME PAPER 83-GT-132] p 618 A84-33702
Efficient method for calculating the axial velocities induced along rotating blades by trailing helical vortices
p 574 A84-34462
Behavior of cascaded airfoils under conditions of high mean loading and flow unsteadiness
[AD-A139799] p 607 N84-24592
Propeller noise at subsonic blade tip speeds, torque and thrust force
[ESA-TT-821] p 632 N84-26385
Contribution to the study of light aircraft propeller noise
[AD-8073101] p 632 N84-26386
- ROTORS**
A principal rotor without joints and pillows, made of fiber materials, for dynamic systems of future helicopters
[MBB-UD-384-83-O] p 628 N84-26440
- S**
- SAFETY**
Statistical review of alcohol-involved aviation accidents
[NTSB/SS-84/03] p 589 N84-25681
The development of the Navy variant of the Dauphin 2 helicopter
[SNIAS-832-210-106] p 599 N84-25706
Testing of turboshaft engines p 612 N84-25729
- SANDWICH STRUCTURES**
Carbon structures on the wing of the regional transport plane ATR-42
[SNIAS-832-111-113] p 598 N84-25704
- SATELLITE NAVIGATION SYSTEMS**
Design and performance evaluation of a five channel Navstar receiver p 591 A84-36264
- SATELLITE NETWORKS**
GPS guidance concepts --- for weapons p 591 A84-36265
- SATELLITE TRANSMISSION**
Electronically steerable SATCOM terminals for airborne use p 591 A84-36230
- SEA LEVEL**
Operational and Performance Measurement on Engines in Sea Level Test Facilities
[AGARD-LS-132] p 612 N84-25723
Operation and performance measurement on engines in sea-level test facilities: Introduction and general survey p 612 N84-25724
Instrumentation techniques in sea level test facilities p 612 N84-25727
Performance derivation of turbojets and turbofans from tests in sea-level test cells p 608 N84-25728
- SEALERS**
Interactions between F-111 fuselage fuel tank sealants. Part 1: Characterisation of polyester sealants and their hydrolytic degradation products
[MRL-R-657-PT-1] p 617 N84-25828
- SEALS (STOPPERS)**
Counter-rotating intershaft seals for advanced engines
[AIAA PAPER 84-1216] p 619 A84-35135
Status of understanding for seal materials p 624 N84-25062
Safety recommendation(s) A-84-10 and -11 p 589 N84-25676
- SEDIMENTS**
Alternative fuel deposit formation p 615 N84-24735
- SENSORS**
Sensor failure detection for jet engines using analytical redundancy
[NASA-TM-83695] p 606 N84-24585
- SEPARATED FLOW**
Analysis of separated boundary-layer flows p 578 A84-35311
Euler solutions as limit of infinite Reynolds number for separation flows and flows with vortices p 579 A84-35344
Hysteresis of supersonic separated flows p 580 A84-35734
Numerical analysis of separated laminar viscous-gas flows in the case of supersonic flow past bodies with leading spikes p 580 A84-35735
- SHAKERS**
Lewis Research Center spin rig and its use in vibration analysis of rotating systems
[NASA-TP-2304] p 605 N84-24578
- SHOCK WAVES**
Numerical simulation of flow through inlets/diffusers with terminal shocks
[AIAA PAPER 84-1362] p 577 A84-35192
Finite difference computation of pressure and wave-drag of slender bodies of revolution at transonic speeds with zero-lift p 579 A84-35330
Numerical solution of the problem of supersonic flow past wings of arbitrary form with a detached shock wave p 579 A84-35351
Conical flows with leading edge vortices p 623 N84-25013
- SHORT TAKEOFF AIRCRAFT**
Design and experimental verification of the USB flap panel structure for NAL-STOL research aircraft p 594 A84-34451
Thrust reverser exhaust plume reingestion model tests p 601 A84-34457
Supersonic STOVL aircraft with turbine bypass/turbo-compressor engines
[NASA-TM-83686] p 606 N84-24582
Aerodynamic characteristics of fan-jet STOL aircraft [NAL-TR-790] p 586 N84-25651
- SHROUDS**
Application of a quasi-3D inviscid flow and boundary layer analysis to the hub-shroud contouring of a radial turbine
[NASA-TM-83669] p 585 N84-25647
- SIGNAL ANALYSIS**
Improvement of the accuracy of Doppler direction finders for general aviation by spectral signal analysis --- German thesis p 590 A84-35694
- SIGNAL PROCESSING**
A simplified method of evaluating aircraft handling qualities using a pilot transfer function model
[GU-AERO-8302] p 610 N84-24595
- SIMILARITY THEOREM**
Hypersonic similarity in the flow past a combination of a circular cone and delta wing p 580 A84-35742
- SINGULARITY (MATHEMATICS)**
Design of a complete multivariable digital flight control system
[AFIT/GE/EE/82D-18] p 610 N84-24532
- SKIN (STRUCTURAL MEMBER)**
The use of Arall in fuselage skins
[AD-B080831] p 596 N84-24572
- SLENDER BODIES**
Numerical solution of transonic shear flows past thin bodies p 578 A84-35326
Finite difference computation of pressure and wave-drag of slender bodies of revolution at transonic speeds with zero-lift p 579 A84-35330
- SMOKE**
The design and development of a low emissions transpily combustor for the civil Spey engine p 607 N84-24755
- SOFTWARE ENGINEERING**
Time flies - The 4D flight management system p 609 A84-33847
Investigation, development, and evaluation of performance proving for fault-tolerant computers
[NASA-CR-166008] p 629 N84-25307
- SOLAR CELLS**
Design of long-endurance unmanned airplanes incorporating solar and fuel cell propulsion
[AIAA PAPER 84-1430] p 595 A84-35215
Structural sizing of a solar powered aircraft
[NASA-CR-172313] p 598 N84-25702
- SOLAR ELECTRIC PROPULSION**
History of solar flight
[AIAA PAPER 84-1429] p 571 A84-35214
Structural sizing of a solar powered aircraft
[NASA-CR-172313] p 598 N84-25702
- SOLAR POWERED AIRCRAFT**
History of solar flight
[AIAA PAPER 84-1429] p 571 A84-35214
- Design of long-endurance unmanned airplanes incorporating solar and fuel cell propulsion
[AIAA PAPER 84-1430] p 595 A84-35215
Structural sizing of a solar powered aircraft
[NASA-CR-172313] p 598 N84-25702
- SOUND FIELDS**
La Recherche Aerospatiale, Bimonthly Bulletin, no. 1983-6, 217/November-December
[ESA-TT-841] p 625 N84-25870
- SOUND INTENSITY**
A comparison of measured take-off and flyover sound levels for several general aviation propeller-driven aircraft
[AD-A139901] p 631 N84-25429
- SOUND PROPAGATION**
On the propagation of sound in nozzles of variable cross-section containing low Mach number mean flow p 630 A84-34718
- SOUND TRANSDUCERS**
Estimation of the flight parameters of low flying aircraft using the radiated noise
[LFD-211] p 595 N84-24569
- SOUND WAVES**
Propagation and radiation of sound from flanged circular ducts with circumferentially varying wall admittances. I Semi-infinite ducts. II - Finite ducts with sources p 631 A84-34746
Computation of noise radiating from a free jet perpendicular to its axis via laser anemometry measurements
[ONERA-NT-1983-6] p 632 N84-26387
- SPACE FLIGHT**
Langley aeronautics and space test highlights, 1983
[NASA-TM-85806] p 633 N84-26564
- SPACE SHUTTLES**
Activities of the Aeronautics and Space Engineering Board Commission on Engineering and Technical Systems
[NASA-CR-173529] p 613 N84-24600
Inherent problems in designing two-failure tolerant electromechanical actuators p 624 N84-25088
- SPACE STATIONS**
Activities of the Aeronautics and Space Engineering Board Commission on Engineering and Technical Systems
[NASA-CR-173529] p 613 N84-24600
- SPACE TRANSPORTATION**
A view of future technology needs for space transportation
[AIAA PAPER 84-1283] p 613 A84-35156
Hypersonic Aerothermodynamics
[VKI-LS-1984-01] p 587 N84-25656
Technical and scientific publication 1983: Research and development p 633 N84-26430
- SPACECRAFT COMPONENTS**
Thermoelastic limit cycling of zippered cross section spacecraft booms
[AIAA PAPER 84-1065] p 613 A84-34915
- SPACECRAFT CONSTRUCTION MATERIALS**
Survey lecture and special experiences in FRG --- carbon fiber composite structures for aerospace application
[MBB-UD-410-83-OE] p 614 A84-35920
The industry's materials: SNIAS and general conditions of its environment
[SNIAS-832-502-101] p 624 N84-25865
- SPACECRAFT DESIGN**
A view of future technology needs for space transportation
[AIAA PAPER 84-1283] p 613 A84-35156
Hypersonic Aerothermodynamics
[VKI-LS-1984-01] p 587 N84-25656
- SPACECRAFT LAUNCHING**
La Recherche Aerospatiale, Bimonthly Bulletin, no. 1983-6, 217/November-December
[ESA-TT-841] p 625 N84-25870
- SPACECRAFT STRUCTURES**
Survey lecture and special experiences in FRG --- carbon fiber composite structures for aerospace application
[MBB-UD-410-83-OE] p 614 A84-35920
- SPACELAB PAYLOADS**
Spacelab 4: Primate experiment support hardware p 624 N84-25092
- SPARK MACHINING**
EDM in the aircraft industry --- Electrical Discharge Machining p 618 A84-33829
- SPECIFICATIONS**
Current procurement specification design requirements for US Navy aircraft p 596 N84-25615
Current requirements on specifications for corrosion prevention p 597 N84-25618
- SPEECH RECOGNITION**
Emulation of a voice interactive Doppler navigation set
[AD-A140204] p 593 N84-25687

SUBJECT INDEX

Specifying and verifying ultra-reliability and fault-tolerance properties p 630 N84-25309

SYSTEMS INTEGRATION
 F/A-18A/F404 propulsion system integration [AIAA PAPER 84-1330] p 595 A84-35174
 Highly integrated digital engine control system on an F-15 airplane [NASA-TM-86040] p 606 N84-24587
 Application of multifunction strapdown inertial system p 594 N84-25698

T

TAIL ASSEMBLIES
 Thermoelastic limit cycling of zippered cross section spacecraft booms [AIAA PAPER 84-1065] p 613 A84-34915

TAIL ROTORS
 A rear engine without joints and pillows [MBB-UD-383-83-O] p 628 N84-26441

TECHNOLOGICAL FORECASTING
 A view of future technology needs for space transportation [AIAA PAPER 84-1283] p 613 A84-35156
 An engine for tomorrow's small helicopters [AIAA PAPER 84-1277] p 604 A84-35655
 Is there a future for infra-red missile systems? p 591 A84-36229
 Aviation fuel specification requirements: Their significance and future trends p 614 N84-24733
 Future of aeronautics [GPO-29-744] p 633 N84-25529

TECHNOLOGY ASSESSMENT
 Evaluation of single and counter rotation gearboxes for propulsion systems [AIAA PAPER 84-1195] p 604 A84-35651

TEMPERATURE CONTROL
 A thermal cycling test for the screening of space materials and processes [ESA-PSS-01-704-ISSUE-1] p 627 N84-26044

TEMPERATURE MEASUREMENT
 Measuring turbine engine inlet total temperature problems and solutions [AIAA PAPER 84-1457] p 604 A84-35222

TEMPERATURE PROFILES
 Performance of a high-work low aspect ratio turbine tested with a realistic inlet radial temperature profile [NASA-TM-83655] p 607 N84-24589

TENSILE STRENGTH
 Analysis of symmetric reinforcement of quasi-isotropic graphite-epoxy plates with a circular cutout under uniaxial tensile loading [AD-A139998] p 614 N84-24715

TENSILE STRESS
 Method for determining stress intensity factors in blades of gas turbine engines p 619 A84-34129

TEST EQUIPMENT
 Operational and Performance Measurement on Engines in Sea Level Test Facilities [AGARD-LS-132] p 612 N84-25723
 Operation and performance measurement on engines in sea-level test facilities: Introduction and general survey p 612 N84-25724
 Aero/thermodynamic and acoustic considerations in the design of test-beds for turbojets and turbofans p 612 N84-25725
 Performance derivation of turbojets and turbofans from tests in sea-level test cells p 608 N84-25728
 Testing of turboshaft engines p 612 N84-25729

TEST FACILITIES
 Operational and Performance Measurement on Engines in Sea Level Test Facilities [AGARD-LS-132] p 612 N84-25723
 Operation and performance measurement on engines in sea-level test facilities: Introduction and general survey p 612 N84-25724
 Aero/thermodynamic and acoustic considerations in the design of test-beds for turbojets and turbofans p 612 N84-25725
 Instrumentation techniques in sea level test facilities p 612 N84-25727
 Performance derivation of turbojets and turbofans from tests in sea-level test cells p 608 N84-25728
 Testing of turboshaft engines p 612 N84-25729

TF-34 ENGINE
 Evaluation of benefits of the A-10/TF34 Turbine Engine Monitoring System Squadron Integration Program [AIAA PAPER 84-1414] p 603 A84-35208

THERMAL CYCLING TESTS
 A thermal cycling test for the screening of space materials and processes [ESA-PSS-01-704-ISSUE-1] p 627 N84-26044

THERMAL DEGRADATION
 Research on aviation fuel instability p 615 N84-24734

THERMAL RADIATION
 Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system p 581 A84-36460

THERMAL STABILITY
 Research on aviation fuel instability p 615 N84-24734
 Comparison of JFTOT (Jet Fuel Thermal Oxidation Tester) and absorbance methods for determining jet fuel thermal stability [AD-A138673] p 616 N84-24825

THERMAL STRESSES
 Derating requirements and application rules for electronic components [ESA-PSS-01-301-ISSUE-1] p 625 N84-25930

THERMODYNAMIC EFFICIENCY
 Comparison of a propfan/turbofan engine by thermodynamic cycle calculation [ESA-TT-820] p 608 N84-25715

THERMODYNAMIC PROPERTIES
 Advanced turbofan concept with regenerator and inter-cooled compressor [AIAA PAPER 84-1270] p 602 A84-35154
 Combustion gas properties of various fuels of interest to gas turbine engines [NASA-TM-83682] p 606 N84-24584
 Uninstalled aero engine testing in operation in the Royal Air Force p 612 N84-25731
 A thermal cycling test for the screening of space materials and processes [ESA-PSS-01-704-ISSUE-1] p 627 N84-26044

THERMOELASTICITY
 Thermoelastic limit cycling of zippered cross section spacecraft booms [AIAA PAPER 84-1065] p 613 A84-34915

THICKNESS
 Unsteady Flow in Turbomachines, volume 1 [VKI-LS-1984-02-VOL-1] p 625 N84-25960

THIN AIRFOILS
 The Sears problem for a lifting airfoil revisited - New results p 575 A84-34691

THIN BODIES
 Nonlinear bending and collapse of long, thin, open section beams and corrugated panels [ASME PAPER 84-APM-4] p 622 A84-36160

THIN WALLS
 Radomes for flight vehicles [AD-A140174] p 625 N84-25920

THIN WINGS
 Theory of a thin wing with a circular mean line p 574 A84-34342
 Engineering analysis of drooped leading-edge wings near stall p 575 A84-34468
 Vortex flap system for thin wings [MBB-FE-122/S/PUB/102] p 587 N84-26435

THREE DIMENSIONAL COMPOSITES
 Optimization of large composite structures with strength and local stability restrictions p 621 A84-35535

THREE DIMENSIONAL FLOW
 Numerical solution of transonic shear flows past thin bodies p 578 A84-35326
 Noniterative grid generation using parabolic difference equations for fuselage-wing flow calculations p 579 A84-35334
 Solution of three-dimensional time-dependent viscous flows p 621 A84-35352
 Application of a quasi-3D inviscid flow and boundary layer analysis to the hub-shroud contouring of a radial turbine [NASA-TM-83669] p 585 N84-25647
 A numerical study of the controlled flow tunnel for a high lift model p 611 N84-25721
 Numerical computation of vortical flows about wings p 587 N84-25987
 Multi-length scale turbulence models [AD-A140527] p 627 N84-25997

THRUST CONTROL
 Ground based testing without wind tunnels p 598 N84-25634

THRUST REVERSAL
 Thrust reverser exhaust plume reingestion model tests p 601 A84-34457
 Axisymmetric approach and landing thrust reverser concepts In-ground effects wind tunnel test results [AIAA PAPER 84-1215] p 601 A84-35134
 Axisymmetric approach and landing thrust reversers for single engine fighters [AIAA PAPER 84-1214] p 604 A84-35652
 Aeropropulsive characteristics of nonaxisymmetric-nozzle thrust reversers at Mach numbers from 0 to 1.20 [NASA-TP-2306] p 581 N84-24538

THRUST VECTOR CONTROL
 Thrust vector control of a V/STOL airship p 609 A84-34458

TRANSMISSIONS (MACHINE ELEMENTS)

Computation of the thrust vector of obliquely cut supersonic nozzles p 575 A84-34719
 Study of an asymmetric flap nozzle as a vector-thrust device [AIAA PAPER 84-1360] p 576 A84-35190

THUNDERSTORMS
 Clouds and flight safety --- Russian book p 587 A84-33525

TILT ROTOR AIRCRAFT
 Tilt rotor concept examined p 595 A84-35025

TIME DEPENDENCE
 Implicit time dependent methods for the solution of the Euler equations. Part 2: Application to transonic flows p 627 N84-25990

TIME LAG
 Multivariable control law theory p 609 N84-24530

TIME OPTIMAL CONTROL
 Optimal control of multimode plants --- for flight control p 629 A84-34773

TITANIUM ALLOYS
 Journal of aeronautical materials (selected articles) [AD-A140181] p 572 N84-25611

TORQUE
 Preliminary method for estimating hinge moments of all-movable controls [AD-A139726] p 611 N84-24597

TORSION
 Flap-lag damping of an elastic rotor blade with torsion and dynamic inflow in hover from symbolically generated equations [AIAA PAPER 84-0989] p 619 A84-34909

TOXICOLOGY
 Statistical review of alcohol-involved aviation accidents [NTSB/SS-84/03] p 589 N84-25681

TRACKING (POSITION)
 Digital multivariable tracker control laws for the C-141-A Starlifter aircraft [AFIT/GE/EE/82D-47] p 610 N84-24533

TRACKING PROBLEM
 Proceedings of the Workshop on Multivariable Control Systems [AD-A139050] p 571 N84-24529
 Multivariable control law theory p 609 N84-24530

TRAILING EDGES
 Computation of transonic flow around airfoils with trailing edge and shock/boundary layer interactions p 574 A84-34454
 Calculation of transonic flow in a linear cascade [NASA-TM-83697] p 581 N84-24539
 An algorithm for the prediction of unsteady potential flow about an arbitrary aerofoil [GU-AERO-8306] p 582 N84-24553
 The study of an idealized wing/body junction [AD-A139933] p 583 N84-24559

TRAINING AIRCRAFT
 Development of the Navy jet trainer duty cycle [AIAA PAPER 84-1486] p 604 A84-35232

TRAINING DEVICES
 Uninstalled aero engine testing in operation in the Royal Air Force p 612 N84-25731

TRAJECTORY ANALYSIS
 Study of aerospace materials, coatings, adhesions and processes. Aircraft icing processes [AD-A139743] p 583 N84-24557
 On the stability of flight vehicles in the low Reynolds number non-linear regime [AD-A140008] p 583 N84-24561

TRANSEQUATORIAL PROPAGATION
 East-West nonreciprocal propagation of Omega Navigational VLF waves on the low latitude and transequatorial paths p 590 A84-34648

TRANSFER FUNCTIONS
 F-14 scale model measurements. Part 1: External response [DE84-008201] p 583 N84-24562

TRANSFER ORBITS
 A view of future technology needs for space transportation [AIAA PAPER 84-1283] p 613 A84-35156

TRANSIENT RESPONSE
 Divergence boundary prediction from random responses - NAL's method --- aeroelastic instability boundary estimation for subcritical divergence cantilever wing model test p 619 A84-34463

TRANSITION FLOW
 Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system p 581 A84-36460

TRANSMISSIONS (MACHINE ELEMENTS)
 Evaluation of single and counter rotation gearboxes for propulsion systems [AIAA PAPER 84-1195] p 604 A84-35651

TRANSONIC FLOW

- Computation of transonic flow around airfoils with trailing edge and shock/boundary layer interactions p 574 A84-34454
- Unsteady pressures and forces during transonic buffeting of a supercritical airfoil [AD-A133139] p 575 A84-34465
- Computation of inviscid transonic internal flow p 578 A84-35317
- Transonic-flow computation using an explicit-implicit method p 578 A84-35325
- Numerical solution of transonic shear flows past thin bodies p 578 A84-35326
- Noniterative grid generation using parabolic difference equations for fuselage-wing flow calculations p 579 A84-35334
- Euler solutions as limit of infinite Reynolds number for separation flows and flows with vortices p 579 A84-35344
- A minimal residual method for transonic potential flows p 621 A84-35353
- Calculation of transonic flow in a linear cascade [NASA-TM-83697] p 581 A84-24539
- Investigation of the behavior of axial compressor stages with steady state inlet distortions [DFVLR-FB-83-39] p 607 A84-24590
- Implicit time dependent methods for the solution of the Euler equations. Part 2: Application to transonic flows p 627 A84-25990

TRANSONIC SPEED

- Finite difference computation of pressure and wave-drag of slender bodies of revolution at transonic speeds with zero-lift p 579 A84-35330

TRANSONIC WIND TUNNELS

- Experimental investigation of wall interference and two-dimensionality of the flow in a transonic airfoil wind tunnel p 576 A84-35017
- The wind tunnel S2MA of the aerodynamic testing plant in Modene-Avrieux, France [ONERA-NT-1983-5] p 613 A84-25735

TRANSPORT AIRCRAFT

- Winglet effects on the flutter of twin-engine-transport type wing [AIAA PAPER 84-0905] p 594 A84-34907
- The use of Arall in fuselage skins [AD-B080831] p 596 A84-24572
- Statistical approach to damage tolerance assessment [SNIAS-832-111-112] p 596 A84-24575
- Carbon structures on the wing of the regional transport plane ATR-42 [SNIAS-832-111-113] p 598 A84-25704

TREIBOLG

- Status of understanding for gear materials p 623 A84-25061
- Status of understanding for seal materials p 624 A84-25062

TUNING

- Effects of structural coupling on mistuned cascade flutter and response [ASME PAPER 83-GT-117] p 618 A84-33701

TUNING FORK GYROSCOPES

- Strapdown inertial systems for tactical missiles using mass unbalanced two-axis rate gyros p 594 A84-25696

TURBINE BLADES

- Effects of structural coupling on mistuned cascade flutter and response [ASME PAPER 83-GT-117] p 618 A84-33701
- Method for determining stress intensity factors in blades of gas turbine engines p 619 A84-34129
- Estimation of vibrational stressed state for GTE blades under random vibrations p 619 A84-34133
- Performance of a high-work low aspect ratio turbine tested with a realistic inlet radial temperature profile [NASA-TM-83655] p 607 A84-24589
- The generation of higher levels of turbulence in the test section of the high speed cascade wind tunnel at Brunswick for simulation of turbomachinery conditions [ESA-TT-815] p 586 A84-25654

TURBINE ENGINES

- Regenerative Intercooled Turbine Engine (RITE) study [AIAA PAPER 84-1267] p 602 A84-35153
- Lewis Research Center spin rig and its use in vibration analysis of rotating systems [NASA-TP-2304] p 605 A84-24578
- Rotorcraft contingency power study [NASA-CR-174675] p 605 A84-24580
- Supersonic STOVL aircraft with turbine bypass/turbo-compressor engines [NASA-TM-83686] p 606 A84-24582
- Performance of a high-work low aspect ratio turbine tested with a realistic inlet radial temperature profile [NASA-TM-83655] p 607 A84-24589
- Optimization of fringe-type laser anemometers for turbine engine component testing [NASA-TM-83658] p 623 A84-25019

- Study of effects of fuel properties in turbine-powered business aircraft [NASA-CR-174627] p 617 A84-25854

TURBINE INSTRUMENTS

- Measuring turbine engine inlet total temperature problems and solutions [AIAA PAPER 84-1457] p 604 A84-35222

TURBOCOMPRESSORS

- A study on the between-stage flow pattern of an axial-flow compressor with inlet distortion - Calculation method for and experimental research on inlet distortion transmission p 576 A84-35018
- Axial flow compressor performance deterioration [AIAA PAPER 84-1208] p 601 A84-35133
- Advanced turbofan concept with regenerator and inter-cooled compressor [NASA PAPER 84-1270] p 602 A84-35154
- Combustor liner construction [NASA-CASE-LEW-14035-1] p 605 A84-24577
- Supersonic STOVL aircraft with turbine bypass/turbo-compressor engines [NASA-TM-83686] p 606 A84-24582
- Cold-air performance of compressor-drive turbine of department of energy upgraded automobile gas turbine engine. 3: Performance of redesigned turbine [NASA-TM-83627] p 585 A84-25644
- Theory of rotating stall of multistage axial compressors p 625 A84-25964
- Unsteady Flow in Turbomachines, volume 2 [VKI-LS-1984-02-VOL-2] p 626 A84-25965
- Encounters with surge p 626 A84-25966
- Structure of rotating stall cells. Part 1: Absolute motion p 626 A84-25967
- Numerical aspects of unsteady flow calculations p 626 A84-25968
- Surge prediction in industrial compressors p 626 A84-25969
- Structure of rotating stall cells. Part 2: Relative motion p 626 A84-25970
- Determination of the stable operating conditions of an axial flow compressor p 626 A84-25971
- Unsteady interactions in supersonic compressor stages p 626 A84-25972

TURBOFAN ENGINES

- Advanced turbofan concept with regenerator and inter-cooled compressor [AIAA PAPER 84-1270] p 602 A84-35154
- Future combat environments - Implications for the engine development process [AIAA PAPER 84-1339] p 605 A84-35659
- Development of dynamic simulation of TF34-GE-100 turbofan engine with post-stall capability [NASA-TM-83660] p 608 A84-25712

TURBOJET ENGINE CONTROL

- Lessons learned in the development of a digital electronic engine control [AIAA PAPER 84-1335] p 602 A84-35177

TURBOJET ENGINES

- A study of the fundamental problems of combustion in the combustion chambers of turbojets using a tubular reactor p 616 A84-24759
- Operational and Performance Measurement on Engines in Sea Level Test Facilities [AGARD-LS-132] p 612 A84-25723

TURBOMACHINE BLADES

- Calculation of transonic flow in a linear cascade [NASA-TM-83697] p 581 A84-24539
- The boundary layer on compressor cascade blades [NASA-CR-173514] p 623 A84-25001
- Unsteady Flow in Turbomachines, volume 1 [VKI-LS-1984-02-VOL-1] p 625 A84-25960

TURBOMACHINERY

- Calculation of transonic flow in a linear cascade [NASA-TM-83697] p 581 A84-24539
- Lewis Research Center spin rig and its use in vibration analysis of rotating systems [NASA-TP-2304] p 605 A84-24578
- An aerodynamic study of combustion in the combustion chambers of turbomachines: Experimental and theoretical approaches p 608 A84-24764
- Unsteady Flow in Turbomachines, volume 1 [VKI-LS-1984-02-VOL-1] p 625 A84-25960
- Unsteady flow in turbomachinery: An overview p 625 A84-25961
- Introduction to unsteady flow in turbomachines p 625 A84-25962
- Unsteady Flow in Turbomachines, volume 2 [VKI-LS-1984-02-VOL-2] p 626 A84-25965
- Numerical aspects of unsteady flow calculations p 626 A84-25968

TURBOPROP AIRCRAFT

- Dash 8 - de Havilland Canada's quiet performer p 588 A84-35361
- An analytical method to predict efficiency of aircraft gearboxes [NASA-TM-83716] p 572 A84-25606

- Renovation of the Helice [SNIAS-832-111-109] p 598 A84-25703

TURBOPROP ENGINES

- Regenerative Intercooled Turbine Engine (RITE) study [AIAA PAPER 84-1267] p 602 A84-35153
- Comparison of a propan/turbofan engine by thermodynamic cycle calculation [ESA-TT-820] p 608 A84-25715

TURBOSHAFTS

- Rotorcraft contingency power study [NASA-CR-174675] p 605 A84-24580
- Status of understanding for bearing materials p 616 A84-25060
- Testing of turboshaft engines p 612 A84-25729

TURBULENCE

- Reynolds number effects on pressure loss and turbulence characteristics of four tube-bundle heat exchangers [NASA-TM-85807] p 585 A84-25645
- The generation of higher levels of turbulence in the test section of the high speed cascade wind tunnel at Brunswick for simulation of turbomachinery conditions [ESA-TT-815] p 586 A84-25654
- Multi-length scale turbulence models [AD-A140527] p 627 A84-25997

TURBULENT BOUNDARY LAYER

- Friction and heat transfer in laminar and turbulent boundary layers in the case of nonuniform supersonic flow past axisymmetric bodies p 580 A84-35730
- The generation of higher levels of turbulence in the test section of the high speed cascade wind tunnel at Brunswick for simulation of turbomachinery conditions [ESA-TT-815] p 586 A84-25654

TURBULENT FLOW

- Numerical computation of the Reynolds stress in supersonic inlet flows [AIAA PAPER 84-1364] p 577 A84-35193
- Demonstration of a new body-fitted coordinate code for modeling gas-turbine combustor flows [AIAA PAPER 84-1381] p 603 A84-35199
- Prediction of turbulent flows in combustor by using Reynolds-stress closure [AIAA PAPER 84-1494] p 620 A84-35237
- Solution of three-dimensional time-dependent viscous flows p 621 A84-35352
- Turbulent heat transport in circular ducts with circumferentially varying heat flux p 622 A84-36151
- A review of internal combustion engine combustion chamber process studies at NASA Lewis Research Center [NASA-TM-83666] p 623 A84-24999
- The boundary layer on compressor cascade blades [NASA-CR-173514] p 623 A84-25001
- Fluid forces on a rigid cylinder in turbulent crossflow [DEB4-006364] p 623 A84-25012
- Multi-length scale turbulence models [AD-A140527] p 627 A84-25997

TURBULENT HEAT TRANSFER

- Turbulent heat transport in circular ducts with circumferentially varying heat flux p 622 A84-36151

TURBULENT JETS

- Multi-length scale turbulence models [AD-A140527] p 627 A84-25997

TURBULENT MIXING

- A study of the fundamental problems of combustion in the combustion chambers of turbojets using a tubular reactor p 616 A84-24759

TURBULENT WAKES

- First experimental evidence of vortex splitting p 580 A84-35876

TWO DIMENSIONAL BOUNDARY LAYER

- The boundary layer on compressor cascade blades [NASA-CR-173514] p 623 A84-25001

TWO DIMENSIONAL FLOW

- Two-dimensional wind-tunnel interference from measurements on two contours p 574 A84-34459
- Experimental investigation of wall interference and two-dimensionality of the flow in a transonic airfoil wind tunnel p 576 A84-35017
- Sidewall boundary layer corrections in subsonic, two-dimensional airfoil/hydrofoil testing [AIAA PAPER 84-1366] p 620 A84-35195
- Numerical computation of vortical flows about wings p 587 A84-25987

U**UH-1 HELICOPTER**

- Safety recommendation(s) A-84-16 p 589 A84-25679

UNSTEADY FLOW

- Unsteady pressures and forces during transonic buffeting of a supercritical airfoil [AD-A133139] p 575 A84-34465

- Steady and unsteady distorted inlet flow simulation for engine ground tests
[AIAA PAPER 84-1490] p 577 A84-35234
- On the use of several compact methods for the study of unsteady incompressible viscous flow for outer problems. II p 620 A84-35327
- Some new developments of the singularity-separating difference method p 621 A84-35356
- An algorithm for the prediction of unsteady potential flow about an arbitrary aerofoil
[GU-AERO-8306] p 582 N84-24553
- Behavior of cascaded airfoils under conditions of high mean loading and flow unsteadiness
[AD-A139799] p 607 N84-24592
- Unsteady Flow in Turbomachines, volume 1
[VKI-LS-1984-02-VOL-1] p 625 N84-25960
- Unsteady flow in turbomachinery: An overview p 625 N84-25961
- Introduction to unsteady flow in turbomachines p 625 N84-25962
- Stability of pumps and compressors p 625 N84-25963
- Unsteady Flow in Turbomachines, volume 2
[VKI-LS-1984-02-VOL-2] p 626 N84-25965
- Encounters with surge p 626 N84-25966
- Structure of rotating stall cells. Part 1: Absolute motion p 626 N84-25967
- Numerical aspects of unsteady flow calculations p 626 N84-25968
- Surge prediction in industrial compressors p 626 N84-25969
- Structure of rotating stall cells. Part 2: Relative motion p 626 N84-25970
- Determination of the stable operating conditions of an axial flow compressor p 626 N84-25971
- Unsteady interactions in supersonic compressor stages p 626 N84-25972
- UPPER SURFACE BLOWING**
- USB applied to high-speed aircraft --- upper surface blowing p 595 A84-35024
- UPPER SURFACE BLOWN FLAPS**
- Design and experimental verification of the USB flap panel structure for NAL-STOL research aircraft p 594 A84-34451
- URINE**
- Spacelab 4: Primate experiment support hardware p 624 N84-25092
- USER REQUIREMENTS**
- Multi-models to increase accuracy p 629 N84-25154
- V**
- V/STOL AIRCRAFT**
- Thrust vector control of a V/STOL airship p 609 A84-34458
- Progress towards a theory of jet-flap thrust recovery p 575 A84-34695
- V/STOL engine development
[AIAA PAPER 84-1337] p 603 A84-35178
- Study of an asymmetric flap nozzle as a vector-thrust device
[AIAA PAPER 84-1360] p 576 A84-35190
- V/STOL wind-tunnel testing
[NASA-TM-85936] p 571 N84-24528
- Tandem fan applications in advanced STOLV fighter configurations
[NASA-TM-83689] p 605 N84-24579
- Supersonic STOLV aircraft with turbine bypass/turbo-compressor engines
[NASA-TM-83686] p 606 N84-24582
- Special Course on V/STOL Aerodynamics
[AGARD-R-710] p 573 N84-25625
- The influence of V/STOL on wing design and tailplane design p 597 N84-25627
- V/STOL concepts in the United States: Past, present, and future p 597 N84-25628
- V/STOL propulsion system aerodynamics p 608 N84-25630
- Jet flowfields p 583 N84-25631
- V/STOL maneuverability and control p 611 N84-25632
- V/STOL wind-tunnel testing p 583 N84-25633
- Ground based testing without wind tunnels p 598 N84-25634
- Aerodynamics of V/STOL aircraft: Performance assessment p 584 N84-25635
- Assessment of aerodynamic performance of V/STOL and STOLV fighter aircraft p 584 N84-25636
- Notes on special flight aspects, such as STO, ski-jump and ODM p 598 N84-25637
- A numerical study of the controlled flow tunnel for a high lift model p 611 N84-25721
- VELOCITY MEASUREMENT**
- Profile drag from laser-Doppler velocimeter measurement p 575 A84-34467
- Infra-red laser velocimetry p 600 A84-36299
- VERTICAL MOTION**
- System modeling and identification of equivalent systems with and without compensating time delay for control-augmented aircraft
[DFVLR-FB-83-36] p 596 N84-24570
- VERTICAL TAKEOFF**
- Aerodynamics of V/STOL aircraft: Performance assessment p 584 N84-25635
- VERTICAL TAKEOFF AIRCRAFT**
- An experimental investigation of VTOL flying qualities requirements in shipboard landings p 609 A84-34453
- Perturbation analysis of optimal integral controls p 629 A84-36131
- VERY LOW FREQUENCIES**
- East-West nonreciprocal propagation of Omega Navigational VLF waves on the low latitude and transequatorial paths p 590 A84-34648
- CONUS (Continental United States) Omega/VLF data collection: Flight test
[AD-A140252] p 593 N84-25688
- VIBRATION**
- Lewis Research Center spin rig and its use in vibration analysis of rotating systems
[NASA-TP-2304] p 605 N84-24578
- VIBRATION DAMPING**
- Experimental modal analysis
[SNIAS-832-210-110] p 587 N84-25655
- The SARIB vibration absorber
[SNIAS-832-210-104] p 628 N84-26058
- VIBRATION ISOLATORS**
- Specification, design, and test of aircraft engine isolators for reduced interior noise p 601 A84-34455
- The SARIB vibration absorber
[SNIAS-832-210-104] p 628 N84-26058
- VIBRATION MEASUREMENT**
- Experimental determination of the natural modes of swept-wing models using laser holographic interferometry p 619 A84-35022
- VIBRATION MODE**
- Experimental determination of the natural modes of swept-wing models using laser holographic interferometry p 619 A84-35022
- Experimental modal analysis
[SNIAS-832-210-110] p 587 N84-25655
- VIBRATION SIMULATORS**
- Lewis Research Center spin rig and its use in vibration analysis of rotating systems
[NASA-TP-2304] p 605 N84-24578
- Experimental modal analysis
[SNIAS-832-210-110] p 587 N84-25655
- VIBRATION TESTS**
- Measurements of self-excited rotor-blade vibrations using optical displacements
[ASME PAPER 83-GT-132] p 618 A84-33702
- La Recherche Aerospatiale, Bimonthly Bulletin, no. 1983-6, 217/November-December
[ESA-TT-841] p 625 N84-25870
- VIBRATIONAL STRESS**
- Estimation of vibrational stressed state for GTE blades under random vibrations p 619 A84-34133
- Design of integrally damped compressor vanes
[AIAA PAPER 84-0867] p 601 A84-34905
- VISCOELASTIC DAMPING**
- Design of integrally damped compressor vanes
[AIAA PAPER 84-0867] p 601 A84-34905
- VISCOUS FLOW**
- Computation of transonic flow around airfoils with trailing edge and shock/boundary layer interactions p 574 A84-34454
- Analysis of separated boundary-layer flows p 578 A84-35311
- On the use of several compact methods for the study of unsteady incompressible viscous flow for outer problems. II p 620 A84-35327
- Numerical solution of viscous flow around arbitrary airfoils in a straight cascade p 579 A84-35340
- Solution of three-dimensional time-dependent viscous flows p 621 A84-35352
- VISIBILITY**
- The determination of visibility conditions at the final portion of a descent glide p 628 A84-35250
- VISUAL FLIGHT RULES**
- The determination of visibility conditions at the final portion of a descent glide p 628 A84-35250
- VOICE CONTROL**
- Emulation of a voice interactive Doppler navigation set
[AD-A140204] p 593 N84-25687
- VORTEX FLAPS**
- Vortex flap system for thin wings
[MBB-FE-122/S/PUB/102] p 587 N84-26435
- VORTEX SHEDDING**
- First experimental evidence of vortex splitting p 580 A84-35876
- Navier-Stokes calculations for the vortex of a rotor in hover
[NASA-TM-85894] p 581 N84-24540
- VORTEX SHEETS**
- A circulation meter for the measurement of discrete vortices
[BU-300] p 582 N84-24551
- VORTICES**
- Efficient method for calculating the axial velocities induced along rotating blades by trailing helical vortices p 574 A84-34462
- Flow simulation by discrete vortex method p 577 A84-35307
- First experimental evidence of vortex splitting p 580 A84-35876
- An investigation into the nature and control of vortex flow round helicopter upswEEP
[BU-285] p 582 N84-24544
- A circulation meter for the measurement of discrete vortices
[BU-300] p 582 N84-24551
- Conical flows with leading edge vortices p 623 N84-25013
- An investigation of aerodynamic characteristics of wings having vortex flow using different numerical codes
[NASA-CR-173596] p 584 N84-25639
- Calculation of aerodynamic characteristics of wings with thickness and camber by a new method based on the modified vortex lattice method
[TAE-493] p 584 N84-25640
- Numerical computation of vortical flows about wings p 587 N84-25987
- VORTICITY**
- Modelling of an airfoil empirical flow field below and through dynamic stall p 576 A84-34832
- W**
- WAKES**
- Numerical computation of vortical flows about wings p 587 N84-25987
- WALL FLOW**
- Two-dimensional wind-tunnel interference from measurements on two contours p 574 A84-34459
- WARNING SYSTEMS**
- A 60 GHz collision warning sensor for helicopters p 600 A84-36262
- Minimum operational performance standards for traffic alert and collision avoidance system (TCAS) airborne equipment, volume 1
[RTCA-DO-185-VOL-1] p 593 N84-25685
- WATER**
- Fluid forces on a rigid cylinder in turbulent crossflow
[DE84-006364] p 623 N84-25012
- WATER INJECTION**
- Rotorcraft contingency power study
[NASA-CR-174675] p 605 N84-24580
- WAVE DRAG**
- Finite difference computation of pressure and wave-drag of slender bodies of revolution at transonic speeds with zero-lift p 579 A84-35330
- WAVE PROPAGATION**
- East-West nonreciprocal propagation of Omega Navigational VLF waves on the low latitude and transequatorial paths p 590 A84-34648
- Propagation and radiation of sound from flanged circular ducts with circumferentially varying wall admittances. I Semi-infinite ducts. II - Finite ducts with sources p 631 A84-34746
- WEAPON SYSTEMS**
- GPS guidance concepts --- for weapons p 591 A84-36265
- Infra-red surveillance techniques for guided weapon systems p 622 A84-36298
- Design and manufacturing practices to minimize corrosion in aircraft p 597 N84-25620
- System concepts for helicopter air-to-air combat
[SNIAS-832-210-102] p 598 N84-25705
- WEATHER**
- VTOL shipboard lakedown guidance system analysis
[NASA-CR-166519] p 611 N84-25716
- WEIGHT REDUCTION**
- Optimization of large composite structures with strength and local stability restrictions p 621 A84-35535
- WIND (METEOROLOGY)**
- Facilities for meteorological research at NASA Goddard/Wallops Flight Facility
[NASA-TM-84422] p 629 N84-25223
- WIND PROFILES**
- The influence of V/STOL on wing design and tailplane design p 597 N84-25627

WIND TUNNEL APPARATUS

The wind tunnel S2MA of the aerodynamic testing plant in Modene-Avrieux, France
[ONERA-NT-1983-5] p 613 N84-25735

WIND TUNNEL MODELS

Two-dimensional wind-tunnel interference from measurements on two contours p 574 A84-34459
Flow-field investigation of a supercruise fighter model [AIAA PAPER 84-1331] p 576 A84-35175

Wake visualization
[BU-282] p 581 N84-24542

The effect of perforation on the aerodynamics of a spoiler
[BU-286] p 582 N84-24545

An investigation into anti-swirl devices for s-shaped air intakes
[BU-293] p 582 N84-24549

WIND TUNNEL STABILITY TESTS

Axisymmetric approach and landing thrust reverser concepts in-ground effects wind tunnel test results
[AIAA PAPER 84-1215] p 601 A84-35134

WIND TUNNEL TESTS

An advanced aerospike to minimize nose drag p 573 A84-33849
Measurements of ground effect for delta wings p 575 A84-34466

Experimental investigation of wall interference and two-dimensionality of the flow in a transonic airfoil wind tunnel p 576 A84-35017

Flow-field investigation of a supercruise fighter model [AIAA PAPER 84-1331] p 576 A84-35175

Hysteresis of supersonic separated flows p 580 A84-35734

V/STOL wind-tunnel testing
[NASA-TM-85936] p 571 N84-24528

Flight mechanical analysis of dynamic derivatives of the Dornier variation wind tunnel model
[DFVLR-FM-83-38] p 581 N84-24541

An investigation into the nature and control of vortex flow round helicopter upsweep
[BU-285] p 582 N84-24544

The effect of perforation on the aerodynamics of a spoiler
[BU-286] p 582 N84-24545

An investigation into anti-swirl devices for s-shaped air intakes
[BU-293] p 582 N84-24549

The structural and aerodynamic behaviour of a semi-inflatable wing
[BU-297] p 596 N84-24574

Installation noise measurements of model SR and CR propellers
[NASA-TM-85790] p 631 N84-25425

Acoustic measurements of a full-scale rotor with four tip shapes. Volume 2: Appendices C, D, E and F
[NASA-TM-85878-VOL-2] p 631 N84-25426

V/STOL wind-tunnel testing p 583 N84-25633
Rotary balance data for a typical single-engine general aviation design for an angle-of-attack range of 20 to 90 deg. 3: Influence of control deflection on predicted model D spin modes

[NASA-CR-3248] p 584 N84-25641
Wind tunnel investigation of the rolling moment of a rectangular wind with some winglets on the left upper tip

[NAL-TR-788] p 586 N84-25650
Aerodynamic characteristics of fan-jet STOL aircraft
[NAL-TR-790] p 586 N84-25651

Wind tunnel investigations on thin supercritical airfoils in the high subsonic flow regime
[ESA-TT-774] p 586 N84-25652

A numerical study of the controlled flow tunnel for a high lift model p 611 N84-25721

The ONERA Aeronautics Research Establishment in Cannes (France)
[ONERA-P-1983-2] p 633 N84-26455

WIND TUNNELS

A numerical study of the controlled flow tunnel for a high lift model
[NASA-CR-166572] p 584 N84-25642

A numerical study of the controlled flow tunnel for a high lift model p 611 N84-25721

The ONERA Aeronautics Research Establishment in Cannes (France)
[ONERA-P-1983-2] p 633 N84-26455

Langley aeronautics and space test highlights, 1983
[NASA-TM-85806] p 633 N84-26564

WING FLOW METHOD TESTS

Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system p 581 A84-36460

WING LOADING

Divergence boundary prediction from random responses - NAL's method --- aeroelastic instability boundary estimation for subcritical divergence cantilever wing model test p 619 A84-34463

Crack resistance of pressed and rolled semifinished products from aluminum alloys used in load-bearing units in aircraft wings p 614 A84-35724

WING OSCILLATIONS

Modelling of an airfoil empirical flow field below and through dynamic stall p 576 A84-34832
Linear problem of a vibrator oscillating harmonically at supercritical frequencies in a subsonic boundary layer p 579 A84-35497

Propulsive efficiency of an oscillating wing in supersonic flow p 580 A84-35736

WING PLANFORMS

On the aerodynamic optimization of supersonic wings --- Thesis p 575 A84-34500

WING PROFILES

Theory of a thin wing with a circular mean line p 574 A84-34342

The structural and aerodynamic behaviour of a semi-inflatable wing
[BU-297] p 596 N84-24574

WINGLETS

Winglet effects on the flutter of twin-engine-transport type wing
[AIAA PAPER 84-0905] p 594 A84-34907

Wind tunnel investigation of the rolling moment of a rectangular wind with some winglets on the left upper tip
[NAL-TR-788] p 586 N84-25650

WINGS

Noniterative grid generation using parabolic difference equations for fuselage-wing flow calculations p 579 A84-35334

A numerical study of the controlled flow tunnel for a high lift model
[NASA-CR-166572] p 584 N84-25642

Hypersonic Aerothermodynamics
[VKI-LS-1984-01] p 587 N84-25656


Safety recommendations A-84-1 through -3 p 588 N84-25673
Carbon structures on the wing of the regional transport plane ATR-42

[SNIAS-832-111-113] p 598 N84-25704

Z**ZIPPERS**

Thermoelastic limit cycling of zippered cross section spacecraft booms
[AIAA PAPER 84-1065] p 613 A84-34915

Typical Personal Author Index Listing

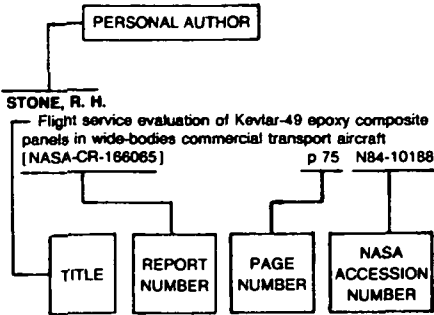

Listings in this index are arranged alphabetically by personal author. The title of the document provides the user with a brief description of the subject matter. The report number helps to indicate the type of document listed (e.g., NASA report, translation, NASA contractor report). The page and accession numbers are located beneath and to the right of the title. Under any one author's name the accession numbers are arranged in sequence with the AIAA accession numbers appearing first.

A

ADAMCZYK, J. J.
Numerical aspects of unsteady flow calculations
p 626 N84-25968

ADATIA, N.
Depolarisation properties of airborne radomes
p 592 A84-36281

ALDHOUSE, G. L. P.
United Kingdom military engine monitoring experience
[AIAA PAPER 84-1409] p 603 A84-35207

ALLOCK, G. J.
Infra-red surveillance techniques for guided weapon systems
p 622 A84-36298

ALTENKIRCH, D.
Flight mechanical analysis of dynamic derivatives of the
Dornier variation wind tunnel model
[DFVLR-FM-83-38] p 581 N84-24541

AMANO, R. S.
Prediction of turbulent flows in combustor by using
Reynolds-stress closure
[AIAA PAPER 84-1494] p 620 A84-35237

AMIN, N. F.
Thrust reverser exhaust plume reingestion model tests
p 601 A84-34457

ANDERSON, J. D., JR.
Engineering analysis of drooped leading-edge wings
near stall
p 575 A84-34468

ANDERSON, N. E.
An analytical method to predict efficiency of aircraft
gearboxes
[NASA-TM-83716] p 572 N84-25606

ANDERSON, S. B.
V/STOL concepts in the United States: Past, present,
and future
p 597 N84-25628

V/STOL maneuverability and control
p 611 N84-25632

ANDO, Y.
Divergence boundary prediction from random responses
- NAL's method
p 619 A84-34463

ANDRISANI, D., II
An experimental investigation of VTOL flying qualities
requirements in shipboard landings
p 609 A84-34453

ARMILLI, R. V.
Measurement of local connective heat transfer
coefficients of four ice accretion shapes
[NASA-CR-174880] p 585 N84-25646

ASHWOOD, P. F.
Operation and performance measurement on engines
in sea-level test facilities: Introduction and general
survey
p 612 N84-25724

ATASSI, H. M.
The Sears problem for a lifting airfoil revisited - New
results
p 575 A84-34691

AVEDISSIAN, G.
Aerospaziale's experience on helicopter flight in icing
conditions
[SNIAS-832-210-107] p 599 N84-25707

AZAR, J. J.
Aircraft structures (2nd edition)
p 595 A84-35687

B

BACON, L. D.
An investigation into anti-swirl devices for s-shaped air
intakes
[BU-293] p 582 N84-24549

BAILEY, A. T.
Infra-red surveillance techniques for guided weapon
systems
p 622 A84-36298

BAKER, C. E.
Research on aviation fuel instability
p 615 N84-24734

BALAN, C.
Axial flow compressor performance deterioration
[AIAA PAPER 84-1208] p 601 A84-35133

BALLHAUS, W. F., JR.
Computational aerodynamics and design
p 577 A84-35302

BAMBERGER, E. N.
Status of understanding for bearing materials
p 616 N84-25060

BANK, W.
First experimental evidence of vortex splitting
p 580 A84-35876

BARANOV, A. M.
Clouds and flight safety
p 587 A84-33525

BARBER, P. J.
Redundant color coding on airborne CRT displays
p 599 A84-35899

BARBER, T. J.
Computational design and validation tests of advanced
concept subsonic inlets
[AIAA PAPER 84-1329] p 576 A84-35173

BARE, E. A.
Flow-field investigation of a supercruise fighter model
[AIAA PAPER 84-1331] p 576 A84-35175

BARFIELD, A. F.
Multivariable control laws for the AFTI/F-16
[AFIT/GE/EE/83S-4] p 609 N84-24531

BARNHART, B. P.
Rotary balance data for a typical single-engine general
aviation design for an angle-of-attack range of 20 to 90
deg. 3: Influence of control deflection on predicted model
D spin modes
[NASA-CR-3248] p 584 N84-25641

BARON, S.
F-14 modeling study
[NASA-CR-172336] p 598 N84-25701

BASLER, U.
Advanced combustor liner cooling concepts
p 608 N84-24756

BAUGHN, J. W.
Turbulent heat transport in circular ducts with
circumferentially varying heat flux
p 622 A84-36151

BAUSCHLICHER, J. M.
Design of a complete multivariable digital flight control
system
[AFIT/GE/EE/82D-18] p 610 N84-24532

BAYLISS, A.
Simulation of the fluctuating field of a forced jet
p 578 A84-35309

BEINER, L.
Aeroelastic optimization of axisymmetric circular
cylindrical shells for supersonic flow
p 619 A84-34722

BELLET, J. C.
A study of the fundamental problems of combustion in
the combustion chambers of turbojets using a tubular
reactor
p 616 N84-24759

BENSON, R. C.
Nonlinear bending and collapse of long, thin, open
section beams and corrugated panels
[ASME PAPER 84-APM-4] p 622 A84-36160

BERGER, D.
Renovation of the Helice
[SNIAS-832-111-109] p 598 N84-25703

BERGMANN, J. W.
Comparison of combustion efficiencies for ramjet
engines
p 601 A84-34723

BEVERT, A.
The ONERA Aeronautics Research Establishment in
Cannes (France)
[ONERA-P-1983-2] p 633 N84-26455

BEVILAQUA, P. M.
Progress towards a theory of jet-flap thrust recovery
p 575 A84-34695

BHANGU, J. K.
The design and development of a low emissions transply
combustor for the civil Spey engine
p 607 N84-24755

BHATIA, K. G.
Winglet effects on the flutter of twin-engine-transport
type wing
[AIAA PAPER 84-0905] p 594 A84-34907

BIEGEN, R. J.
Study of effects of fuel properties in turbine-powered
business aircraft
[NASA-CR-174627] p 617 N84-25854

BION, J. R.
Steady and unsteady distorted inlet flow simulation for
engine ground tests
[AIAA PAPER 84-1490] p 577 A84-35234

BIRCH, S. F.
Multi-length scale turbulence models
[AD-A140527] p 627 N84-25997

BIRKLER, J. L.
Future combat environments - Implications for the engine
development process
[AIAA PAPER 84-1339] p 605 A84-35659

BIRON, W. J.
Cabin safety subject index
[AD-A140409] p 590 N84-25683

BISCHOFF, M.
A 60 GHz collision warning sensor for helicopters
p 600 A84-36262

BITTKER, D. A.
Research on aviation fuel instability
p 615 N84-24734

BITTRICK, W. C.
Axisymmetric approach and landing thrust reversers for
single engine fighters
[AIAA PAPER 84-1214] p 604 A84-35652

BLACK, J. D.
An analytical method to predict efficiency of aircraft
gearboxes
[NASA-TM-83716] p 572 N84-25606

BLAIR, P. K.
Design considerations and trade-offs in RPV
communication links
p 591 A84-36240

BLAND, T. L.
Noise measurement flight test: Data/Analyses Bell 222
twin jet helicopter
[AD-A139906] p 631 N84-25430

BLOCK, P. J. W.
Installation noise measurements of model SR and CR
propellers
[NASA-TM-85790] p 631 N84-25425

Noise generated by a propeller in a wake
[NASA-TM-85794] p 631 N84-26382

BORE, C. L.
The influence of V/STOL on wing design and tailplane
design
p 597 N84-25627

Ground based testing without wind tunnels
p 598 N84-25634

- Notes on special flight aspects, such as STO, ski-land and ODM p 598 N84-25637
- BORETZ, J. E.**
Propane powered engine for long duration unmanned aircraft [AIAA PAPER 84-1431] p 603 A84-35216
- BOS, H. J.**
On the aerodynamic optimization of supersonic wings p 575 A84-34500
- BOSQUE, M. A.**
Detailed fuel spray analysis techniques p 622 N84-24747
- BOUCHER, R. J.**
History of solar flight [AIAA PAPER 84-1429] p 571 A84-35214
- BOURQUIN, A. W.**
Degradation of jet fuel hydrocarbons by aquatic microbial communities [AD-A139791] p 616 N84-24822
- BOUWER, G.**
A piloted simulator investigation of decoupling helicopters by using a model following control system [AD-A139976] p 611 N84-24598
- BOYD, K. E.**
Regenerative Intercooled Turbine Engine (RITE) study [AIAA PAPER 84-1267] p 602 A84-35153
- BOYER, R. S.**
Investigation, development, and evaluation of performance proving for fault-tolerant computers [NASA-CR-166008] p 629 N84-25307
The use of a formal simulator to verify a simple real time control program p 630 N84-25322
- BREUGELMANS, F. A. E.**
Structure of rotating stall cells. Part 1: Absolute motion p 626 N84-25967
Structure of rotating stall cells. Part 2: Relative motion p 626 N84-25970
- BRIGHAM, B. A.**
Length to diameter ratio and row number effects in short pin fin heat transfer [ASME PAPER 83-GT-54] p 618 A84-33706
- BROAD, C.**
Uninstalled aero engine testing in operation in the Royal Air Force p 612 N84-25731
- BROICHHAUSEN, K. D.**
Unsteady interactions in supersonic compressor stages p 626 N84-25972
- BROWN, G. V.**
Lewis Research Center spin rig and its use in vibration analysis of rotating systems [NASA-TP-2304] p 605 N84-24578
- BROWN, P. F.**
Status of understanding for seal materials p 624 N84-25062
- BROWNE, G. T.**
US Navy corrosion control maintenance p 573 N84-25619
- BRUNELLO**
System concepts for helicopter air-to-air combat [SNIAS-832-210-102] p 598 N84-25705
- BRUNSCH, K.**
Survey lecture and special experiences in FRG [MBB-UD-410-83-OE] p 614 A84-35920
Autoclave - Curing of extremely thin HM CFC-skins [MBB-UD-409-83-OE] p 622 A84-35921
- BULL, D. A.**
Investigation of the RF properties of carbon fibre composite materials [AD-A140261] p 617 N84-25774
- BULL, J. S.**
Development and flight test of a helicopter compact, portable, precision landing system concept [NASA-TM-85951] p 592 N84-24566
- BUNDAS, D. J.**
Flutter and forced response of mistuned rotors using standing wave analysis [NASA-CR-173555] p 606 N84-24586
- BURCHAM, F. W., JR.**
Highly integrated digital engine control system on an F-15 airplane [AIAA PAPER 84-1259] p 602 A84-35149
Preliminary flight test results of the F100 EMD engine in an F-15 airplane [AIAA PAPER 84-1332] p 602 A84-35176
Highly integrated digital engine control system on an F-15 airplane [NASA-TM-86040] p 606 N84-24587
Preliminary flight test results of the F100 EMD engine in an F-15 airplane [NASA-TM-85902] p 606 N84-24588
- BURNETT, J.**
Safety recommendation(s) A-84-10 and -11 p 589 N84-25676
Safety recommendation(s) A-84-16 p 589 N84-25679

- BUTLER, L. C.**
Degradation of jet fuel hydrocarbons by aquatic microbial communities [AD-A139791] p 616 N84-24822
- BUTLER, M. C. J.**
Aircrew Gliding Escape System (AGES) exploratory development investigation of aircrew emergency escape ram-air inflated, flexible wing [AD-A139928] p 588 N84-24565
- C**
- CALDWELL, R. T.**
Regenerative Intercooled Turbine Engine (RITE) study [AIAA PAPER 84-1267] p 602 A84-35153
- CAMBRAY, P.**
A study of the fundamental problems of combustion in the combustion chambers of turbojets using a tubular reactor p 616 N84-24759
- CAMPBELL, G. S.**
Calculation of potential flow past simple bodies using axial sources and a least-squares method p 575 A84-34464
- CAMPOS, L. M. B. C.**
On the propagation of sound in nozzles of variable cross-section containing low Mach number mean flow p 630 A84-34718
- CAPONE, F. J.**
Aeropropulsive characteristics of nonaxisymmetric-nozzle thrust reversers at Mach numbers from 0 to 1.20 [NASA-TP-2306] p 581 N84-24538
- CARAFOLI, E.**
The supersonic flow around a conic nozzle p 574 A84-34347
- CARR, R. E.**
Facilities for meteorological research at NASA Goddard/Wallops Flight Facility [NASA-TM-84422] p 629 N84-25223
- CARSON, G. T., JR.**
Aeropropulsive characteristics of nonaxisymmetric-nozzle thrust reversers at Mach numbers from 0 to 1.20 [NASA-TP-2306] p 581 N84-24538
- CARTER, J. E.**
Analysis of separated boundary-layer flows p 578 A84-35311
- CARTER, J. R.**
Computer program to simulate digital computer based longitudinal flight control laws in a high performance aircraft [AD-A140143] p 611 N84-25719
- CASSIER, A.**
The development of the Navy variant of the Dauphin 2 helicopter [SNIAS-832-210-106] p 599 N84-25706
- CATANI**
System concepts for helicopter air-to-air combat [SNIAS-832-210-102] p 598 N84-25705
- CHABASSIEU**
Experimental modal analysis [SNIAS-832-210-110] p 587 N84-25655
- CHAMPION, M.**
A study of the fundamental problems of combustion in the combustion chambers of turbojets using a tubular reactor p 616 N84-24759
- CHAPMAN, G. T.**
Nonlinear problems in flight dynamics [NASA-TM-85940] p 585 N84-25648
- CHARPIN, F.**
The wind tunnel S2MA of the aerodynamic testing plant in Modene-Avrieux, France [ONERA-NT-1983-5] p 613 N84-25735
- CHATURVEDI, S.**
An investigation of aerodynamic characteristics of wings having vortex flow using different numerical codes [NASA-CR-173596] p 584 N84-25639
- CHEN, B.-M.**
Some new developments of the singularity-separating difference method p 621 A84-35356
- CHEN, F.**
A study on the between-stage flow pattern of an axial-flow compressor with inlet distortion - Calculation method for and experimental research on inlet distortion transmission p 576 A84-35018
- CHEN, S.**
An exploratory study of retirement-for-cause for gas turbine engine components [AIAA PAPER 84-1220] p 601 A84-35136
- CHENG, Y. N.**
Evolution of a heave control system for an amphibious hovercraft [CAR-8401] p 624 N84-25864

- CHERANEVA, N. A.**
Numerical analysis of separated laminar viscous-gas flows in the case of supersonic flow past bodies with leading spikes p 580 A84-35735
- CHIQUILLO, M.**
Nondestructive testing of composite structures [SNIAS-832-210-108] p 627 N84-26045
- CHISHOLM, J. P.**
Development and flight test of a helicopter compact, portable, precision landing system concept [NASA-TM-85951] p 592 N84-24566
- CHLEBOUN, P. V.**
An investigation of the interaction between multiple dilution jets and combustion products p 616 N84-24758
- CHO, T. H.**
Engineering analysis of drooped leading-edge wings near stall p 575 A84-34468
- CHOW, W. L.**
Study of an asymmetric flap nozzle as a vector-thrust device [AIAA PAPER 84-1360] p 576 A84-35190
- CHRISTOPHEL, R. B.**
Evaluation of benefits of the A-10/TF34 Turbine Engine Monitoring System Squadron Integration Program [AIAA PAPER 84-1414] p 603 A84-35208
- CHRISTOPHER, P. A. T.**
Evolution of a heave control system for an amphibious hovercraft [CAR-8401] p 624 N84-25864
- CIVINSKAS, K. C.**
Application of a quasi-3D inviscid flow and boundary layer analysis to the hub-shroud contouring of a radial turbine [NASA-TM-83669] p 585 N84-25647
- CLARY, G. R.**
Development and flight test of a helicopter compact, portable, precision landing system concept [NASA-TM-85951] p 592 N84-24566
- CLOUGH, L. D.**
A small integrated J band altimeter p 600 A84-36261
- COHEN, E. E.**
An engine for tomorrow's small helicopters [AIAA PAPER 84-1277] p 604 A84-35655
- COHEN, S. M.**
Research on aviation fuel instability p 615 N84-24734
- COLE, R. B.**
Behavior of cascaded airfoils under conditions of high mean loading and flow unsteadiness [AD-A139799] p 607 N84-24592
- COLEMAN, J. R.**
Comparison of JFTOT (Jet Fuel Thermal Oxidation Tester) and absorbance methods for determining jet fuel thermal stability [AD-A138673] p 616 N84-24825
- COLLINS, B. S.**
A CW CO₂ laser rangefinder/velocimeter using heterodyne detection p 591 A84-36232
- CONG, M.**
A study on the between-stage flow pattern of an axial-flow compressor with inlet distortion - Calculation method for and experimental research on inlet distortion transmission p 576 A84-35018
- CONN, F. E.**
The AHIP power plant [AIAA PAPER 84-1282] p 604 A84-35656
- COOK, M. V.**
A technique for optimizing the aerodynamic design of a generalized combat aircraft with forward swept wings for the purposes of stability and control investigation [CA-8325] p 598 N84-25700
- CORREA, S. M.**
Demonstration of a new body-fitted coordinate code for modeling gas-turbine combustor flows [AIAA PAPER 84-1381] p 603 A84-35199
- CORY, R.**
Lessons learned in the development of a digital electronic engine control [AIAA PAPER 84-1335] p 602 A84-35177
- COSTAKIS, W.**
Real-time simulation of an automotive gas turbine using the hybrid computer [NASA-TM-83593] p 633 N84-26484
- COTE, S. M.**
Development of the Navy jet trainer duty cycle [AIAA PAPER 84-1486] p 604 A84-35232
- COVERT, E. E.**
On the stability of flight vehicles in the low Reynolds number non-linear regime [AD-A140008] p 583 N84-24561
- CRAIG, H. M.**
Combustor liner construction [NASA-CASE-LEW-14035-1] p 605 N84-24577

- CREMER, R. L.**
Cabin safety subject index
[AD-A140409] p 590 N84-25683
- CRONIN, C. E.**
Instrumentation techniques in sea level test facilities
p 612 N84-25727
- CUNNINGHAM, H. J.**
On the convergence of unsteady generalized aerodynamic forces p 574 A84-34460

D

- DABOIN, S. A.**
Noise measurement flight test: Data/Analyses Bell 222 twin jet helicopter
[AD-A139906] p 631 N84-25430
- DAMBRA, F.**
Towards a better understanding of helicopter external noise p 630 A84-34173
Towards a better understanding of helicopter external noise
[SNIAS-832-210-113] p 632 N84-26388
- DAMONGEOT, A.**
Towards a better understanding of helicopter external noise p 630 A84-34173
Towards a better understanding of helicopter external noise
[SNIAS-832-210-113] p 632 N84-26388
- DANAHER, P. J.**
System safety and the Coast Guard lighter-than-air system project
[AD-A139807] p 588 N84-24564
- DAVENPORT, E. M.**
An adaptive antenna for military aircraft communications p 592 A84-36292
- DAVIS, R. H.**
Rotorcraft contingency power study
[NASA-CR-174675] p 605 N84-24580
- DAVIS, T. J.**
Development and flight test of a helicopter compact, portable, precision landing system concept
[NASA-TM-85951] p 592 N84-24566
- DECKER, A. J.**
Measurement of fluid properties using rapid-double-exposure and time-average holographic interferometry
[AIAA PAPER 84-1461] p 620 A84-35223
- DEJONGE, J. B.**
The use of Arall in fuselage skins
[AD-B080831] p 596 N84-24572
Review of aeronautical fatigue investigations in the Netherlands during the period March 1981 - February 1983
[AD-B082166] p 627 N84-26057
- DELAHAYE, B.**
Determination of the stable operating conditions of an axial flow compressor p 626 N84-25971
- DEMMELE, J.**
First stage of equipment for aircraft Do 28 of DFVLR as a research aircraft for icing and first research results
[DFVLR-FB-83-40] p 596 N84-24571
- DEUTSCH, S.**
The boundary layer on compressor cascade blades
[NASA-CR-173514] p 623 N84-25001
- DICKMAN, R. B.**
Design of integrally damped compressor vanes
[AIAA PAPER 84-0867] p 601 A84-34905
- DODDS, W. J.**
Combustor technology for broadened-properties fuels
p 615 N84-24736
- DONATH, R. C.**
Statistics of crack growth of a superalloy under sustained load p 614 A84-36175
- DONOVAN, L. F.**
Calculation of transonic flow in a linear cascade
[NASA-TM-83697] p 581 N84-24539
- DOROKHOV, V. B.**
Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system p 581 A84-36460
- DOTSENKO, A. M.**
Crack resistance of pressed and rolled semifinished products from aluminum alloys used in load-bearing units in aircraft wings p 614 A84-35724
- DUKE, A. M.**
Study of effects of fuel properties in turbine-powered business aircraft
[NASA-CR-174627] p 617 N84-25854
- DUMITRESCU, H.**
The supersonic flow around a conic nozzle
p 574 A84-34347
- DUNGUNDJI, J.**
Flutter and forced response of mistuned rotors using standing wave analysis
[NASA-CR-173555] p 606 N84-24586

E

- EARDLEY, B. R.**
The design and development of a low emissions transply combustor for the civil Spey engine p 607 N84-24755
- EDLUND, S. N.**
Wake visualization
[BU-282] p 581 N84-24542
- EDWARDS, J. L.**
Measuring turbine engine inlet total temperature problems and solutions
[AIAA PAPER 84-1457] p 604 A84-35222
- EGOROV, I. V.**
Estimation of vibrational stressed state for GTE blades under random vibrations p 619 A84-34133
- EHLERS, K. K.**
Development of the Engine Condition Monitoring System for the HH-65A helicopter
[AIAA PAPER 84-1411] p 605 A84-35666
- EIBERT, M.**
Position updating using a passive millimeter wave sensor p 591 A84-36263
- EIGENMANN, M. F.**
Axisymmetric approach and landing thrust reverser concepts In-ground effects wind tunnel test results
[AIAA PAPER 84-1215] p 601 A84-35134
- ELAIS, G.**
Computation of noise radiating from a free jet perpendicular to its axis via laser anemometry measurements
[ONERA-NT-1983-6] p 632 N84-26387
- ELLE, B.**
Worldwide aviation outlook p 587 A84-34456
- ELLIOTT, W. D.**
Investigation, development, and evaluation of performance proving for fault-tolerant computers
[NASA-CR-166008] p 629 N84-25307
- EREMITSEV, I. G.**
Friction and heat transfer in laminar and turbulent boundary layers in the case of nonuniform supersonic flow past axisymmetric bodies p 580 A84-35730
- ESKEY, M. A.**
Tandem fan applications in advanced STOVL fighter configurations
[NASA-TM-83689] p 605 N84-24579

F

- FAISS, G. D.**
Thrust vector control of a V/STOL airship
p 609 A84-34458
- FAN, C. S.**
Effects of pin shape and array orientation on heat transfer and pressure loss in pin fin arrays
p 618 A84-33707
- FAVIER, D.**
Modelling of an airfoil empirical flow field below and through dynamic stall p 576 A84-34832
- FAVORSKII, K. G.**
Optimal control of multimode plants
p 629 A84-34773
- FENNER, P. J.**
Requirements, applications, and results of strapdown inertial technology to commercial airplanes
p 593 N84-25695
- FLORES, J.**
Evaluation of benefits of the A-10/TF34 Turbine Engine Monitoring System Squadron Integration Program
[AIAA PAPER 84-1414] p 603 A84-35208
- FLOSDORFF, H.**
Projects and programs as a reflection of the performances of engineers in aircraft making by Hans-Wocke
[MBB-UT-24-83-O] p 572 N84-25608
- FOMBONNE, P.**
Air navigation 1973-1983 p 590 A84-35590
- FORD, T. E.**
Indication and alerting p 599 A84-33830
- FOURNIER, J. F.**
Problems in air navigation at the North Pole. II
p 590 A84-35589
- FRAGER, G.**
An aerodynamic study of combustion in the combustion chambers of turbomachines: Experimental and theoretical approaches p 608 N84-24764
- FRANCISCHUS, L. C.**
Supersonic STOVL aircraft with turbine bypass/turbo-compressor engines
[NASA-TM-83686] p 606 N84-24582
- FRANK, W. F. X.**
A 60 GHz collision warning sensor for helicopters
p 600 A84-36262
- FRANKLIN, J. A.**
V/STOL maneuverability and control
p 611 N84-25632

- FRENCH, R. D.**
Current design requirements for corrosion control on helicopters p 597 N84-25616
- FREYMUTH, P.**
First experimental evidence of vortex splitting
p 580 A84-35876
- FRITZ, W.**
Mesh generation strategies for CFD on complex configurations p 578 A84-35328
- FROLOV, V. M.**
Use of composite materials for fabricating the anisotropic structure of a swept-forward wing required by aeroelasticity and strength considerations p 621 A84-35537
- FROMMLET, H.**
A rear engine without joints and pillows
[MBB-UD-383-83-O] p 628 N84-26441
- FUJIMORI, Y.**
Design and experimental verification of the USB flap panel structure for NAL-STOL research aircraft
p 594 A84-34451
- FULLER, C. R.**
Propagation and radiation of sound from flanged circular ducts with circumferentially varying wall admittances. I
Semi-infinite ducts. II - Finite ducts with sources
p 631 A84-34746
- FUSCO, P. R.**
Spacelab 4: Primate experiment support hardware
p 624 N84-25092

G

- GAGNAGE, B.**
Nondestructive testing of composite structures
[SNIAS-832-210-108] p 627 N84-26045
- GALBRAITH, R. A. M.**
An algorithm for the prediction of unsteady potential flow about an arbitrary aerofoil
[GU-AERO-8306] p 582 N84-24553
An investigation of three-dimensional stall development on NACA 23012 and NACA 0012 aerofoils
[GU-AERO-8300] p 582 N84-24554
- GALLOP, L. D.**
Comparison of JFTOT (Jet Fuel Thermal Oxidation Tester) and absorbance methods for determining jet fuel thermal stability
[AD-A138673] p 616 N84-24825
- GALLUS, H. E.**
Unsteady interactions in supersonic compressor stages p 626 N84-25972
- GAMBLE, W. L.**
Counter-rotating intershaft seals for advanced engines
[AIAA PAPER 84-1216] p 619 A84-35135
- GARDNER, L.**
Aviation fuel specification requirements: Their significance and future trends p 614 N84-24733
- GARTRELL, C. F.**
A view of future technology needs for space transportation
[AIAA PAPER 84-1283] p 613 A84-35156
- GEISSLER, W.**
Unsteady laminar boundary-layer calculations on oscillating configurations including backflow. Part 2: Airfoil in high-amplitude pitching motion. Dynamic stall
[NASA-TM-84319-PT-2] p 581 N84-24537
- GENOUX, G.**
The SARIB vibration absorber
[SNIAS-832-210-104] p 628 N84-26058
- GENTRY, C. L., JR.**
Reynolds number effects on pressure loss and turbulence characteristics of four tube-bundle heat exchangers
[NASA-TM-85807] p 585 N84-25645
- GERLACH, J. C.**
Facilities for meteorological research at NASA Goddard/Wallops Flight Facility
[NASA-TM-84422] p 629 N84-25223
- GHAFFARI, F.**
An investigation of aerodynamic characteristics of wings having vortex flow using different numerical codes
[NASA-CR-173596] p 584 N84-25639
- GIBSON, A. E.**
An investigation into the nature and control of vortex flow round helicopter upsweep
[BU-285] p 582 N84-24544
- GIESE, U.**
Computation of inviscid transonic internal flow
p 578 A84-35317
- GILLESPIE, G. P.**
Helicopter Pilot/Copilot survival system
[AD-A140358] p 590 N84-25682
- GILMER, R. O.**
Air-ice drag coefficients for first-year sea ice derived from aircraft measurements p 628 A84-34508

H

GILMORE, J. P.
Modular strapdown guidance unit with embedded microprocessors p 594 N84-25697

GINKO, I. B.
Optimization of large composite structures with strength and local stability restrictions p 621 A84-35535

GLICKSTEIN, M. R.
Alternative fuel deposit formation p 615 N84-24735

GODSTON, J.
Evaluation of single and counter rotation gearboxes for propulsion systems [AIAA PAPER 84-1195] p 604 A84-35651

GOLDSTEIN, D. N.
Rotorcraft contingency power study [NASA-CR-174675] p 605 N84-24580

GOLOVKIN, M. A.
Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system p 581 A84-36460

GOODWIN, F. K.
Preliminary method for estimating hinge moments of all-movable controls [AD-A139726] p 611 N84-24597

GORBAN, V. P.
Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system p 581 A84-36460

GORDON, R.
Calculation of aerodynamic characteristics of wings with thickness and camber by a new method based on the modified vortex lattice method [TAE-493] p 584 N84-25640

GORENKOV, A. F.
Determination of the heat of combustion of reactive fuels by a calculation method p 614 A84-35761

GOUNET, H.
Contribution to the study of light aircraft propeller noise [AD-B073101] p 632 N84-26386

GRAHAM, A. D.
NERF: A computer program for the numerical evaluation of reliability functions-reliability modeling, numerical methods and program documentation [AR-00-984] p 627 N84-26048

GRASHOF, J.
Mesh generation strategies for CFD on complex configurations p 578 A84-35328

GRATTON, M.
Fuel character effects on performance of small gas turbine combustion systems p 607 N84-24738

GREEN, M. W.
Investigation, development, and evaluation of performance proving for fault-tolerant computers [NASA-CR-166008] p 629 N84-25307
The use of a formal simulator to verify a simple real time control program p 630 N84-25322

GREITZER, E. M.
Introduction to unsteady flow in turbomachines p 625 N84-25962
Stability of pumps and compressors p 625 N84-25963

GREMLI, C.
Surge prediction in industrial compressors p 626 N84-25969

GRUENER, K.
New results of airborne measurements with a sensitive, high resolution 90 GHz radiometer - First results for an equivalent 140 GHz system p 600 A84-36287

GU, S.
Experimental determination of the natural modes of swept-wing models using laser holographic interferometry p 619 A84-35022

GUAN, S. Y.
Fast estimation of state feedback gain for the design of aircraft autopilots [GU-AERO-8305] p 610 N84-24596

GUAN, Y.
A linear multivariable dynamical model of supersonic inlet-engine combination [AIAA PAPER 84-1496] p 577 A84-35239

GUPTA, G. S.
Depolarisation properties of airborne radomes p 592 A84-36281

GURNEY, G. B.
Sidewall boundary layer corrections in subsonic, two-dimensional airfoil/hydrofoil testing [AIAA PAPER 84-1366] p 620 A84-35195

GUZHVIN, A. I.
Hysteresis of supersonic separated flows p 580 A84-35734

HAAS, J. E.
Cold-air performance of compressor-drive turbine of department of energy upgraded automobile gas turbine engine. 3: Performance of redesigned turbine [NASA-TM-83627] p 585 N84-25644

HACKENBERG, R. G.
Emulation of a voice interactive Doppler navigation set [AD-A140204] p 593 N84-25687

HAERING, E. A., JR.
Highly integrated digital engine control system on an F-15 airplane [AIAA PAPER 84-1259] p 602 A84-35149
Highly integrated digital engine control system on an F-15 airplane [NASA-TM-86040] p 606 N84-24587

HAFEZ, M. M.
A minimal residual method for transonic potential flows p 621 A84-35353

HAKIM, A. D.
Axisymmetric approach and landing thrust reverser concepts In-ground effects wind tunnel test results [AIAA PAPER 84-1215] p 601 A84-35134

HALEY, S. W.
Effects of pin shape and array orientation on heat transfer and pressure loss in pin fin arrays p 618 A84-33707

HALL, D. W.
Structural sizing of a solar powered aircraft [NASA-CR-172313] p 598 N84-25702

HALL, R. E.
Design and performance evaluation of a five channel Navstar receiver p 591 A84-36264

HALL, S. A.
Structural sizing of a solar powered aircraft [NASA-CR-172313] p 598 N84-25702

HAMELIN, J.
Problems in air navigation at the North Pole. II p 590 A84-35589

HANHELA, P. J.
Interactions between F-111 fuselage fuel tank sealants. Part 1: Characterisation of polyester sealants and their hydrolytic degradation products [MRL-R-657-PT-1] p 617 N84-25828

HANNHEIM, A. S.
The structural and aerodynamic behaviour of a semi-inflatable wing [BU-297] p 596 N84-24574

HARDY, J.-M.
Exhaust system for combat aircraft optimized for supersonic cruise p 574 A84-34172

HARE, D.
Investigation, development, and evaluation of performance proving for fault-tolerant computers [NASA-CR-166008] p 629 N84-25307

HARGRAVE, P. J.
Design and performance evaluation of a five channel Navstar receiver p 591 A84-36264

HART, R. J.
Measuring turbine engine inlet total temperature problems and solutions [AIAA PAPER 84-1457] p 604 A84-35222

HASSENPLUG, W.
Initial alignment and augmentation of the ARINC 705 strapdown AHRS LTR-81 p 594 N84-25699

HAYNES, C.
Uninstalled aero engine testing in operation in the Royal Air Force p 612 N84-25731

HAYNES, J. F.
Rotorcraft contingency power study [NASA-CR-174675] p 605 N84-24580

HAYWARD, D. R.
The interpretation of design requirements for multi-market helicopters p 597 N84-25617

HEBRARD, P.
An aerodynamic study of combustion in the combustion chambers of turbomachines: Experimental and theoretical approaches p 608 N84-24764

HEGE, P.
The SARIB vibration absorber [SNIAS-832-210-104] p 628 N84-26058

HELLARD, G.
Carbon structures on the wing of the regional transport plane ATR-42 [SNIAS-832-111-113] p 598 N84-25704

HILBERT, K. B.
A piloted simulator investigation of decoupling helicopters by using a model following control system [AD-A139976] p 611 N84-24598

HIROSE, K.
Aerodynamic characteristics of fan-jet STOL aircraft [NAL-TR-790] p 586 N84-25651

HIRSCHKRON, R.
Rotorcraft contingency power study [NASA-CR-174675] p 605 N84-24580

HIZAL, A.
Depolarisation properties of airborne radomes p 592 A84-36281

HOEIJMAKERS, H. W. M.
Numerical computation of vortical flows about wings p 587 N84-25987

HOFFMAN, H. E.
First stage of equipment for aircraft Do 28 of DFVLR as a research aircraft for icing and first research results [DFVLR-FB-83-40] p 596 N84-24571

HOFFMAN, M. A.
Turbulent heat transport in circular ducts with circumferentially varying heat flux p 622 A84-36151

HOEISEL, H.
The generation of higher levels of turbulence in the test section of the high speed cascade wind tunnel at Brunswick for simulation of turbomachinery conditions [ESA-TT-815] p 586 N84-25654

HOHMAN, A. E.
Design and manufacturing practices to minimize corrosion in aircraft p 597 N84-25620

HOLT, D. J.
USB applied to high-speed aircraft p 595 A84-35024
Tilt rotor concept examined p 595 A84-35025

HOPKINS, H.
Dash 8 - de Havilland Canada's quiet performer p 588 A84-35361

HOPKINSON, M. J.
The structural and aerodynamic behaviour of a semi-inflatable wing [BU-297] p 596 N84-24574

HORNIAK, S.
Inherent problems in designing two-failure tolerant electromechanical actuators p 624 N84-25088

HOTTNER, TH.
Experimental investigation of wall interference and two-dimensionality of the flow in a transonic airfoil wind tunnel p 576 A84-35017

HUANG, P. N.
A simplified method of evaluating aircraft handling qualities using a pilot transfer function model [GU-AERO-8302] p 610 N84-24595

HUBER, M.
A principal rotor without joints and pillows, made of fiber materials, for dynamic systems of future helicopters [MBB-UD-384-83-O] p 628 N84-26440

HUDSON, H. G.
F-14 scale model measurements. Part 1: External response [DE84-008201] p 583 N84-24562

HUFFINGTON, N. J., JR.
Revisions to the PETROS 4 shell response code [AD-A140268] p 628 N84-26059

HULME, K. F.
A CW CO₂ laser rangefinder/velocimeter using heterodyne detection p 591 A84-36232

HULTGREN, E.
Current requirements on specifications for corrosion prevention p 597 N84-25618

HUMENIK, F. M.
Detailed fuel spray analysis techniques p 622 N84-24747

IGOE, W. B.
Reynolds number effects on pressure loss and turbulence characteristics of four tube-bundle heat exchangers [NASA-TM-85807] p 585 N84-25645

IMRIE, W. M.
Workshop on Requirements for Aircraft Corrosion Control [AGARD-R-714] p 573 N84-25613

INGER, G. R.
Computation of transonic flow around airfoils with trailing edge and shock/boundary layer interactions p 574 A84-34454

INNOCENTI, M.
Optimal cooperative control synthesis applied to a control-configured aircraft [NASA-CR-170411] p 610 N84-24593

INUMARU, N.
Aerodynamic characteristics of fan-jet STOL aircraft [NAL-TR-790] p 586 N84-25651

IVES, D. C.
Computational design and validation tests of advanced concept subsonic inlets [AIAA PAPER 84-1329] p 576 A84-35173
Orthogonal grid generation [AIAA PAPER 84-1248] p 622 A84-35654

- LEISHMANN, J. G.**
An investigation of three-dimensional stall development on NACA 23012 and NACA 0012 aerofoils [GU-AERO-8300] p 582 N84-24554
- LEKOUDIS, S. G.**
Computation of transonic flow around airfoils with trailing edge and shock/boundary layer interactions p 574 A84-34454
- LEONARD, J. M.**
Statistical approach to damage tolerance assessment [SNIAS-832-111-112] p 596 N84-24575
- LESSER, J. D.**
The influence of a moving suspension on the behaviour of modelled helicopter underslung loads [BU-288] p 596 N84-24573
- LETOUZEY**
System concepts for helicopter air-to-air combat [SNIAS-832-210-102] p 598 N84-25705
- LEUNG, E.**
Aerodynamics of pointed forebodies at high angles of attack p 574 A84-34461
- LEVIN, D.**
Measurements of ground effect for delta wings p 575 A84-34466
- LEVISON, W. H.**
F-14 modeling study [NASA-CR-172336] p 598 N84-25701
- LEVITT, K. N.**
Investigation, development, and evaluation of performance proving for fault-tolerant computers [NASA-CR-166008] p 629 N84-25307
- LEVY, M.**
Current design requirements for corrosion control on helicopters p 597 N84-25616
- LEWIS, T.**
High-gain error actuated flight control systems for continuous linear multivariable plants [AFIT/GAE/EE/82D-1] p 610 N84-24534
- LEWIS, W. J.**
V/STOL engine development [AIAA PAPER 84-1337] p 603 A84-35178
V/STOL propulsion system aerodynamics p 608 N84-25630
- LEYLAND, D. C.**
Aerodynamics of V/STOL aircraft: Performance assessment p 584 N84-25635
- LI, K. C.**
Application of an optimization method to high performance propeller designs [NASA-TM-83710] p 572 N84-25607
- LI, S.-Y.**
Finite difference computation of pressure and wave-drag of slender bodies of revolution at transonic speeds with zero-lift p 579 A84-35330
- LI, W.**
A study on the between-stage flow pattern of an axial-flow compressor with inlet distortion - Calculation method for and experimental research on inlet distortion transmission p 576 A84-35018
- LIBRESCU, L.**
Aeroelastic optimization of axisymmetric circular cylindrical shells for supersonic flow p 619 A84-34722
- LIFANOVA, T. A.**
Determination of the heat of combustion of reactive fuels by a calculation method p 614 A84-35761
- LIN, C. Q.**
An approximate analytical solution of incompressible potential flow around a circular cylinder between two parallel flat plates p 576 A84-35023
- LILOULIS, I. S.**
Design and analysis of Coordinated Bank-To-Turn (CBTT) autopilots for Bank-To-Turn (BTT) missiles [AD-A140103] p 613 N84-24698
- LIU, C. H.**
Navier-Stokes calculations for the vortex of a rotor in hover [NASA-TM-85894] p 581 N84-24540
- LLOYD, D. E.**
A small integrated J band altimeter p 600 A84-36261
- LOEWENTHAL, S. H.**
An advanced pitch change mechanism incorporating a hybrid traction drive [NASA-TM-83709] p 572 N84-25605
An analytical method to predict efficiency of aircraft gearboxes [NASA-TM-83716] p 572 N84-25606
- LONG, L. N.**
The compressible aerodynamics of rotating blades using an acoustic formulation p 587 N84-25670
- LONGO, J.**
Mesh generation strategies for CFD on complex configurations p 578 A84-35328
- LORANCHET, P.**
Single-pilot IFR flights and operations [SNIAS-832-210-103] p 630 N84-26374

- LUCAS, P. D.**
Wake visualization [BU-282] p 581 N84-24542
- LUDEF, C. B.**
Redundant color coding on airborne CRT displays p 599 A84-35899
- LUIDENS, R. W.**
Supersonic STOVL aircraft with turbine bypass/turbo-compressor engines [NASA-TM-83686] p 606 N84-24582
- LUO, S.-J.**
Finite difference computation of pressure and wave-drag of slender bodies of revolution at transonic speeds with zero-lift p 579 A84-35330
- LUSH, K. J.**
Electrical subsystems flight test handbook [AD-A139783] p 596 N84-24576
- LUTOVINOV, V. M.**
Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system p 581 A84-36460

M

- MACCORMACK, R. W.**
Transonic-flow computation using an explicit-implicit method p 578 A84-35325
- MAEKAWA, S.**
Design and experimental verification of the USB flap panel structure for NAL-STOL research aircraft p 594 A84-34451
- MAESTRELLO, L.**
Simulation of the fluctuating field of a forced jet p 578 A84-35309
- MAGOWAN, J. M.**
An investigation into anti-swirl devices for s-shaped air intakes [BU-293] p 582 N84-24549
- MAILLOUX, R. J.**
Electronically steerable SATCOM terminals for airborne use p 591 A84-36230
- MAKAROV, V. E.**
Hypersonic similarity in the flow past a combination of a circular cone and delta wing p 580 A84-35742
- MALKIN, F. J.**
Emulation of a voice interactive Doppler navigation set [AD-A140204] p 593 N84-25687
- MALLINSON, G. D.**
NERF: A computer program for the numerical evaluation of reliability functions-reliability modeling, numerical methods and program documentation [AR-00-984] p 627 N84-26048
- MAN, K. F.**
Evolution of a heave control system for an amphibious hovercraft [CAR-8401] p 624 N84-25864
- MANG, H.**
Shear stress distribution and shear stiffness in transversely loaded, inhomogeneous cross-sections of arbitrary form made of orthotropic materials p 621 A84-35592
- MANGANAS, T.**
Design of robust digital controllers for gas turbines with explicit actuator and sensor dynamics [AIAA PAPER 84-1185] p 601 A84-35128
- MARCHIONNA, N. R.**
Alternative fuels use in a vehicular gas turbine p 615 N84-24741
- MARESCA, C.**
Modelling of an airfoil empirical flow field below and through dynamic stall p 576 A84-34832
- MASI, M. A.**
Proceedings of the Workshop on Multivariable Control Systems [AD-A139050] p 571 N84-24529
Digital multivariable tracker control laws for the C-141-A Starlifter aircraft [AFIT/GE/EE/82D-47] p 610 N84-24533
- MASON, M. L.**
Aeropropulsive characteristics of nonaxisymmetric-nozzle thrust reversers at Mach numbers from 0 to 1.20 [NASA-TP-2306] p 581 N84-24538
- MASSON, P.**
Strapdown inertial systems for tactical missiles using mass unbalanced two-axis rate gyros p 594 N84-25696
- MASURE, B.**
Towards a better understanding of helicopter external noise p 630 A84-34173
Towards a better understanding of helicopter external noise [SNIAS-832-210-113] p 632 N84-26388
- MATHIOUDAKIS, K.**
Structure of rotating stall cells. Part 1: Absolute motion p 626 N84-25967
Structure of rotating stall cells. Part 2: Relative motion p 626 N84-25970
- MATSUO, J. T.**
Aircrew Gliding Escape System (AGES) exploratory development investigation of aircrew emergency escape ram-air inflated, flexible wing [AD-A139928] p 588 N84-24565
- MATSUZAKI, Y.**
Divergence boundary prediction from random responses - NAL's method p 619 A84-34463
- MAULARD, J.**
Computation of noise radiating from a free jet perpendicular to its axis via laser anemometry measurements [ONERA-NT-1983-6] p 632 N84-26387
- MCCONKEY, E. D.**
CONUS Lorax-C error budget: Flight test [AD-A139871] p 592 N84-24568
CONUS (Continental United States) Omega/VLF data collection: Flight test [AD-A140252] p 593 N84-25688
- MCDONALD, H.**
Solution of three-dimensional time-dependent viscous flows p 621 A84-35352
- MCHALE, A.**
Investigation of the RF properties of carbon fibre composite materials [AD-A140261] p 617 N84-25774
- MCKENZIE, A. B.**
Encounters with surge p 626 N84-25966
- MCLOUGHLIN, V. C. R.**
Corrosion control requirements for UK military aircraft p 617 N84-25614
- MEADOWS, N.**
The effect of perforation on the aerodynamics of a spoiler [BU-286] p 582 N84-24545
- MEI, C.**
Large deflection multimode response of clamped rectangular panels to acoustic excitation, volume 1 [AD-A139622] p 624 N84-25107
- MELLIAR-SMITH, P. M.**
Investigation, development, and evaluation of performance proving for fault-tolerant computers [NASA-CR-166008] p 629 N84-25307
STP: A mechanized logic for specification and verification p 629 N84-25308
Specifying and verifying ultra-reliability and fault-tolerance properties p 630 N84-25309
- MERCIER, O.**
Robustness quantification for nonlinear sampled-data systems with dynamic multiplicative perturbations p 630 N84-25871
- MERRILL, D. R.**
Naval aviation IMA repair capability: A readiness to resources approach [AD-A140465] p 572 N84-25612
- MERRILL, W. C.**
Sensor failure detection for jet engines using analytical redundancy [NASA-TM-83695] p 606 N84-24585
Real-time simulation of an automotive gas turbine using the hybrid computer [NASA-TM-83593] p 633 N84-26484
- METZGER, D. E.**
Effects of pin shape and array orientation on heat transfer and pressure loss in pin fin arrays p 618 A84-33707
- MEYN, E. H.**
Lewis Research Center spin rig and its use in vibration analysis of rotating systems [NASA-TP-2304] p 605 N84-24578
- MICHELIN, J. L.**
Strapdown inertial systems for tactical missiles using mass unbalanced two-axis rate gyros p 594 N84-25696
- MIETRACH, D.**
Successful utilization of economic, light aluminum-casted structures in airplane construction [VFW-31/83-O] p 599 N84-26439
- MIKE, F. J.**
Evaluation of single and counter rotation gearboxes for propulsion systems [AIAA PAPER 84-1195] p 604 A84-35651
- MILLER, R. M.**
Computational design and validation tests of advanced concept subsonic inlets [AIAA PAPER 84-1329] p 576 A84-35173
- MIR, A.**
An aerodynamic study of combustion in the combustion chambers of turbomachines: Experimental and theoretical approaches p 608 N84-24764

P

- MIRANDA, L. R.**
Application of computational aerodynamics to airplane design p 594 A84-34452
- MITCHELL, R. G.**
Cost of corrosion for commercial aviation p 573 N84-25624
- MIURA, Y.**
Advanced turbofan concept with regenerator and inter-cooled compressor [AIAA PAPER 84-1270] p 602 A84-35154
- MOCK, E. A. T.**
Regenerative Intercooled Turbine Engine (RITE) study [AIAA PAPER 84-1267] p 602 A84-35153
- MODI, V. J.**
Aerodynamics of pointed forebodies at high angles of attack p 574 A84-34461
- MOFFITT, T. P.**
Performance of a high-work low aspect ratio turbine tested with a realistic inlet radial temperature profile [NASA-TM-83655] p 607 N84-24589
- MOLLAN, L. W.**
A circulation meter for the measurement of discrete vortices [BU-300] p 582 N84-24551
- MOONEY, A. L.**
The aerodynamic effects of cavities in a body [BU-289] p 582 N84-24547
- MOOR, D.**
Time flies - The 4D flight management system p 609 A84-33847
- MOORE, F. K.**
Theory of rotating stall of multistage axial compressors p 625 N84-25964
- MOORE, J. S.**
Investigation, development, and evaluation of performance proving for fault-tolerant computers [NASA-CR-166008] p 629 N84-25307
The use of a formal simulator to verify a simple real time control program p 630 N84-25322
- MORRIS, R. E.**
Lewis Research Center spin rig and its use in vibration analysis of rotating systems [NASA-TP-2304] p 605 N84-24578
- MOSES, C. A.**
U.S. Army alternative gas-turbine fuels research: MERADCOM p 615 N84-24739
- MOSHER, M.**
Acoustic measurements of a full-scale rotor with four tip shapes. Volume 2: Appendices C, D, E and F [NASA-TM-85878-VOL-2] p 631 N84-25426
- MOSIER, S. A.**
Fuel effects on gas turbine combustion systems p 615 N84-24737
- MOUNT, R. E.**
Design of a high-performance rotary stratified-charge research aircraft engine [AIAA PAPER 84-1395] p 603 A84-35204
- MOXON, J.**
Crash for safety p 588 A84-35360
- MULARZ, E. J.**
Detailed fuel spray analysis techniques p 622 N84-24747
- MULCAHY, T. M.**
Fluid forces on a rigid cylinder in turbulent crossflow [DE84-006364] p 623 N84-25012
- MURAMOTO, K. K.**
A theoretical analysis of the aerodynamic and structural forces associated with a ribbon parachute canopy in steady descent p 587 N84-25671
- MYERS, L. P.**
Preliminary flight test results of the F100 EMD engine in an F-15 airplane [AIAA PAPER 84-1332] p 602 A84-35176
Preliminary flight test results of the F100 EMD engine in an F-15 airplane [NASA-TM-85902] p 606 N84-24588
- N**
- NAGABHUSHAN, B. L.**
Thrust vector control of a V/STOL airship p 609 A84-34458
- NAGARAJA, K. S.**
Winglet effects on the flutter of twin-engine-transport type wing [AIAA PAPER 84-0905] p 594 A84-34907
- NAKAMURA, S.**
Noniterative grid generation using parabolic difference equations for fuselage-wing flow calculations p 579 A84-35334
- NASSER, S. H.**
An investigation of the interaction between multiple dilution jets and combustion products p 616 N84-24758
- NELMS, W. P.**
V/STOL concepts in the United States: Past, present, and future p 597 N84-25628
Assessment of aerodynamic performance of V/STOL and STOVL fighter aircraft p 584 N84-25636
- NELSON, D. P.**
Computational design and validation tests of advanced concept subsonic inlets [AIAA PAPER 84-1329] p 576 A84-35173
- NEPERSHIN, R. I.**
Optimization of large composite structures with strength and local stability restrictions p 621 A84-35535
- NEWBERY, A. R.**
Is there a future for infra-red missile systems? p 591 A84-36229
- NEWMAN, J. S.**
Noise measurement flight test: Data/Analyses Bell 222 twin jet helicopter [AD-A139906] p 631 N84-25430
- NEWTRICK, P. F.**
An investigation into the nature and control of vortex flow round helicopter upsweep [BU-285] p 582 N84-24544
- NIELSEN, J. N.**
Preliminary method for estimating hinge moments of all-movable controls [AD-A139726] p 611 N84-24597
- NIEMITZ, H. P.**
Position updating using a passive millimeter wave sensor p 591 A84-36263
- NISKODE, P. M.**
Design of integrally damped compressor vanes [AIAA PAPER 84-0867] p 601 A84-34905
- NOLL, B. E.**
Development of temperature-, velocity- and concentration-profiles in a curved combustor p 608 N84-24757
- NOLL, T. E.**
Active suppression of aeroelastic instabilities for forward swept wings p 584 N84-25638
- NORUM, T. D.**
Effects of simulated flight on the structure and noise of underexpanded jets [NASA-TP-2308] p 631 N84-25422
- NOZAKI, K.**
East-West nonreciprocal propagation of Omega Navigational VLF waves on the low latitude and transequatorial paths p 590 A84-34648
- O**
- OBERLE, L. G.**
Optimization of fringe-type laser anemometers for turbine engine component testing [NASA-TM-83658] p 623 N84-25019
- OBIKANE, Y.**
Numerical computation of the Reynolds stress in supersonic inlet flows [AIAA PAPER 84-1364] p 577 A84-35193
- OHMAN, L. H.**
Unsteady pressures and forces during transonic buffeting of a supercritical airfoil [AD-A133139] p 575 A84-34465
- OHSE, M.**
East-West nonreciprocal propagation of Omega Navigational VLF waves on the low latitude and transequatorial paths p 590 A84-34648
- OHTANI, A.**
East-West nonreciprocal propagation of Omega Navigational VLF waves on the low latitude and transequatorial paths p 590 A84-34648
- OLSEN, J. W.**
Evaluation of benefits of the A-10/TF34 Turbine Engine Monitoring System Squadron Integration Program [AIAA PAPER 84-1414] p 603 A84-35208
- ORIORDAN, S. J. P.**
A technique for optimizing the aerodynamic design of a generalized combat aircraft with forward swept wings for the purposes of stability and control investigation [CA-8325] p 598 N84-25700
- OSBOURN, E. W.**
Evolution of a heave control system for an amphibious hovercraft [CAR-8401] p 624 N84-25864
- OSHIMA, K.**
Flow simulation by discrete vortex method p 577 A84-35307
- OSHIMA, Y.**
Flow simulation by discrete vortex method p 577 A84-35307
- OSTASHOV, V. G.**
Hang gliding p 580 A84-35682
- OVERLAND, J. E.**
Air-ice drag coefficients for first-year sea ice derived from aircraft measurements p 628 A84-34508
- PALMER, M.**
First experimental evidence of vortex splitting p 580 A84-35876
- PALMIERI, T.**
Time flies - The 4D flight management system p 609 A84-33847
- PARIKH, P. C.**
A numerical study of the controlled flow tunnel for a high lift model [NASA-CR-166572] p 584 N84-25642
A numerical study of the controlled flow tunnel for a high lift model p 611 N84-25721
- PARKER, I.**
Chinook's trial by ice p 588 A84-35359
- PARKER, J. C.**
A small integrated J band altimeter p 600 A84-36261
- PASKONOV, V. M.**
Numerical analysis of separated laminar viscous-gas flows in the case of supersonic flow past bodies with leading spikes p 580 A84-35735
- PAUL, D. B.**
Interactions between F-111 fuselage fuel tank sealants. Part 1: Characterisation of polyester sealants and their hydrolytic degradation products [MRL-R-657-PT-1] p 617 N84-25828
- PEERY, D. J.**
Aircraft structures (2nd edition) p 595 A84-35687
- PEGG, R. J.**
Design of long-endurance unmanned airplanes incorporating solar and fuel cell propulsion [AIAA PAPER 84-1430] p 595 A84-35215
- PEOT, H.**
An electronic umbrella - The B-1B defensive avionics system p 590 A84-35862
- PERDZOCK, J. M.**
Application of multifunction strapdown inertial system p 594 N84-25698
- PEREZ, E. S.**
Conical flows with leading edge vortices p 623 N84-25013
- PEYRAN, R. J.**
Spacelab 4: Primate experiment support hardware p 624 N84-25092
- PHATAK, A. V.**
VTOL shipboard letdown guidance system analysis [NASA-CR-166519] p 611 N84-25716
- PICKETT, D. H.**
Analysis of symmetric reinforcement of quasi-isotropic graphite-epoxy plates with a circular cutout under uniaxial tensile loading [AD-A139998] p 614 N84-24715
- PIETERSEN, O. B. M.**
Electromagnetic compatibility in aerospace vehicles [NLR-MP-83002-U] p 623 N84-24929
- PILIUGIN, N. N.**
Friction and heat transfer in laminar and turbulent boundary layers in the case of nonuniform supersonic flow past axisymmetric bodies p 580 A84-35730
- PILOSIAN, V. G.**
Optimization of large composite structures with strength and local stability restrictions p 621 A84-35535
- PIQUET, J.**
On the use of several compact methods for the study of unsteady incompressible viscous flow for outer problems. II p 620 A84-35327
- PLATZER, K. H.**
Development of temperature-, velocity- and concentration-profiles in a curved combustor p 608 N84-24757
- POGUST, F. B.**
Tactical battlefield aircraft still lack all weather landing systems p 591 A84-35863
- POLASEK, J.**
Numerical solution of transonic shear flows past thin bodies p 578 A84-35326
- POLLARD, D. W.**
Cabin safety subject index [AD-A140409] p 590 N84-25683
- PONOMAREVA, V. S.**
Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system p 581 A84-36460
- PORTER, B.**
Design of robust digital controllers for gas turbines with explicit actuator and sensor dynamics [AIAA PAPER 84-1185] p 601 A84-35128
- POSKACHEI, A. A.**
Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system p 581 A84-36460

- POSTA, S. J.**
Lewis Research Center spin rig and its use in vibration analysis of rotating systems
[NASA-TP-2304] p 605 N84-24578
- POVINELLI, L. A.**
Application of a quasi-3D inviscid flow and boundary layer analysis to the hub-shroud contouring of a radial turbine
[NASA-TM-83669] p 585 N84-25647
- POWELL, F. D.**
Study of effects of fuel properties in turbine-powered business aircraft
[NASA-CR-174627] p 617 N84-25854
- POWELL, J. G. C.**
The aerodynamic effects of cavities in a body
[BU-289] p 582 N84-24547
- POWELL, K. G.**
Conical flows with leading edge vortices
p 623 N84-25013
- PRIGODA, B. A.**
Radomes for flight vehicles
[AD-A140174] p 625 N84-25920
- PROKOPEKO, A. V.**
Method for determining stress intensity factors in blades of gas turbine engines
p 619 N84-34129
- PUFFERT-MEISSNER, W.**
Wind tunnel investigations on thin supercritical airfoils in the high subsonic flow regime
[ESA-TT-774] p 586 N84-25652
- PURVIS, J. W.**
Improved prediction of parachute line sail during lines-first deployment
[DE84-007340] p 583 N84-24563

R

- RADFORD, R. C.**
An experimental investigation of VTOL flying qualities requirements in shipboard landings p 609 N84-34453
- RADONDY, R.**
Composite materials: The user and the producer
[SNIAS-832-111-108] p 617 N84-25772
- RALSTON, J. N.**
Rotary balance data for a typical single-engine general aviation design for an angle-of-attack range of 20 to 90 deg. 3: Influence of control deflection on predicted model D spin modes
[NASA-CR-3248] p 584 N84-25641
- RAND, O.**
Efficient method for calculating the axial velocities induced along rotating blades by trailing helical vortices
p 574 N84-34462
- REBONT, J.**
Modelling of an airfoil empirical flow field below and through dynamic stall
p 576 N84-34832
- REDDY, T. S. R.**
Flap-lag damping of an elastic rotor blade with torsion and dynamic inflow in hover from symbolically generated equations
[AIAA PAPER 84-0989] p 619 N84-34909
- REDING, J. P.**
An advanced aerospike to minimize nose drag
p 573 N84-33849
- REMBOLD, B.**
A 60 GHz collision warning sensor for helicopters
p 600 N84-36262
- RENKEN, J. H.**
Ground and inflight operational effects of APU's
[VFW-30/83-O] p 609 N84-26438
- REUBUSH, D. E.**
Flow-field investigation of a supercruise fighter model
[AIAA PAPER 84-1331] p 576 N84-35175
- RICE, D. J.**
Airborne Self Protection Jammer - ASPJ/ALQ-165
p 592 N84-36266
- RICHARDS, C. J.**
Thrust reverser exhaust plume reingestion model tests
p 601 N84-34457
- RICHMOND, W.**
A small integrated J band altimeter
p 600 N84-36261
- RICKLEY, E. J.**
Noise measurement flight test: Data/Analyses Bell 222 twin jet helicopter
[AD-A139906] p 631 N84-25430
- RIES, T.**
Aerodynamics of pointed forebodies at high angles of attack
p 574 N84-34461
- RITCHIE, E. H.**
Astronautics and aeronautics, 1976. A chronology
[NASA-SP-4021] p 633 N84-25602
- RODRIGUEZ, E. M.**
Study of aerospace materials, coatings, adhesions and processes. Aircraft icing processes
[AD-A139743] p 583 N84-24557

- ROELKE, R. J.**
Cold-air performance of compressor-drive turbine of department of energy upgraded automobile gas turbine engine. 3: Performance of redesigned turbine
[NASA-TM-83627] p 585 N84-25644
- ROEMERMAN, S.**
GPS guidance concepts
p 591 N84-36265
- ROM, J.**
Calculation of aerodynamic characteristics of wings with thickness and camber by a new method based on the modified vortex lattice method
[TAE-493] p 584 N84-25640
- ROSEN, A.**
Efficient method for calculating the axial velocities induced along rotating blades by trailing helical vortices
p 574 N84-34462
- ROSENFELD, M.**
Numerical solution of viscous flow around arbitrary airfoils in a straight cascade
p 579 N84-35340
- ROSENTHAL, L.**
Evolution of the combat aircraft
p 571 N84-34171
- ROVNER, B. A.**
General aviation activity and avionics survey
[AD-A139936] p 571 N84-24536
- ROWE, W. S.**
On the convergence of unsteady generalized aerodynamic forces
p 574 N84-34460
- ROWLAND, J. A.**
Uninstalled aero engine testing in operation in the Royal Air Force
p 612 N84-25731
- RUBIN, S. G.**
A composite velocity procedure for the incompressible Navier-Stokes equations
p 620 N84-35341
- RUDNITSKI, D. M.**
Performance derivation of turbojets and turbofans from tests in sea-level test cells
p 608 N84-25728
- RUHLIN, C. L.**
Winglet effects on the flutter of twin-engine-transport type wing
[AIAA PAPER 84-0905] p 594 N84-34907
- RUSS, D. E.**
Proceedings of the Workshop on Multivariable Control Systems
[AD-A139050] p 571 N84-24529
Reconfigurable digital control laws for the A-7D DIGITAC 2 aircraft with failed primary control surfaces
[AFIT/GE/EE/82D-59] p 610 N84-24535

S

- SAKURAI, C.**
Advanced turbofan concept with regenerator and inter-cooled compressor
[AIAA PAPER 84-1270] p 602 N84-35154
- SAMPATH, P.**
Fuel character effects on performance of small gas turbine combustion systems
p 607 N84-24738
- SANDOR, J.**
Digital control of flight simulator motion base actuator
[ARL-SYS-TM-69] p 613 N84-25732
- SANO, M.**
Design and experimental verification of the USB flap panel structure for NAL-STOL research aircraft
p 594 N84-34451
- SARGISSON, D. F.**
An advanced pitch change mechanism incorporating a hybrid traction drive
[NASA-TM-83709] p 572 N84-25605
- SAVAGE, P. G.**
Advances in strapdown sensors
p 593 N84-25693
- SCARAMUZZINO**
System concepts for helicopter air-to-air combat
[SNIAS-832-210-102] p 598 N84-25705
- SCHAIRER, E. T.**
Two-dimensional wind-tunnel interference from measurements on two contours
p 574 N84-34459
- SCHILLER, J.**
Estimation of the flight parameters of low flying aircraft using the radiated noise
[LFD-211] p 595 N84-24569
- SCHIMMING, P.**
Comparison of a propfan/turbofan engine by thermodynamic cycle calculation
[ESA-TT-820] p 608 N84-25715
- SCHMIDT, D. K.**
Optimal cooperative control synthesis applied to a control-configured aircraft
[NASA-CR-170411] p 610 N84-24593
- SCHMIDT, G. T.**
Advances in strapdown inertial systems: Introduction and overview
p 593 N84-25692
- SCHMIDT, W.**
Euler solutions as limit of infinite Reynolds number for separation flows and flows with vortices
p 579 N84-35344

- SCHOCK, H. J.**
A review of internal combustion engine combustion chamber process studies at NASA Lewis Research Center
[NASA-TM-83666] p 623 N84-24999
- SCHUBER, D.**
Advanced combustor liner cooling concepts
p 608 N84-24756
- SCHUM, E. F.**
Progress towards a theory of jet-flap thrust recovery
p 575 N84-34695
- SCHUMACHER, M. J.**
Design of integrally damped compressor vanes
[AIAA PAPER 84-0867] p 601 N84-34905
- SCHWARMANN, L.**
On improving the fatigue performance of a double-shear lap joint
[VFW-29/83-O] p 628 N84-26431
- SCHWARTZ, R.**
Investigation, development, and evaluation of performance proving for fault-tolerant computers
[NASA-CR-166008] p 629 N84-25307
STP: A mechanized logic for specification and verification
p 629 N84-25308
- SCHWARTZ, R. L.**
Specifying and verifying ultra-reliability and fault-tolerance properties
p 630 N84-25309
- SCHWARTZ, T. J.**
Measuring turbine engine inlet total temperature problems and solutions
[AIAA PAPER 84-1457] p 604 N84-35222
- SCHWENK, J. C.**
General aviation activity and avionics survey
[AD-A139936] p 571 N84-24536
- SCOFIELD, B.**
Uninstalled aero engine testing in operation in the Royal Air Force
p 612 N84-25731
- SEASHOLTZ, R. G.**
Optimization of fringe-type laser anemometers for turbine engine component testing
[NASA-TM-83658] p 623 N84-25019
- SEBBOWA, F. B.**
An investigation of the interaction between multiple dilution jets and combustion products
p 616 N84-24758
- SEBRING, D. L.**
Application of multifunction strapdown inertial system
p 594 N84-25698
- SENG, G. T.**
Research on aviation fuel instability
p 615 N84-24734
- SETO, L. Y.**
An investigation of three-dimensional stall development on NACA 23012 and NACA 0012 aerofoils
[GU-AERO-8300] p 582 N84-24554
- SEVESTRE, C.**
La Recherche Aerospatiale, Bimonthly Bulletin, no. 1983-6, 217/November-December
[ESA-TT-841] p 625 N84-25870
- SHAFFER, I. S.**
Methodology for assessment of corrosion costs
p 573 N84-25623
- SHALLENE, F. M.**
The AHIP power plant
[AIAA PAPER 84-1282] p 604 N84-35656
- SHANYGIN, A. N.**
Use of composite materials for fabricating the anisotropic structure of a swept-forward wing required by aeroelasticity and strength considerations
p 621 N84-35537
- SHEARIN, J. G.**
Effects of simulated flight on the structure and noise of underexpanded jets
[NASA-TP-2308] p 631 N84-25422
- SHEPPARD, C. G. W.**
An investigation of the interaction between multiple dilution jets and combustion products
p 616 N84-24758
- SHESTAEV, S. M.**
Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system
p 581 N84-36460
- SHOSTAK, R. E.**
Investigation, development, and evaluation of performance proving for fault-tolerant computers
[NASA-CR-166008] p 629 N84-25307
STP: A mechanized logic for specification and verification
p 629 N84-25308
- SHYY, W.**
Demonstration of a new body-fitted coordinate code for modeling gas-turbine combustor flows
[AIAA PAPER 84-1381] p 603 N84-35199
- SIDDONS, W. D., JR.**
Orthogonal grid generation
[AIAA PAPER 84-1248] p 622 N84-35654

- SIDES, J.**
Implicit time dependent methods for the solution of the Euler equations. Part 2: Application to transonic flows p 627 N84-25990
- SIMARD, R.**
Corrosion control maintenance practices for Canadian aircraft p 573 N84-25621
- SIMON, B.**
Advanced combustor liner cooling concepts p 608 N84-24756
- SISTO, F.**
Behavior of cascaded airfoils under conditions of high mean loading and flow unsteadiness [AD-A139799] p 607 N84-24592
- SKUDRIDAKIS, J.**
System modeling and identification of equivalent systems with and without compensating time delay for control-augmented aircraft [DFVLR-FB-83-36] p 596 N84-24570
- SLATER, G. L.**
Perturbation analysis of optimal integral controls p 629 A84-36131
- SMITH, M. E.**
Measurement of local convective heat transfer coefficients of four ice accretion shapes [NASA-CR-174680] p 585 N84-25646
- SMITH, M. J. T.**
Aircraft noise control - Progress and prospects p 595 A84-34950
- SMITHERS, B. W.**
Investigation of the RF properties of carbon fibre composite materials [AD-A140261] p 617 N84-25774
- SNAPE, D. M.**
The design and development of a low emissions transply combustor for the civil Spey engine p 607 N84-24755
- SOMERVILLE, C. C.**
Degradation of jet fuel hydrocarbons by aquatic microbial communities [AD-A139791] p 616 N84-24822
- SPADACCINI, L. J.**
Alternative fuel deposit formation p 615 N84-24735
- SPAIN, J. C.**
Degradation of jet fuel hydrocarbons by aquatic microbial communities [AD-A139791] p 616 N84-24822
- SPRINGER, R.**
Improvement of the accuracy of Doppler direction finders for general aviation by spectral signal analysis p 590 A84-35694
- STABE, R. G.**
Performance of a high-work low aspect ratio turbine tested with a realistic inlet radial temperature profile [NASA-TM-83655] p 607 N84-24589
- STAUDACHER, W.**
Vortex flap system for thin wings [MBB-FE-122/S/PUB/102] p 587 N84-26435
- STEBUNOV, A. I.**
Estimation of vibrational stressed state for GTE blades under random vibrations p 619 A84-34133
- STEEN, J. A.**
Cabin safety subject index [AD-A140409] p 590 N84-25683
- STEFKO, G. L.**
Application of an optimization method to high performance propeller designs [NASA-TM-83710] p 572 N84-25607
- STEINETS, B. M.**
An advanced pitch change mechanism incorporating a hybrid traction drive [NASA-TM-83709] p 572 N84-25605
- STEYERT, W. A.**
Solid state compressor [AD-A140498] p 627 N84-26032
- STRINGFIELD, G.**
The study of an idealized wing/body junction [AD-A139933] p 583 N84-24559
- STROCK, W. J.**
Combustor liner construction [NASA-CASE-LEW-14035-1] p 605 N84-24577
- STUFF, R.**
Propeller noise at subsonic blade tip speeds, torque and thrust force [ESA-TT-821] p 632 N84-26385
- SUDWORTH, J. P.**
Design and performance evaluation of a five channel Navstar receiver p 591 A84-36264
- SUESS, H.**
New results of airborne measurements with a sensitive, high resolution 90 GHz radiometer - First results for an equivalent 140 GHz system p 600 A84-36287
- SUKHAREV, V. I.**
Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system p 581 A84-36460
- SULLIVAN, P.**
Analysis of symmetric reinforcement of quasi-isotropic graphite-epoxy plates with a circular cutout under uniaxial tensile loading [AD-A139998] p 614 N84-24715
- SZETELA, E. J.**
Alternative fuel deposit formation p 615 N84-24735

T

- TABAKOFF, W.**
Axial flow compressor performance deterioration [AIAA PAPER 84-1208] p 601 A84-35133
- TAKAHASHI, H.**
Aerodynamic characteristics of fan-jet STOL aircraft [NAL-TR-790] p 586 N84-25651
- TAKAHASHI, R. K.**
Turbulent heat transport in circular ducts with circumferentially varying heat flux p 622 A84-36151
- TAKIZAWA, N.**
Wind tunnel investigation of the rolling moment of a rectangular wind with some winglets on the left upper tip [NAL-TR-788] p 586 N84-25650
- TALAY, T. A.**
Design of long-endurance unmanned airplanes incorporating solar and fuel cell propulsion [AIAA PAPER 84-1430] p 595 A84-35215
- TALCOTT, N. A., JR.**
Numerical simulation of flow through inlets/diffusers with terminal shocks [AIAA PAPER 84-1362] p 577 A84-35192
- TARQUINIO, S. W.**
Evaluation of benefits of the A-10/TF34 Turbine Engine Monitoring System Squadron Integration Program [AIAA PAPER 84-1414] p 603 A84-35208
- TERENTEV, E. D.**
Linear problem of a vibrator oscillating harmonically at supercritical frequencies in a subsonic boundary layer p 579 A84-35497
- TEVELDE, J.**
Alternative fuel deposit formation p 615 N84-24735
- THOMAS, A. S. W.**
Flow visualization as an aerodynamic diagnostic tool p 618 A84-33850
- THOMAS, J. L.**
Navier-Stokes calculations for the vortex of a rotor in hover [NASA-TM-85894] p 581 N84-24540
- THOMAS, J. M.**
Statistical approach to damage tolerance assessment [SNIAS-832-111-112] p 596 N84-24575
- TOBAK, M.**
Nonlinear problems in flight dynamics [NASA-TM-85940] p 585 N84-25648
- TODA, N.**
Aerodynamic characteristics of fan-jet STOL aircraft [NAL-TR-790] p 586 N84-25651
- TOENSKOETTER, H.**
Aspects of advanced fighter engine design on the basis of equal technology [AIAA PAPER 84-1271] p 602 A84-35155
- TONG, S. S.**
Demonstration of a new body-fitted coordinate code for modeling gas-turbine combustor flows [AIAA PAPER 84-1381] p 603 A84-35199
- TORLEGAARD, K.**
Multi-models to increase accuracy p 629 N84-25154
- TORRES, M.**
Nondestructive testing of composite structures [SNIAS-832-210-108] p 627 N84-26045
- TOWNSEND, D. P.**
Status of understanding for gear materials p 623 N84-25061
- TREASTER, A. L.**
Sidewall boundary layer corrections in subsonic, two-dimensional airfoil/hydrofoil testing [AIAA PAPER 84-1366] p 620 A84-35195
- TREMILLON**
Composite materials: The user and the producer [SNIAS-832-111-108] p 617 N84-25772
- TREVINO, J.**
Numerical predictions of internal flows using a diagonalized flux vector splitting algorithm [AIAA PAPER 84-1246] p 580 A84-35653
- TRIVIER, D.**
Aerospatiale's experience on helicopter flight in icing conditions [SNIAS-832-210-107] p 599 N84-25707
- TROITSKII, V. V.**
Investigation of transition from laminar to turbulent boundary layer flow by means of a thermal imaging system p 581 A84-36460

- TROUT, A. M.**
Combustion gas properties of various fuels of interest to gas turbine engineers [NASA-TM-83682] p 606 N84-24584
- TROUVE**
Experimental modal analysis [SNIAS-832-210-110] p 587 N84-25655
- TUNG, C.**
Navier-Stokes calculations for the vortex of a rotor in hover [NASA-TM-85894] p 581 N84-24540
- TURKEL, E.**
Simulation of the fluctuating field of a forced jet p 578 A84-35309

U

- UEDA, T.**
Doublet point method for calculations on oscillatory lifting surfaces. Part 2: Supersonic flow [NAL-TR-785-PT-2] p 586 N84-25649
- UNRUH, J. F.**
Specification, design, and test of aircraft engine isolators for reduced interior noise p 601 A84-34455
- USTINOV, M. V.**
Propulsive efficiency of an oscillating wing in supersonic flow p 580 A84-35736

V

- VACZY, C. M.**
On the stability of flight vehicles in the low Reynolds number non-linear regime [AD-A140008] p 583 N84-24561
- VANFOSSSEN, G. J.**
Length to diameter ratio and row number effects in short pin fin heat transfer [ASME PAPER 83-GT-54] p 618 A84-33706
- VATSA, V. N.**
Analysis of separated boundary-layer flows p 578 A84-35311
- VAUGHAN, J. M.**
Infra-red laser velocimetry p 600 A84-36299
- VAVRINCOVA, M.**
Numerical solution of transonic shear flows past thin bodies p 578 A84-35326
- VENEZIA, K. J.**
CONUS Loran-C error budget: Flight test [AD-A139871] p 592 N84-24568
- VEZZA, M.**
An algorithm for the prediction of unsteady potential flow about an arbitrary airfoil [GU-AERO-8306] p 582 N84-24553
- VON LAVANTE, E.**
Numerical predictions of internal flows using a diagonalized flux vector splitting algorithm [AIAA PAPER 84-1246] p 580 A84-35653
- VOSKRESENSKII, G. P.**
Numerical solution of the problem of supersonic flow past wings of arbitrary form with a detached shock wave p 579 A84-35351
- VOVNIANKO, A. G.**
Crack resistance of pressed and rolled semifinished products from aluminum alloys used in load-bearing units in aircraft wings p 614 A84-35724
- VOWINKEL, B.**
New results of airborne measurements with a sensitive, high resolution 90 GHz radiometer - First results for an equivalent 140 GHz system p 600 A84-36287

W

- WAGNER, W. B.**
Combustor liner construction [NASA-CASE-LEW-14035-1] p 605 N84-24577
- WALKER, G. J.**
The influence of a moving suspension on the behaviour of modelled helicopter underslung loads [BU-268] p 596 N84-24573
- WALLACE, J. C.**
Digital scan conversion p 600 A84-36259
- WALTER, B. A.**
Air-ice drag coefficients for first-year sea ice derived from aircraft measurements p 628 A84-34508
- WEAR, J. D.**
Combustion gas properties of various fuels of interest to gas turbine engineers [NASA-TM-83682] p 606 N84-24584
- WEAVER, B.**
Time flies - The 4D flight management system p 609 A84-33847

WEIKLE, D. H.**WEIKLE, D. H.**

Optimization of fringe-type laser anemometers for turbine engine component testing
[NASA-TM-83658] p 623 N84-25019

WEINBERG, B. C.

Solution of three-dimensional time-dependent viscous flows p 621 A84-35352

WEITZ, P. G., JR.

Study of effects of fuel properties in turbine-powered business aircraft
[NASA-CR-174627] p 617 N84-25854

WENDEL, C. J.

F/A-18A/F404 propulsion system integration
[AIAA PAPER 84-1330] p 595 A84-35174

WHIFFEN, M. C.

Flow visualization as an aerodynamic diagnostic tool p 618 A84-33850

WHITE, G.

An advanced pitch change mechanism incorporating a hybrid traction drive
[NASA-TM-83709] p 572 N84-25605

WHITMORE, M.

EDM in the aircraft industry p 618 A84-33829

WHITNEY, W. J.

Performance of a high-work low aspect ratio turbine tested with a realistic inlet radial temperature profile
[NASA-TM-83655] p 607 N84-24589

WHYTE, R. B.

Aviation fuel specification requirements: Their significance and future trends p 614 N84-24733

WILBY, E. G.

A comparison of measured take-off and flyover sound levels for several general aviation propeller-driven aircraft
[AD-A139901] p 631 N84-25429

WILBY, J. F.

A comparison of measured take-off and flyover sound levels for several general aviation propeller-driven aircraft
[AD-A139901] p 631 N84-25429

WILLIAMS, B. R.

F/A-18A/F404 propulsion system integration
[AIAA PAPER 84-1330] p 595 A84-35174

WILLIS, E. A.

An overview of NASA intermittent combustion engine research
[NASA-TM-83668] p 606 N84-24583

WILSON, S. B., III

Tandem fan applications in advanced STOVL fighter configurations
[NASA-TM-83689] p 605 N84-24579

WINTUCKY, W. T.

An overview of NASA intermittent combustion engine research
[NASA-TM-83668] p 606 N84-24583

WIPPICH, H. G.

A 60 GHz collision warning sensor for helicopters p 600 A84-36262

WISNIEWSKI, H. L.

Revisions to the PETROS 4 shell response code
[AD-A140268] p 628 N84-26059

WITTIG, S.

Development of temperature-, velocity- and concentration-profiles in a curved combustor p 608 N84-24757

WOAN, C. J.

Progress towards a theory of jet-flap thrust recovery p 575 A84-34695

WOERNLE, R.

Shear stress distribution and shear stiffness in transversely loaded, inhomogeneous cross-sections of arbitrary form made of orthotropic materials p 621 A84-35592

WOLFSHTEIN, M.

Numerical solution of viscous flow around arbitrary airfoils in a straight cascade p 579 A84-35340

WONG, Y. S.

A minimal residual method for transonic potential flows p 621 A84-35353

WREN, C. A.

A circulation meter for the measurement of discrete vortices
[BU-300] p 582 N84-24551

WU, C. C.

Study of an asymmetric flap nozzle as a vector-thrust device
[AIAA PAPER 84-1360] p 576 A84-35190

WU, X.-H.

Some new developments of the singularity-separating difference method p 621 A84-35356

WUNDER, M. D.

Testing of turboshaft engines p 612 N84-25729

WYTHE, D. M.

F-14 scale model measurements. Part 1: External response
[DE84-008201] p 583 N84-24562

X**XU, Q.-S.**

Some new developments of the singularity-separating difference method p 621 A84-35356

Y**YANG, J. N.**

An exploratory study of retirement-for-cause for gas turbine engine components
[AIAA PAPER 84-1220] p 601 A84-35136
Statistics of crack growth of a superalloy under sustained load p 614 A84-36175

YARNG, J.

A linear multivariable dynamical model of supersonic inlet-engine combination
[AIAA PAPER 84-1496] p 577 A84-35239

YARNG, S.

A linear multivariable dynamical model of supersonic inlet-engine combination
[AIAA PAPER 84-1496] p 577 A84-35239

YAROS, S. F.

Flow-field investigation of a supercruise fighter model
[AIAA PAPER 84-1331] p 576 A84-35175

YEN, S. M.

Numerical solution of the Euler equation for a compressible flow problem p 579 A84-35354

YETTER, J. A.

Flow-field investigation of a supercruise fighter model
[AIAA PAPER 84-1331] p 576 A84-35175

YOU, W.

Experimental determination of the natural modes of swept-wing models using laser holographic interferometry p 619 A84-35022

YOUNG, J. T.

Application of multifunction strapdown inertial system p 594 N84-25698

YOUNGBLOOD, J. W.

Design of long-endurance unmanned airplanes incorporating solar and fuel cell propulsion
[AIAA PAPER 84-1430] p 595 A84-35215

Z**ZAJDMAN, A.**

Electrical spray modification with various fuels in a t56 combustor
[AD-A139961] p 616 N84-24824

ZHANG, N.

Experimental investigation of wall interference and two-dimensionality of the flow in a transonic airfoil wind tunnel p 576 A84-35017

ZHU, Y.-L.

Some new developments of the singularity-separating difference method p 621 A84-35356

ZHUKOV, V. B.

Strength calculation for an aviation GTE stator in axisymmetric deformation p 600 A84-34134


ZIERKE, W. C.

The boundary layer on compressor cascade blades
[NASA-CR-173514] p 623 N84-25001

ZOLAR, C. L.

Tandem fan applications in advanced STOVL fighter configurations
[NASA-TM-83689] p 605 N84-24579

Typical Corporate Source Index Listing

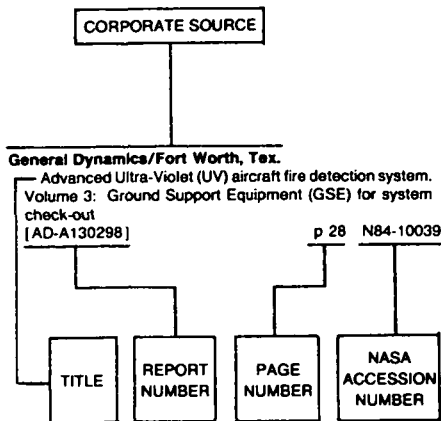

Listings in this index are arranged alphabetically by corporate source. The title of the document is used to provide a brief description of the subject matter. The page number and the accession number are included in each entry to assist the user in locating the abstract in the abstract section. If applicable, a report number is also included as an aid in identifying the document.

A

Advisory Group for Aerospace Research and Development, Neuilly-Sur-Seine (France).
 Combustion Problems in Turbine Engines [AGARD-CP-353] p 614 N84-24732
 Workshop on Requirements for Aircraft Corrosion Control [AGARD-R-714] p 573 N84-25613
 Special Course on V/STOL Aerodynamics [AGARD-R-710] p 573 N84-25625
 Advances in Strapdown Inertial Systems [AGARD-LS-133] p 593 N84-25691
 Operational and Performance Measurement on Engines in Sea Level Test Facilities [AGARD-LS-132] p 612 N84-25723

Aeronautical Research Labs., Melbourne (Australia).
 Digital control of flight simulator motion base actuator [ARL-SYS-TM-69] p 613 N84-25732

NERF: A computer program for the numerical evaluation of reliability functions-reliability modeling, numerical methods and program documentation [AR-00-984] p 627 N84-26048

Air Force Engineering and Services Center, Tyndall AFB, Fla.
 Degradation of jet fuel hydrocarbons by aquatic microbial communities [AD-A139791] p 616 N84-24822

Air Force Flight Dynamics Lab., Wright-Patterson AFB, Ohio.
 Proceedings of the Workshop on Multivariable Control Systems [AD-A139050] p 571 N84-24529
 Multivariable control law theory p 609 N84-24530
 Multivariable control laws for the AFTI/F-16 [AFIT/GE/EE/83S-4] p 609 N84-24531
 Design of a complete multivariable digital flight control system [AFIT/GE/EE/82D-18] p 610 N84-24532

B

Digital multivariable tracker control laws for the C-141-A Starlifter aircraft [AFIT/GE/EE/82D-47] p 610 N84-24533
 High-gain error actuated flight control systems for continuous linear multivariable plants [AFIT/GAE/EE/82D-1] p 610 N84-24534
 Reconfigurable digital control laws for the A-7D DIGITAC 2 aircraft with failed primary control surfaces [AFIT/GE/EE/82D-59] p 610 N84-24535

Air Force Flight Test Center, Edwards AFB, Calif.
 Electrical subsystems flight test handbook [AD-A139783] p 596 N84-24576

Air Force Systems Command, Wright-Patterson AFB, Ohio.
 Journal of aeronautical materials (selected articles) [AD-A140181] p 572 N84-25611
 Radomes for flight vehicles [AD-A140174] p 625 N84-25920

Air Force Wright Aeronautical Labs., Wright-Patterson AFB, Ohio.
 Application of multifunction strapdown inertial system p 594 N84-25698

Air Products and Chemicals, Inc., Allentown, Pa.
 Solid state compressor [AD-A140498] p 627 N84-26032

Analytical Mechanics Associates, Inc., Mountain View, Calif.
 VTOL shipboard letdown guidance system analysis [NASA-CR-166519] p 611 N84-25716

Applied Physics Lab., Johns Hopkins Univ., Laurel, Md.
 Ocean energy systems [DE84-005200] p 629 N84-25182

Argonne National Lab., Ill.
 Fluid forces on a rigid cylinder in turbulent crossflow [DE84-006364] p 623 N84-25012

Army Materials and Mechanics Research Center, Watertown, Mass.
 Current design requirements for corrosion control on helicopters p 597 N84-25616

Army Research and Technology Labs., Cleveland, Ohio.
 Cold-air performance of compressor-drive turbine of department of energy upgraded automobile gas turbine engine. 3: Performance of redesigned turbine [NASA-TM-83627] p 585 N84-25644

Army Research and Technology Labs., Moffett Field, Calif.
 A piloted simulator investigation of decoupling helicopters by using a model following control system [AD-A139976] p 611 N84-24598

Ashwood (P. F.), Farnham (England).
 Operation and performance measurement on engines in sea-level test facilities: Introduction and general survey p 612 N84-25724

Atlantic Fleet, Norfolk, Va.
 US Navy corrosion control maintenance p 573 N84-25619

Avco Lycoming Div., Stratford, Conn.
 Alternative fuels use in a vehicular gas turbine p 615 N84-24741

Ballistic Research Labs., Aberdeen Proving Ground, Md.
 Revisions to the PETROS 4 shell response code [AD-A140268] p 628 N84-26059

Bihre Applied Research, Inc., Jericho, N. Y.
 Rotary balance data for a typical single-engine general aviation design for an angle-of-attack range of 20 to 90 deg. 3: Influence of control deflection on predicted model D spin modes [NASA-CR-3248] p 584 N84-25641

Boeing Commercial Airplane Co., Renton, Wash.
 On the convergence of unsteady generalized aerodynamic forces p 574 A84-34460

Boeing Commercial Airplane Co., Seattle, Wash.
 Winglet effects on the flutter of twin-engine-transport type wing [AIAA PAPER 84-0905] p 594 A84-34907

C

Requirements, applications, and results of strapdown inertial technology to commercial airplanes p 593 N84-25695

Boeing Military Airplane Development, Seattle, Wash.
 Flow-field investigation of a supercruise fighter model [AIAA PAPER 84-1331] p 576 A84-35175
 Multi-length scale turbulence models [AD-A140527] p 627 N84-25997

Bolt, Beranek, and Newman, Inc., Cambridge, Mass.
 F-14 modeling study [NASA-CR-172336] p 598 N84-25701

Bolt, Beranek, and Newman, Inc., Canoga Park, Calif.
 A comparison of measured take-off and flyover sound levels for several general aviation propeller-driven aircraft [AD-A139901] p 631 N84-25429

Bristol Univ. (England).
 Wake visualization [BU-282] p 581 N84-24542
 An investigation into the nature and control of vortex flow round helicopter upsweep [BU-285] p 582 N84-24544
 The effect of perforation on the aerodynamics of a spoiler [BU-286] p 582 N84-24545
 The aerodynamic effects of cavities in a body [BU-289] p 582 N84-24547
 An investigation into anti-swirl devices for s-shaped air intakes [BU-293] p 582 N84-24549
 A circulation meter for the measurement of discrete vortices [BU-300] p 582 N84-24551
 The influence of a moving suspension on the behaviour of modelled helicopter underslung loads [BU-288] p 596 N84-24573
 The structural and aerodynamic behaviour of a semi-inflatable wing [BU-297] p 596 N84-24574

British Aerospace Aircraft Group, Kingston-upon-Thames (England).
 The influence of V/STOL on wing design and tailplane design p 597 N84-25627
 Ground based testing without wind tunnels p 598 N84-25634
 Notes on special flight aspects, such as STO, ski-jump and ODM p 598 N84-25637

British Aerospace Public Ltd. Co., Preston (England).
 Aerodynamics of V/STOL aircraft: Performance assessment p 584 N84-25635

British Airways, Middlesex (England).
 Cost of corrosion for commercial aviation p 573 N84-25624

California Univ., Livermore. Lawrence Livermore Lab.
 F-14 scale model measurements. Part 1: External response [DE84-008201] p 583 N84-24562

Centre National de la Recherche Scientifique, Poitiers (France).
 A study of the fundamental problems of combustion in the combustion chambers of turbojets using a tubular reactor p 616 N84-24759

Cincinnati Univ., Ohio.
 Perturbation analysis of optimal integral controls p 629 A84-36131

Committee on Appropriations (U. S. House).
 National Aeronautics and Space Administration p 633 N84-25531

Committee on Science and Technology (U. S. House).
 The 1985 NASA authorization [GPO-31-453] p 632 N84-25526
 Future of aeronautics [GPO-29-744] p 633 N84-25529

Cornell Univ., Ithaca, N.Y.
 Theory of rotating stall of multistage axial compressors p 625 N84-25964

SOURCE

- Cranfield Inst. of Tech., Bedfordshire (England).**
Effects of airblast atomizer design upon spray quality
p 622 N84-24744
- Full scale wind tunnel tests on hang glider pilots
[CA-8416] p 585 N84-25643
- A technique for optimizing the aerodynamic design of a generalized combat aircraft with forward swept wings for the purposes of stability and control investigation
[CA-8325] p 598 N84-25700
- Evolution of a heave control system for an amphibious hovercraft
[CAR-8401] p 624 N84-25864

D

- Dayton Univ., Ohio.**
Active suppression of aeroelastic instabilities for forward swept wings
p 584 N84-25638
- Defence Research Establishment, Ottawa. (Ontario).**
Comparison of JFTOT (Jet Fuel Thermal Oxidation Tester) and absorbance methods for determining jet fuel thermal stability
[AD-A138673] p 616 N84-24825
- Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (West Germany).**
Flight mechanical analysis of dynamic derivatives of the Dornier variation wind tunnel model
[DFVLR-FM-83-38] p 581 N84-24541
- System modeling and identification of equivalent systems with and without compensating time delay for control-augmented aircraft
[DFVLR-FB-83-36] p 596 N84-24570
- Design and implementation of input signals for identification of pilot/aircraft models
[DFVLR-FB-84-08] p 599 N84-25709
- Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Cologne (West Germany).**
Investigation of the behavior of axial compressor stages with steady state inlet distortions
[DFVLR-FB-83-39] p 607 N84-24590
- Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Goettingen (West Germany).**
Transonic-flow computation using an explicit-implicit method
p 578 A84-35325
- Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Oberpfaffenhofen (West Germany).**
First stage of equipment for aircraft Do 28 of DFVLR as a research aircraft for icing and first research results
[DFVLR-FB-83-40] p 596 N84-24571
- Draper (Charles Stark) Lab., Inc., Cambridge, Mass.**
Advances in strapdown inertial systems: Introduction and overview
p 593 N84-25692
- Modular strapdown guidance unit with embedded microprocessors
p 594 N84-25697

E

- Ecole Royale Militaire, Brussels (Belgium).**
Aero/thermodynamic and acoustic considerations in the design of test-beds for turbojets and turbopans
p 612 N84-25725
- Electrical Research Association, Leatherhead (England).**
Investigation of the RF properties of carbon fibre composite materials
[AD-A140261] p 617 N84-25774
- European Space Agency, Paris (France).**
Wind tunnel investigations on thin supercritical airfoils in the high subsonic flow regime
[ESA-TT-774] p 586 N84-25652
- The generation of higher levels of turbulence in the test section of the high speed cascade wind tunnel at Brunswick for simulation of turbomachinery conditions
[ESA-TT-815] p 586 N84-25654
- Comparison of a propfan/turbopfan engine by thermodynamic cycle calculation
[ESA-TT-820] p 608 N84-25715
- Propeller noise at subsonic blade tip speeds, torque and thrust force
[ESA-TT-821] p 632 N84-26385
- European Space Research and Technology Center, Noordwijk (Netherlands).**
Derating requirements and application rules for electronic components
[ESA-PSS-01-301-ISSUE-1] p 625 N84-25930
- A thermal cycling test for the screening of space materials and processes
[ESA-PSS-01-704-ISSUE-1] p 627 N84-26044

C-2

F

- Federal Aviation Administration, Washington, D.C.**
Noise measurement flight test: Data/Analyses Bell 222 twin jet helicopter
[AD-A139906] p 631 N84-25430
- Cabin safety subject index
[AD-A140409] p 590 N84-25683
- Forschungsinstitut fuer Funk und Mathematik, Werthoven (West Germany).**
Estimation of the flight parameters of low flying aircraft using the radiated noise
[LFD-211] p 595 N84-24569

G

- General Dynamics Corp., San Diego, Calif.**
Inherent problems in designing two-failure tolerant electromechanical actuators
p 624 N84-25088
- General Electric Co., Cincinnati, Ohio.**
Combustor technology for broadened-properties fuels
p 615 N84-24736
- Status of understanding for bearing materials
p 616 N84-25060
- General Electric Co., Lynn, Mass.**
Rotorcraft contingency power study
[NASA-CR-174675] p 605 N84-24580
- General Research Corp., McLean, Va.**
A view of future technology needs for space transportation
[AIAA PAPER 84-1283] p 613 A84-35156
- George Washington Univ., Washington, D.C.**
A minimal residual method for transonic potential flows
p 621 A84-35353
- The compressible aerodynamics of rotating blades using an acoustic formulation
p 587 N84-25670
- Glasgow Univ. (Scotland).**
An algorithm for the prediction of unsteady potential flow about an arbitrary aerofoil
[GU-AERO-8306] p 582 N84-24553
- An investigation of three-dimensional stall development on NACA 23012 and NACA 0012 aerofoils
[GU-AERO-8300] p 582 N84-24554
- A simplified method of evaluating aircraft handling qualities using a pilot transfer function model
[GU-AERO-8302] p 610 N84-24595
- Fast estimation of state feedback gain for the design of aircraft autopilots
[GU-AERO-8305] p 610 N84-24596
- Gremil Systemdynamik A.G., Abtwil (Switzerland).**
Surge prediction in industrial compressors
p 626 N84-25969

H

- Human Engineering Labs., Aberdeen Proving Ground, Md.**
Emulation of a voice interactive Doppler navigation set
[AD-A140204] p 593 N84-25687

I

- Instituto Nacional de Tecnica Aeroespacial, Madrid (Spain).**
Study of aerospace materials, coatings, adhesions and processes. Aircraft icing processes
[AD-A139743] p 583 N84-24557
- International Trade Administration, Washington, D.C.**
Competitive assessment of the U.S. Civil aircraft industry
[PB84-154913] p 632 N84-25525

J

- Jet Propulsion Lab., California Inst. of Tech., Pasadena.**
Thermoelastic limit cycling of zippered cross section spacecraft booms
[AIAA PAPER 84-1065] p 613 A84-34915

K

- Karlsruhe Univ. (West Germany).**
Development of temperature-, velocity- and concentration-profiles in a curved combustor
p 608 N84-24757

L

- Leeds Univ. (England).**
An investigation of the interaction between multiple dilution jets and combustion products
p 616 N84-24758
- Litton Technische Werke, Freiburg (West Germany).**
Initial alignment and augmentation of the ARINC 705 strapdown AHRS LTR-81
p 594 N84-25699
- Lockheed Missiles and Space Co., Sunnyvale, Calif.**
Structural sizing of a solar powered aircraft
[NASA-CR-172313] p 598 N84-25702

M

- Maryland Univ., College Park.**
Engineering analysis of drooped leading-edge wings near stall
p 575 A84-34468
- Massachusetts Inst. of Tech., Cambridge.**
On the stability of flight vehicles in the low Reynolds number non-linear regime
[AD-A140008] p 583 N84-24561
- Flutter and forced response of mistuned rotors using standing wave analysis
[NASA-CR-173555] p 606 N84-24586
- Conical flows with leading edge vortices
p 623 N84-25013
- Introduction to unsteady flow in turbomachines
p 625 N84-25962
- Stability of pumps and compressors
p 625 N84-25963
- Materials Research Labs., Melbourne (Australia).**
Interactions between F-111 fuselage fuel tank sealants. Part 1: Characterisation of polyester sealants and their hydrolytic degradation products
[MRL-R-657-PT-1] p 617 N84-25828
- McDonnell Aircraft Co., St. Louis, Mo.**
Jet flowfields
p 583 N84-25631
- Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen (West Germany).**
Successful utilization of economic, light aluminum-casted structures in airplane construction
[VFW-31/83-O] p 599 N84-26439
- Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).**
A principal rotor without joints and pillows, made of fiber materials, for dynamic systems of future helicopters
[MBB-UD-384-83-O] p 628 N84-26440
- A rear engine without joints and pillows
[MBB-UD-383-83-O] p 628 N84-26441
- Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).**
Projects and programs as a reflection of the performances of engineers in aircraft making by Hans-Wocke
[MBB-UT-24-83-O] p 572 N84-25608
- Technical and scientific publication 1983: Research and development
p 633 N84-26430
- Vortex flap system for thin wings
[MBB-FE-122/S/PUB/102] p 587 N84-26435
- The Airbus: The state-of-the-art today, and future developments
[MBB-UT-22-83-O] p 599 N84-26437
- Minnesota Univ., Minneapolis.**
A theoretical analysis of the aerodynamic and structural forces associated with a ribbon parachute canopy in steady descent
p 587 N84-25671
- Motoren- und Turbinen-Union Muenchen G.m.b.H. (West Germany).**
Advanced combustor liner cooling concepts
p 608 N84-24756
- Testing of turboshaft engines
p 612 N84-25729

N

- National Academy of Sciences - National Research Council, Washington, D. C.**
Activities of the Aeronautics and Space Engineering Board Commission on Engineering and Technical Systems
[NASA-CR-173529] p 613 N84-24600
- National Aeronautics and Space Administration, Washington, D. C.**
Astronautics and aeronautics, 1976. A chronology
[NASA-SP-4021] p 633 N84-25602
- Cold-air performance of compressor-drive turbine of department of energy upgraded automobile gas turbine engine. 3: Performance of redesigned turbine
[NASA-TM-83627] p 585 N84-25644
- National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.**
Two-dimensional wind-tunnel interference from measurements on two contours
p 574 A84-34459

- Flap-lag damping of an elastic rotor blade with torsion and dynamic inflow in hover from symbolically generated equations
[AIAA PAPER 84-0989] p 619 A84-34909
- Computational aerodynamics and design
p 577 A84-35302
- Transonic-flow computation using an explicit-implicit method
p 578 A84-35325
- V/STOL wind-tunnel testing
[NASA-TM-85936] p 571 N84-24528
- Unsteady laminar boundary-layer calculations on oscillating configurations including backflow. Part 2: Airfoil in high-amplitude pitching motion. Dynamic stall
[NASA-TM-84319-PT-2] p 581 N84-24537
- Navier-Stokes calculations for the vortex of a rotor in hover
[NASA-TM-85894] p 581 N84-24540
- Development and flight test of a helicopter compact, portable, precision landing system concept
[NASA-TM-85951] p 592 N84-24566
- Highly integrated digital engine control system on an F-15 airplane
[NASA-TM-86040] p 606 N84-24587
- Preliminary flight test results of the F100 EMD engine in an F-15 airplane
[NASA-TM-85902] p 606 N84-24588
- Acoustic measurements of a full-scale rotor with four tip shapes. Volume 2: Appendices C, D, E and F
[NASA-TM-85878-VOL-2] p 631 N84-25426
- V/STOL concepts in the United States: Past, present, and future
p 597 N84-25628
- V/STOL maneuverability and control
p 611 N84-25632
- V/STOL wind-tunnel testing
p 583 N84-25633
- Assessment of aerodynamic performance of V/STOL and STOVL fighter aircraft
p 584 N84-25636
- Nonlinear problems in flight dynamics
[NASA-TM-85940] p 585 N84-25648
- National Aeronautics and Space Administration, Flight Research Center, Edwards, Calif.**
- Highly integrated digital engine control system on an F-15 airplane
[AIAA PAPER 84-1259] p 602 A84-35149
- Preliminary flight test results of the F100 EMD engine in an F-15 airplane
[AIAA PAPER 84-1332] p 602 A84-35176
- National Aeronautics and Space Administration, Goddard Space Flight Center, Greenbelt, Md.**
- Spacelab 4: Primate experiment support hardware
p 624 N84-25092
- Facilities for meteorological research at NASA Goddard/Wallops Flight Facility
[NASA-TM-84422] p 629 N84-25223
- National Aeronautics and Space Administration, Langley Research Center, Hampton, Va.**
- On the convergence of unsteady generalized aerodynamic forces
p 574 A84-34460
- Propagation and radiation of sound from flanged circular ducts with circumferentially varying wall admittances. I Semi-infinite ducts. II - Finite ducts with sources
p 631 A84-34746
- Winglet effects on the flutter of twin-engine-transport type wing
[AIAA PAPER 84-0905] p 594 A84-34907
- Flow-field investigation of a supercruise fighter model
[AIAA PAPER 84-1331] p 576 A84-35175
- Numerical simulation of flow through inlets/diffusers with terminal shocks
[AIAA PAPER 84-1362] p 577 A84-35192
- Design of long-endurance unmanned airplanes incorporating solar and fuel cell propulsion
[AIAA PAPER 84-1430] p 595 A84-35215
- Simulation of the fluctuating field of a forced jet
p 578 A84-35309
- A minimal residual method for transonic potential flows
p 621 A84-35353
- Aeropropulsive characteristics of nonaxisymmetric-nozzle thrust reversers at Mach numbers from 0 to 1.20
[NASA-TP-2306] p 581 N84-24538
- Effects of simulated flight on the structure and noise of underexpanded jets
[NASA-TP-2308] p 631 N84-25422
- Installation noise measurements of model SR and CR propellers
[NASA-TM-85790] p 631 N84-25425
- Reynolds number effects on pressure loss and turbulence characteristics of four tube-bundle heat exchangers
[NASA-TM-85807] p 585 N84-25645
- Noise generated by a propeller in a wake
[NASA-TM-85794] p 631 N84-26382
- Langley aeronautics and space test highlights, 1983
[NASA-TM-85806] p 633 N84-26564
- National Aeronautics and Space Administration, Lewis Research Center, Cleveland, Ohio.**
- Effects of structural coupling on mistuned cascade flutter and response
[ASME PAPER 83-GT-117] p 618 A84-33701
- Measurements of self-excited rotor-blade vibrations using optical displacements
[ASME PAPER 83-GT-132] p 618 A84-33702
- Length to diameter ratio and row number effects in short pin fin heat transfer
[ASME PAPER 83-GT-54] p 618 A84-33706
- Measurement of fluid properties using rapid-double-exposure and time-average holographic interferometry
[AIAA PAPER 84-1461] p 620 A84-35223
- Calculation of transonic flow in a linear cascade
[NASA-TM-83697] p 581 N84-24539
- Combustor liner construction
[NASA-CASE-LEW-14035-1] p 605 N84-24577
- Lewis Research Center spin rig and its use in vibration analysis of rotating systems
[NASA-TP-2304] p 605 N84-24578
- Tandem fan applications in advanced STOVL fighter configurations
[NASA-TM-83689] p 605 N84-24579
- Supersonic STOVL aircraft with turbine bypass/turbo-compressor engines
[NASA-TM-83686] p 606 N84-24582
- An overview of NASA intermittent combustion engine research
[NASA-TM-83668] p 606 N84-24583
- Combustion gas properties of various fuels of interest to gas turbine engines
[NASA-TM-83682] p 606 N84-24584
- Sensor failure detection for jet engines using analytical redundancy
[NASA-TM-83695] p 606 N84-24585
- Performance of a high-work low aspect ratio turbine tested with a realistic inlet radial temperature profile
[NASA-TM-83655] p 607 N84-24589
- Research on aviation fuel instability
p 615 N84-24734
- Detailed fuel spray analysis techniques
p 622 N84-24747
- A review of internal combustion engine combustion chamber process studies at NASA Lewis Research Center
[NASA-TM-83666] p 623 N84-24999
- Optimization of fringe-type laser anemometers for turbine engine component testing
[NASA-TM-83658] p 623 N84-25019
- Status of understanding for gear materials
p 623 N84-25061
- An advanced pitch change mechanism incorporating a hybrid traction drive
[NASA-TM-83709] p 572 N84-25605
- An analytical method to predict efficiency of aircraft gearboxes
[NASA-TM-83716] p 572 N84-25606
- Application of an optimization method to high performance propeller designs
[NASA-TM-83710] p 572 N84-25607
- Application of a quasi-3D inviscid flow and boundary layer analysis to the hub-shroud contouring of a radial turbine
[NASA-TM-83669] p 585 N84-25647
- Development of dynamic simulation of TF34-GE-100 turbofan engine with post-stall capability
[NASA-TM-83660] p 608 N84-25712
- Unsteady flow in turbomachinery: An overview
p 625 N84-25961
- Numerical aspects of unsteady flow calculations
p 626 N84-25968
- Real-time simulation of an automotive gas turbine using the hybrid computer
[NASA-TM-83593] p 633 N84-26484
- National Aerospace Lab., Amsterdam (Netherlands).**
- The use of Arall in fuselage skins
[AD-B080831] p 596 N84-24572
- Electromagnetic compatibility in aerospace vehicles
[NLR-MP-83002-U] p 623 N84-24929
- Numerical computation of vortical flows about wings
p 587 N84-25987
- Review of aeronautical fatigue investigations in the Netherlands during the period March 1981 - February 1983
[AD-B082166] p 627 N84-26057
- National Aerospace Lab., Tokyo (Japan).**
- Doublet point method for calculations on oscillatory lifting surfaces. Part 2: Supersonic flow
[NAL-TR-785-PT-2] p 586 N84-25649
- Wind tunnel investigation of the rolling moment of a rectangular wing with some winglets on the left upper tip
[NAL-TR-788] p 586 N84-25650
- Aerodynamic characteristics of fan-jet STOL aircraft
[NAL-TR-790] p 586 N84-25651
- National Defence Headquarters, Ottawa (Ontario).**
- Corrosion control maintenance practices for Canadian aircraft
p 573 N84-25621
- National Research Council of Canada, Ottawa (Ontario).**
- Aviation fuel specification requirements: Their significance and future trends
p 614 N84-24733
- Performance derivation of turbojets and turbofans from tests in sea-level test cells
p 608 N84-25728
- National Transportation Safety Board, Washington, D. C.**
- Annual review of aircraft accident data: US general aviation, 1980
[PB84-182914] p 588 N84-25672
- Safety recommendations A-84-1 through -3
p 588 N84-25673
- Safety recommendation A-84-7
p 588 N84-25674
- Safety recommendations A-84-8 and -9, and A-84-17 through -20
p 589 N84-25675
- Safety recommendation(s) A-84-10 and -11
p 589 N84-25676
- Safety recommendations A-84-14 and -15
p 589 N84-25678
- Safety recommendation(s) A-84-16
p 589 N84-25679
- Safety recommendation: Cessna Model 402C airplane, September 5, 1983, Tampa International Airport, Tampa, Florida
p 589 N84-25680
- Statistical review of alcohol-involved aviation accidents
[NTSB/SS-84/03] p 589 N84-25681
- Naval Air Development Center, Warminster, Pa.**
- Current procurement specification design requirements for US Navy aircraft
p 596 N84-25615
- Methodology for assessment of corrosion costs
p 573 N84-25623
- Helicopter Pilot/Copilot survival system
[AD-A140358] p 590 N84-25682
- Naval Postgraduate School, Monterey, Calif.**
- System safety and the Coast Guard lighter-than-air system project
[AD-A139807] p 588 N84-24564
- Design and analysis of Coordinated Bank-To-Turn (CBTT) autopilots for Bank-To-Turn (BTT) missiles
[AD-A140103] p 613 N84-24698
- Analysis of symmetric reinforcement of quasi-isotropic graphite-epoxy plates with a circular cutout under uniaxial tensile loading
[AD-A139998] p 614 N84-24715
- Electrical spray modification with various fuels in a t56 combustor
[AD-A139961] p 616 N84-24824
- Naval aviation IMA repair capability: A readiness to resources approach
[AD-A140465] p 572 N84-25612
- Computer program to simulate digital computer based longitudinal flight control laws in a high performance aircraft
[AD-A140143] p 611 N84-25719
- Naval Weapons Center, China Lake, Calif.**
- Aircrow Gliding Escape System (AGES) exploratory development investigation of aircrew emergency escape ram-air inflated, flexible wing
[AD-A139928] p 588 N84-24565
- Nelsen Engineering and Research, Inc., Mountain View, Calif.**
- Preliminary method for estimating hinge moments of all-movable controls
[AD-A139726] p 611 N84-24597
- New York Univ., New York.**
- Simulation of the fluctuating field of a forced jet
p 578 A84-35309
- Office National d'Etudes et de Recherches Aérospatiales, Paris (France).**
- The wind tunnel S2MA of the aerodynamic testing plant in Modene-Avrieux, France
[ONERA-NT-1983-5] p 613 N84-25735
- La Recherche Aérospatiale, Bimonthly Bulletin, no. 1983-6, 217/November-December
[ESA-TT-841] p 625 N84-25870
- Robustness quantification for nonlinear sampled-data systems with dynamic multiplicative perturbations
p 630 N84-25871
- Implicit time dependent methods for the solution of the Euler equations. Part 2: Application to transonic flows
p 627 N84-25990
- Contribution to the study of light aircraft propeller noise
[AD-B073101] p 632 N84-26386

- Computation of noise radiating from a free jet perpendicular to its axis via laser anemometry measurements
[ONERA-NT-1983-6] p 632 N84-26387
The ONERA Aeronautics Research Establishment in Cannes (France)
[ONERA-P-1983-2] p 633 N84-26455
- Office National d'Etudes et de Recherches Aeronautiques, Toulouse (France).**
An aerodynamic study of combustion in the combustion chambers of turbomachines: Experimental and theoretical approaches p 608 N84-24764
- Ohio State Univ., Columbus.**
Noniterative grid generation using parabolic difference equations for fuselage-wing flow calculations p 579 A84-35334
- Old Dominion Univ., Norfolk, Va.**
Large deflection multimode response of clamped rectangular panels to acoustic excitation, volume 1 [AD-A139622] p 624 N84-25107
An investigation of aerodynamic characteristics of wings having vortex flow using different numerical codes [NASA-CR-173596] p 584 N84-25639

P

- Pennsylvania State Univ., State College.**
The boundary layer on compressor cascade blades [NASA-CR-173514] p 623 N84-25001
- Pratt and Whitney Aircraft, West Palm Beach, Fla.**
Fuel effects on gas turbine combustion systems p 615 N84-24737
Instrumentation techniques in sea level test facilities p 612 N84-25727
- Pratt and Whitney Aircraft Group, East Hartford, Conn.**
Status of understanding for seal materials p 624 N84-25062
- Pratt and Whitney Aircraft of Canada Ltd., Mississauga (Ontario).**
Fuel character effects on performance of small gas turbine combustion systems p 607 N84-24738
- Purdue Univ., Lafayette, Ind.**
Optimal cooperative control synthesis applied to a control-configured aircraft [NASA-CR-170411] p 610 N84-24593

R

- Radio Technical Commission for Aeronautics, Washington, D. C.**
Minimum operational performance standards for traffic alert and collision avoidance system (TCAS) airborne equipment, volume 1 [RTCA-DO-185-VOL-1] p 593 N84-25685
Minimum operational performance standards for traffic alert and collision avoidance system (TCAS) airborne equipment, volume 2 [RTCA/DO-185-VOL-2] p 593 N84-25686
- Rolls-Royce Ltd., Bristol (England).**
V/STOL propulsion system aerodynamics p 608 N84-25630
- Rolls-Royce Ltd., Derby (England).**
The design and development of a low emissions transply combustor for the civil Spey engine p 607 N84-24755
Encounters with surge p 626 N84-25966
- Royal Air Force, Barry (England).**
Uninstalled aero engine testing in operation in the Royal Air Force p 612 N84-25731
- Royal Aircraft Establishment, Farnborough (England).**
Corrosion control requirements for UK military aircraft p 617 N84-25614
- Royal Inst. of Tech., Stockholm (Sweden).**
Multi-models to increase accuracy p 629 N84-25154

S

- Saab-Space A.B., Linköping (Sweden).**
Current requirements on specifications for corrosion prevention p 597 N84-25618
- Sandia Labs., Albuquerque, N. Mex.**
Improved prediction of parachute line sail during lines-first deployment [DE84-007340] p 583 N84-24563
- Scientific Research Associates, Inc., Glastonbury, Conn.**
Solution of three-dimensional time-dependent viscous flows p 621 A84-35352
- Simmonds Precision Products, Inc., Vergennes, Vermont.**
Study of effects of fuel properties in turbine-powered business aircraft [NASA-CR-174627] p 617 N84-25854

- Societe de Fabrication d'Instruments de Mesure, Massy (France).**
Strapdown inertial systems for tactical missiles using mass unbalanced two-axis rate gyros p 594 N84-25696
- Societe Nationale d'Etudes et de Construction de Moteurs d'Aviation, Moissy-Cramayel (France).**
Determination of the stable operating conditions of an axial flow compressor p 626 N84-25971
- Societe Nationale Industrielle Aerospaciale, Marignane (France.)**
Experimental modal analysis [SNIAS-832-210-110] p 587 N84-25655
System concepts for helicopter air-to-air combat [SNIAS-832-210-102] p 598 N84-25705
The development of the Navy variant of the Dauphin 2 helicopter [SNIAS-832-210-106] p 599 N84-25706
Aerospaciale's experience on helicopter flight in icing conditions [SNIAS-832-210-107] p 599 N84-25707
Nondestructive testing of composite structures [SNIAS-832-210-108] p 627 N84-26045
The SARIB vibration absorber p 628 N84-26058
Single-pilot IFR flights and operations [SNIAS-832-210-103] p 630 N84-26374
Towards a better understanding of helicopter external noise [SNIAS-832-210-113] p 632 N84-26388
- Societe Nationale Industrielle Aerospaciale, Paris (France).**
The industry's materials: SNIAS and general conditions of its environment [SNIAS-832-502-101] p 624 N84-25865
- Societe Nationale Industrielle Aerospaciale, Suresnes (France).**
Influence of the environment on the application and drying quality of organic paints [SNIAS-832-551-102] p 617 N84-25833
- Societe Nationale Industrielle Aerospaciale, Toulouse (France).**
Statistical approach to damage tolerance assessment [SNIAS-832-111-112] p 596 N84-24575
Renovation of the Helice p 598 N84-25703
Carbon structures on the wing of the regional transport plane ATR-42 [SNIAS-832-111-113] p 598 N84-25704
Composite materials: The user and the producer [SNIAS-832-111-108] p 617 N84-25772
- Southwest Research Inst., San Antonio, Tex.**
Specification, design, and test of aircraft engine isolators for reduced interior noise p 601 A84-34455
U.S. Army alternative gas-turbine fuels research: MERADCOM p 615 N84-24739
- SRI International Corp., Menlo Park, Calif.**
Investigation, development, and evaluation of performance proving for fault-tolerant computers [NASA-CR-166008] p 629 N84-25307
STP: A mechanized logic for specification and verification p 629 N84-25308
Specifying and verifying ultra-reliability and fault-tolerance properties p 630 N84-25309
The use of a formal simulator to verify a simple real time control program p 630 N84-25322
- Stevens Inst. of Tech., Hoboken, N. J.**
Behavior of cascaded airfoils under conditions of high mean loading and flow unsteadiness [AD-A139799] p 607 N84-24592
- Strapdown Associates, Inc., Minnetonka, Minn.**
Advances in strapdown sensors p 593 N84-25693
- Systems Control Technology, Inc., West Palm Beach, Fla.**
CONUS Loran-C error budget: Flight test [AD-A139871] p 592 N84-24568
CONUS (Continental United States) Omega/VLF data collection: Flight test [AD-A140252] p 593 N84-25688

T

- Technion - Israel Inst. of Tech., Haifa.**
Calculation of aerodynamic characteristics of wings with thickness and camber by a new method based on the modified vortex lattice method [TAE-493] p 584 N84-25640
- Technische Hochschule, Aachen (West Germany).**
Unsteady interactions in supersonic compressor stages p 626 N84-25972
- Tel-Aviv Univ. (Israel).**
Simulation of the fluctuating field of a forced jet p 578 A84-35309

U

- United Technologies Corp., East Hartford, Conn.**
Combustor liner construction [NASA-CASE-LEW-14035-1] p 605 N84-24577
Alternative fuel deposit formation p 615 N84-24735
- United Technologies Research Center, East Hartford, Conn.**
Analysis of separated boundary-layer flows p 578 A84-35311

V


- Vereinigte Flugtechnische Werke G.m.b.H., Bremen (West Germany).**
On improving the fatigue performance of a double-shear lap joint [VFW-29/83-O] p 628 N84-26431
Ground and inflight operational effects of APU's [VFW-30/83-O] p 609 N84-26438
- Von Karman Inst. for Fluid Dynamics, Rhode-Saint-Genese (Belgium).**
The study of an idealized wing/body junction [AD-A139933] p 583 N84-24559
Hypersonic Aerothermodynamics [VKI-LS-1984-01] p 587 N84-25656
Unsteady Flow in Turbomachines, volume 1 [VKI-LS-1984-02-VOL-1] p 625 N84-25960
Unsteady Flow in Turbomachines, volume 2 [VKI-LS-1984-02-VOL-2] p 626 N84-25965
Structure of rotating stall cells. Part 1: Absolute motion p 626 N84-25967
Structure of rotating stall cells. Part 2: Relative motion p 626 N84-25970
Computational Fluid Dynamics, volume 2 [VKI-LS-1984-04-VOL-2] p 627 N84-25986
- Vought Corp., Dallas, Tex.**
Design and manufacturing practices to minimize corrosion in aircraft p 597 N84-25620

W

- Washington Univ., Seattle.**
Transonic-flow computation using an explicit-implicit method p 578 A84-35325
A numerical study of the controlled flow tunnel for a high lift model [NASA-CR-166572] p 584 N84-25642
A numerical study of the controlled flow tunnel for a high lift model p 611 N84-25721
- Westland Aircraft Ltd., Yeovil (England).**
The interpretation of design requirements for multi-market helicopters p 597 N84-25617

CONTRACT NUMBER INDEX

Typical Contract Number Index Listing

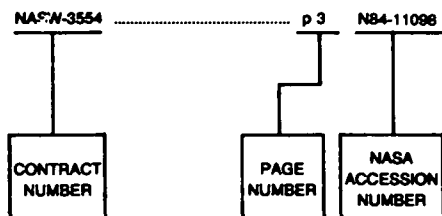


Listings in this index are arranged alphanumerically by contract number. Under each contract number, the accession numbers denoting documents that have been produced as a result of research done under that contract are arranged in ascending order with the AIAA accession numbers appearing first. The accession number denotes the number by which the citation is identified in the abstract section. Preceding the accession number is the page number on which the citation may be found.

AF PROJ. 1900	p 616	N84-24822	NAS1-16738	p 598	N84-25701
AF PROJ. 2301	p 583	N84-24557	NAS1-16975	p 598	N84-25702
	p 583	N84-24559	NAS2-10016	p 621	A84-35352
AF PROJ. 2307	p 624	N84-25107	NAS2-10184	p 583	N84-25631
	p 627	N84-25997	NAS2-10288	p 611	N84-25716
AF-AFOSR-0064-80	p 584	N84-25640	NAS2-11161	p 583	N84-25631
AF-AFOSR-0107-80	p 624	N84-25107	NAS2-9646	p 583	N84-25631
AF-AFOSR-0127-83	p 583	N84-24559	NAS3-22827	p 617	N84-25854
AF-AFOSR-0316-82	p 583	N84-24557	NAS3-23044	p 572	N84-25605
AF-AFOSR-76-2881	p 578	A84-35309	NAS3-23056	p 603	A84-35204
AF-AFOSR-80-0047	p 620	A84-35341	NAS3-23705	p 605	N84-24580
AF-AFOSR-81-0037	p 580	A84-35876	NCA2-OR-130-801	p 629	A84-36131
AF-AFOSR-82-0269	p 575	A84-34691	NCA2-OR-565-101	p 579	A84-35334
DA PROJ. 1L1-61102-AH-43	p 628	N84-26059	NIVR-1950	p 596	N84-24572
DA PROJ. 1L1-61102-AH-45	p 585	N84-25647	NSERC-A-2181	p 574	A84-34461
DAAG29-79-C-0184	p 576	A84-35190	NSF CME-77-27613	p 622	A84-36151
DAAG29-82-K-0029	p 601	A84-35133	NSF MCS-79-04081	p 629	N84-25308
DAAG29-83-K-0043	p 576	A84-35190	NSG-1561	p 584	N84-25639
DARPA ORDER 4746	p 627	N84-26032	NSG-1570	p 575	A84-34468
DE-AC02-76ER-03077	p 578	A84-35309	NSG-2260	p 584	N84-25642
DE-AC04-76DP-00789	p 583	N84-24563	NSG-3264	p 623	N84-25001
DE-AI01-77CS-51040	p 633	N84-26484	N00014-76-C-0357	p 575	A84-34467
DE-AI01-77ET-20342	p 629	N84-25182	N00014-79-C-0130	p 583	N84-25631
DE-AI01-80CS-50194	p 585	N84-25644	N00014-81-C-0267	p 611	N84-24597
DOT-FA01-80-C-10080	p 593	N84-25688	N00014-82-K-0310	p 583	N84-24561
DRET-81-075	p 620	A84-35327	N00014-82-K-0369	p 607	N84-24592
DTCA-78/98417	p 576	A84-34832	N00014-83-C-0394	p 627	N84-26032
DTF A01-83-C-20041	p 592	N84-24568	N62269-76-C-0086	p 583	N84-25631
DTF A01-83-P-81230	p 631	N84-25429	N62269-78-C-0043	p 609	A84-34453
F08635-76-C-0306	p 594	N84-25697	N62269-81-C-0717	p 583	N84-25631
F33615-81-C-5015	p 601	A84-35136	SERC-E.3131	p 582	N84-24554
F41-451	p 588	N84-24565	SRI PROJ. 7821	p 629	N84-25307
F49620-78-C-0069	p 575	A84-34695	W-31-109-ENG-38	p 623	N84-25012
F49620-79-C-0099	p 629	N84-25308	W-7405-ENG-48	p 583	N84-24562
F49620-82-C-0032	p 627	N84-25997	500-40-62	p 623	N84-24999
MOD-2048/026XR/STR	p 582	N84-24554	505-24-11	p 631	N84-25426
M00140-80-C-0097	p 615	N84-24735	505-31-01	p 585	N84-25648
NAG3-214	p 606	N84-24586	505-31-02	p 581	N84-24539
NAG3-83	p 585	N84-25646	505-31-33-12	p 631	N84-25422
NAG4-1	p 610	N84-24593	505-31-42	p 585	N84-25647
NASW-3455	p 613	N84-24600	505-31-53	p 585	N84-25645
NASW-3592	p 613	A84-35156	505-32-6B	p 606	N84-24585
NAS1-14471	p 578	A84-35309	505-33-52	p 605	N84-24578
NAS1-14861	p 601	A84-34455	505-34-02	p 633	N84-26484
NAS1-15528	p 629	N84-25307	505-34-11	p 611	N84-25716
	p 629	N84-25308	505-35-33	p 598	N84-25701
	p 630	N84-25309	505-36-21	p 610	N84-24593
NAS1-15810	p 621	A84-35353	505-40-22	p 606	N84-24584
NAS1-16205	p 584	N84-25641	505-40-42	p 607	N84-24589
NAS1-16394	p 578	A84-35309	505-40-5B	p 572	N84-25605
	p 621	A84-35353	505-40-62	p 572	N84-25606
			505-40-82	p 608	N84-25712
			505-40-82	p 606	N84-24583
			505-40-82	p 606	N84-24582
			505-42-11	p 584	N84-25642
			505-42-21	p 581	N84-24537
			505-43-01	p 571	N84-24528
			505-43-02	p 605	N84-24579
			505-43-13-01	p 584	N84-25641
			505-43-93-07	p 581	N84-24538
			505-45-02	p 585	N84-25646
			532-01-11	p 592	N84-24566
			533-02-21	p 592	N84-24587
				p 606	N84-24588
			533-04-1A	p 623	N84-25019
			535-03-12	p 631	N84-25425
				p 572	N84-25607
				p 631	N84-26382
			778-32-01	p 585	N84-25644

ACCESSION NUMBER INDEX

Typical Accession Number Index Listing

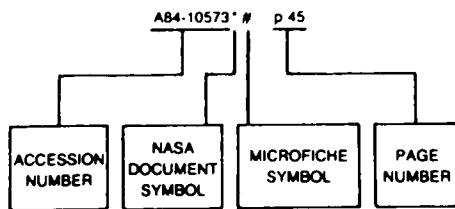

Listings in this index are arranged alphanumerically by accession number. The page number listed to the right indicates the page on which the citation is located. An asterisk (*) indicates that the item is a NASA report. A pound sign (#) indicates that the item is available on microfiche.

A84-33525 #	p 587	A84-35022 #	p 619	N84-24557 #	p 583	N84-25525 #	p 632
A84-33701 *	p 618	A84-35023 #	p 576	N84-24559 #	p 583	N84-25526 #	p 632
A84-33702 *	p 618	A84-35024 #	p 595	N84-24561 #	p 583	N84-25529 #	p 633
A84-33706 *	p 618	A84-35025 #	p 595	N84-24562 #	p 583	N84-25531 #	p 633
A84-33707 #	p 618	A84-35128 #	p 601	N84-24563 #	p 583	N84-25602 *	p 633
A84-33829 #	p 618	A84-35133 #	p 601	N84-24563 #	p 583	N84-25605 *	p 572
A84-33830 #	p 599	A84-35134 #	p 601	N84-24564 #	p 588	N84-25606 *	p 572
A84-33847 #	p 609	A84-35135 #	p 619	N84-24565 #	p 588	N84-25607 *	p 572
A84-33849 #	p 573	A84-35136 #	p 601	N84-24566 *	p 592	N84-25608 #	p 572
A84-33850 #	p 618	A84-35149 #	p 602	N84-24568 #	p 592	N84-25611 #	p 572
A84-34129 #	p 619	A84-35153 #	p 602	N84-24569 #	p 595	N84-25612 #	p 572
A84-34133 #	p 619	A84-35154 #	p 602	N84-24570 #	p 596	N84-25613 #	p 573
A84-34134 #	p 600	A84-35155 #	p 602	N84-24571 #	p 596	N84-25614 #	p 617
A84-34171 #	p 571	A84-35156 #	p 613	N84-24572 #	p 596	N84-25615 #	p 596
A84-34172 #	p 574	A84-35173 #	p 576	N84-24573 #	p 596	N84-25616 #	p 597
A84-34173 #	p 630	A84-35174 #	p 595	N84-24576 #	p 596	N84-25618 #	p 597
A84-34342 #	p 574	A84-35175 #	p 576	N84-24577 *	p 605	N84-25619 #	p 573
A84-34347 #	p 574	A84-35176 *	p 602	N84-24578 *	p 605	N84-25620 #	p 597
A84-34451 #	p 594	A84-35177 #	p 602	N84-24579 *	p 605	N84-25621 #	p 573
A84-34452 #	p 594	A84-35178 #	p 603	N84-24580 *	p 605	N84-25623 #	p 573
A84-34453 #	p 609	A84-35190 #	p 576	N84-24582 *	p 606	N84-25624 #	p 573
A84-34454 #	p 574	A84-35192 #	p 577	N84-24583 *	p 606	N84-25625 #	p 573
A84-34455 *	p 601	A84-35193 #	p 577	N84-24584 *	p 606	N84-25627 #	p 597
A84-34456 #	p 587	A84-35195 #	p 620	N84-24585 *	p 606	N84-25628 *	p 597
A84-34457 #	p 601	A84-35199 #	p 603	N84-24586 *	p 606	N84-25630 #	p 608
A84-34458 #	p 609	A84-35204 #	p 603	N84-24587 *	p 606	N84-25631 #	p 583
A84-34459 *	p 574	A84-35207 #	p 603	N84-24588 *	p 606	N84-25632 *	p 611
A84-34460 #	p 574	A84-35208 #	p 603	N84-24589 #	p 607	N84-25633 #	p 583
A84-34461 #	p 574	A84-35209 #	p 603	N84-24590 #	p 607	N84-25634 #	p 598
A84-34462 #	p 574	A84-35214 #	p 571	N84-24592 #	p 607	N84-25635 #	p 584
A84-34463 #	p 619	A84-35215 #	p 595	N84-24593 *	p 610	N84-25636 *	p 584
A84-34464 #	p 575	A84-35216 #	p 603	N84-24595 #	p 610	N84-25637 #	p 598
A84-34465 #	p 575	A84-35222 #	p 604	N84-24596 #	p 611	N84-25638 #	p 584
A84-34466 #	p 575	A84-35223 *	p 620	N84-24597 #	p 611	N84-25640 #	p 584
A84-34467 #	p 575	A84-35232 #	p 604	N84-24598 #	p 611	N84-25641 #	p 584
A84-34468 *	p 575	A84-35234 #	p 577	N84-24600 #	p 613	N84-25642 *	p 584
A84-34500 #	p 575	A84-35235 #	p 604	N84-24698 #	p 613	N84-25643 #	p 585
A84-34508 #	p 628	A84-35237 #	p 620	N84-24715 #	p 614	N84-25644 *	p 585
A84-34648 #	p 590	A84-35239 #	p 577	N84-24732 #	p 614	N84-25645 *	p 585
A84-34691 #	p 575	A84-35250 #	p 628	N84-24733 #	p 614	N84-25646 *	p 585
A84-34695 #	p 575	A84-35301 #	p 620	N84-24734 #	p 615	N84-25647 *	p 585
A84-34718 #	p 630	A84-35302 #	p 577	N84-24735 #	p 615	N84-25648 *	p 585
A84-34719 #	p 575	A84-35307 #	p 577	N84-24736 #	p 615	N84-25649 #	p 586
A84-34722 #	p 619	A84-35309 #	p 578	N84-24737 #	p 615	N84-25650 #	p 586
A84-34723 #	p 601	A84-35311 #	p 578	N84-24738 #	p 607	N84-25651 #	p 586
A84-34746 *	p 631	A84-35317 #	p 578	N84-24739 #	p 615	N84-25652 #	p 586
A84-34773 #	p 629	A84-35325 #	p 578	N84-24741 #	p 615	N84-25654 #	p 586
A84-34832 #	p 576	A84-35326 #	p 578	N84-24744 #	p 622	N84-25654 #	p 586
A84-34905 #	p 601	A84-35327 #	p 620	N84-24747 *	p 622	N84-25655 #	p 587
A84-34907 #	p 594	A84-35328 #	p 578	N84-24755 #	p 607	N84-25656 #	p 587
A84-34909 #	p 619	A84-35330 #	p 579	N84-24756 #	p 608	N84-25670 #	p 587
A84-34915 #	p 613	A84-35332 #	p 579	N84-24757 #	p 608	N84-25671 #	p 587
A84-34950 #	p 595	A84-35334 #	p 620	N84-24759 #	p 616	N84-25672 #	p 588
A84-35017 #	p 576	A84-35340 #	p 579	N84-24764 #	p 608	N84-25673 #	p 588
A84-35018 #	p 576	A84-35341 #	p 620	N84-24766 #	p 608	N84-25674 #	p 588
		A84-35344 #	p 579	N84-24822 #	p 616	N84-25675 #	p 589
		A84-35351 #	p 579	N84-24824 #	p 616	N84-25676 #	p 589
				N84-24825 #	p 616	N84-25677 #	p 589
				N84-24929 #	p 623	N84-25679 #	p 589
				N84-24999 #	p 623	N84-25680 #	p 589
				N84-25001 #	p 623	N84-25681 #	p 589
				N84-25012 #	p 623	N84-25682 #	p 590
				N84-25030 #	p 609	N84-25683 #	p 590
				N84-25031 #	p 609	N84-25685 #	p 593
				N84-25032 #	p 609	N84-25686 #	p 593
				N84-25033 #	p 610	N84-25687 #	p 593
				N84-25034 #	p 610	N84-25688 #	p 593
				N84-25035 #	p 610	N84-25689 #	p 593
				N84-25036 #	p 571	N84-25690 #	p 593
				N84-25037 *	p 581	N84-25691 #	p 593
				N84-25038 *	p 581	N84-25692 #	p 593
				N84-25039 *	p 581	N84-25693 #	p 593
				N84-25042 #	p 581	N84-25694 #	p 593
				N84-25044 #	p 582	N84-25695 #	p 594
				N84-25045 #	p 582	N84-25696 #	p 594
				N84-25047 #	p 582	N84-25697 #	p 594
				N84-25049 #	p 582	N84-25698 #	p 594
				N84-25051 #	p 582	N84-25699 #	p 594
				N84-25053 #	p 582	N84-25700 #	p 598
				N84-25054 #	p 582	N84-25701 #	p 598
				N84-25055 #	p 582	N84-25702 #	p 598
				N84-25056 #	p 582	N84-25703 #	p 598
				N84-25057 #	p 582	N84-25704 #	p 598
				N84-25058 #	p 582	N84-25705 #	p 598
				N84-25059 #	p 582	N84-25706 #	p 599
				N84-25060 #	p 582		
				N84-25061 #	p 582		
				N84-25062 #	p 582		
				N84-25063 #	p 582		
				N84-25064 #	p 582		
				N84-25065 #	p 582		
				N84-25066 #	p 582		
				N84-25067 #	p 582		
				N84-25068 #	p 582		
				N84-25069 #	p 582		
				N84-25070 #	p 582		
				N84-25071 #	p 582		
				N84-25072 #	p 582		
				N84-25073 #	p 582		
				N84-25074 #	p 582		
				N84-25075 #	p 582		
				N84-25076 #	p 582		

N84-25707**ACCESSION NUMBER INDEX**

N84-25707 # p 599
N84-25709 # p 599
N84-25712 * # p 608
N84-25715 # p 608
N84-25716 # p 611
N84-25719 # p 611
N84-25721 # p 611
N84-25723 # p 612
N84-25724 # p 612
N84-25725 # p 612
N84-25727 # p 612
N84-25728 # p 608
N84-25729 # p 612
N84-25731 # p 612
N84-25732 # p 613
N84-25735 # p 613
N84-25772 # p 617
N84-25774 # p 617
N84-25828 # p 617
N84-25833 # p 617
N84-25854 * # p 617
N84-25864 # p 624
N84-25865 # p 624
N84-25870 # p 625
N84-25871 # p 630
N84-25920 # p 625
N84-25930 # p 625
N84-25960 # p 625
N84-25961 * # p 625
N84-25962 # p 625
N84-25963 # p 625
N84-25964 # p 625
N84-25965 # p 626
N84-25966 # p 626
N84-25967 # p 626
N84-25968 * # p 626
N84-25969 # p 626
N84-25970 # p 626
N84-25971 # p 626
N84-25972 # p 626
N84-25986 # p 627
N84-25987 # p 587
N84-25990 # p 627
N84-25997 # p 627
N84-26032 # p 627
N84-26044 # p 627
N84-26045 # p 627
N84-26048 # p 627
N84-26057 # p 627
N84-26058 # p 628
N84-26059 # p 628
N84-26374 # p 630
N84-26382 * # p 631
N84-26385 # p 632
N84-26386 # p 632
N84-26387 # p 632
N84-26388 # p 632
N84-26430 # p 633
N84-26431 # p 628
N84-26435 # p 587
N84-26437 # p 599
N84-26438 # p 609
N84-26439 # p 599
N84-26440 # p 628
N84-26441 # p 628
N84-26455 # p 633
N84-26484 * # p 633
N84-26564 * # p 633

1. Report No. NASA SP-7037 (178)	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Aeronautical Engineering A Continuing Bibliography (Supplement 178)		5. Report Date August 1984	6. Performing Organization Code
		8. Performing Organization Report No.	10. Work Unit No.
7. Author(s)	9. Performing Organization Name and Address National Aeronautics and Space Administration Washington, D.C. 20546		11. Contract or Grant No.
12. Sponsoring Agency Name and Address			13. Type of Report and Period Covered
		14. Sponsoring Agency Code	
15. Supplementary Notes			
16. Abstract This bibliography lists 426 reports, articles and other documents introduced into the NASA scientific and technical information system in August 1984.			
17. Key Words (Suggested by Author(s)) Aeronautical Engineering Aeronautics Bibliographies		18. Distribution Statement Unclassified - Unlimited	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 122	22. Price* \$6.00HC

FEDERAL DEPOSITORY LIBRARY PROGRAM

The Federal Depository Library Program provides Government publications to designated libraries throughout the United States. The Regional Depository Libraries listed below receive and retain at least one copy of nearly every Federal Government publication, either in printed or microfilm form, for use by the general public. These libraries provide reference services and inter-library loans; however, they are *not* sales outlets. You may wish to ask your local library to contact a Regional Depository to help you locate specific publications, or you may contact the Regional Depository yourself.

ARKANSAS STATE LIBRARY

One Capitol Mall
Little Rock, AR 72201
(501) 371-2326

AUBURN UNIV. AT MONTGOMERY LIBRARY

Documents Department
Montgomery, AL 36193
(205) 279-9110, ext. 253

UNIV. OF ALABAMA LIBRARY

Documents Dept.—Box S
University, AL 35486
(205) 348-7369

DEPT. OF LIBRARY, ARCHIVES AND PUBLIC RECORDS

Third Floor—State Cap.
1700 West Washington
Phoenix, AZ 85007
(602) 255-4121

UNIVERSITY OF ARIZONA LIB.

Government Documents Dept.
Tucson, AZ 85721
(602) 626-5233

CALIFORNIA STATE LIBRARY

Govt. Publications Section
P.O. Box 2037
Sacramento, CA 95809
(916) 322-4572

UNIV. OF COLORADO LIB.

Government Pub. Division
Campus Box 184
Boulder, CO 80309
(303) 492-8834

DENVER PUBLIC LIBRARY

Govt. Pub. Department
1357 Broadway
Denver, CO 80203
(303) 571-2131

CONNECTICUT STATE LIBRARY

Government Documents Unit
231 Capitol Avenue
Hartford, CT 06106
(203) 566-4971

UNIV. OF FLORIDA LIBRARIES

Library West
Documents Department
Gainesville, FL 32611
(904) 392-0367

UNIV. OF GEORGIA LIBRARIES

Government Reference Dept.
Athens, Ga. 30602
(404) 542-8951

UNIV. OF HAWAII LIBRARY

Govt. Documents Collection
2550 The Mall
Honolulu, HI 96822
(808) 948-8230

UNIV. OF IDAHO LIBRARY

Documents Section
Moscow, ID 83843
(208) 885-6344

ILLINOIS STATE LIBRARY

Information Services Branch
Centennial Building
Springfield, IL 62706
(217) 782-5185

INDIANA STATE LIBRARY

Serials Documents Section
140 North Senate Avenue
Indianapolis, IN 46204
(317) 232-3686

UNIV. OF IOWA LIBRARIES

Govt. Documents Department
Iowa City, IA 52242
(319) 353-3318

UNIVERSITY OF KANSAS

Doc. Collect.—Spencer Lib.
Lawrence, KS 66045
(913) 864-4662

UNIV. OF KENTUCKY LIBRARIES

Govt. Pub. Department
Lexington, KY 40506
(606) 257-3139

LOUISIANA STATE UNIVERSITY

Middleton Library
Govt. Docs. Dept.
Baton Rouge, LA 70803
(504) 388-2570

LOUISIANA TECHNICAL UNIV. LIBRARY

Documents Department
Ruston, LA 71272
(318) 257-4962

UNIVERSITY OF MAINE

Raymond H. Fogler Library
Tri-State Regional Documents
Depository
Orono, ME 04469
(207) 581-1680

UNIVERSITY OF MARYLAND

McKeldin Lib.—Doc. Div.
College Park, MD 20742
(301) 454-3034

BOSTON PUBLIC LIBRARY

Government Docs. Dept.
Boston, MA 02117
(617) 536-5400 ext. 226

DETROIT PUBLIC LIBRARY

Sociology Department
5201 Woodward Avenue
Detroit, MI 48202
(313) 833-1409

MICHIGAN STATE LIBRARY

P.O. Box 30007
Lansing, MI 48909
(517) 373-0640

UNIVERSITY OF MINNESOTA

Government Pubs. Division
409 Wilson Library
309 19th Avenue South
Minneapolis, MN 55455
(612) 373-7813

UNIV. OF MISSISSIPPI LIB.

Documents Department
University, MS 38677
(601) 232-5857

UNIV. OF MONTANA

Mansfield Library
Documents Division
Missoula, MT 59812
(406) 243-6700

NEBRASKA LIBRARY COMM.

Federal Documents
1420 P Street
Lincoln, NE 68508
(402) 471-2045
In cooperation with University of
Nebraska-Lincoln

UNIVERSITY OF NEVADA LIB.

Govt. Pub. Department
Reno, NV 89557
(702) 784-6579

NEWARK PUBLIC LIBRARY

5 Washington Street
Newark, NJ 07101
(201) 733-7812

UNIVERSITY OF NEW MEXICO

Zimmerman Library
Government Pub. Dept.
Albuquerque, NM 87131
(505) 277-5441

NEW MEXICO STATE LIBRARY

Reference Department
325 Don Gaspar Avenue
Santa Fe, NM 87501
(505) 827-2033, ext. 22

NEW YORK STATE LIBRARY

Empire State Plaza
Albany, NY 12230
(518) 474-5563

UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL

Wilson Library
BA/SS Documents Division
Chapel Hill, NC 27515
(919) 962-1321

UNIVERSITY OF NORTH DAKOTA

Chester Fritz Library
Documents Department
Grand Forks, ND 58202
(701) 777-2617, ext. 27
(In cooperation with North
Dakota State Univ. Library)

STATE LIBRARY OF OHIO

Documents Department
65 South Front Street
Columbus, OH 43215
(614) 462-7051

OKLAHOMA DEPT. OF LIB.

Government Documents
200 NE 18th Street
Oklahoma City, OK 73105
(405) 521-2502

OKLAHOMA STATE UNIV. LIB.

Documents Department
Stillwater, OK 74078
(405) 624-6546

PORTLAND STATE UNIV. LIB.

Documents Department
P.O. Box 1151
Portland, OR 97207
(503) 229-3673

STATE LIBRARY OF PENN.

Government Pub. Section
P.O. Box 1601
Harrisburg, PA 17105
(717) 787-3752

TEXAS STATE LIBRARY

Public Services Department
P.O. Box 12927—Cap. Sta.
Austin, TX 78753
(512) 471-2996

TEXAS TECH UNIV. LIBRARY

Govt. Documents Department
Lubbock, TX 79409
(806) 742-2268

UTAH STATE UNIVERSITY

Merrill Library, U.M.C. 30
Logan, UT 84322
(801) 750-2682

UNIVERSITY OF VIRGINIA

Alderman Lib.—Public Doc.
Charlottesville, VA 22901
(804) 924-3133

WASHINGTON STATE LIBRARY

Documents Section
Olympia, WA 98504
(206) 753-4027

WEST VIRGINIA UNIV. LIB.

Documents Department
Morgantown, WV 26506
(304) 293-3640

MILWAUKEE PUBLIC LIBRARY

814 West Wisconsin Avenue
Milwaukee, WI 53233
(414) 278-3000

ST. HIST. LIB. OF WISCONSIN

Government Pub. Section
816 State Street
Madison, WI 53706
(608) 262-4347

WYOMING STATE LIBRARY

Supreme Ct. & Library Bld.
Cheyenne, WY 82002
(307) 777-6344

National Aeronautics and
Space Administration

Washington, D.C.
20546

Official Business

Penalty for Private Use, \$300

THIRD-CLASS BULK RATE

Postage and Fees Paid
National Aeronautics and
Space Administration
NASA-451



8 1 SP-7037, 840830 S90569AS 850630
NASA
SCIEN & TECH INFO FACILITY
ATTN: ACCESSIONING DEPT
P O BOX 8757 BWI ARPRT
BALTIMORE MD 21240



POSTMASTER: If Undeliverable (Section 158
Postal Manual) Do Not Return
