

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

NASA CR 170482

(NASA-CR-170482) FGGE/SBUV TAPE
SPECIFICATION AND SHIPPING LETTER
DESCRIPTION (Systems and Applied Sciences
Corp.) 39 p HC A03/MF A01

CSCI 05B

N84-16071

Unclas
11305

G3/82

FGGE/SBUV TAPE SPECIFICATION AND SHIPPING LETTER DESCRIPTION

MARCH 1983



NASA

National Aeronautics and
Space Administration

Codrard Space Flight Center
Greenbelt, Maryland 20773

FGGE/SBUV TAPE SPECIFICATION AND
SHIPPING LETTER DESCRIPTION

Systems and Applied Sciences Corp.
5809 Annapolis Road
Hyattsville, Maryland 20784

Contract No. NAS5-26753
SSD-T-4-8234-006-82

FGGE/SBUV TAPE SPECIFICATION
AND SHIPPING LETTER DESCRIPTION

Systems and Applied Sciences Corporation
5809 Annapolis Road
Hyattsville, Maryland 20784
Contract No. NAS5-26753
SSD-T-4-8234-006-82

Table of Contents

<u>Title</u>	<u>Page</u>
Abbreviations and Acronyms	ii
1. Introduction	1
2. Data Set Production	2
2.1 Data Flow	2
2.2 Quality Checks	2
3. Tape Format Description	10
3.1 Tape Structure Record	10
3.1.1 Physical Tape Characteristics	10
3.1.2 Tape Organization	11
3.1.3 Data Organization on the Tape	11
3.2 Test File Format Record	14
3.3 Header File Format	14
3.4 Data Files Record Formats	18
4. Shipping Letter Description	19
Appendices	
Addition and Modification of FGGE	
Data Management Plan	24

Abbreviations and Acronyms

BPI	-	Bytes Per Inch
ESDP	-	Experimental Satellite Data Producer (USA)
FGGE	-	First GARP Global Experiment
GARP	-	Global Atmospheric Research Program
GSFC	-	Goddard Space Flight Center
N-7	-	Nimbus-7 Spacecraft
NOCC	-	Nimbus Observatory Control Center
NOPS	-	Nimbus-7 Observation Processing System
OPT	-	Ozone Processing Team
SBUV	-	Solar Backscatter Ultraviolet instrument flown on N-7
TOMS	-	Total Ozone Mapping Specrometer instrument flown on N-7
WDC-A	-	World Data Center A (USA)
WDC-B	-	World Data Center B (USSR)

1. INTRODUCTION

The ESDP is responsible for the production of the FGGE/SBUV Level IIc data set. This data set consists of 12 data tapes, copies of which are stored at GSFC, WDC-A, and WDC-B. Each tape copy contains total ozone and ozone profile data for one calendar month grouped in files containing the data in a 6 hour synoptic time block. The tape copies are all 9-track tapes and are identical in content and format but do have different densities. The local archive at GSFC contains 6250 and 1600 BPI density versions, WDC-A contains a 1600 BPI version, and WDC-B contains a 800 BPI version.

This document briefly describes the data flow and quality checks in the production of this data set. In addition it also describes the format of the data tapes and the accompanying shipping documents. The tape format description is abstracted from "Appendix 10: Formats for the International Exchange of Level II Data Sets During the FGGE" in the FGGE Data Management Plan.

2. DATA SET PRODUCTION

2.1 Data Flow

The source of data for the FGGE/SBUV production system is the ozone data tapes produced by the NOPS/OPT and validated by the SBUV Nimbus Experiment Team (NET). The ozone data tapes are denoted as OZONE-S tapes and are described in a document entitled NOPS Tape Specification T634041 SBUV/TOMS OZONE-S (SBUV). Each OZONE-S tape contains a calendar week of data in chronological order grouped in files each containing data from one orbit of the spacecraft. The products of this system are the international exchange format data tapes denoted as FGGE/SBUV Level IIc data tapes and their accompanying shipping documentation described in sections 3 and 4 respectively, of this document.

The data flow for this process is shown in Figure 2.1-1. The data sets and processes are described in Table 2.1-1 and Table 2.1-2, respectively.


2.2 Quality Checks

The objectives of the quality checks performed on the FGGE/SBUV Level IIc data tapes are to ensure that

- a) There are no irrecoverable (permanent) read errors on each tape copy,
- b) The FGGE formatted data is a valid representation of the data on the OZONE-S tapes,
- c) All of the data is accounted for.

The first objective is met by processing each Level IIC tape through the SBUVDP program step. No tape is accepted for archive or shipment unless it has no read errors and produces the expected tape summary printouts. The second objective was first met by successful completion of a test plan which dictated that the Level IIC data must produce the same printout as the parent OZONE-S data when processed through a program provided by the OPT. On a continuing basis during production, the SBUV2C step checks parameter values against expected range limits provided by the OPT and tests quality and error flags on the OZONE-S tape for consistency with data content. Data anomalies and summaries are printed by the SBUV2C program and are individually verified. No data verified to be erroneous are on the final edition of the FGGE/SBUV Level IIC data tapes.

The third objective is met by reconciling missing synoptic periods with the SBUV instrument status history provided by NOCC and data not available report provided by the OPT. The status history lists the times when the instrument was turned on or off and when changes were made in the SBUV operating mode (step scan/continuous scan/non-scanning). The 'data not available' report lists orbits for which ozone observations should have been possible but were not because of acquisition or processing problems. The second section of the shipping letter includes comments indicating the reason for missing synoptic periods.

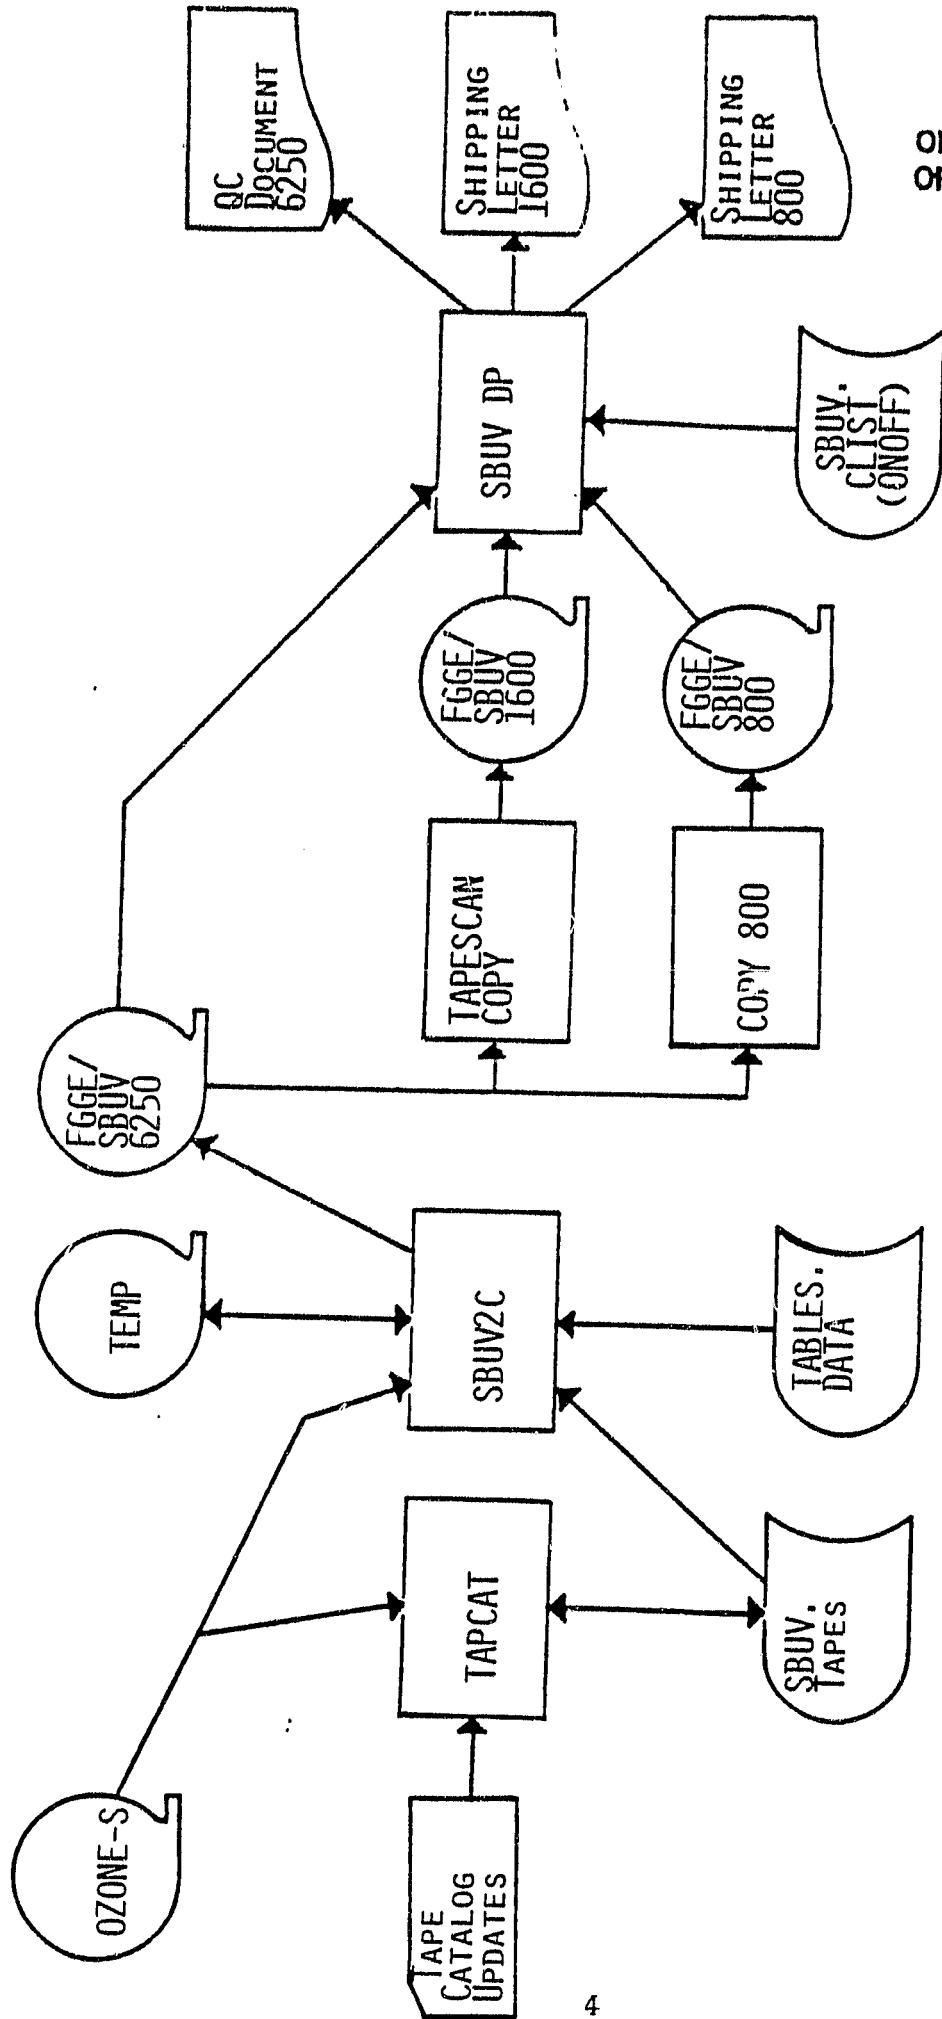

ORIGINAL PAGE IS
OF POOR QUALITY

FIGURE 2.1-1 FGGE/SBUV LEVEL IIC DATA FLOW

Table 2.1-1: FGGE/SBUV Level IIc Production System Data Sets

<u>NAME</u>	<u>SOURCE</u>	<u>DESCRIPTION</u>
OZONE-S	NOPS/OPT	source tape of SBUV ozone data
SBUV.TAPES	internal (TAPCAT)	catalog of SBUV OZONE-S tapes con- taining <ul style="list-style-type: none"> o NOPS tape sequence number o time span of data o call number (location) in tape library
TABLES.DATA	internal	card images of tables from Appendix 10 in the <u>FGGE Data Management Plan</u> .
TEMP	internal	intermediate product tape containing data files for the FGGE/SBUV Level IIc output tape

Table 2.1-1: FGGE/SBUV Level IIC Production System Data Sets (Cont'd)

<u>NAME</u>	<u>SOURCE</u>	<u>DESCRIPTION</u>
FGGE/SBUV(6250)	internal (SBUV2C)	local archive FGGE/SBUV Level IIC data tape containing <ul style="list-style-type: none"> o test file o tape header file o data files copied from TEMP
FGGE/SBUV(1600)	internal (TAPESCAN)	FGGE/SBUV Level IIC tape for shipment to WDC-A
FGGE/SBUV(800)	internal (COPY800)	FGGE/SBUV Level IIC tape for shipment to WDC-B
SBUV.CLIST (ONOFF)	NOCC	table of SBUV operational status by time interval specifying <ul style="list-style-type: none"> o ON/OFF times of SBUV instrument o mode of operation(step or continuous scan) o missing(unprocessed data)

Table 2.1-1: FGGE/SBUV Level IIC Production System Data Sets (Cont'd)

<u>NAME</u>	<u>SOURCE</u>	<u>DESCRIPTION</u>
QC Document	internal	printout derived from the
Shipping Letter (1,600)	(SBUVDP)	contents of the local archive, WDC-A, and WDC-B
Shipping Letter (800)		copies, respectively, of the FGGE/SBUV Level IIC data tapes.

Table 2.1-2: FGGE/SBUV Level IIc Production System Processes

<u>PROCESS NAME</u>	<u>DATA SETS</u>	<u>DATA SET TYPES</u>	<u>PROCESS DESCRIPTION</u>
TAPCAT	Tape catalog update (control cards)	IN	read control cards specifying <ul style="list-style-type: none"> o SBUV.TAPES library o operation to be performed (make new entry; delete old entry)
	SBUV.TAPES	IN/OUT	read to verify correct library accessed; write to update catalog
	OZONE-S	IN	obtain NOPS sequence number, start/end time of data for tape catalog entry
SBUV20	control cards	IN	specify time interval to be processed
	SBUV.TAPES	IN	specify location of tapes with desired time interval for processing
	OZONE-S TEMP FGGE/SBUV (6250)	IN OUT/IN OUT	for data in specified time interval <ul style="list-style-type: none"> o printout diagnostic information for quality checks o reformat data and write to TEMP o build tape header file o write test file and tape header file and copy TEMP tape to FGGE/SBUV(6250)

Table 2.1-2: FGGE/SBUV Level IIc Production System Processes

<u>PROCESS NAME</u>	<u>DATA SETS</u>	<u>DATA SET TYPES</u>	<u>PROCESS DESCRIPTION</u>
TAPESCAN	control cards FGGE/SBUV(6250) FGGE/SBUV (1600)	IN IN OUT	copy local archive to WDC-A copy
COPY800	control cards FGGE/SBUV (6250) FGGE/SBUV(800)	IN IN OUT	copy local archive to WDC-B copy
<hr/>			
SBUVDP	control cards FGGE/SBUV (6250) or FGGE/SBUV (1600) or FGGE/SBUV (800) or SBUV.CLIST (ONOFF)	IN IN IN IN IN	read FGGE/SBUV tape and produce print- out o summarizing contents of the tape o verifying no permanent read errors o listing by time period SBUV mode of operation

3. TAPE FORMAT DESCRIPTION

3.1 Tape Structure Record

The FGGE/SBUV tapes contain data extracted from the Nimbus-7 SBUV OZONE-S tapes and reformatted in accordance with the FGGE Level II International Exchange Format specifications. In describing the general FGGE/SBUV tape specifications, there are three areas of interest. These are the physical tape characteristics, the tape organization, and the data organization. Each of these topics is discussed below.

3.1.1 Physical Tape Characteristics

All FGGE/SBUV tapes will have the following physical characteristics:

	WDC-A (Washington)	WDC-B (Moscow)
Number of tracks	9	9
Tape recording density	1600 bpi	800 bpi
Tape recording mode	PE	NRZI
Tape recording code	EBCDIC	EBCDIC
Tape recording parity	Odd	Odd

3.1.2 Tape Organization

The tape organization is shown on the next page. There are three types of files. The first file on the tape is the test file. The second file on the tape is the tape header file. The remaining one or more files are data files. All files are terminated with a single end of file (EOF) mark. The last data file is terminated with two end of file (EOF) marks.

All files are made up of one or more physical records. Each physical record contains 2960 bytes. The test file and the data files have physical records which contain 80 logical records, each containing 37 bytes. The tape header file has physical records which contain 37 logical records, each containing 80 bytes. Each of these files is described in detail later.

3.1.3 Data Organization on the Tape

The data organization refers to how the data values are organized into files and records on the FGGE/SBUV tapes. The data values are grouped chronologically into six-hour synoptic time periods and stored in the data files. The six-hour synoptic periods are defined as follows (2100:01 represents hour 21, minute 00, second 01):

BEGINNING OF TAPE

TEST FILE
EOF
TAPE HEADER FILE
EOF
DATA FILE 1
EOF
DATA FILE 2
EOF
DATA FILE 3
EOF
○ ○ ○ ○
EOF
DATA FILE N
EOF
EOF
UNUSED TAPE

ENDING OF TAPE

FIGURE 3-1. TAPE ORGANIZATION

TABLE FOR MAJOR TIME

<u>FIRST DATA</u>	<u>SYNOPTIC TIME</u>	<u>LAST DATA</u>
2100:01	0000	0300:00
0300:01	0600	0900:01
0900:01	1200	1500:01
1500:01	1800	2100:01

Each data file contains all available data values for a six-hour synoptic time period. The data files are stored on the tape in increasing time order. The last data file on the tape must be complete (not split between reels). If no data is available for a particular synoptic period, then the file will not be written.

The total time period covered by the data on a single tape is variable. At the time that an FGGE/SBUV tape is produced, up to fifty time intervals can be specified. All observations falling within any of these time intervals are then included on the FGGE/SBUV tape, grouped into files on a synoptic time period basis as described earlier. (Multiple time intervals are allowed in order to provide the capability to exclude data taken during time intervals when the validity of the data values is questionable, e.g., during instrument malfunction.)

The software program which generates the FGGE/SBUV tapes ensures that duplicate files for a specific synoptic period are not stored on a single tape, but it is the responsibility of the user generating the tapes to ensure that such duplicate files do not occur across separate tapes.

3.2 Test File Format Record

The test file is the first file on the tape. The test file has physical records which contains 80 logical records, each containing 37 bytes. This file occupies about 20 meters of the tape (350 blocks at 1600 bpi; 200 blocks at 800 bpi). Each block is 2960 bytes long, and consists of all "1" bits.

3.3 Header File Format

The header file is the second file on the tape. It contains EBCDIC-coded text information, with 80 bytes per logical record and 37 records per block (2960 bytes per block). The header file describes the data, giving the data source, the agency involved (NASA), and the data coverage. The header file also contains the tables of codes presented in the FGGE International Data Management Plan, Appendix 10, Appendix A. Following the tables is a short section containing the FORTRAN formats for reading the data. The last block of the file is padded with blanks, if needed. The first fifteen logical records are shown in Figure 3-2. The contents of these logical records are as follows.

FGGE 45647911010079113019
NAME: NATIONAL AERONAUTICS AND SPACE ADMINISTRATION (NASA)

ADDRESS: GODDARD SPACE FLIGHT CENTER (GSFC)
GREENBELT, MARYLAND 20771
UNITED STATES OF AMERICA (USA)

SCIENTIST: GARY N WOLFORD
DATE: MON OCT 25 1982

0123456789=> /STUVWXYZ.(-JKLMNPOQR*);+ABCDEFGHI.)(<
TAPE CHARACTERISTICS: 9 TRACK, 800 BPI, CODE EBCDIC, MODE NRZI, PARITY ODD
TAPE CONTENTS: THIS TAPE CONTAINS TOTAL AND PROFILE OZONE DATA THAT WAS
DERIVED FROM THE SBUV INSTRUMENT FLOWN ON THE NIMBUS-7 EXPERIMENTAL SATELLITE.
THIS TAPE CONFORMS WITH THE FGGE LEVEL 2B INTERNATIONAL EXCHANGE FORMAT. ALL
AVAILABLE DATA FROM 79 10 31 21 00 TO 79 11 30 20 24 IS SUPPLIED.

ORIGINAL PAGE IS
OF POOR QUALITY

Figure 3-2. Tape Header Record - First Fifteen Logical Records

Record 1: The first logical record contains the project title (FGGEbb), the producer code (4564), and the beginning and ending synoptic time periods contained on the tape.

The synoptic times are variable data and contain the major synoptic times of the first and last data files on the tape. There are two-byte fields for the year (YF, YL), the month (MF, ML), the day (DF, DL), and the hour (HF, HL) of the first and last major synoptic times. The character F indicates the first major synoptic time and L the last major synoptic time. The year field represents the last two digits of the year. As an example, 1978 would be represented by an EBCDIC-coded 78. The month values range from 01 to 12. The day values range from 01 to 31. The hour values are either 00, 06, 12, or 18.

Record 2: The second logical record contains the name of the producing office.

Record 3: The third logical record is filled with EBCDIC coded blanks.

Records 4-6: The fourth through the sixth logical records contain the address and country of the producing office.

Record 7: The seventh logical record contains the name of the scientist making the data available. This person is also the person to contact for more information about the data.

Record 8: The eighth logical record contains the date the tape was written. The data is variable data. The day name field (WWW) contains the first three characters of the day of the week (e.g., TUE). The month field (MMM) contains the first three characters of the name of the month (e.g., JAN). The day number field (DD) contains the numeric day within the month; its values range from 01 to 31. The year field (YYYY) contains four bytes which represent the year.

Record 9: The ninth logical record contains a translation table which will be stored exactly as shown in Figure 3-1.

Record 10: The tenth logical record contains information on the physical tape characteristics.

Record 11-15: The eleventh through the fifteenth logical records contain a description of the tape contents. The variable field in the eleventh logical record will contain the following character string to describe parameter data stored on the tape.

TOTALbANdbPROFILEbOZONEbbbbbb

The variable fields in the fourteenth logical record contain the beginning and ending year (YB, YE), month (MB, ME), day (DB, DE) hour (HB, HE), and minute (NB, NE) of the time period represented by the tape. These beginning and ending times represent the search interval used in producing the tape. They differ from the first and last major synoptic times stored in the first logical record of the tape header file.

3.4 Organization of Data Within a Data File

The first logical record in a data file is the file header logical record. This logical record contains information on the data contained in the file. Following the file header logical record are data records, for six hours of observations sorted in time increasing order.

The first logical record in a report is the report identification logical record (See TABLE IV-(a) in the Appendix). The report identification logical record contains information on the data contained in the report. The total ozone is given in the first record of each report. If the profile ozone data is present, the report will contain 9 logical records. Record 2 contains the time and location for the profile (See TABLE IV-(g) in the Appendix). Records 3-6 contain the profile ozone amounts, and standard deviations (See TABLE IV-(h) in the Appendix). Records 7-9 contain the ozone mixing ratios (See TABLE IV-(i) in the Appendix).

The last data logical record in the file is followed by an end of data logical record. Following the end of data logical record, a sufficient number of fill logical records are stored to complete the current physical record. Note that reports are not constrained to begin or end on physical record boundaries. The logical records are stored sequentially and continuously, with physical record boundaries occurring after each group of 80 logical records.

4. SHIPPING LETTER DESCRIPTION

The Shipping letter contains the summary of the data on the tape. First part of the shipping letter (marked I in the sample shipping letter) is generated through the SBUVDP program with option=0. It contains the following information:

- (i) Print level of the SBUVDP program, input and output tape designation and tape slot number.
- (ii) First fifteen logical records of the tape header file.
- (iii) Summary of each file which contains file header, number of logical records in the file, number of blocks in the file, number of reports with total ozone only, number of reports with total and profile of ozone, and summary of the file and report errors.

Second part of the shipping letter (marked II) is the list of missing synoptic periods with comments indicating the reason for their absence. A sample shipping letter is included in the following pages.

I

S U V D P P R O G R A M

PRINT LEVEL = 0
FILE HEADER DUMP = OFF
REPORT HEADER DUMP = OFF
DATA RECORD DUMP = OFF
TAPE DESIGNATOR UAIJ10
SLUT NUMBER L2735

* F5GE TAPE UAIJ10 *

END FILE 1 - TEST FILE: 350 BLOCKS. 0 I/C LFKGFS. 0 BLOCK ERRORS

TAPE HEADER FILE:
FORM: 4564750901007-043016
NAME: NATIONAL AERONAUTICS AND SPACE ADMINISTRATION (NASA)
ADDRESS: GODDARD SPACE FLIGHT CENTER (GSFC)
GREENBELT, MARYLAND 20771
UNITED STATES OF AMERICA (USA)
SCIENTIST: GARY N ALLFORD
DATE: 01 SEP 70
TIME: 012456789
TAPL CHARACTERISTICS: TRACKS 1600 HPI; CODE ENCODIC; MODE PL; PARITY ODD
DERIVED FROM THE SUBV INSTRUMENT FLGON ON THE HIMBUS-7 EXPERIMENTAL SATELLITE.
THIS TAPE CONFORMS WITH THE FGGE LEVEL-28 INTERNATIONAL EXCHANGE FORMAT. ALL
AVAILABLE DATA FFLM 79 03 31 21 00 10 73 05 30 20 20 IS SUPPLIE.

11

END FILE 2 - TAPE HEADER FILE: 26 BLOCKS 0 I/C ERFLFS

FILE #	FILE HEADER	LOGICAL RECORDS	#	REPORTS WITH TOTAL ONLY	TAPE I/C LFKGFS	---FILE ERRORS---	---REPORT ERRORS---
	YYMMDDHH		BLKCS			NO FOR ECC ECF	NO LEN GMT
1	H04750501000042	1008	350	0	0	0	0
2	H04750501120042	201	28	112	0	0	0
3	H04750501180042	2582	11	287	0	0	0
4	H04750502000042	2403	33	239	0	0	0
5	H04750502060042	3222	27	267	0	0	0
6	H04750502120042	2484	41	258	0	0	0
7	H04750502180042	3057	32	276	0	0	0
8	H04750503000042	2511	40	341	0	0	0
9	H04750503060042	2934	32	277	0	0	0
10	H04750503120042	2772	37	303	0	0	0
11	H04750503180042	2588	35	303	0	0	0
12	H04750504000042	2538	38	332	0	0	0
13	H04750504060042	1647	30	282	0	0	0
14	H04750504120042	1350	30	343	0	0	0
15	H04750504180042	1652	21	131	0	0	0
16	H04750505000042	2132	6	30	0	0	0
17	H04750505060042	2764	27	237	0	0	0
18	H04750505120042	2826	35	307	0	0	0
19	H04750505180042	2859	26	319	0	0	0
20	H04750507000042	1701	37	322	0	0	0
21	H04750507060042	3067	22	167	0	0	0
22	H04750507120042	2350	37	343	0	0	0
23	H04750507180042	1242	30	261	0	0	0
24	H04750508000042	1652	16	138	0	0	0
25	H04750508060042	2252	21	164	0	0	0
26	H04750508120042	2594	29	255	0	0	0
27	H04750508180042	1629	23	187	0	0	0
28	H04750509000042	567	21	181	0	0	0
29	H04750509060042	1782	17	129	0	0	0
30	H04750509120042	1782	17	129	0	0	0
31	H04750509180042	1782	17	129	0	0	0
32	H04750510000042	1782	17	129	0	0	0
33	H04750510060042	1782	17	129	0	0	0
34	H04750510120042	1782	17	129	0	0	0
35	H04750510180042	1782	17	129	0	0	0
36	H04750511000042	1782	17	129	0	0	0

111

ORIGINAL PAGE IS
OF POOR QUALITY

II

FILL	SYNOPTIC TIME	EXPLORATION STATUS	DATE	TIME	REMARKS
J	79090100	UH	AT	06/31/75 23:28	
MISSING	79090106	UFF			
4	79090112	UFF			
5	79090118	LN	AT	05/31/75 13:52	
6	79090200	LN			
7	79090206	DN			
8	79090212	LN			
9	79090218	LN			
10	79090300	ON			
11	79090306	ON			
12	79090312	UN			
13	79090318	UN			
14	79090400	UN			
15	79090406	UN			
16	79090412	LN			
17	79090418	LN			
18	79090500	UN			
MISSING	79090506	UFF	AT	05/05/75 00:28	
MISSING	79090512	UFF			
MISSING	79090518	UFF			
15	79090500	UFF	AT	05/06/75 01:32	
20	79090606	LN			
41	79090612	JN			
44	79090618	JN			
23	79090700	LN			
24	79090706	UN			
25	79090712	UN			
26	79090718	UN			
27	79090800	UN			
28	79090806	UN			
29	79090812	UN			
30	79090818	UN			
31	79090900	UN			
MISSING	79090906	UFF	AT	05/05/75 00:20	
MISSING	79090912	UFF			
MISSING	79090918	UFF			
MISSING	79091000	UFF			
MISSING	79091006	UN	AT	05/10/75 00:30	
MISSING	79091012	UN			
MISSING	79091018	UN			
MISSING	79091100	JN			
MISSING	79091106	LN			
32	79091112	LN	AT	05/11/75 13:50	
33	79091118	UN			
34	79091200	UN			
35	79091206	UN			
36	79091212	LN			
37	79091218	UN			
38	79091300	UN			
MISSING	79091306	UFF	AT	05/12/75 23:06	
MISSING	79091312	UFF			
MISSING	79091318	UFF			
35	79091400	UN	AT	05/13/75 23:58	
40	79091406	LN			
41	79091412	UN			
42	79091418	UN			
43	79091500	LN			
44	79091506	UN			
45	79091512	UN			
46	79091518	UN			
MISSING	79091600	UN	AT	05/15/75 20:53	
47	79091606	UN			
48	79091612	UN	AT	05/16/75 02:24	
49	79091618	UN			
50	79091700	UN	AT	05/17/75 13:52	

NON-STEP MODE -- LZLINE DERIVATION NOT POSSIBLE
 LN-STEP MODE -- LZLINE DERIVATION NOT POSSIBLE
 UN-STEP MODE -- LZLINE DERIVATION NOT POSSIBLE
 UN-STEP MODE -- LZLINE DERIVATION NOT POSSIBLE
 UN-STEP MODE -- LZLINE DERIVATION NOT POSSIBLE
 UN-STEP MODE -- LZLINE DERIVATION NOT POSSIBLE
 UN-STEP MODE -- LZLINE DERIVATION NOT POSSIBLE

MISSING CRITICAL DATA
 MISSING CRITICAL DATA
 MISSING CRITICAL DATA

Appendix

Addition and modification of FGGE Data Management Plan.

Some of the tables in the Appendix 10 of the FGGE Data Management Plan have been modified. In the following pages, new tables which are needed for the FGGE/SBUV tape format are listed.

TABLE IV

Satellite Sounding Format
(a) Report Identification

PARAMETER	NO. OF CHARACTERS	POSITION NUMBER	UNITS	REMARKS
Report Identification flag ¹	1	1		Unique Character*
Data Source Index	2	2-3	code figure	See Appendix A, Table 1
Total Ozone	3	4-6	Dobson units	1 Dobson Unit 10 ⁻³ atm-cm
Total Ozone quality flag	2	7-8	code figure	See Appendix A, Table XLI
Seconds ³	2	9-10		00-59
Indicator for data processing technique used	2	11-12	code figure	See Appendix A, Table XVI

Latitude ²	5	13-17	Degrees and hundredths	North = +; South = -
Longitude	5	18-22	Degrees and hundredths	From 0.00 to 359.99E
Instrument type	2	23-24	code figure	See Appendix A, Table II
Year ³	2	25-26	Last two digits	78 = 1978
Month ³	2	27-28		01-12, January-December
Day ³	2	29-30		01-31
Hour ³	2	31-32		00-23 GMT
Minutes ³	2	33-34		00-59
Number of logical Records ⁴	3	35-37		Number of logical records in the reports

- 1 For positive identification of the report-identification record, the unique character asterisk (*) will always be used.
- 2 For SBUV data, this is location of total ozone value.
- 3 For SBUV data, this is time of total ozone value.
- 4 For SBUV data, this is one or greater. If no profile data are available, this will be the only record in the report.

(g) Second record in SBUV ozone observation¹

PARAMETER	NO. OF CHARACTERS	POSITION NUMBER	UNITS	REMARKS
Latitude	5	1-5	10 ⁻² deg.	Average latitude for profile; North=+, South=-; differs from total ozone latitude by up to approx. 1 deg.
Longitude	5	6-10	10 ⁻² deg.	Average longitude for profile; from 0.00 to 359.99 (always positive); differs from total ozone longitude by up to approx. 1 deg.
Indicator for data processing technique used	2	11-12	code figure	See Appendix A, Table XVI
Year	2	13-14	last two digits	78-1978
Day	2	17-18		01-12, January-December
Hour	2	19-20		00-23 GMT
Minutes	2	21-22		00-59
Seconds	2	23-24		00-59
Not used	13	25-37		

¹ This record and subsequent profile data records will be present in report only if the SBUV observation generated acceptable profile data.

(h) Record for layer ozone amount data ¹

PARAMETER	NO. OF CHARACTERS	POSITION NUMBER	UNITS	REMARKS
SBUV record type	1	1	code figure	1=vertical profile data, 2=ozone mixing ratio data
First pressure layer XLI	2	2-3	code figure	See Appendix A, Table XLI
First layer, ozone amount	5	4-8	10 ⁻⁵ atm-cm	
First layer, standard deviation	5	9-13	10 ⁻⁵ atm-cm	
Second pressure layer	2	14-15	code figure	See Appendix A, Table XLII
Second layer, ozone amount	5	16-20	10 ⁻⁵ atm-cm	
Second layer, standard deviation	5	21-25	10 ⁻⁵ atm-cm	
Third pressure layer	2	26-27	code figure	See Appendix A, Table XLII
Third layer, ozone amount	5	28-32	10 ⁻⁵ atm-cm	
Third layer standard deviation	5	33-37	10 ⁻⁵ atm-cm	

¹ All pressure layer codes will be present. Associated ozone amount and/or standard deviation may be set to fill value (nines, signed negative). Unneeded fields in a logical record will be set to fill value.

(i) Record for ozone mixing ratio data¹

PARAMETER	NO. OF CHARACTERS	POSITION NUMBER	UNITS	REMARKS
SBUV record type	1	1	code figure	1=vertical profile data, 2=ozone mixing ratio data
First pressure level	2	2-3	code figure	See Appendix A, Table XLIII
First level, ozone mixing ratio	4	4-7	10 ⁻² gm/gm	
Second pressure level	2	8-9	code figure	See Appendix A, Table XLIII
Second level, ozone mixing ratio	4	10-13	10 ⁻² gm/gm	
Third pressure level	2	14-15	code figure	See Appendix A, Table XLIII
Third level, ozone mixing ratio	4	16-19	10 ⁻² gm/gm	
Fourth pressure level	2	20-21	code figure	See Appendix A, Table XLIII

¹ All pressure layer codes will be present. Associated ozone amount and/or standard deviation may be set to fill value (nines, signed negative). Unneeded fields in a logical record will be set to fill value.

Fourth level, ozone
mixing ratio 4 22-25 10^{-2} gm/gm

Fifth pressure level 2 26-27 code figure See Appendix A,
Table XLIII

Fifth level, ozone
mixing ratio 4 28-31 10^{-2} gm/gm

Sixth pressure level 2 32-33 code figure See Appendix A,
Table XLIII

Sixth level, ozone
mixing ratio 4 34-37 10^{-2} gm/gm

1. All pressure level codes will be present. Associated ozone mixing ratio may be set to fill value (nines, signed negative). Unneeded fields in a logical record will be set to fill value.

TABLE XVI

Indicator for data-processing technique used by satellite data producer (for tropopause level SBUV total ozone and SBUV ozone profiles)

<u>Code Figure</u>	<u>Description</u>
00	Processing technique not specified
01	Statistical regression
02	Total ozone - interpolation of precomputed tables based on ratios of measured radiances
03	Vertical ozone profiles - profile inversion using the pressure increment method.
04	Vertical ozone profiles - optimum statistical method weighted by confidence in climatological model at pressure levels and by radiance noise.
05	Average with equal weight

(Appendix 10, Appendix A) - ADDITION

TABLE XLI

SBUV TOTAL OZONE QUALITY FLAGS

CODE FIGURE	DESCRIPTION
00	Most accurate data
01	Near terminator data (acceptable, but less accurate)
02	Descending orbit data (acceptable accuracy, may be redundant ¹)
03	Descending orbit data near terminator (acceptable but less accurate, may be redundant ¹)

¹Redundant - more accurate ascending orbit data
(lower solar zenith angles) may be available for same
location.

(Appendix 10, Appendix A) - ADDITION
TABLE XLII
SBUV OZONE AMOUNTS PRESSURE LAYERS

CODE FIGURE	PRESSURE LAYER RANGE (mb)
1	0.00 - 0.24
2	0.24 - 0.50
3	0.50 - 0.99
4	0.99 - 1.98
5	1.98 - 3.96
6	3.96 - 7.91
7	7.91 - 15.81
8	15.81 - 31.71
9	31.71 - 63.33
10	63.33 - 126.66
11	126.66 - 250.31
12	250.31 - 1013.25

(Appendix 10, Appendix A) - ADDITION
TABLE XLIII
SBUV OZONE MIXING RATIO PRESSURE LEVELS

CODE FIGURE	PRESSURE LEVEL (mb)
01	0.3
02	0.4
03	0.5
04	0.7
05	1.0
06	1.5
07	2.0
08	3.0
09	4.0
10	5.0
11	7.0
12	10.0
13	15.0
14	20.0
15	30.0
16	40.0