
An Experimental Study of Dynamic Stall on Advanced Airfoil Sections Volume 3. Hot-Wire and Hot-Film Measurements

L. W. Carr

W. J. McCroskey

K. W. McAlister

S. L. Pucci, Aeromechanics Laboratory

AVRADCOM Research and Technology Laboratories

Ames Research Center, Moffett Field, California

O. Lambert, Service Technique des Constructions Aeronautiques,

Paris, France

NASA

National Aeronautics and
Space Administration

Ames Research Center
Moffett Field, California 94035

United States Army
Aviation Research and
Development Command
St. Louis, Missouri 63166



TABLE OF CONTENTS

| | <u>Page</u> |
|--|-------------|
| LIST OF FIGURES | v |
| LIST OF TABLES | ix |
| SYMBOLS | xi |
| SUMMARY | 1 |
| INTRODUCTION | 1 |
| DESCRIPTION OF EXPERIMENTAL PROCEDURES | 1 |
| DATA ANALYSIS AND INTERPRETATION | 2 |
| Skin-Friction Gage | 2 |
| Hot-Wire Probe | 3 |
| Reverse-Flow Sensors | 3 |
| Averaging Techniques | 4 |
| Example of Signal Analysis | 4 |
| RESULTS | 4 |
| REFERENCES | 6 |
| TABLES | 7 |
| FIGURES | 36 |

PRECEDING PAGE BLANK NOT FILMED

LIST OF FIGURES

| | <u>Page</u> |
|---|-------------|
| 1 Diagram showing installation of spar and airfoil shell in tunnel | 36 |
| 2 Diagram of hot-film skin-friction gage | 37 |
| 3 Response of hot-film skin-friction gages mounted on Ames A-01 airfoil during airfoil oscillation in pitch ($\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.10$, $M_\infty = 0.22$) | 37 |
| 4 Response of hot-film skin-friction gages at surface of NACA 0012 airfoil during airfoil oscillation in pitch ($\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.10$, $M_\infty = 0.295$) | 38 |
| 5 Diagram of dual-element hot-wire probe | 38 |
| 6 Response of hot-wire anemometer probes on Wortmann FX-098 airfoil during airfoil oscillation in pitch ($\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.10$, $M_\infty = 0.11$) | 39 |
| 7 Response of hot-wire anemometer probe installed near trailing edge of the Vertol VR-7 airfoil during oscillation in pitch | 39 |
| 8 Results obtained using triple-wire flow-reversal sensor: (a) Typical comparison of flow-reversal sensor and hot-wire anemometer signal (from ref. 2); (b) Progression of flow reversal up airfoil during dynamic stall (from ref. 2) | 40 |
| 9 Diagram of three-element, directionally sensitive hot-wire probe (from ref. 2) | 41 |
| 10 Comparison of 100-cycle ensemble average and single-cycle signals from hot-wire anemometers for Vertol VR-7 airfoil during oscillation in pitch: ———, 100 cycle average; -----, single cycle | 42 |
| 11 Response of hot-film skin-friction gage and hot-wire anemometer probes on Vertol VR-7 during oscillation in pitch ($\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.10$, $M_\infty = 0.185$) | 43 |
| 12 Phase angle, ωt , of flow reversal on NACA 0012 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects | 44 |
| 13 Phase angle, ωt , of flow reversal on Ames A-01 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects | 45 |
| 14 Phase angle, ωt , of flow reversal on Wortmann FX-098 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects | 46 |

PRECEDING PAGE BLANK NOT FILMED

| | | |
|----|--|----|
| 15 | Phase angle, ωt , of flow reversal on Sikorsky SC-1095 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects | 47 |
| 16 | Phase angle, ωt , of flow reversal on Hughes HH-02 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects | 48 |
| 17 | Phase angle, ωt , of flow reversal on Vertol VR-7 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects | 49 |
| 18 | Phase angle, ωt , of flow reversal on NLR-1 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects | 50 |
| 19 | Phase angle, ωt , of flow reversal on NLR-7 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects | 51 |
| 20 | Phase angle, ωt , of flow reversal on NACA 0012 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 12^\circ + 5^\circ \sin \omega t$ - light-stall conditions | 51 |
| 21 | Phase angle, ωt , of flow reversal on Ames A-01 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 11^\circ + 5^\circ \sin \omega t$ - light-stall conditions | 52 |
| 22 | Phase angle, ωt , of flow reversal on Wortmann FX-098 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 10^\circ + 5^\circ \sin \omega t$ - light-stall conditions | 52 |
| 23 | Phase angle, ωt , of flow reversal on Sikorsky SC-1095 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 11^\circ + 5^\circ \sin \omega t$ - light-stall conditions | 53 |
| 24 | Phase angle, ωt , of flow reversal on Hughes HH-02 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 10^\circ + 5^\circ \sin \omega t$ - light-stall conditions | 53 |
| 25 | Phase angle, ωt , of flow reversal on Vertol VR-7 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 15^\circ + 5^\circ \sin \omega t$ - light-stall conditions | 54 |
| 26 | Phase angle, ωt , of flow reversal on NLR-1 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 10^\circ + 5^\circ \sin \omega t$ - light-stall conditions | 54 |
| 27 | Phase angle, ωt , of flow reversal on NLR-7 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 15^\circ + 5^\circ \sin \omega t$ - light-stall conditions | 55 |

| | <u>Page</u> |
|---|-------------|
| 28 Phase angle, ωt , of flow reversal on Ames A-01 airfoil vs chord for a range of frequencies at $M_\infty = 0.295$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - deep-stall conditions | 56 |
| 29 Phase angle, ωt , of flow reversal on Wortmann W-98 airfoil vs chord for a range of frequencies at $M_\infty = 0.295$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - deep-stall conditions | 57 |
| 30 Phase angle, ωt , of flow reversal on Wortmann FX-098 airfoil vs chord for a range of frequencies at $M_\infty = 0.185$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - deep-stall conditions | 58 |
| 31 Phase angle, ωt , of flow reversal on Vertol VR-7 airfoil vs chord for a range of frequencies at $M_\infty = 0.295$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - deep-stall conditions | 59 |

LIST OF TABLES

| | <u>Page</u> |
|---|-------------|
| 1 Summary of analyzed flow-reversal data | 7 |
| 2 Phase angle of flow reversal: NACA 0012 airfoil | 7 |
| 3 Phase angle of flow reversal: Ames A-01 airfoil | 8 |
| 4 Phase angle of flow reversal: Wortmann FX-098 airfoil | 9 |
| 5 Phase angle of flow reversal: Sikorsky SC-1 airfoil | 10 |
| 6 Phase angle of flow reversal: Hughes HH-02 airfoil | 10 |
| 7 Phase angle of flow reversal: Vertol VR-7 airfoil | 11 |
| 8 Phase angle of flow reversal: NLR NL-1 airfoil | 12 |
| 9 Phase angle of flow reversal: NLR-7301 airfoil | 12 |
| 10 Error-bound for flow-reversal measurements (deg): NACA 0012 airfoil | 13 |
| 11 Error-bound for flow-reversal measurements (deg): Ames A-01 airfoil | 14 |
| 12 Error-bound for flow-reversal measurements (deg): Wortmann FX-098 airfoil | 15 |
| 13 Error-bound for flow-reversal measurements (deg): Hughes HH-02 airfoil | 16 |
| 14 Error-bound for flow-reversal measurements (deg): Vertol VR-7 airfoil | 17 |
| 15 Error-bound for flow-reversal measurements (deg): NLR-1 airfoil | 18 |
| 16 Error-bound for flow-reversal measurements (deg): NLR-7301 airfoil | 18 |
| 17 Notes pertaining to tables 18 to 25 | 19 |
| 18 Catalog of recorded data: NACA 0012 airfoil | 20 |
| 19 Catalog of recorded data: Ames A-01 airfoil | 22 |
| 20 Catalog of recorded data: Wortmann FX-098 airfoil | 24 |
| 21 Catalog of recorded data: Sikorsky SC-1095 airfoil | 26 |
| 22 Catalog of recorded data: Hughes HH-02 airfoil | 28 |

| | <u>Page</u> |
|--|-------------|
| 23 Catalog of recorded data: Vertol VR-7 airfoil | 30 |
| 24 Catalog of recorded data: NLR-1 airfoil | 32 |
| 25 Catalog of recorded data: NLR-7301 airfoil | 34 |

SYMBOLS

| | |
|----------|---|
| C | chord, m |
| CM | moment coefficient |
| CN | normal force coefficient |
| FR | flow reversal |
| HF | hot-film |
| HW | hot-wire |
| k | reduced frequency |
| LS | lift stall |
| M | free-stream Mach number |
| MS | moment stall |
| NFR | no flow reversal detected |
| R | reattachment |
| T1 | transition from turbulent to laminar flow |
| T2 | transition from laminar to turbulent flow |
| t | time, sec |
| u | local velocity, m/sec |
| x | distance along the chord, m |
| α | angle of incidence, deg |
| ω | rotational frequency, rad/sec |

AN EXPERIMENTAL STUDY OF DYNAMIC STALL ON ADVANCED AIRFOIL SECTIONS

VOLUME 3. HOT-WIRE AND HOT-FILM MEASUREMENTS

L. W. Carr, W. J. McCroskey, K. W. McAlister, and S. L. Pucci

U.S. Army Aeromechanics Laboratory (AVRADCOM), Ames Research Center

and

O. Lambert

Service Technique des Constructions Aeronautiques, Paris, France

SUMMARY

Detailed unsteady boundary-layer measurements are presented for eight airfoils oscillated in pitch through the dynamic-stall regime. The present report (the third of three volumes) describes the techniques developed for analysis and evaluation of the hot-film and hot-wire signals, offers some interpretation of the results, and tabulates all the cases in which flow reversal has been recorded.

INTRODUCTION

The study of dynamic stall of oscillating airfoils has demonstrated the need for obtaining detailed boundary-layer data during the stall process. Results from the present experiment show that boundary-layer characteristics can be significantly altered by airfoil shape, and that the boundary-layer behavior is sensitive to many parameters associated with the airfoil motion. These conclusions are based on analysis of signals from hot-wire and hot-film probes mounted near or at the surface of the various airfoils. However, evaluation of hot-wire data is very subjective, and presents a formidable analytical task. The present report describes the techniques developed for analysis and evaluation of the hot-film and hot-wire signals, offers some interpretations of the results, and tabulates all the cases in which flow-reversal data have been recorded. An overview of the experiment has been presented in reference 1; a detailed summary of this test and the experimental conditions that were studied is presented in volume 1 of the present report; details of the pressure distribution results, along with lift and moment data are presented in volume 2. The present report presents the corresponding details of the viscous flow measurements that were obtained.

DESCRIPTION OF EXPERIMENTAL PROCEDURES

The experiment was designed to allow accurate testing of various airfoils under virtually identical operating conditions. Therefore each airfoil profile was machined into a shell which could be attached to the metal spar that contained all the instrumentation. After each airfoil profile was tested, the instrumentation was removed from the shell; it then remained with the spar, ready for installation of the next shell. In this way, the various profiles could be tested using identical

instrumentation and oscillation mechanisms; details of this system are presented in reference 1; figure 1 is a diagram of the spar with a shell installed. Instantaneous single-surface pressure measurements were obtained for a wide range of test conditions. Hot-wire, hot-film measurements, or both, were made near the airfoil surface to determine the flow-reversal characteristics for each test condition. Three different types of hot-wire anemometer sensors were used during the oscillating airfoil test: hot-film surface skin-friction gages, dual hot-wire probes, and triple-wire flow-reversal sensors. The most common configurations had either six hot-films along the airfoil upper surface, or one hot-film at the leading edge ($x/C = 0.025$) and five hot-wires distributed along the upper surface. The data were recorded on 32-channel analog tape, with a timing code that allowed comparison of hot-wire data and the pressure data, which were recorded separately for each test condition.

DATA ANALYSIS AND INTERPRETATION

Skin-Friction Gage

The skin-friction gage that was used during a major portion of the test program consisted of an alumina-coated platinum surface element epoxied into a metal sleeve (see fig. 2). This sensor, which was very resistant to damage, was used for much of the oscillating airfoil test program. However, the characteristics of this probe design must be taken into account when analyzing the output signals.

The output from the hot-film probe is related to the shear stress; when flow reversal occurs, the instantaneous value of shear stress passes through zero, and there is a local minimum in the resultant signal. Unfortunately, a significant part of the energy supplied to the probe element is transmitted from the element to the substrate of the gage. This heat transfer results in a relatively high dc-offset in the output voltage of the probe. In addition, this heat transfer causes the minimum value of the hot-film signal to decrease slowly with time, even when the flow is fully separated (with a nominal shear-stress value = 0). These effects can make the interpretation of the signal somewhat difficult.

Figure 3 presents an example of the output from skin-friction gages mounted near the leading edge of the Ames A-01 airfoil during oscillation. At the marker "T1," the flow has passed through transition from turbulent to laminar flow, with a resultant reduction in shear stress and decrease in fluctuation intensity. The flow remains laminar during the low-angle portion of the cycle; as the angle increases, transition to turbulent flow occurs (at "T2"), and the skin-friction gage shows a corresponding increase in signal magnitude, as well as an increase in fluctuation amplitude. The next major event, marked by "FR," is the occurrence of flow reversal; this results in a drop in the magnitude of the shear stress. Note that the signal does not remain constant, even though the airfoil flow has separated; this continuing decrease is associated with the heat-transfer effects outlined earlier. Finally, marker "R" indicates the point when flow reattaches to the airfoil (during the down-stroke), beginning the oscillation cycle once more.

Unfortunately, the relatively crisp delineation of flow conditions that appears in figure 3 is not always present. Figure 4 shows an example of a less clear case of leading-edge flow: here, the development of flow reversal is relatively slow, and the decreasing of the signal to its minimum is difficult to separate from the decreasing of the minimum itself. The estimated flow-reversal points are marked by "FR."

Hot-Wire Probe

Hot-wire anemometer measurements were performed using a dual-wire probe (see fig. 5); this dual-wire approach was chosen to reduce the chance of interruption of the test as a result of wire breakage; since both wires were being recorded, the loss of either wire would not mean the loss of flow-reversal information at that x-station. The output signal from a hot-wire probe is a nonlinear function of the local velocity; therefore, the signals were linearized and scaled such that the resultant signal was approximately proportional to the associated velocity. Figure 6 shows a representative example of hot-wire data for flow near the leading edge of the FX-098 airfoil.

As the angle of attack increases, transition to turbulent flow occurs at $x/C = 0.025$; this is observed at "T2" in figure 6 for hot-wire probe HW1. Note that there is no dramatic change in the output signal magnitude. Transition on airfoils occurs at low angles of attack, for conditions where the boundary layer is thin. In these conditions, the hot-wire probe is often near or at the edge of the boundary layer. Therefore, the change of the velocity profile during transition has little or no effect on the value of U ; transition will mainly be marked by changes in the fluctuation level. The next major flow phenomenon is marked by "FR"; at this point the flow has separated from the airfoil, causing an abrupt decrease in the local velocity. Note that the hot-wire signal changes abruptly to zero, and then continues at a well-defined constant value (compare with the hot-film output of fig. 3). Later, reattachment occurs (at "R"); as the minimum angle is approached, the flow becomes laminar again, and the cycle repeats.

As was noted for the hot-film, the hot-wire results are not always clearly delineated. Figure 7 shows a hot-wire signal measured near the trailing edge of the VR-7 airfoil which was difficult to evaluate. The turbulence level in this signal is very high, and is masking the development of the periodic component of the signal. Because this turbulent component is superimposed on the periodic part of the signal, the instantaneous value of the signal reaches zero long before and after flow reversal of the ensemble-averaged flow (marked as "FR" in the figure) would have occurred. Therefore, the error band for signals measured near the trailing edge is significantly larger than those associated with leading-edge, or midchord locations.

Reverse-Flow Sensors

A specially designed hot-wire probe was developed for evaluation of the flow reversal on the VR-7 airfoil. This airfoil has trailing-edge flow reversal during almost all unsteady flow conditions, and a better method was needed for determining the reversal point under these conditions. The probe is described in detail in reference 2; operation is based on the use of a highly heated center wire, with two additional wires, one upstream and one downstream of this heater, operated at low overheat ratio. These additional wires detect the heated wake of the center wire, and a comparison circuit is used to determine the instantaneous flow direction. This probe system can detect both the magnitude and the direction of the local flow, and is especially effective in regions of high-turbulence, low-velocity flow. Examples of the output from this probe are presented in figure 8; a diagram of the probe is presented in figure 9.

Averaging Techniques

Ensemble-averaging is often used to extract determinate signals from unsteady turbulent flow data, and this approach was applied to the present hot-wire data. Figure 10 presents the results of an ensemble-average of 100 cycles of the hot-wire signals on the VR-7 airfoil. It is evident in this figure that cyclic averaging smears the flow-reversal signal (to the point where no approach to zero voltage is observable in the averaged signal). In contrast, note the data for the last cycle digitized (shown as dotted in fig. 10). In this case, there are several instances of zero velocity; there are also indications of vortex motion on the airfoil (in the 40, 60, and 80 percent x/C wire outputs), which cannot be observed in the averaged data. There were small but significant variations in the angle at which flow reversal occurred between one cycle and the next; therefore, averages based on mechanical timing marks were not always able to capture the flow phenomena. In fact, this variation was sufficient in the present case to completely obscure the flow-reversal point in the data (in order to properly correlate these data, a true conditional ensemble-averaging technique would be needed, possibly triggered by a change in the character of the leading-edge pressure). Therefore, although some of the hot-wire and hot-film data were digitized and cyclically averaged, the analysis presented in this report has been based on visual evaluation of the analog signals for each of several cycles, after which the values of ωt associated with flow reversal for a given sensor were averaged.

Example of Signal Analysis

Figure 11 shows an example of a set of hot-wire and hot-film analog signals obtained during one period of oscillation. The first three signals are the angle of attack, the lift coefficient, and the moment coefficient, showing the lift stall (LS) and the moment stall (MS). The next six signals come from anemometer sensors: one hot-film near the leading edge (HF1), and five hot-wire probes (HW1 to HW6). The markers on these signals refer to the various events that have an effect on the hot-wire and hot-film readings: FR - initiation of reversed flow; R - reattachment of flow; T1 - transition from turbulent to laminar flow; T2 - transition from laminar to turbulent flow (as determined from hot-film signals).

RESULTS

Results similar to these have been analyzed for all eight airfoils. In particular, the phase angle ωt , at which flow reversal first appears at the x/C location of each hot-wire or hot-film probe, has been documented for a range of Mach numbers, frequencies, and stall severity for each airfoil. These phase angles, determined by the techniques outlined earlier, have been recorded in degrees measured through the oscillation cycle, referenced to the mean angle, for $d\alpha/dt > 0$. Table 1 presents a summary of the analyzed flow-reversal data. The Mach number studies were performed for $\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.1$, and cover Mach number conditions that range from incompressible values ($M_\infty = 0.035$) to ones that include small regions of supersonic flow near the leading edge ($M_\infty = 0.30$). The "light-stall" frequency studies present data for a range of frequencies at $M = 0.30$, where the amplitude and mean angle have been chosen to cause a slight overshoot of the static stall angle associated with each airfoil during the oscillatory motion. The "deep-stall" study presents data for a range of frequencies at $M_\infty = 0.30$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ (deep stall has been defined in ref. 1 as a condition in which a fully developed vortex is formed during

the oscillation cycle). The experimental data in deep stall were less amenable to analysis — the results were more subjective and in some cases inconclusive. Therefore, the results for only three airfoils are reported.

The results of these surveys are presented graphically in figures 12 to 31. Figures 12 to 19 present Mach number effects for deep-stall conditions; figures 20 to 27 present frequency effects for light-stall conditions; and figures 28 to 31 present frequency effects for deep-stall conditions. These data are also presented in tabular form in tables 2 to 9. The error bounds for these surveys are presented in tables 10 to 16. Finally, a catalog of all the hot-film and hot-wire data that were recorded is presented in tables 17 to 25, tabulated according to the corresponding pressure data (stored in digital form, as explained in vols. 1 and 2).

REFERENCES

1. McCroskey, W. J.; McAlister, K. W.; Carr, L. W.; Pucci, S. L.; Lambert, O.; and Indergand, R. F.: "Dynamic Stall on Advanced Airfoil Sections," J. of the American Helicopter Society, July 1981.
2. Carr, L. W.; and McCroskey, W. J.: "A Directionally Sensitive Hot-Wire Probe for Detection of Flow Reversal in Highly Unsteady Flows," in International Congress on Instrumentation in Aerospace Facilities 1979 Record, Sept. 1979, pp. 154-162.

TABLE 1.- SUMMARY OF ANALYZED FLOW-REVERSAL DATA

| Airfoil | Mach No. ^a | Light stall ^c | Deep stall ^b |
|------------|-----------------------|--------------------------|---|
| NACA 0012. | Film ^d | Film ^d | Comb. ^e Wire ^g |
| A-01 | Film ^d | Film ^d | |
| FX-098 | Wire ^g | Comb. ^e | |
| SC-1095 | Film ^d | Film ^d | Comb. ^f |
| HH-02 | Film ^d | Comb. ^e | |
| VR-7 | Comb. ^e | Comb. ^e | |
| NLR-1 | Film ^d | Film ^d | |
| NLR-7301 | Film ^d | Film ^d | |

^aMach number sweep $\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.1$.

^bFrequency sweep, $\alpha = 15^\circ + 10^\circ \sin \omega t$, $M = 0.295$.

^cFrequency sweep, $\alpha = \alpha_0 + \alpha_1 \sin \omega t$, $M = 0.29$.

^dHot-film shear-stress gage.

^eHot film at $x/c = 0.025$; hot wire at all other locations.

^fHot wire at 0.025, 0.10, 0.25; reverse-flow sensors at $x/c = 0.4, 0.6, 0.8$

^gHot-wire velocity probe.

TABLE 2.- PHASE ANGLE OF FLOW REVERSAL: NACA 0012 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|---|-------|-------|-------|-------|-------|-------|------------|
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.1$ | | | | | | | |
| 0.036 | 10.0 | 0.0 | 1.0 | 3.0 | 6.0 | 12.5 | 8013 |
| .076 | 50.0 | 46.5 | 40.0 | 35.5 | 23.0 | 15.0 | 8115 |
| .110 | 59.5 | 54.5 | 44.5 | 40.0 | 35.5 | 19.5 | 2320 |
| .145 | 67.0 | 61.5 | 50.5 | 50.5 | 47.0 | 35.0 | 2314 |
| .185 | 60.5 | 53.0 | 45.0 | 41.5 | 36.5 | 30.0 | 2310 |
| .220 | 43.5 | 39.0 | 38.0 | 36.5 | 35.5 | 27.5 | 2208 |
| .250 | 21.5 | 24.5 | 26.0 | 29.0 | 29.5 | 33.5 | 2204 |
| .270 | 14.5 | 16.5 | 18.0 | 21.0 | 28.0 | 28.5 | 2202 |
| .280 | 10.5 | 15.0 | 21.0 | 21.5 | 23.0 | 24.0 | 2200 |
| .290 | 8.0 | 13.0 | 16.0 | 20.5 | 24.0 | 20.5 | 2103 |
| .295 | 8.5 | 10.5 | 13.5 | 16.5 | 22.0 | 20.5 | 2101 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 12^\circ + 5^\circ \sin \omega t$, $M = 0.295$ | | | | | | | |
| 0.025 | NFR | 55.5 | 48.0 | 37.0 | 32.5 | 26.5 | 7201 |
| .050 | NFR | 32.5 | 37.0 | 38.0 | 33.0 | 31.0 | 7204 |
| .100 | NFR | 34.0 | 42.5 | 45.0 | 47.5 | 41.0 | 7206 |
| .200 | 35.5 | 44.0 | 54.0 | 59.0 | 64.0 | 71.0 | 7208 |

**ORIGINAL PAGE IS
OF POOR QUALITY**

TABLE 3.- PHASE ANGLE OF FLOW REVERSAL: Ames A-01 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|---|-----------------------------------|-------|-------|-------|-------|-------|------------|
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 15^\circ + 10^\circ \sin \omega t, k = 0.1$ | | | | | | | |
| 0.076 | 48.5 | 48.5 | 32.5 | 26.5 | 25.5 | 22.5 | 24400 |
| .110 | 56.5 | 47.5 | 35.5 | 33.5 | 37.5 | 43.5 | 24316 |
| .185 | 56.5 | 53.0 | 31.5 | 34.0 | 38.0 | 44.5 | 24219 |
| .220 | 53.5 | 46.5 | 32.5 | 33.0 | 39.0 | 28.5 | 24210 |
| .250 | 29.5 | 29.0 | 26.0 | 29.5 | 32.0 | 33.5 | 24202 |
| .280 | 18.0 | 19.5 | 19.5 | 23.0 | 27.0 | 31.5 | 24118 |
| .295 | 12.0 | 16.0 | 17.5 | 19.5 | 23.0 | 28.5 | 24108 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 11^\circ + 5^\circ \sin \omega t, M = 0.295$ | | | | | | | |
| 0.010 | NFR | 63.5 | 59.5 | 59.5 | 59.0 | 55.5 | 30202 |
| .050 | NFR | 96.0 | 72.0 | 68.5 | 65.5 | 56.5 | 25215 |
| .010 | Data too irregular to be analyzed | | | | | | 25217 |
| $\alpha = 15^\circ + 10^\circ \sin \omega t, M = 0.295$ | | | | | | | |
| 0.010 | NFR | 12.0 | 6.5 | 5.0 | 5.0 | 2.0 | 30021 |
| .025 | 12.5 | 15.5 | 11.5 | 11.0 | 11.0 | 11.0 | 31016 |
| .05 | 12.0 | 16.0 | 12.0 | 14.5 | 18.5 | 24.5 | 31018 |
| .100 | 14.5 | 17.5 | 17.5 | 19.0 | 27.5 | 31.0 | 31019 |
| .150 | 23.0 | 28.5 | 23.5 | 28.0 | 33.5 | 38.5 | 31020 |

**ORIGINAL PAGE IS
OF POOR QUALITY**

TABLE 4.- PHASE ANGLE OF FLOW REVERSAL: Wortmann FX-098 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|---|-------|-------|-------|-------|-------|-------|------------|
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 15^\circ + 10^\circ \sin \omega t, k = 0.1$ | | | | | | | |
| 0.036 | 2.5 | -1.2 | -3.6 | -2.0 | -4.6 | -8.6 | 16022 |
| .076 | 36.5 | 34.5 | 27.0 | 18.5 | 14.5 | 4.5 | 16106 |
| .110 | 43.0 | 39.5 | 32.5 | 24.5 | 16.5 | 10.5 | 16115 |
| .185 | 37.0 | 37.0 | 36.5 | 33.5 | 31.0 | 24.0 | 16201 |
| .220 | 22.5 | 24.5 | 25.0 | 26.5 | 24.0 | 21.5 | 16301 |
| .250 | 14.5 | 15.5 | 18.0 | 18.0 | 17.5 | 21.5 | 16309 |
| .280 | 9.0 | 12.0 | 18.0 | 20.0 | 17.5 | 15.5 | 22209 |
| .295 | 6.5 | 12.5 | 15.5 | 16.5 | 18.5 | 21.0 | 22202 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.25 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 10^\circ + 5^\circ \sin \omega t, M = 0.295$ | | | | | | | |
| 0.010 | NFR | NFR | 67.0 | 67.0 | 66.5 | 63.0 | 21201 |
| .025 | NFR | NFR | 95.0 | 93.5 | 82.0 | 49.0 | 22223 |
| .050 | NFR | NFR | 69.0 | 66.0 | 61.5 | 57.0 | 22300 |
| .100 | NFR | 72.0 | 77.5 | 75.5 | 70.0 | 66.0 | 22301 |
| .150 | 68.0 | 76.0 | 82.0 | 76.0 | 81.0 | 85.0 | 22302 |
| .200 | 64.0 | 69.5 | 79.0 | 68.5 | 75.0 | 83.0 | 22303 |
| $\alpha = 15^\circ + 10^\circ \sin \omega t, M = 0.295$ | | | | | | | |
| 0.010 | -99.9 | 37.5 | 4.5 | 2.5 | 2.5 | 0.0 | 21102 |
| .025 | 0.0 | 3.5 | 3.5 | 3.5 | 3.5 | 5.5 | 17118 |
| .050 | 0.5 | 1.5 | 4.5 | 6.5 | 8.0 | 9.5 | 17123 |
| .100 | 10.0 | 12.5 | 14.5 | 15.0 | 19.0 | 20.5 | 17201 |
| $\alpha = 15^\circ + 10^\circ \sin \omega t, M = 0.185$ | | | | | | | |
| 0.050 | 14.0 | 15.5 | 17.5 | 16.0 | 10.0 | 6.5 | 17102 |
| .100 | 20.5 | 21.5 | 25.0 | 24.0 | 21.0 | 19.0 | 17108 |
| .150 | 28.0 | 30.0 | 32.0 | 32.0 | 33.5 | 26.5 | 17110 |

TABLE 5.- PHASE ANGLE OF FLOW REVERSAL: Sikorsky SC-1 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|--|-------|-------|-------|-------|-------|-------|------------|
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 15^\circ + 10^\circ \sin \omega t, k = 0.1$ | | | | | | | |
| 0.076 | 33.5 | 30.5 | 24.5 | 21.0 | 15.5 | 23.5 | 33023 |
| .110 | 43.5 | 41.0 | 28.0 | 28.0 | 36.5 | 42.5 | 33107 |
| .185 | 42.0 | 38.0 | 33.0 | 35.0 | 36.5 | 48.5 | 33111 |
| .220 | 32.0 | 28.5 | 26.5 | 24.5 | 28.5 | 35.5 | 33206 |
| .250 | 22.0 | 18.5 | 22.5 | 26.0 | 29.5 | 34.5 | 33208 |
| .280 | 15.0 | 14.5 | 18.5 | 20.5 | 23.5 | 27.5 | 33216 |
| .295 | 9.0 | 12.0 | 15.0 | 18.0 | 22.5 | 16.5 | 33303 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 11^\circ + 5^\circ \sin \omega t, M = 0.295$ | | | | | | | |
| 0.050 | -99.9 | 70.0 | 61.0 | 52.0 | 65.0 | 67.5 | 37220 |
| .100 | 66.0 | 62.5 | 61.5 | 63.5 | 65.5 | 67.0 | 37222 |

TABLE 6.- PHASE ANGLE OF FLOW REVERSAL: Hughes HH-02 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|--|-------|-------|-------|-------|-------|-------|------------|
| | 0.030 | 0.120 | 0.250 | 0.380 | 0.560 | 0.750 | |
| $\alpha = 15^\circ + 10^\circ \sin \omega t, k = 0.1$ | | | | | | | |
| 0.076 | 40.0 | 40.0 | 32.5 | 28.0 | 17.5 | 11.5 | 42112 |
| .110 | 48.5 | 45.0 | 40.5 | 36.5 | 30.5 | 13.5 | 42322 |
| .185 | 52.5 | 42.0 | 40.0 | 38.5 | 37.0 | 32.4 | 42303 |
| .220 | 25.0 | 25.0 | 28.0 | 31.5 | 36.0 | 15.5 | 42310 |
| .250 | 15.0 | 16.0 | 17.0 | 19.5 | 24.5 | 18.0 | 42314 |
| .280 | 7.0 | 9.0 | 11.5 | 13.0 | 14.5 | 5.8 | 42319 |
| .295 | 5.0 | 9.5 | 15.1 | 18.5 | 13.0 | 13.0 | 42211 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 10^\circ + 5^\circ \sin \omega t, M = 0.295$ | | | | | | | |
| 0.010 | NFR | 72.0 | 68.5 | 59.0 | 47.5 | 20.5 | 44020 |
| .025 | NFR | 78.5 | 74.5 | 60.0 | 49.0 | 33.0 | 44022 |
| .050 | 53.5 | 60.0 | 64.5 | 62.5 | 57.0 | 36.5 | 44100 |
| .100 | 58.5 | 67.0 | 78.0 | 79.0 | 84.0 | 50.0 | 44105 |
| .150 | 56.0 | 67.0 | 80.0 | 83.5 | 94.0 | 54.0 | 44107 |
| .200 | 57.5 | 67.0 | 79.0 | 86.0 | 94.0 | 58.0 | 44113 |

TABLE 7.- PHASE ANGLE OF FLOW REVERSAL: Vertol VR-7 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|---|-------|-------|-------|-------|-------|-------|------------|
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 15^\circ + 10^\circ \sin \omega t, k = 0.1$ | | | | | | | |
| 0.076 | 48.0 | 46.0 | 37.0 | 30.0 | 10.5 | -4.0 | 47200 |
| .110 | 51.5 | 49.0 | 44.0 | 32.5 | 15.0 | -6.0 | 47207 |
| .185 | 54.0 | 49.5 | 45.5 | 37.8 | 25.0 | 3.5 | 47214 |
| .220 | 38.0 | 40.5 | 39.5 | 36.0 | 25.0 | 4.5 | 47218 |
| .250 | 26.0 | 26.5 | 29.0 | 29.5 | 25.5 | 7.0 | 47302 |
| .280 | 24.5 | 25.5 | 30.0 | 33.0 | 23.5 | 7.0 | 47306 |
| .295 | 16.5 | 19.0 | 26.5 | 26.0 | 19.0 | 2.0 | 45100 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.025 | 0.010 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 15^\circ + 5^\circ \sin \omega t, M = 0.295$ | | | | | | | |
| 0.100 | NFR | NFR | -3.0 | -11.0 | -14.0 | -63.0 | 45204 |
| .025 | NFR | NFR | 15.0 | 8.0 | -11.0 | -39.0 | 45206 |
| .050 | NFR | 31.0 | 26.5 | 23.0 | 2.5 | -35.0 | 45208 |
| .100 | NFR | 36.0 | 36.0 | 30.0 | 17.5 | -23.0 | 45210 |
| .150 | 41.5 | 44.5 | 49.5 | 41.5 | 39.5 | 2.0 | 45212 |
| .200 | 27.5 | 32.5 | 48.0 | 44.0 | 30.0 | 9.5 | 45214 |
| $\alpha = 15^\circ + 10^\circ \sin \omega t, M = 0.295$ | | | | | | | |
| 0.025 | NFR | | 14.5 | 18.0 | 6.5 | -4.5 | 50021 |
| .050 | 17.5 | | 18.5 | 20.0 | 14.0 | 0.0 | 50019 |
| .100 | 22.0 | | 28.0 | 30.5 | 27.0 | 8.0 | 50017 |
| .150 | 26.0 | | 37.0 | 43.0 | 29.0 | 9.5 | 50015 |

ORIGINAL PAGE 13
OF POOR QUALITY

TABLE 8.- PHASE ANGLE OF FLOW REVERSAL: NLR-1 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|--|-------|-------|-------|-------|-------|-------|------------|
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 15^\circ + 10^\circ \sin \omega t, k = 0.1$ | | | | | | | |
| 0.076 | 17.0 | 17.5 | 18.0 | 21.5 | 25.5 | 32.5 | 62021 |
| .110 | 29.0 | 26.0 | 23.0 | 26.0 | 30.0 | 36.0 | 62105 |
| .185 | 36.0 | 32.0 | 26.0 | 28.5 | 33.0 | 38.0 | 62113 |
| .200 | 30.5 | 30.5 | 27.0 | 33.5 | 41.0 | 41.0 | 62115 |
| .220 | 20.5 | 17.5 | 18.5 | 21.0 | 21.5 | 29.5 | 62209 |
| .250 | 9.5 | 12.5 | 15.5 | 21.0 | 24.0 | 24.5 | 62211 |
| .280 | 1.5 | 11.0 | 14.5 | 18.0 | 21.5 | 27.0 | 62218 |
| .295 | 0.0 | 6.0 | 9.5 | 12.5 | 17.5 | 24.0 | 62308 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 10^\circ + 5^\circ \sin \omega t, M = 0.295$ | | | | | | | |
| 0.025 | NFR | 43.5 | 44.0 | 42.0 | 36.5 | 35.5 | 63109 |
| .100 | 45.0 | 50.0 | 47.0 | 49.0 | 55.0 | 59.0 | 63113 |
| .200 | 52.0 | 55.0 | 54.5 | 55.0 | 61.0 | 66.5 | 63115 |

TABLE 9.- PHASE ANGLE OF FLOW REVERSAL: NLR-7301 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|--|-------|-------|-------|-------|-------|-------|------------|
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 15^\circ + 10^\circ \sin \omega t, k = 0.1$ | | | | | | | |
| 0.110 | 84.0 | 78.5 | 75.0 | 66.5 | 56.0 | 24.0 | 62105 |
| .185 | 98.5 | 93.5 | 82.5 | 76.0 | 50.5 | 35.0 | 62113 |
| .250 | 69.5 | 58.5 | 55.0 | 52.5 | 48.0 | 38.5 | 62211 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| $\alpha = 15^\circ + 5^\circ \sin \omega t, M = 0.295$ | | | | | | | |
| 0.010 | NFR | 56.5 | 54.5 | 51.0 | 48.5 | 40.5 | 68020 |
| .025 | NFR | 64.0 | 57.5 | 53.5 | 48.0 | 16.0 | 68101 |
| .050 | NFR | 68.5 | 60.0 | 56.5 | 43.5 | 2.0 | 68103 |
| .100 | NFR | 34.0 | 43.0 | 44.5 | 43.0 | 11.0 | 68105 |
| .150 | NFR | 37.5 | 46.0 | 51.0 | 61.0 | 24.0 | 68110 |
| .200 | NFR | 35.0 | 53.0 | 64.5 | 44.0 | 23.0 | 68112 |

TABLE 10.- ERROR-BOUND FOR FLOW-REVERSAL MEASUREMENTS (deg):
NACA 0012 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|---|-------|-------|-------|-------|-------|-------|------------|
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| Corresponds to table 2: $\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.1$ | | | | | | | |
| 0.035 | 4.0 | 0.0 | 1.5 | 1.0 | 1.5 | 2.0 | 8103 |
| .073 | 2.0 | 0.0 | 1.5 | 2.5 | 5.0 | 3.0 | 8115 |
| .110 | 1.5 | 0.5 | 0.5 | 1.0 | 3.0 | 3.0 | 2320 |
| .145 | 5.0 | 2.5 | 4.0 | 3.5 | 3.5 | 3.5 | 2314 |
| .185 | 0.5 | 2.0 | 1.0 | 1.0 | 3.5 | 2.0 | 8221 |
| .185 | 2.5 | 3.0 | 2.5 | 1.5 | 4.0 | 9.0 | 2310 |
| .220 | 3.0 | 1.0 | 0.5 | 2.5 | 2.5 | 3.0 | 2208 |
| .250 | 0.0 | 0.0 | 1.5 | 2.0 | 0.5 | 1.5 | 2204 |
| .270 | 2.0 | 2.0 | 2.0 | 2.5 | 1.5 | 0.0 | 2202 |
| .280 | 2.0 | 2.0 | 1.0 | 2.0 | 2.0 | 3.0 | 2200 |
| .290 | 0.5 | 2.5 | 1.5 | 2.5 | 1.0 | 1.5 | 2103 |
| .295 | 0.5 | 1.5 | 1.5 | 0.0 | 0.0 | 2.5 | 2101 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| Corresponds to table 2: $\alpha = 12^\circ + 5^\circ \sin \omega t$, $M = 0.295$ | | | | | | | |
| 0.025 | NFR | 5.0 | 4.0 | 2.0 | 2.0 | 1.5 | 7201 |
| .050 | NFR | 0.0 | 2.0 | 5.0 | 2.0 | 2.0 | 7204 |
| .100 | NFR | 2.0 | 2.0 | 2.5 | 4.0 | 4.6 | 7206 |
| .200 | 5.0 | 1.0 | 3.5 | 5.0 | 2.0 | 1.5 | 7208 |

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 11.- ERROR-BOUND FOR FLOW-REVERSAL MEASUREMENTS (deg):
Ames A-01 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|--|-----------------------------------|-------|-------|-------|-------|-------|---------------|
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| Corresponds to table 3: $\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.1$ | | | | | | | |
| 0.076 | 1.5 | 1.5 | 6.0 | 3.0 | 0.5 | 6.0 | 24400 |
| .110 | 1.0 | 0.5 | 2.0 | 2.0 | 2.0 | 3.0 | 24316 |
| .185 | 1.5 | 2.5 | 5.0 | 4.0 | 1.2 | 3.0 | 24219 |
| .220 | 2.0 | 3.0 | 3.0 | 3.5 | 6.5 | 5.0 | 24210 |
| .250 | 1.0 | 1.5 | 1.0 | 0.0 | 4.0 | 2.0 | 24202 |
| .280 | 0.0 | 1.5 | 1.5 | 1.5 | 2.0 | 4.0 | 24118 |
| .295 | 0.5 | 1.5 | 0.5 | 1.5 | 1.5 | 3.0 | 24108 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| Corresponds to table 3: $\alpha = 11^\circ + 5^\circ \sin \omega t$, $M = 0.295$ | | | | | | | |
| 0.010 | NFR | 3.0 | 4.0 | 4.0 | 3.5 | 2.5 | 30202 |
| .050 | NFR | 6.5 | 2.5 | 2.5 | 2.0 | 5.5 | 25215 |
| .100 | Data too irregular to be analyzed | | | | | | 25217 |
| Corresponds to table 3: $\alpha = 15^\circ + 10^\circ \sin \omega t$, $M = 0.295$ | | | | | | | |
| 0.010 | NFR | 3.0 | 2.0 | 3.0 | 1.0 | 1.5 | 30021 |
| .025 | 2.0 | 2.5 | 3.0 | 1.0 | 1.0 | 1.0 | 31016 |
| .050 | 1.0 | 1.0 | 0.5 | 0.0 | 2.5 | 3.5 | 31018 |
| .100 | 1.3 | 1.0 | 1.0 | 1.5 | 4.0 | 2.0 | 31019 |
| .150 | 1.5 | 3.0 | 2.5 | 1.0 | 1.5 | 0.5 | 31020 |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 12.- ERROR-BOUND FOR FLOW-REVERSAL MEASUREMENTS (deg):
Wortmann FX-098 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|--|-------|-------|-------|-------|-------|-------|---------------|
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| Corresponds to table 4: $\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.1$ | | | | | | | |
| 0.036 | 0.5 | 1.5 | 0.0 | 1.5 | 1.0 | 1.0 | 16022 |
| .076 | 2.0 | 3.0 | 1.5 | 1.0 | 1.0 | 2.0 | 16106 |
| .110 | 1.0 | 2.0 | 3.0 | 1.0 | 1.0 | 1.0 | 16115 |
| .185 | 1.0 | 1.0 | 1.0 | 3.0 | 3.0 | 2.0 | 16201 |
| .220 | 1.0 | 1.0 | 1.5 | 2.0 | 2.0 | 3.0 | 16301 |
| .250 | 1.5 | 1.0 | 1.0 | 0.5 | 1.5 | 2.0 | 16309 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| Corresponds to table 4: $\alpha = 10^\circ + 5^\circ \sin \omega t$, $M = 0.295$ | | | | | | | |
| 0.025 | NFR | NFR | 3.0 | 3.5 | 7.0 | 2.5 | 22223 |
| .050 | NFR | NFR | 2.0 | 2.0 | 2.0 | 2.0 | 22300 |
| .100 | NFR | 2.0 | 3.0 | 1.0 | 1.0 | 1.0 | 22301 |
| .150 | 2.5 | 0.5 | 1.0 | 1.5 | 1.0 | 1.0 | 22302 |
| .200 | 3.0 | 1.5 | 0.0 | 0.0 | 1.0 | 3.5 | 22303 |
| Corresponds to table 4: $\alpha = 15^\circ + 10^\circ \sin \omega t$, $M = 0.295$ | | | | | | | |
| 0.010 | NFR | 2.0 | 1.0 | 2.0 | 2.0 | 2.5 | 22102 |
| .025 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 17118 |
| .050 | 1.0 | 1.5 | 1.0 | 0.5 | 1.5 | 0.5 | 17123 |
| .100 | 1.0 | 2.0 | 0.5 | 2.0 | 2.0 | 5.0 | 17201 |
| Corresponds to table 4: $\alpha = 15^\circ + 10^\circ \sin \omega t$, $M = 0.295$ | | | | | | | |
| 0.050 | 14.0 | 15.5 | 17.5 | 16.0 | 10.0 | 6.5 | 17102 |
| .100 | 20.5 | 21.5 | 25.0 | 24.0 | 21.0 | 19.0 | 17108 |
| .150 | 28.0 | 30.0 | 32.0 | 32.0 | 33.5 | 26.5 | 17110 |

**ORIGINAL PAGE IS
OF POOR QUALITY**

TABLE 13.- ERROR-BOUND FOR FLOW-REVERSAL MEASUREMENTS (deg):
Hughes HH-02 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|---|-------|-------|-------|-------|-------|-------|---------------|
| | 0.030 | 0.120 | 0.250 | 0.380 | 0.560 | 0.750 | |
| Corresponds to table 6: $\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.1$ | | | | | | | |
| 0.076 | 1.0 | 1.0 | 3.0 | 1.5 | 3.0 | 4.0 | 42122 |
| .110 | 1.5 | 2.0 | 3.0 | 7.0 | 8.0 | 2.0 | 42322 |
| .185 | 3.0 | 2.0 | 3.0 | 2.0 | 3.0 | 3.0 | 42303 |
| .220 | 1.0 | 1.0 | 1.0 | 1.0 | 1.5 | 4.0 | 42310 |
| .250 | 1.0 | 1.5 | 2.0 | 1.5 | 1.0 | 4.0 | 42314 |
| .280 | 0.0 | 3.0 | 2.0 | 2.0 | 3.0 | 1.0 | 42319 |
| .295 | 1.0 | 1.0 | 7.0 | 1.0 | 1.0 | 1.0 | 42211 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.050 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| Corresponds to table 6: $\alpha = 10^\circ + 5^\circ \sin \omega t$, $M = 0.295$ | | | | | | | |
| 0.010 | NFR | 3.5 | 5.0 | 4.5 | 2.5 | 2.0 | 44020 |
| .025 | NFR | 6.5 | 6.5 | 3.5 | 3.0 | 3.0 | 44022 |
| .050 | 1.0 | 1.5 | 1.5 | 1.5 | 2.0 | 2.0 | 44100 |
| .100 | 2.0 | 0.5 | 2.5 | 2.0 | 2.0 | 2.0 | 44105 |
| .150 | 1.0 | 3.0 | 3.0 | 3.0 | 6.5 | 0.0 | 44107 |
| .200 | 1.0 | 1.0 | 0.0 | 1.0 | 2.0 | 5.5 | 44113 |

**ORIGINAL PAGE IS
OF POOR QUALITY**

TABLE 15.- ERROR-BOUND FOR FLOW-REVERSAL MEASUREMENTS (deg):
NLR-1 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|---|-------|-------|-------|-------|-------|-------|------------|
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| Corresponds to table 8: $\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.1$ | | | | | | | |
| 0.076 | 0.5 | 2.0 | 1.0 | 2.0 | 2.5 | 5.0 | 62021 |
| .110 | 0.5 | 4.0 | 2.0 | 2.5 | 4.0 | 1.0 | 62105 |
| .185 | 1.0 | 3.0 | 3.0 | 1.0 | 3.0 | 2.0 | 62113 |
| .200 | 1.0 | 1.0 | 2.0 | 2.0 | 2.0 | 2.0 | 62115 |
| .220 | 1.0 | 0.0 | 0.5 | 1.0 | 3.0 | 1.0 | 62209 |
| .250 | 0.5 | 1.0 | 1.5 | 1.0 | 1.5 | 1.0 | 62211 |
| .280 | 1.0 | 2.0 | 1.0 | 0.0 | 0.5 | 1.0 | 62218 |
| .295 | 0.0 | 1.0 | 2.0 | 1.0 | 3.0 | 1.5 | 62308 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| Corresponds to table 8: $\alpha = 10^\circ + 5^\circ \sin \omega t$, $M = 0.295$ | | | | | | | |
| 0.025 | NFR | 3.5 | 3.0 | 3.5 | 0.5 | 0.5 | 63109 |
| .100 | 0.0 | 0.5 | 5.0 | 2.0 | 2.5 | 2.0 | 63113 |
| .200 | 2.0 | 0.5 | 5.5 | 2.0 | 0.0 | 2.5 | 63115 |

TABLE 16.- ERROR-BOUND FOR FLOW-REVERSAL MEASUREMENTS (deg):
NLR-7301 AIRFOIL

| Mach No. | x/c | | | | | | Ref. frame |
|---|-------|-------|-------|-------|-------|-------|------------|
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| Corresponds to table 9: $\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.1$ | | | | | | | |
| 0.110 | 4.0 | 4.0 | 10.0 | 13.0 | 11.0 | 6.0 | 67121 |
| .185 | 5.0 | 6.0 | 7.0 | 7.0 | 4.0 | 1.5 | 67221 |
| .250 | 2.5 | 2.5 | 1.0 | 2.0 | 5.0 | 1.1 | 67306 |
| Reduced freq. | x/c | | | | | | Ref. frame |
| | 0.025 | 0.100 | 0.250 | 0.400 | 0.600 | 0.800 | |
| Corresponds to table 9: $\alpha = 15^\circ + 5^\circ \sin \omega t$, $M = 0.295$ | | | | | | | |
| 0.010 | NFR | 1.0 | 1.5 | 0.5 | 1.5 | 2.0 | 68020 |
| .025 | NFR | 2.0 | 3.0 | 2.0 | 1.5 | 4.0 | 68101 |
| .050 | NFR | 3.5 | 3.5 | 5.5 | 0.5 | 2.5 | 68103 |
| .100 | NFR | 1.0 | 1.0 | 2.0 | 0.5 | 5.0 | 68105 |
| .150 | NFR | 1.5 | 1.0 | 4.5 | 2.5 | 5.5 | 68110 |
| .200 | NFR | 0.5 | 4.0 | 4.0 | 11.0 | 9.0 | 68112 |

ORIGINAL FRAMES
OF POOR QUALITY

TABLE 17.- NOTES PERTAINING TO TABLES 18 TO 25

DATA LISTED IN ORDER A FRAMES STORED ON DIGITAL TAPE
B FRAMES ARE ON ANALOG TAPE ONLY

- A FRAME - CATALOG ENTRY FOR PRESSURE DATA
- TRIP - TRIP IS PRESENT - (Y)YES, OR (N)NO
- TYPE - TEST CONDITIONS (S)STEADY, OR (U)UNSTEADY
- AO - MEAN ANGLE OF OSCILLATION, DEGREES
- A1 - AMPLITUDE OF OSCILLATION, DEGREES
- Q - FREE STREAM DYNAMIC PRESSURE, PSI
- M - FREE STREAM MACH NUMBER
- RE - FREE STREAM REYNOLDS NUMBER
- FREQ - DIMENSIONAL FREQUENCY, HERTZ
- B FRAME - CATALOG ENTRY FOR HOT-FILM AND HOT-WIRE DATA

TABLE 18.- CATALOG OF RECORDED DATA: NACA 0012 AIRFOIL

| A | | | | | | | | | | B | | | | | | | | | | | |
|-------|------|------|------|-----|------|------|----------|--------|-------|-------|------|------|------|------|------|------|----------|-------|-------|-------|--|
| FRAME | TRIP | TYPE | AU | A1 | Q | H | RE | K | FREQ | FRAME | TRIP | TYPE | A0 | A1 | Q | H | RE | K | FREQ | FRAME | |
| 4019 | N | ST | -5.0 | 0.0 | .875 | .301 | 3957803. | 0.0000 | 0.00 | 4020 | N | US | 9.0 | 5.0 | .878 | .301 | 3909814. | .1496 | 8.10 | 7102 | |
| 4100 | N | ST | -2.0 | 0.0 | .877 | .301 | 3932537. | 0.0000 | 0.00 | 4101 | N | US | 8.0 | 5.0 | .878 | .301 | 3901884. | .0249 | 1.35 | 7105 | |
| 4102 | N | ST | 0.0 | 0.0 | .877 | .301 | 3923848. | 0.0000 | 0.00 | 4103 | N | US | 9.0 | 5.0 | .878 | .301 | 3920784. | .0250 | 1.35 | | |
| 4109 | N | ST | 2.0 | 0.0 | .877 | .302 | 3910221. | 0.0000 | 0.00 | 4110 | N | US | 8.0 | 5.0 | .878 | .301 | 3903187. | .0997 | 5.40 | | |
| 4111 | N | ST | 4.0 | 0.0 | .885 | .299 | 3931136. | 0.0000 | 0.00 | 4112 | N | US | 8.0 | 5.0 | .877 | .301 | 3894727. | .1992 | 10.80 | | |
| 4119 | N | ST | 8.0 | 0.0 | .877 | .302 | 3898235. | 0.0000 | 0.00 | 4114 | N | US | 10.0 | 5.0 | .877 | .301 | 3879891. | .0252 | 1.37 | | |
| 4119 | N | ST | 8.0 | 0.0 | .877 | .301 | 3500632. | 0.0000 | 0.00 | 4120 | N | US | 10.0 | 5.0 | .877 | .301 | 3877295. | .0994 | 5.40 | | |
| 4123 | N | ST | 12.0 | 0.0 | .877 | .302 | 3876047. | 0.0000 | 0.00 | 4121 | N | US | 11.0 | 5.0 | .877 | .301 | 3869051. | .1987 | 10.80 | | |
| 4201 | N | ST | 13.0 | 0.0 | .877 | .302 | 3870568. | 0.0000 | 0.00 | 4202 | N | US | 11.0 | 5.0 | .878 | .301 | 3891815. | .0249 | 1.35 | | |
| 4203 | N | ST | 13.5 | 0.0 | .879 | .301 | 3867132. | 0.0000 | 0.00 | 4204 | N | US | 11.0 | 5.0 | .878 | .301 | 3875085. | .0497 | 2.70 | | |
| 4209 | N | ST | 14.0 | 0.0 | .877 | .302 | 3861326. | 0.0000 | 0.00 | 4210 | N | US | 11.0 | 5.0 | .877 | .301 | 3865664. | .0993 | 5.40 | | |
| 4211 | N | ST | 14.5 | 0.0 | .868 | .305 | 3822671. | 0.0000 | 0.00 | 4212 | N | US | 11.0 | 5.0 | .877 | .301 | 3860258. | .1488 | 8.10 | | |
| 4213 | N | ST | 15.0 | 0.0 | .877 | .302 | 3843407. | 0.0000 | 0.00 | 4214 | N | US | 11.0 | 5.0 | .878 | .301 | 3852461. | .1983 | 10.80 | | |
| 4215 | N | ST | 15.5 | 0.0 | .784 | .284 | 3628769. | 0.0000 | 0.00 | 4216 | N | US | 12.0 | 5.0 | .878 | .301 | 3878632. | .0249 | 1.35 | | |
| 4217 | N | ST | 16.0 | 0.0 | .688 | .266 | 3398340. | 0.0000 | 0.00 | 4218 | N | US | 12.0 | 5.0 | .877 | .302 | 3853339. | .0991 | 5.40 | | |
| 4219 | N | ST | 17.8 | 0.0 | .717 | .271 | 3462550. | 0.0000 | 0.00 | 4220 | N | US | 12.0 | 5.0 | .877 | .302 | 3845471. | .1981 | 10.80 | | |
| 4301 | N | ST | 20.0 | 0.0 | .700 | .266 | 3448278. | 0.0000 | 0.00 | 4302 | N | US | 8.8 | 5.0 | .877 | .302 | 3864684. | .1488 | 8.10 | | |
| 4401 | N | ST | 13.0 | 0.0 | .877 | .302 | 3795037. | 0.0000 | 0.00 | 4402 | N | US | 8.8 | 5.0 | .877 | .302 | 3659691. | .0992 | 5.40 | | |
| 4403 | N | ST | 11.0 | 0.0 | .877 | .302 | 3783629. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 4404 | N | ST | 8.0 | 0.0 | .877 | .302 | 3780176. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 4405 | N | ST | 5.0 | 0.0 | .877 | .302 | 3781319. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 4410 | N | ST | 2.0 | 0.0 | .877 | .302 | 3781319. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 4411 | N | ST | 2.0 | 0.0 | .877 | .302 | 3783016. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 4412 | N | ST | 0.0 | 0.0 | .877 | .302 | 3781623. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 4418 | N | ST | -2.0 | 0.0 | .877 | .302 | 3778643. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11019 | N | ST | -2.0 | 0.0 | .875 | .301 | 3998937. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11020 | N | ST | -2.0 | 0.0 | .875 | .301 | 3869548. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11101 | N | ST | 2.0 | 0.0 | .875 | .302 | 3978589. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11102 | N | ST | 4.0 | 0.0 | .875 | .301 | 3958541. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11105 | N | ST | 8.1 | 0.0 | .876 | .301 | 3938660. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11110 | N | ST | 10.0 | 0.0 | .875 | .301 | 3936424. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11111 | N | ST | 12.3 | 0.0 | .875 | .301 | 3921945. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11112 | N | ST | 13.4 | 0.0 | .875 | .301 | 3912483. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11118 | N | ST | 13.8 | 0.0 | .875 | .301 | 3904607. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11121 | N | ST | 14.6 | 0.0 | .875 | .302 | 3929975. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11122 | N | ST | 15.0 | 0.0 | .887 | .304 | 3925323. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11200 | N | ST | 15.5 | 0.0 | .811 | .289 | 3745403. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11201 | N | ST | 16.0 | 0.0 | .841 | .295 | 3733699. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11204 | N | ST | 17.9 | 0.0 | .803 | .288 | 3793167. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11205 | N | ST | 20.0 | 0.0 | .764 | .280 | 3725491. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11208 | N | ST | 24.9 | 0.0 | .610 | .249 | 3252565. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11209 | N | ST | 30.0 | 0.0 | .561 | .239 | 3105558. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11210 | N | ST | 25.0 | 0.0 | .619 | .251 | 3254780. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11211 | N | ST | 20.0 | 0.0 | .725 | .273 | 3515071. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11213 | N | ST | 18.0 | 0.0 | .764 | .280 | 3628495. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11215 | N | ST | 15.0 | 0.0 | .875 | .302 | 3866108. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11216 | N | ST | 14.0 | 0.0 | .869 | .301 | 3861556. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11221 | N | ST | 13.1 | 0.0 | .875 | .302 | 3846733. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11222 | N | ST | 11.0 | 0.0 | .875 | .302 | 3884818. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11223 | N | ST | 8.0 | 0.0 | .875 | .302 | 3876254. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11304 | N | ST | 5.0 | 0.0 | .875 | .302 | 3864492. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11305 | N | ST | 2.0 | 0.0 | .875 | .302 | 3886782. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11308 | N | ST | 0.0 | 0.0 | .875 | .301 | 3870607. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 11309 | N | ST | -2.0 | 0.0 | .878 | .301 | 3870953. | 0.0000 | 0.00 | | | | | | | | | | | | |
| 7019 | N | US | 9.0 | 5.0 | .878 | .302 | 3894008. | .0508 | 2.70 | 7020 | N | US | 12.0 | 10.0 | .878 | .301 | 3769502. | .1447 | 6.04 | | |
| 7021 | N | US | 9.0 | 5.0 | .886 | .299 | 3962010. | .1004 | 5.40 | 7022 | N | US | 20.0 | 10.0 | .688 | .265 | 3303441. | .0976 | 5.36 | | |
| 7023 | N | US | 9.0 | 5.0 | .886 | .299 | 3944777. | .2005 | 10.80 | 7100 | N | US | 12.0 | 8.0 | .877 | .303 | 3711352. | .0485 | 8.25 | | |

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 18.- Concluded.

| A | FRAME | TRIP | TYPE | A0 | A1 | Q | H | RE | K | FREQ | B | FRAME |
|-------|-------|------|------|------|------|------|----------|-------|-------|-------|---|-------|
| 10105 | N | US | 12.0 | 8.0 | .878 | .302 | 3694271. | .0968 | 5.36 | 12033 | | |
| 10108 | N | US | 12.0 | 8.0 | .847 | .295 | 3635589. | 1.253 | 6.81 | 12105 | | |
| 10113 | N | US | 15.0 | 5.0 | .876 | .302 | 3896846. | .0998 | 5.53 | 12112 | | |
| 10118 | N | US | 15.0 | 5.0 | .841 | .295 | 3801337. | .0252 | 1.34 | 12121 | | |
| 10120 | N | US | 15.0 | 5.0 | .842 | .294 | 3748526. | 10.20 | 5.36 | 12212 | | |
| 10123 | N | US | 15.0 | 5.0 | .832 | .293 | 3758528. | 20.24 | 8.04 | 12306 | | |
| 10202 | N | US | 10.0 | 5.0 | .877 | .301 | 3658103. | .0098 | 1.54 | 13104 | | |
| 10204 | N | US | 10.0 | 5.0 | .870 | .300 | 3647481. | .0246 | 1.34 | 13108 | | |
| 10207 | N | US | 10.0 | 5.0 | .870 | .300 | 3826614. | .0493 | 2.68 | 13116 | | |
| 10208 | N | US | 10.0 | 5.0 | .870 | .300 | 3884629. | .0740 | 4.02 | 13202 | | |
| 10211 | N | US | 10.0 | 5.0 | .870 | .300 | 3859785. | .0990 | 5.36 | 13104 | | |
| 10212 | N | US | 10.0 | 5.0 | .870 | .300 | 3863353. | 1.886 | 8.04 | 13108 | | |
| 10218 | N | US | 5.0 | 5.0 | .880 | .300 | 3850737. | 1.979 | 10.72 | 13104 | | |
| 10221 | N | US | 5.0 | 5.0 | .878 | .301 | 3933484. | .0098 | 5.36 | 13108 | | |
| 10222 | N | US | 5.0 | 5.0 | .878 | .301 | 3925387. | .0993 | 5.36 | 13104 | | |
| 10303 | N | US | 3.8 | 10.0 | .877 | .301 | 3912114. | 1.983 | 10.72 | 12306 | | |
| 10305 | N | US | 5.0 | 10.0 | .877 | .301 | 3910580. | .0991 | 5.36 | 13104 | | |
| 10309 | N | US | 2.8 | 10.0 | .877 | .301 | 3896361. | .0989 | 5.36 | 13108 | | |
| 12020 | N | US | 20.0 | 10.0 | .882 | .270 | 3490909. | .0010 | .05 | 12033 | | |
| 12102 | N | US | 5.0 | 10.0 | .882 | .302 | 3820000. | .0009 | .05 | 12105 | | |
| 12109 | N | US | 6.0 | 10.0 | .756 | .279 | 3485785. | .0010 | .05 | 12112 | | |
| 12118 | N | US | 20.0 | 10.0 | .676 | .262 | 3246704. | .0010 | .05 | 12121 | | |
| 12203 | N | US | 20.0 | 10.0 | .531 | .231 | 2887477. | .0011 | .05 | 12212 | | |
| 12208 | N | US | 7.0 | 10.0 | .587 | .244 | 3269975. | .0010 | .05 | 12301 | | |
| 12300 | N | US | 20.0 | 10.0 | .421 | .204 | 2706734. | .0011 | .04 | 12306 | | |
| 12305 | N | US | 20.0 | 10.0 | .292 | .169 | 2252844. | .0011 | .03 | 13104 | | |
| 12310 | N | US | 7.0 | 10.0 | .350 | .186 | 2469266. | .0010 | .03 | 13108 | | |
| 13021 | N | US | 7.0 | 10.0 | .120 | .108 | 1502757. | .0017 | .03 | 13116 | | |
| 13107 | N | US | 20.0 | 10.0 | .113 | .105 | 1421201. | .0017 | .03 | 13202 | | |
| 13115 | N | US | 20.0 | 10.0 | .048 | .068 | 918563. | .0027 | .03 | 13213 | | |
| 13120 | N | US | 5.0 | 10.0 | .053 | .072 | 962303. | .0025 | .02 | 13310 | | |
| 13205 | N | US | 5.0 | 10.0 | .014 | .036 | 488772. | .0026 | .02 | 13405 | | |
| 13217 | N | US | 20.0 | 10.0 | .013 | .036 | 485631. | .0026 | .02 | 14019 | | |
| 13222 | N | US | 20.0 | 10.0 | .749 | .276 | 3656957. | .0010 | .05 | 14021 | | |
| 13303 | N | US | 7.0 | 10.0 | .603 | .247 | 3298109. | .0010 | .05 | 14023 | | |
| 13308 | N | US | 7.0 | 10.0 | .461 | .215 | 2884310. | .0010 | .04 | 14104 | | |
| 13310 | N | US | 7.0 | 10.0 | .466 | .216 | 2884723. | .0010 | .04 | 14105 | | |
| 13313 | Y | US | 7.0 | 10.0 | .332 | .181 | 2404990. | .0010 | .03 | 14109 | | |
| 13321 | Y | US | 7.0 | 10.0 | .332 | .181 | 2404954. | .0009 | .05 | 14118 | | |
| 14019 | Y | US | 15.0 | 10.0 | .839 | .294 | 3740954. | .0009 | .05 | 14201 | | |
| 14021 | Y | US | 15.0 | 10.0 | .339 | .183 | 2453890. | .0499 | 1.65 | 14203 | | |
| 14023 | Y | US | 15.0 | 10.0 | .336 | .182 | 2434182. | 1001 | 3.30 | 14209 | | |
| 14104 | Y | US | 15.0 | 10.0 | .338 | .183 | 2448651. | 1504 | 4.95 | 14211 | | |
| 14106 | Y | US | 15.0 | 10.0 | .340 | .184 | 2449389. | .0499 | 1.65 | 14212 | | |
| 14108 | Y | US | 15.0 | 10.0 | .339 | .183 | 2443079. | .0994 | 3.30 | 14213 | | |
| 14117 | Y | US | 15.0 | 10.0 | .837 | .293 | 3843264. | .0257 | 1.35 | 14214 | | |
| 14119 | Y | US | 15.0 | 10.0 | .836 | .293 | 3818432. | .0509 | 2.68 | 14215 | | |
| 14200 | Y | US | 15.0 | 10.0 | .843 | .294 | 3822179. | .0253 | 1.34 | 14216 | | |
| 14202 | Y | US | 15.0 | 10.0 | .839 | .293 | 3792702. | .0506 | 2.68 | 14217 | | |
| 14208 | Y | US | 15.0 | 10.0 | .828 | .291 | 3764396. | .1019 | 5.36 | 14218 | | |
| 14210 | Y | US | 15.0 | 10.0 | .832 | .292 | 3760353. | .1014 | 5.36 | 14219 | | |
| 14218 | N | US | 15.0 | 10.0 | .830 | .292 | 3762798. | .0254 | 1.34 | 14220 | | |
| 14219 | N | US | 15.0 | 10.0 | .824 | .291 | 3735990. | .0509 | 2.68 | 14221 | | |
| 14220 | N | US | 15.0 | 10.0 | .805 | .287 | 3683317. | .1031 | 5.24 | 14222 | | |
| 15218 | N | US | 15.0 | 10.0 | .818 | .290 | 3678973. | .0994 | 5.24 | 14223 | | |
| 10117 | N | US | 15.0 | 5.0 | .843 | .295 | 3802563. | .0504 | 2.68 | 7201 | | |
| 7202 | N | US | 12.0 | 5.0 | .877 | .302 | 3861194. | .0496 | 2.70 | 7222 | | |
| 7222 | N | US | 10.0 | 5.0 | .876 | .298 | 3975490. | .0509 | 2.70 | | | |

TABLE 19.- Concluded.

| A | | B | | K | | M | | Q | | A0 | | A1 | | RE | | FREQ | | FRAME | | |
|-------|------|------|------|------|------|------|----------|-------|-------|-------|----|----|----|----|----|------|----|-------|----|----|
| FRAME | TRIP | TYPE | US | US | US | US | US | US | US | US | US | US | US | US | US | US | US | US | US | US |
| 25102 | N | US | 10.0 | 10.0 | 881 | 302 | 3831527. | .0489 | 2.68 | 25103 | | | | | | | | | | |
| 25104 | N | US | 10.0 | 10.0 | .880 | .302 | 3816708. | .0978 | 5.36 | 25108 | | | | | | | | | | |
| 25109 | N | US | 10.0 | 10.0 | .879 | .302 | 3810775. | .1468 | 8.04 | 25110 | | | | | | | | | | |
| 25117 | N | US | 10.0 | 5.0 | .884 | .303 | 3829075. | .0244 | 1.34 | | | | | | | | | | | |
| 25118 | N | US | 10.0 | 5.0 | .879 | .302 | 3803407. | .0489 | 2.68 | | | | | | | | | | | |
| 25119 | N | US | 10.0 | 5.0 | .883 | .303 | 3805390. | .0975 | 5.36 | | | | | | | | | | | |
| 25121 | N | US | 10.0 | 5.0 | .881 | .302 | 3813088. | .1465 | 8.04 | | | | | | | | | | | |
| 25122 | N | US | 10.0 | 5.0 | .884 | .303 | 3819823. | .1462 | 8.04 | | | | | | | | | | | |
| 25123 | N | US | 10.0 | 5.0 | .885 | .303 | 3816827. | .1947 | 10.72 | | | | | | | | | | | |
| 29023 | Y | US | 15.0 | 10.0 | .820 | .291 | 3697799. | .0248 | 1.34 | 29100 | | | | | | | | | | |
| 29101 | Y | US | 15.0 | 10.0 | .805 | .288 | 3639654. | .0500 | 2.62 | 29102 | | | | | | | | | | |
| 29106 | Y | US | 15.0 | 10.0 | .806 | .288 | 3646183. | .1001 | 5.24 | 29107 | | | | | | | | | | |
| 29115 | Y | US | 15.0 | 10.0 | .340 | .184 | 2418131. | .0494 | 1.65 | 29116 | | | | | | | | | | |
| 29117 | Y | US | 15.0 | 10.0 | .341 | .184 | 2418248. | .0987 | 3.30 | 29118 | | | | | | | | | | |
| 29119 | Y | US | 15.0 | 10.0 | .341 | .184 | 2417060. | .1481 | 4.95 | 29121 | | | | | | | | | | |
| 29205 | N | US | 5.0 | 10.0 | .876 | .301 | 3947215. | .0098 | .53 | 29206 | | | | | | | | | | |
| 29207 | N | US | 5.0 | 10.0 | .877 | .301 | 3918856. | .0496 | 2.68 | 29210 | | | | | | | | | | |
| 29211 | N | US | 5.0 | 10.0 | .877 | .301 | 3902857. | .0991 | 5.36 | 29212 | | | | | | | | | | |
| 29213 | N | US | 5.0 | 10.0 | .879 | .301 | 3896095. | .1483 | 8.04 | 29214 | | | | | | | | | | |
| 29215 | N | US | 5.0 | 10.0 | .879 | .301 | 3891313. | .1481 | 8.04 | | | | | | | | | | | |
| 29223 | N | US | 13.5 | 2.0 | .876 | .301 | 3811877. | .1965 | 10.72 | 29300 | | | | | | | | | | |
| 29304 | N | US | 14.5 | 2.0 | .870 | .300 | 3777473. | .1967 | 10.72 | 29306 | | | | | | | | | | |
| 29309 | N | US | 15.5 | 2.0 | .852 | .296 | 3722411. | .1986 | 10.72 | 29310 | | | | | | | | | | |
| 29317 | N | US | 15.0 | 10.0 | .013 | .035 | 472349. | .1021 | .65 | 29318 | | | | | | | | | | |
| 30019 | N | US | 15.0 | 10.0 | .865 | .298 | 3856941. | .0097 | .52 | 30021 | | | | | | | | | | |
| 30020 | N | US | 15.0 | 10.0 | .864 | .298 | 3828146. | .0096 | .52 | 30021 | | | | | | | | | | |
| 30105 | N | US | 10.0 | 10.0 | .880 | .301 | 3844592. | .0097 | .53 | 30106 | | | | | | | | | | |
| 30110 | N | US | 15.0 | 5.0 | .877 | .301 | 3817844. | .0097 | .53 | 30111 | | | | | | | | | | |
| 30119 | N | US | 10.0 | 5.0 | .874 | .300 | 3819252. | .0097 | .53 | 30120 | | | | | | | | | | |
| 30201 | N | US | 11.0 | 5.0 | .877 | .301 | 3814196. | .0099 | .54 | 30202 | | | | | | | | | | |
| 30206 | N | US | 14.0 | 2.0 | .876 | .301 | 3818960. | .0097 | .53 | 30208 | | | | | | | | | | |
| 30215 | N | US | 7.5 | 10.0 | .338 | .183 | 2415733. | .0099 | .33 | 30216 | | | | | | | | | | |
| 31102 | N | US | 10.0 | 10.0 | .877 | .302 | 3880208. | .0247 | 1.34 | 31103 | | | | | | | | | | |
| 31104 | N | US | 10.0 | 10.0 | .878 | .302 | 3859857. | .0492 | 2.68 | 31105 | | | | | | | | | | |
| 31110 | N | US | 10.0 | 10.0 | .880 | .302 | 3841535. | .1471 | 8.04 | 31111 | | | | | | | | | | |
| 31112 | N | US | 10.0 | 10.0 | .880 | .302 | 3832051. | .1469 | 8.04 | 31111 | | | | | | | | | | |
| 31119 | N | US | 5.0 | 10.0 | .884 | .303 | 3856266. | .0245 | 1.34 | 31120 | | | | | | | | | | |
| 31121 | N | US | 5.0 | 10.0 | .880 | .302 | 3826984. | .0489 | 2.68 | 31122 | | | | | | | | | | |
| 31123 | N | US | 5.0 | 10.0 | .884 | .303 | 3823741. | .0975 | 5.36 | 31200 | | | | | | | | | | |
| 31201 | N | US | 5.0 | 10.0 | .883 | .303 | 3816823. | .1463 | 8.04 | 31202 | | | | | | | | | | |
| 31209 | N | US | 15.0 | 10.0 | .341 | .184 | 2421425. | .0987 | 3.30 | 31210 | | | | | | | | | | |
| 31215 | N | US | 7.5 | 10.0 | .341 | .184 | 2425489. | .0494 | 1.65 | 31216 | | | | | | | | | | |
| 31217 | N | US | 7.5 | 10.0 | .341 | .185 | 2423083. | .1972 | 6.60 | 31218 | | | | | | | | | | |
| 31302 | N | US | 14.5 | 2.0 | .852 | .297 | 3765532. | .1990 | 10.72 | 31304 | | | | | | | | | | |
| 31310 | N | US | 14.5 | 2.0 | .854 | .298 | 3731989. | .1485 | 8.04 | 31312 | | | | | | | | | | |
| 25204 | N | US | 15.0 | 5.0 | .877 | .301 | 3973275. | .0249 | 1.34 | | | | | | | | | | | |
| 25205 | N | US | 15.0 | 5.0 | .878 | .301 | 3952662. | .0497 | 2.68 | | | | | | | | | | | |
| 25208 | N | US | 15.0 | 5.0 | .878 | .301 | 3950602. | .0994 | 5.36 | | | | | | | | | | | |
| 25209 | N | US | 15.0 | 5.0 | .852 | .298 | 3887313. | .1506 | 8.04 | | | | | | | | | | | |
| 25210 | N | US | 15.0 | 5.0 | .852 | .297 | 3865306. | .2013 | 10.72 | | | | | | | | | | | |
| 25214 | N | US | 11.0 | 5.0 | .880 | .302 | 3926436. | .0495 | 2.68 | 25215 | | | | | | | | | | |
| 25216 | N | US | 11.0 | 5.0 | .883 | .302 | 3909711. | .0986 | 5.36 | 25217 | | | | | | | | | | |
| 25301 | N | US | 5.0 | 5.0 | .884 | .302 | 3903998. | .0984 | 5.36 | 25302 | | | | | | | | | | |
| 25303 | N | US | 5.0 | 5.0 | .885 | .303 | 3878688. | .1962 | 10.72 | 25304 | | | | | | | | | | |
| 25311 | N | US | 5.0 | 10.1 | .881 | .302 | 3852707. | .0982 | 5.36 | 25312 | | | | | | | | | | |
| 25319 | N | US | 5.5 | 10.0 | .881 | .302 | 3833693. | .0980 | 5.36 | 25320 | | | | | | | | | | |

TABLE 20.- CATALOG OF RECORDED DATA: Wortmann FX-098 AIRFOIL

| A | | B | | A | | B | | A | | B | | A | | B | | A | | B | |
|-------|------|------|------|-----|-----|-----|---------|--------|------|-------|------|------|------|------|-----|-----|---------|--------|------|
| FRAME | TRIP | TYPE | AO | A1 | Q | M | RE | K | FREQ | FRAME | TRIP | TYPE | AO | A1 | Q | M | RE | K | FREQ |
| 17208 | Y | ST | 0.0 | 0.0 | 877 | 301 | 3975279 | 0.0000 | 0.00 | 19223 | N | ST | 13.0 | 0.0 | 340 | 185 | 2353097 | 0.0000 | 0.00 |
| 17212 | Y | ST | 5.0 | 0.0 | 880 | 301 | 3928557 | 0.0000 | 0.00 | 19300 | N | ST | 11.0 | 0.0 | 341 | 185 | 2354186 | 0.0000 | 0.00 |
| 17220 | Y | ST | 10.0 | 0.0 | 879 | 302 | 3911481 | 0.0000 | 0.00 | 19305 | N | ST | 5.0 | 0.0 | 340 | 185 | 2357348 | 0.0000 | 0.00 |
| 17303 | Y | ST | 12.0 | 0.0 | 847 | 296 | 3802285 | 0.0000 | 0.00 | 19308 | N | ST | 0.0 | 0.0 | 340 | 185 | 2354786 | 0.0000 | 0.00 |
| 17305 | Y | ST | 13.0 | 0.0 | 870 | 300 | 3835772 | 0.0000 | 0.00 | 19314 | N | ST | -5.0 | 0.0 | 614 | 250 | 3151118 | 0.0000 | 0.00 |
| 17310 | Y | ST | 14.0 | 0.0 | 866 | 299 | 3820036 | 0.0000 | 0.00 | 19316 | N | ST | -2.0 | 0.0 | 611 | 250 | 3138172 | 0.0000 | 0.00 |
| 17312 | Y | ST | 15.0 | 0.0 | 866 | 299 | 3805980 | 0.0000 | 0.00 | 19317 | N | ST | 0.0 | 0.0 | 612 | 250 | 3137611 | 0.0000 | 0.00 |
| 17314 | Y | ST | 16.0 | 0.0 | 828 | 292 | 3710084 | 0.0000 | 0.00 | 19401 | N | ST | 2.0 | 0.0 | 616 | 251 | 3300956 | 0.0000 | 0.00 |
| 18019 | Y | ST | 0.0 | 0.0 | 341 | 184 | 2398709 | 0.0000 | 0.00 | 19402 | N | ST | 4.0 | 0.0 | 616 | 251 | 3297074 | 0.0000 | 0.00 |
| 18102 | Y | ST | 5.0 | 0.0 | 343 | 185 | 2400750 | 0.0000 | 0.00 | 19405 | N | ST | 8.0 | 0.0 | 617 | 251 | 3287867 | 0.0000 | 0.00 |
| 18106 | Y | ST | 10.0 | 0.0 | 339 | 184 | 2378846 | 0.0000 | 0.00 | 19406 | N | ST | 10.0 | 0.0 | 614 | 250 | 3275608 | 0.0000 | 0.00 |
| 18108 | Y | ST | 12.0 | 0.0 | 343 | 185 | 2388927 | 0.0000 | 0.00 | 19411 | N | ST | 12.0 | 0.0 | 617 | 251 | 3278455 | 0.0000 | 0.00 |
| 18115 | Y | ST | 13.0 | 0.0 | 346 | 185 | 2394744 | 0.0000 | 0.00 | 19413 | N | ST | 13.0 | 0.0 | 618 | 251 | 3268218 | 0.0000 | 0.00 |
| 18117 | Y | ST | 14.0 | 0.0 | 345 | 185 | 2388872 | 0.0000 | 0.00 | 19415 | N | ST | 13.5 | 0.0 | 620 | 251 | 3264994 | 0.0000 | 0.00 |
| 18119 | Y | ST | 15.0 | 0.0 | 341 | 184 | 2374587 | 0.0000 | 0.00 | 19423 | N | ST | 14.0 | 0.0 | 613 | 250 | 3235583 | 0.0000 | 0.00 |
| 18121 | Y | ST | 16.0 | 0.0 | 340 | 184 | 2368089 | 0.0000 | 0.00 | 19504 | N | ST | 15.0 | 0.0 | 613 | 250 | 3233310 | 0.0000 | 0.00 |
| 18123 | Y | ST | 19.9 | 0.0 | 342 | 184 | 2370588 | 0.0000 | 0.00 | 19506 | N | ST | 16.0 | 0.0 | 613 | 250 | 3228546 | 0.0000 | 0.00 |
| 18206 | Y | ST | 0.0 | 0.0 | 341 | 184 | 2379635 | 0.0000 | 0.00 | 19508 | N | ST | 18.0 | 0.0 | 602 | 248 | 3194789 | 0.0000 | 0.00 |
| 18215 | N | ST | -5.0 | 0.0 | 122 | 110 | 1500031 | 0.0000 | 0.00 | 20019 | N | ST | 25.0 | 0.0 | 610 | 249 | 3162267 | 0.0000 | 0.00 |
| 18217 | N | ST | -2.0 | 0.0 | 123 | 110 | 1502458 | 0.0000 | 0.00 | 20020 | N | ST | 20.0 | 0.0 | 612 | 250 | 3158666 | 0.0000 | 0.00 |
| 18218 | N | ST | 0.0 | 0.0 | 121 | 109 | 1487692 | 0.0000 | 0.00 | 20021 | N | ST | 16.0 | 0.0 | 614 | 250 | 3163174 | 0.0000 | 0.00 |
| 18220 | N | ST | 2.0 | 0.0 | 122 | 110 | 1494149 | 0.0000 | 0.00 | 20022 | N | ST | 14.0 | 0.0 | 614 | 250 | 3163970 | 0.0000 | 0.00 |
| 18304 | N | ST | 4.0 | 0.0 | 121 | 109 | 1486754 | 0.0000 | 0.00 | 20103 | N | ST | 13.0 | 0.0 | 610 | 249 | 3155282 | 0.0000 | 0.00 |
| 18308 | N | ST | 8.0 | 0.0 | 121 | 109 | 1480425 | 0.0000 | 0.00 | 20104 | N | ST | 11.0 | 0.0 | 609 | 249 | 3150506 | 0.0000 | 0.00 |
| 18305 | N | ST | 10.0 | 0.0 | 122 | 110 | 1483466 | 0.0000 | 0.00 | 20109 | N | ST | 5.0 | 0.0 | 613 | 250 | 3157103 | 0.0000 | 0.00 |
| 18307 | N | ST | 12.0 | 0.0 | 122 | 109 | 1476483 | 0.0000 | 0.00 | 20112 | N | ST | 0.0 | 0.0 | 615 | 250 | 3152218 | 0.0000 | 0.00 |
| 18312 | N | ST | 13.0 | 0.0 | 121 | 109 | 1466753 | 0.0000 | 0.00 | 20118 | N | ST | -5.0 | 0.0 | 883 | 304 | 3774892 | 0.0000 | 0.00 |
| 18319 | N | ST | 13.5 | 0.0 | 123 | 109 | 1469738 | 0.0000 | 0.00 | 20122 | N | ST | -2.0 | 0.0 | 883 | 303 | 3776701 | 0.0000 | 0.00 |
| 18321 | N | ST | 14.0 | 0.0 | 124 | 110 | 1474082 | 0.0000 | 0.00 | 20203 | N | ST | 0.0 | 0.0 | 877 | 302 | 3758789 | 0.0000 | 0.00 |
| 18401 | N | ST | 15.0 | 0.0 | 122 | 110 | 1463922 | 0.0000 | 0.00 | 20204 | N | ST | 2.0 | 0.0 | 879 | 303 | 3748627 | 0.0000 | 0.00 |
| 18410 | N | ST | 16.0 | 0.0 | 122 | 109 | 1461183 | 0.0000 | 0.00 | 20204 | N | ST | 4.0 | 0.0 | 876 | 302 | 3741653 | 0.0000 | 0.00 |
| 18411 | N | ST | 18.0 | 0.0 | 124 | 111 | 1459953 | 0.0000 | 0.00 | 20211 | N | ST | 8.0 | 0.0 | 878 | 303 | 3768915 | 0.0000 | 0.00 |
| 18413 | N | ST | 20.0 | 0.0 | 123 | 110 | 1447617 | 0.0000 | 0.00 | 20211 | N | ST | 10.0 | 0.0 | 880 | 302 | 3764181 | 0.0000 | 0.00 |
| 18414 | N | ST | 20.0 | 0.0 | 123 | 109 | 1445110 | 0.0000 | 0.00 | 20213 | N | ST | 12.0 | 0.0 | 860 | 299 | 3709078 | 0.0000 | 0.00 |
| 18421 | N | ST | 0.0 | 0.0 | 122 | 110 | 1439675 | 0.0000 | 0.00 | 20222 | N | ST | 13.0 | 0.0 | 821 | 291 | 3820534 | 0.0000 | 0.00 |
| 18422 | N | ST | 0.0 | 0.0 | 123 | 109 | 1445948 | 0.0000 | 0.00 | 20300 | N | ST | 13.5 | 0.0 | 841 | 295 | 3848559 | 0.0000 | 0.00 |
| 18423 | N | ST | 0.0 | 0.0 | 122 | 110 | 1438216 | 0.0000 | 0.00 | 20302 | N | ST | 14.0 | 0.0 | 875 | 301 | 3916076 | 0.0000 | 0.00 |
| 18501 | N | ST | 5.0 | 0.0 | 122 | 109 | 1436482 | 0.0000 | 0.00 | 20307 | N | ST | 15.0 | 0.0 | 866 | 299 | 3903574 | 0.0000 | 0.00 |
| 18502 | N | ST | 0.0 | 0.0 | 122 | 110 | 1439616 | 0.0000 | 0.00 | 20311 | N | ST | 18.0 | 0.0 | 835 | 294 | 3811625 | 0.0000 | 0.00 |
| 19022 | N | ST | -2.0 | 0.0 | 342 | 185 | 2454849 | 0.0000 | 0.00 | 20312 | N | ST | 20.0 | 0.0 | 873 | 275 | 3577136 | 0.0000 | 0.00 |
| 19023 | N | ST | 0.0 | 0.0 | 342 | 184 | 2447610 | 0.0000 | 0.00 | 20317 | N | ST | 25.0 | 0.0 | 668 | 261 | 3411407 | 0.0000 | 0.00 |
| 19101 | N | ST | 2.0 | 0.0 | 340 | 185 | 2441467 | 0.0000 | 0.00 | 20318 | N | ST | 20.0 | 0.0 | 740 | 275 | 3578432 | 0.0000 | 0.00 |
| 19110 | N | ST | 4.0 | 0.0 | 341 | 185 | 2443653 | 0.0000 | 0.00 | 20319 | N | ST | 16.0 | 0.0 | 881 | 302 | 3892367 | 0.0000 | 0.00 |
| 19116 | N | ST | 8.0 | 0.0 | 340 | 185 | 2398777 | 0.0000 | 0.00 | 20321 | N | ST | 13.0 | 0.0 | 882 | 302 | 3888966 | 0.0000 | 0.00 |
| 19117 | N | ST | 10.0 | 0.0 | 341 | 185 | 2378719 | 0.0000 | 0.00 | 20322 | N | ST | 11.0 | 0.0 | 879 | 302 | 3875469 | 0.0000 | 0.00 |
| 19119 | N | ST | 12.0 | 0.0 | 340 | 185 | 2372613 | 0.0000 | 0.00 | 16019 | N | UN | 15.0 | 10.0 | 013 | 036 | 488137 | 1.007 | .66 |
| 19121 | N | ST | 13.0 | 0.0 | 338 | 183 | 2355087 | 0.0000 | 0.00 | 16105 | N | UN | 15.0 | 10.0 | 056 | 074 | 986067 | .0972 | 1.30 |
| 19204 | N | ST | 13.5 | 0.0 | 343 | 185 | 2370521 | 0.0000 | 0.00 | 16114 | N | UN | 15.0 | 10.0 | 123 | 110 | 1463255 | .0982 | 1.96 |
| 19206 | N | ST | 14.0 | 0.0 | 340 | 185 | 2361633 | 0.0000 | 0.00 | 16200 | N | UN | 15.0 | 10.0 | 343 | 185 | 2429922 | .0983 | 3.30 |
| 19208 | N | ST | 15.0 | 0.0 | 342 | 185 | 2379520 | 0.0000 | 0.00 | 16213 | N | UN | 6.5 | 10.0 | 340 | 184 | 2502119 | .0500 | 1.65 |
| 19213 | N | ST | 16.0 | 0.0 | 342 | 185 | 2361273 | 0.0000 | 0.00 | 16215 | N | UN | 6.5 | 10.0 | 340 | 184 | 2494598 | .1999 | 6.60 |
| 19214 | N | ST | 18.0 | 0.0 | 341 | 185 | 2365586 | 0.0000 | 0.00 | 16300 | N | UN | 15.0 | 10.0 | 481 | 220 | 2890556 | .0988 | 3.93 |
| 19216 | N | ST | 20.0 | 0.0 | 340 | 185 | 2358408 | 0.0000 | 0.00 | 16308 | Y | UN | 15.0 | 10.0 | 612 | 249 | 3229332 | .0988 | 4.46 |
| 19217 | N | ST | 25.0 | 0.0 | 341 | 184 | 2351317 | 0.0000 | 0.00 | 17100 | Y | UN | 15.0 | 10.0 | 340 | 184 | 2457106 | .0497 | 1.65 |
| 19221 | N | ST | 0.0 | 0.0 | 340 | 185 | 2348131 | 0.0000 | 0.00 | 17103 | Y | UN | 15.0 | 10.0 | 341 | 184 | 2452721 | .0992 | 3.30 |
| 19222 | N | ST | 14.0 | 0.0 | 341 | 185 | 2359002 | 0.0000 | 0.00 | 17109 | Y | UN | 15.0 | 10.0 | 342 | 184 | 2452926 | .1486 | 4.95 |
| | | | | | 343 | 186 | 2354589 | 0.0000 | 0.00 | 17117 | Y | UN | 15.0 | 10.0 | 830 | 293 | 3772247 | .0248 | 1.31 |
| | | | | | | | | | | 17119 | Y | UN | 15.0 | 10.0 | 823 | 291 | 3724643 | .0497 | 2.62 |

TABLE 20.- Concluded.

| A | FRAME | TRIP | Y | TYPE | A0 | A1 | Q | M | RE | K | FREQ | B |
|-------|-------|------|------|------|------|------|----------|-------|-------|-------|-------|---|
| 17200 | N | UN | 15.0 | 10.0 | 814 | .290 | 3702477. | .0999 | 5.24 | 21102 | 21102 | |
| 21100 | N | UN | 15.0 | 10.0 | .823 | .291 | 3718613. | .0098 | .52 | 21201 | 21201 | |
| 21107 | N | UN | 10.0 | 10.0 | .867 | .299 | 3792469. | .0098 | .53 | 21209 | 21209 | |
| 21200 | N | UN | 10.0 | 5.0 | .875 | .301 | 3932117. | .0097 | .53 | 21220 | 21220 | |
| 21208 | N | UN | 3.3 | 10.0 | .882 | .302 | 3898549. | .0098 | .33 | 22104 | 22104 | |
| 21219 | N | UN | 6.5 | 10.0 | .339 | .184 | 2455459. | .0247 | 1.31 | 22207 | 22207 | |
| 22023 | N | UN | 15.0 | 10.0 | .827 | .293 | 3727983. | .0492 | 2.62 | 22209 | 22209 | |
| 22103 | N | UN | 15.0 | 10.0 | .837 | .294 | 3749080. | .1008 | 5.24 | | | |
| 22201 | N | UN | 15.0 | 10.0 | .785 | .285 | 3554419. | .1542 | 7.86 | | | |
| 22206 | N | UN | 15.0 | 10.0 | .754 | .279 | 3477029. | .0969 | 4.98 | | | |
| 22208 | N | UN | 15.0 | 10.0 | .763 | .281 | 3483672. | .0243 | 1.34 | | | |
| 22216 | N | UN | 10.0 | 10.0 | .875 | .302 | 3732111. | .0485 | 2.68 | | | |
| 22217 | N | UN | 10.0 | 10.0 | .875 | .302 | 3720266. | .0485 | 2.68 | | | |
| 22218 | N | UN | 10.0 | 10.0 | .862 | .300 | 3684571. | .0977 | 5.36 | | | |
| 22219 | N | UN | 10.0 | 10.0 | .835 | .294 | 3618609. | .1490 | 8.04 | | | |
| 22307 | N | UN | 10.0 | 5.0 | .875 | .301 | 3854387. | .0246 | 1.34 | 22223 | 22223 | |
| 22308 | N | UN | 10.0 | 5.0 | .880 | .303 | 3857324. | .0491 | 2.68 | 22300 | 22300 | |
| 22309 | N | UN | 10.0 | 5.0 | .881 | .303 | 3853461. | .0980 | 5.36 | 22301 | 22301 | |
| 22311 | N | UN | 10.0 | 5.0 | .877 | .302 | 3849798. | .1475 | 8.04 | 22302 | 22302 | |
| 22312 | N | UN | 10.0 | 5.0 | .882 | .303 | 3849072. | .1957 | 10.72 | 22303 | 22303 | |
| 23021 | N | UN | 15.0 | 5.0 | .858 | .298 | 3792196. | .0248 | 1.34 | | | |
| 23022 | N | UN | 15.0 | 5.0 | .851 | .297 | 3750472. | .0497 | 2.68 | | | |
| 23023 | N | UN | 15.0 | 5.0 | .840 | .295 | 3716891. | .1000 | 5.36 | | | |
| 23100 | N | UN | 15.0 | 5.0 | .822 | .292 | 3670934. | .1516 | 8.04 | 23108 | 23108 | |
| 23107 | N | UN | 5.0 | 5.0 | .867 | .300 | 3802836. | .0986 | 5.36 | 23110 | 23110 | |
| 23109 | N | UN | 5.0 | 5.0 | .867 | .300 | 3769174. | .1970 | 10.72 | 23118 | 23118 | |
| 23117 | N | UN | 5.0 | 10.0 | .869 | .300 | 3803440. | .0985 | 5.36 | 23202 | 23202 | |
| 23201 | N | UN | 3.8 | 10.0 | .866 | .299 | 3948210. | .1003 | 5.36 | 23207 | 23207 | |
| 23206 | N | UN | 3.3 | 10.0 | .866 | .299 | 3924045. | .0500 | 2.68 | 23210 | 23210 | |
| 23208 | N | UN | 3.3 | 10.0 | .871 | .300 | 3914485. | .0996 | 5.36 | 23212 | 23212 | |
| 23211 | N | UN | 3.3 | 10.0 | .870 | .300 | 3896319. | .1492 | 8.04 | 23220 | 23220 | |
| 23219 | N | UN | 12.0 | 2.0 | .864 | .299 | 3865609. | .1994 | 10.72 | 23306 | 23306 | |
| 23305 | N | UN | 14.0 | 2.0 | .858 | .298 | 3831711. | .1995 | 10.72 | 23311 | 23311 | |
| 23310 | N | UN | 16.0 | 2.0 | .839 | .294 | 3768762. | .2014 | 10.72 | | | |
| 21112 | N | UN | 15.0 | 5.0 | .873 | .301 | 3940131. | .0099 | .53 | | | |
| 23101 | N | UN | 15.0 | 5.0 | .800 | .287 | 3617353. | .2049 | 10.72 | | | |

ORIGINAL PAGE IS
OF POOR QUALITY

TABLE 21.- CATALOG OF RECORDED DATA: Sikorsky SC-1095 AIRFOIL

| A | | | | | | | | | | B | | | | | | | | | |
|-------|------|------|------|-----|------|------|----------|--------|------|-------|------|------|------|------|------|------|----------|--------|-------|
| FRAME | TRIP | TYPE | A0 | A1 | Q | M | RE | K | FREQ | FRAME | TRIP | TYPE | A0 | A1 | Q | M | RE | K | FREQ |
| 34022 | Y | ST | 5.0 | 0.0 | .878 | .301 | 3985083. | 0.0000 | 0.00 | 36118 | N | ST | 16.0 | 0.0 | .340 | .184 | 2432059. | 0.0000 | 0.00 |
| 34100 | Y | ST | 5.0 | 0.0 | .880 | .301 | 3976998. | 0.0000 | 0.00 | 36120 | N | ST | 20.0 | 0.0 | .341 | .185 | 2424852. | 0.0000 | 0.00 |
| 34102 | Y | ST | 10.0 | 0.0 | .884 | .303 | 3969476. | 0.0000 | 0.00 | 36202 | N | ST | -5.0 | 0.0 | .124 | .110 | 1457009. | 0.0000 | 0.00 |
| 34107 | Y | ST | 12.0 | 0.0 | .879 | .302 | 3961576. | 0.0000 | 0.00 | 36203 | N | ST | 0.0 | 0.0 | .123 | .111 | 1461763. | 0.0000 | 0.00 |
| 34109 | Y | ST | 13.0 | 0.0 | .883 | .302 | 3946692. | 0.0000 | 0.00 | 36204 | N | ST | 5.0 | 0.0 | .123 | .110 | 1455304. | 0.0000 | 0.00 |
| 34111 | Y | ST | 14.0 | 0.0 | .856 | .297 | 3868254. | 0.0000 | 0.00 | 36209 | N | ST | 10.0 | 0.0 | .122 | .110 | 1429342. | 0.0000 | 0.00 |
| 34113 | Y | ST | 16.0 | 0.0 | .866 | .287 | 3735389. | 0.0000 | 0.00 | 36210 | N | ST | 12.0 | 0.0 | .121 | .109 | 1420840. | 0.0000 | 0.00 |
| 34115 | Y | ST | 0.0 | 0.0 | .880 | .301 | 3902976. | 0.0000 | 0.00 | 36211 | N | ST | 13.5 | 0.0 | .122 | .110 | 1428033. | 0.0000 | 0.00 |
| 34200 | Y | ST | 0.0 | 0.0 | .341 | .184 | 2464109. | 0.0000 | 0.00 | 36212 | N | ST | 14.0 | 0.0 | .124 | .110 | 1430614. | 0.0000 | 0.00 |
| 34202 | Y | ST | 5.0 | 0.0 | .342 | .184 | 2463733. | 0.0000 | 0.00 | 36213 | N | ST | 15.0 | 0.0 | .122 | .110 | 1421260. | 0.0000 | 0.00 |
| 34204 | Y | ST | 10.0 | 0.0 | .342 | .184 | 2455124. | 0.0000 | 0.00 | 36216 | N | ST | 15.5 | 0.0 | .123 | .110 | 1425215. | 0.0000 | 0.00 |
| 34208 | Y | ST | 13.0 | 0.0 | .342 | .184 | 2449358. | 0.0000 | 0.00 | 36217 | N | ST | 16.0 | 0.0 | .121 | .109 | 1413387. | 0.0000 | 0.00 |
| 34210 | Y | ST | 14.0 | 0.0 | .342 | .184 | 2447969. | 0.0000 | 0.00 | 36218 | N | ST | 20.0 | 0.0 | .120 | .109 | 1408711. | 0.0000 | 0.00 |
| 34212 | Y | ST | 16.0 | 0.0 | .341 | .184 | 2441097. | 0.0000 | 0.00 | 36222 | N | UN | 15.0 | 10.0 | .054 | .073 | 975044. | 0.987 | 1.30 |
| 34214 | Y | ST | 0.0 | 0.0 | .341 | .184 | 2444858. | 0.0000 | 0.00 | 33022 | N | UN | 15.0 | 10.0 | .124 | .110 | 1462074. | 0.979 | 1.96 |
| 35021 | N | ST | -5.0 | 0.0 | .880 | .301 | 3835776. | 0.0000 | 0.00 | 33106 | N | UN | 15.0 | 10.0 | .339 | .183 | 2400379. | 0.990 | 3.30 |
| 35023 | N | ST | -2.0 | 0.0 | .878 | .301 | 3819752. | 0.0000 | 0.00 | 33118 | N | UN | 6.2 | 10.0 | .334 | .182 | 2390916. | 0.499 | 1.65 |
| 35100 | N | ST | 0.0 | 0.0 | .877 | .301 | 3816485. | 0.0000 | 0.00 | 33121 | N | UN | 6.2 | 10.0 | .340 | .184 | 2409037. | 1.975 | 6.60 |
| 35102 | N | ST | 2.0 | 0.0 | .880 | .301 | 3819991. | 0.0000 | 0.00 | 33205 | N | UN | 15.0 | 10.0 | .479 | .219 | 2837984. | 0.985 | 3.93 |
| 35103 | N | ST | 2.0 | 0.0 | .877 | .301 | 3811571. | 0.0000 | 0.00 | 33209 | N | UN | 15.0 | 10.0 | .612 | .249 | 3185055. | 0.984 | 4.46 |
| 35111 | N | ST | 8.0 | 0.0 | .881 | .302 | 4009328. | 0.0000 | 0.00 | 33215 | N | UN | 15.0 | 10.0 | .762 | .279 | 3744973. | 1.002 | 4.98 |
| 35112 | N | ST | 10.0 | 0.0 | .879 | .302 | 3991392. | 0.0000 | 0.00 | 33217 | N | UN | 15.0 | 10.0 | .855 | .297 | 3920520. | 0.247 | 1.31 |
| 35114 | N | ST | 12.0 | 0.0 | .877 | .301 | 3960357. | 0.0000 | 0.00 | 33222 | N | UN | 15.0 | 10.0 | .852 | .296 | 3886915. | 0.494 | 2.62 |
| 35116 | N | ST | 13.0 | 0.0 | .845 | .295 | 3867672. | 0.0000 | 0.00 | 33300 | N | UN | 15.0 | 10.0 | .828 | .292 | 3816743. | 0.997 | 5.24 |
| 35123 | N | ST | 14.0 | 0.0 | .879 | .302 | 3927789. | 0.0000 | 0.00 | 34306 | Y | UN | 15.0 | 10.0 | .807 | .288 | 3800453. | 1.017 | 5.24 |
| 35200 | N | ST | 16.0 | 0.0 | .832 | .293 | 3808814. | 0.0000 | 0.00 | 34308 | Y | UN | 15.0 | 10.0 | .340 | .184 | 2482077. | 0.500 | 3.30 |
| 35206 | N | ST | 14.0 | 0.0 | .874 | .301 | 3893325. | 0.0000 | 0.00 | 34321 | Y | UN | 15.0 | 10.0 | .341 | .184 | 2476494. | 0.998 | 3.30 |
| 35207 | N | ST | 13.0 | 0.0 | .822 | .291 | 3760893. | 0.0000 | 0.00 | 34323 | Y | UN | 15.0 | 10.0 | .341 | .184 | 2472265. | 1.495 | 4.95 |
| 35208 | N | ST | 12.5 | 0.0 | .845 | .295 | 3802021. | 0.0000 | 0.00 | 34409 | N | UN | 15.0 | 10.0 | .762 | .279 | 3601340. | 1.557 | 7.86 |
| 35213 | N | ST | 5.0 | 0.0 | .878 | .302 | 3894699. | 0.0000 | 0.00 | 34418 | N | UN | 4.4 | 10.0 | .881 | .302 | 3864557. | 0.983 | 5.36 |
| 35214 | N | ST | 0.0 | 0.0 | .883 | .302 | 3894747. | 0.0000 | 0.00 | 37023 | N | UN | 10.0 | 10.0 | .866 | .300 | 3936295. | 0.252 | 1.35 |
| 35220 | N | ST | -5.0 | 0.0 | .610 | .249 | 3240465. | 0.0000 | 0.00 | 37101 | N | UN | 10.0 | 10.0 | .880 | .302 | 3928667. | 0.495 | 2.68 |
| 35221 | N | ST | -2.0 | 0.0 | .611 | .249 | 3233853. | 0.0000 | 0.00 | 37107 | N | UN | 10.0 | 10.0 | .880 | .302 | 3915346. | 0.987 | 5.36 |
| 35222 | N | ST | 2.0 | 0.0 | .613 | .250 | 3233853. | 0.0000 | 0.00 | 37109 | N | UN | 10.0 | 10.0 | .879 | .302 | 3894279. | 1.480 | 8.04 |
| 35223 | N | ST | 2.0 | 0.0 | .612 | .249 | 3228312. | 0.0000 | 0.00 | 37119 | N | UN | 4.1 | 10.0 | .879 | .302 | 3866563. | 0.492 | 2.68 |
| 35300 | N | ST | 5.0 | 0.0 | .613 | .250 | 3228749. | 0.0000 | 0.00 | 37121 | N | UN | 4.1 | 10.0 | .886 | .303 | 3859634. | 0.978 | 5.36 |
| 35305 | N | ST | 8.0 | 0.0 | .612 | .249 | 3194450. | 0.0000 | 0.00 | 37123 | N | UN | 4.1 | 10.0 | .879 | .302 | 3836077. | 1.471 | 8.04 |
| 35306 | N | ST | 10.0 | 0.0 | .614 | .249 | 3194632. | 0.0000 | 0.00 | 37207 | N | UN | 10.0 | 5.0 | .879 | .302 | 3784178. | 0.244 | 1.34 |
| 35307 | N | ST | 12.0 | 0.0 | .610 | .249 | 3176162. | 0.0000 | 0.00 | 37208 | N | UN | 10.0 | 5.0 | .871 | .301 | 3750400. | 0.489 | 2.68 |
| 35308 | N | ST | 13.0 | 0.0 | .609 | .248 | 3167812. | 0.0000 | 0.00 | 37210 | N | UN | 10.0 | 5.0 | .879 | .302 | 3760364. | 0.972 | 5.36 |
| 35309 | N | ST | 13.5 | 0.0 | .605 | .247 | 3151475. | 0.0000 | 0.00 | 37213 | N | UN | 10.0 | 5.0 | .885 | .303 | 3780389. | 1.454 | 8.04 |
| 35310 | N | ST | 14.1 | 0.0 | .615 | .250 | 3175031. | 0.0000 | 0.00 | 37215 | N | UN | 10.0 | 5.0 | .883 | .303 | 3763997. | 1.939 | 10.72 |
| 35314 | N | ST | 18.0 | 0.0 | .611 | .249 | 3171847. | 0.0000 | 0.00 | 37219 | N | UN | 11.0 | 5.0 | .871 | .301 | 3752512. | 0.489 | 2.68 |
| 35315 | N | ST | 20.0 | 0.0 | .609 | .248 | 3155127. | 0.0000 | 0.00 | 37221 | N | UN | 11.0 | 5.0 | .878 | .302 | 3752961. | 0.972 | 5.36 |
| 35316 | N | ST | 25.0 | 0.0 | .612 | .250 | 3138860. | 0.0000 | 0.00 | 37304 | N | UN | 12.0 | 8.0 | .878 | .301 | 4001117. | 0.499 | 2.68 |
| 35317 | N | ST | 14.0 | 0.0 | .611 | .249 | 3135933. | 0.0000 | 0.00 | 37305 | N | UN | 12.0 | 8.0 | .878 | .301 | 3984111. | 0.997 | 5.36 |
| 35318 | N | ST | 13.0 | 0.0 | .612 | .250 | 3142583. | 0.0000 | 0.00 | 37306 | N | UN | 12.0 | 8.0 | .876 | .301 | 3969804. | 1.266 | 6.81 |
| 35319 | N | ST | 12.5 | 0.0 | .611 | .249 | 3143100. | 0.0000 | 0.00 | 38021 | N | UN | 15.0 | 5.0 | .879 | .302 | 3954977. | 0.248 | 1.34 |
| 35400 | N | ST | 5.0 | 0.0 | .614 | .249 | 3139723. | 0.0000 | 0.00 | 38022 | N | UN | 15.0 | 5.0 | .865 | .299 | 3893850. | 0.499 | 2.68 |
| 35401 | N | ST | 0.0 | 0.0 | .611 | .249 | 3166450. | 0.0000 | 0.00 | 38102 | N | UN | 15.0 | 5.0 | .840 | .294 | 3784856. | 1.008 | 5.36 |
| 36019 | N | ST | -5.0 | 0.0 | .342 | .184 | 2509809. | 0.0000 | 0.00 | 38103 | N | UN | 15.0 | 5.0 | .808 | .293 | 3747172. | 1.519 | 8.04 |
| 36020 | N | ST | 0.0 | 0.0 | .341 | .185 | 2503010. | 0.0000 | 0.00 | 38104 | N | UN | 14.0 | 2.0 | .870 | .300 | 3853545. | 1.980 | 10.72 |
| 36022 | N | ST | 5.0 | 0.0 | .341 | .185 | 2493947. | 0.0000 | 0.00 | 38119 | N | UN | 12.3 | 2.0 | .876 | .301 | 3876423. | 1.975 | 10.72 |
| 36106 | N | ST | 10.0 | 0.0 | .341 | .185 | 2467697. | 0.0000 | 0.00 | 38201 | N | UN | 6.2 | 10.0 | .339 | .183 | 2468863. | 0.100 | 3.3 |
| 36108 | N | ST | 12.0 | 0.0 | .340 | .185 | 2461702. | 0.0000 | 0.00 | 38216 | N | UN | 15.0 | 10.0 | .862 | .298 | 3931336. | 0.102 | 5.4 |
| 36110 | N | ST | 13.5 | 0.0 | .340 | .184 | 2452406. | 0.0000 | 0.00 | 38300 | N | UN | 10.0 | 10.0 | .869 | .299 | 3931609. | 0.099 | 5.3 |
| 36112 | N | ST | 14.0 | 0.0 | .341 | .185 | 2447787. | 0.0000 | 0.00 | 39021 | N | UN | 4.1 | 10.0 | .875 | .300 | 3811898. | 0.097 | 5.3 |
| 36117 | N | ST | 15.0 | 0.0 | .338 | .183 | 2428146. | 0.0000 | 0.00 | 39104 | N | UN | 15.0 | 5.0 | .856 | .297 | 3926571. | 0.100 | 5.3 |

TABLE 21.- Concluded.

| A | | B | | | | | | | | |
|-------|------|------|------|-----|------|------|----------|-------|-------|-------|
| FRAME | TRIP | TYPE | AO | A1 | Q | M | RE | K | FREQ | FRAME |
| 39110 | N | UN | 11.0 | 5.0 | .869 | .299 | 3896687. | .0099 | .53 | |
| 39115 | N | UN | 14.0 | 2.0 | .865 | .298 | 3838622. | .0100 | .54 | |
| 38110 | N | UN | 16.0 | 2.0 | .832 | .293 | 3754517. | .2023 | 10.72 | 38111 |
| 39107 | N | UN | 10.0 | 5.0 | .876 | .300 | 3939495. | .0098 | .53 | |

TABLE 22.- CATALOG OF RECORDED DATA: Hughes HH-02 AIRFOIL

| A | | B | | A | | B | | A | | B | | A | | B | | | | | | |
|-------|------|------|------|-----|-----|-----|----------|--------|------|-------|------|------|------|------|-----|-----|----------|--------|-------|-------|
| FRAME | TRIP | TYPE | A0 | A1 | Q | M | RE | K | FREQ | FRAME | TRIP | TYPE | A0 | A1 | Q | M | RE | K | FREQ | FRAME |
| 40018 | N | ST | -5.0 | 0.0 | 122 | 110 | 1508746. | 0.0000 | 0.00 | 41215 | N | ST | 0.0 | 0.0 | 611 | 249 | 3331668. | 0.0000 | 0.00 | 41222 |
| 40019 | N | ST | 0.0 | 0.0 | 121 | 109 | 1502749. | 0.0000 | 0.00 | 41221 | Y | ST | 0.0 | 0.0 | 875 | 299 | 4054062. | 0.0000 | 0.00 | 41300 |
| 40020 | N | ST | 5.0 | 0.0 | 123 | 110 | 1511661. | 0.0000 | 0.00 | 41223 | Y | ST | 5.0 | 0.0 | 874 | 300 | 4025612. | 0.0000 | 0.00 | 41302 |
| 40101 | N | ST | 10.0 | 0.0 | 123 | 110 | 1511504. | 0.0000 | 0.00 | 41301 | Y | ST | 10.0 | 0.0 | 877 | 300 | 4012119. | 0.0000 | 0.00 | 41302 |
| 40102 | N | ST | 12.0 | 0.0 | 120 | 109 | 1490668. | 0.0000 | 0.00 | 41303 | Y | ST | 12.0 | 0.0 | 873 | 300 | 3995297. | 0.0000 | 0.00 | 41304 |
| 40103 | N | ST | 14.0 | 0.0 | 125 | 111 | 1514773. | 0.0000 | 0.00 | 41305 | Y | ST | 13.0 | 0.0 | 858 | 296 | 3950234. | 0.0000 | 0.00 | 41306 |
| 40104 | N | ST | 14.5 | 0.0 | 123 | 109 | 1502336. | 0.0000 | 0.00 | 41307 | Y | ST | 13.5 | 0.0 | 879 | 300 | 3987094. | 0.0000 | 0.00 | 41308 |
| 40105 | N | ST | 15.0 | 0.0 | 122 | 110 | 1499223. | 0.0000 | 0.00 | 41312 | Y | ST | 14.0 | 0.0 | 876 | 300 | 3990589. | 0.0000 | 0.00 | 41313 |
| 40106 | N | ST | 15.5 | 0.0 | 121 | 109 | 1494155. | 0.0000 | 0.00 | 41314 | Y | ST | 16.0 | 0.0 | 811 | 287 | 3822102. | 0.0000 | 0.00 | 41315 |
| 40107 | N | ST | 16.0 | 0.0 | 121 | 109 | 1487366. | 0.0000 | 0.00 | 41401 | Y | ST | 0.0 | 0.0 | 336 | 182 | 2505262. | 0.0000 | 0.00 | 41402 |
| 40108 | N | ST | 20.0 | 0.0 | 122 | 110 | 1497097. | 0.0000 | 0.00 | 41403 | Y | ST | 5.0 | 0.0 | 340 | 184 | 2516822. | 0.0000 | 0.00 | 41404 |
| 40114 | N | ST | -5.0 | 0.0 | 342 | 185 | 2477234. | 0.0000 | 0.00 | 41405 | Y | ST | 10.0 | 0.0 | 339 | 183 | 2509654. | 0.0000 | 0.00 | 41406 |
| 40115 | N | ST | 0.0 | 0.0 | 341 | 185 | 2468667. | 0.0000 | 0.00 | 41407 | Y | ST | 12.0 | 0.0 | 336 | 182 | 2495906. | 0.0000 | 0.00 | 41408 |
| 40117 | N | ST | 4.0 | 0.0 | 341 | 185 | 2469822. | 0.0000 | 0.00 | 41409 | Y | ST | 13.0 | 0.0 | 337 | 183 | 2499130. | 0.0000 | 0.00 | 41410 |
| 40201 | N | ST | 9.0 | 0.0 | 341 | 185 | 2478173. | 0.0000 | 0.00 | 41411 | Y | ST | 13.5 | 0.0 | 333 | 182 | 2498901. | 0.0000 | 0.00 | 41412 |
| 40203 | N | ST | 12.0 | 0.0 | 343 | 185 | 2480399. | 0.0000 | 0.00 | 41413 | Y | ST | 14.0 | 0.0 | 334 | 181 | 2488812. | 0.0000 | 0.00 | 41414 |
| 40205 | N | ST | 14.0 | 0.0 | 341 | 185 | 2474050. | 0.0000 | 0.00 | 41415 | Y | ST | 14.5 | 0.0 | 339 | 183 | 2503241. | 0.0000 | 0.00 | 41416 |
| 40207 | N | ST | 14.5 | 0.0 | 344 | 186 | 2483787. | 0.0000 | 0.00 | 41417 | Y | ST | 16.0 | 0.0 | 338 | 182 | 2496014. | 0.0000 | 0.00 | 41418 |
| 40212 | N | ST | 15.0 | 0.0 | 340 | 185 | 2474314. | 0.0000 | 0.00 | 41419 | Y | ST | 0.0 | 0.0 | 338 | 182 | 2495914. | 0.0000 | 0.00 | 42020 |
| 40215 | N | ST | 16.0 | 0.0 | 340 | 185 | 2473125. | 0.0000 | 0.00 | 42019 | Y | US | 15.0 | 10.0 | 836 | 292 | 3952553. | 0.252 | 1.31 | 42020 |
| 40222 | N | ST | 8.0 | 0.0 | 879 | 302 | 4129994. | 0.0000 | 0.00 | 42021 | Y | US | 15.0 | 10.0 | 821 | 289 | 3884045. | 0.0508 | 2.62 | 42022 |
| 40223 | N | ST | 10.0 | 0.0 | 874 | 301 | 4103323. | 0.0000 | 0.00 | 42100 | Y | US | 15.0 | 10.0 | 788 | 283 | 3786236. | 0.1035 | 5.24 | 42101 |
| 40301 | N | ST | 12.0 | 0.0 | 869 | 300 | 4085502. | 0.0000 | 0.00 | 42108 | Y | US | 15.0 | 10.0 | 339 | 183 | 2530006. | 0.0506 | 1.65 | 42109 |
| 40303 | N | ST | 13.0 | 0.0 | 869 | 299 | 4051531. | 0.0000 | 0.00 | 42110 | Y | US | 15.0 | 10.0 | 338 | 183 | 2526566. | 0.1013 | 3.30 | 42112 |
| 40308 | N | ST | 13.5 | 0.0 | 878 | 301 | 4059676. | 0.0000 | 0.00 | 42113 | Y | US | 15.0 | 10.0 | 340 | 183 | 2532492. | 0.1516 | 4.95 | 42114 |
| 40310 | N | ST | 14.0 | 0.0 | 878 | 301 | 4041789. | 0.0000 | 0.00 | 42121 | N | US | 15.0 | 10.0 | 054 | 072 | 1027532. | 0.1011 | 1.30 | 42122 |
| 40312 | N | ST | 14.5 | 0.0 | 883 | 302 | 4039947. | 0.0000 | 0.00 | 42206 | N | US | 15.0 | 10.0 | 823 | 290 | 3980979. | 0.0256 | 1.31 | 42207 |
| 40314 | N | ST | 15.0 | 0.0 | 884 | 303 | 4032069. | 0.0000 | 0.00 | 42208 | N | US | 15.0 | 10.0 | 834 | 292 | 3977572. | 0.0507 | 2.62 | 42209 |
| 40321 | N | ST | 18.0 | 0.0 | 806 | 288 | 3854130. | 0.0000 | 0.00 | 42212 | N | US | 15.0 | 10.0 | 813 | 288 | 3911977. | 0.1025 | 5.24 | 42211 |
| 40322 | N | ST | 14.0 | 0.0 | 715 | 270 | 3619314. | 0.0000 | 0.00 | 42217 | N | US | 15.0 | 10.0 | 786 | 283 | 3830288. | 0.1561 | 7.85 | 42212 |
| 40323 | N | ST | 13.0 | 0.0 | 869 | 301 | 4009498. | 0.0000 | 0.00 | 42218 | N | US | 15.0 | 10.0 | 759 | 278 | 3756013. | 0.1008 | 4.98 | 42219 |
| 40400 | N | ST | 5.0 | 0.0 | 871 | 300 | 3981644. | 0.0000 | 0.00 | 42302 | N | US | 15.0 | 10.0 | 339 | 183 | 2526382. | 0.1011 | 3.30 | 42303 |
| 40406 | N | ST | 5.0 | 0.0 | 877 | 301 | 4024289. | 0.0000 | 0.00 | 42309 | N | US | 15.0 | 10.0 | 476 | 218 | 2981460. | 0.1011 | 3.30 | 42310 |
| 40407 | N | ST | 0.0 | 0.0 | 878 | 301 | 4023056. | 0.0000 | 0.00 | 42313 | N | US | 15.0 | 10.0 | 604 | 246 | 3327957. | 0.1013 | 4.46 | 42314 |
| 41019 | N | ST | -5.0 | 0.0 | 874 | 300 | 4148783. | 0.0000 | 0.00 | 42321 | N | US | 15.0 | 10.0 | 120 | 108 | 1510607. | 0.1013 | 1.96 | 42322 |
| 41021 | N | ST | -2.0 | 0.0 | 872 | 300 | 4123880. | 0.0000 | 0.00 | 43019 | N | US | 10.0 | 10.0 | 858 | 297 | 3898111. | 0.0101 | 5.4 | 43020 |
| 41100 | N | ST | 0.0 | 0.0 | 875 | 300 | 4107145. | 0.0000 | 0.00 | 43106 | N | US | 10.0 | 10.0 | 870 | 301 | 3930420. | 0.0249 | 1.34 | 43107 |
| 41103 | N | ST | 5.0 | 0.0 | 877 | 301 | 4090950. | 0.0000 | 0.00 | 43108 | N | US | 10.0 | 10.0 | 876 | 302 | 3927336. | 0.0496 | 2.68 | 43109 |
| 41110 | N | ST | -5.0 | 0.0 | 610 | 248 | 3409824. | 0.0000 | 0.00 | 43114 | N | US | 10.0 | 10.0 | 861 | 299 | 3899487. | 0.1502 | 8.04 | 43110 |
| 41112 | N | ST | 0.0 | 0.0 | 611 | 248 | 3397141. | 0.0000 | 0.00 | 43117 | N | US | 10.0 | 10.0 | 849 | 297 | 3886604. | 0.1514 | 8.04 | 43118 |
| 41114 | N | ST | 2.0 | 0.0 | 611 | 248 | 3391537. | 0.0000 | 0.00 | 43122 | N | US | 10.0 | 10.0 | 874 | 301 | 3946814. | 0.0249 | 1.34 | 43203 |
| 41119 | N | ST | 5.0 | 0.0 | 609 | 248 | 3381054. | 0.0000 | 0.00 | 43204 | N | US | 10.0 | 10.0 | 876 | 302 | 3945527. | 0.0993 | 5.36 | 43205 |
| 41120 | N | ST | 8.0 | 0.0 | 609 | 248 | 3361029. | 0.0000 | 0.00 | 43206 | N | US | 3.8 | 10.0 | 876 | 302 | 3962955. | 0.0497 | 2.68 | 43208 |
| 41122 | N | ST | 12.0 | 0.0 | 609 | 248 | 3342575. | 0.0000 | 0.00 | 43209 | N | US | 3.8 | 10.0 | 878 | 302 | 3955351. | 0.0994 | 5.36 | 43210 |
| 41200 | N | ST | 14.0 | 0.0 | 611 | 249 | 329347. | 0.0000 | 0.00 | 43215 | N | US | 3.8 | 10.0 | 876 | 302 | 3955884. | 0.1489 | 8.04 | 43210 |
| 41201 | N | ST | 14.5 | 0.0 | 610 | 248 | 3321682. | 0.0000 | 0.00 | 43219 | N | US | 4.0 | 10.0 | 879 | 303 | 4045707. | 0.0101 | 5.4 | 43216 |
| 41202 | N | ST | 15.0 | 0.0 | 609 | 248 | 3315976. | 0.0000 | 0.00 | 43303 | N | US | 15.0 | 5.0 | 821 | 296 | 3841831. | 0.0254 | 1.34 | 44020 |
| 41205 | N | ST | 18.0 | 0.0 | 608 | 248 | 3317288. | 0.0000 | 0.00 | 43305 | N | US | 15.0 | 5.0 | 817 | 291 | 3822850. | 0.1030 | 5.36 | 44021 |
| 41206 | N | ST | 20.0 | 0.0 | 608 | 248 | 3306088. | 0.0000 | 0.00 | 43309 | N | US | 15.0 | 5.0 | 805 | 289 | 3776817. | 0.2073 | 10.72 | 44022 |
| 41208 | N | ST | 13.0 | 0.0 | 609 | 248 | 3321536. | 0.0000 | 0.00 | 43314 | N | US | 11.0 | 5.0 | 876 | 302 | 3934345. | 0.0248 | 1.34 | 44023 |
| 41209 | N | ST | 12.5 | 0.0 | 613 | 249 | 3319411. | 0.0000 | 0.00 | 43316 | N | US | 11.0 | 5.0 | 877 | 302 | 3922072. | 0.0489 | 2.65 | 44100 |
| 41214 | N | ST | 5.0 | 0.0 | 613 | 249 | 3342074. | 0.0000 | 0.00 | 43319 | N | US | 10.0 | 5.0 | 869 | 301 | 3902929. | 0.0990 | 5.36 | 44105 |
| | | | | | | | | | | 44104 | N | US | 10.0 | 5.0 | 881 | 303 | 3996291. | 0.0496 | 2.68 | 44100 |
| | | | | | | | | | | 44106 | N | US | 10.0 | 5.0 | 880 | 303 | 3991389. | 0.1490 | 8.04 | 44107 |

TABLE 23.- CATALOG OF RECORDED DATA: Vertol VR-7 AIRFOIL

| A | | B | | A | | B | | A | | B | | A | | B | | | | | |
|-------|------|------|------|-----|------|-----|----------|--------|------|-------|------|------|------|------|------|-----|----------|--------|-------|
| FRAME | TRIP | TYPE | AO | A1 | Q | M | RE | K | FREQ | FRAME | TRIP | TYPE | AO | A1 | Q | M | RE | K | FREQ |
| 46018 | N | ST | -5.0 | 0.0 | .121 | 108 | 1551001. | 0.0000 | 0.00 | 46609 | N | ST | 13.0 | 0.0 | .876 | 299 | 4071175. | 0.0000 | 0.00 |
| 46019 | N | ST | 0.0 | 0.0 | .121 | 108 | 1546271. | 0.0000 | 0.00 | 46610 | N | ST | 12.0 | 0.0 | .881 | 299 | 4055190. | 0.0000 | 0.00 |
| 46020 | N | ST | 5.0 | 0.0 | .123 | 109 | 1557517. | 0.0000 | 0.00 | 46615 | N | ST | 0.0 | 0.0 | .872 | 300 | 4097411. | 0.0000 | 0.00 |
| 46101 | N | ST | 10.0 | 0.0 | .118 | 107 | 1512690. | 0.0000 | 0.00 | 46621 | Y | ST | 0.0 | 0.0 | .881 | 183 | 2522757. | 0.0000 | 0.00 |
| 46102 | N | ST | 12.0 | 0.0 | .122 | 109 | 1540066. | 0.0000 | 0.00 | 46623 | Y | ST | 5.0 | 0.0 | .340 | 183 | 2514978. | 0.0000 | 0.00 |
| 46103 | N | ST | 12.5 | 0.0 | .123 | 109 | 1547844. | 0.0000 | 0.00 | 46701 | Y | ST | 10.0 | 0.0 | .340 | 183 | 2513421. | 0.0000 | 0.00 |
| 46104 | N | ST | 13.0 | 0.0 | .123 | 109 | 1543789. | 0.0000 | 0.00 | 46703 | Y | ST | 12.0 | 0.0 | .341 | 183 | 2515338. | 0.0000 | 0.00 |
| 46105 | N | ST | 13.5 | 0.0 | .123 | 109 | 1542255. | 0.0000 | 0.00 | 46705 | Y | ST | 13.0 | 0.0 | .340 | 183 | 2506104. | 0.0000 | 0.00 |
| 46106 | N | ST | 14.0 | 0.0 | .122 | 109 | 1535872. | 0.0000 | 0.00 | 46707 | Y | ST | 14.0 | 0.0 | .338 | 182 | 2501582. | 0.0000 | 0.00 |
| 46107 | N | ST | 15.0 | 0.0 | .122 | 109 | 1537932. | 0.0000 | 0.00 | 46714 | Y | ST | 15.0 | 0.0 | .340 | 183 | 2518275. | 0.0000 | 0.00 |
| 46108 | N | ST | 17.0 | 0.0 | .123 | 109 | 1541148. | 0.0000 | 0.00 | 46716 | Y | ST | 16.0 | 0.0 | .341 | 184 | 2516975. | 0.0000 | 0.00 |
| 46109 | N | ST | 20.0 | 0.0 | .122 | 109 | 1534206. | 0.0000 | 0.00 | 46718 | Y | ST | 20.0 | 0.0 | .343 | 184 | 2517610. | 0.0000 | 0.00 |
| 46110 | N | ST | 25.0 | 0.0 | .120 | 108 | 1523001. | 0.0000 | 0.00 | 46719 | Y | ST | 0.0 | 0.0 | .342 | 183 | 2519323. | 0.0000 | 0.00 |
| 46116 | N | ST | -5.0 | 0.0 | .341 | 184 | 2550698. | 0.0000 | 0.00 | 46802 | Y | ST | 0.0 | 0.0 | .881 | 300 | 4204772. | 0.0000 | 0.00 |
| 46117 | N | ST | 5.0 | 0.0 | .342 | 183 | 2552563. | 0.0000 | 0.00 | 46804 | Y | ST | 5.0 | 0.0 | .881 | 300 | 4185103. | 0.0000 | 0.00 |
| 46119 | N | ST | 5.0 | 0.0 | .341 | 183 | 2546869. | 0.0000 | 0.00 | 46806 | Y | ST | 10.0 | 0.0 | .886 | 301 | 4170536. | 0.0000 | 0.00 |
| 46203 | N | ST | 10.0 | 0.0 | .343 | 184 | 2562110. | 0.0000 | 0.00 | 46808 | Y | ST | 12.0 | 0.0 | .882 | 300 | 4148330. | 0.0000 | 0.00 |
| 46205 | N | ST | 12.0 | 0.0 | .341 | 183 | 2551368. | 0.0000 | 0.00 | 46810 | Y | ST | 13.0 | 0.0 | .883 | 301 | 4139718. | 0.0000 | 0.00 |
| 46207 | N | ST | 12.5 | 0.0 | .342 | 183 | 2553262. | 0.0000 | 0.00 | 46815 | Y | ST | 14.0 | 0.0 | .881 | 300 | 4137342. | 0.0000 | 0.00 |
| 46209 | N | ST | 13.0 | 0.0 | .342 | 184 | 2553793. | 0.0000 | 0.00 | 46817 | Y | ST | 15.0 | 0.0 | .877 | 300 | 4108330. | 0.0000 | 0.00 |
| 46211 | N | ST | 13.5 | 0.0 | .341 | 183 | 2550511. | 0.0000 | 0.00 | 46819 | Y | ST | 16.0 | 0.0 | .877 | 299 | 4091352. | 0.0000 | 0.00 |
| 46217 | N | ST | 14.0 | 0.0 | .342 | 183 | 2637541. | 0.0000 | 0.00 | 46821 | Y | ST | 20.0 | 0.0 | .806 | 287 | 3898404. | 0.0000 | 0.00 |
| 46219 | N | ST | 15.0 | 0.0 | .341 | 183 | 2630320. | 0.0000 | 0.00 | 46823 | Y | ST | 0.0 | 0.0 | .881 | 300 | 4085157. | 0.0000 | 0.00 |
| 46221 | N | ST | 17.0 | 0.0 | .340 | 183 | 2624424. | 0.0000 | 0.00 | 45019 | N | UN | 15.0 | 10.0 | .873 | 300 | 4062142. | 0.0000 | 0.00 |
| 46223 | N | ST | 20.0 | 0.0 | .340 | 183 | 2622591. | 0.0000 | 0.00 | 45021 | N | UN | 15.0 | 10.0 | .830 | 292 | 3937973. | 0.0505 | 2.62 |
| 46301 | N | ST | 25.0 | 0.0 | .340 | 183 | 2614669. | 0.0000 | 0.00 | 45023 | N | UN | 15.0 | 10.0 | .835 | 293 | 3931111. | 1.0055 | 5.24 |
| 46307 | N | ST | -5.0 | 0.0 | .612 | 248 | 3482182. | 0.0000 | 0.00 | 45109 | N | UN | 15.0 | 10.0 | .793 | 301 | 3824874. | 1549 | 7.86 |
| 46308 | N | ST | -2.0 | 0.0 | .613 | 249 | 3476509. | 0.0000 | 0.00 | 45111 | N | UN | 10.0 | 10.0 | .873 | 301 | 4033486. | 0.0101 | 54 |
| 46309 | N | ST | 0.0 | 0.0 | .612 | 248 | 3468801. | 0.0000 | 0.00 | 45113 | N | UN | 10.0 | 10.0 | .875 | 301 | 4010614. | 0.0251 | 1.34 |
| 46310 | N | ST | 2.0 | 0.0 | .611 | 248 | 3461144. | 0.0000 | 0.00 | 45113 | N | UN | 10.0 | 10.0 | .878 | 301 | 4010372. | 0.0500 | 2.68 |
| 46311 | N | ST | 5.0 | 0.0 | .614 | 248 | 3462655. | 0.0000 | 0.00 | 45119 | N | UN | 10.0 | 10.0 | .875 | 301 | 4019136. | 1.0033 | 5.36 |
| 46317 | N | ST | 8.0 | 0.0 | .615 | 249 | 3457898. | 0.0000 | 0.00 | 45209 | N | UN | 15.0 | 5.0 | .869 | 300 | 4015256. | 1498 | 8.04 |
| 46318 | N | ST | 10.0 | 0.0 | .611 | 248 | 3435015. | 0.0000 | 0.00 | 45205 | N | UN | 15.0 | 5.0 | .876 | 301 | 4008473. | 0.0250 | 1.34 |
| 46319 | N | ST | 12.0 | 0.0 | .613 | 248 | 3433344. | 0.0000 | 0.00 | 45207 | N | UN | 15.0 | 5.0 | .877 | 301 | 4005939. | 0.0500 | 2.68 |
| 46320 | N | ST | 12.5 | 0.0 | .615 | 249 | 3429825. | 0.0000 | 0.00 | 45209 | N | UN | 15.0 | 5.0 | .871 | 300 | 3986080. | 1.0022 | 5.36 |
| 46321 | N | ST | 13.0 | 0.0 | .612 | 248 | 3419429. | 0.0000 | 0.00 | 45211 | N | UN | 15.0 | 5.0 | .860 | 298 | 3957187. | 1513 | 8.04 |
| 46322 | N | ST | 13.5 | 0.0 | .610 | 248 | 3409796. | 0.0000 | 0.00 | 45213 | N | UN | 15.0 | 5.0 | .841 | 295 | 3908733. | 2041 | 10.72 |
| 46323 | N | ST | 14.0 | 0.0 | .613 | 249 | 3417715. | 0.0000 | 0.00 | 45221 | N | UN | 10.0 | 5.0 | .878 | 302 | 4054475. | 0.0251 | 1.34 |
| 46400 | N | ST | 15.0 | 0.0 | .613 | 249 | 3413348. | 0.0000 | 0.00 | 45223 | N | UN | 10.0 | 5.0 | .877 | 301 | 4032781. | 0.0501 | 2.68 |
| 46403 | N | ST | 17.0 | 0.0 | .616 | 249 | 3427697. | 0.0000 | 0.00 | 45300 | N | UN | 10.0 | 5.0 | .878 | 301 | 4031948. | 1.0017 | 5.36 |
| 46404 | N | ST | 20.0 | 0.0 | .615 | 249 | 3412222. | 0.0000 | 0.00 | 45302 | N | UN | 10.0 | 5.0 | .879 | 302 | 4030474. | 1.5000 | 8.04 |
| 46405 | N | ST | 25.0 | 0.0 | .614 | 248 | 3396768. | 0.0000 | 0.00 | 45303 | N | UN | 10.0 | 5.0 | .878 | 301 | 4026973. | 2.0022 | 10.72 |
| 46406 | N | ST | 13.0 | 0.0 | .613 | 249 | 3398737. | 0.0000 | 0.00 | 47020 | Y | UN | 15.0 | 10.0 | .859 | 299 | 4059175. | 0.0249 | 1.31 |
| 46407 | N | ST | 12.0 | 0.0 | .610 | 248 | 3391942. | 0.0000 | 0.00 | 47100 | Y | UN | 15.0 | 10.0 | .838 | 292 | 3928981. | 0.0249 | 1.31 |
| 46412 | N | ST | 0.0 | 0.0 | .614 | 248 | 3394265. | 0.0000 | 0.00 | 47110 | Y | UN | 15.0 | 10.0 | .820 | 292 | 3927997. | 1014 | 5.24 |
| 46418 | N | ST | -5.0 | 0.0 | .877 | 300 | 3996105. | 0.0000 | 0.00 | 47112 | Y | UN | 15.0 | 10.0 | .842 | 185 | 2577901. | 0508 | 1.65 |
| 46420 | N | ST | -2.0 | 0.0 | .878 | 301 | 3986471. | 0.0000 | 0.00 | 47114 | Y | UN | 15.0 | 10.0 | .842 | 185 | 2586091. | 1008 | 3.30 |
| 46423 | N | ST | 2.0 | 0.0 | .875 | 300 | 3968964. | 0.0000 | 0.00 | 47114 | Y | UN | 15.0 | 10.0 | .842 | 185 | 2580642. | 1512 | 4.95 |
| 46500 | N | ST | 5.0 | 0.0 | .877 | 300 | 3965878. | 0.0000 | 0.00 | 47123 | N | UN | 15.0 | 10.0 | .854 | 073 | 1030887. | 1007 | 1.30 |
| 46508 | N | ST | 8.0 | 0.0 | .878 | 300 | 4161706. | 0.0000 | 0.00 | 47206 | N | UN | 15.0 | 10.0 | .123 | 110 | 1553432. | 1006 | 1.96 |
| 46509 | N | ST | 10.0 | 0.0 | .876 | 299 | 4119351. | 0.0000 | 0.00 | 47213 | N | UN | 15.0 | 10.0 | .340 | 185 | 2608965. | 1016 | 3.30 |
| 46511 | N | ST | 12.0 | 0.0 | .876 | 299 | 4119351. | 0.0000 | 0.00 | 47217 | N | UN | 15.0 | 10.0 | .479 | 221 | 3036397. | 1008 | 3.93 |
| 46513 | N | ST | 12.5 | 0.0 | .874 | 299 | 4099803. | 0.0000 | 0.00 | 47301 | N | UN | 15.0 | 10.0 | .610 | 250 | 3408483. | 1009 | 4.46 |
| 46515 | N | ST | 13.0 | 0.0 | .867 | 298 | 4070743. | 0.0000 | 0.00 | 47305 | N | UN | 15.0 | 10.0 | .760 | 281 | 3783711. | 1003 | 4.98 |
| 46517 | N | ST | 13.5 | 0.0 | .879 | 300 | 4087558. | 0.0000 | 0.00 | 54019 | N | UN | 10.0 | 10.0 | .340 | 183 | 2632968. | 0258 | .83 |
| 46519 | N | ST | 14.0 | 0.0 | .878 | 300 | 4071474. | 0.0000 | 0.00 | 54022 | N | UN | 10.0 | 10.0 | .340 | 183 | 2616265. | 0511 | 1.65 |
| 46600 | N | ST | 15.0 | 0.0 | .873 | 299 | 4089463. | 0.0000 | 0.00 | 54101 | N | UN | 10.0 | 10.0 | .339 | 183 | 2607326. | 1021 | 3.30 |
| 46602 | N | ST | 17.0 | 0.0 | .878 | 300 | 4078310. | 0.0000 | 0.00 | 54110 | N | UN | 10.0 | 10.0 | .341 | 184 | 2597940. | 1526 | 6.40 |
| 46604 | N | ST | 20.0 | 0.0 | .831 | 291 | 3955770. | 0.0000 | 0.00 | 54113 | N | UN | 10.0 | 10.0 | .341 | 184 | 2588267. | 2030 | 6.60 |
| 46608 | N | ST | 25.0 | 0.0 | .690 | 265 | 3626593. | 0.0000 | 0.00 | 54116 | N | UN | 10.0 | 10.0 | .341 | 184 | 2581336. | 2535 | 8.25 |

TABLE 23.- Concluded.

| A | | B | |
|-------|----------------|-------|----------------|
| FRAME | TRIP | FRAME | TRIP |
| 54216 | N UN 15.0 10.0 | 48216 | N UN 15.0 10.0 |
| 48019 | N UN 4.1 10.0 | 48019 | N UN 4.1 10.0 |
| 48023 | N UN 4.1 10.0 | 48023 | N UN 4.1 10.0 |
| 48101 | N UN 4.1 10.0 | 48101 | N UN 4.1 10.0 |
| 48103 | N UN 4.1 10.0 | 48103 | N UN 4.1 10.0 |
| 48116 | N UN 13.0 2.0 | 48116 | N UN 13.0 2.0 |
| 48118 | N UN 13.0 2.0 | 48118 | N UN 13.0 2.0 |
| 48122 | N UN 13.0 2.0 | 48122 | N UN 13.0 2.0 |
| 48209 | N UN 16.0 2.0 | 48209 | N UN 16.0 2.0 |
| 48215 | N UN 14.0 2.0 | 48215 | N UN 14.0 2.0 |
| 48216 | N UN 14.0 2.0 | 48216 | N UN 14.0 2.0 |
| 48217 | N UN 14.0 2.0 | 48217 | N UN 14.0 2.0 |
| 48300 | N UN 12.5 2.0 | 48300 | N UN 12.5 2.0 |
| 48301 | N UN 12.5 2.0 | 48301 | N UN 12.5 2.0 |
| 48302 | N UN 12.5 2.0 | 48302 | N UN 12.5 2.0 |
| 48303 | N UN 12.5 2.0 | 48303 | N UN 12.5 2.0 |
| 48304 | N UN 12.5 2.0 | 48304 | N UN 12.5 2.0 |
| 48308 | N UN 12.5 2.0 | 48308 | N UN 12.5 2.0 |
| 49110 | N UN 15.0 10.0 | 49110 | N UN 15.0 10.0 |
| 49117 | N UN 15.0 10.0 | 49117 | N UN 15.0 10.0 |
| 49203 | N UN 15.0 10.0 | 49203 | N UN 15.0 10.0 |
| 49206 | N UN 15.0 10.0 | 49206 | N UN 15.0 10.0 |
| 49216 | N UN 4.7 10.0 | 49216 | N UN 4.7 10.0 |
| 49300 | N UN 4.7 10.0 | 49300 | N UN 4.7 10.0 |
| 49307 | N UN 4.7 10.0 | 49307 | N UN 4.7 10.0 |
| 49310 | N UN 4.7 10.0 | 49310 | N UN 4.7 10.0 |
| 49023 | N UN 15.0 10.0 | 49023 | N UN 15.0 10.0 |
| 50116 | N UN 4.7 10.0 | 50116 | N UN 4.7 10.0 |
| 57018 | N UN 15.0 10.0 | 57018 | N UN 15.0 10.0 |
| 58018 | N UN 15.0 10.0 | 58018 | N UN 15.0 10.0 |
| 58102 | N UN 15.0 10.0 | 58102 | N UN 15.0 10.0 |
| 58111 | N UN 15.0 10.0 | 58111 | N UN 15.0 10.0 |
| 58120 | N UN 15.0 10.0 | 58120 | N UN 15.0 10.0 |
| 58121 | N UN 15.0 10.0 | 58121 | N UN 15.0 10.0 |
| 47022 | Y UN 15.0 10.0 | 47022 | Y UN 15.0 10.0 |
| 48200 | N UN 13.0 2.0 | 48200 | N UN 13.0 2.0 |

| | | | | | | | | |
|-------|---------|------|------|------|---------|-------|-------|-------|
| 1514 | 2547606 | 184 | 340 | 874 | 2547606 | 1514 | 4.95 | 54217 |
| .0103 | 4215503 | .299 | .874 | .874 | 4215503 | .0103 | .54 | 54217 |
| .0255 | 4189985 | .300 | .880 | .880 | 4189985 | .0255 | 1.34 | 48100 |
| .0509 | 4160141 | .299 | .877 | .877 | 4160141 | .0509 | 2.68 | 48102 |
| .1016 | 4154411 | .300 | .879 | .879 | 4154411 | .1016 | 5.36 | 48104 |
| .0253 | 4084662 | .299 | .878 | .878 | 4084662 | .0253 | 1.34 | 48117 |
| .0504 | 4059323 | .299 | .878 | .878 | 4059323 | .0504 | 2.68 | 48119 |
| .1010 | 4057706 | .299 | .876 | .876 | 4057706 | .1010 | 5.36 | 48123 |
| .2028 | 4058728 | .298 | .870 | .870 | 4058728 | .2028 | 10.72 | 48211 |
| .0504 | 4057579 | .300 | .877 | .877 | 4057579 | .0504 | 2.68 | 48211 |
| .1005 | 4047826 | .300 | .879 | .879 | 4047826 | .1005 | 5.36 | 48218 |
| .2009 | 4038080 | .300 | .874 | .874 | 4038080 | .2009 | 10.72 | 48218 |
| .0101 | 4033369 | .300 | .878 | .878 | 4033369 | .0101 | .54 | |
| .0251 | 4011900 | .300 | .881 | .881 | 4011900 | .0251 | 1.34 | |
| .0500 | 4009055 | .301 | .874 | .874 | 4009055 | .0500 | 2.68 | |
| .1004 | 3986169 | .299 | .873 | .873 | 3986169 | .1004 | 5.36 | |
| .1505 | 3980450 | .299 | .875 | .875 | 3980450 | .1505 | 8.04 | |
| .2007 | 3998448 | .300 | .875 | .875 | 3998448 | .2007 | 10.72 | 48309 |
| .0257 | 2634248 | .184 | .339 | .339 | 2634248 | .0257 | 1.83 | 49111 |
| .0507 | 2619856 | .185 | .342 | .342 | 2619856 | .0507 | 1.65 | 49118 |
| .1014 | 2599912 | .185 | .340 | .340 | 2599912 | .1014 | 3.30 | 49121 |
| .1518 | 2592737 | .185 | .341 | .341 | 2592737 | .1518 | 4.95 | 49204 |
| .2020 | 2584616 | .185 | .341 | .341 | 2584616 | .2020 | 6.60 | 49207 |
| .0254 | 2550438 | .184 | .340 | .340 | 2550438 | .0254 | .83 | 49217 |
| .1009 | 2535655 | .184 | .338 | .338 | 2535655 | .1009 | 3.30 | 49301 |
| .2005 | 2548693 | .185 | .342 | .342 | 2548693 | .2005 | 6.60 | 49308 |
| .2503 | 2543519 | .185 | .343 | .343 | 2543519 | .2503 | 8.25 | 49311 |
| .0101 | 2543127 | .184 | .338 | .338 | 2543127 | .0101 | .33 | 49100 |
| .0101 | 2531156 | .183 | .339 | .339 | 2531156 | .0101 | .33 | 50117 |
| .1516 | 2555187 | .184 | .340 | .340 | 2555187 | .1516 | 4.95 | 57019 |
| .1495 | 2437793 | .183 | .338 | .338 | 2437793 | .1495 | 4.95 | 58019 |
| .0983 | 496703 | .037 | .014 | .014 | 496703 | .0983 | .65 | 58103 |
| .1010 | 1528745 | .109 | .121 | .121 | 1528745 | .1010 | 1.96 | 58112 |
| .1511 | 2536174 | .184 | .340 | .340 | 2536174 | .1511 | 4.95 | |
| .1007 | 2532230 | .184 | .340 | .340 | 2532230 | .1007 | 3.30 | |
| .0501 | 3990015 | .296 | .841 | .841 | 3990015 | .0501 | 2.62 | 47023 |
| .2006 | 4062447 | .301 | .884 | .884 | 4062447 | .2006 | 10.72 | 48201 |

TABLE 24.- CATALOG OF RECORDED DATA: NLR-1 AIRFOIL

| A | | B | | A | | B | | A | | B | | A | | B | | | | | | | | | | | | | | | | | |
|-------|------|------|------|-----|------|-----|----------|--------|------|-------|------|------|-------|------|------|-----|----------|--------|-------|-------|--------|------|-------|-------|------|-------|-------|----------|--------|-------|------|
| FRAME | TRIP | TYPE | AO | A1 | Q | M | RE | K | FREQ | FRAME | TRIP | TYPE | AO | A1 | Q | M | RE | K | FREQ | FRAME | TRIP | TYPE | AO | A1 | Q | M | RE | K | FREQ | | |
| 61018 | N | ST | -5.0 | 0.0 | .122 | 109 | 1524150. | 0.0000 | 0.00 | 64223 | Y | ST | 5.0 | 0.0 | .339 | 184 | 2345411. | 0.0000 | 0.00 | 64300 | 0.0000 | 0.00 | ST | 10.0 | 0.0 | .342 | 185 | 2349991. | 0.0000 | 0.00 | |
| 61019 | N | ST | 0.0 | 0.0 | .123 | 110 | 1534313. | 0.0000 | 0.00 | 64301 | Y | ST | 10.0 | 0.0 | .341 | 185 | 2346533. | 0.0000 | 0.00 | 64304 | 0.0000 | 0.00 | ST | 12.0 | 0.0 | .341 | 185 | 2344262. | 0.0000 | 0.00 | |
| 61020 | N | ST | 5.0 | 0.0 | .122 | 110 | 1529480. | 0.0000 | 0.00 | 64305 | Y | ST | 13.0 | 0.0 | .341 | 185 | 2344262. | 0.0000 | 0.00 | 64306 | 0.0000 | 0.00 | ST | 13.0 | 0.0 | .341 | 185 | 2344262. | 0.0000 | 0.00 | |
| 61101 | N | ST | 10.0 | 0.0 | .125 | 111 | 1537127. | 0.0000 | 0.00 | 64307 | Y | ST | 14.0 | 0.0 | .348 | 187 | 2370314. | 0.0000 | 0.00 | 64308 | 0.0000 | 0.00 | ST | 14.0 | 0.0 | .348 | 187 | 2370314. | 0.0000 | 0.00 | |
| 61102 | N | ST | 10.0 | 0.0 | .122 | 110 | 1517792. | 0.0000 | 0.00 | 64309 | Y | ST | 16.0 | 0.0 | .344 | 186 | 2345780. | 0.0000 | 0.00 | 64310 | 0.0000 | 0.00 | ST | 16.0 | 0.0 | .344 | 186 | 2345780. | 0.0000 | 0.00 | |
| 61103 | N | ST | 14.0 | 0.0 | .122 | 110 | 1522421. | 0.0000 | 0.00 | 64311 | Y | ST | 0.0 | 0.0 | .344 | 186 | 2355621. | 0.0000 | 0.00 | 64312 | 0.0000 | 0.00 | ST | 0.0 | 0.0 | .344 | 186 | 2355621. | 0.0000 | 0.00 | |
| 61104 | N | ST | 15.0 | 0.0 | .122 | 110 | 1517668. | 0.0000 | 0.00 | 65019 | Y | ST | -11.0 | 0.0 | .875 | 301 | 3814433. | 0.0000 | 0.00 | | | | ST | -11.0 | 0.0 | .875 | 301 | 3814433. | 0.0000 | 0.00 | |
| 61105 | N | ST | 14.0 | 0.0 | .122 | 110 | 1511515. | 0.0000 | 0.00 | 65020 | Y | ST | -9.0 | 0.0 | .876 | 301 | 3804399. | 0.0000 | 0.00 | | | | ST | -9.0 | 0.0 | .876 | 301 | 3804399. | 0.0000 | 0.00 | |
| 61106 | N | ST | 16.0 | 0.0 | .121 | 109 | 1502456. | 0.0000 | 0.00 | 65021 | Y | ST | -7.0 | 0.0 | .875 | 301 | 3798094. | 0.0000 | 0.00 | | | | ST | -7.0 | 0.0 | .875 | 301 | 3798094. | 0.0000 | 0.00 | |
| 61107 | N | ST | 18.0 | 0.0 | .123 | 110 | 1511233. | 0.0000 | 0.00 | 65022 | Y | ST | -6.0 | 0.0 | .874 | 301 | 3790531. | 0.0000 | 0.00 | | | | ST | -6.0 | 0.0 | .874 | 301 | 3790531. | 0.0000 | 0.00 | |
| 61108 | N | ST | 20.0 | 0.0 | .122 | 110 | 1509433. | 0.0000 | 0.00 | 65023 | Y | ST | -5.0 | 0.0 | .876 | 301 | 3792112. | 0.0000 | 0.00 | | | | ST | -5.0 | 0.0 | .876 | 301 | 3792112. | 0.0000 | 0.00 | |
| 61114 | N | ST | 0.0 | 0.0 | .341 | 185 | 2466730. | 0.0000 | 0.00 | 65100 | Y | ST | 0.0 | 0.0 | .875 | 301 | 3786607. | 0.0000 | 0.00 | | | | ST | 0.0 | 0.0 | .875 | 301 | 3786607. | 0.0000 | 0.00 | |
| 61115 | N | ST | 0.0 | 0.0 | .342 | 185 | 2469459. | 0.0000 | 0.00 | 65101 | Y | ST | 5.0 | 0.0 | .878 | 302 | 3783080. | 0.0000 | 0.00 | | | | ST | 5.0 | 0.0 | .878 | 302 | 3783080. | 0.0000 | 0.00 | |
| 61117 | N | ST | 5.0 | 0.0 | .341 | 184 | 2461681. | 0.0000 | 0.00 | 65103 | Y | ST | 10.0 | 0.0 | .875 | 301 | 3764580. | 0.0000 | 0.00 | | | | ST | 10.0 | 0.0 | .875 | 301 | 3764580. | 0.0000 | 0.00 | |
| 61201 | N | ST | 10.0 | 0.0 | .341 | 184 | 2434057. | 0.0000 | 0.00 | 65107 | Y | ST | 11.8 | 0.0 | .842 | 295 | 3697279. | 0.0000 | 0.00 | | | | ST | 11.8 | 0.0 | .842 | 295 | 3697279. | 0.0000 | 0.00 | |
| 61203 | N | ST | 12.0 | 0.0 | .345 | 185 | 2440090. | 0.0000 | 0.00 | 65109 | Y | ST | 13.0 | 0.0 | .858 | 298 | 3722261. | 0.0000 | 0.00 | | | | ST | 13.0 | 0.0 | .858 | 298 | 3722261. | 0.0000 | 0.00 | |
| 61205 | N | ST | 14.0 | 0.0 | .344 | 186 | 2430259. | 0.0000 | 0.00 | 65112 | Y | ST | 14.0 | 0.0 | .839 | 294 | 3665290. | 0.0000 | 0.00 | | | | ST | 14.0 | 0.0 | .839 | 294 | 3665290. | 0.0000 | 0.00 | |
| 61208 | N | ST | 15.4 | 0.0 | .338 | 184 | 2407482. | 0.0000 | 0.00 | 65115 | Y | ST | 16.0 | 0.0 | .800 | 288 | 3574574. | 0.0000 | 0.00 | | | | ST | 16.0 | 0.0 | .800 | 288 | 3574574. | 0.0000 | 0.00 | |
| 61212 | N | ST | 16.5 | 0.0 | .342 | 185 | 2420407. | 0.0000 | 0.00 | 62020 | N | US | 15.0 | 10.0 | .054 | 073 | 968160. | 0.985 | 1.30 | 62021 | 0.985 | 1.30 | 62021 | 0.985 | 1.30 | 62021 | 0.985 | 1.30 | 62021 | 0.985 | 1.30 |
| 61213 | N | ST | 18.0 | 0.0 | .341 | 184 | 2413757. | 0.0000 | 0.00 | 62104 | N | US | 15.0 | 10.0 | .340 | 184 | 2513401. | 1.003 | 3.30 | 62113 | 1.003 | 3.30 | 62113 | 1.003 | 3.30 | 62113 | 1.003 | 3.30 | 62113 | 1.003 | 3.30 |
| 61215 | N | ST | 20.0 | 0.0 | .342 | 185 | 2407546. | 0.0000 | 0.00 | 62112 | N | US | 15.0 | 10.0 | .340 | 184 | 2513401. | 1.003 | 3.30 | 62115 | 1.003 | 3.30 | 62115 | 1.003 | 3.30 | 62115 | 1.003 | 3.30 | 62115 | 1.003 | 3.30 |
| 61222 | N | ST | -2.0 | 0.0 | .614 | 250 | 3195467. | 0.0000 | 0.00 | 62114 | N | US | 15.0 | 10.0 | .396 | 200 | 2557024. | 1.712 | 6.25 | | | | ST | -2.0 | 0.0 | .614 | 250 | 3195467. | 0.0000 | 0.00 | |
| 61223 | N | ST | 0.0 | 0.0 | .613 | 250 | 3194392. | 0.0000 | 0.00 | 62202 | N | US | 15.0 | 5.0 | .398 | 200 | 2540409. | .2826 | 10.35 | | | | ST | 0.0 | 0.0 | .613 | 250 | 3194392. | 0.0000 | 0.00 | |
| 61300 | N | ST | 2.0 | 0.0 | .612 | 250 | 3191078. | 0.0000 | 0.00 | 62208 | N | US | 15.0 | 10.0 | .480 | 220 | 2777505. | .0974 | 3.93 | | | | ST | 2.0 | 0.0 | .612 | 250 | 3191078. | 0.0000 | 0.00 | |
| 61301 | N | ST | 5.0 | 0.0 | .612 | 250 | 3188268. | 0.0000 | 0.00 | 62210 | N | US | 15.0 | 10.0 | .760 | 280 | 3441981. | .0967 | 4.98 | | | | ST | 5.0 | 0.0 | .612 | 250 | 3188268. | 0.0000 | 0.00 | |
| 61306 | N | ST | 8.0 | 0.0 | .616 | 251 | 3401485. | 0.0000 | 0.00 | 62302 | N | US | 15.0 | 10.0 | .838 | 295 | 3859287. | .0248 | 1.31 | | | | ST | 8.0 | 0.0 | .616 | 251 | 3401485. | 0.0000 | 0.00 | |
| 61306 | N | ST | 8.0 | 0.0 | .616 | 251 | 3401485. | 0.0000 | 0.00 | 62304 | N | US | 15.0 | 10.0 | .834 | 294 | 3816841. | .0496 | 2.32 | | | | ST | 8.0 | 0.0 | .616 | 251 | 3401485. | 0.0000 | 0.00 | |
| 61306 | N | ST | 10.0 | 0.0 | .619 | 251 | 3402068. | 0.0000 | 0.00 | 62307 | N | US | 15.0 | 10.0 | .835 | 294 | 3810660. | .0991 | 5.24 | | | | ST | 10.0 | 0.0 | .619 | 251 | 3402068. | 0.0000 | 0.00 | |
| 61308 | N | ST | 12.0 | 0.0 | .613 | 249 | 3381325. | 0.0000 | 0.00 | 62309 | N | US | 15.0 | 10.0 | .796 | 287 | 3699269. | .1521 | 7.86 | | | | ST | 12.0 | 0.0 | .613 | 249 | 3381325. | 0.0000 | 0.00 | |
| 61309 | N | ST | 12.5 | 0.0 | .614 | 250 | 3381216. | 0.0000 | 0.00 | 62311 | N | US | 15.0 | 10.0 | .872 | 301 | 3725580. | .0098 | 5.4 | | | | ST | 12.5 | 0.0 | .614 | 250 | 3381216. | 0.0000 | 0.00 | |
| 61310 | N | ST | 13.0 | 0.0 | .610 | 249 | 3364760. | 0.0000 | 0.00 | 62320 | N | US | 10.0 | 10.0 | .874 | 302 | 3704354. | .0243 | 1.34 | | | | ST | 13.0 | 0.0 | .610 | 249 | 3364760. | 0.0000 | 0.00 | |
| 61311 | N | ST | 14.0 | 0.0 | .611 | 251 | 3385628. | 0.0000 | 0.00 | 62322 | N | US | 10.0 | 10.0 | .873 | 301 | 3685360. | .0484 | 2.38 | | | | ST | 14.0 | 0.0 | .611 | 251 | 3385628. | 0.0000 | 0.00 | |
| 61312 | N | ST | 15.0 | 0.0 | .611 | 249 | 3361196. | 0.0000 | 0.00 | 62400 | N | US | 10.0 | 10.0 | .878 | 302 | 3685928. | .0965 | 5.36 | | | | ST | 15.0 | 0.0 | .611 | 249 | 3361196. | 0.0000 | 0.00 | |
| 61316 | N | ST | 16.0 | 0.0 | .611 | 249 | 3363498. | 0.0000 | 0.00 | 62403 | N | US | 10.0 | 10.0 | .881 | 303 | 3701055. | .1156 | 6.43 | | | | ST | 16.0 | 0.0 | .611 | 249 | 3363498. | 0.0000 | 0.00 | |
| 61316 | N | ST | 20.0 | 0.0 | .612 | 250 | 3357544. | 0.0000 | 0.00 | 62405 | N | US | 10.0 | 10.0 | .866 | 300 | 3656986. | .1457 | 8.04 | | | | ST | 20.0 | 0.0 | .612 | 250 | 3357544. | 0.0000 | 0.00 | |
| 61317 | N | ST | 25.0 | 0.0 | .612 | 250 | 3344638. | 0.0000 | 0.00 | 63018 | N | US | 15.0 | 5.0 | .855 | 297 | 3912793. | .0102 | 5.4 | | | | ST | 25.0 | 0.0 | .612 | 250 | 3344638. | 0.0000 | 0.00 | |
| 61318 | N | ST | 14.0 | 0.0 | .612 | 250 | 3349019. | 0.0000 | 0.00 | 63019 | N | US | 15.0 | 5.0 | .862 | 299 | 3885789. | .0250 | 1.34 | | | | ST | 14.0 | 0.0 | .612 | 250 | 3349019. | 0.0000 | 0.00 | |
| 61400 | N | ST | 5.0 | 0.0 | .614 | 250 | 3357487. | 0.0000 | 0.00 | 63020 | N | US | 15.0 | 5.0 | .862 | 299 | 3885789. | .0250 | 1.34 | | | | ST | 5.0 | 0.0 | .614 | 250 | 3357487. | 0.0000 | 0.00 | |
| 61401 | N | ST | 5.0 | 0.0 | .612 | 249 | 3367279. | 0.0000 | 0.00 | 63021 | N | US | 15.0 | 5.0 | .862 | 299 | 3885789. | .0250 | 1.34 | | | | ST | 5.0 | 0.0 | .612 | 249 | 3367279. | 0.0000 | 0.00 | |
| 61407 | N | ST | -5.0 | 0.0 | .876 | 301 | 3981952. | 0.0000 | 0.00 | 63100 | N | US | 15.0 | 5.0 | .850 | 297 | 3836177. | .1004 | 5.36 | | | | ST | -5.0 | 0.0 | .876 | 301 | 3981952. | 0.0000 | 0.00 | |
| 61409 | N | ST | -2.0 | 0.0 | .87 | | | | | | | | | | | | | | | | | | | | | | | | | | |

TABLE 24.- Concluded.

| A | | B | | | | | | | | |
|-------|------|------|------|------|------|------|----------|-------|-------|-------|
| FRAME | TRIP | TYPE | AO | A1 | Q | M | RE | K | FREQ | FRAME |
| 63320 | N | US | 2.5 | 10.0 | .878 | .303 | 3739575. | .0969 | 5.36 | 63321 |
| 63323 | N | US | 2.7 | 10.0 | .880 | .303 | 3746774. | .0969 | 5.36 | 63400 |
| 64019 | Y | US | 15.0 | 10.0 | .844 | .296 | 3865490. | .0247 | 1.31 | 64020 |
| 64021 | Y | US | 15.0 | 10.0 | .840 | .295 | 3813567. | .0493 | 2.62 | 64022 |
| 64023 | Y | US | 15.0 | 10.0 | .821 | .292 | 3752005. | .0997 | 5.24 | 64100 |
| 64107 | Y | US | 15.0 | 10.0 | .340 | .185 | 2448919. | .0496 | 1.65 | 64108 |
| 64109 | Y | US | 15.0 | 10.0 | .340 | .184 | 2439010. | .0991 | 3.30 | 64110 |
| 64111 | Y | US | 15.0 | 10.0 | .341 | .185 | 2439626. | .1481 | 4.95 | 64112 |
| 64119 | Y | US | 2.5 | 10.0 | .876 | .302 | 3823417. | .0099 | 1.54 | 64120 |
| 64121 | Y | US | 2.5 | 10.0 | .875 | .302 | 3785081. | .0244 | 1.34 | 64122 |
| 64202 | Y | US | 2.5 | 10.0 | .879 | .303 | 3794515. | .0487 | 2.68 | 64203 |
| 64204 | Y | US | 2.5 | 10.0 | .878 | .302 | 3774318. | .0974 | 5.36 | 64205 |
| 64212 | Y | US | -2.0 | 10.0 | .877 | .302 | 3717936. | .0098 | 1.54 | |
| 64213 | Y | US | -2.0 | 10.0 | .878 | .303 | 3695424. | .0241 | 1.34 | |
| 64214 | Y | US | -2.0 | 10.0 | .878 | .302 | 3685179. | .0482 | 2.68 | |
| 64215 | Y | US | -2.0 | 10.0 | .880 | .303 | 3683703. | .0963 | 5.36 | |
| 65121 | N | US | -2.0 | 10.0 | .869 | .300 | 3717371. | .0098 | 1.54 | |
| 65122 | N | US | -2.0 | 10.0 | .873 | .301 | 3700235. | .0243 | 1.34 | |
| 65123 | N | US | -2.0 | 10.0 | .874 | .301 | 3694893. | .0485 | 2.68 | |
| 65200 | N | US | -2.0 | 10.0 | .877 | .302 | 3694943. | .0968 | 5.36 | |
| 65207 | N | US | 15.0 | 10.0 | .395 | .199 | 2646668. | .0997 | 3.57 | |
| 65209 | N | US | 15.0 | 10.0 | .828 | .292 | 3775170. | 1.019 | 5.36 | |
| 65223 | N | US | 7.0 | 5.0 | .121 | .109 | 1475396. | .0249 | 1.49 | |
| 65300 | N | US | 7.0 | 5.0 | .121 | .109 | 1472656. | .1996 | 3.92 | |
| 65311 | N | US | 7.0 | 5.0 | .879 | .301 | 3862901. | .1969 | 10.72 | |
| 65309 | N | US | 7.0 | 5.0 | .876 | .301 | 3889117. | .0100 | 1.54 | |
| 63222 | N | US | 15.0 | 2.0 | .818 | .291 | 3675798. | .2028 | 10.72 | 63223 |

TABLE 25.- Concluded.

| A | | B | |
|-------|------|-------|-------|
| FRAME | TRIP | FREQ | FRAME |
| 69100 | N | 1.34 | 69101 |
| 69102 | N | 2.68 | 69103 |
| 69105 | N | 5.36 | 69106 |
| 69107 | N | 8.04 | 69108 |
| 69119 | N | 1.34 | 69120 |
| 69121 | N | 2.68 | 69122 |
| 69123 | N | 5.36 | 69200 |
| 69201 | N | 10.72 | 69202 |
| 69206 | N | 1.34 | 69207 |
| 69208 | N | 2.68 | 69209 |
| 69211 | N | 5.36 | 69212 |
| 69213 | N | 8.04 | 69214 |
| 69215 | N | 10.72 | 69216 |
| 69221 | N | 2.68 | 69222 |
| 69223 | N | 5.36 | 69300 |
| 69304 | N | 2.68 | 69305 |
| 69310 | N | 5.36 | 69311 |
| 70019 | N | 8.04 | 70020 |
| 70021 | N | 10.72 | 70022 |
| 70023 | N | 3.30 | 70100 |
| 70107 | N | 6.60 | 70108 |
| 70109 | N | 5.6 | 70110 |
| 70113 | N | 1.34 | 70114 |
| 70115 | N | 2.68 | 70116 |
| 70117 | N | 5.36 | 70118 |
| | | 8.04 | 70118 |

ORIGINAL PAGE IS
OF POOR QUALITY


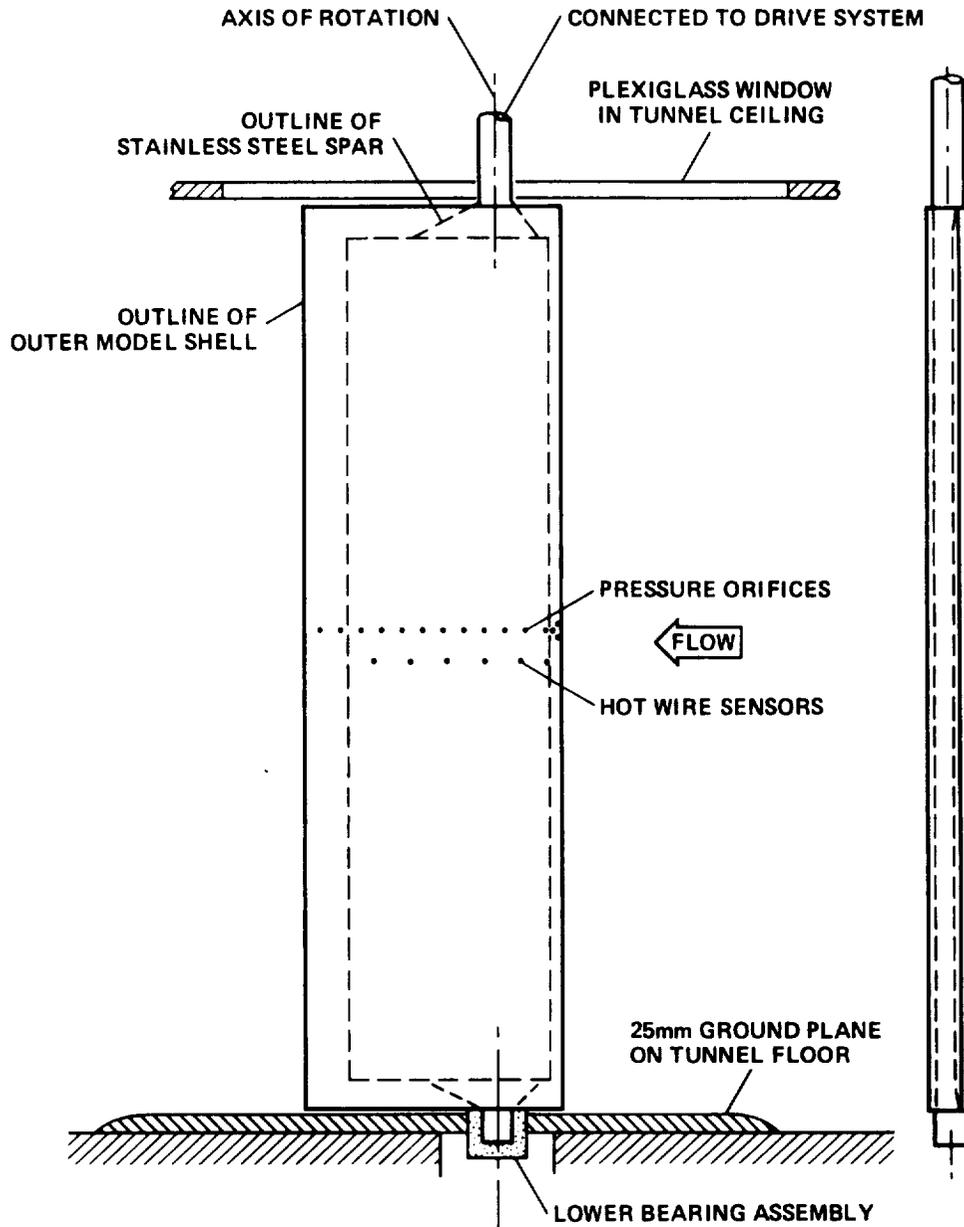


Figure 1.- Diagram showing installation of spar and airfoil shell in tunnel.

ORIGINAL PAGE IS
OF POOR QUALITY

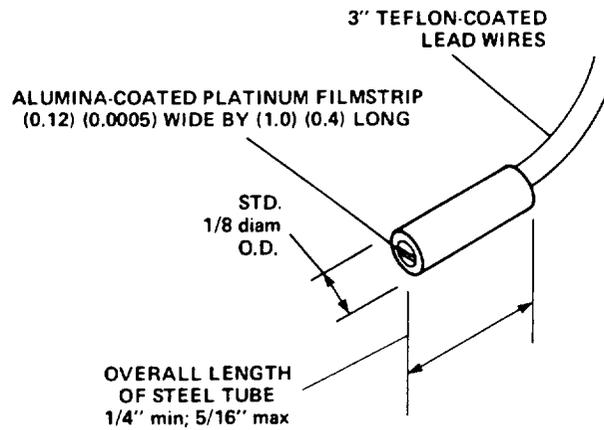

NOTE: PROBE MODIFIED FROM TSI MODEL 1237
FLUSH SURFACE SENSOR

Figure 2.- Diagram of hot-film skin-friction gage.

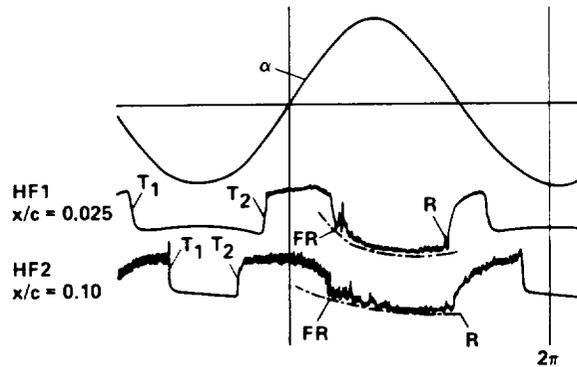


Figure 3.- Response of hot-film skin-friction gages mounted on Ames A-01 airfoil during airfoil oscillation in pitch ($\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.10$, $M_\infty = 0.22$).

ORIGINAL PAGE 13
OF POOR QUALITY

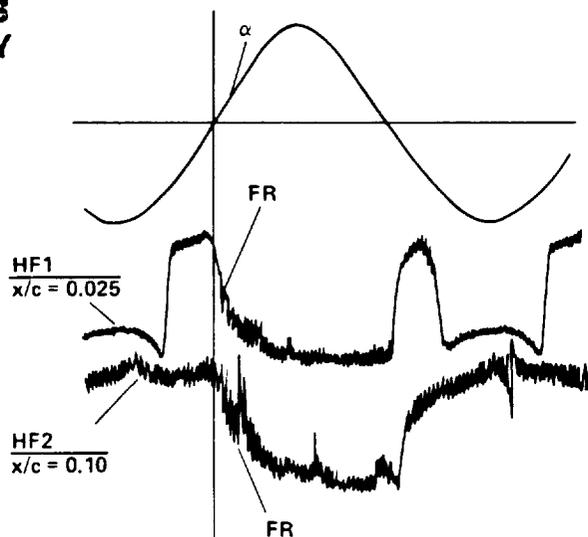


Figure 4.- Response of hot-film skin-friction gages at surface of NACA 0012 airfoil during airfoil oscillation in pitch ($\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.10$, $M_\infty = 0.295$).

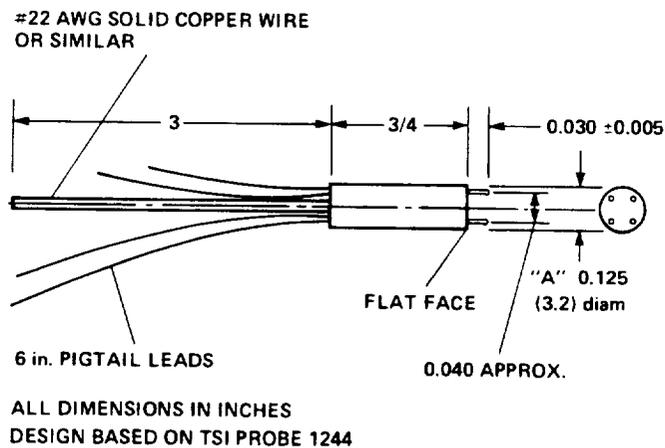


Figure 5.- Diagram of dual-element hot-wire probe.

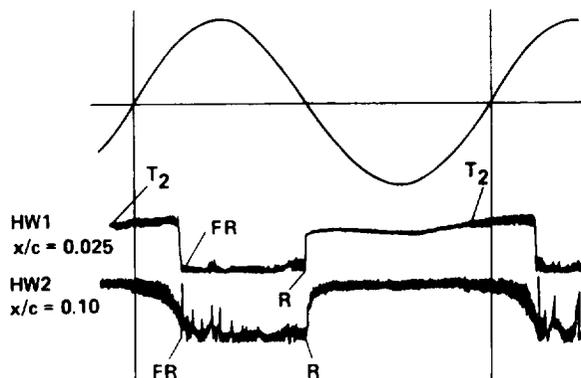


Figure 6.- Response of hot-wire anemometer probes on Wortmann FX-098 airfoil during airfoil oscillation in pitch ($\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.10$, $M_\infty = 0.11$).



Figure 7.- Response of hot-wire anemometer probe installed near trailing edge of the Vertol VR-7 airfoil during oscillation in pitch.


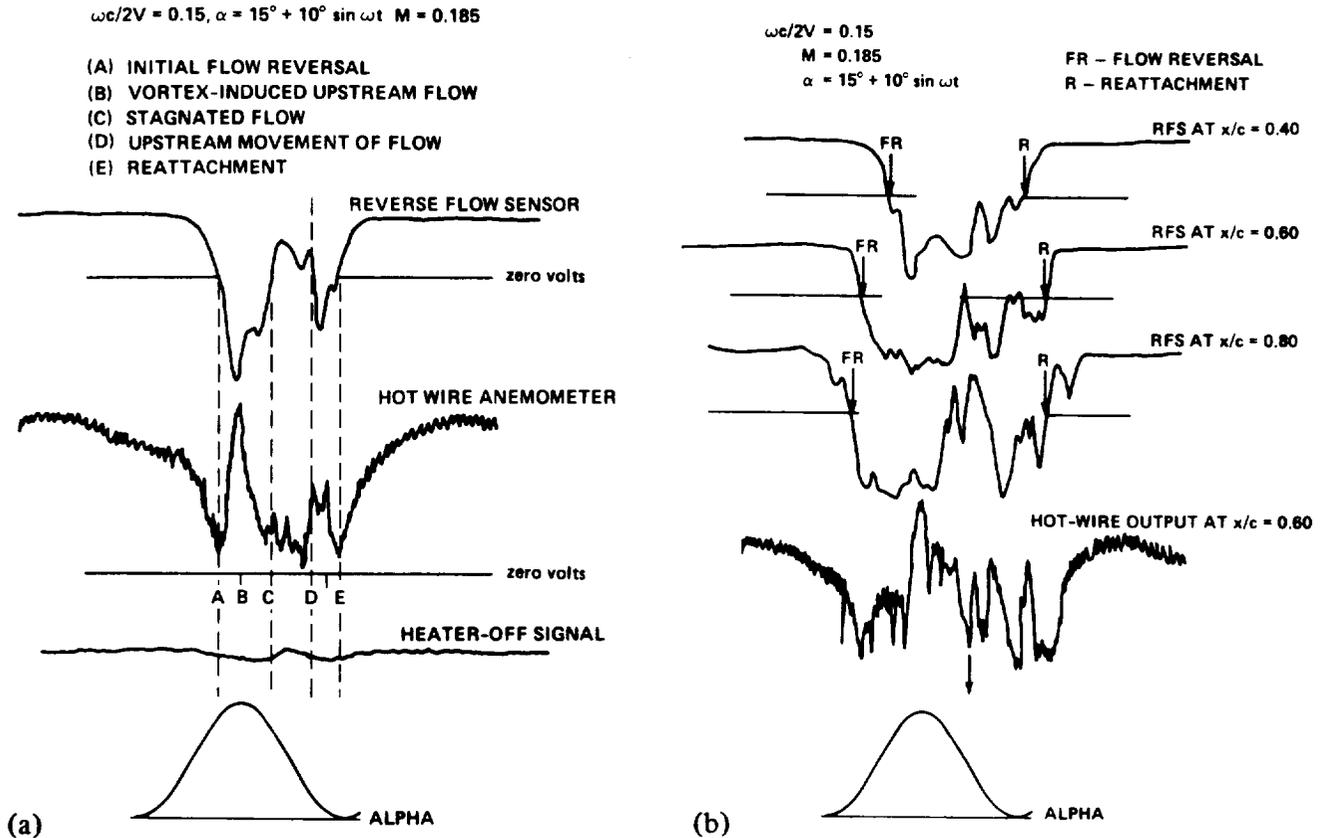


Figure 8.- Results obtained using triple-wire flow-reversal sensor:
(a) Typical comparison of flow-reversal sensor and hot-wire anemometer
signal (from ref. 2); (b) Progression of flow reversal up airfoil during
dynamic stall (from ref. 2).

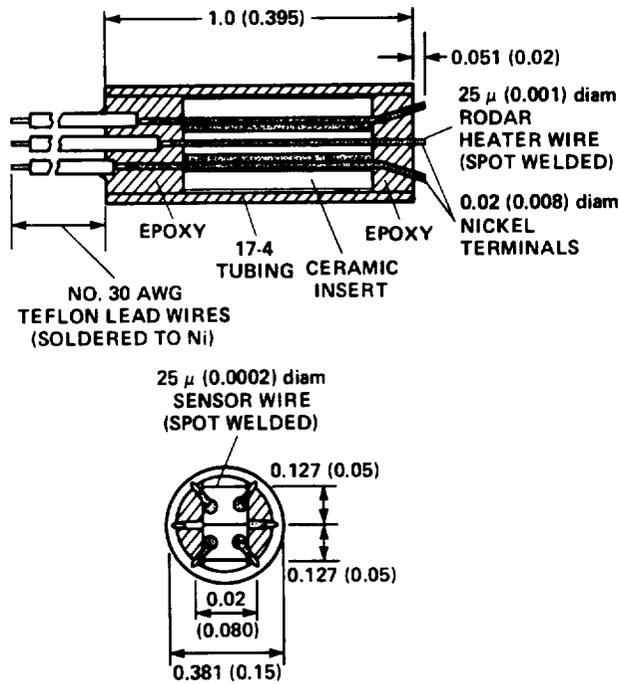

DIMENSIONS IN mm (ft)

Figure 9.- Diagram of three-element, directionally sensitive hot-wire probe
(from ref. 2).

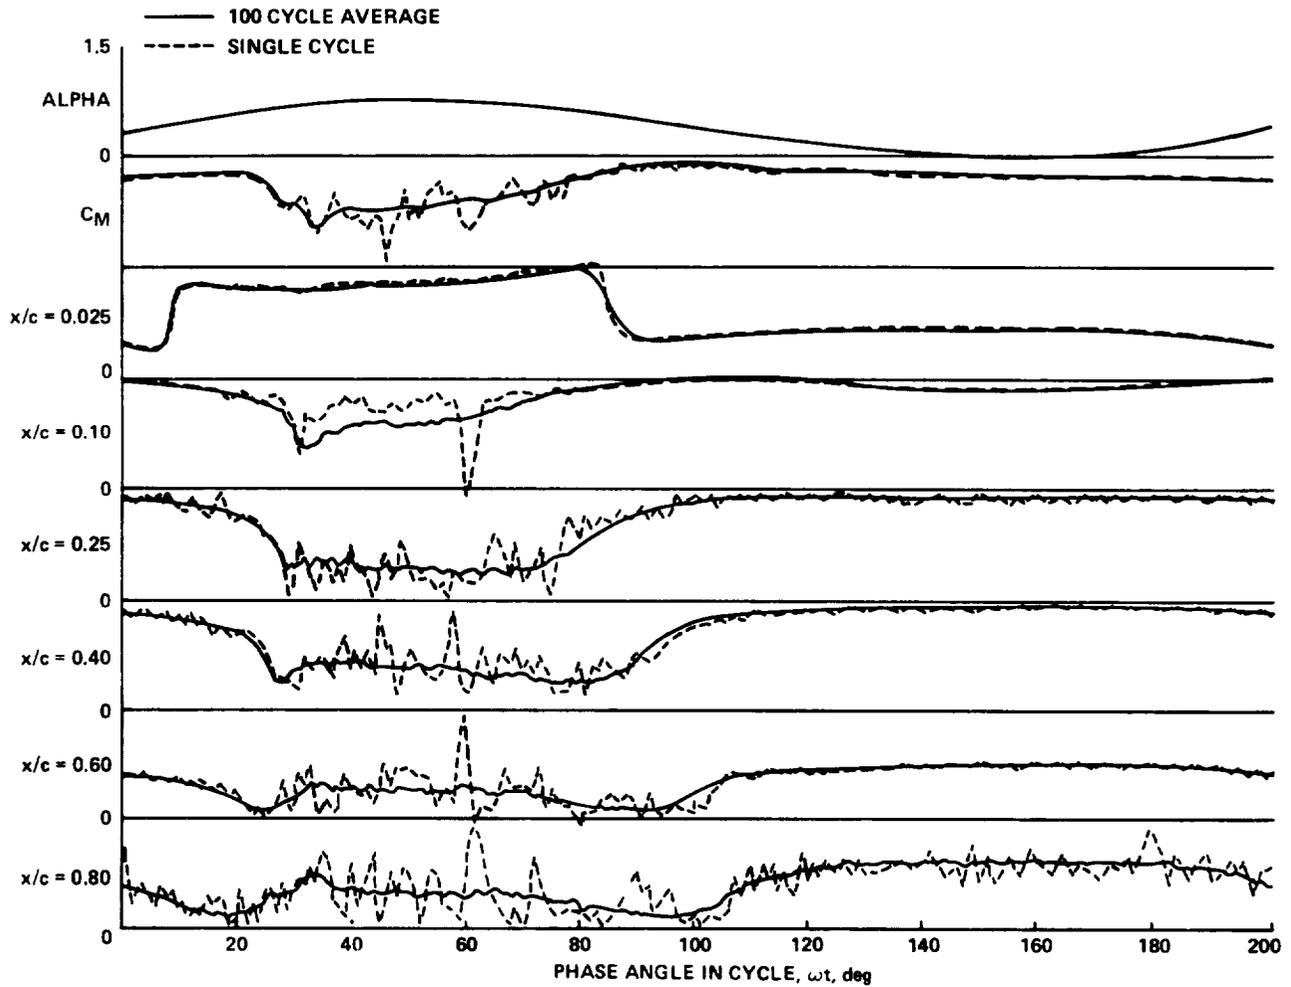


Figure 10.- Comparison of 100-cycle ensemble average and single-cycle signals from hot-wire anemometers for Vertol VR-7 airfoil during oscillation in pitch: ———, 100 cycle average; -----, single cycle.

ORIGINAL PAGE IS
OF POOR QUALITY

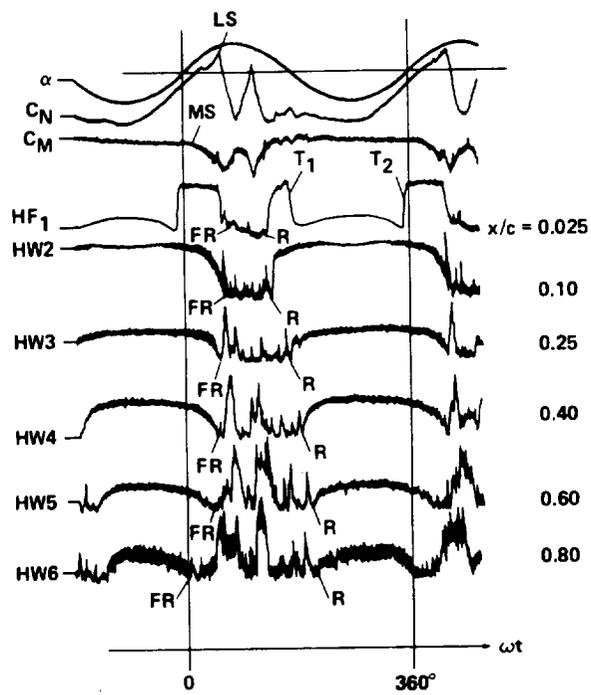


Figure 11.- Response of hot-film skin-friction gage and hot-wire anemometer probes on Vertol VR-7 during oscillation in pitch ($\alpha = 15^\circ + 10^\circ \sin \omega t$, $k = 0.10$, $M_\infty = 0.185$).

ORIGINAL PAGE IS
OF POOR QUALITY

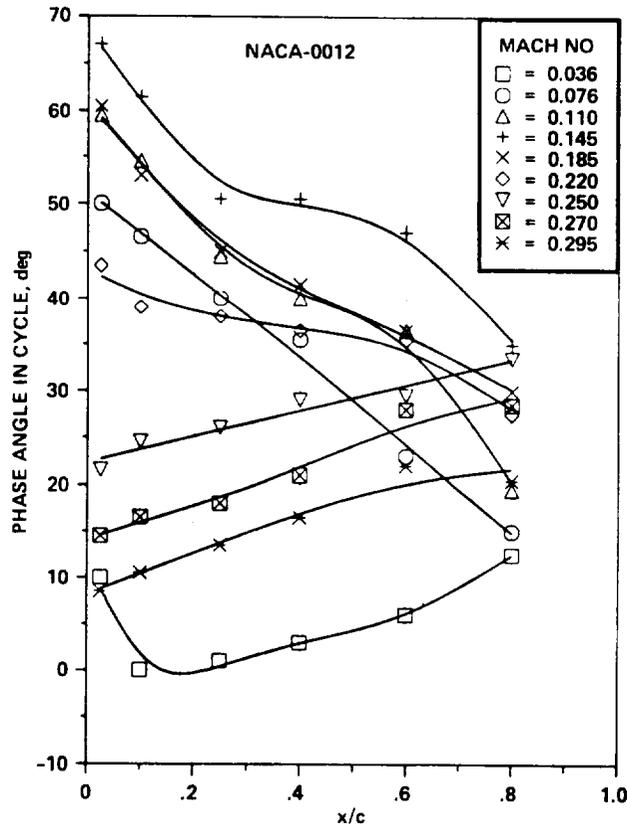


Figure 12.- Phase angle, ωt , of flow reversal on NACA 0012 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects.

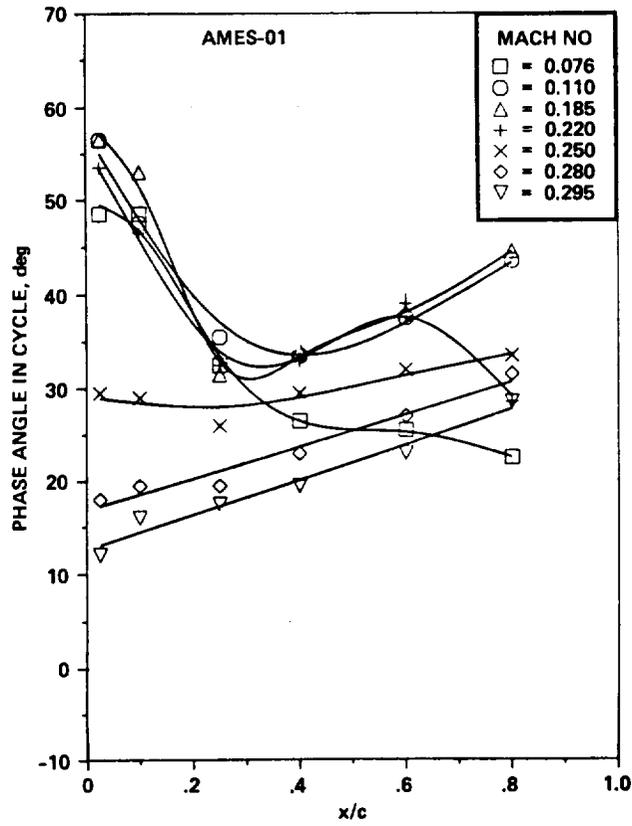


Figure 13.- Phase angle, ωt , of flow reversal on Ames A-01 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects.

ORIGINAL PAGE IS
OF POOR QUALITY

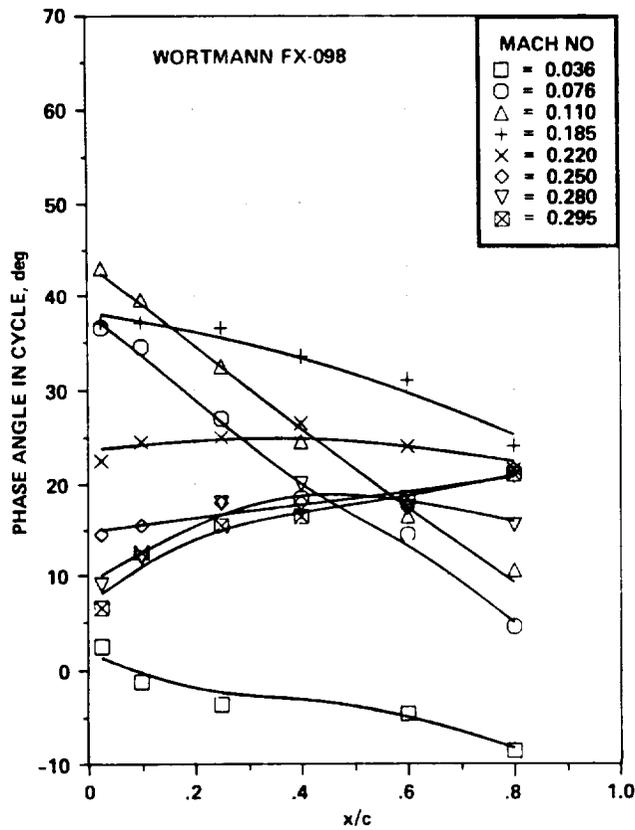


Figure 14.- Phase angle, ωt , of flow reversal on Wortmann FX-098 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects.

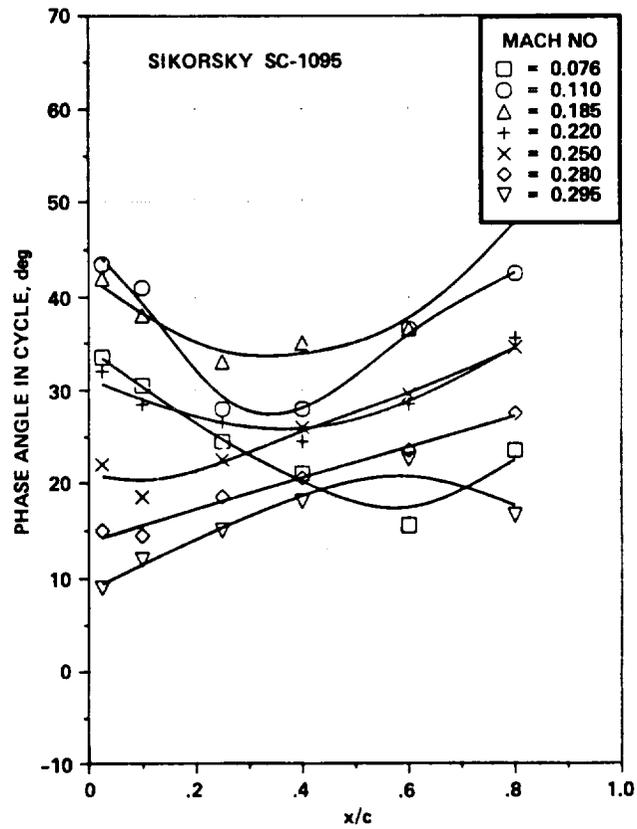


Figure 15.- Phase angle, ωt , of flow reversal on Sikorsky SC-1095 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects.

ORIGINAL PAGE IS
OF POOR QUALITY

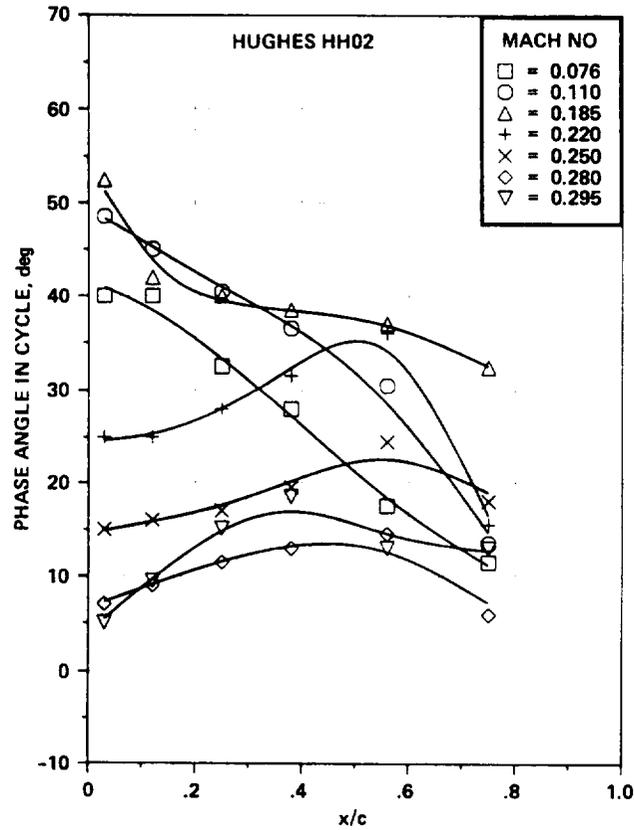


Figure 16.- Phase angle, ωt , of flow reversal on Hughes HH-02 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects.

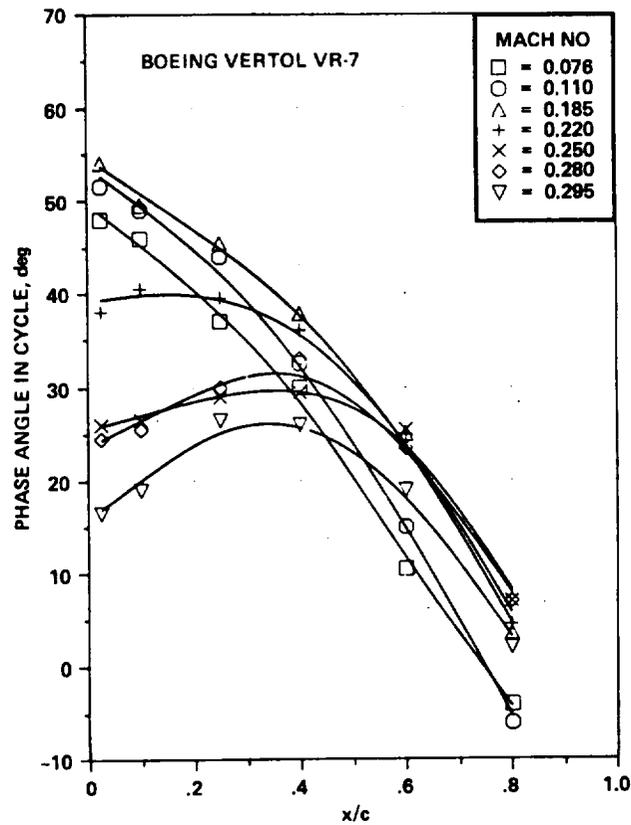


Figure 17.- Phase angle, ωt , of flow reversal on Vertol VR-7 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects.

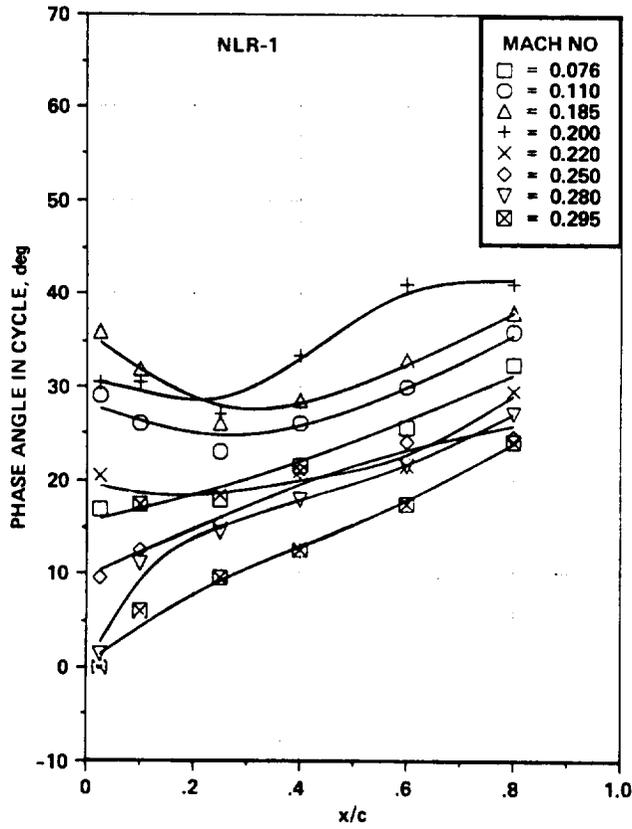


Figure 18.- Phase angle, ωt , of flow reversal on NLR-1 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects.

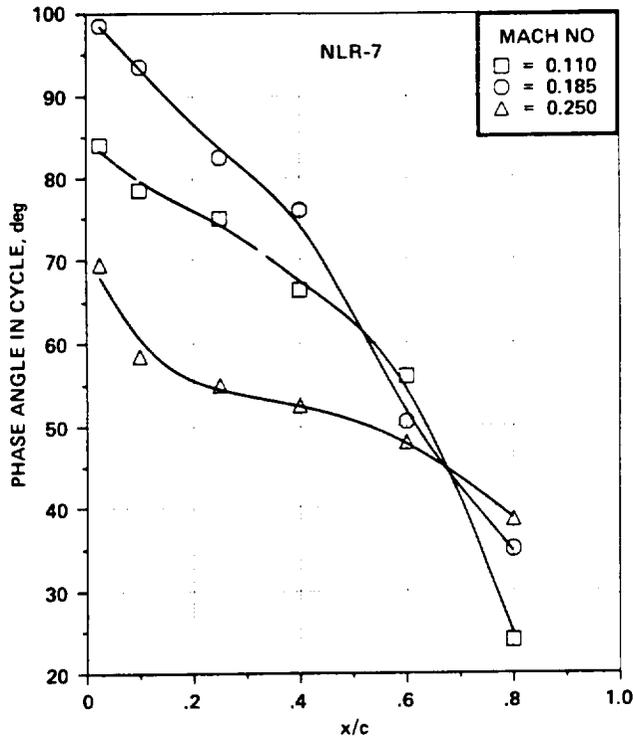


Figure 19.- Phase angle, ωt , of flow reversal on NLR-7 airfoil vs chord location for a range of Mach numbers at $k = 0.1$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - Mach number effects.

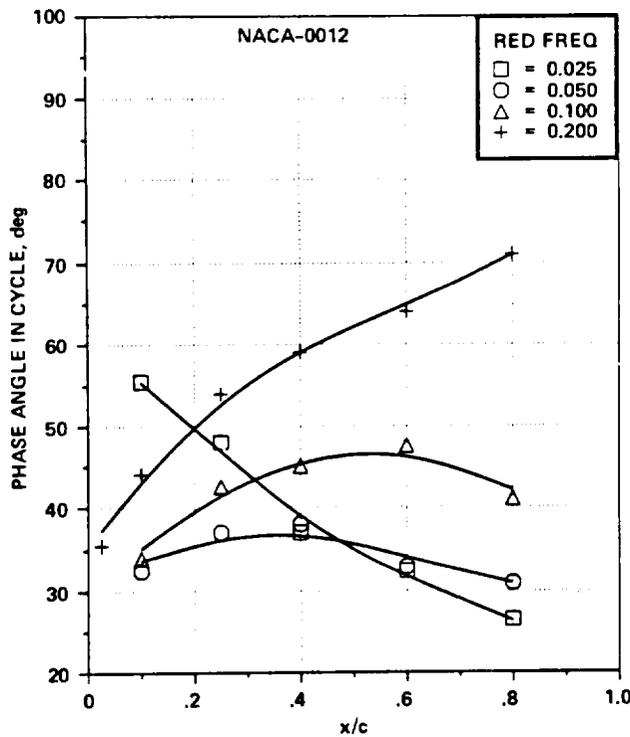


Figure 20.- Phase angle, ωt , of flow reversal on NACA 0012 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 12^\circ + 5^\circ \sin \omega t$ - light-stall conditions.

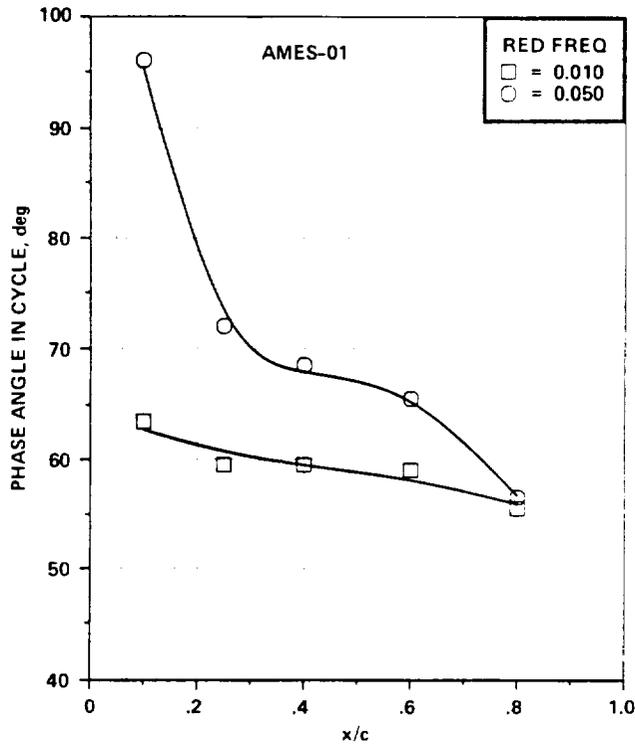


Figure 21.- Phase angle, ωt , of flow reversal on Ames A-01 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 11^\circ + 5^\circ \sin \omega t$ - light-stall conditions.

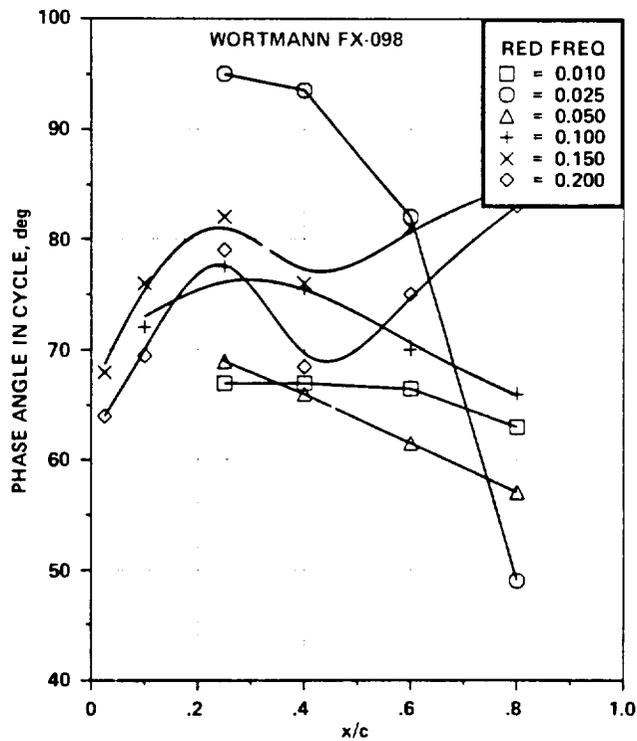


Figure 22.- Phase angle, ωt , of flow reversal on Wortmann FX-098 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 10^\circ + 5^\circ \sin \omega t$ - light-stall conditions.

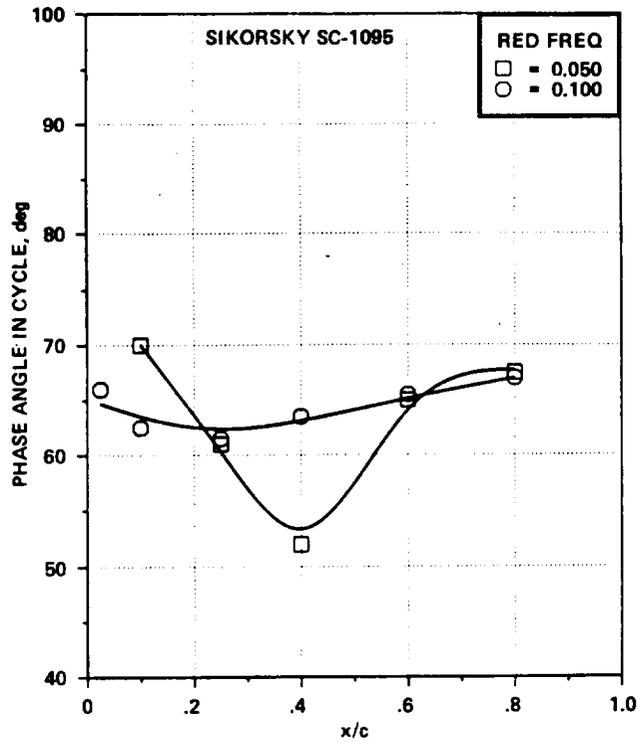


Figure 23.- Phase angle, ωt , of flow reversal on Sikorsky SC-1095 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 11^\circ + 5^\circ \sin \omega t$ - light-stall conditions.

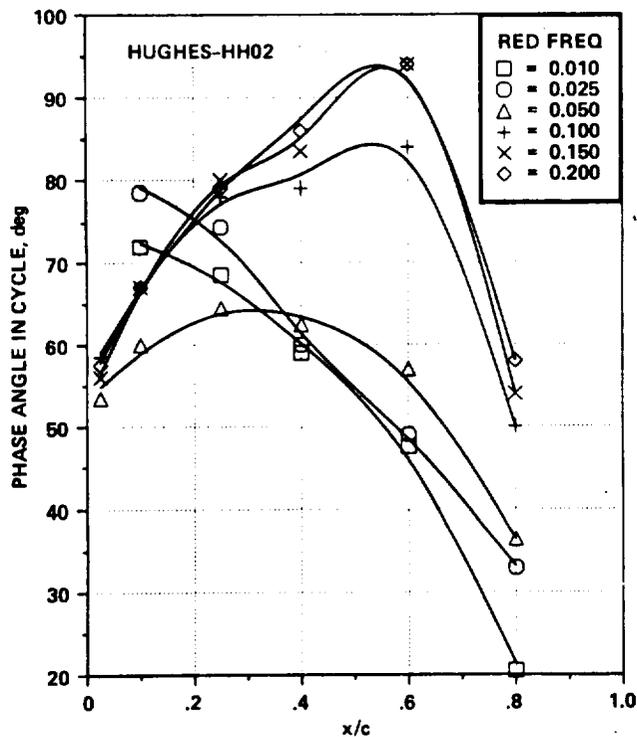


Figure 24.- Phase angle, ωt , of flow reversal on Hughes HH-02 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 10^\circ + 5^\circ \sin \omega t$ - light-stall conditions.

ORIGINAL PAGE IS
OF POOR QUALITY

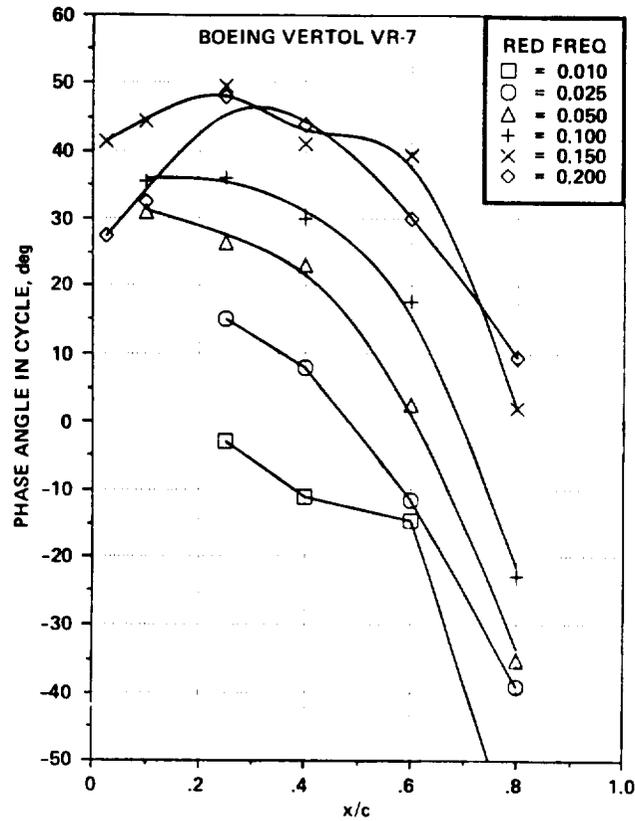


Figure 25.- Phase angle, ωt , of flow reversal on Vertol VR-7 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 15^\circ + 5^\circ \sin \omega t$ - light-stall conditions.

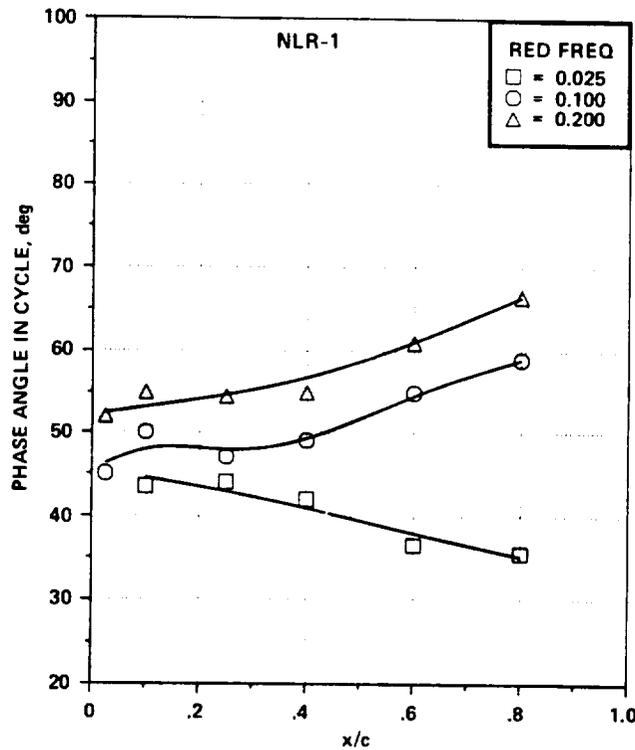


Figure 26.- Phase angle, ωt , of flow reversal on NLR-1 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 10^\circ + 5^\circ \sin \omega t$ - light-stall conditions.

ORIGINAL PAGE IS
OF POOR QUALITY

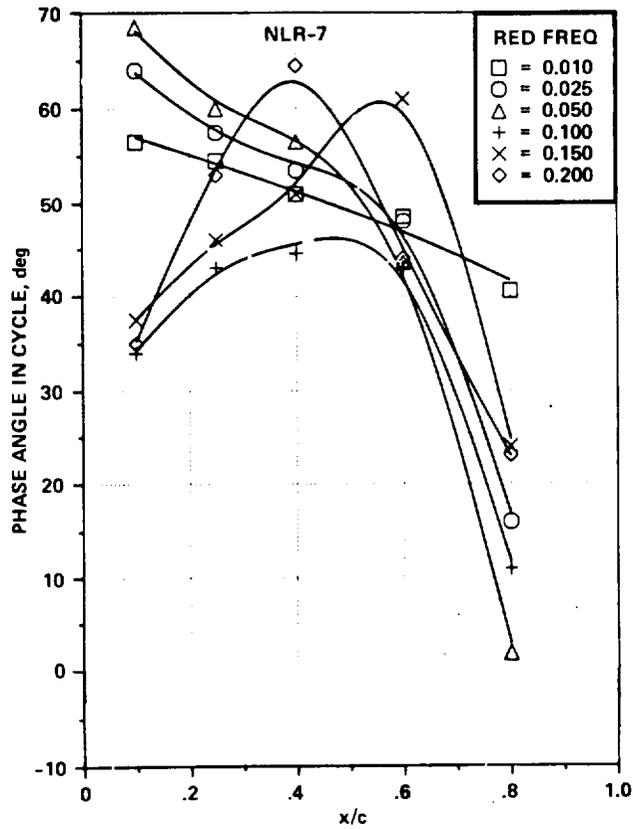


Figure 27.- Phase angle, ωt , of flow reversal on NLR-7 airfoil vs chord location for a range of frequencies at $M_\infty = 0.295$, $\alpha = 15^\circ + 5^\circ \sin \omega t$ - light-stall conditions.

ORIGINAL PAGE IS
OF POOR QUALITY

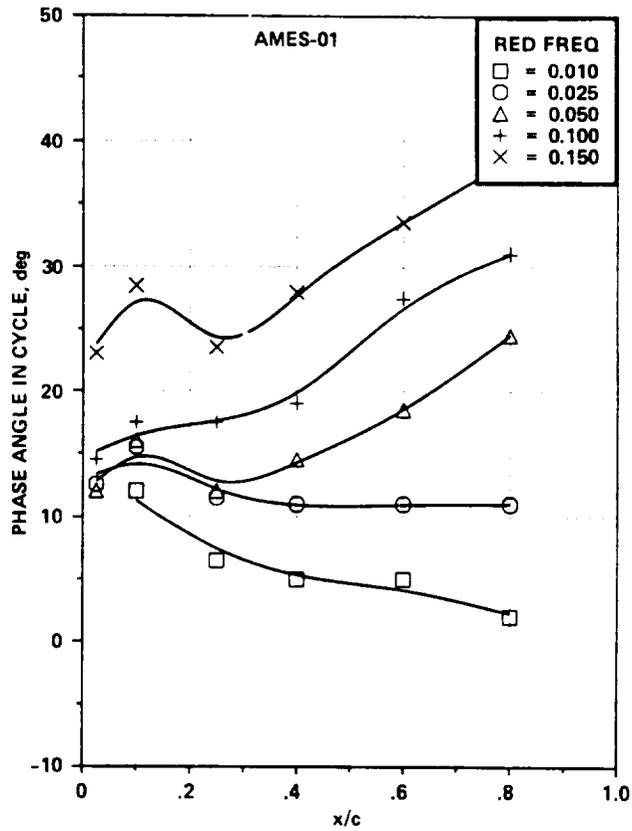


Figure 28.- Phase angle, ωt , of flow reversal on Ames A-01 airfoil vs chord for a range of frequencies at $M_\infty = 0.295$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - deep-stall conditions.

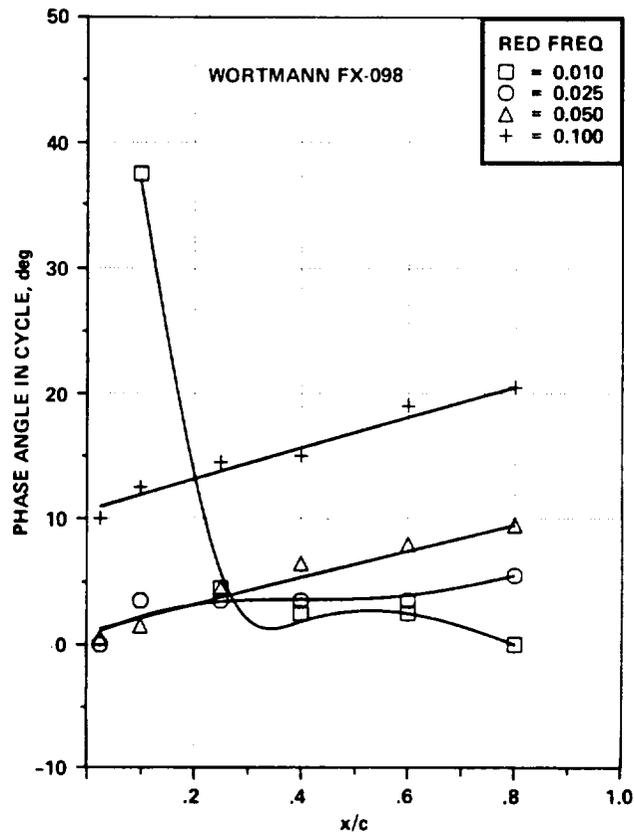


Figure 29.- Phase angle, ωt , of flow reversal on Wortmann W-98 airfoil vs chord for a range of frequencies at $M_\infty = 0.295$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - deep-stall conditions.

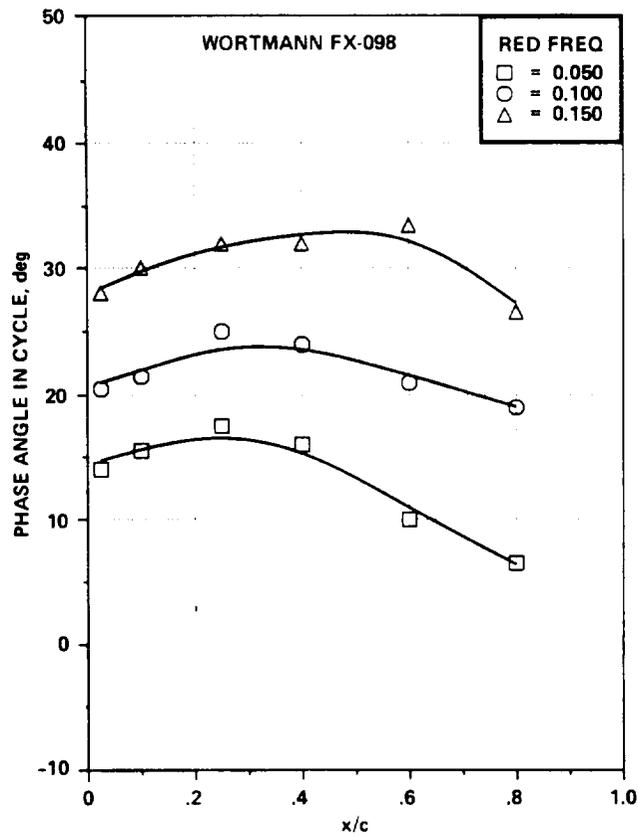


Figure 30.- Phase angle, ωt , of flow reversal on Wortmann FX-098 airfoil vs chord for a range of frequencies at $M_\infty = 0.185$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - deep-stall conditions.

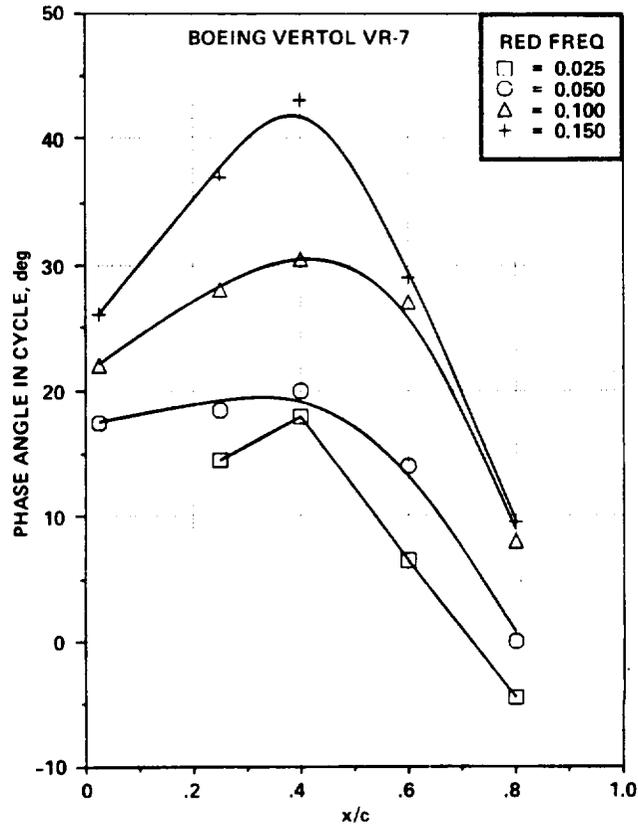


Figure 31.- Phase angle, ωt , of flow reversal on Vertol VR-7 airfoil vs chord for a range of frequencies at $M_\infty = 0.295$, $\alpha = 15^\circ + 10^\circ \sin \omega t$ - deep-stall conditions.

| | | | | | |
|---|--|--|--|---|-------------------|
| 1. Report No. NASA TM-84245 USAAVRADCOM TR-82-A-8 | | 2. Government Accession No. | | 3. Recipient's Catalog No. | |
| 4. Title and Subtitle AN EXPERIMENTAL STUDY OF DYNAMIC STALL ON ADVANCED AIRFOIL SECTIONS VOLUME 3. HOT-WIRE AND HOT-FILM MEASUREMENTS | | | | 5. Report Date December 1982 | |
| | | | | 6. Performing Organization Code | |
| 7. Author(s) L. W. Carr, W. J. McCroskey, K. W. McAlister, S. L. Pucci, and O. Lambert* | | | | 8. Performing Organization Report No. A-8938 | |
| 9. Performing Organization Name and Address NASA Ames Research Center, Moffett Field, Calif. 94035, and U.S. Army Aero- mechanics Laboratory (AVRADCOM), Ames Research Center, Moffett Field, Calif. 94035 | | | | 10. Work Unit No. K-1585 | |
| | | | | 11. Contract or Grant No. | |
| 12. Sponsoring Agency Name and Address National Aeronautics and Space Administration, Washington, D.C. 20546, and U.S. Army Aviation R&D Command, St. Louis, MO 93166 | | | | 13. Type of Report and Period Covered Technical Memorandum | |
| | | | | 14. Sponsoring Agency Code | |
| 15. Supplementary Notes *Service Technique des Constructions Aéronautiques, Paris, France. Point of Contact: L. W. Carr, Ames Research Center, MS 215-1, Moffett Field, Calif. 94035. (415) 965-5892 or FTS 448-5892. | | | | | |
| 16. Abstract Detailed unsteady boundary-layer measurements are presented for eight airfoils oscillated in pitch through the dynamic-stall regime. The present report (the third of three volumes) describes the techniques developed for analysis and evaluation of the hot-film and hot-wire signals, offers some interpretation of the results, and tabulates all the cases in which flow reversal has been recorded. | | | | | |
| 17. Key Words (Suggested by Author(s)) Dynamic stall Maximum lift Oscillating airfoils Airfoil data Boundary layer measurements Unsteady pressure distributions | | | 18. Distribution Statement Unlimited Subject Category - 02 | | |
| 19. Security Classif. (of this report) Unclassified | | 20. Security Classif. (of this page) Unclassified | | 21. No. of Pages 67 | 22. Price* A04 |